# CAMUTCD 2026

California Manual On Uniform Traffic Control Devices


























**NOTE:**

**The contents of this publication are not copyrighted. They may be reprinted freely.**

**The California MUTCD is available on the following Caltrans webpage:**
https://dot.ca.gov/programs/safety-programs/camutcd

CALIFORNIA STATE TRANSPORTATION AGENCY GAVIN NEWSOM, GOVERNOR

**California Department of Transportation**

DIVISION OF SAFETY PROGRAMS
P.O. BOX 942873, MS–49 | SACRAMENTO, CA 94273–0001
(916) 654-6130 | FAX (916) 653-5776 TTY 711
www.dot.ca.gov

January 14, 2026

Mr. Robert W. Bronkall, Chair
California Traffic Control Devices Committee (CTCDC)
County Engineers Association of California (CEAC) Representative
County Surveyor, Humboldt County Public Works
3033 H Street, Room 17
Eureka, CA 95501

Dear Mr. Bronkall:

Effective January 18, 2026, the California Department of Transportation (Caltrans) will issue the California Manual on Uniform Traffic Control Devices (CA MUTCD) 2026 to provide uniform standards and specifications for all official traffic control devices in California. CA MUTCD 2026 will replace the current CA MUTCD 2014 Revision 9 to meet substantial conformance with the National MUTCD 2023. This action was taken pursuant to the provisions of California Vehicle Code Section 21400 and the recommendations of the California Traffic Control Devices Committee (CTCDC). Caltrans' issuance of the CA MUTCD 2026 complies with the two-year window from the January 18, 2024 effective date of the FHWA's final rule, as permitted under Title 23 CFR §655.603(b)(3).

Caltrans has received a letter dated January 13, 2026, from the Federal Highway Administration (FHWA) confirming substantial conformance of the CA MUTCD 2026 edition with the 2023 Edition of the National Manual on Uniform Traffic Control Devices (MUTCD) for Streets and Highways, as required by title 23 Code of Federal Regulations, section 655.603(b)(1).

FHWA's final rule adopting the National MUTCD 2023 (11th Edition) was published in the Federal Register with an effective date of January 18, 2024. In January 2024, Caltrans began the process to review the National MUTCD 2023 by forming 10 Subject Matter Expert (SME) Workgroups, consisting of over 80 CA MUTCD practitioners, representing Caltrans, the California Public Utilities Commission, cities, counties, and private consultants, and conducting the SME Workgroup review meetings throughout 2024 and 2025.

Caltrans drafted the CA MUTCD 2026 documents based on reviews and recommendations from the SME Workgroups and the California Traffic Control Devices Committee and requirements in the National MUTCD 2023 (11th Edition).

Mr. Bronkall, CTCDC Chair, County Surveyor, Humboldt County Public Works
January 14, 2026
Page 2

The CA MUTCD 2026 finalized draft documents were submitted to the FHWA CA Division office for review of substantial conformance finding in compliance with 23 CFR 655.603(b). FHWA reviewed the finalized draft documents and provided comments, which were resolved. CA MUTCD 2026 has been revised accordingly.

The CA MUTCD 2026 will be posted on the Internet at https://dot.ca.gov/programs/safety-programs/camutcd.

Caltrans is grateful to the CTCDC members for providing invaluable time, support, guidance, and direction in the development of the CA MUTCD.

If you have any questions or concerns, please contact me at (909) 764-4915 or paul.chung@dot.ca.gov.
Sincerely,

*Paul Chung*

PAUL CHUNG
Road Safety Division Chief (acting)

Attachments:
None

c:
Godson Okereke, Acting Deputy Director, Maintenance and Operations, Caltrans
Duper Tong, Division Chief, Division of Traffic Operations, Caltrans
Shaila Chowdhury, Deputy Division Chief, Division of Safety Programs, Caltrans
Johnny Bhullar, CA MUTCD Editor, Office of Safety Systems and Devices, Division of Safety Programs, Caltrans
Timothy Kong, Transportation Engineer, Office of Safety Systems and Devices, Division of Safety Programs, Caltrans
Kelli Hutnick, Chief of Staff, Maintenance and Operations, Caltrans
Daniel Rubinstein, Chief of Staff, Division of Safety Programs, Caltrans

"Improving lives and communities through transportation."

U.S. Department of Transportation
Federal Highway Administration

**California Division**

650 Capitol Mall, Suite 4-100
Sacramento, CA 95814
(916) 498-5001
HDACA@dot.gov

January 13, 2026

In Reply, Refer To:
HDA-CA

**ELECTRONIC CORRESPONDENCE ONLY**

Dina El-Tawansy
Director, California Department of Transportation
1120 N Street
Sacramento, CA 95814

**SUBJECT**: California Division to review the California Manual on Uniform Traffic Control Devices 2026 Edition Substantial Conformance Determination

Dear Director El-Tawansy,

This letter is in response to your Dec. 29, 2025, request to find the California Manual on Uniform Traffic Control Devices for Streets and Highways 2026 Edition (CA MUTCD) to be in substantial conformance with the national Manual on Uniform Traffic Control Devices for Streets and Highways, 11th Edition (MUTCD 11th Edition).

In December 2023, the Federal Highway Administration published the MUTCD 11th Edition, which became effective on Jan. 18, 2024. As required by 23 CFR 655.603, the State of California must revise the CA MUTCD to be in substantial conformance with the MUTCD 11th Edition. Our office has reviewed the proposed revisions to the CA MUTCD, to be published on Jan. 18, 2026, and we find it to be in substantial conformance with the MUTCD 11th Edition.

We commend the efforts of Caltrans to update the CA MUTCD. Over the last two years, Caltrans staff lead a group of subject matter experts to update and revise the entire CA MUTCD to ensure compliance with the MUTCD 11th Edition. We recognize that California had some long-established practices that required modification, and we appreciate the state's efforts to modernize the CA MUTCD. We would also like to recognize the men and women that worked on this effort. At the risk of overlooking certain people, we would like to acknowledge the hundreds of hours dedicated to this project by Johnny Bhullar, Mario Lozano-Cisneros, Ejaz Shaikh, Jaime Sanchez, Jeri Fabian, Timothy Kong, Vitality Tertahnyi, Michael Robinson, Florencia Allenger, Caroline Chen, Kevin Murai, Diane Dostalek, Mike Malyy, and many others.

We recognize that many other documents that Caltrans uses to implement the CA MUTCD will need to be updated. We look forward to working with your staff to update those documents in the coming months, and to continuously improve the quality of the CA MUTCD to enhance the safety of the state's roadways.

For questions, please contact Steve Pyburn, PE, Design Program Manager, at steve.pyburn@dot.gov or call (916) 498-5057.

Sincerely,

DOUGLAS RICHARD HECOX

Digitally signed by DOUGLAS RICHARD HECOX
Date: 2026.01.13 10:03:52 -08'00'

Douglas R. Hecox
Deputy Division Administrator
FHWA California Division

To (via email):

Dina El-Tawansy
Dina.El-Tawansy@dot.ca.gov

CC (via email):

Dave Moore, Acting Chief Deputy Director, Caltrans
Godson Okereke, Acting Deputy Director, Maintenance and Operations, Caltrans
Paul Chung, Acting Chief Safety Officer, Division of Safety Programs, Caltrans
Duper Tong, Chief, Division of Traffic Operations, Caltrans
Shaila Chowdhury, Deputy Division Chief, Division of Safety Programs, Caltrans
Johnny Bhullar, CA MUTCD Editor, Division of Safety Programs, Caltrans
Timothy Kong, Division of Safety Programs, Caltrans
Kelli Hutnick, Chief of Staff, Maintenance and Operations, Caltrans
Daniel Rubinstein, Chief of Staff, Division of Safety Programs, Caltrans
Eric Ferron, Acting Technical Services Director, California Division, FHWA
Steve Pyburn, Design Program Manager, California Division, FHWA

Dave.Moore@dot.ca.gov
Godson.Okereke@dot.ca.gov
Paul.Chung@dot.ca.gov
Duper.Tong@dot.ca.gov
Shaila.Chowdhury@dot.ca.gov
Johnny.Bhullar@dot.ca.gov
Timothy.Kong@dot.ca.gov
Kelli.Hutnick@dot.ca.gov
Daniel.Rubinstein@dot.ca.gov
Eric.Ferron@dot.gov
Steve.Pyburn@dot.gov

CALIFORNIA STATE TRANSPORTATION AGENCY GAVIN NEWSOM, GOVERNOR

**California Department of Transportation**

OFFICE OF THE DIRECTOR
P.O. BOX 942873, MS–49 | SACRAMENTO, CA 94273–0001
(916) 654-6130 | FAX (916) 653-5776 TTY 711
www.dot.ca.gov

December 29, 2025

Mr. Doug Hecox, Acting California Division Administrator
Attention: Eric Ferron, Acting Director of Technical Services
Federal Highway Administration
650 Capitol Mall, Suite 4-100
Sacramento, CA 95814

Dear Mr. Hecox:

The California Department of Transportation (Caltrans) requests that the Federal Highway Administration (FHWA) California Division review the California Manual on Uniform Traffic Control Devices (CA MUTCD) 2026 Edition for substantial conformance with the National Manual on Uniform Traffic Control Devices (MUTCD) for Streets and Highways 2023 (11th Edition), as required by title 23 Code of Federal Regulations, section 655.603(b)(1).

FHWA's final rule adopting the National MUTCD 2023 (11th Edition) was published in the Federal Register on December 19, 2023, with an effective date of January 18, 2024. This proposed CA MUTCD 2026 will replace the current CA MUTCD 2014 Revision 9 to meet substantial conformance with the National MUTCD 2023. Caltrans plans to issue the CA MUTCD 2026, on or before January 18, 2026 (within 2 years of the effective date of final rule), as allowed by title 23 CFR section 655.603(b)(3).

In January 2024, Caltrans began the process to review the National MUTCD 2023 by forming 10 Subject Matter Expert (SME) Workgroups, consisting of over 80 CA MUTCD practitioners, representing Caltrans, the California Public Utilities Commission, cities, counties, and private consultants, and conducting the SME Workgroup review meetings throughout 2024 and 2025.

Caltrans drafted the CA MUTCD 2026 documents based on reviews and recommendations from the SME Workgroups and the California Traffic Control Devices Committee and requirements in the National MUTCD 2023 (11th Edition).

The CA MUTCD 2026 finalized draft documents were submitted to the FHWA CA Division office for initial review of substantial conformance finding in compliance with 23 CFR 655.603(b). Your division office program manager, Steve Pyburn, reviewed the finalized draft documents and provided comments, which have been resolved with

input from the CA MUTCD topic owners. The final CA MUTCD 2026 documents have been revised accordingly.

The final CA MUTCD 2026 will be issued after Caltrans receives FHWA's determination on finding the CA MUTCD 2026 documents to be in substantial conformance with the National MUTCD 2023. The CA MUTCD 2026 will be posted on the Internet at https://dot.ca.gov/programs/safety-programs/camutcd.

Caltrans would like to acknowledge the efforts of Steve Pyburn for participating in Subject Matter Expert Workgroup meetings and partnering with the Caltrans Division of Safety Programs staff, including Johnny Bhullar and Timothy Kong, to review these CA MUTCD 2026 final draft documents.

Please provide your response on the substantial conformance finding to Paul Chung, acting Division Chief of Caltrans Division of Safety Programs, by email to paul.chung@dot.ca.gov. If you have any questions, please do not hesitate to contact Paul Chung at (909) 764-4915 or paul.chung@dot.ca.gov.

Sincerely,

Dave Moore (Dec 29, 2025 15:41:33 PST)

FOR DINA A. EL-TAWANSY
Director

Attachment: CA MUTCD 2026

c:
Dave Moore, Acting Chief Deputy Director, Caltrans
Godson Okereke, Acting Deputy Director, Maintenance and Operations, Caltrans
Paul Chung, Acting Chief Safety Officer, Division of Safety Programs, Caltrans
Duper Tong, Chief, Division of Traffic Operations, Caltrans
Shaila Chowdhury, Deputy Division Chief, Division of Safety Programs, Caltrans
Johnny Bhullar, CA MUTCD Editor, Division of Safety Program, Caltrans
Kelli Hutnick, Chief of Staff, Maintenance and Operations, Caltrans
Daniel Rubinstein, Chief of Staff, Division of Safety Programs, Caltrans

*THIS PAGE INTENTIONALLY LEFT BLANK*

# CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES
# TABLE OF CONTENTS

**Page**

CTCDC NOTIFICATION LETTER ..... 3
FHWA LETTER OF SUBSTANTIAL CONFORMANCE ..... 5
LIST OF FIGURES ..... 36
LIST OF TABLES ..... 51

## PART 1 GENERAL

### CHAPTER 1A. GENERAL

Section 1A.01 Purpose of the MUTCD ..... 55
Section 1A.02 Traffic Control Devices – General Description ..... 56
Section 1A.03 Target Road Users ..... 56
Section 1A.04 Use of the MUTCD ..... 56
Section 1A.05 Relation to Other Publications ..... 58
Section 1A.06 Uniform Vehicle Code – Rules of the Road ..... 59

### CHAPTER 1B. LEGAL REQUIREMENTS FOR TRAFFIC CONTROL DEVICES

Section 1B.01 National Standard ..... 67
Section 1B.02 State Adoption and Conformance ..... 68
Section 1B.03 Compliance of Devices ..... 69
Section 1B.04 Interpretations ..... 70
Section 1B.05 Experimentation ..... 71
Section 1B.06 Changes to the MUTCD ..... 75
Section 1B.07 Interim Approvals ..... 75
Section 1B.08 Requesting Official Interpretations, Experiments, Changes to the MUTCD, or Interim Approvals ..... 77

### CHAPTER 1C. DEFINITIONS, ACRONYMS, AND ABBREVIATIONS USED IN THIS MANUAL

Section 1C.01 Definitions of Headings Used in this Manual ..... 85
Section 1C.02 Definitions of Words and Phrases Used in this Manual ..... 85
Section 1C.03 Meanings of Acronyms and Abbreviations Used in this Manual ..... 107

### CHAPTER 1D. PROVISIONS APPLICABLE TO TRAFFIC CONTROL DEVICES IN GENERAL

Section 1D.01 Purpose and Principles of Traffic Control Devices ..... 110
Section 1D.02 Responsibility and Authority for Traffic Control Devices ..... 110
Section 1D.03 Engineering Study and Engineering Judgment ..... 112
Section 1D.04 Design of Traffic Control Devices ..... 113
Section 1D.05 Color Code ..... 113
Section 1D.06 Public Domain, Copyrights, and Patents ..... 114
Section 1D.07 Advertising ..... 114
Section 1D.08 Abbreviations Used on Traffic Control Devices ..... 115
Section 1D.09 Placement and Operation of Traffic Control Devices ..... 115
Section 1D.10 Maintenance of Traffic Control Devices ..... 115
Section 1D.11 Crashworthiness of Traffic Control Devices and Other Roadside Appurtenances ..... 116

# PART 2 SIGNS

## CHAPTER 2A. GENERAL

Section 2A.01 Function and Purpose of Signs....121
Section 2A.02 Standardization of Application....121
Section 2A.03 Classification of Signs....122
Section 2A.04 Design of Signs....122
Section 2A.05 Shapes....124
Section 2A.06 Colors....125
Section 2A.07 Dimensions....125
Section 2A.08 Word Messages....126
Section 2A.09 Symbols....128
Section 2A.10 Sign Borders....128
Section 2A.11 Enhanced Conspicuity for Standard Signs....129
Section 2A.12 LEDs Used for Conspicuity Enhancement on Standard Signs....130
Section 2A.13 Standardization of Location....131
Section 2A.14 Overhead Sign Installations....132
Section 2A.15 Mounting Height....133
Section 2A.16 Lateral Offset....134
Section 2A.17 Orientation....135
Section 2A.18 Posts and Mountings....136
Section 2A.19 Maintenance....136
Section 2A.20 Excessive Use of Signs....136
Section 2A.21 Retroreflection and Illumination....137
Section 2A.22 Maintaining Minimum Retroreflectivity....138
Section 2A.23 Median Opening Treatments for Divided Highways....138
Section 2A.101(CA) Signs Off the State Right-of-Way....139

## CHAPTER 2B. REGULATORY SIGNS, BARRICADES, AND GATES

### GENERAL

Section 2B.01 Application of Regulatory Signs....156
Section 2B.02 Design of Regulatory Signs....156
Section 2B.03 Size of Regulatory Signs....156
Section 2B.04 STOP Sign (R1-1) and ALL-WAY Plaque (R1-3P)....157
Section 2B.05 YIELD Sign (R1-2)....158

### SIGNING FOR RIGHT-OF-WAY AT INTERSECTIONS

Section 2B.06 General Considerations....159
Section 2B.07 Determining the Minor Road for Unsignalized Intersections....160
Section 2B.08 Right-of-Way Intersection Control Considerations....160
Section 2B.09 No Intersection Control....161
Section 2B.10 Yield Control....161
Section 2B.11 Minor Road Stop Control....162
Section 2B.12 All-Way Stop Control....163
Section 2B.13 All-Way Stop Control Warrant A: Crash Experience....163
Section 2B.14 All-Way Stop Control Warrant B: Sight Distance....163
Section 2B.15 All-Way Stop Control Warrant C: Transition to Signal Control or Transition to Yield Control at a Circular Intersection....163
Section 2B.16 All-Way Stop Control Warrant D: 8-Hour Volume (Vehicles, Pedestrians, Bicycles)....164
Section 2B.17 All-Way Stop Control Warrant E: Other Factors....164
Section 2B.18 STOP Sign or YIELD Sign Placement....164
Section 2B.19 Yield Here To Pedestrians Signs and Stop Here For Pedestrians Signs (R1-5 Series)....165

Section 2B.20 In-Street and Overhead Pedestrian and Trail Crossing Signs (R1-6 and R1-9 Series)..... 166

**SPEED LIMIT SIGNS AND PLAQUES**

Section 2B.21 Speed Limit Sign (R2-1) ..... 168
Section 2B.22 Vehicle Speed Limit Plaques (R2-2P Series)..... 179
Section 2B.23 Night Speed Limit Plaque (R2-3P)..... 179
Section 2B.24 Minimum Speed Limit Plaque (R2-4P) and Combined Maximum and Minimum Speed Limits Sign (R2-4a)..... 180
Section 2B.25 Higher Fines Signs and Plaque (R2-6P, R2-10, and R2-11)..... 180

**MOVEMENT AND LANE CONTROL SIGNS AND PLAQUES**

Section 2B.26 Movement Prohibition Signs (R3-1 through R3-4, R3-18, and R3-27)..... 182
Section 2B.27 Intersection Lane Control Signs (R3-5 through R3-8)..... 183
Section 2B.28 Mandatory Movement Lane Control Signs (R3-5, R3-5a, R3-7, R3-19 Series, and R3-20) and Plaques ..... 184
Section 2B.29 Optional Movement Lane Control Signs (R3-6 Series)..... 185
Section 2B.30 Advance Intersection Lane Control Signs (R3-8 Series)..... 186
Section 2B.31 RIGHT (LEFT) LANE MUST EXIT Signs (R3-33, R3-33a)..... 186
Section 2B.32 Two-Way Left-Turn-Only Signs (R3-9a and R3-9b) and Plaques..... 187
Section 2B.33 BEGIN and END Plaques (R3-9cP and R3-9dP)..... 187
Section 2B.34 Reversible Lane Control Signs (R3-9e through R3-9i) ..... 187
Section 2B.35 Jughandle Signs (R3-23, R3-24, R3-25, and R3-26 Series)..... 188

**PASSING, KEEP RIGHT, AND SLOW TRAFFIC SIGNS**

Section 2B.36 DO NOT PASS Sign (R4-1) ..... 190
Section 2B.37 PASS WITH CARE Sign (R4-2) ..... 190
Section 2B.38 KEEP RIGHT EXCEPT TO PASS Sign (R4-16), SLOWER TRAFFIC KEEP RIGHT Sign (R4-3), and TRUCKS USE RIGHT LANE Sign (R4-5)..... 190
Section 2B.39 Keep Right and Keep Left Signs (R4-7 Series and R4-8 Series)..... 191
Section 2B.40 STAY IN LANE Sign (R4-9)..... 192
Section 2B.41 RUNAWAY VEHICLES ONLY Sign (R4-10)..... 192
Section 2B.42 Slow Vehicle Turn-Out Signs (R4-12, R4-13, and R4-14) ..... 192
Section 2B.43 DO NOT DRIVE ON SHOULDER Sign (R4-17) and DO NOT PASS ON SHOULDER Sign (R4-18) ..... 193
Section 2B.44 ALL TRAFFIC Sign (R4-20) and RIGHT (LEFT) TURN ONLY Sign (R4-21)..... 193

**SELECTIVE EXCLUSION SIGNS AND PLAQUES**

Section 2B.45 Selective Exclusion Signs and Plaques ..... 194

**DO NOT ENTER, WRONG WAY, ONE WAY, AND RELATED SIGNS AND PLAQUES**

Section 2B.46 DO NOT ENTER Sign (R5-1)..... 197
Section 2B.47 WRONG WAY Sign (R5-1a)..... 198
Section 2B.48 Wrong-Way Traffic Control at Interchange Ramps ..... 198
Section 2B.49 ONE WAY Signs (R6-1 and R6-2)..... 200
Section 2B.50 Divided Highway Crossing Signs (R6-3 and R6-3a)..... 201
Section 2B.51 Roundabout Circulation Plaque (R6-5P)..... 202

**PARKING, STANDING, STOPPING, AND EMERGENCY RESTRICTION SIGNS**

Section 2B.52 Parking, Standing, and Stopping Signs (R7 and R8 Series)..... 203
Section 2B.53 Design of Parking, Standing, and Stopping Signs ..... 209
Section 2B.54 Placement of Parking, Standing, and Stopping Signs..... 212
Section 2B.55 Emergency Restriction Signs (R8-4 and R8-7)..... 212

**PEDESTRIAN SIGNS**

Section 2B.56 WALK ON LEFT FACING TRAFFIC and No Hitchhiking Signs (R9-1, R9-4, and R9-4a) 213

Section 2B.57 Pedestrian Crossing Signs (R9-2 and R9-3) ..... 213
Section 2B.58 Traffic Signal Pedestrian and Bicyclist Actuation Signs (R10-1 through R10-4 and R10-24 through R10-26) ..... 213

**TRAFFIC SIGNAL SIGNS AND PLAQUES**

Section 2B.59 Traffic Signal Signs and Plaques (R10-5 through R10-30) ..... 215
Section 2B.60 No Turn on Red Signs (R10-11 Series, R10-17a, and R10-30) ..... 216
Section 2B.61 Ramp Metering Signs (R10-28 and R10-29) ..... 218

**ROAD CLOSED AND WEIGHT LIMIT SIGNS**

Section 2B.62 KEEP OFF MEDIAN Sign (R11-1) ..... 219
Section 2B.63 ROAD CLOSED Sign (R11-2) and LOCAL TRAFFIC ONLY Signs (R11-3 Series, R11-4) ..... 219
Section 2B.64 Weight Limit Signs (R12-1 through R12-7) ..... 219
Section 2B.65 Weigh Station Sign (R13-1) ..... 221
Section 2B.66 TRUCK ROUTE Sign (R14-1) ..... 221
Section 2B.67 Hazardous Material Signs (R14-2 and R14-3) ..... 222
Section 2B.68 National Network Signs (R14-4 and R14-5) ..... 223

**OTHER REGULATORY SIGNS AND PLAQUES**

Section 2B.69 Photo Enforced Signs and Plaques (R10-18, R10-18a, R10-19P, R10-19aP) ..... 224
Section 2B.70 Move Vehicles from Travel Lanes Sign (R16-4) ..... 224
Section 2B.71 Move Over or Reduce Speed Sign (R16-3) ..... 224
Section 2B.72 No Hand-Held Phone Use by Driver Signs (R16-15 and R16-15a) ..... 225
Section 2B.73 Headlight Use Signs (R16-5 through R16-11) ..... 225
Section 2B.74 Seat Belt Symbol ..... 225

**BARRICADES AND GATES**

Section 2B.75 Barricades ..... 226
Section 2B.76 Gates ..... 226
Section 2B.101(CA) NO FISHING (JUMPING) FROM BRIDGE Sign (R23(CA)) ..... 227
Section 2B.102(CA) $1000 Fine Signs (R47(CA) and R47A(CA)) ..... 227
Section 2B.103(CA) PRIVATE ROAD (PRIVATE PROPERTY) VEHICLE CODE ENFORCED Sign (R101(CA)) ..... 227
Section 2B.104(CA) GOLF CARTS OK DAYLIGHT HOURS Sign (SR43(CA)) ..... 227
Section 2B.105(CA) Bus and Truck Registration Sign (SR44(CA)) ..... 228
Section 2B.106(CA) EMERGENCY ACCESS KEEP CLEAR Sign (SR46(CA)) ..... 228
Section 2B.107(CA) Off Highway Vehicle Signs (SR47(CA) and SR48(CA)) ..... 228
Section 2B.108(CA) NO CAMPING OR SLEEPING IN VEHICLE Sign (R119(CA)) ..... 228
Section 2B.109(CA) BEGIN/END FREEWAY Sign (R57(CA) and R58(CA)) ..... 228
Section 2B.110(CA) No Loitering, Camping, Vending or Parking of Vehicles 30 Feet or Longer Sign (S22(CA)) ..... 228

## CHAPTER 2C. WARNING SIGNS AND OBJECT MARKERS

**GENERAL**

Section 2C.01 Application of Warning Signs ..... 308
Section 2C.02 Design of Warning Signs ..... 308
Section 2C.03 Size of Warning Signs and Plaques ..... 308
Section 2C.04 Placement of Warning Signs ..... 309

**HORIZONTAL ALIGNMENT WARNING SIGNS AND PLAQUES**

Section 2C.05 Horizontal Alignment Warning Signs – General ..... 310
Section 2C.06 Device Selection for Changes in Horizontal Alignment ..... 310
Section 2C.07 Horizontal Alignment Signs (W1-1 through W1-5, W1-11, and W1-15) ..... 311
Section 2C.08 Chevron Alignment Sign (W1-8) ..... 312
Section 2C.09 Combination Horizontal Alignment/Intersection Signs (W1-10 Series) ..... 312

Section 2C.10 One-Direction Large Arrow Sign (W1-6) ..... 313
Section 2C.11 Truck Rollover Sign (W1-13) ..... 313
Section 2C.12 Advisory Exit and Ramp Speed Signs (W13-2 and W13-3) and Combination Horizontal Alignment/Advisory Exit and Ramp Speed Signs (W13-6 through W13-13) ..... 314
Section 2C.13 Vehicle Speed Feedback Sign and Plaque (W13-20 and W13-20aP) ..... 315

**VERTICAL GRADE WARNING SIGNS AND PLAQUES**

Section 2C.14 Hill Signs (W7-1 and W7-1a) ..... 316
Section 2C.15 Truck Escape Ramp Signs (W7-4 Series) ..... 316
Section 2C.16 HILL BLOCKS VIEW Sign (W7-6) ..... 317

**ROADWAY GEOMETRY WARNING SIGNS**

Section 2C.17 ROAD NARROWS Sign (W5-1) ..... 318
Section 2C.18 NARROW BRIDGE and NARROW UNDERPASS Signs (W5-2 and W5-2a) ..... 318
Section 2C.19 ONE LANE BRIDGE and ONE LANE UNDERPASS Signs (W5-3 and W5-3a) ..... 318
Section 2C.20 Divided Highway Sign (W6-1) ..... 319
Section 2C.21 Divided Highway Ends Sign (W6-2) ..... 319
Section 2C.22 Freeway or Expressway Ends Signs (W19 Series) ..... 319
Section 2C.23 Double Arrow Sign (W12-1) ..... 319
Section 2C.24 DEAD END, NO OUTLET, and ROAD ENDS Signs (W14-1, W14-1a, W14-2, W14-2a, W8-26, and W8-26a) ..... 319
Section 2C.25 Low Clearance Signs (W12-2, W12-2a, and W12-2b) ..... 320

**ROADWAY AND WEATHER-CONDITION WARNING SIGNS AND PLAQUES**

Section 2C.26 BUMP and DIP Signs (W8-1 and W8-2) ..... 322
Section 2C.27 SPEED HUMP Sign (W17-1) ..... 322
Section 2C.28 PAVEMENT ENDS Sign (W8-3) ..... 322
Section 2C.29 Shoulder Signs (W8-4, W8-9, W8-17, W8-23, and W8-25) ..... 322
Section 2C.30 Surface Condition Signs (W8-5, W8-7, W8-8, W8-11, W8-13, and W8-14) ..... 323
Section 2C.31 Warning Signs and Plaque for Motorcyclists (W8-15, W8-15aP, and W8-16) ..... 324
Section 2C.32 NO CENTER LINE Sign (W8-12) ..... 324
Section 2C.33 NO TRAFFIC SIGNS Sign (W18-1) ..... 324
Section 2C.34 Weather Condition Signs (W8-18, W8-19, W8-21, and W8-22) ..... 324

**TRAFFIC CONTROL AND INTERSECTION WARNING SIGNS AND PLAQUES**

Section 2C.35 Advance Traffic Control Signs (W3-1, W3-2, W3-3, and W3-4) ..... 326
Section 2C.36 DRAW BRIDGE Sign (W3-6) ..... 327
Section 2C.37 Advance Ramp Control Signal Signs (W3-7 and W3-8) ..... 327
Section 2C.38 NEW TRAFFIC PATTERN and NEW SIGNAL OPERATION AHEAD Signs (W23-2 and W23-2a) ..... 327
Section 2C.39 WATCH FOR STOPPED TRAFFIC Sign (W26-1) ..... 327
Section 2C.40 Reduced Speed Limit Ahead and Speed Zone Signs (W3-5, W3-5a, W3-5b, and W3-5c) ..... 328
Section 2C.41 Intersection Warning Signs (W2-1 through W2-8) ..... 328
Section 2C.42 Actuated Advance Intersection Signs (W2-10 and W2-11) ..... 329
Section 2C.43 Two-Direction Large Arrow Sign (W1-7) ..... 329
Section 2C.44 Traffic Signal Oncoming Extended Green Signs (W25-1 and W25-2) ..... 329

**MERGING, TWO-WAY TRAFFIC, AND NO PASSING WARNING SIGNS AND PLAQUES**

Section 2C.45 Merge Signs and Plaque (W4-1, W4-5, and W4-5aP) ..... 330
Section 2C.46 Added Lane Signs (W4-3 and W4-6) ..... 330
Section 2C.47 Lane Ends Signs (W4-2 and W9-1) ..... 331
Section 2C.48 Lanes Merge Signs (W9-4 and W4-8) ..... 331
Section 2C.49 HEAVY MERGE FROM LEFT (RIGHT) Sign (W4-7) ..... 332
Section 2C.50 RIGHT (LEFT) LANE FOR EXIT ONLY Sign (W9-7) ..... 332

Section 2C.51 Two-Way Traffic Sign (W6-3) ..... 332
Section 2C.52 Two-Way Traffic on a Three-Lane Roadway Signs (W6-5 and W6-5a) ..... 333
Section 2C.53 NO PASSING ZONE Sign (W14-3) ..... 333

**MISCELLANEOUS WARNING SIGNS AND PLAQUES**

Section 2C.54 Vehicular Traffic Warning Signs (W8-6, W11-1, W11-5, W11-8, W11-10, W11-11, W11-12P, W11-14, W11-15, and W11-15a) ..... 334
Section 2C.55 Non-Vehicular Warning Signs (W11-2, W11-3, W11-4, W11-6, W11-7, W11-9, and W11-16 through W11-22) ..... 335
Section 2C.56 Playground Sign (W15-1) ..... 337

**SUPPLEMENTAL PLAQUES**

Section 2C.57 Use of Supplemental Warning Plaques ..... 338
Section 2C.58 Design of Supplemental Warning Plaques ..... 338
Section 2C.59 Advisory Speed Plaque (W13-1P) and Confirmation Advisory Speed Plaque (W13-1aP) ..... 338
Section 2C.60 NEW Plaque (W16-15P) ..... 339
Section 2C.61 Distance Plaques (W16-2 Series, W16-3 Series, W16-4P, and W7-3aP) ..... 339
Section 2C.62 Supplemental Arrow Plaques (W16-5P and W16-6P) ..... 340
Section 2C.63 Diagonal Downward-Pointing Arrow Plaques (W16-7P and W16-7aP) ..... 340
Section 2C.64 Hill-Related Plaques (W7-2 Series and W7-3 Series) ..... 340
Section 2C.65 Advance Street Name Plaque (W16-8P and W16-8aP) ..... 340
Section 2C.66 Traffic Does Not Stop Plaques (W4-4P Series) ..... 341
Section 2C.67 IN ROAD and IN STREET Plaques (W16-1P and W16-1aP) ..... 341
Section 2C.68 EXCEPT BICYCLES Plaque (W16-20P) ..... 341
Section 2C.69 Photo Enforced Plaques (W16-10P and W16-10aP) ..... 342

**OBJECT MARKERS**

Section 2C.70 Object Marker Design and Placement Height ..... 343
Section 2C.71 Object Markers for Obstructions within the Roadway ..... 343
Section 2C.72 Object Markers for Obstructions Adjacent to the Roadway ..... 344
Section 2C.73 Object Markers for Ends of Roadways ..... 345
Section 2C.101(CA) TRACTOR-SEMIS OVER ___ FEET KINGPIN TO REAR AXLE NOT ADVISED (SW48(CA)) ..... 345
Section 2C.102(CA) Weight Limit signs (W20(CA) and W20A(CA)) ..... 345
Section 2C.103(CA) Safety Corridor Sign (SW33(CA)) ..... 346

**CHAPTER 2D. GUIDE SIGNS—CONVENTIONAL ROADS**

**GENERAL DESIGN**

Section 2D.01 Scope of Conventional Road Guide Sign Standards and Application ..... 389
Section 2D.02 Color, Retroreflection, and Illumination ..... 389
Section 2D.03 Size of Signs ..... 390
Section 2D.04 Lettering Style ..... 390
Section 2D.05 Size of Lettering ..... 391
Section 2D.06 Amount of Legend ..... 391
Section 2D.07 Abbreviations ..... 391
Section 2D.08 Arrows ..... 392

**ROUTE SIGNS AND AUXILIARY PLAQUES**

Section 2D.09 Numbered Highway Systems ..... 394
Section 2D.10 Route Signs and Auxiliary Plaques ..... 394
Section 2D.11 Design of Route Signs ..... 395
Section 2D.12 Design of Route Sign Auxiliary Plaques ..... 396
Section 2D.13 Junction Auxiliary Plaque (M2-1P) ..... 396
Section 2D.14 Combination Junction Sign (M2-2) ..... 397
Section 2D.15 Cardinal Direction Auxiliary Plaques (M3-1P through M3-4P) ..... 397

Section 2D.16 Alternative Route Auxiliary Plaques (M4-1P through M4-4P) ....397
Section 2D.17 ALTERNATE Auxiliary Plaques (M4-1P and M4-1aP) .... 397
Section 2D.18 BY-PASS Auxiliary Plaque (M4-2P) .... 397
Section 2D.19 BUSINESS Auxiliary Plaque (M4-3P) ....398
Section 2D.20 TRUCK Auxiliary Plaque (M4-4P) ....398
Section 2D.21 TO Auxiliary Plaque (M4-5P) ....398
Section 2D.22 END Auxiliary Plaque (M4-6P) ....398
Section 2D.23 BEGIN Auxiliary Plaque (M4-14P) ....398
Section 2D.24 TEMPORARY Auxiliary Plaques (M4-7P and M4-7aP) ....399
Section 2D.25 Temporary Detour Signs and Auxiliary Plaques ....399
Section 2D.26 Advance Turn Arrow Auxiliary Plaques (M5-1P, M5-2P, and M5-3P) ....399
Section 2D.27 Lane Designation Auxiliary Plaques (M5-4P, M5-5P, and M5-6P) ....399
Section 2D.28 Directional Arrow Auxiliary Plaques (M6 Series) ....400

**SIGN ASSEMBLIES**

Section 2D.29 Route Sign Assemblies ....401
Section 2D.30 Junction Assembly ....401
Section 2D.31 Advance Route Turn Assembly ....402
Section 2D.32 Directional Assembly ....403
Section 2D.33 Confirming or Reassurance Assemblies ....403
Section 2D.34 Trailblazer Assembly ....404

**DESTINATION AND DISTANCE SIGNS**

Section 2D.35 Destination and Distance Signs ....405
Section 2D.36 Destination Signs (D1 Series) ....405
Section 2D.37 Overhead Arrow-per-Lane Destination Guide Signs ....408
Section 2D.38 Combination Lane-Use/Destination Overhead Guide Sign (D15-1) ....409
Section 2D.39 Destination Signs at Circular Intersections ....409
Section 2D.40 Destination Signs at Jughandles ....410
Section 2D.41 Destination Signs at Intersections with Indirect Turning Movements ....410
Section 2D.42 Location of Destination Signs ....410
Section 2D.43 Distance Signs (D2 Series) ....410
Section 2D.44 Location of Distance Signs ....411

**STREET NAME AND PARKING SIGNS**

Section 2D.45 Street Name Signs (D3-1 and D3-1a) ....412
Section 2D.46 Advance Street Name Signs (D3-2 Series) ....414
Section 2D.47 Parking Area Guide Sign (D4-1) ....415
Section 2D.48 PARK - RIDE Sign (D4-2) ....416

**FREEWAY INTERCHANGE APPROACH SIGNS**

Section 2D.49 Signing on Conventional Roads on Approaches to Interchanges ....417
Section 2D.50 Freeway Entrance Signs (D13-3 and D13-3a) ....418

**WEIGH STATION, CROSSOVER, TRUCK AND PASSING LANE, AND EMERGENCY AND SLOW VEHICLE TURN-OUT SIGNS**

Section 2D.51 WEIGH STATION Signing (D8 Series) ....419
Section 2D.52 Crossover Signs (D13-1 and D13-2) ....419
Section 2D.53 Truck and Passing Lane Signs (D17-1 through D17-4) ....420
Section 2D.54 Emergency and Slow Vehicle Turn-Out Signs (D17-5 through D17-7) ....420

**OTHER GUIDE SIGNS**

Section 2D.55 Community Wayfinding Signs ....421
Section 2D.56 Signing of Named Highways for Mapping and Address Purposes ....424
Section 2D.57 National Scenic Byways Sign and Plaque (M10-1 and M10-1aP) ....425

Section 2D.58 State-Designated Scenic Byway, Historic Trail, and Auto Tour Route Signs....425
Section 2D.59 Emergency Routing Signs and Plaques (M4-11 and M4-12 Series) ....427

**SIGNING AT AIRPORTS**

Section 2D.60 Signing at Airports ....429
Section 2D.101(CA) Intersection Number (G98A(CA)) Sign....429

**CHAPTER 2E. GUIDE SIGNS—FREEWAYS AND EXPRESSWAYS**

**GENERAL**

Section 2E.01 Scope of Freeway and Expressway Guide Sign Standards ....494
Section 2E.02 Freeway and Expressway Signing Principles....494
Section 2E.03 Guide Sign Classification ....494
Section 2E.04 Characteristics of Urban Signing....495
Section 2E.05 Characteristics of Rural Signing....495
Section 2E.06 Signing of Named Highways....496
Section 2E.07 Designation of Destinations....496

**SIGN DESIGN**

Section 2E.08 General ....497
Section 2E.09 Color of Guide Signs ....497
Section 2E.10 Retroreflection or Illumination ....497
Section 2E.11 Interchange Classification ....497
Section 2E.12 Size of Signs and Letters ....497
Section 2E.13 lnterline and Edge Spacing....498
Section 2E.14 Sign Borders....498
Section 2E.15 Amount of Legend on Guide Signs ....499
Section 2E.16 Abbreviations ....499
Section 2E.17 Symbols....499
Section 2E.18 Arrows for Interchange Guide Signs ....499

**INSTALLATION**

Section 2E.19 Overhead Sign Installations ....501
Section 2E.20 Lateral Offset ....501

**GUIDE SIGNING FOR INTERCHANGES**

Section 2E.21 Interchange Guide Signs....502
Section 2E.22 Interchange Exit Numbering....502
Section 2E.23 Interchange Advance Guide Signs (E1-1 through E1-3)....504
Section 2E.24 Interchange Sequence Signs (E9-1 and E9-2)....506
Section 2E.25 Exit Direction Signs (E4 Series) ....506
Section 2E.26 Exit Gore Signs and Plaque (E5-1 Series)....508
Section 2E.27 Pull-Through Signs (E6-1 Series and E6-2 Series)....509
Section 2E.28 Signing for Interchange Lane Drops without an Optional Exit Lane....509
Section 2E.29 Signing by Type of Interchange....510
Section 2E.30 Minor Interchange ....511
Section 2E.31 Diamond Interchange ....511
Section 2E.32 Diamond Interchange in Urban Area....511
Section 2E.33 Cloverleaf Interchange ....512
Section 2E.34 Cloverleaf Interchange with Collector-Distributor Roadways....512
Section 2E.35 Partial Cloverleaf Interchange....512
Section 2E.36 Collector-Distributor Roadways for Successive Interchanges ....513
Section 2E.37 Freeway-to-Freeway Interchanges....513
Section 2E.38 Freeway Split with Dedicated Lanes ....514
Section 2E.39 Signing for Option Lanes at Splits and Multi-Lane Exits....514

Section 2E.40 Design of Overhead Arrow-per-Lane Guide Signs for Option Lanes ..... 514
Section 2E.41 Design of Freeway and Expressway Diagrammatic Advance Guide Signs ..... 516
Section 2E.42 Signing for Intermediate and Minor Interchange Multi-Lane Exits with an Option Lane ..... 518
Section 2E.43 Number of Signs at an Overhead Installation and Sign Spreading ..... 519
Section 2E.44 Closely-Spaced Interchanges ..... 519
Section 2E.45 Guide Signing in Tunnels and Similar Structures ..... 519

**OTHER GUIDE SIGNS**

Section 2E.46 Next Exit Plaques (E2-1P and E2-1aP) ..... 521
Section 2E.47 Post-Interchange Signs ..... 521
Section 2E.48 Post-Interchange Distance Signs (E7-1 through E7-3) ..... 521
Section 2E.49 Post-Interchange Travel Time Sign (E7-4) ..... 522
Section 2E.50 Distance and Travel Time Sign (E7-5) and Comparative Travel Time Sign (E7-6) ..... 522
Section 2E.51 Supplemental Guide Signs (E3 Series) ..... 523
Section 2E.52 Community Interchanges Identification Signs (E9-4 and E9-5) ..... 524
Section 2E.53 Next Exits Signs (E9-3 and E9-3a) ..... 525
Section 2E.54 Weigh Station Signing ..... 525
Section 2E.55 Route Signs and Trailblazer Assemblies ..... 526
Section 2E.56 Eisenhower Interstate System Signs (M1-10 and M1-10a) ..... 526

**SIGNS FOR ROUTE DIVERSION BY VEHICLE CLASS**

Section 2E.57 Signs for Route Diversion by Vehicle Class ..... 527

**INTERFACE WITH CONVENTIONAL ROADWAYS**

Section 2E.58 Signing on Conventional Road Approaches and Connecting Roadways ..... 528
Section 2E.59 Wrong-Way Traffic Control at Interchange Ramps ..... 528

**CHAPTER 2F. TOLL ROAD SIGNS**

**GENERAL**

Section 2F.01 Scope ..... 608
Section 2F.02 Sizes of Toll Road Signs and Electronic Toll Collection (ETC) System Pictographs ..... 608
Section 2F.03 Use of Color on Toll Signs ..... 608

**REGULATORY SIGNS**

Section 2F.04 Regulatory Signs for Toll Plazas ..... 610
Section 2F.05 Electronic Toll Collection (ETC) Account-Only Regulatory Sign and Plaque (R3-31 and R3-32P) ..... 611

**WARNING SIGNS**

Section 2F.06 Pay Toll and Take Ticket Advance Warning Signs (W9-6 and W9-6e) ..... 612
Section 2F.07 Pay Toll and Take Ticket Advance Warning Plaques (W9-6bP, W9-6dP, and W9-6gP) ..... 612
Section 2F.08 Stop Ahead Pay Toll and Take Ticket Warning Signs (W9-6a and W9-6f) ..... 613
Section 2F.09 Stop Ahead Pay Toll and Take Ticket Warning Plaques (W9- 6cP and W9-6hP) ..... 613
Section 2F.10 LAST EXIT BEFORE TOLL Warning Plaques (W16-16P and W16-16aP) ..... 613
Section 2F.11 TOLL Warning Plaque (W16-17P) ..... 614

**GUIDE SIGNS**

Section 2F.12 Toll Facility and Toll Plaza Guide Signs – General ..... 615
Section 2F.13 Electronic Toll Collection (ETC) Signs – General ..... 616
Section 2F.14 Advance Signs for Conventional Toll Plazas ..... 617
Section 2F.15 Advance Signs for Toll Plazas on Diverging Alignments from Open-Road ETC Account-Only Lanes ..... 617
Section 2F.16 Toll Plaza Canopy Signs ..... 618
Section 2F.17 Guide Signs for Entrances to Electronic Toll Collection (ETC) Only Facilities ..... 618
Section 2F.18 Guide Signs for ETC-Only Entrance Ramps to Non-Toll Highways ..... 619

Section 2F.19 ETC Account Program Information Signs ..... 620
Section 2F.101(CA) TOLL BRIDGE Advance Warning Sign (SW95(CA)) ..... 620

**CHAPTER 2G. PREFERENTIAL AND MANAGED LANE SIGNS**

**GENERAL**

Section 2G.01 Scope ..... 644
Section 2G.02 Sizes of Preferential and Managed Lane Signs ..... 644

**REGULATORY SIGNS**

Section 2G.03 Regulatory Signs for Preferential Lanes – General ..... 645
Section 2G.04 Vehicle Occupancy Definition Signs (R3-10 Series and R3-13 Series) ..... 647
Section 2G.05 Preferential Lane Operation Signs (R3-11 Series and R3-14 Series) ..... 648
Section 2G.06 Preferential Lane Advance Signs (R3-12, R3-12e, R3-12f, R3-15, R3-15a, and R3-15d) ..... 650
Section 2G.07 Preferential Lane Ends Signs (R3-12a, R3-12b, R3-12c, R3-12d, R3-12g, R3-12h, R3-15b, R3-15c, and R3-15e) ..... 651

**WARNING SIGNS AND PLAQUE**

Section 2G.08 Warning Signs on Median Barriers for Preferential Lanes ..... 652
Section 2G.09 High-Occupancy Vehicle (HOV) Plaque (W16-11P) ..... 652

**GUIDE SIGNS**

Section 2G.10 Preferential Lane Guide Signs – General ..... 653
Section 2G.11 Signing for Initial Entry Points to Preferential Lanes ..... 655
Section 2G.12 Signing for Intermediate Entry Points to Preferential Lanes ..... 656
Section 2G.13 Signing for Egress from Preferential Lanes to General-Purpose Lanes ..... 656
Section 2G.14 Signing for Direct Entrances to Preferential Lanes from Another Highway ..... 657
Section 2G.15 Signing for Direct Exits from Preferential Lanes to Another Highway ..... 657

**MANAGED LANE SIGNS, PLAQUES, AND LANE-USE CONTROL SIGNALS**

Section 2G.16 Signs for Managed Lanes – General ..... 659
Section 2G.17 Signs for Priced Managed Lanes – General ..... 659
Section 2G.18 Regulatory Signs for Priced Managed Lanes ..... 660
Section 2G.19 Guide Signs for Priced Managed Lanes ..... 661
Section 2G.20 Signs for Part-Time Travel on a Shoulder – General ..... 662
Section 2G.21 Regulatory Signs and Plaques for Part-Time Travel on a Shoulder ..... 663
Section 2G.22 Warning Signs for Part-Time Travel on a Shoulder ..... 664
Section 2G.23 Guide Signs for Part-Time Travel on a Shoulder ..... 664
Section 2G.24 Lane-Use Control Signals for Part-Time Travel on a Shoulder ..... 664
Section 2G.25 Lane-Use Control Signals for Active Lane Management on Freeways and Expressways ..... 665
Section 2G.26 Variable Speed Limits for Active Traffic Management on Freeways and Expressways ..... 666
Section 2G.101(CA) Preferential Lane Enforcement Signing (SR50(CA) Series) ..... 666
Section 2G.102(CA) Regulatory Signs for Preferential Lanes at Metered On-Ramps ..... 666

**CHAPTER 2H. GENERAL INFORMATION SIGNS**

Section 2H.01 Scope ..... 712
Section 2H.02 Sizes of General Information Signs ..... 712
Section 2H.03 Airport Signs ..... 713
Section 2H.04 Traffic Signal Speed Sign (I1-1) ..... 713
Section 2H.05 Jurisdictional Boundary Signs (I2-1) ..... 713
Section 2H.06 Geographical Feature Signs (I2-2) ..... 715
Section 2H.07 State Welcome Signs ..... 715
Section 2H.08 Future Interstate Corridor Signs (I2-4 and I2-4a) ..... 716
Section 2H.09 Project Information Sign (I2-5) ..... 716
Section 2H.10 Grade-Separated Roadway Identification Signs (I2-3 and I2-3a) ..... 717

Section 2H.11 Reference Location Signs (D10-1 through D10-3) and Intermediate Reference Location Signs (D10-1a through D10-3a) ..... 717
Section 2H.12 Enhanced Reference Location Signs (D10-4) and Intermediate Enhanced Reference Location Signs (D10-5) ..... 718
Section 2H.13 Acknowledgment Signs and Plaques (I20 Series) ..... 719
Section 2H.14 Alternative Fuels Corridor Sign (D9-19) ..... 721
Section 2H.101(CA) Coastal Access (SG28A(CA)) Sign ..... 723
Section 2H.102(CA) The POST OFFICE (SG60A(CA)) Sign ..... 723

**CHAPTER 2I. GENERAL SERVICE SIGNS**

Section 2I.01 Sizes of General Service Signs ..... 738
Section 2I.02 General Service Signs for Conventional Roads ..... 738
Section 2I.03 General Service Signs for Freeways and Expressways ..... 740
Section 2I.04 Interstate Oasis Signing (D5-12 Series) ..... 748
Section 2I.05 Rest Area and Other Roadside Area Signs (D5-1 through D5-11 Series) ..... 749
Section 2I.06 Brake Check Area Signs (D5-13 and D5-14) ..... 750
Section 2I.07 Chain-Up Area Signs (D5-15 and D5-16) ..... 750
Section 2I.08 Tourist Information and Welcome Center Signs (D5-7 Series and D5-8) ..... 750
Section 2I.09 Radio Information Signing (D12-1 Series) ..... 753
Section 2I.10 Channel 9 Monitored Sign (D12-3) ..... 754
Section 2I.11 EMERGENCY CALL 911 Sign (D12-4) ..... 754
Section 2I.12 TRAVEL INFO CALL 511 Signs (D12-5 and D12-5a) ..... 755
Section 2I.13 Roadside Assistance Sign (D12-6) ..... 755
Section 2I.14 Carpool and Ridesharing Signing (D12-2) ..... 755
Section 2I.15 Signing for Truck Parking Availability (D9-16b through D9-16e) ..... 756
Section 2I.101(CA) REPORT DRUNK DRIVERS CALL 911 (G81-66(CA)) Sign ..... 756
Section 2I.102(CA) PEDESTRIANS PROHIBITED CALL 911 (G81-67(CA)) Sign ..... 756

**CHAPTER 2J. SPECIFIC SERVICE SIGNS**

Section 2J.01 Eligibility ..... 773
Section 2J.02 Application ..... 774
Section 2J.03 Logos and Business Identification Sign Panels ..... 776
Section 2J.04 Number and Size of Signs and Business Identification Sign Panels ..... 777
Section 2J.05 Size of Lettering ..... 778
Section 2J.06 Signs at Interchanges ..... 778
Section 2J.07 Single-Exit Interchanges ..... 778
Section 2J.08 Double-Exit Interchanges ..... 779
Section 2J.09 Collector-Distributor Roadways for Successive Interchanges ..... 780
Section 2J.10 Specific Service Trailblazer Signs ..... 780
Section 2J.11 Signs at Intersections ..... 781
Section 2J.12 Signing Policy ..... 781
Section 2J.101(CA) Signs at Ramps (SG42-4(CA), SG42-5(CA), SG42-8(CA) and SG42-12(CA)) ..... 782

**CHAPTER 2K. TOURIST-ORIENTED DIRECTIONAL SIGNS**

Section 2K.01 Purpose and Application ..... 793
Section 2K.02 Design ..... 793
Section 2K.03 Style and Size of Lettering ..... 794
Section 2K.04 Arrangement and Size of Signs ..... 794
Section 2K.05 Advance Signs ..... 795
Section 2K.06 Sign Locations ..... 795
Section 2K.07 State Policy ..... 796

**CHAPTER 2L. CHANGEABLE MESSAGE SIGNS**

Section 2L.01 Description of Changeable Message Signs ..... 801
Section 2L.02 Applications of Changeable Message Signs ..... 801
Section 2L.03 Legibility and Visibility of Changeable Message Signs ..... 804
Section 2L.04 Design Characteristics of Messages ..... 805
Section 2L.05 Message Length and Units of Information ..... 806
Section 2L.06 Travel Time Messages ..... 807
Section 2L.07 Traffic Safety Campaign Messages ..... 808
Section 2L.08 Permanently-Located Changeable Message Signs ..... 808
Section 2L.101(CA) Extinguishable Message Signs ..... 809

**CHAPTER 2M. RECREATIONAL AND CULTURAL INTEREST AREA SIGNS**

Section 2M.01 Scope ..... 814
Section 2M.02 Application of Recreational and Cultural Interest Area Signs ..... 814
Section 2M.03 Regulatory and Warning Signs ..... 818
Section 2M.04 General Design Requirements for Recreational and Cultural Interest Area Symbol Guide Signs ..... 818
Section 2M.05 Symbol Sign Sizes ..... 818
Section 2M.06 Use of Educational Plaques ..... 819
Section 2M.07 Use of Prohibitive Circle and Diagonal for Non-Road Applications ..... 819
Section 2M.08 Placement of Recreational and Cultural Interest Area Symbol Signs ..... 819
Section 2M.09 Destination Guide Signs ..... 820
Section 2M.10 Memorial or Dedication Signing ..... 821
Section 2M.101(CA) Historical Landmark Signs (G13-1A(CA), G13-2A(CA) and G14A(CA)) ..... 823
Section 2M.102(CA) POINT OF HISTORICAL INTEREST Sign (G15A(CA)) ..... 824
Section 2M.103(CA) Historic Route Signs (SG2(CA), SG2A(CA), S18(CA) and S25(CA)) ..... 824
Section 2M.104(CA) Historic Bridge Signs (S29(CA), S29-1(CA) and S29-2(CA)) ..... 824

**CHAPTER 2N. EMERGENCY MANAGEMENT SIGNS**

Section 2N.01 Emergency Management ..... 841
Section 2N.02 Design and Use of Emergency Management Signs ..... 841
Section 2N.03 Evacuation Route Signs (EM1 Series) ..... 841
Section 2N.04 AREA CLOSED Sign (EM2-1) ..... 842
Section 2N.05 TRAFFIC CONTROL POINT Sign (EM2-2) ..... 842
Section 2N.06 MAINTAIN TOP SAFE SPEED Sign (EM2-3) ..... 842
Section 2N.07 Permit Required Sign (EM2-4) ..... 843
Section 2N.08 Emergency Aid Center Signs (EM3-1 Series) ..... 843
Section 2N.09 Shelter Directional Signs (EM4-1 Series) ..... 844

**PART 3 MARKINGS**

**CHAPTER 3A. GENERAL**

Section 3A.01 Standardization of Application ..... 847
Section 3A.02 Materials ..... 847
Section 3A.03 Colors ..... 847
Section 3A.04 Functions, Widths, and Patterns of Longitudinal Pavement Markings ..... 848
Section 3A.05 Maintaining Minimum Pavement Marking Retroreflectivity ..... 849

**CHAPTER 3B. PAVEMENT AND CURB MARKINGS**

Section 3B.01 Yellow Center Line Pavement Markings ..... 867
Section 3B.02 Warrants for Yellow Center Lines ..... 867
Section 3B.03 No-Passing Zone Pavement Markings ..... 868

Section 3B.04 Yellow Pavement Markings for Reversible Lanes ....869
Section 3B.05 Pavement Markings for Two-Way Left-Turn Lanes ....869
Section 3B.06 White Lane Line Pavement Markings ....870
Section 3B.07 White Lane Line Markings for Non-Continuing Lanes ....871
Section 3B.08 Channelizing Lines ....873
Section 3B.09 Edge Line Pavement Markings ....873
Section 3B.10 Warrants for Use of Edge Lines ....874
Section 3B.11 Application of Pavement Markings through Intersections or Interchanges ....875
Section 3B.12 Lane-Reduction Transitions ....875
Section 3B.13 Approach Markings for Obstructions ....876
Section 3B.14 Raised Pavement Markers – General ....877
Section 3B.15 Raised Pavement Markers as Vehicle Positioning Guides with Other Longitudinal Markings ....878
Section 3B.16 Raised Pavement Markers Supplementing Other Markings ....878
Section 3B.17 Raised Pavement Markers Substituting for Pavement Markings ....879
Section 3B.18 Curb Markings for Parking Regulations ....880
Section 3B.19 Stop and Yield Lines ....881
Section 3B.20 Word, Symbol, and Arrow Pavement Markings – General ....882
Section 3B.21 Word Pavement Markings ....883
Section 3B.22 Symbol Pavement Markings ....884
Section 3B.23 Lane-Use Arrows ....885
Section 3B.24 Wrong-Way Arrows ....886
Section 3B.25 Chevron and Diagonal Markings ....887
Section 3B.26 Do Not Block Intersection Markings ....888
Section 3B.27 Parking Space Markings ....888
Section 3B.28 Speed Reduction Markings ....889
Section 3B.29 Speed Hump and Speed Table Markings ....889
Section 3B.30 Advance Speed Hump and Speed Table Markings ....890
Section 3B.31 Markings for a Diamond Interchange with a Transposed Alignment Crossroad ....890
Section 3B.101(CA) Turnouts ....890

**CHAPTER 3C. CROSSWALK MARKINGS**

Section 3C.01 General ....957
Section 3C.02 Application of Crosswalk Markings ....957
Section 3C.03 Design of Crosswalk Markings ....958
Section 3C.04 Transverse Line Crosswalks ....959
Section 3C.05 High-Visibility Crosswalks ....960
Section 3C.06 Longitudinal Bar Crosswalks ....960
Section 3C.07 Ladder Crosswalks ....961
Section 3C.08 Bar Pair Crosswalks ....961
Section 3C.09 Crosswalk Markings at Circular Intersections ....961
Section 3C.10 Crosswalks for Exclusive Pedestrian Phases that Permit Diagonal Crossings ....962
Section 3C.11 Crosswalks at Diamond Interchanges with a Transposed Alignment Crossroad ....962
Section 3C.12 Pedestrian Islands and Medians ....962

**CHAPTER 3D. CIRCULAR INTERSECTION MARKINGS**

Section 3D.01 General ....966
Section 3D.02 White Lane Line Pavement Markings for Roundabouts ....966
Section 3D.03 Edge Line Pavement Markings for Roundabout Circulatory Roadways ....966
Section 3D.04 Yield Lines for Roundabouts ....967
Section 3D.05 Word and Symbol Pavement Markings for Roundabouts ....967
Section 3D.06 Arrow Pavement Markings for Roundabouts ....967

Section 3D.07 Markings for Other Circular Intersections....967

**CHAPTER 3E. PREFERENTIAL LANE MARKINGS FOR MOTOR VEHICLES**

Section 3E.01 General....977
Section 3E.02 Longitudinal Markings....977
Section 3E.03 Preferential Lane Word and Symbol Markings....978
Section 3E.04 Markings for Part-Time Travel on a Shoulder....979

**CHAPTER 3F. MARKINGS FOR TOLL PLAZAS**

Section 3F.01 General....992
Section 3F.02 Longitudinal Markings....992
Section 3F.03 Pavement Word and Symbol Markings....992

**CHAPTER 3G. DELINEATORS**

Section 3G.01 General....994
Section 3G.02 Design....994
Section 3G.03 Application....994
Section 3G.04 Placement and Spacing....995
Section 3G.101(CA) Emergency Passageway Marker....997
Section 3G.102(CA) Narrow Bridge Signing and Marking....997
Section 3G.103(CA) Median Barrier Delineation....997

**CHAPTER 3H. COLORED PAVEMENT**

Section 3H.01 Standardization of Application....1006
Section 3H.02 Materials....1006
Section 3H.03 Aesthetic Surface Treatments....1006
Section 3H.04 Yellow-Colored Pavement....1007
Section 3H.05 White-Colored Pavement....1008
Section 3H.06 Green-Colored Pavement for Bicycle Facilities....1008
Section 3H.07 Red-Colored Pavement for Public Transit Systems....1009
Section 3H.08 Purple-Colored Pavement for Electronic Toll Collection (ETC) Account-Only Preferential Lanes....1009

**CHAPTER 3I. CHANNELIZING DEVICES USED FOR EMPHASIS OF PAVEMENT MARKING PATTERNS**

Section 3I.01 Channelizing Devices....1018
Section 3I.02 Tubular Markers....1019

**CHAPTER 3J. MARKING AND DELINEATION OF ISLANDS AND SIDEWALK EXTENSIONS**

Section 3J.01 General....1023
Section 3J.02 Approach-End Treatment....1023
Section 3J.03 Islands Designated by Pavement Markings....1023
Section 3J.04 Curb Markings for Raised Islands....1024
Section 3J.05 Pavement Markings for Raised Islands....1024
Section 3J.06 Island Delineation....1025
Section 3J.07 Sidewalk Extensions Designated by Pavement Markings....1025

**CHAPTER 3K. RUMBLE STRIP MARKINGS**

Section 3K.01 Longitudinal Rumble Strip Markings....1034
Section 3K.02 Transverse Rumble Strip Markings....1034

# PART 4 HIGHWAY TRAFFIC SIGNALS

## CHAPTER 4A. GENERAL

Section 4A.01 Types ..... 1037
Section 4A.02 Meanings of Signal Indications ..... 1037
Section 4A.03 Meanings of Steady Vehicular Signal Indications ..... 1037
Section 4A.04 Meanings of Flashing Vehicular Signal Indications ..... 1038
Section 4A.05 Meanings of Bicycle Symbol Signal Indications ..... 1040
Section 4A.06 Meanings of Pedestrian Signal Indications ..... 1040
Section 4A.07 Lateral Offset of Signal Supports and Cabinets ..... 1041
Section 4A.08 Use of Signs at Signalized Locations ..... 1041
Section 4A.09 Use of Pavement Markings at Signalized Locations ..... 1042
Section 4A.10 Responsibility for Operation and Maintenance ..... 1042

## CHAPTER 4B. TRAFFIC CONTROL SIGNALS—GENERAL

Section 4B.01 General ..... 1044
Section 4B.02 Advantages and Disadvantages of Traffic Control Signals ..... 1044
Section 4B.03 Alternatives to Traffic Control Signals ..... 1044
Section 4B.04 Basis of Installation of Traffic Control Signals ..... 1045
Section 4B.05 Basis of Removal of Traffic Control Signals ..... 1045
Section 4B.101(CA) Modifications of Existing Signals ..... 1046

## CHAPTER 4C. TRAFFIC CONTROL SIGNAL NEEDS STUDIES

Section 4C.01 Studies and Factors for Justifying Traffic Control Signals ..... 1047
Section 4C.02 Warrant 1, Eight-Hour Vehicular Volume ..... 1049
Section 4C.03 Warrant 2, Four-Hour Vehicular Volume ..... 1050
Section 4C.04 Warrant 3, Peak Hour ..... 1051
Section 4C.05 Warrant 4, Pedestrian Volume ..... 1051
Section 4C.06 Warrant 5, School Crossing ..... 1052
Section 4C.07 Warrant 6, Coordinated Signal System ..... 1053
Section 4C.08 Warrant 7, Crash Experience ..... 1053
Section 4C.09 Warrant 8, Roadway Network ..... 1054
Section 4C.10 Warrant 9, Intersection Near a Grade Crossing ..... 1055

## CHAPTER 4D. DESIGN FEATURES OF TRAFFIC CONTROL SIGNALS

Section 4D.01 General ..... 1077
Section 4D.02 Provisions for Pedestrians ..... 1078
Section 4D.03 Provisions for Bicyclists ..... 1078
Section 4D.04 Provisions for Transit Vehicles ..... 1078
Section 4D.05 Number of Signal Faces on an Approach ..... 1079
Section 4D.06 Visibility, Aiming, and Shielding of Signal Faces ..... 1080
Section 4D.07 Lateral Positioning of Signal Faces ..... 1081
Section 4D.08 Longitudinal Positioning of Signal Faces ..... 1082
Section 4D.09 Mounting Height of Signal Faces ..... 1082
Section 4D.10 Lateral Offset (Clearance) of Signal Faces ..... 1083
Section 4D.11 Temporary and Portable Traffic Control Signals ..... 1083
Section 4D.101(CA) Permissive Left-Turn Phasing ..... 1084
Section 4D.102(CA) Review of Traffic Signal Operations ..... 1084

## CHAPTER 4E. TRAFFIC CONTROL SIGNAL INDICATIONS

Section 4E.01 Signal Indications – Design, Illumination, Color, and Shape ..... 1093
Section 4E.02 Size of Vehicular Signal Indications ..... 1093

Section 4E.03 Positions of Signal Indications within a Signal Face – General ..... 1094
Section 4E.04 Positions of Signal Indications within a Vertical Signal Face ..... 1095
Section 4E.05 Positions of Signal Indications within a Horizontal Signal Face ..... 1096

**CHAPTER 4F. STEADY (STOP-AND-GO) OPERATION OF TRAFFIC CONTROL SIGNALS**

Section 4F.01 Application of Steady and Flashing Signal Indications during Steady (Stop-and-Go) Operation ..... 1100
Section 4F.02 Signal Indications for Left-Turn Movements – General ..... 1103
Section 4F.03 Signal Indications for Permissive Only Mode Left-Turn Movements in a Shared Signal Face ..... 1105
Section 4F.04 Signal Indications for Permissive Only Mode Left-Turn Movements in a Separate Signal Face ..... 1105
Section 4F.05 Signal Indications for Protected Only Mode Left-Turn Movements in a Shared Signal Face ..... 1106
Section 4F.06 Signal Indications for Protected Only Mode Left-Turn Movements in a Separate Signal Face ..... 1107
Section 4F.07 Signal Indications for Protected/Permissive Mode Left-Turn Movements in a Shared Signal Face ..... 1108
Section 4F.08 Signal Indications for Protected/Permissive Mode Left-Turn Movements in a Separate Signal Face ..... 1108
Section 4F.09 Signal Indications for Right-Turn Movements – General ..... 1110
Section 4F.10 Signal Indications for Permissive Only Mode Right-Turn Movements in a Shared Signal Face ..... 1111
Section 4F.11 Signal Indications for Permissive Only Mode Right-Turn Movements in a Separate Signal Face ..... 1112
Section 4F.12 Signal Indications for Protected Only Mode Right-Turn Movements in a Shared Signal Face ..... 1113
Section 4F.13 Signal Indications for Protected Only Mode Right-Turn Movements in a Separate Signal Face ..... 1114
Section 4F.14 Signal Indications for Protected/Permissive Mode Right-Turn Movements in a Shared Signal Face ..... 1114
Section 4F.15 Signal Indications for Protected/Permissive Mode Right-Turn Movements in a Separate Signal Face ..... 1115
Section 4F.16 Signal Indications for Approaches with No Through Movement ..... 1117
Section 4F.17 Yellow Change and Red Clearance Intervals ..... 1119
Section 4F.18 Preemption and Priority Control of Traffic Control Signals – General ..... 1120
Section 4F.19 Preemption Control of Traffic Control Signals ..... 1121
Section 4F.20 Priority Control of Traffic Control Signals ..... 1123

**CHAPTER 4G. FLASHING OPERATION OF TRAFFIC CONTROL SIGNALS**

Section 4G.01 Flashing Operation of Traffic Control Signals – General ..... 1141
Section 4G.02 Flashing Operation – Transition into Flashing Mode ..... 1141
Section 4G.03 Flashing Operation – Signal Indications during Flashing Mode ..... 1141
Section 4G.04 Flashing Operation – Transition Out of Flashing Mode ..... 1142

**CHAPTER 4H. BICYCLE SIGNALS**

Section 4H.01 Use of Bicycle Signal Faces ..... 1144
Section 4H.02 Prohibited Uses of Bicycle Signal Faces ..... 1144
Section 4H.03 Bicycle Signal Signs ..... 1145
Section 4H.04 Application of Bicycle Symbol Signal Indications during Steady (Stop-and-Go) Operation ..... 1145
Section 4H.05 Application of Bicycle Symbol Signal Indications during Flashing Operation ..... 1145
Section 4H.06 Layout of Bicycle Signal Faces ..... 1146

Section 4H.07 Size of Bicycle Symbol Signal Indications ..... 1146
Section 4H.08 Placement of Bicycle Signal Faces ..... 1146
Section 4H.09 Mounting Height of Bicycle Signal Faces ..... 1147
Section 4H.10 Intensity and Light Distribution of Bicycle Signal Faces ..... 1147
Section 4H.11 Yellow Change and Red Clearance Intervals for Bicycle Signal Faces ..... 1147
Section 4H.12 Bicycle Push Buttons ..... 1147
Section 4H.101(CA) Optional Use of Bicycle Signal Faces ..... 1147
Section 4H.102(CA) Limit Line Bicycle Detection Zone ..... 1148

**CHAPTER 4I. PEDESTRIAN CONTROL FEATURES**

Section 4I.01 Pedestrian Signal Heads ..... 1155
Section 4I.02 Size, Design, and Illumination of Pedestrian Signal Head Indications ..... 1155
Section 4I.03 Location and Height of Pedestrian Signal Heads ..... 1156
Section 4I.04 Countdown Pedestrian Signals ..... 1156
Section 4I.05 Pedestrian Detectors ..... 1157
Section 4I.06 Pedestrian Intervals and Signal Phases ..... 1158

**CHAPTER 4J. PEDESTRIAN HYBRID BEACONS**

Section 4J.01 Application of Pedestrian Hybrid Beacons ..... 1165
Section 4J.02 Design of Pedestrian Hybrid Beacons ..... 1165
Section 4J.03 Operation of Pedestrian Hybrid Beacons ..... 1166

**CHAPTER 4K. ACCESSIBLE PEDESTRIAN SIGNALS AND DETECTORS**

Section 4K.01 General ..... 1171
Section 4K.02 Location ..... 1172
Section 4K.03 Walk Indications ..... 1173
Section 4K.04 Vibrotactile Arrows and Locator Tones ..... 1174
Section 4K.05 Extended Push Button Press Features ..... 1175

**CHAPTER 4L. RECTANGULAR RAPID FLASHING BEACONS**

Section 4L.01 Application of Rectangular Rapid Flashing Beacons ..... 1177
Section 4L.02 Design of Rectangular Rapid Flashing Beacons ..... 1177
Section 4L.03 Operation of Rectangular Rapid Flashing Beacons ..... 1178

**CHAPTER 4M. TRAFFIC CONTROL SIGNALS FOR EMERGENCY-VEHICLE ACCESS**

Section 4M.01 Application of Emergency-Vehicle Traffic Control Signals ..... 1182
Section 4M.02 Design of Emergency-Vehicle Traffic Control Signals ..... 1182
Section 4M.03 Operation of Emergency-Vehicle Traffic Control Signals ..... 1182

**CHAPTER 4N. HYBRID BEACONS FOR EMERGENCY-VEHICLE ACCESS**

Section 4N.01 Application of Emergency-Vehicle Hybrid Beacons ..... 1184
Section 4N.02 Design of Emergency-Vehicle Hybrid Beacons ..... 1184
Section 4N.03 Operation of Emergency-Vehicle Hybrid Beacons ..... 1184

**CHAPTER 4O. TRAFFIC CONTROL SIGNALS FOR ONE-LANE, TWO-WAY FACILITIES**

Section 4O.01 Application of Traffic Control Signals for One-Lane, Two-Way Facilities ..... 1187
Section 4O.02 Design of Traffic Control Signals for One-Lane, Two-Way Facilities ..... 1187
Section 4O.03 Operation of Traffic Control Signals for One-Lane, Two-Way Facilities ..... 1187

**CHAPTER 4P. TRAFFIC CONTROL SIGNALS FOR FREEWAY ENTRANCE RAMPS**

Section 4P.01 Application of Freeway Entrance Ramp Control Signals ..... 1188
Section 4P.02 Design of Freeway Entrance Ramp Control Signals ..... 1188
Section 4P.03 Operation of Freeway Entrance Ramp Control Signals ..... 1189

**CHAPTER 4Q. TRAFFIC CONTROL FOR MOVABLE BRIDGES**

Section 4Q.01 Application of Traffic Control for Movable Bridges....1190
Section 4Q.02 Design and Location of Movable Bridge Signals and Gates....1190
Section 4Q.03 Operation of Movable Bridge Signals and Gates....1191

**CHAPTER 4R. HIGHWAY TRAFFIC SIGNALS AT TOLL PLAZAS**

Section 4R.01 Traffic Signals at Toll Plazas....1193
Section 4R.02 Lane-Use Control Signals at or Near Toll Plazas....1193
Section 4R.03 Warning Beacons at Toll Plazas....1193

**CHAPTER 4S. FLASHING BEACONS**

Section 4S.01 General Design and Operation of Flashing Beacons....1194
Section 4S.02 Intersection Control Beacon....1194
Section 4S.03 Warning Beacon....1195
Section 4S.04 Speed Limit Sign Beacon....1196
Section 4S.05 Stop Beacon....1196
Section 4S.101(CA) Flashing Beacons at School Crosswalks....1196
Section 4S.102(CA) Flashing Beacons for Fire Stations....1197
Section 4S.103(CA) Flashing Beacons at Bus Stops on Freeway Interchanges....1197

**CHAPTER 4T. LANE-USE CONTROL SIGNALS**

Section 4T.01 Application of Lane-Use Control Signals....1199
Section 4T.02 Meaning of Lane-Use Control Signal Indications....1199
Section 4T.03 Design of Lane-Use Control Signals....1200
Section 4T.04 Operation of Lane-Use Control Signals....1201

**CHAPTER 4U. IN-ROADWAY WARNING LIGHTS**

Section 4U.01 Application of In-Roadway Warning Lights....1203
Section 4U.02 In-Roadway Warning Lights at Crosswalks....1203

## PART 5 TRAFFIC CONTROL DEVICE CONSIDERATIONS FOR AUTOMATED VEHICLES

**CHAPTER 5A. GENERAL**

Section 5A.01 Scope and Purpose....1207
Section 5A.02 Overview of Automated Vehicles and Connected Vehicles....1207
Section 5A.03 Definitions and Terms....1208
Section 5A.04 Traffic Control Device Design and Use Considerations....1208

**CHAPTER 5B. PROVISIONS FOR TRAFFIC CONTROL DEVICES**

Section 5B.01 Signs....1211
Section 5B.02 Markings....1211
Section 5B.03 Highway Traffic Signals....1211
Section 5B.04 Temporary Traffic Control....1212
Section 5B.05 Traffic Control for Highway-Rail and Highway-Light Rail Transit Grade Crossings....1212
Section 5B.06 Traffic Control for Bicycle Facilities....1213

## PART 6 TEMPORARY TRAFFIC CONTROL

**CHAPTER 6A. GENERAL**

Section 6A.01 General....1215
Section 6A.02 Fundamental Principles of Temporary Traffic Control....1216

Section 6A.03 TTC Devices ..... 1218
Section 6A.04 Crashworthiness of TTC Devices ..... 1219
Section 6A.05 Night Work ..... 1219

**CHAPTER 6B. TEMPORARY TRAFFIC CONTROL ELEMENTS**

Section 6B.01 Temporary Traffic Control Plans ..... 1220
Section 6B.02 Temporary Traffic Control Zones ..... 1222
Section 6B.03 Components of Temporary Traffic Control Zones ..... 1223
Section 6B.04 Advance Warning Area ..... 1223
Section 6B.05 Transition Area ..... 1223
Section 6B.06 Activity Area ..... 1224
Section 6B.07 Termination Area ..... 1225
Section 6B.08 Tapers ..... 1225
Section 6B.09 Detours and Diversions ..... 1226

**CHAPTER 6C. PEDESTRIAN AND WORKER SAFETY**

Section 6C.01 Pedestrian and Worker Safety – General ..... 1234
Section 6C.02 Pedestrian Considerations ..... 1234
Section 6C.03 Accessibility Considerations ..... 1236
Section 6C.04 Worker Safety Considerations ..... 1237
Section 6C.05 High-Visibility Safety Apparel ..... 1238
Section 6C.101(CA) Bicycle Considerations ..... 1239

**CHAPTER 6D. FLAGGER CONTROL**

Section 6D.01 Qualifications for Flaggers ..... 1240
Section 6D.02 STOP/SLOW Paddle for Hand-Signaling ..... 1240
Section 6D.03 Flag for Hand-Signaling ..... 1241
Section 6D.04 Flashlight for Hand-Signaling ..... 1241
Section 6D.05 Flagger Procedures ..... 1242
Section 6D.06 Flagger Stations ..... 1243

**CHAPTER 6E. ONE-LANE, TWO-WAY TRAFFIC CONTROL**

Section 6E.01 One-Lane, Two-Way Traffic Control – General ..... 1245
Section 6E.02 Flagger Method ..... 1245
Section 6E.03 Flag Transfer Method ..... 1245
Section 6E.04 Pilot Car Method ..... 1245
Section 6E.05 Temporary Traffic Control Signal Method ..... 1246
Section 6E.06 Stop or Yield Control Method ..... 1246

**CHAPTER 6F. TEMPORARY TRAFFIC CONTROL ZONE SIGNS – GENERAL**

Section 6F.01 General Characteristics of TTC Zone Signs ..... 1247
Section 6F.02 Sign Placement ..... 1247
Section 6F.03 Sign Maintenance ..... 1248

**CHAPTER 6G. TTC ZONE REGULATORY SIGNS**

Section 6G.01 Regulatory Sign Authority ..... 1251
Section 6G.02 Regulatory Sign Design and Size ..... 1251
Section 6G.03 Regulatory Sign Applications ..... 1251
Section 6G.04 Road Closed Signs (R11-2 Series) ..... 1251
Section 6G.05 Local Traffic Only Signs (R11-3 Series and R11-4) ..... 1251
Section 6G.06 Weight Limit Signs (R12-1, R12-2, and R12-5) ..... 1252
Section 6G.07 STAY IN LANE Signs (R4-9 and R4-9a) ..... 1252
Section 6G.08 Work Zone and Higher Fines Signs and Plaques ..... 1252

Section 6G.09 PEDESTRIAN CROSSWALK Sign (R9-8) ..... 1253
Section 6G.10 SIDEWALK CLOSED Signs (R9-9, R9-10, R9-11, and R9-11a) ..... 1253
Section 6G.11 TURN OFF 2-WAY RADIO AND CELL PHONE Sign (R22-2) ..... 1254
Section 6G.12 Other Regulatory Signs ..... 1254
Section 6G.101(CA) RAMP CLOSED (C2(CA)) and RAMP CLOSED, USE RAMP AT __ (SC7(CA)) Signs ..... 1254
Section 6G.102(CA) MOVE OVER OR SLOW WHEN AMBER LIGHTS FLASHING Sign (R111(CA)) ..... 1255
Section 6G.103(CA) Moving Lane Closure Signs (W23-1 and SC10(CA), SC11(CA), SC13(CA), SC15(CA)) ..... 1255

**CHAPTER 6H. TTC ZONE WARNING SIGNS**

Section 6H.01 Warning Sign Function, Design, and Application ..... 1261
Section 6H.02 Position of Advance Warning Signs ..... 1261
Section 6H.03 ROAD (STREET) WORK Sign (W20-1) ..... 1262
Section 6H.04 DETOUR Sign (W20-2) ..... 1263
Section 6H.05 ROAD (STREET) CLOSED Sign (W20-3) ..... 1263
Section 6H.06 ONE LANE ROAD Sign (W20-4) ..... 1263
Section 6H.07 Lane(s) Closed Signs (W20-5, W20-5a, and W9-3) ..... 1263
Section 6H.08 Lane Ends Signs (W4-2 and W9-2a) ..... 1263
Section 6H.09 ON RAMP Plaque (W13-4P) ..... 1264
Section 6H.10 RAMP NARROWS Sign (W5-4) ..... 1264
Section 6H.11 SLOW TRAFFIC AHEAD Sign (W23-1) ..... 1264
Section 6H.12 EXIT OPEN and EXIT CLOSED Signs (E5-2 and E5-2a) ..... 1264
Section 6H.13 EXIT ONLY Sign (E5-3) ..... 1264
Section 6H.14 NEW TRAFFIC PATTERN AHEAD Sign (W23-2) ..... 1264
Section 6H.15 Flagger Signs (W20-7 and W20-7a) ..... 1265
Section 6H.16 Two-Way Traffic Sign (W6-3) ..... 1265
Section 6H.17 Narrow Two-Way Traffic Sign (W6-4) ..... 1265
Section 6H.18 Workers Signs (W21-1 and W21-1a) ..... 1265
Section 6H.19 FRESH OIL (TAR) Sign (W21-2) ..... 1265
Section 6H.20 ROAD MACHINERY AHEAD Sign (W21-3) ..... 1265
Section 6H.21 Motorized Traffic Signs (W8-6 and W11-10) ..... 1266
Section 6H.22 Shoulder Work Signs (W21-5, W21-5a, and W21-5b) ..... 1266
Section 6H.23 SURVEY CREW Sign (W21-6) ..... 1266
Section 6H.24 UTILITY WORK Sign (W21-7) ..... 1266
Section 6H.25 Signs for Blasting Areas ..... 1266
Section 6H.26 Shoulder Signs and Plaque (W8-4, W8-9, W8-17, and W8-17P) ..... 1267
Section 6H.27 UNEVEN LANES Sign (W8-11) ..... 1267
Section 6H.28 STEEL PLATE AHEAD Sign (W8-24) ..... 1268
Section 6H.29 NO CENTER LINE Sign (W8-12) ..... 1268
Section 6H.30 Reverse Curve Signs (W1-4 Series) ..... 1268
Section 6H.31 Double Reverse Curve Signs (W24-1 Series) ..... 1268
Section 6H.32 Advisory Speed Plaque (W13-1P) ..... 1269
Section 6H.33 Supplementary Distance Plaque (W7-3aP) ..... 1269
Section 6H.34 Motorcycle Plaque (W8-15P) ..... 1269
Section 6H.35 ROAD WORK NEXT XX MILES Sign (G20-1) ..... 1269
Section 6H.36 END ROAD WORK Sign (G20-2) ..... 1270
Section 6H.37 PILOT CAR FOLLOW ME Sign (G20-4) ..... 1270
Section 6H.38 Other Warning Signs ..... 1270
Section 6H.101(CA) LOOSE GRAVEL Sign (W8-7) ..... 1270
Section 6H.102(CA) NARROW LANE(S) Sign (C12(CA)) ..... 1271
Section 6H.103(CA) OPEN TRENCH Sign (C27(CA)) ..... 1271
Section 6H.104(CA) Object Markers ..... 1271
Section 6H.105(CA) Slow For The Cone Zone (SC19(CA) and SC20(CA)) Signs ..... 1272

Section 6H.106(CA) FRESH CONCRETE Sign (C43(CA)) ..... 1272
Section 6H.107(CA) CAUTION FREQUENT STOPPING AND BACKING STAY BACK 100 FEET Sign (SC21(CA)) ..... 1272

**CHAPTER 6I. TTC ZONE GUIDE SIGNS**

Section 6I.01 Guide Signs – General ..... 1283
Section 6I.02 Detour Signs and Plaques (M4-8P, M4-8a, M4-8bP, M4-9, M4-9a, M4-9b, M4-9c, and M4-10) ..... 1283
Section 6I.03 EXIT CLOSED Panel ..... 1284
Section 6I.101(CA) Construction Project Funding Identification Signs ..... 1284

**CHAPTER 6J. TTC ZONE PAVEMENT MARKINGS**

Section 6J.01 Pavement Markings in TTC Zones ..... 1290
Section 6J.02 Temporary Markings ..... 1290
Section 6J.03 Temporary Raised Pavement Markers ..... 1291
Section 6J.04 Delineators ..... 1292

**CHAPTER 6K. TTC ZONE CHANNELIZING DEVICES**

Section 6K.01 Channelizing Devices – General ..... 1293
Section 6K.02 Pedestrian Channelizing Devices ..... 1293
Section 6K.03 Cones ..... 1294
Section 6K.04 Tubular Markers ..... 1295
Section 6K.05 Vertical Panels ..... 1297
Section 6K.06 Drums ..... 1297
Section 6K.07 Type 1, 2, or 3 Barricades ..... 1298
Section 6K.08 Direction Indicator Barricades ..... 1299
Section 6K.09 Temporary Traffic Barriers as Channelizing Devices ..... 1300
Section 6K.10 Longitudinal Channelizing Devices ..... 1300
Section 6K.11 Temporary Lane Separators ..... 1301
Section 6K.12 Other Channelizing Devices ..... 1301

**CHAPTER 6L. OTHER TTC ZONE TRAFFIC CONTROL DEVICES**

Section 6L.01 Temporary Traffic Control Signals ..... 1306
Section 6L.02 Automated Flagger Assistance Devices – General ..... 1307
Section 6L.03 STOP/SLOW Automated Flagger Assistance Devices ..... 1308
Section 6L.04 Red/Yellow Lens Automated Flagger Assistance Devices ..... 1309
Section 6L.05 Portable Changeable Message Signs ..... 1310
Section 6L.06 Arrow Boards ..... 1313
Section 6L.07 Flashing Beacons and Warning Lights ..... 1315
Section 6L.08 High-Level Warning Devices (Flag Trees) ..... 1316

**CHAPTER 6M. OTHER TTC ZONE DESIGN FEATURES AND SAFETY DEVICES**

Section 6M.01 General ..... 1321
Section 6M.02 Positive Protection and Temporary Traffic Barriers ..... 1321
Section 6M.03 Temporary Raised Islands ..... 1322
Section 6M.04 Detectable Edging for Pedestrians ..... 1322
Section 6M.05 Crash Cushions ..... 1323
Section 6M.06 Rumble Strips ..... 1323
Section 6M.07 Screens ..... 1324
Section 6M.08 Lighting for Night Work ..... 1325

**CHAPTER 6N. TYPES OF TEMPORARY TRAFFIC CONTROL ZONE ACTIVITIES**

Section 6N.01 Work Duration ..... 1326
Section 6N.02 Location of Work ..... 1327

Section 6N.03 Modifications to Fulfill Special Needs ..... 1327
Section 6N.04 Work Affecting Pedestrian and Bicycle Facilities ..... 1328
Section 6N.05 Work Outside of the Shoulder ..... 1330
Section 6N.06 Work on the Shoulder with No Encroachment ..... 1330
Section 6N.07 Work on the Shoulder with Minor Encroachment ..... 1331
Section 6N.08 Work within the Median ..... 1331
Section 6N.09 Work within the Traveled Way of a Two-Lane Highway ..... 1331
Section 6N.10 Work within the Traveled Way of an Urban Street ..... 1332
Section 6N.11 Work within the Traveled Way of a Multi-Lane, Non-Access Controlled Highway ..... 1332
Section 6N.12 Work within the Traveled Way at an Intersection ..... 1334
Section 6N.13 Work within the Traveled Way of a Freeway or Expressway ..... 1335
Section 6N.14 Two-Lane, Two-Way Traffic on One Roadway of a Normally-Divided Highway ..... 1335
Section 6N.15 Crossovers ..... 1336
Section 6N.16 Interchanges ..... 1336
Section 6N.17 Work in the Vicinity of a Grade Crossing ..... 1336
Section 6N.18 Work during Nighttime Hours ..... 1337
Section 6N.19 Late Merge ..... 1337

**CHAPTER 6O. CONTROL OF TRAFFIC THROUGH TRAFFIC INCIDENT MANAGEMENT AREAS**

Section 6O.01 General ..... 1340
Section 6O.02 Major Traffic Incidents ..... 1341
Section 6O.03 Intermediate Traffic Incidents ..... 1342
Section 6O.04 Minor Traffic Incidents ..... 1342
Section 6O.05 Use of Emergency-Vehicle Lighting ..... 1342
Section 6O.101(CA) FLOODING AHEAD TURN AROUND DON'T DROWN W86(CA) Sign ..... 1343
Section 6O.102(CA) EMERGENCY SCENE AHEAD W90(CA) Sign ..... 1343

**CHAPTER 6P. TYPICAL APPLICATIONS**

Section 6P.01 Typical Applications ..... 1346

**PART 7 TRAFFIC CONTROL FOR SCHOOL AREAS**

**CHAPTER 7A. GENERAL**

Section 7A.01 Introduction ..... 1467
Section 7A.02 School Route Plans and School Crossings ..... 1467

**CHAPTER 7B. SIGNS**

Section 7B.01 Design of School Signs ..... 1470
Section 7B.02 School Area Signs and Plaques ..... 1470
Section 7B.03 School Crossing Signs ..... 1471
Section 7B.04 School Bus Stop Signs ..... 1473
Section 7B.05 School Speed Limit Signs and Plaques ..... 1473
Section 7B.06 Higher Fines Zone Signs and Plaques in School Areas ..... 1476
Section 7B.07 Parking and Stopping (R7 and R8 Series) Signs ..... 1476

**CHAPTER 7C. MARKINGS**

Section 7C.01 Crosswalk Markings ..... 1493
Section 7C.02 Pavement Word, Symbol, and Arrow Markings ..... 1494

**CHAPTER 7D. CROSSING SUPERVISION**

Section 7D.01 Adult Crossing Guards ..... 1497
Section 7D.02 Operating Procedures for Adult Crossing Guards ..... 1498

Section 7D.101(CA) School Safety Patrols ..... 1498

# PART 8 TRAFFIC CONTROL FOR RAILROAD AND LIGHT RAIL TRANSIT GRADE CROSSINGS

## CHAPTER 8A. GENERAL

Section 8A.01 Introduction ..... 1499
Section 8A.02 Highway-LRT Grade Crossings ..... 1500
Section 8A.03 Traffic Control Systems and Practices at Grade Crossings ..... 1500
Section 8A.04 Traffic Control Systems at Highway-LRT Grade Crossings ..... 1501
Section 8A.05 Engineering Studies at Grade Crossings ..... 1501
Section 8A.06 Uniform Provisions ..... 1502
Section 8A.07 Minimum Track Clearance Distance and Clear Storage Distance ..... 1502
Section 8A.08 Adjacent Grade Crossings ..... 1503
Section 8A.09 Grade Crossing Elimination ..... 1503
Section 8A.10 Illumination at Grade Crossings ..... 1504
Section 8A.11 Quiet Zone Treatments at Highway-Rail Grade Crossings ..... 1504
Section 8A.12 Grade Crossings within or in Close Proximity to Circular Intersections ..... 1504
Section 8A.13 Temporary Traffic Control Zones ..... 1505
Section 8A.101(CA) Relation to Other Documents ..... 1506

## CHAPTER 8B. SIGNS

Section 8B.01 Purpose and Application ..... 1507
Section 8B.02 Sizes of Grade Crossing Signs ..... 1507
Section 8B.03 Grade Crossing (Crossbuck) Sign (R15-1) and Number of Tracks Plaque (R15-2P) at Active and Passive Grade Crossings ..... 1507
Section 8B.04 Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings ..... 1508
Section 8B.05 Use of STOP (R1-1) or YIELD (R1-2) Signs without Crossbuck Signs at Highway-LRT Grade Crossings ..... 1510
Section 8B.06 Grade Crossing Advance Warning Signs (W10-1 through W10-4) ..... 1510
Section 8B.07 DO NOT STOP ON TRACKS Sign (R8-8) ..... 1512
Section 8B.08 TRACKS OUT OF SERVICE Sign (R8-9) ..... 1512
Section 8B.09 STOP HERE WHEN FLASHING Signs (R8-10 and R8-10a) ..... 1512
Section 8B.10 STOP HERE ON RED Signs (R10-6 and R10-6a) ..... 1513
Section 8B.11 EXEMPT Grade Crossing Plaques (R15-3P and W10-1aP) ..... 1513
Section 8B.12 Light Rail Transit Only Lane Signs (R15-4 Series) ..... 1513
Section 8B.13 Do Not Pass Light Rail Transit Signs (R15-5 and R15-5a) ..... 1514
Section 8B.14 No Motor Vehicles on Tracks Signs (R15-6 and R15-6a) ..... 1514
Section 8B.15 Divided Highway with Light Rail Transit Crossing Signs (R15-7 Series) ..... 1514
Section 8B.16 Low Ground Clearance Grade Crossing Sign (W10-5) ..... 1515
Section 8B.17 Light Rail Transit Approaching-Activated Blank-Out Warning Sign (W10-7) ..... 1515
Section 8B.18 Another Train Coming Sign (W10-16) ..... 1515
Section 8B.19 TRAINS MAY EXCEED 80 MPH Sign (W10-8) ..... 1516
Section 8B.20 NO TRAIN HORN Sign or Plaque (W10-9 and W10-9P) ..... 1516
Section 8B.21 Storage Space Signs (W10-11, W10-11a, and W10-11b) ..... 1516
Section 8B.22 Skewed Crossing Sign (W10-12) ..... 1516
Section 8B.23 NO GATES OR LIGHTS Plaque (W10-13P) ..... 1517
Section 8B.24 Next Crossing Plaques (W10-14P and W10-14aP) ..... 1517
Section 8B.25 ROUGH CROSSING Plaque (W10-15P) ..... 1517
Section 8B.26 Light Rail Transit Station Sign (I3-8) ..... 1517
Section 8B.27 Emergency Notification System Sign (I13-1) ..... 1517
Section 8B.101(CA) Train Station Signs (I3-7 and G97AP(CA)) ..... 1518

Section 8B.102(CA) Pedestrian Grade Crossing Sign (R15-1D(CA)) ..... 1518
Section 8B.103(CA) Private Grade Crossing Sign (R15-1X(CA)) ..... 1518

**CHAPTER 8C. MARKINGS**

Section 8C.01 Purpose and Application ..... 1531
Section 8C.02 Grade Crossing Pavement Markings ..... 1531
Section 8C.03 Stop and Yield Lines ..... 1532
Section 8C.04 Lane-Use Arrow Markings ..... 1532
Section 8C.05 Edge Lines, Lane Lines, Center Lines, Raised Pavement Markers, and Tubular Markers ..... 1532
Section 8C.06 Dynamic Envelope and Do Not Block Pavement Markings ..... 1533

**CHAPTER 8D. FLASHING-LIGHT SIGNALS, AUTOMATIC GATES, AND TRAFFIC CONTROL SIGNALS**

Section 8D.01 Introduction ..... 1542
Section 8D.02 Flashing-Light Signals ..... 1543
Section 8D.03 Automatic Gates ..... 1544
Section 8D.04 Use of Active Traffic Control Systems at LRT Grade Crossings ..... 1546
Section 8D.05 Exit Gate and Four-Quadrant Gate Systems ..... 1546
Section 8D.06 Wayside Horn Systems ..... 1548
Section 8D.07 Rail Traffic Detection ..... 1548
Section 8D.08 Use of Traffic Control Signals at Grade Crossings ..... 1548
Section 8D.09 Preemption of Highway Traffic Signals at or Near Grade Crossings ..... 1549
Section 8D.10 Movements Prohibited During Preemption ..... 1553
Section 8D.11 Pre-Signals at or Near Grade Crossings ..... 1554
Section 8D.12 Queue Cutter Signals at or Near Grade Crossings ..... 1556
Section 8D.13 Warning Beacons or LED-Enhanced Warning Signs at Grade Crossings ..... 1558
Section 8D.14 Traffic Control Signals at or Near Highway-LRT Grade Crossings ..... 1559
Section 8D.15 Use of LRT Signals for Control of LRT Vehicles at Highway-LRT Grade Crossings ..... 1560

**CHAPTER 8E. PATHWAY AND SIDEWALK GRADE CROSSINGS**

Section 8E.01 Purpose ..... 1565
Section 8E.02 Use of Standard Devices, Systems, and Practices ..... 1565
Section 8E.03 Pathway and Sidewalk Grade Crossing Signs and Markings ..... 1566
Section 8E.04 Stop Lines, Edge Lines, and Detectable Warnings ..... 1566
Section 8E.05 Passive Traffic Control Devices – Crossbuck Assemblies ..... 1567
Section 8E.06 Channelizing Devices Used with Sidewalk and Pathway Traffic Control Devices ..... 1568
Section 8E.07 Active Traffic Control Systems ..... 1568
Section 8E.08 Active Traffic Control Devices – Signals ..... 1569
Section 8E.09 Active Traffic Control Devices – Automatic Pedestrian Gates ..... 1570
Section 8E.10 Active Traffic Control Devices – Multiple-Track Pathway or Sidewalk Grade Crossings ..... 1571

# PART 9 TRAFFIC CONTROL FOR BICYCLE FACILITIES

**CHAPTER 9A. GENERAL**

Section 9A.01 General ..... 1585
Section 9A.02 Standardization of Application for Signing ..... 1585
Section 9A.03 Standardization of Application for Markings ..... 1586
Section 9A.101(CA) Traffic Controls for Bicycle Facilities at Rail Crossings ..... 1587

**CHAPTER 9B. REGULATORY SIGNS**

Section 9B.01 STOP and YIELD Signs (R1-1 and R1-2) ..... 1593
Section 9B.02 EXCEPT BICYCLES Regulatory Plaque (R3-7bP) ..... 1593
Section 9B.03 Advance Intersection Lane Control Signs (R3-8 Series) for Bicycle Lanes ..... 1594

Section 9B.04 Bicycle Lane Signs and Plaques (R3-17, R3-5hP, R3-17aP, and R3-17bP) ..... 1594
Section 9B.05 BEGIN RIGHT TURN LANE YIELD TO BIKES Sign (R4-4) ..... 1595
Section 9B.06 Bicycle Wrong Way Sign and RIDE WITH TRAFFIC Plaque (R5-1b and R9-3cP) ..... 1595
Section 9B.07 NO MOTOR VEHICLES Sign (R5-3) ..... 1595
Section 9B.08 Selective Exclusion Signs ..... 1595
Section 9B.09 No Parking Bike Lane Signs (R7-9 and R7-9a) ..... 1596
Section 9B.10 Back-In Parking Sign (R7-10) ..... 1596
Section 9B.11 Bicycles Use Ped Signal Sign (R9-5) ..... 1596
Section 9B.12 Bicycles Yield to Peds Sign (R9-6) ..... 1596
Section 9B.13 Shared-Use Path Restriction Sign (R9-7) ..... 1596
Section 9B.14 Bicycles Allowed Use of Full Lane Sign (R9-20) ..... 1597
Section 9B.15 Bicycle Passing Clearance Sign (R4-19) ..... 1597
Section 9B.16 Bicycles Use Shoulder Only Sign (R9-21) ..... 1597
Section 9B.17 Signing for Bicycles on Freeways and Expressways ..... 1598
Section 9B.18 Two-Stage Bicycle Turn Box Regulatory Signing (R9-23 Series) ..... 1598
Section 9B.19 Bicycle Jughandle Signs (R9-24, R9-25, R9-26, and R9-27 Series) ..... 1599
Section 9B.20 Bicycle Actuation Signs (R10-4, R10-22, R10-24, R10-25, and R10-26) ..... 1599
Section 9B.21 Left Turn Yield to Bicycles Sign (R10-12b) ..... 1600
Section 9B.22 Bicycle Signal Signs (R10-40, R10-40a, R10-41, R10-41a, R10-41b, and R10-41c) ..... 1600
Section 9B.23 LOOK Sign (R15-8) ..... 1600
Section 9B.24 Other Regulatory Signs ..... 1600
Section 9B.101(CA) Bike Turn-out Signs SR64A(CA) and SR64B(CA) ..... 1600

**CHAPTER 9C. WARNING SIGNS AND OBJECT MARKERS**

Section 9C.01 Turn or Curve Warning Signs (W1 Series) ..... 1609
Section 9C.02 Intersection Warning Signs (W2 Series) ..... 1609
Section 9C.03 Bicycle Surface Condition Warning Sign (W8-10) ..... 1609
Section 9C.04 Bicycle Warning and Trail Crossing Signs (W11-1 and W11-15) ..... 1609
Section 9C.05 EXCEPT BICYCLES Warning Plaque (W16-20P) ..... 1610
Section 9C.06 Two-Way Bicycle Cross Traffic Warning Plaque (W16-21P) ..... 1610
Section 9C.07 Bicycle Lane Ends Warning Sign (W9-5) and Bicycles Merging Sign (W9-5a) ..... 1610
Section 9C.08 Other Bicycle Warning Signs ..... 1611
Section 9C.09 Object Markers ..... 1611

**CHAPTER 9D. GUIDE AND SERVICE SIGNS**

Section 9D.01 Bicycle Destination Signs (D1-1b, D1-1c, D1-2b, D1-2c, D1-3b, D1-3c, D2-1a, D2-2a, and D2-3a) ..... 1614
Section 9D.02 Bike Route Guide Signs (D11-1 and D11-1c) ..... 1615
Section 9D.03 BIKE ROUTE Plaque (D11-1bP) ..... 1616
Section 9D.04 Numbered Bikeway Systems ..... 1616
Section 9D.05 Numbered Bicycle Route Signs (M1-8 and M1-8a) ..... 1617
Section 9D.06 Non-Numbered Bicycle Route Signs (M1-8b and M1-8c) ..... 1617
Section 9D.07 U.S. Bicycle Route Sign (M1-9) ..... 1618
Section 9D.08 Bicycle Route Sign and Auxiliary Plaques ..... 1618
Section 9D.09 Bicycle Parking Area, Sharing Station, and Lockers Guide Signs (D4-3, D4-4, and D4-4a) ..... 1620
Section 9D.10 Reference Location Signs (D10-1 through D10-3) and Intermediate Reference Location Signs (D10-1a through D10-3a) ..... 1620
Section 9D.11 Mode-Specific Directional Guide Signs for Shared-Use Paths (D11-11, D11-12, D11-13, and D11-14) ..... 1621
Section 9D.12 Destination Guide Signs for Shared-Use Paths (D11-10a, D11-10b, D11-10c, D11-10d, D11-10e, and D11-10f) ..... 1621
Section 9D.13 Two-Stage Bicycle Turn Box Guide Signs (D11-20 Series) ..... 1623

Section 9D.14 General Service Signing for Bikeways....1624
Section 9D.101(CA) Signs on Overcrossing Structures....1624

## CHAPTER 9E. MARKINGS

Section 9E.01 Bicycle Lanes....1636
Section 9E.02 Bicycle Lanes at Intersection Approaches....1637
Section 9E.03 Extensions of Bicycle Lanes through Intersections....1639
Section 9E.04 Bicycle Lanes at Driveways....1640
Section 9E.05 Bicycle Lanes at Circular Intersections....1641
Section 9E.06 Buffer-Separated Bicycle Lanes....1641
Section 9E.07 Separated Bicycle Lanes....1642
Section 9E.08 Counter-Flow Bicycle Lanes....1645
Section 9E.09 Shared-Lane Marking....1646
Section 9E.10 Shared-Lane Markings for Circular Intersections....1647
Section 9E.11 Two-Stage Bicycle Turn Boxes....1647
Section 9E.12 Bicycle Box....1648
Section 9E.13 Shared-Use Paths....1649
Section 9E.14 Bicycle Route Pavement Markings....1650
Section 9E.15 Bicycle Detector Symbol....1651
Section 9E.16 Pavement Markings for Obstructions....1651
Section 9E.17 Raised Devices....1651

## CHAPTER 9F. SIGNALS

Section 9F.01 Application....1696
Section 9F.02 Bicycle Signal Faces....1696
Section 9F.03 Signal Operations for Bicycles....1696

**APPENDIX A1. CONGRESSIONAL LEGISLATION....1698**
**APPENDIX A2. METRIC CONVERSIONS....1700**

## FIGURES

**Page**

Figure 1A-101(CA) CA MUTCD Format Explanations....60
Figure 1B-1 Process for Requesting and Conducting Experimentations for New Traffic Control Devices....78
Figure 1B-1(CA) Process for Incorporating New Traffic Control Devices into the MUTCD....79
Figure 1B-2 Process for Incorporating New Traffic Control Devices into the MUTCD....80
Figure 1B-101(CA) Process for the Use of Traffic Control Devices in California Approved as Interim Approval (IA) by FHWA....81
Figure 2A-1 Examples of Enhanced Conspicuity for Signs....140
Figure 2A-2 Examples of Heights and Lateral Locations of Sign Installations....141
Figure 2A-2(CA) California Examples of Heights and Lateral Locations of Sign Installations....142
Figure 2A-3 Examples of Locations for Some Typical Signs at Intersections....143
Figure 2A-4 Relative Locations of Regulatory, Warning, and Guide Signs on an Intersection Approach....144
Figure 2A-5 Intersection Configuration at a Divided Highway Crossing....148
Figure 2B-1 STOP and YIELD Signs and Plaques....229
Figure 2B-2 Unsignalized Pedestrian Crosswalk Signs....230
Figure 2B-3 Speed Limit Signs and Plaques....231
Figure 2B-3(CA) Speed Limit and Photo Enforcement Signs and Plaques....232
Figure 2B-4 Movement Prohibition and Lane Control Signs and Plaques....233
Figure 2B-4(CA) Movement Prohibition and Lane Control Signs and Plaques....235
Figure 2B-5 Intersection Lane Control Sign Arrow Options for Roundabouts....236
Figure 2B-6 Center and Reversible Lane Control Signs and Plaques....237

Figure 2B-7 Location of Reversible Two-Way Left-Turn Signs ....238
Figure 2B-8 Jughandle Regulatory Signs ....239
Figure 2B-9 Examples of Applications of Jughandle Regulatory and Guide Signing ....240
Figure 2B-10 Passing, Keep Right, and Slow Traffic Signs ....243
Figure 2B-10(CA) Passing, Keep Right, and Slow Traffic Signs ....244
Figure 2B-11 Examples of Keep Right and Keep Left Sign Placement ....245
Figure 2B-12 Selective Exclusion Signs and Plaques ....246
Figure 2B-12(CA) Selective Exclusion Signs and Plaques ....247
Figure 2B-13 DO NOT ENTER, WRONG WAY, ONE WAY, and Related Signs and Plaques ....248
Figure 2B-13(CA) DO NOT ENTER, WRONG WAY, ONE WAY, and Related Signs and Plaques ....248
Figure 2B-14 Locations of DO NOT ENTER and WRONG WAY Signing for Divided Highway Crossings that Function as Two Separate Intersections ....249
Figure 2B-14(CA) Locations of DO NOT ENTER and WRONG WAY Signing for Divided Highway Crossings that Function as a Single Intersection ....250
Figure 2B-15 Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry ....251
Figure 2B-15(CA) Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry ....252
Figure 2B-16 Example of Application of Regulatory Signing and Pavement Markings at an Entrance Ramp Terminal ....257
Figure 2B-17 Examples of Low-Mounted WRONG WAY Signs with DO NOT ENTER Signs for Wrong-Way Traffic Control ....258
Figure 2B-18 Locations of ONE WAY Signs ....259
Figure 2B-19 ONE WAY Signing for Divided Highway Crossings that Function as Two Separate Intersections ....260
Figure 2B-20 ONE WAY, DO NOT ENTER, and WRONG WAY Signing for Divided Highway Crossings that Function as a Single Intersection ....261
Figure 2B-21 Example of Regulatory and Warning Signs for a Mini-Roundabout ....262
Figure 2B-22 Example of Regulatory and Warning Signs for a One-Lane Roundabout ....263
Figure 2B-23 Example of Regulatory and Warning Signs for a Two-Lane Roundabout with Consecutive Double Lefts ....264
Figure 2B-24 Example of Regulatory and Warning Signs for a Neighborhood Traffic Circle ....265
Figure 2B-25 Parking, Standing, and Stopping Signs and Plaques (R7 and R8 Series) ....266
Figure 2B-25(CA) Parking, Standing, and Stopping Signs and Plaques ....268
Figure 2B-26 Emergency Restriction Signs ....271
Figure 2B-27 Pedestrian Signs and Plaques ....272
Figure 2B-27(CA) Pedestrian Signs and Plaques ....273
Figure 2B-28 Traffic Signal Signs and Plaques ....274
Figure 2B-28(CA) Traffic Signal Signs and Plaques ....275
Figure 2B-29 Ramp Metering Signs ....276
Figure 2B-29(CA) Ramp Metering Signs ....276
Figure 2B-30 Road Closed and Weight Limit Signs ....277
Figure 2B-30(CA) Road Closed and Weight Limit Signs ....277
Figure 2B-31 Truck Signs ....278
Figure 2B-31(CA) Truck Signs ....278
Figure 2B-32 Photo Enforcement Signs and Plaques ....279
Figure 2B-33 Other Regulatory Signs ....280
Figure 2B-33(CA) Other Regulatory Signs and Symbols ....280
Figure 2B-34 Headlight Use Signs ....281
Figure 2B-34(CA) Headlight Use Signs ....281
Figure 2B-101(CA) Example of Speed Zone Survey Sheet ....282

Figure 2B-102(CA) Example of Cumulative Speed Curve Sheet ..... 283
Figure 2B-103(CA) Example of Vehicle Speed Survey Sheet for City and County Through Highways, Arterials, and Collector Roads ..... 284
Figure 2B-104(CA) Example of Vehicle Speed Survey Sheet (For 40 MPH and Under) ..... 285
Figure 2B-105(CA) U-Turn Signs for Signalized Intersections with Separate Turn Phase ..... 286
Figure 2B-106(CA) California Miscellaneous Regulatory Signs ..... 287
Figure 2C-1 Horizontal Alignment Signs and Plaques ..... 347
Figure 2C-2 Examples of Warning Signs for Changes in Horizontal Alignment ..... 348
Figure 2C-3 Examples of Exit Ramp Advisory Speed and Other Warning Signs ..... 350
Figure 2C-4 Vehicle Speed Feedback Sign and Plaque ..... 355
Figure 2C-5 Vertical Grade Signs and Plaques ..... 356
Figure 2C-5(CA) Vertical Grade Signs and Plaques ..... 356
Figure 2C-6 Miscellaneous Warning Signs ..... 357
Figure 2C-6(CA) Miscellaneous Warning Signs ..... 358
Figure 2C-7 Roadway and Weather Condition Signs and Plaques ..... 359
Figure 2C-7(CA) Roadway and Weather Condition Signs and Plaques ..... 360
Figure 2C-8 Advance Traffic Control Signs ..... 361
Figure 2C-8(CA) Advance Traffic Control Signs ..... 361
Figure 2C-9 Reduced Speed Limit Ahead and Speed Zone Signs ..... 362
Figure 2C-10 Intersection Warning Signs and Plaques ..... 363
Figure 2C-10(CA) Intersection Warning Signs and Plaques ..... 363
Figure 2C-11 Merging and Passing Signs and Plaques ..... 364
Figure 2C-11(CA) Merging and Passing Signs and Plaques ..... 365
Figure 2C-12 Examples of Merge and Added Lane Sign Placement for Entering and Converging Roadways ..... 366
Figure 2C-13 Example Sequences for Lane Ends and Lane Merge Signs ..... 367
Figure 2C-14 Vehicular Traffic Warning Signs and Plaques ..... 372
Figure 2C-14(CA) Vehicular Traffic Warning Signs and Plaques ..... 372
Figure 2C-15 Non-Vehicular Warning Signs ..... 373
Figure 2C-15(CA) Non-Vehicular Warning Signs ..... 373
Figure 2C-16 Supplemental Warning Plaques ..... 374
Figure 2C-17 Object Markers ..... 375
Figure 2C-17(CA) California Object Markers ..... 376
Figure 2C-101(CA) Determination of Comfortable Speed From Ball Bank Indicator Readings ..... 377
Figure 2D-1 Examples of Color-Coded Destination Guide Signs ..... 430
Figure 2D-2 Examples of Uses of Abbreviations on Guide Signs ..... 431
Figure 2D-3 Arrows for Use on Guide Signs ..... 432
Figure 2D-4 Route Signs ..... 433
Figure 2D-4(CA) California Route Signs ..... 433
Figure 2D-5 Route Sign Auxiliary Plaques and Combination Junction Sign ..... 434
Figure 2D-5(CA) California Route Sign Auxiliaries and Combination Junction Sign ..... 434
Figure 2D-6 Advance Turn and Directional Arrow Auxiliary Plaques ..... 435
Figure 2D-6(CA) California Advance Turn and Directional Arrow Auxiliary Plaques ..... 435
Figure 2D-7 Examples of Consolidation of Route Sign Assemblies into Guide Signs ..... 436
Figure 2D-8 Illustration of Directional Assemblies and Other Route Signs ..... 438
Figure 2D-9 Destination and Distance Signs ..... 442
Figure 2D-9(CA) California Destination and Distance Signs ..... 443
Figure 2D-10 Examples of Overhead Signs at an Intersection ..... 444
Figure 2D-11 Destination Signs for Circular Intersections ..... 447
Figure 2D-12 Examples of Guide Signs for Circular Intersections ..... 448
Figure 2D-13 Examples of Signing for Intersections with Indirect Left Turns ..... 452

Figure 2D-14 Street Name and Parking Signs ..... 455
Figure 2D-15 Example of Interchange Crossroad Guide Signing for a One-Lane Approach ..... 456
~~Figure 2D-16 Example of Minor Interchange Crossroad Guide Signing ..... 457~~
Figure 2D-17 Examples of Multi-Lane Crossroad Guide Signing for a Diamond Interchange ..... 458
Figure 2D-18 Examples of Multi-Lane Crossroad Guide Signing for a Partial Cloverleaf Interchange ..... 459
Figure 2D-19 Examples of Multi-Lane Crossroad Signing for a Cloverleaf Interchange ..... 460
Figure 2D-20 Example of Crossroad Guide Signing for an Entrance Ramp with a Nearby Frontage Road ..... 461
Figure 2D-21 Example of Transposed Alignment Crossroad Guide Signing at a Diamond Interchange ..... 462
Figure 2D-22 Example of Crossroad Intersection Guide Signs for a Single-Point Urban Interchange ..... 463
Figure 2D-23 Example of Weigh Station Signing – Conventional Road ..... 464
Figure 2D-24 Crossover Signs ..... 465
Figure 2D-25 Truck and Passing Lane Signs ..... 466
Figure 2D-26 Example of Signing for a Truck Lane ..... 467
Figure 2D-27 Example of Signing for an Intermittent Passing Lane ..... 468
Figure 2D-28 Emergency and Slow Vehicle Turn-Out Signs ..... 469
Figure 2D-29 Example of Signing for an Emergency Turn-Out ..... 470
Figure 2D-30 Examples of Community Wayfinding Guide Signs ..... 471
Figure 2D-31 Example of a Community Wayfinding Guide Sign System Showing Direction from a Freeway or Expressway ..... 472
Figure 2D-32 Example of a Color-Coded Community Wayfinding Guide Sign System ..... 473
Figure 2D-33 National Scenic Byways Sign and Plaque, and Examples of Use ..... 474
Figure 2D-34 Byway Identification, State Scenic Byway, and National Historic Trail Signs and Plaques, and Examples of Use ..... 475
Figure 2D-35 Example of Guide and Directional Signing for a National Historic Trail ..... 476
Figure 2D-36 Example of Historic Trails Signing from an Expressway or Freeway ..... 477
Figure 2D-37 Signs and Plaques for Rerouting Because of Traffic Incidents ..... 478
~~Figure 2D-38 Example of Permanent Guide Signing for Rerouting Because of Traffic Incidents ..... 479~~
Figure 2D-39 Example of a System of Major Guide Signs for an Airport Roadway Network ..... 480
Figure 2D-101(CA) California Miscellaneous Guide Signs ..... 483
Figure 2E-1 Designation of Destination for Interchanges in Opposing Directions of Travel ..... 529
Figure 2E-2 Typical Sequence of Interchange Guide Signs ..... 530
Figure 2E-3 Examples of Interchange Exit Numbering ..... 531
Figure 2E-4 Example of Interstate Loops and Spurs ..... 532
Figure 2E-5 Example of Interchange Numbering for Mainline and Circumferential Routes ..... 533
Figure 2E-6 Example of Interchange Numbering for Mainline and Loop Routes ..... 534
Figure 2E-7 Example of Interchange Numbering for Mainline and Spur Routes ..... 535
Figure 2E-8 Example of Interchange Numbering for Overlapping Routes ..... 536
Figure 2E-9 Examples of Interchange Advance Guide Signs, Exit Number Plaques, and LEFT Plaque ..... 537
Figure 2E-9(CA) California Examples of Interchange Advance Guide Signs, Exit Number Plaques, and LEFT Plaque ..... 538
Figure 2E-10 Example of an Interchange Sequence Sign ..... 539
Figure 2E-10(CA) California Example of an Interchange Sequence Sign ..... 539
Figure 2E-11 Example of Using a Series of Interchange Sequence Signs for Closely-Spaced Interchanges ..... 540
Figure 2E-12 Examples of Exit Direction Signs ..... 541
Figure 2E-12(CA) California Examples of Interchange Exit Direction Signs ..... 542
Figure 2E-13 Exit Direction Sign Placement ..... 543
Figure 2E-14 Examples of Exit Direction Signs with Advisory Speed Panels and Flashing Yellow Beacons ..... 544
Figure 2E-15 Exit Gore Signs and Plaques ..... 545
Figure 2E-16 Examples of Pull-Through Signs ..... 546

Figure 2E-16(CA) California Examples of Pull-Through Signs ..... 546
Figure 2E-17 EXIT ONLY and LEFT Sign Panels ..... 547
Figure 2E-18 Guide Signs for a Single-Lane Exit to the Left with a Dropped Lane ..... 548
Figure 2E-19 Guide Signs for a Single-Lane Exit to the Right with a Dropped Lane ..... 549
Figure 2E-20 Example of Overhead Guide Signs for a Dropped Auxiliary Lane between Separate Interchange Ramps ..... 550
Figure 2E-21 Example of Post-Mounted Advance Guide and Supplemental Warning Signs for a Dropped Auxiliary Lane between Separate Interchange Ramps ..... 551
Figure 2E-22 Example of Guide Signs for an Auxiliary Lane of at Least One-Half Mile in Length ..... 552
Figure 2E-23 Examples of Signing for Mainline Terminations within an Interchange ..... 553
Figure 2E-24 Example of Signing for an Intermediate Interchange within a Major Interchange ..... 554
Figure 2E-25 Examples of Signing for an Interchange Exit Ramp with a Downstream Split ..... 555
Figure 2E-26 Examples of Guide Signs for a Minor Interchange ..... 557
Figure 2E-27 Example of Guide Signs for a Diamond Interchange ..... 558
Figure 2E-28 Example of Guide Signs for a Diamond Interchange in an Urban Area ..... 559
Figure 2E-29 Example of Guide Signs for a Full Cloverleaf Interchange ..... 560
Figure 2E-30 Example of Guide Signs for a Full Cloverleaf Interchange with Collector-Distributor Roadways ..... 561
Figure 2E-31 Example of Guide Signs for a Partial Cloverleaf Interchange ..... 562
Figure 2E-32 Examples of Guide Signs for Successive Interchanges with Collector-Distributor Roadways ..... 563
Figure 2E-33 Examples of Guide Signs for a Freeway-to-Freeway Interchange ..... 565
Figure 2E-34 Example of Guide Signs for a Split with Dedicated Lanes ..... 567
Figure 2E-35 Example of an Overhead Arrow-per-Lane Guide Sign for a Multi-Lane Exit with an Option Lane ..... 568
Figure 2E-36 Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane ..... 569
Figure 2E-36(CA) California Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane ..... 570
Figure 2E-37 Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane (Through Lanes Curve to the Left) ..... 571
Figure 2E-38 Example of Overhead Arrow-per-Lane Guide Signs for a Split with an Option Lane ..... 572
Figure 2E-39 Example of Guide Signing for a Narrow Gore at a Split with an Option Lane ..... 573
Figure 2E-40 Example of Guide Signing for a Narrow Gore at a Two-Lane Exit with an Option Lane ..... 574
Figure 2E-41 Examples of Diagrammatic Advance Guide Signs ..... 575
Figure 2E-42 Example of Diagrammatic Advance Guide Sign Use ..... 576
Figure 2E-43 Example of a Partial Width Overhead Arrow-per-Lane Guide Sign for Intermediate or Minor Interchanges ..... 577
Figure 2E-44 Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with an Option Lane and a Dropped Lane Using Partial-Width Overhead Arrow-per-Lane Signs ..... 578
~~Figure 2E-45 Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes Using Partial-Width Overhead Arrow-per-Lane Signs ..... 579~~
Figure 2E-45(CA) California Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes using Partial-Width Overhead Arrow-per-Lane Signs ..... 580
Figure 2E-46 Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with an Option Lane and a Dropped Lane ..... 581
Figure 2E-47 Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes ..... 582
Figure 2E-48 Example of Sign Spreading ..... 583
Figure 2E-49 Next Exit Plaques ..... 584
Figure 2E-50 Example of a Post-Interchange Distance Sign ..... 585

Figure 2E-51 Example of a Post-Interchange Travel Time Sign ..... 586
Figure 2E-52 Examples of Travel Time Signs ..... 587
Figure 2E-53 Example of a Supplemental Guide Sign for a Multi-Exit Interchange ..... 588
Figure 2E-54 Examples of Supplemental Guide Signs for a Park-and-Ride Facility ..... 589
Figure 2E-54(CA) California Examples of Supplemental Guide Signs for a Park-and-Ride Facility ..... 589
Figure 2E-55 Example of a Community Interchanges Identification Sign ..... 590
Figure 2E-56 Example of the Use of a Community Interchanges Identification Sign ..... 591
Figure 2E-57 Example of a Next Exits Sign ..... 592
Figure 2E-58 Example of the Use of a Next Exits Sign ..... 593
Figure 2E-59 Example of Weigh Station Signing on Freeways ..... 594
~~Figure 2E-60 Interstate, Off-Interstate, and U.S. Route Signs ..... 595~~
Figure 2E-61 Eisenhower Interstate System Signs ..... 596
Figure 2E-62 Example of Signing for Route Diversion by Vehicle Class ..... 597
Figure 2F-1 Examples of ETC Account Pictographs and Use of Purple Backgrounds and Underlay Panels ..... 621
Figure 2F-2 Toll Plaza Regulatory Signs and Plaques ..... 622
Figure 2F-3 ETC Account-Only Auxiliary Signs for Use in Route Sign Assemblies ..... 623
Figure 2F-4 Toll Plaza Warning Signs and Plaques ..... 624
~~Figure 2F-5 Example of Minor Interchange Crossroad Signing for an Approach to a Toll Highway ..... 625~~
Figure 2F-6 Example of Interchange Crossroad Signing for a One-Lane Approach to a Toll Highway ..... 626
Figure 2F-7 Examples of Multi-Lane Crossroad Signing for a Diamond Interchange ..... 627
Figure 2F-8 Examples of Guide Signs for Entrances to Toll Highways or Ramps ..... 628
Figure 2F-9 Examples of Conventional Toll Plaza Advance Signs ..... 629
Figure 2F-10 Example of an Overhead Arrow-per-Lane Guide Sign and Arrow for a Split with an Option Lane ..... 630
Figure 2F-11 Examples of Guide Signs for a Split with an Option Lane for a Mainline Toll Plaza on a Diverging Alignment from Open-Road ETC Lanes ..... 631
Figure 2F-12 Examples of Guide Signs for the Entrance to a Toll Highway on which Tolls are Collected Electronically Only ..... 632
Figure 2F-13 Examples of Guide Signs for Alternative Toll and Non-Toll Ramp Connections to a Non-Toll Highway ..... 635
Figure 2F-14 Examples of Mainline Toll Plaza Approach and Canopy Signing ..... 636
Figure 2F-15 Examples of Guide Signs for a Mainline Toll Plaza on a Diverging Alignment from Open-Road ETC Lanes ..... 637
Figure 2F-16 Examples of Toll Plaza Canopy Signs ..... 638
Figure 2F-101(CA) California Freeway Entrance Package to Toll Facilities ..... 639
Figure 2F-102(CA) California Example of Warning Sign and Plaque for Toll Crossings ..... 640
Figure 2G-1 Preferential Lane Regulatory Signs and Plaque ..... 668
Figure 2G-1(CA) California Preferential Lane Regulatory Signs and Plaques ..... 670
Figure 2G-2 Example of Signing for an Added Continuous-Access Contiguous or Buffer-Separated HOV Lane ..... 671
Figure 2G-3 Example of Signing for a General-Purpose Lane that Becomes a Continuous-Access Contiguous or Buffer-Separated HOV Lane ..... 672
Figure 2G-4 Examples of Warning Signs and Plaques Applicable Only to Preferential Lanes ..... 673
Figure 2G-5 Example of an Overhead Advance Guide Sign for a Preferential Lane Entrance ..... 674
Figure 2G-6 Examples of Overhead or Post-Mounted Preferential Lane Entrance Direction Signs ..... 675
Figure 2G-6(CA) California Examples of Overhead or Post-Mounted Preferential Lane Entrance Direction Signs ..... 675
Figure 2G-7 Entrance Gore Signs for Barrier-Separated Preferential Lanes ..... 676
Figure 2G-8 Example of Advance Guide and Entrance Direction Signs for a General-Purpose Lane that Becomes a Preferential Lane ..... 677
Figure 2G-9 Example of Signing for an Entrance to Access-Restricted HOV Lanes ..... 678

Figure 2G-10 Example of Signing for an Intermediate Entry to a Barrier-Separated or Buffer-Separated HOV Lane ..... 679
Figure 2G-11 Example of Signing for the Intermediate Entry to, Egress from, and End of Access-Restricted HOV Lanes ..... 680
Figure 2G-12 Examples of Barrier-Mounted Guide Signs for an Intermediate Egress from Preferential Lanes ..... 681
Figure 2G-13 Examples of Signs for an Intermediate Egress from a Barrier-Separated or Buffer-Separated HOV Lane ..... 682
Figure 2G-14 Example of Signing for a Direct Entrance Ramp to an HOV Lane from a Park-and-Ride Facility and a Local Street ..... 683
Figure 2G-15 Exit Gore Sign for a Direct Exit from a Preferential Lane ..... 684
Figure 2G-15(CA) California Exit Gore Sign for a Direct Exit from a Preferential Lane ..... 684
Figure 2G-16 Examples of Guide Signs for Direct HOV Lane Entrance and Exit Ramps ..... 685
Figure 2G-16(CA) California Example of Guide Signs For Direct HOV Lane Entrance ..... 686
Figure 2G-17 Examples of Guide Signs for a Direct Access Ramp between HOV Lanes on Separate Freeways ..... 687
Figure 2G-18 Regulatory Signs for Managed Lanes ..... 688
Figure 2G-19 Examples of Guide Signs for Entrances to Priced Managed Lanes ..... 689
Figure 2G-20 Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane on which Registration in a Toll Account Program Is Not Required ..... 690
Figure 2G-21 Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane – ETC Account Required ..... 691
Figure 2G-22 Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane Where a General-Purpose Lane Becomes the Managed Lane ..... 692
Figure 2G-23 Example of Signing for an Intermediate Entry to a Barrier-Separated or Buffer-Separated Priced Managed Lane ..... 693
Figure 2G-24 Example of Signing for the Intermediate Entry to, Egress from, and End of Access-Restricted Priced Managed Lanes ..... 694
Figure 2G-25 Example of an Exit Destinations Sign for a Managed Lane ..... 695
Figure 2G-26 Example of a Comparative Travel Time Information Sign for Preferential or Managed Lanes ..... 696
Figure 2G-27 Examples of Guide Signs for an Intermediate Egress from a Barrier-Separated or Buffer-Separated Managed Lane ..... 697
Figure 2G-28 Examples of Guide Signs for Direct Managed Lane Entrance and Exit Ramps ..... 698
Figure 2G-29 Examples of Guide Signs for a Direct Access Ramp between Managed Lanes on Separate Freeways ..... 699
Figure 2G-30 Examples of Guide Signs for a Direct Entrance Ramp to a Priced Managed Lane and Trailblazing to a Nearby Entrance to the General-Purpose Lanes ..... 700
Figure 2G-31 Examples of Guide Signs for Separate Entrance Ramps to General-Purpose and Priced Managed Lanes from the Same Crossroad ..... 701
Figure 2G-32 Examples of Signing for Part-Time Travel on a Shoulder ..... 702
Figure 2G-32(CA) California Examples of Signing for Part-Time Travel on a Shoulder ..... 706
Figure 2G-33 Example of Lane-Use Control Signals and Variable Speed Limit Signs for Active Lane Management During an Incident ..... 707
Figure 2G-101(CA) California Signs and Plaques for Part-Time Transit Bus on Shoulder ..... 708
Figure 2H-1 General Information and Miscellaneous Information Signs and Plaques ..... 724
Figure 2H-1(CA) General Information and Miscellaneous Information Signs and Plaques ..... 725
Figure 2H-2 Future Interstate Signs (I2-4, I2-4a) ..... 726
Figure 2H-3 Examples of Project Information Signs ..... 727
Figure 2H-4 Examples and Typical Placement of Grade Separation Identification Signs ..... 728
Figure 2H-5 Reference Location Signs ..... 729

Figure 2H-6 Intermediate Reference Location Signs....730
Figure 2H-7 Enhanced Reference Location Signs....731
Figure 2H-8 Examples of Acknowledgment Sign Designs....732
Figure 2H-9 Examples of Signs for Alternative Fuels Corridors....733
Figure 2H-10 Example of Signing for an Alternative Fuels Corridor....734
Figure 2H-11 Typical Signing from a Freeway Exit Ramp to a Service Facility....735
Figure 2I-1 General Service Signs and Plaques....757
Figure 2I-1(CA) General Service Signs and Plaques....758
Figure 2I-2 Example of Next Services Plaque....759
Figure 2I-3 Examples of General Service Signs with and without Exit Numbering....760
Figure 2I-4 Examples of Interstate Oasis Signs and Plaques....761
Figure 2I-5 Rest Area and Other Roadside Area Signs....762
Figure 2I-5(CA) Rest Area and Other Roadside Area Signs....763
Figure 2I-6 Brake Check Area and Chain-Up Area Signs....764
Figure 2I-6(CA) Brake Check Area and Chain-Up Area Signs....764
Figure 2I-7 Examples of Tourist Information and Welcome Center Signs....765
Figure 2I-7(CA) Examples of Tourist Information and Welcome Center Signs....765
Figure 2I-8 Radio, Telephone, and Carpool Information Signs....766
Figure 2I-8(CA) Radio, Telephone, and Carpool Information Signs....767
Figure 2I-9 Examples of Truck Parking Availability Signs....768
Figure 2I-10 Examples of Use of Truck Parking Availability Signs....769
Figure 2J-1 Examples of Business Identification Panel Arrangements on Specific Service Signs....783
Figure 2J-1(CA) Examples of Business Identification Panel Arrangements on Specific Service Signs....784
Figure 2J-2 Examples of Specific Service Sign Locations....785
Figure 2J-3 Example of General Service Signs Used in Conjunction with Specific Service Signs....786
Figure 2J-4 Examples of Supplemental Messages on Business Identification Sign Panels....787
Figure 2J-5 Example of Specific Services Signing for a Conventional Road Accessed within a Freeway-to-Freeway Interchange....788
Figure 2J-6 Example of Signing for Services Accessed from a Collector-Distributor Road Adjacent to a Freeway....789
Figure 2J-7 Examples of Specific Service Trailblazer Signs....790
~~Figure 2K-1 Examples of Tourist-Oriented Directional Signs....797~~
Figure 2K-1(CA) Examples of Tourist-Oriented Directional Signs....798
~~Figure 2K-2 Examples of Tourist-Oriented Directional Signs on an Intersection Approach....799~~
Figure 2L-1 Example of CMS Capability to Display Sign Legends Based on Pixel Pitch....810
Figure 2M-1 Examples of Use of Arrows, Educational Plaques, and Prohibitive Circles and Diagonals..825
Figure 2M-1(CA) Examples of Use of Arrows, Educational Plaques, and Prohibitive Circles and Diagonals....825
Figure 2M-2 Examples of Recreational and Cultural Interest Area Guide Signs....826
Figure 2M-2(CA) Examples of Recreational and Cultural Interest Area Guide Signs....827
Figure 2M-3 Arrangement, Height, and Lateral Position of Signs Located within Recreational and Cultural Interest Areas....828
Figure 2M-4 Examples of Symbol and Destination Guide Signing Layout....829
Figure 2M-5 Recreational and Cultural Interest Area Symbol Signs for General Applications....830
Figure 2M-6 Recreational and Cultural Interest Area Symbol Signs for Accommodations....831
Figure 2M-7 Recreational and Cultural Interest Area Symbol Signs for Services....832
Figure 2M-8 Recreational and Cultural Interest Area Symbol Signs for Land Recreation....833
Figure 2M-8(CA) Recreational and Cultural Interest Area Symbol Signs for Land Recreation....833
Figure 2M-9 Recreational and Cultural Interest Area Symbol Signs for Water Recreation....834
Figure 2M-10 Recreational and Cultural Interest Area Symbol Signs for Winter Recreation....835
Figure 2M-10(CA) Recreational and Cultural Interest Area Symbol Signs for Winter Recreation....835
Figure 2M-101(CA) Memorial or Dedication Signing....836

Figure 2M-102(CA) Prohibited Recreational and Cultural Interest Area Symbol Signs and Educational Plaque ..... 837
Figure 2N-1 Emergency Management Signs ..... 845
Figure 3A-101(CA) Centerlines - 2 Lane Highways ..... 851
Figure 3A-102(CA) Lane Lines - Multilane Highways ..... 852
Figure 3A-103(CA) No Passing Zones - One Direction ..... 854
Figure 3A-104(CA) No Passing Zones - Two Direction ..... 855
Figure 3A-105(CA) Left Edge Lines for Divided Highways ..... 856
Figure 3A-106(CA) Right Edge Line and Right Edge Line Extension Through Intersections ..... 857
Figure 3A-107(CA) Median Islands ..... 858
Figure 3A-108(CA) Two-Way Left-Turn Lanes ..... 859
Figure 3A-109(CA) Intersection Markings ..... 860
Figure 3A-110(CA) Freeway Exit and Entrance Ramp Channelizing Line ..... 861
Figure 3A-111(CA) Lane Drop Markings ..... 863
Figure 3A-112(CA) Channelizing Line and Lane Line/Centerline Extensions ..... 864
Figure 3A-113(CA) Examples of Preferential Lane Lines ..... 865
Figure 3A-114(CA) Exit Ramp with Enhanced Pavement Markers for Wrong Way Details ..... 866
Figure 3B-1 Yellow Center Lines for Two-Lane, Two-Way Applications ..... 891
Figure 3B-2 Yellow Center Lines for Four-or-More Lane, Two-Way Applications ..... 892
Figure 3B-3 Yellow Center Lines for Three-Lane, Two-Way Applications ..... 893
Figure 3B-4 Method of Locating and Determining the Limits of No-Passing Zones at Curves ..... 894
Figure 3B-5 Application of Three-Lane, Two-Way Markings for Changing the Direction of the Center Lane ..... 895
Figure 3B-6 Example of Yellow Pavement Markings for Reversible Lanes ..... 896
Figure 3B-7 Examples of Two-Way Left-Turn Lane Marking Applications ..... 897
Figure 3B-7(CA) Example of Two-Way Left-Turn Lane Marking Applications ..... 898
Figure 3B-8 Example of a Double Solid White Line Used to Prohibit Lane Changing ..... 899
Figure 3B-9 Examples of Dotted Line and Channelizing Line Applications for Exit Ramp Markings ..... 900
Figure 3B-9(CA) Examples of Dotted Line, Chevron Markings, and Channelizing Line Applications for Exit Ramp Markings ..... 902
Figure 3B-10 Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings ..... 903
Figure 3B-10(CA) Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings ..... 905
Figure 3B-11 Examples of Applications of Freeway and Expressway Lane-Drop Markings ..... 907
Figure 3B-11(CA) Examples of Applications of Freeway and Expressway Lane-Drop Markings ..... 913
Figure 3B-12 Examples of Applications of Conventional Road Lane-Drop Markings ..... 915
Figure 3B-13 Examples of Line Extensions through Intersections ..... 917
Figure 3B-14 Examples of Applications of Lane-Reduction Transition Markings ..... 919
Figure 3B-14(CA) Examples of Applications of Lane-Reduction Transition Markings ..... 920
Figure 3B-15 Examples of Applications of Markings for Obstructions in the Roadway ..... 923
Figure 3B-16 Examples of Yield Line Applications ..... 925
Figure 3B-17 Example of Elongated Letters for Word Pavement Markings ..... 926
Figure 3B-18 Examples of Elongated Route Shields and Markers Applied as Pavement Markings ..... 927
Figure 3B-18(CA) Examples of California Elongated Route Shields and Markers Applied as Pavement Markings ..... 927
Figure 3B-19 International Symbol of Accessibility Parking Space Marking ..... 928
Figure 3B-19(CA) International Symbol of Accessibility Parking Space Marking and Related Markings ..... 929
Figure 3B-20 Yield Ahead Triangle Symbols ..... 931
Figure 3B-21 Examples of Standard Arrows for Pavement Markings ..... 932
Figure 3B-21(CA) Examples of Standard Arrows for Pavement Markings ..... 933
Figure 3B-22 Examples of Lane-Use Control Word and Arrow Pavement Markings ..... 942
Figure 3B-23 Examples of Parking Space Markings ..... 943
Figure 3B-24 Do Not Block Intersection Markings ..... 944

Figure 3B-25 Example of the Application of Speed Reduction Markings ..... 945
Figure 3B-26 Pavement Markings for Speed Humps without Crosswalks ..... 946
Figure 3B-27 Pavement Markings for Speed Tables or Speed Humps with Crosswalks ..... 947
Figure 3B-28 Advance Warning Markings for Speed Humps or Speed Tables ..... 948
Figure 3B-29 Example of Pavement Markings for a Diamond Interchange with a Transposed Alignment Crossroad ..... 949
Figure 3B-101(CA) Examples of Left-Turn Channelization Markings ..... 950
Figure 3B-102(CA) Examples of Intersection Markings ..... 951
Figure 3B-103(CA) Treatment for Divided Highway Illusion ..... 952
Figure 3B-104(CA) Passing Lanes ..... 953
Figure 3B-105(CA) Examples of Signing and Marking Turnouts ..... 954
Figure 3B-106(CA) Electric Vehicle Charging Station Pavement Legend Detail ..... 955
Figure 3C-1 Crosswalk Markings ..... 963
Figure 3C-2 Example of Crosswalk Markings for an Exclusive Pedestrian Phase that Permits Diagonal Crossings ..... 964
Figure 3C-101(CA) Examples of Crosswalk Enhancements at Uncontrolled Multilane Approaches ..... 965
Figure 3D-1 Example of Markings for Approach and Circulatory Roadways at a Roundabout ..... 968
Figure 3D-2 Example of Markings for a One-Lane Roundabout ..... 969
Figure 3D-3 Example of Markings for a Two-Lane Roundabout with One-Lane and Two-Lane Approaches ..... 970
Figure 3D-4 Example of Markings for a Two-Lane Roundabout with One-Lane Exits ..... 972
Figure 3D-5 Example of Markings for a Two-Lane Roundabout with Two-Lane Exits ..... 973
Figure 3D-6 Example of Markings for a Two-Lane Roundabout with a Double Left Turn ..... 974
Figure 3D-7 Example of Markings for a Two-Lane Roundabout with a Double Right Turn ..... 975
Figure 3D-8 Example of Markings for a Diamond Interchange with Two Circular-Shaped Roundabout Ramp Terminals ..... 976
Figure 3E-1 Markings for Barrier-Separated Preferential Lanes ..... 980
Figure 3E-2 Markings for Buffer-Separated Preferential Lanes ..... 981
Figure 3E-3 Markings for Contiguous Preferential Lanes ..... 983
Figure 3E-4 Markings for Contra-Flow Preferential Lanes on Divided Highways ..... 984
Figure 3E-5 Markings for Part-Time Travel on Shoulder and Application of Pavement Word Markings ..... 985
Figure 3E-6 Markings for Part-Time Travel on a Shoulder through an Intersection ..... 988
Figure 3E-101(CA) Diamond Symbol (HOV Lane) ..... 989
Figure 3G-1 Examples of Delineator Placement ..... 998
Figure 3G-101(CA) Examples of Delineators ..... 999
Figure 3G-102(CA) Examples of Delineator Placement When Used at Intersections, Islands, Ramps, and Connectors ..... 1000
Figure 3G-103(CA) Examples of Runaway Truck Ramp Signs and Markings ..... 1002
Figure 3G-104(CA) Narrow Bridge Signs and Markings (One-Way and Two-Way Roadways) ..... 1003
Figure 3G-105(CA) Examples of Median Barrier Delineation ..... 1004
Figure 3H-1 Aesthetic Treatments for Transverse Crosswalks ..... 1011
Figure 3H-2 Examples of Yellow-Colored Pavement Applications ..... 1012
Figure 3H-3 Examples of White-Colored Pavement Applications ..... 1013
Figure 3H-4 Examples of Green-Colored Pavement Applications ..... 1014
Figure 3H-5 Examples of Red-Colored Pavement Applications ..... 1015
Figure 3H-6 Examples of Purple-Colored Pavement Applications ..... 1016
Figure 3I-1 Examples of Tubular Markers Supplementing Pavement Markings in Advance of an Unsignalized Crosswalk ..... 1020
Figure 3I-101(CA) Example of Channelizers ..... 1022
Figure 3J-1 Example of Markings for an Approach-End Treatment to an Island ..... 1027
Figure 3J-2 Examples of Islands Designated by Pavement Markings ..... 1028
Figure 3J-3 Examples of Curb Markings for Raised Islands ..... 1029

Figure 3J-4 Examples of Pavement Markings for Raised Islands ..... 1030
Figure 3J-5 Example of Optional Chevron and Diagonal Pavement Markings at a Raised Island ..... 1032
Figure 3J-6 Examples of Sidewalk Extensions Designated by Pavement Markings and Channelization ..... 1033
Figure 3K-1 Examples of Longitudinal Rumble Strip Markings ..... 1035
Figure 4C-1 Warrant 2, Four-Hour Vehicular Volume ..... 1057
Figure 4C-2 Warrant 2, Four-Hour Vehicular Volume (70% Factor) ..... 1058
Figure 4C-3 Warrant 3, Peak Hour ..... 1059
Figure 4C-4 Warrant 3, Peak Hour (70% Factor) ..... 1060
Figure 4C-5 Warrant 4, Pedestrian Four-Hour Volume ..... 1061
Figure 4C-6 Warrant 4, Pedestrian Peak Hour ..... 1062
Figure 4C-7 Warrant 4, Pedestrian Four-Hour Volume (70% Factor) ..... 1063
Figure 4C-8 Warrant 4, Pedestrian Peak Hour (70% Factor) ..... 1064
Figure 4C-9 Warrant 9, Intersection Near a Grade Crossing (One Approach Lane at the Track Crossing) ..... 1065
Figure 4C-10 Warrant 9, Intersection Near a Grade Crossing (Two or More Approach Lanes at the Track Crossing) ..... 1066
Figure 4C-101(CA) Traffic Signal Warrants Worksheet ..... 1067
Figure 4C-102(CA) Traffic Count Worksheet ..... 1072
Figure 4C-103(CA) Traffic Signal Warrants Worksheet (Average Traffic Estimate Form) ..... 1073
Figure 4D-1 Recommended Vehicular Signal Faces for Approaches with Posted, Statutory, or 85th-Percentile Speed of 45 mph or Higher ..... 1086
Figure 4D-2 Lateral and Longitudinal Location of Primary Signal Faces ..... 1087
Figure 4D-3 Maximum Mounting Height of Signal Faces that Are Located between 40 Feet and 53 Feet from the Stop Line ..... 1088
Figure 4E-1 Typical Arrangements of U-Turn Signal Faces ..... 1098
Figure 4E-2 Typical Arrangements of Signal Sections in Signal Faces That Do Not Control Turning Movements ..... 1099
Figure 4F-1 Typical Position and Arrangements of Shared Signal Faces for Permissive Only Mode Left Turns ..... 1124
Figure 4F-2 Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Permissive Only Mode Left Turns ..... 1125
Figure 4F-3 Typical Position and Arrangements of Separate Signal Faces with Flashing Red Arrow for Permissive Only Mode and Protected/Permissive Mode Left Turns ..... 1126
Figure 4F-4 Typical Positions and Arrangements of Shared Signal Faces for Protected Only Mode Left Turns ..... 1127
Figure 4F-5 Typical Position and Arrangements of Separate Signal Faces for Protected Only Mode Left Turns ..... 1128
Figure 4F-6 Typical Position and Arrangements of Shared Signal Faces for Protected/Permissive Mode Left Turns ..... 1129
Figure 4F-7 Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Protected/Permissive Mode and Variable Mode Left Turns ..... 1130
Figure 4F-8 Typical Positions and Arrangements of Shared Signal Faces for Permissive Only Mode Right Turns ..... 1131
Figure 4F-9 Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Permissive Only Mode Right Turns ..... 1132
Figure 4F-10 Typical Position and Arrangements of Separate Signal Faces with Flashing Red Arrow for Permissive Only Mode and Protected/Permissive Mode Right Turns ..... 1133
Figure 4F-11 Typical Positions and Arrangements of Shared Signal Faces for Protected Only Mode Right Turns ..... 1134

Figure 4F-12 Typical Position and Arrangements of Separate Signal Faces for Protected Only Mode Right Turns....1135
Figure 4F-13 Typical Positions and Arrangements of Shared Signal Faces for Protected/Permissive Mode Right Turns....1136
Figure 4F-14 Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Protected/Permissive Mode and Variable Mode Right Turns....1137
Figure 4F-15 Signal Indications for Approaches with a Combined Left-Turn/Right-Turn Lane and No Through Movement....1138
Figure 4H-1 Typical Arrangements of Bicycle Signal Faces....1150
Figure 4H-101(CA) Bicycle Detection Systems....1151
Figure 4I-1 Typical Pedestrian Signal Indications....1161
Figure 4I-2 Preferred Push Button Location Area....1162
Figure 4I-3 Typical Push Button Locations....1163
Figure 4I-4 Pedestrian Intervals....1164
Figure 4J-1 Guidelines for the Installation of Pedestrian Hybrid Beacons on Low-Speed Roadways....1168
Figure 4J-2 Guidelines for the Installation of Pedestrian Hybrid Beacons on High-Speed Roadways....1169
Figure 4J-3 Sequence for a Pedestrian Hybrid Beacon....1170
Figure 4L-1 Example of RRFBs at Uncontrolled, Marked Crosswalks at an Intersection....1180
Figure 4L-1(CA) Example of RRFBs at Uncontrolled, Marked Crosswalks at an Intersection....1181
Figure 4N-1 Sequence for an Emergency-Vehicle Hybrid Beacon....1186
Figure 4S-101(CA) Flashing Beacon at School Crossings Worksheet....1198
Figure 4T-1 Lane-Use Control Signal Indications....1202
Figure 4U-101(CA) Typical Layout for In-Roadway Warning Lights (IRWLs)....1206
Figure 6B-1 Component Parts of a Temporary Traffic Control Zone....1227
Figure 6B-2 Types of Tapers and Buffer Spaces....1228
Figure 6B-3 Example of a One-Lane, Two-Way Traffic Taper....1229
Figure 6D-1 Use of Hand-Signaling Devices by Flaggers....1244
Figure 6F-1 Height and Lateral Location of Signs—Typical Installations....1249
Figure 6F-2 Methods of Mounting Signs Other Than on Posts....1250
Figure 6G-1 Regulatory Signs and Plaques in Temporary Traffic Control Zones....1256
Figure 6G-101(CA) California Regulatory Signs and Plaques in Temporary Traffic Control Zones....1258
Figure 6H-1 Warning Signs and Plaques in Temporary Traffic Control Zones....1273
Figure 6H-1(CA) California Warning Signs and Plaques in Temporary Traffic Control Zones....1277
Figure 6H-101(CA) Examples of Object Markers in Temporary Traffic Control Zones....1278
Figure 6I-1 Exit Open and Closed and Detour Signs and Plaques....1286
Figure 6I-1(CA) California Guide Signs and Plaques in Temporary Traffic Control Zones....1287
Figure 6I-101(CA) California Guide Signs and Plaques in Temporary Traffic Control Zones....1288
Figure 6K-1 Examples of Channelizing Devices....1302
Figure 6K-2 Pedestrian Channelizing Device....1303
Figure 6K-101(CA) Tubular Markers....1304
Figure 6L-1 Example of the Use of a STOP/SLOW Automated Flagger Assistance Device (AFAD)....1317
Figure 6L-2 Example of the Use of a Red/Yellow Lens Automated Flagger Assistance Device (AFAD)....1318
Figure 6L-3 Advance Warning Arrow Board Display Specifications....1319
Figure 6L-101(CA) Typical Layout Using Channelizing Devices to Delineate a Portable Changeable Message Sign on Shoulder....1320
Figure 6N-1 Late Merge....1339
Figure 6O-1 Examples of Traffic Incident Management Area Signs....1344
Figure 6O-1(CA) Examples of Traffic Incident Management Area Signs....1345
Figure 6P-1 Work Beyond the Shoulder (TA-1)....1351
Figure 6P-2 Blasting Zone (TA-2)....1353

Figure 6P-3 Work on the Shoulders (TA-3) ..... 1355
Figure 6P-4 Short-Duration or Mobile Operation on a Shoulder (TA-4) ..... 1357
Figure 6P-5 Shoulder Closure on a Freeway (TA-5) ..... 1359
Figure 6P-6 Shoulder Work with Minor Encroachment (TA-6) ..... 1361
Figure 6P-7 Road Closure with a Diversion (TA-7) ..... 1363
Figure 6P-8 Road Closure with an Off-Site Detour (TA-8) ..... 1365
Figure 6P-9 Overlapping Routes with a Detour (TA-9) ..... 1367
Figure 6P-10 Lane Closure on a Two-Lane Road Using Flaggers (TA-10) ..... 1369
Figure 6P-11 Lane Closure on a Two-Lane Road with Low Traffic Volumes (TA-11) ..... 1371
Figure 6P-12 Lane Closure on a Two-Lane Road Using Temporary Traffic Control Signals (TA-12) ..... 1373
Figure 6P-13 Temporary Road Closure (TA-13) ..... 1375
Figure 6P-14 Haul Road Crossing (TA-14) ..... 1378
Figure 6P-15 Work in the Center of a Road with Low Traffic Volumes (TA-15) ..... 1380
Figure 6P-16 Surveying Along the Center Line of a Road with Low Traffic Volumes (TA-16) ..... 1382
Figure 6P-17 Mobile Operations on a Two-Lane Road (TA-17) ..... 1384
Figure 6P-18 Lane Closure on a Minor Street (TA-18) ..... 1386
Figure 6P-19 Detour for One Travel Direction (TA-19) ..... 1388
Figure 6P-19(CA) Detour for One Travel Direction (TA-19(CA)) ..... 1389
Figure 6P-20 Detour for a Closed Street (TA-20) ..... 1391
Figure 6P-21 Lane Closure on the Near Side of an Intersection (TA-21) ..... 1393
Figure 6P-22 Right-Hand Lane Closure on the Far Side of an Intersection (TA-22) ..... 1395
Figure 6P-23 Left-Hand Lane Closure on the Far Side of an Intersection (TA-23) ..... 1397
Figure 6P-24 Half Road Closure on the Far Side of an Intersection (TA-24) ..... 1399
Figure 6P-24(CA) Half Road Closure on the Far Side of an Intersection (TA-24(CA)) ..... 1400
Figure 6P-25 Multiple Lane Closures at an Intersection (TA-25) ..... 1402
Figure 6P-26 Closure in the Center of an Intersection (TA-26) ..... 1404
Figure 6P-27 Closure at the Side of an Intersection (TA-27) ..... 1406
Figure 6P-28 Sidewalk Detour or Diversion (TA-28) ..... 1408
Figure 6P-29 Crosswalk Closures and Pedestrian Detours (TA-29) ..... 1410
Figure 6P-30 Interior Lane Closure on a Multi-Lane Street (TA-30) ..... 1412
Figure 6P-31 Lane Closures on a Street with Uneven Directional Volumes (TA-31) ..... 1414
Figure 6P-32 Half Road Closure on a Multi-Lane, High-Speed Highway (TA-32) ..... 1416
Figure 6P-33 Stationary Lane Closure on a Divided Highway (TA-33) ..... 1418
Figure 6P-34 Lane Closure with a Temporary Traffic Barrier (TA-34) ..... 1420
Figure 6P-35 Mobile Operation on a Multi-Lane Road (TA-35) ..... 1422
Figure 6P-36 Lane Shift on a Freeway (TA-36) ..... 1425
Figure 6P-37 Double Lane Closure on a Freeway (TA-37) ..... 1427
~~Figure 6P-38 Interior Lane Closure on a Freeway (TA-38) ..... 1429~~
Figure 6P-39 Median Crossover on a Freeway (TA-39) ..... 1431
Figure 6P-40 Median Crossover for an Entrance Ramp (TA-40) ..... 1433
Figure 6P-41 Median Crossover for an Exit Ramp (TA-41) ..... 1435
Figure 6P-42 Work in the Vicinity of an Exit Ramp (TA-42) ..... 1437
Figure 6P-43 Partial Exit Ramp Closure (TA-43) ..... 1439
Figure 6P-44 Work in the Vicinity of an Entrance Ramp (TA-44) ..... 1441
Figure 6P-45 Temporary Reversible Lane Using Movable Barriers (TA-45) ..... 1443
Figure 6P-46 Work in the Vicinity of a Grade Crossing (TA-46) ..... 1445
Figure 6P-47 Bicycle Lane Closure without a Detour (TA-47) ..... 1447
Figure 6P-48 Bicycle Lane Closure with an On-Road Detour (TA-48) ..... 1449
Figure 6P-49 Shared-Use Path Closure with a Diversion (TA-49) ..... 1451
Figure 6P-50 On-Road Detour for a Shared-Use Path (TA-50) ..... 1453
Figure 6P-51 Paved Shoulder Closure with a Bicycle Diversion onto a Temporary Path (TA-51) ..... 1455

Figure 6P-51(CA) Paved Shoulder Closure with Bicycle Diversion onto a Temporary Path (TA-51(CA)) ..... 1456
Figure 6P-52 Short-Term or Short-Duration Work in a Circular Intersection (TA-52) ..... 1458
Figure 6P-53 Flagging Operation on a Single-Lane Circular Intersection (TA-53) ..... 1460
Figure 6P-54 Inside Lane Closure on a Multi-Lane Circular Intersection (TA-54) ..... 1462
Figure 6P-101(CA) Right Lane and Bike Lane Closure on Far Side of Intersection (TA-101(CA)) ..... 1464
Figure 6P-102(CA) Lane Shift on Road With Low Traffic Volumes (TA-102(CA)) ..... 1466
Figure 7A-1 Example of School Route Plan Map ..... 1469
Figure 7B-1 Signs in School Areas and at School Crossings ..... 1478
Figure 7B-1(CA) Signs in School Areas and at School Crossings ..... 1480
Figure 7B-2 Example of Signing for a School Zone with a School Speed Limit and a School Crossing ..... 1481
Figure 7B-2(CA) Example of Signing for a School Zone with a School Speed Limit and a School Crossing ..... 1482
Figure 7B-3 Example of Signing for a School Crossing Outside of a School Zone ..... 1483
~~Figure 7B-4 Example of Signing for a School Zone with a School Speed Limit and Higher Fines Only for Speeding ..... 1484~~
~~Figure 7B-5 Example of Signing for a School Zone with Higher Fines for All Traffic Violations ..... 1485~~
Figure 7B-101(CA) Example of School Area Signs with Flashing Yellow Beacons ..... 1487
Figure 7B-102(CA) Example of Signing for Traffic Control in School Areas with Flashing Yellow Beacons ..... 1488
Figure 7B-103(CA) Example of Signing for School Area Traffic Control with Extended and/or Reduced School Zone Speed Limits ..... 1489
Figure 7B-104(CA) Example of Signing for School Crosswalk Warning Assembly ..... 1490
~~Figure 7C-1 Two-Lane Pavement Marking of "SCHOOL" ..... 1495~~
Figure 7C-101(CA) Pavement Word Markings for School Areas ..... 1496
Figure 8B-1 Regulatory Signs and Plaques for Grade Crossings ..... 1520
Figure 8B-1(CA) Regulatory Signs and Plaques for Grade Crossings ..... 1521
Figure 8B-2 Crossbuck Assembly with a YIELD or STOP Sign on the Crossbuck Sign Support ..... 1522
Figure 8B-3 Crossbuck Assembly with a YIELD or STOP Sign on a Separate Sign Support ..... 1523
Figure 8B-4 Warning Signs and Plaques for Grade Crossings ..... 1525
Figure 8B-4(CA) Warning Signs and Plaques for Grade Crossings ..... 1526
Figure 8B-5 Example of an Emergency Notification System Sign ..... 1527
Figure 8B-101(CA) Train Station Signs ..... 1528
Figure 8C-1 Example of Placement of Warning Signs and Pavement Markings at Grade Crossings ..... 1534
Figure 8C-1(CA) Example of Placement of Warning Signs and Pavement Markings at Grade Crossings ..... 1535
Figure 8C-2 Grade Crossing Pavement Markings ..... 1538
Figure 8C-3 Example of Dynamic Envelope Pavement Markings at Grade Crossings ..... 1539
Figure 8C-4 Example of Dynamic Envelope and Do Not Block Pavement Markings at Grade Crossings ..... 1540
Figure 8C-5 Examples of Light Rail Transit Vehicle Dynamic Envelope Markings for Mixed-Use Alignments ..... 1541
Figure 8D-1 Composite Drawing of Active Traffic Control Devices for Grade Crossings Showing Clearances ..... 1561
Figure 8D-2 Examples of Location Plan for Flashing-Light Signals and Four-Quadrant Gates ..... 1562
Figure 8D-3 Light Rail Transit Signal Indications ..... 1563
Figure 8D-3(CA) Light Rail Transit Signals ..... 1564
Figure 8E-1 Illustration of the Difference between a Pathway Grade Crossing and a Sidewalk Grade Crossing ..... 1572
Figure 8E-2 Example of an Active Traffic Control System for a Sidewalk or Pathway Grade Crossing ..... 1573
Figure 8E-3 Example of Signing and Markings at a Pathway Grade Crossing ..... 1574
Figure 8E-4 Example of Detectable Warning and Stop Lines for a Refuge Area at a Sidewalk Grade Crossing ..... 1575

Figure 8E-5 Example of a Crossbuck Assembly at a Pathway or Sidewalk Grade Crossing ..... 1576
Figure 8E-6 Example of an Automatic Pedestrian Gate and an Emergency Escape Route at a Pathway Grade Crossing ..... 1577
Figure 8E-7 Example of a Flashing-Light Signal Assembly at a Pathway or Sidewalk Grade Crossing 1578
Figure 8E-8 Example of an Automatic Pedestrian Gate at a Pathway or Sidewalk Grade Crossing ..... 1579
Figure 8E-9 Example of Active Traffic Control Systems with Automatic Pedestrian Gates and Swing Gates at a Sidewalk Grade Crossing ..... 1580
Figure 8E-10 Example of Traffic Control Devices for an Optional Swing Gate ..... 1581
Figure 8E-11 Example of a Separate Automatic Pedestrian Gate ..... 1582
Figure 8E-12 Example of an Automatic Pedestrian Gate with a Horizontal Hanging Bar at a Pathway or Sidewalk Grade Crossing ..... 1583
Figure 9A-1 Sign Placement on Shared-Use Paths ..... 1588
Figure 9B-1 Regulatory Signs and Plaques for Bicycle Facilities ..... 1601
Figure 9B-1(CA) California Regulatory Signs and Plaques for Bicycle Facilities ..... 1603
Figure 9B-2 Examples of Applications of EXCEPT BICYCLES Regulatory Plaques ..... 1604
Figure 9B-3 Examples of Bicycle Facilities Adjacent to Back-In Parking ..... 1605
Figure 9B-4 Signing for Termination of Bicycle Access on Freeways and Expressways ..... 1606
Figure 9B-5 Example of Two-Stage Bicycle Turn Box when Use is Mandatory ..... 1607
Figure 9B-6 Example of Application of Bicycle Jughandle Sign ..... 1608
Figure 9C-1 Warning Signs and Plaques and Object Markers for Bicycle Facilities ..... 1612
Figure 9D-1 Guide Signs and Plaques for Bicycle Facilities ..... 1625
Figure 9D-1(CA) California Guide Signs and Plaques for Bicycle Facilities ..... 1628
Figure 9D-2 Examples of Bicycle Guide Signing ..... 1629
Figure 9D-3 Example of Bicycle Route Guide Signing ..... 1631
Figure 9D-4 Examples of Route Signing for Numbered or Named Bicycle Routes ..... 1632
Figure 9D-5 Examples of Mode-Specific Guide Signing on a Shared-Use Path ..... 1633
Figure 9D-6 Examples of Destination Guide Signs for Shared-Use Paths ..... 1634
Figure 9D-7 Example of Two-Stage Bicycle Turn Box when Use is Optional ..... 1635
Figure 9E-1 Word, Symbol, and Arrow Pavement Markings for Bicycle Lanes ..... 1652
Figure 9E-2 Example of Pavement Markings for Bicycle Lanes on a Two-Way Street ..... 1653
Figure 9E-2(CA) Example of Pavement Markings for Bicycle Lanes on a Two-Way Street ..... 1654
Figure 9E-3 Examples of Bicycle Lane Markings on an Approach to an Intersection ..... 1656
Figure 9E-3(CA) Example of Bicycle Lane Markings on an Approach to an Intersection ..... 1659
Figure 9E-4 Example of Bicycle Lane Markings on an Approach to an Intersection that Transitions from a Shared Lane ..... 1666
Figure 9E-5 Examples of Pavement Markings for Mixing Zones ..... 1667
Figure 9E-6 Examples of Markings for Buffer-Separated Bicycle Lanes ..... 1668
Figure 9E-6(CA) Examples of Markings for Buffer-Separated Bicycle Lanes ..... 1669
Figure 9E-7 Examples of Lane Markings for Separated Bicycle Lanes ..... 1671
Figure 9E-8 Example of Counter-Flow Bicycle Lanes at an Intersection ..... 1673
Figure 9E-9 Examples of Shared-Lane Marking Applications ..... 1674
Figure 9E-10 Examples of Two-Stage Turn Box Locations at Intersections ..... 1675
Figure 9E-11 Example of a Two-Stage Turn Box Location at an Intersection with a Two-Way Bikeway ..... 1676
Figure 9E-12 Examples of Intersection Bicycle Boxes ..... 1677
Figure 9E-13 Examples of Center Line Markings for Shared-Use Paths ..... 1679
Figure 9E-14 Example of Pavement Markings for a Shared-Use Path with Mode Separation ..... 1680
Figure 9E-15 Example of Placement of Route Markers for Shared-Use Paths ..... 1681
Figure 9E-16 Bicycle Detector Pavement Marking ..... 1682
Figure 9E-17 Examples of Obstruction Pavement Markings ..... 1683
Figure 9E-101(CA) Examples of Bicycle Lane Treatment Where Vehicle Parking is Prohibited/Permitted ..... 1684

Figure 9E-102(CA) Example of Bicycle Lane Treatment Through an Interchange ..... 1685
Figure 9E-103(CA) Examples of Bicycle Lane Extensions Through Intersection ..... 1686
Figure 9E-104(CA) Example of Marking for a One-Lane Roundabout with Shared Lane Markings and Bicycle Lanes ..... 1687
Figure 9E-105(CA) Example of Placement of Shared Lane Markings ..... 1688
Figure 9E-106(CA) Examples of Markings for Separated Bikeways ..... 1689
Figure 9E-107(CA) Example of Intersection Pavement Markings and Signs—Bicycle Traveling Straight From Left Turn and Right Turn Only Lanes - One Way ..... 1693
Figure 9E-108(CA) Example of Intersection Pavement Markings and Signs—Bicycle Traveling Straight From Right Turn Only Lanes ..... 1694
Figure 9E-109(CA) Examples of Optional Green-Colored Pavement Applications ..... 1695

## TABLES

Page

Table 1B-1 Target Compliance Dates Established by the FHWA ..... 82
Table 1B-1(CA) Target Compliance Dates ..... 83
Table 1B-101(CA) Status of Interim Approvals Issued By FHWA in California ..... 84
Table 1D-1 Acceptable Abbreviations ..... 117
Table 1D-2 Abbreviations that Shall be Used Only for Temporary Messages on Portable Changeable Message Signs ..... 118
Table 1D-3 Unacceptable Abbreviations ..... 119
Table 2A-1 Use of Sign Shapes ..... 149
Table 2A-2 Common Uses of Sign Colors ..... 150
Table 2A-3 Illumination of Sign Elements ..... 151
Table 2A-4 Retroreflection of Sign Elements ..... 151
Table 2A-5 Minimum Maintained Retroreflectivity Levels ..... 152
Table 2B-1 Regulatory Sign and Plaque Sizes ..... 288
Table 2B-1(CA) California Regulatory Sign and Plaque Sizes ..... 294
Table 2B-2 Meanings of Symbols and Legends on Reversible Lane Control Signs ..... 300
Table 2B-101(CA) Standard Application of Speed Limits per California Vehicle Code ..... 301
Table 2B-102(CA) Standard Application of Speed Limits per California Vehicle Code ..... 302
Table 2B-103(CA) Examples showing the applicability of rounding and additional speed reduction ..... 303
Table 2B-104(CA) Safety Corridor Factors ..... 304
Table 2B-105(CA) Generators of High Concentrations of Bicyclists or Pedestrians ..... 305
Table 2C-1 Warning Sign and Plaque Sizes ..... 378
Table 2C-1(CA) California Warning Sign and Plaque Sizes ..... 382
Table 2C-2 Minimum Size of Supplemental Warning Plaques ..... 383
Table 2C-3 Guidelines for Advance Placement of Warning Signs ..... 384
Table 2C-4 Application of Traffic Control Devices for Changes in Horizontal Alignment ..... 385
Table 2C-5 Typical Spacing of Chevron Alignment Signs on Horizontal Curves ..... 386
Table 2C-6 Use of Advisory Speed Plaque for Horizontal Alignment Changes ..... 386
Table 2D-1 Conventional Road Guide Sign and Plaque Sizes ..... 484
Table 2D-1(CA) California Conventional Road Guide Sign Sizes ..... 486
Table 2D-2 Recommended Minimum Letter and Numeral Sizes for Conventional Road Guide Signs According to Speed ..... 487
Table 2D-3 Acceptable Abbreviations for Street Name Descriptors ..... 489
Table 2D-4 Street Name Descriptors Not Acceptable for Abbreviation ..... 489
Table 2D-5 Overhead Arrow-per-Lane Arrow Height Based on Principal Legend Letter Height ..... 490
Table 2D-6 Minimum Letter Heights on Street Name Signs ..... 490
Table 2D-101(CA) Criteria for Supplemental Destination Signs ..... 491
Table 2E-1 Freeway or Expressway Guide Sign and Plaque Sizes ..... 598
Table 2E-1(CA) California Freeway or Expressway Guide Sign and Plaque Sizes ..... 601

Table 2E-2 Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Interchange Classification....602
Table 2E-3 Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Sign Type....603
Table 2E-4 Minimum Letter and Numeral Sizes for Freeway Guide Signs According to Interchange Classification....604
Table 2E-5 Minimum Letter and Numeral Sizes for Freeway Guide Signs According to Sign Type....605
Table 2E-6 Overhead Arrow-per-Lane Arrow Height Based on Principal Legend Letter Height....606
Table 2F-1 Toll Road Sign and Plaque Minimum Sizes....641
Table 2F-1(CA) California Toll Road Sign and Plaque Minimum Sizes....642
Table 2G-1 Managed and Preferential Lanes Sign and Plaque Minimum Sizes....709
Table 2G-1(CA) California Managed and Preferential Lane Signs and Plaques Minimum Sizes....711
Table 2H-1 General Information Sign and Plaque Sizes....736
Table 2H-1(CA) California General Information Sign and Plaque Sizes....737
Table 2I-1 General Service Sign and Plaque Sizes....770
Table 2I-1(CA) California General Service Sign and Plaque Sizes....772
Table 2J-1 Minimum Letter and Numeral Sizes for Specific Service Signs According to Sign Type....791
Table 2J-2 Maximum Business Identification Sign Panel Sizes by Roadway Classification....791
Table 2J-101(CA) California Specific Service Sign and Plaque Sizes....792
Table 2K-101(CA) California Tourist-Oriented Directional Sign Sizes....800
Table 2L-1 Spacing between Message Characters, Words, and Lines of Text....811
Table 2L-2 Example of Units of Information....811
Table 2L-3 Examples of Message Construction for CMS....812
Table 2L-4 Examples of Message Construction for Portable CMS....813
Table 2M-1 Category Chart for Recreational and Cultural Interest Area Symbols....838
Table 2M-1(CA) California Category Chart for Recreational and Cultural Interest Area Symbols....839
Table 2M-101(CA) California Recreational and Cultural Interest Area Sign and Plaque Sizes....840
Table 2N-1 Emergency Management Sign Sizes....846
Table 3B-1 Minimum Passing Sight Distances for No-Passing Zone Markings....956
Table 3E-1 Standard Edge Line and Lane Line Markings for Preferential Lanes....990
Table 3E-2 Standard Center Line and Edge Line Markings for Counter-Flow Preferential Lanes on Divided Highways....991
Table 3G-1 Approximate Spacing for Delineators on Horizontal Curves....1005
Table 4C-1 Warrant 1, Eight-Hour Vehicular Volume....1074
Table 4C-2 Minimum Number of Reported Crashes in a One-Year Period....1074
Table 4C-3 Minimum Number of Reported Crashes in a Three-Year Period....1075
Table 4C-4 Minimum Number of Reported Crashes in a One-Year Period....1075
Table 4C-5 Minimum Number of Reported Crashes in a Three-Year Period....1075
Table 4C-6 Warrant 9, Adjustment Factor for Daily Frequency of Rail Traffic....1076
Table 4C-7 Warrant 9, Adjustment Factor for Percentage of High-Occupancy Buses....1076
Table 4C-8 Warrant 9, Adjustment Factor for Percentage of Tractor-Trailer Trucks....1076
Table 4D-1 Recommended Minimum Number of Primary Signal Faces for Through Traffic on Approaches with Posted, Statutory, or 85th-Percentile Speed of 45 mph or Higher....1089
Table 4D-2 Minimum Sight Distance for Signal Visibility....1089
Table 4D-101(CA) Minimum Yellow Change Interval Timing....1090
Table 4D-102(CA) Traffic Signal Timing Analysis Chart....1091
Table 4D-103(CA) Signal Operations - Vehicular Speed....1092
Table 4H-101(CA) Signal Operations - Minimum Bicycle Timing....1154
Table 5A-1 Automation Levels....1210
Table 6B-1 Recommended Advance Warning Sign ~~Minimum~~ Spacing....1230

Table 6B-2 Stopping Sight Distance as a Function of Speed on Level Roads (Used as suggested longitudinal buffer space length or location for flagger station) ..... 1231
Table 6B-2(CA) Stopping Sight Distance as a Function of Speed on Downgrades (Used as suggested longitudinal buffer space length or location for flagger station) ..... 1231
Table 6B-3 Taper Length Criteria for Temporary Traffic Control Zones ..... 1232
Table 6B-3(CA) Taper Length Criteria for Temporary Traffic Control Zones (for 12 feet Offset Width) ..... 1232
Table 6B-4 Formulas for Determining Taper Length ..... 1233
Table 6G-1 Temporary Traffic Control Zone Regulatory Sign and Plaque Sizes ..... 1259
Table 6G-1(CA) California Temporary Traffic Control Zone Regulatory Sign and Plaque Sizes ..... 1260
Table 6H-1 Temporary Traffic Control Zone Warning Sign and Plaque Sizes ..... 1279
Table 6H-1(CA) California Temporary Traffic Control Zone Warning Sign and Plaque Sizes ..... 1281
Table 6H-101(CA) Pavement Surface Tolerances ..... 1282
Table 6I-1 Temporary Traffic Control Zone Guide Sign and Plaque Sizes ..... 1289
Table 6I-1(CA) California Temporary Traffic Control Zone Guide Sign and Plaque Sizes ..... 1289
Table 6K-101(CA) Maximum Spacing of Channelizing Devices ..... 1305
Table 6P-1 Index to Typical Applications ..... 1347
Table 6P-1(CA) Index to Typical Applications ..... 1348
Table 6P-2 Meaning of Symbols on Typical Application Diagrams ..... 1349
Table 7B-1 School Area Sign and Plaque Sizes ..... 1491
Table 7B-1(CA) California School Area Sign Assembly Sizes ..... 1492
Table 8B-1 Grade Crossing Sign and Plaque Minimum Sizes ..... 1529
Table 8B-1(CA) California Grade Crossing Sign and Plaque Minimum Sizes ..... 1530
Table 9A-1 Bicycle Facility Sign and Plaque Minimum Sizes ..... 1589
Table 9A-1(CA) California Bicycle Facility Sign and Plaque Minimum Sizes ..... 1592

*THIS PAGE INTENTIONALLY LEFT BLANK*

# PART 1
# GENERAL

## CHAPTER 1A. GENERAL

### Section 1A.01 Purpose of the MUTCD

Support:

01 The purpose of the MUTCD is to establish uniform national criteria for the use of traffic control devices that meet the needs and expectancy of road users on all streets, highways, pedestrian and bicycle facilities, and site roadways open to public travel. Refer to Section 1B.01 and 1C.02 (phrase "Site Roadways Open to Public Travel") for applicability of CA MUTCD on various types of public and private roadway facilities.

02 This purpose is achieved through the following objectives:

A. Promote safety, inclusion, and mobility for all users of the road network;
B. Promote efficiency through creating national uniformity in the meaning and appearance of traffic control devices;
C. Promote national consistency in the use, installation, and operation of traffic control devices; and
D. Provide basic principles for traffic engineers to use in making decisions regarding the use, installation, operation, maintenance, and removal of traffic control devices.

03 Uniformity of the meaning of traffic control devices is vital to their effectiveness. Uniformity means treating similar situations in a similar way. Uniformity of devices simplifies the task of the road user because it aids in recognition and understanding, thereby reducing perception/reaction time. Uniformity assists road users, law enforcement officers, and traffic courts by giving everyone the same interpretation. Uniformity assists public highway officials through efficiency in manufacture, installation, maintenance, and administration.

04 The use of uniform traffic control devices also requires uniform and appropriate application.

05 The applicability of the MUTCD to facilities open to public travel is independent of ~~the type of ownership or jurisdiction (public or private) and~~ the source of funding (Federal, State, local, or private). Refer to Section 1B.01 and 1C.02 (phrase "Site Roadways Open to Public Travel") for applicability of CA MUTCD on various types of public and private roadway facilities.

06 This Manual presumes the user of the MUTCD has sufficient working knowledge, professional training and experience, and education in the principles of traffic engineering. Other resources can be consulted to understand the basis for decisions that are made in which engineering study or judgment will be applied.

07 This California Manual on Uniform Traffic Control Devices (California MUTCD) is published by the State of California, Caltrans and is issued to adopt uniform standards and specifications for all official traffic control devices in California, in accordance with Section (§) 21400 of the California Vehicle Code (CVC).

08 This California MUTCD incorporates Federal Highway Administration's Manual on Uniform Traffic Control Devices (11th Edition) published on December 19, 2023, and the previous California MUTCD 2014 Revision 9, dated April 1, 2025. It also includes other editorial, errata and format changes that were necessary to update the previous documents.

**Standard:**

09 **The California MUTCD is hereby adopted as and shall be the standard for all official traffic control devices, under § 21400 of CVC and § 11340.9(h) of California Government Code.**

Support:

10 California MUTCD is revised annually by end of March every year, based on California Traffic Control Devices Committee (CTCDC) quarterly meetings, agenda item proposals and discussions, leading to passing motion vote on the proposals, resulting in formal recommendations to Caltrans to incorporate and revise California MUTCD. To ensure that the traffic control device practitioner is accessing the most current information regarding traffic control device topics for California, the practitioner is advised to always reference the California MUTCD web site.

11 The California MUTCD, California Sign Specifications and other publications and related current information is available on the Internet at the following web link: http://www.dot.ca.gov/programs/safety-programs.

## Section 1A.02 Traffic Control Devices – General Description

Support:

01 As defined in Section 1C.02 of this Manual, traffic control devices include all signs, signals, markings, channelizing devices, or other devices that use colors, shapes, symbols, words, sounds, and/or tactile information for the primary purpose of communicating a regulatory, warning, or guidance message to road users on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel.

02 Infrastructure elements that restrict the road user's travel paths or vehicle speeds, such as islands, curbs, speed humps, and other raised roadway surfaces, are not traffic control devices. Transverse or longitudinal rumble strips are also not traffic control devices. Operational devices associated with the application of traffic control strategies such as fencing, roadway lighting, barriers, and attenuators are shown in this Manual for context, but their design, application, and usage are not specified since they are not traffic control devices.

03 Certain types of signs and other devices that do not have any traffic control purpose are sometimes placed within the highway right-of-way by or with the permission of the public agency or the official having jurisdiction over the street or highway. These signs and other devices are not considered to be traffic control devices and provisions regarding their design and use are not included in this Manual. Among these signs and other devices are the following:

A. Devices whose purpose is to assist highway maintenance personnel, such as markers to guide snowplow operators, devices that identify culvert and drop inlet locations, and devices that precisely identify highway locations for maintenance or mowing purposes;
B. Devices whose purpose is to assist fire or law enforcement personnel, such as markers that identify fire hydrant locations, signs that identify fire or water district boundaries, speed measurement pavement markings, small indicator lights to assist in enforcement of red light violations, and photo enforcement systems;
C. Devices whose purpose is to assist utility company personnel and highway contractors, such as markers that identify underground utility locations;
D. Signs posting local non-traffic ordinances; and
E. Signs giving civic organization meeting information.

## Section 1A.03 Target Road Users

Support:

01 Traffic control devices can be targeted at operators of motor vehicles, including driving automation systems, and at vulnerable road users.

02 Targeted operators of motor vehicles include motorists, public transportation operators, truck drivers, and motorcyclists. Targeted users also include vulnerable road users, who have little to no protection from crash forces. These users are defined in Title 23, U.S.C. 148(a). They include bicyclists and pedestrians, including persons with disabilities. Pedestrians with disabilities might be blind or vision-impaired, have mobility limitations, or other impairments. Protection of vulnerable users is a priority in this Manual as directed in Section 11135 of the Infrastructure Investment and Jobs Act.

03 Operators of motor vehicles and vulnerable road users are both likely to be present on roadways where adjacent land use suggests that trips could be served by varied modes. Application of traffic control devices on these roadways requires careful consideration of measures to set and design for appropriate speeds; separation of various users in time and space; improvement of connectivity and access for pedestrians, bicyclists, and transit riders, including for people with disabilities; and implementation of safety countermeasures.

## Section 1A.04 Use of the MUTCD

Support**:**

01 Traffic control device principles in the MUTCD are developed for and used by individuals who are duly authorized and qualified to conduct traffic control device activities.

**Standard:**

02 **Where the content of this Manual requires a decision for implementation, such decisions shall be made by an engineer, or an individual under the supervision of an engineer, who has the appropriate levels of experience and expertise to make the traffic control device decision. Those decisions shall be made using engineering judgment or engineering study, as required by the MUTCD provision.**

Support:

03 Section 1C.02 contains definitions of "engineering study" and "engineering judgment."

*Guidance:*

04 *In making traffic control device decisions, individuals should consider the impacts of the decision on the following: safety and operational efficiency (mobility) of all road users at that location, the effective use of agency resources, cost-effectiveness, and enforcement and education aspects of traffic control devices.*

Support:

05 Throughout this Manual the headings Standard, Guidance, Option, and Support, the meanings of which are defined in Section 1C.01, are used to classify the nature of the text that follows. Figures and tables, including the notes contained therein, supplement the text, and might constitute a Standard, Guidance, Option, or Support. The user needs to refer to the appropriate text to classify the nature of the figure, table, or note contained therein.

*Guidance:*

06 *Except when a specific numeral is required or recommended by the text of a Section of this Manual, numerals displayed on the images of devices in the figures that specify quantities such as times, distances, speed limits, and weights should be regarded as examples only. When installing any of these devices, the numerals should be appropriately altered to fit the specific situation.*

07 *Similarly, destination names, route numbers, and State route shields that are displayed on the images of devices in the figures should be regarded as examples only. When installing any of these devices, the destination names, route numbers, and State route shields should be appropriately altered to fit the specific situation.*

Support:

08 The information contained in Paragraphs 9 and 10 of this Section will be useful when reference is being made to a specific portion of text in this Manual.

09 There are nine Parts in this Manual, and each Part includes one or more Chapters. Each Chapter includes one or more Sections. Parts are identified by a single-digit numerical identification, such as "Part 2 – Signs." Chapters are identified by the Part number and a letter, such as "Chapter 2B – Regulatory Signs." Sections are identified by the Chapter number and letter followed by a decimal point and a 2-digit number, such as "Section 2B.03 – Size of Regulatory Signs." In some Chapters, the Sections are grouped together by subject into unnumbered sub-chapters with a heading, such as "Signing for Right-of-Way at Intersections" (for Sections 2B.06 through 2B.20).

10 Each Section includes one or more paragraphs. The paragraphs are indented and are identified by a number. Paragraphs are counted from the beginning of each Section without regard to the intervening text headings (Standard, Guidance, Option, or Support) or any intervening text in embedded Figures or Tables. Some paragraphs have lettered or numbered items. As an example of how to cite this Manual, the phrase "[n]ot less than 40 feet beyond the stop line" that appears in Section 4D.08 of this Manual would be referenced in writing as "Section 4D.08, Par.1, A.1," and would be verbally referenced as "Item A.1 of Paragraph 1 of Section 4D.08."

11 The California MUTCD uses a format similar to the National MUTCD, as follows:

A. It incorporates National MUTCD in its entirety and explicitly shows which portions thereof are applicable or not applicable in California.
B. The unedited National MUTCD text is shown in "Times New Roman" font with black color.
C. Text portions of the National MUTCD content that are not applicable in California are shown with a strikethrough of the black National MUTCD text and blue vertical bars on the right margin to keep them distinct from the National MUTCD unedited black text.
D. California text additions, including new paragraphs, and enhancements are incorporated into the combined document at appropriate locations and shown in an "Arial Narrow" font with blue color and blue vertical bars on the right margin to keep them distinct from the National MUTCD content.
E. All National MUTCD figures and tables, or portions thereof, which are not applicable in California, are shown with appropriate size blue X cross-outs.
F. California text additions to National MUTCD figures are shown in an "Arial" font with blue color to keep them distinct from the National MUTCD content.
G. California symbols, diagrams, dimensions, text marking additions to National MUTCD figures are shown in blue color to keep them distinct from the National MUTCD content.

H. National MUTCD figures and tables that have been modified or added to, in the California MUTCD retain the same MUTCD Figure or Table number but include "(CA)" to indicate that it is the California version of the MUTCD Figure or Table. For example:
   1. Figure 2C-5(CA). Vertical Grade Signs and Plaques
   2. Table 8B-1(CA) California Grade Crossing Sign and Plaque Minimum Sizes

I. California added figure's title text is shown in "Arial" font with blue color. California added table's title text is show in "Arial Narrow" font with blue color.

J. All CA MUTCD modifications to the NMUTCD are denoted by blue vertical bars on the right margin as demonstrated on the right.

K. For the applicability of the figures and tables, practitioners are expected to refer to the corresponding figure and table number reference in the section text contents of the CA MUTCD to determine if it is a Standard, Guidance, Option or Support statement and other details.

L. For California topics where there is no corresponding section, figure or table in the National MUTCD, the California MUTCD gives a number that begins with the number 101 for that section, figure or table and increases in sequence, followed with a "(CA)" to indicate that this is a California created section, figure or table number. For example:
   1. Section 3B.101(CA) Turnouts
   2. Figure 7B-101(CA). Example of School Area Signs with Flashing Yellow Beacons
   3. Table 1B-101(CA). Status of Interim Approvals Issued By FHWA in California

12 Refer to Figure 1A-101(CA) for further details and information regarding California MUTCD format.

13 List of Known Errors in Federal Highway Administration's Manual on Uniform Traffic Control Devices (11th Edition) published on December 19, 2023, are available at the Federal Highway Administration's MUTCD Web site at http://mutcd.fhwa.dot.gov. The FHWA intends to correct these errors via a future rulemaking action. This list of known errors is provided solely for the information of MUTCD users and does not constitute official changes to the National MUTCD at this time.

14 California MUTCD includes references to Federal Highway Administration's List of Known Errors throughout this Manual, where appropriate. Since these known errors do not constitute official changes to the National MUTCD, only a reference to the List of Known Errors is included in this Manual and no changes have been made in this Manual to address these Known Errors.

15 Federal Highway Administration's MUTCD Team receives questions about a wide variety of issues involving traffic control devices and the MUTCD. These frequently asked questions (FAQs) are compiled and updated, and are available at the Federal Highway Administration's MUTCD Web site at http://mutcd.fhwa.dot.gov.

## Section 1A.05 Relation to Other Publications

**Standard:**

01 **To the extent that they are incorporated by specific reference, the latest editions of the following publications shall be a part of this Manual: "Standard Highway Signs" publication (FHWA), and "Color Specifications for Retroreflective Sign and Pavement Marking Materials" (appendix to Subpart F of Part 655 of Title 23 of the Code of Federal Regulations).**

Support:

02 The "Standard Highway Signs" publication includes standard alphabets and symbols and arrows for signs and pavement markings.

03 The MUTCD is not a roadway design manual, and engineers seeking guidance on design should refer to appropriate roadway design guides recognized by the Federal Highway Administration as needed for the design application.

04 Other publications are referenced in this Manual as useful resources, but they are not regulatory in nature and are not independently legally enforceable.

05 Latest version of other publications are referenced in this Manual as useful resources of information with respect to the use of this Manual. For publication references that appear only once in this manual, as they are specific to a single section, these references are located within those sections throughout the chapters and parts of the manual. Any publication references that appear multiple times and referenced in multiple sections of this manual, are listed below:

A. "California Building Standards Code" (California Building Standards Commission)
B. "California Business and Professions Code" (State of California)
C. "California Code of Regulations (CCR)" (State of California)
D. "California Health and Safety Code" (State of California)

E. "California Manual for Setting Speed Limits" (Caltrans)
F. "California Streets and Highways Code (SHC)" (State of California)
G. "California Vehicle Code (CVC)" (Department of Motor Vehicles)
H. "Highway Design Manual" (Caltrans)
I. "High Occupancy Vehicle (HOV) Guidelines for Planning, Design, and Operations" (Caltrans)
J. "Maintenance Manual" (Caltrans)
K. "Ramp Metering Design Manual" (Caltrans)
L. "Standard Plans" (Caltrans)
M. "Standard Specifications" (Caltrans)
N. "Standard Special Provisions" (Caltrans)
O. "Traffic Manual" (Caltrans)
P. "Traffic Safety Systems Manual" (Caltrans)

06 Following information can be used to access some of these publications referenced:
A. State of California Code Publications & California Law http://leginfo.legislature.ca.gov/faces/codes.xhtml
B. Caltrans Manuals https://dot.ca.gov/manuals

## Section 1A.06 Uniform Vehicle Code – Rules of the Road


Support:

01 The "Uniform Vehicle Code" (UVC) is one of the publications referenced in the MUTCD. The UVC contains a model set of motor vehicle codes and traffic laws for use throughout the United States, the intent of which is to promote national uniformity in these laws. The Rules of the Road contained in the UVC are intended to be recommendations for States to adopt in their State statutes and are not independently legally enforceable.


*Guidance:*

02 *The actions required of road users to obey regulatory devices should be specified by State statute, or in cases not covered by State statute, in local ordinances or resolutions. Such statutes, ordinances, and resolutions should be consistent with the "Uniform Vehicle Code." and "California Vehicle Code" (CVC).*

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 1 of 7)*

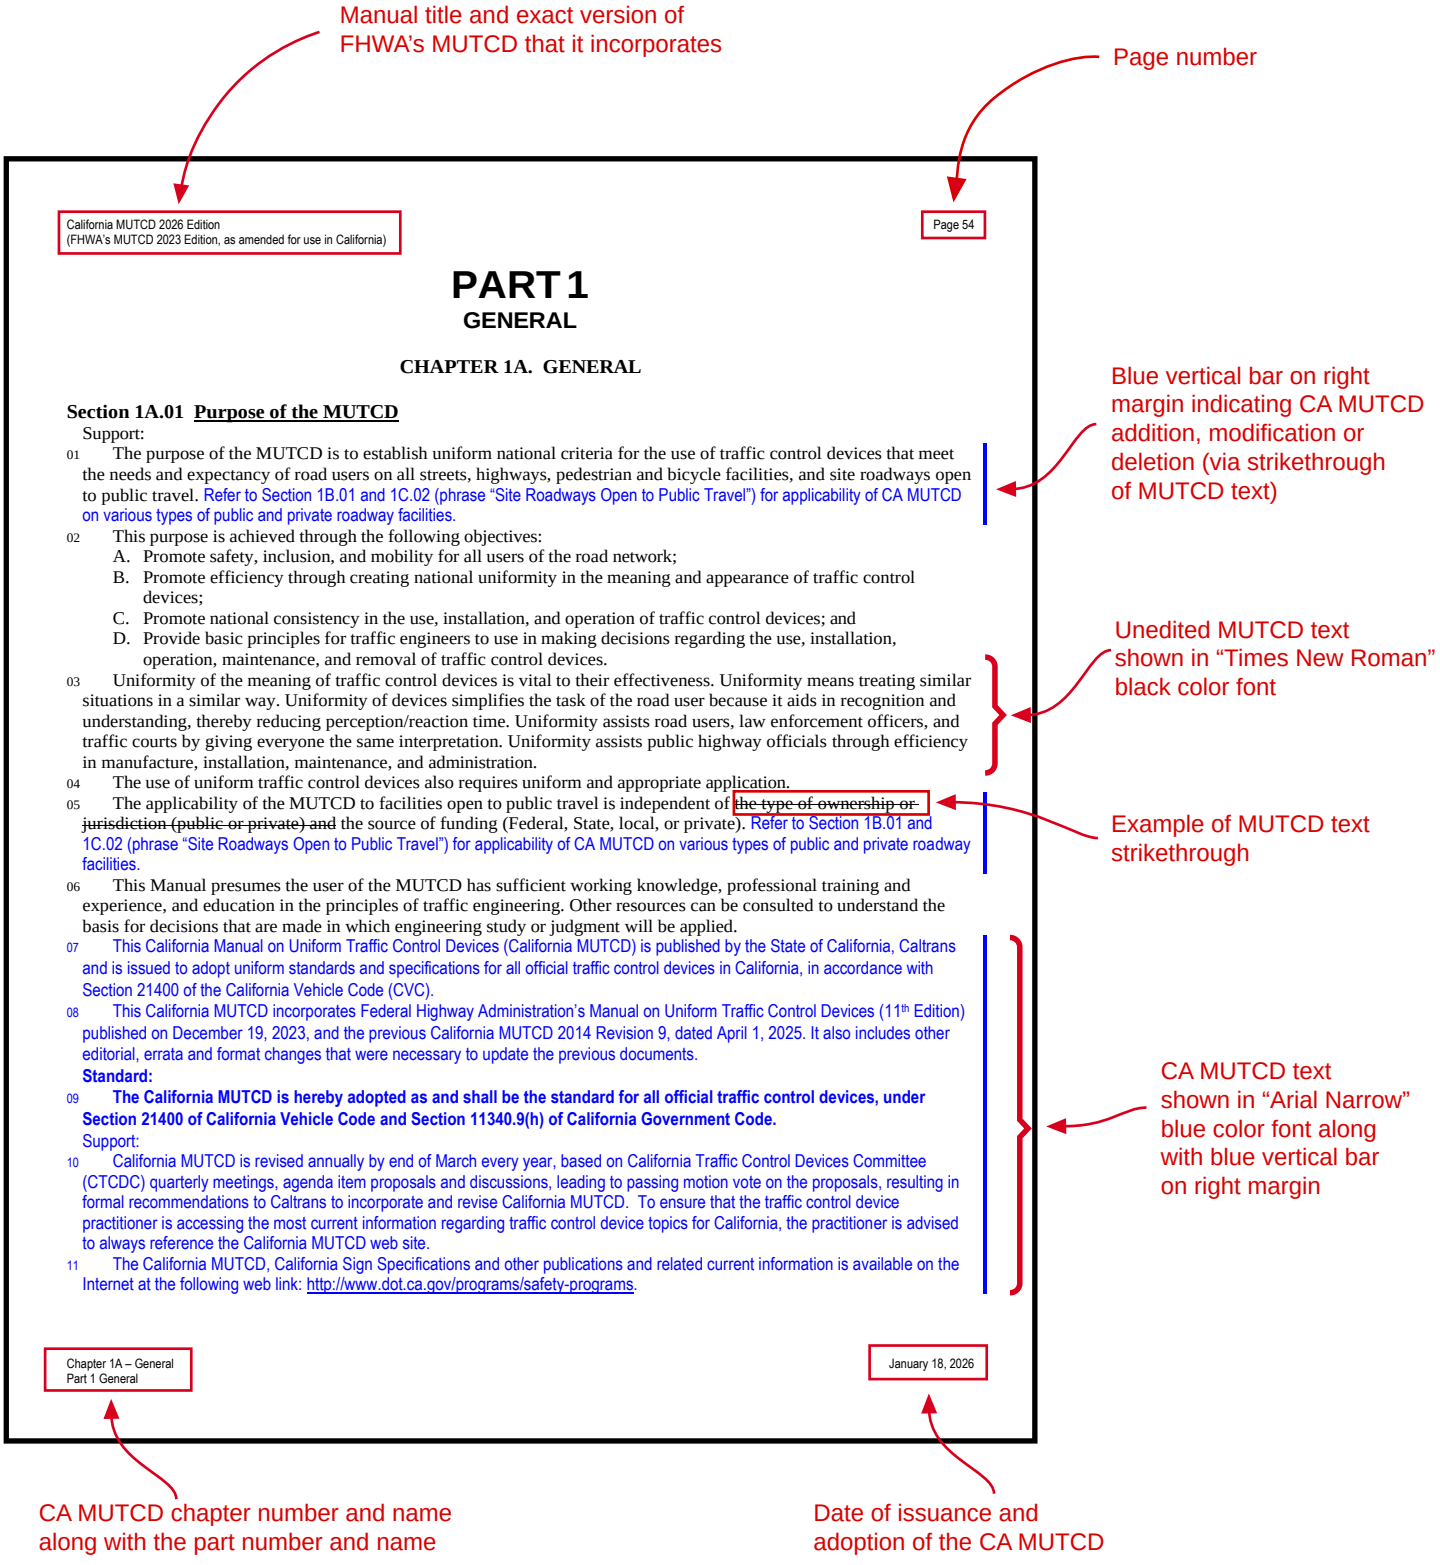


## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 2 of 7)*

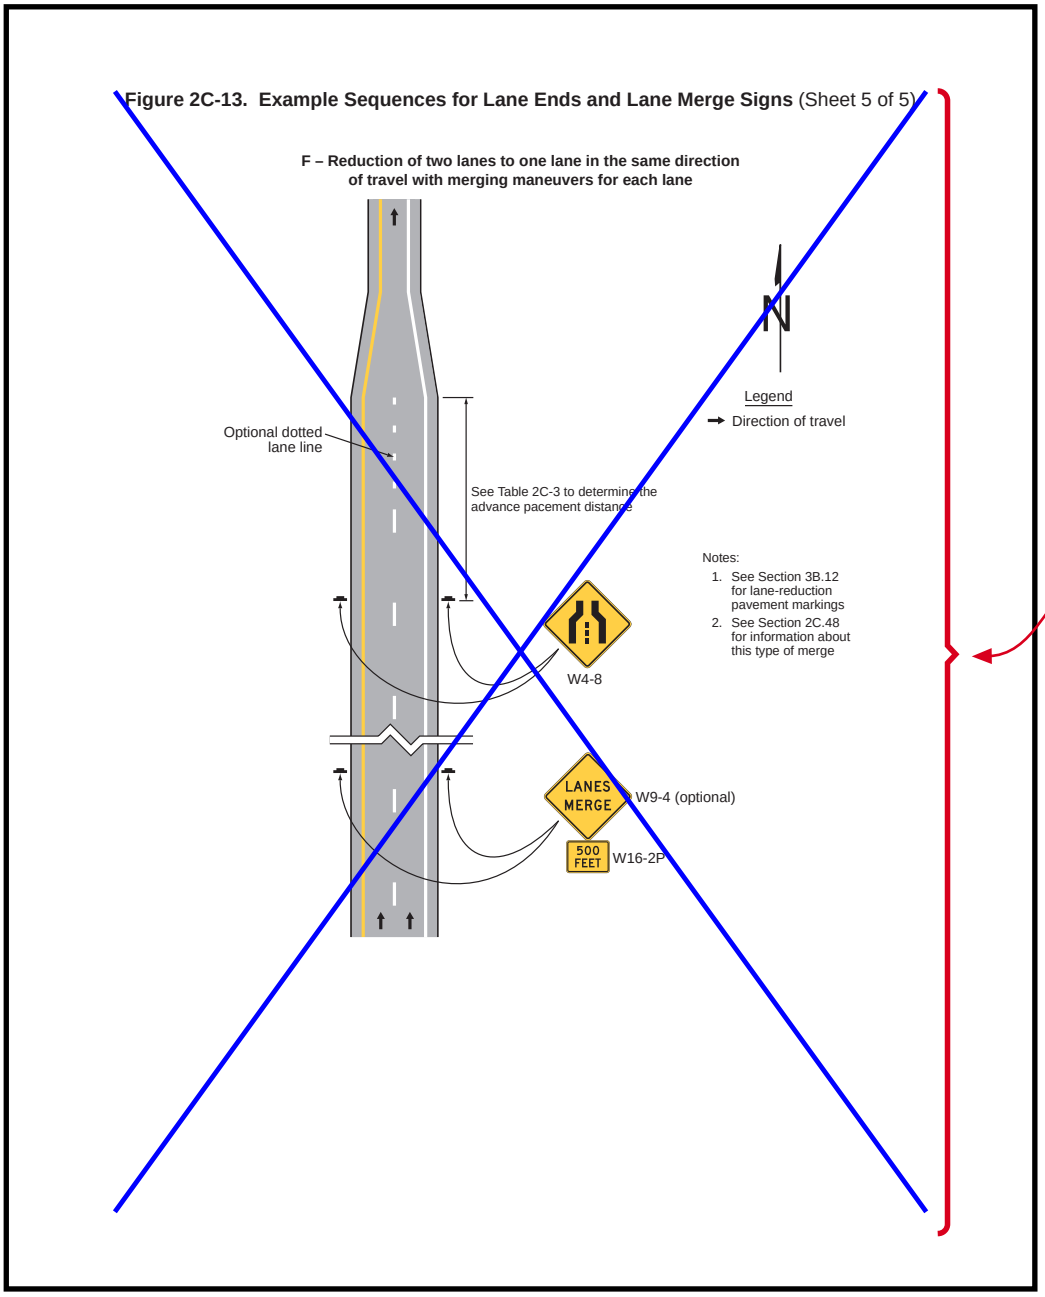



Entire national MUTCD figure not applicable in California is shown with a blue X cross-out

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 3 of 7)*

**Figure 2B-5. Intersection Lane Control Sign Arrow Options for Roundabouts**




A – Standard arrows





B – Curved-stem arrows

Partial national MUTCD figure not applicable in California is shown with a blue X cross-out only on the applicable sub-figure

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 4 of 7)*

**Figure 2B-2. Unsignalized Pedestrian Crosswalk Signs**

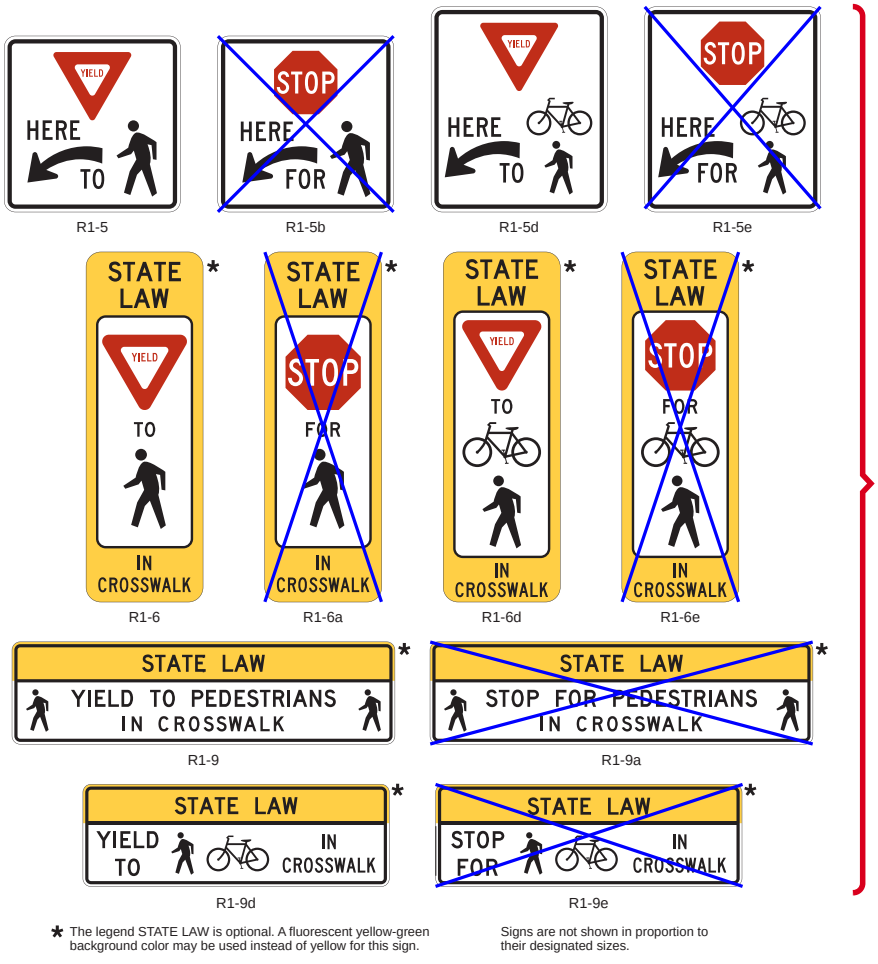



* The legend STATE LAW is optional. A fluorescent yellow-green background color may be used instead of yellow for this sign.

Signs are not shown in proportion to their designated sizes.

National MUTCD signs, markings, devices, symbols or diagrams not applicable in California are shown with a blue X cross-out only on the applicable signs, markings, devices, symbols or diagrams within the national MUTCD figure

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 5 of 7)*


**Figure 2C-5. Vertical Grade Signs and Plaques**

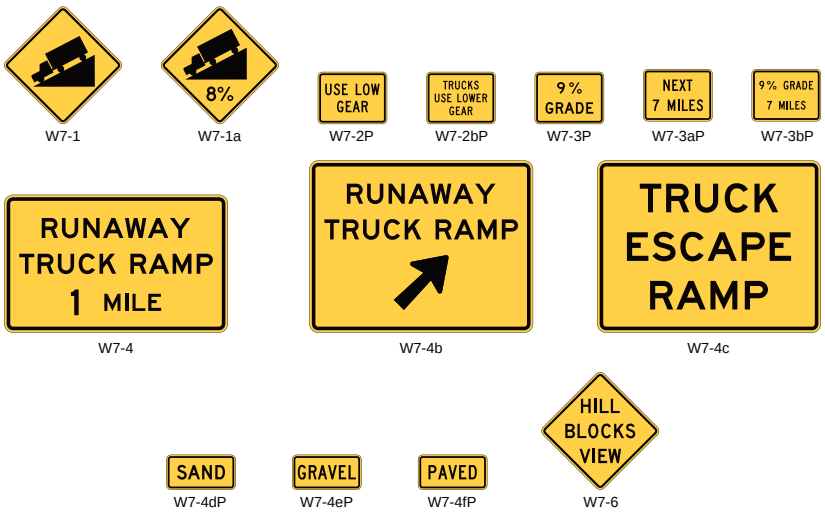


W7-1 W7-1a W7-2P W7-2bP W7-3P W7-3aP W7-3bP W7-4 W7-4b W7-4c W7-4dP W7-4eP W7-4fP W7-6

---

*Figure 2C-5(CA). Vertical Grade Signs and Plaques*




W30B(CA) W30cP(CA) W51(CA) SW4-1(CA)

California MUTCD figures which complement national MUTCD figures retain the federal figure number while adding "(CA)" at the end of the number. In such cases, more often than not, the CA MUTCD figure title also matches the national MUTCD figure title.

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 6 of 7)*

*Figure 2D-101(CA). California Miscellaneous Guide Signs*




G30(CA) G30aP(CA) G30bP(CA)

G68(CA) G98A(CA) SG1(CA)

California MUTCD figures with no corresponding national MUTCD figures begin with the number "101" and add "(CA)" while increasing in sequence from that number. The same goes for chapter section texts and tables.

## *Figure 1A-101(CA). California MUTCD Format Explanations (Sheet 7 of 7)*

**Table 2B-1. Regulatory Sign and Plaque Sizes** (Sheet 1 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Stop | R1-1 | 2B.04 | 30 x 30 | 36 x 36 | 36 x 36 | — | 30 x 30* | 48 x 48 |
| Yield | R1-2 | 2B.05 | 36x36x36 | 48x48x48 | 48x48x48 | 60x60x60 | 30x30x30* | — |
| To Oncoming Traffic (plaque) | R1-2aP | 2B.18 | 24 x 18 | 24 x 18 | 36 x 30 | 48 x 36 | 24 x 18 | — |
| To Traffic in Circle (plaque) | R1-2bP | 2B.18 | 24 x 15 | 24 x 15 | — | — | 24 x 15 | 36 x 24 |
| To All Lanes (plaque) | R1-2cP | 2B.18 | 24 x 15 | 24 x 15 | — | — | 24 x 15 | 36 x 24 |
| All Way (plaque) | R1-3P | 2B.04 | 18 x 6 | 18 x 6 | — | — | — | 30 x 12 |
| Yield Here to Pedestrians | R1-5 | 2B.19 | — | 36 x 36 | — | — | — | 36 x 36 |
| ~~Stop Here for Pedestrians~~ | ~~R1-5b~~ | ~~2B.19~~ | ~~—~~ | ~~36 x 36~~ | — | — | — | ~~36 x 36~~ |
| Yield Here to ~~(Stop Here for)~~ Trail Crossing | R1-5d,~~5e~~ | 2B.19 | — | 36 x 42 | — | — | — | — |
| In-Street Pedestrian Crossing - Yield ~~(Stop)~~ | R1-6,~~6a~~ | 2B.20 | 12 x 36 | 12 x 36 | — | — | — | — |
| In-Street Trail Crossing - Yield ~~(Stop)~~ | R1-6d,~~6c~~ | 2B.20 | 12 x 36 | 12 x 36 | — | — | — | — |
| Overhead Pedestrian Crossing - Yield ~~(Stop)~~ | R1-9,~~9a~~ | 2B.20 | 90 x 24 | 90 x 24 | — | — | — | — |
| Overhead Trail Crossing | R1-9d,~~9c~~ | 2B.20 | 72 x 24 | 72 x 24 | — | — | — | — |
| Except Right Turn (plaque) | R1-10P | 2B.04 | 24 x 18 | 24 x 18 | — | — | — | — |
| Speed Limit | R2-1 | 2B.21 | 24 x 30 | 30 x 36 | 36 x 48 | 48 x 60 | 18 x 24 | 30 x 36 |
| Truck Speed Limit (plaque) | R2-2P | 2B.22 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Bus Speed Limit (plaque) | R2-2aP | 2B.22 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Truck-Bus Speed Limit (plaque) | R2-2bP | 2B.22 | 24 x 30 | 24 x 30 | 36 x 42 | 48 x 54 | — | 36 x 42 |
| Vehicles Over X Tons Speed Limit (plaque) | R2-2cP | 2B.22 | 24 x 30 | 24 x 30 | 36 x 42 | 48 x 54 | — | 36 x 42 |
| Night Speed Limit (plaque) | R2-3P | 2B.23 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Minimum Speed Limit (plaque) | R2-4P | 2B.24 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Combined Maximum and Minimum Speed Limits | R2-4a | 2B.24 | 24 x 48 | 24 x 48 | 36 x 72 | 48 x 96 | — | 36 x 72 |
| ~~Unless Otherwise Posted (plaque)~~ | ~~R2-5P~~ | ~~2B.21~~ | ~~24 x 18~~ | ~~24 x 18~~ | ~~36 x 24~~ | ~~36 x 24~~ | — | ~~36 x 24~~ |
| ~~Citywide (plaque)~~ | ~~R2-5aP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | — | — | — | ~~30 x 9~~ |
| ~~Neighborhood (plaque)~~ | ~~R2-5bP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | — | — | — | ~~30 x 9~~ |
| ~~Residential (plaque)~~ | ~~R2-5cP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | — | — | — | ~~30 x 9~~ |
| ~~Fines Higher (plaque)~~ | ~~R2-6P~~ | ~~2B.25~~ | ~~24 x 18~~ | ~~24 x 18~~ | ~~36 x 24~~ | ~~48 x 36~~ | — | ~~36 x 24~~ |
| Fines Double (plaque) | R2-6aP | 2B.25 | 24 x 18 | 24 x 18 | 36 x 24 | 48 x 36 | — | 36 x 24 |
| $XX Fine (plaque) | R2-6bP | 2B.25 | 24 x 18 | 24 x 18 | 36 x 24 | 48 x 36 | — | 36 x 24 |
| Begin Double ~~Higher~~ Fines Zone | R2-10 | 2B.25 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Double ~~Higher~~ Fines Zone | R2-11 | 2B.25 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Variable Speed Limit | R2-13 | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Truck Speed Limit | R2-14 | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| Movement Prohibition | R3-1,2,3, 4,18,27 | 2B.26 | 24 x 24 | 36 x 36 | 36 x 36 | — | — | 48 x 48 |
| Movement Prohibition - Trucks | R3-1b | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |
| Movement Prohibition - Trucks Buses | R3-1c | 2B.26 | 24 x 42 | 24 x 42 | 36 x 60 | 36 x 60 | — | — |
| Movement Prohibition - Trucks Over X Tons | R3-1d | 2B.26 | 24 x 48 | 24 x 48 | 36 x 66 | 36 x 66 | — | — |
| Movement Prohibition - Except Buses | R3-1e | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |
| Movement Prohibition - Except Buses Taxis | R3-1f | 2B.26 | 24 x 42 | 24 x 42 | 36 x 66 | 36 x 66 | — | — |
| Movement Prohibition - Time and Day | R3-1g | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |

National MUTCD tables content not applicable in California have blue strikethrough, and often, replaced by blue California text above the strikethrough.

# CHAPTER 1B. LEGAL REQUIREMENTS FOR TRAFFIC CONTROL DEVICES

## Section 1B.01 National Standard

**Standard**:

01 **The Manual on Uniform Traffic Control Devices for Streets and Highways (MUTCD) is incorporated by reference in 23 Code of Federal Regulations (CFR), Part 655, Subpart F and shall be recognized as the national standard for all traffic control devices installed on any street, highway, bikeway, or site roadway open to public travel (see definition in Section 1C.02) in accordance with 23 U.S.C. 109(d) and 402(a).**

02 **In accordance with 23 CFR 655.603(a), the MUTCD shall apply to all of the following types of facilities:**

- **A. Any street, roadway, or bikeway open to public travel, either publicly or privately owned;**
- **B. Streets and roadways on sites that are off the public right-of-way that are open to public travel without full-time access restrictions. Examples include roadways within shopping centers, office parks, airports, sports arenas, other similar business and/or recreation facilities, governmental office complexes, schools, universities, recreational parks, and other similar publicly-owned complexes and/or recreation facilities. The above-described examples of streets and roadways are referred to in this Manual as site roadways open to public travel;**
- **C. Publicly-owned toll roads, including those under the jurisdiction of a public agency, public authority, or public-private partnership;**
- **D. Privately-owned toll roads where the public is allowed to travel without access restriction. This includes gated toll roads or roadways where the general public is able to pay to access the facility; and**
- **E. Grade crossings of publicly-owned roadways with railroads or light rail transit.**

03 **The MUTCD shall not apply to the following types of facilities:**

- **A. Roadways within private gated properties where access to the general public is restricted at all times;**
- **B. Grade crossings of privately-owned roadways with railroads; and**
- **C. Parking areas, including the driving aisles within those parking areas, that are either publicly or privately owned.**

Support:

03a Refer to FHWA's List of Known Errors for errors in Paragraphs 2 and 3 text. Refer to Section 1A.04 for more details.

**Standard:**

03b **In California, California MUTCD, which has been reviewed by FHWA CA Division and determined to be in substantial conformance with the National MUTCD, replaces the National MUTCD, and shall be the state standard for all official traffic control devices.**

03c **California MUTCD shall be the standard for all traffic control devices installed on all of the following types of facilities:**

- **A. Any highway or street that is publicly owned and maintained and open to the use of the public for purposes of vehicular travel. Refer to CVC Sections (§§) 360, 590, 21350, 21351, 21400 and 21401 and California Government Code § 11340.9(h).**
- **B. Any privately owned and maintained road, upon which a city or county has enacted an ordinance or resolution, regulating vehicular traffic. Refer to CVC §§ 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7. This includes privately owned and maintained roads:**
  1. **That are generally held open for use by the public for vehicular travel and which so connect with highways that the public cannot determine that the roads are not highways. Refer to CVC § 21107.5(a).**
  2. **Which are generally held open to the public for purposes of vehicular travel to serve commercial establishments. Refer to CVC § 21107.6(a).**
  3. **That are not generally held open for use of the public for purposes of vehicular travel but, by reason of their proximity to or connection with highways, the interests of any residents residing along the roads and the motoring public will best be served by application of the provisions of this code to those roads. Refer to CVC § 21107.7(a).**
- **C. Any privately owned and maintained road, upon which the private property owner has erected a notice to the effect that the road is privately owned and maintained and that it is subject to public traffic regulations or control. Refer to CVC §§ 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7.**

03d **California MUTCD shall not be applicable to any privately owned and maintained road under the following conditions:**

- **A. Any privately owned and maintained road upon which the owner has erected a notice of a size, shape, and color as**

**to be readily legible during daylight hours from a distance of 100 feet to the effect that the road is privately owned and maintained and that it is not subject to public traffic regulations or control. Refer to CVC §§ 21107.5, 21107.6 and 21107.7.**

**B. Any privately owned and maintained road upon which upon which a city or county has not enacted an ordinance or resolution, regulating vehicular traffic. Refer to CVC §§ 21100, 21100.1, 21107, 21107.5, 21107.6 and 21107.7.**

Support:

03e The use of this Manual is encouraged on all privately owned and maintained roads, in general, as a good practice. See Section 1D.02 for more information.

04 The policies and procedures of the Federal Highway Administration (FHWA) to obtain basic uniformity of traffic control devices are as described in 23 CFR 655, Subpart F.

05 Section 15-116 of the UVC (see Section 1A.06) states, "No person shall install or maintain in any area of private property used by the public any sign, signal, marking, or other device intended to regulate, warn, or guide traffic unless it conforms with the State manual and specifications adopted under Section 15-104." Adoption by agencies of such a provision through statute or ordinance can help maintain the integrity of official traffic control devices and provide continuity of uniformity at locations that are not subject to the provisions of this Manual.

## Section 1B.02 State Adoption and Conformance

Support:

01 All States have officially adopted the National MUTCD either in its entirety, with supplemental provisions, or as a separate published document. The National MUTCD has also been adopted by the National Park Service, the U.S. Forest Service, the U.S. Military Command, the Bureau of Indian Affairs, the Bureau of Land Management, and the U.S. Fish and Wildlife Service.

**Standard:**

02 **States or other Federal agencies that have their own MUTCDs or Supplements shall revise these MUTCDs or Supplements to be in substantial conformance with changes to the National MUTCD within 2 years of the effective date of the Final Rule for the changes [23 CFR 655.603(b)(3)]. Substantial conformance of such State or other Federal agency MUTCDs or Supplements shall be as defined in 23 CFR 655.603(b)(1).**

Support:

02a On December 19, 2023, a Final Rule adopting the National MUTCD 2023 was published by Federal Highway Administration (FHWA) in the Federal Register with an effective date of January 18, 2024. California does not automatically adopt the National MUTCD immediately upon the effective date of the latest edition or revision of the National MUTCD. Caltrans revises the current CA MUTCD to adopt changes issued by FHWA to the National MUTCD, and to bring it into substantial conformance with the National MUTCD, within two years from the effective date of the final rule. Refer to Section 1A.01 for information on Caltrans' CA MUTCD annual revision cycle.

02b This California MUTCD supersedes and replaces the previously adopted (on April 1, 2025) California MUTCD 2014 Revision 9.

**Standard:**

03 **For the purposes of Paragraph 2 of this Section, policies, directives, specifications, standard drawings, or similar documents that are issued by an agency and that change or modify Standard, Guidance, or Option provisions in this Manual shall be considered as supplements to the MUTCD and shall also be revised to be in substantial conformance with the National MUTCD.**

04 **In accordance with 23 CFR 655.603(b)(1), in addition to a State MUTCD or Supplement, supplemental documents that a State issues, including but not limited to policies, directives, standard drawings or details, and specifications, shall not contravene or negate Standard or Guidance statements in the National MUTCD.**

Support:

05 Caltrans publishes Standard Plans, Standard Specifications, Standard Special Provisions and other manuals and guidelines, which in addition to other topics, also contain specifications and requirements for traffic control devices, including their use and placement, when performing work on State highways. For the traffic control device topic portion of the contents in these publications, these publications are considered to be supplemental documents to the California MUTCD. In some cases, the specifications and requirements for traffic control devices contained in these publications, although in compliance with the minimum standards of the California MUTCD and the National MUTCD, can be more stringent (higher standard) than those shown in the California MUTCD.

**Standard:**

06 **On State highways, the California MUTCD shall mean to include, but not limited to, supplemental documents (for the traffic control device topic portion of the contents), such as Caltrans' publications of manuals, guidelines, handbooks, pamphlets and other publications, including the following:**

- **A. California Manual for Setting Speed Limits,**
- **B. Changeable Message Sign (CMS) Guidelines**
- **C. Flagging Instructions Handbook**
- **D. Managed Lanes Guidelines**
- **E. Official Memos.**
- **F. Proven Safety Countermeasure Guidance, Manuals and related publications,**
- **G. Standard Plans,**
- **H. Standard Special Provisions,**
- **I. Standard Specifications,**
- **J. Traffic Calming Guide,**
- **K. Traffic Operation Policy Directives (TOPD)**
- **L. Traffic Safety Bulletins,**

07 **Any revisions to these supplemental documents shall conform to, or not contravene or negate, any Standard and Guidance statements, figures, or tables of the California MUTCD.**

08 **If there is a discrepancy between the supplemental documents and the California MUTCD, the California MUTCD shall govern.**

Support:

09 Following information can be used to access some of these publications referenced:

- A. Caltrans Manuals https://dot.ca.gov/manuals
- B. Caltrans Safety Program https://dot.ca.gov/programs/safety-programs
- C. Caltrans Traffic Operations https://dot.ca.gov/programs/traffic-operations

**Standard:**

10 **The latest edition of Caltrans' California Sign Specifications shall be a part of this manual. If there are any discrepancies between the Sign Specifications and the California MUTCD, the California MUTCD shall govern. California Sign Specifications shall conform to, or not contravene or negate, any Standard and Guidance statements, figures or tables of the California MUTCD.**

Support:

11 Refer to the following web link for Caltrans' California Sign Specifications: https://dot.ca.gov/programs/safety-programs/sign-specs

## Section 1B.03 Compliance of Devices

**Standard:**

01 **The U.S. Secretary of Transportation, under authority granted by the Highway Safety Act of 1966, decreed that traffic control devices on all streets and highways open to public travel in accordance with 23 U.S.C. 109(d) and 402(a) in each State shall be in substantial conformance with the Standards issued or endorsed by the FHWA.**

Support:

02 23 CFR 655.603 also requires traffic control devices on all streets, highways, bikeways, and site roadways open to public travel in each State be in substantial conformance with standards issued or endorsed by the Federal Highway Administrator.

**Standard:**

03 **After the effective date of a new edition of the MUTCD or a revision thereto, or after the adoption thereof by the State, whichever occurs later, new or reconstructed devices installed shall comply with the new edition or revision, as required by 23 CFR 655.603.**

**Standard:**

03a **For the purpose of the Standard in Paragraphs 4 and 5 of this Section, the reference to National MUTCD shall mean the California MUTCD. Refer to Sections 1A.01 and 1B.01 and CVC §§ 21400 and 21401 for more details.**

04 **In cases involving Federal-aid projects for new construction, reconstruction, resurfacing, restoration, or**

**rehabilitation of a facility to which this Manual applies, the traffic control devices installed (temporary or permanent) shall comply with the most recent edition of the National MUTCD before that highway is opened or re-opened to the public for unrestricted travel [23 CFR 655.603(d)(2) and (d)(3)].**

05 **Unless a particular device is no longer serviceable (see definition in Section 1C.02), non-compliant devices on existing highways and bikeways shall be brought into compliance with the current edition of the National MUTCD as part of the systematic upgrading of substandard traffic control devices (and installation of new required traffic control devices) required pursuant to the Highway Safety Program, 23 U.S.C. §402(a).**

Support:

06 The FHWA has the authority to establish other target compliance dates for implementation of particular changes to the MUTCD [23 CFR 655.603(d)(1)].

**Standard:**

07 **The target compliance dates established by the FHWA shall be as shown in Table 1B-1.** The target compliance dates previously established by the FHWA in the National MUTCD 2009 Edition shall be as shown in Table 1B-1(CA) (Sheet 1 of 2). The target compliance dates previously established by Caltrans pursuant to CTCDC recommendation shall be as shown in Table 1B-1(CA) (Sheet 2 of 2).

08 **Design, application, and placement of traffic control devices other than those adopted in this Manual shall be prohibited unless the provisions of Sections 1B.04 through 1B.08 are followed regarding official interpretations, experiments, changes to the MUTCD, and interim approvals granted by the FHWA.**

Support:

09 Many of the provisions in this Manual that are explicitly prohibitive have been included to address practices that have been shown to be ineffective, unsafe, or inconsistent with uniformity. A provision of mandatory or recommended practice represents the accepted and established practice that promotes uniformity and consistency. The absence of a provision in this Manual that explicitly prohibits a particular practice, use, design, application, operation, or other aspect of a traffic control device does not, in itself, constitute acceptability or permission to use the device in a manner not provided for in this Manual.

*Guidance:*

10 *Agencies should contact the FHWA when considering employing a practice or application that is not explicitly addressed in this Manual to ensure continued compliance with the provisions in this Manual.*

Support:

11 The FHWA reviews and interprets the provisions in this Manual for agencies on an as-needed basis, which can lead to the issuance of official interpretations (see Section 1B.04), or interim approvals (see Section 1B.07).

**Standard:**

12 **A non-compliant traffic control device that is being replaced or refurbished because it is damaged, missing, or no longer serviceable (see definition in Section 1C.02) for any reason shall be replaced with a compliant device, except as provided for in Paragraph 13 of this Section.**

Option:

13 A non-compliant traffic control device may be replaced in kind when engineering judgment indicates it is more appropriate because:

A. One compliant device in the midst of a series of adjacent non-compliant devices would be confusing to road users, and/or
B. The schedule for replacement of the whole series of non-compliant devices will result in achieving timely compliance with the MUTCD.

14 Agencies may install traffic control devices included in previously approved construction plans that complied with the previous version of CA MUTCD at the time of plan approval, if they have already been ordered.

15 Except for the traffic control devices with target compliance dates established by FHWA as shown in Table 1B-1 and those established by Caltrans using the CTCDC process and shown in Table 1B-1(CA), and traffic control devices that are not located within a construction work zone, all traffic control devices on existing highways and bikeways that have become non-compliant per California MUTCD adopted standards may remain in service through the end of their useful service life.

## Section 1B.04 Interpretations

Support:

01 The FHWA issues authoritative interpretations of this Manual when necessary to provide clarity in response to

unique situations for device application or general requests for clarification of a provision.

02 An interpretation includes a consideration of the application and operation of standard traffic control devices, the official meanings of standard traffic control devices, or the variations from standard device designs and design requirements.

*Guidance:*

03 *Requests for an interpretation of this Manual should contain the following information:*

*A. A concise statement of the interpretation being sought;*
*B. A description of the condition that provoked the need for an interpretation;*
*C. Any illustration that would be helpful to understand the request; and*
*D. Any supporting research data that is pertinent to the item to be interpreted.*

Support:

04 Section 1B.08 contains information on submitting a request for interpretation.

## Section 1B.05 Experimentation

Support:

01 Requests for experimentation (see Section 1B.08) include consideration of field deployment for the purpose of testing or evaluating a new traffic control device, its application or manner of use, or a provision not specifically described in this Manual.

**Standard:**

02 **A traffic control device or application that does not comply with the provisions of this Manual shall not be used on any street, highway, bikeway, or site roadway open to public travel (see definition in Section 1C.02) without first receiving official approval to experiment from the FHWA's Office of Transportation Operations.**

Support:

03 A request for permission to experiment (see Section 1B.08) will be considered only when submitted by the public agency or toll facility authority responsible for the operation of the road or street on which the experiment is to take place. For a site roadway open to public travel, the request will be considered only if it is submitted by the private owner or official having jurisdiction.

04 A request for experimentation with a novel device or application across multiple jurisdictions as a single experiment with a common hypothesis, evaluation plan, and evaluation team will be considered when submitted jointly by all the authorities responsible for operation of the roads or streets on which the experiment is to take place. Similarly, a request to add experimental sites to an experimentation approved for another jurisdiction will be considered when submitted jointly by the all the authorities for operation of the roads or streets on which the experiment is then to take place.

05 Manufacturers or inventors of novel devices are encouraged to engage the services of a qualified traffic engineer or other professional who is versed in traffic control devices. Early engagement during the concept and development processes will help ensure the efficacy of the device with regard to human factors, operational, safety, and other considerations prior to an agency requesting experimentation.

06 In some cases, an off-roadway closed-course or laboratory study might be required before a request for experimentation can be considered. The purpose of such a study is to determine whether testing the experimental device or application in an open-road setting could result in an undue safety risk.

*Guidance:*

*07 Before requesting permission to experiment with a new device or application, an owner of a site roadway open to public travel should first check for any laws, regulations, and/or directives covering the application of the MUTCD that might apply.*

Option:

08 An agency may request a preliminary assessment of the viability of a potential request for experimentation by submitting an abstract that briefly describes the experimental concept.

Support:

09 A diagram indicating the process for requesting and conducting experimentations with traffic control devices is shown in Figure 1B-1.

**Standard:**

10 **The request for permission to experiment shall contain the following:**

**A. A statement indicating the nature of the problem and a hypothesis establishing the premise of the**

**experiment.**

**B. A description of the proposed change to the traffic control device or application of the traffic control device, including the manner in which it deviates from the provisions of this Manual, and how it is expected to be an improvement over existing provisions.**

**C. Illustrations that would help to explain the traffic control device or use of the traffic control device.**

**D. Any supporting data explaining how the traffic control device was developed, including if it has been tested, in what ways it was found to be adequate or inadequate, and how this choice of device or application was derived.**

**E. Comparison of the proposed device to other compliant devices or treatments, either individually or in combination, that address the same condition, if applicable.**

**F. A legally binding statement that the experimental device or application is in the public domain, in accordance with Paragraph 16 of this Section.**

**G. The time period and location(s) of the experiment.**

**H. Control sites for comparison purposes or justification for not using control sites.**

**I. A detailed research and evaluation plan that provides for close monitoring of the experimentation, throughout all stages of its field implementation. The evaluation plan shall include an appropriate evaluation methodology, such as before and after analysis, or other appropriate methodology as well as quantitative data describing the performance of the experimental device.**

**J. An agreement to provide semi-annual progress reports for the duration of the experimentation, in accordance with the schedule provided in Paragraph 12 of this Section, and an agreement to provide a report of the final results of the experimentation to the FHWA's Office of Transportation Operations within 3 months following completion of the experimentation (see Paragraph 14 of this Section). The FHWA's Office of Transportation Operations shall have the right to terminate approval of an agency's experiment if reports are not received in accordance with this schedule.**

**K. An agreement to restore the site of the experiment to a condition that complies with the provisions of this Manual within 3 months following the end of the time period of the experiment. This agreement shall also provide that the agency sponsoring the experimentation will terminate the experimentation at any time that it determines that safety concerns are directly or indirectly attributable to the experimentation and the agency shall provide timely notification to the FHWA's Office of Transportation Operations. The FHWA's Office of Transportation Operations shall have the right to terminate approval of the experimentation at any time if there is an indication of safety or operational concerns, or if the terms of the approval are not being adhered to. If, as a result of the experimentation, a request is made that this Manual be changed to include the device or application being experimented with, the FHWA's Office of Transportation Operations will determine whether the device or application can be permitted to remain in place until an official rulemaking action has occurred.**

11 **Where an item in Paragraph 10 of this Section is determined to not be applicable to the type of experiment, device, or application, the request shall provide sufficient explanation.**

12 **The required semi-annual progress reports shall be submitted throughout the course of an approved experiment in accordance with the following schedule:**

**A. No later than August 1st for the preceding period of January through June; and**

**B. No later than February 1st for the preceding period of July through December.**

13 **The experimenting agency shall submit a semi-annual progress report for any approved experiment even if no work was performed during the previous reporting period. Failure to submit two consecutive progress reports shall result in termination of the experiment and shall constitute rescission of the FHWA's approval to the experimenting agency, requiring restoration of the site(s) to a condition that complies with the provisions of this Manual within 3 months.**

14 **The experimenting agency shall submit a final report within 3 months of the conclusion of an approved experiment. If a final report is not received by the FHWA's Office of Transportation Operations, and the experimenting agency fails to notify the FHWA of any mitigating circumstances within 6 months of the end of the approved experimentation period, then the experiment shall be considered terminated and shall constitute rescission of the FHWA's approval to the experimenting agency, requiring restoration of the site(s) to a condition that complies with the provisions of this Manual within 3 months.**

Support:

15 Under certain circumstances the FHWA Office of Transportation Operations might allow an experimental device or device application that has been shown to be effective and without safety concerns to remain in use after the experiment has ended. This typically would occur if the device or application is actively being considered for interim approval under the provisions of Section 1B.07.

**Standard**

16 **A request for experimentation that involves a new traffic control device or a new application of an existing traffic control device shall include from the agency conducting the experiment, the manufacturer and/or developer of the device, and the supplier of the device, a legally-binding statement certifying that the traffic control device is not protected by a patent, trademark, or copyright in accordance with Section 1D.06, and that the traffic control device is in the public domain and can be used freely in traffic control device design and application without infringement or claim of trade secret misappropriation. The legally-binding statement shall also state that the agency conducting the experiment, the manufacturer and/or developer of the device, and the supplier of the device are aware that if patent, trademark, or copyright protection is established in the future for the device or application, such action will result in its removal from the MUTCD, cancellation of its interim approval, or cancellation of the authorization for experimentation.**

Support:

17 For the purpose of the Standard in Paragraph 16 of this Section, traffic control device refers to those aspects of a sign, signal, marking or other device which regulates, warns, or guides traffic. The limitation on patent, trademark, or copyright protection does not include the legal protection of individual elements of such devices. For example, manufacturing methods, assembly methods, or individual components of such devices can be protected, whereas the traffic control device cannot be subject to protection so long as it remains in this Manual. As a further example, an internal circuit board for an electronic traffic control device can be legally protected, but the electronic traffic control device itself or its operational function cannot be legally protected by any of the above forms of intellectual property rights.

Support:

18 In addition to the requirements of the FHWA, experimental traffic control devices are subject to the laws, regulations and policies of the State of California.

**Standard:**

19 **The agency shall request and receive approval from FHWA and Caltrans (using CTCDC agenda item and process), prior to installation of experimentation devices on public roadways in California (Refer to Figure 1B-1 and Figure 1B-1(CA)).**

*Guidance:*

20 *Caltrans should present the request to the California Traffic Control Devices Committee (CTCDC), prior to any agency's installation of experimentation devices on public roadways in California.*

Support:

21 For information contact:
Executive Secretary,
California Traffic Control Devices Committee
https://www.dot.ca.gov/programs/safety-programs/ctcdc

22 The California MUTCD contains the official standards and policies of the State of California for the design, application, and placement of traffic control devices.

23 Experimentation is defined as research involving the acts of testing, evaluating, analyzing or discovering the effect of a specific device, principle, supposition, etc., usually carried out in an operational context. Experimentation could also be performed in a laboratory. The request for experimentation is a submission specifically requesting approval to use a non-standard device on public roadways for purposes of gathering verification data.

24 As used herein, the term "device" includes not only signs, signals, and markings, but also their application and manner of use.

*Guidance:*

25 *Requests for experimentation, interpretation, or changes relating to the California edited portion of the California MUTCD should be sent to:*

*Executive Secretary,*
*California Traffic Control Devices Committee – MS36*
*P.O. Box 942874, Sacramento, CA-94274-0001*

Support:

26 The following procedures apply to requests for experimentation:

**Submission of Projects**

27 A request for permission to experiment will be considered only when submitted by the public agency or private toll facility responsible for the operation of the road or street on which the experiment is to take place.

**Standard:**

28 **Experimentation requests shall contain Items A through K listed in Paragraph 10 of this section.**

Support:

29 Requests for experimentation that are submitted without an explanation of the objective, scope, and duration will be returned to the originator for amplification.

**Procedure for Processing Requests**

A. All requests for experimentation will be reviewed by Caltrans (Secretary of the CTCDC) to determine whether other related experimentation has been scheduled, in process, or already completed.
B. The Secretary of the CTCDC will list the experimentation proposal on the next CTCDC meeting agenda for review and recommendation. The Committee's recommendation would also include the specific guidelines to be followed for the experimentation.
C. Action by Caltrans based on CTCDC recommendation on any request for experimental use of a non-conforming device could take several forms:
    1. Recommendation of the device for limited use on an experimental project, subject to FHWA approval.
    2. Recommendation of the device for limited use in a formal research project, subject to FHWA approval.
    3. Not recommended until such time as satisfactory research or other justification is submitted.
    4. Not recommended.
D. If action by Caltrans based on CTCDC recommendation on any request for experimental use of a non-conforming device results in a recommendation of the device for limited use, the agency will need to submit the experimentation request to FHWA and receive official approval to experiment from the FHWA's Office of Transportation Operations, to conduct the experiment.
E. After action by Caltrans based on CTCDC recommendation, the Secretary of the California Traffic Control Devices Committee will notify the originating party of its decision. If approved by FHWA, the originating parties will be requested to submit a status report on the experimental testing at appropriate intervals. When the results of experimentation are completed, a final report will be prepared and forwarded to the Secretary for Committee review.
F. The agency receiving FHWA approval for experimentation must agree to faithfully follow the specific guidelines for the experimentation, must forward reports as indicated, and must agree to terminate the experimentation upon notification.

**Specific Guidelines for Experimental Proposal**

*Guidance:*

30 *A specific proposal should be submitted for each request.*

Support:

31 This proposal can be submitted with the initial request or could be a follow-up to specific comments by the CTCDC in their recommendation to Caltrans. The proposal, after FHWA approval, will become an integral part of the approved experimentation.

*Guidance:*

32 *Each proposal should include:*

*A. Scope: A detailed description of the experimentation, locations of installation, and number of experimental projects.*
*B. Work Plan: A description of the proposed plan of study; the variables that are to be measured; the criteria against which the devices is to be evaluated; observations, measures and data which will be collected; whether the experimentation will be carried out in the field or under laboratory conditions; how installations of the experimental device or application will be made; the indication if any adverse effects on safety or traffic operations can be anticipated, together with the means that may be taken to minimize them; and the factors which will be held constant or measured and controlled in order to ensure that the true effects of the device are measured.*
*C. Time Periods: Time periods for experimentation will normally not be less than six months nor more than two years.*
*D. Evaluation Procedures: Caltrans via CTCDC process will recommend needed changes to criteria, if any, which will be used to evaluate experimental devices or applications. To permit meaningful comparisons with standard installations, advice from specialists such as human factor experts, statisticians, etc., could be included.*

*E. Reporting: A written status report must be forwarded to the sponsor 45 days prior to each public meeting. A final report must be completed within 90 days of the terminal date of the experimentation and forwarded to Caltrans (Secretary of the CTCDC). Status reports will describe the progress of the work, any particular deviation from the work plan and anticipated time of conclusion. The final report will contain, as a minimum, the basic information on the problem, the preliminary investigations, the proposed solutions, the study procedures, the detailed analysis of the data, the results of the work, a discussion of the results, and whatever conclusions are drawn. If a change in the California MUTCD is proposed, the recommended text (wording) for the California MUTCD should be included.*

*F. Administration: All experimentation proposals will include the agency sponsoring the study, the agency conducting the study, and the name and titles of principal researchers. There must be proof of professional traffic engineering capabilities and other related professional expertise to perform the experimentation and related evaluation processes.*

**Termination of Experimentation**

**Standard:**

33 **The project shall terminate at the end of the approved period unless an extension is granted in writing by FHWA, and all experimental devices and applications shall be removed unless specific permission is given for continued operation.**

Support:

34 FHWA could, at any time, terminate approval of experimentation if significant safety hazards are indicated to be directly or indirectly attributable to the experimentation. Approval of any experimentation could also be terminated if no status report is received 45 days prior to each public meeting or no final report is received within 90 days of the terminal date of the experimentation.

**Removal of Experimentation Installations**

**Standard:**

35 **All experimentation installations shall be removed upon termination of the experiment when a decision is made by FHWA and Caltrans that the device is not warranted.**

Support:

36 Authority and reference cited for removal of experimentation installation is CVC § 21400.

## Section 1B.06 Changes to the MUTCD

Support:

01 Continuing advances in technology and approaches to traffic safety will produce changes in the highway, vehicle, and road-user proficiency; therefore, portions of the system of traffic control devices in this Manual will require updating. It is important to have a procedure for recognizing these developments and for introducing new ideas and modifications into the system.

02 A change includes consideration of a new device to replace a present standard device, an additional device to be added to the list of standard devices, or a revision to a traffic control device application or placement criteria.

*Guidance:*

03 *Requests for a change to this Manual (see Section 1B.08) should contain the following information:*

*A. A statement indicating what change is proposed;*

*B. Any illustration that would be helpful to understand the request; and*

*C. Any supporting research data that is pertinent to the item to be reviewed.*

Support:

04 Requests for a change to this Manual will be evaluated to consider the potential safety and operational benefits of the requested change and be considered for inclusion in the future for consideration in the next rulemaking to issue a new edition or revision of the Manual. A diagram indicating the process for incorporating new traffic control devices into this Manual is shown in Figure 1B-2.

05 Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

## Section 1B.07 Interim Approvals

Support:

01 Interim approval allows for provisional use, pending official rulemaking, of a new traffic control device, a revision to the application or manner of use of an existing traffic control device, or a provision not specifically described in this Manual.

02 The FHWA issues an interim approval by official memorandum signed by the Associate Administrator for Operations and posts this memorandum on the MUTCD Web site.

03 Interim approval allows for the optional use of a traffic control device or application and does not create a new mandate or recommendation for its use. Interim approval includes conditions that jurisdictions, toll facility operators, or owners of site roadways open to public travel agree to comply with in order to use the traffic control device or application until an official rulemaking action has occurred.

04 The issuance by FHWA of an interim approval might result in the traffic control device or application being proposed for adoption in the next scheduled rulemaking process to issue a new edition or revision of this Manual. If the device or application under interim approval is not proposed in the next rulemaking for a new edition or revision, then a statement of the status of the interim approval, whether it is to be rescinded or remain in effect, will be included in the Federal Register notice for the rulemaking.

05 Interim approval is considered based on the results of experimentation, and/or results of analytical or laboratory studies with a traffic control device or application that analytically demonstrates a device effectively communicates its intended meaning. Interim approval considerations include an assessment of relative risks, benefits, costs, impacts, and other factors.

06 Section 1B.08 contains information on submitting a request for interim approval.

07 Interim approval is ordinarily considered only after published authoritative research and experimentation sufficiently demonstrate that the device or application provides a significant safety or operational improvement. Individual experiments by various jurisdictions, without a research report on the overall findings of the experimental device or application, will not ordinarily qualify for issuance of an interim approval.

08 Interim approval ordinarily is not considered based solely on non-U.S. experience with a new traffic control device or application. Differences in regulations, enforcement and penalties, and driver licensing requirements, among other factors, can result in dissimilar road-user behavior. Additionally, due to variations in conventions for traffic control device design, a non-U.S. traffic control device concept might need to be adapted to U.S. criteria to ensure consistency with the provisions and principles of this Manual. However, documented non-U.S. experience can be considered in the development of requests for experimentation (see Section 1B.05) and within the evaluation plan for traffic control device research.

08a Refer to Table 1B-101(CA) for the Interim Approvals issued by FHWA and their status in California.

**Standard:**

09 **A jurisdiction, toll facility operator, or owner of a site roadway open to public travel that desires to use a traffic control device or application for which FHWA has issued an interim approval shall request and receive permission from FHWA in writing prior to applying the device or application.**

10 **The request to place a traffic control device or application under an existing interim approval shall contain the following:**

- **A. A description of where the device or application will be used, such as a list of specific locations or highway segments or types of situations, or a statement of the intent to use the device or application jurisdiction-wide;**
- **B. An agreement to abide by the specific conditions for use of the device or application as contained in the FHWA's interim approval memorandum;**
- **C. An agreement to maintain and continually update a list of locations where the device or application has been installed; and**
- **D. An agreement to:**
  1. **Restore the site(s) of the interim approval to a condition that complies with the provisions in this Manual within 3 months following the issuance of a Final Rule on this traffic control device or application; and**
  2. **Terminate use of the device or application installed under the interim approval at any time that it determines that safety concerns are directly or indirectly attributable to the device or application. The FHWA's Office of Transportation Operations shall have the right to terminate the interim approval at any time if there is an indication of safety, operational, or other concerns.**

Option:

11 A State may submit a request for permission to use a device or application under an existing interim approval for all jurisdictions in that State, as long as the request contains the information required in Paragraph 9 of this Section.

Support:

11a Figure 1A-101(CA) shows the process for the use of traffic control devices in California approved as interim approval by FHWA.

**Standard:**

12 **A jurisdiction, toll facility operator, or owner of a site roadway open to public travel that elects to use a device or application under a statewide interim approval shall inform the State of its use of the device or application.**

13 **Under a statewide interim approval, the respective jurisdictions, toll facility operators, and owners of site roadways open to public travel shall maintain and continually update a record of all locations on their roads where the device or application is implemented (see Item C of Paragraph 9 of this Section) and shall furnish this information to the State.**

Support:

14 Refer to FHWA's List of Known Errors for errors in Paragraphs 11 and 13 text. Refer to Section 1A.04 for more details.

## Section 1B.08 Requesting Official Interpretations, Experiments, Changes to the MUTCD, or Interim Approvals

*Guidance:*

01 *A local jurisdiction, toll facility operator, or owner of a site roadway open to public travel that is requesting permission to experiment or permission to use a device or application under an existing interim approval should first check for any State laws, regulations, and/or directives covering the application of the MUTCD provisions that might apply.*

**Standard:**

02 **Except as provided in Paragraph 3 of this Section, requests for an interpretation, permission to experiment, a change to the MUTCD, granting of an interim approval, or permission to use an existing interim approval shall be submitted electronically to the Federal Highway Administration (FHWA), Office of Transportation Operations, MUTCD team, at the following e-mail address: MUTCDofficialrequest@dot.gov.**

Option:


03 If electronic submittal is not possible, requests for an interpretation, permission to experiment, a change to the MUTCD, granting of an interim approval, or permission to use an existing interim approval may instead be mailed to the Office of Transportation Operations, HOTO-1, Federal Highway Administration, 1200 New Jersey Avenue, SE, Washington, DC 20590.

Support:


04 Communications regarding other MUTCD matters that are not related to official requests will receive quicker attention if they are submitted electronically to the MUTCD Team Leader or to the appropriate individual MUTCD technical lead team member. Their e-mail addresses are available through the links contained on the "MUTCD Team" page on the MUTCD Web site at http://mutcd.fhwa.dot.gov/team.htm.

05 For additional information concerning interpretations, experimentation, changes, or interim approvals, visit the MUTCD Web site at http://mutcd.fhwa.dot.gov.


# Figure 1B-1. Process for Requesting and Conducting Experimentations for New Traffic Control Devices

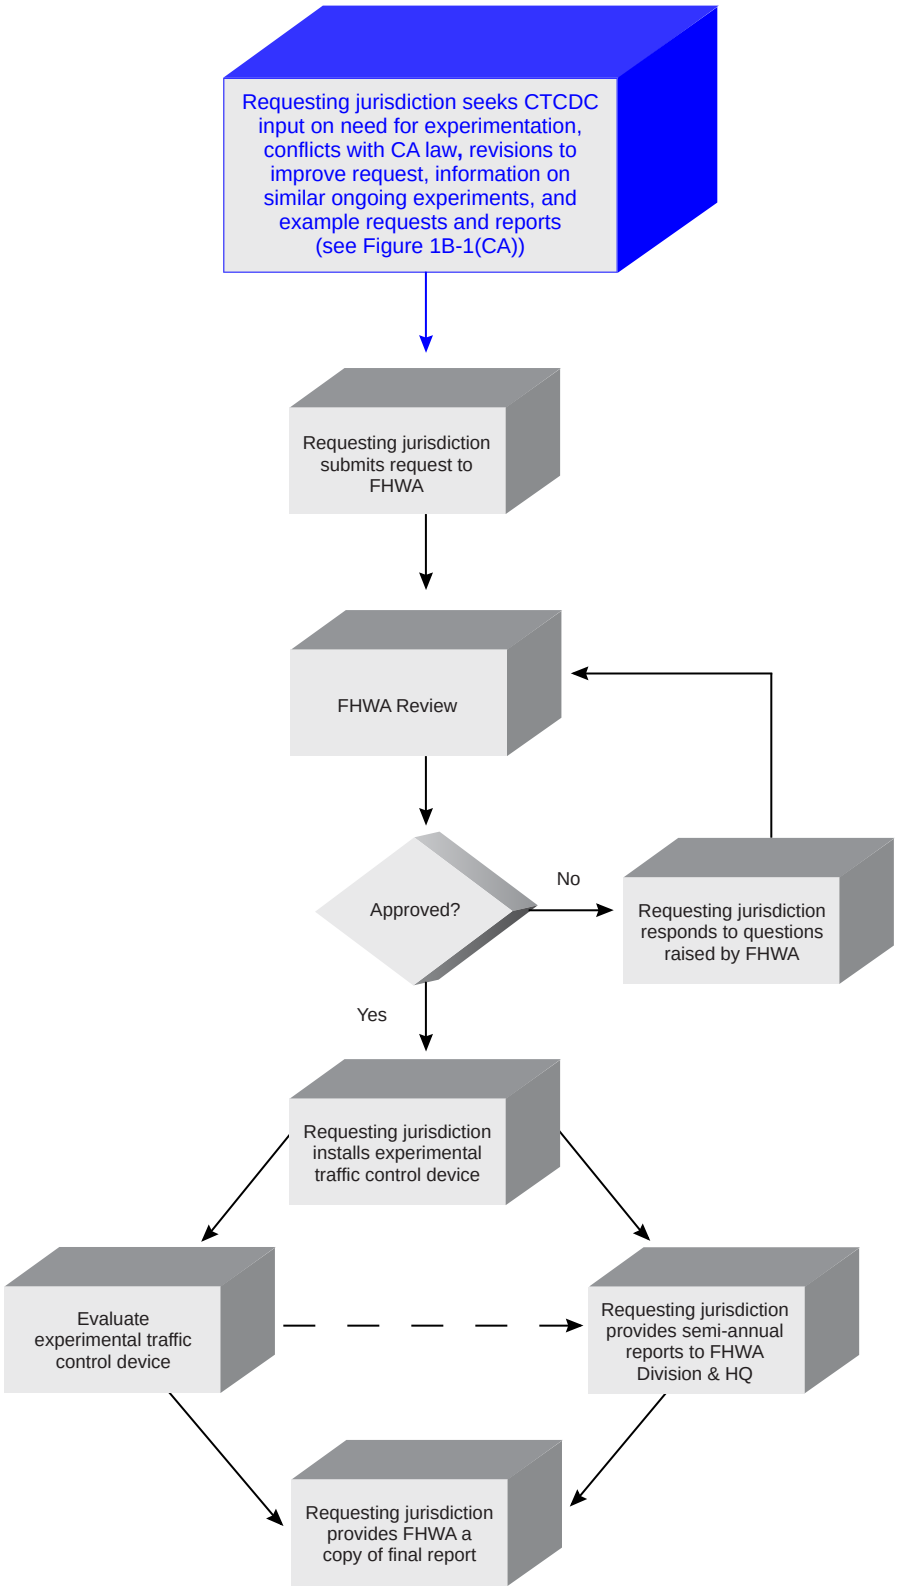

## *Figure 1B-1(CA). Process for Requesting and Conducting Experimentations for New Traffic Control Devices in California*

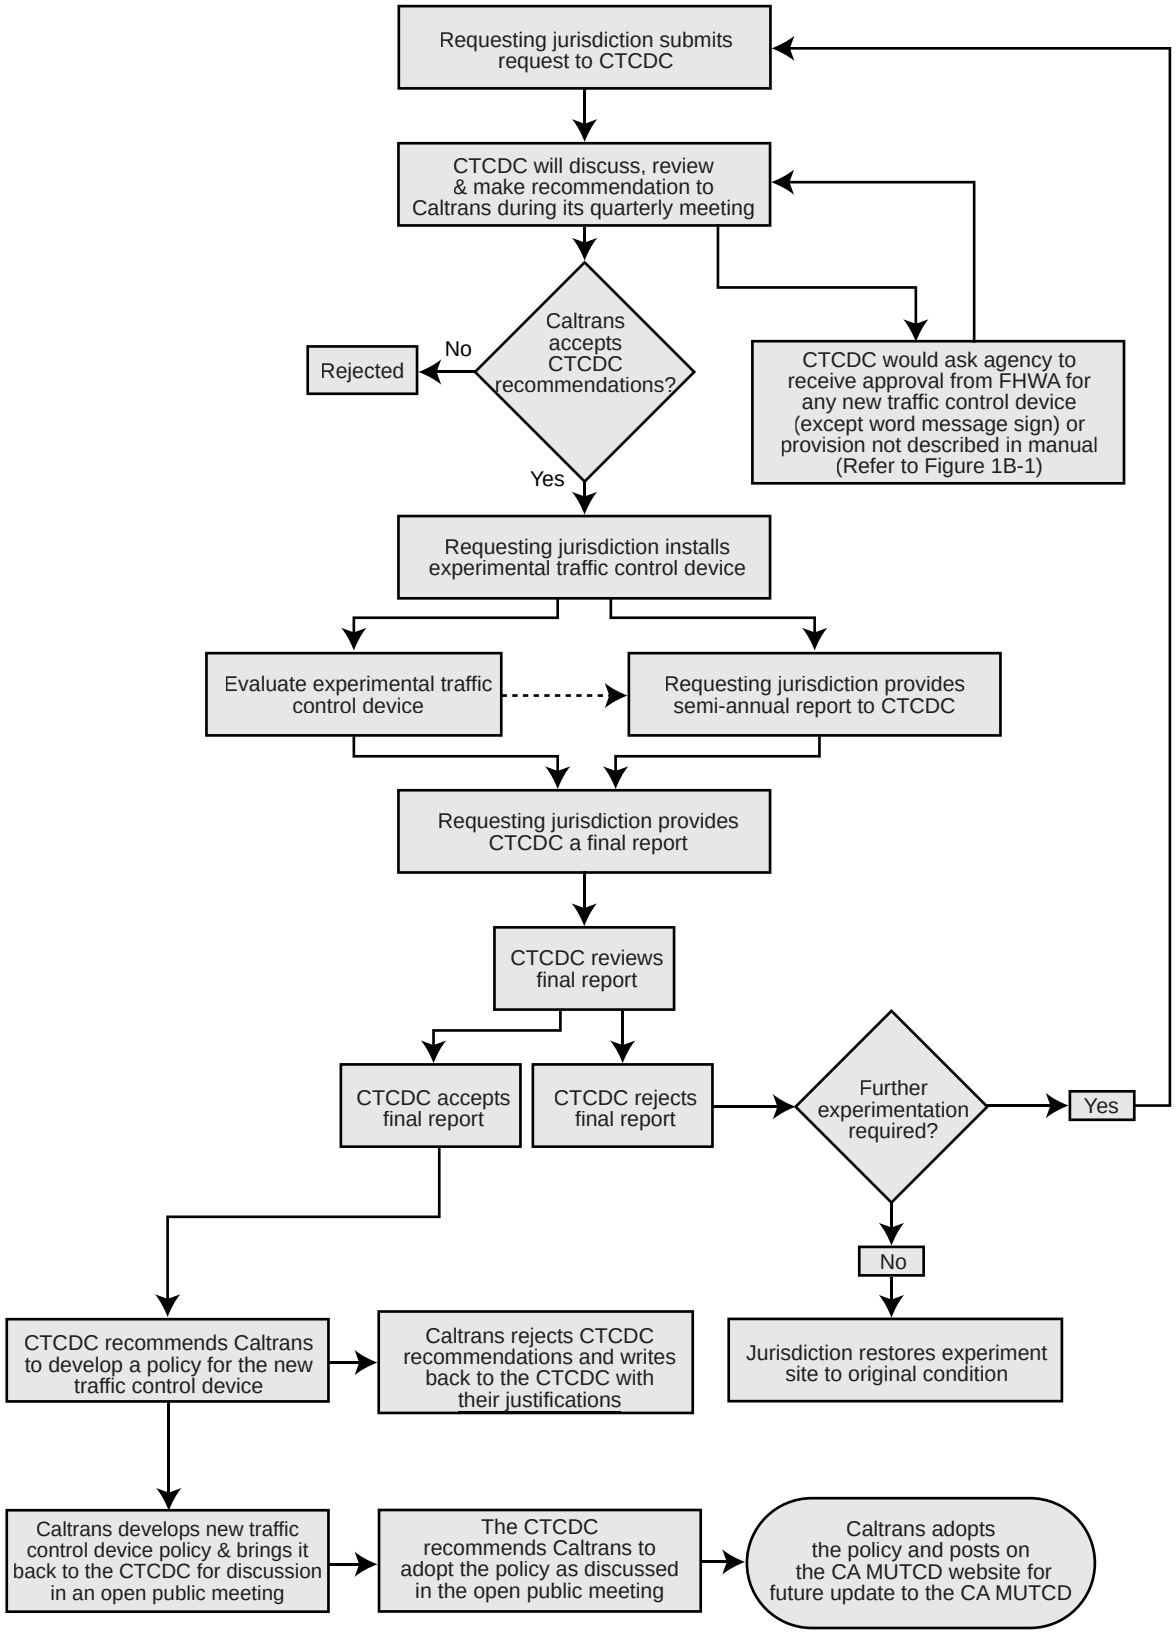


## Figure 1B-2. Process for Incorporating New Traffic Control Devices into the MUTCD

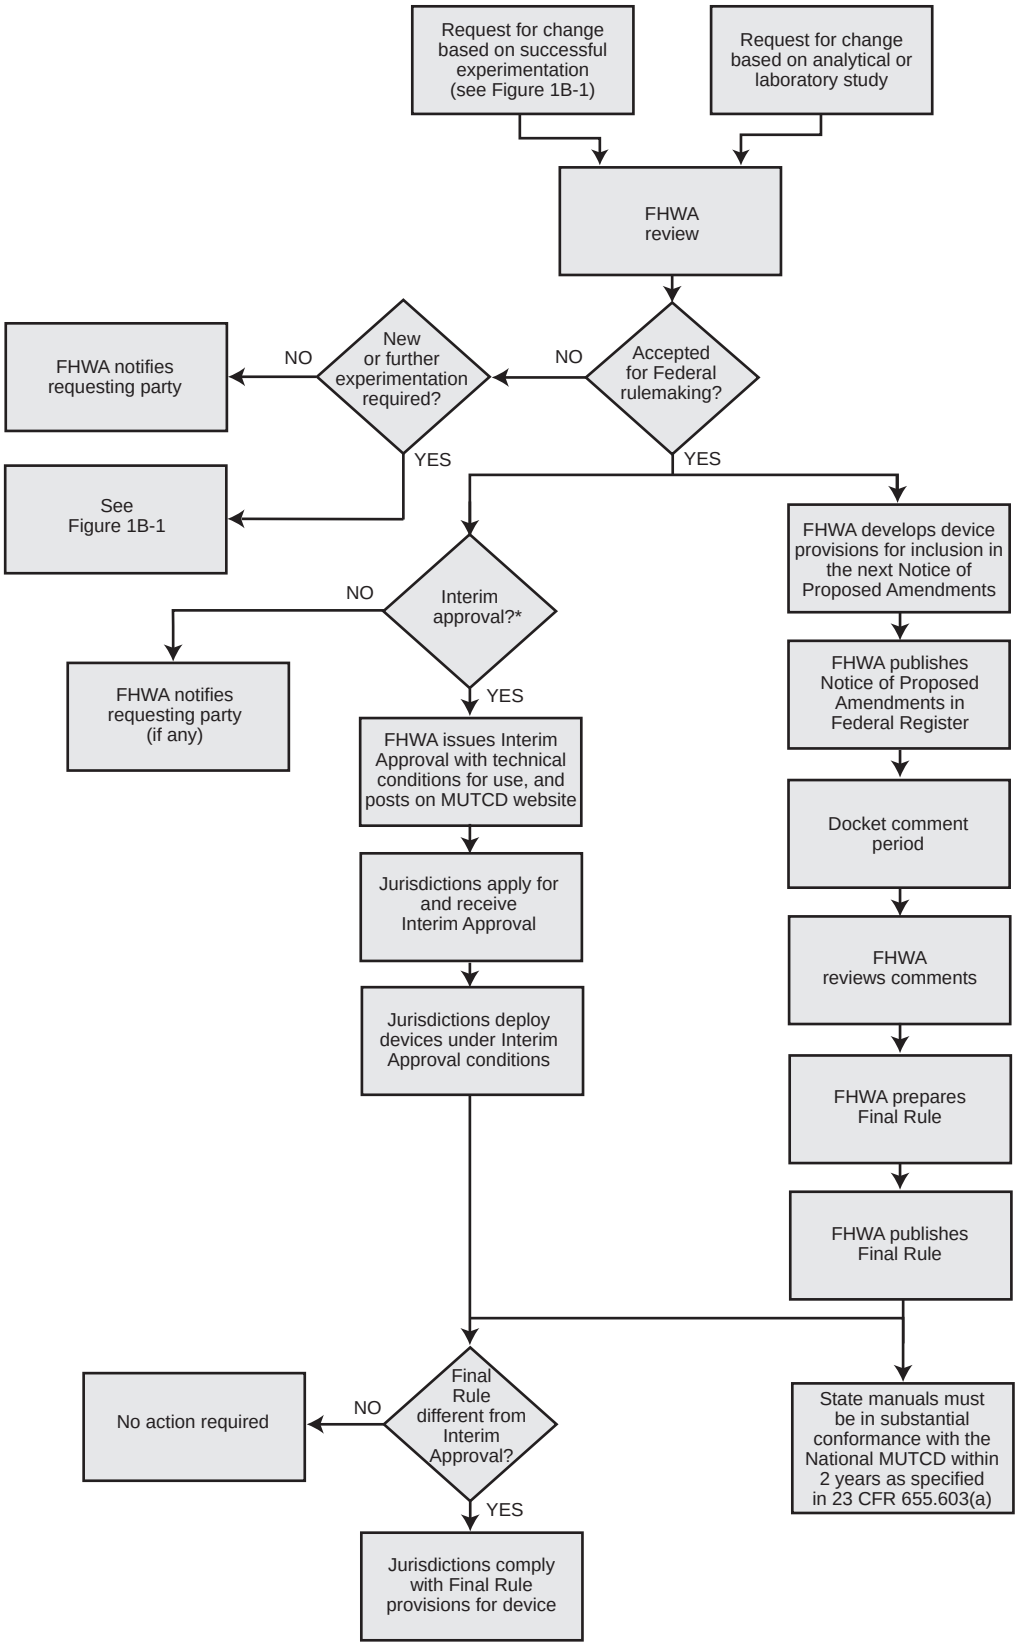


*A change request to allow the use of a new traffic control device is considered for Interim Approval when FHWA determines that the change will have a substantial national safety or operational benefit and that it would not be in the public interest to wait the intervening time period before the device could otherwise be officially incorporated into the MUTCD through rulemaking.

## *Figure 1B-101(CA). Process for the Use of Traffic Control Devices in California Approved as Interim Approval (IA) by FHWA*

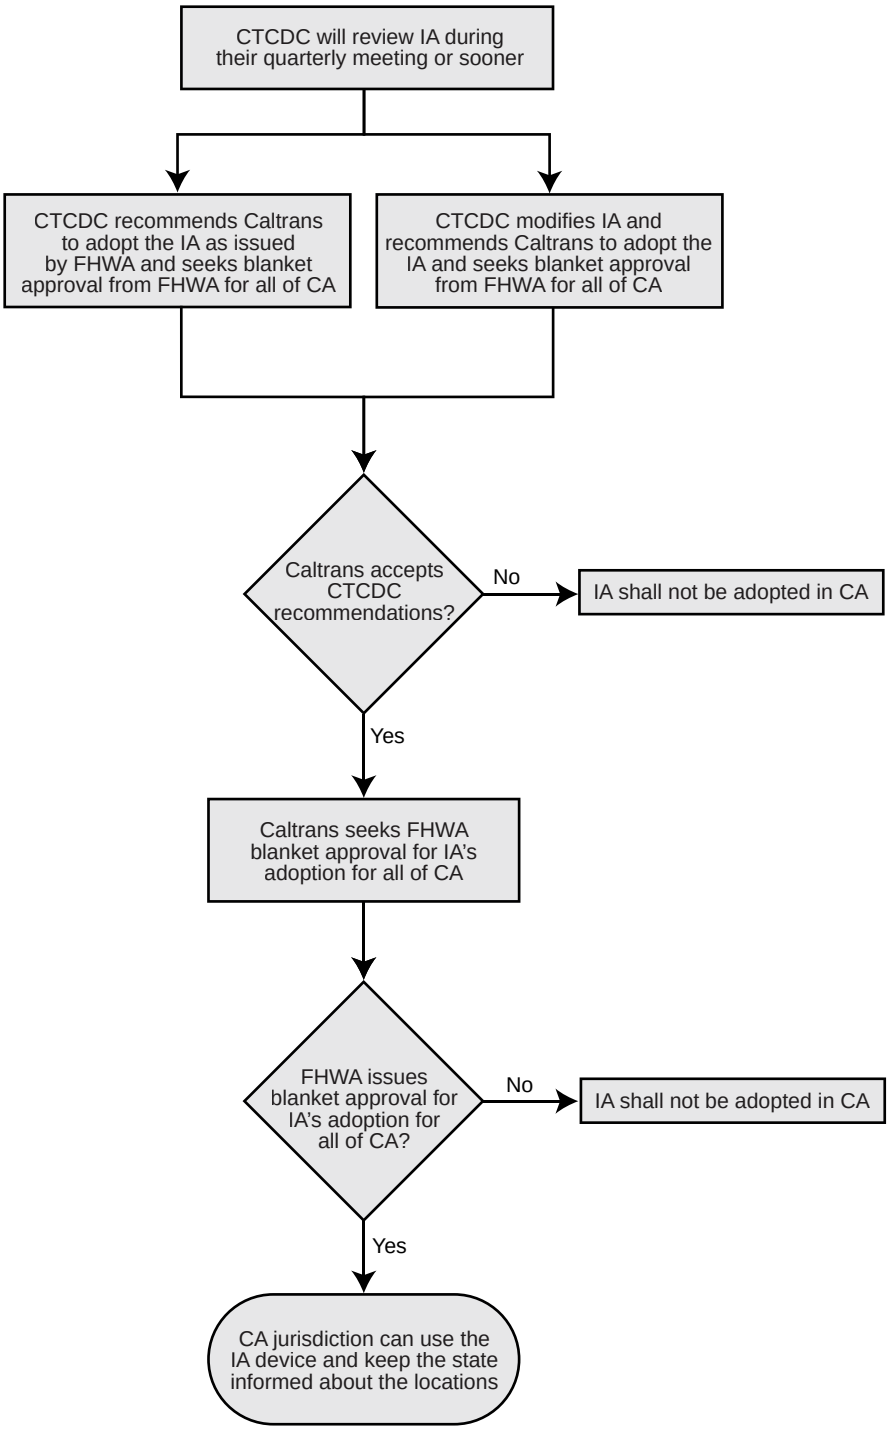

## Table 1B-1. Target Compliance Dates Established by the FHWA

| MUTCD Section(s) | Subject Area | Specific Provision | Compliance Date |
|---|---|---|---|
| 2B.64 | Weight Limit Signs | Paragraph 14 - requirement for additional Weight Limit sign with the advisory distance or directional legend in advance of applicable section of highway or structure | 5 years from the effective date of this edition of the MUTCD (January 18, 2029) |
| 2C.25 | Low Clearance Signs (W12-2) | Paragraph 1 - Required posting of the Low Clearance Advance (W12-2) sign in advance of the structure | 5 years from the effective date of this edition of the MUTCD (January 18, 2029) |
| 2C.25 | Low Clearance Signs (W12-2a, W12-2b) | Paragraph 8 - Recommended posting of Low Clearance Overhead (W12-2a or 12-2b) signs on an arch or other structure under which the clearance varies greatly | 5 years from the effective date of this edition of the MUTCD (January 18, 2029) |
| 3A.05 | Maintaining Minimum Retroreflectivity | Implementation and continued use of a method that is designed to maintain retroreflectivity of longitudinal pavement markings (see Paragraph 1 of Section 3A.05) | September 6, 2026 |
| 8B.16 | High-Profile Grade Crossings | Paragraphs 3 and 7 - Recommended installation of Low Ground Clearance and/or Vehicle Exclusion signs and detour signs for vehicles with low ground clearances that might hang up on high-profile grade crossings at locations with a known history | 5 years from the effective date of this edition of the MUTCD (January 18, 2029) |
| 8D.09 through 8D.12 | Highway Traffic Signals at or Near Grade Crossings | Assessment and determination of appropriate treatment to achieve compliance (preemption, movement prohibition, pre-signals, queue cutter signals) | 10 years from the effective date of this edition of the MUTCD (January 18, 2034) |

## Table 1B-1(CA). Target Compliance Dates Established by the FHWA (Sheet 1 of 2) (Included in National MUTCD 2009 (10th Edition))

| 2009 MUTCD Section Number(s) | 2009 MUTCD Section Title | Specific Provision | Compliance Date |
|---|---|---|---|
| 2A.08 | Maintaining Minimum Retroreflectivity | Implementation and continued use of an assessment or management method that is designed to maintain regulatory and warning sign retroreflectivity at or above the established minimum levels (see Paragraph 2) | June 13, 2014* |
| ~~2A.19~~ | ~~Lateral Offset~~ | ~~Crashworthiness of sign supports on roads with posted speed limit of 50 mph or higher (see Paragraph 2)~~ | ~~January 17, 2013 (date established in the 2000 MUTCD)~~ |
| 2B.40 | ONE WAY Signs (R6-1, R6-2) | New requirements in the 2009 MUTCD for the number and locations of ONE WAY signs (see Paragraphs 4, 9, and 10) | December 31, 2019 |
| 2C.06 through 2C.14 | Horizontal Alignment Warning Signs | Revised requirements in the 2009 MUTCD regarding the use of various horizontal alignment signs (see Table 2C-5) | December 31, 2019 |
| 2E.31, 2E.33, and 2E.36 | Plaques for Left-Hand Exits | New requirement in the 2009 MUTCD to use E1-5aP and E1-5bP plaques for left-hand exits | December 31, 2014 |
| 3A.03 | Maintaining Minimum Retroreflectivity | Implementation and continued use of a method that is designed to maintain retroreflectivity of longitudinal pavement markings (see Paragraph 1) | September 6, 2026 ~~4 years from the effective date of this revision of the MUTCD~~ |
| 4D.26 | Yellow Change and Red Clearance Intervals | New requirement in the 2009 MUTCD that durations of yellow change and red clearance intervals shall be determined using engineering practices (see Paragraphs 3 and 6) | 2017 June 13, ~~2014~~, or when timing adjustments are made to the individual intersection and/or corridor, whichever occurs first |
| 4E.06 | Pedestrian Intervals and Signal Phases | New requirement in the 2009 MUTCD that the pedestrian change interval shall not extend into the red clearance interval and shall be followed by a buffer interval of at least 3 seconds (see Paragraph 4) | 2017 June 13, ~~2014~~, or when timing adjustments are made to the individual intersection and/or corridor, whichever occurs first |
| 6D.03** | Worker Safety Considerations | New requirement in the 2009 MUTCD that all workers within the right-of-way shall wear high-visibility apparel (see Paragraphs 4, 6, and 7) | December 31, 2011 |
| 6E.02** | High-Visibility Safety Apparel | New requirement in the 2009 MUTCD that all flaggers within the right-of-way shall wear high-visibility apparel | December 31, 2011 |
| 7D.04** | Uniform of Adult Crossing Guards | New requirement in the 2009 MUTCD for high-visibility apparel for adult crossing guards | December 31, 2011 |
| 8B.03, 8B.04 | Grade Crossing (Crossbuck) Signs and Supports | Retroreflective strip on Crossbuck sign and support (see Paragraph 7 in Section 8B.03 and Paragraphs 15 and 18 in Section 8B.04) | December 31, 2019 |
| 8B.04 | Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings | New requirement in the 2009 MUTCD for the use of STOP or YIELD signs with Crossbuck signs at passive grade crossings | December 31, 2019 |

* Types of signs other than regulatory or warning are to be added to an agency's management or assessment method as resources allow.
** MUTCD requirement is a result of a legislative mandate.

Note: All compliance dates that were previously published in Table I-2 of the 2009 MUTCD and that do not appear in this revised table have been eliminated.

## Table 1B-1(CA). Target Compliance Dates Established by the CTCDC/Caltrans (Sheet 2 of 2) (Included in CA MUTCD 2012)

| 2014 CA MUTCD Section Number(s) | 2014 CA MUTCD Section Title | Specific Provision | Compliance Date |
|---|---|---|---|
| 4D.26 | Yellow Change & Red Clearance Intervals | Signalized intersections equipped with Red Light Cameras shall comply with 2014 CA MUTCD, Section 4D.26 | August 1, 2015 |
| 4D.26 | Yellow Change & Red Clearance Intervals | All signalized intersections shall comply with 2014 CA MUTCD, Section 4D.26 | August 1, 2017 |

## Table 1B-101(CA). Status of Interim Approvals Issued By FHWA in California

| No. | Description | Date Issued by FHWA | Date Adopted in CA |
|---|---|---|---|
| IA-23 | Optional Use of Residential Driveway Temporary Signal | 1/8/25 | Pending |

Visit https://dot.ca.gov/programs/safety-programs/camutcd/interim for full table including web links and pdf file links.

# CHAPTER 1C. DEFINITIONS, ACRONYMS, AND ABBREVIATIONS USED IN THIS MANUAL

## Section 1C.01 Definitions of Headings Used in this Manual

**Standard:**

01 **When used in this Manual, the text headings of Standard, Guidance, Option, and Support shall be defined as follows:**

- **A. Standard—a statement of required, mandatory, or specifically prohibitive practice regarding a traffic control device. In limited, location-specific cases, the results of a documented engineering study (see Section 1D.03) might indicate a deviation from one or more requirements of a Standard provision to be appropriate. All Standard statements are labeled, and the text appears in bold type. The verb "shall" is typically used. The verbs "should" and "may" are not used in Standard statements. Standard statements are sometimes modified by Option statements.**
- **B. Guidance—a statement of recommended practice in typical situations, with deviations allowed if engineering judgment or engineering study (see Section 1D.03) indicates the deviation to be appropriate. All Guidance statements are labeled, and the text appears in unbold italic type. The verb "should" is typically used. The verbs "shall" and "may" are not used in Guidance statements. Guidance statements are sometimes modified by Option statements.**
- **C. Option—a statement of practice that is a permissive condition and carries no requirement or recommendation. Option statements sometimes contain allowable modifications to a Standard or Guidance statement. All Option statements are labeled, and the text appears in unbold type. The verb "may" is typically used. The verbs "shall" and "should" are not used in Option statements.**
- **D. Support—an informational statement that does not convey any degree of mandate, recommendation, authorization, prohibition, or enforceable condition. Support statements are labeled, and the text appears in unbold type. The verbs "shall," "should," and "may" are not used in Support statements.**

## Section 1C.02 Definitions of Words and Phrases Used in this Manual

**Standard:**

01 **Unless otherwise defined in this Section, or in other Parts of this Manual, words or phrases shall have the meaning(s) as defined in the "Uniform Vehicle Code," "AASHTO Transportation Glossary (Highway Definitions)," "California Vehicle Code," or other appropriate publications.**

02 **Where a term that is defined in this Section or elsewhere in this Manual has a different definition in another resource or in common use, the definition herein shall govern for purposes of the applicability of the provisions of this Manual.**

03 **The following words and phrases, when used in this Manual, shall have the following meanings:**

1. **Accessible Pedestrian Signal—a device that communicates information about pedestrian signal timing in a non-visual format such as audible tones and/or speech messages and vibrating surfaces.**
2. **Accessible Pedestrian Signal Detector—a device designated to assist the pedestrian who has vision or physical disabilities in activating the pedestrian phase.**
3. **Active Grade Crossing—a grade crossing equipped with automatic traffic control devices, such as flashing-light signals, gates, and/or traffic control signals, that are activated upon the detection of approaching rail traffic.**
4. **Actuated—a type of traffic control signal operation in which some or all signal phases are operated on the basis of actuation.**
5. **Actuation—initiation of, a change in, or an extension of a traffic signal phase or a sign legend through the operation of any type of detector.**
6. **Advance Preemption—the notification of approaching rail traffic that is forwarded to the highway traffic signal controller unit or assembly by the railroad or light rail transit equipment in advance of the activation of the railroad or light rail transit warning devices.**
7. **Advance Preemption Time—the period of time that is the difference between the required maximum highway traffic signal preemption time and the activation of the railroad or light rail transit warning devices.**
8. **Advisory Speed—a recommended speed for all vehicles operating on a section of highway and based on**

**the highway design, operating characteristics, and conditions.**

9. **Agency—an organization with the responsibility for providing, maintaining, and/or operating a public or private road system.**
10. **Alley—a street or highway intended to provide access to the rear or side of lots or buildings in urban areas and not intended for the purpose of through vehicular traffic.** As per CVC § 110, "Alley" is any highway having a roadway not exceeding 25 feet in width which is primarily used for access to the rear or side entrances of abutting property; provided, that the City and County of San Francisco may designate by ordinance or resolution as an "alley" any highway having a roadway not exceeding 25 feet in width.
11. **Annual Average Daily Traffic (AADT)—the total volume of traffic passing a point or segment of a highway facility in both directions for one year divided by the number of days in the year. Normally, periodic daily traffic volumes are adjusted for hours of the day counted, days of the week, and seasons of the year to arrive at annual average daily traffic.**
12. **Application—in regard to a traffic control device, the act of deciding to use a device, generally or at a particular location for a particular condition.**
13. **Approach—all lanes of traffic moving toward an intersection or a midblock location from one direction, including any adjacent parking lane(s).**
14. **Arterial Highway (Street)—a general term denoting a highway primarily used by through traffic, usually on a continuous route or a highway designated as part of an arterial system.**
15. **Automated Vehicle—see Driving Automation System.**
16. **Automatic Lane—see Exact Change Lane within the definition of Toll Collection.**
17. **Average Daily Traffic (ADT)—the average 24 hour volume, being the total volume during a stated period divided by the number of days in that period. Normally, this would be periodic daily traffic volumes over several days, not adjusted for days of the week or seasons of the year.**
18. **Average Day—a day representing traffic volumes normally and repeatedly found at a location, typically a weekday when volumes are influenced by employment or a weekend day when volumes are influenced by entertainment or recreation.**
19. **Backplate—see Signal Backplate.**
20. **Barrier-Separated Lane—a preferential lane or other special purpose lane that is separated from the adjacent general-purpose lane(s) by a physical barrier.**
21. **Beacon—a highway traffic signal with one or more signal indications that operates in a flashing mode. Types of beacons include:**
    - **(a) Emergency-Vehicle Hybrid Beacon—a special type of beacon (see Hybrid Beacon).**
    - **(b) Intersection Control Beacon—a beacon used only at an intersection to control two or more directions of travel.**
    - **(c) Pedestrian Hybrid Beacon—a special type of beacon (see Hybrid Beacon).**
    - **(d) Rectangular Rapid-Flashing Beacon (RRFB)—a pedestrian-activated and/or bicycle- activated device comprising two horizontally arranged, rapidly flashed, rectangular-shaped yellow indications that is used to provide supplemental emphasis for a pedestrian, school, or trail crossing warning sign at a marked crosswalk across an uncontrolled approach.**
    - **(e) Speed Limit Sign Beacon—a beacon used only to supplement a SPEED LIMIT sign.**
    - **(f) Stop Beacon—a beacon used only to supplement a STOP sign, a DO NOT ENTER sign, or a WRONG WAY sign.**
    - **(g) Warning Beacon—a beacon used only to supplement an appropriate warning or regulatory sign or marker.**
22. **Bicycle—a pedal-powered vehicle upon which the human operator sits.** Also see Electric Bicycle (CVC § 312.5) and Pedicab (CVC § 467.5). As per CVC § 231, A bicycle is a device upon which a person may ride, propelled exclusively by human power, except as provided in § 312.5, through a belt, chain, or gears, and having one or more wheels. A person riding a bicycle is subject to the provisions of this code specified in §§ 21200 and 21200.5. An electric bicycle is a bicycle. Also refer to CVC § 39000 and California Streets & Highways Code (SHC) § 890.2.
23. **Bicycle Box—a designated area on the approach to a signalized intersection, between an advance motorist stop line and the crosswalk or intersection, intended to provide bicyclists a visible place to wait**

**in front of stopped motorists during the red signal phase.**

24. **Bicycle Facilities—a general term denoting improvements and provisions that accommodate or encourage bicycling, including parking and storage facilities, and shared roadways not specifically defined for bicycle use.**
25. **Bicycle Lane (See Class II Bikeway)—a portion of a roadway that has been designated for preferential or exclusive use by bicyclists. A "bicycle lane" or "bike lane" is a Class II bikeway, as defined in subdivision (a) of § 890.4 of the SHC. A typical bicycle lane is delineated from the adjacent general-purpose lane(s) by longitudinal pavement markings and bicycle lane symbol or word markings and, if used, signs. Other types of bicycle lanes include:**
    (a) **Buffer-Separated Bicycle Lane (See Class II Bikeway)—a bicycle lane that is separated from the adjacent general-purpose lane(s) by a pattern of standard longitudinal pavement markings that is wider than a normal or wide lane line marking. A "buffer-separated bicycle lane" or "buffer-separated bike lane" is a Class II Bikeway, Bicycle Lane or Bike Lane. Refer to SHC § 890.4.**
    (b) **Counter-Flow Bicycle Lane (See Class II and Class IV Bikeways)—a one-directional bicycle lane that provides a lawful path of travel for bicycles in the opposite direction from general traffic on a roadway that allows general traffic to travel in only one direction. Counter-flow bicycle lanes are designated by the traffic control devices used for other bicycle lanes. A "counter-flow bicycle lane" or "counter-flow bike lane" can be a Class II Bikeway, Bicycle Lane or Bike Lane or it can be a Class IV Bikeway, such as a cycle track or separated bikeway. Refer to SHC § 890.4.**
    (c) **Separated Bicycle Lane (See Class II or Class IV Bikeway)—an exclusive facility for bicyclists that is located within or directly adjacent to the roadway and that is physically separated from motor vehicle traffic with a vertical element. Separated bicycle lanes are differentiated from other bicycle lanes by a vertical element. A "separated bicycle lane" or "separated bike lane" can be a Class II Bikeway, Bicycle Lane or Bike Lane or it can be a Class IV Bikeway, such as a cycle track or separated bikeway. Refer to SHC § 890.4.**

25a. **Bicycle Path or Bike Path—see Class I Bikeway. As per CVC § 231.5, a "bicycle path" or "bike path" is a Class I Bikeway or "shared-use path", as defined in subdivision (a) of § 890.4 of the SHC.**

25b. **Bicycle Path Crossing—as per CVC § 231.6,**
    1. **A "bicycle path crossing" is either of the following:**
        a. **That portion of a roadway included within the prolongation or connection of the boundary lines of a bike path at intersections where the intersecting roadways meet at approximately right angles.**
        b. **Any portion of a roadway distinctly indicated for bicycle crossing by lines or other markings on the surface.**
    2. **Notwithstanding subdivision (a), there shall not be a bicycle path crossing where local authorities have placed signs indicating no crossing.**

26. **Bicycle Signal Face—a signal face that displays only bicycle symbol signal indications, that exclusively controls a bicycle movement from a designated bicycle lane or from a separate facility such as a shared-use path, and that displays signal indications that are applicable only to the bicycle movement.**
27. **Bicycle Symbol Signal Indication—a red, yellow, or green signal indication that displays a bicycle symbol rather than a circular or arrow indication.**
28. **Bikeway—a generic term for any road, street, path, or way that in some manner is specifically designated for bicycle travel, regardless of whether such facilities are designated for the exclusive use of bicycles or are to be shared with other transportation modes. As per SHC § 890.4, "bikeway" means all facilities that provide primarily for, and promote, bicycle travel.**

28a. **Bike Route—see Class III Bikeway.**

28b. **Buffered Bicycle Lane—a bicycle lane that is separated from the adjacent general-purpose lane or parking lane by a pattern of standard longitudinal markings. The buffer area might include chevron or diagonal markings.**

29. **Blank-Out Sign—a sign that displays a single predetermined message only when activated. When not activated, the sign legend is not visible.**

29a. **Buffer-Separated Bicycle Lane—see Class II Bikeway.**

30. **Buffer-Separated Lane—a preferential lane or other special purpose lane that is separated from the adjacent general-purpose lane(s) by a pattern of standard longitudinal pavement markings that is wider**

**than a normal or wide lane line marking. The buffer area might include rumble strips, textured pavement, or channelizing devices such as tubular markers or traversable curbs, but does not include a physical barrier.**

**31a. Business Activity District—as per CVC § 22358.9(b), a "business activity district" is that portion of a highway and the property contiguous thereto that includes central or neighborhood downtowns, urban villages, or zoning designations that prioritize commercial land uses at the downtown or neighborhood scale and meets at least three of the following requirements in paragraphs (1) to (4), inclusive:**

**(1) No less than 50 percent of the contiguous property fronting the highway consists of retail or dining commercial uses, including outdoor dining, that open directly onto sidewalks adjacent to the highway.**

**(2) Parking, including parallel, diagonal, or perpendicular spaces located alongside the highway.**

**(3) Traffic control signals or stop signs regulating traffic flow on the highway, located at intervals of no more than 600 feet.**

**(4) Marked crosswalks not controlled by a traffic control device.**

**31b. Business District—as per CVC § 235, a "business district" is that portion of a highway and the property contiguous thereto**

**(a) upon one side of which highway, for a distance of 600 feet, 50 percent or more of the contiguous property fronting thereon is occupied by buildings in use for business, or**

**(b) upon both sides of which highway, collectively, for a distance of 300 feet, 50 percent or more of the contiguous property fronting thereon is so occupied.**

**A business district may be longer than the distances specified in this section if the above ratio of buildings in use for business to the length of the highway exists. Refer to CVC §§ 240 and 515, to determine whether a highway is within a business or residence district.**

**31. Business Identification Sign Panel—a panel containing a word legend or logo used to identify a business on a Specific Service sign.**

**32. Busway—a traveled way that is used exclusively by buses.**

**33. Cantilevered Signal Structure—a structure, also referred to as a mast arm, that is rigidly attached to a vertical pole and is used to provide overhead support of highway traffic signal faces or grade crossing signal units.**

**34. Center Line Markings—the yellow pavement marking line(s) that delineates the separation of traffic lanes that have opposite directions of travel on a roadway. These markings need not be at the geometrical center of the pavement.**

**35. Changeable Message Sign—a sign that is capable of displaying more than one message (one of which might be a "blank" display), changeable manually, by remote control, or by automatic control. Electronic-display changeable message signs are referred to as Dynamic Message Signs in the National Intelligent Transportation Systems (ITS) Architecture and are referred to as Variable Message Signs in the National Electrical Manufacturers Association (NEMA) standards publication.**

**36. Channelizing Line—a solid wide or double white line marking used to form islands where traffic in the same direction of travel is permitted on both sides of the island.**

**37. Circular Intersection—an intersection that has an island, generally circular in design, located in the center of the intersection where traffic passes to the right of the island. Circular intersections include roundabouts, rotaries, and traffic circles.**

**38. Circulatory Roadway—the roadway within a circular intersection on which traffic travels in a counterclockwise direction around an island in the center of the circular intersection.**

**38a. Civil Engineer—a professional engineer in the branch of civil engineering and refers to one who practices or offers to practice civil engineering in any of its phases. Refer to California Business and Professions Code § 6702.**

**38b. Class I Bikeway (such as a Bike Path or a Shared-Use Path)—provides a completely separated right-of-way designated for the exclusive use of bicycles and pedestrians with crossflows by motorists minimized. Refer SHC § 890.4. Refer to Caltrans' Highway Design Manual Index 1003.1 for design criteria.**

**38c. Class II Bikeway (such as a Bike Lane)—provides a restricted right-of-way designated for the exclusive or semi-exclusive use of bicycles with through travel by motor vehicles or pedestrians prohibited, but with vehicle parking and crossflows by pedestrians and motorists permitted. Refer to SHC § 890.4. Refer to Caltrans' Highway Design Manual Index 1003.2 for design criteria.**

38d. Class III Bikeway (such as a Bike Route)—provides a right-of-way designated by signs or permanent markings and shared with pedestrians or motorists. Refer to SHC § 890.4. Refer to Caltrans' Highway Design Manual Index 1003.3 for design criteria.

38e. Class IV Bikeway (such as a cycle track, separated bikeway or shared-use path (see #219 in this section))—provides a right-of-way designated exclusively for bicycle travel adjacent to a roadway and which is separated from vehicular traffic. Types of separation include, but are not limited to, grade separation, flexible posts, inflexible physical barriers, or on-street parking. Refer to SHC § 890.4. Refer to Caltrans' Design Information Bulletin Number 89 for design criteria.

39. **Clear Storage Distance**—when used in Part 8, the distance available for vehicle storage measured between 6 feet from the rail nearest the intersection to the intersection stop line or the normal stopping point on the highway. At skewed grade crossings and intersections, the 6-foot distance shall be measured perpendicular to the nearest rail either along the center line or edge line of the highway, as appropriate, to obtain the shorter distance. Where exit gates are used, the distance available for vehicle storage is measured from the point where the rear of the vehicle would be clear of the exit gate arm. In cases where the exit gate arm is parallel to the track(s) and is not perpendicular to the highway, the distance is measured either along the center line or edge line of the highway, as appropriate, to obtain the shorter distance.

40. **Clear Zone**—the total roadside border area, starting at the edge of the traveled way, that is available for an errant driver to stop or regain control of a vehicle. This area might consist of a shoulder, a recoverable slope, and/or a non-recoverable, traversable slope with a clear run-out area at its toe.

41. **Collector Highway**—a term denoting a highway that in rural areas connects small towns and local highways to arterial highways, and in urban areas provides land access and traffic circulation within residential, commercial, and business areas and connects local highways to the arterial highways.

42. **Conflict Monitor**—a device used to detect and respond to improper or conflicting signal indications and improper operating voltages in a traffic controller assembly.

43. **Constant Warning Time Detection**—a means of detecting rail traffic that provides relatively uniform warning time for the approach of through rail traffic that is not accelerating or decelerating after being detected.

44. **Contiguous Lane**—a lane, preferential or otherwise, that is separated from the adjacent lane(s) only by a normal or wide lane line marking.

44a. Contraflow Bicycle Lane—see Counter-Flow Bicycle Lane and Class II and Class IV Bikeways.

45. **Controller Assembly**—a complete electrical device mounted in a cabinet for controlling the operation of a highway traffic signal.

46. **Controller Unit**—that part of a controller assembly that is devoted to the selection and timing of the display of signal indications.

47. **Conventional Road**—a street or highway other than an expressway or freeway.

47a. Counter-Flow Bicycle Lane—see Class II and Class IV Bikeways.

48. **Counter-Flow Lane**—a lane operating in a direction opposite to the normal flow of traffic designated for peak direction of travel during at least a portion of the day. Counter-flow lanes are usually separated from the off-peak direction lanes by tubular markers or other flexible channelizing devices, temporary lane separators, or movable or permanent barrier.

49. **Crashworthy**—the ability of a roadside safety hardware device or appurtenance to minimize risks to vehicle occupants by allowing a vehicle impacting the appurtenance to be slowed before stopping, redirected, or to continue without significant resistance. Section 1D.11 contains additional information about crashworthiness.

50. **Crosswalk**—(a) that part of a roadway at an intersection included within the connections of the lateral lines of the sidewalks on opposite sides of the highway measured from the curbs or in the absence of curbs, from the edges of the traversable roadway, and in the absence of a sidewalk on one side of the roadway, the part of a roadway included within the extension of the lateral lines of the sidewalk at right angles to the center line; (b) any portion of a roadway at an intersection or elsewhere distinctly indicated as a pedestrian crossing by pavement marking lines on the surface, which might be supplemented by contrasting pavement texture, style, or color. As per CVC § 275, "Crosswalk" is either:

(a) That portion of a roadway included within the prolongation or connection of the boundary lines of sidewalks at intersections where the intersecting roadways meet at approximately right angles, except the prolongation of such lines from an alley across a street.
(b) Any portion of a roadway distinctly indicated for pedestrian crossing by lines or other markings on the surface. Notwithstanding the foregoing provisions of this section, there shall not be a crosswalk where local authorities have placed signs indicating no crossing.

51. **Crosswalk Lines—white or yellow (in school areas per CVC § 21368) pavement marking lines that identify a crosswalk.**
52. **Cycle Length—the time required for one complete sequence of signal indications.**
52a. **Cycle Track—see Class IV Bikeway.**
53. **Dark Mode—the lack of all signal indications at a signalized location. The dark mode is most commonly associated with power failures, ramp meters, hybrid beacons, beacons, and some movable bridge signals.**
54. **Dedicated Lane*—A lane on a freeway or expressway that provides access to: (a) either an exit lane or the mainline, but not both, at a freeway or expressway exit, or (b) only one roadway at a freeway or expressway split.**
55. **Delineator—a retroreflective device mounted at the side of the roadway in a series to indicate the alignment of the roadway, especially at night or in adverse weather.**
56. **Design Vehicle—the longest vehicle permitted by statute of the road authority (State or other) on that roadway.**
57. **Designated Bicycle Route—a system of bikeways designated by the jurisdiction having authority with appropriate directional and informational route signs, with or without specific bicycle route numbers.**
58. **Detectable*—having a continuous edge within 6 inches of the surface so that pedestrians with vision disabilities can sense its presence and receive usable guidance information.**
59. **Detector—a device used for determining the presence or passage of motor vehicles (including motorcycles), bicycles, or pedestrians.**
60. **Detection Plate—a smooth continuous plate used on pedestrian channelizing devices to facilitate the use of low-vision canes for pedestrians with vision disabilities. The bottom edge of the detection plate shall be no more than 2 inches above the walkway and the top edge of the detection plate shall be at least 8 inches above the walkway. The detection plate shall share the same vertical plane as the hand trailing edge of the pedestrian channelizing device.**
61. **Diagnostic Team—a group of knowledgeable representatives of the parties of interest in a grade crossing or group of grade crossings (see 23 CFR Part 646.204). The Diagnostic Team includes, at a minimum, representatives of the highway agency or authority with jurisdiction over the roadway, the railroad company and/or transit agency with responsibility for the track and signals, and the California Public Utilities Commission (CPUC).**
61a. **Divided Highway—a highway with separated roadbeds for traffic in opposing directions. Refer to Caltrans' Highway Design Manual Index 62.3(5)(f) for design criteria.**
62. **Downstream—a term that refers to a location that is encountered by traffic subsequent to an upstream location as it flows in an "upstream to downstream" direction. For example, "the downstream end of a lane line separating the turn lane from a through lane on the approach to an intersection" is the end of the lane line that is closest to the intersection.**
63. **Driveway—an access from a roadway to a building, site, or abutting property. "Private road or driveway" is a way or place in private ownership and used for vehicular travel by the owner and those having express or implied permission from the owner but not by other members of the public. CVC § 490.**
64. **Driving Aisle—circulation area for motor vehicles within a parking area, typically between rows of parking spaces. Driving aisles provide one-way or two-way travel. Driving aisles are exempted from compliance with MUTCD provisions.**
65. **Driving Automation System—technology that automates some or all aspects of the driving task to assist or replace the human vehicle operator. Section 5A.03 contains descriptions of the automation levels.**
66. **Dropped Lane—see Lane Drop.**
67. **Dual-Arrow Signal Section—a type of signal section designed to include both a yellow arrow and a green arrow.**
68. **Dynamic Envelope—the clearance required for light rail transit traffic or a train and its cargo overhang**

**due to any combination of loading, lateral motion, or suspension failure (see Figure 8C-3).**

**69. Dynamic Exit Gate Operating Mode—a mode of operation where the exit gate operation is based on the presence of vehicles within the minimum track clearance distance.**

**70. Dynamic Message Sign—see Changeable Message Sign.**

**71. Edge Line Markings—white or yellow pavement marking lines that delineate the right or left edge(s) of a traveled way.**

**71a. Electric Bicycle—also see Bicycle (CVC § 231) and Pedicab (CVC § 467.5). As per CVC § 312.5(a), An "electric bicycle" is a bicycle equipped with fully operable pedals and an electric motor of less than 750 watts.**

**(a) A "class 1 electric bicycle," or "low-speed pedal-assisted electric bicycle," is a bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the bicycle reaches the speed of 20 miles per hour.**

**(b) A "class 2 electric bicycle," or "low-speed throttle-assisted electric bicycle," is a bicycle equipped with a motor that may be used exclusively to propel the bicycle, and that is not capable of providing assistance when the bicycle reaches the speed of 20 miles per hour.**

**(c) A "class 3 electric bicycle," or "speed pedal-assisted electric bicycle," is a bicycle equipped with a motor that provides assistance only when the rider is pedaling, and that ceases to provide assistance when the bicycle reaches the speed of 28 miles per hour and equipped with a speedometer.**

**71b. Electric Personal Assistive Mobility Device (EPAMD)—a self-balancing, nontandem two-wheeled device, that is not greater than 20 inches deep and 25 inches wide and can turn in place, designed to transport only one person, with an electric propulsion system averaging less than 750 watts (1 horsepower), the maximum speed of which, when powered solely by a propulsion system on a paved level surface, is no more than 12.5 miles per hour. Refer to CVC § 313.**

**71c. Electrically Motorized Board—any wheeled device that has a floorboard designed to be stood upon when riding that is not greater than 60 inches deep and 18 inches wide, is designed to transport only one person, and has an electric propulsion system averaging less than 1,000 watts, the maximum speed of which, when powered solely by a propulsion system on a paved level surface, is no more than 20 miles per hour. The device may be designed to also be powered by human propulsion. Refer to CVC § 313.5.**

**71d. Electrical Engineer—a professional engineer in the branch of electrical engineering and refers to one who practices or offers to practice electrical engineering in any of its phases. Refer to California Business and Professions Code § 6702.1.**

**72. Electronic Toll Collection (ETC) Account Only Lane—a non-attended toll lane that is restricted to use only by vehicles with a registered toll payment account.**

**73. Emergency-Vehicle Hybrid Beacon—see Hybrid Beacon.**

**74. Emergency-Vehicle Traffic Control Signal—see Highway Traffic Signal.**

**75. Engineer—see Professional Engineer.**

**76. Engineering Judgment—the evaluation of available pertinent information including, but not limited to, the safety and operational efficiency of all road users, and the application of appropriate principles, experience, education, provisions, and practices as contained in this Manual and other sources, for the purpose of deciding upon the design (see Section 1D.03), use, installation, or operation of a traffic control device. Engineering judgment shall be exercised by a professional engineer (see definition in this Section) with appropriate traffic engineering expertise, or by an individual working under the supervision of such an engineer, through the application of procedures and criteria established by the engineer. Documentation of engineering judgment is not required.**

**77. Engineering Study—the analysis and evaluation of available pertinent information including, but not limited to, the safety and operational efficiency of all road users, and the application of appropriate principles, engineering judgment, experience, education, provisions, and practices as contained in this Manual and other sources, for the purpose of deciding upon the design (see Section 1D.03), use, installation, or operation of a traffic control device. An engineering study shall be performed by a professional engineer (see definition in this Section) with appropriate traffic engineering expertise, or by an individual working under the supervision of such an engineer, through the application of procedures and criteria established by the engineer. An engineering study shall be documented in writing.**

**77a. Engineering and Traffic Survey—refer to CVC § 627.**

78. **Entrance Gate—an automatic gate that can be lowered across the lanes approaching a grade crossing to block road users from entering the grade crossing.**
79. **Exclusive Alignment—a light rail transit track(s) or a bus rapid transit busway that is grade- separated or protected by a fence or traffic barrier. No grade crossings exist along the track(s) or busway. Motor vehicles, bicycles, and pedestrians are prohibited within the right-of-way. Subways and elevated structures are included within this definition.**
80. **Exit Gate—an automatic gate that can be lowered across the lanes departing a grade crossing to block road users from entering the grade crossing by driving in the opposing traffic lanes.**
81. **Exit Gate Clearance Time—for Four-Quadrant Gate systems at grade crossings, the amount of time provided to delay the descent of the exit gate arm(s) after entrance gate arm(s) begin to descend.**
82. **Exit Gate Operating Mode—for Four-Quadrant Gate systems at grade crossings, the mode of control used to govern the operation of the exit gate arms.**
83. **Expressway—a divided highway with partial control of access.** As per CVC § 314, an "expressway" is a portion of highway that is part of either of the following: (a) An expressway system established by a county under § 941.4 of the SHC. (b) An expressway system established by a county before January 1, 1989, as described in subdivision (g) of § 941.4 of the SHC.
84. **Fail-Safe—when used in Part 8, a railroad signal design philosophy applied to a system or device such that the result of a hardware failure or the effect of a software error shall either prohibit the system or device from assuming or maintaining an unsafe state or shall cause the system or device to assume a state that is known to be safe.**
85. **Flagger—a person who actively controls the flow of vehicular traffic into and/or through a temporary traffic control zone using hand-signaling devices or an Automated Flagger Assistance Device (AFAD).**
86. **Flasher—a device used to turn highway traffic signal indications on and off at a repetitive rate of approximately once per second.**
87. **Flashing—an operation in which a light source, such as a traffic signal indication or LEDs in a sign, is turned on and off repetitively.**
88. **Flashing-Light Signals—a warning device consisting of two red signal indications arranged horizontally that are activated to flash alternately when rail traffic is approaching or present at a grade crossing.**
89. **Flashing Mode—a mode of operation in which at least one traffic signal indication in each vehicular signal face of a highway traffic signal is turned on and off repetitively.**
90. **Four-Quadrant Gate System—an exit gate system that includes entrance and exit gates that control and block road users on all lanes entering and exiting the grade crossing.**
91. **Freeway—a divided highway with full control of access.** As per CVC § 332, "Freeway" is a highway in respect to which the owners of abutting lands have no right or easement of access to or from their abutting lands or in respect to which such owners have only limited or restricted right or easement of access.
92. **Full-Actuated—a type of traffic control signal operation in which all signal phases function on the basis of actuation.**
93. **Gate—an automatically-operated or manually-operated traffic control device that is used to physically obstruct road users such that they are discouraged from proceeding past a particular point on a roadway or pathway, or such that they are discouraged from entering a particular grade crossing, ramp, lane, roadway, or facility.**
94. **General-Purpose Lane—a highway lane or set of lanes, other than a Managed Lane (see definition in this Section) or a Preferential Lane (see definition in this Section), that all or most of the traffic that is allowed on that highway is also allowed to use. Certain classes of vehicles, such as commercial vehicles or vehicles exceeding a certain weight or size, might be prohibited from using one or more of the general-purpose lanes. A general-purpose lane might also be restricted to certain uses, such as passing or turning or as an auxiliary lane.**
95. **Gore Area—see Physical Gore and Theoretical Gore.**
96. **Grade Crossing—the general area where a highway and a railroad and/or light rail transit route cross at the same level, within which are included the tracks, highway, and traffic control devices for traffic traversing that area.**
97. **Grade Crossing Warning System—the flashing-light signals, with or without automatic gates, together**

**with the necessary control equipment used to inform road users of the approach or presence of rail traffic at a grade crossing.**

98. **Guide Sign—a sign that shows route designations, highway names, destinations, directions, distances, services, points of interest, or other geographical, recreational, or cultural information.**
99. **High-Occupancy Vehicle (HOV)—a motor vehicle carrying at least two (or more than two if the signs for a specific roadway indicate a higher minimum occupancy requirement) persons, including carpools, vanpools, and buses.**
100. **Highway—a general term for denoting a public way for purposes of travel by vehicles and vulnerable road users, including the entire area within the right-of-way.** As per CVC § 360, "Highway" is a way or place of whatever nature, publicly maintained and open to the use of the public for purposes of vehicular travel. Highway includes street. Also, refer to CVC § 590 definition of "Street".
101. **Highway-Light Rail Transit Grade Crossing—the general area where a highway and a light rail transit route cross at the same level, within which are included the light rail transit tracks, highway, and traffic control devices for traffic traversing that area.**
102. **Highway-Rail Grade Crossing—the general area where a highway and a railroad cross at the same level, within which are included the railroad tracks, highway, and traffic control devices for highway traffic traversing that area.**
103. **Highway Traffic Signal—a power-operated traffic control device by which traffic is warned or directed to take some specific action. These devices do not include power-operated signs (except as provided in Chapters 4S and 4T), steadily-illuminated raised pavement markers, gates, flashing-light signals (see Section 8D.02), warning lights (see Section 6L.07), or steady-burning electric lamps. Highway traffic signals include:**
    - **(a) Flashing Beacon—see Beacon.**
    - **(b) In-Roadway Warning Lights—a special type of highway traffic signal installed in the roadway surface to warn road users that they are approaching a condition on or adjacent to the roadway that might not be readily apparent and might require the road users to reduce speed and/or come to a stop.**
    - **(c) Lane-Use Control Signal—a signal face or comparable display on a full-matrix Changeable Message Sign (see Chapters 2L and 4T) displaying indications to permit or prohibit the use of specific lanes of a roadway or a shoulder where driving is sometimes permitted, or to indicate the impending prohibition of such use.**
    - **(d) Traffic Control Signal (Traffic Signal)—a highway traffic signal placed at intersections, movable bridges, fire stations, midblock crosswalks, alternating one-way sections of a single lane road, private driveways, or other locations that require conflicting traffic to be directed to stop and permitted to proceed in an orderly manner. These devices do not include pedestrian hybrid beacons (see Chapter 4J) or emergency-vehicle hybrid beacons (see Chapter 4N). Traffic control signals include vehicular signal indications, pedestrian signal indications, and bicycle symbol signal indications. Special traffic control signals include:**
        1. **Emergency-Vehicle Traffic Control Signal—a traffic control signal that directs all conflicting traffic to stop in order to permit the driver of an authorized emergency vehicle to proceed into the roadway or intersection.**
        2. **Movable Bridge Traffic Control Signal—a traffic control signal installed at a movable bridge to notify traffic to stop during periods when the roadway is closed to allow the bridge to open.**
        3. **Portable Traffic Control Signal—a temporary component of a traffic control signal on a mobile support with one or more signal faces that is designed so that it can be easily transported, deployed, or relocated as part of a temporary traffic control signal, or during construction and maintenance as a temporary part of a permanent traffic control signal installation.**
        4. **Pre-Signal—traffic control signal faces that are located upstream from a signalized intersection and are operated in conjunction with the traffic control signal faces at the downstream signalized intersection in a manner that is designed to keep the area between the stop line for the upstream traffic control signal faces and the stop line for the downstream signalized intersection clear of queued vehicles. When used in conjunction with a grade crossing, the pre-signal is operated for**

**the purpose of preventing vehicles from queuing within the minimum track clearance distance. Supplemental near-side traffic control signal faces for the downstream signalized intersection are not considered to be pre-signals.**

5. **Queue Cutter Signal—an independently-controlled traffic control signal (not operated in conjunction with the traffic control signal faces at a downstream signalized intersection) located at a grade crossing that controls traffic in one direction only on the roadway for the purpose of keeping the minimum track clearance distance clear of vehicles. The display of red signal indications is activated from a downstream queue detection system, by time of day, by approaching rail traffic, by an approaching bus on a busway, or by a combination of any of these methods.**
6. **Ramp Control Signal—a traffic control signal installed to control the merging flow of traffic onto a freeway at an entrance ramp or at a freeway-to-freeway ramp connection.**
7. **Temporary Traffic Control Signal—a traffic control signal that is installed for a limited time period using fixed or portable traffic control signal units.**

104. **HOV Lane—any preferential lane designated for exclusive use by high-occupancy vehicles for all or part of a day—including a designated lane on a freeway, other highway, street, or independent roadway on a separate right-of-way.**
105. **Hybrid Beacon—a special type of beacon that is intentionally placed in a dark mode (no indications displayed) between periods of operation and, when operated, displays both steady and flashing traffic control signal indications. Hybrid beacons include:**
    **(a) Emergency-Vehicle Hybrid Beacon—used to warn and control traffic at an unsignalized location to assist authorized emergency vehicles in entering or crossing a street or highway.**
    **(b) Pedestrian Hybrid Beacon—used to warn and control traffic at an unsignalized location to assist pedestrians in crossing a street or highway at a marked crosswalk.**
106. **Identification Marker—a shape, color, and/or pictograph that is used as a visual identifier for a destination guide signing system of a community wayfinding system or a shared-use path system for an area.**
107. **Inherently Low Emission Vehicle (ILEV)—any kind of vehicle that, because of inherent properties of the fuel system design, will not have significant evaporative emissions, even if its evaporative emission control system has failed.**
108. **In-Roadway Warning Lights—see Highway Traffic Signal.**
109. **Interchange—a system of interconnecting roadways providing for traffic movement between two or more highways that do not intersect at grade.**
110. **Interchange Lane Drop—see Lane Drop.**
111. **Preemption Interconnection*—the electrical connection between the railroad or light rail transit active warning system and the highway traffic signal controller assembly for the purpose of preemption.**
112. **Intermediate Interchange—an interchange with an urban or rural route that is not a major or minor interchange as defined in this Section.**
113. **Intersection—intersection is defined as follows:**
    **(a) The area embraced within the prolongation or connection of the lateral curb lines, or if none, the lateral boundary lines of the roadways of two highways that join one another at, or approximately at, right angles, or the area within which vehicles traveling on different highways that join at any other angle might come into conflict.** As per CVC § 365, an "intersection" is the area embraced within the prolongation of the lateral curb lines, or, if none, then the lateral boundary lines of the roadways, of two highways which join one another at approximately right angles or the area within which vehicles traveling upon different highways joining at any other angle may come in conflict.
    **(b) The junction of an alley, driveway, or site roadway with a public roadway or highway shall not constitute an intersection, unless the public roadway or highway at said junction is controlled by a traffic control device.**
    **(c) If a highway includes two roadways separated by a median, then every crossing of each roadway of such divided highway by an intersecting highway shall be a separate intersection if the opposing left-turn paths cross and there is sufficient interior storage for the design vehicle (see Figure 2A-5).**

**(d) At a location controlled by a traffic control signal, regardless of the distance between the separate intersections as defined in (c) above:**

1. **If a stop line, yield line, or crosswalk has not been designated on the roadway (within the median) between the separate intersections, the two intersections and the roadway (median) between them shall be considered as one intersection;**
2. **Where a stop line, yield line, or crosswalk is designated on the roadway on the intersection approach, the area within the crosswalk and/or beyond the designated stop line or yield line shall be part of the intersection; and**
3. **Where a crosswalk is designated on a roadway on the departure from the intersection, the intersection shall include the area extending to the far side of such crosswalk.**

**114. Intersection Control Beacon—see Beacon.**

**115. Interval—the part of a signal cycle during which signal indications do not change.**

**116. Island—a defined area between traffic lanes for control of vehicular movements, for toll collection, or for pedestrian or bicyclist refuge. It includes all end protection and approach treatments. Within an intersection area, a median or an outer separation is considered to be an island.**

**117. Jughandle Turn—a left-turn or U-turn that, in conjunction with special geometry, is made by initially making a right-turn or diverging to the right. With other special geometry, a right-turn or U-turn makes a jughandle turn by initially making a left-turn or diverging to the left.**

**118. Lane Drop—a through lane that becomes a mandatory turn lane on a conventional roadway, or a through lane that becomes a mandatory exit lane on a freeway or expressway. The end of an acceleration lane and reductions in the number of through lanes that do not involve a mandatory turn or exit are not considered lane drops.**

**119. Lane Line Markings—white pavement marking lines that delineate the separation of traffic lanes that have the same direction of travel on a roadway.**

**120. Lane Reduction*—elimination of a through lane by a gradual narrowing of the travel pavement (taper) through physical construction or pavement markings at which traffic in the lane being eliminated must merge into the adjacent through lane and continue in the same direction of travel. A lane reduction can occur outside the influence of an intersection or interchange, or within an interchange a short distance downstream of the gore of an exit ramp. Through lanes that become a mandatory turn or exit are considered lane drops rather than lane reductions.**

**121. Lane-Use Control Signal—see Highway Traffic Signal.**

**122. Legend—see Sign Legend.**

**123. Lens—see Signal Lens.**

**124. Light Rail Transit Traffic (Light Rail Transit Equipment)—every device in, upon, or by which any person or property can be transported on light rail transit tracks, including single-unit light rail transit cars (such as streetcars and trolleys) and assemblies of multiple light rail transit cars coupled together.**

**124a. Limit Line—a solid white line not less than 12 nor more than 24 inches wide, extending across a roadway or any portion thereof to indicate the point at which traffic is required to stop in compliance with legal requirements. Refer to CVC § 377.**

**124b. Limit Line Bicycle Detection Zone—a Referenced Bicycle-Rider must be detected in a 6 x 6 feet area immediately behind the limit line, centered either in a normal width lane or if the lane is more than 12 feet wide, centered 6 feet from the left lane line. For a lane of 20 feet or greater, two minimum 6 x 6 feet areas shall constitute the Limit Line Bicycle Detection Zone.**

**125. Loading Zone—a specially marked, signed or designated area for the loading or unloading of vehicles (passenger or freight).**

**126. Locomotive Horn—an air horn, steam whistle, or similar audible warning device (see 49 CFR Part 229.129) mounted on a locomotive or control cab car. The terms "locomotive horn," "train whistle," "locomotive whistle," and "train horn" are used interchangeably in the railroad industry.**

**127. Logo—a distinctive emblem or trademark that identifies a commercial or non-commercial business, program, or organization.**

**128. Longitudinal Markings—pavement markings that are generally placed parallel and adjacent to the flow of traffic such as lane lines, center lines, edge lines, channelizing lines, and others.**

129. **Louver—see Signal Louver.**
130. **Low-Volume Rural Road*—A category of paved or unpaved conventional or special-purpose roadways having an AADT of less than 400 vehicles and lying outside of built-up or urbanized areas of cities, towns, and communities.**
131. **Major Interchange—an interchange with another freeway or expressway, or an interchange with a high-volume multi-lane highway, principal urban arterial, or major rural route where the interchanging traffic is heavy or includes many road users unfamiliar with the area.**
132. **Major Street—the street normally carrying the higher volume of vehicular traffic.**
133. **Malfunction Management Unit—see Conflict Monitor.**
134. **Managed Lane—a highway lane or set of lanes, or a highway facility, for which variable operational strategies such as direction of travel, tolling, pricing, and/or vehicle type or occupancy requirements are implemented and managed in real-time in response to changing conditions. Managed lanes are typically buffer-separated or barrier-separated lanes parallel to the general-purpose lanes of a highway in which access is restricted to designated locations. There are also some highways on which all lanes are managed.**
135. **Manual Lane—see Attended Lane within the definition of Toll Collection.**

135a. Markings—all lines, words, or symbols, except signs, officially placed within the roadway to regulate, warn or guide traffic.

136. **Maximum Highway Traffic Signal Preemption Time—the maximum amount of time needed following initiation of the preemption sequence for the highway traffic signals to complete the timing of the right-of-way transfer time, queue clearance time, and separation time.**
137. **Median—the portion of a highway separating opposing directions of the traveled way or the area between two roadways of a divided highway measured from edge of traveled way to edge of traveled way. The median excludes turn lanes. The median width might be different between intersections, interchanges, and at opposite approaches of the same intersection.**
138. **Minimum Track Clearance Distance—the length along a highway over the track(s) where a vehicle could be struck by rail traffic. The minimum track clearance distance is measured from a point upstream from the track(s) on the approach to the grade crossing to a point downstream from the track(s) on the departure from the grade crossing. The length along the highway between the two points is the minimum track clearance distance.** See Section 8A.07.
139. **Minor Interchange—an interchange where traffic is local and very light, such as interchanges with land service access roads. Where the sum of the exit volumes is estimated to be lower than 100 vehicles per day in the design year, the interchange is classified as local.**
140. **Minor Street—the street normally carrying the lower volume of vehicular traffic.**
141. **Mixed-Use Alignment—a light rail transit track(s), a busway, or a bus only lane(s) where the light rail transit (LRT) or bus rapid transit (BRT) vehicles operate in mixed traffic with all types of road users. This includes streets, transit malls, and pedestrian malls where the right-of- way is shared. In a mixed-use alignment, the light rail transit or the bus rapid transit traffic does not have the right-of-way over other road users at grade crossings and intersections. If the LRT traffic or buses are controlled by traffic control signals or LRT signal faces at an intersection with a roadway, the alignment is considered to be mixed-use even if some of the approaches to the intersection are used exclusively by LRT traffic or buses.**

141a. Motorcycle—a motor vehicle having a seat or saddle for the use of the rider, designed to travel on not more than three wheels in contact with the ground. Refer to CVC § 400.

141b. Motor-driven Cycle—any motorcycle with a motor that displaces less than 150 cubic centimeters. A motor-driven cycle does not include a motorized bicycle. Refer to CVC § 405.

141c. Motorized Bicycle—or "moped" is a two-wheeled or three-wheeled device having fully operative pedals for propulsion by human power or having no pedals if powered solely by electrical energy, and an automatic transmission and a motor that produces less than 4 gross brake horsepower and is capable of propelling the device at a maximum speed of not more than 30 miles per hour on level ground. Refer to CVC § 406.

141d. Motorized Quadricycle—a four-wheeled device, and a "motorized tricycle" is a three-wheeled device, designed to carry not more than two persons, including the driver, and having either an electric motor or a motor with an automatic transmission developing less than two gross brake horsepower and capable of propelling the device at a maximum speed of not more than 30 miles per hour on level ground. The device shall be utilized only by a person

who by reason of physical disability is otherwise unable to move about as a pedestrian or by a senior citizen. Refer to CVC § 407.

141e. Motorized Scooter—any two-wheeled device that has handlebars, has either a floorboard that is designed to be stood upon when riding or a seat and footrests in place of the floorboard, and is powered by an electric motor. This device may also be designed to be powered by human propulsion. Refer to CVC § 407.5.

142. Movable Bridge Resistance Gate—a type of traffic gate, which is located downstream of the movable bridge warning gate, that provides a physical deterrent to vehicle and/or pedestrian traffic when placed in the appropriate position.

143. Movable Bridge Signal—see Highway Traffic Signal.

144. Movable Bridge Warning Gate—a type of traffic gate designed to warn, but not primarily to block, vehicle and/or pedestrian traffic when placed in the appropriate position.

145. Multi-Lane—more than one lane moving in the same direction. A multi-lane street, highway, or roadway has a basic cross-section comprised of two or more through lanes in one or both directions. A multi-lane approach has two or more lanes moving toward the intersection, including turning lanes.

146. Neutral Area—the paved area between the channelizing lines separating an entrance or exit ramp or a channelized turn lane or channelized entering lane from the adjacent through lane(s).

146a. Night or Nighttime—is equivalent of "darkness" defined by CVC § 280: "Darkness" is any time from one-half hour after sunset to one-half hour before sunrise and any other time when visibility is not sufficient to render clearly discernible any person or vehicle on the highway at a distance of 1000 feet.

147. Object Marker—a device used to mark obstructions within or adjacent to the roadway.

148. Occupancy Requirement—any restriction that regulates the use of a facility or one or more lanes of a facility for any period of the day based on a specified minimum number of persons in a vehicle.

149. Occupant—a person driving or riding in a car, truck, bus, or other vehicle.

150. On-Street Parking—parking within or along, and accessed directly from, a public roadway or a site roadway open to public travel.

151. Open-Road ETC Lane—a non-attended lane that is designed to allow toll payments to be electronically collected from vehicles traveling at normal highway speeds. Open-Road ETC lanes are typically physically separated from the toll plaza, often following the alignment of the mainline lanes, with toll plaza lanes for cash toll payments being on a different alignment after diverging from the mainline lanes or a subset thereof.

152. Open-Road Tolling Point—the location along an Open-Road ETC lane at which roadside or overhead detection and receiving equipment are placed and vehicles are electronically assessed a toll.

153. Opposing Traffic—vehicles that are traveling in the opposite direction. At an intersection, vehicles entering from an approach that is approximately straight ahead would be considered to be opposing traffic, but vehicles entering from approaches on the left or right would be considered to be conflicting traffic rather than opposing traffic.

154. Option Lane*—A lane on a freeway, expressway, or conventional road multi-lane exit or multi- lane split that widens on the approach to allow access, without changing lanes, to:
   (a) Both an exit lane and the mainline at a freeway or expressway exit; or
   (b) Both diverging roadways at a freeway, expressway, or conventional road split.

155. Overhead Sign—a sign that is placed such that a portion or the entirety of the sign or its support is directly above the roadway or shoulder such that vehicles travel below it. Typical installations include signs placed on cantilever arms that extend over the roadway or shoulder, signs placed on sign support structures that span the entire width of the pavement, signs placed on mast arms or span wires either independently or that also support traffic control signals, and signs placed on highway bridges that cross over the roadway.

155a. Park or Parking—standing of a vehicle, whether occupied or not, otherwise than temporarily for the purpose of and while actually engaged in loading or unloading merchandise or passengers. Refer to CVC § 463.

156. Parking Area—a parking lot or parking garage that is separated from a roadway. Parallel, perpendicular, or angle parking spaces along a roadway are not considered a parking area.

157. Parking Space—an area marked or designated for storage of a vehicle while the driver is not present.

158. Preemption Clearance Interval*—the part of a traffic signal sequence displayed as a result of a

**preemption request when vehicles are provided the opportunity to clear the railroad or light rail transit tracks, or a movable bridge, prior to the arrival of the train or boat for which the traffic signal is being preempted.**

159. **Preemption Time Variability*—the result that occurs when the traffic signal controller enters the Preemption Clearance Interval with less than the maximum design Right-of-Way Transfer Time or the speed of a train approaching the grade crossing varies.**
160. **Passive Grade Crossing—a grade crossing where none of the automatic traffic control devices associated with an Active Grade Crossing Warning System are present and at which the traffic control devices consist entirely of signs and/or markings.**
161. **Pathway—a general term denoting a public way for purposes of travel by authorized users outside the traveled way and physically separated from the roadway by an open space or barrier and either within the highway right-of-way or within an independent alignment. Pathways include shared-use paths, but do not include sidewalks.**
162. **Pathway Grade Crossing—the general area where a pathway and railroad and/or light rail transit tracks cross at the same level, within which are included the tracks, pathway, and traffic control devices for pathway traffic traversing that area.**
163. **Paved—having a roadway surface that has both a structural (weight bearing) and a sealing purpose for the roadway, such as a bituminous surface treatment, mixed bituminous concrete, or Portland cement concrete.**
164. **Pedestrian—a person on foot, in a wheelchair, on other devices determined by local law to be equivalent, which might include skates or a skateboard.** As per CVC § 467,
    (a) A "pedestrian" is a person who is afoot or who is using any of the following:
        1. A means of conveyance propelled by human power other than a bicycle.
        2. An electric personal assistive mobility device.
    (b) "Pedestrian" includes a person who is operating a self-propelled wheelchair, motorized tricycle, or motorized quadricycle and, by reason of physical disability, is otherwise unable to move about as a pedestrian, as specified in subdivision(a).
165. **Pedestrian Change Interval—an interval during which the flashing UPRAISED HAND (symbolizing DONT WALK) signal indication is displayed.**
166. **Pedestrian Clearance Time—the time provided for a pedestrian crossing in a crosswalk, after leaving the curb or edge of pavement, to travel to the far side of the traveled way or to a median.**
167. **Pedestrian Facility—a general term denoting a location where improvements and provisions have been made to accommodate or encourage pedestrian activity.**
168. **Pedestrian Hybrid Beacon—see Hybrid Beacon.**
169. **Pedestrian Signal Head—a signal head, which contains the symbols WALKING PERSON (symbolizing WALK) and UPRAISED HAND (symbolizing DONT WALK), that is installed to direct pedestrians at a traffic control signal.**

169a. Pedicab—also see Bicycle (CVC § 231) and Electric Bicycle (CVC § 312.5). As per CVC § 467.5, "Pedicab" means any of the following:
    (a) A bicycle, including an electric bicycle, that has three or more wheels, that transports, or is capable of transporting, passengers on seats attached to the bicycle, that is operated by a person, and that is being used for transporting passengers for hire.
    (b) A bicycle, including an electric bicycle, that pulls a trailer, sidecar, or similar device, that transports, or is capable of transporting, passengers on seats attached to the trailer, sidecar, or similar device, that is operated by a person, and that is being used for transporting passengers for hire.
    (c) A four-wheeled device that is primarily or exclusively pedal-powered, has a seating capacity for eight or more passengers, cannot travel in excess of 15 miles per hour, and is being used for transporting passengers for hire.

170. **Permissive Mode—a mode of traffic control signal operation in which left or right turns are permitted to be made after yielding to pedestrians, if any, and/or opposing traffic, if any. When a CIRCULAR GREEN signal indication is displayed, both left and right turns are permitted unless otherwise prohibited by another traffic control device. When a flashing YELLOW ARROW or flashing RED ARROW signal**

**indication is displayed, the turn indicated by the arrow is permitted.**

171. **Physical Gore—a longitudinal point where a physical barrier or the lack of a paved surface inhibits road users from crossing from a ramp or channelized turn lane or channelized entering lane to the adjacent through lane(s) or vice versa.**
172. **Pictograph—a pictorial representation used to identify a governmental jurisdiction, an area of jurisdiction, a governmental or other public transportation agency or provider, a military base or branch of service, a governmental-approved university or college, a governmental-approved institution, or a toll payment system.**
173. **Plaque—a traffic control device intended to communicate specific information to road users through a word, symbol, or arrow legend that is placed immediately adjacent to a sign to supplement the message on the sign. The difference between a plaque and a sign is that a plaque cannot be used alone. The designation for a plaque includes a "P" suffix.**
174. **Platoon—a group of vehicles or pedestrians traveling together as a group, either voluntarily or involuntarily, because of traffic signal controls, geometrics, or other factors.**

174a. **Pocket bike—as per CVC § 473, a two-wheeled motorized device that has a seat or saddle for the use of the rider, and that is not designed or manufactured for highway use. "Pocket bike" does not include an off-highway motorcycle, as defined in CVC § 436.**

175. **Portable Traffic Control Signal—see Highway Traffic Signal.**
176. **Post-Exit Ramp Lane Reduction—see Lane Reduction.**
177. **Post-Mounted Sign—a sign that is placed to the side of the roadway such that no portion of the sign or its support is directly above the roadway or shoulder.**
178. **Posted Speed Limit—a speed limit determined by law or regulation and displayed on Speed Limit signs.**
179. **Preemption—the transfer of normal operation of a traffic control signal or a hybrid beacon to a special control mode of operation.**
180. **Preferential Lane—a highway lane or set of lanes, or a highway facility, reserved for the exclusive use of one or more specific types of vehicles or of vehicles with a specific minimum number of occupants.**
181. **Pre-Signal—see Highway Traffic Signal.**
182. **Pretimed Operation—a type of traffic control signal operation in which none of the signal phases function on the basis of actuation.**
183. **Primary Signal Face—one of the required or recommended minimum number of signal faces for a given approach or separate turning movement, but not including near-side signal faces required as a result of the far-side signal faces exceeding the maximum distance from the stop line.**
184. **Principal Legend—place names, street names, and route numbers displayed on guide signs.**
185. **Priority Control—a means by which the assignment of right-of-way is obtained or modified.**
186. **Private Road—see Site Roadways Open to Public Travel. Refer to CVC § 490.**
187. **Professional Engineer (P.E.)*—An individual who has fulfilled education and experience requirements and passed examinations that, under State licensure laws, permit the individual to offer engineering services within areas of expertise directly to the public. Refer to California Business and Professions Code § 6704.**
    (a) **Engineer—a person registered under California Professional Engineers Act as a professional engineer, including any of the branches thereof. Refer to California Business and Professions Code § 6706.**
    (b) **Professional Engineer—a person engaged in the professional practice of rendering service or creative work requiring education, training and experience in engineering sciences and the application of special knowledge of the mathematical, physical and engineering sciences in such professional or creative work as consultation, investigation, evaluation, planning or design of public or private utilities, structures, machines, processes, circuits, buildings, equipment or projects, and supervision of construction for the purpose of securing compliance with specifications and design for any such work. Refer to California Business and Professions Code § 6701.**
188. **Protected Mode—a mode of traffic control signal operation in which left or right turns are permitted to be made only when a left or right GREEN ARROW signal indication is displayed.**
189. **Public Road—any road, street, or similar facility under the jurisdiction of and maintained by a public agency and open to public travel (see definition of Site Roadways Open to Public Travel).**

190. **Push Button—a button to activate a device or signal timing for pedestrians, bicyclists, or other road users.**
191. **Push Button Information Message—a recorded message that can be actuated by pressing a push button when the walk interval is not timing and that provides the name of the street that the crosswalk associated with that particular push button crosses and can also provide other information about the intersection signalization or geometry.**
192. **Push Button Locator Tone—a repeating sound that informs approaching pedestrians that a push button exists to actuate pedestrian timing or receive additional information and that enables pedestrians with vision disabilities to locate the push button.**
193. **Queue Clearance Time—when used in Part 8, the time required for the design vehicle of maximum length stopped just inside the minimum track clearance distance to start up and move through and clear the entire minimum track clearance distance.**
194. **Queue Cutter Signal—see Highway Traffic Signal.**
195. **Quiet Zone—a segment of a rail line, within which is situated one or a number of consecutive public highway-rail grade crossings at which locomotive horns are not routinely sounded per 49 CFR Part 222.**
196. **Rail Traffic—every device in, upon, or by which any person or property can be transported on rails or tracks and to which all other traffic must yield the right-of-way by law at grade crossings, including trains, one or more locomotives coupled (with or without cars), other railroad equipment, and light rail transit operating in exclusive or semi-exclusive alignments. Light rail transit operating in a mixed-use alignment, to which other traffic is not required to yield the right-of-way by law, is a vehicle and is not considered to be rail traffic.**
197. **Raised Pavement Marker—a device mounted on or in a road surface that has a height generally not exceeding approximately 1 inch above the road surface for a permanent marker, or not exceeding approximately 2 inches above the road surface for a temporary flexible marker, and that is intended to be used as a positioning guide and/or to supplement or substitute for pavement markings. Raised pavement markers might also be recessed into or flush with the pavement surface.**
198. **Ramp Control Signal (Ramp Meter)—see Highway Traffic Signal.**
199. **Red Clearance Interval—an interval that follows a yellow change interval and precedes the next conflicting green interval.**
199a. **Reference Bicycle-Rider—a minimum 4 feet tall person, weighing minimum 90 lb, riding on an unmodified minimum 16 inch wheel bicycle with non-ferromagnetic frame, non-ferromagnetic fork and cranks, aluminum rims, stainless steel spokes, and headlight.**
199b. **Registered Engineer—See Professional Engineer.**
200. **Regulatory Sign—a sign that gives notice to road users of traffic laws or regulations.**
200a. **Residence District—As per CVC § 515, a portion of a highway and the property contiguous thereto, other than a business district,**
   (a) **upon one side of which highway, within a distance of a quarter of a mile, the contiguous property fronting thereon is occupied by 13 or more separate dwelling houses or business structures, or**
   (b) **upon both sides of which highway, collectively, within a distance of a quarter of a mile, the contiguous property fronting thereon is occupied by 16 or more separate dwelling houses or business structures.**

   **A residence district may be longer than one-quarter of a mile if the above ratio of separate dwelling houses or business structures to the length of the highway exists. Refer to CVC §§ 235 and 240, to determine whether a highway is within a business or residence district.**
201. **Retroreflectivity—a property of a surface that allows a large portion of the light coming from a point source to be returned directly back to a point near its origin.**
202. **Road—see Roadway.**
203. **Road User—a vehicle operator, bicyclist, or pedestrian, including persons with disabilities, within the highway or on a site roadway open to public travel (see definition of Site Roadways Open to Public Travel).**
204. **Roadway—that portion of a highway improved, designed, or ordinarily used for vehicular travel and parking lanes, but exclusive of the sidewalk, berm, or shoulder even though such sidewalk, berm, or shoulder is used by persons riding bicycles or other human-powered vehicles. In the event a highway includes two or more separate roadways, the term roadway as used in this Manual shall refer to any such roadway separately, but not to all such roadways collectively. Refer to CVC §§ 527 and 530.**

205. **Roadway Network—a geographical arrangement of intersecting roadways.**
206. **Roundabout—a circular intersection with yield control at entry, which permits a vehicle on the circulatory roadway to proceed, and with deflection of the approaching vehicle counter- clockwise around a central island.**
207. **Rumble Strip—a series of intermittent, narrow, transverse areas of rough-textured, slightly raised, or depressed road surface that extend across the travel lane to alert vehicle operators to unusual traffic conditions or are located along the shoulder, along the roadway center line, or within islands formed by pavement markings to alert road users that they are leaving the travel lanes.**
208. **Rural Highway—a type of roadway normally characterized by lower volumes, higher speeds, fewer turning conflicts, and less conflict with pedestrians.**
209. **Scanning Graphic—a graphic designed for scanning by machine, and includes bar codes, quick- response (QR) codes or other matrix bar code formats, or similar graphics.**
209a. **Scenic Highway—an officially designated portion of the State Highway System traversing areas of outstanding scenic beauty which together with the adjacent scenic corridors requires special scenic conservation treatment.**
210. **School—a public or private educational institution recognized by the State education authority for one or more grades K through 12 or as otherwise defined by the State. A "private school" is any school, whether conducted for profit or not, giving a course of training similar to that given in a public school at or below the twelfth grade, including but not limited to schools owned or operated by any church. Refer to CVC § 492.**
211. **School Zone—a designated roadway segment approaching, adjacent to, and beyond school buildings or grounds, or along which school related activities occur. As per CVC § 22352(a)(2)(B) When approaching or passing a school building or the grounds thereof, contiguous to a highway and posted with a standard "SCHOOL" warning sign, while children are going to or leaving the school either during school hours or during the noon recess period. The prima facie limit shall also apply when approaching or passing any school grounds which are not separated from the highway by a fence, gate, or other physical barrier while the grounds are in use by children and the highway is posted with a standard "SCHOOL" warning sign.**
212. **Semi-Actuated—a type of traffic control signal operation in which at least one, but not all, signal phases function on the basis of actuation.**
213. **Semi-Exclusive Alignment—a light rail transit track(s) or a bus rapid transit busway that is in a separate right-of-way or that is along a street or railroad right-of-way where motor vehicles, bicycles, and pedestrians have limited access and cross only at designated locations, such as at grade crossings where road users must yield the right-of-way to the light rail transit or the bus rapid transit traffic.**
213a. **Separated Bicycle Lane—see Class II or Class IV Bikeway.**
214. **Separate Turn Signal Face—a signal face that exclusively controls a turn movement and that displays signal indications that are applicable only to the turn movement.**
215. **Separation Time—the component of maximum highway traffic signal preemption time during which the minimum track clearance distance is clear of vehicular traffic prior to the arrival of rail traffic.**
216. **Serviceable—a condition in which a traffic control device appears (day and night) and operates as intended, beyond which it requires replacement due to damage or wear. Whether a device is serviceable will depend on the type of device under consideration. In general, if the device is capable of being serviced with minimal effort or replacement parts so that it continues to appear and operate as intended, and the device is otherwise substantially intact, then it can be considered to be in serviceable condition. If the device is damaged or not operational beyond reasonable repair, then it is likely no longer serviceable.**
217. **Shared Roadway—a roadway that is officially designated and marked as a bicycle route, but which is open to motor vehicle travel and upon which no bicycle lane is designated. Shared Roadway (No Bikeway Designation)—A roadway that permits bicycle use but is not officially designated as a bikeway.**
218. **Shared Turn Signal Face—a signal face, for controlling both a turn movement and the adjacent through movement, that always displays the same color of circular signal indication that the adjacent through signal face or faces display.**
219. **Shared-Use Path (Class I or IV Bikeway)—a bikeway outside the traveled way and physically separated from motorized vehicular traffic by an open space or barrier and either within the highway right-of-way or within an independent alignment. Shared-use paths are also used by pedestrians (including skaters, users of manual and motorized wheelchairs, and joggers) and other authorized motorized and non-**

**motorized users.**

220. **Shoulder—a longitudinal area contiguous with the traveled way that is used for accommodation of stopped vehicles for emergency use and for lateral support of base and surface courses, and that is graded for emergency stopping. A shoulder might be paved or unpaved. A paved shoulder might be opened to part-time travel by some or all vehicles and might also be available for use by pedestrians and/or bicycles in the absence of other pedestrian or bicycle facilities.** The portion of the highway contiguous with the roadway for accommodations of pedestrians, bicyclists, stopped vehicles, for emergency use, and for lateral support of base and surface courses. Refer to the Caltrans' Highway Design Manual Index 62.1(9) for design criteria.
221. **Sidewalk—that portion of a street between the curb line, or the lateral line of a roadway, and the adjacent property line or on easements of private property that is paved or improved and intended for use by pedestrians.** As per CVC § 555, "Sidewalk" is that portion of a highway, other than the roadway, set apart by curbs, barriers, markings or other delineation for pedestrian travel.
222. **Sidewalk Extension—a pedestrian facility at an intersection or midblock crosswalk which extends the sidewalk by physically and visually narrowing the roadway.**
223. **Sidewalk Grade Crossing—the portion of a highway-rail grade crossing or of a highway-light rail transit grade crossing where a sidewalk and railroad tracks or a sidewalk and light rail transit tracks cross at the same level, within which are included the tracks, sidewalk, and traffic control devices for sidewalk users traversing that area.**
224. **Sign—with regard to controlling traffic, any traffic control device that is intended to communicate specific information to road users through a word, symbol, and/or arrow legend. Signs do not include highway traffic signals, pavement markings, delineators, or channelization devices. Signs whose purpose is unrelated to traffic control are addressed in Section 1A.02.**
225. **Sign Assembly—a group of signs, located on the same support(s), that supplement one another in conveying information to road users.**
226. **Sign Illumination—either internal or external lighting that shows similar color by day or night. Street or highway lighting shall not be considered as meeting this definition.**
227. **Sign Legend—all word messages, logos, pictographs, and symbol and arrow designs that are intended to convey specific meanings. The border, if any, on a sign is not considered to be a part of the legend.**
228. **Sign Panel—a separate panel or piece of material containing a word, logo, pictograph, symbol, and/or arrow legend that is affixed to the face of a sign.**
229. **Signal*—See Highway Traffic Signal.**
230. **Signal Backplate—a thin strip of material that extends outward from and parallel to a signal face on all sides of a signal housing to provide a background for improved visibility of the signal indications.**
231. **Signal Coordination—the establishment of timed relationships between adjacent traffic control signals.**
232. **Signal Dimming—a reduction of the light output from a signal indication, hybrid beacon, or rectangular rapid-flashing beacon indication, typically for nighttime conditions, to a value that is below the minimum specified intensity for daytime conditions. If a variety of intensity levels are used during daytime conditions and all of the various levels (including the lowest of the intensities) are above the minimum specified intensity for daytime conditions, this would not be considered to be signal dimming.**
233. **Signal Face—an assembly of one or more signal sections that is provided for controlling one or more traffic movements on a single approach.**
234. **Signal Head—an assembly of one or more signal faces that is provided for controlling traffic movements on one or more approaches.**
235. **Signal Housing—that part of a signal section that protects the light source and other required components.**
236. **Signal Indication—the illumination of a signal lens or equivalent device.**
237. **Signal Lens—that part of the signal section that redirects the light coming directly from the light source and its reflector, if any.**
238. **Signal Louver—a device that can be mounted inside a signal visor to restrict visibility of a signal indication from the side or to limit the visibility of the signal indication to a certain lane or lanes, or to a certain distance from the stop line.**
239. **Signal Phase—the right-of-way, yellow change, and red clearance intervals in a cycle that are assigned to**

**an independent traffic movement or combination of movements.**

**240. Signal Section—the assembly of a signal housing, signal lens, if any, and light source with necessary components to be used for displaying one signal indication.**

**241. Signal Sequence (Sequence of Indications)—the order of appearance of signal indications during successive intervals of a signal cycle.**

**242. Signal System—two or more traffic control signals operating in signal coordination.**

**243. Signal Timing—the amount of time allocated for the display of a signal indication.**

**244. Signal Visor—that part of a signal section that directs the signal indication specifically to approaching traffic and reduces the effect of direct external light entering the signal lens.**

**245. Signing—individual signs or a group of signs, not necessarily on the same support(s), that supplement one another in conveying information to road users.**

**246. Simultaneous Preemption—notification of approaching rail traffic is forwarded to the highway traffic signal controller unit or assembly and railroad or light rail transit active warning devices at the same time.**

**247. Site Roadways Open to Public Travel*—Roadways and bikeways on sites of shopping centers, office parks, airports, schools, universities, sports arenas, recreational parks, and other similar business, governmental, and/or recreation facilities that are publicly or privately owned but where the public is allowed to travel without full-time access restrictions. Two types of roadways are not included in this definition: (1) roadways where access is restricted at all times by gates and/or guards to residents, employees, or other specifically-authorized persons; and (2) private highway-rail grade crossings. Site roadways open to public travel do not include parking areas (see definition in this Section), including the driving aisles (see definition in this Section) within those parking areas. The MUTCD national standard and Caltrans standards and specifications for traffic control devices shall not be applicable to privately owned and maintained roads or commercial establishments, unless the particular city or county enacts an ordinance or resolution to this effect. Refer to CVC §§ 21100, 21100.1, 21107, 21107.5, 21107.6, and 21107.7.**

**247a. Private Road or Driveway—is a way or place in private ownership and used for vehicular travel by the owner and those having express or implied permission from the owner but not by other members of the public. Refer to CVC § 490.**

**248. Special-Purpose Road—a low-volume, low-speed road that serves recreational areas or resource development activities.**

**249. Speed—speed is defined based on the following classifications:**

- **(a) Average Speed—the summation of the instantaneous or spot-measured speeds at a specific location of vehicles divided by the number of vehicles observed.**
- **(b) Design Speed—a selected speed used to determine the various geometric design features of a roadway.**
- **(c) 85th-Percentile Speed—the speed at or below which 85 percent of the motor vehicles travel.**
- **(d) Operating Speed—a speed at which a typical vehicle or the overall traffic operates. Operating speed might be defined with speed values such as the average, pace, or 85th- percentile speeds.**
- **(e) Pace—the 10 mph speed range representing the speeds of the largest percentage of vehicles in the traffic stream.**

**250. Speed Limit—the maximum (or minimum) speed applicable to a section of highway as established by law or regulation.**

**250a. Speed Measurement Markings—a white transverse pavement marking placed on the roadway to assist the enforcement of speed regulations.**

**251. Speed Zone—a section of highway with a speed limit that is established by law or regulation, but which might be different from a legislatively-specified statutory speed limit.**

**252. Splitter Island—a median island used to separate opposing directions of traffic entering and exiting a roundabout.**

**252a. State highway—any highway owned and operated by Caltrans.**

**253. Station Crossing—a pathway grade crossing that is associated with a station platform.**

**254. Statutory Speed Limit—a speed limit established by legislative action (such as Federal or State law) that typically is applicable for a particular class of highways with specified design, functional, jurisdictional,**

**and/or location characteristics and that is not necessarily displayed on Speed Limit signs.**

**255. Steady (Steady Mode)—the continuous display of a signal indication for the duration of an interval, signal phase, or consecutive signal phases.**

**256. Stop Line—a solid white pavement marking line extending across approach lanes to indicate the point at which a stop is intended or required to be made.** For all purposes, limit line(s) as defined per CVC § 377 shall mean stop line(s).

**257. Street—see Highway.** "Street" is a way or place of whatever nature, publicly maintained and open to the use of the public for purposes of vehicular travel. Refer to CVC §§ 590 and 591.

**258. Supplemental Signal Face—a signal face that is not a primary signal face but which is provided for a given approach or separate turning movement to enhance visibility or conspicuity.**

**259. Swing Gate—a self-closing fence-type gate designated to swing open away from the track area and return to the closed position upon release.**

**260. Symbol—the approved design of a pictorial or graphical representation of a specific traffic control message for signs, pavement markings, traffic control signals, or other traffic control devices, as shown in the MUTCD.**

**261. Temporary Traffic Control Signal—see Highway Traffic Signal.**

**262. Temporary Traffic Control Zone—an area of a highway, pedestrian or bicycle facility where road user conditions are changed because of a work zone or incident by the use of temporary traffic control devices, flaggers, uniformed law enforcement officers, or other authorized personnel.**

**263. Theoretical Gore—a longitudinal point at the upstream end of a neutral area at an exit ramp or channelized turn lane where the channelizing lines that separate the ramp or channelized turn lane from the adjacent through lane(s) begin to diverge, or a longitudinal point at the downstream end of a neutral area at an entrance ramp or channelized entering lane where the channelizing lines that separate the ramp or channelized entering lane from the adjacent through lane(s) intersect each other.**

263a. Through Highway—a "through highway" is a highway or portion thereof at the entrance to which vehicular traffic from intersecting highways is regulated by stop signs or traffic control signals or is controlled when entering on a separated right-turn roadway by a yield-right-of-way sign.

**264. Through Train—a train movement that continues without stopping or reversing direction throughout the entire length of the rail traffic detection circuit length approaching a highway- rail grade crossing.**

**265. Timed Exit Gate Operating Mode—a mode of operation where the exit gate descent at a grade crossing is based on a predetermined time interval.**

**266. Toll Booth—a shelter where a toll attendant is stationed to collect tolls or issue toll tickets. A toll booth is located adjacent to a toll lane and is typically set on a toll island.**

**267. Toll Collection—manual or electronic methods and elements used to collect a fee for use of a toll facility. Toll collection methods include:**

**(a) Electronic Toll Collection (ETC)—a cashless system for automated collection of tolls from moving or stopped vehicles through wireless technologies such as radio-frequency communication or optical scanning. ETC systems are classified as one of the following:**

1. **systems that require users to have registered toll accounts, with the use of equipment inside or on the exterior of vehicles, such as a transponder or barcode decal, that communicates with or is detected by roadside or overhead receiving equipment, or with the use of license plate optical scanning, to automatically deduct the toll from the registered user account,**
2. **systems that do not require users to have registered toll accounts because vehicle license plates are optically scanned and invoices for the toll amount are typically sent through postal mail to the address of the vehicle owner, or**
3. **systems that allow electronic toll collection for both registered and non-registered toll accounts.**

**(b) Open-Road Tolling (ORT)—a system designed to allow electronic toll collection (ETC) from vehicles traveling at posted speeds. Open-road tolling might be used on toll roads or toll facilities in conjunction with toll plazas. Open-road tolling is also typically used on managed lanes and on toll facilities that only accept payment by ETC.**

**(c) Manual Toll Collection—a system of toll collection from stopped vehicles through acceptance of cash, toll tickets, tokens, or credit cards, and may involve issuance of receipts. Toll collection may be by a**

**machine or toll booth attendant.**

1. **Toll-Ticket System—a toll system in which the user of a toll road must stop to receive a ticket from a machine or toll booth attendant upon entering the toll facility. The ticket denotes the user's point of entry and, upon exiting the toll system, the user surrenders the ticket and is charged a toll based on the distance traveled between the points of entry and exit.**
2. **Attended Lane (Manual Lane)—a toll lane adjacent to a toll booth occupied by a human toll collector who makes change, issues receipts, and performs other toll-related functions. Attended lanes at toll plazas typically require vehicles to stop to pay the toll.**
3. **Exact Change Lane (Automatic Lane)—a non-attended toll lane that has a receptacle into which road users deposit coins totaling the exact amount of the toll. Exact Change lanes at toll plazas typically require vehicles to stop to pay the toll.**

268. **Toll Island—a raised island on which a toll booth or other toll collection and related equipment are located.**
269. **Toll Lane—an individual lane located within a toll plaza in which a toll payment is collected or, for toll-ticket systems, a toll ticket is issued.**
270. **Toll Plaza—the location at which tolls are collected consisting of a grouping of toll booths, toll islands, toll lanes, and, typically, a canopy. Toll plazas might be located on highway mainlines or on interchange ramps. A mainline toll plaza is sometimes referred to as a barrier toll plaza because it interrupts the traffic flow.**
271. **Toll Road (Facility)—a road or facility that is open to traffic only by payment of a user toll or fee.** A "toll highway" or "toll road" is a publicly owned way or place open to the use of the public for purposes of vehicular travel which use requires the payment of a fee. Refer to CVC § 611.
272. **Traffic—pedestrians, bicyclists, ridden or herded animals, vehicles, streetcars, and other conveyances either singularly or together while using for purposes of travel any highway or site roadway open to public travel** (see definition of private road open to public travel)**.** As per CVC § 620, the term "traffic" includes pedestrians, ridden animals, vehicles, street cars, and other conveyances, either singly or together, while using any highway for purposes of travel.
273. **Traffic Control Device—all signs, signals, markings, channelization devices, or other devices that use colors, shapes, symbols, words, sounds, and/or tactile information for the primary purpose of communicating a regulatory, warning, or guidance message to road users on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel** (see definition of Site Roadways Open to Public Travel)**. Section 1A.02 contains information regarding items that are not traffic control devices.**
274. **Traffic Control Signal (Traffic Signal)—see Highway Traffic Signal.**
275. **Train—one or more locomotives coupled, with or without cars, that operates on rails or tracks and to which all other traffic must yield the right-of-way by law at highway-rail grade crossings.**
276. **Transverse Markings—pavement markings that are generally placed perpendicular and across the flow of traffic such as shoulder markings; word, symbol, and arrow markings; stop lines; crosswalk lines; parking space markings; and others.**
277. **Traveled Way—the portion of the roadway for the movement of vehicles, exclusive of the shoulders, berms, sidewalks, and parking lanes.**
278. **Turn Bay—a lane for the exclusive use of turning vehicles that is formed on the approach to the location where the turn is to be made. In most cases where turn bays are provided, drivers who desire to turn must move out of a through lane into the newly-formed turn bay in order to turn. A through lane that becomes a turn lane is considered to be a lane drop rather than a turn bay.**
279. **Two-Stage Bicycle Turn Box—a designated area at an intersection intended to provide bicyclists a place to wait for traffic to clear before proceeding in a different direction of travel.**
280. **Uncontrolled Approach—an approach on which vehicles are not controlled by a traffic control signal, hybrid beacon, STOP sign, or YIELD sign.**
281. **Upstream—a term that refers to a location that is encountered by traffic prior to a downstream location as it flows in an "upstream to downstream" direction. For example, "the upstream end of a lane line separating the turn lane from a through lane on the approach to an intersection" is the end of the line that**

**is furthest from the intersection.**

282. **Urban Street—a type of street normally characterized by relatively low speeds, wide ranges of traffic volumes, narrower lanes, frequent intersections and driveways, significant pedestrian traffic, and more businesses and houses.**
283. **Variable Message Sign—see Changeable Message Sign.**
284. **Vehicle—every device in, upon, or by which any person or property can be transported or drawn upon a highway, except trains and light rail transit operating in exclusive or semi-exclusive alignments. Light rail transit equipment operating in a mixed-use alignment, to which other traffic is not required to yield the right-of-way by law, is a vehicle. As per CVC § 670, a "vehicle" is a device by which any person or property may be propelled, moved, or drawn upon a highway, excepting a device moved exclusively by human power or used exclusively upon stationary rails or tracks.**
285. **Vibrotactile Pedestrian Device—an accessible pedestrian signal feature that communicates, by touch, information about pedestrian timing using a vibrating surface.**
286. **Visibility-Limited Signal Face or Visibility-Limited Signal Section—a type of signal face or signal section designed (or shielded, hooded, or louvered) to restrict the visibility of a signal indication from the side, to a certain lane or lanes, or to a certain distance from the stop line.**
287. **Walk Interval—an interval during which the WALKING PERSON (symbolizing WALK) signal indication is displayed.**
288. **Warning Light—a portable, powered, yellow, lens-directed, enclosed light that is used in a temporary traffic control zone in either a steady burn or a flashing mode.**
289. **Warning Sign—a sign that gives notice to road users of a situation that might not be readily apparent.**
290. **Warrant—a warrant describes a threshold condition based upon average or normal conditions that, if found to be satisfied as part of an engineering study, shall result in analysis of other traffic conditions or factors to determine whether a traffic control device or other improvement is justified. Warrants are not a substitute for engineering judgment. The fact that a warrant for a particular traffic control device is met is not conclusive justification for the installation of the device.**
291. **Wayside Horn System—a stationary horn (or a series of horns) located at a grade crossing that is used in conjunction with train-activated or light rail transit-activated warning systems to provide audible warning of approaching rail traffic to road users on the highway or pathway approaches to a grade crossing, either as a supplement or alternative to the sounding of a locomotive horn.**
292. **Worker—a person on foot whose duties place him or her within the right-of-way of a street, highway, or pathway, such as: construction and maintenance forces; survey crews; utility crews; responders to incidents within the right-of-way; and law enforcement personnel when directing traffic, investigating crashes, and handling lane closures, obstructed roadways, and disasters within the right-of-way.**
293. **Wrong-Way Arrow—a slender, elongated, white pavement marking arrow placed upstream from the ramp terminus to indicate the correct direction of traffic flow. Wrong-way arrows are intended primarily to warn wrong-way road users that they are going in the wrong direction.**
294. **Yellow Change Interval—the first interval following the green or flashing arrow interval during which the steady yellow signal indication is displayed.**
295. **Yield Line—a row of solid white isosceles triangles pointing toward approaching vehicles extending across approach lanes to indicate the point at which the yield is intended or required to be made.**

Support:

03a * Refer to FHWA's List of Known Errors for errors in Paragraph 3 (Definitions 54, 58, 111, 120, 130, 154, 158, 159, 187, 229, and 247) text. Refer to Section 1A.04 for more details.

04 The following terms are defined in the California Vehicle Code:

1. All-terrain vehicle—Section 111.
2. Amber—Section 112.
3. Authorized Emergency Vehicle—Section 165.
4. Autoette—Section 175.
5. Automated Enforcement System—Section 210.
6. Axle—Section 230.
7. Bus—Section 233.

8. City—Section 255.
9. Commercial Vehicle—Section 260.
10. County—Section 270.
11. Darkness—Section 280
12. Department of Transportation—Section 291.
13. Disabled Person—Section 295.5.
14. Golf Cart—Section 345.
15. Hazardous Material—Section 353.
16. Liquefied Petroleum Gas—Section 380.
17. Local Authorities—Section 385.
18. Motor Vehicle—Section 415.
19. Official Traffic Control Device—Section 440.
20. Official Traffic Control Signal—Section 445.
21. Pickup Truck—Section 471.
22. Pilot Car—Section 472.
23. Ridesharing—Section 522.
24. Right-of-way—Section 525.
25. Safety Zone—Section 540.
26. Schoolbus—Section 545.
27. Snowmobile—Section 557.
28. Stop or Stopping—Section 587.
29. Street or Highway—Highway Exclusion—Section 592.
30. Through Highway—Section 600.
31. Trailer—Section 630.
32. U-Turn—Section 665.5.

## Section 1C.03 Meanings of Acronyms and Abbreviations Used in this Manual

**Standard:**

01 **The following acronyms and abbreviations, when used in this Manual, shall have the following meanings:**

1. **AADT—annual average daily traffic**
2. **AASHTO—American Association of State Highway and Transportation Officials**
3. **AC—alternating current**
4. **ADA—Americans with Disabilities Act**
5. **ADAS—Advanced Driver Assistance Systems**
6. **ADS—Automated Driving System**
7. **ADT—average daily traffic**
8. **AFAD—Automated Flagger Assistance Device**
9. **ANSI—American National Standards Institute**
10. **AREMA—American Railway Engineering and Maintenance-of-Way Association**
11. **AV—automated vehicle**
12. **cd/lx/m$^2$---candelas per lux per square meter**
13. **CFR—Code of Federal Regulations**
14. **CMS—changeable message sign**
15. **dBA—A-weighted decibels**
16. **DC—direct current**
17. **DDT—Dynamic Driving Task**
18. **EPA—Environmental Protection Agency**
19. **ETC—electronic toll collection**
20. **EV—electric vehicle**
21. **FHWA—Federal Highway Administration**
22. **FRA—Federal Railroad Administration**
23. **ft—foot or feet**
24. **FTA—Federal Transit Administration**

25. **HOV—high-occupancy vehicle**
26. **IEEE—Institute of Electrical and Electronics Engineers**
27. **IES—Illuminating Engineering Society**
28. **ILEV—inherently low-emission vehicle**
29. **in—inch(es)**
30. **ISEA—International Safety Equipment Association**
31. **ITE—Institute of Transportation Engineers**
32. **ITS—intelligent transportation systems**
33. **L—taper length**
34. **LED—light-emitting diode**
35. **LP—liquified petroleum**
36. **LRT—light rail transit**
37. **mi—mile(s)**
38. **MPH or mph—miles per hour**
39. **MUTCD—Manual on Uniform Traffic Control Devices for Streets and Highways**
40. **N—length of one line segment plus one gap of a broken line**
41. **NCEES—National Council of Examiners for Engineering and Surveying**
42. **NCHRP—National Cooperative Highway Research Program**
43. **ODD—Operational Design Domain**
44. **OPM—U.S. Office of Personnel Management**
45. **ORT—open-road tolling**
46. **PCMS—portable changeable message sign**
47. **PRT—perception-response time**
48. **RRFB—rectangular rapid-flashing beacon**
49. **RV—recreational vehicle**
50. **SAE—Society of Automotive Engineers**
51. **SHV—Specialized Hauling Vehicle**
52. **SPF—safety performance function**
53. **TA—Typical Application**
54. **TDD—telecommunication device for the deaf**
55. **TRB—Transportation Research Board**
56. **TTC—temporary traffic control**
57. **U.S.—United States**
58. **U.S.C.—United States Code**
59. **USDOT—United States Department of Transportation**
60. **UVC—Uniform Vehicle Code**
61. **VPH or vph—vehicles per hour**
62. **V2I—vehicle to infrastructure**

Support:

02 The following list of acronyms are related to traffic control devices and provided for ease of use and as a handy reference:

1. AHS — Automated Highway System
2. AMBER — Use of CMS signs for child abduction alert messages
3. AVCS — Automated Vehicle Control System
4. Cal/OSHA — California Occupational Safety and Health Administration
5. CA MUTCD — California Manual on Uniform Traffic Control Devices for Streets and Highways
6. Caltrans — California Department of Transportation
7. CBD — Central Business District
8. CCR — California Code of Regulations
9. CDC — California Department of Conservation
10. CDF — California Department of Forestry
11. CDFW — California Department of Fish and Wildlife
12. CHP — California Highway Patrol
13. CMS — Changeable Message Sign or Congestion Management System

14. COZEEP Construction Zone Enhanced Enforcement Program
15. CPUC California Public Utilities Commission
16. CRHR California Register of Historical Resources
17. CT Caltrans or California Department of Transportation
18. CTCDC California Traffic Control Devices Committee
19. CVC California Vehicle Code
20. DIB Design Information Bulletin
21. DMV Department of Motor Vehicles
22. ESA Environmentally Sensitive Area
23. Exp or EXP Expressway
24. FCC Federal Communication Commission
25. Fwy or FWY Freeway
26. HAR Highway Advisory Radio
27. HAZMAT Hazardous Material
28. HOT High Occupancy Toll
29. HM Hazardous Material
30. HW Hazardous Waste
31. IRLs In-Roadway Lights
32. IRWLs In-Roadway Warning Lights
33. ITS Intelligent Transportation Systems or Institute of Transportation Studies
34. IVHS Intelligent Vehicle Highway System
35. MAZEEP Maintenance Zone Enhanced Enforcement Program
36. NCUTLO National Committee on Uniform Traffic Laws and Ordinances
37. NHL National Historic Landmark
38. NPS National Park Service (U.S.)
39. ODA Outdoor Advertising (Act)
40. OSA Office of the State Architect
41. OSHA Occupational Safety and Health Administration
42. PHI Point of Historic Interest
43. PM Post Mile
44. PS&E Plans, Specifications, and Estimate
45. ROW Right of Way
46. RR Railroad
47. RXR Railroad Crossing
48. SAFE Service Authority for Freeways & Expressways
49. SHC California Streets & Highways Code
50. SHL State Historical Landmark
51. SHS State Highway System or Standard Highway Signs and Markings book (FHWA)
52. SWITRS Statewide Integrated Traffic Records Systems
53. TASAS Traffic Accident Surveillance and Analysis System
54. TMC Traffic Management Center
55. TODS Tourist-Oriented Directional Signs
56. TOPD Traffic Operations Policy Directives
57. TS Traffic Signal
58. TSS Caltrans Traffic Sign Specifications
59. WATCH Work Area Traffic Control Handbook
60. WIM Weigh-in Motion
61. Xing or XING Crossing

# CHAPTER 1D. PROVISIONS APPLICABLE TO TRAFFIC CONTROL DEVICES IN GENERAL

## Section 1D.01 Purpose and Principles of Traffic Control Devices

Support:

01 The purpose of traffic control devices, as well as the principles for their use, is to promote highway safety, inclusion and mobility of all road users, and efficiency by providing for the orderly movement of road users on streets, highways, bikeways, and site roadways open to public travel throughout the Nation. Section 1A.03 contains additional information on target road users.

02 This Manual contains the basic principles that govern the design and use of traffic control devices for all streets, highways, bikeways, and site roadways open to public travel (see definition in Section 1C.02) regardless of type or class or the public agency, official, or owner having jurisdiction. The text of this Manual specifies the restriction on the use of a device if it is intended for limited application or for a specific system. It is important that these principles be given primary consideration in the selection and application of each device.

*Guidance:*

03 *To be effective, a traffic control device should:*

*A. Fulfill a need;*
*B. Command attention;*
*C. Convey a clear, simple meaning;*
*D. Command respect from road users; and*
*E. Give adequate time for proper response.*

04 *Design, placement, operation, maintenance, and uniformity are aspects that should be carefully considered by the engineer in order to maximize the ability of a traffic control device to be consistent with the five principles listed in Paragraph 3 of this Section. Vehicle speed, geometrics and other relevant factors and road-user types should be carefully considered as ~~an element~~ elements that ~~governs~~ govern the design, operation, placement, and location of various traffic control devices.*

05 *The proper use of traffic control devices should provide the road user with the information necessary to safely, efficiently, and lawfully use the streets, highways, pedestrian facilities, and bikeways.*

**Standard:**

06 **Traffic control devices used on site roadways open to public travel shall have the same shape, color, and meaning as those required by the MUTCD for use on public highways, except as provided otherwise elsewhere in this Manual. Sign size exceptions are noted in each Part as applicable.**

## Section 1D.02 Responsibility and Authority for Traffic Control Devices

**Standard:**

01 **The responsibility for the design, placement, operation, maintenance, and uniformity of traffic control devices in compliance with the provisions of this Manual shall rest with the public agency or the official having jurisdiction, or, in the case of site roadways open to public travel, with the private owner or private official having jurisdiction.**

02 **All regulatory traffic control devices shall be supported by laws, ordinances, or regulations.**

03 **Traffic control devices, public announcements or notices, and other signs or messages within the highway right-of-way shall be placed only as authorized by a public authority or the official having jurisdiction, or, in the case of site roadways or private toll roads open to public travel, by the private owner or private official having jurisdiction, for the purpose of regulating, warning, or guiding traffic.**

Support:

03a Refer to Sections 1A.01, 1B.01, 1C.02 (phrase "Site Roadways Open to Public Travel") for authority and applicability of CA MUTCD on various types of public and private roadway facilities.

03b The delegation of maintenance activities to local authorities is usually exercised under the authority of Streets and Highways Code § 130.

**Standard:**

04 **When the public agency or the official having jurisdiction over a street or highway or, in the case of site roadways open to public travel, the private owner or private official having jurisdiction, has granted proper authority, others such as contractors and public utility companies shall be allowed to install temporary traffic**

**control devices in temporary traffic control zones. Such traffic control devices shall comply with the provisions of this Manual.**

05 **Signs and other devices that do not have any traffic control purpose that are placed within the highway right-of-way shall not be located where they will interfere with, or detract from, traffic control devices.**

Support:

06 States are encouraged to adopt, through policy or legislation, the provisions of 23 CFR 750.108 that restrict outdoor advertising from resembling traffic control devices.

07 CVC references are used throughout this California MUTCD when the subject matter relates to State law.

**Standard:**

08 **CVC § 21400 provides that Caltrans shall, after consultation with local agencies and public hearings, adopt rules and regulations prescribing uniform standards and specifications for all official traffic control devices placed pursuant to the provisions of the Code.**

09 **CVC § 21401 provides that only those official traffic control devices that conform to the uniform standards and specifications promulgated by Caltrans shall be placed upon a street or highway.**

10 **CVC §§ 21350 and 21351 give basic authority to Caltrans and local authorities, in their respective jurisdictions, to place and maintain such official traffic control devices.**

Option:

11 Local authorities may adopt rules and regulations by ordinance or resolution for regulating traffic by means of official traffic control devices meeting the requirements of CVC § 21400. Refer to CVC § 21100 (d).

**Standard:**

12 **Except as provided in Paragraph 14 of this section, local agencies responsible for the development or operation of bikeways or roadways where bicycle travel is permitted shall:**

- **A. Utilize the minimum safety design criteria established by Caltrans for the planning and construction of bikeways and roadways where bicycle travel is permitted.**
- **B. Also utilize the uniform specifications and symbols for signs, markers, and traffic control devices established by Caltrans to designate bikeways, regulate traffic, improve safety and convenience for bicyclists, and alert pedestrians and motorists of the presence of bicyclists on bikeways and on roadways where bicycle travel is permitted.**

Support:

13 Refer to Streets and Highways Code §§ 890.4, 890.6, 890.8 and 891.

Option:

14 Local agencies may utilize minimum safety design criteria other than those established by Caltrans (Refer to Streets and Highways Code §§ 890.6 and 891), if all of the following conditions are met:

- A. The alternative criteria have been reviewed and approved by a qualified engineer with consideration for the unique characteristics and features of the proposed bikeway and surrounding environs.
- B. The alternative criteria, or the description of the project with reference to the alternative criteria, are adopted by resolution at a public meeting, after having provided proper notice of the public meeting and opportunity for public comment.
- C. The alternative criteria adhere to guidelines established by a national association of public agency transportation officials.

Support:

15 The use of unauthorized traffic control devices is prohibited by CVC § 21465.

**Standard:**

16 **Prohibited traffic control devices constitute a public nuisance and shall be removed per CVC § 21467.**

Support:

17 This does not modify or limit the authority of the Public Utilities Commission to erect or maintain traffic control devices as authorized by law. Refer to CVC § 21468.

18 Private advertising is prohibited on any highway right-of-way by § 5403 (a) of the Business and Professions Code. "Highway" in this context includes roads, streets, boulevards, lanes, courts, places, commons, trails, ways or other rights-of-way or easements used for or laid out and intended for the public passage of vehicles or of vehicles and persons per § 5213 of the Business and Professions Code. Also refer to CVC § 360 for definition of "highway".

19 The California Public Utilities Commission is the state regulatory agency with statutory authority over highway-rail grade crossings and highway-light rail transit grade crossings. Refer to Public Utilities Code § 1202(a).

## Section 1D.03 Engineering Study and Engineering Judgment

Support:

01 Definitions of professional engineer, engineering study, and engineering judgment are provided in Section 1C.02.

01a Refer to CVC § 627 for definition and requirements of "Engineering and Traffic Survey". It is also abbreviated in this manual as E&TS.

02 The application of engineering study and engineering judgment is a fundamental principle of the use of traffic control devices. It is for this reason that, in most cases, the selection of a particular device is not required by a Standard provision but is determined by engineering study or engineering judgment. Many Standard provisions in this Manual specifically require, by explicit language in the individual provisions or by implication, the application of engineering study or engineering judgment in applying those Standards. Site- specific conditions might result in the determination that it is impossible or impracticable to comply with a Standard at that location. In such a case, a deviation from the requirement of a particular Standard at that location might be the only possibility. In such limited, specific cases, the deviation is allowed, provided that the agency or official having jurisdiction fully documents, through an engineering study, the engineering basis for the deviation.

**Standard:**

03 **This Manual describes the application of traffic control devices, but shall not be a legal requirement for their installation.**

Support:

04 The MUTCD does not mandate, and is not intending to imply, that an engineer must make the final decision whether to implement or execute the determination or advice of an engineer by installing or constructing the traffic control device to the engineer's specification in the field. Rather, the engineer, individual under supervision of an engineer, or other individual as duly authorized by State law to engage in the practice of engineering, develops an engineering-based solution that includes the specifications for selection and placement of traffic control devices, but the responsibility for a final decision to implement that solution rests with the agency having jurisdiction over the roadway, after consultation with and based on advice from the engineer.

*Guidance:*

05 *The decision to use a particular device at a particular location should be made on the basis of either an engineering study or the application of engineering judgment by an engineer, someone under the direct supervision of an engineer, or other individual as duly authorized by State law to engage in the practice of engineering. Thus, while this Manual provides Standards, Guidance, and Options for design and application of traffic control devices, this Manual should not be considered a substitute for engineering judgment. Engineering judgment should be exercised in the selection and application of traffic control devices, as well as in the location and design of roads and streets that the devices complement.*

06 *Early in the processes of location and design of roads and streets, engineers should coordinate such location and design with the design and placement of the traffic control devices to be used with such roads and streets.*

07 *Jurisdictions, or owners of site roadways or private toll roads open to public travel, with responsibility for traffic control that do not have an engineer on their staff who is trained and/or experienced in traffic control devices should seek engineering assistance from others, such as the State transportation agency, their county, a nearby large city, or a traffic engineering consultant.*

Support:

08 The provisions of this Manual are intended to be interpreted and applied by engineers or those under the supervision of an engineer. The construction of the provisions of this Manual, therefore, are informed by bases referenced in Paragraphs 9 and 10 of this Section.

09 The National Council of Examiners for Engineering and Surveying (NCEES) has defined the practice of engineering as "any service or creative work requiring engineering education, training, and experience in the application of engineering principles and the interpretation of engineering data to engineering activities that potentially impact the health, safety, and welfare of the public." The practice of engineering is, therefore, subject to regulation in the public interest and is regulated by the State licensing boards in order to safeguard the health, safety, and welfare of the public. The NCEES has defined an engineer as "an individual who is qualified to practice engineering by reason of engineering education, training, and experience in the application of engineering principles and the interpretation of engineering data."

10 The U.S. Office of Personnel Management (OPM) has defined the professional knowledge of engineering as "the

comprehensive, in-depth knowledge of mathematical, physical, and engineering sciences applicable to a specialty field of engineering that characterizes a full 4-year engineering program leading to a bachelor's degree, or the equivalent." The OPM has defined professional ability to apply engineering knowledge as "the ability to (a) apply fundamental and diversified professional engineering concepts, theories, and practices to achieve engineering objectives with versatility, judgment, and perception; (b) adapt and apply methods and techniques of related scientific disciplines; and (c) organize, analyze, interpret, and evaluate scientific data in the solution of engineering problems."

11 Requisite technical training in the application of the principles of the MUTCD might be available from the State's Local Technical Assistance Program (LTAP) for needed engineering guidance and assistance.

## Section 1D.04 Design of Traffic Control Devices

*Guidance:*

01 *Devices should be designed so that features such as size, shape, color, composition, lighting or retroreflection, and contrast are combined to draw attention to the devices; so that size, shape, color, and simplicity of message combine to produce a clear meaning; so that legibility and size combine with placement to provide adequate time for response; and so that uniformity, size, legibility, and reasonableness of the message combine to command respect.*

**Standard:**

01a **Traffic control devices shall comply with the provisions of CVC § 21466.5 for light brilliance so as not to impair the vision of drivers.**

Option:

02 Except for symbols and colors, minor modifications in the specific design elements of a device may be made based on an engineering study or engineering judgment, in accordance with Paragraph 3 of this Section, provided the essential appearance characteristics are preserved.

*Guidance:*

03 *Aspects of the standard design of a traffic control device should not be modified unless there is a demonstrated need in unusual circumstances, based on an engineering study or engineering judgment.*

Support:

04 An example of acceptably modifying the design of a device would be to modify the Combination Horizontal Alignment/Intersection (W1-10) sign to show intersecting side roads on both sides rather than on just one side of the major road within the curve.

## Section 1D.05 Color Code

Support:

01 The following color code establishes general meanings for 11 colors of a total of 13 colors that have been identified as being appropriate for use in conveying traffic control information.

**Standard:**

02 **The general meaning of the 13 colors shall be as follows:**

- **A. Black—regulation**
- **B. Blue—road-user services guidance, tourist information, and evacuation route**
- **C. Brown—recreational and cultural interest area guidance**
- **D. Coral—reserved for future designation (see Paragraph 4 of this Section)**
- **E. Fluorescent Pink—incident management**
- **F. Fluorescent Yellow-Green—pedestrian warning, bicycle warning, playground warning, school bus warning, and school warning**
- **G. Green—indicated movements or actions permitted and direction guidance**
- **H. Light Blue—reserved for future designation (see Paragraph 4 of this Section)**
- **I. Orange—temporary traffic control**
- **J. Purple—restricted to use only by vehicles with registered electronic toll collection (ETC) accounts**
- **K. Red—stop or prohibition**
- **L. White—regulation**
- **M. Yellow—warning**

03 **These colors shall be used only as prescribed for the specific devices or applications throughout this Manual.**

Support:

04 The two colors for which general meanings have not yet been assigned are being reserved for future applications that will be determined only by the FHWA after consultation with the States, the engineering community, and the general public. The meanings described in this Section are of a general nature. More specific assignments of colors are given in the individual Parts of this Manual relating to each class of devices.

05 Tolerance limits for each color are contained in 23 CFR Part 655, Appendix to Subpart F and are available at the Federal Highway Administration's MUTCD Web site at http://mutcd.fhwa.dot.gov.

## Section 1D.06 Public Domain, Copyrights, and Patents

**Standard:**

01 **Traffic control device design or application provisions contained in this Manual shall be in the public domain. Traffic control devices contained in this Manual shall not be protected by a patent, trademark, or copyright, except for the Interstate Shield, 511 Travel Information pictograph, National Scenic Byway graphic, and any items under the stewardship of or owned by FHWA.** **The Caltrans logos consisting of the "CT" symbol and the "Caltrans" logotype are registered service marks and when used on any traffic control device they shall be presented in a uniform and consistent manner as outlined in Caltrans' Deputy Directive DD-33-R1.**

02 **A traffic control device design or application shall not be eligible for official experimentation (see Section 1B.05) or interim approval (see Section 1B.07) unless it is in the public domain. Express abandonment of any and all forms of proprietary protection, such as patents, trademarks, or copyrights, related to the design and application of the traffic control device shall satisfy the requirement for the traffic control device to be in the public domain.**

03 **The requirement for the traffic control device to be in the public domain shall not apply to individual components used in the assembly or manufacture of the traffic control device.**

Support:

04 The limitation on patented, trademarked, or copyrighted traffic control devices applies to the message that the device conveys to the road user. If a patent or other protection covers the device's communication to the road user by virtue of its appearance, audible message, or other aspects of the message conveyed (such as the order in which traffic control signal indications change from green to yellow and red), then the device is considered to be protected and not in the public domain. Such a device is precluded from inclusion in this Manual. The purpose of this limitation is to ensure uniformity of the messaging of individually approved traffic control devices. This limitation does not apply to other aspects of a device (such as internal controls, circuitry, electronics, mechanics, or housing) so long as the appearance, audible message, or other aspects of the message conveyed, including the manner of conveyance, remain freely reproducible by all without infringing on any proprietary rights or interests. This Manual does not prohibit such other aspects of a traffic control device that meet the legal requirements from being protected through patent, trademark, or copyright; and does not restrict components, parts, manufacturing processes, or similar aspects of traffic control devices from being patented or otherwise protected. Examples of acceptable protected traffic control device components or parts might include sign sheeting or retroreflectivity technology, internal electronic components of traffic signal controllers, and breakaway sign support mechanisms.

05 Pictographs, as defined in Section 1C.02, are embedded in traffic control devices, but the pictographs themselves are not considered traffic control devices for the purposes of Paragraph 4 of this Section.

06 Business identification logos, as defined in Section 1C.02, are embedded in traffic control devices, but the logos themselves are not considered traffic control devices for the purposes of Paragraph 4 of this Section.

## Section 1D.07 Advertising

**Standard:**

01 **Traffic control devices or their supports shall not bear any advertising message or any other message that is not related to traffic control.**

Support:

02 Acknowledgment signs (see Section 2H.13), Specific Service signs (see Chapter 2J), and Tourist- Oriented Directional signs (see Chapter 2K) are not considered advertising.

## Section 1D.08 Abbreviations Used on Traffic Control Devices

**Standard:**

01 **When the word messages shown in Table 1D-1 need to be abbreviated in connection with traffic control devices, the abbreviations shown in Table 1D-1 shall be used.**

02 **When the word messages shown in Table 1D-2 need to be abbreviated on a portable changeable message sign, the abbreviations shown in Table 1D-2 shall be used. Unless indicated by an asterisk, these abbreviations shall only be used on portable changeable message signs.**

*Guidance:*

03 *The abbreviations for the words listed in Table 1D-2 that also show a prompt word should not be used on a portable changeable message sign (or on a static sign if indicated in Table 1D-2 by an asterisk) unless the prompt word shown in Table 1D-2 either precedes or follows the abbreviation, as applicable.*

**Standard:**

04 **The abbreviations shown in Table 1D-3 shall not be used in connection with traffic control devices because of their potential to be misinterpreted by road users.**

*Guidance:*

05 *If Table 1D-1 or 1D-2 indicates that more than one abbreviation is allowed for a given word or phrase, the same abbreviation should be used throughout a single jurisdiction.*

06 *Except as otherwise provided in Table 1D-1 or 1D-2 or unless necessary to avoid confusion, periods, commas, apostrophes, question marks, ampersands, and other punctuation marks or characters that are not letters or numerals should not be used in any abbreviation.*

## Section 1D.09 Placement and Operation of Traffic Control Devices

**Standard:**

01 **Before any highway, site roadway open to public travel (see definition in Section 1C.02), detour, or temporary route is opened to public travel, all traffic control devices necessary for safe operation shall be in place. Detour signs shall be erected at the nearest points of detour from that portion of a highway, or from any bridge, which is closed to traffic while under construction or repair per CVC § 21363 and Section 6I.02.**

Option:

02 Temporary traffic control devices, as provided for in Part 6 of this Manual, may be used in place of permanent devices that have yet to be installed for safe operation.

*Guidance:*

03 *Placement of a traffic control device should be within the road user's view so that adequate visibility is provided. To aid in conveying the proper meaning, the traffic control device should be appropriately positioned with respect to the location, object, or situation to which it applies. The location and legibility of the traffic control device should be such that a road user has adequate time to make the proper response in both day and night conditions.*

04 *Traffic control devices should be placed and operated in a uniform and consistent manner as part of maintaining uniformity in traffic control.*

04a *Traffic control devices, which are used on a part-time basis, should be in operation only during the time periods that they are required.*

Support:

05 Inconsistent placement or use of a device can result in disrespect for the device at locations where the device is needed and appropriate.

*Guidance:*

06 *Unnecessary traffic control devices should be removed. The fact that a device is in good physical condition should not be a basis for deferring needed removal or change.*

Support:

07 Section 2A.02 contains information on excessive use of signs and other considerations that can reduce their effectiveness and the effectiveness of other traffic control devices.

## Section 1D.10 Maintenance of Traffic Control Devices

*Guidance:*

01 *Functional maintenance of traffic control devices should be used to determine if certain devices need to be changed*

*to meet current traffic conditions.*

02 *Physical maintenance of traffic control devices should be performed to retain the legibility and visibility of the device, and to retain the proper functioning of the device.*

Support:

03 Clean, legible, properly mounted devices in good working condition command the respect of road users.

## Section 1D.11 Crashworthiness of Traffic Control Devices and Other Roadside Appurtenances

**Standard**:

01 **In accordance with various Sections of this Manual, certain traffic control devices and their supports, and/or related appurtenances shall be crashworthy (see definition in Section 1C.02). Crashworthiness provisions in this Manual shall apply to all streets, highways, and site roadways open to public travel.**

Support:

02 Roadside appurtenances include permanent and portable sign supports, other permanent or temporary traffic control devices, and other roadside fixtures that are not traffic control devices, such as longitudinal barriers, bridge railings, and crash cushions, within the clear zone. Crashworthiness of a device or appurtenance is determined by nationally established standards such as the "Manual for Assessing Safety Hardware" (MASH), 2016, AASHTO. Information on the FHWA's policy on crashworthiness of devices on the National Highway System and other roadways is available at the FHWA Office of Safety Web site at https://safety.fhwa.dot.gov/roadway_dept/countermeasures/reduce_crash_severity/policy_memo_guidance.cfm.

03 Refer to Caltrans' Traffic Safety Systems Manual and Supplement to Traffic Safety Systems Manual for uniform practices and guidance for the traffic safety systems. Refer to Section 1A.05 for information regarding this publication.

# Table 1D-1. Acceptable Abbreviations

## General Abbreviations

| Word Message | Standard Abbreviation |
|---|---|
| Afternoon / Evening | PM |
| Alternate | ALT |
| AM Radio | AM |
| Avenue | Ave, Av* |
| Bicycle(s) | BIKE, BIKES |
| Boulevard | Blvd* |
| Bridge | (See Table 1D-2) |
| CB Radio | CB |
| Center | Ctr** |
| Circle | Cir* |
| Civil Defense | CD |
| Compressed Natural Gas | CNG |
| Court | Ct* |
| Crossing (other than highway-rail) | X-ING |
| Drive | Dr* |
| East | E |
| Electric Vehicle | EV |
| Expressway | Expwy* |
| Feet | FT |
| FM Radio | FM |
| Freeway | Fwy* |
| Hazardous Material(s) | HAZMAT, HAZMATS |
| High Occupancy Vehicle(s) | HOV |
| Highway | Hwy* |
| Hospital | HOSP |
| Hour(s) | HR, HRS |
| Information | INFO |
| Inherently Low Emission Vehicle | ILEV |
| International | Intl |
| Interstate | (See Table 1D-2) |
| Junction / Intersection | JCT |
| Lane | (See Table 1D-2) |
| Liquified Petroleum Gas | LP-GAS |
| Maximum | MAX |

| Word Message | Standard Abbreviation |
|---|---|
| Mile(s) | MI |
| Miles per Hour | MPH |
| Minimum | MIN |
| Minute(s) | MIN, MINS |
| Morning / Late Night | AM |
| Mount | Mt** |
| Mountain | Mtn** |
| National | Natl** |
| North | N |
| Northeast | NE |
| Northwest | NW |
| Parkway | Pkwy* |
| Pedestrian(s) | PED, PEDS |
| Place | Pl* |
| Pounds | LBS |
| Road | Rd* |
| Saint | St** |
| South | S |
| Southeast | SE |
| Southwest | SW |
| State, county, or other non-US or non-Interstate numbered route | (See Table 1D-2) |
| Street | St* |
| Telephone | PHONE |
| Temporary | TEMP |
| Terrace | Ter* |
| Thruway | Thwy* |
| Ton(s) | T |
| Trail | Tr* |
| Turnpike | Tpk* |
| Two-Way Intersection, Two-Way Traffic | 2-WAY |
| US Numbered Route | (See Table 1D-2) |
| West | W |

## Days of the Week

| Day | Standard Abbreviation |
|---|---|
| Sunday | SUN |
| Monday | MON |
| Tuesday | TUES*** |
| Wednesday | WED |

| Day | Standard Abbreviation |
|---|---|
| Thursday | THURS*** |
| Friday | FRI |
| Saturday | SAT |

* Abbreviation shall not be used for any application other than the name of a roadway. See Table 2D-3 for complete list of street name descriptors. Examples include: Bayshore Fwy, Cross County Hwy, Mid-County Pkwy

** Abbreviation shall not be used for any application other than as a descriptor or title within a proper name. Examples include: Vestal Ctr, Mt Hope, Pocono Mtn, Eldorado Natl Forest, St Louis

*** Tuesday and Thursday may be abbreviated on a Changeable Message Sign (CMS) to TUE and THU, respectively, when the number of Characters in a message to be displayed cannot be practically reduced through rewording to fit the number of characters supported by the CMS, such as might occur at times on a portable CMS.

Note: Abbreviations shown in upper- and lower-case lettering may be in all upper-case lettering when displayed on a changeable message sign with lower resolution that will not accommodate lower-case letter forms. See Chapter 2L of this Manual.

## Table 1D-2. Abbreviations that Shall be Used Only for Temporary Messages on Portable Changeable Message Signs (Sheet 1 of 2)

| Word Message | Standard Abbreviation | Prompt Word Preceding the Abbreviation | Prompt Word Following the Abbreviation | Example |
|---|---|---|---|---|
| Access | ACCS | — | Road | ACCS ROAD |
| Ahead | AHD | Fog | — | FOG AHD |
| Blocked | BLKD | Lane | — | 2 LANES BLKD |
| Bridge | BR* | [Name] | — | BAY BR |
| Cannot | CANT | — | — | — |
| Center | CNTR | — | Lane | CNTR LANE, CNTR LN |
| Chemical | CHEM | — | Spill | CHEM SPILL |
| Condition | COND | Traffic | — | TRAFFIC COND |
| Congested | CONG | Traffic | — | TRAFFIC CONG AHD |
| Construction | CONST | — | Ahead | CONST AHEAD |
| Crossing | XING | — | — | PED XING |
| Do Not | DONT | — | — | — |
| Downtown | DWNTN | — | Traffic | DWNTN TRAFFIC |
| Eastbound | EAST | Route Number, Road Name | — | I-4 EAST |
| | E-BND | — | Lane, Traffic | E-BND LANE |
| Emergency | EMER | — | — | EMER VEHICLES |
| Entrance, Enter | ENT | — | — | ENT TO I-90 |
| Exit | EX | Next | — | NEXT EX |
| Express | EXP | — | Lane | EXP LANE OPEN |
| Frontage | FRNTG | — | Road | FRNTG RD |
| Hazardous | HAZ | — | Driving | HAZ DRIVING |
| Highway-Rail Grade Crossing | RR XING | — | — | RR XING |
| Interstate | I-* | — | [Number] | I-80 |
| It Is | ITS | — | — | — |
| Lane(s) (travel lanes of a highway) | LN, LNS | Right, Left, Center | — | LEFT LN ONLY<br>2 RIGHT LNS |
| Left | LFT | Keep, Next | — | NEXT LFT |
| | LFT | — | Lane | LFT LANE |
| Local | LOC | — | Traffic | LOC TRAFFIC ONLY |
| Lower | LWR | — | Level | LWR LEVEL |
| Maintenance | MAINT | — | — | ROAD MAINT |
| Major | MAJ | — | Crash | MAJ CRASH |
| Minor | MNR | — | Crash | MNR CRASH |
| Normal | NORM | — | — | — |
| Northbound | NORTH | Route Number, Road Name | — | US 1 NORTH |
| | N-BND | — | Lane, Traffic | N-BND TRAFFIC |
| Oversized | OVRSZ | — | Load | OVRSZ LOAD |
| Parking | PKING | — | — | — |
| Pavement | PVMT | Icy | — | ICY PVMT |
| Prepare | PREP | — | To Stop | PREP TO STOP |
| Quality | QLTY | Air | — | AIR QLTY |
| Right | RT | Keep, Next | — | KEEP RT |
| | RT | — | Lane | RT LANE |
| Road Work | RD WK | — | Ahead, [Distance] | RD WK 1 MILE |
| Route | RTE | Best | — | BEST RTE |
| Service | SERV | — | — | SERV AREA OPEN |
| Shoulder | SHLDR | — | — | SHLDR CLOSED |

## Table 1D-2. Abbreviations that Shall be Used Only for Temporary Messages on Portable Changeable Message Signs (Sheet 2 of 2)

| Word Message | Standard Abbreviation | Prompt Word Preceding the Abbreviation | Prompt Word Following the Abbreviation | Example |
|---|---|---|---|---|
| Slippery | SLIP | — | — | — |
| Southbound | SOUTH | Route Number, Road Name | — | CA 1 SOUTH |
| | S-BND | — | Lane, Traffic | S-BND TRAFFIC |
| Speed | SPD | — | — | SPD LIMIT |
| State, County, or other non-U.S. or non-Interstate numbered route | [Route Abbreviation determined by highway agency]* | — | [Number]** | NY 7, CR 43 |
| Tires With Lugs | LUGS | — | — | — |
| Traffic | TRAF | — | — | — |
| Travelers | TRVLRS | — | — | — |
| Two-Wheeled Vehicles | CYCLES | — | — | — |
| Upper | UPR | — | Level | UPR LEVEL |
| U.S. Numbered Route | US* | — | [Number]** | US 202 |
| Vehicle(s) | VEH, VEHS | — | — | — |
| Warning | WARN | — | — | — |
| Westbound | WEST | Route Number, Road Name | — | IL 53 WEST |
| | W-BND | — | Lane, Traffic | W-BND LANES |
| Will Not | WONT | — | — | — |

* Abbreviation, when accompanied by the prompt word, may be used on traffic control devices other than portable message signs. See Table 1D-1 for uses and format.

** A space and no hyphen shall be placed between the abbreviation and the number of the route.

Note: See Chapter 2L of this Manual for additional information on changeable message signs.

## Table 1D-3. Unacceptable Abbreviations

| Abbreviation | Intended Word | Common Misinterpretation |
|---|---|---|
| ACC | Accident | Access (Road) |
| CLRS | Clears | Colors |
| DLY | Delay | Daily |
| FDR | Feeder | Federal |
| L | Left | Lane (Merge) |
| LT | Light (Traffic) | Left |
| PARK | Parking | Park |
| POLL | Pollution (Index) | Poll |
| RED | Reduce | Red |
| STAD | Stadium | Standard |
| WRNG | Warning | Wrong |

*THIS PAGE INTENTIONALLY LEFT BLANK*

# PART 2
# SIGNS

## CHAPTER 2A. GENERAL

### Section 2A.01 Function and Purpose of Signs

Support:

01 This Manual contains Standards, Guidance, and Options for the signing of all types of highways, and site roadways open to public travel (refer to definition in Section 1C.02). The functions of signs are to provide regulations, warnings, and guidance information for road users. Words, symbols, and arrows are used to convey the messages. Signs are not typically used to confirm rules of the road (see Paragraph 4 of this Section).

02 Detailed sign requirements are located in the following Chapters of Part 2:

Chapter 2B—Regulatory Signs, Barricades, and Gates
Chapter 2C—Warning Signs and Object Markers
Chapter 2D—Guide Signs for Conventional Roads
Chapter 2E—Guide Signs for Freeways and Expressways
Chapter 2F—Toll Road Signs
Chapter 2G—Preferential and Managed Lane Signs
Chapter 2H—General Information Signs
Chapter 2I—General Service Signs
Chapter 2J—Specific Service Signs
Chapter 2K—Tourist-Oriented Directional Signs
Chapter 2L—Changeable Message Signs
Chapter 2M—Recreational and Cultural Interest Area Signs
Chapter 2N—Emergency Management Signs

03 Definitions and acronyms that are applicable to signs are provided in Chapter 1C.

*Guidance:*

04 *Permanent signs should not be used on a frequent basis to confirm rules of the road or statutes. Instead, when determined necessary to advise of new regulations as part of an educational campaign, temporary signs or messages should be used instead of permanent signs. These temporary signs or messages should be used sparingly and only at strategic locations, and should be considered only as a supporting element of a larger educational campaign rather than as the primary source of notification. If engineering judgment determines a need for a permanent sign to distinguish between differing requirements of similar statutes in different jurisdictions, then a sign should be located in the vicinity of the jurisdictional boundary, and should be located away from warning, directional, and higher-priority regulatory signs, so as not to contribute to sign clutter (see Section 2A.20).*

### Section 2A.02 Standardization of Application

Support:

01 It is recognized that urban traffic conditions differ from those in rural environments, and in many instances signs are applied and located differently. Where pertinent and practical, this Manual sets forth separate recommendations for urban and rural conditions.

02 Low-volume rural roads typically include access to rural residences, agricultural, recreational, resource management and development (such as mining, logging, and grazing), and local roads in rural areas. On low-volume rural roads, the use of traffic control devices is limited to essential information regarding regulation, warning, and guidance. On low-volume rural roads, it is important to consider the needs of unfamiliar road users for occasional, recreational, and commercial transportation purposes.

*Guidance:*

03 *Signs should be used only where justified by engineering judgment or studies, as provided in Section 1D.03.*

04 *Results from traffic engineering studies of physical and traffic safety or operational factors should indicate the locations where signs are deemed necessary or desirable.*

05 *Roadway geometric design and sign application should be coordinated so that signing can be effectively placed to give the road user any necessary regulatory, warning, guidance, and other information.*

**Standard:**

06 **Each standard sign (see Paragraph 1 of Section 2A.04) shall be displayed only for the specific purpose as prescribed in this Manual. Before any new highway, site roadway open to public travel (see definition in Section 1C.02), detour, or temporary route is opened to public travel, all necessary signs shall be in place. Signs required by road conditions or restrictions shall be removed when those conditions cease to exist or the restrictions are withdrawn.**

## Section 2A.03 Classification of Signs

**Standard:**

01 **Signs shall be defined by their function as follows:**

**A. Regulatory signs give notice of traffic laws or regulations.**

**B. Warning signs give notice of a situation that might not be readily apparent.**

**C. Guide signs show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, or cultural information.**

Support:

01a Construction signs can be Warning, Regulatory, or Guide signs. Construction signs are included in Part 6.

02 Barricades are described in Sections 2B.75 and 6K.07.

03 Gates are described in Section 2B.76.

04 Object markers are described in Section 2C.70.

## Section 2A.04 Design of Signs

Support:

01 This Manual shows many standard signs and object markers approved for use on streets, highways, bikeways, and pedestrian crossings. Standard signs and object markers have a standardized design, shape, background, and legend as shown in this Manual.

02 In the provisions for individual standard signs and object markers, the general appearance of the legend, color, and size are shown in the accompanying tables and illustrations, and are not always detailed in the text.

03 Detailed drawings of standard signs, object markers, alphabets, symbols, and arrows (see Figure 2D- 3) are contained in the "Standard Highway Signs" publication and the California Sign Specifications. Section 1A.05 contains information regarding this publication.

04 The basic requirements of a sign are that it be legible to those for whom it is intended and that it be understandable in time to allow for a proper response. Desirable attributes include:

A. High visibility by day and night; and

B. High legibility (adequately-sized letters, symbols, or arrows, and a short legend for quick comprehension by a road user approaching a sign).

05 Standardized colors and shapes are specified so that the several classes of traffic signs can be promptly recognized. Simplicity and uniformity in design, position, and application are essential for a sign to be effective.

**Standard:**

06 **The term legend shall include all word messages and symbol and arrow designs that are intended to convey specific meanings.**

07 **Uniformity in design shall include shape, color, dimensions, legends, letter style, borders, and illumination or retroreflectivity.**

08 **Standardization of these designs does not preclude further improvement by minor modifications to the orientation of symbols (see Section 2A.09), width of borders, or layout of word messages, but all shapes and colors shall be as indicated.**

09 **All symbols (see Section 2A.09) shall be unmistakably similar to, or mirror images of, the adopted symbol signs, all of which are shown in the "Standard Highway Signs" publication (see Section 1A.05). Symbols and colors shall not be modified unless otherwise provided in this Manual. All symbols, colors, or other design features for signs not shown in the "Standard Highway Signs" publication (see Section 1A.05) shall follow the procedures for experimentation and change described in Chapter 1B.**

10 **Where a standard word message is applicable, the wording shall be as provided in this Manual.**

11 **In situations where word messages are necessary other than those provided in this Manual (see Paragraph 15 of this Section), the signs shall be of the same shape and color as standard signs of the same functional type.**

12 **Where the legend of a standard sign is a symbol or a combination of a symbol and words, an alternative word legend shall not be allowed in place of the symbol, except as otherwise provided in this Manual.**

13 **Where a standard sign provided in this Manual or the "Standard Highway Signs" publication (see Section 1A.05) is applicable, an alternative legend sign or alternative sign design shall not be allowed in place of the standardized legend or design except as provided in this Manual.**

14 **Where a standard sign provided in this Manual or the "Standard Highway Signs" publication (see Section 1A.05) is applicable, but the legend is variable, such as for destination names, an alternative sign design or dimensions shall not be allowed in place of the standardized design for the non-variable elements except as provided in this Manual.**

Option:

15 ~~State and local highway agencies~~ Caltrans (in accordance with CVC § 21400) and owners of site roadways open to public travel may develop special word legend signs in situations where engineering judgment determines roadway conditions make it necessary to provide road users with additional regulatory, warning, or guidance information, such as when road users need to be notified of special regulations or warned about a situation that might not be readily apparent. Unlike colors that have not been assigned or symbols that have not been approved for signs, new word legend signs may be used without the need for experimentation.

**Standard:**

15a **Except as noted in the Option below, in accordance with CVC § 21401, highway agencies shall not develop word message signs and plaques. Only word message signs and plaques conforming to FHWA's "Standard Highway Signs" publication or the Caltrans standards and specifications shall be placed on streets and highways. Any new word message signs or plaques that do not conform to these standards must be submitted to the California Traffic Control Devices Committee (CTCDC) for possible inclusion in the CA MUTCD and adoption in the Caltrans standards and specifications.**

Option:

15b Local agencies may develop place/facility name or day, date, time portion of the word message on signs to notify road users of special events/circumstances or to warn road users of a situation that might not be readily apparent. Unlike symbol signs and colors, these place/facility name or day, date, time modified word message signs may be used without the need for experimentation.

Support:

16 The message conveyed by some special word legend signs might be unclear to the road user. Although experimentation is not required for such word legends, they might still warrant an evaluation to determine comprehension or possible misinterpretation of the intended message by the road user.

17 Scanning graphics are graphics designed for scanning by machine, and include bar codes, quick- response (QR) codes or other matrix bar-code formats, or similar graphics.

**Standard:**

18 **Unless otherwise provided in this Manual for a specific sign or as provided in Paragraph 19 of this Section, telephone numbers, Internet addresses, e-mail addresses, domain names, uniform resource locators (URL), metadata tags ("hash-tags"), and scanning graphics (see Paragraph 17 of this Section) for the purpose of obtaining information (other than those for maintenance or inventory purposes per the provisions of Paragraphs 21 through 23 of this Section) shall not be displayed on any sign, plaque, sign panel, or changeable message sign.**

Option:

19 Internet addresses, e-mail addresses, telephone numbers, scanning graphics, or other graphics for the purpose of conveying information may be displayed on the face of signs, plaques, sign panels, and changeable message signs that are oriented away from or otherwise not readily visible to operators of motor vehicles but rather are intended for viewing only by pedestrians, occupants of parked vehicles, and driving automation systems.

**Standard:**

20 **Pictographs (see definition in Section 1C.02) shall not be displayed on signs except as specifically provided in this Manual for a particular type of sign. Pictographs shall be simple, dignified, and devoid of any advertising and shall not contain any scanning graphics (see Paragraph 17 of this Section) for the purpose of conveying information. When used to represent a political jurisdiction (a State, county, or municipal corporation) the pictograph shall be the official designation adopted by the jurisdiction, except as provided otherwise in this**

**Manual. When used to represent any other type of jurisdiction, the pictograph shall be the official designation adopted by the jurisdiction. When used to represent a college or university, the pictograph shall be the official seal adopted by the institution. College or university pictographs shall not include pictorial representations of university or college programs, or athletic mascots.**

21 **No items other than official traffic control signs, inventory stickers or decals, sign installation dates, manufacturer name, sign sizes, sign designations, anti-vandalism stickers, inventory or maintenance codes, and maintenance-related scanning graphics shall be mounted on the back of a sign.**

Option:

22 The date of fabrication, sign designation, sign size, and/or manufacturer name may be displayed on the front of a sign face in accordance with the provisions of Paragraph 23 of this Section.

**Standard:**

23 **If displayed on the sign face, the date of fabrication, sign designation, sign size, manufacturer name, or similar maintenance and inventory information shall be completely within the border or inset along the bottom edge of the sign. The letter height or scanning graphic shall not exceed ¾ of the width of the border or inset or, if no border is used, shall not exceed 1.75 inches and shall be within 2 inches of the edge of the sign. The color of the lettering within the border shall be the same as the color of the sign background. The color of the lettering or scanning graphic within the inset shall be the same as the color of the sign border. For changeable message signs or blank-out signs, such information, if displayed, shall be embossed in a non-contrasting color in the housing of the sign.**

Support:

24 Refer to FHWA's List of Known Errors for error in Paragraph 23 text. Refer to Section 1A.04 for more details.

*Guidance:*

25 *If no border is used, the letter height or scanning graphic should be 11% of the legend.*

## Section 2A.05 Shapes

**Standard:**

01 **Particular shapes, as shown in Table 2A-1, shall be used exclusively for specific signs or a series of signs, unless otherwise provided in this Manual for a particular sign or class of signs.**

02 **The Crossbuck is a shape exclusive to the Grade Crossing (R15-1) sign and shall not be obscured by mounting a different shape sign on the back of the Crossbuck (see Section 8B.03).**

*Guidance:*

03 *Shapes that are exclusive to a particular sign (such as an octagon for STOP, a pennant for NO PASSING ZONE, or a circle for Railroad Advance) should not be obscured by another sign mounted on the back of the same assembly protruding or extending beyond the edge of the sign with the exclusive shape. The following methods should be considered in lieu of mounting a sign on the back of another sign that would obscure the exclusive shape of the sign:*

- *A. Install the signs on separate mountings to maintain the exclusive shape.*
- *B. Increase the size of the sign with the exclusive shape so the sign installed on the back does not obscure its shape.*
- *C. Increase the mounting height of the sign with the exclusive shape to allow the installation of a back- mounted sign below the bottom edge while still ensuring the minimum required mounting height for the lower sign.*

04 *Where the lateral space available in which to install a standard sign is constrained, such as mounting on a narrow median barrier or adjacent to a retaining wall, the following methods should be considered to maintain the shape of the sign:*

- *A. Angle the sign up to 45 degrees toward the roadway while still maintaining adequate legibility.*
- *B. Install the sign at a different location that still provides adequate advance warning, supplementing the sign with a Distance plaque (see Section 2C.61), if appropriate*
- *C. Reduce the size of the sign, but supplement it with a duplicate sign on the opposite side of the roadway (see Section 2A.11).*
- *D. In addition to either angling or reducing the size of the sign, supplement it with a duplicate warning sign and Distance plaque at an upstream location.*
- *E. Mount the sign asymmetrically on the sign support, such as when the support is mounted on a bridge parapet or railing, such that the edge of the sign does not overhang the roadway, shoulder, or other areas used by*

*bicyclists or pedestrians.*

Option:

05 Where the shape of the sign cannot be maintained due to lateral constraints, the following methods may be considered:

A. For warning signs or other types of signs displayed in a horizontally-oriented rectangle, the legend may be displayed in a vertically-oriented rectangle.
B. When mounted overhead, the word legend for a standard warning sign may be displayed in a horizontally-oriented rectangle.

Support:

06 Provisions for mounting height of signs that overhang any portion of the traveled way are contained in Section 2A.15.

07 Provisions for lateral offset are contained in Section 2A.16.

**Standard:**

08 **Modifications to sign shapes, such as cutting off the left and right points of a diamond, shall not be allowed.**

Option:

09 Where the methods described in Paragraph 3 of this Section are impracticable, the legend of the warning sign may be displayed in a vertically-oriented rectangle.

## Section 2A.06 Colors

**Standard:**

01 **The colors to be used on signs and their specific uses on signs shall be as provided in the applicable Sections of this Manual. The color coordinates and values shall be as described in 23 CFR, Part 655, Subpart F, Appendix.**

02 **Colors (see Section 1D.05) shall be consistent across the face of a sign or a sign panel. Color gradients (smooth or defined gradual transitions either within a color or transition to another color) shall not be allowed, except as specifically provided in Section 2J.03 for business identification sign panels.**

Support:

03 Common uses of sign colors are shown in Table 2A-2. Color schemes on specific signs are shown in the illustrations located in each applicable Chapter.

04 Whenever white is specified in this Manual or in the "Standard Highway Signs" publication (see Section 1A.05) as a color, it is understood to include silver-colored retroreflective coatings or elements that reflect white light.

05 The colors coral and light blue are being reserved for uses that will be determined in the future by the Federal Highway Administration.

06 Information regarding color coding of destinations on guide signs, including community wayfinding signs, is contained in Chapter 2D.

Option:

07 The approved fluorescent version of the standard red, yellow, green, or orange color may be used as an alternative to the corresponding standard color.

08 The fluorescent version of red, yellow, green or orange colors provide higher conspicuity than the standard colors, especially during twilight.

## Section 2A.07 Dimensions

Support:

01 The "Standard Highway Signs" publication (see Section 1A.05) prescribes design details for different sizes of each sign or plaque depending on the type of traffic facility, including bikeways. Smaller sizes are designed to be used on bikeways and some other off-road applications. Larger sizes are designed for use on freeways and expressways, and can also be used in oversized applications to enhance road user safety and convenience on other facilities, especially on multi-lane divided highways and on undivided highways having five or more lanes of traffic and/or high speeds. The intermediate sizes are designed to be used on other highway types. Minimum sizes of signs and plaques for specific applications are prescribed in the various sign size tables in each Chapter of this Manual.

**Standard:**

02 **The sign dimensions prescribed in the sign size tables in the various Parts and Chapters in this Manual and in the "Standard Highway Signs" publication (see Section 1A.05) and Caltrans' California Sign Specifications shall be**

**used unless engineering judgment determines that other sizes are appropriate in accordance with the following. Except as provided in Paragraph 3 of this Section, where engineering judgment determines that sizes smaller than the prescribed dimensions are appropriate for use, the sign dimensions shall not be less than the minimum dimensions specified in this Manual. The sizes shown in the Minimum columns that are smaller than the sizes shown in the Conventional Road columns in the various sign size tables in this Manual shall only be used on low-speed roadways, alleys, site roadways open to public travel (refer to definition in Section 1C.02), and on low-volume rural roads with operating speeds of 30 mph or less; and only where the reduced legend size would be adequate for the regulation or warning or where physical conditions preclude the use of larger sizes.**

Option:

03 For alleys with restrictive physical conditions and vehicle use that limits installation of the Minimum size sign (or the Conventional Road size sign if no Minimum size is shown), both the sign height and the sign width may be decreased by up to 6 inches.

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *The sizes shown in the Freeway and Expressway columns in the various sign size tables in this Manual should also be used for other higher-speed applications on conventional roads, based upon engineering judgment, to provide larger signs for increased visibility and recognition.*

05 *The sizes shown in the Oversized columns in the various sign size tables in this Manual should be used for those special applications where speed, volume, or other factors result in conditions where increased emphasis, improved recognition, or increased legibility is needed, as determined by engineering judgment or study.*

06 *Except as provided in Paragraph 7 of this Section, and where specifically prohibited in this Manual, increases above the minimum prescribed sizes should be used where greater legibility or emphasis is needed. If signs larger than the prescribed sizes are used, the overall sign dimensions should be increased in 6-inch increments.*

**Standard:**

07 **Where a maximum allowable sign size is prescribed, increases in sign size above the maximum size shall not be allowed.**

08 **Where engineering judgment determines that sizes that are different from the minimum prescribed dimensions are appropriate for use, standard shapes and colors shall be used. Standard proportions shall be retained as much as practicable.**

*Guidance:*

09 *Except where specifically prohibited in this Manual, when supplemental plaques are installed with larger-sized signs, a corresponding increase in the size of the plaque and its legend should also be made. The resulting plaque size should be approximately in the same relative proportion to the larger-sized sign as the conventional-sized plaque is to the conventional-sized sign.*

10 *At intersections where the left-turn lane treatment results in channelized offset left-turn lanes (e.g., a parallel or tapered left-turn lane between two medians), the size of regulatory signs, if used, should be of the next higher roadway classification, if feasible, as shown in Table 2B-1 and 2B-1(CA).*

## Section 2A.08 Word Messages

**Standard:**

01 **Except as otherwise provided in this Manual, all word messages shall be aligned horizontally across a sign, reading left to right.**

02 **Except as provided in Section 2A.04, all word messages shall use standard wording as shown in this Manual and in the "Standard Highway Signs" publication (see Section 1A.05).**

03 **All sign lettering, numerals, and other characters shall be of the Standard Alphabets as provided in the "Standard Highway Signs" publication (see Section 1A.05), unless otherwise provided in this Manual.**

04 **The sign lettering for names of places, streets, and highways shall be composed of a combination of lower-case letters with initial upper-case letters. The sign lettering for other legends shall be composed of upper-case letters, unless otherwise provided in this Manual for a particular sign or type of message.**

05 **Except as provided in Chapter 2E of this Manual, when a mixed-case legend is used, the nominal loop height**

**of the lower-case letters shall be ¾ of the height of the initial upper-case letter.**

06 **The unique letter forms for each of the Standard Alphabet series shall not be stretched, compressed, warped, or otherwise manipulated.**

Support:

07 Section 2D.03 contains information regarding the acceptable methods of modifying the length of a word for a given letter height and series.

*Guidance:*

08 *Word messages should be as brief as practical to convey a clear, simple meaning, and the lettering should be large enough to provide the necessary legibility distance. A minimum specific ratio of 1 inch of letter height per 30 feet of legibility distance should be used.*

09 *Abbreviations (see Section 1D.08) should be kept to a minimum, except as otherwise prescribed in this Manual.*

10 *Word messages should not contain periods, apostrophes, question marks, ampersands, or other punctuation or characters that are not letters, numerals, or hyphens unless necessary to avoid confusion.*

Support:

11 Diacritical marks on words or names that are adapted to English are not normally needed on signs for comprehension or navigational purposes.

Option:

12 A legend in a secondary language, in addition to English, may be displayed on the face of signs, plaques, sign panels, and changeable message signs that are oriented away from or otherwise not readily visible to operators of motor vehicles, but rather are intended for viewing only by pedestrians and occupants of parked vehicles.

*Guidance:*

13 *The solidus (slanted line or forward slash) is intended to be used for fractions only and should not be used to separate words on the same line of legend. Instead, a hyphen should be used for this purpose, such as "TRUCKS - BUSES."*

**Standard:**

14 **Fractions shall be displayed with the numerator and denominator diagonally arranged about the solidus. The overall height of the fraction is measured from the top of the numerator to the bottom of the denominator, each of which is vertically aligned with the upper and lower ends of the solidus. The overall height of the fraction shall be determined by the height of the numerals within the fraction, and shall be 1.5 times the height of an individual numeral within the fraction.**

15 **Except as otherwise provided in this Manual, distances shall be displayed on signs using fractions of a mile rather than decimals.**

Support:

16 The "Standard Highway Signs" publication (see Section 1A.05) contains details regarding the layouts of fractions on signs.

*Guidance:*

17 *When initials are used to represent an abbreviation for separate words (such as "U S" for a United States route), the initials should be separated by a space of between ½ and ¾ of the letter height of the initials.*

18 *When an Interstate route is displayed in text form instead of using the route shield, a hyphen should be used for clarity, such as "I-50."*

Support:

19 Letter height is expressed in terms of the height of an upper-case letter. For mixed-case legends (those composed of an initial upper-case letter followed by lower-case letters), the height of the lower-case letters is derived from the specified height of the initial upper-case letter based on a prescribed ratio. Letter heights for mixed-case legends might be expressed in terms of both the upper- and lower-case letters, or in terms of the initial upper-case letter alone. When the height of a lower-case letter is specified or determined from the prescribed ratio, the reference is to the nominal loop height of the letter. The term loop height refers to the portion of a lower-case letter that excludes any ascending or descending stems or tails of the letter, such as with the letters "d" or "q." The nominal loop height is equal to the actual height of a non-rounded lower-case letter whose form does not include ascending or descending stems or tails, such as the letter "x." The rounded portions of a lower-case letter extend slightly above and below the baselines projected from the top and bottom of such a non-rounded letter so that the appearance of a uniform letter height within a word is achieved. The actual loop height of a rounded lower-case letter is slightly greater than the nominal loop height and this

additional height is excluded from the expression of the lower-case letter height.

## Section 2A.09 Symbols

**Standard:**

01 **Symbol designs shall in all cases be unmistakably similar to those shown in this Manual, and in the "Standard Highway Signs" publication (see Section 1A.05).**

Option:

02 Although most standard symbols are oriented facing left, mirror images of these symbols may be used where the reverse orientation might better convey to road users a direction of movement.

Support:

03 New symbol designs are adopted by the Federal Highway Administration based on research evaluations to determine road user comprehension, sign conspicuity, and sign legibility.

03a The use of symbols to word messages is preferred.

Option:

04 State and/or local highway agencies may conduct research studies to determine road user comprehension, sign conspicuity, and sign legibility in compliance with the provisions for official experimentation (see Section 1B.05) when a new symbol design is under consideration.

Support:

05 Sometimes a change from word messages to symbols requires significant time for public education and transition. Therefore, this Manual sometimes includes the practice of using educational plaques to accompany new symbol signs.

*Guidance:*

06 *New standard warning or regulatory symbol signs should be accompanied by an educational plaque where engineering judgment determines that the plaque will improve road user comprehension during the transition from word message to symbol signs.*

Option:

07 Educational plaques may be left in place as long as they are in serviceable condition.

**Standard:**

08 **A symbol used for a given category of signs (regulatory, warning, or guide) shall not be used for a different category of signs, except as specifically authorized in this Manual.**

09 **A recreational and cultural interest area symbol (see Chapter 2M) shall not be used on streets or highways outside of recreational and cultural interest areas.**

10 **A recreational and cultural interest area symbol (see Chapter 2M) shall not be used on any regulatory or warning sign on any street, road, or highway.**

Support:

11 Section 2M.07 contains provisions for the use of recreational and cultural interest area symbols to indicate prohibited activities or items in non-road applications.

## Section 2A.10 Sign Borders

**Standard:**

01 **Unless otherwise provided, signs shall have a border of the same color as the legend in order to outline their distinctive shape and thereby give them easy recognition and a finished appearance.**

02 **The corners of all sign borders shall be rounded, except for STOP signs.**

*Guidance:*

03 *A dark border on a light background should be set in from the edge, while a light border on a dark background should extend to the edge of the sign. A border for 30-inch signs with a light background should be from ½ to ¾ inch in width, ½ inch from the edge. For similar signs with a light border, a width of 1 inch should be used. For other sizes, the border width should be of similar proportions, but should not exceed the stroke-width of the major lettering of the sign. On signs exceeding 72 x 120 inches in size, the border should be 2 inches wide. On unusually large signs with oversized letter heights, route shields, or other legend elements, the border should be 2.5 inches wide and should not exceed 3 inches in width. Except for STOP signs and large guide signs and as otherwise provided in Section 2E.14, the corners of the sign should be rounded to a radius that is concentric with that of the border.*

Support:

04 Section 2A.12 contains information regarding the use of light-emitting diode (LED) units within the border of a sign.

## Section 2A.11 Enhanced Conspicuity for Standard Signs

Option:

01 Based upon engineering judgment, where the improvement of the conspicuity of a standard regulatory, warning, or guide sign is desired, any of the following methods may be used, as appropriate, to enhance the sign's conspicuity (see Figure 2A-1):

A. Increasing the size of a standard regulatory, warning, or guide sign. Refer to Paragraph 7 of Section 2A.07 for maximum sign sizes.
B. Dual signing of a standard regulatory, warning, or guide sign by adding a second identical sign on the left-hand side of the roadway at the same location.
C. Adding a solid yellow or fluorescent yellow rectangular header panel above a standard regulatory sign, with the width of the panel corresponding to the width of the standard regulatory sign. A legend of "NOTICE," "STATE LAW," or other appropriate text may be added in black letters within the header panel for a period of time determined by engineering judgment.
D. Adding a NEW plaque (see Section 2C.60) above a new standard regulatory or warning sign, for a period of time in accordance with Paragraph 3 of this Section, to call attention to the new sign.
E. Adding one or more red or orange flags (cloth or retroreflective sheeting) above a standard regulatory or warning sign, with the flags oriented at 45 degrees to the vertical.
F. Adding a solid yellow, a solid fluorescent yellow, or a diagonally-striped black and yellow (or black and fluorescent yellow) strip of retroreflective sheeting at least 3 inches wide around the perimeter of a standard warning sign. This may be accomplished by affixing the standard warning sign on a background that is 6 inches larger than the size of the standard warning sign.
G. Adding a Warning Beacon (see Section 4S.03) to a standard regulatory (other than a STOP, DO NOT ENTER, WRONG WAY, or a Speed Limit sign), warning, or guide sign.
H. Adding a Speed Limit Sign Beacon (see Section 4S.04) to a standard Speed Limit sign.
I. Adding a Stop Beacon (see Section 4S.05) to a STOP, DO NOT ENTER, or WRONG WAY sign.
J. Adding a rectangular rapid-flashing beacon (see Chapter 4L) to a Pedestrian, School, or Trail warning sign at an uncontrolled marked crosswalk.
K. Adding light-emitting diode (LED) units within the symbol, legend, or border of a standard regulatory, warning, or guide sign, as provided in Section 2A.12.
L. Adding a strip of retroreflective material to the sign support in accordance with the provisions of Paragraph 5 of this Section.
M. Using other methods that are specifically allowed for certain signs as described elsewhere in this Manual.
N. For applicable sign types and colors, using a sign with its color in a fluorescent version. (Refer to Section 2A.06).
O. Repeat sets of warning signs to give notice of a situation that might not be readily apparent on high-speed roads.

Support:

02. Sign conspicuity improvements can also be achieved by removing non-essential and illegal signs from the right-of-way (see Section 1D.02), and by relocating signs to provide better spacing. Section 2A.20 contains information on excessive use of signs.

*Guidance:*

03. *If a NEW plaque is used, it should remain in place for a period of time determined by engineering judgment, but not more than 12 months.*

**Standard:**

04. **Strobe lights shall not be used to enhance the conspicuity of highway signs.**

05. **If a strip of retroreflective material is used on the sign support, it shall be at least 2 inches in width, it shall be placed for the full length of the support from the sign to within 2 feet above the near edge of the roadway, and its color shall match the background color of the sign, except that the color of the strip for the YIELD and DO NOT ENTER signs shall be red. The retroreflective strip shall not display any legend or other information.**

06. **For a post-mounted sign installation, placing a duplicate sign in the same assembly facing the same direction of traffic shall not be permitted as a method of enhancing conspicuity.**

## Section 2A.12 LEDs Used for Conspicuity Enhancement on Standard Signs

Support:

01 This Section regarding light-emitting diode (LED) units applies to the use of illuminated elements that supplement a sign legend to enhance the conspicuity of the sign.

02 LED units that are used to illuminate the full sign display, background, or legend are changeable message signs (CMS), which are covered in Chapters 2B, 2C, and 2L, and Part 7.

03 The application of LED units in compliance with Paragraph 8 of this Section does not create a changeable message sign because the legend of the sign is always displayed when the LED units are not illuminated. Changeable message or blank-out signs whose legends change or extinguish by means of illuminated elements are addressed elsewhere in this Manual.

Option:

04 Light-emitting diode (LED) units may be used individually within the symbol, legend, or border of a sign to enhance the sign conspicuity and legibility (see Section 2A.11).

05 Except as provided in Paragraph 11 of this Section, LED units may either operate continuously or be actuated.

**Standard:**

06 **Where LED units are used to enhance the conspicuity of a sign, the sign shall otherwise comply with the requirements for retroreflection and illumination for nighttime viewing (see Section 2A.21).**

07 **Except as provided in Paragraphs 16 and 17 of this Section, and for changeable message signs, neither individual LEDs nor groups of LEDs shall be placed within the background area of a sign.**

08 **The application of LEDs to display sign legends or symbols shall use a maximum pitch of 20 millimeters to cover the stroke width of the letter or symbol.**

09 **The LEDs shall not protrude outside the sign border or legend when used in such applications, shall have a maximum diameter of ¼ inch, and shall be the following colors based on the type of sign:**

- **A. ~~White or~~ red, with STOP, ~~YIELD~~, DO NOT ENTER, or WRONG WAY signs.**
- **B. White, with other regulatory signs including YIELD signs.**
- **C. ~~White or~~ yellow, with warning signs.**
- **D. ~~White or~~ green, with guide signs.**
- **E. ~~White, yellow, or~~ orange with temporary traffic control signs of warning type.**
- **F. ~~White~~, yellow, or fluorescent yellow-green, with ~~school area or~~ pedestrian or bicycle warning signs.**

10 **If flashed, all LED units shall flash simultaneously at a steady rate between 50 and 60 times per minute. All the LED units in a sign legend or border shall be illuminated simultaneously with no sequential (chasing) or variable flash rates (dancing), except as otherwise allowed in this Manual. A cluster of LEDs shall not be used within the border of a sign.**

11 **Where used in STOP or YIELD signs, flashing LED units shall operate continuously. Actuation of the LED units shall not be allowed.**

12 **Flashing LED units shall not be used within the legend or border of a Speed Limit sign to indicate that the displayed speed limit is in effect.**

13 **LED units shall not be used within the legend or border of a sign in conjunction with the phrase WHEN FLASHING in its legend or on a supplemental WHEN FLASHING plaque (see Item E in Paragraph 1 of Section 4S.03 for the use of Warning Beacons to indicate when a regulatory or warning message is in effect).**

14 **Where LED units are used along the edge of a sign, at least one LED unit shall be placed along each edge of the sign, in addition to one LED unit at each corner of the sign, so that the distinct outline of the sign shape is recognized under nighttime viewing conditions. The LED units along each side of the sign shall be spaced approximately equidistantly. For a circular sign shape, the number of LED units shall clearly form the appearance of a circle and not be perceived as some other shape.**

15 **The uniformity of the sign design shall be maintained without any decrease in visibility, legibility, or driver comprehension during either daytime or nighttime conditions. The LED units shall have the capability to be dimmed automatically by a timing mechanism or a device sensitive to ambient light (photoelectric cell) such that the LEDs do not reduce the visibility of the sign legend.**

Option:

16 For STOP, YIELD, DO NOT ENTER, and WRONG WAY signs, LEDs may be placed within the border or within one border width within the background of the sign.

Support:

17 Section 6D.02 contains information about STOP/SLOW paddles used by flaggers. Section 7D.02 contains information about STOP paddles used by adult crossing guards.

18 Other methods of enhancing the conspicuity of standard signs are described in Section 2A.11.

## Section 2A.13 Standardization of Location

Support:

01 Standardization of position cannot always be attained in practice. Examples of heights and lateral locations of signs for typical installations are illustrated in Figure 2A-2 and 2A-2(CA), and examples of locations for some typical signs at intersections are illustrated in Figure 2A-3 and all four sheets in Figure 2A-4.

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

02 Examples of advance signing on intersection approaches are illustrated in all four sheets in Figure 2A-

Chapters 2B, 2C, and 2D contain provisions regarding the application of regulatory, warning, and guide signs, respectively.

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

**Standard:**

03 **Signs requiring separate decisions by the road user shall be spaced sufficiently far apart for the appropriate decisions to be made.**

*Guidance:*

04 *One of the factors considered when determining the appropriate spacing of signs should be the posted ~~or 85th percentile~~ speed limit.*

05 *Except as provided in Paragraph 8 of this Section, signs should be located on the right-hand side of the roadway where they are easily recognized and understood by road users. Signs in other locations should be considered only as supplementary to signs in the normal locations, except as otherwise provided in this Manual.*

06 *Signs should be individually installed on separate posts or mountings except where:*

- *A. One sign supplements another;*
- *B. Route or directional signs are grouped to clarify information to motorists;*
- *C. ~~Regulatory~~ signs that do not conflict with each other are grouped, such as Turn Prohibition signs posted with ONE WAY signs or a parking regulation sign posted with ~~a Speed Limit~~ another sign; or*
- *D. Street Name signs are posted with a STOP or YIELD sign.*

07 *Signs should be located so that they:*

- *A. Are outside the clear zone unless placed on a crashworthy (see definition in Section 1C.02) support,*
- *B. Optimize nighttime visibility,*
- *C. Minimize the effects of mud splatter and debris,*
- *D. Do not obscure each other,*
- *E. Do not obscure the sight distance to approaching vehicles on the major street for drivers who are stopped on minor-street approaches, and*
- *F. Are not hidden from view.*

*08 Except for STOP, YIELD, DO NOT ENTER, and WRONG WAY signs, or as otherwise provided in this Manual, where a sign on a one-way roadway indicates an action intended exclusively or primarily for a road user in the left-hand lane or at the left-hand side of that roadway, such as LEFT LANE MUST TURN LEFT (R3-7) or LEFT LANE ENDS (W9-1), the sign should be located on the left-hand side of the roadway. In the case of a divided road, the sign should be located in the median.*

Option:

09 Signs located on the left-hand side of a one-way roadway or in the median of a divided road, in accordance with Paragraph 8 of this Section, may be supplemented by an identical sign located on the right- hand side of the roadway.

Support:

10 The clear zone (see definition in Section 1C.02) is the total roadside border area, starting at the edge of the traveled way, available for an errant driver to stop or regain control of a vehicle. The width of the clear zone is dependent upon traffic volumes, speeds, and roadside geometry. Additional information can be found in the "Roadside Design Guide," 4th Edition, 2011, AASHTO.

*Guidance:*

11 *With the increase in traffic volumes and the need to provide road users regulatory, warning, and guidance information, an order of priority for sign installation should be established.*

Support:

12 An order of priority is especially critical where space is limited for sign installation and there is a demand for several different types of signs. Overloading road users with too much information is not desirable. Priority according to type of sign will depend on the specific situation and conditions of the site at which the signs are to be installed. For example, in the vicinity of an exit ramp, guide signs and warning signs for the exit ramp might take precedence over regulatory signs that confirm rules of the road, such as a STATE LAW-NO HANDHELD PHONE USE BY DRIVER sign, or a mainline Speed Limit sign where there is no change in the speed zone.

*Guidance:*

13 *Because regulatory and warning information is typically more critical to the road user than guidance information, regulatory and warning signing whose locations are critical should be displayed rather than guide signing in cases where conflicts occur. In such cases, the guide sign should be relocated to another appropriate location where it will still be effective. In other cases, such as at a decision point, the guide sign should take precedence over other signs whose locations are not as critical to an immediate decision or action necessary by the road user. In all cases, careful attention should be given to minimizing sign clutter (see Section 2A.20). Community wayfinding and acknowledgment guide signs should have a lower priority as to placement than other guide signs. Signs conveying information of a less-critical nature should be moved to less-critical locations or omitted.*

Option:

14 Under some circumstances, such as on curves to the right, signs may be placed on median islands or on the left-hand side of the road. A supplementary sign located on the left-hand side of the roadway may be used on a multi-lane road where traffic in a lane to the right might obstruct the view to the right.

*Guidance:*

15 *In urban areas where crosswalks exist, signs should not be placed within 4 feet in advance of the crosswalk (see Drawing D in Figure 2A-3).*

## Section 2A.14 Overhead Sign Installations

*Guidance:*

01 *Overhead signs should be used on freeways and expressways, at locations where some degree of lane- use control is desirable, and at locations where space is not available at the roadside.*

Support:

02 The operational requirements of the present highway system are such that overhead signs have value at many locations. The factors to be considered for the installation of overhead sign displays are not definable in specific numerical terms. In some cases, overhead mounting of a sign might be required by other provisions of this Manual.

Option:

03 The following conditions (not in priority order) may be considered in an engineering study to determine if overhead signs would be beneficial:

A. Traffic volume at or near capacity,
B. Complex interchange and intersection design,
C. Three or more lanes in each direction,
D. Restricted sight distance,
E. Closely-spaced interchanges,
F. Multi-lane exits,
G. Large percentage of trucks,
H. Street lighting background,
I. High-speed traffic,
J. Consistency of sign message location through a series of interchanges,
K. Insufficient space for post-mounted signs,
L. Junction of two freeways, and
M. Left-side exit ramps.
N. "Exit Only" lanes and lane drops.

O. Necessity to have a sign message directly over the lane to which it refers.

04 Over-crossing structures may be used to support overhead signs.

Support:

05 Under some circumstances, the use of over-crossing structures as sign supports might be the only practical solution that will provide adequate viewing distance. The use of such structures as sign supports might eliminate the need for the foundations and sign supports along the roadside.

06 On state highways, refer to Caltrans' Standard Plans publication for standard application of overhead signs. Refer to Section 1A.05 for information regarding this publication.

**Standard:**

07 **On State highways, any deviation from standard plans requires a structural analysis. All such signage must be referred to Caltrans' Division of Engineering Services, Office of Structure Design Services.**

*Guidance:*

08 *Signs mounted on overcrossing structures should not project above the bridge rail by more than 1 foot.*

Option:

09 Structure mounted signs may be placed parallel with the structures for skews up to 10°. At greater angles of skew, position the sign as close to 10° from the normal as possible.

**Standard:**

10 **If the skew is so great that this is not practical, separate sign structures shall be used.**

## Section 2A.15 Mounting Height

**Standard:**

01 **The provisions of this Section shall apply unless specifically stated otherwise for a particular sign or object marker elsewhere in this Manual.**

Support:

02 It might be necessary to use larger minimum mounting heights than those prescribed in this Manual to ensure appropriate crash performance of sign installations that are required to be crashworthy (see Section 1D.11).

03 In addition to the provisions of this Section, information affecting the minimum mounting height of signs as a function of crash performance can be found in the "Roadside Design Guide," 4th Edition, 2011, AASHTO.

**Standard:**

04 **In rural areas, the minimum height, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement, of signs installed at the side of the road shall be 5 feet (see Figure 2A-2).**

05 **In business, commercial, or residential areas where parking, bicyclist, or pedestrian movements are likely to occur, or where the view of the sign might be obstructed, the minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of signs installed at the side of the road shall be 7 feet (see Figure 2A-2).**

Option:

06 The height to the bottom of a secondary sign mounted below another sign may be 1 foot less than the height specified in Paragraphs 4 and 5 of this Section.

**Standard:**

07 **The minimum height of signs, measured vertically from the bottom of the sign to the sidewalk shall be 7 feet.**

08 **If the bottom of a secondary sign that is mounted below another sign is mounted lower than 7 feet above a pedestrian sidewalk or pathway (see Section 6C.02), the secondary sign shall not project more than 4 inches into the pedestrian facility.**

Support:

09 Section 9A.02 contains provisions for the minimum mounting height of signs on shared-use paths. Option:

10 Signs that are placed 30 feet or more from the edge of the traveled way may be installed with a minimum height of 5 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement.

**Standard:**

11 **Directional signs on freeways and expressways shall be installed with a minimum height of 7 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement. All route signs, warning signs, and regulatory signs on freeways and expressways shall be installed with a minimum height of 7 feet,**

**measured vertically from the bottom of the sign to the elevation of the near edge of the pavement. If a secondary sign is mounted below another sign on a freeway or expressway, the major sign shall be installed with a minimum height of 8 feet and the secondary sign shall be installed with a minimum height of 5 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement.**

12 **Where large signs having an area exceeding 50 square feet are installed on multiple breakaway posts, the clearance from the ground to the bottom of the sign shall be at least 7 feet.**

Option:

13 A route sign assembly (see Section 2D.29 and 2D.12) consisting of a route sign and auxiliary signs may be treated as a single sign for the purposes of this Section.

14 The mounting height may be adjusted when supports are located near the edge of the right-of-way on a steep backslope in order to avoid the sometimes less desirable alternative of placing the sign closer to the roadway.

**Standard:**

15 **Signs that are post-mounted on a median barrier that overhang any portion of the traveled way shall be mounted with a vertical clearance that complies with that of overhead signs.**

16 **Overhead signs shall provide a vertical clearance of not less than 17 feet to the sign, light fixture, or sign bridge over the entire width of the pavement and shoulders, except where the structure on which the overhead signs are to be mounted or other structures along the roadway near the sign structure have a lesser vertical clearance.**

16a **The lowest element of the overhead sign structure, including any attachments or known possible future additions, located over a roadway shall provide a minimum vertical clearance of 18 feet and 6 inches on State highways. Refer to Caltrans' Standard Plans publication. Refer to Section 1A.05 for information regarding this publication.**

Option:

17 If the vertical clearance of other structures along the roadway near the sign structure is less than 16 feet, the vertical clearance to an overhead sign structure or support may be as low as 1 foot higher than the vertical clearance of the other structures in order to improve the visibility of the overhead signs.

18 In special cases the clearance to overhead signs may be reduced if necessary because of substandard dimensions in tunnels and other major structures such as double-deck bridges.

*Guidance:*

19 *While a maximum mounting height for signs is generally not prescribed in this Manual, agencies should ensure that signs are not mounted at such a height as to be out of the road user's normal field of vision (see Paragraph 3 of Section 1D.09), especially in urban settings where signs are mounted on traffic signal or light poles.*

Support:

20 Figure 2A-2 and 2A-2(CA) illustrates some examples of the mounting height requirements contained in this Section.

21 Exceptions to the mounting heights are the FREEWAY ENTRANCE (D13-3) and DO NOT ENTER (R5-1) sign packages which are mounted lower to avoid sight restrictions and be most responsive to headlights.

*Guidance:*

22 *The FREEWAY ENTRANCE (D13-3) and DO NOT ENTER (R5-1) sign packages should be mounted with the bottom of the lower sign 2 feet above the edge of the pavement. The ONE WAY (R6-1) signs should be mounted 1.5 foot above the edge of the pavement.*

**Standard:**

23 **Reference Location and Intermediate Reference Location signs as well as Enhanced Reference Location Signs and Intermediate Enhanced Reference Location shall have a minimum mounting height of 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the roadway. Refer to Sections 2H.11 and 2H.12.**

## Section 2A.16 Lateral Offset

**Standard:**

01 **For overhead sign supports, the minimum lateral offset from the edge of the shoulder (or if no shoulder exists, from the edge of the pavement) to the near edge of overhead sign supports (cantilever or sign bridges) shall be 6 feet. Overhead sign supports shall have a barrier or crash cushion to shield them if they are within the clear zone.**

02 **Post-mounted sign and object marker supports shall be crashworthy (see Section 1D.11) if within the clear zone.**

*Guidance:*

03 *For post-mounted signs, the minimum lateral offset should be 12 feet from the edge of the traveled way. If a shoulder wider than 6 feet exists, the minimum lateral offset for post-mounted signs should be 6 feet from the edge of the shoulder.*

04 *Supports for signs mounted laterally behind a longitudinal barrier should be placed so that the near edge of the support is located beyond the deflection distance of the longitudinal barrier.*

Support:

05 The minimum lateral offset requirements for object markers are provided in Chapter 2C.

06 The minimum lateral offset is intended to keep trucks and cars that use the shoulders from striking the signs or supports. The minimum lateral offset requirements do not supersede the requirement for crashworthiness (see Paragraph 2 of this Section) if the sign is located within the clear zone.

*Guidance:*

07 *All supports should be located as far as practical from the edge of the shoulder. Advantage should be taken to place signs behind existing roadside barriers, on over-crossing structures, or other locations that minimize the exposure of the traffic to sign supports.*

Support:

07a Overcrossing structures can often serve for the support for overhead signs, and may be the only practical location that will provide adequate viewing distance. Use of these structures, as sign supports will minimize the need for sign supports along the roadway. Where overhead crossings are closely spaced and the proximity of other structures does not limit visibility, it is desirable to place signs on the bridges for economy, to reduce fixed objects and to enhance safety.

Option:

08 Lesser lateral offsets may be used on connecting roadways or ramps at interchanges, but not less than 6 feet from the edge of the traveled way.

09 On conventional, low-volume rural, and special-purpose roads in areas where it is impractical to locate a sign with the lateral offset prescribed by this Section because of roadside features such as terrain or vegetation, a lateral offset of at least 2 feet may be used.

10 A lateral offset of at least 1 foot from the face of the curb may be used in business, commercial, or residential areas where sidewalk width is limited or where existing poles are close to the curb.

*Guidance:*

11 *Overhead sign supports and post-mounted sign and object marker supports should not intrude into the usable width of a sidewalk or other pedestrian facility.*

Support:

12 Guidance for maintaining sign shape in laterally-constrained conditions is described in Section 2A.05.

13 Figures 2A-2 and 2A-3 illustrate some examples of the lateral offset requirements contained in this Section.

14 Refer to Caltrans' Highway Design Manual Section 309.1 for horizontal clearances. Refer to Section 1A.05 for information regarding this publication.

*Guidance:*

15 *Where a freeway or an expressway median is 12 feet or less in width, consideration should be given to spanning both roadways without a center support. Butterfly-type signs or other overhead sign supports should not be erected in neutral areas (gores) or other exposed locations.*

**Standard:**

16 **In cuts steeper than 4:1, where there are no recovery areas, the sign supports shall be placed on the slopes a minimum of 4 feet vertically from the hinge point. In fill sections, sign supports shall be protected by a minimum of 50 feet of guardrail plus the breakaway end anchor. The supports shall be placed over the hinge point approximately 4 feet from the face of the guard rail.**

*Guidance:*

17 *Overhead signs should be placed at least 30 feet from light standards.*

## Section 2A.17 Orientation

*Guidance:*

01 *Unless otherwise provided in this Manual, signs should be vertically mounted at right angles to the direction of, and facing, the traffic that they are intended to serve.*

02 *Where mirror reflection from the sign face is encountered to such a degree as to reduce legibility, the sign should be turned slightly away from the road. Signs that are placed 30 feet or more from the pavement edge should be turned toward the road. On curved alignments, the angle of placement should be determined by the direction of approaching traffic rather than by the roadway edge at the point where the sign is located.*

Option:

03 On grades, sign faces may be tilted forward or back from the vertical position to improve the viewing angle.

## Section 2A.18 Posts and Mountings

**Standard:**

01 **Sign posts, foundations, and mountings shall be so constructed as to hold signs in a proper and permanent position, and to resist swaying in the wind or displacement by vandalism.**

Support:

02 The latest edition of AASHTO's "Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals" contains additional information regarding posts and mounting.

Option:

03 Where permitted, signs may be placed on existing supports used for other purposes, such as highway traffic signal supports, highway lighting supports, and utility poles.

*Guidance:*

03a *The installation of signs, including route shields, on traffic signal supports should be avoided unless they directly affect traffic movements in the intersection.*

Support:

04 Section 2A.11 contains criteria for enhanced conspicuity of standard signs.

05 Sections 2A.15 and 2A.16 contain lateral and height placement criteria for signs placed on existing supports.

**Standard:**

06 **If mounted to the sign support, equipment for powering electronic components of a sign, including solar panels, shall be mounted so as not to compromise the crashworthy performance of the sign installation (see Section 1D.11). Such equipment shall be mounted so as not to obscure the shape of the sign.**

Option:

07 When needed for emphasis to facilitate traffic safety on streets with speed limits of 35 mph or less, small plastic signs not exceeding 12 inch in width may be mounted on channelizers, cones, or portable delineators to be placed on lane lines and/or centerlines.

**Standard:**

08 **When installed, they shall supplement permanently mounted standard signs and shall use standard legends, sign colors and retroreflectivity, but in a smaller, proportional format. If the device is used on lane lines, there shall be an engineering study, which documents the limited potential of the device to be struck due to lane changing.**

## Section 2A.19 Maintenance

*Guidance:*

01 *Maintenance activities should consider proper position, cleanliness, legibility, and daytime and nighttime visibility (see Sections 2A.21 and 2A.22). Damaged or deteriorated signs, gates, or object markers should be replaced.*

02 *To assure adequate maintenance, a schedule for inspecting (both day and night), cleaning, and replacing signs, gates, and object markers should be established. Employees of highway, law enforcement, and other public agencies whose duties require that they travel on the roadways should be encouraged to report any damaged, deteriorated, missing or obscured signs, gates, or object markers at the first opportunity.*

03 *Steps should be taken to see that weeds, trees, shrubbery, and construction, maintenance, and utility materials and equipment do not obscure the face of any sign or object marker.*

04 *A regular schedule of replacement of lighting elements for illuminated signs should be maintained.*

## Section 2A.20 Excessive Use of Signs

*Guidance:*

01 *Signs should be used and located judiciously, minimizing their proliferation in order to maintain their effectiveness. Regulatory and warning signs should be used conservatively because these signs, if used to excess, tend to lose their*

*effectiveness. Route signs and directional guide signs for primary routes and destinations should be used frequently at strategic locations because their use promotes efficient operations by keeping road users informed of their location. In all cases, however, sign clutter (see Paragraph 2 of this Section) should be avoided and minimized as much as practicable.*

Support:

02 Sign clutter is the proliferation of sign installations or assemblies along the roadway or roadside, either separately or grouped, to such an extent that adequate spacing between installations necessary for orderly processing of the sign messages by the driver cannot be achieved. Sign clutter can reduce the effectiveness of one or more signs in a sequence of signs.

03 The basic role of traffic control devices is to provide only as much information to the road user as necessary to promote the safe and efficient operation of streets and highways. Sign clutter can result from the overuse of MUTCD-compliant signs and or signs that display information unrelated to traffic operation, navigation, or transportation information. Examples of such signs would include, but are not limited to, those displaying the birthplace or home of a noted person, memorializing or dedicating a segment or facility of roadway, local sports team accomplishments, population information, and self-described qualities of a community such as "friendly" or "open for business."

03a Sign information overload occurs when the frequency of signing, complexity of messages or diversity of messages is so great that they cannot be readily assimilated by motorists in time to respond properly and safely to roadway situations. Sign information overload can be avoided by:

A. Increasing the spacing between signs so that they can be understood before encountering new messages.
B. Minimizing content and using accepted symbols so as to simplify messages.
C. Spreading the information so that each element of stand-alone information is presented in a separate sign.
D. Using standard sign formats applied in a consistent fashion to enhance motorist recognition.
E. Using redundant signing or a combination of signing and pavement messages to offer multiple opportunities for motorists to recognize and respond to the situation.
F. Reducing or eliminating less-essential signs.

03b Refer to ITE's Traffic Control Devices Handbook, Chapter 2 for more information on this topic. Refer to Section 1A.05 for information regarding this publication.

*Guidance:*

04 *Signs and other traffic control devices should be installed and maintained from a systematic standpoint rather than individually. When a new sign is installed, the existing signs in the vicinity should be considered for replacement, relocation, or removal as a result of the new sign that is installed. Existing systems of signs should be reviewed periodically for evidence of sign clutter and adjustments should be made accordingly.*

Support:

05 Section 2A.13 contains information regarding an order of priority for signs where available spacing along the roadway is limited.

## Section 2A.21 Retroreflection and Illumination

Support:

01 There are many materials currently available for retroreflection and various methods currently available for the illumination of signs and object markers. New materials and methods continue to emerge. New materials and methods can be used as long as the signs and object markers meet the standard requirements for color, both by day and by night.

02 This Section applies to visibility of signs at night or in low-light or adverse weather conditions, whose legends are otherwise visible under typical daytime viewing conditions.

**Standard:**

03 **Regulatory, warning, and guide signs (see Section 2A.03), and object markers, shall be retroreflective or illuminated to show the same shape and similar color by both day and night, unless otherwise provided in this Manual for a particular sign or group of signs.**

04 **Where the color black is specified for the legend or background of a sign, an opaque and non- retroreflective material shall be used.**

05 **The requirements for sign illumination shall not be considered to be satisfied by street or highway lighting.**

Option:

06 Sign elements may be illuminated by the means shown in Table 2A-3.

07 Retroreflection of sign elements may be accomplished by the means shown in Table 2A-4. Support:
08 Information regarding the use of retroreflective material on the sign support is contained in Section 2A.11.

## Section 2A.22 Maintaining Minimum Retroreflectivity

Support:
01 Retroreflectivity is one of several factors associated with maintaining nighttime sign visibility (see Section 2A.21).

**Standard:**
02 **Public agencies or officials having jurisdiction shall use an assessment or management method that is designed to maintain sign retroreflectivity at or above the minimum levels in Table 2A-5.**

Support:
03 Compliance with the Standard in Paragraph 2 of this Section is achieved by having a method in place and using the method to maintain the minimum levels established in Table 2A-5. Provided that an assessment or management method is being used, an agency or official having jurisdiction would be in compliance with the Standard in Paragraph 2 of this Section even if there are some individual signs that do not meet the minimum retroreflectivity levels at a particular point in time.

*Guidance:*
04 *Except for those signs specifically identified in Paragraph 5 of this Section, one or more of the methods described in "Maintaining Traffic Sign Retroreflectivity," (FHWA-SA-07-020, Revised 2013), FHWA, or a method developed based on an engineering study, should be used to maintain sign retroreflectivity at or above the minimum levels in Table 2A-5. Signs that are identified through the agency's method as being below the minimum levels should be replaced.*

Option:
05 Highway agencies may exclude the following signs from the retroreflectivity maintenance guidelines described in this Section:

A. Parking, Standing, and Stopping (R7 and R8 series) signs;
B. Walking/Hitchhiking/Crossing (R9 series, R10-1 through R10-4b) signs;
C. Acknowledgment signs; and
D. Bikeway signs that are intended for exclusive use by bicyclists or pedestrians.

## Section 2A.23 Median Opening Treatments for Divided Highways

*Guidance:*
01 *A divided highway crossing should be signed and marked as separate intersections when both of the following conditions are present:*

*A. The paths of opposing left turns from the divided highway cross each other (see Figure 2A-5), and*
*B. There is adequate storage in the interior approaches for the design vehicles expected to cross the divided highway.*

02 *If either one or both of the conditions in Paragraph 1 of this Section do not exist, the divided highway crossing should be signed and marked as a single intersection.*
03 *At the crossing of two divided highways, engineering judgment should be used to determine the number of separate intersections.*

Support:
04 Divided highway crossings with median widths between 30 feet and 85 feet might function as either one or two intersections depending upon the interaction of the opposing left-turn vehicle paths and the available interior storage in the median for a crossing vehicle. Other factors that could determine whether a divided highway crossing is operating as one or two intersections include:

A. The geometric design of the divided highway crossing,
B. The use of positive offset mainline left-turn lanes,
C. The length of the median opening (as measured parallel to the center line of the divided highway),
D. The geometric design of the median noses,
E. Other roadway geometric considerations such as a skewed side street approach or a variable median width,
F. Intersection sight distance,
G. The physical characteristics of the design vehicle, and
H. The observed prevailing driver behavior with regard to opposing left-turn path interaction.

Option:

05 Additional signs may be placed at divided highway crossings that function as two separate intersections.

06 Standard directional or wrong way arrow pavement markings may be placed in each approach lane of each roadway in advance of a grade intersection and at other selected locations to indicate the direction of traffic flow.

07 At locations which are determined to have special need, other standard warning or prohibitive methods and devices may be used as a deterrent to the wrong way movement.

Support:

08 Refer to Chapter 2B for Wrong-Way Traffic Control at Interchange Ramps.

## Section 2A.101(CA) Signs Off the State Right-of-Way

Support:

01 CVC § 21350 permits Caltrans, with the consent of the local authorities, to place and maintain along city streets and county roads appropriate signs as may be necessary or desirable to direct traffic to State highways.

*Guidance:*

02 *Where a sign beyond the right-of-way line is required for the proper operation of a State highway, such sign should be placed and maintained at State expense.*

# Figure 2A-1. Examples of Enhanced Conspicuity for Signs

**A – W16-15P plaque above a regulatory or warning sign if the regulation or condition is new**




**B – Red or orange flags above a regulatory, warning, or guide sign**





**C – W16-18P plaque above a regulatory sign**




**D – Solid yellow, solid fluorescent yellow, or diagonally striped black and yellow (or black and fluorescent yellow) strip of retroreflective sheeting around a warning sign**




**E – Vertical retroreflective strip on sign support**

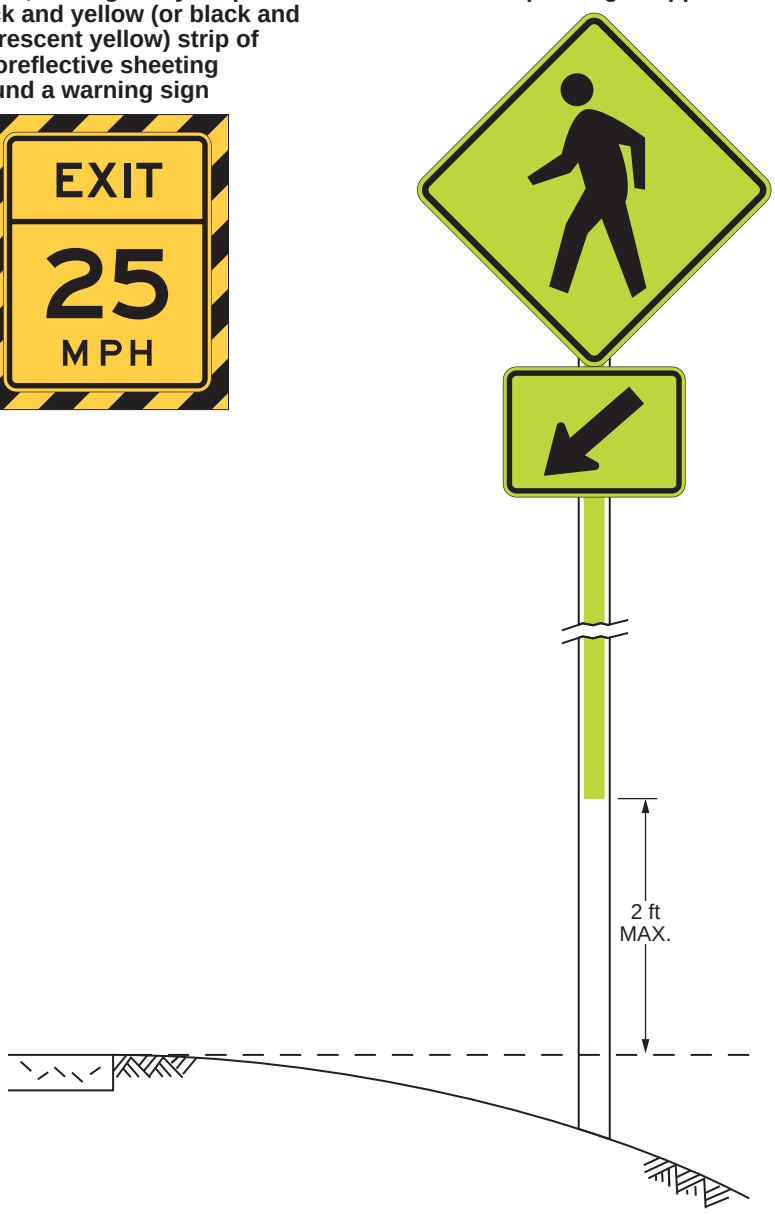


**F – Supplemental beacon**




**G – LEDs in border**




# Figure 2A-2. Examples of Heights and Lateral Locations of Sign Installations


**A – Roadside sign in rural area**

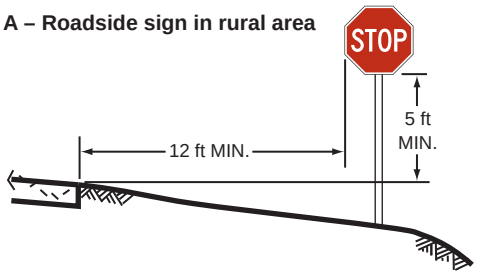


**B – Roadside sign in rural area**

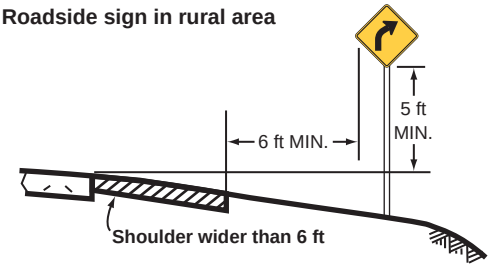



**C – Roadside sign in business, commercial, or residential area**





*Where parking or pedestrian movements are likely to occur


**D – Warning sign with advisory speed plaque in rural area**

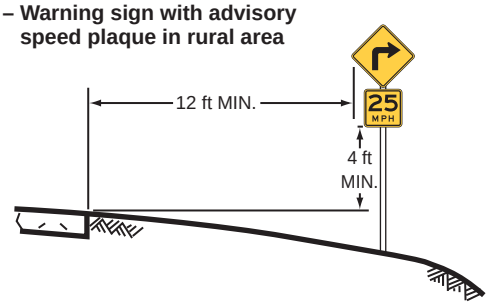



**E – Roadside assembly in rural area**

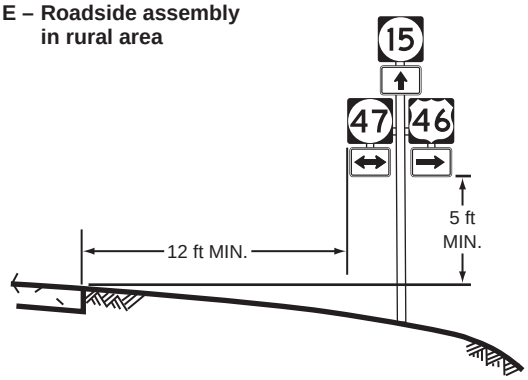



**F – Sign on nose of median**




**G – Freeway or expressway sign with secondary sign**

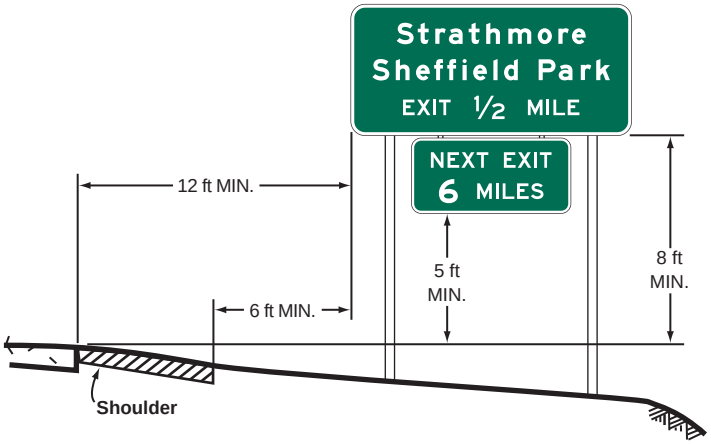


**H – Overhead sign**

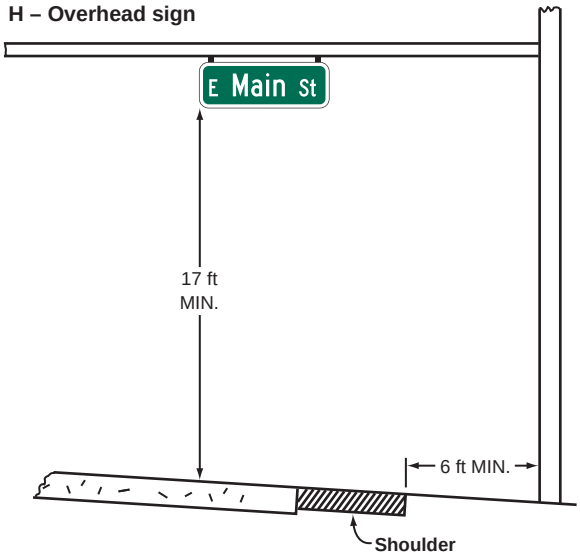


Note: See Section 2A.16 for reduced lateral offset distances that may be used in areas where lateral offsets are limited, and in business, commercial, or residential areas where sidewalk width is limited or where existing poles are close to the curb.

## *Figure 2A-2(CA). California Examples of Heights and Lateral Locations of Sign Installations*


Notes:

These sign positions are typical and should be considered a standard. When physical conditions require deviation from these typicals, they should be documented. When clear roadside recovery areas are provided, signs shall be placed as far from the traveled way as possible, up to 30 ft. When possible, they should be placed in protected locations.


Signs in medians shall be placed at midpoint of median, and should not be closer than 6 ft from the edge of a paved shoulder, or if none, 12 ft from the edge of the traveled way. When appropriate, signs for opposing directions shall be placed back to back.

E.T.W. = Edge of Traveled Way
E.P.S. = Edge of Paved Shoulder

### Freeway and Expressway Locations

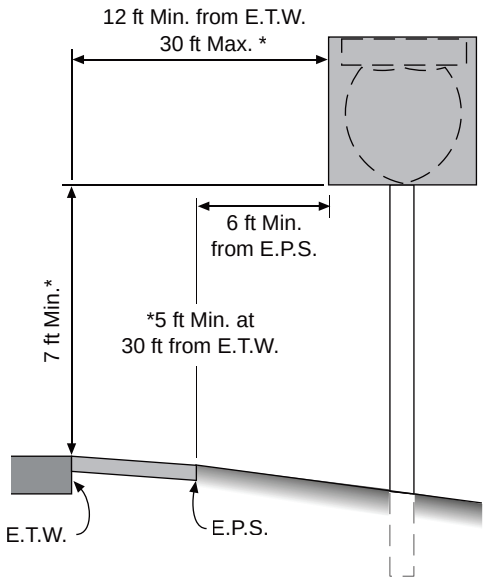



**ROUTE SHIELDS**
**REGULATORY AND WARNING SIGNS**

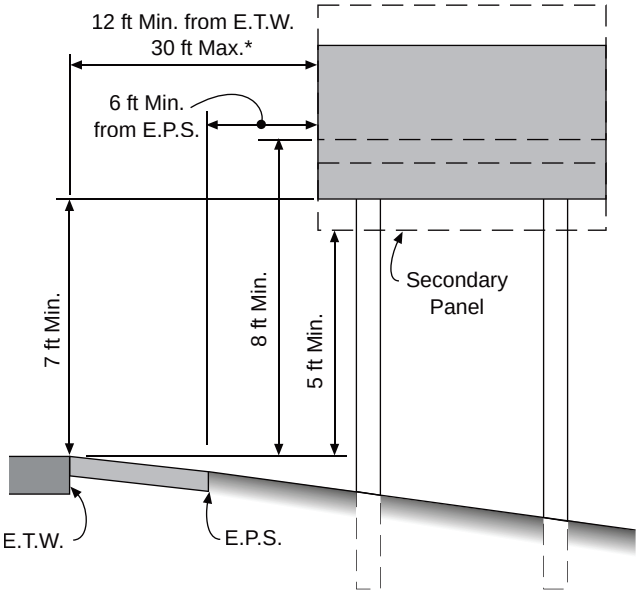



**GUIDE SIGNS**

### Conventional Highways and Interchange Areas

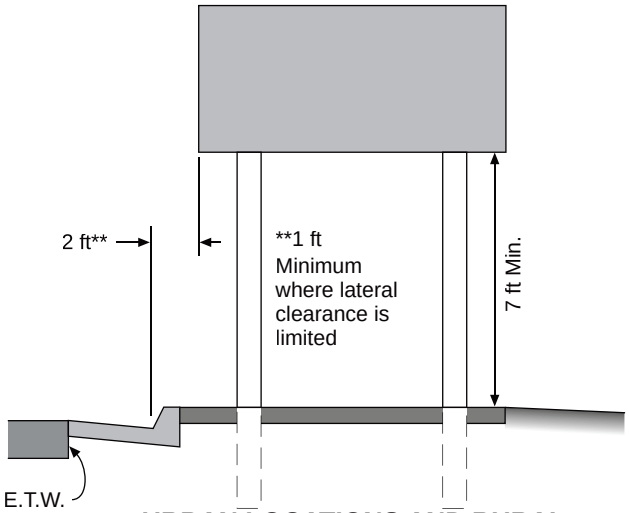



**URBAN LOCATIONS AND RURAL**
**LOCATIONS WITH SIDEWALK**

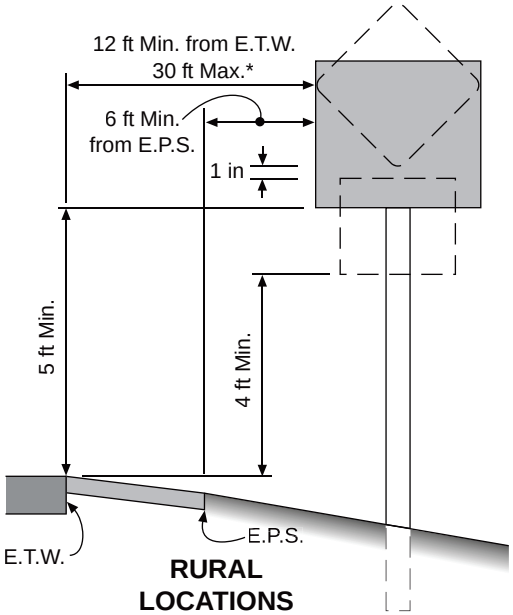



**RURAL**
**LOCATIONS**

# Figure 2A-3. Examples of Locations for Some Typical Signs at Intersections

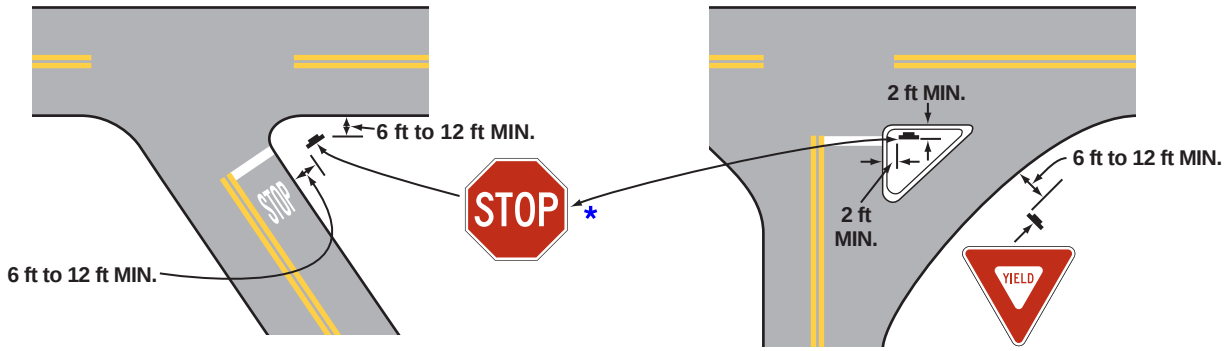



A – Acute-angle intersection

B – Channelized intersection

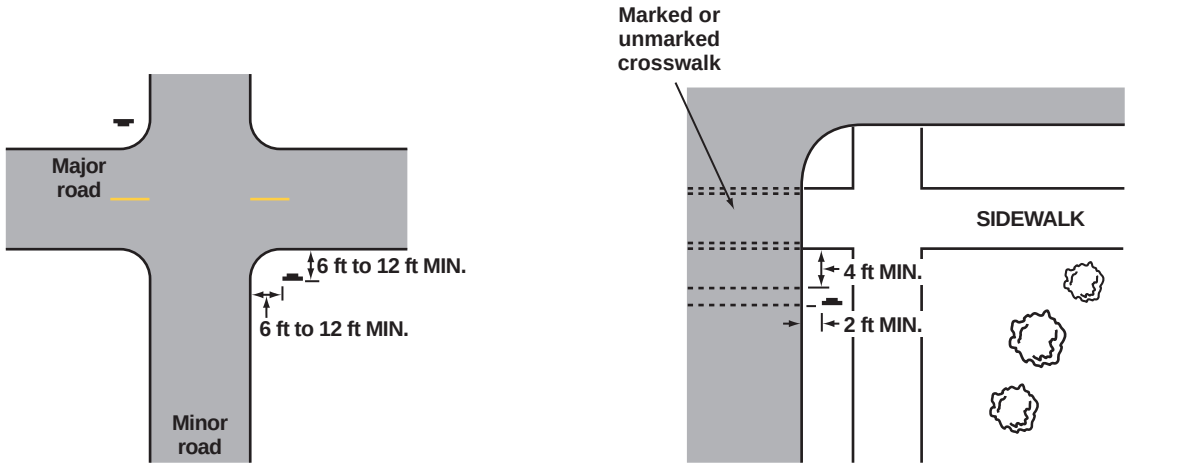


C – Minor crossroad

D – Urban intersection

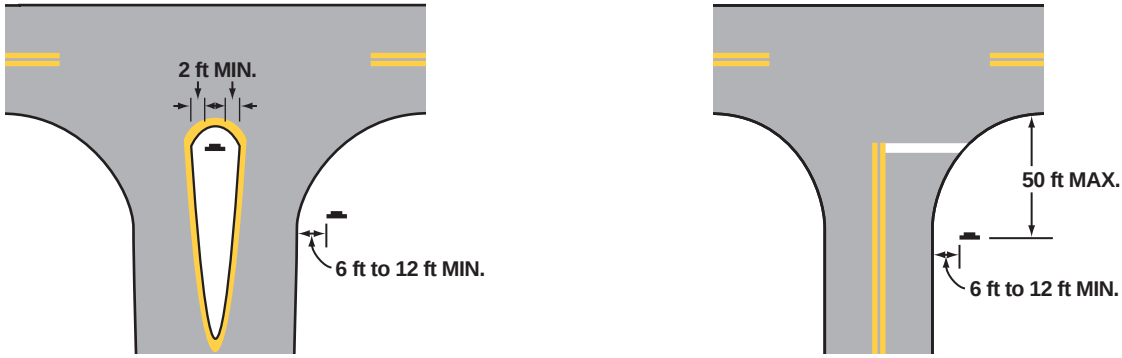



E – Divisional island

F – Wide-throat intersection

Note: Lateral offset is a minimum of 6 feet measured from the edge of the shoulder, or 12 feet measured from the edge of the traveled way. See Section 2A.16 for lower minimums that may be used in urban areas, or where lateral offset space is limited.

* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2A-4. Relative Locations of Regulatory, Warning, and Guide Signs on an Intersection Approach (Sheet 1 of 4)

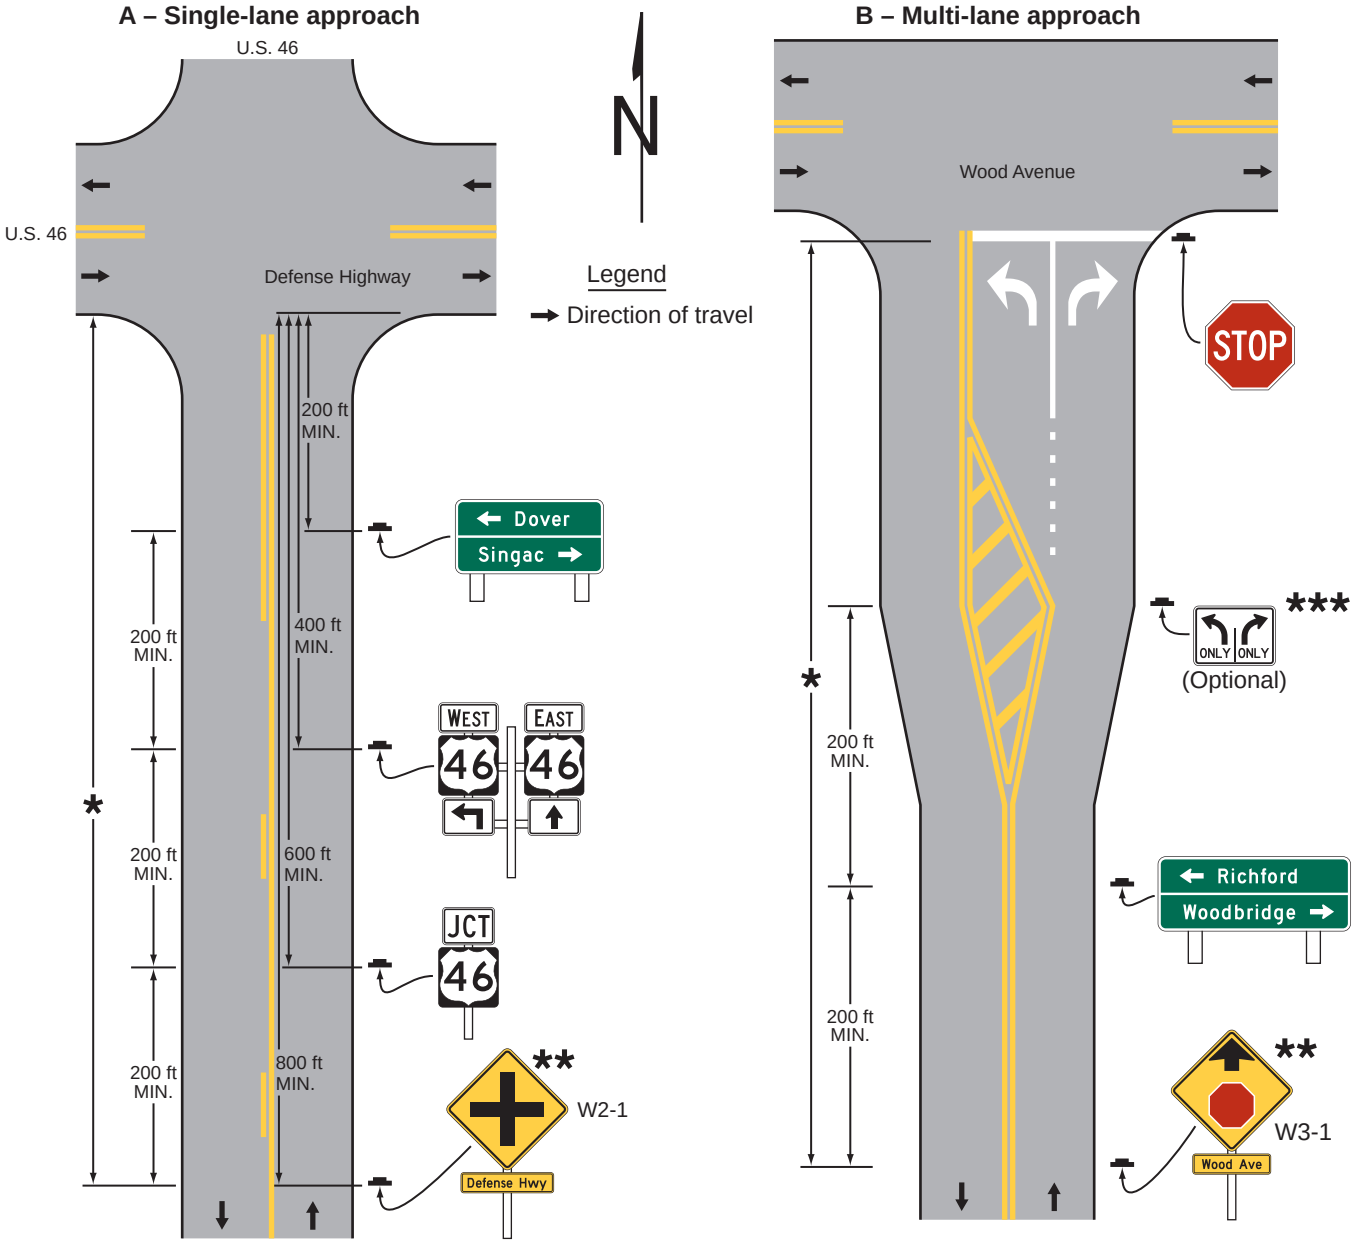


Note: See Chapter 2D for information on guide signs and Part 3 for information on pavement markings


* See Table 2C-3 for the recommended minimum distance

** See Section 2C.41 for the application of the W2-1 sign and Section 2C.35 for the application of the W3-1 sign

*** See Section 2B.27 for the application of Intersection Lane Control signs

# Figure 2A-4. Relative Locations of Regulatory, Warning, and Guide Signs on an Intersection Approach (Sheet 2 of 4)

## C – Multi-lane approach with optional movement turn lanes

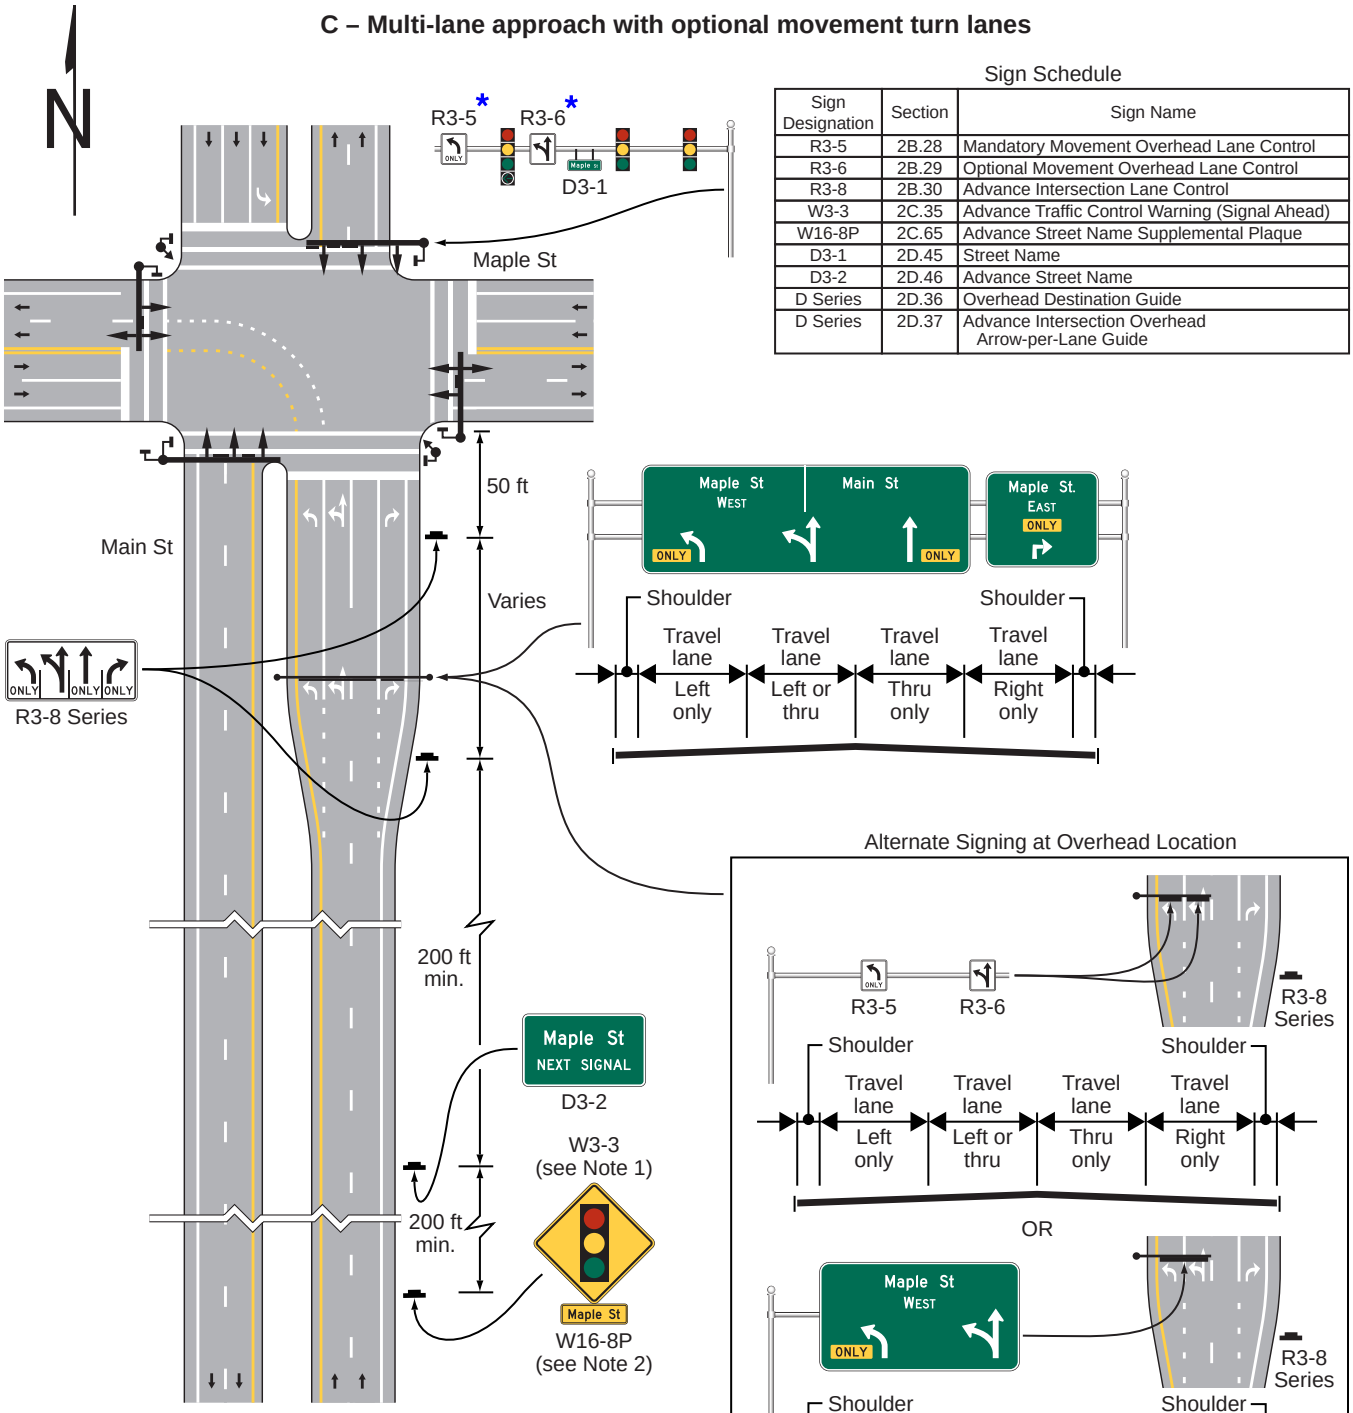


Sign Schedule

| Sign Designation | Section | Sign Name |
|---|---|---|
| R3-5 | 2B.28 | Mandatory Movement Overhead Lane Control |
| R3-6 | 2B.29 | Optional Movement Overhead Lane Control |
| R3-8 | 2B.30 | Advance Intersection Lane Control |
| W3-3 | 2C.35 | Advance Traffic Control Warning (Signal Ahead) |
| W16-8P | 2C.65 | Advance Street Name Supplemental Plaque |
| D3-1 | 2D.45 | Street Name |
| D3-2 | 2D.46 | Advance Street Name |
| D Series | 2D.36 | Overhead Destination Guide |
| D Series | 2D.37 | Advance Intersection Overhead Arrow-per-Lane Guide |

Notes:

1. See Table 2C-3 for location.
2. If D3-2 is not used.
3. Pavement markings shown for reference only. See Part 3 for criteria.


* Refer to Chapter 2B and Figure 2B-105(CA) for mast arm mounted no U-turn signs

Legend

→ Direction of travel

# Figure 2A-4. Relative Locations of Regulatory, Warning, and Guide Signs on an Intersection Approach (Sheet 3 of 4)

## D – Multi-lane approach with mandatory movement turn lanes

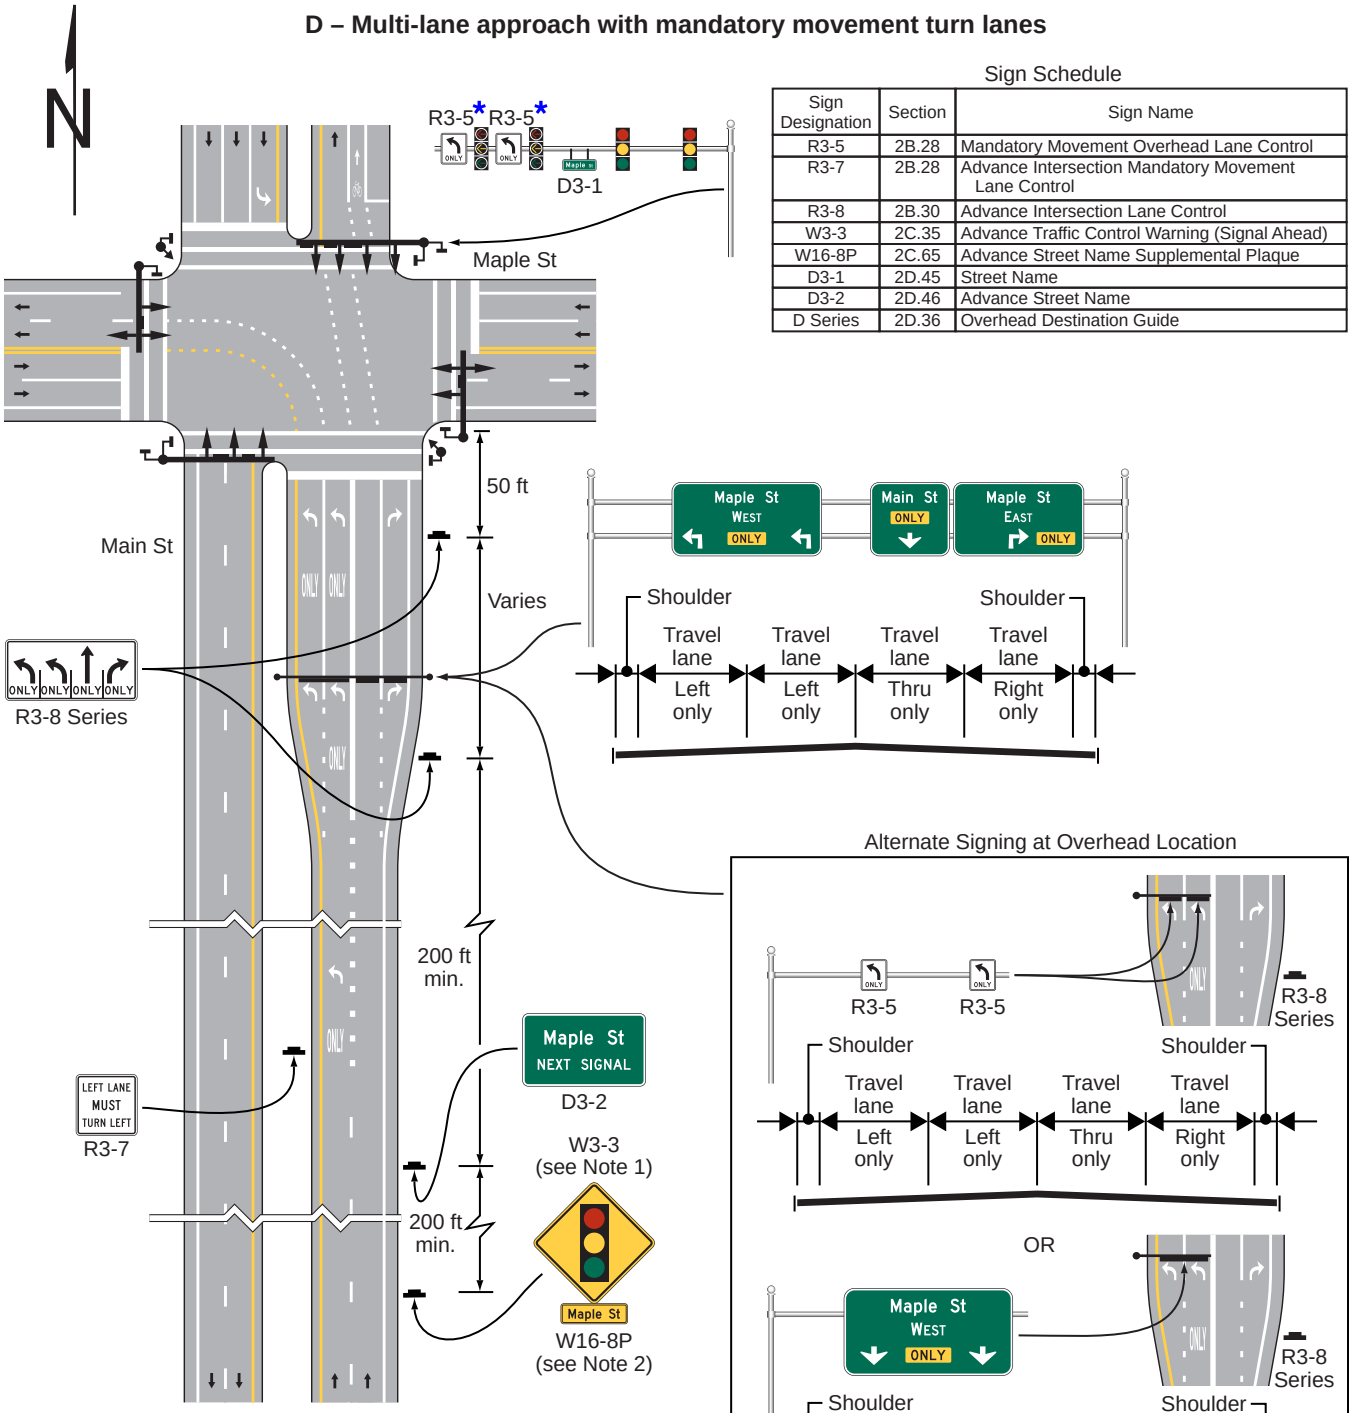


Sign Schedule

| Sign Designation | Section | Sign Name |
|---|---|---|
| R3-5 | 2B.28 | Mandatory Movement Overhead Lane Control |
| R3-7 | 2B.28 | Advance Intersection Mandatory Movement Lane Control |
| R3-8 | 2B.30 | Advance Intersection Lane Control |
| W3-3 | 2C.35 | Advance Traffic Control Warning (Signal Ahead) |
| W16-8P | 2C.65 | Advance Street Name Supplemental Plaque |
| D3-1 | 2D.45 | Street Name |
| D3-2 | 2D.46 | Advance Street Name |
| D Series | 2D.36 | Overhead Destination Guide |

Notes:

1. See Table 2C-3 for location.
2. If D3-2 is not used.
3. Pavement markings shown for reference only. See Part 3 for criteria.

* Refer to Chapter 2B and Figure 2B-105(CA) for mast arm mounted no U-turn signs

Legend


➞ Direction of travel

# Figure 2A-4. Relative Locations of Regulatory, Warning, and Guide Signs on an Intersection Approach (Sheet 4 of 4)

## E – Multi-lane approach to a circular intersection with optional movement turn lanes

Sign Schedule

| Sign Designation | Section | Sign Name |
|---|---|---|
| R3-5 Series | 2B.28 | Mandatory Movement Overhead Lane Control |
| R3-6 Series | 2B.29 | Optional Movement Overhead Lane Control |
| R3-8 | 2B.30 | Advance Intersection Lane Control |
| W2-6 | 2C.41 | Intersection Warning (Circular Intersection |
| D Series | 2D.36 | Overhead Destination Guide |
| D Series | 2D.37 | Advance Intersection Overhead Arrow-per-Lane Guide |

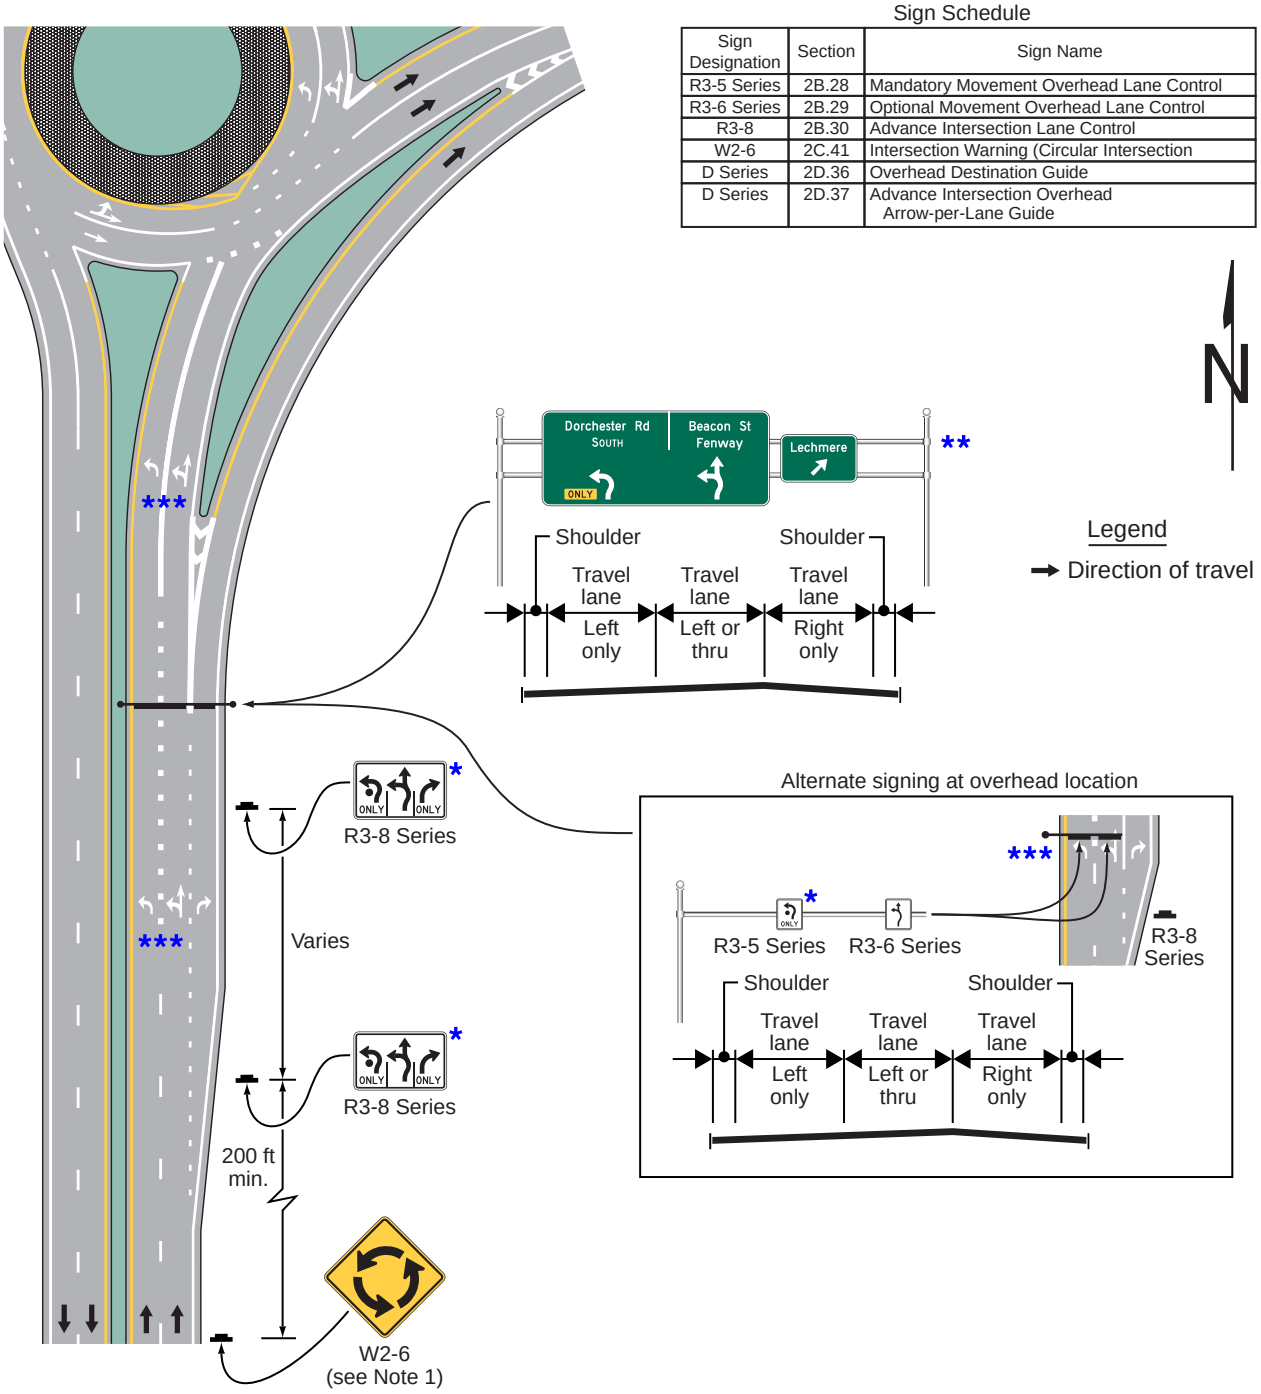


Notes:


1. See Table 2C-3 for location.
2. Pavement markings shown for reference only. See Part 3 for criteria.

* Refer to Figure 2B-5 for intersection lane control sign arrow options.

** All adjacent sign panels mounted on an overhead sign structures on state highways should have the same sign depth.

*** Refer to FHWA's List of Known Errors for error in lane-use arrow pavement markings. Refer to Section 1A.04 for more details.

## Figure 2A-5. Intersection Configuration at a Divided Highway Crossing

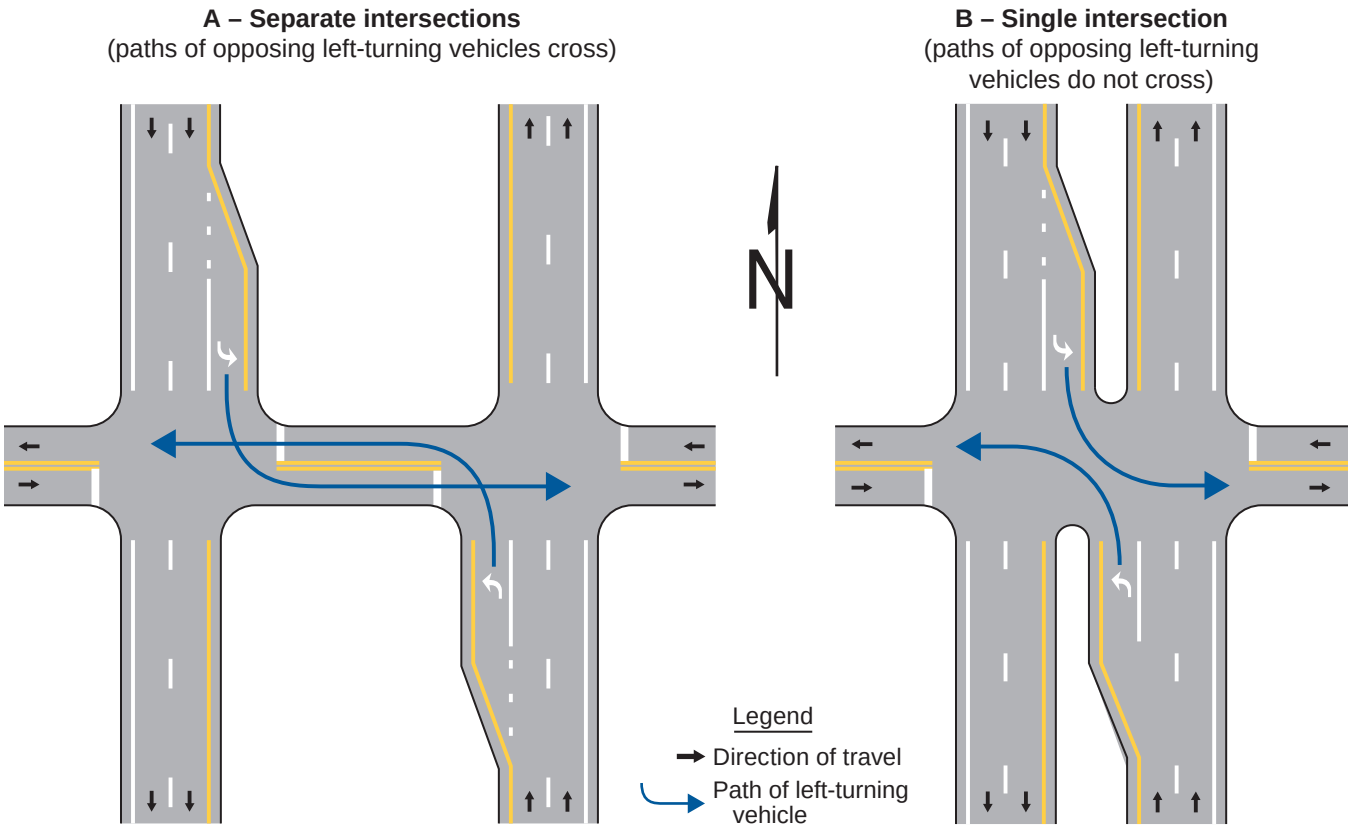

# Table 2A-1. Use of Sign Shapes

| Shape | Signs |
|---|---|
| Octagon* | Stop (R1-1)** |
| Equilateral Triangle (downward-pointing)* | Yield (R1-2)** |
| Circle* | Grade Crossing Advance Warning (W10-1)** |
| Pennant (Isosceles Triangle with longer axis horizontal, pointed right)* | No Passing Zone (W14-3)** |
| Pentagon (upward-pointing)* | School (S1-1) (squared bottom corners)**<br>County Route (M1-6) (tapered lower sides)** |
| Crossbuck (two rectangles in a perpendicular "X" configuration)* | Grade Crossing (R15-1)** |
| Diamond | Warning Series |
| Rectangle (including square) | Regulatory Series<br>Guide Series***<br>Warning Series |
| Trapezoid* | Recreational and Cultural Interest Area Guide Series (isosceles or right-angled)<br>National Forest Route Sign (M1-1) (isosceles)** |

* This shape shall be limited exclusively to the sign(s) indicated.

** This sign shall be exclusively the shape shown.

*** Guide series includes general service, specific service, tourist-oriented directional, general information, recreational and cultural interest area, and emergency management signs.

Note: Signs with standardized designs shall not be modified to accommodate a different shape except as provided in this Manual.

# Table 2A-2. Common Uses of Sign Colors

| Type of Sign | Legend | | | | | | | | Background | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Black | Green | Red | White | Yellow | Orange | Fluorescent Yellow-Green | Fluorescent Pink | Black | Blue | Brown | Green | Orange[1] | Red[1] | White | Yellow[1] | Purple | Fluorescent Yellow-Green | Fluorescent Pink |
| Regulatory | X | | X | X | | | | | X | | | | | X | X | | | | |
| Prohibitive | | | X | X[2] | | | | | | | | | | X[2] | X | | | | |
| Permissive | | X | | | | | | | | | | | | | X | | | | |
| Warning | X | | | | | | | | | | | | | | | X | | | |
| Pedestrian | X | | | | | | | | | | | | | | | X | | X | |
| Bicycle | X | | | | | | | | | | | | | | | X | | X | |
| Guide | | | | X | | | | | | | | X | | | | | | | |
| Interstate Route | | | | X | | | | | | X | | | | X | | | | | |
| State Route | ~~X~~ | | | X | | | | | | | | X | | | ~~X~~ | | | | |
| U.S. Route | X | | | | | | | | | | | | | | X | | | | |
| County Route | | | | | X | | | | | X | | | | | | | | | |
| Forest Route | | | | X | | | | | | | X | | | | | | | | |
| Street Name | | | | X | | | | | | | | X | | | | | | | |
| Destination | | | | X | | | | | | | | X | | | | | | | |
| Reference Location | | | | X | | | | | | | | X | | | | | | | |
| Information | | | | X | | | | | | X | | X | | | | | | | |
| Evacuation Route | | | | X | | | | | | X | | | | | | | | | |
| Road User Service | | | | X | | | | | | X | | | | | | | | | |
| Recreational | | | | X | | | | | | | X | X | | | | | | | |
| Temporary Traffic Control | X | | | | | | | | | | | | X | | | | | | |
| Incident Management | X | | | | | | | | | | | | X | | | | | | X |
| School | X | | | | | | | | | | | | | | | | | X | |
| ETC-Account Only | X | | | | | | | | | | | | | | | | X[5] | | |
| Changeable Message Signs | | | | | | | | | | | | | | | | | | | |
| Regulatory | | | X[4] | X | | | | | X | | | | | | | | | | |
| Warning | | | | | X | | | | X | | | | | | | | | | |
| Temporary Traffic Control | | | | | X | X | | | X | | | | | | | | | | |
| Guide | | | | X | | | | | X | | | X[3] | | | | | | | |
| Motorist Services | | | | X | | | | | X | X[3] | | | | | | | | | |
| Incident Management | | | | | X | | | X | X | | | | | | | | | | |
| School, Pedestrian, Bicycle | | | | | X | | X | | X | | | | | | | | | | |

[1] Fluorescent versions of these background colors may also be used.
[2] Legend and background color combination for use only as identified for specific signs in this Manual or Standard Highway Signs.
[3] These alternative background colors would be provided by blue or green lighted pixels such that the entire CMS would be lighted, not just the legend.
[4] Red is used only for the circle and diagonal or other red elements of a similar static regulatory sign.
[5] The use of purple on signs is restricted per the provisions of Chapter 2F.

Notes:
1. The purpose of the information in this table is to provide a general overview of common color combinations. The color combinations and orientations for signs with standardized designs shall not be modified. For signs with unique legends, the shape and color shall be the same as standard signs of the same functional type.
2. The colors shown for changeable message signs are for those with electronic displays.

## Table 2A-3. Illumination of Sign Elements

| Means of Illumination | Sign Element to be Illuminated |
|---|---|
| Light behind the sign face | • Symbol or word message<br>• Background<br>• Symbol, word message, and background (through a translucent material) |
| Attached or independently-mounted light source designed to direct essentially uniform illumination onto the sign face | • Entire sign face |
| Light-emitting diodes (LEDs) | • Symbol or word message<br>• Entire sign border |
| Other devices or treatments that highlight the sign shape, color, or message:<br>Luminous tubing<br>Fiber optics<br>Incandescent light bulbs<br>Luminescent panels | • Symbol or word message<br>• Entire sign face |

## Table 2A-4. Retroreflection of Sign Elements

| Means of Retroreflection | Sign Element |
|---|---|
| Prismatic reflector "buttons" or similar units | Symbol<br>Word message<br>Border |
| A material that has a smooth, sealed outer surface over a microstructure that reflects light | Symbol<br>Word message<br>Border<br>Background |

# Table 2A-5. Minimum Maintained Retroreflectivity Levels[1]

| Sign Color | Beaded Sheeting Type (ASTM D4956) | | | Prismatic Sheeting | Additional Criteria |
|---|---|---|---|---|---|
| | I | II | III | | |
| White on Green | W*; G ≥ 7 | W*; G ≥ 15 | W*; G ≥ 25 | W ≥ 250; G ≥ 25 | Overhead |
| | W*; G ≥ 7 | W ≥ 120; G ≥ 15 | | | Post-mounted |
| White on Blue | W*; B ≥ 3 | W*; B ≥ 5 | W*; B ≥ 12 | W ≥ 250; B ≥ 12 | Overhead |
| | W*; B ≥ 3 | W ≥ 120; B ≥ 7 | | | Post-mounted |
| White on Brown | W*; Br ≥ 1 | W*; Br ≥ 5 | W*; Br ≥ 10 | W ≥ 350; Br ≥ 10 | Overhead |
| | W*; Br ≥ 1 | W ≥ 150; Br ≥ 5 | | | Post-mounted |
| Black on Yellow or Black on Orange | Y*; O* | Y ≥ 50; O ≥ 50 | | | [2] |
| | Y*; O* | Y ≥ 75; O ≥ 75 | | | [3] |
| White on Red | W ≥ 35; R ≥ 7 | | | | [4] |
| Black on White | W ≥ 50 | | | | – |

[1] The minimum maintained retroreflectivity levels shown in this table are in units of cd/lx/m$^2$ measured at an observation angle of 0.2° and an entrance angle of -4.0°.
[2] For word legend and fine symbol signs measuring at least 48 inches and for all sizes of bold symbol signs
[3] For word legend and fine symbol signs measuring less than 48 inches
[4] Minimum sign contrast ratio ≥ 3:1 (white retroreflectivity ÷ red retroreflectivity)
* This sheeting type shall not be used for this color for this application

**Bold Symbol Signs**

- W1-1,2 – Turn and Curve
- W1-3,4 – Reverse Turn and Curve
- W1-5 – Winding Road
- W1-6,7 – Large Arrow
- W1-8 – Chevron
- W1-10 – Intersection in Curve
- W1-11 – Hairpin Curve
- W1-15 – 270 Degree Loop
- W2-1 – Cross Road
- W2-2,3 – Side Road
- W2-4,5 – T and Y Intersection
- W2-6 – Circular Intersection
- W2-7,8 – Double Side Roads
- W3-1 – Stop Ahead
- W3-2 – Yield Ahead
- W3-3 – Signal Ahead
- W4-1 – Merge
- W4-2 – Lane Ends
- W4-3 – Added Lane
- W4-5 – Entering Roadway Merge
- W4-6 – Entering Roadway Added Lane
- W6-1,2 – Divided Highway Begins and Ends
- W6-3 – Two-Way Traffic
- W10-1,2,3,4,11,12 – Grade Crossing Advance Warning
- W11-2 – Pedestrian Crossing
- W11-3,4,16-22 – Large Animals
- W11-5 – Farm Equipment
- W11-6 – Snowmobile Crossing
- W11-7 – Equestrian Crossing
- W11-8 – Fire Station **
- W11-10 – Truck Crossing
- W12-1 – Double Arrow
- W16-5P,6P,7P – Pointing Arrow Plaques
- W20-7 – Flagger
- W21-1 – Worker

**Fine Symbol Signs** (symbol signs not listed as bold symbol signs)

**Special Cases**

- W3-1 – Stop Ahead: Red retroreflectivity ≥ 7
- W3-2 – Yield Ahead: Red retroreflectivity ≥ 7; White retroreflectivity ≥ 35
- W3-3 – Signal Ahead: Red retroreflectivity ≥ 7; Green retroreflectivity ≥ 7
- W3-5 – Speed Reduction: White retroreflectivity ≥ 50
- For non-diamond shaped signs, such as W14-3 (No Passing Zone), W4-4P (Cross Traffic Does Not Stop), or W13-1P,2,3,6,7 (Speed Advisory Signs), use the largest sign dimension to determine the proper minimum retroreflectivity level.

** Refer to FHWA's List of Known Errors for error in table. Refer to Section 1A.04 for more details.

# CHAPTER 2B. REGULATORY SIGNS, BARRICADES, AND GATES

## Chapter 2B Subchapter and Section Organization

**GENERAL**

2B.01 Application of Regulatory Signs
2B.02 Design of Regulatory Signs
2B.03 Size of Regulatory Signs
2B.04 STOP Sign (R1-1) and ALL-WAY Plaque (R1-3P)
2B.05 YIELD Sign (R1-2)

**SIGNING FOR RIGHT-OF-WAY AT INTERSECTIONS**

2B.06 General Considerations
2B.07 Determining the Minor Road for Unsignalized Intersections
2B.08 Right-of-Way Intersection Control Considerations
2B.09 No Intersection Control
2B.10 Yield Control
2B.11 Minor Road Stop Control
2B.12 All-Way Stop Control
2B.13 All-Way Stop Control Warrant A: Crash Experience
2B.14 All-Way Stop Control Warrant B: Sight Distance
2B.15 All-Way Stop Control Warrant C: Transition to Signal Control or YIELD Control at a Circular Intersection
2B.16 All-Way Stop Control Warrant D: 8-Hour Volume (Vehicles, Pedestrians, Bicycles)
2B.17 All-Way Stop Control Warrant E: Other Factors
2B.18 STOP Sign or YIELD Sign Placement
2B.19 Yield Here to Pedestrians Signs and Stop Here for Pedestrians Signs (R1-5 Series)
2B.20 In-Street and Overhead Pedestrian and Trail Crossing Signs (R1-6 and R1-9 Series)

**SPEED LIMIT SIGNS AND PLAQUES**

2B.21 Speed Limit Sign (R2-1)
2B.22 Vehicle Speed Limit Plaques (R2-2P Series)
2B.23 Night Speed Limit Plaque (R2-3P)
2B.24 Minimum Speed Limit Plaque (R2-4P) and Combined Maximum and Minimum Speed Limits Sign (R2-4a)
2B.25 Higher Fines Signs and Plaque (R2-6P, R2-10, and R2-11)

**MOVEMENT AND LANE CONTROL SIGNS AND PLAQUES**

2B.26 Movement Prohibition Signs (R3-1 through R3-4, R3-18, and R3-27)
2B.27 Intersection Lane Control Signs (R3-5 through R3-8)
2B.28 Mandatory Movement Lane Control Signs (R3-5, R3-5a, R3-7, R3-19 Series, and R3-20) and Plaques
2B.29 Optional Movement Lane Control Signs (R3-6 Series)
2B.30 Advance Intersection Lane Control Signs (R3-8 Series)
2B.31 RIGHT (LEFT) LANE MUST EXIT Signs (R3-33 and R3-33a)
2B.32 Two-Way Left-Turn-Only Signs (R3-9a and R3-9b) and Plaques
2B.33 BEGIN and END Plaques (R3-9cP and R3-9dP)
2B.34 Reversible Lane Control Signs (R3-9e through R3-9i)
2B.35 Jughandle Signs (R3-23, R3-24, R3-25, and R3-26 Series)

**PASSING, KEEP RIGHT AND SLOW TRAFFIC SIGNS**

2B.36 DO NOT PASS Sign (R4-1)
2B.37 PASS WITH CARE Sign (R4-2)

2B.38 KEEP RIGHT EXCEPT TO PASS Sign (R4-16), SLOWER TRAFFIC KEEP RIGHT Sign (R4-3), and TRUCKS USE RIGHT LANE Sign (R4-5)
2B.39 Keep Right and Keep Left Signs (R4-7 Series and R4-8 Series)
2B.40 STAY IN LANE Sign (R4-9)
2B.41 RUNAWAY VEHICLES ONLY Sign (R4-10)
2B.42 Slow Vehicle Turn-Out Signs (R4-12, R4-13, and R4-14)
2B.43 DO NOT DRIVE ON SHOULDER Sign (R4-17) and DO NOT PASS ON SHOULDER Sign (R4-18)
2B.44 ALL TRAFFIC Sign (R4-20) and RIGHT (LEFT) TURN ONLY Sign (R4-21)

**SELECTIVE EXCLUSION SIGNS AND PLAQUES**
2B.45 Selective Exclusion Signs and Plaques

**DO NOT ENTER, WRONG WAY, ONE WAY, AND RELATED SIGNS AND PLAQUES**
2B.46 DO NOT ENTER Sign (R5-1)
2B.47 WRONG WAY Sign (R5-1a)
2B.48 Wrong-Way Traffic Control at Interchange Ramps
2B.49 ONE WAY Signs (R6-1 and R6-2)
2B.50 Divided Highway Crossing Signs (R6-3 and R6-3a)
2B.51 Roundabout Circulation Plaque (R6-5P)

**PARKING, STANDING, STOPPING, AND EMERGENCY RESTRICTION SIGNS**
2B.52 Parking, Standing, and Stopping Signs (R7 and R8 Series)
2B.53 Design of Parking, Standing, and Stopping Signs
2B.54 Placement of Parking, Standing, and Stopping Signs
2B.55 Emergency Restriction Signs (R8-4 and R8-7)

**PEDESTRIAN SIGNS**
2B.56 WALK ON LEFT FACING TRAFFIC and No Hitchhiking Signs (R9-1, R9-4, and R9-4a)
2B.57 Pedestrian Crossing Signs (R9-2 and R9-3)
2B.58 Traffic Signal Pedestrian and Bicycle Actuation Signs (R10-1 through R10-4 and R10-24 through R1-26)

**TRAFFIC SIGNAL SIGNS**
2B.59 Traffic Signal Signs (R10-5 through R10-30)
2B.60 No Turn on Red Signs (R10-11 Series, R10-17a, and R10-30)
2B.61 Ramp Metering Signs (R10-28 and R10-29)

**ROAD CLOSED AND WEIGHT LIMIT SIGNS**
2B.62 KEEP OFF MEDIAN Sign (R11-1)
2B.63 ROAD CLOSED Sign (R11-2) and LOCAL TRAFFIC ONLY Signs (R11-3 Series and R11-4)
2B.64 Weight Limit Signs (R12-1 through R12-7)
2B.65 Weigh Station Sign (R13-1)
2B.66 TRUCK ROUTE Sign (R14-1)
2B.67 Hazardous Material Signs (R14-2 and R14-3)
2B.68 National Network Signs (R14-4 and R14-5)

**OTHER REGULATORY SIGNS AND PLAQUES**
2B.69 Photo Enforced Signs and Plaques (R10-18, R10-18a, R10-19P, and R10-19aP)
2B.70 MINOR CRASHES MOVE VEHICLES FROM TRAVEL LANES Sign (R16-4)
2B.71 Move Over or Reduced Speed Sign (R16-3)
2B.72 No Hand-Held Phone Use by Driver Signs (R16-15 and R16-15a)
2B.73 Headlight Use Signs (R16-5 through R16-11)
2B.74 Seat Belt Symbol

## BARRICADES AND GATES

2B.75 Barricades
2B.76 Gates

## CALIFORNIA SECTIONS

2B.101(CA) NO FISHING (JUMPING) FROM BRIDGE Sign (R23(CA))
2B.102(CA) $1000 Fine Signs (R47(CA) and R47A(CA))
2B.103(CA) PRIVATE ROAD (PRIVATE PROPERTY) VEHICLE CODE ENFORCED Sign (R101(CA))
2B.104(CA) GOLF CARTS OK DAYLIGHT HOURS Sign (SR43(CA))
2B.105(CA) Bus and Truck Registration Sign (SR44(CA))
2B.106(CA) EMERGENCY ACCESS KEEP CLEAR Sign (SR46(CA))
2B.107(CA) Off Highway Vehicle Signs (SR47(CA) and SR48(CA))
2B.108(CA) NO CAMPING OR SLEEPING IN VEHICLE Sign (R119(CA))
2B.109(CA) BEGIN/END FREEWAY Signs (R57(CA) and R58(CA))
2B.110(CA) No Loitering, Camping, Vending or Parking of Vehicles 30 Feet or Longer Sign (S22(CA))

# GENERAL

## Section 2B.01 Application of Regulatory Signs

**Standard:**

01 **Regulatory signs shall be used to inform road users of selected traffic laws or regulations and to indicate the applicability of the legal requirements.**

02 **Regulatory signs shall be installed at or near where the regulations apply. The signs shall clearly indicate the requirements imposed by the regulations and shall be designed and installed to provide adequate visibility and legibility in order to obtain compliance.**

03 **Regulatory signs shall be retroreflective or illuminated (see Section 2A.21).**

04 **Traffic control device related orders, ordinances and resolutions by local authorities which affect State highways shall be approved by Caltrans.**

Support:

05 Signs required for enforcement are normally placed by, and at the expense of, the authority establishing the regulation.

06 Refer to CVC § 21461 for failure to obey a regulatory sign.

## Section 2B.02 Design of Regulatory Signs

**Standard:**

01 **Regulatory signs shall be rectangular unless specifically designated otherwise in this Manual. Regulatory signs shall be designed in accordance with the sizes, shapes, colors, and legends contained in the "Standard Highway Signs" publication and Caltrans' California Sign Specifications (see Section 1A.05).**

Support:

02 The use of educational plaques to supplement symbol signs is described in Section 2A.09.

03 The use of LEDs in the border or legend of regulatory signs is described in Section 2A.12.

**Standard:**

04 **LED signs displaying a part-time prohibitory message incorporating a red circle and diagonal of a static sign shall display a red symbol that approximates the same red circle and diagonal as closely as possible. The symbol of the action to be prohibited shall be displayed in white LEDs on a black background.**

05 **A regulatory sign displayed entirely with LEDs and incorporated within the border of a larger full-matrix changeable message sign shall display the regulatory sign legend in the size, shape, color, and legend of the standard regulatory sign.**

## Section 2B.03 Size of Regulatory Signs

**Standard:**

01 **Except as provided in Section 2A.07, the minimum sizes for regulatory signs shall be as shown in Table 2B-1 and Table 2B-1(CA).**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2B-1.

**Standard:**

03 **Except as provided in Paragraphs 5 and 6 of this Section, the minimum sizes for regulatory signs facing traffic on multi-lane conventional roads shall be as shown in the Multi-Lane column of Table 2B-1 and Table 2B-1(CA).**

04 **The minimum size of regulatory signs applied on low-volume rural roads with operating speeds of 30 mph or less shall be as shown in the Minimum column of Table 2B-1.**

Option:

05 Where the posted speed limit is 35 mph or less on a multi-lane highway or street, other than for a STOP sign, the minimum size shown in the Single Lane column in Table 2B-1 and 2B-1(CA) may be used.

06 Where a regulatory sign, other than a STOP sign, is placed on the left-hand side of a multi-lane roadway in addition to the installation of the same regulatory sign on the right-hand side or the roadway, the minimum size shown in the Single Lane column in Table 2B-1 and 2B-1(CA) may be used for both the sign on the right- hand side and the sign on the left-hand side of the roadway.

*Guidance:*

07 *The minimum sizes for regulatory signs facing traffic on exit and entrance ramps at major interchanges connecting an Expressway or Freeway with an Expressway or Freeway (see Section 2E.11) should be as shown in the column of*

*Table 2B-1 that corresponds to the mainline roadway classification (Expressway or Freeway). If a minimum size is not provided in the Freeway column, the minimum size in the Expressway column should be used. If a minimum size is not provided in the Freeway or Expressway Column, the size in the Oversized column should be used.*

08 *The minimum sizes for all regulatory signs facing traffic on exit and entrance ramps at all other classifications of interchanges (see Section 2E.11) should be the sizes shown in Table 2B-1 in the Conventional Road Single Lane column for single-lane ramps and in the Multi-Lane column for multi-lane ramps.*

## Section 2B.04 STOP Sign (R1-1) and ALL-WAY Plaque (R1-3P)

**Standard:**

01 **When it is determined that a full stop is always required on an approach to an intersection, a STOP (R1-1) sign (see Figure 2B-1) shall be used.**

01a **When a required stop is to apply at the entrance to an intersection from a one-way street with a roadway of 30 feet or more in width, stop signs shall be erected both on the left and the right sides of the one-way street at or near the entrance to the intersection. Refer to CVC § 21355.**

02 **Secondary legends shall not be used on STOP sign faces.**

03 **The STOP sign shall not be displayed using a changeable message sign.**

04 **At intersections where all approaches are controlled by STOP signs (see Section 2B.12), an ALL-WAY (R1-3P) supplemental plaque (see Figure 2B-1) shall be mounted below each STOP sign. The ALL-WAY plaque shall have a white legend and border on a red background.**

05 **Supplemental plaques with legends such as 2-WAY, 3-WAY, 4-WAY, or other numbers of ways shall not be used with STOP signs.**

Support:

06 The use of the CROSS TRAFFIC DOES NOT STOP (W4-4P Series) and other plaques with variations of this legend is described in Section 2C.66.

*Guidance:*

07 *The TRAFFIC FROM LEFT (RIGHT) DOES NOT STOP (W4-4aP) plaque or ONCOMING TRAFFIC DOES NOT STOP (W4-4bP) plaque should be used at intersections where STOP signs control all but one approach to the intersection, unless the only non-stopped approach is from a one-way street.*

Option:

08 The EXCEPT RIGHT TURN (R1-10P) plaque (see Figure 2B-1) may be mounted below the STOP sign if an engineering study determines that a special combination of geometry and traffic volumes is present that makes it possible for right-turning traffic on the approach to be allowed to enter the intersection without stopping.

Support:

09 The design and application of Stop Beacons are described in Section 4S.05.

10 A STOP (R1-1) sign is not a "cure-all" and is not a substitute for other traffic control devices and/or other traffic calming strategies. Often, the need for a STOP (R1-1) sign can be eliminated if the sight distance is increased by removing obstructions.

### Through Highways

Option:

11 STOP (R1-1) signs may be installed either at or near the entrance to a State highway, except at signalized intersections, or at any location so as to control traffic within an intersection. Refer to CVC §§ 21352 and 21355. See Section 1A.05 for information regarding this publication.

Support:

12 Authority to place STOP (R1-1) signs facing State highway traffic is delegated to the Caltrans District Directors.

Option:

13 Local authorities may designate any highway under their jurisdiction as a through highway and install STOP (R1-1) signs in a like manner. Refer to CVC § 21354.

**Standard:**

14 **No local authority shall erect or maintain any STOP (R1-1) sign or other traffic control device requiring a stop, on any State highway, except by permission of Caltrans. Refer to CVC § 21353.**

Support:

15 Caltrans will grant such permission only when an investigation indicates that the STOP (R1-1) sign will benefit traffic.

## Section 2B.05 YIELD Sign (R1-2)

Support:

01 The YIELD sign requires road users to yield the right-of-way to other traffic on certain approaches to an intersection or on a two way approach to a one way section of roadway, such as a narrow bridge or underpass. Vehicles controlled by a YIELD sign need to slow down to a speed that is reasonable for the existing conditions or stop when necessary to avoid interfering with conflicting traffic.

**Standard:**

02 **The YIELD (R1-2) sign (see Figure 2B-1) shall not be displayed using a changeable message sign.**

# SIGNING FOR RIGHT-OF-WAY AT INTERSECTIONS

## Section 2B.06 General Considerations

Support:

01 Unsignalized intersections represent the most common form of intersection right-of-way control. Selection of control type might be impacted by specific requirements of State law or local ordinances.

02 Roundabouts and traffic circles are circular intersection designs and are not traffic control devices. The decision to convert an intersection from a conventional intersection to a circular intersection is an engineering design decision and not a traffic control device decision. As such, criteria for conversion from a conventional intersection to a circular intersection are not included in the MUTCD.

*Guidance:*

03 *The type of traffic control used at an unsignalized intersection should be the least restrictive that provides appropriate levels of safety and efficiency for all road users.*

Support:

04 Some types of right-of-way control that can exist at an unsignalized intersection in order from the least restrictive to the most restrictive are the following:

A. No intersection control (see Section 2B.09): There are no right-of-way traffic control devices on any of the approaches to the intersection.
B. Yield control (see Section 2B.10): YIELD signs are placed on all approaches (for a circular intersection), ~~on opposing approaches for a four-leg intersection~~, on a single approach for a three-leg intersection, ~~or in the median of a divided highway~~. The YIELD signs are placed on the minor road.
C. Minor road stop control (see Section 2B.11): STOP signs are typically placed on opposing approaches (for a four-leg intersection) or on a single approach (for a three-leg intersection). The STOP signs are normally placed on the minor road. Section 2B.07 contains guidance on selecting the minor road.
D. All-way stop control (see Section 2B.12): STOP signs are placed on all approaches to the intersection.

*Guidance:*

05 *When selecting a form of intersection control, the following factors should be considered:*

*A. Motor vehicle, bicycle, and pedestrian traffic volumes on all approaches**;** where the term units/day or units/hour is indicated, it should be the total of motor vehicle, bicycle, and pedestrian volume;*
*B. Driver yielding behavior with regard to all modes of conflicting traffic, including bicyclists and pedestrians;*
*C. Number and angle of approaches;*
*E. Approach speeds;*
*E. Sight distance available on each approach;*
*F. Reported crash experience; and*
*G. The presence of a grade crossing near the intersection.*

**Standard:**

06 **YIELD or STOP signs shall not be used for speed control.**

Support:

07 Appropriate traffic calming or other speed control measures are available to control vehicle speeds, such as those that do not have the potential to diminish the effectiveness of traffic control devices when used for their specified purpose.

**Standard:**

08 **Because the potential for conflicting commands could create driver confusion, YIELD ~~or STOP~~ signs shall not be used in conjunction with any traffic control signal operation, except in the following cases:**

**~~A. If the signal indication for an approach is a flashing red at all times;~~**
**B. If a minor street or driveway is located within or adjacent to the area controlled by the traffic control signal, but does not require separate traffic signal control because an extremely low potential for conflict exists; or**
**C. If a channelized turn lane is separated from the adjacent travel lanes by an island and the channelized turn lane is not controlled by a traffic control signal.**

08a **STOP signs shall not be erected at any entrance to an intersection controlled by traffic signals. Refer to CVC § 21355(a).**

Option:

08b STOP signs may be used at a channelized turn lane if it is separated from the adjacent travel lanes moving in same direction by an island and the channelized turn lane is not controlled by a traffic control signal.

**Standard:**

09 **STOP signs and YIELD signs shall not be installed on different approaches to the same unsignalized intersection if those approaches conflict with or oppose each other, except as provided for in Items ~~A and~~ B in Paragraph 3 of Section 2B.10.**

10 **Portable or part-time STOP or YIELD signs shall not be used except for emergency and temporary traffic control zone purposes.**

11 **A portable or part-time (folding) STOP sign that is manually placed into view and manually removed from view shall not be used during a power outage to control a signalized approach unless the maintaining agency establishes that the signal indication that will first be displayed to that approach upon restoration of power is a flashing red signal indication and that the portable STOP sign will be manually removed from view prior to resuming stop-and-go operation of the traffic control signal.**

Option:

12 A portable or part-time (folding) STOP sign that is electrically or mechanically operated such that it only displays the stop message during a power outage and ceases to display the stop message upon restoration of power may be used during a power outage to control a signalized approach.

Support:

13 The use of STOP signs at grade crossings is described in Sections 8B.04 and 8B.05.

14 Section 9B.01 contains provisions regarding the assignment of priority where a shared-use path crosses a roadway.

## Section 2B.07 Determining the Minor Road for Unsignalized Intersections

*Guidance:*

01 *The selection of the minor road to be controlled by YIELD or STOP signs should be based on one or more of the following criteria:*

*A. A roadway intersecting a designated through or numbered highway,*
*B. A roadway with the lower functional classification,*
*C. A roadway with the lower traffic volume,*
*D. A roadway with the lower speed limit, and/or*
*E. A roadway that intersects with a roadway that has a higher priority for one or more modes of travel.*

02 *When two roadways that have relatively equal volumes, speeds, and/or other characteristics intersect, the following factors should be considered in selecting the minor road for installation of YIELD or STOP signs:*

*A. Controlling the direction that conflicts the most with established pedestrian crossing activity or school walking routes;*
*B. Controlling the direction that has obscured vision, dips, or bumps that already require drivers to use lower operating speeds; and*
*C. Controlling the direction that has the best sight distance from a controlled position to observe conflicting traffic.*

Support:

03 Refer to CVC § 21356 for the erection of YIELD signs upon the approaches to more than one of the intersecting streets.

## Section 2B.08 Right-of-Way Intersection Control Considerations

*Guidance:*

01 *Before converting to a more restrictive form of right-of-way control at an unsignalized intersection, the following alternative treatments to address safety, operational, or other concerns should be among those to be considered:*

*A. Where yield or stop controlled, installing Yield Ahead or Stop Ahead signs on the appropriate approaches to the intersection;*
*B. Removing parking on one or more approaches;*
*C. Removing sight distance obstructions;*
*D. Installing signs along the major street to warn road users approaching the intersection;*
*E. Relocating the stop line(s) and making other changes to improve the sight distance at the intersection;*

*F. Installing measures designed to reduce speeds on the approaches;*
*G. Installing an Intersection Control Beacon (see Section 4S.02) or Stop Beacon (see Section 4S.05) at the intersection to supplement STOP sign control;*
*H. Installing a Warning Beacon (see Section 4S.03) on warning signs in advance of a stop-controlled intersection on major-street and/or minor-street approaches;*
*I. Adding one or more lanes on a minor-street approach to reduce the number of vehicles per lane on the approach;*
*J. Revising the geometrics at the intersection to channelize vehicular movements and reduce the time required for a vehicle to complete a movement, which could also assist pedestrians;*
*K. Revising the geometrics at the intersection to add pedestrian median refuge islands and/or curb extensions;*
*L. Installing roadway lighting if a disproportionate number of crashes occur at night;*
*M. Restricting one or more turning movements on a full-time or part-time basis if alternate routes are available;*
*N. Installing on the major street a pedestrian-actuated device: Warning Beacon (see Section 4S.03), rectangular rapid-flashing beacon (see Section 4L.01), or In-Roadway Warning Lights (see Chapter 4U), if pedestrian safety is the major concern;*
*O. If the warrant is satisfied, installing all-way stop control;*
*P. Installing a pedestrian hybrid beacon (see Chapter 4J) on the major street to address pedestrian safety;*
*Q. Installing a circular intersection; and*
*R. Employing other alternatives, depending on conditions at the intersection.*

## Section 2B.09 No Intersection Control

*Guidance:*

01 *The decision not to use intersection control should be based on engineering judgment.*

Option:

02 The following factors may be considered:

A. Intersection sight distance is adequate on all approaches.
B. All approaches to the intersection are a single lane and there are no separate turn lanes.
C. The combined motor vehicle, bicycle, and pedestrian volume (existing or projected) entering the intersection from all approaches averages less than 1,000 units per day or 80 units in the peak hour.
D. There are no marked crosswalks or bicycle lanes on any approach.
E. None of the approaches to the intersection are for a through highway, main road, or higher functional classification.
F. The angle of intersection is between 90 and 75 degrees.
G. The functional classification of the intersecting streets is either the intersection of two local streets or the intersection of a local street with a collector street.

## Section 2B.10 Yield Control

*Guidance:*

01 *At intersections where a full stop is not necessary at all times, consideration should first be given to using less restrictive measures such as YIELD signs.*

02 *Yield control should be considered when engineering judgment indicates that all of the following conditions exist:*

*A. Intersection sight distance is adequate on the approaches to be controlled by YIELD signs.*
*B. All approaches to the intersection are a single lane and there are no separate turn lanes.*
*C. One of the following crash-related criteria applies:*
*D. For changing from no intersection control to yield control, there have been two or more reported crashes in the previous 12 months that are susceptible to correction by the installation of a YIELD sign.*
*E. For changing from minor road stop control to yield control, there have been two or fewer reported crashes in the previous 12 months.*
*F. The combined motor vehicle, bicycle, and pedestrian volume entering the intersection averages less than 1,800 units per day or 140 units in the peak hour.*

*G. The angle of intersection is between 90 and 75 degrees.*

*H. The functional classification of the intersecting streets is either the intersection of two local streets or the intersection of a local street with a collector street.*

Support:

02a Refer to FHWA's List of Known Errors for errors in Paragraph 2, Items D and E text. Refer to Section 1A.04 for more details.

Option:

03 YIELD signs may be installed at an intersection when any of the following conditions apply:

~~A. At the second intersection of a divided highway crossing or median break functioning as two separate intersections (see Figure 2B-19). In this case, a YIELD sign may be installed at the entrance to the second intersection.~~

B. For a channelized turn lane that is separated from the adjacent travel lanes by an island, even if the adjacent lanes at the intersection are controlled by a highway traffic control signal or by a STOP sign.

C. At an intersection where a special problem exists and where engineering judgment indicates the problem to be susceptible to correction by the use of the YIELD sign.

D. Facing the entering roadway for a merge-type movement if engineering judgment indicates that control is needed because acceleration geometry and/or sight distance is not adequate for merging traffic operation.

E. On low-volume rural roads if engineering judgment indicates that a YIELD sign would provide adequate control.

F. On an approach to an intersection where the only permissible movement is a right-turn movement with an intersection geometry similar to a channelized right-turn lane or an approach to a roundabout.

*Guidance:*

04 *The YIELD signs should be installed on opposing minor-street approaches (for a four-leg intersection) or on the minor-street approach (for a three-leg intersection). When two intersecting roadways have relatively equal volumes, speeds, and other characteristics, yield control should be installed on the approach that conflicts the most with established pedestrian crossing activity, school walking routes, or bicycle crossing activity.*

**Standard:**

05 **A YIELD sign shall be used to require road users to yield the right-of-way to other traffic at the entrance to a roundabout. YIELD signs at roundabouts shall be used to control the approach roadways and shall not be used to control the circulatory roadway.**

06 **YIELD signs shall not be placed in more than one of ~~on all of~~ the approaches to an intersection, except at roundabouts. Refer to CVC § 21356.**

## Section 2B.11 Minor Road Stop Control

*Guidance:*

01 *Stop control on the minor-road approach or approaches to an intersection should be considered when engineering judgment indicates that one or more of the following conditions exist:*

*A. A restricted view exists that requires road users to stop in order to adequately observe conflicting traffic on the through street or highway.*

*B. Crash records indicate that:*

*1. For a four-leg intersection, there are three or more reported crashes in a 12-month period or six or more reported crashes in a 36-month period. The crashes should be susceptible to correction by installation of minor-road stop control.*

*2. For a three-leg intersection, there are three or more reported crashes in a 12-month period or five or more reported crashes in a 36-month period. The crashes should be susceptible to correction by installation of minor-road stop control.*

*C. The intersection is of a lower functional classification road with a higher functional classification road.*

*D. Conditions that previously supported the installation of all-way stop control no longer exist.*

02 *On low-volume rural roads, a STOP sign should be considered at an intersection where engineering judgment indicates that Item C in Paragraph 1 of this Section is applicable or where the intersection has inadequate sight distance for the operating vehicle speeds.*

## Section 2B.12 All-Way Stop Control

Support:

01 The provisions in the following sections describe warrants for the recommended engineering study to determine all-way stop control. Warrants are not a substitute for engineering judgment. The fact that a warrant for a particular traffic control device is met is not conclusive justification to install or not install all-way stop control. Because each intersection will have unique characteristics that affect its operational performance or safety, it is the engineering study for a given intersection that is ultimately the basis for a decision to install or not install all-way stop control.

02 All-way stop controls at intersections with substantially differing approach volumes can reduce the effectiveness of these devices for all roadway users.

*Guidance:*

03 *The decision to establish all-way stop control at an unsignalized intersection should be based on an engineering study. The engineering study for all-way stop control should include an analysis of factors related to the existing operation and safety at the intersection, the potential to improve these conditions, and the applicable factors contained in the following all-way stop control warrants:*

- *A. All-Way Stop Control Warrant A: Crash Experience (see Section 2B.13)*
- *B. All-Way Stop Control Warrant B: Sight Distance (see Section 2B.14)*
- *C. All-Way Stop Control Warrant C: Transition to Signal Control or Transition to Yield Control at a Circular Intersection (see Section 2B.15)*
- *D. All-Way Stop Control Warrant D: 8-Hour Volume (Vehicles, Pedestrians, Bicycles) (see Section 2B.16)*
- *E. All-Way Stop Control Warrant E: Other Factors (see Section 2B.17)*

Option:

04 The decision to install all-way stop control on site roadways open to public travel may be based on engineering judgment.

**Standard:**

05 **The satisfaction of an all-way stop control warrant or warrants shall not in itself require the installation of all-way stop control at an unsignalized intersection.**

## Section 2B.13 All-Way Stop Control Warrant A: Crash Experience

Option:

01 All-way stop control may be installed at an intersection where an engineering study indicates that:

A. For a four-leg intersection, there are five or more reported crashes in a 12-month period or six or more reported crashes in a 36-month period that were of a type susceptible to correction by the installation of all-way stop control.

B. For a three-leg intersection, there are four or more reported crashes in a 12-month period or five or more reported crashes in a 36-month period that were of a type susceptible to correction by the installation of all-way stop control.

## Section 2B.14 All-Way Stop Control Warrant B: Sight Distance

Option:

01 All-way stop control may be installed at an intersection where an engineering study indicates that sight distance on the minor-road approaches controlled by a STOP sign is not adequate for a vehicle to turn onto or cross the major (uncontrolled) road.

Support:

02 At such a location, a road user, after stopping, cannot see conflicting traffic and is not able to negotiate the intersection unless conflicting cross traffic is also required to stop.

## Section 2B.15 All-Way Stop Control Warrant C: Transition to Signal Control or Transition to Yield Control at a Circular Intersection

Option:

01 All-way stop control may be installed at locations where all-way stop control is an interim measure that can be installed to control traffic while arrangements are being made for the installation of a traffic control signal (see Chapter 4C) at the intersection or for the installation of yield control at a circular intersection.

## Section 2B.16 All-Way Stop Control Warrant D: 8-Hour Volume (Vehicles, Pedestrians, Bicycles)

Option:

01 All-way stop control may be installed at an intersection where an engineering study indicates:

A. The combined motor vehicle, bicycle, and pedestrian volume entering the intersection from the major- street approaches is at least 300 units per hour for each of any 8 hours of a typical day; and
B. The combined motor vehicle, bicycle, and pedestrian volume entering the intersection from the minor- street approaches is at least 200 units per hour for each of any of the same 8 hours.

02 If the 85th-percentile approach speed of the major-street traffic exceeds 40 mph, the minimum vehicular volume warrants may be reduced to 70 percent of the values given in Items A and B in Paragraph 1 of this Section.

## Section 2B.17 All-Way Stop Control Warrant E: Other Factors

Option:

01 All-way stop control may be installed at an intersection where an engineering study indicates that all- way stop control is needed due to other factors not addressed in the other all-way stop control warrants. Such other factors may include, but are not limited to, the following:

A. The need to control left-turn conflicts,
B. An intersection of two residential neighborhood collector (through) streets of similar design and operating characteristics where all-way stop control would improve traffic operational characteristics of the intersection, or
C. Where pedestrian and/or bicyclist movements support the installation of all-way stop control.

## Section 2B.18 STOP Sign or YIELD Sign Placement

**Standard:**

01 **The STOP or YIELD sign shall be installed on the near side of the intersection on the right- hand side of the approach to which it applies. When the STOP or YIELD sign is installed at this required location and the sign visibility is restricted, a Stop Ahead sign (see Section 2C.35) shall be installed in advance of the STOP sign or a Yield Ahead sign (see Section 2C.35) shall be installed in advance of the YIELD sign.**

02 **The STOP or YIELD sign shall be located as close as practicable to the intersection it regulates, while optimizing its visibility to the road user it is intended to regulate.**

03 **STOP signs and YIELD signs shall not be mounted on the same post.**

03a **If other signs are grouped with a STOP sign, except for ONE WAY (R6-1 & R6-2) signs and Street Name (D3-1) sign (refer to Sections 2B.49 & 2D.45), they shall be installed below the STOP sign.**

Support:

03b When a Street Name sign and a ONE WAY sign are mounted on the same assembly as a STOP sign, the Street Name sign needs to be placed at the top, the ONE WAY sign directly below it, and the STOP sign at the bottom.

04 Section 2A.05 contains information about mounting signs back-to-back with a STOP or YIELD sign.

*Guidance:*

05 *STOP or YIELD signs should not be placed farther than 50 feet from the edge of the pavement of the intersected roadway (see Drawing F in Figure 2A-3).*

06 *Supplemental plaques used in conjunction with a STOP or YIELD sign should be limited to those specified for such use in this Manual*

Option:

07 Where drivers proceeding straight ahead must yield to traffic approaching from the opposite direction, such as at a one-lane bridge, a TO ONCOMING TRAFFIC (R1-2aP) plaque (see Figure 2B-1) may be mounted below the YIELD sign.

08 Where drivers must yield to traffic in a multi-lane roundabout, a TO TRAFFIC IN CIRCLE (R1-2bP) or TO ALL LANES (R1-2cP) plaque (see Figure 2B-1) may be mounted below the YIELD sign.

Support:

09 Figure 2A-3 shows examples of some typical placements of STOP signs and YIELD signs.

**Standard:**

09a **The TO ONCOMING TRAFFIC (R1-2a) sign when used, shall be mounted on the same post and immediately below a YIELD (R1-2) sign.**

*Guidance:*

09b *The width of the R1-2a sign should be equal to the width of the YIELD (R1-2) sign.*

Support:

10 Section 2A.13 contains additional information about separate and combined mounting of other signs with STOP or YIELD signs.

*Guidance:*

11 *Stop lines that are used to supplement a STOP sign should be located as described in Section 3B.19. Yield lines that are used to supplement a YIELD sign should be located as described in Section 3B.19.*

12 *Where there is a marked crosswalk at the intersection, the STOP sign should be installed in advance of the edge of the crosswalk that is nearest to the approaching traffic.*

13 *Except at roundabouts and channelized right-turn lanes, where there is a marked crosswalk at the intersection, the YIELD sign should be installed in advance of the edge of the crosswalk that is nearest to the approaching traffic.*

14 *Where two roads intersect at an acute angle, the STOP or YIELD sign should be positioned at an angle, or shielded, so that the legend is out of view of traffic to which it does not apply.*

15 *If a raised splitter island is available on the left-hand side of a multi-lane roundabout approach, an additional YIELD sign should be placed on the left-hand side of the approach.*

Option:

16 If a raised splitter island is available on the left-hand side of a single-lane roundabout approach, an additional YIELD sign may be placed on the left-hand side of the approach.

17 At wide-throat intersections or where two or more approach lanes of traffic exist on the signed approach, an additional STOP or YIELD sign may be installed on the left-hand side of the road and/or a stop or yield line may be used to improve observance of the right-of-way control. At channelized intersections or at divided roadways separated by a median or divisional island, the additional STOP or YIELD sign may be placed on a channelizing island, or in the median or on the divisional island. An additional STOP or YIELD sign may also be placed overhead facing the approach at the intersection to improve observance of the right- of-way control.

**Standard:**

18 **More than one STOP sign or more than one YIELD sign shall not be placed on the same support facing in the same direction.**

Option:

19 For a yield-controlled channelized right-turn movement onto a roadway without an acceleration lane and for an entrance ramp onto a freeway or expressway without an acceleration lane, a NO MERGE AREA (W4-5aP) supplemental plaque (see Section 2C.45) may be mounted below a Yield Ahead (W3-2) sign and/or below a YIELD (R1-2) sign when engineering judgment indicates that road users would expect an acceleration lane to be present.

## Section 2B.19 Yield Here To Pedestrians Signs and Stop Here For Pedestrians Signs (R1-5 Series)

Support:

01 The R1-5 series signs are intended to mitigate the scenario that can place pedestrians at risk by blocking other drivers' view of pedestrians and by blocking the pedestrians' view of the vehicles approaching in the adjacent lanes.

**Standard:**

02 **Yield Here to ~~(Stop Here for)~~ Pedestrians (R1-5, R1-5a, ~~R1-5b, R1-5c~~, R1-5d, and ~~R1-5e~~) signs (see Figure 2B-2) shall be used if yield ~~(stop)~~ lines are used in advance of a marked crosswalk only where it crosses an uncontrolled multi-lane approach. ~~The Stop Here for Pedestrians signs shall only be used where the law specifically requires that a driver must stop for a pedestrian in a crosswalk~~. The legend STATE LAW shall not be displayed on the R1-5 series signs.**

Support:

02a The Stop Here for Pedestrian signs (R1-5b, R1-5c and R1-5e) are deleted as a stop is not required in California per CVC § 21950.

*Guidance:*

03 *If yield ~~(stop)~~ lines and Yield Here to ~~(Stop Here for)~~ Pedestrians signs are used in advance of a crosswalk that crosses an uncontrolled multi-lane approach, the signs should be placed 20 to 50 feet in advance of the nearest edge of the crosswalk (see Section 3B.19 and Figure 3B-16).*

**Standard:**

04 **When used with a School Crossing assembly within school zones (see Part 7), the R1-5a ~~and R1-5c~~ signs shall be used in place of the R1-5 ~~and R1-5b~~ signs in accordance with Paragraph 2 of this Section.**

05 **When used with a Trail Crossing assembly (see Section 2C.54), the R1-5d ~~and R1-5e~~ signs shall be used in place of the R1-5 ~~and R1-5b~~ signs in accordance with Paragraph 2 of this Section.**

*Guidance:*

06 *When Yield Here to ~~(Stop Here for)~~ Pedestrians signs are provided in advance of a crosswalk across an multi-lane approach, parking should be prohibited in the area between the yield (stop) line and the crosswalk.*

07 *Yield ~~(stop)~~ lines and Yield Here to (~~Stop Here for~~) Pedestrians signs should not be used in advance of crosswalks that cross an approach to or departure from a roundabout.*

Option:

08 Yield Here to ~~(Stop Here for)~~ Pedestrians signs may be used in accordance with Paragraphs 2 through 4 of this Section even if yield ~~(stop)~~ lines are not used.

09 A Pedestrian Crossing (W11-2) warning sign may be placed overhead or may be post-mounted with a diagonal downward-pointing arrow (W16-7P) plaque at the crosswalk location where Yield Here to ~~(Stop Here for)~~ Pedestrians signs have been installed in advance of the crosswalk.

**Standard:**

10 **If a W11-2 sign is post-mounted at the crosswalk location where a Yield Here to ~~(Stop Here for)~~ Pedestrians sign is used on the approach, the Yield Here to ~~(Stop Here for)~~ Pedestrians sign shall not be placed on the same post as the W11-2 sign.**

Option:

11 An advance Pedestrian Crossing (W11-2) warning sign with an AHEAD or a distance supplemental plaque may be used in conjunction with a Yield Here to ~~(Stop Here for)~~ Pedestrians sign on the approach to the same crosswalk.

12 In-Street Pedestrian Crossing signs and Yield Here to ~~(Stop Here for)~~ Pedestrians signs may be used together at the same crosswalk.

## Section 2B.20 In-Street and Overhead Pedestrian and Trail Crossing Signs (R1-6 and R1-9 Series)

Option:

01 The In-Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) sign (see Figure 2B-2), In-Street Trail Crossing (R1-6d ~~or R1-6e~~) sign (see Figure 2B-2), the Overhead Pedestrian Crossing (R1-9 ~~or R1-9a~~) sign (see Figure 2B-2), or the Overhead Trail Crossing (R1-9d ~~or R1-9e~~) sign (see Figure 2B-2) may be used to remind road users of laws regarding right-of-way at an unsignalized crosswalk. The legend STATE LAW may be displayed at the top of the R1-6 series and R1-9 series signs if applicable. On the R1-6 series signs, the legends ~~STOP or~~ YIELD may be used instead of the appropriate ~~STOP sign or~~ YIELD sign symbol.

02 Highway agencies may develop and apply criteria for determining the applicability of In-Street Pedestrian Crossing signs.

Support:

02a The In-Street Pedestrian crossing (R1-6a), In-Street Trail Crossing (R1-6e), and Overhead Pedestrian Crossing (R1-9a), and Overhead Trail Crossing (R1-9e) signs are deleted as a stop is not required in California per CVC § 21950.

**Standard:**

03 **~~The STOP FOR legend shall only be used in States where the State law specifically requires that a driver must stop for a pedestrian or a bicyclist in a crosswalk.~~**

04 **If used, In-Street Pedestrian or Trail Crossing signs shall only be placed in the roadway at the crosswalk location on the center line, on a median island, on a lane line, or on an edge line.**

05 **The In-Street Pedestrian or Trail Crossing sign shall not be post-mounted on the left-hand or right-hand side of the roadway.**

Support:

06 Section 3I.02 contains information about the use of tubular markers to provide additional emphasis for a pedestrian crossing.

**Standard:**

07 **If used, the Overhead Pedestrian or Trail Crossing sign shall be placed over the roadway at the crosswalk location.**

08 **When used at an uncontrolled crossing, the In-Street or Overhead Pedestrian Crossing sign shall be used only**

**as a supplement to a Pedestrian Crossing (W11-2) warning sign with a diagonal downward-pointing arrow (W16-7P) plaque at the crosswalk location.**

09 **When used at an uncontrolled crossing, the In-Street or Overhead Trail Crossing sign shall be used only as a supplement to a Trail Crossing (W11-15) warning sign with a diagonal downward- pointing arrow (W16-7P) plaque at the crosswalk location.**

10 **An In-Street or Overhead Pedestrian or Trail Crossing sign shall not be placed in advance of the crosswalk to educate road users about the State law prior to reaching the crosswalk, nor shall it be installed as an educational display that is not near any crosswalk.**

*Guidance:*

11 *If an island (see Chapter 3J) is available, the In-Street Pedestrian or Trail Crossing sign, if used, should be placed on the island.*

Option:

12 In-Street Pedestrian or Trail Crossing signs may be mounted back-to-back in the median or on the center line of an undivided roadway.

**Standard:**

13 **The In-Street Pedestrian or Trail Crossing sign and the Overhead Pedestrian Crossing or Trail sign shall not be used at crosswalks on approaches controlled by a stop control, traffic control signal, pedestrian hybrid beacon, or an emergency-vehicle hybrid beacon.**

14 **Except where the In-Street Crossing sign is placed on a physical island, the sign support shall be designed to bend over and then bounce back to its normal vertical position when struck by a vehicle.**

Option:

15 The In-Street and Overhead Pedestrian and Trail Crossing sign may be used at intersections or midblock pedestrian crossings with flashing beacons.

Support:

16 The provisions of Section 2A.15 concerning mounting height are not applicable for the In-Street Pedestrian Crossing sign. Section 2A.18 contains information about sign mounting methods.

**Standard:**

17 **The top of an In-Street Pedestrian or Trail Crossing sign shall be a maximum of 4 feet above the pavement surface. The top of an In-Street Pedestrian or Trail Crossing sign placed in an island shall be a maximum of 4 feet above the island surface.**

Option:

18 The In-Street Pedestrian Crossing or Trail Crossing signs may be used seasonally to prevent damage in winter because of plowing operations, and may be removed at night if the pedestrian activity at night is minimal.

19 Both sign mounting types, In-Street Crossing (R1-6 series) signs and Overhead Crossing (R1-9 series) signs, may be used together at the same crosswalk.

# SPEED LIMIT SIGNS AND PLAQUES

## Section 2B.21 Speed Limit Sign (R2-1)

Support:

01 In general, the maximum speed limits applicable to rural and urban roads are established:

A. Statutorily – a maximum speed limit applicable to a particular class of road, such as freeways or city streets, that is established by State law; or

B. As speed zones – based on engineering studies.

02 State statutory limits might restrict the maximum speed limit that can be established on a particular road, notwithstanding what an engineering study might indicate.

03 Agencies with designated authorities to set speed limits, which include States, and sometimes local jurisdictions, can establish non-statutory speed limits or ~~designate reduced~~ speed zones using an engineering study. Setting appropriate speed limits is especially important to ensure safety for all road users in varying types of contexts, particularly on roadways where adjacent land use suggests that trips could be served by varied modes. These situations include urban and suburban non-freeway arterials or rural arterials that serve as main streets in smaller communities, consistent with the context classifications of urban core, urban, suburban, and rural towns found in "A Policy on Geometric Design of Highways and Streets," 2018 Edition, AASHTO. When setting a speed limit, a range of factors such as land-use context, pedestrian and bicyclist activity, crash history, intersection spacing, driveway density, roadway geometry, roadside conditions, roadway functional classification, traffic volume, and observed speeds can influence the speed limit determined in the engineering study. The engineering study will determine which of the recommended factors will prevail in setting the speed limit.

04 Jurisdictions can use speed limit setting tools and methods such as expert systems and those consistent with the safe system approach as part of the required engineering study for a non-statutory speed limit. As speed limit setting tools vary, jurisdictions need to be aware of their limitations and advantages, possible variation between the tools and the need to explore gaps or weaknesses of tools, and weigh the output accordingly in consideration of setting speed limits.

04a The setting of speed limits can be controversial and requires a rational and defensible determination to maintain public confidence. Speed limits are normally set near the 85th-percentile speed that statistically represents one standard deviation above the average speed and establishes the upper limit of what is considered reasonable and prudent. As with most laws, speed limits need to depend on the voluntary compliance of the greater majority of motorists. Speed limits cannot be set arbitrarily low, as this would create violators of the majority of drivers and would not command the respect of the public. Artificially low speed limits can lead to poor compliance as well as large variations in speed within the traffic stream. Increased speed variance can also create more conflicts and passing maneuvers.

05 To achieve desired operating speeds, agencies often implement other speed management strategies concurrently with setting speed limits, such as traffic calming measures, geometric design features, speed safety cameras, and increased enforcement.

05a The most effective way to reduce speeds is through a combination of strategies using traffic control devices related to speed management, roadway design and engineering solutions, traffic calming techniques and measures, public education, and enforcement efforts. Effectively managing road user speed relies on numerous factors, which include enforcement, roadway characteristics, surrounding environment, adjacent land use, and traffic control devices. Many studies find that engineering changes, such as change a road's infrastructure, are one of the most important factors in reducing vehicle operating speeds. Engineering changes are also one of the most effective interventions at reducing pedestrian injury and fatality rates. Potential street engineering changes, such as curb extensions, median islands, raised crosswalks, roundabouts, and speed bumps or speed humps, naturally result in lower speeds. It is realized that these engineering changes can be costly and time-consuming to implement.

**Standard:**

06 **Speed zones (other than statutory speed limits) shall only be established on the basis of an engineering and traffic survey (E&TS), also noted as an engineering study that has been performed in accordance with traffic engineering practices. ~~The engineering study shall consider the roadway context.~~**

*Guidance:*

07 *The engineering study should consider the roadway context. Among the factors that should be considered when conducting an engineering study for establishing or reevaluating speed limits within speed zones are the following:*

*A. Roadway environment not readily apparent to the driver (CVC § 627) (such as roadside development, number and frequency of driveways and access points, and land use), functional classification, public transit volume and*

*location or frequency of stops, parking practices, and pedestrian and bicycle facilities and activity;*

B. *Roadway characteristics not readily apparent to the driver (CVC § 627) (such as lane widths, shoulder condition, grade, alignment, median type, and sight distance);*

C. *Geographic context (such as ~~an urban district, rural town center, non-urbanized rural area, or suburban area~~ residential district, business district, business activity district), ~~and multi-modal trip generation;~~*

D. *Reported crash experience for at least a ~~12~~ 36-month period;*

E. *Speed distribution of free-flowing vehicles including the pace, median (50th-percentile), and 85th- ~~precentile~~ percentile speeds; and*

F. *A review of past speed studies to identify any trends in operating speeds (CVC § 22358.8)*

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 7, Item E text. Refer to Section 1A.04 for more details.

*Guidance:*

08 *When the 85th-percentile speed is appreciably greater than the posted speed limit, and the roadway context does not support setting a higher speed limit, the engineering (not E&TS) study should consider whether changes to geometric features, enforcement, and/or other speed-reduction countermeasures might improve compliance with the posted speed limit. A similar approach should be used if the results of past speed studies indicate that the 85th-percentile speed has consistently increased.*

09 ~~*On urban and suburban arterials, and on rural arterials that serve as main streets through developed areas of communities, the 85th-percentile speed should not be used to set speed limits without consideration of all factors described in Paragraph 7 of this Section.*~~

**Standard:**

10 **~~On a freeway, expressway, or rural highway (outside urbanized locations or conditions),~~ On a highway, the speed limit that is posted within a speed zone ~~should~~ shall be within ~~5 mph~~ 12.4 mph of the 85th-percentile speed of free-flowing motor-vehicle traffic under the following conditions:**

**A. All factors described in Paragraph 7 of this Section have been considered and determined to be non-mitigating.**

**B. ~~The measures described in Paragraph 8 of this Section have been considered to the extent practicable.~~**

*Guidance:*

11 *State and local agencies should conduct engineering studies to reevaluate non-statutory speed limits on segments of their roadways that have undergone significant changes since the last review (such as changes to roadway context, the addition or elimination of parking or driveways, changes in the number of travel lanes, changes in the configuration of bicycle lanes, changes to road geometrics, changes in traffic control signal coordination, or significant changes in traffic volumes).*

12 *Speed studies for signalized intersection approaches should be taken outside the influence area of the traffic control signal, which is generally considered to be approximately ½ mile, to avoid obtaining skewed results for the speed distribution. If the signal spacing is less than 1 mile, the speed study should be at approximately the middle of the segment.*

Support:

12a Speed limits in California are governed by the CVC, §§ 22348 through 22413; also, pertinent sections are found in §§ 627 and 40802 and others referenced in this section. Refer to Section 1A.05 for information regarding this publication.

12b Refer to Part 6, Section 6B.01 for speed limit signs in temporary traffic control zones. Refer to Part 7 for speed limit signs in school areas.

**Basic Speed Law and Prima Facie Speed Limits – Refer to CVC §§ 22350 & 22352**

12c The basic speed law states "No person shall drive a vehicle upon a highway at a speed greater than is reasonable or prudent having due regard for weather, visibility, the traffic on, and the surface and width of, the highway, and in no event at a speed which endangers the safety of persons or property."

**Standard:**

12d **Prima facie speed limits are specific limits and shall apply unless changed based upon an E&TS and signs are posted that display the new speed limit.**

Option:

12e Prima facie speed limits may be preempted by the basic speed law, when roadway, traffic or weather conditions warrant a lower speed.

**Legal Authority for Establishing Speed Limits**

Support:

12f Delegation of legal authority to set speed limits based on valid E&TS on State highways is given to Caltrans District Directors. The District Director of each transportation district is authorized to issue orders regulating the speed of traffic, up to 70 mph on State highways. The Director of Caltrans retains the authority to approve variable, and minimum speed limits on State freeways.

**Standard:**

12g **The speed limits shown in Table 2B-101(CA) shall apply, unless changed upon the basis of an E&TS.**

Option:

12h The speed limits shown in Table 2B-102(CA) may apply, unless changed upon E&TS.

**Variable Speed Limits on Freeways - Refer to CVC § 22355**

12i The following speed limits may apply:

- Whenever Caltrans determines based upon an E&TS that the safe and orderly movement of traffic upon any freeway segment will be facilitated by the establishment of variable speed limits
- Caltrans may erect, regulate, and control signs upon the state highway which is a freeway, or any portion thereof, which, if used, signs shall be designed to permit display of different speeds at various times of the day or night.
- Such signs need not conform to the standards & specifications per CVC § 21400, but if used, shall be of sufficient size and clarity to give adequate notice of the applicable speed limit.

**Minimum Speed Limits on State Highways - Refer to CVC § 22400**

12j The following speed limits may apply:

- Whenever Caltrans determines based upon an E&TS that slow speeds on any part of a state highway consistently impede the normal and reasonable movement of traffic, Caltrans may determine and declare a minimum speed limit. Appropriate signs giving notice shall then be installed on that segment.
- A motorist can be cited for stopping or impeding the normal and reasonable movement of traffic unless the stop is necessary for safe operation and in compliance with the law.

**Engineering and Traffic Survey (E&TS)**

Support:

12k CVC § 627 defines the term "Engineering and traffic survey" and lists its requirements.

**Standard:**

12l **An E&TS shall include, among other requirements deemed necessary by Caltrans, consideration of all of the following:**

**A. Prevailing speeds as determined by traffic engineering measurements.**

**B. Collision records.**

**C. Highway, traffic, and roadside conditions not readily apparent to the driver.**

*Guidance:*

12m *The E&TS should contain sufficient information to document that the required three items of CVC § 627 are provided and that other conditions not readily apparent to a driver are properly identified.*

12n *Prevailing speeds are determined by a speed zone survey. A speed zone survey should include:*

*A. The intent of the speed measurements is to determine the actual speed of unimpeded traffic. The speed of traffic should not be altered by concentrated law enforcement, or other means, just prior to, or while taking the speed measurements.*

*B. Speeds should be read directly from a radar or other electronic speed measuring devices; or,*

*C. Devices, other than radar, capable of accurately distinguishing and measuring the unimpeded speed of free flowing vehicles may be used.*

*D. A location should be selected where prevailing speeds are representative of the entire speed zone section. If speeds vary on a given route, more than one speed zone section may be required, with separate measurements for each section. Locations for measurements should be chosen so as to minimize the effects of traffic signals or stop signs.*

*E. Speed measurements should be taken during off-peak hours between peak traffic periods on weekdays. If there is difficulty in obtaining the desired quantity, speed measurements may be taken during any period with free flowing traffic.*

*F. The weather should be fair (dry pavement) with no unusual conditions prevailing.*

*G. The surveyor and equipment should not affect the traffic speeds. For this reason, an unmarked car is recommended, and the radar speed meter located as inconspicuously as possible.*

*H. In order for the sample to be representative of the actual traffic flow, the minimum sample should be 100 vehicles in each survey. In no case should the sample contain less than 50 vehicles.*

*I. Short speed zones of less than 0.5 miles should be avoided, except in transition areas.*

*J. Speed zone changes should be coordinated with changes in roadway conditions or roadside development.*

*K. Speed zoning should be coordinated with adjacent jurisdictions.*

Support:

12o Physical conditions such as width, curvature, grade and surface conditions, or any other condition readily apparent to the driver, in the absence of other factors, would not require special downward speed zoning. Refer to CVC § 22358.5.

Option:

12p When qualifying an appropriate speed limit, local authorities may also consider all of the following findings:

A. Residential density, if any of the following conditions exist on the particular portion of highway and the property contiguous thereto, other than a business district:

1. Upon one side of the highway, within 0.25 miles, the contiguous property fronting thereon is occupied by 13 or more separate dwelling houses or business structures.
2. Upon both sides of the highway, collectively, within a distance of 0.25 miles the contiguous property fronting thereon is occupied by 16 or more separate dwelling houses or business structures.
3. The portion of highway is larger than 0.25 miles but has the ratio of separate dwelling houses or business structures to the length of the highway described in either subparagraph 1 or 2 above.

B. Safety of bicyclists and pedestrians, with increased consideration for vulnerable pedestrian groups including children, seniors, persons with disabilities, users of personal assistive mobility devices, and the unhoused.

12q The following two forms may be used to document speed zoning based on an E&TS to establish speed limits:

1. State Highways - The E&TS for State highways is made under the direction of the Caltrans District traffic engineer. Long form should be used to document the data and reports including:
   a. One copy of Speed Zone Survey Sheet (Refer to Figure 2B-101(CA)) showing:
      - A north arrow
      - Name and/or highway number of the route to be zoned
      - Post Mile or other distance measurement
      - Limits of the proposed zones for each direction of travel
      - Roads and crossroad names, number and width of lanes, indicate parking restrictions
      - Appropriate notations showing type of roadside development, such as "scattered business," "solid residential," etc. Schools adjacent to the highway are shown, but other buildings need not be plotted unless they are a factor in the speed recommendation or the point of termination of a speed zone.
      - Collision rates for the zones involved
      - Annual average daily traffic volume
      - Location of traffic signals, signs and markings
      - If the highway is divided, the limits of zones for each direction of travel
      - Plotted 85$^{th}$ percentile and pace speeds at location taken showing speed profile
   b. A report to the District Director that includes:
      - The reason for the initiation of speed zone survey.
      - Recommendations and supporting reasons.
      - The enforcement jurisdictions involved and the recommendations and opinions of those officials.
      - The stationing or reference post in mileage at the beginning and ending of each proposed zone and any intermediate equations. Location ties must be given to readily identifiable physical features.
2. Roadways under the jurisdiction of City or County:
   a. Short form may be used for documenting speed zoning (Figure 2B-104(CA)).
   b. Determination of Speed Limits - Figures 2B-103(CA) & 2B-104(CA) show examples of data sheets which may be used to record speed observations. Specific types of vehicles may be tallied by use of letter symbols in appropriate squares.

12r In most situations, the short form for local streets and roads will be adequate; however, the procedure or long form used on State highways may be used at the option of the local agency.

*Guidance:*

12s *The establishment of a speed limit of more than 5 mph below the 85th percentile speed should be done with great care as studies have shown that establishing a speed limit less than the 85th percentile generally results in an increase in collision rates; in addition, this may make violators of a disproportionate number of the reasonable majority of drivers.*

Support:

12t Generally, the most decisive evidence of conditions not readily apparent to the driver are identified in collision histories.

12u Speed limits are established at or near the 85th percentile speed, which is defined as that speed at or below which 85 percent of the traffic is moving. The 85th percentile speed is often referred to as the critical speed. Pace speed is defined as the 10 mph increment of speed containing the largest number of vehicles (Refer to Figure 2B-102(CA)). The lower limit of the pace is plotted on the Speed Zone Survey Sheets as an aid in determining the proper zone limits. Speed limits higher than the 85th percentile speed are not generally considered reasonable and prudent. Speed limits below the 85th percentile speed does not ordinarily facilitate the orderly movement of traffic and require constant enforcement to maintain compliance. Speed limits established on the basis of the 85th percentile speed conform to the consensus of those who drive highways as to what speed is reasonable and prudent, and are not dependent on the judgment of one or a few individuals.

12v The majority of drivers comply with the basic speed law. Speed limits set at or near the 85th percentile speed provide law enforcement officers with a limit to cite drivers who will not conform to what the majority considers reasonable and prudent. Further studies show that establishing a speed limit at less than the 85th percentile (Critical Speed) generally results in an increase in collision rates.

Option:

12w When roadside development results in traffic conflicts and unusual conditions which are not readily apparent to drivers, as indicated in collision records, speed limits somewhat below the 85th percentile may be justified. Concurrence and support of enforcement officials are necessary for the successful operation of a speed zone.

*Guidance:*

12x *Speed zones of less than 0.5 miles in rural locations, 0.25 miles for urban locations, and short transition zones should be avoided.*

Support:

12y Any existing E&TS that was performed before January 1, 2022 in accordance with previous traffic control device standards is not required to be updated until it is due for reevaluation per the 5, 7 or 14 year criteria. An E&TS can originally exist for 7 years and may be extended to 14 years if the conditions are met.

**CVC § 22358.6 – 85th-Percentile speed, Rounding, 5 mph Increment, 5 mph speed reduction and Maximum Speed Reduction**

**Standard:**

12z **When a speed limit is to be posted, it shall be established at the nearest 5 mph increment of the 85th-percentile speed of free-flowing traffic (CVC § 22358.6(a)), except as shown in the two Options described in paragraphs 12aa and 12ab, or if using additional 5 mph speed reduction for safety corridor designation (CVC § 22358.7(a)(1)) or adjacent to land or facility generating high concentrations of bicyclists and pedestrians (CVC § 22358.7(a)(2)).**

Option:

12aa For cases in which the nearest 5 mph increment of the 85th-percentile speed would require a rounding down, the speed limit may be reduced by 5 mph from the nearest 5 mph increment of the 85th-percentile speed, in compliance with CVC §§ 627 and 22358.5. CVC §§ 22353, 22353.2, 22353.3, 22353.4, and 22353.5, may also be considered, if applicable. Refer to Standard below for documentation requirements. Refer to CVC § 22358.6(b).

12ab For cases in which rounding the 85th-percentile speed to the nearest 5 mph increment would require a rounding up, the speed limit may be rounded down to the nearest 5 mph increment below the 85th percentile speed. Refer to CVC § 21400(b). Refer to CVC § 22358.6(c).

**Standard:**

12ac **If 5 mph reduction is applied to the 85th percentile speed after it is rounded to the nearest 5 mph increment and the required rounding is a rounding down, to establish posted speed limit, an E&TS shall document in writing the conditions and justification for the 5 mph reduction and be approved by a registered Civil or Traffic Engineer. The reasons for the lower speed limit shall be in compliance with CVC §§ 627 and 22358.5. Refer to § 22358.6(b).**

12ad **If the 85th percentile speed is rounded down to the lower 5 mph increment, in cases in which the 85th percentile speed**

**needs to round up to the nearest 5 mph increment, to establish posted speed limit, the speed limit shall not be reduced any further pursuant to CVC § 22358.6(b).**

12ae **The total reduction from the 85th percentile speed shall not exceed 12.4 mph. Refer to CVC § 22358.6(e).**

Support:

12af Refer to Table 2B-103(CA), which provides examples of 85th-percentile speed values and the application of the speed limit policies and criteria applicable per CVC §§ 22358.6 and 22358.7.

**CVC § 22358.7 – Safety corridor and Land or Facilities Generating High Concentrations of Bicyclists and Pedestrians**

**Standard:**

12ag **Additional lowering of the speed limits from standards, as included in paragraph 12z and Options as described in paragraphs 12aa, and 12ab, is prohibited, except for the roadway segments designated as "safety corridor" or "land or facilities that generate high concentrations of bicyclists and pedestrians" in compliance with CVC §§ 22358.6(d) and 22358.7.**

Option:

12ah Caltrans or local authority may additionally lower the speed limits by 5 mph from the final value determined based on paragraphs 12z, 12aa and 12ab if, after completing an E&TS, it finds that the speed limit is still more than is reasonable or safe, for either of the following reasons:

1. The portion of a highway has been designated as a safety corridor.
2. The portion of highway meets the definition of land or facility that generates high concentrations of bicyclists or pedestrians.

**CVC § 22358.7(a)(1) – "Safety Corridor" Definition**

**Standard:**

12ai **A safety corridor shall be defined as a roadway segment within an overall roadway network where the highest number of serious injury and fatality crashes occur.**

12aj **One or more crash weighting factors as provided in paragraph 12ak of this section shall be used to prioritize the locations of fatal and serious injury crashes in developing the "Safety Corridor".**

Option:

12ak The crash weighting factors to prioritize the locations of fatal and serious injury crashes in developing the "Safety Corridor" may include, but are not limited to, the factors included in Table 2B-104(CA).

12al Data used to determine a safety corridor may be from the most recent E&TS performed. The crash data source may include, but is not limited to, California Highway Patrol's (CHP) Statewide Integrated Traffic Records System (SWITRS).

**Standard:**

12am **The prioritized subset of safety corridors shall:**

1. **Identify specific locations with high crash occurrences.**
2. **Identify corridor-level segments with a pattern of crash reoccurrence.**
3. **Be able to be stratified by mode.**

12an **Safety corridors shall represent a prioritized subset of the overall roadway network within an authority's responsibilities and shall not exceed one-fifth of the overall roadway network.**

*Guidance:*

12ao *A jurisdiction should use three to five years of the most recent crash data to determine a safety corridor based on Fatal and Serious Injury data.*

Option:

12ap For crash coverage, safety corridors may identify the subset of the overall roadway network where a minimum of 25% of the Fatal + Serious Injury (F+SI) crashes occur.

12aq To identify logical termini, the geographic extent of a safety corridor may be determined by non-engineering staff.

**Standard:**

12ar **A licensed professional engineer shall sign off on logical termini identified for a safety corridor using existing E&TS.**

Option:

12as Crash/Volume rate may be used to provide additional locations to be included in the safety corridor. Local agencies may use proactive measures as indicators.

**CVC § 22358.7(a)(2) – "Land or facility that generates high concentrations of bicyclists or pedestrians" definition**

**Standard:**

12at **A land or facility that generates high concentrations of bicyclists or pedestrians shall be defined as the portion of the highway where one or more of any of the generators listed in Table 2B-105(CA) are present within a distance of 1320 feet longitudinally of highway, and meets condition specified in paragraph 12au.**

12au **Crash data demonstrates the highway segment is within the top twenty percent of pedestrian and/or bicyclist fatalities or serious injuries over a three-to-five-year.**

12av **A highway segment shall be defined as the portion of the highway where a location that meets the aforementioned criteria is present within a distance of 1320 feet longitudinally of highway.**

Option:

12aw A highway segment may be longer than 1320 feet longitudinally of highway provided that a minimum of one location within the top twenty percent of fatal and serious injury pedestrian and/or bicyclist crashes within a three-to-five-year period is present for every 1320 feet.

**Standard:**

12ax **The top twenty percent of pedestrian and/or bicyclist fatalities or serious injury crashes within a three to five year period shall be based on the geographic area within the jurisdiction.**

Option:

12ay A high concentration of pedestrians and bicyclists may be longer than 1320 feet longitudinally of highway provided that a minimum of one generator is present for every 1320 feet.

12az Data used to determine high concentration locations may be obtained from the most recently performed E&TS.

**CVC § 22358.8 (Retain currently adopted or restore immediately prior speed limit)**

12ba Caltrans or a local authority may retain the currently adopted speed limit without further reduction or restore the immediately prior adopted speed limit on a highway that is not a freeway without further reduction as provided in CVC § 22358.8.

**Standard:**

12bb **Currently adopted speed limit or immediately prior adopted speed limit shall only be retained, by Caltrans Director's Order for SHS or local ordinance for highways under local jurisdiction, if after completing an E&TS, Caltrans or a local authority finds that the speed limit is still more than reasonable or safe, and that speed limit was established with an E&TS and if a registered engineer has evaluated the section of highway and determined that no additional general purpose lanes have been added to the roadway since completion of the traffic survey that established the prior speed limit.**

12bc **If Caltrans or a local authority decides to use lower speed limit based on CVC § 22358.8, after completing an E&TS and finding that the speed limit is still more than is reasonable or safe, it shall not be reduced by any more than 5 mph from the currently adopted speed limit nor below the immediately prior speed limit. Refer to CVC § 22358.8(b).**

12bd **CVC § 22358.8 shall not be applicable to a roadway that is a freeway.**

**CVC § 22358.9 – Business Activity District**

Option:

12be Caltrans or a local authority may, by Caltrans Director's Order for SHS or local ordinance for highways under local jurisdiction, determine and declare a 25 or 20 mph prima facie speed limit on a highway that is not a freeway and that is contiguous to a business activity district when posted with a sign that indicates a speed limit of 25 or 20 mph if the highway segment meets all of the following conditions:

1. A maximum of four traffic lanes.
2. A maximum posted 30 mph prima facie speed limit immediately prior to and after the business activity district, if establishing a 25 mph speed limit.
3. A maximum posted 25 mph prima facie speed limit immediately prior to and after the business activity district, if establishing a 20 mph speed limit.

12bf A "business activity district" is that portion of a highway that is not a freeway and the property contiguous thereto that includes central or neighborhood downtowns, urban villages, or zoning designations that prioritize commercial land uses at the downtown or neighborhood scale and meets a least three of the following four requirements:

4. No less than 50 percent of the contiguous property fronting the highway consists of retail or dining commercial uses, including outdoor dining, that open directly onto sidewalks adjacent to the highway.
5. Parking, including parallel, diagonal, or perpendicular spaces located alongside the highway.

6. Traffic control signals or stop signs regulating traffic flow on the highway, located at intervals of no more than 600 feet.
7. Marked crosswalk(s) not controlled by a traffic control device.

**Standard:**

12bg **Caltrans or a local authority shall not declare a prima facie speed limit on a portion of a highway where it has already lowered the speed limit as permitted for designated safety corridors (CVC § 22358.7) or using the land or facility adjacent to high concentration of pedestrians and bicyclists (CVC § 22358.7) or retained the currently adopted speed limit (CVC § 22358.8) or have restored the immediately prior adopted speed limit (CVC § 22358.8). Refer to CVC § 22358.9(c).**

12bh **CVC § 22358.9 shall not be applicable to a roadway that is a freeway.**

Support:

12bi CVC §§ 22358.7, 22358.8 and 22358.9 and their related policies are also applicable on any privately owned and maintained roads or commercial establishments, if the private road or private property has been subjected to the CVC application by the private property owner or a particular city or county enacts an ordinance or resolution to this effect. Refer to CVC §§ 21100, 21100.1, 21107, 21107.5, 21107.6, and 21107.7.

**Truck Speed Zone on Descending Grades**

*Guidance:*

12bj *Highway descending grades, if used for posting TRUCK Speed Limit signs (R2-1 and M4-4P) for trucks travelling downhill, should have recorded incident history of runaway commercial vehicles. Descending grades shorter than 1 mile should be avoided for posting signs because deceleration of vehicles due to braking action can generally provide sufficient control on descending grades of less than 1 mile.*

Support:

12bk To establish a downhill truck speed limit, a physical profile showing length and gradient and a downhill speed profile for three or more axle commercial vehicles with a gross rating of 10,000 lbs. or more will be provided.

**Standard:**

12bl **Speed profiles for truck speed limits shall be prepared on the same form as other speed surveys and remain valid for up to 7 years and may be extended to 14 years if conditions are met. An analysis of collisions involving trucks shall be prepared.**

**Speed Traps**

Support:

12bm Refer to CVC § 40802 for Speed Traps.

**Standard:**

12bn **A speed trap shall not apply to a local street, road, school zone, senior zone, or business activity district.**

Support:

12bo Senior zone is an area approaching or passing a senior center building or other facility primarily used by senior citizens, or the grounds thereof that is contiguous to a highway and on which is posted a standard "SENIOR" warning sign pursuant to CVC § 22352.

12bp Business activity district is a section of highway described in CVC § 22358.9(b) in which a standard 25 mph or 20 mph speed limit sign has been posted pursuant to CVC § 22358.9(a)(1).

**Standard:**

12bq **A section of highway shall be defined as a speed trap if the prima facie speed limit is not justified by an E&TS within five years, and the enforcement of the speed limit involves the use of radar or any other electronic device that measures the speed of moving objects, or seven years when using radar and all of the criteria specified in Paragraph 12bn are met.**

12br **This time provision shall be extended to seven years if the existing speed limit is initially valid for 5 years, when using radar and all of the following criteria are met:**

- **The arresting officer has successfully completed a minimum of 24 hours of radar operator course. Approved and certified by the Commission on Peace Officer Standards and Training.**
- **The radar used to measure the speed meets or exceeds the minimal operational standards of the National Traffic Highway Safety Administration, and has been calibrated within three years of the alleged violation.**

12bs **This time provision shall be extended to seven years if the existing speed limit is initially valid for 5 years, when using laser or other electronic device (other than radar) and all of the following criteria are met:**

- **The arresting officer has successfully completed a minimum of 24 hours of radar operator course. Approved and certified by the Commission on Peace Officer Standards and Training.**
- **The arresting officer has successfully completed a minimum of 2 hours of additional training. Course approved and certified by the Commission on Peace Officer Standards and Training .**
- **The laser or other electronic device used to measure the speed meets or exceeds the minimal operational standards of the National Traffic Highway Safety Administration, and has been calibrated within three years of the alleged violation.**

Option:

12bt This time provision for an E&TS may be extended to fourteen years when all of the above conditions are met and no significant changes in roadway or traffic conditions have occurred, including changes in adjoining property or land use, roadway width, or traffic volume as determined by a registered engineer.

**Standard:**

13 **The Speed Limit (R2-1) sign (see Figure 2B-3) shall display the limit established by law, ordinance, resolution, regulation, or as adopted by the authorized agency based on an engineering study. The speed limits displayed shall be in multiples of 5 mph.**

14 **Speed Limit (R2-1) signs, indicating speed limits for which posting is required by law, shall be located at the points of change from one speed limit to another.**

*Guidance:*

14a *Sections 2A.13 and 2A.16 provide guidance provisions on the location and lateral offset for signs.*

Option:

14b Where speed zones are longer than 1-mile, intermediate signs may be placed at approximate 1 mile intervals.

14c For three or more lanes in each direction, dual installation on both the left-side and right-side of the roadway may be used.

**Standard:**

14d **Freeways with a speed limit, 65 mph or 70 mph, Speed Limit (R2-1) signs shall be posted as follows:**

- **At the beginning of the segment, on the right-hand side of the roadway.**
- **Subsequently throughout the segment, at a maximum of 10-mile interval and immediately after locations where significant volumes of traffic enter the segment, on the right-hand side of the roadway.**

Option:

- The 10-mile interval may be modified to include locations following entrance ramps.

**Standard:**

14e **Freeways segment where with a speed limit 55 mph, Speed Limit (R2-1) signs shall be posted as follows:**

- **The beginning of the segment on the right-hand side of the roadway.**
- **Subsequently throughout the segment, at maximum 3-mile interval and immediately after locations where significant volumes of traffic enter the segment with no more than 3 interchanges between signs, on the right-hand side of the roadway.**

14f **Expressways with a speed limit 55 mph or 65 mph, Speed Limit (R2-1) signs shall be posted as follows:**

- **At the beginning of the segment, on the right-hand side of the roadway.**
- **Subsequently throughout the segment, at 3- to 5-mile intervals and immediately after locations where significant volumes of traffic enter the segment, on the right-hand side of the roadway.**

14g **Conventional highways with a speed limit 55 mph or 65 mph, Speed Limit (R2-1) signs shall be posted as follows:**

- **At the beginning of the segment, on the right-hand side of the roadway.**
- **Subsequently throughout the segment, at maximum 5- to 10-mile intervals and immediately after locations where significant volumes of traffic enter the segment, on the right-hand side of the roadway.**

Option:

14h Pavement markings with appropriate numerals (refer to Section 3B.20) may be used to supplement speed limit signs.

**Standard:**

15 **At the downstream end of the section to which a particular speed limit applies, a Speed Limit sign showing the next speed limit shall be installed.**

16 **Speed Limit signs indicating the statutory speed limits shall be installed at entrances to the State and, where**

**appropriate, at jurisdictional boundaries in urban areas.**

*Guidance:*

17 *Additional Speed Limit signs should be installed beyond interchanges and major intersections and at other locations where it is necessary to remind road users of the speed limit that is applicable.*

**Standard:**

17a **The Speed Zone Ahead (R2-4(CA)) sign shall always be followed by a Speed Limit (R2-1) sign installed at the beginning of the zone where the speed limit applies.**

17b **The End Speed Limit (R3(CA)) signs, shall be placed at the end of the final speed zone, before the highway reverts to maximum statutory speed limit.**

17c **The End Speed Limit (R3(CA)) sign shall only be used to mark the end of a speed zone.**

17d **The End Speed Limit (R3(CA)) sign shall not be used at a transition into a change in speed limits within a reduced zone.**

17e **The End Speed Limit (R3(CA)) signs, shall be placed at the end of all speed zones and within a reasonable distance of no greater than 1000 ft from the next Speed Limit (R2-1) sign.**

Option:

17f The Speed Zone Ahead (R2-4(CA)) sign (refer to Figure 2B-3(CA)) may be used to inform the motorist of a speed zone.

17g The End Truck Speed Limit (R2-14) sign or the R3(CA) sign (refer to Figure 2B-3(CA)) with the TRUCK (M4-4P) plaque may be used to mark the end of truck speed zones on descending grades.

17h The SLOWER TRAFFIC KEEP RIGHT (R4-3) signs may be installed at locations where there is a tendency of the motorists to drive in the left-hand lane(s) below the normal speed of traffic.

**Truck and Bus Speed Limit Signs**

**Standard**

17i **The TRUCKS, 3 AXLES OR MORE 55 (R6-3B(CA)) sign, the ALL VEHICLES WHEN TOWING 55 (R6-4B(CA)) sign, or the Speed Limit (R2-1) sign and the TRUCK SPEED LIMIT(R2-2P) plaque, shall be placed to indicate the truck speed limit in all truck speed zones.**

17j **The Speed Limit (R2-1) sign and the BUS SPEED LIMIT (R2-2aP(CA)) plaque shall be placed to indicate bus speed limit in all bus speed zones.**

Support:

17k Refer to Section 2B.22 for TRUCK and BUS speed zone signs.

Support:

18 The "Traffic Control Devices Handbook" contains suggested criteria on the spacing of speed limit signs.

18a Refer to FHWA's List of Known Errors for error in Paragraph 18 text. Refer to Section 1A.04 for more details.

*Guidance:*

18b *The Speed Limit (R2-1) signs and R6-3B(CA) and R6-4B(CA) signs should be placed in a location to be most effectively viewed by the approaching motorists.*

**Standard:**

18c **When used, the TRUCKS, 3 AXLES OR MORE 55 (R6-3B(CA)) sign shall be installed approximately 750 feet following each R2-1 sign, both at the beginning and throughout each 60, 65 or 70 mph segment.**

18d **The ALL VEHICLES WHEN TOWING 55 (R6-4B(CA)) sign shall be installed approximately 750 feet following the R6-3B(CA) sign.**

*Guidance:*

18e *The R6-3B(CA) and R6-4B(CA) signs should be placed on highway segments where speeds in excess of 55 mph are permitted.*

Option:

18f The existing AUTOS WITH TRAILERS, TRUCKS 55 MAXIMUM (R6-1(CA)) sign may remain in place until it is knocked down, damaged, stolen, vandalized, or otherwise reaches the end of its useful life.

18g The local California Highway Patrol office may be consulted to identify highway segments where enforcement is an issue. On these segments early replacement of existing R6-1(CA) signs may be necessary.

Support:

18h Refer to CVC § 22406 for types of vehicles subject to the 55 mph maximum speed limit.

~~Option:~~

19 ~~If a jurisdiction has a policy of installing Speed Limit signs in accordance with statutory requirements only on the~~

~~streets that enter a city, neighborhood, or residential area to indicate the speed limit that is applicable to the entire city, neighborhood, or residential area unless otherwise posted, a CITYWIDE (R2- 5aP), NEIGHBORHOOD (R2-5bP), or RESIDENTIAL (R2-5cP) plaque may be mounted above the Speed Limit sign and an UNLESS OTHERWISE POSTED (R2-5P) plaque may be mounted below the Speed Limit sign (see Figure 2B-3).~~

~~Support:~~

20 Section 2C.40 contains information about the use of speed zone signs to inform road users of a reduced or variable speed zone to provide advance notice to comply with the posted speed limit ahead.

Option:

21 If a W3-5b sign is posted to provide notice of a variable speed zone, an END VARIABLE SPEED LIMIT (R2-13) sign (see Figure 2B-3) may be installed at the downstream end of the zone to provide notice to road users of the termination of the speed zone.

**Standard:**

22 **If a W3-5c sign is posted to provide notice of a truck speed zone, an END TRUCK SPEED LIMIT (R2-14) sign (see Figure 2B-3) shall be installed at the downstream end of the zone to provide notice to road users of the termination of the speed zone.**

*Guidance:*

23 *An advisory speed plaque (see Section 2C.59) mounted below a warning sign should be used to warn road users of an advisory speed for a roadway condition. A Speed Limit sign should not be used for this purpose.*

24 *Advance traffic control warning signs (see Section 2C.35), intersection warning signs (see Section 2C.41), and/or other traffic control devices are appropriate warning prior to a signalized intersection. A Speed Limit sign should not be used for this purpose.*

Option:

25 Two types of Speed Limit signs may be used: one to designate passenger car speeds, including any nighttime information or maximum or minimum speed limit that might apply; and the other to show any special speed limits for trucks and other vehicles.

*Guidance:*

26 *No more than three speed limits should be displayed on any one Speed Limit sign or assembly.*

**Speed Enforced Signs**

Option:

26a The SPEED ENFORCED BY RADAR (R48(CA)) sign (refer to Figure 2B-3(CA)) may be used where the California Highway Patrol has received authority to use radar and requests such signs.

*Guidance:*

26b *One sign should be used in each direction at the beginning of the segment of roadway, and at intervening major route intersections, where radar enforcement is in effect.*

Support:

26c The R48(CA) sign is a stand-alone sign intended to alert motorists that speed is enforced by radar on a particular segment of roadway.

Option:

26d The RADAR ENFORCED (R48-1P(CA)) sign (refer to Figure 2B-3(CA)) may be used in combination with the Speed Limit (R2-1) sign on any roadway where law enforcement has the authority to use radar.

*Guidance:*

26e *When used, the R48-1P(CA) sign should be placed below the R2-1 sign, at the beginning of the segment of roadway and at intervening major intersections, where radar enforcement is in effect.*

Option:

26f The SPEED ENFORCED BY AIRCRAFT (R48-2(CA)) sign (refer to Figure 2B-3(CA)) may be placed, when requested by the California Highway Patrol, on sections of highway regularly patrolled by aircraft.

**Standard:**

26g **The R48-2(CA) sign shall be used for both directions of travel.**

*Guidance:*

26h *The R48-2(CA) sign should be placed at the beginning of the section and spaced at 25-mile intervals.*

**Speed Zones in Temporary Traffic Control Areas**

Support:

26i For signing and establishing speed zones in temporary traffic control areas, refer to Section 6B.01 in Part 6.

**Traffic Signals within Speed Zones**

**Standard:**

26j **An agency changing the speed limits within its jurisdiction shall report the speed limit change to the agency operating and maintaining traffic signals within the speed zone no later than 30 days before changing the posted speed limit.**

Support:

26k Changing the signal timing and adjusting the advance detector loops based on the revised speed limits can enhance the operations of the traffic signal.

**Use of Metric System Designations – Refer to CVC § 21351.3**

Option:

26l Dual units for speed limits on signs may be placed on local streets and roads in both Metric and English units.

*Guidance:*

26m *If used, dual unit speed limits should be rounded to the nearest 10 km/h for Metric and 5 mph for English units for posting on signs on local streets and roads.*

Support:

26n Refer to AASHTO's Traffic Engineering Metric Conversion Factors. Refer to Section 1A.05 for information regarding this publication.

**Standard:**

26o **Metric speed limits shall not be placed on State highways.**

Option:

27 A variable speed limit sign that changes the speed limit for traffic and ambient conditions may be installed provided that the appropriate speed limit is displayed at the proper times and locations in accordance with Paragraphs 9 and 10 of this Section.

**Standard:**

28 **The variable speed limit sign legend "SPEED LIMIT" shall be a black legend on a white retroreflective background. The variable speed limit legend shall be displayed in white LEDs on an opaque black background.**

Support:

29 Section 2C.13 contains information about the use of a Vehicle Speed Feedback plaque mounted below a Speed Limit sign that displays to approaching drivers the speed at which they are traveling.

30 Advisory speed signs and plaques are discussed in Sections 2C.12 and 2C.59. Temporary traffic control zone speed signs are discussed in Part 6. The WORK ZONE (G20-5aP) plaque intended for installation above a Speed Limit sign is discussed in Section 6G.08. School Speed Limit signs are discussed in Section 7B.05.

## Section 2B.22 Vehicle Speed Limit Plaques (R2-2P Series)

**Standard:**

01 **Where a special speed limit applies to certain classes of vehicles, the Truck Speed Limit (R2-2P) plaque, Bus Speed Limit (R2-2aP) plaque, Truck-Bus Speed Limit (R2-2bP) plaque, or Vehicles over X Tons Speed Limit (R2-2cP) plaque (see Figure 2B-3) shall be displayed below the Speed Limit (R2-1) sign, except as provided in Paragraph 2 of this Section.**

Option:

01a Where a special speed limit applies to certain classes of vehicles, the TRUCKS, 3 AXLES OR MORE 55 (R6-3B(CA)) sign followed by the ALL VEHICLES WHEN TOWING 55 (R6-4B(CA)) sign may be used. Refer to Section 2B.21 and CVC § 22406.

02 The legend of a Vehicle Speed Limit (R2-2P series) plaque may be combined in a single sign and displayed below the SPEED LIMIT XX legend, similar to the Combined Maximum and Minimum Speed Limits (R2-4a) sign (see Section 2B.24).

A different vehicle class legend may be substituted on the R2-2P series plaque for other classes of vehicles not included in Paragraph 1 of this Section.

## Section 2B.23 Night Speed Limit Plaque (R2-3P)

**Standard:**

01 **Where different speed limits are prescribed for day and night, both limits shall be posted.**

*Guidance:*

02 *A Night Speed Limit (R2-3P) plaque (see Figure 2B-3) should be reversed using a white retroreflective legend and border on a black background.*

Option:

03 A Night Speed Limit plaque may be combined with or installed below the standard Speed Limit (R2- 1) sign.

Support:

04 Refer to CVC § 22355.

## Section 2B.24 Minimum Speed Limit Plaque (R2-4P) and Combined Maximum and Minimum Speed Limits Sign (R2-4a)

**Standard:**

01 **A Minimum Speed Limit (R2-4P) plaque (see Figure 2B-3) shall be displayed only in combination with a Speed Limit sign. Where used, the R2-4P plaque shall be mounted below a Speed Limit (R2-1) sign.**

Option:

02 Where engineering judgment determines that slow speeds on a highway might impede the normal and reasonable movement of traffic, the Minimum Speed Limit (R2-4P) plaque may be installed below a Speed Limit (R2-1) sign to indicate the minimum legal speed. In lieu of a sign assembly with the R2-1 sign and R2- 4P plaque, the Combined Maximum and Minimum Speed Limits (R2-4a) sign may be used.

Support:

03 Refer to CVC § 22400.

## Section 2B.25 Higher Fines Signs and Plaque (R2-6P, R2-10, and R2-11)

**Standard:**

01 **Except as provided in Paragraph 3 of this Section, if increased fines are imposed for traffic violations within a designated zone of a roadway, a BEGIN ~~HIGHER~~ DOUBLE FINES ZONE (R2-10) sign (see Figure 2B-3) or a FINES ~~HIGHER~~ DOUBLE (R2-6aP) plaque (see Figure 2B-3) shall be used to provide notice to road users.**

02 **If an R2-10 sign or an R2-6P plaque is posted to provide notice of increased fines for traffic violations, an END ~~HIGHER~~ DOUBLE FINES ZONE (R2-11) sign (see Figure 2B-3) shall be installed at the downstream end of the zone to provide notice to road users of the termination of the increased fines zone.**

Option:

03 The BEGIN ~~HIGHER~~ DOUBLE FINES ZONE (R2-10) sign or FINES ~~HIGHER~~ DOUBLE (R2-6aP) plaque may be omitted where the ~~higher~~ double fines zone is established by statute.

*Guidance***:**

04 *The BEGIN ~~HIGHER~~ DOUBLE FINES ZONE sign or FINES ~~HIGHER~~ DOUBLE plaque should be located at the beginning of the temporary traffic control zone, school zone, or other applicable designated zone and just beyond any interchanges, major intersections, or other major traffic generators.*

05 *Agencies should limit the use of the ~~Higher~~ Double Fines signs and plaque to locations where work is actually underway, or to locations where the roadway, shoulder, or other conditions, including the presence of a school zone and/or a reduced school speed limit zone, require a speed reduction or extra caution on the part of the road user***.**

**Standard:**

06 **The ~~Higher~~ Double Fines signs and plaque shall have a black legend and border on a white rectangular background. All supplemental plaques mounted below the ~~Higher~~ Double Fines signs and plaque shall have a black legend and border on a white rectangular background.**

07 **The FINES ~~HIGHER~~ DOUBLE plaque shall be mounted below an applicable regulatory or warning sign in a temporary traffic control zone (see Section 6G.08), a school zone (see Section 7B.06), or other applicable designated zone.**

Option:

08 Alternate legends such as BEGIN (or END) DOUBLE FINES ZONE may also be used for the R2-10 and R2-11 signs.

09 The legend FINES HIGHER on the R2-6P plaque may be replaced by FINES DOUBLE (R2-6aP), $XX FINE (R2-

6bP), or another legend appropriate to the specific regulation (see Figure 2B-3).

10 The following may be mounted below an R2-10 sign or R2-6P plaque:

A. A supplemental plaque specifying the times that the higher fines are in effect (similar to the S4-1P plaque shown in Figure 7B-1),
B. A supplemental plaque WHEN CHILDREN (WORKERS) ARE PRESENT, or
C. A supplemental plaque WHEN FLASHING (similar to the S4-4P plaque shown in Figure 7B-1) if used in conjunction with a Speed Limit Sign Beacon (see Section 4S.04).

Support:

11 In California, as per CVC only doubling of the fines is allowed, not higher fines of other denominations. Refer to CVC § 42010 for Safety Enhancement-Double Fine Zone and Section 6G.08 and CVC § 42009 for fines for offenses committed in highway construction or maintenance area.

**Standard:**

12 **The SPECIAL DRIVING ZONE BEGINS HERE – DOUBLE FINE ZONE (SR53(CA)) sign (refer to Figure 2B-3(CA)) shall be placed at the beginning of those portions of highways designated and identified as Safety Enhancement – Double Fine Zones per CVC § 42010.**

13 **The SPECIAL DRIVING ZONE ENDS HERE (SR55(CA)) sign (refer to Figure 2B-3(CA)) shall be placed at the end of those portions of highways designated and identified as Safety Enhancement – Double Fine Zones per CVC § 42010.**

*Guidance:*

14 *The DOUBLE FINE ZONE (SR54(CA)) sign (refer to Figure 2B-3(CA)) should be placed at major intersections to those portions of highways designated and identified as Safety Enhancement – Double Fine Zone, per CVC § 42010, to advise motorists upon entering the highway that they are in a double fine zone.*

# MOVEMENT AND LANE CONTROL SIGNS AND PLAQUES

## Section 2B.26 Movement Prohibition Signs (R3-1 through R3-4, R3-18, and R3-27)

Support:

00 Motorists can make a semicircular or U-turn on a green signal or green arrow except where such turn is prohibited by signs. Refer to CVC 21451 and 21454.

00a Local authorities, by ordinance, may prohibit the making of any turning movement by any vehicle at any intersection or between any designated intersections. Refer to CVC 22113.

00b Refer to Section 2B.01 for information on ordinances and resolutions by local authorities that affect State highways.

Option:

00c Caltrans may restrict turning movements on State highways. Refer to CVC 21352.

Support:

00d A thorough investigation is necessary to determine whether or not the prohibited movements can be satisfactorily made at other locations without undue circuitry of travel.

00e Refer to CVC 22101 for Turn Prohibition signs.

**Standard:**

01 **Movement Prohibition signs (see Figure 2B-4) shall be installed where specific movements are prohibited at an intersection approach except as provided in Paragraph~~s 13 and~~ 17 of this Section.**

*Guidance:*

*02 Movement Prohibition signs should only be used to prohibit a turn or through movement from an entire approach and should not be used to designate movements that are required or permitted from a specific lane or lanes on a multi-lane approach.*

*03 Movement Prohibition signs should be placed where they will be most easily seen by road users who might be intending to make the movement.*

*04 If a No Right Turn (R3-1) sign (see Figure 2B-4) is used, at least one should be placed either over the roadway or at a right-hand corner of the intersection.*

**Standard:**

05 **If a No Left Turn (R3-2) sign (see Figure 2B-4) is used, at least one ~~should~~ shall be placed over the roadway, at the far left corner of the intersection, on a median, or in conjunction with the STOP sign or YIELD sign located on the near right corner.**

*Guidance*:

*06 Except as provided in Item C in Paragraph 11 of this Section for signalized locations, if a NO TURNS (R3-3) sign (see Figure 2B-4) is used, two signs should be used, one at a location specified for a No Right Turn sign and one at a location specified for a No Left Turn sign.*

**Standard:**

06a **The NO TURNS (R3-3) sign shall be used in advance of an intersection to indicate that turns are prohibited.**

*Guidance*:

*07 If a No U-Turn (R3-4) sign (see Figure 2B-4) or a combination No U or Left Turn (R3-18) sign (see Figure 2B-4) is used, at least one should be used at a location specified for a No Left Turn sign.*

*07a The appropriate R3-4 or R3-18 sign should be placed as follows:*

*A. On undivided roads without traffic signals, place on the near right and far left corners of the intersection.*

*B. On undivided roads with traffic signals, place on the far right and far left corners of the intersection, or on the signal mast arm.*

*C. On divided roads at both signalized and unsignalized intersections, place in the median on the near and far side of the intersection, and on the signal mast arm at signalized intersections.*

**Standard:**

08 **If both left turns and U-turns are prohibited, the combination No U or Left Turn (R3-18) sign ~~should~~ shall be used instead of separate R3-2 and R3-4 signs.**

08a **The No U-Turn (R3-4) sign shall be used where U turns are prohibited except when Intersection Lane Control signs (R73(CA) Series) signs are used at signalized intersections with separate left turn phases.**

08b **The R73(CA) series signs shall be installed adjacent to a signal face viewed by road users of the projection of the lane to which it applies.**

Support:

09 Sections 2B.27 through 2B.30 contain information regarding lane control signs that indicate the required or permitted movements from individual lanes.

*Guidance:*

10 *If a No Straight Through (R3-27) sign (see Figure 2B-4) is used, at least one should be placed either over the roadway or at a location where it can be seen by road users who might be intending to travel straight through the intersection.*

11 *If turn prohibition signs are installed in conjunction with traffic control signals:*

*A. The No Right Turn sign should be installed adjacent to a signal face viewed by road users in the right-hand lane.*

*B. The No Left Turn (or No U-Turn or combination No U or Left Turn) sign should be installed adjacent to a signal face viewed by road users in the left-hand lane.*

*C. A NO TURNS sign should be placed adjacent to a signal face viewed by all road users on that approach, or two signs should be used.*

Option:

12 If turn prohibition signs are installed in conjunction with traffic control signals, an additional turn prohibition sign may be post-mounted to supplement the sign mounted overhead.

13 ~~Where ONE WAY signs are used (see Section 2B.49), No Left Turn and No Right Turn signs may be omitted.~~

**Standard:**

13a **On one-way roads, the No Right/Left Turn (R3-1/R3-2) sign shall be placed at the near right/left corner facing traffic approaching the intersection.**

Option:

14 Where the movement restriction applies to certain vehicle classes, signs incorporating a supplementary legend, modified as appropriate, may be used to indicate the specific vehicle class restriction (R3-1b through R3-1d) or exception (R3-1e and R3-1f) (see Figure 2B-4). When the movement restriction applies during certain time periods only, the following Movement Prohibition signing alternatives may be used and are listed in order of preference:

A. A blank-out or changeable message sign (see Chapter 2L) that displays the prohibited movement only during the time that the movement prohibition is applicable, especially at signalized intersections.

B. Permanently-mounted signs incorporating a supplementary legend showing the hours and days during which the prohibition is applicable (R3-1g and R3-1h) (see Figure 2B-4).

C. Portable signs, installed by proper authority, located off the roadway at each corner of the intersection. The portable signs are only to be used during the time that the movement prohibition is applicable.

**Standard:**

15 **The blank-out part-time electronic-display Movement Prohibition sign shall consist of a red circle and diagonal with a white prohibited movement on an opaque black background.**

Option:

16 Movement Prohibition signs may be omitted at a ramp entrance to an expressway or a channelized intersection where the design is such as to indicate clearly the one-way traffic movement on the ramp or turning lane.

**Standard:**

17 **The No Left Turn (R3-2) sign, the No U-Turn (R3-4) sign, and the combination No U or Left Turn (R3-18) sign shall not be used at approaches to roundabouts to prohibit drivers from turning left onto the circulatory roadway of a roundabout.**

Support:

18 At roundabouts, the use of R3-2, R3-4, or R3-18 signs to prohibit left turns onto the circulatory roadway might confuse drivers about the possible legal turning movements around the roundabout. Roundabout Circulation (R6-5P) plaques (see Section 2B.51) and/or ONE WAY (R6-1 or R6-2) signs are appropriate to indicate the travel direction within a roundabout.

## Section 2B.27 Intersection Lane Control Signs (R3-5 through R3-8)

**Standard:**

01 **Intersection Lane Control signs (see Figure 2B-4), if used, shall require road users in certain lanes to turn, shall permit turns from a lane where such turns would otherwise not be permitted, shall require a road user to**

**stay in the same lane and proceed straight through an intersection, or shall indicate permitted movements from a lane.**

Support:

02 Intersection Lane Control signs have three applications:

A. Mandatory Movement Lane Control (R3-5 series and R3-7 series) signs,
B. Optional Movement Lane Control (R3-6 series) signs, and
C. Advance Intersection Lane Control (R3-8 series) signs.

*Guidance:*

03 *When Intersection Lane Control signs are mounted overhead, each sign used should be placed over the lane or a projection of the lane to which it applies.*

04 *On signalized approaches where through lanes that become mandatory turn lanes, multiple-lane turns that include shared lanes for through and turning movements, or other lane-use regulations are present that would be unexpected by unfamiliar road users, overhead Intersection Lane Control signs should be installed at the signalized location over the appropriate lanes or projections thereof and in advance of the intersection over the appropriate lanes.*

05 *Where overhead mounting on the approach is impracticable for the Advance and/or Intersection lane Control signs, one of the following alternatives should be employed:*

*A. At locations where through lanes become mandatory turn lanes, a Mandatory Movement Lane Control (R3-7) sign should be post-mounted on the left-hand side of the roadway where a through lane is becoming a mandatory left-turn lane on a one-way street or where a median of sufficient width for the signs is available, or on the right-hand side of the roadway where a through lane is becoming a mandatory right-turn lane.*

*B. At locations where a through lane is becoming a mandatory left-turn lane on a two-way street where a median of sufficient width for the signs is not available, and at locations where multiple-lane turns that include shared lanes for through and turning movements are present, an Advance Intersection Lane Control (R3-8 series) sign should be post-mounted in a prominent location in advance of the intersection, and consideration should be given to the use of an oversized version in accordance with Table 2B-1 and 2B-1(CA).*

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

*Guidance:*

06 *Use of an overhead sign for one approach lane should not require installation of overhead signs for the other lanes of that approach.*

Option:

07 Intersection Lane Control signs may be omitted where:

A. A turn bay has been provided by physical construction or pavement markings, and
B. Only the road users using such turn bays are permitted to make a turn in that direction.

08 At roundabouts, Intersection Lane Control (R3-5, R3-6, and R3-8 series) signs may display ~~any of~~ the arrow symbol option~~s~~ shown in Figure 2B-5.

09 The Intersection Lane Control (R61(CA) Series and R73(CA) Series) signs (refer to Figure 2B-4(CA)) may be used to indicate the types of movements permitted at intersections.

Support:

10 Refer to Section 2B.26 for use of the R73(CA) series signs when a NO U-TURN is required.

## Section 2B.28 Mandatory Movement Lane Control Signs (R3-5, R3-5a, R3-7, R3-19 Series, and R3-20) and Plaques

**Standard:**

01 **Mandatory Movement Lane Control (R3-5, R3-5a, and R3-7) signs (see Figure 2B-4), if used, shall indicate only the single vehicle movement that is required from the lane.**

02 **The Mandatory Movement Lane Control (R3-5 and R3-5a) symbol signs shall include the legend ONLY and shall be mounted overhead over the specific lanes or projections thereof to which they apply (see Section 2B.27). The R3-7 sign shall be for post-mounting only. The R3-7 sign shall not be mounted at the far side of the intersection.**

03 **When the mandatory movement applies to lanes exclusively designated for HOV traffic, the HOV 2+ (R3-5cP) supplemental plaque shall be used. When the mandatory movement applies to lanes that are not HOV**

**facilities, but are lanes exclusively designated for buses and/or taxis, the TAXI LANE (R3-5dP) and/or BUS LANE (R3-5gP) supplemental plaques shall be used.**

04 **If used, the Mandatory Movement Lane Control (R3-7) sign shall be located in advance of the intersection, such as near the upstream end of the mandatory movement lane, and/or at the near side of the intersection where the regulation applies.**

*Guidance:*

05 *The use of the Mandatory Movement Lane Control (R3-7) word message sign should be limited to only locations that are adjacent to the full-width portion of a mandatory turn lane. The R3-7 sign should not be installed adjacent to a through lane in advance of a turn bay taper or adjacent to a turn bay taper.*

06 *Mandatory Movement Lane Control signs should be accompanied by lane-use arrow markings, especially where traffic volumes are high, where there is a high percentage of commercial vehicles, or where other distractions exist.*

07 *Where the restriction does not apply to buses or bicycles an EXCEPT BUSES (R3-7aP) or EXCEPT BICYCLES (R3-7bP) plaque should be used.*

Option:

08 The Through Only (R3-5a) sign may be used to require a road user in a particular lane to proceed straight through an intersection.

09 The diamond symbol may be used instead of the word message HOV on the R3-5cP supplemental plaque.

10 Where a mandatory left or U-turn lane is added at a median location, a LANE FOR LEFT TURN ONLY (R3-19) or LANE FOR U TURN ONLY (R3-19a) sign may be post-mounted on the median at the beginning of the taper. Where a U turn and a left turn are both allowed, a LANE FOR U AND LEFT TURNS ONLY (R3-19b) sign may be used. Where a R3-19 series sign is used, Mandatory Movement Lane Control signs along the turn lane in the median may be omitted.

11 The R3-19 series signs may be used where the added median turn lane is separated from the through lanes by a channelizing or divisional island.

12 On an approach to a mandatory turn lane where traffic regularly enters the shoulder to access the turn lane inappropriately, creating safety or operational issues, a DO NOT DRIVE ON SHOULDER (R4-17) sign (see Section 2B.43) may be used to supplement the standard Mandatory Movement Lane Control (R3-5 and/or R3-7 series) signs.

Support:

13 Refer to CVC 22101 for Mandatory Movement Lane Control signs.

*Guidance:*

14 *Signs or markings should be repeated in advance of mandatory turn lanes when necessary to prevent entrapment and to help motorists select the appropriate lane before reaching the end of the line of waiting vehicles.*

Support:

15 Refer to Section 2C.50 for warning signs used in advance of the R3-7 sign.

*Guidance:*

16 *The RIGHT (LEFT) LANE FREEWAY ONLY (R18B(CA)) sign (refer to Figure 2B-4(CA)) should be used on non-freeway facilities to indicate that a particular lane only leads to a freeway entrance and on to the freeway. The sign should be used in conjunction with, and at the beginning of, the 8 inch solid white lines indicating that traffic in that lane has a mandatory movement leading to a freeway*

## Section 2B.29 Optional Movement Lane Control Signs (R3-6 Series)

**Standard:**

01 **Optional Movement Lane Control (R3-6, R3-6a and R3-6b) signs (see Figure 2B-4), if used, shall be used for two or more movements from a specific lane or to emphasize permitted movements. The Optional Movement Lane Control sign shall be mounted overhead over the specific lane or projections thereof to which it applies.**

02 **If used, the Optional Movement Lane Control signs shall indicate all permissible movements from specific lanes.**

03 **Because more than one movement is permitted from the lane, the word message ONLY shall not be used on an Optional Movement Lane Control sign.**

04 **Optional Movement Lane Control signs shall be used for two or more movements from a specific lane where a movement, not allowed by State statute or local ordinance, is permitted.**

05 **The Optional Movement Lane Control signs shall not be used alone to effect a turn prohibition.**

*Guidance:*

06 *If used, the Optional Movement Lane Control sign should be located overhead in advance of the intersection, such as near the upstream end of an adjacent mandatory movement lane, and/or overhead at the intersection where the regulation applies.*

## Section 2B.30 Advance Intersection Lane Control Signs (R3-8 Series)

~~Option:~~

*Guidance:*

01 *Advance Intersection Lane Control (R3-8, R3-8a, and R3-8b) signs (see Figure 2B-4) ~~may~~ should be used to indicate the configuration of all lanes ahead where there are optional lanes, mandatory turn lanes without turning bays or un-shadowed turn lanes.*

Option:

02 The word messages ONLY, THRU, HOV 2+, TAXI, FWY, TRUCKS OK, BUS, or BIKE, or the bicycle symbol, may be used within the border in combination with the arrow symbols of the R3-8 sign series. The R3-5cP, R3-5dP, and R3-5gP supplemental plaques may be installed at the top outside border of the R3-8 sign over the applicable lane designation on the sign. The diamond symbol may be used instead of the word message HOV. The minimum allowable vehicle occupancy requirement may vary based on the level established for a particular facility.

03 Where a bicycle lane is between two general-purpose lanes the R3-8 series signs may be modified to show the bicycle lane with a white legend on a black background in accordance with designs of the R3-8x series signs (see Figure 2B-4).

*Guidance:*

04 *When used, an Advance Intersection Lane Control sign should be placed at an adequate distance in advance of the intersection, either along the lane tapers or at the beginning of the turn lane so that road users can select the appropriate lane (see Figure 2A-4).*

Option:

04a Advance Intersection Lane Control (R3-8, R3-8a, and R3-8b) signs may be installed at the intersection of short storage capacity.

05 An Advance Intersection Lane Control sign may be repeated closer to the intersection along the approach for additional emphasis.

**Standard:**

06 **An Advance Intersection Lane Control (R3-8 series) sign shall not be mounted at the far side of an intersection to which it applies.**

07 **Where three or more approach lanes are available to traffic, Advance Intersection Lane Control (R3-8 series) signs, if used, shall be post-mounted in advance of the intersection and shall not be mounted overhead.**

08 **When only the two outermost lanes of the roadway are shown on a R3-8 sign, the R3-5bP or R3- 5fP plaque shall be mounted above the R3-8 sign.**

## Section 2B.31 RIGHT (LEFT) LANE MUST EXIT Signs (R3-33, R3-33a)

~~Option:~~

01 ~~A RIGHT (LEFT) LANE MUST EXIT (R3-33) sign (see Figure 2B-4) may be used to supplement an overhead EXIT ONLY guide sign to inform road users that traffic in the right-hand (left-hand) lane of a roadway that is approaching a grade-separated interchange is required to depart the roadway on the exit ramp at the next interchange.~~

**Standard:**

01a **The RIGHT (LEFT) LANE MUST EXIT (R3-33) sign (refer to Figure 2B-4) shall be used to indicate a freeway lane drop. The R3-33 sign shall be placed at the beginning of the 8 inch solid white line approaching the exit ramp.**

Option:

02 The R3-33a sign (see Figure 2B-4) may be used in place of the R3-33 sign where the roadside width is limited and will not accommodate the R3-33 sign.

02a The R18C(CA) or R18D(CA) sign (refer to Figure 2B-4(CA)) may be used in place of the R3-33 or R3-33a sign where there are multiple lanes required to depart the roadway on the exit ramp at the next interchange.

Support:

03 Section 2C.50 contains information regarding a warning sign that can be used in advance of lane drops at grade-

separated interchanges.

## Section 2B.32 Two-Way Left-Turn-Only Signs (R3-9a and R3-9b) and Plaques

*Guidance:*

01 *A Two-Way Left-Turn-Only (R3-9a or R3-9b) sign (see Figure 2B-6) should be used in conjunction with the required pavement markings where a non-reversible lane is reserved for the exclusive use of left- turning vehicles in either direction and is not used for passing, overtaking, or through travel.*

Option:

02 The post-mounted R3-9b sign may be used as an alternate to or a supplement to the overhead R3-9a sign. The legend BEGIN or END may be used within the border of the main sign itself, or on an R3-9cP or R3-9dP plaque (see Figure 2B-6) mounted immediately above it.

Support:

03 Signing is especially helpful to drivers in areas where the two-way left-turn-only maneuver is new, in areas subject to environmental conditions that frequently obscure the pavement markings, and on peripheral streets with two-way left-turn-only lanes leading to an extensive system of routes with two-way left-turn-only lanes.

04 Refer to Figure 3A-108(CA) and Figure 3B-7(CA) for pavement marking applications for Two-Way Left Turn Lanes.

## Section 2B.33 BEGIN and END Plaques (R3-9cP and R3-9dP)

Option:

01 The BEGIN (R3-9cP) or END (R3-9dP) plaque (see Figure 2B-6), mounted directly above a regulatory sign, may be used to inform road users of the location where a regulatory condition begins or ends.

## Section 2B.34 Reversible Lane Control Signs (R3-9e through R3-9i)

Option:

01 A reversible lane may be used for through traffic (with left turns either permitted or prohibited) in alternating directions during different periods of the day, and the lane may be used for exclusive left turns in one or both directions during other periods of the day as well. Reversible Lane Control (R3-9e through R3-9i) signs (see Figure 2B-6) may be either static type or changeable message type. These signs may be either post- mounted or overhead. Lane-use control signals (see Chapter 4T) may also be used for reversible lanes.

**Standard:**

02 **Where it is determined by an engineering study that lane-use control signals or physical barriers are not necessary, the lane shall be controlled by overhead Reversible Lane Control signs (see Figure 2B-7).**

03 **Post-mounted Reversible Lane Control signs shall be used only as a supplement to overhead signs or signals. Post-mounted signs shall be identical in design to the overhead signs and an additional legend such as CENTER LANE shall be added to the top of the sign (R3-9f) to indicate which lane is controlled.**

Option:

04 Reversing traffic flow may be controlled with pavement markings and Reversible Lane Control signs (without the use of lane-use control signals), when all of the following conditions are met:

A. Only one lane is being reversed,
B. An engineering study indicates that the use of Reversible Lane Control signs alone would result in an acceptable level of safety and efficiency, and
C. There are no unusual or complex operations in the reversible lane pattern.

**Standard:**

05 **Reversible Lane Control signs shall contain the legend or symbols designating the allowable uses of the lane and the time periods such uses are allowed. Where symbols and legends are used, their meanings shall be as shown in Table 2B-2.**

06 **Reversible Lane Control signs shall consist of a white background with a black legend and border, except for the R3-9e sign, where the color red is used for the X symbol.**

07 **Symbol signs, such as the R3-9e sign, shall consist of the appropriate symbol in the upper portion of the sign with the appropriate times of the day and days of the week below it. All times of the day and days of the week shall be accounted for on the sign to eliminate confusion to the road user.**

08 **In situations where more than one message is conveyed to the road user, such as on the R3-9e sign, the sign**

**legend shall be arranged as follows:**

**A. The prohibition or restriction message is the primary legend and shall be on the top for word message signs and to the far left for symbol signs,**

**B. The permissive use message shall be displayed as the second legend, and**

**C. The OTHER TIMES message shall be displayed at the bottom for word message signs and to the far right for symbol signs.**

Option:

09 The symbol signs may also include a downward-pointing arrow with the legend THIS LANE. The term OTHER TIMES may be used for either the symbol or word message sign.

**Standard:**

10 **A Reversible Lane Control sign shall be mounted over the approximate center of the lane that is being reversed.**

11 **If the vertical or horizontal alignment is curved to the degree that a driver would be unable to see at least one sign, and preferably two signs, then additional overhead signs shall be installed. The placement of the signs shall be such that the driver will have a definite indication of the lanes specifically reserved for use at any given time. Special consideration shall be given to major generators introducing traffic between the normal sign placement.**

12 **Transitions at the entry to and exit from a section of roadway with reversible lanes shall include advance signs to notify or warn drivers of the boundaries of the reversible lane controls. The R3-9g or R3-9h signs (see Figure 2B-6) shall be used for this purpose.**

Option:

13 More than one End Reverse Lane (R3-9i) sign (see Figure 2B-6) may be used at the termination of the reversible lane to emphasize the importance of the message.

14 Where longitudinal barriers separate opposing directions of traffic, the R3-9g or R3-9h signs may be omitted.

**Standard:**

15 **Flashing beacons, if used to supplement the overhead Reversible Lane Control signs, shall comply with the applicable requirements for flashing beacons in Chapter4S.**

16 **When used in conjunction with Reversible Lane Control signs, the Turn Prohibition (R3-1 through R3-4, and R3-18) signs shall be mounted overhead and separate from the Reversible Lane Control signs. The Turn Prohibition signs shall be designed and installed in accordance with Section 2B.26.**

*Guidance:*

17 *For additional emphasis, a supplemental plaque stating the distance of the prohibition, such as NEXT 1 MILE, should be added to the Turn Prohibition signs that are used in conjunction with Reversible Lane Control signs.*

18 *If used, overhead signs should be located at intervals not greater than ¼ mile. The bottom of the overhead Reversible Lane Control signs should not be more than 19 feet above the pavement grade.*

19 *Where more than one sign is used at the termination of a reversible lane, they should be at least 250 feet apart. Longer distances between signs are appropriate for streets with speeds over 35 mph, but the separation should not exceed 1,000 feet.*

20 *Because left-turning vehicles have a significant impact on the safety and efficiency of a reversible lane operation, if a mandatory left-turn lane or two-way left-turn lane cannot be incorporated into the lane- use pattern for a particular peak or off-peak period, consideration should be given to prohibiting left turns and U-turns during that time period.*

21 *Reversible Lane Control signs and parking signs should be consistent in message during the same operational periods.*

## Section 2B.35 Jughandle Signs (R3-23, R3-24, R3-25, and R3-26 Series)

Support:

01 A jughandle turn is a left turn or U-turn that because of special geometry is made by initially making a right turn. This type of turn can increase the operational efficiency of a roadway by eliminating the need for mandatory left-turn lanes and can increase the operational efficiency of a traffic control signal by eliminating the need for protected left-turn phases. A jughandle turn can also provide an opportunity for trucks and commercial vehicles to make a U-turn where the median and roadway are not of sufficient width to accommodate a traditional U-turn by these vehicles.

02 Figure 2B-8 shows the various signs that can be used for signing jughandle turns. Figure 2B-9 shows examples of regulatory and destination guide signing for various types of jughandle turns.

**Standard:**

03 **On multi-lane roadways, since road users generally anticipate that they need to be in the left- hand lane when approaching a location where they desire to turn left or make a U-turn, an ALL TURNS FROM RIGHT LANE (R3-23) or a U TURN FROM RIGHT LANE (R3-23a) sign (see Figure 2B-8) shall be installed in advance of the location to inform drivers that left turns and/or U-turns will be made from the right-hand lane.**

Option:

04 Where a median of sufficient width is available, supplemental regulatory or guide signs may also be placed on the left-hand side of the roadway.

**Standard:**

05 **The R3-24 series sign with an upward diagonal arrow pointing to the right if the jughandle entrance is designed as an exit ramp (see Drawings A and B in Figure 2B-9), or the R3-25 series sign with a horizontal arrow pointing to the right if the jughandle entrance is designed as an intersection, shall be installed on the right-hand side of the roadway at the entrance to the jughandle. The legend on the sign shall be ALL TURNS, U TURN, or U AND LEFT TURNS, as appropriate.**

06 **If the jughandle is designed such that the jughandle entrance is downstream of the location where the turn would normally have been made (see Drawing C in Figure 2B-9), the R3-26 series sign with an arrow pointing straight upward shall be installed on the right-hand side of the roadway at the intersection to inform road users that they need to proceed straight through the intersection in order to make a left turn or U-turn. The legend on the sign shall be U TURN or U AND LEFT TURNS, as appropriate.**

Support:

07 The R3-24, R3-25, and R3-26 series of signs are designed to be mounted below conventional guide signs.

08 Section 2C.12 contains information regarding the use of advisory exit and ramp speed signs for exit ramps.

09 Section 2D.40 contains information regarding the use of guide signs for jughandles.

## PASSING, KEEP RIGHT, AND SLOW TRAFFIC SIGNS

### Section 2B.36 DO NOT PASS Sign (R4-1)

Option:

01 The DO NOT PASS (R4-1) sign (see Figure 2B-10) may be used in addition to pavement markings (see Section 3B.03) to emphasize the restriction on passing.

**Standard:**

01a **When used, the Do Not Pass sign ~~may~~ shall be used at the beginning of, and at intervals within, a zone through which sight distance is restricted or where other conditions make overtaking and passing inappropriate.**

01b **The R4-1 sign shall not be used in the freeway or express way, etc., where two or more lanes remain after a lane dropped or was reduced. Refer to Section 2B.36.**

Option:

02 If signing is needed on the left-hand side of the roadway for additional emphasis, NO PASSING ZONE (W14-3) signs may be used (see Section 2C.53).

Support:

03 Standards for determining the location and extent of no-passing zone pavement markings are set forth in Section 3B.03.

04 Typical examples of where the R4-1 sign could be applied are shown in Figures 3B-14(CA) and 3B-104(CA).

Option:

05 The R4-1 sign may be used in conjunction with temporary traffic control signs.

### Section 2B.37 PASS WITH CARE Sign (R4-2)

*Guidance:*

01 *The PASS WITH CARE (R4-2) sign (see Figure 2B-10) should be installed at the downstream end of a no-passing zone if a DO NOT PASS sign has been installed at the upstream end of the zone.*

### Section 2B.38 KEEP RIGHT EXCEPT TO PASS Sign (R4-16), SLOWER TRAFFIC KEEP RIGHT Sign (R4-3), and TRUCKS USE RIGHT LANE Sign (R4-5)

Option:

01 The KEEP RIGHT EXCEPT TO PASS (R4-16) sign (see Figure 2B-10) may be used on roadways where there are two lanes in one direction of travel to direct drivers to stay in the right-hand lane except when they are passing another vehicle. Refer to CVC 21659.

*Guidance:*

02 *If used, the KEEP RIGHT EXCEPT TO PASS sign should be installed at or just beyond the beginning of a two-lane section of roadway and at selected locations along two-lane roadways where additional emphasis is needed.*

Option:

03 The SLOWER TRAFFIC KEEP RIGHT (R4-3) or the TRUCKS USE RIGHT LANE (R4-5) sign (see Figure 2B-10) may be used on multi-lane through roadways to improve capacity or reduce unnecessary lane changing due to the presence of slower vehicles that impede the normal flow of traffic.

**Standard:**

03a **The SLOWER TRAFFIC KEEP RIGHT (R4-3) sign shall be used at the beginning of passing lanes. Refer to CVC 21654.**

*Guidance:*

04 *If used, the SLOWER TRAFFIC KEEP RIGHT sign or the TRUCKS USE RIGHT LANE sign should be installed at or just beyond the beginning of a multi-lane roadway section or at the beginning of an extra lane provided for trucks and/or other slow-moving traffic, and at selected locations where there is a tendency on the part of some road users to drive in the left-hand lane(or lanes) below the normal speed of traffic. These signs should not be used on the approach to an interchange or through an interchange area where traffic is entering or exiting, or along deceleration or acceleration lanes.*

**Standard:**

04a **The TRUCKS USE RIGHT LANE (R4-5) sign (refer to Figure 2B-10) shall be used when a climbing lane is provided and it is necessary to prohibit trucks from passing slower moving vehicles. Signs shall be placed at the beginning of the**

**restriction and at approximately 0.25 mile intervals. When the restriction is necessary during certain hours, the Specific Hours/Day (R82aP(CA)) Plaque (refer to Figure 2B-10(CA)) shall be placed below the R53B(CA) sign.**

Option:

04b The TRUCKS USE RIGHT LANE (R4-5) sign may be placed to advise trucks that they must use the right lane except to pass slow moving vehicles as provided in CVC 21654.

05 The TRUCKS USE RIGHT LANE sign may be used as a supplement to the SLOWER TRAFFIC KEEP RIGHT sign.

05a The TRUCKS OK (R70(CA)) sign (refer to Figure 2B-10(CA)) may be used to allow trucks to legally use a lane other than the right lane or lanes to facilitate the safe and orderly movement of traffic, such as in advance of freeway branch connections, lane drops, etc. If the TRUCKS OK (R70(CA)) sign cannot fit on an overhead sign structure, the TRUCKS (R70A(CA)) and OK (R70B(CA)) sign panels may be used in place of the TRUCKS OK (R70(CA)) sign. Refer to CVC 21655.

**Standard:**

05b **The TRUCKS OK (R70(CA)) sign shall be placed directly over the appropriate lane. The TRUCKS (R70A(CA)) and OK (R70B(CA)) sign panels shall be placed on either side of and adjacent to the lower end of the appropriate white arrow. See Figures 2B-10(CA) and 2E-36(CA).**

Support:

05c Refer to CVC 21655.

*Guidance:*

06 *If an extra lane has been provided for trucks and other slow-moving traffic, a Lane Ends sign (see Section 2C.47) should be installed in advance of the point where the extra lane ends. Appropriate pavement markings should be installed at both the upstream and downstream ends of the extra lane (see Section 3B.12 and Figure 3B-14).*

Option:

07 The TRUCKS 3 AXLES OR MORE RIGHT 2 LANES ONLY (R6-3A(CA)) sign (refer to Figure 2B-10(CA)) may be used on divided highways having four or more lanes for traffic in one direction where this type of vehicle, unless designated, is restricted to the two right lanes. Refer to CVC 21655 and 22348(c).

08 The ALL VEHICLES WHEN TOWING RIGHT 2 LANES ONLY (R6-4A(CA)) sign (refer to Figure 2B-10(CA)) may be used on divided highways having four or more lanes for traffic in one direction where this type of vehicle, unless designated, is restricted to the two right lanes. Refer to CVC 21655 and 22348(c).

**Standard:**

09 **The END TRUCK LANE CONTROL (R53E(CA)) sign (refer to Figure 2B-10(CA) shall be placed at the end of a segment of roadway in which trucks are restricted to a particular lane.**

10 **The YIELD TO UPHILL TRAFFIC (R55(CA)) sign (refer to Figure 2B-10(CA) shall be used facing downhill traffic where a climbing lane has been provided and where a one-direction no passing marking has been placed to allow downhill traffic to pass. Refer to CVC 21661. Refer to Section 3B.01 for further details.**

## Section 2B.39 Keep Right and Keep Left Signs (R4-7 Series and R4-8 Series)

Option:

01 The Keep Right (R4-7) sign (see Figure 2B-10) may be used at locations where it is necessary for traffic to pass only to the right-hand side of a roadway feature or obstruction. The Keep Left (R4-8) sign (see Figure 2B-10) may be used at locations where it is necessary for traffic to pass only to the left-hand side of a roadway feature or obstruction.

*Guidance:*

02 *At locations where it is not readily apparent that traffic is required to keep to the right, a Keep Right sign should be used.*

**Standard:**

03 **If Keep Right signs are installed at the start of a median or at a median opening, they shall be placed as close as practicable to the approach ends of the medians, and shall be visible to traffic on the divided highway and angled toward the applicable crossroad approach as shown in Figure 2B-20.**

*Guidance:*

04 *If used, the Keep Right sign should be mounted on the face of or just in front of a pier or other obstruction separating opposite directions of traffic in the center of the highway such that traffic will have to pass to the right-hand side of the sign.*

05 *Where the approach end of the island channelizes traffic away from the approach direction, the word legend (R4-7a,*

*R4-7b, R4-8a, or R4-8b) signs (see Figure 2B-10) should be used instead of the symbol (R4-7 or R4-8) signs to emphasize the degree of curvature away from the approach direction (see Figure 2B-11).*

06 *Where a regulatory sign is used within the central island of a neighborhood traffic circle to direct traffic counter-clockwise around the central island, the Keep Right with diagonal arrow (R4-7b) sign should be used (see Figure 2B-24). The mounting height of the sign should be at least 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way.*

**Standard:**

07 **The Keep Right (Left) sign shall not be installed on the right-hand (left-hand) side of the roadway in a position where traffic must pass to the left-hand (right-hand) side of the sign.**

Option:

08 The Keep Right sign may be omitted at intermediate ends of divisional islands and medians.

09 Word message KEEP RIGHT (LEFT) with an arrow (R4-7a or R4-7b) signs (see Figure 2B-10) may be used instead of the R4-7 or R4-8 symbol signs.

10 A narrow Keep Right (R4-7c) sign (see Figure 2B-10) may be installed on the approach end of a median island that is less than 4 feet wide at the point where the sign is to be located.

**Standard:**

11 **A narrow Keep Right (R4-7c) sign shall not be installed on a median island that has a width of 4 feet or more at the point where the sign is to be located.**

~~Option:~~

**Standard:**

12 **The Keep Right sign ~~may~~ shall be installed in the median of a divided highway crossing that functions as a single intersection such that it is visible to traffic on the divided highway and angled as needed toward the applicable crossroad approach as shown in Figure 2B-20.**

Option:

12a If the median is not wide enough to accommodate the KEEP RIGHT or narrow Keep Right sign, the sign may be omitted if all other applicable standards are met.

Support:

13 Section 2B.49 provides more information about the use of the Keep Right sign in combination with or in lieu of ONE-WAY signs at divided highway crossings.

## Section 2B.40 STAY IN LANE Sign (R4-9)

Option:

01 A STAY IN LANE (R4-9) sign (see Figure 2B-10) may be used on multi-lane highways to direct road users to stay in their lane until conditions permit shifting to another lane.

*Guidance:*

02 *If a STAY IN LANE sign is used, it should be accompanied by a solid double white lane line(s) to prohibit lane changing.*

## Section 2B.41 RUNAWAY VEHICLES ONLY Sign (R4-10)

~~*Guidance:*~~

**Standard:**

01 **A RUNAWAY VEHICLES ONLY (R4-10) sign (see Figure 2B-10) ~~should~~ shall be installed near a truck escape (or runaway truck) ramp entrance to discourage other road users from entering the ramp.**

02 **The NO STOPPING ANY TIME (R26A(S)(CA)) signs (refer to Figure 2B-25(CA)) shall be placed as required to keep motorists from stopping in the path of runaway trucks.**

Support:

03 Refer to Figure 3G-103(CA) for runaway truck signing.

## Section 2B.42 Slow Vehicle Turn-Out Signs (R4-12, R4-13, and R4-14)

Support:

01 On two-lane highways in areas where traffic volumes and/or vertical or horizontal curvature make passing difficult, turn-out areas are sometimes provided for the purpose of giving a group of faster vehicles an opportunity to pass a slow-

moving vehicle.

~~Option:~~

**Standard:**

02 **A SLOW VEHICLES WITH ~~XX~~ 5 OR MORE FOLLOWING VEHICLES MUST USE TURN-OUT (R4-12) sign (see Figure 2B-10) ~~may~~ shall be installed in advance of ~~a~~ the first turn-out area to inform drivers who are driving so slow that they have accumulated a specific number of vehicles behind them that they are required by the traffic laws of that State to use the turn-out to allow the vehicles following them to pass. Refer to CVC 21656.**

Support:

03 The specific number of vehicles displayed on the R4-12 sign provides law enforcement personnel with the information they need to enforce this regulation.

03a Refer to CVC 21656 for Turning out of Slow-Moving Vehicles.

03b The R4-12 sign is not intended to be used in advance of each individual turnout.

03c Refer to Section 3B.101(CA) for more details.

Option:

04 If an R4-12 sign has been installed in advance of a turn-out area, a SLOW VEHICLES MUST USE TURN-OUT AHEAD (R4-13) sign (see Figure 2B-10) may also be installed downstream from the R4-12 sign, but upstream from the turn-out area, to remind slow drivers that they are required to use a turn-out that is a short distance ahead.

**Standard:**

05 **If an R4-12 sign has been installed in advance of a turn-out area, a SLOW VEHICLES MUST TURN OUT (with arrow) (R4-14) sign (see Figure 2B-10) shall be installed at the entry point of the turn-out area.**

Support:

06 Section 2D.54 contains information regarding advance information signs for slow vehicle turn-out areas.

## Section 2B.43 DO NOT DRIVE ON SHOULDER Sign (R4-17) and DO NOT PASS ON SHOULDER Sign (R4-18)

Option:

01 The DO NOT DRIVE ON SHOULDER (R4-17) sign (see Figure 2B-10) may be installed to inform road users that using the shoulder of a roadway as a travel lane is prohibited.

02 The DO NOT PASS ON SHOULDER (R4-18) sign (see Figure 2B-10) may be installed to inform road users that using the shoulder of a roadway to pass other vehicles is prohibited.

## Section 2B.44 ALL TRAFFIC Sign (R4-20) and RIGHT (LEFT) TURN ONLY Sign (R4-21)

Option:

01 The ALL TRAFFIC (R4-20) sign may be used at an intersection where all traffic on the approach to the intersection must turn in the direction indicated and the Movement Prohibition (see Section 2B.26) and/or ONE WAY (see Section 2B.49) signs do not adequately convey the allowable direction of travel.

02 The RIGHT (LEFT) TURN ONLY (R4-21) sign may be used at or on an approach to an intersection where all traffic on that approach must turn in the direction indicated.

*Guidance:*

03 *The RIGHT (LEFT) TURN ONLY sign should not be used for a channelized turn lane separated from the adjacent travel lanes by an island.*

**Standard:**

04 **The ALL TRAFFIC sign shall not be used to substitute for the Keep Right (R4-7 series) or Keep Left (R4-8 series) signs.**

05 **The RIGHT (LEFT) TURN ONLY sign shall not be used to substitute for the Mandatory Movement Lane Control signs (see Sections 2B.27 and 2B.28).**

## SELECTIVE EXCLUSION SIGNS AND PLAQUES

### Section 2B.45 Selective Exclusion Signs and Plaques

Option:

01 Selective Exclusion signs (see Figure 2B-12) may be used to provide notice to road users that State or local statutes or ordinances exclude designated types of traffic from using particular roadways or facilities.

**Standard:**

02 **Selective Exclusion signs shall clearly indicate the type of traffic that is excluded.**

Support:

03 Typical exclusion messages include:

A. No Trucks (R5-2),
B. NO MOTOR VEHICLES (R5-3),
C. NO COMMERCIAL VEHICLES (R5-4),
D. NO VEHICLES WITH LUGS (R5-5),
E. No Bicycles (R5-6),
F. NO NON-MOTORIZED TRAFFIC (R5-7),
G. NO MOTOR-DRIVEN CYCLES (R5-8),
H. No Pedestrian Crossing (R9-3),
I. No Skaters (R9-13),
J. No Equestrians (R9-14),
K. No Snowmobiles (R9-15),
L. No All-Terrain Vehicles (R9-16),
M. Hazardous Material (R14-3) (see Section 2B.67),
N. NO THRU TRAFFIC (R5-12),
O. NO THRU TRUCKS (R5-2b),
P. EXCEPT ON SHOULDER (R9-19P) plaque, and
Q. EXCEPT LOCAL DELIVERY (R5-2aP) plaque.

Option:

04 Appropriate combinations or groupings of these legends into a single sign, such as NO PEDESTRIANS BICYCLES MOTOR-DRIVEN CYCLES (R5-10 ~~and R5-10a~~) or NO PEDESTRIANS OR BICYCLES (R5-10b), may be used.

*Guidance:*

05 *If an exclusion is governed by vehicle weight, a Weight Limit sign (see Section 2B.64) should be used instead of a Selective Exclusion sign.*

06 *If used on a ramp to a freeway or expressway where pedestrian and bicyclist travel are prohibited by law or regulation, the ~~NO PEDESTRIANS OR BICYCLES (R5-10b)~~ NO PEDESTRIANS BICYCLES MOTOR-DRIVEN CYCLES (R5-10) sign should be installed in a location where it is clearly visible to any pedestrian or bicyclist attempting to enter the limited access facility from a street intersecting the ramp. In locations where a freeway or expressway is accessed from a ramp from a roadway parallel to the freeway or expressway, the sign should be placed in a location that clearly indicates the prohibition applies only to the freeway or expressway or to the ramp.*

07 *The Selective Exclusion sign should be placed on the right-hand side of the roadway at an appropriate distance from the intersection so as to be clearly visible to all road users turning into the roadway that has the exclusion. The NO PEDESTRIANS (R5-10c) or No Pedestrian Crossing (R9-3) sign (see Section 2B.57) should be installed so as to be clearly visible to pedestrians who are at a location where an alternative route is available.*

Option:

08 The NO PEDESTRIANS (R5-10c) or No Pedestrian Crossing (R9-3) sign may also be used at underpasses or elsewhere where pedestrian facilities are not provided.

09 The NO THRU TRAFFIC (R5-12) or NO THRU TRUCKS (R5-2b) signs may be used at locations to prohibit through traffic from using a particular roadway or facility.

10 The EXCEPT LOCAL DELIVERY (R5-2aP) plaque may be mounted below the R5-2 or R5-2b sign.

11 The EXCEPT ON SHOULDER (R9-19P) plaque may be used where such modes are allowed on a shoulder but not on the traveled way and placed at intersections with other roads and established paths or trails, where such vehicles or

modes are expected to enter the highway.

12 The AUTHORIZED VEHICLES ONLY (R5-11) sign may be used at median openings and other locations to prohibit vehicles from using the median opening or facility unless they have special permission (such as law enforcement vehicles or emergency vehicles) or are performing official business (such as highway agency vehicles).

**Restrictions on Use of Freeways**

Support:

13 CVC Section 21960 authorizes Caltrans and local authorities, with respect to freeways under their respective jurisdictions, to prohibit or restrict the use of freeways by pedestrians, bicycles or other non-motorized traffic or by any person operating a motor-driven cycle or a motorized bicycle.

**Standard:**

14 **Restrictions on use of a freeway shall be by the order of Caltrans, District Director.**

15 **No ordinance or resolution of local authorities shall apply to any State highway until the proposed ordinance or resolution has been presented to, and approved in writing by, Caltrans.**

Support:

16 The District Directors have been delegated the authority to issue orders restricting the use of freeways. They are also authorized to approve orders, ordinances or resolutions of local authorities, which would restrict the use of State highways.

17 It is Caltrans' policy to restrict the use of freeways when a satisfactory alternate route is available.

**Standard:**

18 **The NO PEDESTRIANS BICYCLES MOTOR-DRIVEN CYCLES (R5-10) sign shall be used on a freeway at or near the beginning of the section of freeway to which the prohibition applies and on the right side of freeway entrance ramps.**

*Guidance:*

19 *Prior to placement of the R5-10 sign on State highways, an order signed by the Caltrans District Director should be on file.*

20 *At the end of freeway sections where both bicycles and pedestrians have been allowed, and on the continuing freeway where such traffic is prohibited, the R5-10 sign should be placed beyond the exit ramp gore.*

Option:

21 The R5-10 sign may be modified by deleting the word BICYCLES at locations where bicycles are permitted on freeway shoulders.

**Standard:**

22 **The NO PEDESTRIANS (R5-10c) sign shall be used at all freeways exit ramps to inform the public that pedestrians are prohibited.**

*Guidance:*

23 *The R5-10c sign should be placed on the left facing pedestrian traffic, which might enter a freeway exit ramp. The sign should be placed up the ramp to avoid conflict with the ramp terminal signs.*

Option:

24 Where pedestrian problems exist, a second identical sign on the right-hand side of the offramp at the same location may be installed.

Support:

25 Refer to Section 2E.59 for additional details.

Support:

26 Refer to CVC 21101 through 21104, 22402 through 22405 and 35650 through 35755 for Truck Exclusion signs.

27 The No Trucks (R5-2) sign is used together with a Truck Exclusion (R20DP(CA) Series) plaque (refer to Figure 2B-12(CA) to specify the maximum width or other restrictions in effect.

*Guidance:*

28 *An alternative route should be evaluated for height, weight and size restrictions. Appropriate signs should be posted along the route to advise motorists of any restrictions.*

Option:

29 Advance signs may be necessary to give trucks an opportunity to turn around and retrace their path or select another route.

**Standard:**

30 **The R5-2 signs shall be placed at each end of the affected portion of a highway section. They shall be placed at a distance of not more than 500 feet from the ends of an affected bridge or structure.**

31 **The Bridge Speed and Weight Limit (R21(CA)) sign (refer to Figure 2B-12(CA) shall be used to specify the maximum speed permitted on a bridge or structure for vehicles over a specified weight. The R21(CA) sign shall not be erected more**

**than 500 feet in advance of the bridge or structure.**

Option:

32 The R21(CA) sign, when used with the Weight Limit (R12-5) sign, may be placed on the same post.

33 The Truck Length Limit (R20H(CA)) sign may be used at locations where a semi-truck over 65 feet in length and a semi-truck with trailer over 75 feet in length is prohibited.

34 The No Trucks Variable Message (R20-1(CA)) sign (refer to Figure 2B-12(CA) may be used with an advance guide sign where there is a truck restriction.

**Standard:**

35 **The NEXT RIGHT (R20-1aP(CA)) Plaque (refer to Figure 2B-12(CA) shall be used below the R20-1(CA) sign when no advance guide sign is available.**

Option:

36 The AUTOS WITH TRAILERS -TRUCKS – PROHIBITED (R53D(CA)) sign (refer to Figure 2B-12(CA) may be used at locations where these vehicles are prohibited from using the roadway.

## DO NOT ENTER, WRONG WAY, ONE WAY, AND RELATED SIGNS AND PLAQUES

### Section 2B.46 DO NOT ENTER Sign (R5-1)

Support:

00 The DO NOT ENTER package is a DO NOT ENTER (R5-1) sign with a WRONG WAY (R5-1a) sign directly beneath it on the same sign assembly.

**Standard:**

01 **The DO NOT ENTER package ~~(R5-1) sign~~ (see Figure 2B-13) shall be used at the following locations:**

- **A. Where a two-way roadway becomes a one-way roadway (see Figure 2B-18);**
- **B. The intersection of an interchange exit ramp with a crossroad as specified in Section 2B.48 (see Figure 2B-15);**
- **C. The intersection of a channelized or turning roadway with a two-way undivided crossroad; and**
- **D. ~~Except as provided in Paragraph 4 of this Section, a~~An intersection with a divided highway where the crossing functions as a single (refer to Figure 2B-14(CA)) or two separate intersections (see Figure 2B-14).**

Support:

01a Refer to Section 2B.48 for DO NOT ENTER package requirements at interchange exit ramp terminals.

*Guidance:*

02 *A DO NOT ENTER package ~~sign~~ should be installed at other locations where additional emphasis is needed where wrong-way movements are prominent or where the intersecting angle of roadways is such that the visibility of ONE WAY signs alone does not sufficiently convey the restriction.*

Option:

02a The DO NOT ENTER (R5-1) and WRONG WAY (R5-1a) signs (refer to Figure 2B-13), may be used as Activated Blank-Out signs (refer to Figure 2B-13(CA)) for controlling reversible lanes and for prohibiting turns into reversible lanes.

**Standard:**

02b **If used for controlling reversible lanes and for prohibiting turns into reversible lanes, the R5-1 and R5-1a Activated Blank-Out signs shall be used in two sets.**

Option:

02c The R5-1 and R5-1a Activated Blank-Out signs may also be used to supplement static R5-1 and R5-1a signs.

Option:

03 ~~A DO NOT ENTER sign may be installed at an intersection with a divided highway where the crossing functions as a single intersection as shown in Figure 2B-20.~~

04 ~~A DO NOT ENTER sign may be omitted on a low-speed urban street that is a divided highway at a crossing that functions as two separate intersections.~~

05 An EXCEPT BICYCLES (R3-7bP) plaque (see Figure 2B-4) may be used below ~~with~~ a DO NOT ENTER package ~~sign~~ when counter-flow bicycle traffic is allowed.

*Guidance:*

06 *The DO NOT ENTER package ~~sign~~, if used, should be placed directly in view of a road user at the point where a road user could wrongly enter a divided highway, one-way roadway, or ramp. The sign should be mounted facing traffic that might enter the roadway or ramp in the wrong direction.*

07 *At a crossing with a divided highway that functions as a single intersection; the ~~sign, if used,~~ package should be placed on the outside edge side of the roadway facing traffic that might enter the roadway in the wrong direction.*

08 *If the DO NOT ENTER package ~~sign~~ would be visible to traffic to which it does not apply, the sign should be turned away from, or shielded from, the view of that traffic.*

08a *At least one set of the DO NOT ENTER package should be visible from each decision point on each likely wrong-way approach.*

~~Option:~~

**Standard:**

09 **A second DO NOT ENTER package ~~sign may~~ shall be used, particularly where traffic approaches from an intersecting roadway (see Figure 2B-14).**

Support:

10 Section 2A.15 and 2B.48 contains information regarding an optional lower mounting height for DO NOT ENTER package ~~signs~~ that are located along an exit ramp facing a road user who is traveling in the wrong direction.

11 Section 2A.12 contains the provisions for the use of continuously-operated or actuated LEDs to enhance the

conspicuity of signs.

## Section 2B.47 WRONG WAY Sign (R5-1a)

Option:

01 The WRONG WAY (R5-1a) sign (see Figure 2B-13) may be used as a supplement to the DO NOT ENTER package ~~sign~~ where a crossroad intersects a one-way roadway in a manner that does not physically discourage or prevent wrong-way entry (see Figures 2B-14 and 2B-20).

~~*Guidance:*~~

**Standard:**

02 **~~If used, the~~ A WRONG WAY sign ~~should~~ shall be placed at a location along the one-way roadway farther from the crossroad than the DO NOT ENTER package ~~sign~~ (see Section 2B.46).**

*Guidance:*

03 *The WRONG WAY sign should be placed on the same side of the road as the DO NOT ENTER package ~~sign~~.*

Support:

04 Section 2A.15 and 2B.48 contains information regarding an optional lower mounting height for WRONG WAY signs that are located along an exit ramp facing a road user who is traveling in the wrong direction.

05 Section 2A.12 contains the provisions for the use of continuously-operated or actuated LEDs to enhance the conspicuity of signs.

06 For additional information for the WRONG WAY (R5-1a) sign, refer to Section 2B.46 and 2B.48.

## Section 2B.48 Wrong-Way Traffic Control at Interchange Ramps

**Standard:**

01 **At interchange exit ramp terminals where the ramp intersects a crossroad in such a manner that wrong-way entry could inadvertently be made, the following signs shall be used (see Figure 2B-15):**

- **A. At least one ONE WAY sign for each direction of travel on the crossroad shall be placed where the exit ramp intersects the crossroad.**
- **B. At least one DO NOT ENTER package ~~sign~~ shall be conspicuously placed near the downstream end of the exit ramp in positions appropriate for full view of a road user starting to enter wrongly from the crossroad.**
- **C. At least one stand-alone WRONG WAY sign shall be placed upstream on the exit ramp facing a road user traveling in the wrong direction.**

Option:

01a The WRONG WAY sign may be mounted to the backside of an existing sign upstream the exit ramp facing a road user traveling in the wrong direction.

*Guidance:*

02 *In addition, the following pavement markings should be used (see Figure 2B-15):*

- *A. On two-lane paved crossroads at interchanges, solid double yellow lines should be used as a center line for an adequate distance on both sides approaching the ramp intersections.*
- *B. Where crossroad channelization or ramp geometrics do not make wrong-way movements difficult, a lane-use arrow should be placed in each lane of an exit ramp near the crossroad terminal where it will be clearly visible to a potential wrong-way road user.*

Option:

03 The following traffic control devices may be used to supplement the signs and pavement markings described in Paragraphs 1 and 2 of this Section:

- A. Additional ONE WAY signs may be placed, especially on two-lane rural crossroads, appropriately in advance of the ramp intersection to supplement the required ONE WAY sign(s).
- B. Additional WRONG WAY signs may be used.
- C. Slender, elongated wrong-way arrow pavement markings (see Figure 3B-21 and 3B-21(CA)) intended primarily to warn wrong-way road users that they are traveling in the wrong direction may be placed upstream from the ramp terminus (see Figure 2B-15) to indicate the correct direction of traffic flow. Wrong- way arrow pavement markings may also be placed on the exit ramp at appropriate locations near the crossroad junction to indicate wrong-way movement. The wrong-way arrow markings may consist of pavement markings or bidirectional red-

and-white raised pavement markers or other units that show red to wrong-way road users and white to other road users.

D. Lane-use arrow pavement markings may be placed on the exit ramp and crossroad near their intersection to indicate the permissive direction of flow.
E. Freeway entrance signs (see Section 2D.50) may be used.
F. Lane control signs or movement prohibition signs may be used on the approaches to the exit ramp.
G. A Keep Right (R4-7 or R4-7c) may be used on a ramp median nose for wrong-way traffic control.

*Guidance:*

04 *On interchange entrance ramps where the ramp merges with the through roadway and the design of the interchange does not clearly make evident the direction of traffic on the separate roadways or ramps, a ONE WAY sign visible to traffic on the entrance ramp and through roadway should be placed on each side of the through roadway near the entrance ramp merging point as illustrated in Figure 2B-16.*

Option:

05 On interchange entrance ramps where the ramp merges with the through roadway and the design of the interchange does not clearly make evident the direction of traffic on the separate roadways or ramps a No Left Turn (R3-2) sign may be located on the left-hand side of the entrance ramp at the gore (see Figure 2B- 16). If a No Left Turn (R3-2) sign is located on the left-hand side, a supplemental R3-2 sign may be installed on the right-hand side of the entrance ramp.

06 On interchange entrance ramps where the ramp merges with the through roadway and the design clearly indicates the direction of flow, a ONE WAY sign may be placed visible to traffic on the entrance ramp and/or a NO TURNS (R3-3) sign may be placed visible to traffic on the entrance ramp and through roadway at the gore area as illustrated in Figure 2B-16.

07 Where there are no parked cars, pedestrian activity, or other obstructions such as snow or vegetation, and if an engineering study indicates that a lower mounting height would address wrong-way movements on freeway or expressway exit ramps, ~~a DO NOT ENTER sign(s) and/or~~ a WRONG WAY sign(s) that is located along the exit ramp at a location ~~downstream~~ upstream from the intersection with the crossroad facing a road user who is traveling in the wrong direction may be installed at a minimum mounting height of 3 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement. ~~At the intersection with the crossroad, a WRONG WAY sign may be mounted at a minimum height of 3 feet on the same support on which a DO NOT ENTER sign is mounted at a height that complies with the provisions of Section 2A.15 (see Figure 2B-17).~~

Support:

07a Refer to Section 2A.15 for mounting heights of the DO NOT ENTER package.

07b In locations subject to deep snow, sign heights may be adjusted in accordance with engineering judgment.

08 Sections 2B.46, 2B.47, and 2B.49 contain further information on signing to avoid wrong-way movements at at-grade intersections on expressways.

Support:

09 The sign locations shown in Figure 2B-15(CA) are approximate.

*Guidance:*

10 *All ramp terminals should be reviewed under both day and night conditions by experienced signing personnel to determine exact locations.*

**On-Ramp Terminal Signing**

Support:

11 Lead-in signing directing motorists to on-ramps is important. Care should be taken to ensure that arrows on direction signs couldn't be interpreted as pointing into inappropriate roadways, especially off-ramp terminals.

12 Partial interchanges may need special attention with respect to lead-in signing. Trailblazing a route from a partial interchange to another interchange may be necessary to ensure proper traffic movements.

*Guidance:*

13 *Freeway Entrance packages should be placed as near the diverge point between the on-ramp and the intersecting roadway as practicable. The down diagonal arrow should always point toward the onramp pavement.*

14 *Large Freeway Entrance signs should be used with the Freeway Entrance package unless proper placement requires the smaller Freeway Entrance signs.*

**Off-Ramp Terminal Signing**

**Standard:**

15 **The Turn Prohibition signs (Refer to Section 2B.26) shall be placed in suitable locations on the crossing street in advance of the off-ramp.**

*Guidance:*

16 *The Do Not Enter packages should be placed at off-ramp terminals to meet the following criteria:*

*A. At least one package should be visible to a road user (within the scope of his headlights) at his decision point on each potential approach.*

*B. At least one package should be in the head-on position for the road user turning into the off-ramp from each potential approach.*

17 *A field decision should be made on whether to use three Do Not Enter packages or four if the off-ramp is split by a traffic island.*

18 *The ONE WAY (R6-1) signs should be placed as close to the crossing street as possible. If there are sidewalks immediately adjacent to the cross street, these signs should be located behind the sidewalk to avoid conflicting with pedestrians.*

19 *At skewed ramp intersections, where the angle approaches 90°, a second ONE WAY (R6-1) sign should be added on the obtuse side when it would be visible to approaching traffic. Refer to Figure 2B-15(CA) Sheet 1.*

## Section 2B.49 ONE WAY Signs (R6-1 and R6-2)

**Standard:**

01 **~~Except as provided in Paragraph 6 of this Section, t~~The ONE WAY (R6-1 or R6-2) sign (see Figure 2B-13) shall be used to indicate streets, ramp terminals, or roadways upon which vehicular traffic is allowed to travel in one direction only.**

Option:

01a The ONE WAY (R6-2) sign may be used as an alternative to the R6-1 sign where space is limited and the R6-2 sign is more appropriate.

**Standard:**

02 **ONE WAY signs shall be placed parallel to the one-way street at all alleys and roadways that intersect one-way roadways as shown in Figure 2B-18.**

03 **At the crossing of a roadway with a divided highway that functions as two separate intersections, ONE WAY signs shall be placed, visible to each crossroad approach, on the near right and far left corners of each intersection with the directional roadways (see Figure 2B-19).**

04 **At the crossing of a roadway with a divided highway that functions as a single intersection Keep Right (R4-7) signs (see Section 2B.39) and~~/or~~ ONE WAY signs shall be installed (see Figure 2B-20). If Keep Right signs are installed, they shall be placed as close as practicable to the approach ends of the medians and shall be visible to traffic on the divided highway and angled (as needed) toward the applicable crossroad approach as shown in Figure 2B-20. If ONE WAY signs are installed, they shall be placed on the near right and far left corners of the intersection and shall be visible to each crossroad approach.**

Support:

04b Refer to Section 2B.18 when a ONE WAY sign is proposed on the same sign assembly as a STOP sign.

Option:

05 At the crossing of a roadway with a divided highway, regardless of function as a single or separate intersections, ONE WAY signs may also be placed on the far right corner of the intersection as shown in Figures 2B-19 and 2B-20.

06 ~~ONE WAY signs may be omitted on the one-way roadways of divided highways, where the design of interchanges indicates the direction of traffic on the separate roadways.~~

07 An EXCEPT BICYCLES (R3-7bP) plaque (see Figure 2B-4) may be used with a ONE WAY sign when counter-flow bicycle traffic is allowed.

Support:

08 Section 2B.48 contains information for the placement of ONE WAY signs at a crossroad with an interchange.

**Standard:**

09 **If used at unsignalized intersections with one-way streets, ONE WAY signs shall be placed on the near right and the far left corners of the intersection facing traffic entering or crossing the one-way street (see Figure 2B-18).**

10 **If used at signalized intersections with one-way streets, ONE WAY signs shall be placed near the appropriate**

**signal faces, on the poles holding the traffic signals, on the mast arm or span wire holding the signals, or at the locations specified for unsignalized intersections.**

11 **At unsignalized T-intersections where the roadway at the top of the T-intersection is a one-way roadway, ONE WAY signs shall be placed on the near-right and the far side of the intersection facing traffic on the stem approach (see Figure 2B-18).**

Option:

12 Where the central island of a roundabout allows for the installation of signs, ONE WAY signs may be used to direct traffic counter-clockwise around the central island (see Figures 2B-22 and 2B-23).

Guidance:

13 *Where used on the central island of a roundabout, the mounting height of a ONE WAY sign should be at least 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way.*

Option:

14 The BEGIN ONE WAY (R6-6) sign (see Figure 2B-13) may be used to notify road users of the beginning point of a one direction of travel restriction on the street or roadway. The END ONE WAY (R6-7) sign (see Figure 2B-13) may be used to notify road users of the ending point of a one direction of travel restriction on the street or roadway.

15 On streets and highways under local jurisdiction where medians are less than 30 feet wide, raised or unpaved, the R6-1 signs may be placed in the median.

*Guidance:*

16 *The appropriate height of the R6-1 signs when placed in the median should be 1.5 feet.*

17 *The R6-1 signs should also be placed parallel to the one-way street at the appropriate far corner to a wrong-way turn. They should also be placed opposite the exits from alleys and other public ways.*

Support:

18 Authorities in charge of any highway may designate, by ordinance or resolution, any roadway, part of a roadway, or specific lanes for one-way traffic. Refer to CVC 21657.

19 No such ordinance isa be effective with respect to a State highway until approved by Caltrans.

20 If, by local ordinance, a State highway through a city has been made one of a pair of one-way streets, the Commission may adopt the additional street into the State Highway System. Refer to SHC § 111.5. Refer to Section 1A.05 for information regarding this publication.

## Section 2B.50 Divided Highway Crossing Signs (R6-3 and R6-3a)

**Standard:**

01 **On unsignalized minor-street approaches from which both left turns and right turns are permitted onto a divided highway at a crossing that functions as two separate intersections (see Section 2A.23), except as provided in Paragraph 2 of this Section, a Divided Highway Crossing (R6-3 or R6-3a) sign (see Figure 2B-13) shall be used to advise road users that they are approaching an intersection with a divided highway (see Figure 2B-19).**

Option:

02 If the divided highway has a traffic volume of less than 400 AADT and a speed limit of 25 mph or less, at a crossing that functions as two separate intersections, the Divided Highway Crossing signs facing the unsignalized minor-street approaches may be omitted.

03 A Divided Highway Crossing sign may be used on signalized minor-street approaches from which both left turns and right turns are permitted onto a divided highway to advise road users that they are approaching an intersection with a divided highway.

**Standard:**

04 **If a Divided Highway Crossing sign is used at a four-leg intersection, the R6-3 sign shall be used. If used at a T-intersection, the R6-3a sign shall be used.**

05 **The Divided Highway Crossing sign shall be located on the near right corner of the intersection, mounted beneath a STOP or YIELD sign or on a separate support.**

Option:

06 An additional Divided Highway Crossing sign may be installed on the left-hand side of the approach to supplement the Divided Highway Crossing sign on the near right corner of the intersection.

## Section 2B.51 Roundabout Circulation Plaque (R6-5P)

*Guidance:*

01 *Where the central island of a roundabout or neighborhood traffic circle does not provide a reasonable place to install a sign as provided elsewhere in this Chapter, Roundabout Circulation (R6-5P) plaques (see Figure 2B-13) should be placed below the YIELD signs on each approach.*

Support:

02 Paragraph 6 of Section 2B.39 contains information about the use of a Keep Right (R4-7b) sign in the central island of a neighborhood traffic circle.

03 Paragraph 12 of Section 2B.49 contains information about the use of a One Way (R6-1 or R6-2) sign in the central island of a roundabout.

Option:

04 At roundabouts where ONE WAY signs have been installed in the central island, Roundabout Circulation plaques may be placed below the YIELD signs on approaches to roundabouts to supplement the central island signs.

05 The Roundabout Circulation plaque may be used at any type of circular intersection.

Support:

06 Examples of regulatory and warning signs for roundabouts and neighborhood traffic circles are shown in Figures 2B-21 through 2B-24.

# PARKING, STANDING, STOPPING, AND EMERGENCY RESTRICTION SIGNS

## Section 2B.52 Parking, Standing, and Stopping Signs (R7 and R8 Series)

Support:

01 Parking signs pertain to the parking, standing, and stopping of vehicles along the roadway and in designated parking areas. They cover a wide variety of regulations, and only general guidance can be provided here. ~~The word "standing" when used on the R7 and R8 series of signs refers to the practice of a driver keeping the vehicle in a stationary position while continuing to occupy the vehicle~~. The word "stopping" ~~when used on the R7 and R8 series signs~~ refers to any vehicle, occupied by a driver or not, that stops other than to avoid conflict with other traffic or to comply with official direction. Other types of activities such as active loading, active passenger loading, and/or waiting might be established in State or local codes for use on ~~R7 and R8 series~~ parking, standing, and stopping signs.

01a CVC Section 463 defines "parking", which involves the standing of a vehicle, whether occupied or not. However, the temporary loading or unloading of merchandise or passengers is not considered parking. CVC Section 587 defines "stopping", which involves the cessation of vehicle movement.

01b Refer to CVC 21112 through 22658 regarding the authorities for the various parking, stopping and loading signs.

02 Parking signs are categorized as either (1) prohibiting parking or (2) permitting parking with restrictions on how parking is allowed.

03 The types of parking, standing, or stopping prohibitions that might be encountered include, but are not limited to:

A. Prohibited at all times;
B. Prohibited only at certain times of the day and/or days of the week;
C. Prohibited with exceptions, such as for bus stops, loading/unloading zones, persons with disabilities, or electric vehicle charging stations; or
D. Prohibited under certain conditions, such as Snow Emergency Routes.

04 Permissive parking signs allowing parking with restrictions include, but are not limited to:

A. Parking only allowed for limited time duration (such as 30 minutes or for 1 hour);
B. Metered parking requiring payment at an individual or a multi-space parking meter, or through electronic means such as by telephone or mobile application.;
C. Parking only for specific persons (such as those with disabilities or patrons or employees of a business) or specific vehicle types (such as electric vehicles, police/government vehicles, motorcycles, bicycles, or taxis);
D. Angled or back-in angled parking when it is not commonly used in the area;
E. Parking programs such as neighborhood/residential permits, school areas, or special events; and
F. Emergency parking or stopping only.

04a Refer to FHWA's List of Known Errors for error in Paragraph 4, Item B text. Refer to Section 1A.04 for more details.

### Parking Regulations

Option:

05 Parking on freeways which have full control of access and no crossing at grade may be prohibited under CVC § 21960.

06 Parking on other State highways may be restricted or prohibited under CVC §§ 22505 and 22506.

Support:

07 The Caltrans District Director is authorized to issue orders prohibiting or restricting the parking of vehicles on State highways. The District Director is also authorized to approve ordinances or resolutions of local authorities prohibiting or restricting parking on State highways.

08 The delegation of maintenance activities to local authorities is usually exercised under the authority of SHC § 130. Under a proposal to delegate maintenance and parking regulation authority under CVC § 22506, Caltrans retains the authority to regulate parking under the three conditions specified in CVC § 22505(a). The District Director of Transportation is authorized to make this delegation of authority.

### Policy on Parking Restrictions

*Guidance:*

09 *No Stopping Any Time – Stopping should be prohibited at locations where the prohibition would reduce the risk of collisions or where parking would unduly interfere with the movement of traffic.*

10 *No Parking Anytime – Parking should be prohibited at locations where the prohibition is necessary to accommodate other activities and objectives, such as street sweeping, snow removal, public safety or preferential parking.*

Option:

11 Major factors that may be considered for No Stopping Anytime include:

- Narrow roadway width.
- Restricted visibility at intersections for pedestrian and vehicular traffic.
- Narrow shoulder width.
- Conversion of a parking lane to a through lane or right-turn lane.

Support:

12 Limited Time Parking -Caltrans does not issue orders for limited time parking.

Option:

13 On State highways, limited time parking restrictions may be initiated by local authorities and approved by Caltrans. Parking prohibitions between certain hours may also be initiated by local authorities.

**Standard:**

14 **Before time limit parking regulations are approved in rural areas, law enforcement agency shall be consulted.**

**Special Signs**

Option:

15 The OK TO PARK ON BRIDGE (R22(CA)) sign may be used to inform motorists that parking is permitted on a bridge. Refer to CVC 22500(k).

*Guidance:*

16 *The PARK PARALLEL (R24(CA)) sign should only be used where diagonal parking is prevalent, in violation of CVC 22502.*

17 *If supported by local ordinance, the BACK-IN ANGLE PARKING ONLY (R24F(CA)) sign should be used.*

**Standard:**

18 **The SCHOOL BUS ONLY w/ Double Arrow (R24A(CA)), TAXICAB ONLY w/ Double Arrow (R24B(CA)) and TOUR BUS ONLY w/ Double Arrow (R24C(CA)) signs shall be used to inform motorists of location of stands for use by school buses, taxicabs and tour buses, respectively. Refer to CVC 21112.**

19 **The MAIL DEPOSIT ONLY w/ Double Arrow (R24D(CA)) sign shall be used to inform motorists of curb restrictions at locations for depositing mail in an adjacent mailbox. Refer to CVC 21458(a)(3)(B).**

20 **The BLOCK WHEELS TO CURB (R24E(CA)) sign shall be used to inform motorists when parking on a hill to block the wheels of the vehicle by turning them against the curb, or by other means, when leaving it to stand unattended upon any grade exceeding 3 percent. Refer to CVC 22509.**

Option:

21 The PARK OFF PAVEMENT (R25(CA)) sign may be used where it is likely that vehicles may stop on the traveled way and interfere with through traffic. It may also be used as a temporary sign in snow areas where parking is permitted.

**Standard:**

22 **The LOADING ONLY 7AM TO 6PM EXCEPT SUNDAY 30 MINUTE LIMIT w/ Double Arrow (R25A-1(CA)) sign shall be used to inform motorists of curb restrictions at locations for loading or unloading passengers or freight for the time as specified by local ordinance. Refer to CVC 21458(a)(2).**

23 **The following signs shall be used to inform motorists of curb restrictions at locations for loading or unloading of passengers for the time as specified by local ordinance. Refer to CVC 21458(a)(3)(A).**

- **PASSENGER LOADING ONLY 5 MINUTE LIMIT w/ Double Arrow (R25C(CA)) sign**
- **School Passenger Loading ONLY 7AM TO 4PM SCHOOL DAYS 5 MINUTE LIMIT w/ Double Arrow (R25D-1(CA)) sign**
- **PASSENGER LOADING ONLY 7AM TO 4PM SCHOOL DAYS 5 MINUTE LIMIT w/ Double Arrow (R25E(CA)) sign**
- **School Bus Passenger Loading ONLY w/ Double Arrow (R25F-1(CA)) sign**
- **Tour Bus Passenger Loading ONLY w/ Double Arrow (R25H-1(CA) sign**

24 **The CAR SHARE PARKING ONLY PERMIT REQUIRED w/ Double Arrow (R25J(CA)) sign shall be used to designate certain streets or portions of streets for the exclusive parking privilege of vehicles participating in a car share vehicle program or ridesharing program. Refer to CVC 22507.1.**

Option:

25 The NO PARKING ANY TIME with arrow (R28(CA)) or without arrow (R26(CA)) signs may be used to inform motorists of a parking prohibition at a specific location. The NO PARKING ANY TIME with arrow (R28A(CA)) or without arrow (R26A(CA)) signs may be used where a larger size is desirable.

26 CVC Section 21718 prohibits the stopping, parking or leaving of any vehicle upon a freeway. Large NO PARKING ANY TIME (R26(CA)) or EMERGENCY PARKING ONLY (R8-4) signs may be installed on freeways which have full control of access and no crossing at grade to inform traffic that stopping, parking or leaving of any vehicle upon a freeway is prohibited.

27 The Tow-Away No Parking (R26K(CA)) sign may be used to inform motorists of a parking prohibition and tow-away zone at a specific location.

28 The NO STOPPING FIRE LANE (R26F(CA)) sign may be used to inform motorists of a designated fire lane. Refer to CVC 22500.1.

**Standard:**

29 **The NO STOPPING ANY TIME (R26(S)(CA)) sign or Tow-Away NO STOPPING ANY TIME (R26L(CA)) sign shall be used to inform motorists of a No Stopping Zone at a specific location where red curb marking is not used.**

30 **The NO PARKING HERE TO CORNER (R26M(CA)) sign shall be installed to inform motorists that parking is prohibited within 20 feet of the vehicle approach side of a marked or unmarked crosswalk at a corner or within 15 feet of any marked or unmarked crosswalk at a corner where a curb extension is present. Refer to CVC Section 22500.**

31 **For midblock crosswalk configurations, the NO PARKING HERE TO X-ING (R26M-1(CA)) sign shall be used in place of the standard R26M(CA) sign.**

32 **The Tow-Away NO STOPPING 4 TO 6 PM (R107(CA)) sign in a tow-away zone shall be used to inform motorists of a stopping restriction at a specific location during specific hours.**

33 **In zones where vehicles can be towed for violating the posted prohibition restriction, the "Tow-Away" message or symbol shall be used. Where the "Tow-Away" symbol is used in a 12-inch width format, it shall be as shown in the R26K(CA) sign. When it is used in an 18-inch width format, it shall be shown in the R107(CA) sign.**

Option:

34 The NO STOPPING ANY TIME (R26A(S) (CA)) sign may be used where a larger size is desirable.

35 The NO PARKING ON BRIDGE (R27(CA)) sign may be used only where parking is prevalent in violation of CVC 22500(k).

36 The NO PARKING ON BRIDGE (R27A(CA)) sign may be used where a larger size is desirable.

37 The NO STOPPING ANY TIME with arrow (R28(S)(CA)) sign may be used to inform motorists of no stopping zones. Use only where the beginning and ending points of the prohibition are not otherwise indicated. The NO STOPPING ANY TIME with arrow (R28A(S)(CA)) sign may be used where a larger size is desirable.

**Standard:**

38 **The NO STOPPING BUS ONLY w/ Arrow (R28C(CA)) sign shall be used to inform motorists of no stopping zones at bus stops.**

39 **On State highways, the NO PARKING VEHICLES OVER 6' HIGH w/ Double Arrow (R28D(CA)) or NO STOPPING VEHICLES OVER 6' HIGH w/ Double Arrow (R28D(S)(CA)) sign shall be used to inform motorists of a parking or stopping prohibition, which applies only to vehicles 6 feet or more in height. Refer to CVC 22505.**

Option:

40 The R28D(CA) or R28D(S)(CA)) sign may be installed within 100 feet of an intersection to improve the visibility of the motorists in accordance with CVC 22507, except where parking would obstruct the applicable sight distance as determined by a qualified engineer.

**Standard:**

41 **The NO PUBLIC PARKING SUBJECT TO CITATION AND REMOVAL AT OWNER'S EXPENSE (R28E(CA)) sign shall be used to inform motorists of a parking prohibition on private property. Refer to CVC 22658.**

42 **The No Parking VEHICLES OVER 5 TONS (R28F(CA)) sign shall be used to inform motorists of a parking prohibition in a residential district for commercial vehicles having a manufacturer's gross vehicle weight rating of 5 tons or more. Refer to CVC 22507.5.**

43 **The No Stopping/No Parking Specific Hours (R29(CA)) sign shall be used to inform motorists of a stopping and parking prohibition during certain hours at a specific location.**

44 **The No Parking Specific Hours (R30(CA) and R30A(CA)) signs shall be used to inform motorists of a parking restriction during certain hours at a specific location.**

45 **The No Parking 10AM TO 12 PM WEDNESDAY STREET SWEEPING (R30B(CA)) sign shall be used to inform motorists of a parking prohibition for the purpose of street sweeping. Refer to CVC 22507.6.**

46 **The No Parking 2AM TO 6AM EXCEPT BY PERMIT (R30C(CA))or No Parking 2AM TO 6 AM CITYWIDE EXCEPT BY PERMIT (R30D(CA) sign shall be used to inform motorists of a parking prohibition between the hours of 2 a.m. and 6 a.m.**

**Refer to CVC 22507.5.**

*Guidance:*

47 *When used, the R30D(CA) sign should be posted below the City Limit (G9-5(CA)) sign or downstream from a freeway off-ramp. Refer to CVC 22507.5.*

**Standard:**

46 **The No Parking w/Double Arrow (R30E(CA)) sign shall be used to inform motorists of a parking restriction at a specific location.**

47 **The No Stopping Specific Hours School Days (R30F(CA)) sign shall be used to inform motorists of a stopping prohibition during certain hours at a specific location in a school zone area.**

Option:

48 The No Parking/Parking Specific Hours (R31(CA) and R32B(CA)) and No Stopping/Parking Specific Hours (R31(S)(CA)) signs may be used to inform motorists of a stopping/parking prohibition during certain hours and a parking time limit during other hours at a specific location. The R31(S)(CA) sign is used for stopping prohibitions, generally during peak traffic hours.

49 The Limited Hour/Minute Parking Specific Hours (R32(CA) sign may be used to inform motorists of a parking time limit with specific hours and/or minutes during certain hours at a specific location.

**Standard:**

50 **The 2 HOUR PARKING 8AM TO 6 PM DISTRICT 7 PERMITS EXEMPT (R32C(CA)) sign or 30 MINUTE PARKING 2AM TO 6 AM DISTRICT 3 PERMITS EXEMPT (R32D(CA)) sign shall be used to inform motorists of a parking time limit designation of certain streets upon which preferential parking privileges are given to residents and merchants adjacent to the streets for their use, under which the residents and merchants can be issued a permit or permits that exempt them from the prohibition or restriction. Refer to CVC 22507.**

51 **A combined 2 HOUR PARKING 8AM TO 4 PM – PASSENGER LOADING ONLY 4PM TO MIDNIGHT 5 MINUTE LIMIT w/ Double Arrow (R32E(CA)) sign shall be used to inform motorists of a parking time limit with specific hours and of curb restrictions at locations for loading or unloading of passengers for the time as specified by local ordinance. Refer to CVC 21458(a)(3)(A).**

52 **The 2 HOUR PARKING 8AM TO 6 PM MOTORCYCLE PARKING ONLY w/ Double Arrow (R32F(CA)) sign shall be used to inform motorists of a parking time limit with specific hours for motorcycles. Refer to CVC 22503.5.**

Option:

53 The Tow-Away No Stopping/No Parking Specific Hours (R37(CA)) sign may be used to inform motorists of no stopping and parking prohibitions and tow-away zone at a specific location.

54 The Tow-Away No Parking/Limited Hour Parking Specific Hours (R38(CA)) sign may be used to inform motorists of a parking restriction and tow-away zone at a specific location.

55 The Tow-Away No Stopping/Limited Hour Parking Specific Hours (R38(S)(CA)) sign may be used for stopping prohibitions, generally during peak hours.

Support:

56 Local agencies are allowed to adopt, by resolution or ordinance, the restriction of parking and the impounding of vehicles for sale, subject to the requirements of CVC Section 22651.9. Under these requirements, a vehicle can be impounded if a parking violation was received within the last 30 days and a warning was issued.

Option:

57 The No Parking of Vehicles for Sale (R108(CA)) signs may be posted to inform motorists that the parking of vehicles for sale is prohibited and that vehicles may be impounded, as prescribed in CVC Section 22651.9, and as authorized by a local ordinance or resolution.

*Guidance:*

58 *If used, the applicable municipal code or county code should be shown on the R108(CA) signs to assist enforcement personnel in identifying the appropriate parking infraction, due to the special requirements prescribed in CVC Section 22651.9.*

**Standard:**

59 **The combined TOW-AWAY NO STOPPING 7AM TO 9 AM - PASSENGER LOADING ONLY ALL OTHER TIMES 5 MINUTE LIMIT w/ Double Arrow (R38A(CA)) sign shall be used to inform motorists of no stopping and parking prohibitions and tow-away zone at a specific location during specific hours and of curb restrictions at locations for loading or unloading of**

**passengers for the time as specified by local ordinance. Refer to CVC 21458(a)(3)(A).**

Option:

60 The NO PARKING OF COMMERCIAL VEHICLES EXCEPT BY PERMIT (R39(CA)) sign may be used on any roadway in which local ordinance or resolution per CVC Section 22505 and 22507 has been established to prohibit parking of commercial vehicles.

**Standard:**

61 **If used, the R39(CA) sign shall be used to identify only those street or highway locations, either State or local, upon which parking of commercial vehicles is prohibited, except by permit, as established by the local ordinance or resolution.**

62 **The NO DOUBLE PARKING ANYTIME COMMERCIAL VEHICLES INCLUDED (R39-1(CA) or R39-2(CA)) sign shall be used to inform motorists of a parking prohibition in a business district for commercial vehicles where a local agency has adopted an ordinance per CVC 22502(c).**

Option:

63 The NO IDLING COMMERCIAL VEHICLES AND ALL BUSES SR62(CA) or NO IDLING All Buses and Commercial Vehicles SR63(CA) symbol sign may be placed to remind commercial vehicle operators that idling is prohibited for commercial vehicles and all buses for a duration greater than 5 minutes.

Support:

64 Refer to the CCR, Title 13, Division 3, Chapter 10, Article 1, §§ 2480 and 2485 which prohibits unnecessary idling of commercial vehicles and all buses.

**Standard:**

65 **If used, the NO IDLING COMMERCIAL VEHICLES AND ALL BUSES (SR62(CA)) sign or NO IDLING All Buses and Commercial Vehicles (SR63(CA)) symbol sign or NO IDLING All Buses and Commercial Vehicles REPORT VIOLATIONS (SR63A(CA)) sign shall be placed in areas where idling commonly occurs.**

Option:

66 The NO IDLING All Buses and Commercial Vehicles REPORT VIOLATIONS (SR63A(CA)) sign may be used in areas with idling concern for heavy-duty diesel trucks and buses to report violators directly to California Air Resources Board (CARB) or local law enforcement agencies.

**Standard:**

67 **The phone number used on the SR63A(CA) sign shall be either 1-800-CUT-SMOG or 1-800-END-SMOG, or another local law enforcement agency's number for signs located in the South Coast Mair Quality Management District. SR63A(CA) signs located elsewhere in the State shall use the 1-800-END-SMOG or another local law enforcement agency's number.**

Support:

68 Refer to Health and Safety Code, Division 26, Part 4, Chapter 5, Section 42705.5 and Health and Safety Code, Division 26, Part 6, Chapter 6, Section 44391.2.

*Guidance:*

69 *If using the SR63A(CA) sign, these signs should be placed within 100 feet of sensitive receptors, like daycares, school, senior care facilities, hospitals, and residential neighborhoods.*

Support:

70 CCR Title 13, Sections 2480 and 2485, of the CCR prohibit unnecessary idling of commercial vehicles and all buses for a duration greater than 5 minutes. The sign locations will be determined by Air Resources Board representatives and officials of the law enforcement agency responsible for enforcement and the jurisdiction who owns the roadway will install the signs.

**Standard:**

71 **The Accessible Parking Only (R99(CA)) sign in combination with MINIMUM FINE $250 (R99B(CA)) plaque; or, Accessible Parking Only Minimum Fine $250 (R99C(CA)) sign shall be used in on-street and off-street parking facilities to designate stalls for vehicles with a special identification license plate or a distinguishing placard for persons with disabilities.**

Support:

72 The R99(CA) sign in combination with the R99B(CA) plaque; or, R99C(CA) sign, blue pavement markings and International Symbol of Accessibility Marking, are required for enforcement of these parking areas. Refer to CVC 22511.7 and 22511.8.

**Standard:**

73 **The VAN ACCESSIBLE (R7-8b) sign shall be mounted below the Accessible Parking Only (R99(CA)) sign in combination with MINIMUM FINE $250 (R99B(CA)) plaque; or, Accessible Parking Only Minimum Fine $250 (R99C(CA)) sign of the parking space for persons with disabilities designated as the van accessible space as provided in the Title 24, Part 2 California Building Code (CBC) Section 1129B.**

Option:

74 The TOW-AWAY SPECIAL PLACARD OR LICENSE PLATE REQUIRED (R100A(CA)) sign may be used with the R99(CA) sign in combination with the R99B(CA) plaque; or, R99C(CA) sign to inform motorists that their vehicle will be towed away if they do not have a special identification license plate or a distinguishing placard for persons with disabilities.

**Standard:**

75 **The Disabled Tow-Away (R100B(CA)) sign shall be placed immediately adjacent to, and visible from, the stall or space, or at each entrance to an off street parking facility to inform motorists that their vehicle will be towed away if they park in designated stalls or spaces without a special identification license plate or a distinguishing placard for persons with disabilities. The sign shall include the address where the towed vehicle can be reclaimed and the telephone number of the local traffic law enforcement agency. Refer to CVC 22511.8 and 22511.9.**

Option:

76 The DISPLAY OF VEHICLES FOR SALE PROHIBITED (SR26(CA)) sign may be used on any roadway in which local ordinance or resolution per SHC, § 731 has been established to prohibit the display of vehicles for sale.

**Standard:**

77 **If used, the SR26 (CA) sign shall be used to identify only those street or highway locations, either State or local, upon which display of vehicles for sale is prohibited, as established by the local ordinance or resolution.**

Option:

78 The TOW-AWAY NO PARKING WHEN SNOW REMOVAL CONDITIONS EXIST (SR49(CA)) sign may be used to prohibit or restrict the parking or standing of vehicles on designated streets or highways, or portions thereof, for the purpose of snow removal. Refer to CVC 22510.

*Guidance:*

79 *The SNOW NOT REMOVED BEYOND HERE (SR20-1(CA)) sign should be erected at the beginning of the snow season and removed in the spring when the road is opened. The SR20-1(CA) sign should be placed at a location that will provide a motorist the opportunity to turn around.*

Option:

80 The CHAIN INSTALLATION ONLY (R74(CA)) sign may be erected where parked vehicles interfere with normal winter operations.

*Guidance:*

81 *The R74(CA) sign should be turned or covered at the end of the chain requirement season.*

**Standard:**

82 **The CHAINS REQUIRED (X MILE (X MILES)) AHEAD (R75(CA)) sign shall be used to give advance notice that chains are required ahead.**

83 **The CHAINS REQUIRED (R76(CA)) sign shall be used at the beginning of chain control areas and intermittently as needed.**

Support:

84 The R76(CA) sign is installed in combination with the Speed Limit (R2-1), R79(CA) and R80-1(CA) signs.

Option:

85 The ON SINGLE AXLE DRIVE VEHICLE WITH TRAILER (R76-1(CA)) sign may be used when road conditions are such that only single drive vehicles with trailers need chains.

**Standard:**

86 **When used, the R76-1(CA) sign shall be mounted below the CHAINS REQUIRED (R76(CA)) sign.**

87 **The NO EXCEPTIONS (R77(CA)) sign shall be used with the Speed Limit (R2-1) and CHAINS REQUIRED (R76(CA)) signs when chains are required with no exceptions.**

88 **The END CHAIN CONTROL (R78(CA)) sign shall be used to advise the motorist that the chain control area has ended.**

89 **The AUTOS & PICKUPS SNOW TIRES OK – CARRY CHAINS (R79(CA)) sign shall be used with the Speed Limit (R2-1) and CHAINS REQUIRED (R76(CA)) signs when chains are required but autos and pickups with snow tires are excepted from using chains.**

90 **The 4-W DRIVE WITH SNOW TIRES OK – CARRY CHAINS (R80-1(CA)) sign shall be used with the Speed Limit (R2-1) and CHAINS REQUIRED (R76(CA)) signs when chains are required.**

Support:

91 Vehicles with four wheel drive and snow tires on all four wheels are exempt from using chains.

**Electric Vehicle Charging Station Signs**

**Standard:**

92 **If used, the Electric Vehicle Charging Station Tow-Away (R112(CA)) sign (refer to Figure 2B-25(CA)) shall be placed immediately adjacent to, and visible from, the charging station stall or space, or at each entrance to an off-street parking facility to inform motorists that their vehicles will be towed away if parked in designated stalls or spaces without being connected for electric charging purposes. The sign shall include the address where the towed vehicle can be reclaimed and the telephone number of the local traffic law enforcement agency. Refer to CVC 22511.**

Option:

93 Local agencies may, at their discretion, include CVC Section 22511 or local municipal code section, or ordinance number on the Electric Vehicle Charging Station Tow-Away R112(CA) sign.

**Standard:**

94 **If used, the No Parking (symbol) EXCEPT FOR EV CHARGING (R113(CA)), or the No Parking (symbol) EXCEPT FOR ELECTRIC VEHICLE CHARGING (R113A(CA) sign (refer to Figure 2B-25(CA)) shall be placed immediately adjacent to, and visible from, each charging station stall or space.**

95 **If used, the __HOUR EV CHARGING __AM TO __PM (R114(CA)), or the __HOUR ELECTRIC VEHICLE CHARGING __AM TO __PM (R114A(CA)) sign (refer to Figure 2B-25(CA)) shall be placed immediately adjacent to, and visible from, each charging station stall or space to identify the allowable time limit where electric vehicles may be connected, depending upon what time limitations for charging apply to each charging station.**

96 **Identification signs and surface markings shall be placed for Van Accessible, Standard Accessible and Ambulatory electric vehicle charging stations, as required by Chapter 11B of the Title 24, Part 2 California Building Code (CBC) Section 1129B. The International Symbol of Accessibility for the Handicapped (D9-6) sign in combination with the VAN ACCESSIBLE (R7-8b) sub plaque shall be placed at Van Accessible electric vehicle charging stations, or, the D9-6 sign shall be placed at standard accessible electric vehicle charging stations (refer to CBC 11B-812.8; and, Section 3B.20 for surface markings).**

Option:

97 The Rest Area/Vista Point 8 HOUR PARKING (S23(CA)) sign may be used to discourage extended stays in roadside rests or vista points for noncommercial vehicles. The 10 HOUR PARKING COMMERCIAL MOTOR VEHICLES (R39-3(CA)) may be used to allow ten total hours of parking for commercial vehicles. Refer to CVC 22651(s)1 and CVC 22651(s)2.

## Section 2B.53 Design of Parking, Standing, and Stopping Signs

**Standard:**

01 **Parking~~, standing~~ loading, or stopping signs (see Figure 2B-25) shall be rectangular or square.**

02 **Public agencies shall follow established law (State law, local ordinance, or regulation) as adopted by the authorized agency regarding what messages are allowed on parking signs.**

03 **The legend on parking signs shall state applicable regulations. Parking signs shall comply with the standards of shape, color, and location.**

04 **The colors in parking signs shall conform to their associated curb zone colors. Prohibitive parking signs (see Drawing A in Figure 2B-25 for some commonly used examples) shall be used where parking is prohibited at all times or at specific times. Except as otherwise provided in this Section, parking signs shall have a red legend and border on a white background and, when the parking prohibition symbol is used, the symbol "P" shall be black. Where an exclusive zone is established for freight or passenger loading or mail deposit, the signs shall have a black legend on a white background. Where an exclusive zone is established for disabled persons, the signs shall have a white legend on a blue background, as shown on the R99(CA).**

05 **Permissive parking signs (see Drawing B in Figure 2B-25) shall be used where only time-limited parking or parking in a particular manner is allowed. Permissive parking signs shall have a green legend and border on a white background.**

*Guidance:*

06 *Parking information, should be displayed from top to bottom of the sign, as applicable, in the following order:*

*A0. Any tow-away message or symbol.*

*A. The restriction or prohibition;*

*B. The times of the day that it is applicable, if not all hours;*

*C. The days of the week that it is applicable, if not every day;*

*D. Qualifying or supplementary information;*

*E. Exemptions to the restriction of prohibition; and*

*F. ~~Any tow-away message or symbol.~~*

*G. The appropriate municipal or county code on selected signs, when deemed necessary in order to aid enforcement personnel in identifying the appropriate infraction.*

*H. The phone number to call to recover an impounded or towed vehicle.*

07 *If the parking regulation applies to a limited area or zone, the limits of the regulation should be shown by arrows ~~or supplemental plaques~~. If ~~arrows are used and if~~ the sign is at the end of a parking zone, there should be either no arrows or a single-headed arrow pointing in the direction that the regulation is in effect. If the sign is at an intermediate point in a zone, there should be a double-headed arrow pointing both ways. When a single sign is used at the transition point between two parking zones, it should display a right arrow and a left arrow pointing in the direction that the respective regulations apply.*

**Standard:**

08 **The times and days for which the parking regulations are in effect shall be posted if they are not in effect at all times of day or all days of the week.**

Option:

09 ~~As an alternate to the use of arrows to show designated restriction zones, the following word messages may be used: BEGIN, END, HERE TO CORNER, HERE TO ALLEY, and THIS SIDE OF SIGN.~~

10 The R8 series signs (see Drawing A in Figure 2B-25) may be used where sufficient notice of a parking prohibition is satisfied by the use of single signs and are not needed to designate the beginning and end of a zone in which parking is prohibited or restricted. ~~In rural and certain other areas the legends NO PARKING ON PAVEMENT (R8-1) or NO STOPPING ON PAVEMENT (R8-5) are generally suitable and may be used where parking or stopping is allowed on an unpaved shoulder or border adjacent to the paved portion of the road. If a roadway has an adjacent paved shoulder on which parking or stopping is allowed, the legend NO PARKING EXCEPT ON SHOULDER (R8-2) or NO STOPPING EXCEPT ON SHOULDER (R8-6) may be used. The R8-3 symbol sign or the word message NO PARKING may be used to prohibit any parking along a roadway. Word legend supplemental plaques may be mounted below the NO PARKING signs or the word legend may be incorporated within signs whose sizes are increased accordingly. The R8-3 series signs may include word legends such as ON PAVEMENT (R8-3c), ON BRIDGE (R8-3d), ON TRACKS (R8-3e), and EXCEPT ON SHOULDERS (R8-3f).~~

*Guidance:*

11 *Where special parking restrictions are imposed during heavy snowfall or a declared snow emergency, a Snow Emergency Route (R7-203) sign (see Drawing A in Figure 2B-25) should be installed. The legend should be modified to display the specific regulations. The upper section of the sign should display the designation as a snow emergency route in a white legend and border on a red background.*

12 *If a fee is charged for on-street parking and payments are made at a multi-space parking meter, instead of individual parking meters for each parking space, Metered Parking (R7-21 and R7-22) signs and PAY AT STATION (R109P(CA)) Plaque(see Drawing B in Figure 2B-25) should be used to define the area where the multi-space parking meter applies. The Multi-Space Parking Meter (R7-20) sign (see Drawing B in Figure 2B-25) should be used at the meter location to direct road users to the meter.*

Option:

13 Where payments can be made electronically, such as by telephone or mobile application, the Mobile Parking Payment (R7-21aP) plaque (see Drawing B in Figure 2B-25) may be installed below or as part of the legend of a Metered Parking sign.

**Standard:**

14 **If the metered parking is subject to a maximum time limit, the appropriate time limit (number of hours or minutes) shall be displayed on the Metered Parking (R7-21 and R7-22) signs and, except as provided in Paragraph 15 of this Section, on the Multi-space Parking Meter (R7-20) signs.**

Option:

15 Where the maximum time limit varies by the time of the day or by the day of the week, the display of the time limits may be omitted from the R7-20 sign and, instead, be displayed on the multi-space parking meter so that they are visible to pedestrians as they make payments.

**Standard:**

16 **Where parking spaces are reserved for persons with disabilities, the Accessible Parking (~~R7-8~~ R99(CA)) sign (see ~~Drawing D~~ in Figure 2B-25(CA)) shall be used to designate the space and shall display the official International Symbol of Accessibility.**

17 **Where parking spaces that are reserved for persons with disabilities are designed to accommodate wheelchair vans, a VAN ACCESSIBLE (~~R7-8aP~~ R7-8bP(CA)) plaque (see Drawing D in Figure 2B-25) shall be mounted below the ~~R7-8~~ R99(CA) sign. Refer to CCR Title 24, § 1129B.4.**

Support:

17a Refer to Section 2B.52 for the R99(CA) sign and R7-8bP(CA) plaque.

*Guidance:*

18 *Where parking spaces are designated for parking of electric vehicles, an Electric Vehicle Parking (R7-111 series, R7-112 series, and R7-113) sign (see Drawing E of Figure 2B-25) should be installed adjacent to the designated spaces. Where there is no time limit, the R7-111 series sign should be used. Where parking is subject to a time limit, the R7-112 series sign should be used.*

19 *Where parking spaces are only designated for charging of electric vehicles, an R7-113 sign or R7-114 series sign (see Drawing E in Figure 2B-25) should be installed adjacent to the designated spaces.*

20 *Where additional restrictions apply while a vehicle occupies the designated space, the R7-113P series plaques should be installed below the R7-113 sign or the R7-114 series signs.*

Option:

21 Where parking is prohibited during certain hours and time-limited parking or parking in a particular manner is allowed during certain other time periods, the red Parking Prohibition and green Permissive Parking signs may be designed as follows (see Drawing C in Figure 2B-25):

A. Two 12 x 18-inch parking signs may be used with the red Parking Prohibition ~~(R7-1)~~ sign installed above or to the left of the green Permissive Parking (R7-108) sign; or

~~B. A single sign (R7-200 or R7-200a) may be used.~~

22 At the transition point between two parking zones, a single sign (R7-200 or R7-200a) or two signs mounted side-by-side may be used.

22a On any sign, the words "Tow-Away" may be used interchangeably with the Tow-Away symbol.

23 On any sign, the ~~The~~ words NO PARKING may be used as an alternative to the No Parking symbol (~~see the R7-2a sign in Drawing A in Figure 2B-25~~).

24 Alternate designs for the R7-107 sign may be developed such as the R7-107a sign (see Drawing A in Figure 2B-25). Alternate designs may include, on a single sign, a transit logo, an approved bus symbol, a parking prohibition, the words BUS STOP, and an arrow. The reverse side of the R7-107 series signs may display bus routing information for pedestrians.

25 ~~A Tow-Away Zone (R7-201P or R7-201aP) plaque (see Drawing A in Figure 2B-25) may be mounted below any parking prohibition sign. The word legend TOW-AWAY ZONE may be incorporated into the parking prohibition sign in lieu of using a separate plaque.~~

26 ~~The R7-201P plaque may have a black or red symbol and border on a white background.~~

*Guidance:*

27 *When a legend other than that on the standard parking signs is necessary, letter height, symbol size, and basic sign layout should be consistent with the those shown on the standard parking signs as detailed in the "Standard Highway Signs" publication (see Section 1A.05.)*

Support:

27a Refer to FHWA's List of Known Errors for errors in Paragraph 27 text. Refer to Section 1A.04 for more details.

*Guidance:*

28 *In general, the letter height of the principal legend on parking signs sized for urbanized applications should be at least 2 inches.*

## Section 2B.54 Placement of Parking, Standing, and Stopping Signs

Support:

01 The efficacy of parking, standing, and stopping signs, when used on conventional roads in urbanized or developed environments, depends on their visibility and consistent placement along a street or within a particular block. It is often impracticable for the entire legend to be legible from similar distances as for other types of signs. Therefore, it is important that their conventional form be recognizable from an adequate distance such that the road user can obtain the information upon closer inspection.

*Guidance:*

02 *When signs with arrows are used to indicate the extent of the restricted zones, the signs should be set at an angle of not less than 30 degrees nor more than 45 degrees with the line of traffic flow in order to be visible to approaching traffic.*

03 *When signs are placed at the head of perpendicular parking stalls, the signs should be parallel to the roadway facing the parking stall.*

04 *Spacing of signs should be based on legibility(refer to Section 2A.08), conspicuity, and sign orientation(refer to Section 2A.17).*

05 *If the zone is long, signs should be used at intermediate points within the zone.*

06 *If the signs are mounted at an angle of 90 degrees to the curb line, two signs should be mounted back to back at the transition point between two parking zones, ~~each with an appended THIS SIDE OF SIGN (R7-202P) supplemental plaque~~ (see Drawing A in Figure 2B-25).*

07 *If the signs are mounted at an angle of 90 degrees to the curb line, signs without any arrows or appended plaques should be used at intermediate points within a parking zone, facing in the direction of approaching traffic. Otherwise, the standards of placement should be the same as for signs using directional arrows.*

Option:

08 Blanket parking regulations that apply to an entire jurisdiction may, if legal, be posted in the vicinity of the jurisdictional boundary lines. Blanket parking regulations that apply to a posted zone or district may, if legal, be posted at the entry points to the zone or district.

## Section 2B.55 Emergency Restriction Signs (R8-4 and R8-7)

**Standard:**

01 **Emergency Restriction signs (see Figure 2B-26) shall be rectangular and shall have a black legend and border on a white background.**

Option:

02 The EMERGENCY PARKING ONLY (R8-4) sign or the EMERGENCY STOPPING ONLY (R8-7)sign may be used to discourage or prohibit shoulder parking, particularly where scenic or other attractions create a tendency for road users to desire to stop temporarily.

Support:

03 Section 8B.07 contains information for the use of the DO NOT STOP ON TRACKS (R8-8) sign (see Figure 8B-1) to discourage or prohibit parking or stopping on railroad or light rail transit tracks.

04 **The EMERGENCY PARKING ONLY (R8-4) sign shall be used at the beginning of freeways below the BEGIN FREEWAY (R57(CA)) sign. Refer to CVC 21960.**

Support:

05 See Section 2B.109(CA) for the BEGIN/END FREEWAY (R57(CA) and R58(CA)) sign.

# PEDESTRIAN SIGNS

## Section 2B.56 WALK ON LEFT FACING TRAFFIC and No Hitchhiking Signs (R9-1, R9-4, and R9-4a)

Option:

01 The WALK ON LEFT FACING TRAFFIC (R9-1) sign (see Figure 2B-27) may be used on highways where no sidewalks are provided.

*Guidance:*

02 *If used, the WALK ON LEFT FACING TRAFFIC sign should be installed on the right-hand side of the road where pedestrians walk on the pavement or shoulder in the absence of pedestrian pathways or sidewalks.*

Option:

03 The No Hitchhiking (R9-4) sign (see Figure 2B-27) may be used to prohibit standing in or adjacent to the roadway for the purpose of soliciting a ride. The R9-4a word message sign (see Figure 2B-27) may be used as an alternate to the R9-4 symbol sign.

## Section 2B.57 Pedestrian Crossing Signs (R9-2 and R9-3)

Option:

01 Pedestrian Crossing signs (see Figure 2B-27) may be used to limit pedestrian crossing to specific locations.

**Standard:**

02 **If used, Pedestrian Crossing signs shall be installed to face pedestrian approaches.**

Option:

03 Where crosswalks are clearly defined, the CROSS ONLY AT CROSSWALKS (R9-2) sign may be used to prohibit pedestrians from crossing at locations away from crosswalks.

04 The No Pedestrian Crossing (R9-3) sign may be used to prohibit pedestrians from crossing a roadway at an undesirable location or in front of a school or other public building where a crossing is not designated.

05 The NO PEDESTRIAN CROSSING (R9-3a) word message sign may be used as an alternate to the R9-3 symbol sign. The USE CROSSWALK (R9-3bP) supplemental plaque, along with an arrow, may be installed below either sign to designate the direction of the crossing.

05a The NO PED CROSSING - USE CROSSWALK (R49(CA)) Sign may be used as an alternate to the combined R9-3 and R9-3bP signs.

**Standard:**

05b **The NO PED CROSSING - USE CROSSWALK (R49(CA)) Sign shall only be mounted on a Pedestrian Barricade.**

Support:

06 Pedestrians with vision disabilities might need features other than traffic control devices to provide effective communication of the prohibition of pedestrian crossing.

*Guidance:*

07 *The R9-3bP plaque should not be installed in combination with educational plaques.*

Support:

08 Refer to CVC 21106.

## Section 2B.58 Traffic Signal Pedestrian and Bicyclist Actuation Signs (R10-1 through R10-4 and R10-24 through R10-26)

**Standard:**

01 **Where manual actuation of a traffic signal is required for pedestrians or bicyclists to call a signal phase to cross the roadway, traffic signal signs applicable to pedestrian actuation (see Figure 2B- 27) or bicyclist actuation (see Figure 9B-1) shall be mounted immediately above or incorporated into the push button detector units (see Section 4I.05).**

Support:

02 Traffic signal signs applicable to pedestrians include:

A. CROSS ONLY ON GREEN (symbolic circular green) (R10-1),
B. ~~CROSS ONLY ON (symbolic walk indication) SIGNAL (R10-2),~~
C. Push Button for Walk Signal (R10-3 series), and
D. ~~Push Button for Green Signal (R10-4 series).~~

Option:

03 The following signs may be used as an alternate for the R10-3 ~~and R10-4~~ signs:

A. Push Button to Cross Street Wait for Walk Signal (R10-3a); or

~~B. Push Button to Cross Street Wait for Green Signal (R10-4a).~~

04 The name of the street to be crossed may be substituted for the word STREET in the legends on the R10-3a ~~and R10-4a~~ signs.

*Guidance:*

05 *The finger in the push button symbol on the R10-3, and R10-3a, ~~R10-4, and R10-4a~~ signs should point in the same direction as the arrow on the sign.*

Option:

06 ~~Where symbolic pedestrian signal indications are used, an educational sign (R10-3b) may be used instead of the R10-3 sign to improve pedestrian understanding of pedestrian indications at signalized intersections. Where word legend pedestrian signal indications are being retained for the remainder of their useful service life, the legends WALK/DONT WALK may be substituted for the symbols on the educational sign R10-3b, thus creating educational sign R10-3c. The R10-3d educational sign may be used to inform pedestrians that the pedestrian clearance time is sufficient only for the pedestrian to cross to the median at locations where pedestrians cross in two stages using a median refuge island. The R10-3e educational sign may be used where countdown pedestrian signals have been provided. In order to assist the pedestrian in understanding which push button to push, the R10-3f through R10-3i educational signs that provide the name of the street to be crossed may be used instead of the R10-3b through R10-3e educational signs.~~

06a The R10-3e(CA) or R10-3i(CA) educational sign may be used where countdown pedestrian signals have been provided.

Support

06b Pedestrian pushbuttons or touch-free detectors may be used to actuate pedestrian signal timing, to activate accessible pedestrian signals, or both. Refer to Chapter 4K regarding the application of accessible pedestrian signals and detectors.

Option:

06c The R10-3j(CA) sign may be used where the pedestrian signal can be activated by pushing the button or waving at the button.

06d The R10-3k(CA) sign may be used where warning lights or rapid flashing beacons can be activated by pushing the button or waving at the button.

**Standard**

06e **The bottom panels of signs R10-3e(CA) and R10-3i(CA) shall not be used where the pedestrian signal timing is non-actuated and the pedestrian push button is used solely to activate accessible pedestrian signals.**

Option:

07 The R10-24 or R10-26 sign (see Section 9B.20) may be used where a push button detector has been installed exclusively to actuate a green phase for bicyclists.

08 The R10-25 sign (see Figure 2B-27) may be used where a push button detector has been installed for pedestrians to activate In-Roadway Warning Lights (see Chapter 4U) or flashing beacons that have been added to the pedestrian warning signs.

Support:

08a Refer to Section 4U.02 for standards related to the R10-25 sign.

09 Section 4I.05 contains information regarding the application of the R10-32P plaque.

# TRAFFIC SIGNAL SIGNS AND PLAQUES

## Section 2B.59 Traffic Signal Signs and Plaques (R10-5 through R10-30)

Option:

01 To supplement traffic signal control, traffic signal (R10-5 through R10-30) signs (see Figure 2B-28) may be used to regulate road users.

02 Traffic signal signs may be installed at certain locations to clarify signal control. Among the legends that may be used for this purpose are:

A. LEFT (RIGHT) ON GREEN ARROW ONLY (R10-5),
B. STOP HERE ON RED (R10-6 or R10-6a) for observance of stop lines,
C. DO NOT BLOCK INTERSECTION (R10-7) for avoidance of traffic obstructions,
D. USE LANE(S) WITH GREEN ARROW (R10-8) for obedience to lane-use control signals (see Chapter 4T),
E. LEFT (RIGHT) TURN SIGNAL (R10-10),
F. U TURN SIGNAL (R10-10a) for exclusive control of a U-turn movement,
G. ~~U TURN YIELD TO RIGHT TURN (R10-16),~~
H. LEFT (RIGHT) TURN YIELD ON GREEN (symbolic circular green) (R10-12),
I. LEFT (RIGHT) TURN YIELD ON FLASHING YELLOW ARROW (R10-12a), and
J. ~~LEFT (RIGHT) TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27).~~

Support:

02a Refer to CVC 22526 for the DO NOT BLOCK INTERSECTION (R10-7) sign.

02b The LEFT (RIGHT) TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27) is deleted. Refer to CVC 21457 for the rules governing driver behavior at a flashing red indication at traffic signals.

*Guidance:*

03 *If used, the LEFT ON GREEN ARROW ONLY sign, the LEFT TURN SIGNAL sign, the LEFT TURN YIELD ON GREEN (symbolic circular green)) sign, the LEFT TURN YIELD ON FLASHING YELLOW ARROW sign, ~~or the LEFT TURN YIELD ON FLASHING RED ARROW AFTER STOP) sign~~ should be located adjacent to the left-turn signal face.*

Support:

03a Refer to FHWA's List of Known Errors for errors in Paragraph 3 text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *If used, the RIGHT ON GREEN ARROW ONLY sign, the RIGHT TURN SIGNAL sign, the RIGHT TURN YIELD ON FLASHING YELLOW ARROW sign, ~~or the RIGHT TURN YIELD ON FLASHING RED ARROW AFTER STOP sign~~ should be located adjacent to the right-turn signal face.*

05 *~~A U TURN YIELD TO RIGHT TURN (R10-16) sign should be installed near the left-turn signal face if U-turns are allowed on a protected left-turn movement on an approach from which a right-turn GREEN ARROW signal indication is simultaneously being displayed to drivers making a right turn from the conflicting approach to their left.~~*

5a *The U-TURN YIELD TO RIGHT TURN (R10-16) sign is deleted as this condition should not be practiced. The actual movement conflict should be eliminated rather than try to correct it with this sign.*

Option:

06 If used, a U TURN SIGNAL (R10-10a) sign may be installed adjacent to the signal face that exclusively controls a U-turn movement.

07 If needed for additional emphasis, an additional LEFT TURN YIELD ON GREEN (symbolic circular green) (R10-12) sign with an AT SIGNAL (R10-31P) supplemental plaque (see Figure 2B-28) may be installed in advance of the intersection.

*Guidance:*

07a *If used, the location of this additional R10-12 sign should be in the raised median at the beginning of the left-turn lane, or be based upon Table 2C-3, or as per engineering judgment.*

Option:

07b The LEFT TURN ON GREEN ARROW ONLY – NO U TURN (SR39B(CA)) sign (refer to Figure 2B-28(CA)) may be used at signalized intersections with separate left turn phases to inform traffic that left turns can only be made on a green arrow in accordance with CVC 21454 and "U" turns are prohibited.

07b The LEFT OR U TURN ON GREEN ARROW ONLY (SR39A(U)(CA)) sign (refer to Figure 2B-28(CA)) may be used at signalized intersections with separate left turn phases to inform traffic that left turns and "U" turns can only be made on a green arrow in accordance with CVC 21454.

08 In situations where traffic control signals are coordinated for progressive timing, the Traffic Signal Speed (I1-1) sign may be used (see Section 2H.04).

**Standard:**

09 **The CROSSWALK—STOP ON RED (symbolic circular red) (R10-23) ~~and~~ or STOP ON ~~STEADY~~ RED-YIELD ON FLASHING RED AFTER STOP (R10-23a) signs (see Figure 2B-28) shall only be used in conjunction with pedestrian hybrid beacons (see Section 4J.02).**

Support:

09a Refer to FHWA's List of Known Errors for errors in Paragraph 9 text. Refer to Section 1A.04 for more details.

**Standard:**

10 **The EMERGENCY SIGNAL (R10-13) sign (see Figure 2B-28) shall be used in conjunction with emergency-vehicle traffic control signals (see Section 4M.02).**

11 **The EMERGENCY SIGNAL—STOP ON FLASHING RED (R10-14 or R10-14a) sign (see Figure 2B-28) shall be used in conjunction with emergency-vehicle hybrid beacons (see Section 4N.02).**

Option:

12 If needed for extra emphasis, a STOP HERE ON FLASHING RED (R10-14b) sign may be installed with an emergency-vehicle hybrid beacon.

**Standard:**

13 **The Left Turn Yield to Bicycles (R10-12b) sign shall be limited to applications where the conflicting bicyclist movement would be unexpected in direction, location, or similar condition that would tend to violate the expectation of a turning motorist.**

*Guidance:*

14 *The Left Turn Yield to Bicycles sign should be located adjacent to the left-turn signal face.*

Option:

15 If needed for additional emphasis, an additional Left Turn Yield to Bicycles sign with an AT SIGNAL (R10-31P) supplemental plaque (see Figure 2B-28) may be installed in advance of the intersection for motor vehicles.

*Guidance:*

15a *If used, the location of this additional R10-12b sign should be in the raised median at the beginning of the left-turn lane, or be based upon Table 2C-3, or as per engineering judgment.*

Option:

16 Where conditions might warrant additional emphasis to drivers turning at a signalized intersection where potential pedestrian conflicts might not be readily apparent, a Turning Vehicles Yield to ~~(Stop for)~~ Pedestrians (R10-15, ~~R10-15a~~) sign (see Figure 2B-28) may be used.

**~~Standard:~~**

17 **~~The Turning Vehicles Stop for Pedestrians (R10-15a) sign shall only be used in jurisdictions where laws, ordinances or resolutions specifically require that a driver must stop for a pedestrian.~~**

Support:

17a The Turning Vehicles Stop for Pedestrians (R10-15a) is deleted as a stop is not required in California per CVC 21950.

*Guidance:*

18 *The R10-15 series signs, where used, should be placed as follows:*

*A. On the near right corner of the signalized intersection for right-turning vehicles.*

*B. On the far left corner of the signalized intersection for the left-turning vehicles onto a two-way street.*

*C. On the near left corner of the signalized intersection for left-turning vehicles from a one-way street onto a one-way street.*

## Section 2B.60 No Turn on Red Signs (R10-11 Series, R10-17a, and R10-30)

**Standard:**

01 **Where a right turn on a circular red signal indication (or a left turn on a circular red signal indication from a one-way street to a one-way street) is to be prohibited, a NO TURN ON RED (R10-11, R10-11b) word message**

**sign (see Figure 2B-28) shall be used. A NO TURN ON RED (symbolic circular red) (R10-11a) sign (see Figure 2B-28) shall be used when the approach is controlled by both circular red and red arrow indications.**

Support:

01a Refer to CVC 22101 for the No Turn on Red signs.

*Guidance:*

02 *If used, the No Turn on Red sign should be installed near the appropriate signal head.*

Option:

02a No Right Turn on Red sign may be used on the near right of skewed intersections where the adjacent approach leg to the left intersects the road user's approach leg at an angle of less than 75 degrees.

02b A No Turn on Red sign or may be used on the near right of extremely wide intersections.

*Guidance:*

02c *When used, the No Turn on Red sign should be placed where it will most easily be seen by the road user intending to turn. At least one should be placed overhead, or at a right/left-hand corner facing approaching traffic.*

03 *A No Turn on Red sign should be considered when an engineering study finds that one or more of the following conditions exists:*

*A. Inadequate sight distance to vehicles approaching from the left (or right, if applicable);*
*B. Geometrics or operational characteristics of the intersection that might result in unexpected conflicts;*
*C. An exclusive pedestrian or bicycle phase;*
*D. An unacceptable number of conflicting pedestrian movements with right-turn-on-red maneuvers, especially involving children, older pedestrians, or persons with disabilities;*
*E. More than three right-turn-on-red crashes reported in a 12-month period for the particular approach; or*
*F. The skew angle of the intersecting roadways creates difficulty for drivers to see traffic approaching from their left (or right, if applicable).*

**Standard:**

04 **If an R10-11, R10-11a, R10-11b, ~~or R10-17a~~ sign with conventional road size as shown in Table 2B-1 is used on an approach on the far side of the intersection and the distance between the stop line and the sign is greater than 120 feet, then a duplicate sign shall be located on the near side of the intersection to supplement the sign on the far side of the intersection.**

Option:

05 When a no-turn-on-red restriction applies during certain time periods only, the following alternatives may be used:

A. Movement Prohibition (R3-1, R3-2, R3-4, R3-18, and R3-27) signs or NO TURN ON RED signs displayed by using an Activated blank-out sign for the time period or one or more portion(s) of a particular cycle of the traffic control signal during which the prohibition is applicable; or
B. Static signs incorporating a supplemental legend or with a supplemental R10-20aP plaque (see Figure 2B-28) showing the hours and days during which the prohibition is applicable.

06 White LEDs may be used in the border and activated during periods of turn prohibition to enhance the sign conspicuity.

07 On signalized approaches with more than one right-turn lane, a NO TURN ON RED EXCEPT FROM RIGHT LANE (R10-11c) sign (see Figure 2B-28) may be post-mounted at the intersection or a NO TURN ON RED FROM THIS LANE (with down arrow) (R10-11d) sign (see Figure 2B-28) may be mounted over the approximate center of the lane from which turns on red are prohibited.

*Guidance:*

*08 ~~Where turns on red are permitted and the signal indication is a steady RED ARROW, the RIGHT (LEFT) ON RED ARROW AFTER STOP (R10-17a) sign (see Figure 2B-28) should be installed adjacent to the RED ARROW signal indication.~~ A circular red signal face should be used, instead of correcting the condition with this sign.*

Support:

08a The RIGHT (LEFT) ON RED ARROW AFTER STOP (R10-17a) sign is deleted as it compromises the meaning of the right red arrow.

Option:

09 A RIGHT TURN ON RED MUST YIELD TO U-TURN (R10-30) sign (see Figure 2B-28) may be installed to remind road users that they must yield to conflicting U-turn traffic on the street or highway onto which they are turning

right on a red signal after stopping.

## Section 2B.61 Ramp Metering Signs (R10-28 and R10-29)

Support:

00a For State highways, refer to Caltrans' Ramp Metering Design Manual. Refer to Section 1A.05 for information regarding this publication.

00b Refer to Section 2G.102(CA) for regulatory signs for HOV lanes at metered ramps.

Option:

01 When ramp control signals (see Chapter 4P) are used to meter traffic on a freeway or expressway entrance ramp, regulatory signs with legends appropriate to the control may be installed adjacent to the ramp control signal faces.

02 For entrance ramps with only one controlled lane, an XX VEHICLE(S) PER GREEN ~~(R10-28)~~ R89A(CA) sign (see Figure 2B-29(CA)) may be used to inform road users of the number of vehicles that are permitted to proceed during each short display of the green signal indication. For entrance ramps with more than one controlled lane, an XX VEHICLE(S) PER GREEN EACH LANE (R10-29) (see Figure 2B-29) sign may be used to inform road users of the number of vehicles that are permitted to proceed from each lane during each short display of the green signal indication.

Support:

03 Chapter 2L contains provisions for the use of blank-out or changeable message signs when the metering is limited by time, day, or condition.

*Guidance:*

04 *The STOP HERE ON RED (R10-6) sign should be placed on Type 1 standards near the limit line at metered entrance ramps with three or more lanes.*

Support:

05 The R10-6 sign is used to emphasize the required observance of the signal limit line, such as the metering signal controlling traffic on metered freeway entrance ramps.

*Guidance:*

06 *The ALL VEHICLES STOP ON RED (R90-1(CA)) sign should be placed when converting a non-metered HOV preferential lane to a metered one.*

Option:

07 The R90-1(CA) sign may also be used on new installations where potential for confusion exists.

# ROAD CLOSED AND WEIGHT LIMIT SIGNS

## Section 2B.62 KEEP OFF MEDIAN Sign (R11-1)

Option:

01 The KEEP OFF MEDIAN (R11-1) sign (see Figure 2B-30) may be used to prohibit driving into or parking on the median.

*Guidance:*

02 *The KEEP OFF MEDIAN sign should be installed on the left-hand side of the roadway within the median at random intervals as needed wherever there is a tendency for encroachment.*

## Section 2B.63 ROAD CLOSED Sign (R11-2) and LOCAL TRAFFIC ONLY Signs (R11-3 Series, R11-4)

*Guidance:*

01 *The ROAD CLOSED (R11-2) sign should be installed where roads have been closed to all traffic (except authorized vehicles).*

02 *ROAD CLOSED—LOCAL TRAFFIC ONLY (R11-3) or ROAD CLOSED TO THRU TRAFFIC (R11- 4) signs should be used where through traffic is not permitted, or for a closure some distance beyond the sign, but where the highway is open for local traffic up to the point of closure.*

**Standard:**

03 **The Road Closed (R11-2, R11-3 series, and R11-4) signs (see Figure 2B-30) shall be designed as horizontal rectangles. These signs shall be preceded by the applicable Advance Road Closed warning sign with the secondary distance legend or AHEAD and, if applicable, an Advance Detour warning sign (see Section 6H.04).**

Option:

04 An intersecting street name or a well-known destination may be substituted for the XX MILES AHEAD legend in urban areas.

05 The word message BRIDGE OUT or CLOSED may be substituted for the ROAD CLOSED legend where applicable.

Support:

05a "Bridge Out" refers to conditions where the bridge is destroyed, washed out, or submerged.

05b "Bridge Closed" refers to situations where the bridge is closed temporarily for maintenance, construction, or other activities but remains structurally intact.

Option:

06 Where conditions allow for bicycle travel on the road beyond the point of closure to motor vehicles, an EXCEPT BICYCLES (R3-7bP) plaque (see Figure 2B-4) may be used with the ROAD CLOSED sign.

*Guidance:*

07 *RAMP CLOSED (C2(CA)) sign should be installed where ramps or bridges have been closed to all traffic (except authorized vehicles).*

Support:

08 The word BRIDGE may be substituted for RAMP where applicable.

## Section 2B.64 Weight Limit Signs (R12-1 through R12-7)

**Standard:**

01 **Weight limit signs (see Figure 2B-30) shall be used to indicate a section of highway or structure that has a vehicle weight restriction.**

01a **The weight limit signs shall be placed at each end of the affected portion of a highway section.**

*Guidance:*

01b *They should be placed at a distance of not more than 500 feet from the ends of an affected bridge or structure.*

02 *The units shown on any weight limit sign should be consistent within a State or region with respect to pounds or tons.*

Option:

03 Where the restriction applies to axle weight rather than gross load, the legend AXLE WEIGHT LIMIT XX TONS or AXLE WEIGHT LIMIT XX LBS (R12-2) may be used.

04 In areas where multiple regulations are applicable, such as limiting both axle weight and gross vehicle weight, a WEIGHT LIMIT XX TONS PER AXLE, XX TONS GROSS (R12-4) sign combining the necessary messages on a single

sign may be used.

05 Posting of specific load limits may be accomplished by use of the Weight Limit (R12-5) symbol sign. A sign containing the legend WEIGHT LIMIT on the top two lines, and showing up to three different truck symbols and their respective weight limits for which restrictions apply may be used, with the weight limits displayed to the right of each symbol as XX T. A bottom line of legend stating GROSS WT may be included if needed for enforcement purposes.

Support:

06 A specialized hauling vehicle is a single unit truck with multiple closely-spaced axles. Examples include dump trucks, construction vehicles, solid waste trucks and other hauling trucks. Specialized hauling vehicles typically have 4 to 7 axles.

Option:

07 The Weight Limit (R12-6) sign may be used to indicate vehicle weight restrictions for specialized hauling vehicles.

07a The Commercial Vehicle Weight Exclusion (R36(CA)) sign (refer to Figure 2B-30(CA)) may be used to indicate vehicles over __tons are prohibited from certain streets and highways.

**Standard:**

08 **The symbols shown on the R12-5 and R12-6 Weight Limit sign shall apply to all trucks of that configuration (single-unit, single-trailer or multi-trailer) regardless of the shape of the vehicle. Symbolic representations of other vehicle shapes or modifications of standard symbols shall not be used.**

Option:

09 The facility type (such as "BRIDGE") may be added to the beginning of the legend of the sign to clarify the specific applicability of the weight limit.

**Standard:**

10 **If the R12-5 sign depicts only one single-unit vehicle symbol, the weight limit associated with that single-unit vehicle symbol shall apply to all single-unit vehicles, regardless of number of axles.**

11 **The weight limit associated with the single-trailer vehicle symbol shall apply to all single-trailer vehicles, regardless of number of axles or vehicle shape.**

12 **The weight limit associated with the multi-trailer vehicle symbol shall apply to all multi-trailer vehicles with two or more trailers, regardless of number of axles or vehicle shape.**

13 **A weight limit sign (see Figure 2B-30) shall be located at the applicable section of highway or structure.**

14 **An additional weight limit sign, with an advisory distance or directional legend, shall be located in advance of the applicable section of highway or structure so that prohibited vehicles can detour or turn around prior to the limit zone.**

Support:

14a Refer to Section 2C.102(CA) for warning Weight Limit signs used to select an alternate route.

15 An emergency vehicle is designed to be used under emergency conditions to transport personnel and equipment to support the suppression of fires and mitigation of other hazardous situations. Emergency vehicles are typically operated by fire departments and are primarily equipped for firefighting, but are also used to respond to and mitigate other hazardous situations in an emergency. They can create higher load effects compared to non-emergency vehicles of similar weight.

Option:

16 The Emergency Vehicle Weight Limit (R12-7) sign carrying the legend EMERGENCY VEHICLE WEIGHT LIMIT SINGLE AXLE XX TONS, TANDEM XX TONS, and GROSS XX TONS may be used to indicate vehicle weight restrictions for emergency vehicles.

**Standard:**

17 **When the emergency-vehicle weight limit is displayed in the same assembly as the primary weight limit sign, the Emergency Vehicle Weight Limit (R12-7aP) plaque shall be mounted below.**

Support:

18 Refer to CVC 21101 through 21104 and 35650 through 35755 for Weight Limit signs.

19 The No Trucks (R5-2) sign is used together with a Truck Exclusion plaque (R20D(CA) Series) (refer to Figure 2B-12 and Figure 2B-12(CA)) to specify the maximum weight limit in effect.

## Section 2B.65 Weigh Station Sign (R13-1)

*Guidance:*

01 ~~*An R13-1 sign with the legend TRUCKS OVER XX TONS MUST ENTER WEIGH STATION NEXT RIGHT (see Figure 2B-31) should be used to direct appropriate traffic into an inspection station.*~~

02 ~~*The R13-1 sign should be supplemented by the D8 series of guide signs (see Section 2D.51).*~~

03 *An SR57-1(CA) sign with the legend ALL TRUCKS STOP AT SCALES with NO PICKUPS SR57-1P(CA) mounted below (refer to Figure 2B-31(CA)) should be used to direct appropriate traffic into a weigh station.*

04 *The SR57-1(CA) and SR57-1P(CA) sign combination should be supplemented by the D8 series of guide signs (refer to Section 2D.51).*

Support:

05 Refer to Figure 2B-31(CA) and Figure 2E-59 for Weigh Station Signs.

*Guidance:*

06 *The TRUCKS NOT GIVEN BYPASS SIGNAL MUST ENTER OPEN SCALES (SR17(CA)) sign should be used in advance of a truck weigh station that is equipped with a mainline bypass system and weigh-in-motion scales to electronically weigh and verify compliance of commercial trucks as they approach the weigh station.*

07 *The Width Limit (SR40(CA)) sign (refer to Figure 2B-30(CA)) should be placed at truck weigh stations to direct over width vehicles around the station, if the weigh station lacks adequate width. The California Highway Patrol should be contacted to determine where these signs are needed. Refer to CVC 35790.*

**Standard:**

08 **The ALL BUSES STOP AT SCALES (SR41(CA)) and ALL BUSES with Arrow (SR42(CA)) signs shall be used as a temporary sign for Critical Item Bus Inspections on state highways.**

Option:

09 The Weigh Station Repair Service (S21P(CA)) plaque may be installed at commercial vehicle inspection facilities on State highways where needed at the request of the California Highway Patrol.

Option:

10 The WAIT HERE UNTIL SCALE CLEAR (SR6-1(CA)) sign may be used at Weigh Stations to provide guidance to trucks entering the scales.

11 The RELEASE BRAKES WHILE ON SCALE (SR7-1(CA)) sign may be used at Weigh Stations to provide guidance to trucks when they are on the scales.

12 The SET PARKING BRAKES (SR8-1(CA)) sign may be used at Weigh Stations to provide guidance to trucks when they are on the scales.

13 The LOADED (SR9-1(CA)) sign may be used at Weigh Stations to designate the lane loaded trucks are to use when passing through the scales.

14 The EMPTY (SR10-1(CA)) sign may be used at Weigh Stations to designate the lane empty trucks are to use when passing through the scales.

15 The EMPTY 5 MPH (SR11-1(CA)) sign may be used at Weigh Stations to control the speed of empty trucks when passing through scales.

16 The LOADED 3 MPH (SR12-1(CA)) sign may be used at Weigh Stations to control the speed of loaded trucks when passing through scales.

17 The Theft CHP Plaque (SR13-1P(CA)) may be used at Weigh Stations to advise scale users that removing any property from the Weigh Station without authorization from the California Highway Patrol is a violation of the Penal Code.

## Section 2B.66 TRUCK ROUTE Sign (R14-1)

*Guidance:*

01 *The TRUCK ROUTE (R14-1) sign (see Figure 2B-31) should be used to mark a route that has been designated to allow truck traffic.*

Support:

02 Section 2D.20 contains information regarding the use of the TRUCK (M4-4P) auxiliary plaque (see Figure 2D-5) on a designated numbered alternative route.

Support:

03 Refer to CVC §§ 21101 through 21104 and 35701 through 35715.

04 Generally, Caltrans is not unilaterally authorized to prohibit truck travel on State highways. Various sections in the CVC allow cities and counties to restrict, by ordinance, commercial vehicles subject to the specific conditions in those sections.

05 Generally, no such local ordinance is be effective with respect to any State highway until the ordinance has been approved by Caltrans. This approval shall be made by the Caltrans Director.

**Standard:**

06 **The proposed local ordinance shall designate an unrestricted alternate route, or routes, for use by the prohibited vehicles. Such proposed local ordinances shall not be approved unless the alternate route, or routes, are considered suitable by Caltrans.**

07 **An investigation of designated alternate routes shall be made with special attention being given to the following features:**

1. **Geometrics.**
2. **Increase in distance of travel and comparisons in time of travel.**
3. **Railroad grade crossings.**
4. **Present traffic and practical capacity of proposed alternates.**
5. **Structural adequacy of pavement for heavy truck traffic.**
6. **Heavy grades.**
7. **Proximity to schools or school routes.**
8. **Developed residential areas.**

## Section 2B.67 Hazardous Material Signs (R14-2 and R14-3)

~~Option:~~

**Standard:**

01 **The Hazardous Material Route (R14-2) sign (see Figure 2B-31) ~~may~~ shall be used to identify routes that have been designated by proper authority for vehicles transporting hazardous material and/or waste.**

Support:

01a The R14-2 sign may be used to guide road users around routes where the transportation of Hazardous Material and/or waste is permitted.

**Standard:**

01b **The HAZARDOUS WASTE PERMITTED (R103aP(CA)) or the HAZARDOUS MATERIAL PERMITTED (R105aP(CA)) sign shall be positioned below the R14-3 symbol sign.**

Support:

01d Refer to CVC §§ 31303 and 31304.

**Standard:**

02 **On routes where the transporting of hazardous material and/or waste is prohibited, the Hazardous Material Prohibition (R14-3) sign (see Figure 2B-31) ~~may~~ shall be used.**

02a **The HAZARDOUS WASTE PROHIBITED (R102aP(CA)) or the HAZARDOUS MATERIAL PROHIBITED (R104aP(CA)) sign shall be positioned below the R14-2 sign.**

Support:

02b Refer to CVC §§ 31303 and 31304.

*Guidance:*

03 *If used, the Hazardous Material Prohibition sign should be installed on a street or roadway at a point where vehicles transporting hazardous material have the opportunity to take an alternate route.*

Support:

04 Refer to Figure 2B-31(CA) for Hazardous Waste/Material signs.

*Guidance:*

05 *The NO EXPLOSIVES OR FLAMMABLES (SR18(CA)) sign should be placed on highways, structures, tunnels, etc. where vehicles transporting explosives or flammable materials are prohibited. The SR18(CA) sign should be placed at a location that will provide a motorist the opportunity to turn around.*

06 *The EXPLOSIVES AND CORROSIVES PROHIBITED WITHOUT PERMIT (SR19-1(CA)) sign should be placed on highways, structures, tunnels, etc. where vehicles transporting explosives or corrosive materials are prohibited without a permit. The SR18(CA) sign should be placed at a location that will provide a motorist the opportunity to turn around.*

Option:

07 The TRANSPORTING ILLEGAL FIREWORKS PROHIBITED (SR25(CA)) sign may be used on any roadway upon which the transportation of illegal fireworks have been prohibited by a local ordinance or resolution per California Health & Safety Code Division 11, Part 2, Sections 12500 through 12726.

**Standard:**

08 **If used, the SR25(CA) sign shall be used to identify only those street or highway locations, either State or local, upon which the transportation of illegal fireworks is prohibited, as established by the local ordinance or resolution.**

## Section 2B.68 National Network Signs (R14-4 and R14-5)

Support:

01 The signing of the National Network routes for trucking is optional. Refer to Chapter 2I.

**Standard:**

02 **When a National Network route is signed, the National Network (R14-4) sign (see Figure 2B-31) shall be used.**

Option:

03 The National Network Prohibition (R14-5) sign (see Figure 2B-31) may be used to identify routes, portions of routes, and ramps where trucks are prohibited. The R14-5 sign may also be used to mark the ends of designated routes.

# OTHER REGULATORY SIGNS AND PLAQUES

## Section 2B.69 Photo Enforced Signs and Plaques (R10-18, R10-18a, R10-19P, R10-19aP)

Option:

01 A Traffic Laws Photo Enforced (R10-18) sign (see Figure 2B-32) may be installed at a jurisdictional boundary to advise road users that some of the traffic regulations within that jurisdiction are being enforced by photographic equipment.

**Standard:**

02 **A Traffic Signal Photo Enforced (R10-18a) sign (see Figure 2B-32) ~~may~~ shall be installed within 200 feet in advance of or at a traffic signal to advise road users that compliance with the signal is enforced by photographic equipment. Refer to CVC § 21455.5.**

Option:

02a A Signal Ahead (W3-3) sign and a Traffic Signal Photo Enforced (R10-18a) sign may be used on the same approach provided that they are on separate supports.

02b The RED LIGHT VIOLATION $ ___ FINE (SR58(CA)) sign (refer to Figure 2B-3(CA)) may be used in advance of signalized intersections where a local agency has adopted an ordinance setting a specific fine amount for red light violations within its jurisdiction. The SR58(CA) sign may be placed on State highways when requested by the local agency.

03 A Photo Enforced (R10-19P) plaque or a PHOTO ENFORCED (R10-19aP) word message plaque (see Figure 2B-32) may be mounted below a regulatory sign to advise road users that the regulation is being enforced by photographic equipment.

**Standard:**

04 **The Traffic Signal Photo Enforced (R10-18a) sign shall not be installed on approaches to signalized locations where red-light cameras are not present on any of the approaches to the signalized location.**

05 **A Traffic Signal Photo Enforced (R10-18a) sign shall not be installed on the same support in combination with a Signal Ahead (W3-3) sign.**

06 **If used below a regulatory sign, the Photo Enforced (R10-19P or R10-19aP) plaque shall be a rectangle with a black legend and border on a white background.**

Support:

07 Refer to CVC § 21455.5 for Traffic Signal Automated Enforcement: Photographic Records.

## Section 2B.70 Move Vehicles from Travel Lanes Sign (R16-4)

Option:

01 A ~~STATE LAW MINOR CRASHES MOVE VEHICLES FROM TRAVEL LANES (R16-4)~~ STATE LAW MINOR CRASH NO INJURIES – SAFELY MOVE VEHICLES FROM TRAVEL LANES (SR61-1(CA)) sign (see Figure ~~2B-33~~ 2B-33(CA)) may be installed in accordance with the provisions of Section 2A.01 to require motorists to move their vehicle out of the travel lanes if they have been involved in a non-injury crash.

02 If the specific requirements of a State law vary, the word legend of the R16-4 sign may be modified to reflect the appropriate law.

## Section 2B.71 Move Over or Reduce Speed Sign (R16-3)

Option:

01 A ~~STATE LAW MOVE OVER OR REDUCE SPEED FOR VEHICLES STOPPED ON SHOULDER (R16-3)~~ STATE LAW MOVE OVER OR SLOW FOR STOPPED EMERGENCY AND MAINTENANCE VEHICLES (R110-1(CA)) sign (see Figure ~~2B-33~~ 2B-33(CA)) may be installed in accordance with the provisions of Section 2A.01 to require motorists to change lanes and/or reduce speed when passing stopped emergency vehicles on the shoulder. Refer to CVC 21809.

02 ~~If the specific requirements of a State law vary, the word legend of the R16-3 sign may be modified to reflect the appropriate law.~~

**Standard:**

03 **The R110(CA) sign shall only be used within freeway facilities.**

## Section 2B.72 No Hand-Held Phone Use by Driver Signs (R16-15 and R16-15a)

Option:

01 A STATE LAW NO HAND-HELD PHONE USE BY DRIVER (R16-15 or R16-15a) sign (see Figure 2B-33) may be installed in accordance with the provisions of Section 2A.01 to notify drivers that they are prohibited from using hand-held telephones while driving.

02 If the specific requirements of a State law vary, the word legend of the R16-15 series signs may be modified to reflect the appropriate law.

## Section 2B.73 Headlight Use Signs (R16-5 through R16-11)

Support:

01 Some States require road users to turn on their vehicle headlights under certain weather conditions, as a safety improvement measure on roadways experiencing high crash rates, or in special situations such as when driving through a tunnel.

01a Refer to CVC § 24400.

02 Figure 2B-34 shows the various signs that can be used for informing motorists of these requirements. Option:

03 A LIGHTS ON WHEN USING WIPERS (R16-5) sign or a LIGHTS ON WHEN RAINING (R16-6) sign may be installed in accordance with the provisions of Section 2A.01 to inform road users of State laws regarding headlight use. Although these signs are typically installed facing traffic entering the State just inside the State border, they also may be installed at other locations within the State.

*Guidance:*

04 *If a particular section of roadway has been designated as a safety improvement zone within which headlight use is required, a TURN ON HEADLIGHTS NEXT XX MILES (R16-7) sign or a BEGIN DAYTIME HEADLIGHT SECTION (R16-10) sign should be installed at the upstream end of the section, and an END DAYTIME HEADLIGHT SECTION (R16-11) sign should be installed at the downstream end of the section.*

Option:

05 A TURN ON HEADLIGHTS (R16-8) sign may be installed to require road users to turn on their headlights in special situations such as when driving through a tunnel or at the entrances from major side roads to a daytime headlight section. A CHECK HEADLIGHTS (R16-9) sign may be installed downstream from the special situation to inform drivers that using their headlights is no longer required.

*Guidance:*

06 *A CHECK HEADLIGHTS (R16-9) should be placed approximately 500 feet beyond the end of a daytime headlight section.*

Option:

07 Daytime Headlight (S30(CA)) sign (refer to Figure 2B-34(CA)) may be used after a traffic investigation and consultation with the local CHP office and/or law enforcement as a traffic safety improvement measure in high accident locations on two lane highways where there is a potential for head-on collisions.

Support:

08 Refer to CVC § 21461 for enforcement of S30(CA) Series and R16-5 through R16-11 signs.

## Section 2B.74 Seat Belt Symbol

*Guidance:*

01 *The seat belt symbol should not be used alone. If used, the seat belt symbol should be incorporated into regulatory sign messages for mandatory seat belt use.*

01a *The Seat Belt (SR15(CA)) sign (refer to Figure 2B-33(CA)) should be placed in each direction on all freeways and other major state routes at approximate 50 mile intervals.*

**Standard:**

01b **The SAFETY BELT LAW ENFORCED (SR15aP(CA)) sign (refer to Figure 2B-33(CA)) shall be placed below each installation of the Seat Belt (SR15(CA)) sign.**

Option:

01c The Seat Belt (SR15(CA)) and SAFETY BELT LAW ENFORCED (SR15A(CA)) sign combination may also be used on local arterials.

Support:

02 The seat belt symbol is illustrated in the "Standard Highway Signs" publication (see Section 1A.05).

# BARRICADES AND GATES

## Section 2B.75 Barricades

Option:

01 Barricades may be used to mark any of the following conditions:

A. The end of a roadway,
B. A ramp or lane that is closed for operational purposes, or
C. The permanent or semi-permanent closure or termination of a roadway.

**Standard:**

02 **When used to warn and alert road users of the terminus of a roadway, other than in temporary traffic control zones, barricades shall meet the design criteria of Section 6K.07 for a Type 3 Barricade, except that the colors of the stripes shall be retroreflective white and retroreflective red.**

Option:

03 An end-of-roadway marker or markers may be used as described in Section 2C.73.

*Guidance:*

04 *Appropriate advance warning signs (see Chapter 2C) should be used.*

## Section 2B.76 Gates

Support:

01 Gates described in this section used for weather or other emergency conditions are typically permanently installed to enable the gate to be immediately deployed as needed to prohibit the entry of traffic to the highway segment(s).

02 A gate typically features a gate arm that is moved from a vertical to a horizontal position or is rotated in a horizontal plane from parallel to traffic to perpendicular to traffic. Traffic is obstructed and required to stop when the gate arm is placed in a horizontal position perpendicular to traffic. Another type of gate consists of a segment of fence (usually on rollers) that swings open and closed, or that is retracted to open and then extended to close.

03 Gates are sometimes used to enforce a required stop. Some examples of such uses are the following:

A. Parking facility entrances and exits,
B. Private community entrances and exits,
C. Military base entrances and exits,
D. Toll plaza lanes,
E. Movable bridges (see Chapter 4Q),
F. Automated Flagger Assistance Devices (see Chapter 6L), and
G. Grade crossings (see Part 8).

04 Gates are sometimes used to periodically close a roadway or a ramp. Some examples of such uses are the following:

A. Closing ramps to implement counter-flow operations for evacuations,
B. Closing ramps that lead to reversible lanes, and
C. Closing roadways for weather events such as snow, ice, or flooding, or for other emergencies.

**Standard:**

05 **Except as provided in Paragraph 6 of this Section, gate arms, if used, shall be fully retroreflective on both sides, have vertical stripes alternately red and white at 16-inch intervals measured horizontally as shown in Figure 8D-1. The width (which becomes the height of the retroreflective sheeting when the gate is in the down position) of the retroreflective sheeting on the front of the gate arm shall be at least 4 inches.** **Refer to Section 8D.03 Paragraph 5 if the Gate arm extends beyond 32 feet.**

Option:

06 If used on a one-way roadway or ramp, the retroreflective sheeting may be omitted on the side of the gate (or rolling fence) facing away from approaching traffic.

07 Where gate arms are used to block off ramps into reversible lanes or to redirect approaching traffic, the red and white striping may be angled such that the stripes slope downward at an angle of 45 degrees toward the side of the gate arm on which traffic is to pass.

**Standard:**

08 **The gate arm shall extend across the approaching lane or lanes of traffic to effectively block motor vehicle, bicycle, and/or pedestrian travel as appropriate.**

*Guidance:*

09 *When a gate that is rotated in a horizontal plane is in the position where it is parallel to traffic (indicating that the roadway is open), the outer end of the gate arm should be rotated to the downstream direction (from the perspective of traffic in the lane adjacent to the gate support) to prevent spearing if the gate is struck by an errant vehicle.*

**Standard:**

10 **If red lights are attached to a traffic gate, the red lights shall be steadily illuminated or flashed only during the period when the gate is in the horizontal or closed position and when the gate is in the process of being opened or closed.**

11 **Except as provided in Paragraph 6 of this Section, rolling sections of fence, if used, shall include either a horizontal strip of retroreflective sheeting on both sides of the fence with vertical stripes alternately red and white at 16-inch intervals measured horizontally to simulate the appearance of a gate arm in the horizontal position, or one or more Type 4 object markers (see Section 2C.73), or both. If a horizontal strip of retroreflective sheeting is used, the bottom of the sheeting shall be located 3.5 to 4.5 feet above the roadway surface.**

## Section 2B.101(CA) NO FISHING (JUMPING) FROM BRIDGE Sign (R23(CA))

Option:

01 The NO FISHING (JUMPING) FROM BRIDGE sign (R23(CA)) (refer to Figure 2B-106(CA)) may be used when fishing or jumping from a bridge is prevalent and where investigation has shown that fishing or jumping is unsafe or interferes with the orderly movement of traffic.

## Section 2B.102(CA) $1000 Fine Signs (R47(CA) and R47A(CA))

Option:

01 The $1000 FINE FOR LITTERING (R47(CA)) sign (refer to Figure 2B-106(CA)) may be used to inform the public that it is unlawful to dispose of litter on the highway.

Support:

02 Refer to Streets and Highway Code Section 101.6 and CVC 23111 through 23113 and 42001.7.

03 The $1000 FINE FOR ANIMAL ABANDONMENT (R47A(CA)) sign (refer to Figure 2B-106(CA)) is used to inform the public that the abandonment or dumping of any animal is a criminal offense.

*Guidance:*

04 *The R47A(CA) sign should be placed on all major state highways, as close as practicable, following the Welcome to California (G10B(CA)) sign.*

## Section 2B.103(CA) PRIVATE ROAD (PRIVATE PROPERTY) VEHICLE CODE ENFORCED Sign (R101(CA))

**Standard:**

01 **The PRIVATE ROAD VEHICLE CODE ENFORCED (R101(CA)) sign (refer to Figure 2B-106(CA)) shall be used at the entrance to a privately owned and maintained road when enforcement of vehicle provisions apply, as provided in CVC § 21107.7.**

02 **The alternate message PRIVATE PROPERTY shall be used at each entrance to a privately owned and maintained off-street parking facility when enforcement of vehicle code provisions apply, as provided in CVC § 21107.8.**

## Section 2B.104(CA) GOLF CARTS OK DAYLIGHT HOURS Sign (SR43(CA))

**Standard:**

01 **The GOLF CARTS OK DAYLIGHT HOURS (SR43(CA)) sign (refer to Figure 2B-106(CA)) shall be placed on roadways which local authorities have designated for combined use in accordance with CVC § 21115.**

Option:

02 The ordinance number may be included on the sign.

## Section 2B.105(CA) Bus and Truck Registration Sign (SR44(CA))

*Guidance:*

01 *The Bus and Truck Registration (SR44(CA)) sign (refer to Figure 2B-106(CA)) should be placed at all Border Inspections Stations to relay this information to Interstate carriers.*

## Section 2B.106(CA) EMERGENCY ACCESS KEEP CLEAR Sign (SR46(CA))

Option:

01 The EMERGENCY ACCESS KEEP CLEAR (SR46(CA)) sign (refer to Figure 2B-106(CA)) may be used where there is traffic back up due to a controlled intersection or cross street that affects access to the driveway of any emergency service facility such as fire, police or ambulance. Refer to CVC § 22500(d) and 22526.

**Standard:**

02 **The SR46(CA) sign shall be used in conjunction with KEEP CLEAR pavement markings (refer to Section 3B.26) that delineate the limits of the keep clear area.**

Option:

03 The SR46(CA) signs may be placed on both ends of the keep clear area.

*Guidance:*

04 *However, if only one sign is used, it should be placed on the upstream side.*

## Section 2B.107(CA) Off Highway Vehicle Signs (SR47(CA) and SR48(CA))

*Guidance:*

01 *The OFF HIGHWAY VEHICLE COMBINED USE NEXT (X MILES) (SR47(CA)) sign (refer to Figure 2B-106(CA)) should be used to inform motorists of the length of an Off Highway Vehicle Combined Use segment of the highway.*

02 *The NO OFF HIGHWAY VEHICLES BEYOND THIS POINT (SR48(CA)) sign (refer to Figure 2B-106(CA)) should be placed at the end of an Off Highway Vehicle Combined Use segment of the highway.*

## Section 2B.108(CA) NO CAMPING OR SLEEPING IN VEHICLE Sign (R119(CA))

*Guidance:*

01 *The NO CAMPING OR SLEEPING IN VEHICLE (R119(CA)) sign (refer to Figure 2B-106) may be used to inform the public that it is unlawful to camp or sleep in the vehicle in the right of way of a state highway or local roadway where there is an adopted resolution or ordinance that prohibits camping or sleeping in vehicle and allows use of the sign. The resolution or ordinance number and adopting agency shall be included on the bottom of the sign.*

Option:

02 The *NO CAMPING OR SLEEPING IN VEHICLE* (R119(CA)) sign may have a supplemental plaque (R2-6bP) installed below the sign for the applicable fine amount per the adopted resolution or ordinance (e.g., $XXXX FINE).

Support:

03 Do not use the NO CAMPING OR SLEEPING IN VEHICLE (R119(CA)) sign when there is no adopted resolution or ordinance to support its use or enforcement of the sign.

## Section 2B.109(CA) BEGIN/END FREEWAY Sign (R57(CA) and R58(CA))

**Standard:**

01 **The BEGIN FREEWAY (R57(CA)) sign (refer to Figure 2B-25(CA)) shall be used to mark the beginning of freeway.**

02 **The R57(CA) sign shall be placed above the EMERGENCY PARKING ONLY (R8-4) sign. Refer to CVC 21960.**

**Standard:**


03 **The END FREEWAY (R58(CA)) sign (refer to Figure 2B-25(CA)) shall be used to mark the end of a freeway.**

## Section 2B.110(CA) No Loitering, Camping, Vending or Parking of Vehicles 30 Feet or Longer Sign (S22(CA))

Option:

01 The NO LOITERING, CAMPING, VENDING OR PARKING OF VEHICLES 30 FEET OR LONGER (S22(CA)) sign (refer to Figure 2B-106(CA)) may be placed at fringe and transportation corridor parking facilities constructed, maintained, or operated by Caltrans for the purpose of ridesharing. Refer to CVC Section 22518.

## Figure 2B-1. STOP and YIELD Signs and Plaques

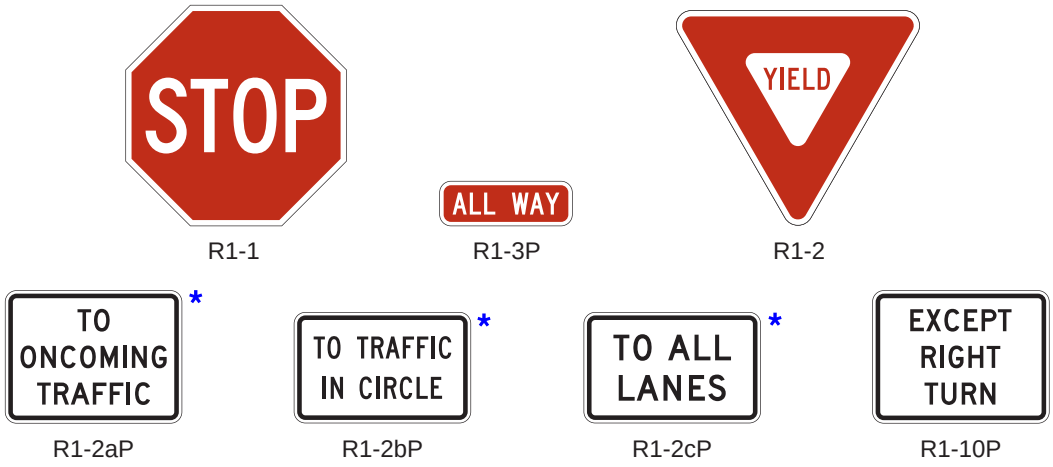



R1-1 R1-3P R1-2

R1-2aP * R1-2bP * R1-2cP * R1-10P

* May be mounted below the YIELD sign.

## Figure 2B-2. Unsignalized Pedestrian Crosswalk Signs

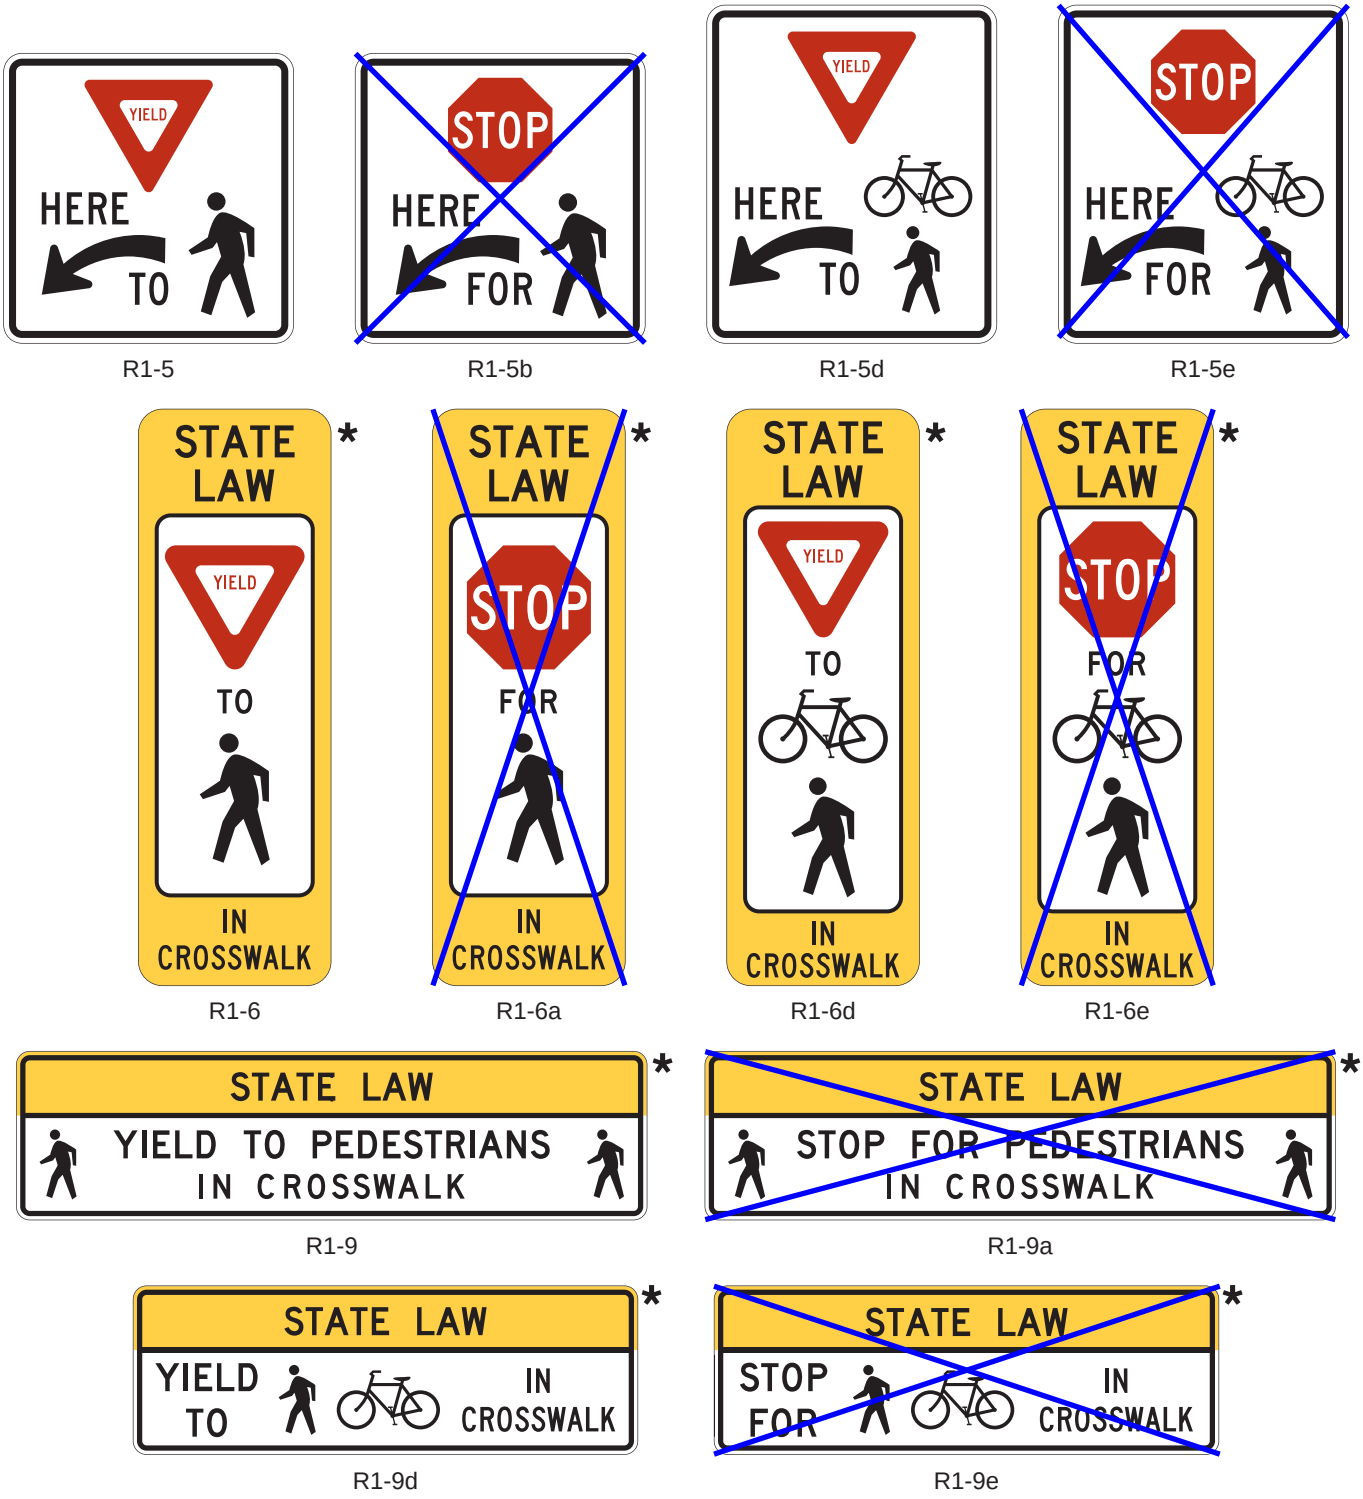


R1-5 R1-5b R1-5d R1-5e

R1-6 R1-6a R1-6d R1-6e


R1-9 R1-9a

R1-9d R1-9e

★ The legend STATE LAW is optional. A fluorescent yellow-green background color may be used instead of yellow for this sign.

Signs are not shown in proportion to their designated sizes.

## Figure 2B-3. Speed Limit Signs and Plaques

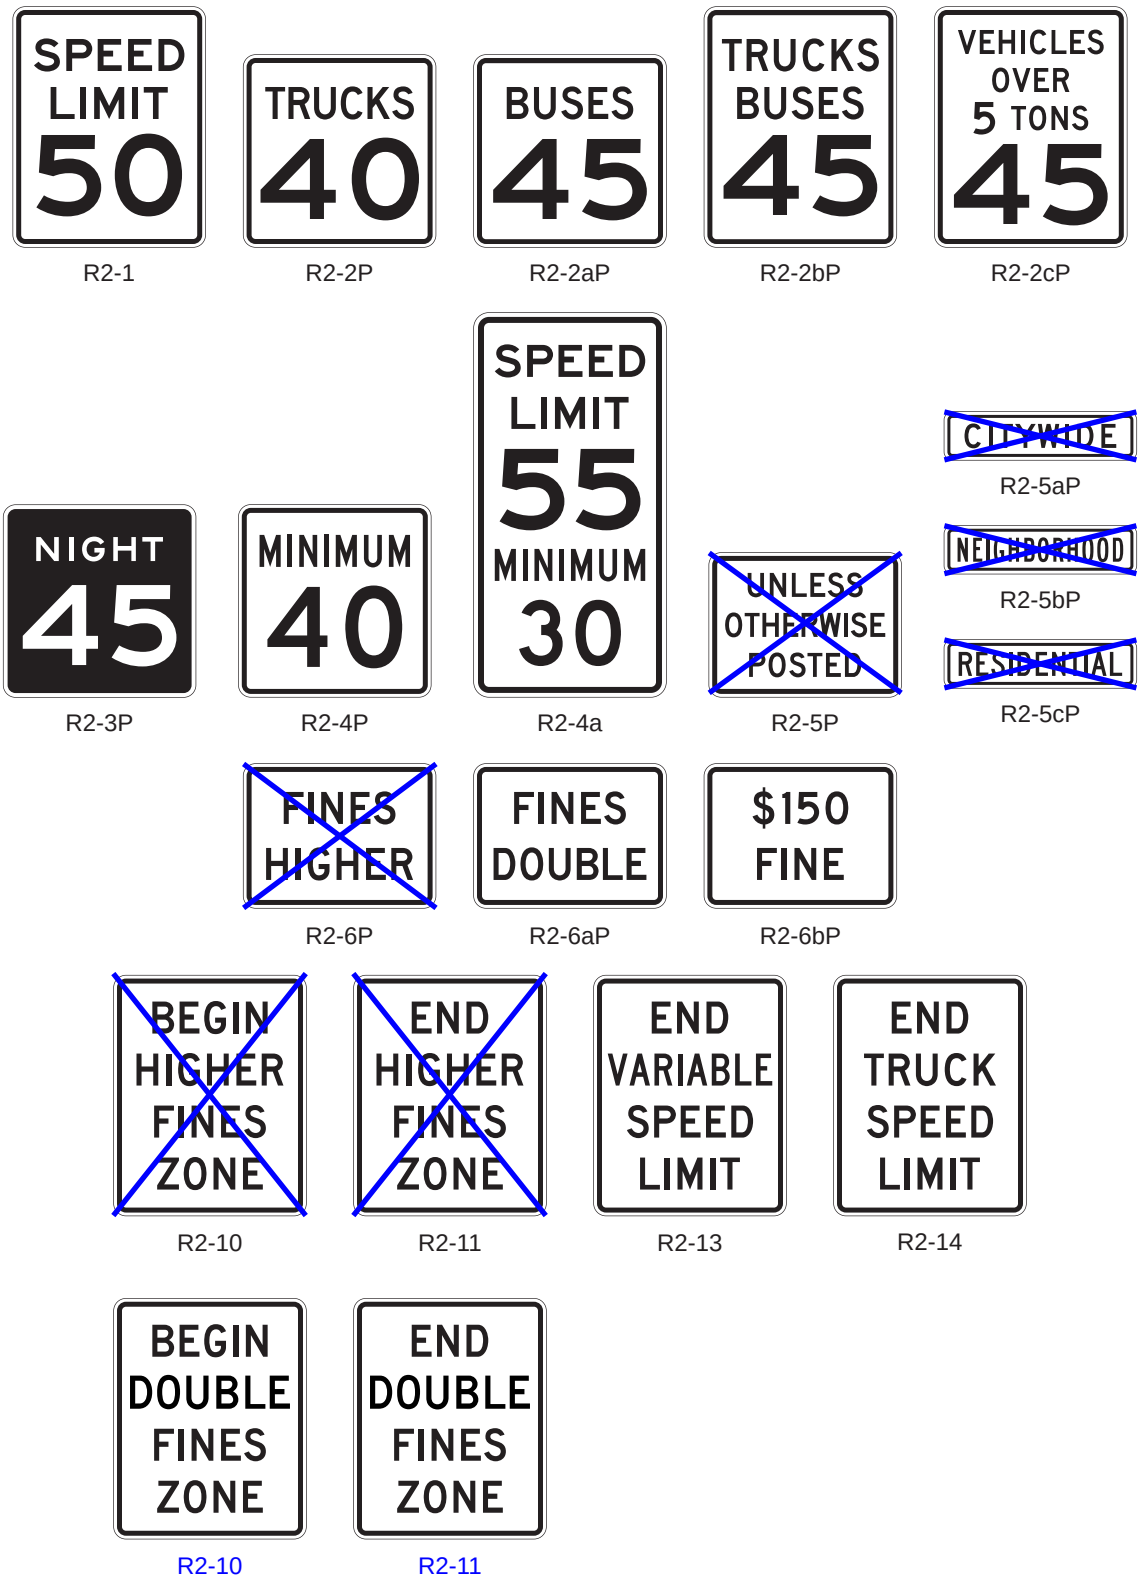

## *Figure 2B-3(CA). California Speed Limit and Photo Enforcement Signs and Plaques*



R2-4(CA)



R3(CA)



R6-3B(CA)



R6-4B(CA)



R48(CA)



R48-1P(CA)



R48-2(CA)



SR53(CA)



SR54(CA)



SR55(CA)



SR58(CA)

## Figure 2B-4. Movement Prohibition and Lane Control Signs and Plaques (Sheet 1 of 2)




R3-1 R3-1b R3-1c R3-1d R3-1e R3-1f R3-1g

R3-1h R3-2 R3-3 R3-4 R3-5 R3-5a

R3-5bP R3-5fP

R3-5cP* R3-5dP R3-5gP R3-6 R3-6a R3-6b

R3-5cP

R3-7L R3-7R R3-7aP R3-7bP R3-8 R3-8a

R3-8b R3-8xa R3-8xb R3-8xc

* The diamond symbol may be used instead of the "HOV" word message. The minimum vehicle occupancy level may vary, such as 2+, 3+, 4+. The words "LANE" or "ONLY" may be used with this sign when appropriate.

**Figure 2B-4. Movement Prohibition and Lane Control Signs and Plaques** (Sheet 2 of 2)



R3-18




R3-19




R3-19a




R3-19b




R3-20L




R3-20R



R3-27




R3-33




R3-33a

## *Figure 2B-4(CA). California Movement Prohibition and Lane Control Signs and Plaques*



R3-1
Activated Blank-Out



R3-2
Activated Blank-Out



R3-4
Activated Blank-Out



R3-18
Activated Blank-Out



R3-27
Activated Blank-Out




R18B(CA)





R18C(CA)




R18D(CA)




R33bP(CA)



R60B(CA)




R61-1(CA)





R61-3(CA)




R61-5(CA)





R61-7(CA)





R61-9(CA)




R61-11(CA)




R61-13(CA)




R61-15(CA)




R61-17(CA)




R61-19(CA)




R61-22(CA)




R61-24(CA)




R61-26(CA)





R61-28(CA)




R61-30(CA)





R61-32(CA)




R61-34(CA)




R61-36(CA)



R73-2(CA)




R73-3(CA)




R73-4(CA)



R73-5(CA)





R73-6(CA)





R73-8(CA)

## Figure 2B-5. Intersection Lane Control Sign Arrow Options for Roundabouts

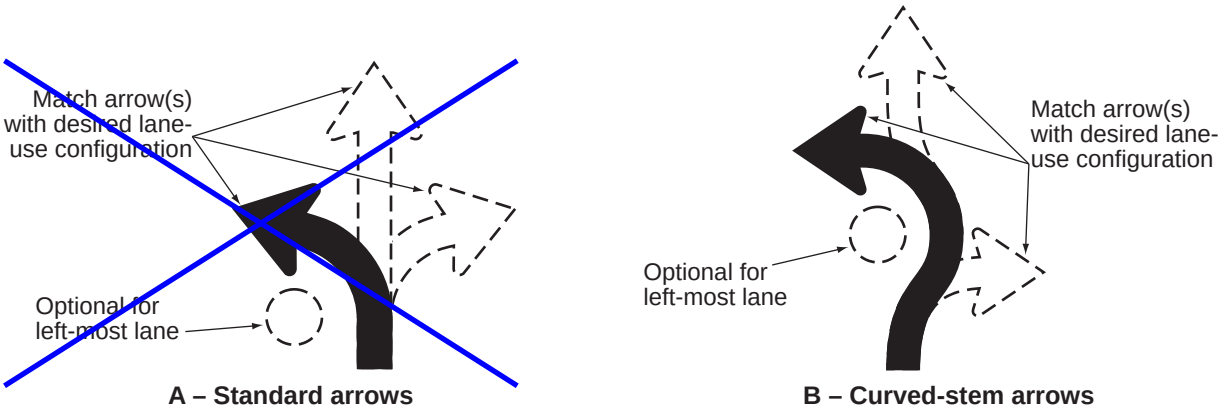


## Figure 2B-6. Center and Reversible Lane Control Signs and Plaques

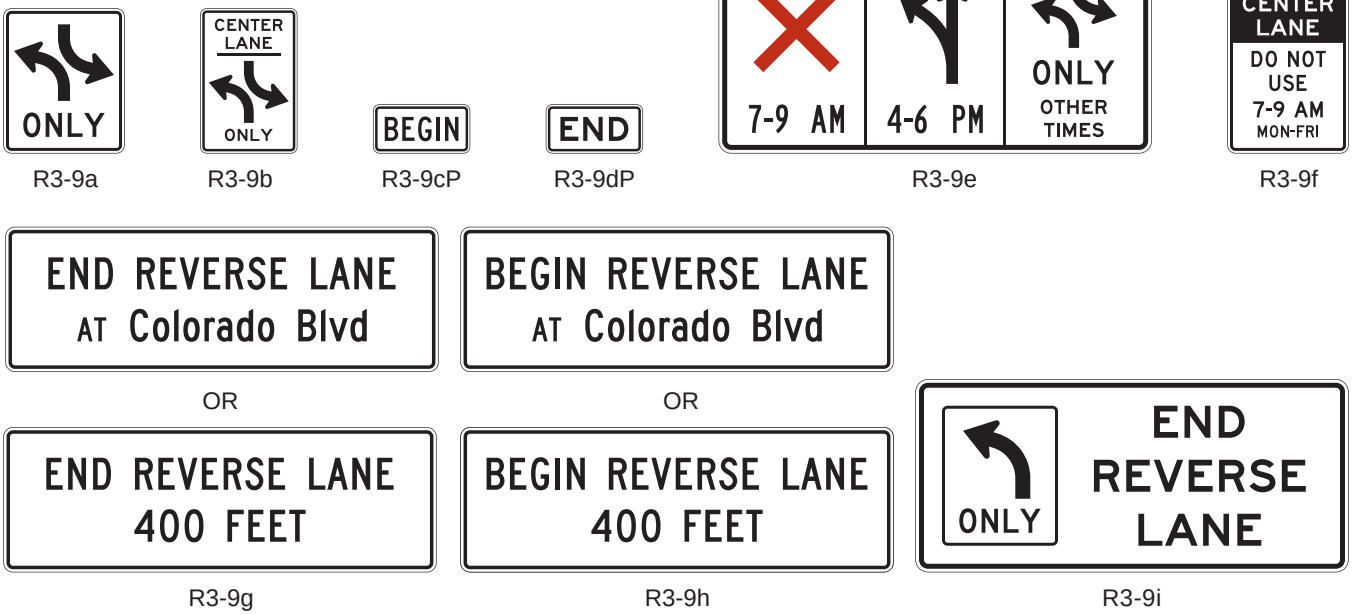


R3-9a R3-9b R3-9cP R3-9dP R3-9e R3-9f


R3-9g R3-9h R3-9i

# Figure 2B-7. Location of Reversible Two-Way Left-Turn Signs

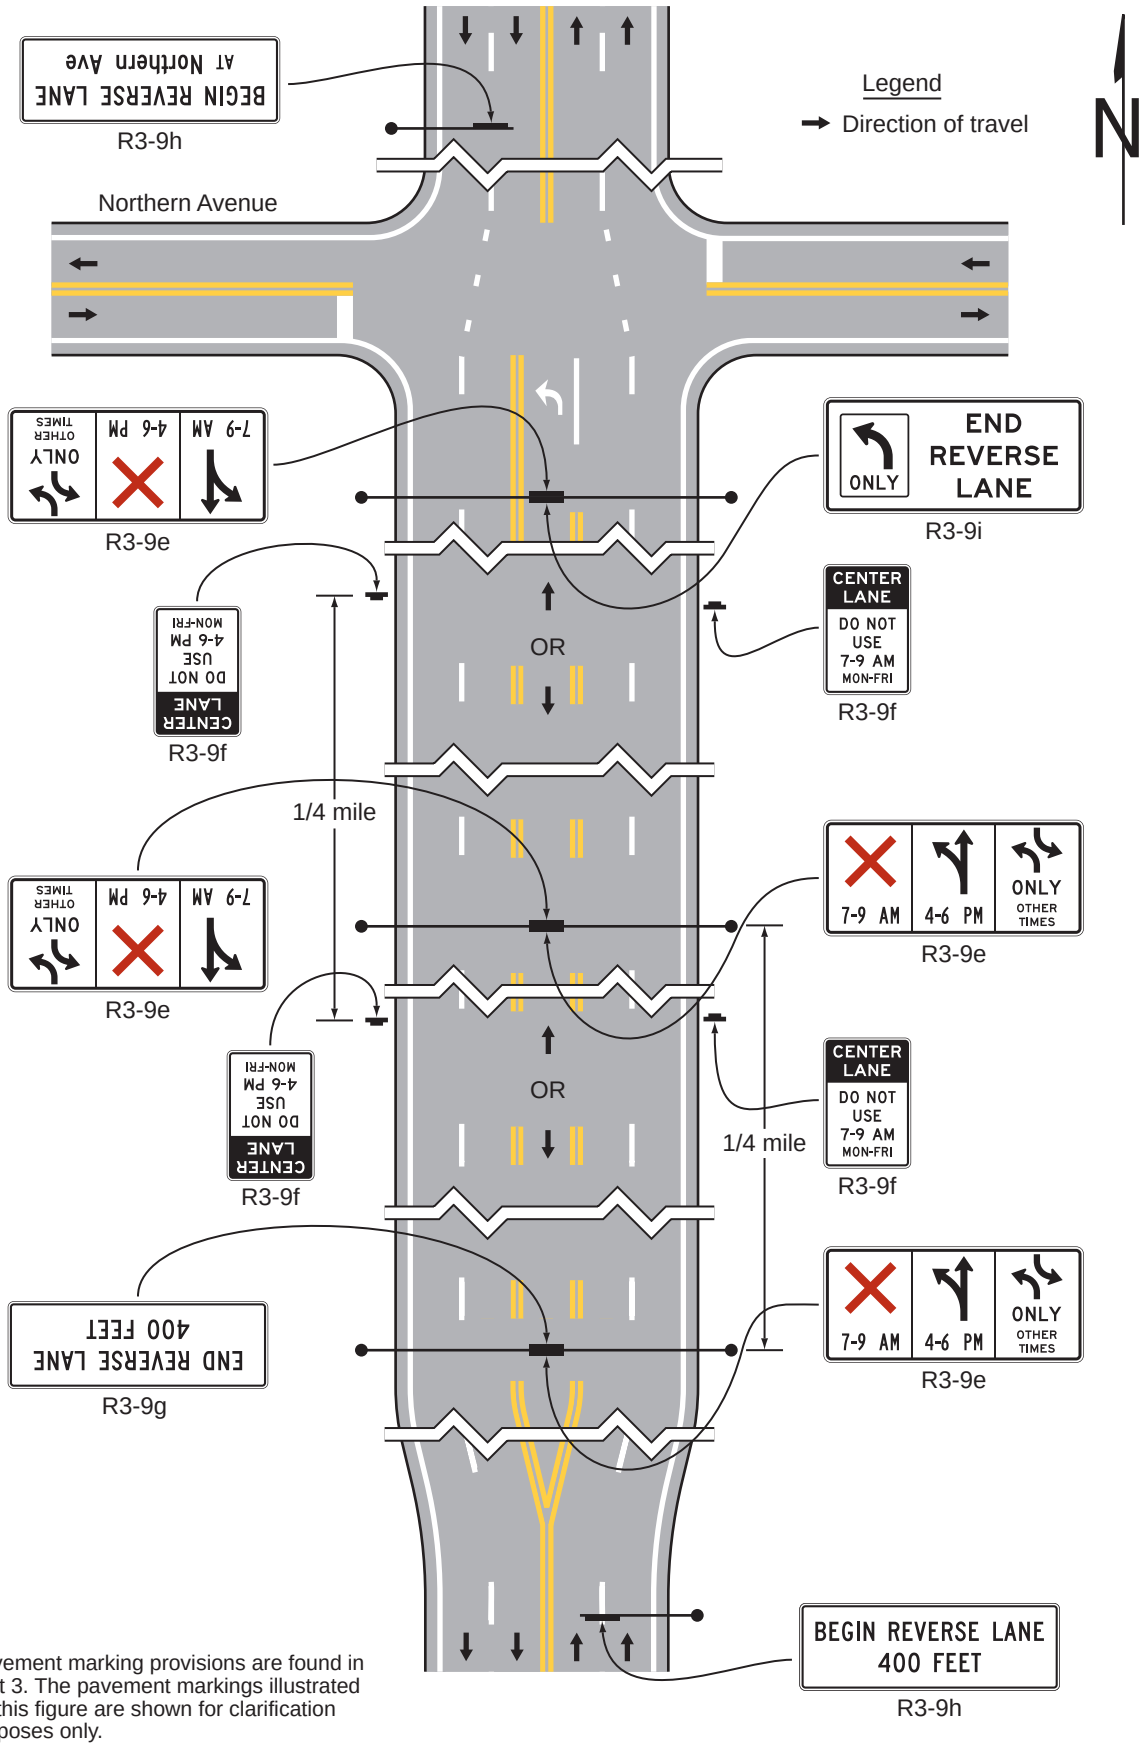


Note: Pavement marking provisions are found in Part 3. The pavement markings illustrated on this figure are shown for clarification purposes only.

## Figure 2B-8. Jughandle Regulatory Signs

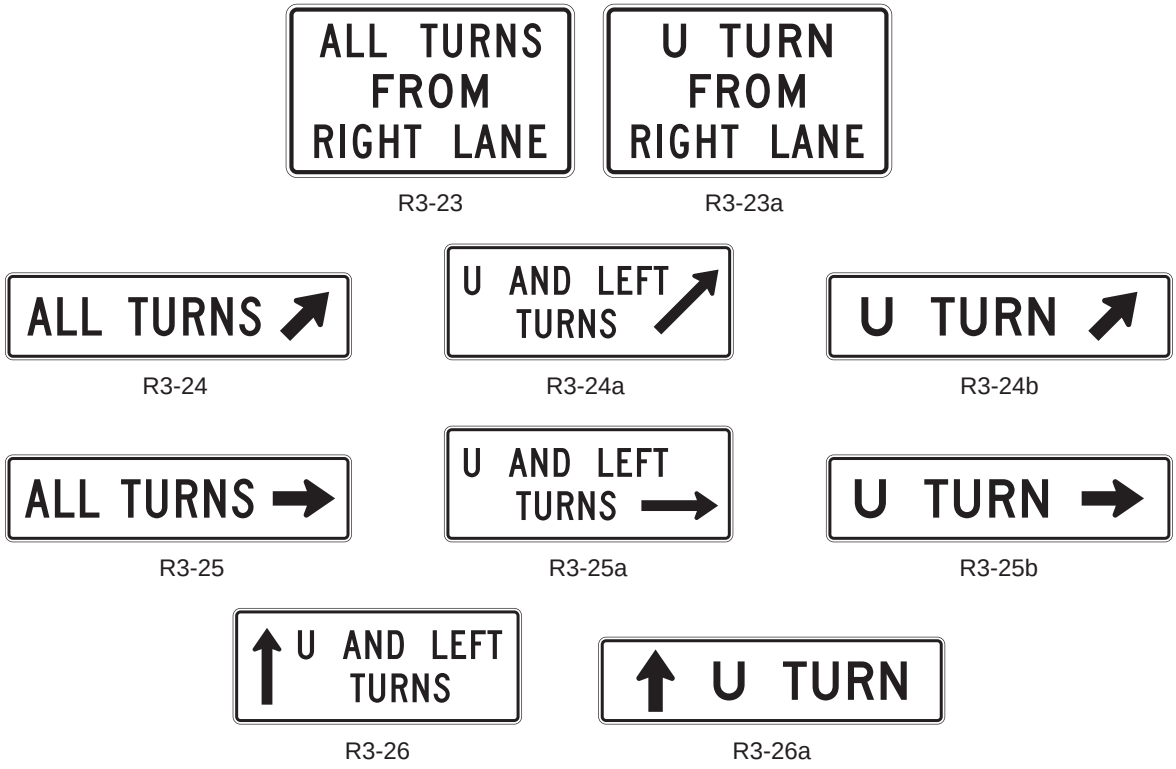


R3-23 R3-23a


R3-24 R3-24a R3-24b

R3-25 R3-25a R3-25b


R3-26 R3-26a

## Figure 2B-9. Examples of Applications of Jughandle Regulatory and Guide Signing
(Sheet 1 of 3)

**A – Turns made prior to the intersection**

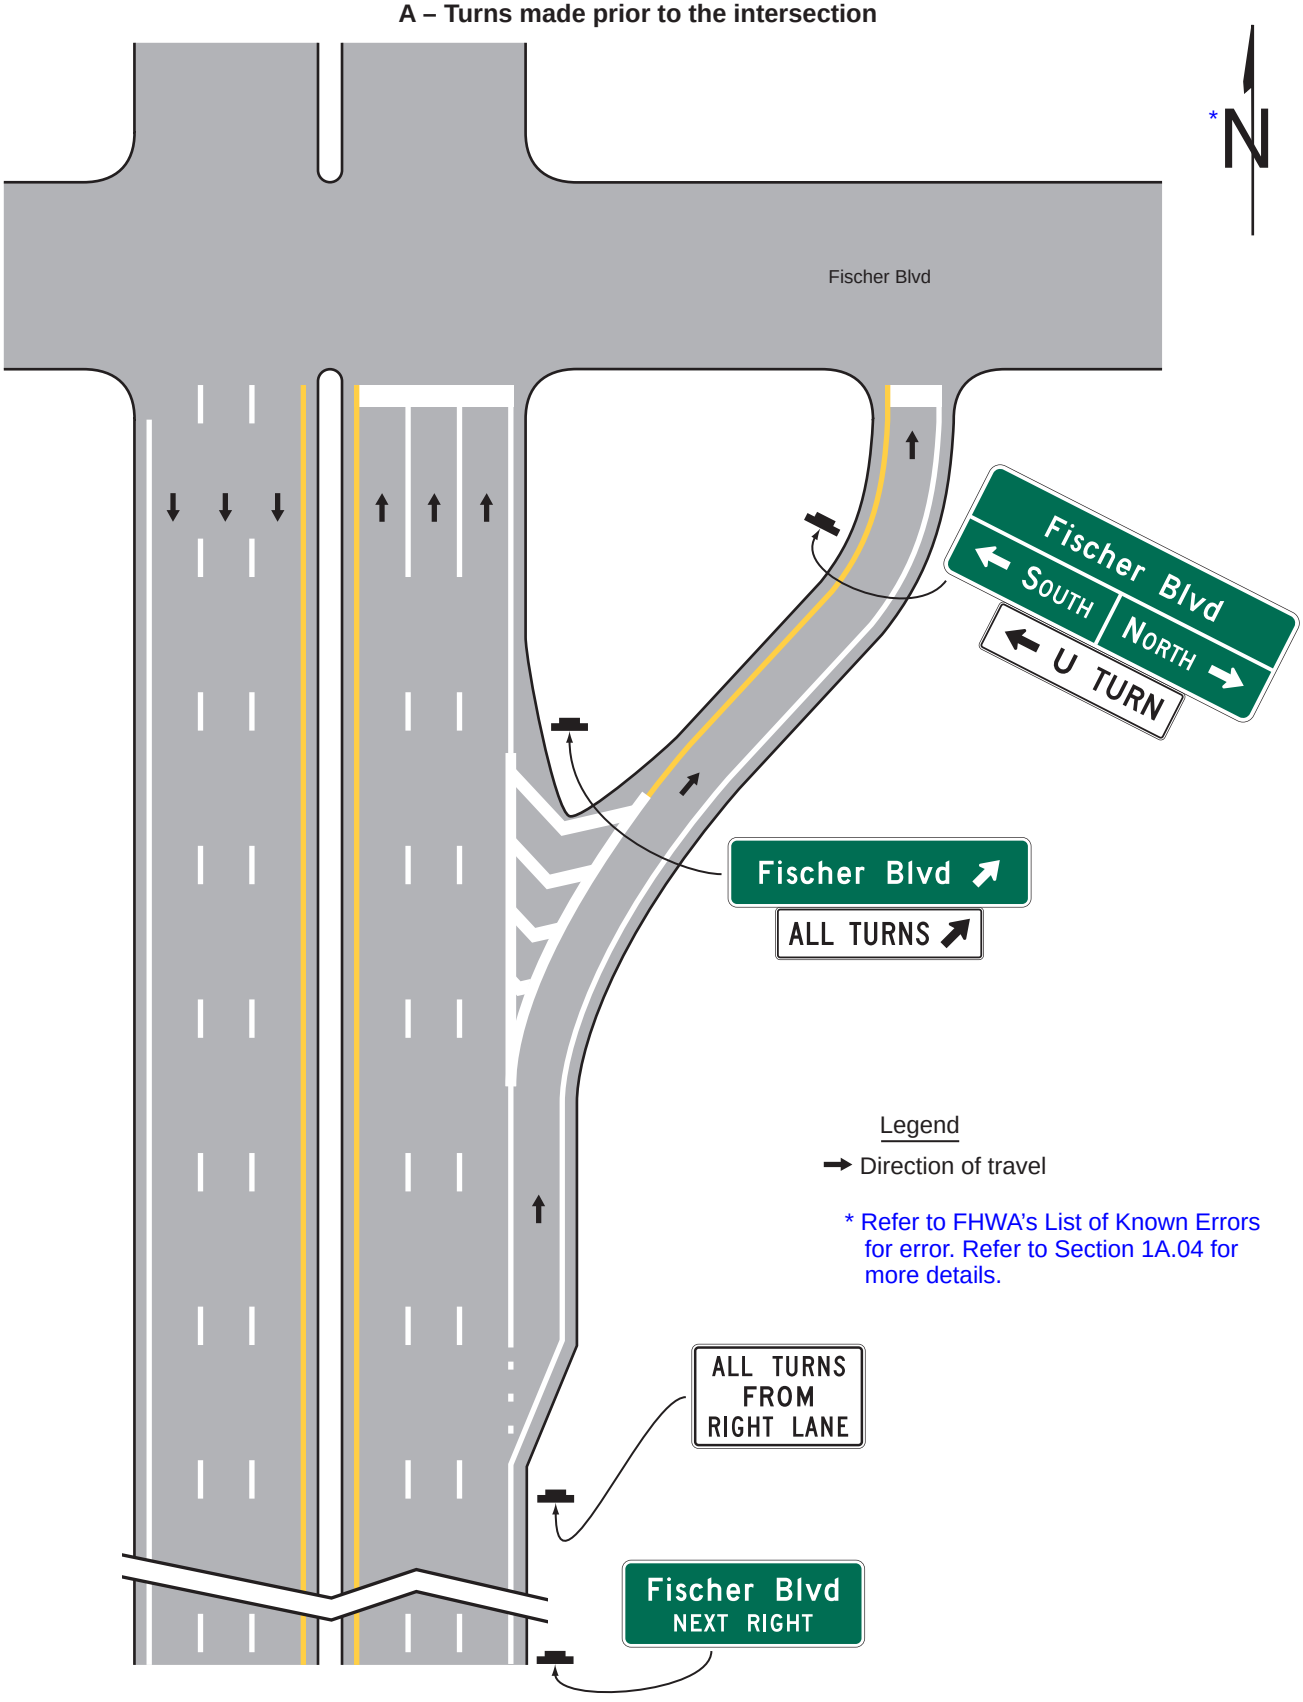


## Figure 2B-9. Examples of Applications of Jughandle Regulatory and Guide Signing
(Sheet 2 of 3)

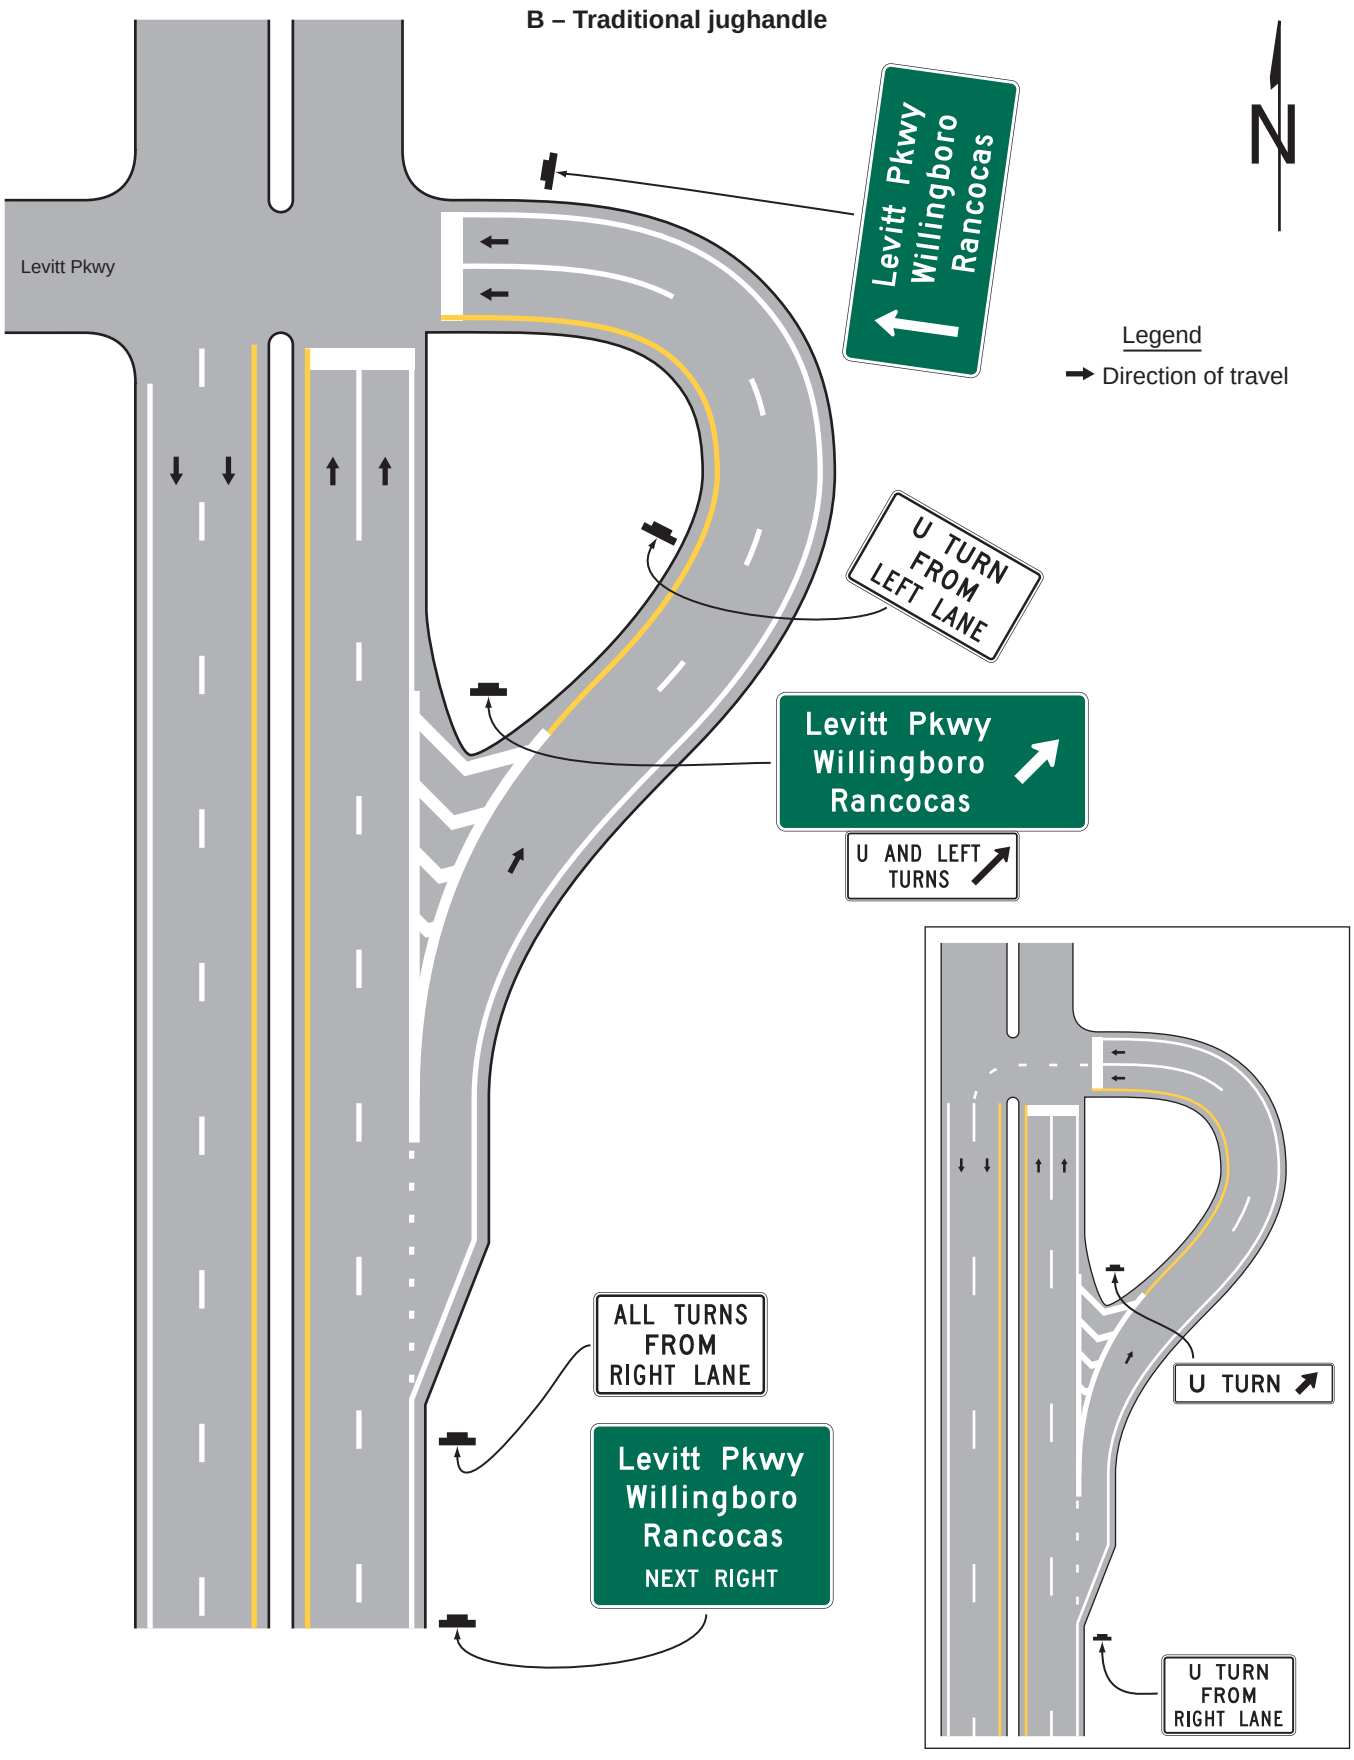


## Figure 2B-9. Examples of Applications of Jughandle Regulatory and Guide Signing
(Sheet 3 of 3)

**C – Turns made beyond the intersection**

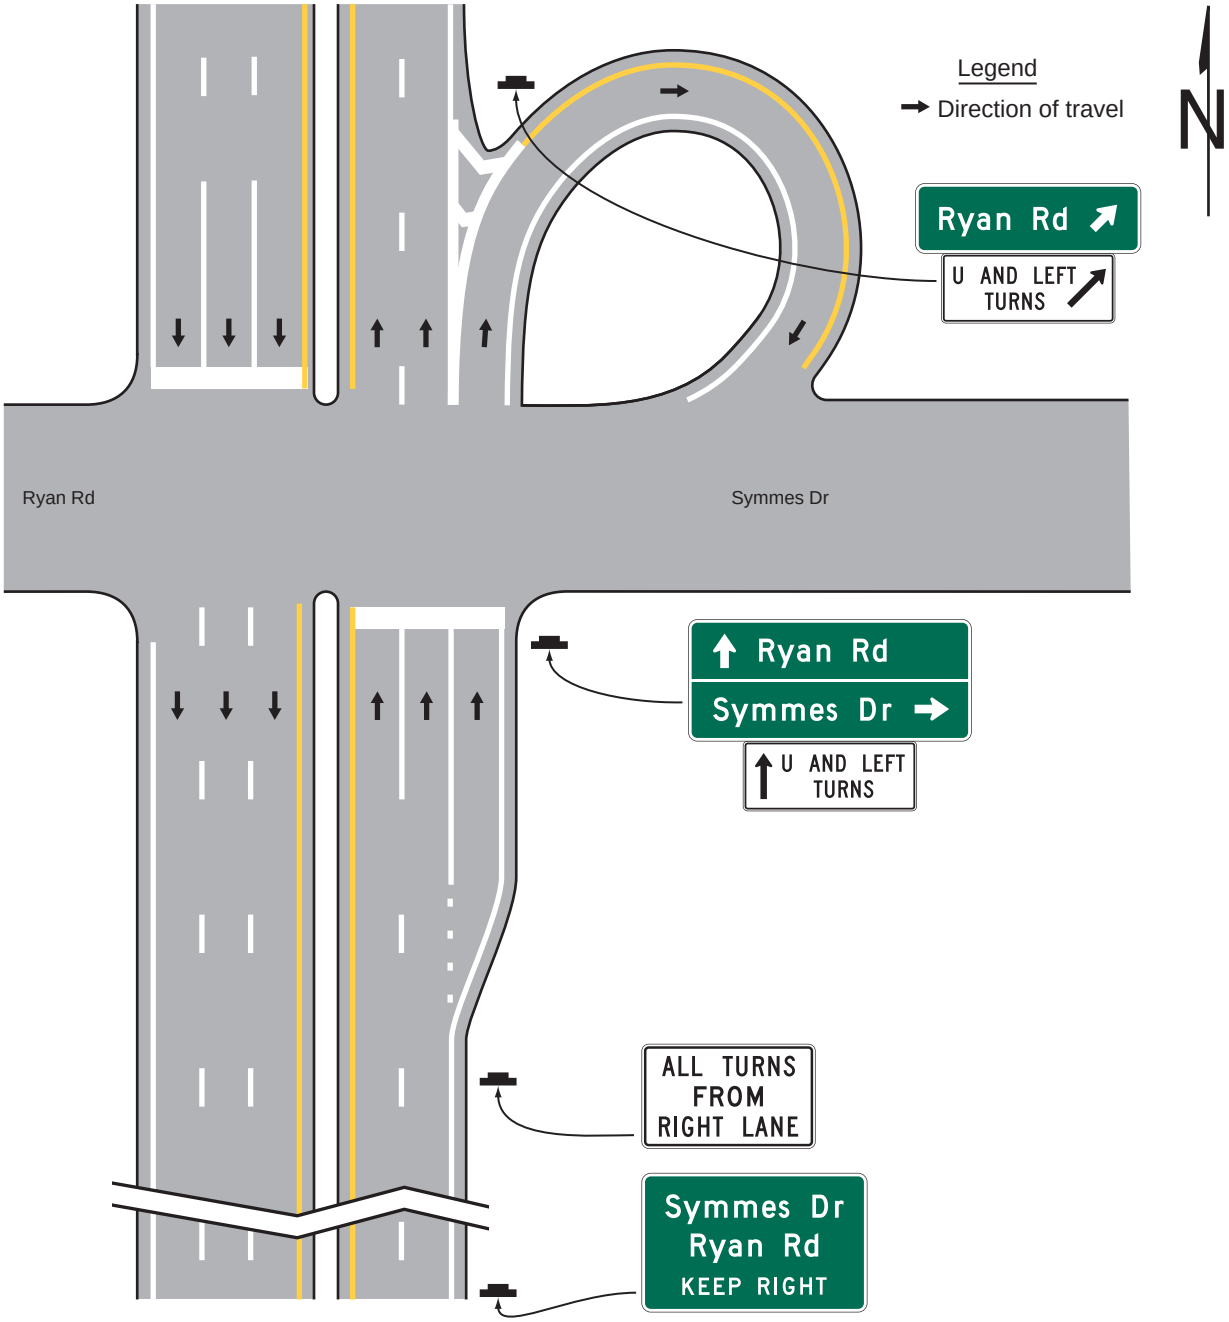

## Figure 2B-10. Passing, Keep Right, and Slow Traffic Signs

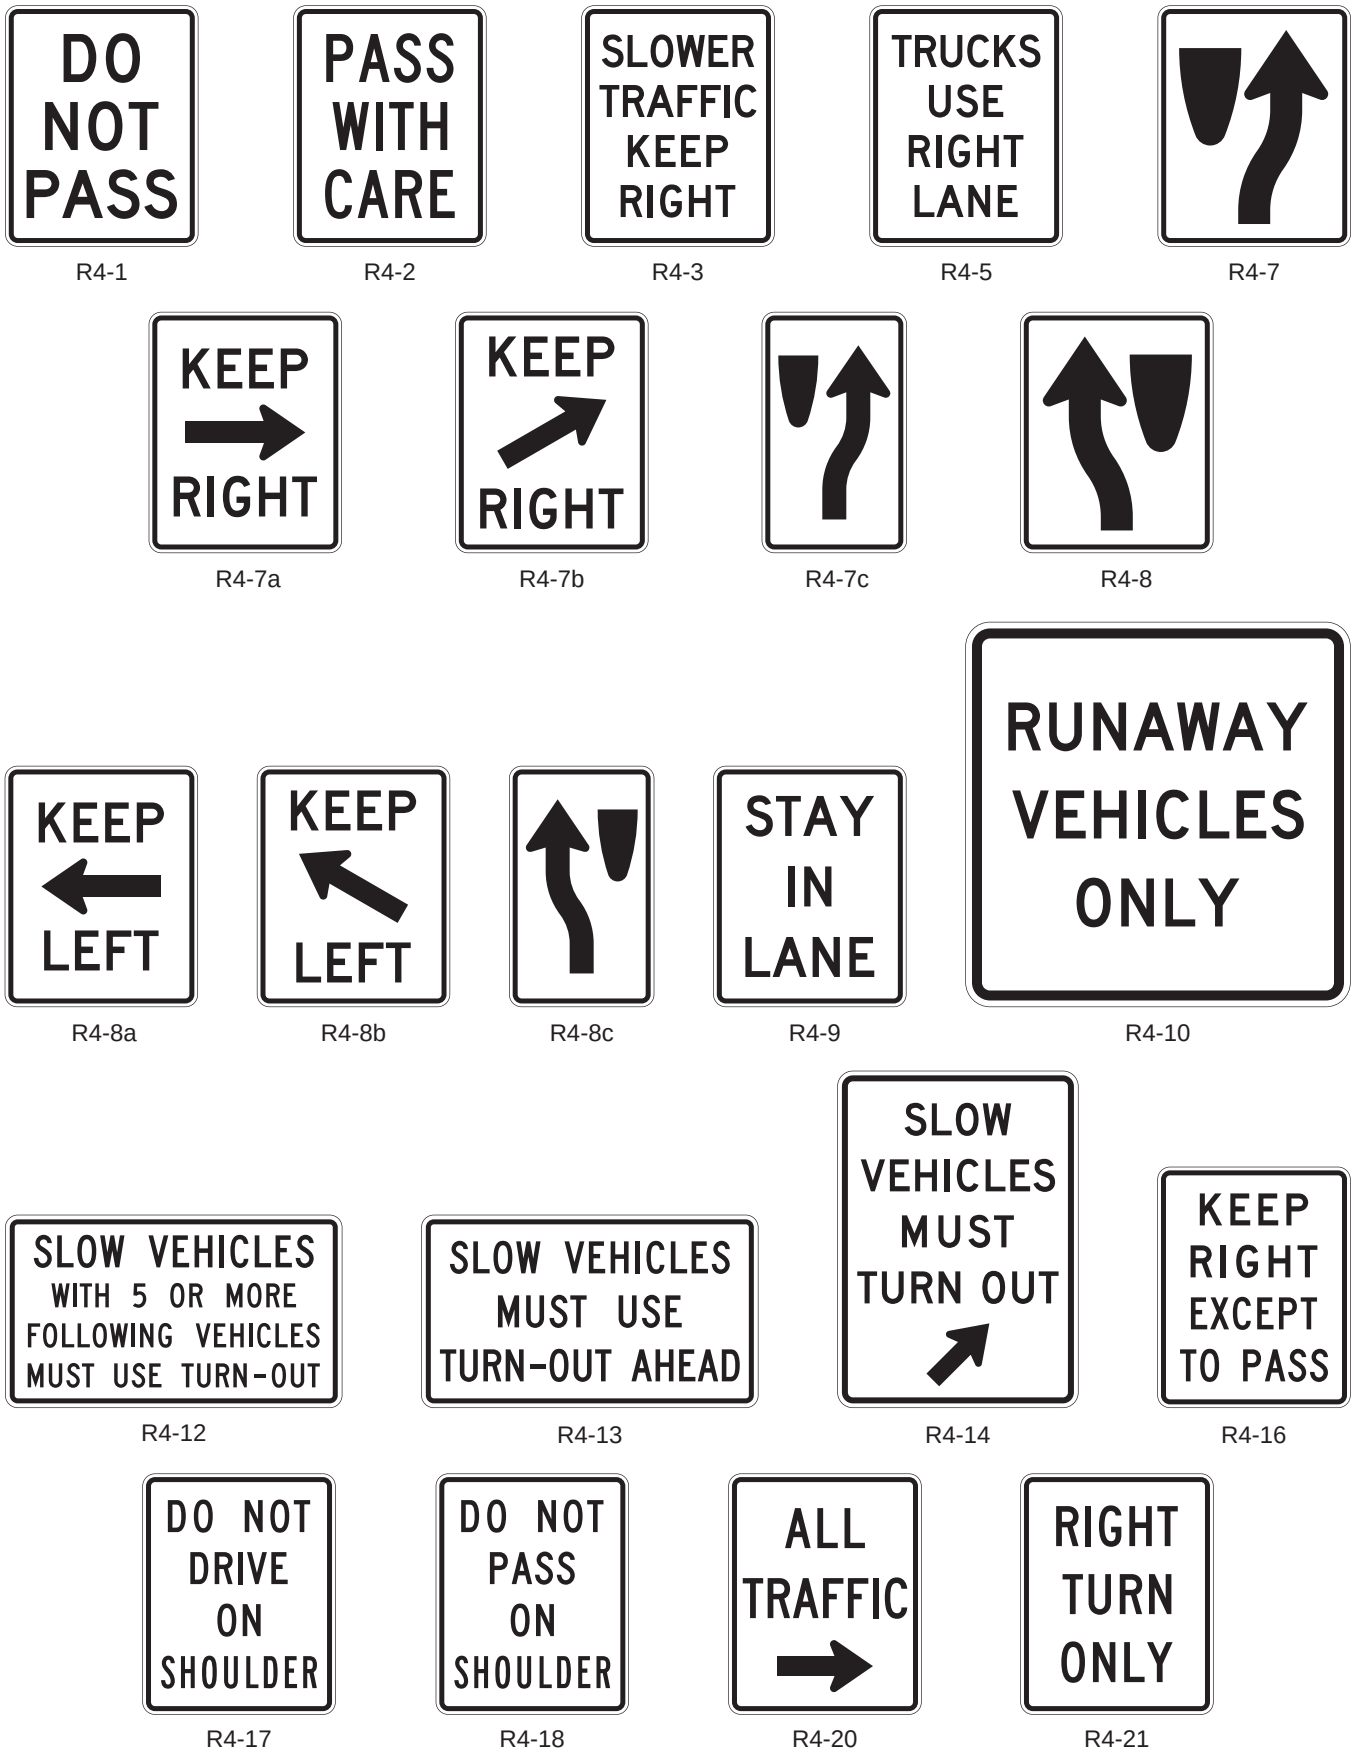

## *Figure 2B-10(CA). California Passing, Keep Right, and Slow Traffic Signs*




R6-3A(CA)




R6-4A(CA)




R53B(CA)




R53E(CA)




R55(CA)




R70(CA)




R70A(CA)





R70B(CA)




R82aP(CA)

## Figure 2B-11. Examples of Keep Right and Keep Left Sign Placement

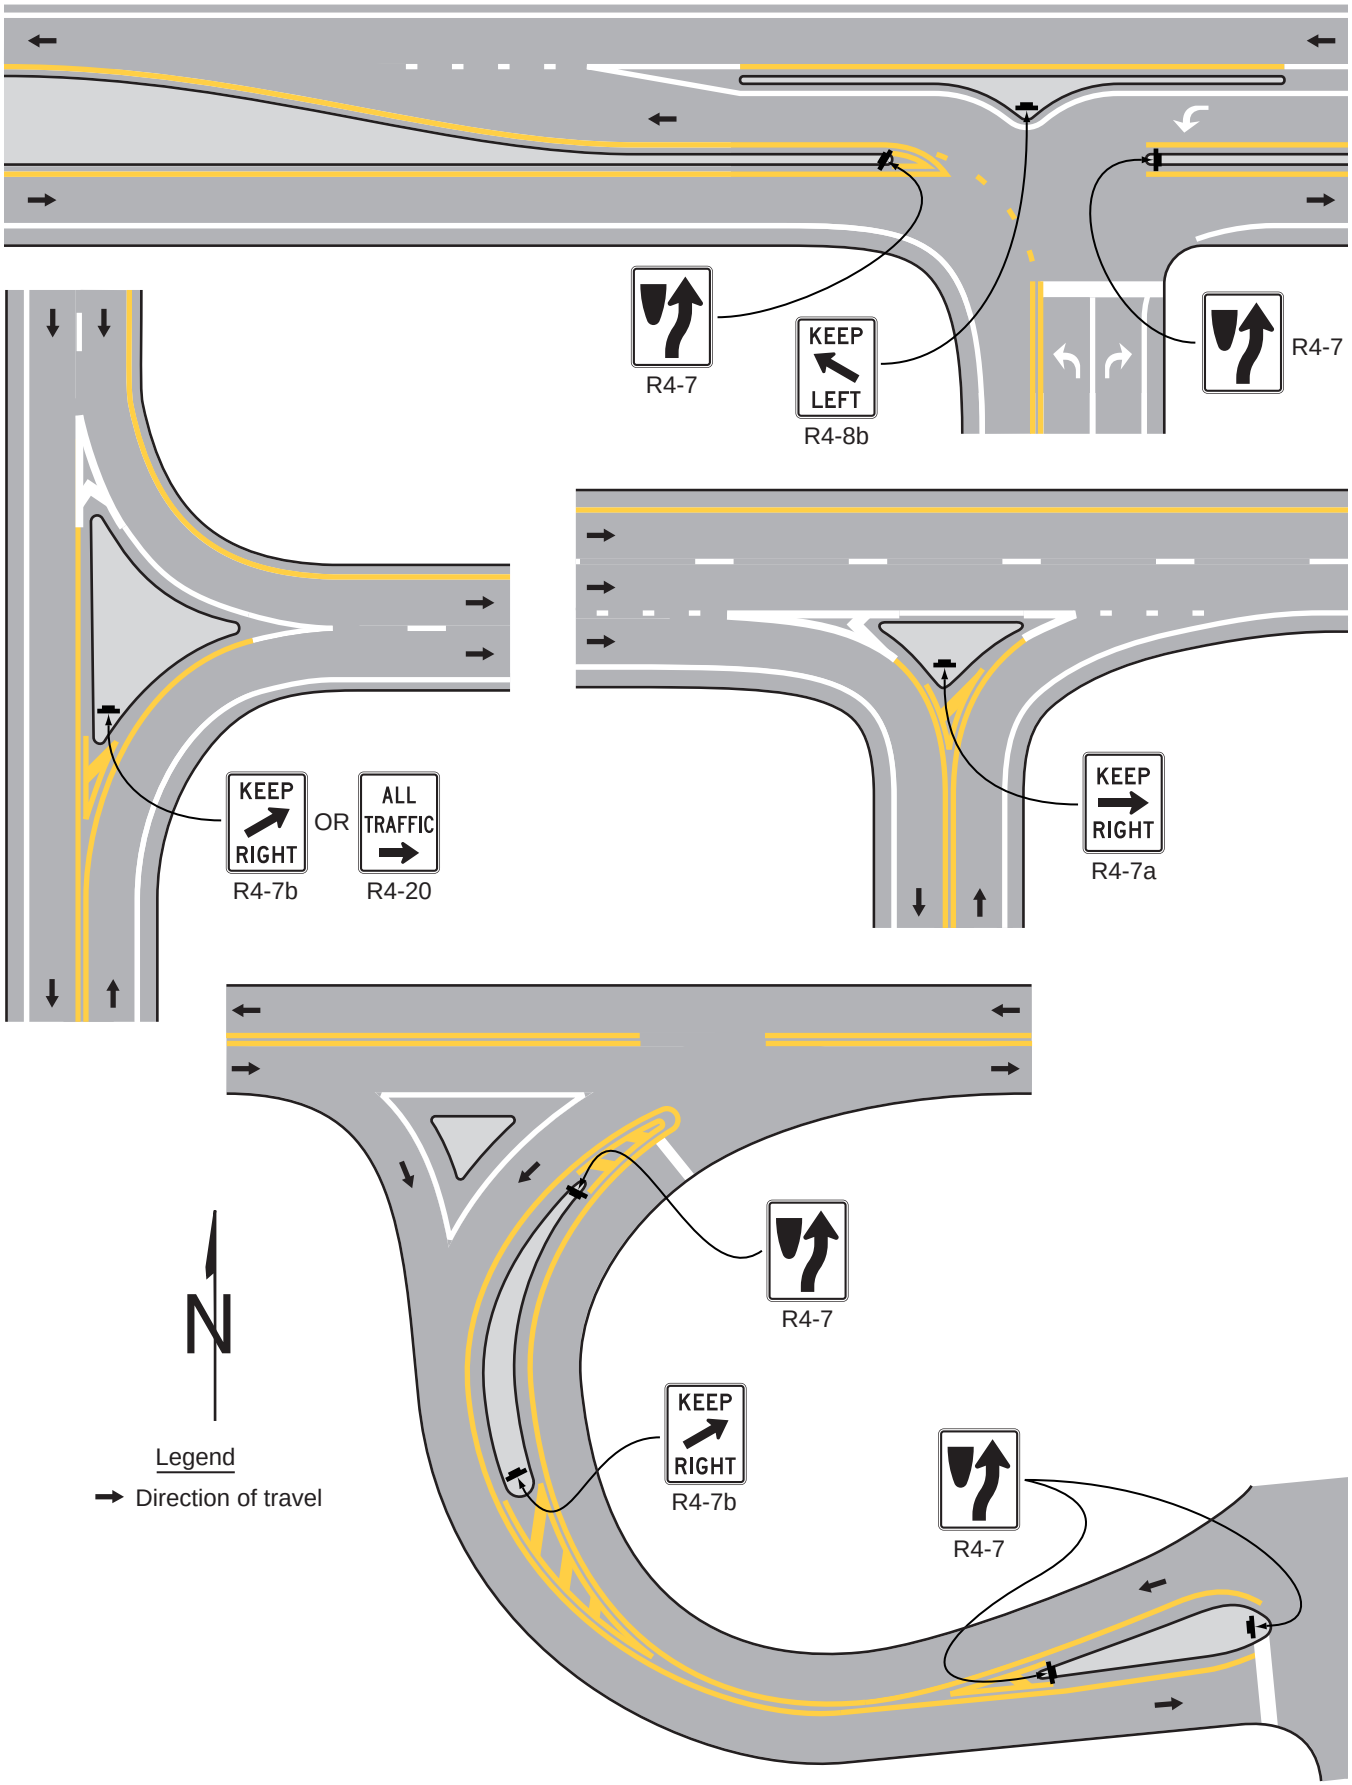

## Figure 2B-12. Selective Exclusion Signs and Plaques


R5-2



R5-2aP



R5-2b



R5-3



R5-4




R5-5


R5-6



R5-7



R5-8



R5-10



R5-10a



R5-10b



R5-10c



R5-11



R5-12


R9-3


R9-13


R9-14


R9-15


R9-16



R9-19P

## *Figure 2B-12(CA). California Selective Exclusion Signs and Plaques*




R20-1(CA)




R20-1aP(CA)




R20D-1P(CA)




R20D-2P(CA)




R20D-3P(CA)





R20D-4P(CA)




R20H(CA)




R21(CA)





R49(CA)




R53D(CA)

## Figure 2B-13. DO NOT ENTER, WRONG WAY, ONE WAY, and Related Signs and Plaques

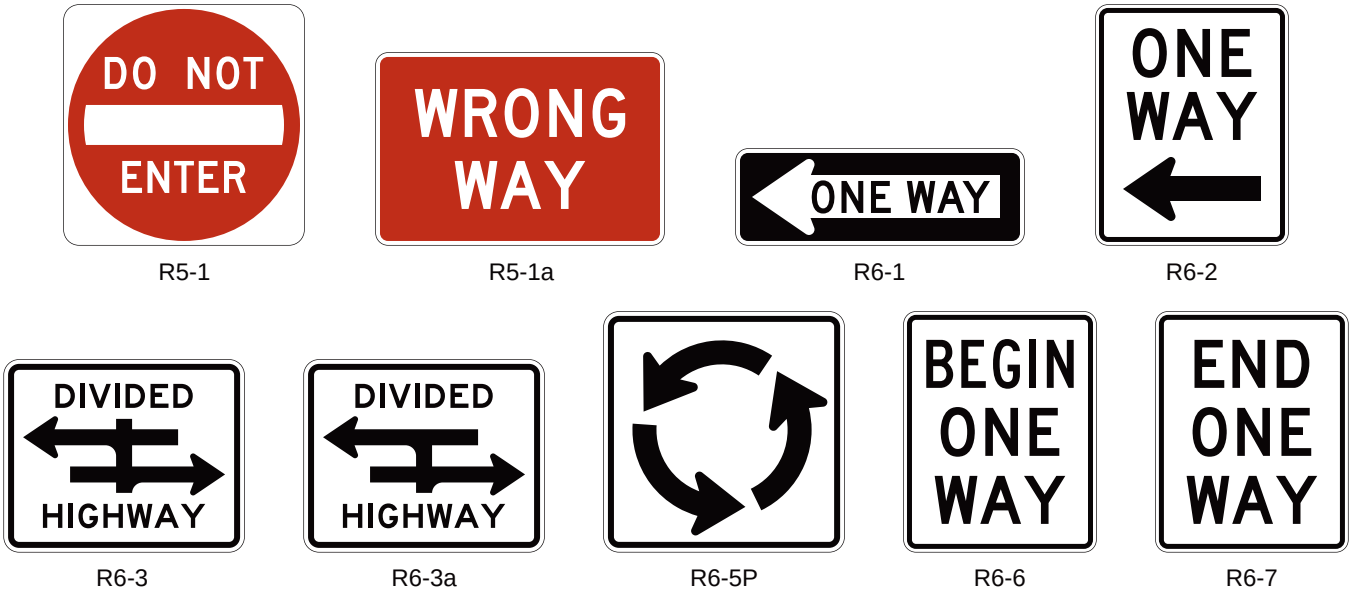


R5-1 R5-1a R6-1 R6-2

R6-3 R6-3a R6-5P R6-6 R6-7

---


## *Figure 2B-13(CA). California DO NOT ENTER, WRONG WAY, ONE WAY, and Related Signs and Plaques*





R5-1
Activated Blank-Out

R5-1a
Activated Blank-Out

## Figure 2B-14. Locations of DO NOT ENTER and WRONG WAY Signing for Divided Highway Crossings that Function as Two Separate Intersections

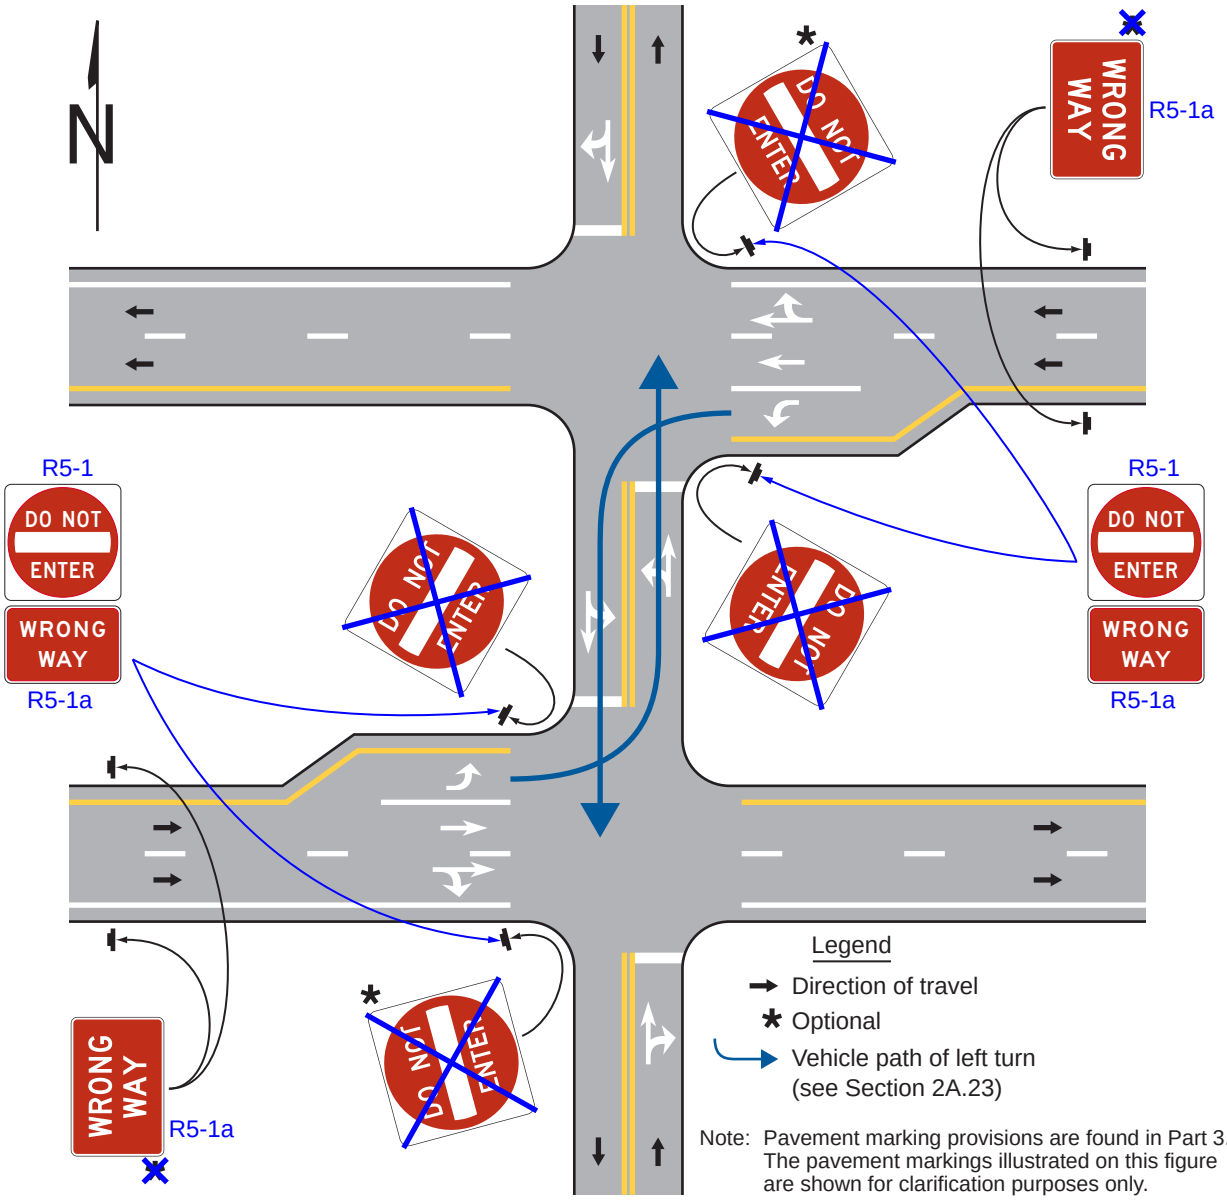

## *Figure 2B-14(CA). Locations of DO NOT ENTER and WRONG WAY Signing for Divided Highway Crossings that Function as a Single Intersection*

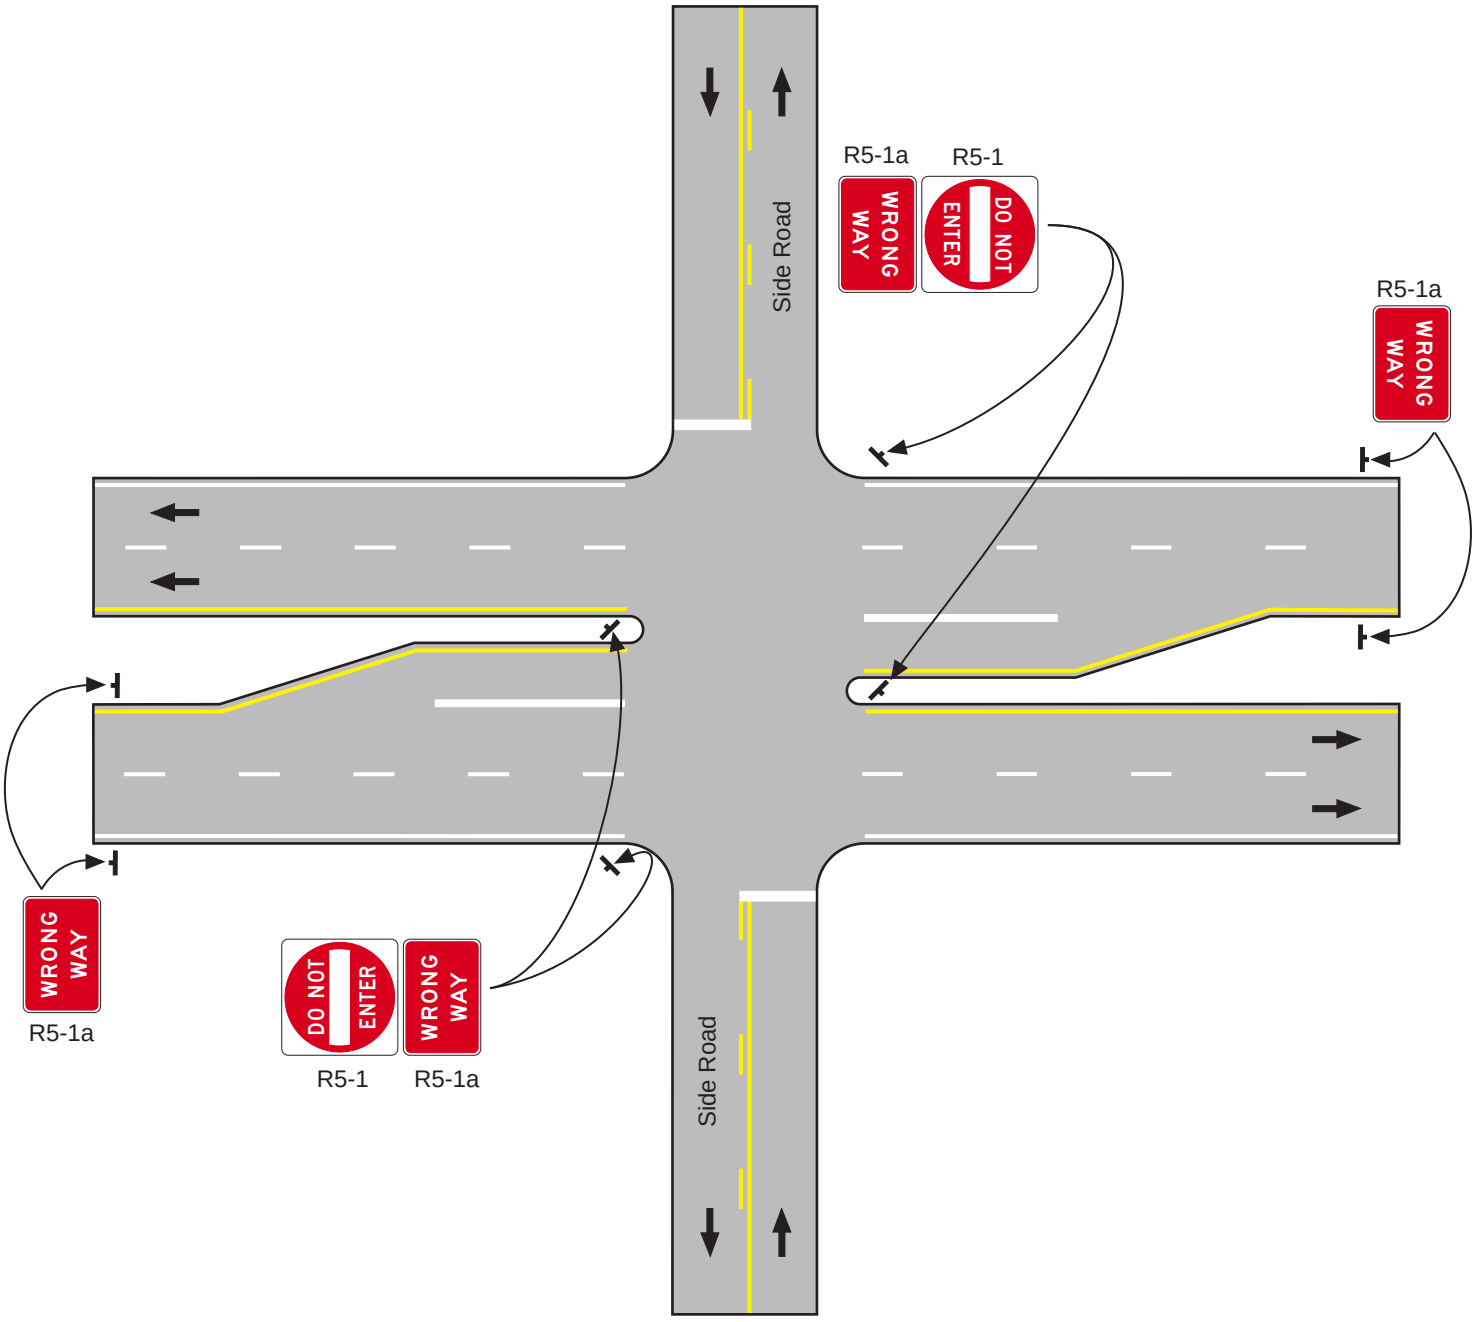



**NOT TO SCALE**


**LEGEND**

→ Direction of Travel  ⊢ Sign Location


## Figure 2B-15. Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry

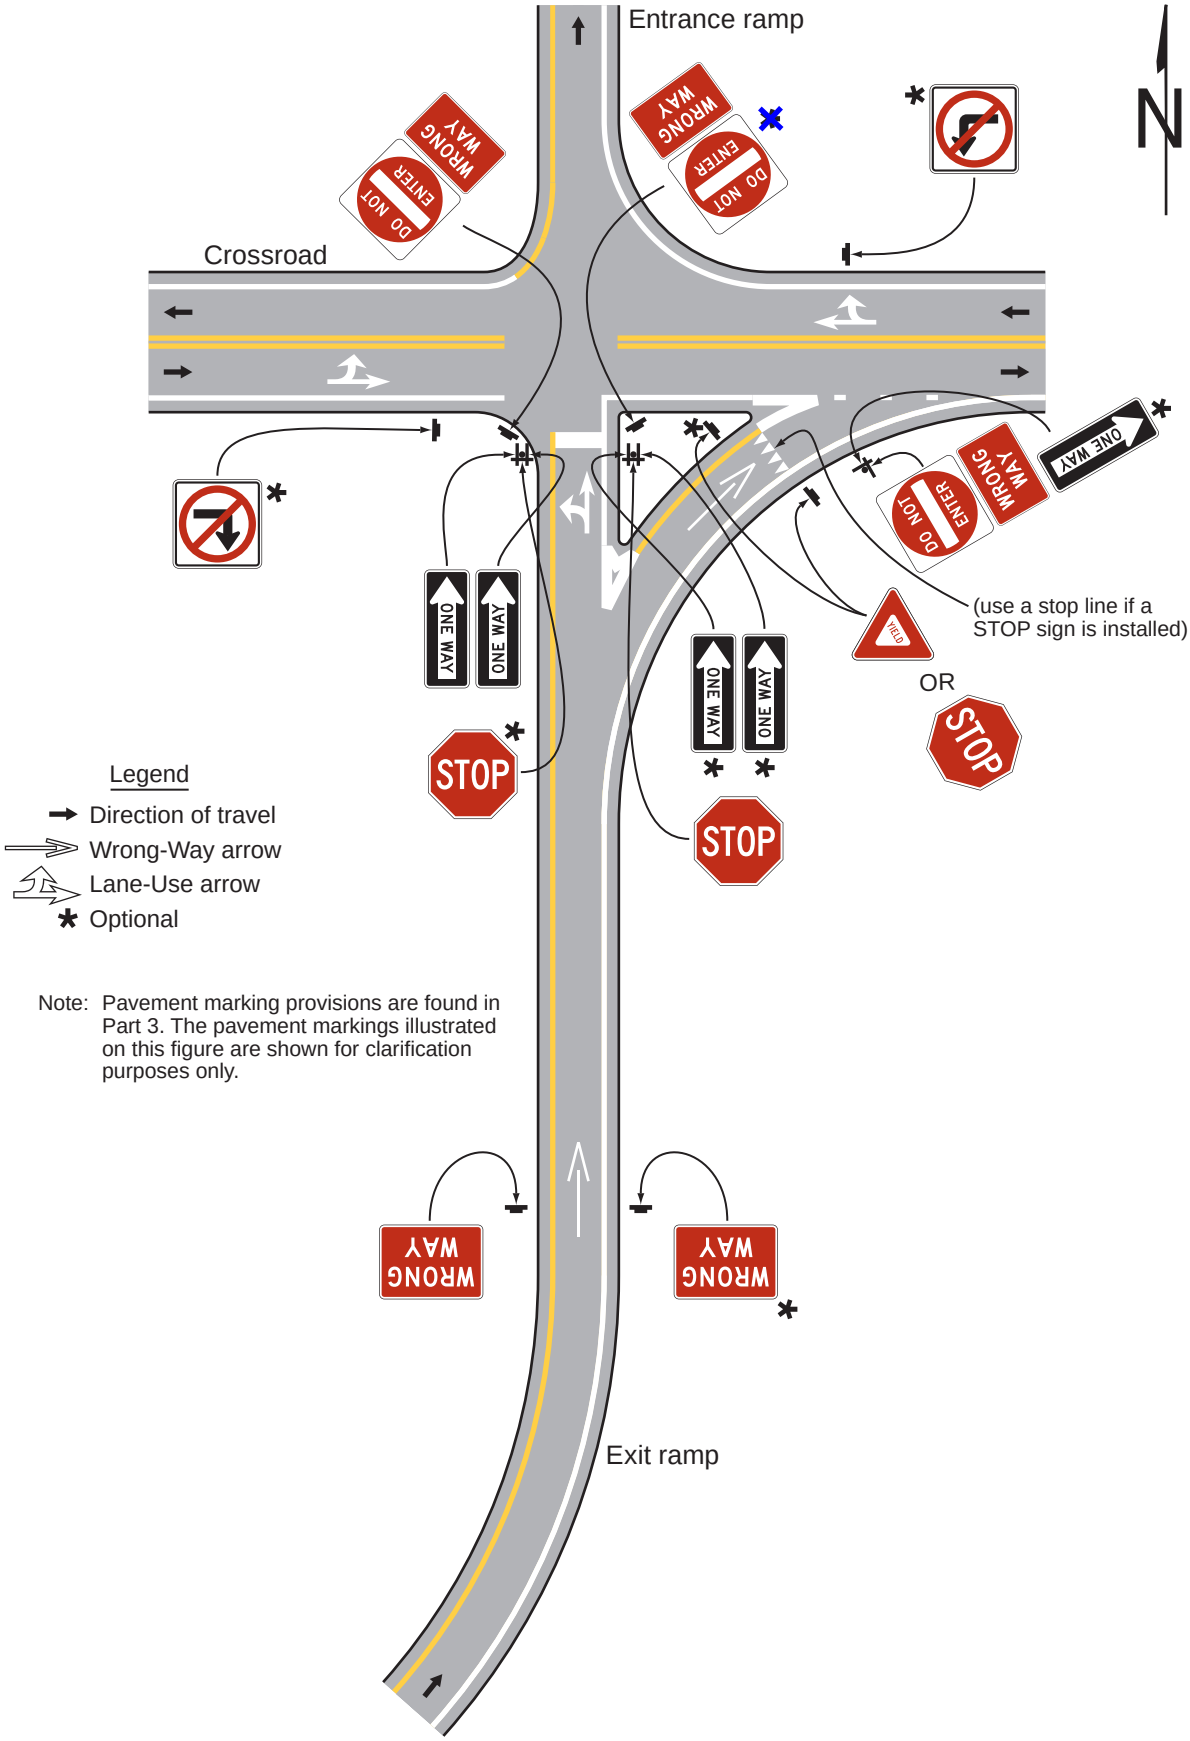


## *Figure 2B-15(CA). California Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry (Sheet 1 of 5)*

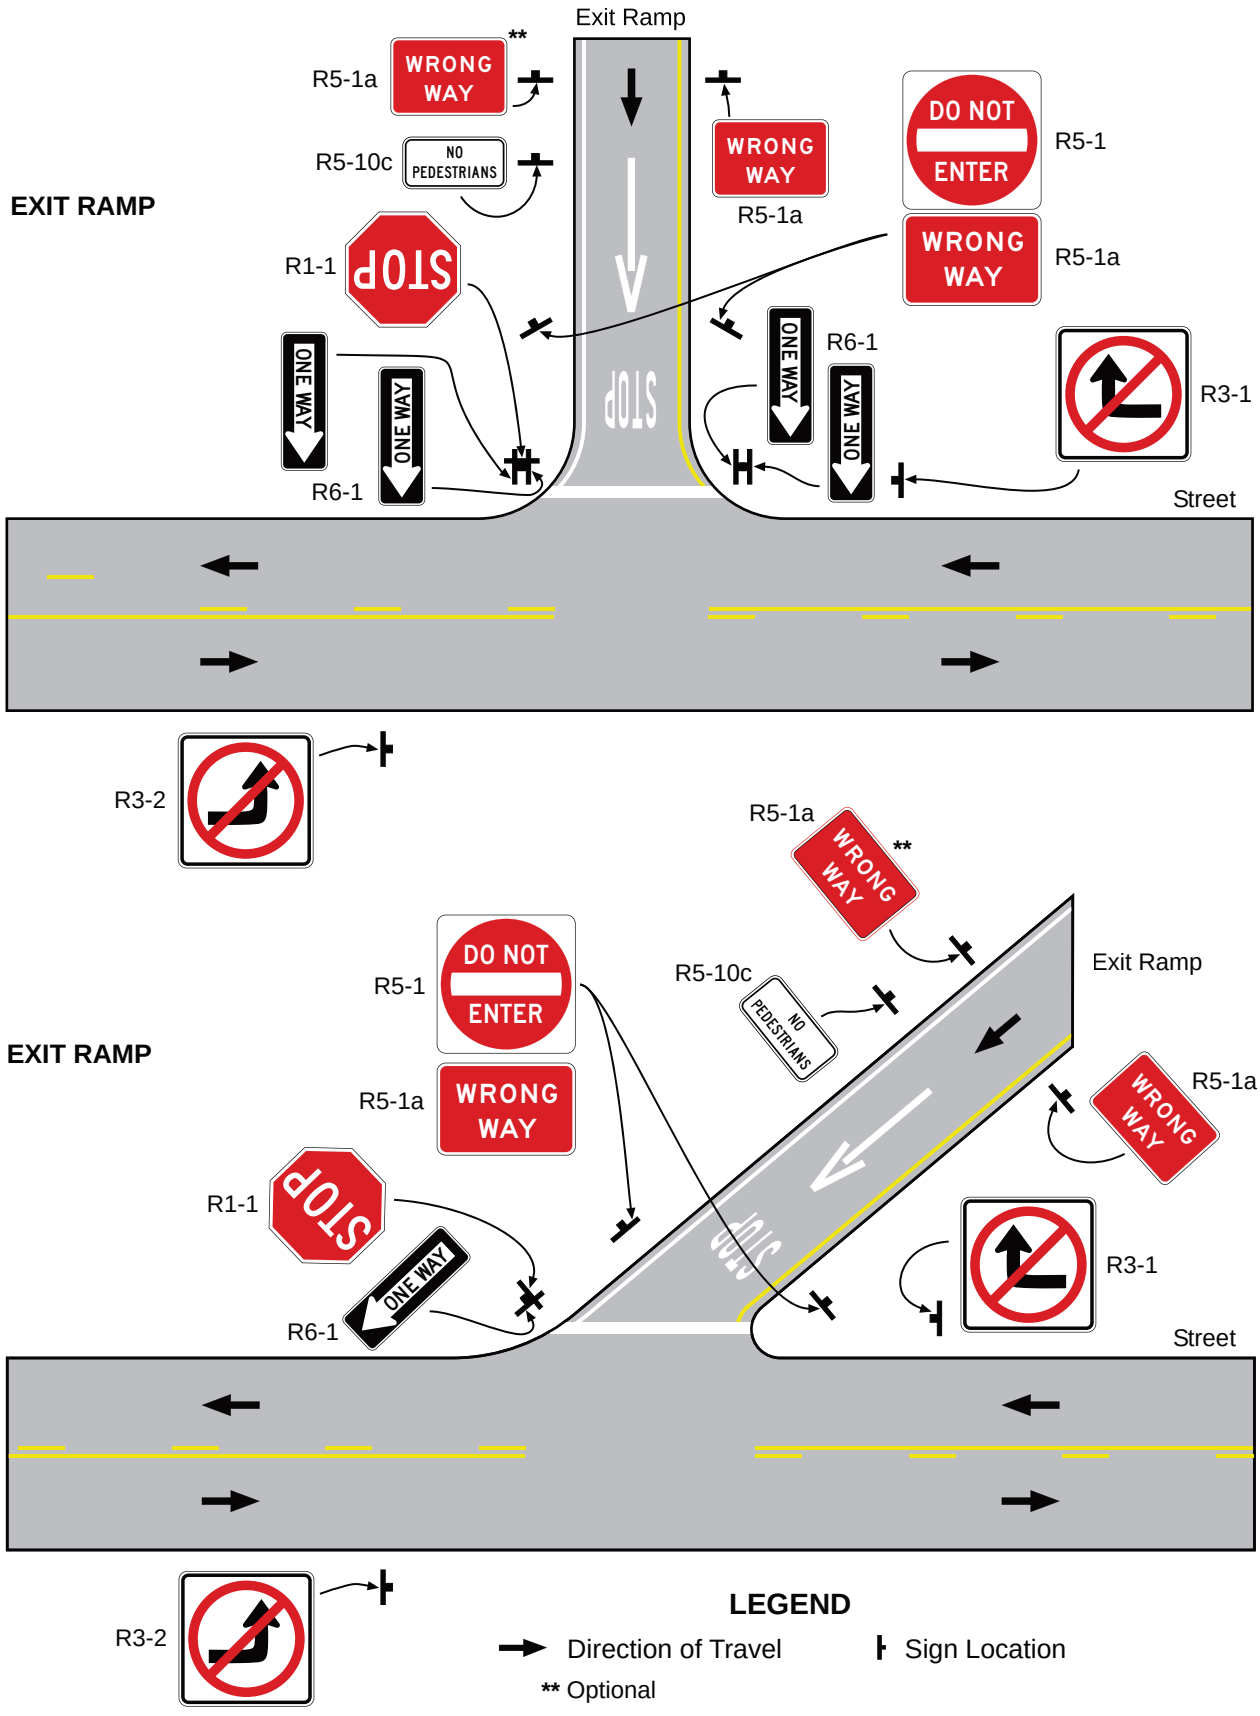


## *Figure 2B-15(CA). California Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry (Sheet 2 of 5)*

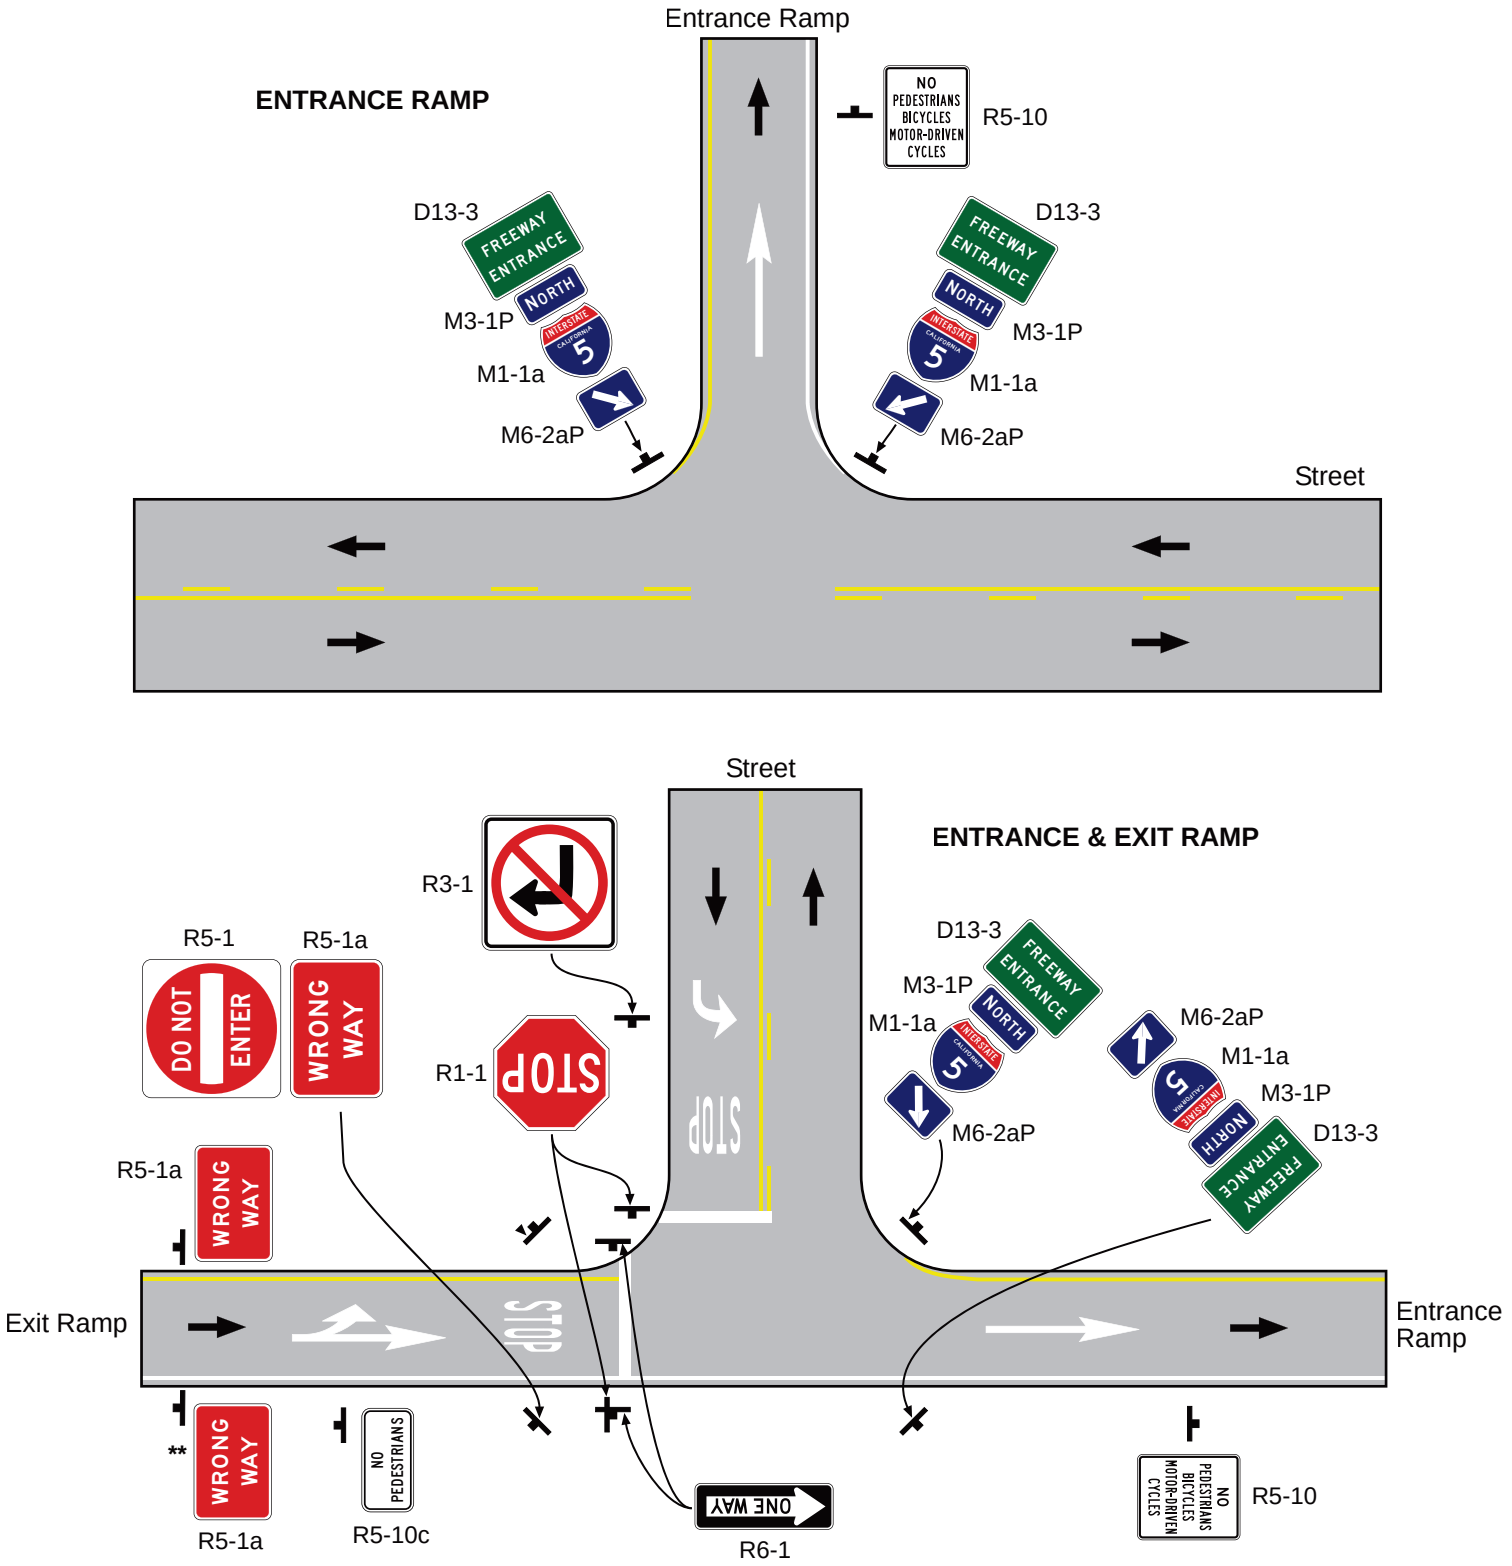


## *Figure 2B-15(CA). California Example of Application of Regulatory Signing andPavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry (Sheet 3 of 5)*

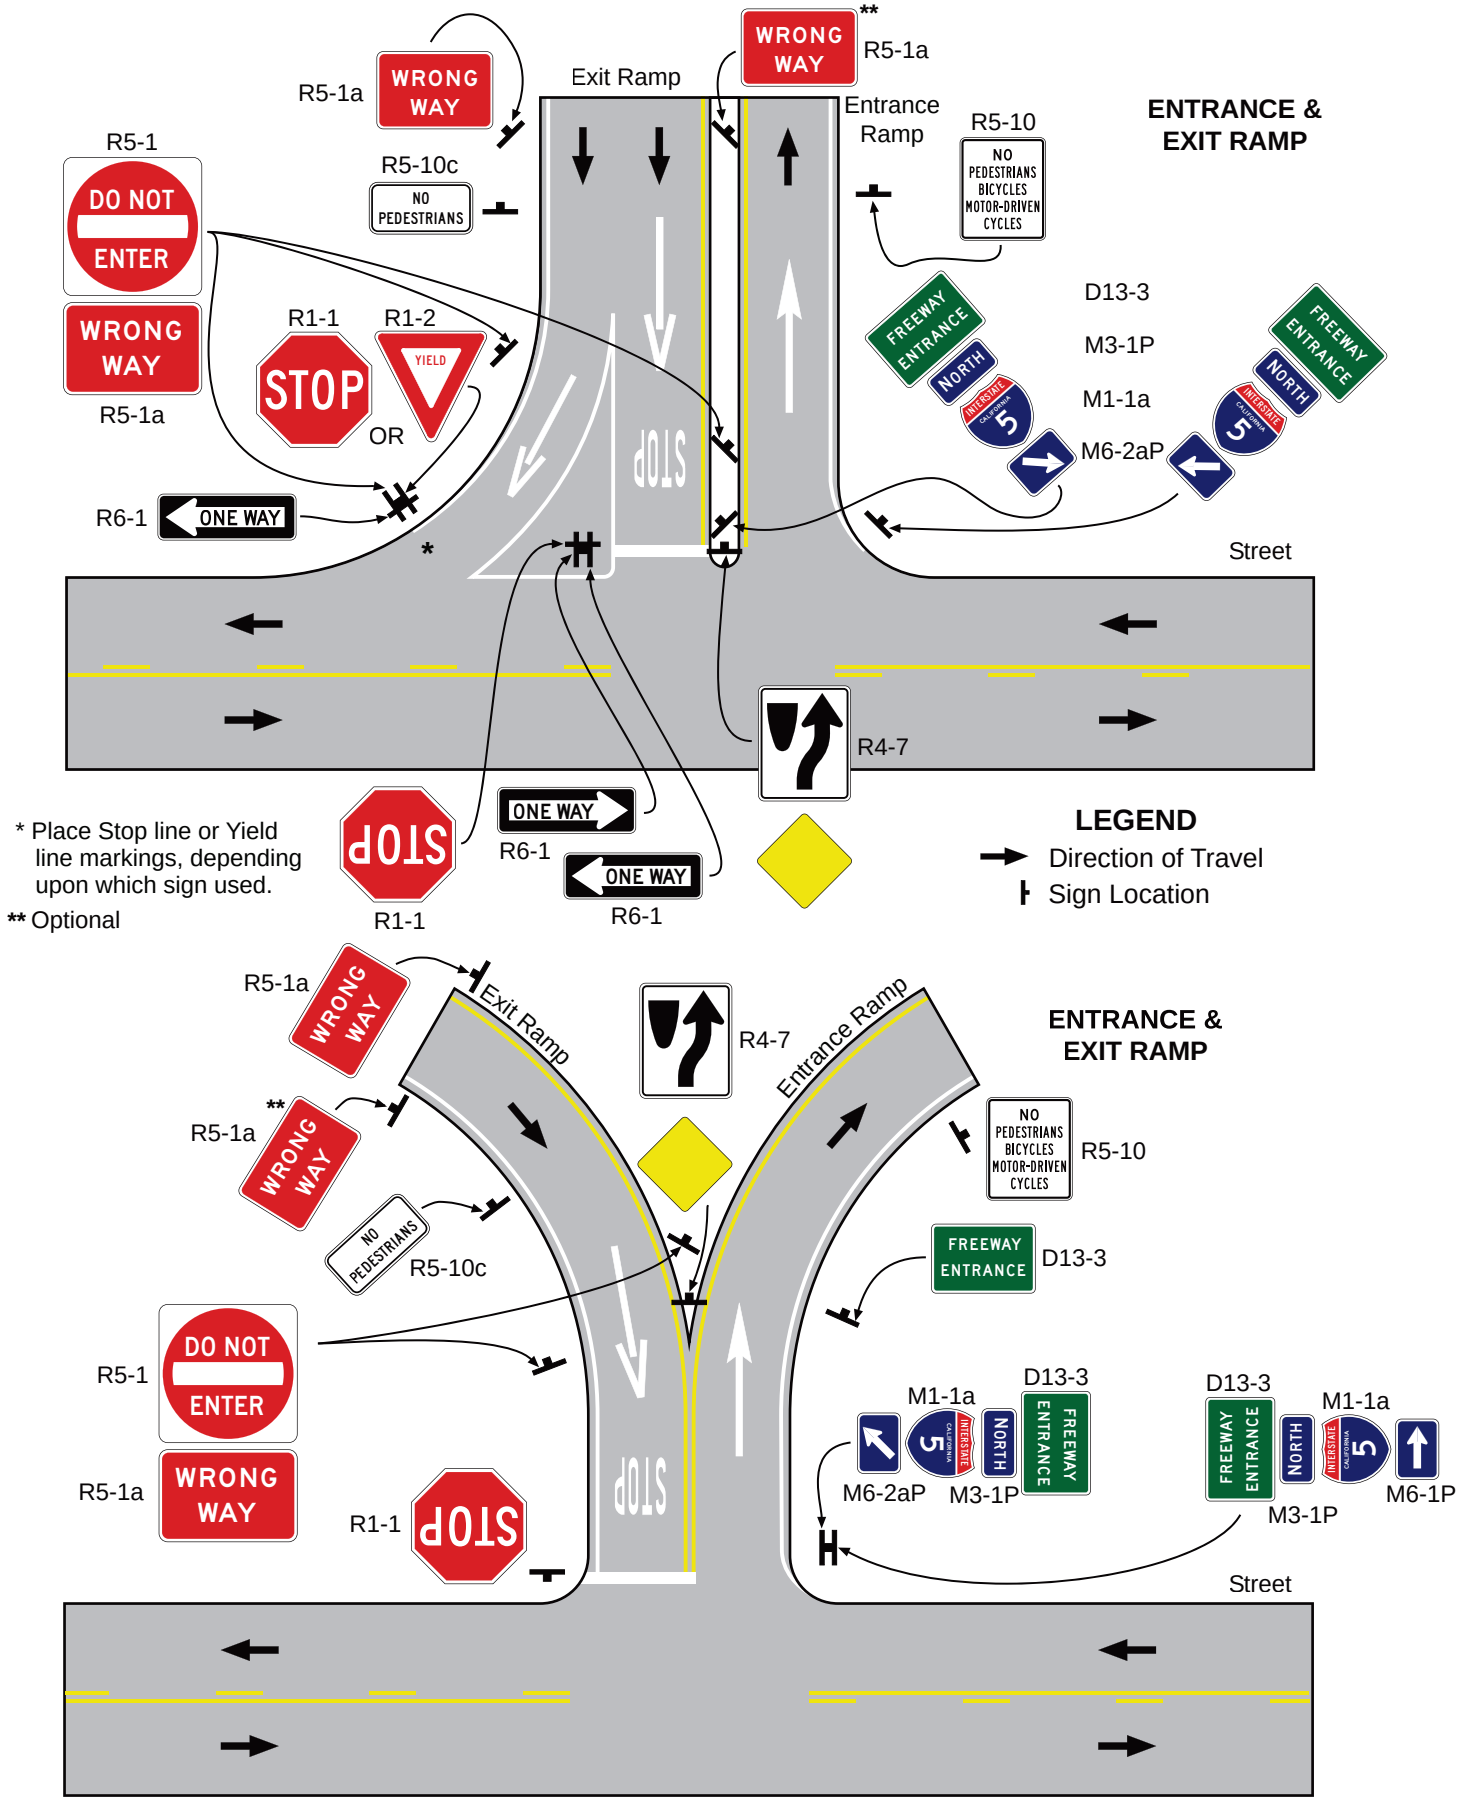

## *Figure 2B-15(CA). California Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry (Sheet 4 of 5)*

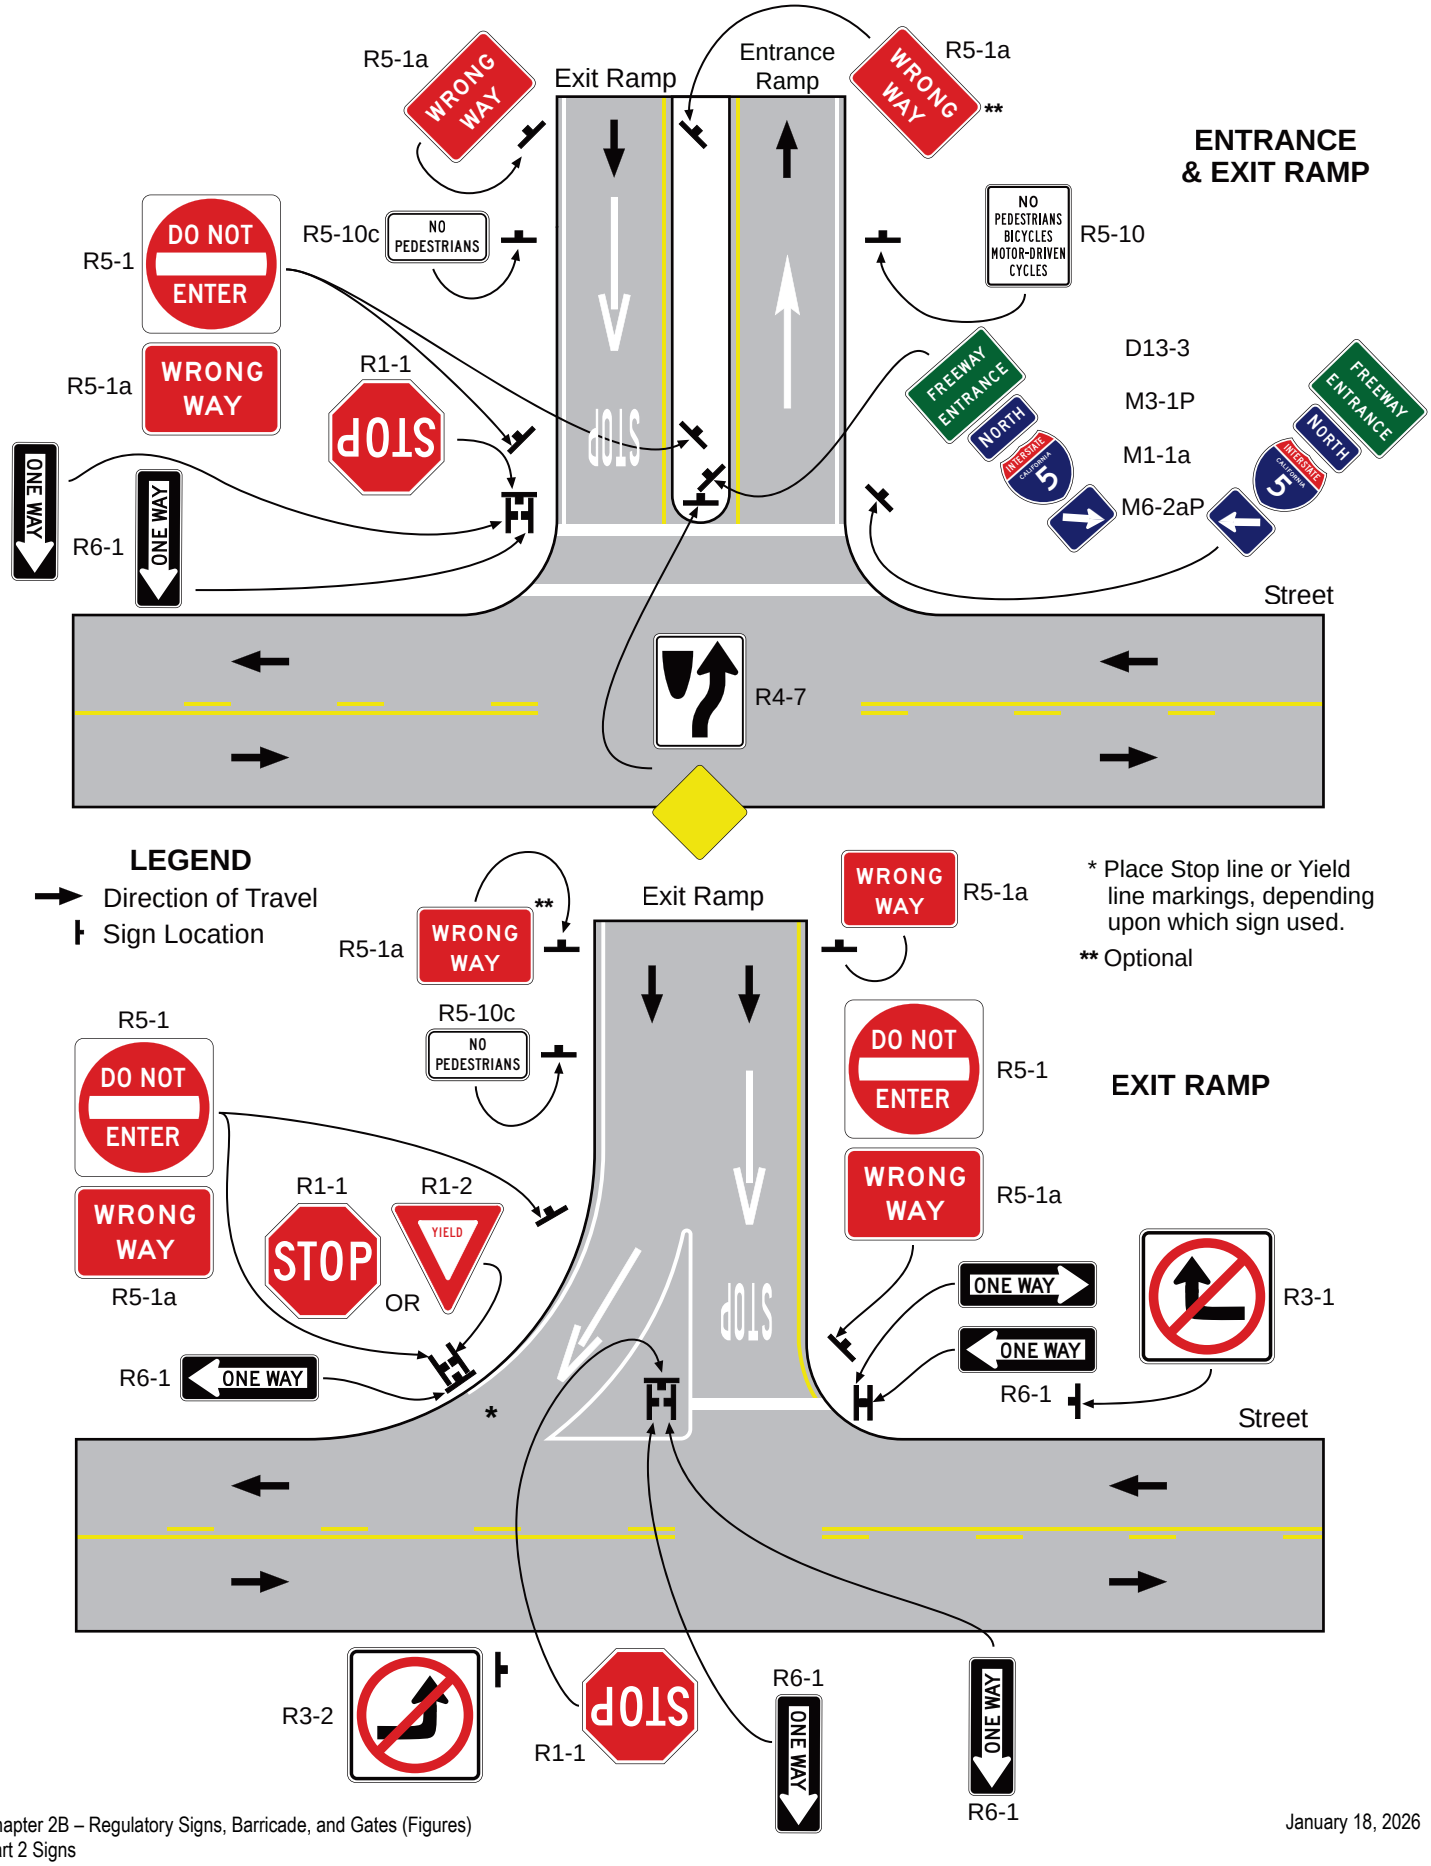


## *Figure 2B-15(CA). California Example of Application of Regulatory Signing and Pavement Markings at an Exit Ramp Termination to Deter Wrong-Way Entry (Sheet 5 of 5)*

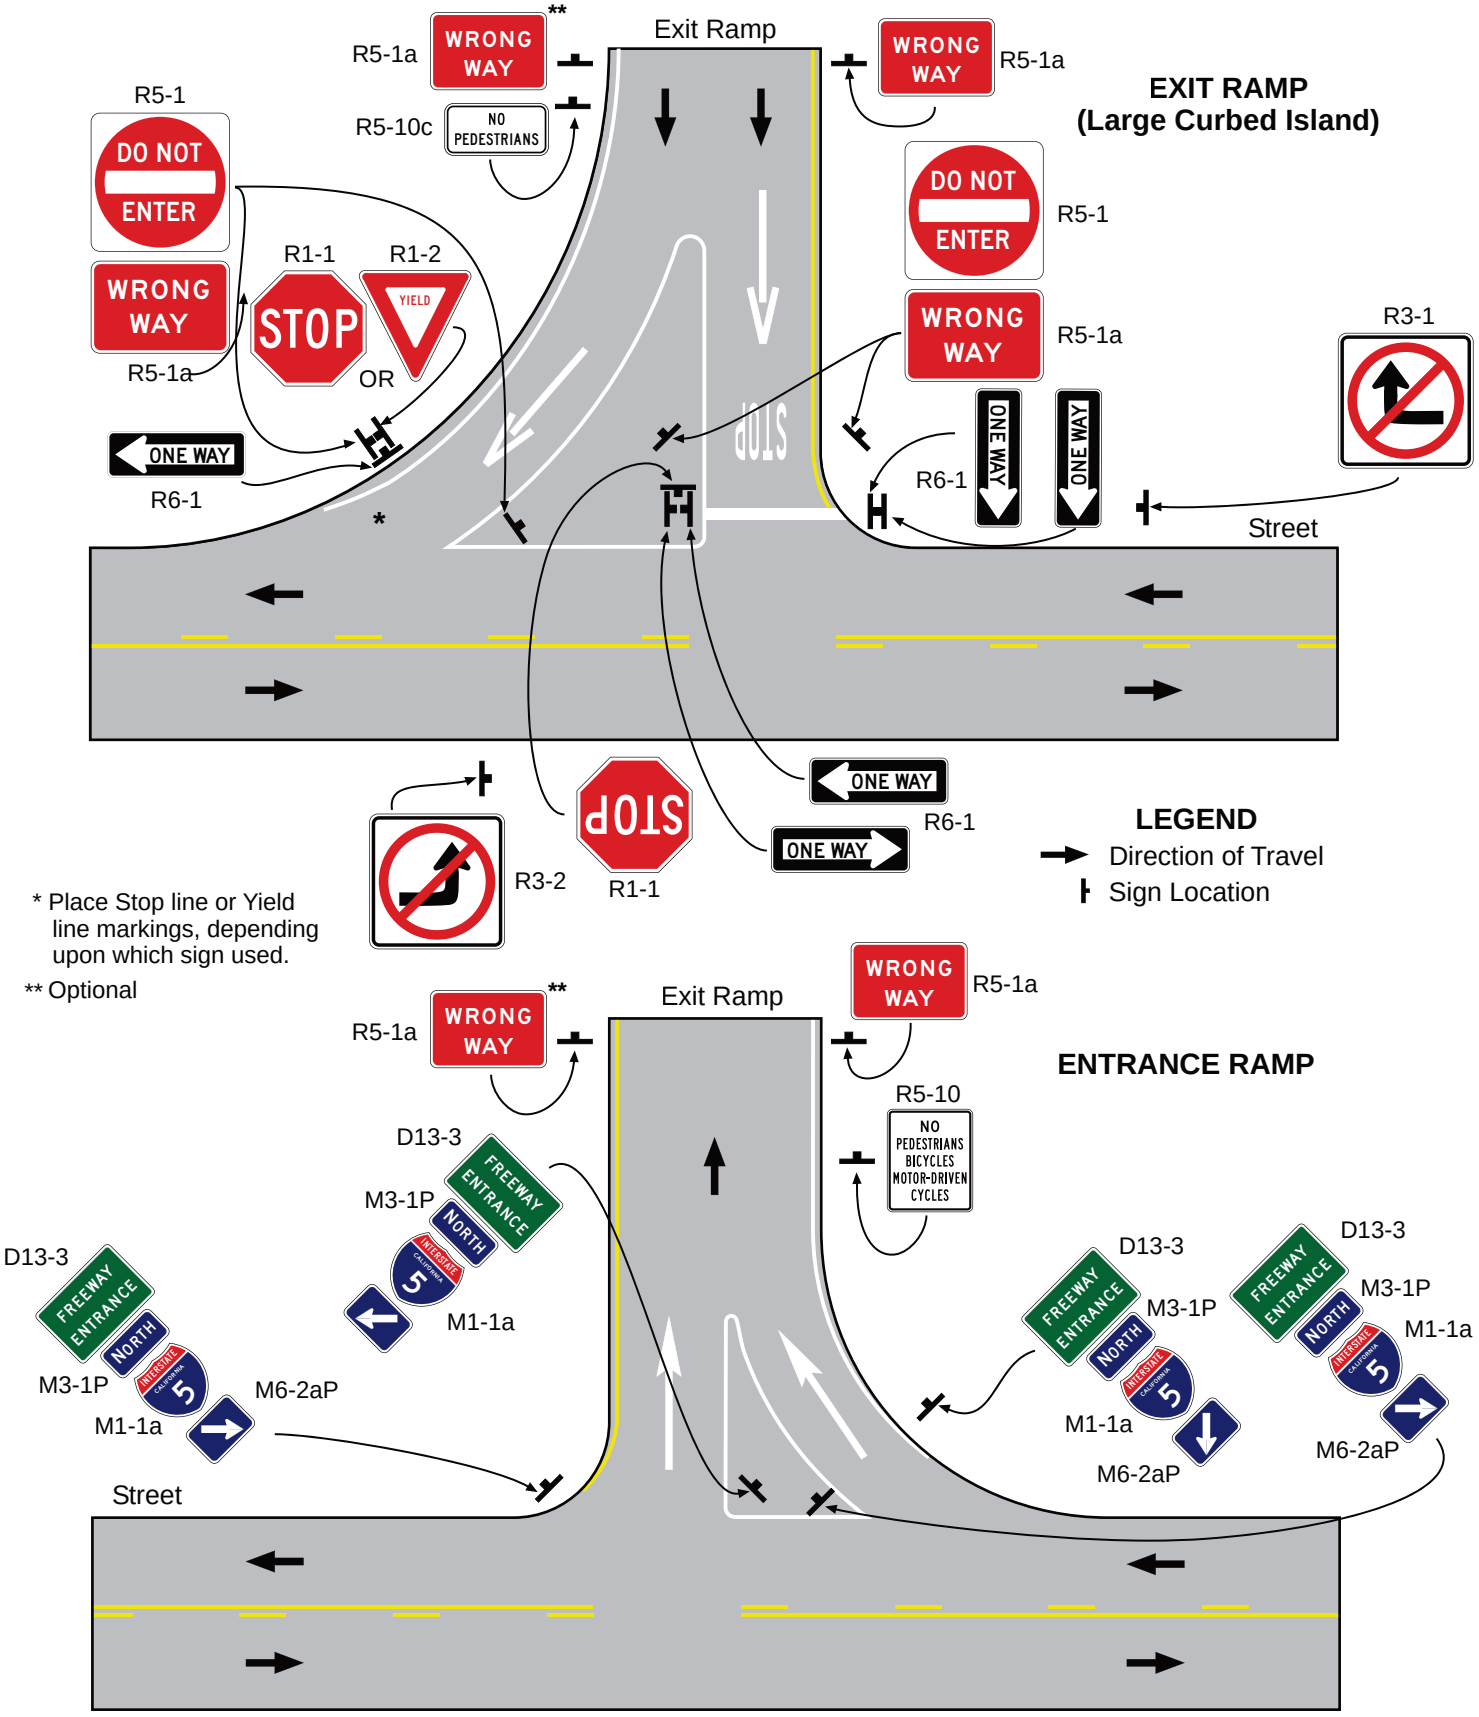


# Figure 2B-16. Example of Application of Regulatory Signing and Pavement Markings at an Entrance Ramp Terminal


**A – Design does not clearly indicate the direction of flow**

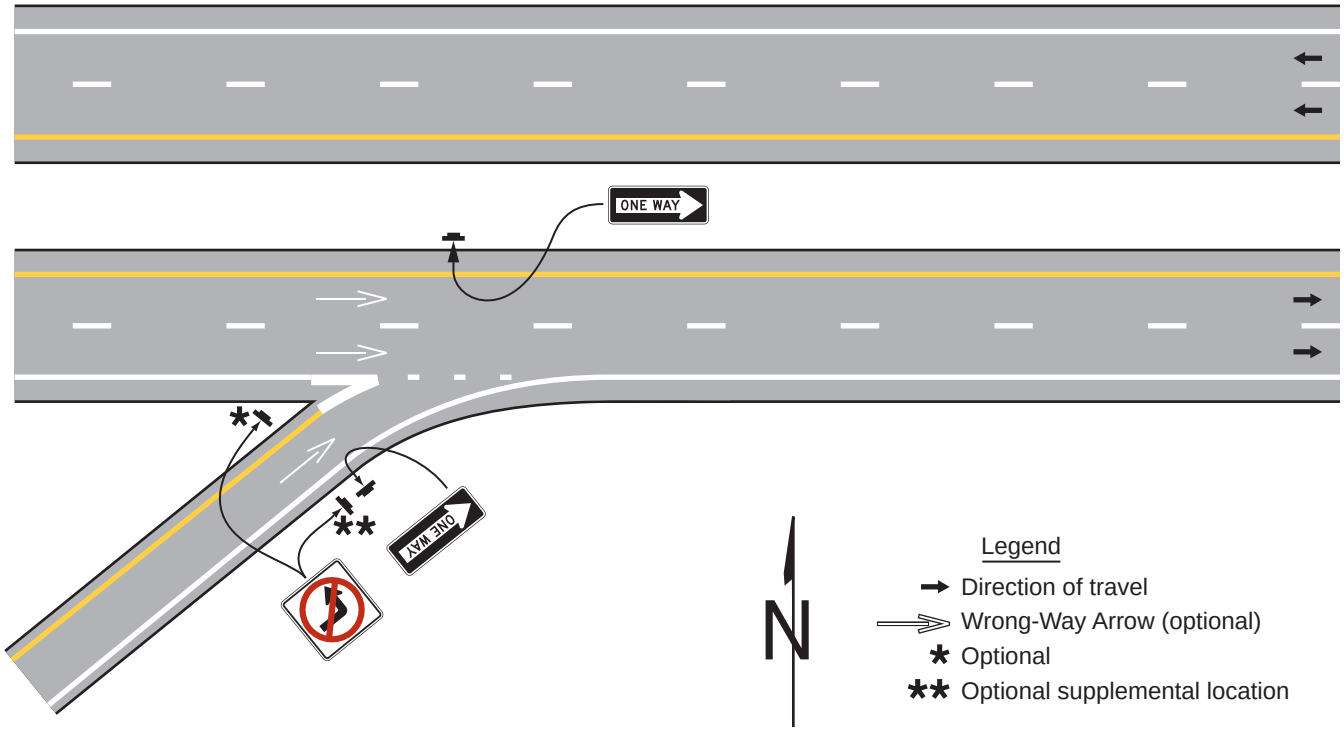



**B – Design clearly indicates the direction of flow**

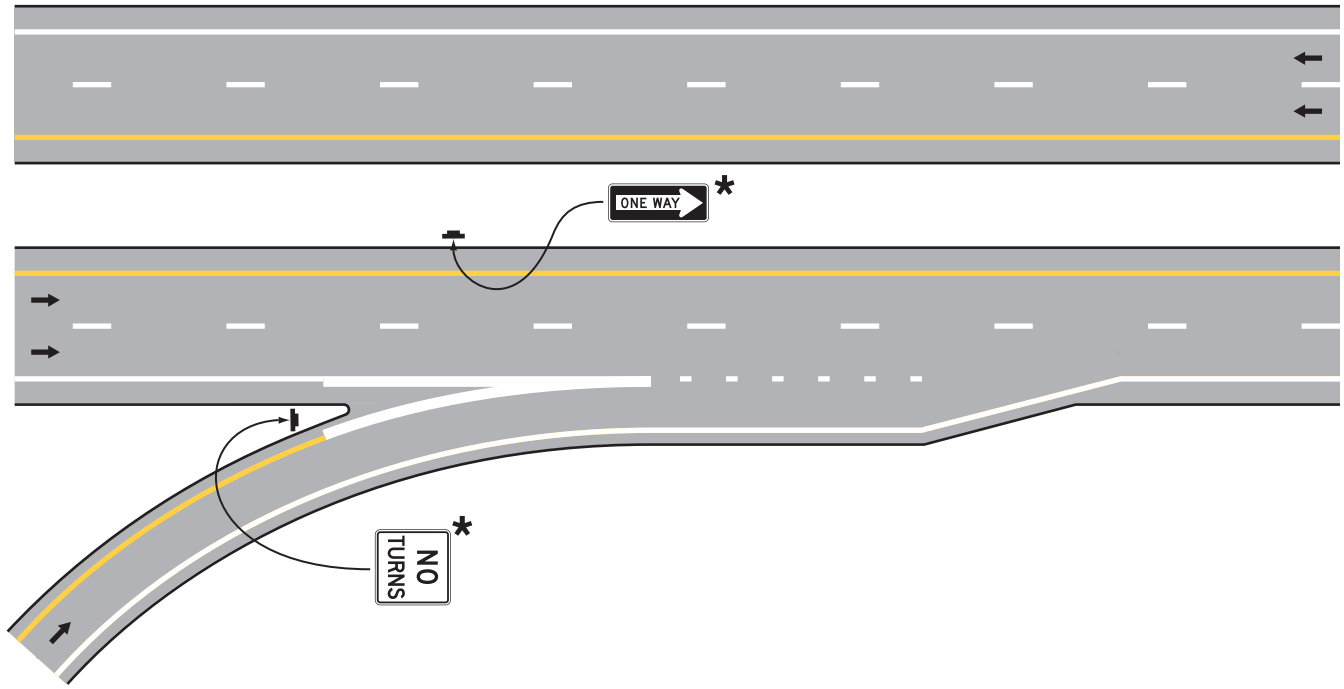

## Figure 2B-17. Examples of Low-Mounted WRONG WAY Signs with DO NOT ENTER Signs for Wrong-Way Traffic Control

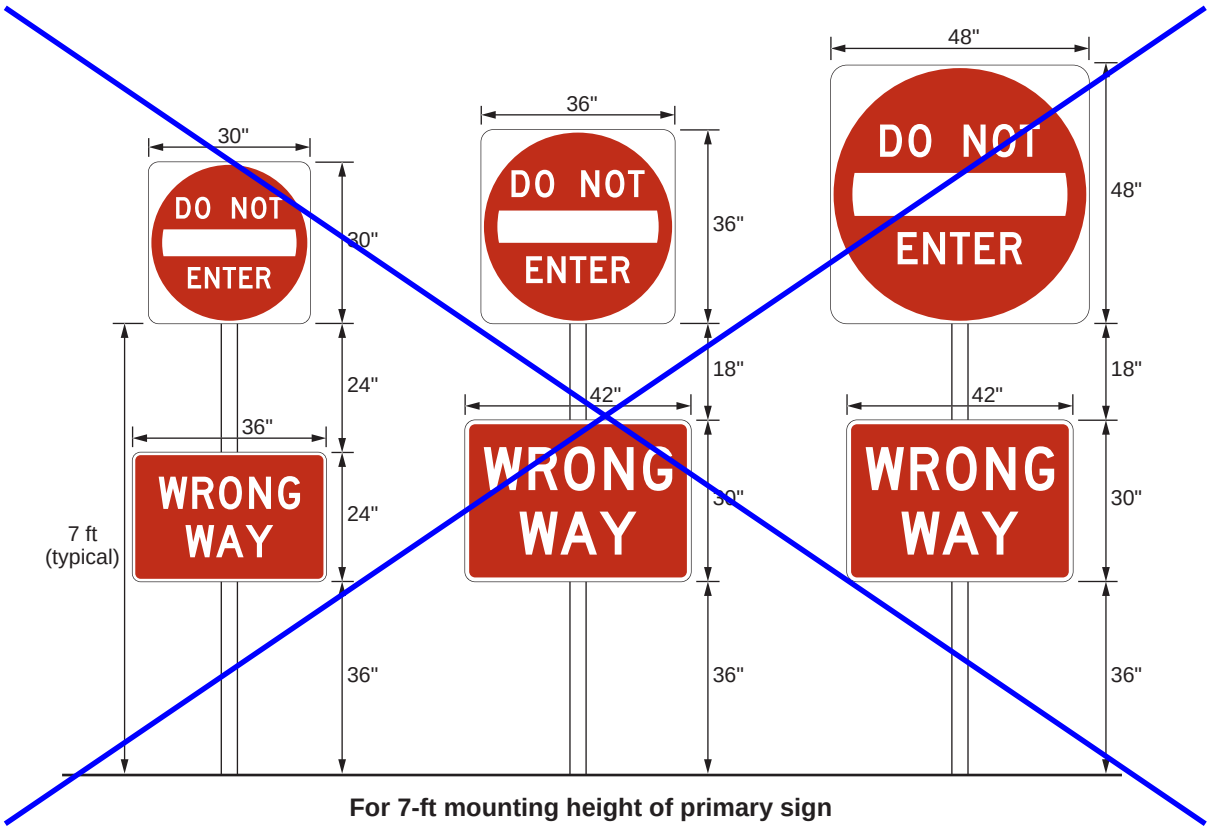



**For 7-ft mounting height of primary sign**

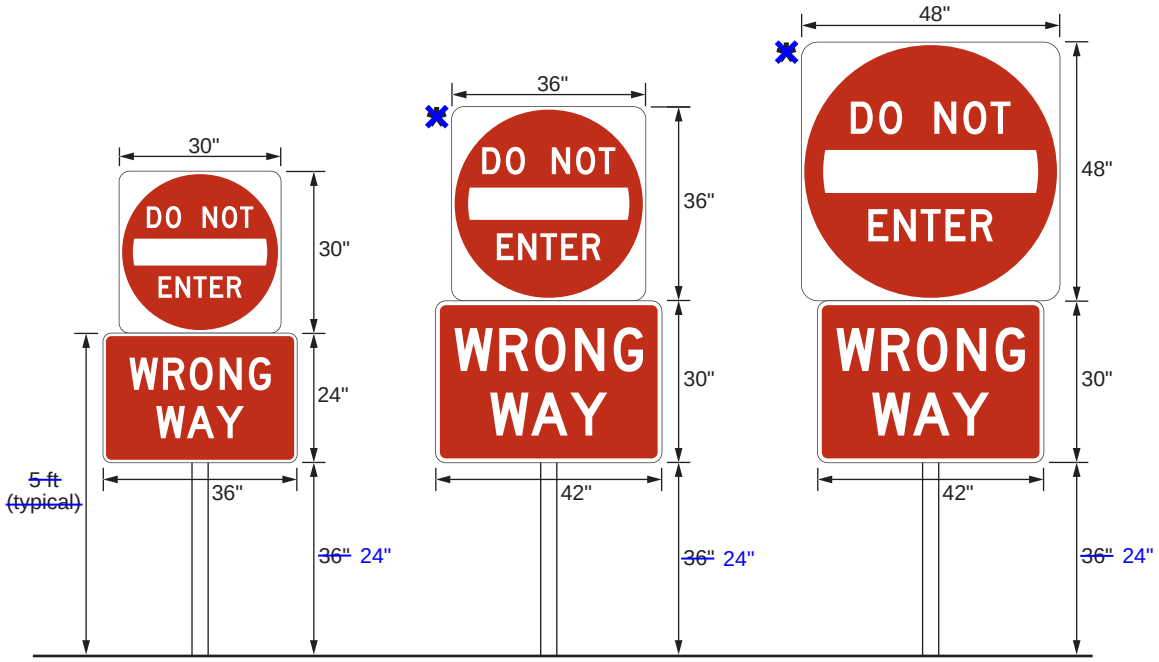


**For 5-ft mounting height of primary sign**


~~* Sign is higher than the 5-ft mounting height as the size of the 42" x 30" WRONG WAY sign is controlling.~~

## Figure 2B-18. Locations of ONE WAY Signs

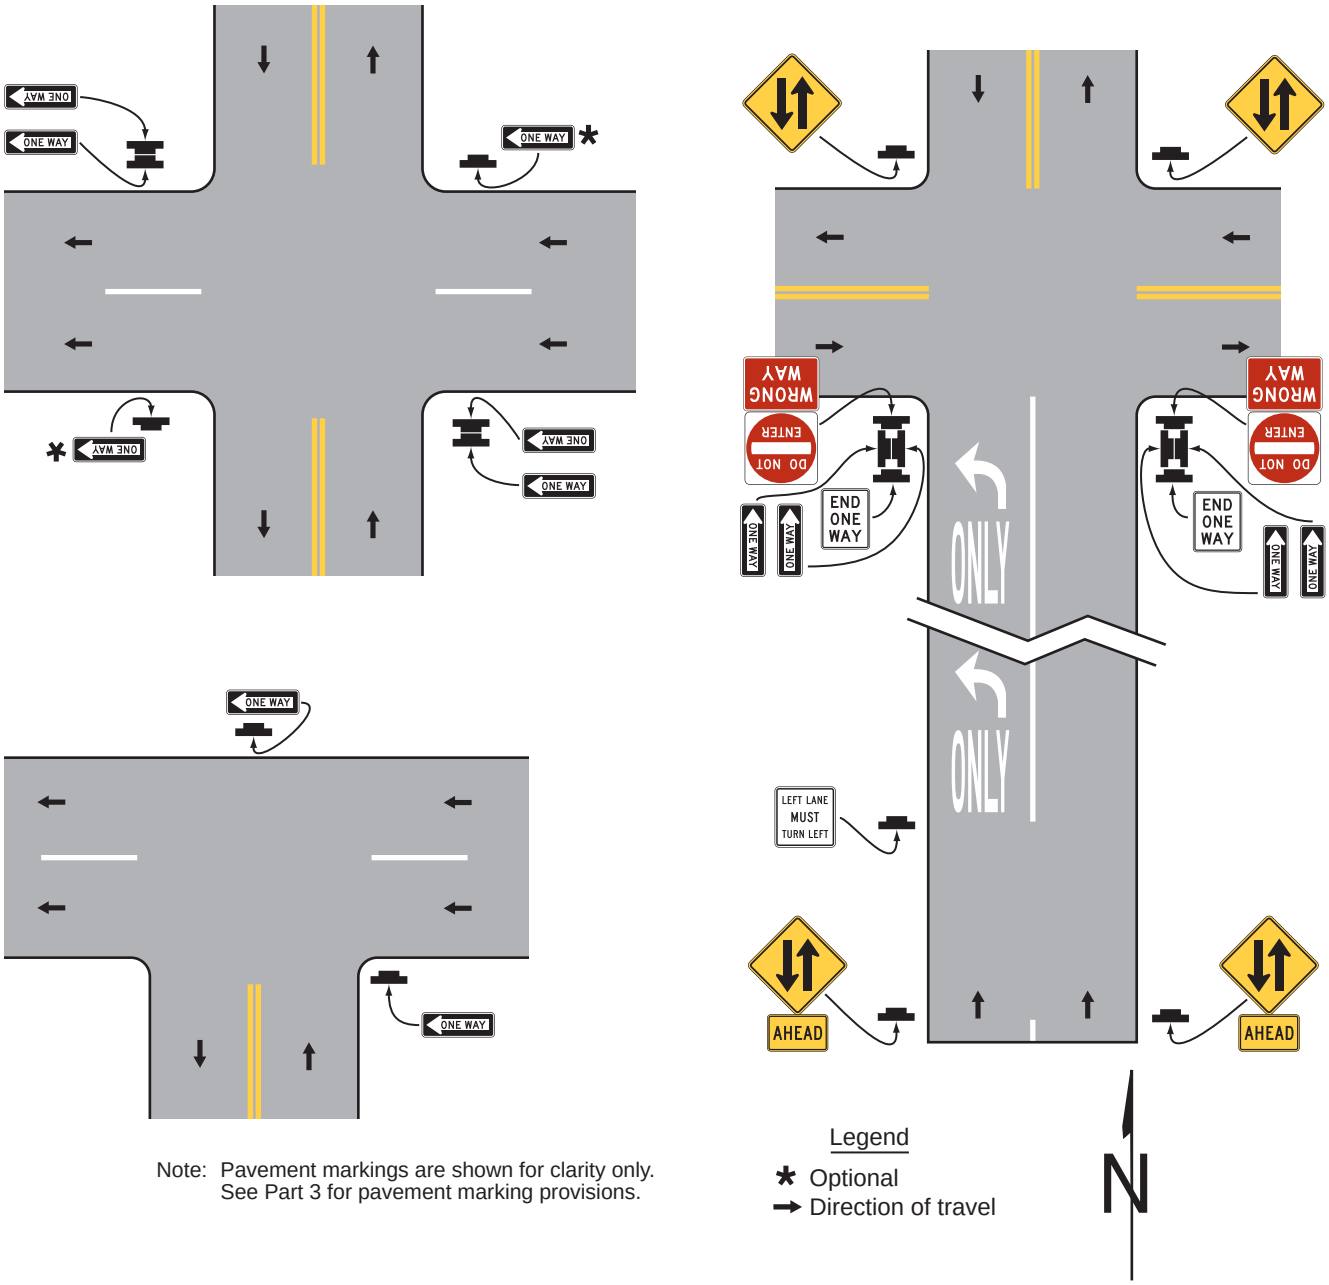



Note: Pavement markings are shown for clarity only. See Part 3 for pavement marking provisions.

# Figure 2B-19. ONE WAY Signing for Divided Highway Crossings that Function as Two Separate Intersections

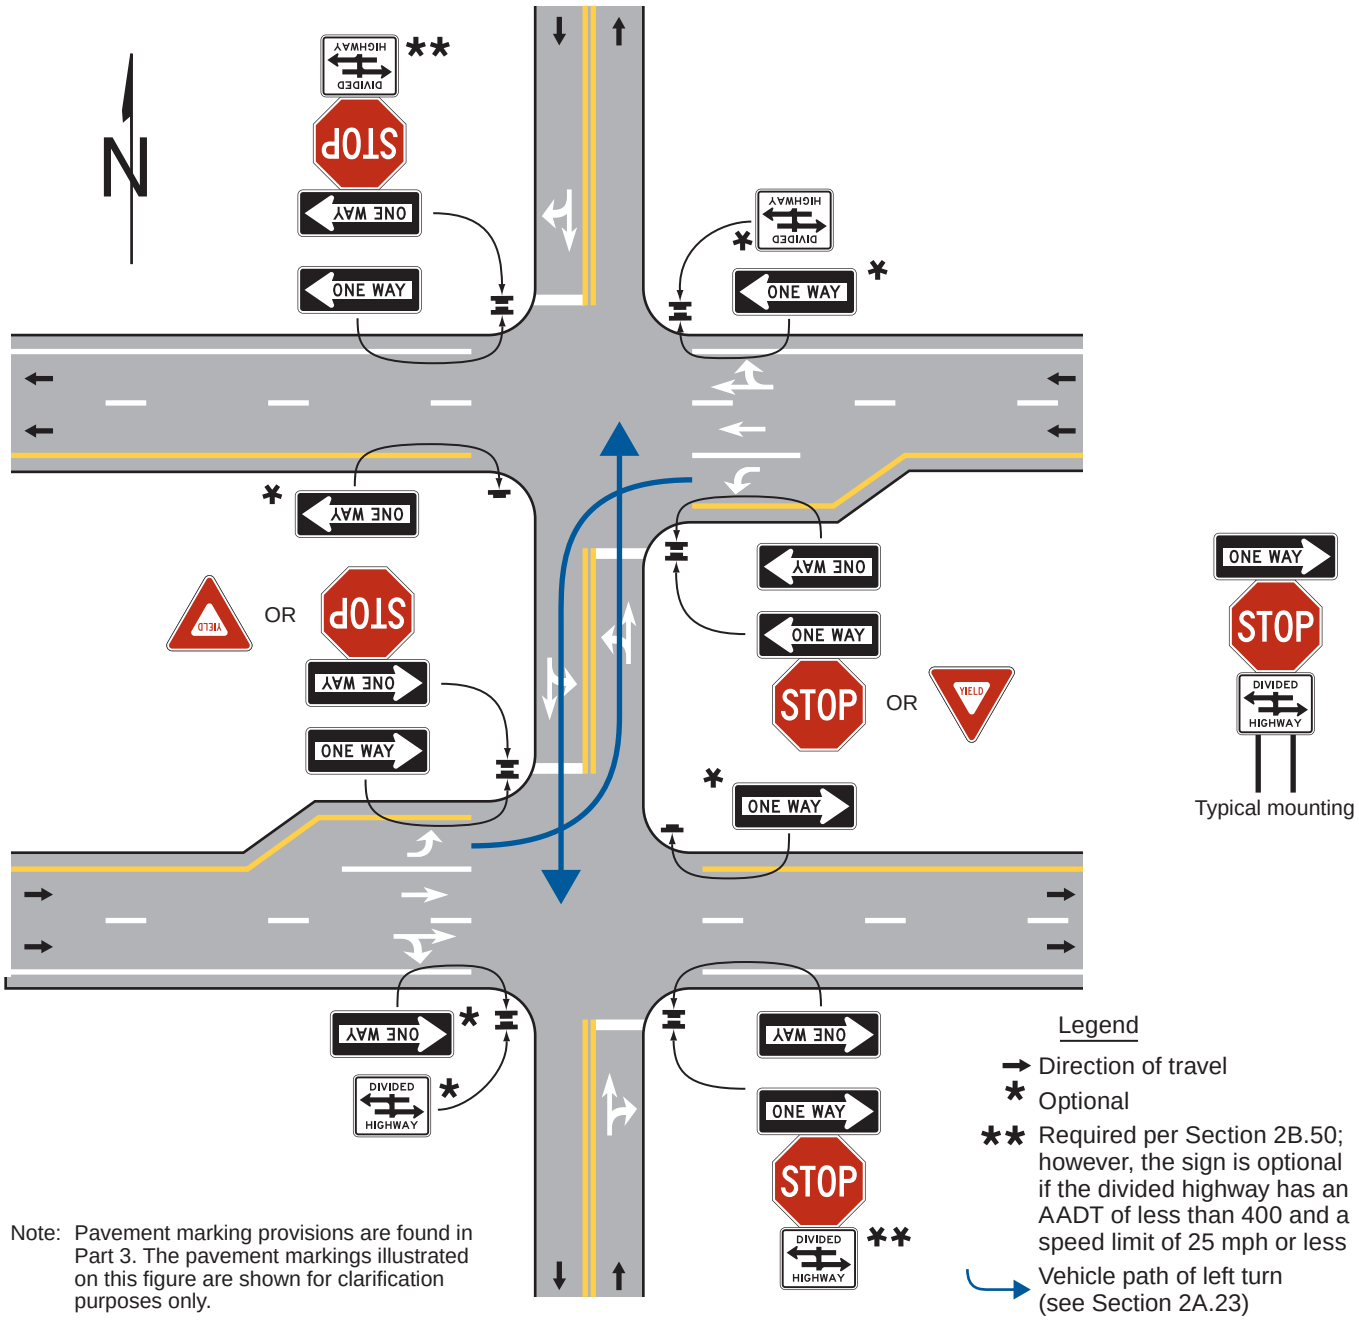


## Figure 2B-20. ONE WAY, DO NOT ENTER, and WRONG WAY Signing for Divided Highway Crossings that Function as a Single Intersection

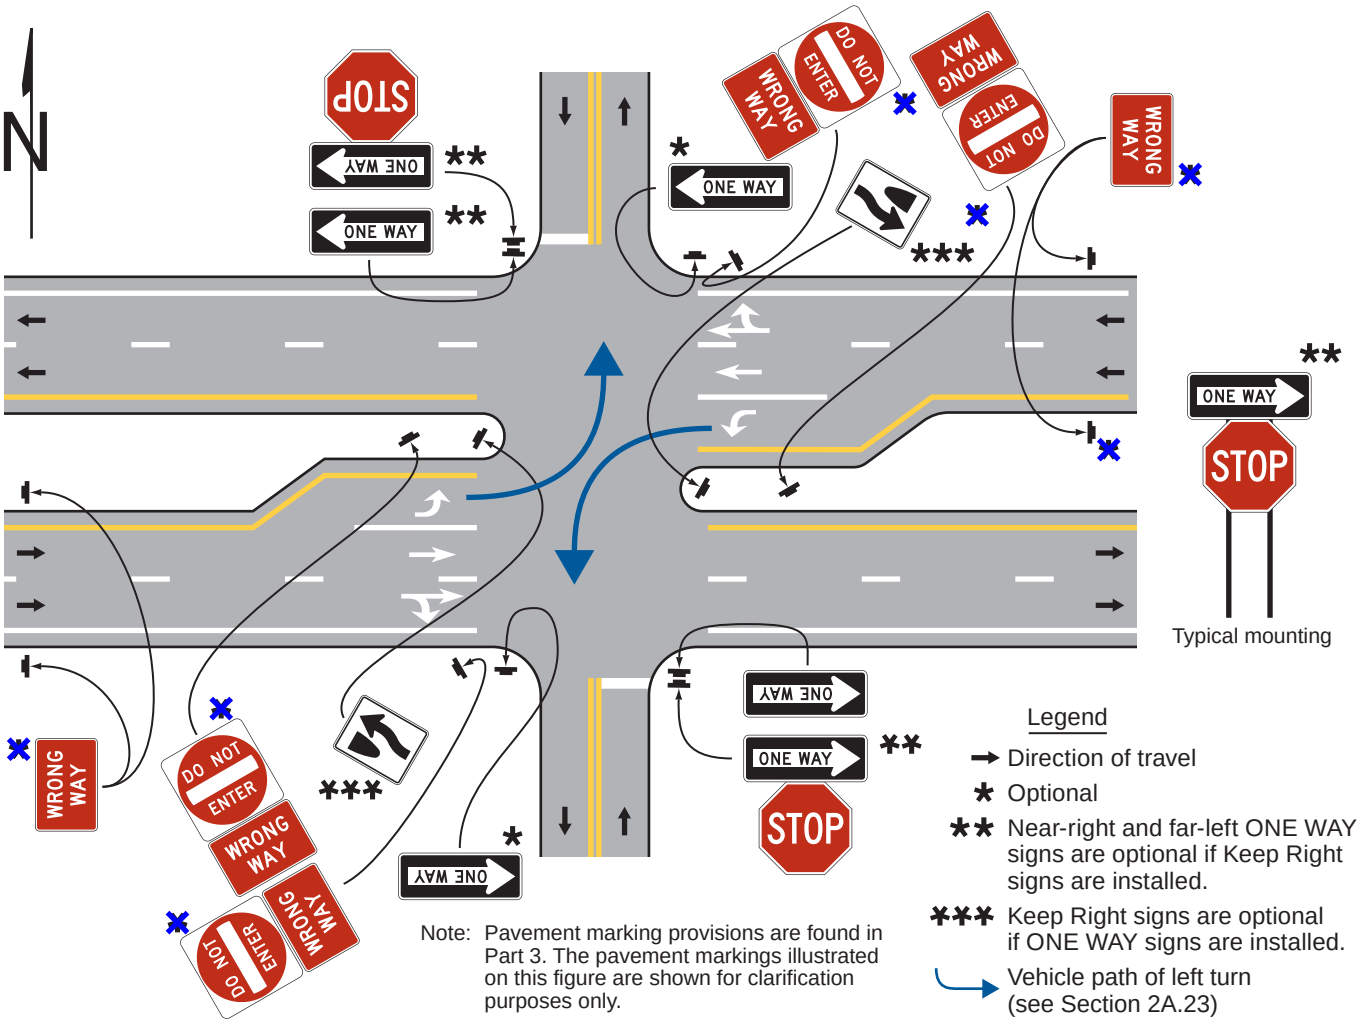


Note: Pavement marking provisions are found in Part 3. The pavement markings illustrated on this figure are shown for clarification purposes only.


## Figure 2B-21. Example of Regulatory and Warning Signs for a Mini-Roundabout

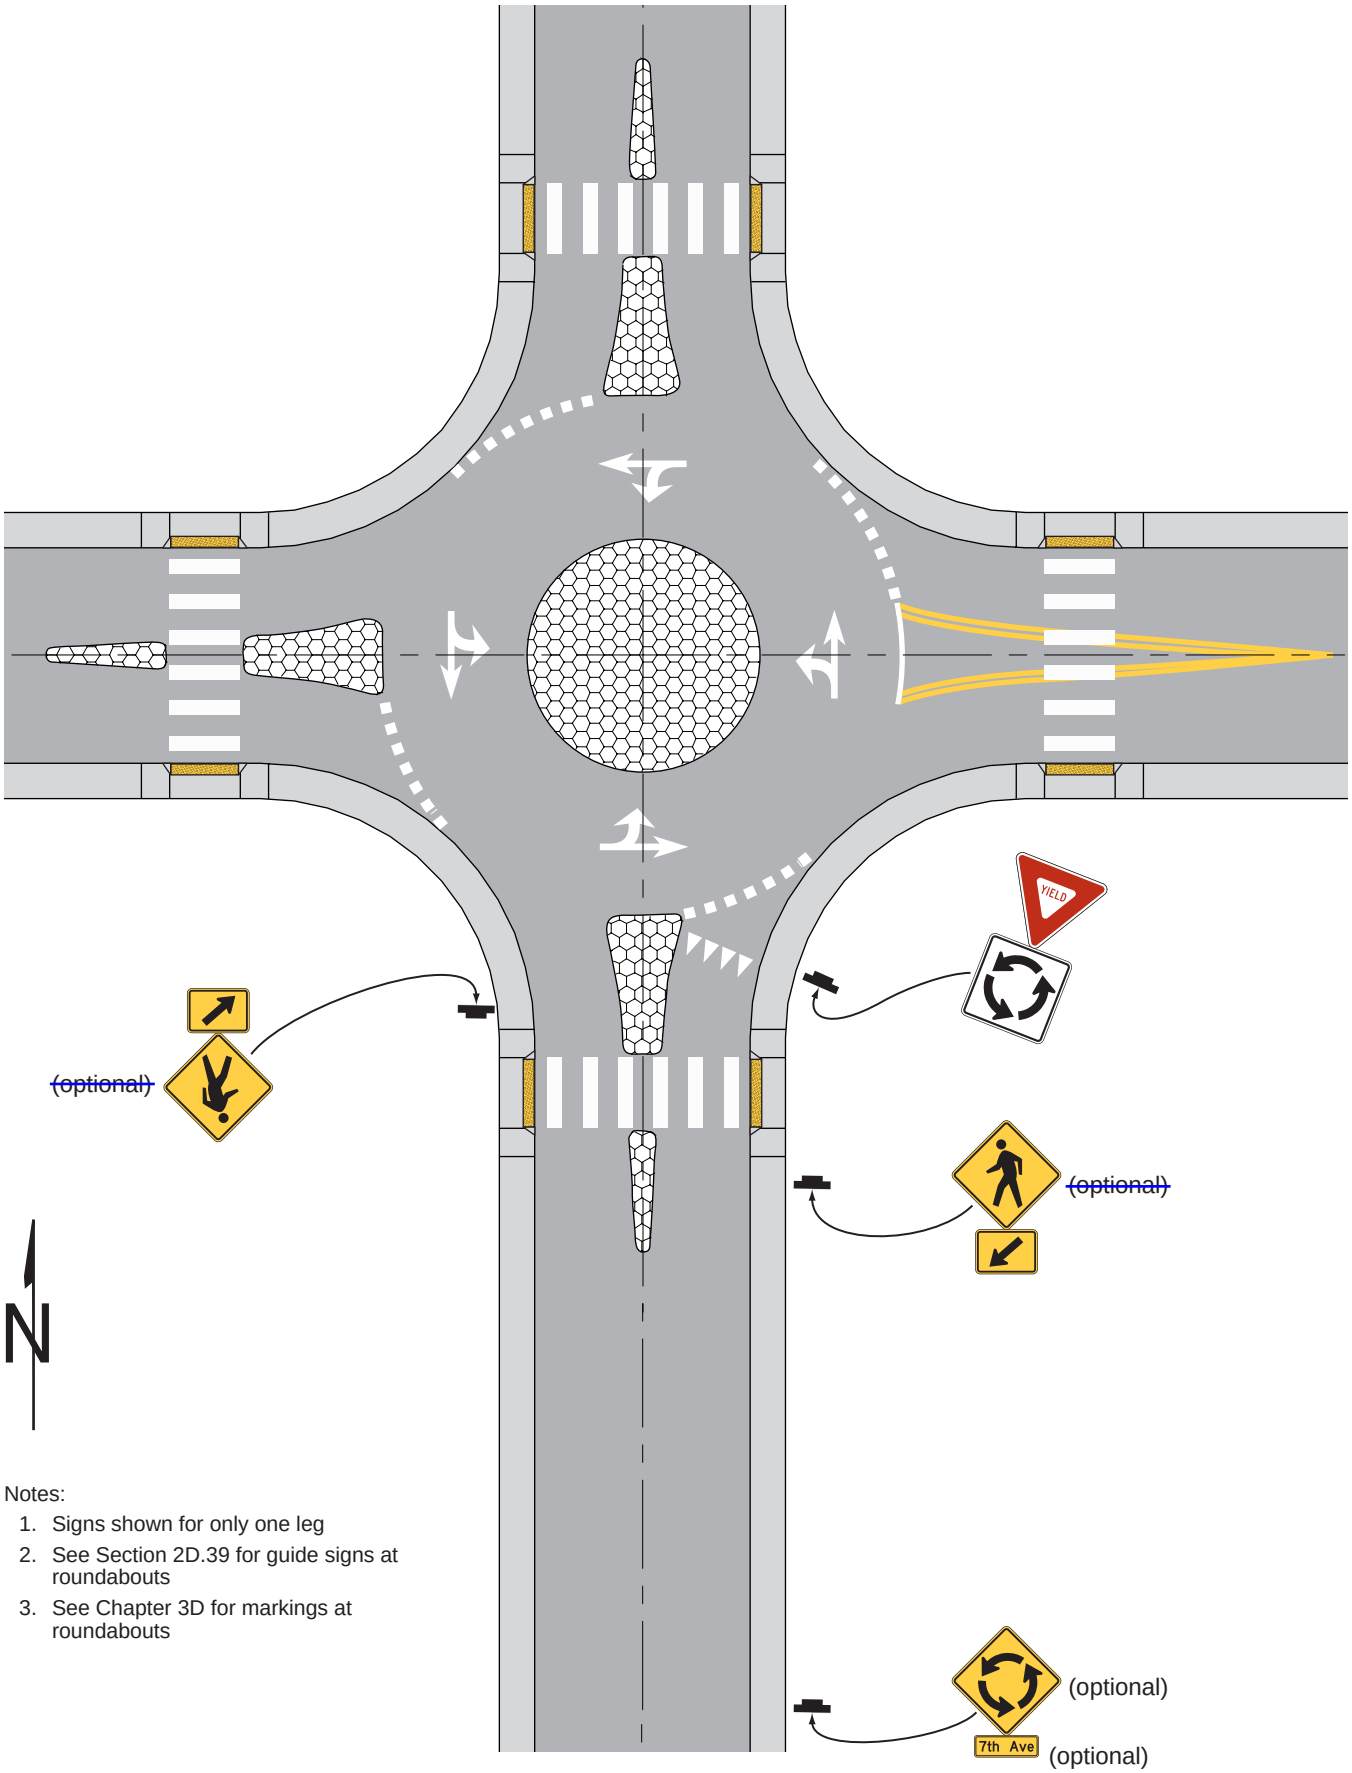


Notes:

1. Signs shown for only one leg
2. See Section 2D.39 for guide signs at roundabouts
3. See Chapter 3D for markings at roundabouts

## Figure 2B-22. Example of Regulatory and Warning Signs for a One-Lane Roundabout

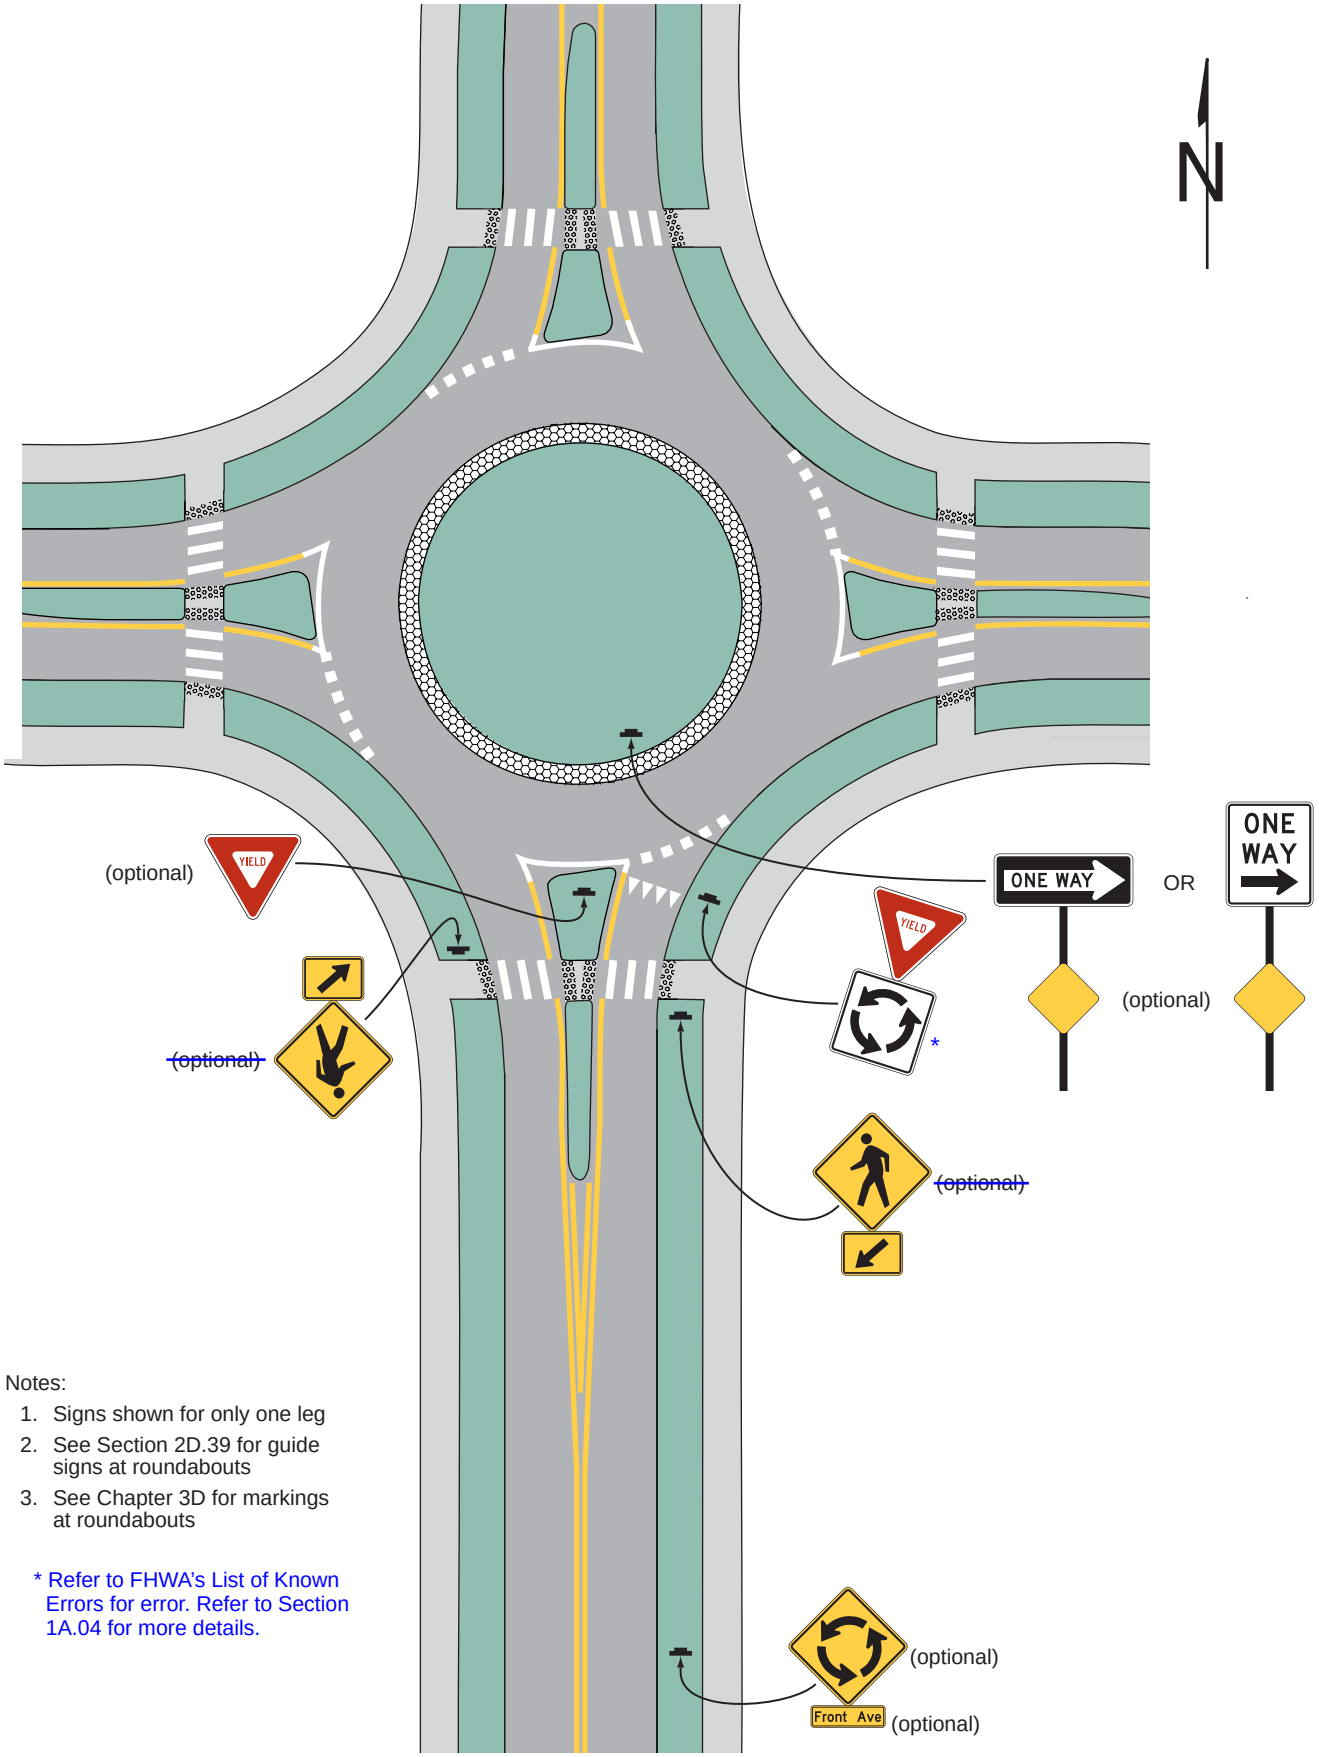



Notes:

1. Signs shown for only one leg
2. See Section 2D.39 for guide signs at roundabouts
3. See Chapter 3D for markings at roundabouts

* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2B-23. Example of Regulatory and Warning Signs for a Two-Lane Roundabout with Consecutive Double Lefts

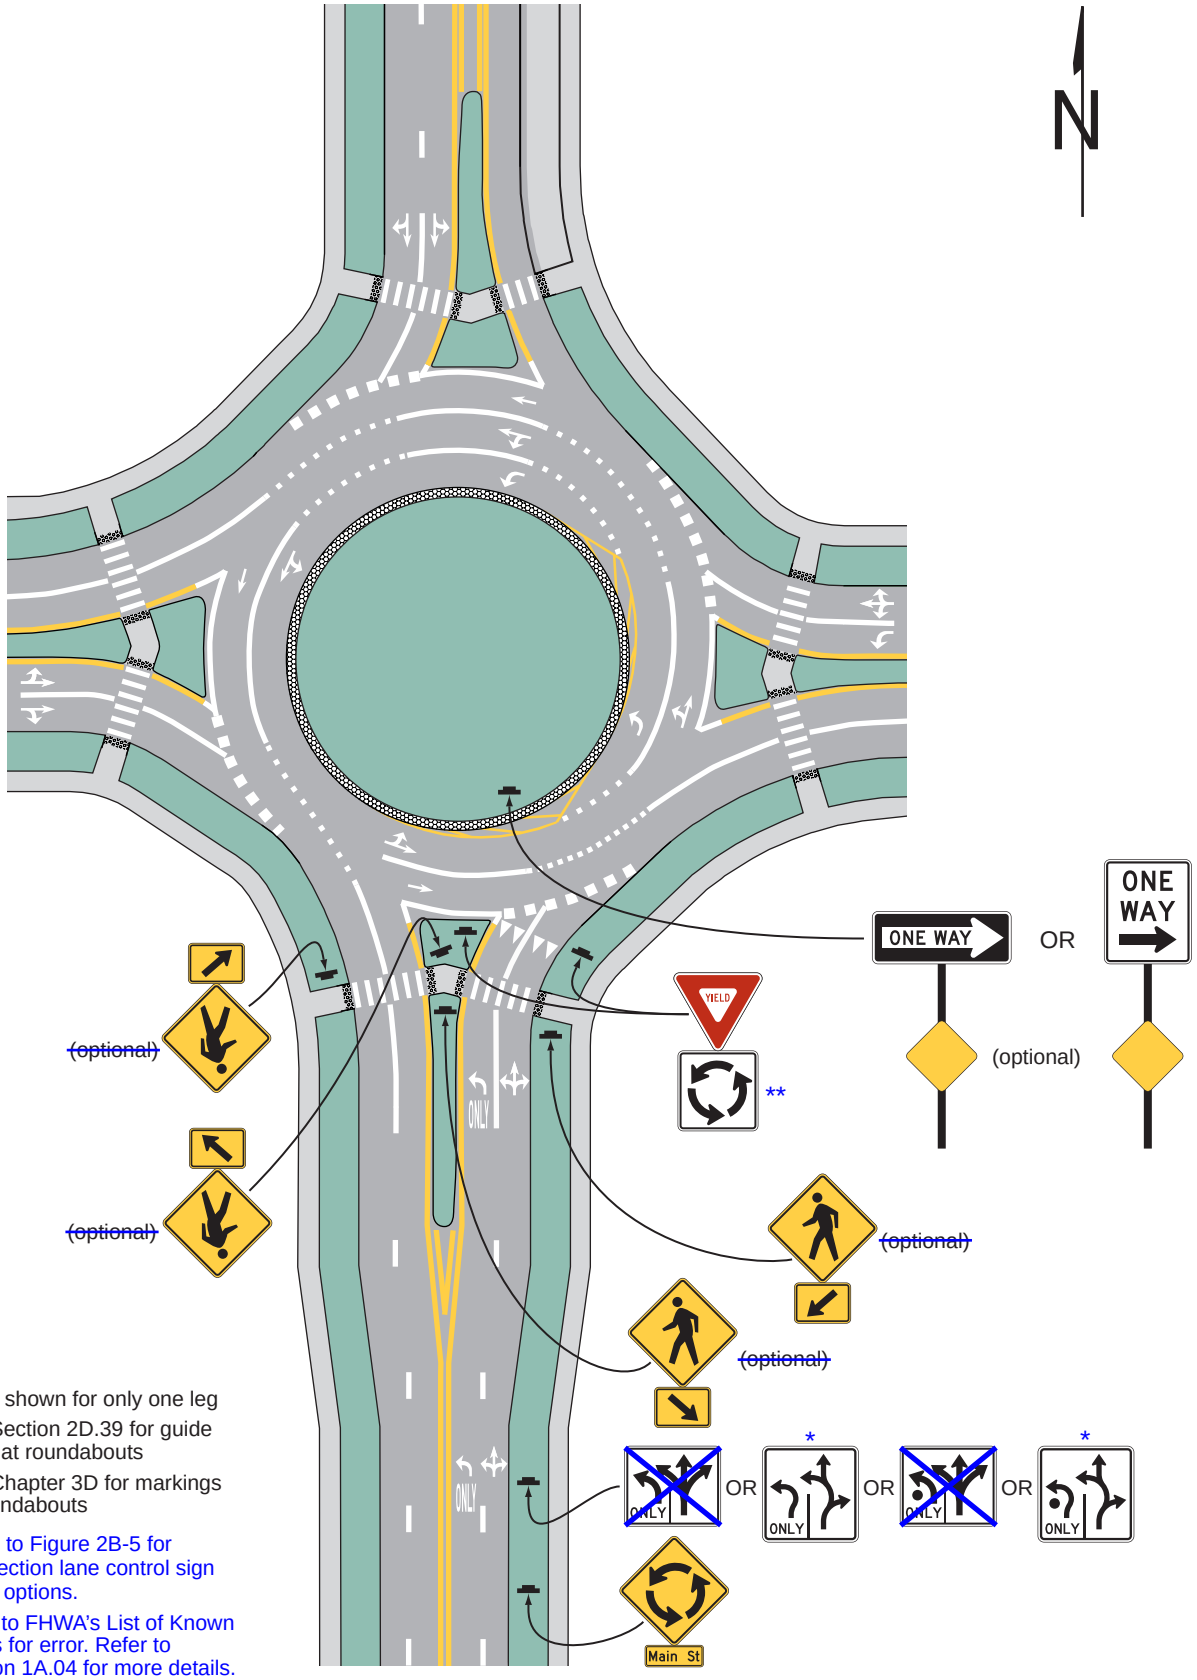



Notes:

1. Signs shown for only one leg
2. See Section 2D.39 for guide signs at roundabouts
3. See Chapter 3D for markings at roundabouts

* Refer to Figure 2B-5 for intersection lane control sign arrow options.

** Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2B-24. Example of Regulatory and Warning Signs for a Neighborhood Traffic Circle

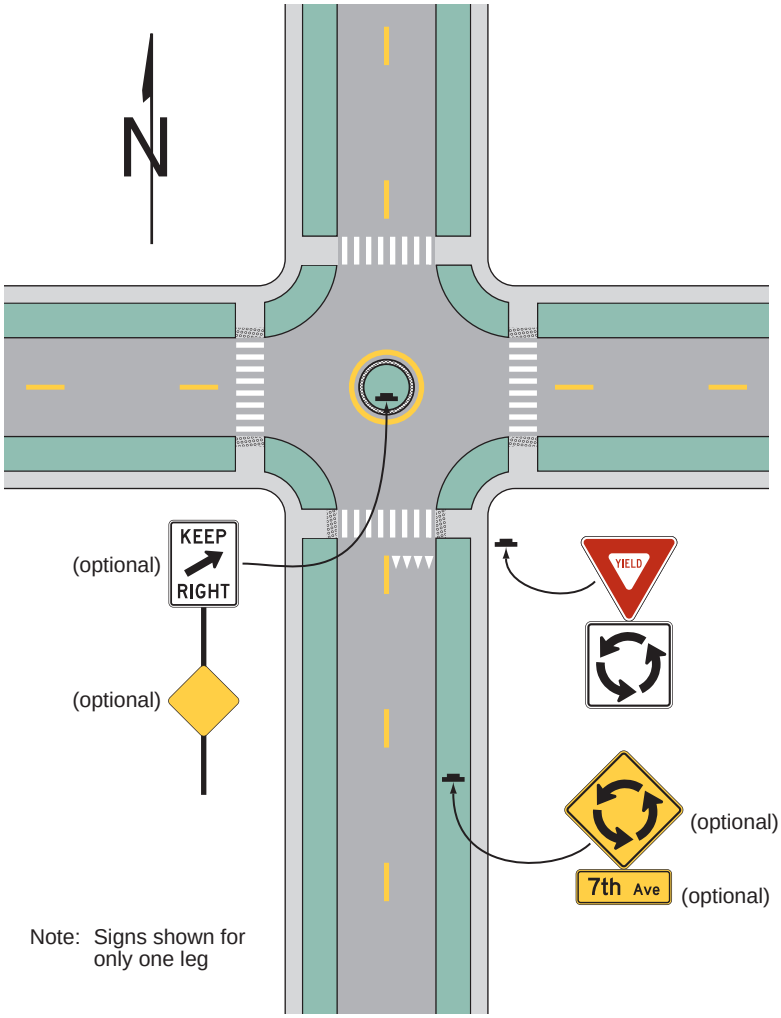


# Figure 2B-25. Parking, Standing, and Stopping Signs and Plaques (R7 and R8 Series) (Sheet 1 of 2)

## A – Prohibited parking, standing, and stopping signs and plaques




R7-1 R7-2 R7-2a R7-3 R7-4 R7-4a R7-6 R7-107

R7-107a R7-107b R7-201P R7-202P R7-201aP R7-203 R8-1 R8-2

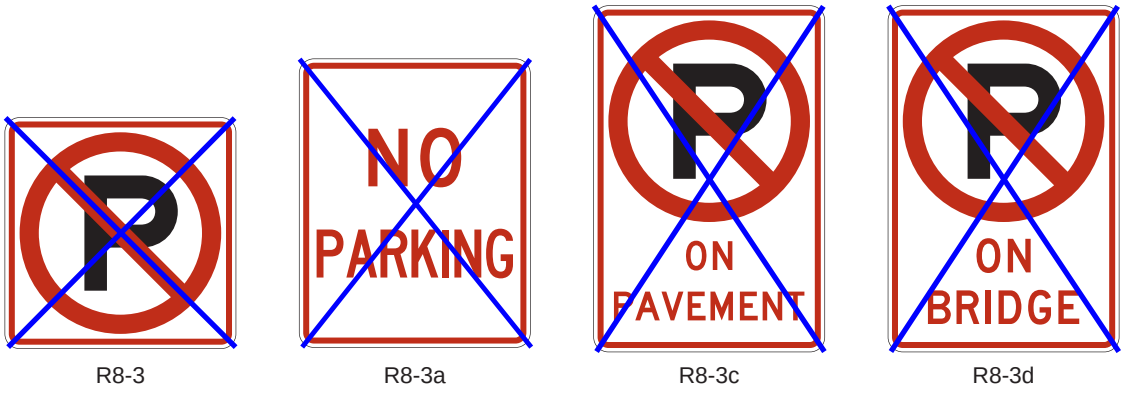


R8-3 R8-3a R8-3c R8-3d




R8-3e R8-3f R8-5 R8-6

## B – Permissive parking signs and plaques




R7-5 R7-10 R7-20 R7-21 R7-21aP R7-22 R7-108

# Figure 2B-25. Parking, Standing, and Stopping Signs and Plaques (R7 and R8 Series) (Sheet 2 of 2)

### C – Combination parking signs




R7-200




R7-200a

### D – Accessible parking signs and plaques




R7-8




R7-8aP

### E – Electric vehicle parking and charging signs and plaques




R7-111




R7-111a




R7-112




R7-112a




R7-112b




R7-113




R7-113aP




R7-113bP




R7-114





R7-114a




R7-114b

## *Figure 2B-25(CA). California Parking, Standing, and Stopping Signs and Plaques (Sheet 1 of 3)*

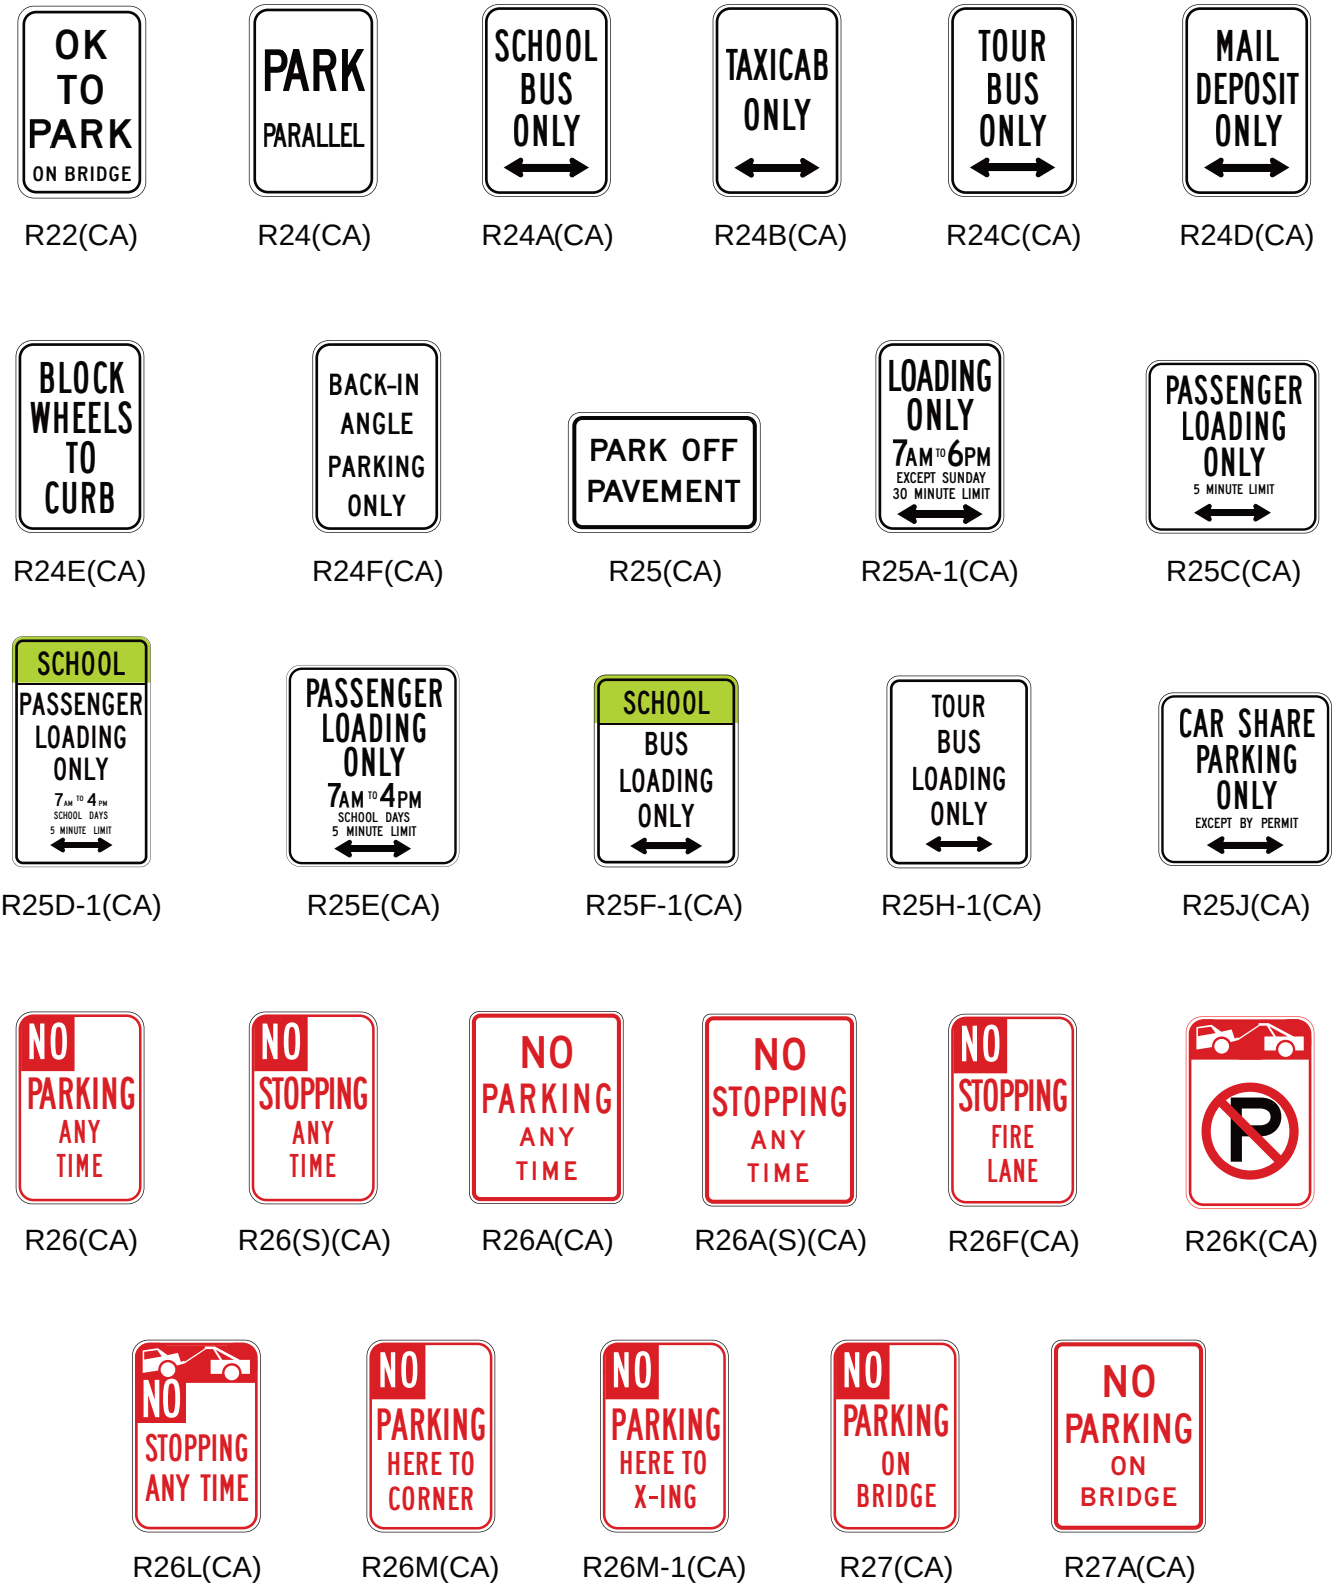

## *Figure 2B-25(CA). California Parking, Standing, and Stopping Signs and Plaques (Sheet 2 of 3)*



R28(CA)



R28(S)(CA)



R28A(CA)



R28A(S)(CA)



R28C(CA)



R28D(CA)



R28D(S)(CA)



R28E(CA)



R28F(CA)



R29(CA)



R30(CA)



R30A(CA)



R30B(CA)



R30C(CA)



R30D(CA)


R30E(CA)



R30F(CA)



R31(CA)



R31(S)(CA)



R32(CA)



R32B(CA)



R32C(CA)



R32D(CA)



R32E(CA)



R32F(CA)

## *Figure 2B-25(CA). California Parking, Standing, and Stopping Signs and Plaques (Sheet 3 of 3)*




R37(CA)




R38(CA)




R38(S)(CA)




R38A(CA)




R39(CA)




R39-1(CA)




R39-2(CA)




R39-3(CA)




R74(CA)




R75(CA)




R76(CA)




R76-1(CA)




R77(CA)




R78(CA)




R79(CA)




R80-1(CA)




R99(CA)




R99B(CA)




R99C(CA)




R7-8bP(CA)




R100A(CA)




R100B(CA)




R107(CA)




R108(CA)




R109(CA)




R112(CA)




R113(CA)




R113A(CA)




R114(CA)




R114A(CA)




SR20-1(CA)

SR26(CA)




SR49(CA)




SR62(CA)




SR63(CA)




SR63A(CA)

## Figure 2B-26. Emergency Restriction Signs




R8-4 R8-7

## Figure 2B-27. Pedestrian Signs and Plaques (Sheet 1 of 2)

* Refer to FHWA's List of Known Errors for errors in sign. Refer to Section 1A.04 for more details.



R9-1



R9-2


R9-3



R9-3a



R9-3bP


R9-4



R9-4a



R10-1



R10-2




R10-3




R10-3a


*




R10-3b




R10-3c




R10-3d




R10-3e



R10-3f



R10-3g



R10-3h


## Figure 2B-27. Pedestrian Signs and Plaques (Sheet 2 of 2)




R10-3i R10-4 R10-4a R10-25 R10-32P

---

## *Figure 2B-27(CA). California Pedestrian Signs and Plaques*

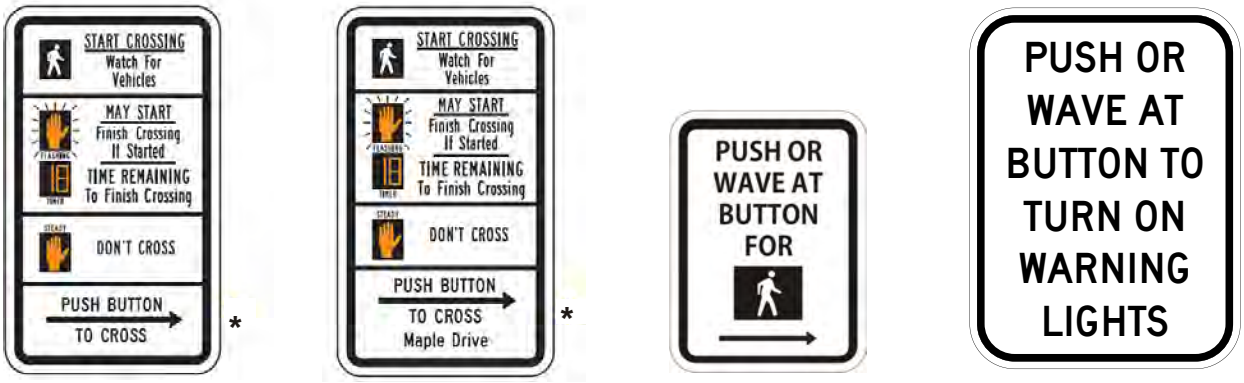


R10-3e(CA)* R10-3i(CA)* R10-3j(CA) R10-3k(CA)

* The bottom portion of the panel shall not be used where the pedestrian signal timing is non-actuated and the pedestrian push button is used solely to activate accessible pedestrian signals.

**Figure 2B-28. Traffic Signal Signs and Plaques** (Sheet 1 of 2)




R10-5



R10-6



R10-6a




R10-7



R10-8



R10-10



R10-10a



R10-11



R10-11a



R10-11b




R10-11c



R10-11d



R10-12




R10-12a



R10-12b



R10-13



R10-14




R10-14a



R10-14b


**Figure 2B-28. Traffic Signal Signs and Plaques** (Sheet 2 of 2)

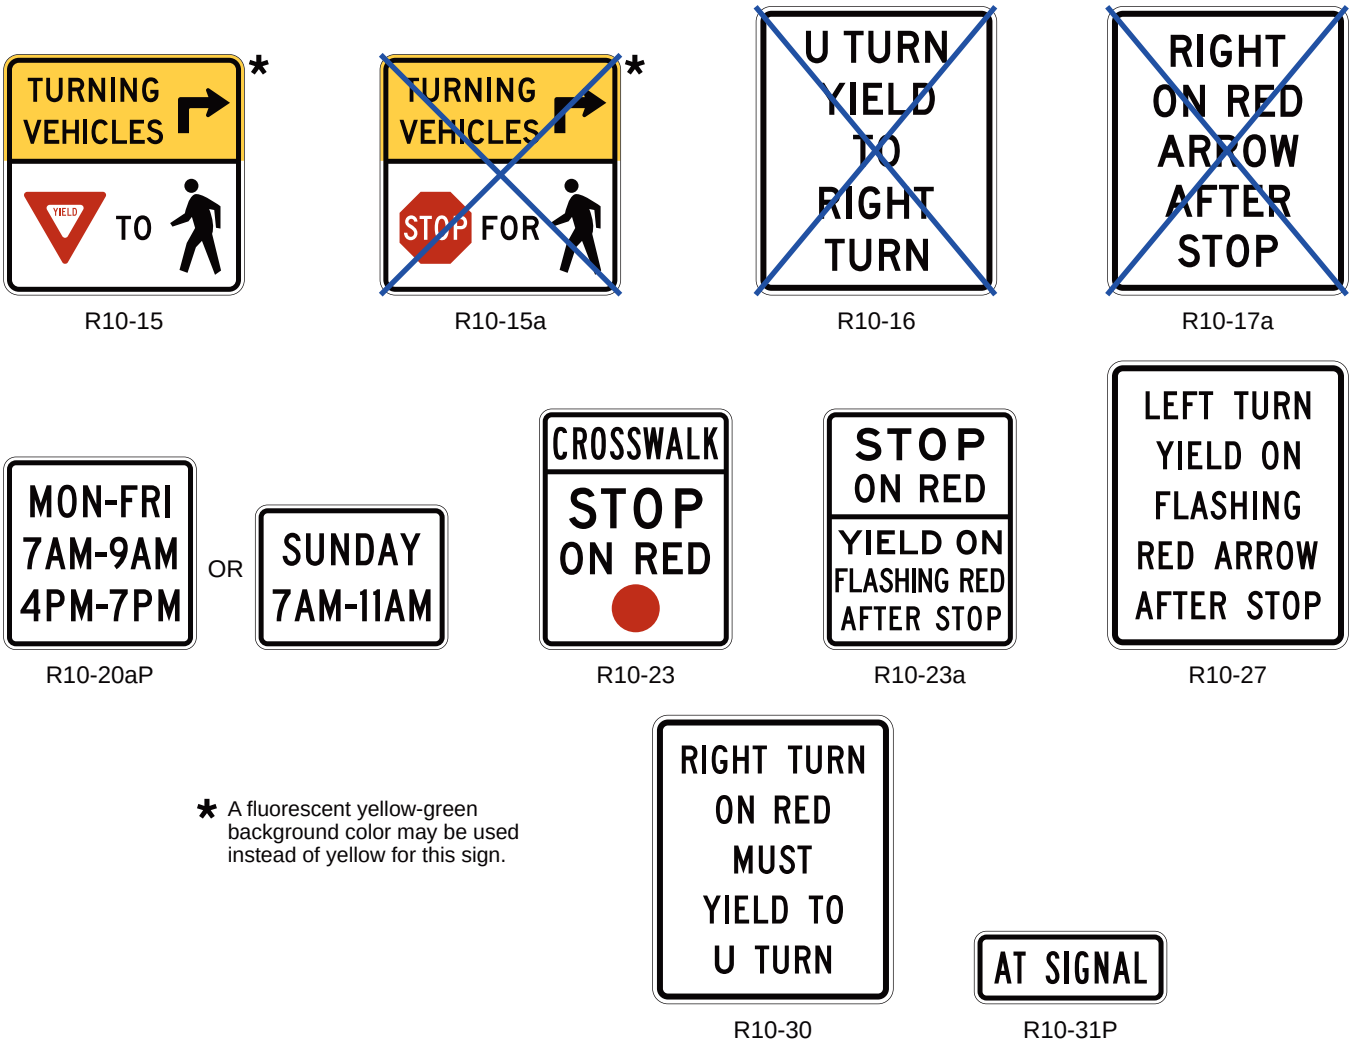


## *Figure 2B-28(CA). California Traffic Signal Signs and Plaques*



## Figure 2B-29. Ramp Metering Signs

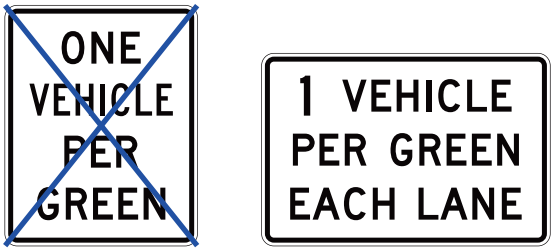


R10-28 R10-29


---

## *Figure 2B-29(CA). California Ramp Metering Signs*





R89A(CA)


## Figure 2B-30. Road Closed and Weight Limit Signs

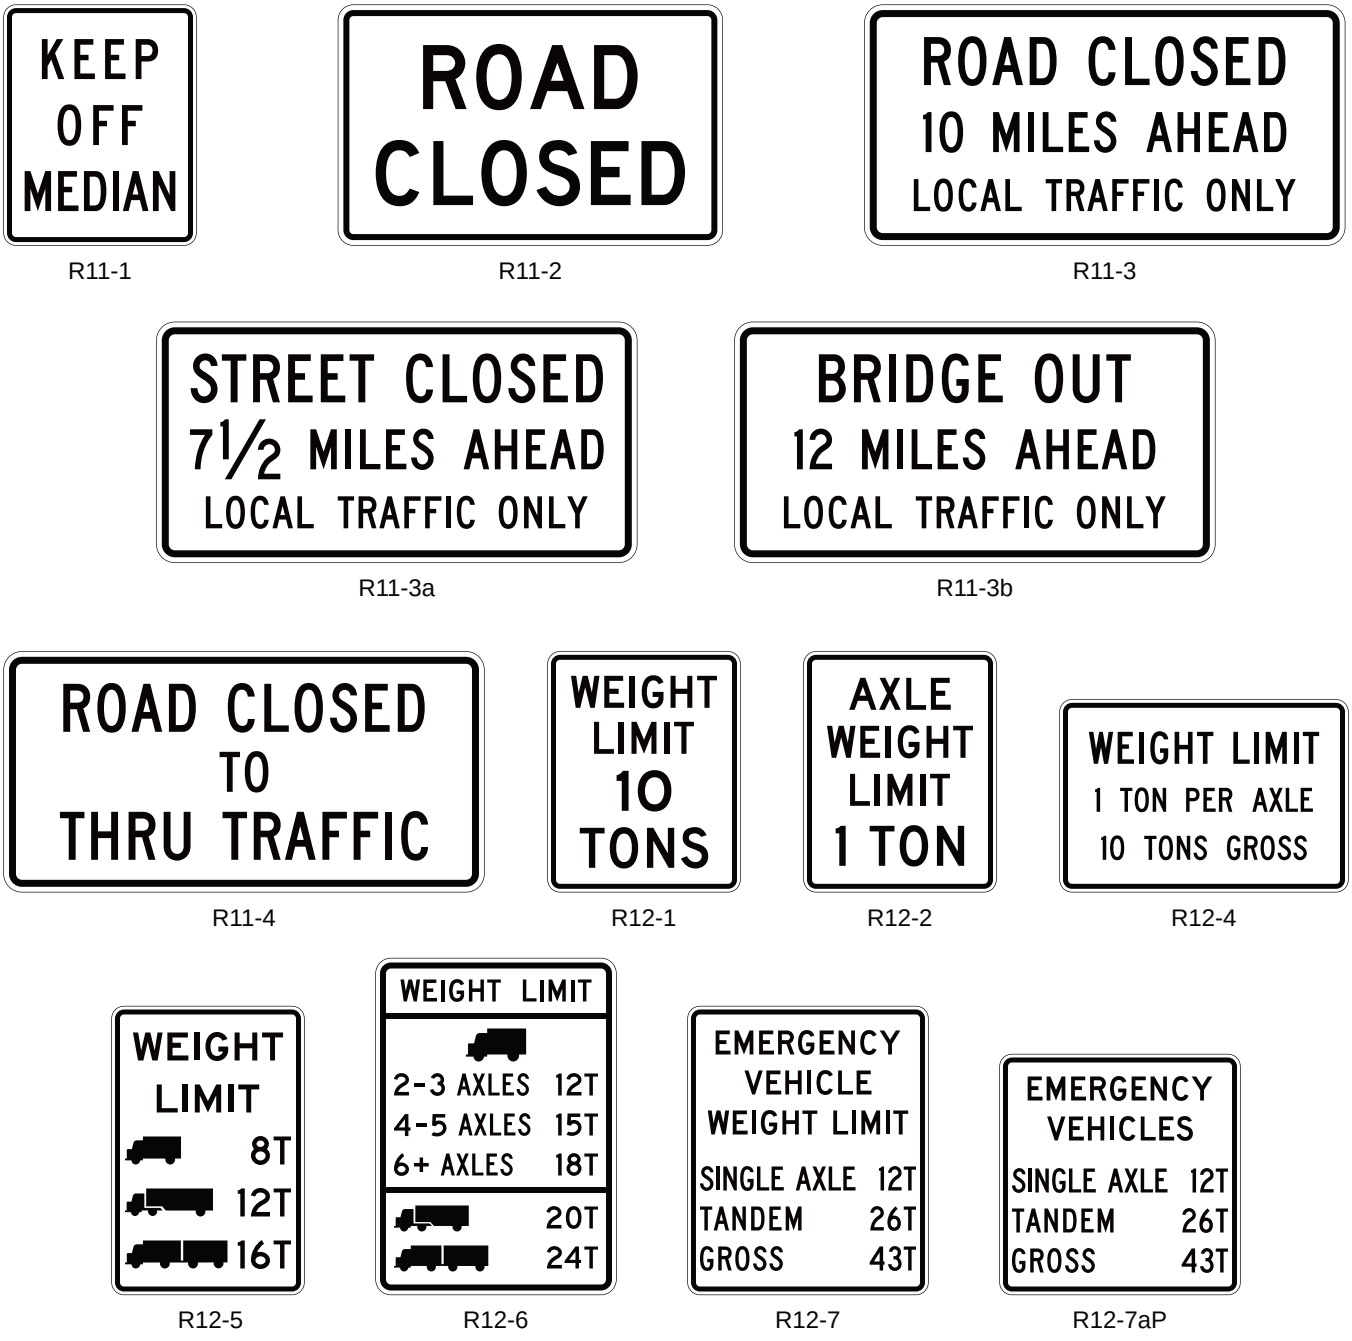


## *Figure 2B-30(CA). California Road Closed and Weight Limit Signs*

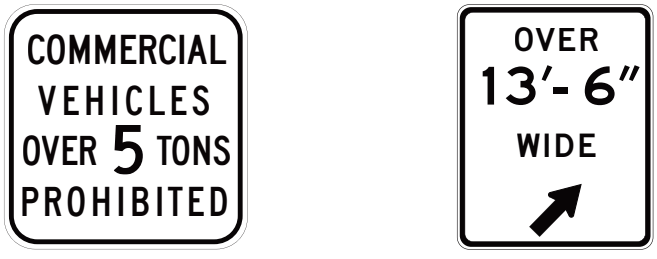

## Figure 2B-31. Truck Signs

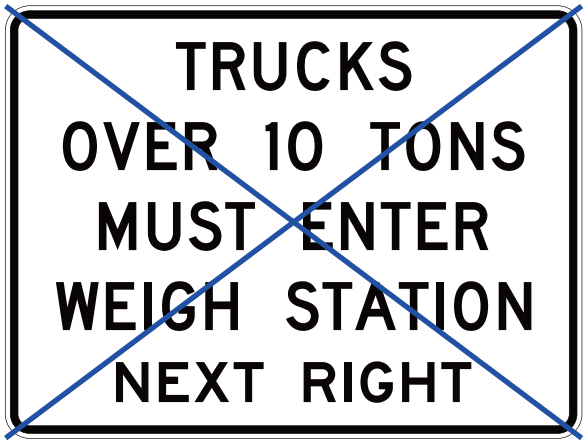


R13-1





R14-1




R14-2




R14-3



R14-4



R14-5

---

## *Figure 2B-31(CA). California Truck Signs*




R102aP(CA)




R103aP(CA)




R104aP(CA)




R105aP(CA)




SR6-1(CA)




SR7-1(CA)




SR8-1(CA)




SR9-1(CA)





SR10-1(CA)





SR11-1(CA)




SR12-1(CA)




SR13-1P(CA)




SR17(CA)




SR18(CA)




SR19-1(CA)




SR25(CA)





SR41(CA)




SR42(CA)





SR57(CA)





S21(CA)

## Figure 2B-32. Photo Enforcement Signs and Plaques

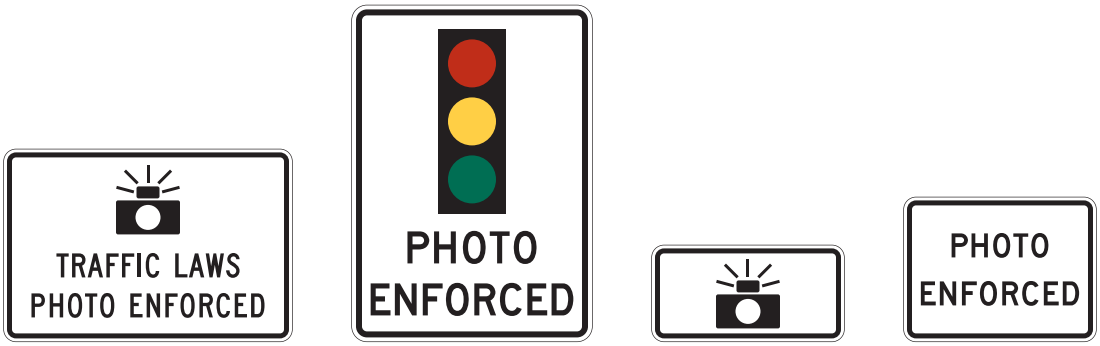



R10-18 R10-18a R10-19P R10-19aP

## Figure 2B-33. Other Regulatory Signs




R16-3




R16-4





R16-15




R16-15a

---

## *Figure 2B-33(CA). California Other Regulatory Signs*

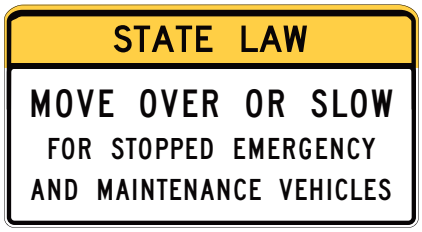


R110-1(CA)



SR15(CA)





SR15aP(CA)




SR61-1(CA)

## Figure 2B-34. Headlight Use Signs

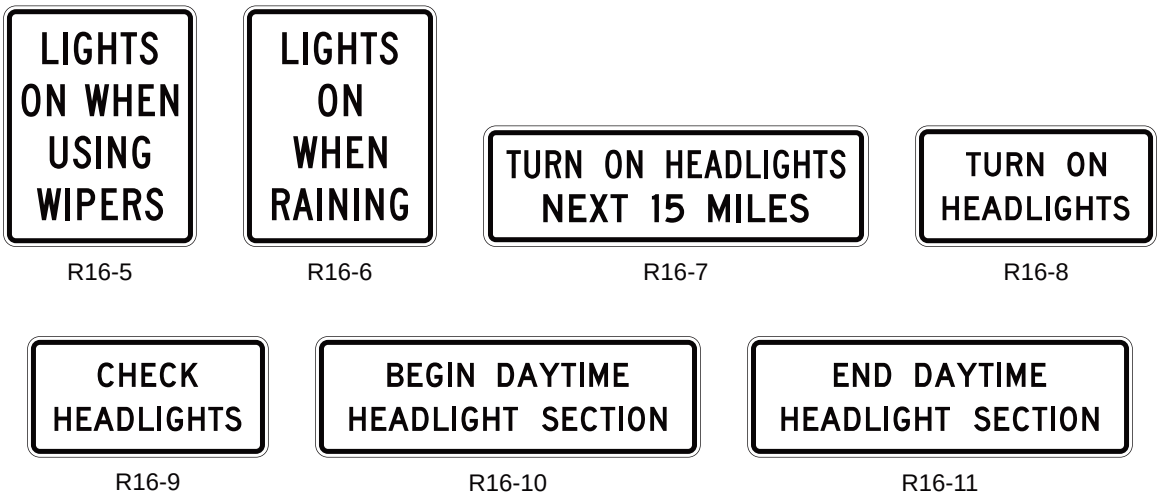


R16-5 R16-6 R16-7 R16-8

R16-9 R16-10 R16-11


---


## *Figure 2B-34(CA). California Headlight Use Signs*




S30-1(CA)

## *Figure 2B-101(CA). Example of Speed Zone Survey Sheet*

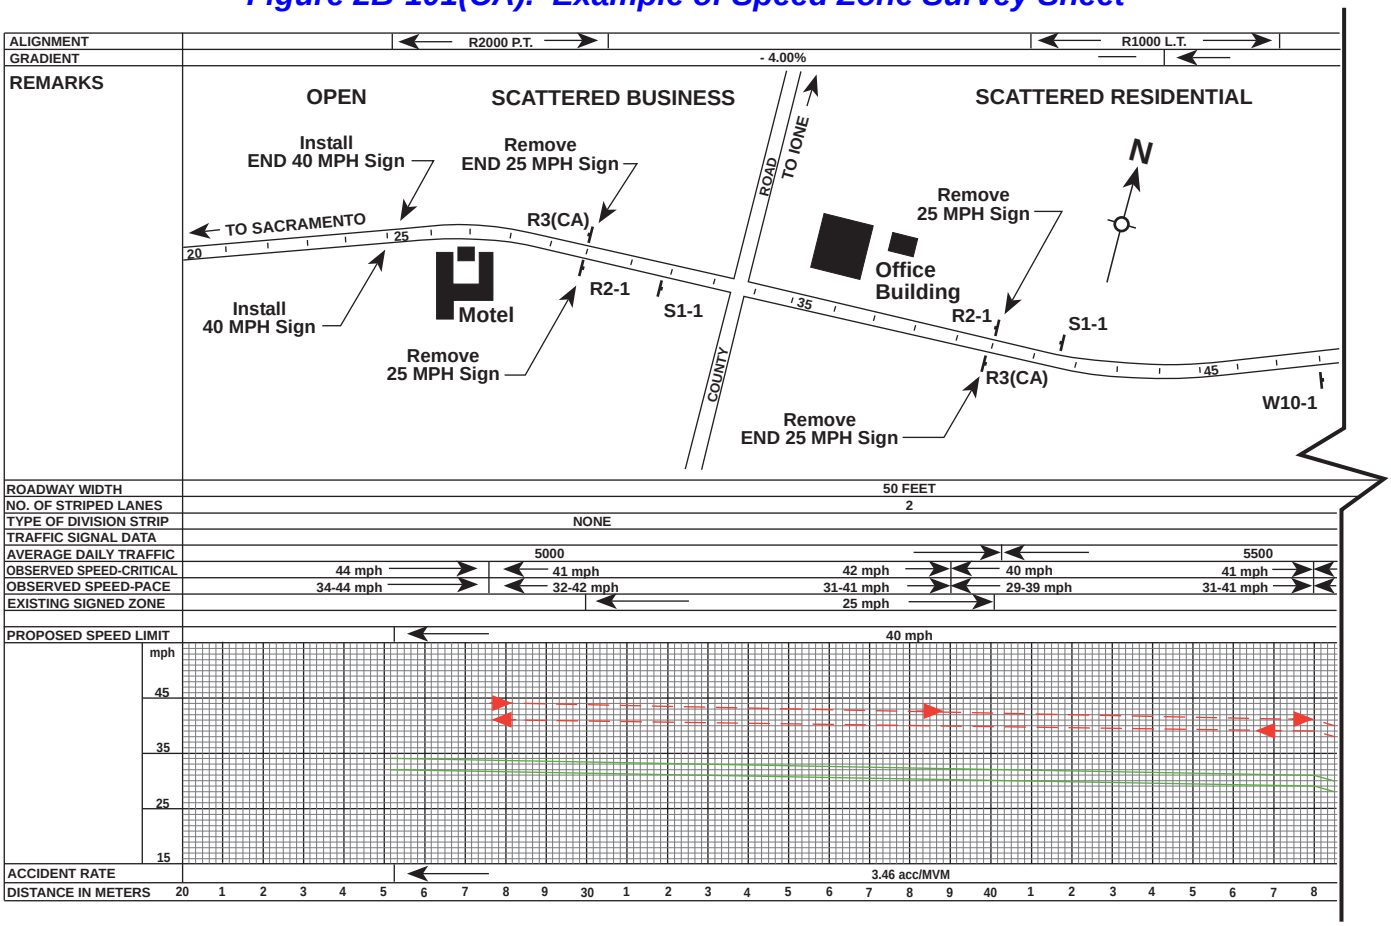

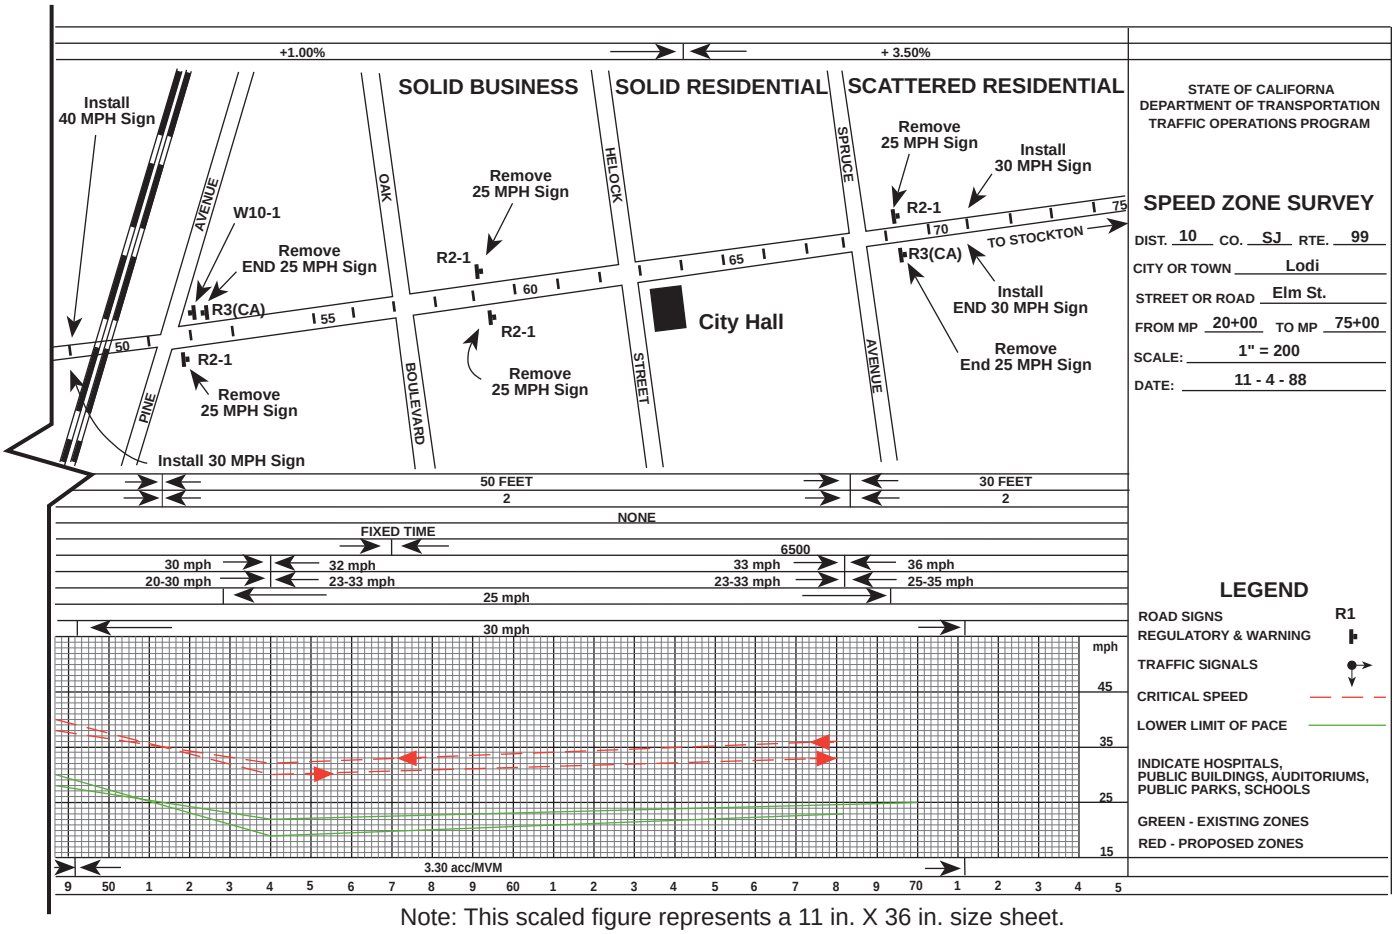




Note: This scaled figure represents a 11 in. X 36 in. size sheet.

## *Figure 2B-102(CA). Example of Cumulative Speed Curve Sheet*


AVERAGE mph 31.7
NO. OF VEHICLES 100
DIRECTION NORTH

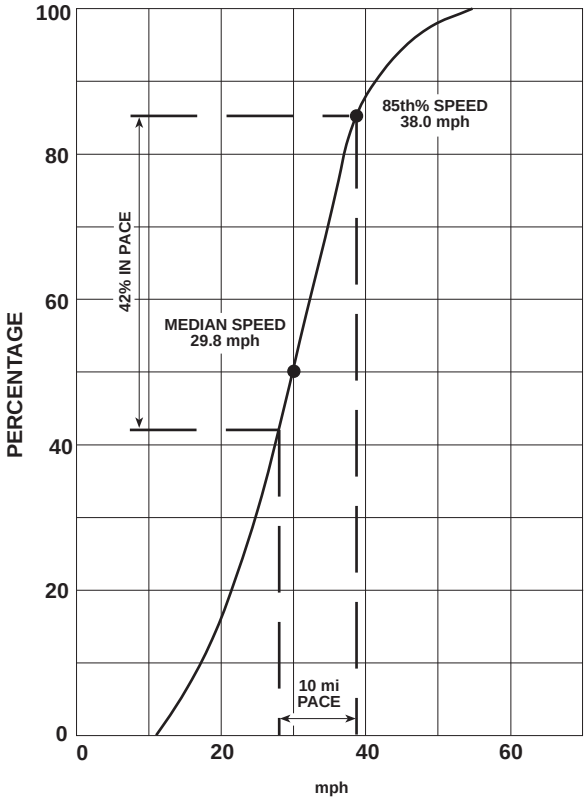85th PERCENTILE mph 38.0
PACE mph 28.0 TO 38.0




AVERAGE mph 33.9
NO. OF VEHICLES 100
DIRECTION SOUTH

85th PERCENTILE mph 39.5
PACE mph 28.0 TO 38.0

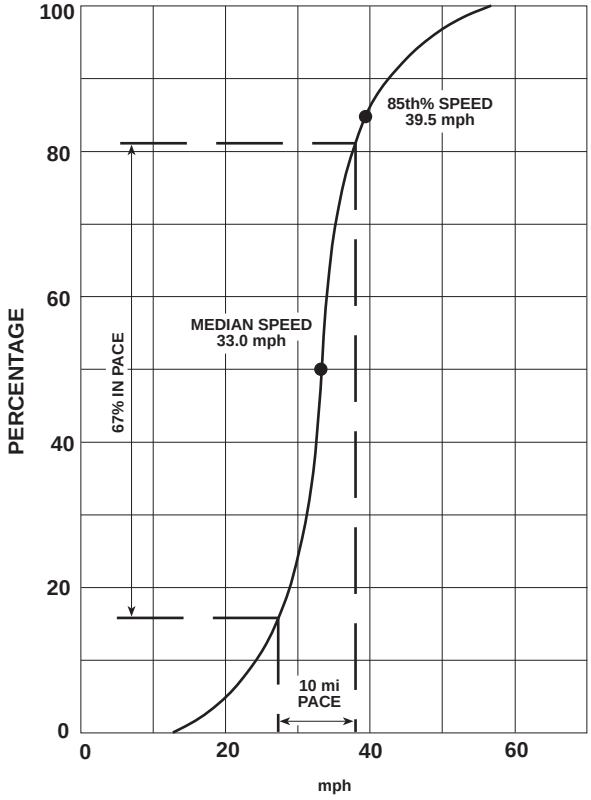


## SPEED ZONE SURVEY

DIST. 01 CO. HUM RTE. 1 mi 9.7

DATE 5 - 5 - 89 TIME: FROM 11:40 AM TO 1:30 PM

PRESENT SIGNED ZONE None MPH


Pepperwood Sta. 505±

## *Figure 2B-103(CA). Example of Vehicle Speed Survey Sheet for City and County Through Highways, Arterials, and Collector Roads*

**Jurisdiction** ______________________ **Date** ______________

**Location** ______________________ **Weather** ______________

**Recorder** ______________ **Begin Time** ______________ **End Time** ______________

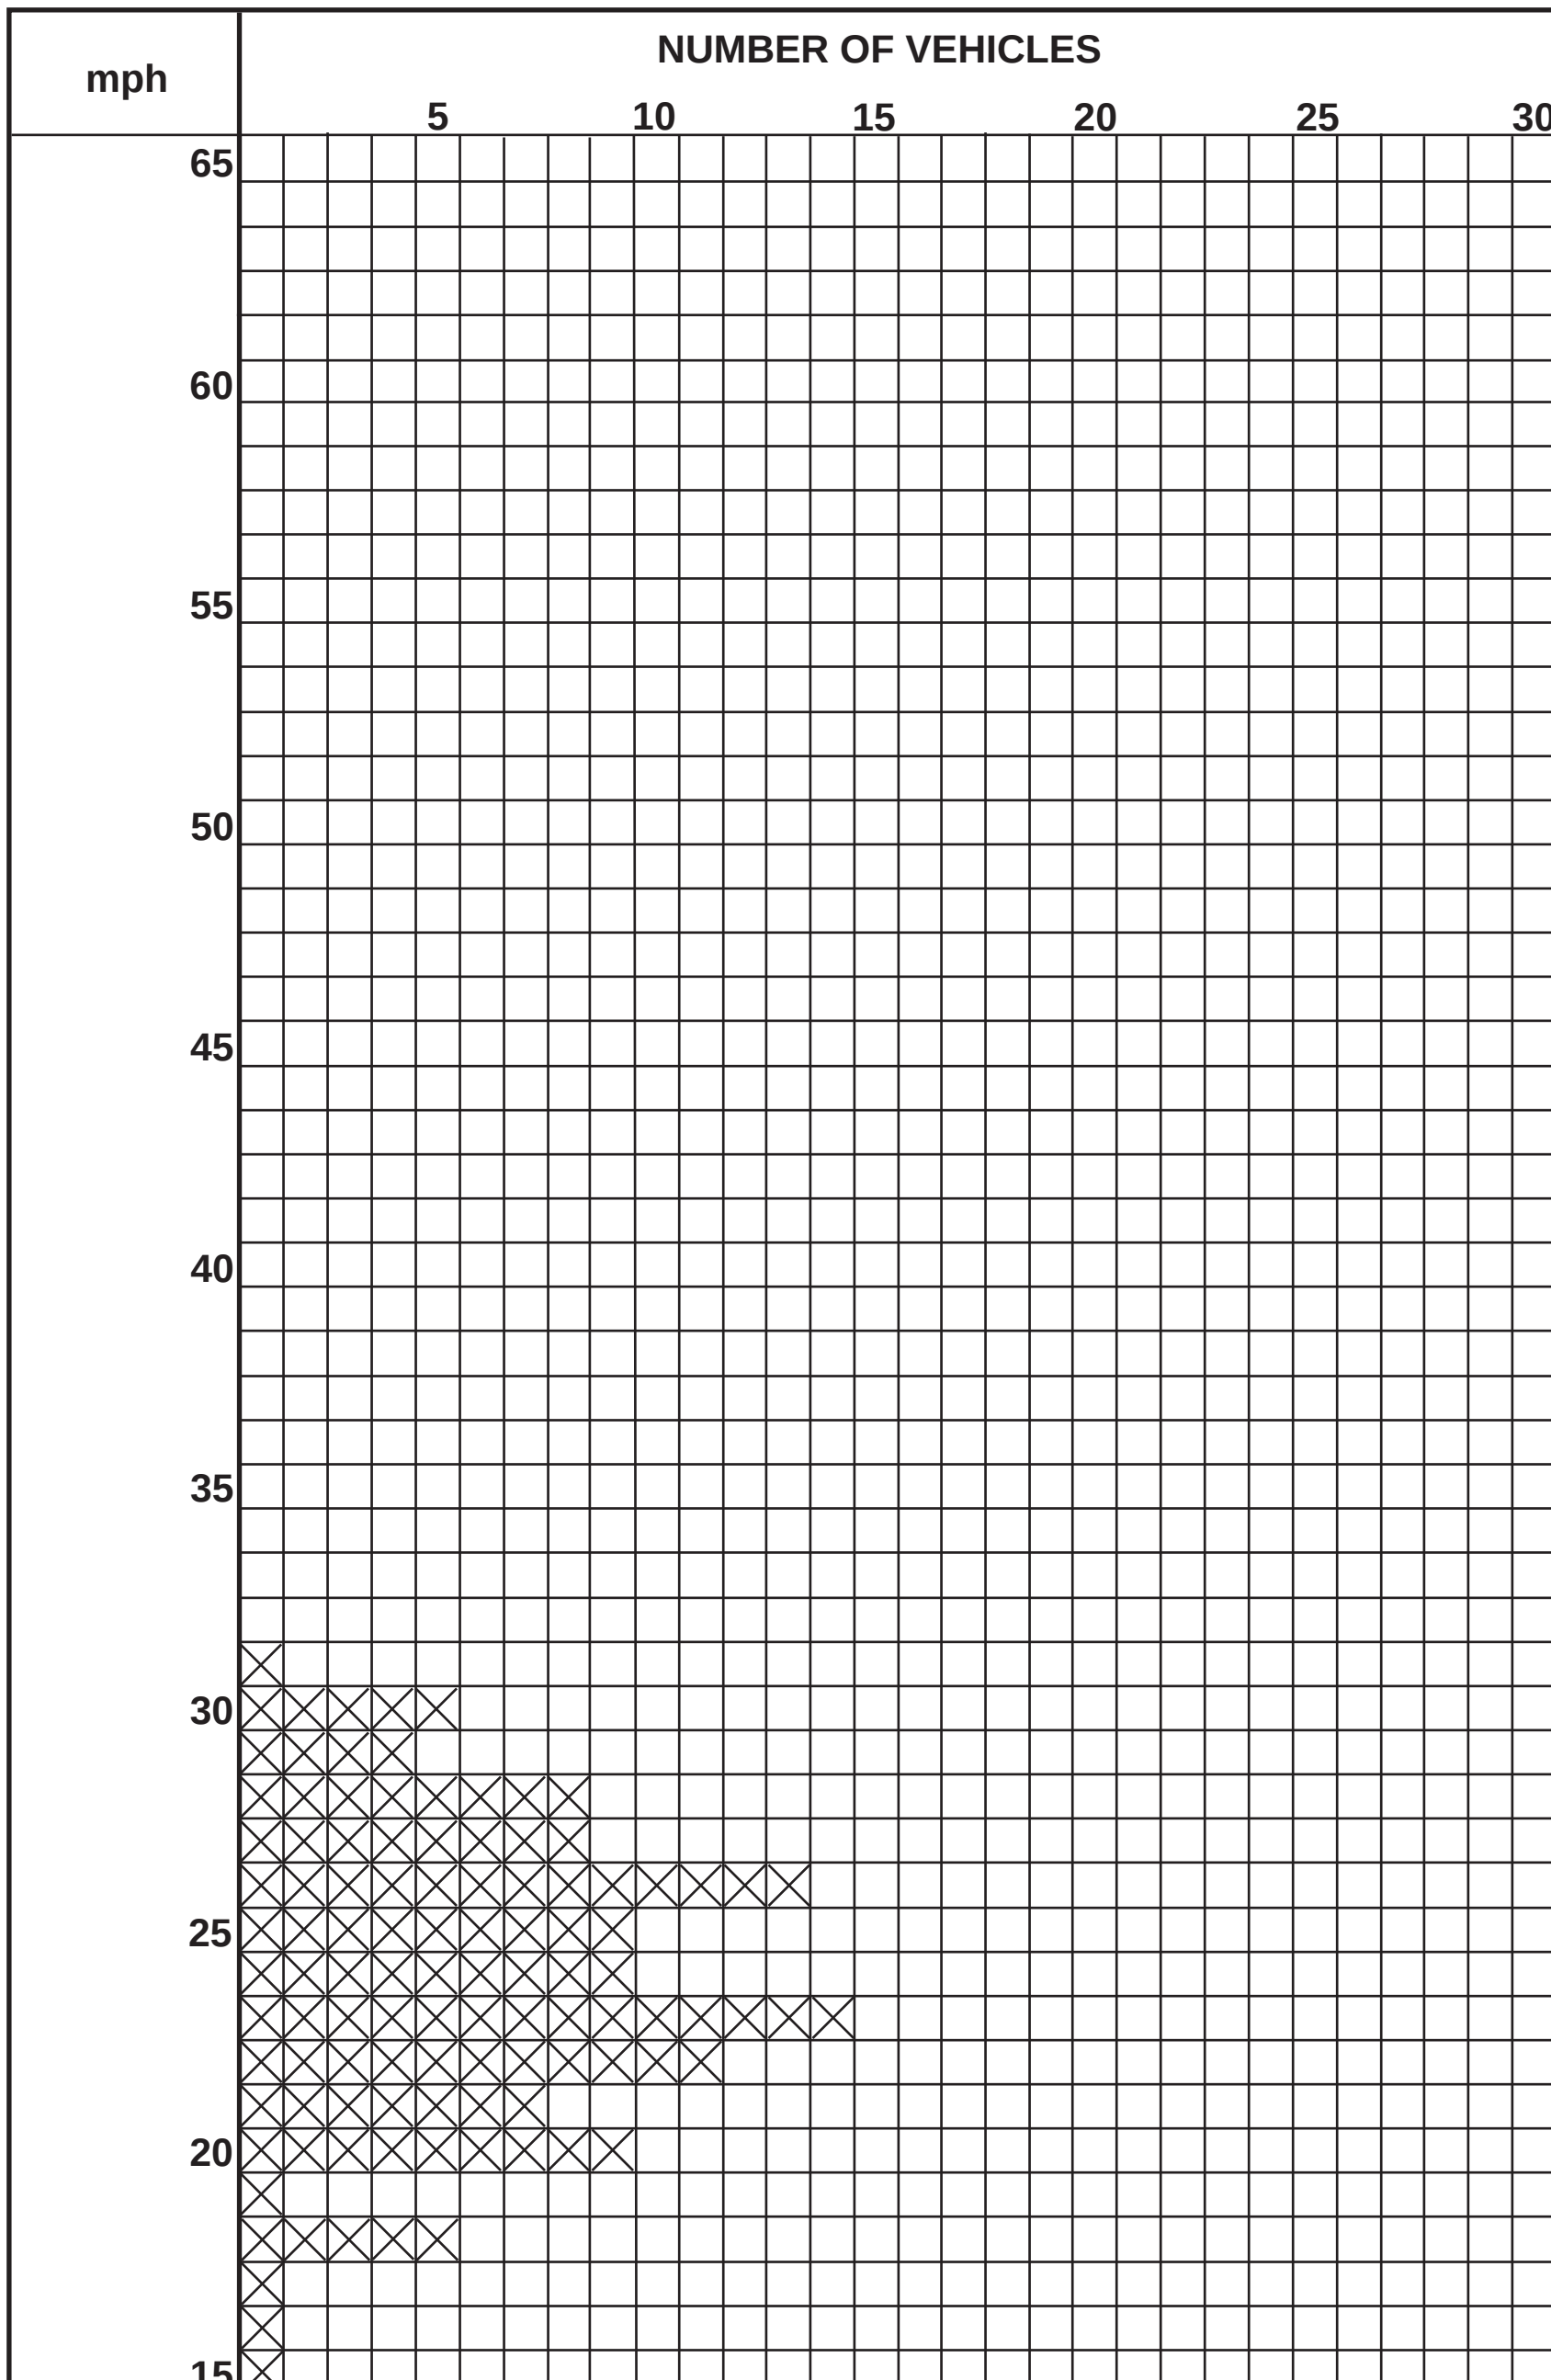


| mph | PERCENT OF TOTAL | CUMULATIVE PERCENTAGE |
|---|---|---|
| 65 | | |
| 60 | | |
| 55 | | |
| 50 | | |
| 45 | | |
| 40 | | |
| 35 | | |
| | 1 | 100 |
| 30 | 5 | 99 |
| | 4 | 94 |
| | 7 | 91 |
| | 7 | 83 |
| | 12 | 76 |
| 25 | 8 | 64 |
| | 8 | 55 |
| | 13 | 47 |
| | 10 | 34 |
| | 7 | 23 |
| 20 | 8 | 17 |
| | 1 | 8 |
| | 5 | 7 |
| | 1 | 3 |
| | 1 | 2 |
| 15 | 1 | 1 |
| TOTAL NUMBER OF VEHICLES = 107 | 100 % | |

Other Conciderations

Accident History : ______

Unusual Conditions : ______

**Signed** ______________________ **Date** ______________ **Title** ______________

## *Figure 2B-104(CA). Example of Vehicle Speed Survey Sheet (For 40 MPH and Under)*

**Jurisdiction :** _____

**Residential Area or Subdivision :** _____

### VEHICLE SPEED DATA

**Location :** _____ **Weather :** _____

**Record :** _____ **Date :** _____ **Begin Time :** _____ **End Time :** _____

| mph | NUMBER OF VEHICLES | TOTAL OF EACH SPEED |
|---|---|---|
| 40 & over | | |
| | | |
| | | |
| | | |
| | | |
| 35 | | |
| | | |
| | | |
| | | |
| | | |
| 30 | | 1 |
| | | 1 |
| | | 2 |
| | | 3 |
| | | 5 |
| 25 | | 11 |
| | | 7 |
| | | 6 |
| | | 6 |
| | | 4 |
| 20 | | 3 |
| | | 2 |
| | | 1 |
| | | 0 |
| | | 1 |
| 15 & under | | 1 |
| mph | TOTAL NUMBER OF VEHICLES OBSERVED | 54 |

**CRITICAL SPEED CALCULATION**

Total 54 multiplied by 0.15 = 8
Count this number of vehicles down from the highest speed observed to determine the critical speed

← CRITICAL SPEED = 26 mph

**Other Considerations :**

**Accident History :** _____

_____

_____

**Unusual Conditions :** _____


_____

_____

**Date :** _____ **Signed :** _____ **Title :** _____


## *Figure 2B-105(CA). U-Turn Signs for Signalized Intersections with Separate Turn Phase*

### Two Left-Turn Lanes with Overhead U-Turn Signs

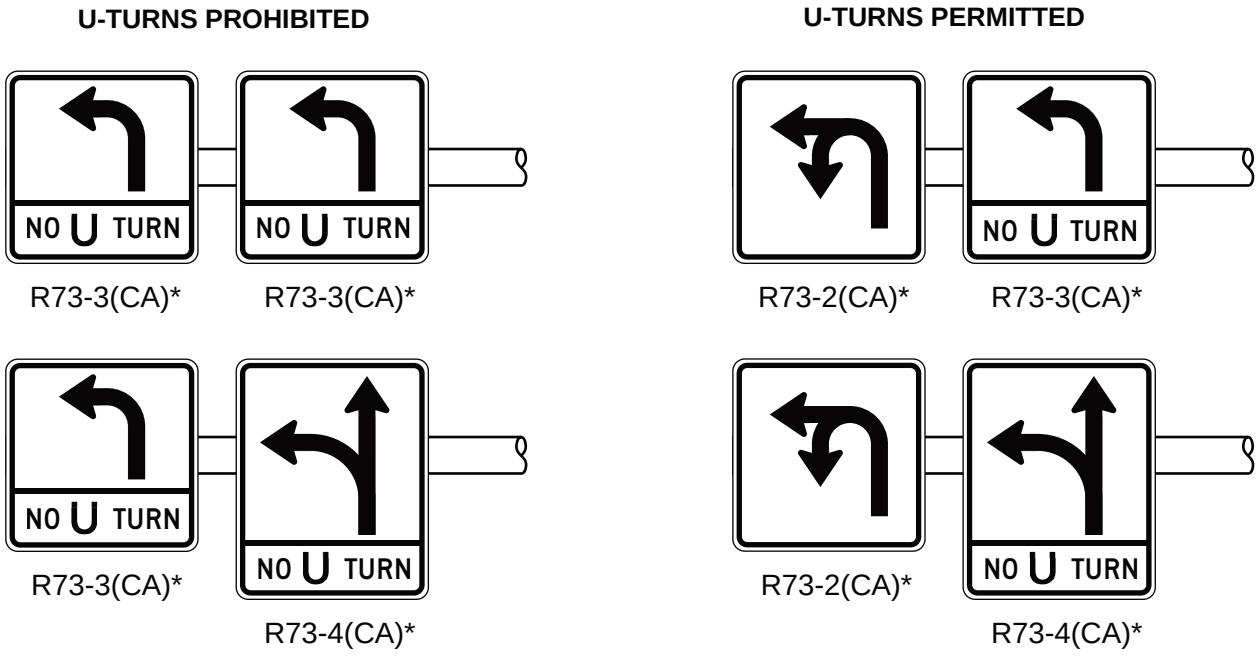


See Department of Transportation's Standard Plans for Mounting Details

### Signal Mastarm Mounted U-Turn Signs

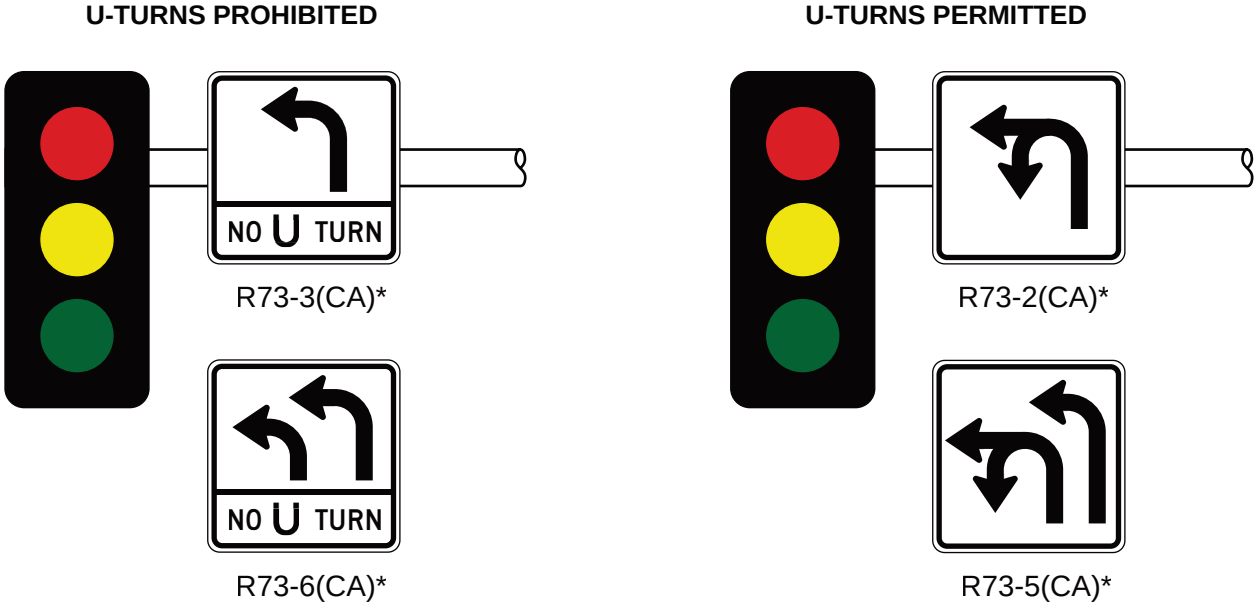


See Department of Transportation's Standard Plans for Mounting Details

* R73(CA) Series Signs

## *Figure 2B-106(CA). California Miscellaneous Regulatory Signs*




R23(CA)




R47(CA)




R47A(CA)




R101(CA)




R119(CA)




SR43(CA)




SR44(CA)





SR46(CA)




SR47(CA)




SR48(CA)




S22(CA)

# Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 1 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Stop | R1-1 | 2B.04 | 30 x 30 | 36 x 36 | 36 x 36 | — | 30 x 30* | 48 x 48 |
| Yield | R1-2 | 2B.05 | 36 x 36 x 36 | 48 x 48 x 48 | 48 x 48 x 48 | 60 x 60 x 60 | 30 x 30 x 30* | — |
| To Oncoming Traffic (plaque) | R1-2aP | 2B.18 | 24 x 18 | 24 x 18 | 36 x 30 | 48 x 36 | 24 x 18 | — |
| To Traffic in Circle (plaque) | R1-2bP | 2B.18 | 24 x 15 | 24 x 15 | — | — | 24 x 15 | 36 x 24 |
| To All Lanes (plaque) | R1-2cP | 2B.18 | 24 x 15 | 24 x 15 | — | — | 24 x 15 | 36 x 24 |
| All Way (plaque) | R1-3P | 2B.04 | 18 x 6 | 18 x 6 | — | — | — | 30 x 12 |
| Yield Here to Pedestrians | R1-5 | 2B.19 | — | 36 x 36 | — | — | — | 36 x 36 |
| ~~Stop Here for Pedestrians~~ | ~~R1-5b~~ | ~~2B.19~~ | ~~—~~ | ~~36 x 36~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~36 x 36~~ |
| Yield Here to ~~(Stop Here for)~~ Trail Crossing | R1-5d,~~5e~~ | 2B.19 | — | 36 x 42 | — | — | — | — |
| In-Street Pedestrian Crossing - Yield ~~(Stop)~~ | R1-6,~~6a~~ | 2B.20 | 12 x 36 | 12 x 36 | — | — | — | — |
| In-Street Trail Crossing - Yield ~~(Stop)~~ | R1-6d,~~6e~~ | 2B.20 | 12 x 36 | 12 x 36 | — | — | — | — |
| Overhead Pedestrian Crossing - Yield ~~(Stop)~~ | R1-9,~~9a~~ | 2B.20 | 90 x 24 | 90 x 24 | — | — | — | — |
| Overhead Trail Crossing | R1-9d,~~9e~~ | 2B.20 | 72 x 24 | 72 x 24 | — | — | — | — |
| Except Right Turn (plaque) | R1-10P | 2B.04 | 24 x 18 | 24 x 18 | — | — | — | — |
| Speed Limit | R2-1 | 2B.21 | 24 x 30 | 30 x 36 | 36 x 48 | 48 x 60 | 18 x 24 | 30 x 36 |
| Truck Speed Limit (plaque) | R2-2P | 2B.22 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Bus Speed Limit (plaque) | R2-2aP | 2B.22 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Truck-Bus Speed Limit (plaque) | R2-2bP | 2B.22 | 24 x 30 | 24 x 30 | 36 x 42 | 48 x 54 | — | 36 x 42 |
| Vehicles Over X Tons Speed Limit (plaque) | R2-2cP | 2B.22 | 24 x 30 | 24 x 30 | 36 x 42 | 48 x 54 | — | 36 x 42 |
| Night Speed Limit (plaque) | R2-3P | 2B.23 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Minimum Speed Limit (plaque) | R2-4P | 2B.24 | 24 x 24 | 24 x 24 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Combined Maximum and Minimum Speed Limits | R2-4a | 2B.24 | 24 x 48 | 24 x 48 | 36 x 72 | 48 x 96 | — | 36 x 72 |
| ~~Unless Otherwise Posted (plaque)~~ | ~~R2-5P~~ | ~~2B.21~~ | ~~24 x 18~~ | ~~24 x 18~~ | ~~36 x 24~~ | ~~36 x 24~~ | ~~—~~ | ~~36 x 24~~ |
| ~~Citywide (plaque)~~ | ~~R2-5aP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~30 x 9~~ |
| ~~Neighborhood (plaque)~~ | ~~R2-5bP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~30 x 9~~ |
| ~~Residential (plaque)~~ | ~~R2-5cP~~ | ~~2B.21~~ | ~~24 x 6~~ | ~~24 x 6~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~30 x 9~~ |
| ~~Fines Higher (plaque)~~ | ~~R2-6P~~ | ~~2B.25~~ | ~~24 x 18~~ | ~~24 x 18~~ | ~~36 x 24~~ | ~~48 x 36~~ | ~~—~~ | ~~36 x 24~~ |
| Fines Double (plaque) | R2-6aP | 2B.25 | 24 x 18 | 24 x 18 | 36 x 24 | 48 x 36 | — | 36 x 24 |
| $XX Fine (plaque) | R2-6bP | 2B.25 | 24 x 18 | 24 x 18 | 36 x 24 | 48 x 36 | — | 36 x 24 |
| Begin Double ~~Higher~~ Fines Zone | R2-10 | 2B.25 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Double ~~Higher~~ Fines Zone | R2-11 | 2B.25 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Variable Speed Limit | R2-13 | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| End Truck Speed Limit | R2-14 | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| Movement Prohibition | R3-1,2,3, 4,18,27 | 2B.26 | 24 x 24 | 36 x 36 | 36 x 36 | — | — | 48 x 48 |
| Movement Prohibition - Trucks | R3-1b | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |
| Movement Prohibition - Trucks Buses | R3-1c | 2B.26 | 24 x 42 | 24 x 42 | 36 x 60 | 36 x 60 | — | — |
| Movement Prohibition - Trucks Over X Tons | R3-1d | 2B.26 | 24 x 48 | 24 x 48 | 36 x 66 | 36 x 66 | — | — |
| Movement Prohibition - Except Buses | R3-1e | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |
| Movement Prohibition - Except Buses Taxis | R3-1f | 2B.26 | 24 x 42 | 24 x 42 | 36 x 66 | 36 x 66 | — | — |
| Movement Prohibition - Time and Day | R3-1g | 2B.26 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | — |

## Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 2 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Movement Prohibition - Multiple Times and Day | R3-1h | 2B.26 | 24 x 42 | 24 x 42 | 36 x 66 | 36 x 66 | — | — |
| Mandatory Movement Lane Control | R3-5,5a | 2B.28 | 30 x 36 | 30 x 36 | — | — | — | — |
| Left Lane (plaque) | R3-5bP | 2B.28 | 30 x 12 | 30 x 12 | — | — | — | — |
| HOV 2+ (plaque) | R3-5cP | 2B.28 | 24 x 12 | 24 x 12 | — | — | — | — |
| Taxi Lane (plaque) | R3-5dP | 2B.28 | 30 x 12 | 30 x 12 | — | — | — | — |
| Right Lane (plaque) | R3-5fP | 2B.28 | 30 x 12 | 30 x 12 | — | — | — | — |
| Bus Lane (plaque) | R3-5gP | 2B.28 | 30 x 12 | 30 x 12 | — | — | — | — |
| Optional Movement Lane Control Thru and Turn | R3-6 | 2B.29 | 30 x 36 | 30 x 36 | — | — | — | — |
| Optional Movement U and Left Turn | R3-6a | 2B.29 | 30 x 36 | 30 x 36 | — | — | — | — |
| Optional Movement Left Turns | R3-6b | 2B.29 | 30 x 36 | 30 x 36 | — | — | — | — |
| Right (Left) Lane Must Turn Right (Left) | R3-7 | 2B.28 | 30 x 30 | 36 x 36 | 48 x 48 | — | — | 48 x 48 |
| Except Buses (plaque) | R3-7aP | 2B.28 | 24 x 12 | 24 x 12 | — | — | — | — |
| Except Bicycles (plaque) | R3-7bP | 2B.28 | 24 x 12 | 24 x 12 | — | — | — | — |
| Advance Intersection Lane Control | R3-8,8a,8b, 8xa, 8xb,8xc | 2B.30 | Varies x 30 | Varies x 30 | — | — | — | Varies x 36 |
| Two-Way Left Turn Only (overhead) | R3-9a | 2B.32 | 30 x 36 | 30 x 36 | — | — | — | — |
| Two-Way Left Turn Only (post-mounted) | R3-9b | 2B.32 | 24 x 36 | 24 x 36 | — | — | — | 36 x 48 |
| Begin (plaque) | R3-9cP | 2B.33 | 24 x 12 | 24 x 12 | — | — | — | 36 x 18 |
| End (plaque) | R3-9dP | 2B.33 | 24 x 12 | 24 x 12 | — | — | — | 36 x 18 |
| Reversible Lane Control (overhead) | R3-9e | 2B.34 | 108 x 48 | 108 x 48 | — | — | — | — |
| Reversible Lane Control (post-mounted) | R3-9f | 2B.34 | 30 x 42 | 36 x 54 | — | — | — | — |
| Advance Reversible Lane Control Transition | R3-9g,9h | 2B.34 | 108 x 36 | 108 x 36 | — | — | — | — |
| End Reverse Lane | R3-9i | 2B.34 | 108 x 48 | 108 x 48 | — | — | — | — |
| Lane For Left Turn Only | R3-19 | 2B.28 | 30 x 24 | 30 x 24 | — | — | — | — |
| Lane for U Turn Only | R3-19a | 2B.28 | 30 x 24 | 30 x 24 | — | — | — | — |
| Lane For U and Left Turns Only | R3-19b | 2B.28 | 30 x 30 | 30 x 30 | — | — | — | — |
| Begin Right (Left) Turn Lane | R3-20 | 2B.28 | 24 x 36 | 24 x 36 | — | — | — | — |
| All Turns (U-Turn) from Right Lane | R3-23,23a | 2B.35 | 60 x 36 | 60 x 36 | — | — | — | — |
| All Turns (U-Turn) Directional | R3-24,24b, 25,25b,26a | 2B.35 | 72 x 18 | 72 x 18 | — | — | — | — |
| U-Turns and Left Turns Directional | R3-24a, 25a,26 | 2B.35 | 60 x 24 | 60 x 24 | — | — | — | — |
| Right (Left) Lane Must Exit | R3-33 | 2B.31 | — | — | 78 x 36 | 78 x 36 | — | — |
| Right (Left) Lane Must Exit | R3-33a | 2B.31 | — | — | 42 x 60 | 42 x 60 | — | — |
| Do Not Pass | R4-1 | 2B.36 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Pass With Care | R4-2 | 2B.37 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Slower Traffic Keep Right | R4-3 | 2B.38 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Trucks Use Right Lane | R4-5 | 2B.38 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| Keep Right | R4-7,7a,7b | 2B.39 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Narrow Keep Right | R4-7c | 2B.39 | 18 x 30 | 18 x 30 | — | — | — | — |
| Keep Left | R4-8,8a,8b | 2B.39 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Narrow Keep Left | R4-8c | 2B.39 | 18 x 30 | 18 x 30 | — | — | — | — |
| Stay in Lane | R4-9 | 2B.40 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Runaway Vehicles Only | R4-10 | 2B.41 | 48 x 48 | 48 x 48 | — | — | — | — |

## Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 3 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Slow Vehicles with XX or More Following Vehicles Must Use Turn-Out | R4-12 | 2B.42 | 42 x 24 | 42 x 24 | — | — | — | 72 x 42 |
| Slow Vehicles Must Use Turn-Out Ahead | R4-13 | 2B.42 | 42 x 24 | 42 x 24 | — | — | — | — |
| Slow Vehicles Must Turn Out | R4-14 | 2B.42 | 30 x 42 | 30 x 42 | — | — | — | — |
| Keep Right Except to Pass | R4-16 | 2B.38 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Do Not Drive on Shoulder | R4-17 | 2B.43 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Do Not Pass on Shoulder | R4-18 | 2B.43 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| All Traffic | R4-20 | 2B.44 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| Right (Left) Turn Only | R4-21 | 2B.44 | 24 x 30 | 24 x 30 | — | — | — | — |
| Do Not Enter | R5-1 | 2B.46 | 30 x 30 | 36 x 36 | 36 x 36 | 48 x 48 | — | 36 x 36 |
| Wrong Way | R5-1a | 2B.47 | 36 x 24 | 42 x 30 | 36 x 24 | 42 x 30 | 30 x 18 | 42 x 30 |
| No Trucks | R5-2 | 2B.45 | 24 x 24 | 24 x 24 | 30 x 30 | 36 x 36 | — | 36 x 36 |
| Except Local Deliveries (plaque) | R5-2aP | 2B.45 | 24 x 12 | 24 x 12 | 30 x 15 | 36 x 18 | — | 36 x 18 |
| No Thru Trucks | R5-2b | 2B.45 | 24 x 30 | 24 x 30 | 30 x 36 | 36 x 48 | — | 36 x 48 |
| No Motor Vehicles | R5-3 | 2B.45 | 24 x 24 | 24 x 24 | — | — | 24 x 24 | — |
| No Commercial Vehicles | R5-4 | 2B.45 | 24 x 30 | 24 x 30 | 36 x 48 | 36 x 48 | — | — |
| No Vehicles with Lugs | R5-5 | 2B.45 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | — |
| No Bicycles | R5-6 | 2B.45 | 24 x 24 | 24 x 24 | 30 x 30 | 36 x 36 | 24 x 24* | 48 x 48 |
| No Non-Motorized Traffic | R5-7 | 2B.45 | 30 x 24 | 30 x 24 | 42 x 24 | 48 x 30 | — | 42 x 24 |
| No Motor-Driven Cycles | R5-8 | 2B.45 | 30 x 24 | 30 x 24 | 42 x 24 | 48 x 30 | — | 42 x 24 |
| No Pedestrians, Bicycles, Motor-Driven Cycles | R5-10 | 2B.45 | 30 x 36 | 30 x 36 | — | — | — | — |
| ~~No Pedestrians, Bicycles, Motor-Driven Cycles On Freeway~~ | ~~R5-10a~~ | ~~2B.45~~ | ~~30 x 36~~ | ~~30 x 36~~ | | | | |
| No Pedestrians or Bicycles | R5-10b | 2B.45 | 30 x 18 | 30 x 18 | — | — | — | — |
| No Pedestrians | R5-10c | 2B.45 | 24 x 12 | 24 x 12 | — | — | — | — |
| Authorized Vehicles Only | R5-11 | 2B.45 | 30 x 24 | 30 x 24 | — | — | — | — |
| No Thru Traffic | R5-12 | 2B.45 | 24 x 30 | 24 x 30 | — | — | — | 30 x 36 |
| One Way | R6-1 | 2B.49 | 36 x 12 | 48 x 18 | 48 x 18 | 48 x 18 | — | 72 x 24 |
| One Way | R6-2 | 2B.49 | 24 x 30 | 30 x 36 | 36 x 48 | 48 x 60 | 18 x 24 | 36 x 48 |
| Divided Highway Crossing | R6-3,3a | 2B.50 | 30 x 24 | 30 x 24 | 36 x 30 | — | — | 36 x 30 |
| Roundabout Circulation (plaque) | R6-5P | 2B.51 | 30 x 30 | 30 x 30 | — | — | — | — |
| Begin One Way | R6-6 | 2B.49 | 24 x 30 | 30 x 36 | — | — | — | — |
| End One Way | R6-7 | 2B.49 | 24 x 30 | 30 x 36 | — | — | — | — |
| Parking Restrictions | R7-~~1~~,2,~~2a,3~~, ~~4,4a~~,5,~~6,8~~,10, ~~107~~,108 | 2B.52, 2B.53 | 12 X 18 | 12 X 18 | — | — | — | — |
| ~~Van Accessible (plaque)~~ | ~~R7-8aP~~ | 2B.52, 2B.53 | ~~12 x 6~~ | ~~12 x 6~~ | | | | |
| Parking Fee Station, Multispace Meter | R7-20 | 2B.52, 2B.53 | 24 x 18 | 24 x 18 | — | — | — | — |
| Metered Parking | R7-21 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Mobile Parking Payment (plaque) | R7-21aP | 2B.52, 2B.53 | 12 x 6 | 12 x 6 | | | | |
| Metered Parking | R7-22 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking Bus Stop | R7-107a | 2B.52, 2B.53 | 12 x 24 | 12 x 24 | — | — | — | — |
| No Parking Bus Stop (with transit pictograph) | R7-107b | 2B.52, 2B.53 | 12 x 30 | 12 x 30 | — | — | — | — |

# Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 4 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| No Parking Except Electric Vehicles | R7-111 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking Except Electric Vehicles (part-time) | R7-111a | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Electric Vehicle Parking (time limit) | R7-112 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Electric Vehicle Parking (time limit part-time) | R7-112a | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Electric Vehicle Parking (time limit part-time) | R7-112b | 2B.52, 2B.53 | 12 x 21 | 12 x 21 | — | — | — | — |
| No Parking Except While Charging | R7-113 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Vehicle Must Be Plugged In (plaque) | R7-113aP | 2B.52, 2B.53 | 12 x 6 | 12 x 6 | — | — | — | — |
| Vacate Stall When Charging Completed (plaque) | R7-113bP | 2B.52, 2B.53 | 12 x 6 | 12 x 6 | — | — | — | — |
| Vehicle Charging Only (time limit) | R7-114 | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Vehicle Charging Only (time limit, part-time) | R7-114a | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| Vehicle Charging Only (time limit part-time) | R7-114b | 2B.52, 2B.53 | 12 x 21 | 12 x 21 | — | — | — | — |
| ~~No Parking/Restricted Parking (combined sign)~~ | ~~R7-200~~ | 2B.52, 2B.53 | ~~24 x 18~~ | ~~24 x 18~~ | — | — | — | — |
| ~~No Parking/Restricted Parking (combined sign)~~ | ~~R7-200a~~ | 2B.52, 2B.53 | ~~12 x 36~~ | ~~12 x 36~~ | — | — | — | — |
| ~~Tow-Away Zone (plaque)~~ | R7-201P, 201aP | 2B.52, 2B.53 | ~~12 x 6~~ | ~~12 x 6~~ | — | — | — | — |
| ~~This Side of Sign (plaque)~~ | ~~R7-202P~~ | 2B.52, 2B.53 | ~~12 x 6~~ | ~~12 x 6~~ | — | — | — | — |
| Snow Emergency Route | R7-203 | 2B.52, 2B.53 | 18 x 24 | 18 x 24 | — | — | — | 24 x 30 |
| ~~No Parking on Pavement~~ | ~~R8-1~~ | 2B.52, 2B.53 | ~~24 x 30~~ | ~~24 x 30~~ | ~~36 x 48~~ | ~~48 x 60~~ | — | ~~36 x 48~~ |
| ~~No Parking Except on Shoulder~~ | ~~R8-2~~ | 2B.52, 2B.53 | ~~24 x 30~~ | ~~24 x 30~~ | ~~36 x 48~~ | ~~48 x 60~~ | — | ~~36 x 48~~ |
| ~~No Parking (symbol)~~ | ~~R8-3~~ | 2B.52, 2B.53 | ~~24 x 24~~ | ~~30 x 30~~ | ~~36 x 36~~ | ~~48 x 48~~ | ~~12 x 12~~ | ~~36 x 36~~ |
| ~~No Parking~~ | ~~R8-3a~~ | 2B.52, 2B.53 | ~~24 x 30~~ | ~~24 x 30~~ | ~~36 x 36~~ | ~~48 x 48~~ | ~~18 x 24~~ | ~~36 x 36~~ |
| ~~On Pavement~~ | ~~R8-3c~~ | 2B.52, 2B.53 | ~~24 x 36~~ | ~~24 x 36~~ | — | — | ~~18 x 30~~ | ~~36 x 54~~ |
| ~~On Bridge~~ | ~~R8-3d~~ | 2B.52, 2B.53 | ~~24 x 36~~ | ~~24 x 36~~ | — | — | ~~18 x 30~~ | ~~36 x 54~~ |
| ~~On Tracks~~ | ~~R8-3e~~ | 2B.52, 2B.53 | ~~24 x 36~~ | ~~24 x 36~~ | — | — | ~~18 x 30~~ | ~~36 x 54~~ |
| ~~Except on Shoulder~~ | ~~R8-3f~~ | 2B.52, 2B.53 | ~~24 x 36~~ | ~~24 x 36~~ | — | — | ~~18 x 30~~ | ~~36 x 54~~ |
| Emergency Parking Only | R8-4 | 2B.55 | 30 x 24 | 30 x 24 | 30 x 24 | 48 x 36 | — | 48 x 36 |
| ~~No Stopping on Pavement~~ | ~~R8-5~~ | 2B.53, 2B.54 | ~~24 x 30~~ | ~~24 x 30~~ | ~~36 x 48~~ | ~~48 x 60~~ | — | ~~36 x 48~~ |
| ~~No Stopping Except on Shoulder~~ | ~~R8-6~~ | 2B.53, 2B.54 | ~~24 x 30~~ | ~~24 x 30~~ | ~~36 x 48~~ | ~~48 x 60~~ | — | ~~36 x 48~~ |
| Emergency Stopping Only | R8-7 | 2B.55 | 30 x 24 | 30 x 24 | 48 x 36 | 48 x 36 | — | 48 x 36 |
| Walk on Left Facing Traffic | R9-1 | 2B.56 | 18 x 24 | 18 x 24 | — | — | — | — |
| Cross Only at Crosswalks | R9-2 | 2B.57 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Pedestrian Crossing (symbol) | R9-3 | 2B.57 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| No Pedestrian Crossing | R9-3a | 2B.57 | 12 x 18 | 12 x 18 | — | — | — | — |

# Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 5 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Use Crosswalk (plaque) | R9-3bP | 2B.57 | 18 x 12 | 18 x 12 | — | — | — | — |
| No Hitchhiking (symbol) | R9-4 | 2B.56 | 18 x 18 | 18 x 18 | — | — | — | 24 x 24 |
| No Hitchhiking | R9-4a | 2B.56 | 18 x 24 | 18 x 24 | — | — | 12 x 18 | — |
| No Skaters | R9-13 | 2B.45 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| No Equestrians | R9-14 | 2B.45 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| No Snowmobiles | R9-15 | 2B.45 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| ** No All-Terrian Vehicles | R9-16 | 2B.45 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| Except on Shoulder (plaque) | R9-19P | 2B.45 | 18 x 12 | 18 x 12 | 24 x 18 | 30 x 24 | — | 30 x 24 |
| Cross Only On Green | R10-1 | 2B.58 | 12 x 18 | 12 x 18 | — | — | — | — |
| Pedestrian Signs | R10-~~2~~,3, ~~3b,3c,3d,4~~ | 2B.58 | 9 x 12 | 9 x 12 | — | — | — | — |
| Pedestrian Signs | R10-3a,~~3e,3f, 3g,3h,3i,4a~~ | 2B.58 | 9 x 15 | 9 x 15 | — | — | — | — |
| Left on Green Arrow Only | R10-5 | 2B.59 | 30 x 36 | 30 x 36 | 30 x 36 | — | 24 x 30 | 48 x 60 |
| Stop Here on Red | R10-6 | 2B.59 | 24 x 36 | 24 x 36 | — | — | — | 36 x 48 |
| Stop Here on Red | R10-6a | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | 36 x 42 |
| Do Not Block Intersection | R10-7 | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | — |
| Use Lane with Green Arrow | R10-8 | 2B.59 | 30 x 36 | 30 x 36 | 36 x 42 | — | — | 60 x 72 |
| Left (Right) Turn Signal | R10-10 | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | 30 x 36 |
| U- Turn Signal | R10-10a | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | 30 x 36 |
| No Turn on Red | R10-11 | 2B.60 | 24 x 30 | 24 x 30 | — | — | — | 36 x 48 |
| No Turn on Circular Red | R10-11a | 2B.60 | 24 x 30 | 24 x 30 | — | — | — | 36 x 48 |
| No Turn on Red | R10-11b | 2B.60 | 24 x 24 | 24 x 24 | — | — | — | 36 x 36 |
| No Turn on Red Except From Right Lane | R10-11c | 2B.60 | 30 x 36 | 30 x 36 | — | — | — | — |
| No Turn on Red From This Lane | R10-11d | 2B.60 | 30 x 42 | 30 x 42 | — | — | — | — |
| Left Turn Yield on Green | R10-12 | 2B.59 | 30 x 36 | 30 x 36 | — | — | — | — |
| Left Turn Yield on Flashing Yellow Arrow | R10-12a | 2B.59 | 30 x 36 | 30 x 36 | — | — | — | — |
| Left Turn Yield to Bicycle | R10-12b | 2B.59 | 30 x 36 | 30 x 36 | — | — | — | — |
| Emergency Signal | R10-13 | 2B.59 | 36 x 24 | 36 x 24 | — | — | — | 42 x 30 |
| Emergency Signal - Stop on Flashing Red | R10-14 | 2B.59 | 36 x 42 | 36 x 42 | — | — | — | — |
| Emergency Signal - Stop on Flashing Red (overhead) | R10-14a | 2B.59 | 60 x 24 | 60 x 24 | — | — | — | — |
| Stop Here on Flashing Red | R10-14b | 2B.59 | 24 x 36 | 24 x 36 | — | — | — | 36 x 48 |
| Turning Vehicles Yield to Pedestrians | R10-15 | 2B.59 | 30 x 30 | 30 x 30 | — | — | — | — |
| ~~Turning Vehicles Stop for Pedestrians~~ | ~~R10-15a~~ | ~~2B.59~~ | ~~30 x 30~~ | ~~30 x 30~~ | — | — | — | — |
| ~~U-Turn Yield to Right Turn~~ | ~~R10-16~~ | ~~2B.59~~ | ~~30 x 36~~ | ~~30 x 36~~ | | | | |
| ~~Right on Red Arrow After Stop~~ | ~~R10-17a~~ | ~~2B.60~~ | ~~30 x 36~~ | ~~30 x 36~~ | | | | ~~36 x 48~~ |
| Traffic Laws Photo Enforced | R10-18 | 2B.69 | 36 x 24 | 36 x 24 | 48 x 30 | 54 x 36 | — | 54 x 36 |
| Traffic Signal Photo Enforced | R10-18a | 2B.69 | 30 x 42 | 30 x 42 | 30 x 42 | — | — | 36 x 54 |
| Photo Enforced (symbol plaque) | R10-19P | 2B.69 | 24 x 12 | 24 x 12 | 36 x 18 | 48 x 24 | — | 48 x 24 |
| Photo Enforced (plaque) | R10-19aP | 2B.69 | 24 x 18 | 24 x 18 | 36 x 24 | 48 x 36 | — | 48 x 36 |
| MON—FRI (and times) (3 lines) (plaque) | R10-20aP | 2B.60 | 24 x 24 | 24 x 24 | — | — | — | — |
| SUNDAY (and times) (2 lines) (plaque) | R10-20aP | 2B.60 | 24 x 18 | 24 x 18 | — | — | — | — |
| Crosswalk - Stop on Red | R10-23 | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | — |

# Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 6 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Stop on Red - Yield on Flashing Red After Stop | R10-23a | 2B.59 | 24 x 30 | 24 x 30 | — | — | — | — |
| Push Button For Warning Lights - Wait for Gap in Traffic | R10-25 | 2B.58 | 9 x 12 | 9 x 12 | — | — | — | — |
| Left Turn Yield on Flashing Red Arrow After Stop | R10-27 | 2B.59 | 30 x 36 | 30 x 36 | — | — | — | — |
| ~~XX Vehicles per Green~~ | ~~R10-28~~ | ~~2B.61~~ | ~~24 x 30~~ | ~~24 x 30~~ | — | — | — | — |
| XX Vehicles per Green Each Lane | R10-29 | 2B.61 | 36 x 24 | 36 x 24 | — | — | — | — |
| Right Turn on Red Must Yield to U-Turn | R10-30 | 2B.60 | 30 x 36 | 30 x 36 | — | — | — | — |
| At Signal (plaque) | R10-31P | 2B.59 | 24 x 9 | 24 x 9 | — | — | — | — |
| Push Button for 2 Seconds for Extra Crossing Time | R10-32P | 2B.58 | 9 x 12 | 9 x 12 | — | — | — | — |
| Keep Off Median | R11-1 | 2B.62 | 24 x 30 | 24 x 30 | — | — | — | — |
| Road Closed | R11-2,2a, 2b,2c | 2B.63 | 48 x 30 | 48 x 30 | — | — | — | — |
| Road Closed - Local Traffic Only | R11-3,3a, 3b,4 | 2B.63 | 60 x 30 | 60 x 30 | — | — | — | — |
| Weight Limit | R12-1, 2 | 2B.64 | 24 x 30 | 24 x 30 | 36 x 48 | — | — | 36 x 48 |
| Weight Limit - Axle, Gross | R12-4 | 2B.64 | 36 x 24 | 36 x 24 | — | — | — | — |
| Weight Limit | R12-5 | 2B.64 | 24 x 36 | 24 x 36 | 36 x 48 | 48 x 60 | — | — |
| Weight Limit - Specialized Hauling Vehicles | R12-6 | 2B.64 | 30 x 42 | 36 x 48 | 36 x 48 | 48 x 60 | — | 48 x 60 |
| Weight Limit - Emergency Vehicles | R12-7 | 2B.64 | 30 x 36 | 30 x 36 | 48 x 60 | 48 x 60 | — | 48 x 60 |
| Weight Limit - Emergency Vehicles (plaque) | R12-7aP | 2B.64 | 30 x 30 | 30 x 30 | 48 x 48 | 48 x 48 | — | 48 x 48 |
| ~~Weight Station~~ | ~~R13-1~~ | ~~2B.65~~ | ~~72 x 54~~ | ~~72 x 54~~ | ~~96 x 72~~ | ~~132 x 90~~ | — | — |
| Truck Route | R14-1 | 2B.66 | 24 x 18 | 24 x 18 | — | — | — | — |
| Hazardous Material | R14-2,3 | 2B.67 | 24 x 24 | 24 x 24 | 30 x 30 | 36 x 36 | — | 42 x 42 |
| National Network | R14-4,5 | 2B.68 | 30 x 30 | 30 x 30 | 36 x 36 | 36 x 36 | — | 42 x 42 |
| ~~Move Over or Reduce Speed~~ | ~~R16-3~~ | ~~2B.71~~ | — | ~~60 x 48~~ | ~~84 x 60~~ | ~~102 x 72~~ | — | ~~84 x 60~~ |
| ~~Minor Crashes Move Vehicles from Travel Lanes~~ | ~~R16-4~~ | ~~2B.70~~ | — | ~~60 x 42~~ | ~~84 x 54~~ | ~~96 x 60~~ | — | ~~84 x 54~~ |
| Lights On When Using Wipers or Raining | R16-5,6 | 2B.73 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | — | 36 x 48 |
| Turn On Headlights Next XX Miles | R16-7 | 2B.73 | 60 x 18 | 60 x 18 | 96 x 30 | 132 x 36 | — | 96 x 30 |
| Turn On, Check Headlights | R16-8,9 | 2B.73 | 42 x 18 | 42 x 18 | 60 x 30 | 78 x 36 | — | 60 x30 |
| Begin, End Daytime Headlight Section | R16-10,11 | 2B.73 | 60 x 18 | 60 x 18 | 96 x 30 | 120 x 36 | — | 96 x 30 |
| No Hand-Held Phone Use By Driver | R16-15 | 2B.72 | — | — | 72 x 48 | 72 x 48 | — | — |
| No Hand-Held Phone Use By Driver | R16-15a | 2B.72 | 30 x 42 | 30 x 42 | — | — | — | — |

* See Table 9A-1 for minimum size required for signs on bicycle facilities

** Refer to FHWA's List of Known Errors for error in row with the R9-16 sign. Refer to Section 1A.04 for more details.

Notes: 1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 1 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Speed Zone Ahead | R2-4(CA) | 2B.21 | 24 x 30 | 24 x 30 | 36 x 45 | 48 x 60 | 24 x 30 | — |
| End Speed Limit | R3(CA) | 2B.21 | 24 x 30 | 24 x 30 | 36 x 45 | 48 x 60 | 24 x 30 | — |
| TRUCKS 3 AXLES OR MORE RIGHT 2 LANES ONLY | R6-3A(CA) | 2B.38 | 54 x 66 | 54 x 66 | 54 x 66 | 54 x 66 | — | — |
| TRUCKS, 3 AXLES OR MORE 55 | R6-3B(CA) | 2B.21, 2B.38 | 48 x 60 | 48 x 60 | 48 x 60 | 48 x 60 | — | — |
| ALL VEHICLES WHEN TOWING RIGHT 2 LANES ONLY | R6-4A(CA) | 2B.38 | 54 x 66 | 54 x 66 | 54 x 66 | 54 x 66 | — | — |
| ALL VEHICLES WHEN TOWING 55 | R6-4B(CA) | 2B.21, 2B.22 | 48 x 60 | 48 x 60 | 48 x 60 | 48 x 60 | — | — |
| Pedestrian Signs | R10-3e(CA) R10-3i(CA) | 2B.58 | 9 x 15 | 9 x 15 | — | — | — | — |
| Pedestrian Sign | R10-3j(CA) | 2B.58 | 9 x 12 | 9 x 12 | — | — | — | — |
| Push or Wave at Button to Turn on Warning Lights | R10-3k(CA) | 2B.58 | 9 x 12 | 9 x 12 | — | — | — | — |
| RIGHT (LEFT) LANE FREEWAY ONLY | R18B(CA) | 2B.28 | 36 x 36 | 36 x 36 | — | — | — | — |
| RIGHT (LEFT) __ LANES MUST EXIT | R18C(CA) | 2B.31 | — | — | 102 x 36 | 102 x 36 | — | — |
| RIGHT (LEFT) __ LANES MUST EXIT | R18D(CA) | 2B.31 | — | — | 48 x 78 | 48 x 78 | — | — |
| No Trucks Variable Message | R20-1(CA) | 2B.45 | — | — | 102 x 48 | 102 x 48 | — | — |
| NEXT RIGHT (plaque) | R20-1aP(CA) | 2B.45 | — | — | 102 x 18 | 102 x 18 | — | — |
| Truck Exclusion (plaque) | R20D-1P(CA) | 2B.45 | 24 x 6 | 30 x 9 | 36 x 12 | — | 24 x 6 | — |
| Truck Exclusion (plaque) | R20D-2P(CA) | 2B.45 | 24 x 6 | 30 x 9 | 36 x 12 | — | 24 x 6 | — |
| Truck Exclusion (plaque) | R20D-3P(CA) | 2B.45 | 24 x 6 | 30 x 9 | 36 x 12 | — | 24 x 6 | — |
| Truck Exclusion (plaque) | R20D-4P(CA) | 2B.45 | 24 x 6 | 30 x 9 | 36 x 12 | — | 24 x 6 | — |
| Truck Length Limit | R20H(CA) | 2B.45 | 36 x 36 | 36 x 36 | 42 x 42 | — | 36 x 36 | — |
| Bridge Speed and Weight Limit | R21(CA) | 2B.45 | 36 x 30 | 36 x 30 | — | — | — | — |
| OK TO PARK ON BRIDGE | R22(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO FISHING (JUMPING) FROM BRIDGE | R23(CA) | 2B.101(CA) | 26 x 18 | 26 x 18 | — | — | — | — |
| PARK PARALLEL | R24(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| SCHOOL BUS ONLY w/Double Arrow | R24A(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| TAXI CAB ONLY with Double Arrow | R24B(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| TOUR BUS ONLY with Double Arrow | R24C(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| MAIL DEPOSIT ONLY with Double Arrow | R24D(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| BLOCK WHEELS TO CURB | R24E(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| BACK-IN ANGLE PARKING ONLY | R24F(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| PARK OFF PAVEMENT | R25(CA) | 2B.52 | 24 x 15 | 24 x 15 | — | — | — | — |
| LOADING ONLY 7 AM TO 6 PM EXCEPT SUNDAY 30-MINUTE LIMIT with Double Arrow | R25A-1(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| PASSENGER LOADING ONLY 5 MINUTE LIMIT with Double Arrow | R25C(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| School Passenger Loading ONLY 7 AM TO 4 PM SCHOOL DAYS 5 MINUTE LIMIT with Double Arrow | R25D-1(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| PASSENGER LOADING ONLY 7 AM TO 4 PM SCHOOL DAYS 5 MINUTE LIMIT with Double Arrow | R25E(CA) | 2B.52 | 18 x 21 | 18 x 21 | — | — | — | — |

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 2 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| School Bus Passenger Loading ONLY with Double Arrow | R25F-1(CA) | 2B.52 | 18 x 24 | 18 x 24 | — | — | — | — |
| Tour Bus Passenger Loading ONLY with Double Arrow | R25H-1(CA) | 2B.52 | 18 x 24 | 18 x 24 | — | — | — | — |
| CAR SHARE PARKING ONLY PERMIT REQUIRED with Double Arrow | R25J(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| NO PARKING ANY TIME | R26(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO STOPPING ANY TIME | R26(S)(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING ANY TIME | R26A(CA) | 2B.52 | 24 x 30 | 24 x 30 | 24 x 30 | — | — | — |
| NO STOPPING ANY TIME | R26A(S)(CA) | 2B.41, 2B.52 | 24 x 30 | 24 x 30 | 24 x 30 | — | — | — |
| NO STOPPING FIRE LANE | R26F(CA) | 2B.52 | 12 x 18 | 12 x 18 | 24 x 30 | — | 12 x 18 | — |
| Tow-Away No Parking | R26K(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| Tow-Away NO STOPPING ANY TIME | R26L(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING HERE TO CORNER | R26M(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING HERE TO X-ING | R26M-1(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING ON BRIDGE | R27(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING ON BRIDGE | R27A(CA) | 2B.52 | 24 x 30 | 24 x 30 | 24 x 30 | — | — | — |
| NO PARKING ANY TIME with Arrow | R28(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO STOPPING ANY TIME with Arrow | R28(S)(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING ANY TIME with Arrow | R28A(CA) | 2B.52 | 24 x 30 | 24 x 30 | 24 x 30 | — | — | — |
| NO STOPPING ANY TIME with Arrow | R28A(S)(CA) | 2B.52 | 24 x 30 | 24 x 30 | 24 x 30 | — | — | — |
| NO STOPPING BUS ONLY with Arrow | R28C(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO PARKING VEHICLES OVER 6' HIGH with Double Arrow | R28D(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| NO STOPPING VEHICLES OVER 6' HIGH with Double Arrow | R28D(S)(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| NO PUBLIC PARKING SUBJECT TO CITATION AND REMOVAL AT OWNER'S EXPENSE | R28E(CA) | 2B.52 | 18 x 24 | 18 x 24 | — | — | — | — |
| No Parking VEHICLES OVER 5 TONS | R28F(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Stopping/No Parking Specific Hours | R29(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| No Parking Specific Hours | R30(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking Specific Hours | R30A(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking 10 AM TO 12 PM WEDNESDAY STREET SWEEPING | R30B(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking 2 AM TO 6 AM EXCEPT BY PERMIT | R30C(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking 2 AM TO 6 AM CITYWIDE EXCEPT BY PERMIT | R30D(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| No Parking with Double Arrow | R30E(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Stopping Specific Hours School Days | R30F(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| No Parking/Parking Specific Hours | R31(CA) | 2B.52 | 14 x20.5 | 14 x 20.5 | — | — | — | — |
| No Stopping/Parking Specific Hours | R31(S)(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| Limited Hour/Minute Parking Specific Hours | R32(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| The No Parking/Parking Specific Hours | R32B(CA) | 2B.52 | 12 x 30 | 12 x 30 | — | — | — | — |
| 2-HOUR PARKING 8 AM TO 6 PM DISTRICT 7 PERMITS EXEMPT | R32C(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| 30 MINUTE PARKING 2 AM TO 6 AM DISTRICT 3 PERMITS EXEMPT | R32D(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| 2-HOUR PARKING 8 AM TO 4 PM – PASSENGER LOADING ONLY 4 PM TO MIDNIGHT 5 MINUTE LIMIT with Double Arrow | R32E(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 3 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| 2-HOUR PARKING 8 AM TO 6 PM MOTORCYCLE PARKING ONLY with Double Arrow | R32F(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| EXCEPT HOLIDAYS (plaque) | R33bP(CA) | 2B.26 | 24 x 18 | 24 x 18 | 36 x 24 | 36 x 24 | — | — |
| Commercial Vehicle Weight Exclusion | R36(CA) | 2B.64 | 24 x 24 | 24 x 24 | — | — | — | — |
| Tow-Away No Stopping/Limited Hours Parking Specific Hours | R37(CA) | 2B.52 | 18 x 31 | 18 x 31 | — | — | — | — |
| Tow-Away No Stopping/Limited Hours Parking Specific Hours | R38(CA) | 2B.52 | 14 x 20.5 | 14 x 20.5 | — | — | — | — |
| Tow-Away No Stopping/Limited Hours Parking Specific Hours | R38(S)(CA) | 2B.52 | 18 x 31 | 18 x 31 | — | — | — | — |
| TOW-AWAY NO STOPPING 7 AM TO 9 AM – PASSENGER LOADING ONLY ALL OTHER TIMES 5 MINUTE LIMIT with Double Arrow | R38A(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| NO PARKING OF COMMERCIAL VEHICLES EXCEPT BY PERMIT | R39(CA) | 2B.52 | 24 x 30 | 24 x 30 | — | — | — | — |
| NO DOUBLE PARKING ANYTIME COMMERCIAL VEHICLES INCLUDED | R39-1(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| NO DOUBLE PARKING ANYTIME COMMERCIAL VEHICLES INCLUDED | R39-2(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| 10-HOUR PARKING COMMERCIAL MOTOR VEHICLES | R39-3(CA) | 2B.52, 2I.05 | 24 x 18 | 24 x 18 | — | — | — | — |
| $1000 FINE FOR LITTERING | R47(CA) | 2B.102(CA) | 52 x 36 | 52 x 36 | 52 x 36 | 52 x 36 | — | — |
| $1000 FINE FOR ANIMAL ABANDONMENT | R47A(CA) | 2B.102(CA) | 54 x 36 | 54 x 36 | 54 x 36 | 54 x 36 | — | — |
| SPEED ENFORCEMENT BY RADAR | R48(CA) | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | — |
| RADAR ENFORCED (plaque) | R48-1P(CA) | 2B.21 | 36 x 18 | 36 x 18 | 48 x 24 | 48 x 24 | 24 x 12 | — |
| SPEED ENFORCED BY AIRCRAFT | R48-2(CA) | 2B.21 | 24 x 30 | 24 x 30 | 36 x 48 | 48 x 60 | 18 x 24 | — |
| NO PED CROSSING USE CROSSWALK | R49(CA) | 2B.57 | 42x 18 | 42 x 18 | — | — | — | — |
| AUTOS WITH TRAILERS – TRUCKS – PROHIBITED | R53D(CA) | 2B.45 | — | — | 66 x 72 | 66 x 72 | — | — |
| END TRUCK LANE CONTROL | R53E(CA) | 2B.38 | 36 x 48 | 36 x 48 | 48 x 60 | 48 x 60 | 24 x 30 | — |
| YIELD TO UPHILL TRAFFIC | R55(CA) | 2B.38 | — | — | 48 x 54 | 48 x 54 | — | — |
| BEGIN FREEWAY | R57(CA) | 2B.55, 2B.109(CA) | — | — | 48 x 26 | 48 x 26 | — | — |
| END FREEWAY | R58(CA) | 2B.55, 2B.109(CA) | — | — | 48 x 26 | 48 x 26 | — | — |
| Optional Movement Lane Control | R60B(CA) | 2B.29 | 54 x 48 | 54 x 48 | — | — | — | — |
| Intersection Lane Control | R61-1(CA) | 2B.27 | 30 x 30 | 45 x 45 | — | — | 30 x 30 | — |
| Intersection Lane Control | R61-3(CA) | 2B.27 | 30 x 30 | 45 x 45 | — | — | 30 x 30 | — |
| Intersection Lane Control | R61-5(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-7(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-9(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-11(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-13(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| Intersection Lane Control | R61-15(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| Intersection Lane Control | R61-17(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| Intersection Lane Control | R61-19(CA) | 2B.27 | 36 x 30 | 48 x 36 | — | — | 30 x 24 | — |
| Intersection Lane Control | R61-22(CA) | 2B.27 | 54 x 30 | 78 x 45 | — | — | 54 x 30 | — |
| Intersection Lane Control | R61-24(CA) | 2B.27 | 54 x 30 | 78 x 45 | — | — | 54 x 30 | — |
| Intersection Lane Control | R61-26(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| Intersection Lane Control | R61-28(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| Intersection Lane Control | R61-30(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-32(CA) | 2B.27 | 36 x 30 | 54 x 45 | — | — | 36 x 30 | — |
| Intersection Lane Control | R61-34(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 4 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Intersection Lane Control | R61-36(CA) | 2B.27 | 48 x 30 | 72 x 45 | — | — | 48 x 30 | — |
| TRUCKS OK | R70(CA) | 2B.38 | — | — | — | 96 x 70 | — | — |
| TRUCKS | R70A(CA) | 2B.38 | — | — | — | 72 x 30 | — | — |
| OK | R70B(CA) | 2B.38 | — | — | — | 72 x 30 | — | — |
| Intersection Lane Control | R73-1(CA) | 2B.27, 2B.28 | 36 x 30 | 36 x 30 | — | — | 24 x 20 | 45 x 36 |
| Intersection Lane Control | R73-2(CA) | 2B.29 | 36 x 36 | 36 x 36 | — | — | 24 x 24 | 45 x 45 |
| Intersection Lane Control | R73-3(CA) | 2B.26, 2B.27 | 36 x 36 | 36 x 36 | — | — | 24 x 24 | 45 x 45 |
| Intersection Lane Control | R73-4(CA) | 2B.26, 2B.27 | 36 x 45 | 36 x 45 | — | — | 36 x 45 | — |
| Intersection Lane Control | R73-5(CA) | 2B.29 | 36 x 36 | 36 x 36 | — | — | 24 x 24 | — |
| Intersection Lane Control | R73-6(CA) | 2B.26, 2B.27 | 36 x 36 | 36 x 36 | — | — | 24 x 24 | — |
| Intersection Lane Control | R73-8(CA) | 2B.26, 2B.27 | 36 x 45 | 36 x 45 | — | — | 24 x 30 | — |
| CHAIN INSTALLATION ONLY | R74(CA) | 2B.52 | 36 x 36 | 36 x 36 | 36 x 36 | 36 x 36 | — | — |
| CHAINS REQUIRED (X MILE (X MILES)) AHEAD | R75(CA) | 2B.52 | 48 x 42 | 48 x 42 | 48 x 42 | 48 x 42 | — | — |
| CHAINS REQUIRED | R76(CA) | 2B.52 | 48 x 24 | 48 x 24 | 48 x 24 | 48 x 24 | — | — |
| ON SINGLE AXLE DRIVE VEHICLE WITH TRAILER | R76-1(CA) | 2B.52 | 48 x 24 | 48 x 24 | 48 x 24 | 48 x 24 | — | — |
| NO EXCEPTIONS | R77(CA) | 2B.52 | 48 x 30 | 48 x 30 | 48 x 30 | 48 x 30 | 48 x 12 | — |
| END CHAIN CONTROL | R78(CA) | 2B.52 | 48 x 34 | 48 x 34 | 48 x 34 | 48 x 34 | — | — |
| AUTOS & PICKUPS SNOW TIRES OK - CARRY CHAINS | R79(CA) | 2B.52 | 48 x 30 | 48 x 30 | 48 x 30 | 48 x 30 | — | — |
| 4-W DRIVE WITH SNOW TIRES OK - CARRY CHAINS | R80-1(CA) | 2B.52 | 48 x 30 | 48 x 30 | 48 x 30 | 48 x 30 | — | — |
| Specific Hours/Days (plaque) | R82aP(CA) | 2B.38 | 30 x 12 | 30 x 12 | 36 x 18 | 36 x 18 | 30 x 12 | 48 x 24 |
| 1 VEHICLE PER GREEN | R89A(CA) | 2B.61 | 36 x 18 | 36 x 18 | — | — | — | — |
| Accessible Parking Only | R99(CA) | 2B.52, 2B.53 | 12 x 18 | 12 x 18 | — | — | — | — |
| MINIMUM FINE $250 plaque | R99B(CA) | 2B.52 | 12 x 9 | 12 x 9 | — | — | — | — |
| Accessible Parking Only Minimum Fine $250 | R99C(CA) | 2B.52 | 12 x 24 | 12 x 24 | — | — | — | — |
| TOW-AWAY SPECIAL PLACARD OR LICENSE PLATE REQUIRED | R100A(CA) | 2B.52 | 12 x 8 | 12 x 8 | — | — | — | — |
| Disabled Tow-Away | R100B(CA) | 2B.52 | 24 x 24 | 24 x 24 | — | — | — | — |
| PRIVATE ROAD (PRIVATE PROPERTY) VEHICLE CODE ENFORCED | R101(CA) | 2B.103(CA) | 36 x 24 | 36 x 24 | — | — | 24 x 18 | — |
| HAZARDOUS WASTE PROHIBITED (plaque) | R102aP(CA) | 2B.67 | 24 x 18 | 24 x 18 | 30 x 20 | 30 x 20 | 18 x 12 | 48 x 30 |
| HAZARDOUS WASTE PERMITTED (plaque) | R103aP(CA) | 2B.67 | 24 x 18 | 24 x 18 | 30 x 20 | 30 x 20 | 18 x 12 | 48 x 30 |
| HAZARDOUS MATERIAL PROHIBITED (plaque) | R104aP(CA) | 2B.67 | 24 x 18 | 24 x 18 | 30 x 20 | 30 x 20 | 18 x 12 | 48 x 30 |
| HAZARDOUS MATERIAL PERMITTED (plaque) | R105aP(CA) | 2B.67 | 24 x 18 | 24 x 18 | 30 x 20 | 30 x 20 | 18 x 12 | 48 x 30 |
| Tow-Away NO STOPPING 4 TO 6 PM | R107(CA) | 2B.52 | 18 x 18 | 18 x 18 | — | — | — | — |
| No Parking of Vehicles for Sale | R108(CA) | 2B.52 | 12 x 18 | 12 x 18 | — | — | — | — |
| PAY AT STATION (plaque) | R109P(CA) | 2B.53 | 12 x 6 | 12 x 6 | 12 x 6 | — | — | — |
| STATE LAW MOVE OVER OR SLOW FOR STOPPED EMERGENCY AND MAINTENANCE VEHICLES | R110-1(CA) | 2B.71(CA) | — | — | — | 120 x 66 | — | — |
| Electric Vehicle Charging Station Tow-Away | R112(CA) | 2B.52 | — | — | — | — | 24 x 24 | — |
| No Parking EXCEPT FOR EV CHARGING | R113(CA) | 2B.52 | — | — | — | — | 12 x 18 | — |
| No Parking EXCEPT FOR ELECTRIC VEHICLE CHARGING | R113A(CA) | 2B.52 | — | — | — | — | 12 x 18 | — |
| __ HOUR EV CHARGING __ AM TO __ PM | R114(CA) | 2B.52 | — | — | — | — | 12 x 18 | — |

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 5 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| NO CAMPING OR SLEEPING IN VEHICLE MON Co Ord. XXXXXX | R119(CA) | 2B.108(CA) | 30 x 24 | 30 x 24 | — | — | — | — |
| WAIT HERE UNTIL SCALE CLEAR | SR6-1(CA) | 2B.65 | — | — | 44 x 36 | 44 x 36 | — | — |
| RELEASE BRAKES WHILE ON SCALE | SR7-1(CA) | 2B.65 | — | — | 42 x 36 | 42 x 36 | — | — |
| SET PARKING BRAKES | SR8-1(CA) | 2B.65 | — | — | 48 x 20 | 48 x 20 | — | — |
| LOADED | SR9-1(CA) | 2B.65 | — | — | 68 x 24 | 68 x 24 | — | — |
| EMPTY | SR10-1(CA) | 2B.65 | — | — | 62 x 24 | 62 x 24 | — | — |
| EMPTY 5 MPH | SR11-1(CA) | 2B.65 | — | — | 112 x 24 | 112 x 24 | — | — |
| LOADED 3 MPH | SR12-1(CA) | 2B.65 | — | — | 118 x 24 | 118 x 24 | — | — |
| Theft CHP (plaque) | SR13-1P(CA) | 2B.65 | 48 x 10 | 48 x 10 | — | — | — | — |
| Seat Belt | SR15(CA) | 2B.74 | 18 x 24 | 18 x 24 | 18 x 24 | 18 x 24 | — | — |
| SAFETY BELT LAW ENFORCED (plaque) | SR15aP(CA) | 2B.74 | 18 x 18 | 18 x 18 | 18 x 18 | 18 x 18 | — | — |
| TRUCKS NOT GIVEN BYPASS SIGNAL MUST ENTER OPEN SCALES | SR17(CA) | 2B.65 | — | — | 120 x 42 | 144 x 54 | 120 x 42 | — |
| NO EXPLOSIVES OR FLAMMABLES | SR18(CA) | 2B.67 | 36 x 24 | 36 x 24 | — | — | — | — |
| EXPLOSIVES AND CORROSIVES PROHIBITED WITHOUT PERMIT | SR19-1(CA) | 2B.67 | 60 x 48 | 60 x 48 | — | — | — | — |
| SNOW NOT REMOVED BEYOND HERE | SR20-1(CA) | 2B.52 | 48 x 30 | 48 x 30 | — | — | — | — |
| TRANSPORTING ILLEGAL FIREWORKS PROHIBITED | SR25(CA) | 2B.67 | 84 x 42 | 84 x 42 | 108 x 54 | 108 x 54 | 84 x 42 | — |
| DISPLAY OF VEHICLES FOR SALE PROHIBITED | SR26(CA) | 2B.52 | 30 x 24 | 30 x 24 | — | — | — | — |
| LEFT OR U TURN ON GREEN ARROW ONLY | SR39A(U)(CA) | 2B.59 | 42 x 24 | 42 x 24 | — | — | — | — |
| LEFT TURN ON GREEN ARROW ONLY – NO U TURN | SR39B(CA) | 2B.59 | 36 x 48 | 36 x 48 | — | — | — | — |
| Width Limit | SR40(CA) | 2B.65 | — | — | 60 x 78 | 60 x 78 | 48 x 60 | — |
| ALL BUSES STOP AT SCALES | SR41(CA) | 2B.65 | — | — | 84 x 48 | 84 x 48 | — | — |
| ALL BUSES with Arrow | SR42(CA) | 2B.65 | — | — | 54 x 54 | 54 x 54 | — | — |
| GOLF CARTS OK DAYLIGHT HOURS | SR43(CA) | 2B.104(CA) | 18 x 24 | 18 x 24 | — | — | — | — |
| Bus and Truck Registration | SR44(CA) | 2B.105(CA) | 72 x 42 | 72 x 42 | — | — | — | — |
| EMERGENCY ACCESS KEEP CLEAR | SR46(CA) | 2B.106(CA) | 24 x 30 | 24 x 30 | — | — | — | — |
| OFF HIGHWAY VEHICLES COMBINED USE NEXT (X) MILES | SR47(CA) | 2B.107(CA) | 48 x 48 | 48 x 48 | — | — | — | — |
| NO OFF-HIGHWAY VEHICLES BEYOND THIS POINT | SR48(CA) | 2B.107(CA) | 48 x 48 | 48 x 48 | — | — | — | — |
| TOW AWAY NO PARKING WHEN SNOW REMOVAL CONDITIONS EXIST | SR49(CA) | 2B.52 | 36 x 45 | 36 x 45 | — | — | 18 x 24 | — |
| SPECIAL DRIVING ZONE BEGINS HERE – DOUBLE FINE ZONE | SR53(CA) | 2B.25 | 48 x 48 | 48 x 48 | 72 x 72 | 72 x 72 | 48 x 48 | — |
| DOUBLE FINE ZONE | SR54(CA) | 2B.25 | 30 x 30 | 30 x 30 | 42 x 42 | 42 x 42 | 30 x 30 | — |
| SPECIAL DRIVING ZONE ENDS HERE | SR55(CA) | 2B.25 | 48 x 30 | 48 x 30 | 72 x 42 | 72 x 42 | 48 x 30 | — |
| ALL TRUCKS – 2 AXLES AND MORE – STOP AT SCALE | SR57-1(CA) | 2B.65 | 66 x 18 | 66 x 18 | 84 x 24 | 108 x 30 | 84 x 24 | — |
| NO PICKUPS (plaque) | SR57-1P(CA) | 2B.65 | 66 x 12 | 66 x 12 | 84 x 18 | 108 x 24 | 84 x 18 | |
| RED LIGHT VIOLATION $___ FINE | SR58(CA) | 2B.69 | 30 x 36 | 30 x 36 | 36 x 48 | 36 x 48 | 30 x 36 | — |
| STATE LAW MINOR CRASH NO INJURIES – SAFELY MOVE VEHICLES FROM TRAVEL LANES | SR61-1(CA) | 2B.70 | 96 x 84 | 96 x 84 | 96 x 84 | 96 x 84 | 96 x 84 | — |
| NO IDLING COMMERCIAL VEHICLES AND ALL BUSES | SR62(CA) | 2B.52 | 18 x 24 | 18 x 24 | — | — | — | — |

## Table 2B-1(CA). California Regulatory Sign and Plaque Sizes (Sheet 6 of 6)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| NO IDLING All Buses and Commercial Vehicles | SR63(CA) | 2B.52 | 18 x 24 | 18 x 24 | — | — | — | — |
| NO IDLING All Buses and Commercial Vehicles REPORT VIOLATIONS | SR63A(CA) | 2B.52 | 18 x 30 | 18 x 30 | — | — | — | — |
| Weight Station Repair Service (plaque) | S21P(CA) | 2B.65 | 36 x 24 | 36 x 24 | — | — | — | — |
| NO LOITERING, CAMPING, VENDING OR PARKING OF VEHICLES 30 FEET OR LONGER | S22(CA) | 2B.110(CA) | — | — | — | — | 48 x 15 | — |
| Rest Area/Vista Point 8-HOUR PARKING | S23(CA) | 2B.52, 2I.05 | 24 x 24 | 24 x 24 | — | — | — | — |

## Table 2B-2. Meanings of Symbols and Legends on Reversible Lane Control Signs

| Symbol / Word Message | Meaning |
|---|---|
| Red X on white background | Lane closed |
| Upward-pointing black arrow on white background (if left turns are permitted, the arrow shall be modified to show left / through arrow) | Lane open for through travel and any turns not otherwise prohibited |
| Black two-way left-turn arrows on white background and legend ONLY | Lane may be used only for left turns in either direction (i.e., as a two-way left-turn lane) |
| Black single left-turn arrow on white background and legend ONLY | Lane may be used only for left turns in one direction (without opposing left turns in the same lane) |

## Table 2B-101(CA). Standard Application of Speed Limits per California Vehicle Code

| Speed | Determined by | Roadway Facility | CVC Section |
|---|---|---|---|
| 15 mph | State or local authority | ▪ Railroad grade crossing with obstructed view<br>▪ Uncontrolled highway intersection with obstructed view<br>▪ An alley | 22352.a.1 |
| 15 & 20 mph | State or local authority | Where the prima facie speed of 25 mph is more than is reasonable or safe<br>▪ Narrow street not exceeding 25 feet other than a State Highway in a business or residential area or in a public park<br>▪ Road near a school or senior center facility | 22358.3 & 22358.4 |
| 25 mph | State or local authority | ▪ Any highway in any business or residential district<br>▪ A street contiguous to a senior citizen facility other than a State highway<br>▪ Adjacent to a children's playground in a public park, but only during particular hours or days when children are expected to use the facilities | 22352.b & 22357.1 |

## Table 2B-102(CA). Standard Application of Speed Limits per California Vehicle Code

| Speed | Determined by | Roadway Facility | CVC Section |
|---|---|---|---|
| 15 to 60 mph | Caltrans | State highway, based on an E&TS where the limit of 65 mph is more than reasonable or safe | 22354 |
| 15 to 60 mph | Local city council or county board of supervisors for Caltrans | State highway, local entities may conduct a public hearing on proposed increases or decreases, and the State Department of Transportation shall take into consideration the results of the public hearing | 22354.5 |
| 30 to 65 mph | Local authority | Any street other than a state highway, by ordinance, may post a prima facie speed limit based on an E&TS where a speed > 25 mph would facilitate the orderly movement of vehicular traffic and would be reasonable and safe | 22357 |
| 15 to 60 mph | Local authority | Any street other than a state highway, by ordinance, may post a prima facie speed limit based on an E&TS where the limit of 65 mph is more than is reasonable and safe | 22358 |
| 20 to 50 mph for Trucks | State or local authority | Highways under their respective jurisdiction where 55 mph is more than is reasonable or safe for vehicles mentioned in CVC 22406 (Trucks and other large vehicles) | 22407 |
| Maximum Speed 55 mph | State or local authority | ▪ Two-lane, undivided highway<br>▪ Any highway when driving any of the following vehicles:<br>a. Motortruck or truck tractor with > 3 axles<br>b. Passenger vehicle or bus towing any other vehicle<br>c. School bus transporting any school pupil<br>d. A farm labor vehicle when transporting passengers<br>e. A vehicle transporting explosives<br>f. A trailer bus | 22349.b & .c and 22406 |
| Maximum Speed Limit of 65 mph | State or local authority | Any highway, posted at 65 mph based upon an E&TS, for vehicles not subject to CVC 22406 | 22349(a) & 22349 |
| Maximum Freeway Speed Limit of 70 mph | Caltrans | Freeways, after consultation with the California Highway Patrol, based upon an E&TS, or upon the basis of appropriate design standards and projected traffic volumes in the case of newly constructed freeway segments, for vehicles not subject to CVC 22406 | 22356 |

## Table 2B-103(CA). Examples Showing the Applicability of Rounding and Additional Speed Reduction

| 85th-Percentile Speed (mph) | Rounding to the nearest 5 mph increment (CVC 22358.6(a)) | If rounding to the nearest is up, may round down (CVC 22358.6(c)) | If rounding to the nearest is down, it may additionally be lowered by 5 mph (CVC 22358.6(b)) | If safety corridor or adjacent to high concentration of bicyclists & pedestrians, may additionally lower by 5 mph (CVC 22358.7) |
|---|---|---|---|---|
| 47.5-50.0 | 50 | 45 | N/A | 40 |
| 45.1-47.4 | 45 | N/A | 40 | 35 |
| 42.5-45.0 | 45 | 40 | N/A | 35 |
| 40.1-42.4 | 40 | N/A | 35 | 30 |

## Table 2B-104(CA). Safety Corridor Factors

| Category | Factors |
|---|---|
| Crash Weighting Factors to Develop One Serious/Fatal Injury Safety Corridor | ▪ Crash severity: Fatal Crashes, Serious Injury Crashes<br>▪ Mode: Pedestrian-bicycle related crashes, vehicle/other<br>▪ Disadvantaged Community Status: MPO/RTPA or locally defined disadvantaged community status based on most current version of CalEnviroScreen<br>▪ Vulnerable Populations: Seniors (age 65 and older) and Youth (under age 15) based on the American Community Survey<br>▪ School proximity (within 0.25 miles) based on the California School Campus Database<br>▪ Systemic or Predicted Crashes |
| Crash Density | Each roadway segment block may be converted into ~ 0.25-mile overlapping or contiguous "corridor" segments to create a consistent unit of measurement and assess the concentration of linear patterns of crashes within a defined distance. The highest scoring (i.e., most fatal and serious injury crashes per mile) "corridor" segments within a street need to be identified and an appropriate threshold set to determine safety corridor eligibility. |
| Maintenance | The jurisdiction may establish a review and re-evaluation frequency for safety corridors. However, such frequency need not exceed seven years. |

## Table 2B-105(CA). Generators of High Concentrations of Bicyclists or Pedestrians

| Category | Generator |
|---|---|
| Land Use | Employment centers |
| | Presence of retail |
| | Parks, multi-use trails, and recreational destinations |
| | Schools/universities |
| | Senior Centers |
| | Cultural areas, entertainment space areas, or areas of community significance |
| | Religious facilities |
| | Health/medical facilities |
| Transit Factors | Transit stops |
| | Transit-Oriented Developments/Transit Priority Areas |
| Presence of Pedestrian/Bicyclist Infrastructure | Sidewalk presence |
| | Crosswalk presence |
| | Bikeway presence |
| | Nearby signalized intersections on four-way intersections |
| | Presence of micromobility devices such as bicycles or scooters |
| Demographic Factors | Presence of vulnerable groups, including children, seniors, persons with disabilities, users of personal assistive mobility devices, and the unhoused |
| | MPO/RTPA or locally defined disadvantaged community status |
| | Presence of students (all levels) |
| Local Data | Need identified in a safety analysis, such as a road safety audit or a formalized planning document, such as a local road safety plan |

# CHAPTER 2C. WARNING SIGNS AND OBJECT MARKERS

## Chapter 2C Subchapter and Section Organization

**GENERAL**
- 2C.01 Application of Warning Signs
- 2C.02 Design of Warning Signs
- 2C.03 Size of Warning Signs and Plaques
- 2C.04 Placement of Warning Signs

**HORIZONTAL ALIGNMENT WARNING SIGNS AND PLAQUES**
- 2C.05 Horizontal Alignment Warning Signs – General
- 2C.06 Device Selection for Changes in Horizontal Alignment
- 2C.07 Horizontal Alignment Signs (W1-1 through W1-5, W1-11, and W1-15)
- 2C.08 Chevron Alignment Sign (W1-8)
- 2C.09 Combination Horizontal Alignment/Intersection Signs (W1-10 Series)
- 2C.10 One-Direction Large Arrow Sign (W1-6)
- 2C.11 Truck Rollover Sign (W1-13)
- 2C.12 Advisory Exit and Ramp Speed Signs (W13-2 and W13-3) and Combination Horizontal Alignment/Advisory Exit and Ramp Speed Signs (W13-6 through W13-13)
- 2C.13 Vehicle Speed Feedback Sign and Plaque (W13-20 and W13-20aP)

**VERTICAL GRADE WARNING SIGNS AND PLAQUES**
- 2C.14 Hill Signs (W7-1 and W7-1a)
- 2C.15 Truck Escape Ramp Signs (W7-4 Series)
- 2C.16 HILL BLOCKS VIEW Sign (W7-6)

**ROADWAY GEOMETRY WARNING SIGNS**
- 2C.17 ROAD NARROWS Sign (W5-1)
- 2C.18 NARROW BRIDGE and NARROW UNDERPASS Signs (W5-2 and W5-2a)
- 2C.19 ONE LANE BRIDGE and ONE LANE UNDERPASS Signs (W5-3 and W5-3a)
- 2C.20 Divided Highway Sign (W6-1) 2C.21
- 2C.21 Divided Highway Ends Sign (W6-2)
- 2C.22 Freeway or Expressway Ends Signs (W19 Series)
- 2C.23 Double Arrow Sign (W12-1)
- 2C.24 DEAD END, NO OUTLET, and ROAD ENDS Signs (W14-1, W14-1a, W14-2, W14-2a, W8-26, and W8-26a)
- 2C.25 Low Clearance Signs (W12-2, W12-2a, and W12-2b)

**ROADWAY AND WEATHER-CONDITION WARNING SIGNS AND PLAQUES**
- 2C.26 BUMP and DIP Signs (W8-1 and W8-2)
- 2C.27 SPEED HUMP Sign (W17-1)
- 2C.28 PAVEMENT ENDS Sign (W8-3)
- 2C.29 Shoulder Signs (W8-4, W8-9, W8-17, W8-23, and W8-25)
- 2C.30 Surface Condition Signs (W8-5, W8-7, W8-8, W8-11, W8-13, and W8-14)
- 2C.31 Warning Signs and Plaque for Motorcyclists (W8-15, W8-15aP, and W8-16)
- 2C.32 NO CENTER LINE Sign (W8-12)
- 2C.33 NO TRAFFIC SIGNS Sign (W18-1)
- 2C.34 Weather Condition Signs (W8-18, W8-19, W8-21, and W8-22)

**TRAFFIC CONTROL AND INTERSECTION WARNING SIGNS AND PLAQUES**
- 2C.35 Advance Traffic Control Signs (W3-1, W3-2, W3-3, and W3-4)

2C.36 DRAW BRIDGE Sign (W3-6)
2C.37 Advance Ramp Control Signal Signs (W3-7 and W3-8)
2C.38 NEW TRAFFIC PATTERN and NEW SIGNAL OPERATION AHEAD Signs (W23-2 and W23-2a)
2C.39 WATCH FOR STOPPED TRAFFIC Sign (W26-1)
2C.40 Reduced Speed Limit Ahead and Speed Zone Signs (W3-5, W3-5a, W3-5b, and W3-5c)
2C.41 Intersection Warning Signs (W2-1 through W2-8)
2C.42 Actuated Advance Intersection Signs (W2-10 and W2-11)
2C.43 Two-Direction Large Arrow Sign (W1-7)
2C.44 Traffic Signal Oncoming Extended Green Signs (W25-1 and W25-2)

**MERGING, TWO-WAY TRAFFIC, AND NO PASSING WARNING SIGNS AND PLAQUES**
2C.45 Merge Signs and Plaque (W4-1, W4-5, and W4-5aP)
2C.46 Added Lane Signs (W4-3 and W4-6)
2C.47 Lane Ends Signs (W4-2 and W9-1)
2C.48 Lanes Merge Signs (W9-4 and W4-8)
2C.49 HEAVY MERGE FROM LEFT (RIGHT) Sign (W4-7)
2C.50 RIGHT (LEFT) LANE FOR EXIT ONLY Sign (W9-7)
2C.51 Two-Way Traffic Sign (W6-3)
2C.52 Two-Way Traffic on a Three-Lane Roadway Sign (W6-5 and W6-5a)
2C.53 NO PASSING ZONE Sign (W14-3)

**MISCELLANEOUS WARNING SIGNS**
2C.54 Vehicular Traffic Warning Signs (W8-6, W11-1, W11-5, W11-8, W11-10, W11-11, W11- 12P, W11-14, W11-15, and W11-15a)
2C.55 Non-Vehicular Warning Signs (W11-2, W11-3, W11-4, W11-6, W11-7, W11-9, and W11-16 through W11-22)
2C.56 Playground Sign (W15-1)

**SUPPLEMENTAL WARNING PLAQUES**
2C.57 Use of Supplemental Warning Plaques
2C.58 Design of Supplemental Warning Plaques
2C.59 Advisory Speed Plaque (W13-1P) and Confirmation Advisory Speed Plaque (W13-1aP)
2C.60 NEW Plaque (W16-15P)
2C.61 Distance Plaques (W16-2 Series, W16-3 Series, W16-4P, and W7-3aP)
2C.62 Supplemental Arrow Plaques (W16-5P and W16-6P)
2C.63 Diagonal Downward-Pointing Arrow Plaques (W16-7P and W19-7aP)
2C.64 Hill-Related Plaques (W7-2 Series and W7-3 Series)
2C.65 Advance Street Name Plaques (W16-8P and W16-8aP)
2C.66 Traffic Does Not Stop Plaques (W4-4P Series)
2C.67 IN ROAD and IN STREET Plaques (W16-1P and W16-1aP)
2C.68 EXCEPT BICYCLES Plaque (W16-20P)
2C.69 Photo Enforced Plaques (W16-10P and W16-10aP)

**OBJECT MARKERS**
2C.70 Object Marker Design and Placement Height
2C.71 Object Markers for Obstructions Within the Roadway
2C.72 Object Markers for Obstructions Adjacent to the Roadway
2C.73 Object Markers for Ends of Roadways

**CALIFORNIA SECTIONS:**
2C.101(CA) TRACTOR-SEMIS OVER ___ FEET KINGPIN TO REAR AXLE NOT ADVISED (SW48(CA))
2C.102(CA) Weight Limit signs (W20(CA) and W20A(CA))
2C.103(CA) Safety Corridor Sign (SW33(CA))

# GENERAL

## Section 2C.01 Application of Warning Signs

**Standard:**

01 **The use of warning signs shall be based on an engineering study or on engineering judgment.**

02 **Warning signs shall be retroreflective or illuminated (see Section 2A.21).**

*Guidance:*

03 *The use of warning signs should be kept to a minimum as the unnecessary use of warning signs tends to breed disrespect for all signs. In situations where the condition or activity is seasonal or temporary, the warning sign should be removed or covered when the condition or activity does not exist.*

## Section 2C.02 Design of Warning Signs

**Standard:**

01 **Except as provided in Paragraph 2 of this Section or unless specifically designated otherwise, all warning signs shall be diamond-shaped (square with one diagonal vertical) with a black legend and border on a yellow background. Warning signs shall be designed in accordance with the sizes, shapes, colors, and legends contained in the "Standard Highway Signs" publication (see Section 1A.05) and Caltrans' California Sign Specifications.**

Option:

02 A warning sign that is larger than the size shown in the Oversized column in Table 2C-1 and 2C-1(CA) for that particular sign may be diamond-shaped or may be rectangular or square in shape.

Support:

03 The use of a shape other than diamond-shaped is typical for overhead installations.

04 Section 2A.05 contains information on allowable methods to accommodate a diamond-shaped warning sign where the lateral space available in which to install a diamond-shaped warning sign is constrained, such as in urban locations, when mounting on a narrow median barrier or adjacent to a retaining wall, including the display of the standard legend in a vertically oriented rectangle.

05 The use of LEDs in the border and legend of warning signs is described in Section 2A.12.

Option:

06 Except for symbols on warning signs, minor modifications may be made to the design provided that the essential appearance characteristics are met. Modifications may be made to the symbols shown on combined horizontal alignment/intersection signs (see Section 2C.09) and intersection warning signs (see Section 2C.41) in order to approximate the geometric configuration of the intersecting roadway(s).

07 Word message warning signs other than those provided in this Manual may be developed by Caltrans (in accordance with CVC § 21400) and installed by State ~~and~~ or local highway agencies for conditions otherwise not addressed by standard signs (see Section 2A.04).

08 Warning signs regarding conditions associated with pedestrians, bicyclists, and playgrounds and their related plaques may have a black legend and border on a yellow or fluorescent yellow-green background.

**Standard:**

09 **Warning signs regarding conditions associated with school buses and schools and their related supplemental plaques shall have a black legend and border on a fluorescent yellow-green background (see Section 7B.01).**

Option:

10 Consistent with the provisions of Section 4S.03, a Warning Beacon may be used in combination with a standard warning sign.

Support:

11 Refer to Section 2A.09 for the use of educational plaques.

## Section 2C.03 Size of Warning Signs and Plaques

**Standard:**

01 **Except as provided in Section 2A.07, the sizes for warning signs shall be as shown in Table 2C-1 and Table 2C-1(CA).**

Support:

01a Refer to Paragraph 02 of Section 2C.02 and Paragraph 06 of this section for sizes larger than shown in Table 2C-1 and Table 2C-1(CA).

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2C-1.

**Standard:**

03 **Except as provided in Paragraph 5 of this Section, the minimum size for all diamond-shaped warning signs facing traffic on a multi-lane conventional road where the posted speed limit is higher than 35 mph shall be 36 x 36 inches.**

04 **The minimum size for supplemental warning plaques that are not included in Table 2C-1 shall be as shown in Table 2C-2.**

Option:

05 If a diamond-shaped warning sign is placed on the left-hand side of a multi-lane roadway to supplement the installation of the same warning sign on the right-hand side of the roadway, the minimum size identified in the Single Lane column in Table 2C-1 may be used.

06 Signs and plaques larger than those shown in Tables 2C-1 and 2C-2 may be used (see Section 2A.11).

*Guidance:*

07 *The minimum size for all diamond-shaped warning signs facing traffic on exit and entrance ramps at major interchanges connecting an Expressway or Freeway with an Expressway or Freeway (see Section 2E.11) should be the size identified in Table 2C-1 for the mainline roadway classification (Expressway or Freeway). If a minimum size is not provided in the Freeway Column, the Expressway size should be used. If a minimum size is not provided in the Freeway or the Expressway Column, the Oversized size should be used.*

08 *The minimum size for all diamond-shaped warning signs facing traffic on exit and entrance ramps at all other interchanges (see Section 2E.11) should be 36 x 36 inches.*

09 *The typical size of warning signs used on low-volume rural roads with ~~operating speeds~~ posted speed limits of 30 mph or less should be in accordance with the minimum column of Table 2C-1.*

## Section 2C.04 Placement of Warning Signs

Support:

01 Information on the placement of warning signs is contained in Sections 2A.13 through 2A.18.

02 The time needed for detection, recognition, decision, and reaction is called the Perception-Response Time (PRT). Table 2C-3 is provided as an aid for determining warning sign location. The distances shown in Table 2C-3 can be adjusted for roadway features, other signing, and to improve visibility.

*Guidance:*

03 *Warning signs should be placed so that they provide an adequate PRT. The distances contained in Table 2C-3 should be applied with engineering judgment.*

04 *Minimum spacing between warning signs with different messages should be based on the estimated PRT for driver comprehension of and reaction to the second sign.*

05 *The effectiveness of the placement of warning signs should be periodically evaluated under both day and night conditions.*

# HORIZONTAL ALIGNMENT WARNING SIGNS AND PLAQUES

## Section 2C.05 Horizontal Alignment Warning Signs – General

Support:

01 A variety of horizontal alignment warning signs (see Figure 2C-1), pavement markings (see Chapter 3B), and delineation (see Chapter 3G) can be used to advise motorists of a change in the roadway alignment. Uniform application of these traffic control devices with respect to the amount of change in the roadway alignment conveys a consistent message establishing driver expectancy and promoting effective roadway operations. The design and application of horizontal alignment warning signs to meet those requirements are addressed in Sections 2C.05 through 2C.12.

02 The following list identifies treatments that might be used in advance of or within a change in horizontal alignment:

A. Horizontal alignment (Turn (W1-1), Curve (W1-2, W1-10 series, W1-11, W1-13, W1-15), Reverse Turn (W1-3), Reverse Curve (W1-4), Winding Road (W1-5), Exit Speed (W13-2), Ramp Speed (W13-3), and Combination Horizontal Alignment (Advisory Exit or Ramp Speed W13-6 through W13-11)) signs (see Sections 2C.07, 2C.09, and 2C.12)
B. Advisory Speed (W13-1P) plaque (see Section 2C.59)
C. Chevron Alignment (W1-8) signs (see Section 2C.08)
D. Delineators (see Chapter 3G)
E. One Direction Large Arrow (W1-6) sign (see Section 2C.10)
F. Raised Retroreflective Pavement Markers (see Sections 3B.15 through 3B.17)
G. Sign or marking conspicuity enhancements (see Section 2A.11)
H. Wide edge lines (see Section 3A.04)
I. Pavement word, symbol and arrow markings (symbol or words) (see Sections 3B.20 through 3B.22)
J. Rumble strips (see Chapter 3K)
K. Vehicle Speed Feedback Sign (see Section 2C.13)
L. Speed reduction markings (see Section 3B.28)

03 In addition, considerations other than traffic control devices, such as improved surface friction (high friction surface treatments), pavement edge treatments, lighting improvements, increased superelevation, and rumble strips, might be used in advance of or within a change in horizontal alignment.

*Guidance:*

04 *Except as provided in Section 2C.06, the selection of traffic control devices used to warn road users of a change in horizontal alignment or to provide guidance in navigating the change in horizontal alignment should be based on consideration of one or more of the following factors:*

*A. The speed of traffic on the approach to the change in horizontal alignment*
*B. The recommended advisory speed for the change in horizontal alignment*
*C. The difference between the speed limit and the advisory speed, or the speed differential for the change in horizontal alignment*
*D. Daily traffic volumes on the roadway*
*E. The typical mix of vehicle types on the roadway*
*F. Sight distance throughout the change in horizontal alignment*
*G. Other types of traffic control devices that are used in advance of and within the change in horizontal alignment on the same roadway segment*
*H. The crash history of the change in horizontal alignment*
*I. The presence of driveways or intersections within the curve radius*

## Section 2C.06 Device Selection for Changes in Horizontal Alignment

**Standard:**

01 **The criteria shown in Chart A of Table 2C-4 shall be used to determine the need for devices for changes in horizontal alignment. If the use of a device or devices is indicated by Chart A of Table 2C-4, then Chart B of Table 2C-4 shall be used to specify the type(s) of devices to be used in advance of, and/or along, a horizontal curve, except as provided in Paragraphs 3, 5, and 6 of this Section. The speed differential in Chart B of Table 2C-4 shall be the difference between the horizontal curve's advisory speed and the roadway's posted speed limit, statutory speed limit, or the 85th percentile speed on the approach to the curve**.

Support:

02 Chart A of Table 2C-4 represents existing AADT, type of roadway, and whether or not there are existing markings.

Option:

03 A One Direction Large Arrow (W1-6) sign may be used in place of or to supplement delineators (see Chapter 3G) or Chevron Alignment (W1-8) signs when:

A. Site conditions limit the number of delineators or Chevron Alignment signs that are visible; or
B. The number of delineators or Chevron Alignment signs that can be installed within the change in horizontal alignment is less than the number determined by the spacing specified in Sections 2C.08 or 3G.04.

04 Additional or supplemental devices may be used for a change in horizontal alignment on the basis of engineering judgment.

05 Devices for changes in horizontal alignment may be omitted when the speed limit on the approach to an alignment change is 20 mph or less.

06 Devices for changes in horizontal alignment may be omitted on urban streets with an AADT of 1,000 vehicles per day or less.

Support:

07 For purposes of selecting traffic control devices for changes in horizontal alignment, an arterial or collector is considered to have pavement markings when either a center line, edge lines, or both are present. Warrants for center lines and edge lines are provided in Sections 3B.02 and 3B.10, respectively.

## Section 2C.07 Horizontal Alignment Signs (W1-1 through W1-5, W1-11, and W1-15)

**Standard:**

01 **If Table 2C-4 indicates that a horizontal alignment sign (see Figure 2C-1) is required, recommended, or allowed, the sign installed in advance of the curve shall be a Curve (W1-2) sign unless a different sign is recommended or allowed by the provisions of this Section.**

*Guidance:*

02 *A Turn (W1-1) sign should be used instead of a Curve (W1-2) sign in advance of a horizontal curve that has an advisory speed of 30 mph or less.*

03 *Where there are two changes in roadway alignment in opposite directions that are separated by a tangent distance of less than 600 feet, the Reverse Turn (W1-3) sign should be used instead of multiple Turn (W1-1) signs or the Reverse Curve (W1-4) sign should be used instead of multiple Curve (W1-2) signs.*

Support:

04 Figure 2C-2 provides examples of warning signs used for turns and curves.

Option:

05 A Winding Road (W1-5) sign may be used instead of multiple Turn (W1-1) or Curve (W1-2) signs where there are ~~three or more changes~~ a series of turns or curves in a roadway alignment which requires driving caution, and where curve or turn signs would be too numerous to be effective. ~~each separated by a tangent distance of less than 600 feet.~~

Support:

05a Where any of the curves has an advisory speed that is 10 mph or more below that of the first curve then it should be posted with a curve or turn sign and an Advisory Speed (W13-1P) plaque.

Option:

06 A NEXT XX MILES (W7-3aP) supplemental distance plaque (see Section 2C.61) may be installed below the Winding Road sign where continuous roadway curves exist for a specific distance.

07 If the curve has a change in horizontal alignment of 135 degrees or more, the Hairpin Curve (W1-11) sign may be used instead of a Turn or Curve sign.

08 If the curve has a change of direction of approximately 270 degrees, such as on a cloverleaf interchange ramp, the 270-degree Loop (W1-15) sign may be used instead of a Turn or Curve sign.

*Guidance:*

09 *When the Hairpin Curve sign or the 270-degree Loop sign is installed, either a One-Direction Large Arrow (W1-6) sign or Chevron Alignment (W1-8) signs should be installed on the outside of the turn or curve.*

Option:

10 Horizontal Alignment Signs may be combined with the Advisory Speed (W13-1P) plaque (refer to Section 2C.59).

Support:

11 Refer to Section 2C.35 for use of an oversized square shape version of W1-1 at a short ramp length with limiting curve near ramp terminals (refer to Figure 2C-3).

## Section 2C.08 Chevron Alignment Sign (W1-8)

**Standard:**

01 **The use of the Chevron Alignment (W1-8) sign (see Figures 2C-1 and 2C-2) to provide additional emphasis and guidance for a change in horizontal alignment shall be in accordance with the information shown in Table 2C-4.**

Option:

02 Chevron Alignment signs may be used instead of or in addition to standard delineators.

**Standard:**

03 **The Chevron Alignment sign shall be a vertical rectangle. No border shall be used on the Chevron Alignment sign.**

04 **If used, Chevron Alignment signs shall be installed on the outside of a turn or curve, in line with and at approximately a right angle to approaching traffic. Chevron Alignment signs shall be installed at a minimum height of 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way.**

*Guidance:*

05 *The approximate spacing of Chevron Alignment signs on the turn or curve measured from the point of curvature (PC) should be as shown in Table 2C-5.*

06 *The Chevron Alignment signs should be visible for a sufficient distance to provide the road user with adequate time to react to the change in alignment.*

Option:

07 LEDs may be used to enhance the conspicuity of Chevron Alignment signs (see Section 2A.12).

**Standard:**

08 **The LEDs used in the Chevron Alignment sign shall consist of yellow LEDs outlining the chevron symbol.**

09 **Chevron Alignment signs shall not be placed on the far side of a T-intersection facing traffic on the stem approach to warn drivers that a through movement is not physically possible, as this is the function of a Two-Direction (or One-Direction) Large Arrow sign.**

10 **Chevron Alignment signs shall not be used to mark obstructions within or adjacent to the roadway, including the beginning of guardrails or barriers, as this is the function of an object marker (see Section 2C.70).**

11 **Chevron Alignment signs directing traffic to the right shall not be used in the central island of a roundabout or a neighborhood traffic circle.**

## Section 2C.09 Combination Horizontal Alignment/Intersection Signs (W1-10 Series)

Option:

01 The Turn (W1-1) sign, the Curve (W1-2) sign, and the Reverse Curve (W1-4) sign may be combined with the Cross Road (W2-1) sign or the Side Road (W2-2 or W2-3) sign to create a combination Horizontal Alignment/Intersection (W1-10 series) sign (see Figure 2C-1) that depicts the condition where an intersection occurs within or immediately adjacent to a turn or curve.

Support:

02 Section 2C.65 contains information about the use of an advance street name plaque to identify an intersecting road.

*Guidance:*

03 *Elements of the combination Horizontal Alignment/Intersection sign related to horizontal alignment should comply with the provisions of Section 2C.07, and elements related to intersection configuration should comply with the provisions of Section 2C.41. The symbol design should approximate the configuration of the intersecting roadway(s). No more than one Cross Road or two Side Road symbols should be displayed on any one combination Horizontal Alignment/Intersection sign.*

**Standard:**

04 **The use of the combination Horizontal Alignment/Intersection sign shall be in accordance with the provisions of Section 2C.07 for the appropriate Turn or Curve sign.**

Support:

05 The advisory speed needs to be determined in accordance with Section 2C.59.

## Section 2C.10 One-Direction Large Arrow Sign (W1-6)

Option:

01 A One-Direction Large Arrow (W1-6) sign (see Figure 2C-1) may be used either as a supplement or alternative to Chevron Alignment signs or delineators in order to delineate a change in horizontal alignment (see Figure 2C-2).

02 A One-Direction Large Arrow (W1-6) sign may be used to supplement a Turn (W1-1) or Reverse Turn (W1-3) sign (see Figure 2C-2) to emphasize the abrupt curvature.

**Standard:**

03 **The One-Direction Large Arrow sign shall be a horizontal rectangle with an arrow pointing to the left or right.**

04 **If used, the One-Direction Large Arrow sign shall be installed on the outside of a turn or curve in line with and at approximately a right angle to approaching traffic.**

05 **The One-Direction Large Arrow sign shall not be used where there is no alignment change in the direction of travel, such as at the beginnings and ends of medians or at center piers.**

06 **The One-Direction Large Arrow sign directing traffic to the right shall not be used in the central island of a roundabout or a neighborhood traffic circle.**

*Guidance:*

07 *The One-Direction Large Arrow sign should be visible for a sufficient distance to provide the road user with adequate time to react to the change in alignment.*

08 *The OM1-3 object marker should be used below and on the same post as the W1-6 sign. Refer to Section 2C.70.*

Support:

09 Refer to Section 2C.59 for use of the Confirmation Advisory Speed Plaque (W13-1aP).

## Section 2C.11 Truck Rollover Sign (W1-13)

Option:

01 A Truck Rollover (W1-13) sign (see Figure 2C-1) may be used as a supplement to a horizontal alignment warning sign to warn drivers of vehicles with a high center of gravity, such as trucks, tankers, and recreational vehicles, of a curve or turn where there are:

A. Past incidents of truck rollovers at the specific location,
B. High volumes of trucks, or
C. A speed differential (see Section 2C.06) that might pose a greater risk for vehicles with high centers of gravity.

*Guidance:*

02 *Where engineering judgment determines the need for the installation of a Truck Rollover (W1-13) sign, it should be located downstream of the horizontal alignment warning sign in advance of the curve.*

**Standard:**

03 **If a Truck Rollover (W1-13) sign is used, it shall be accompanied by an Advisory Speed (W13- 1P) plaque indicating the recommended speed for vehicles with a higher center of gravity.**

*Guidance:*

03a *An oversized square shape version should be used if installed on the outside of a turn or curve in line with and at approximately a right angle to approaching traffic (refer to Figure 2C-3).*

Option:

04 The Truck Rollover sign may include conspicuity enhancements, or may be a blank-out sign, activated by the detection of an approaching vehicle with a high center of gravity that is traveling in excess of the recommended speed for the condition.

Support:

05 The curved arrow on the Truck Rollover sign shows the direction of roadway curvature. The truck tips in the opposite direction.

## Section 2C.12 Advisory Exit and Ramp Speed Signs (W13-2 and W13-3) and Combination Horizontal Alignment/Advisory Exit and Ramp Speed Signs (W13-6 through W13-13)

**Standard:**

01 **Where an advisory speed is posted in advance of a freeway or expressway exit, the Advisory Exit Speed (W13-2) sign (see Figure 2C-1) shall be used.**

02 **Where an advisory speed is posted in advance of a conventional road ramp or to another roadway or roadside facility, the Advisory Ramp Speed (W13-3) sign (see Figure 2C-1) shall be used.**

03 **An Advisory Exit Speed or Advisory Ramp Speed sign shall be used when the difference between the mainline roadway speed limit and the exit or ramp advisory speed in the vicinity of the departure is 20 mph or greater.**

*Guidance:*

03a *The Advisory Ramp Speed (W13-3) sign (refer to Figure 2C-1) should be installed on the right of right freeway to freeway connectors or on the left of left freeway to freeway connector ramps just beyond the neutral area (gore) where the ramps cannot be comfortably negotiated by motorists at approach speeds.*

04 *An Advisory Exit Speed or Advisory Ramp Speed sign should be used when the difference between the mainline roadway speed limit and the exit or ramp advisory speed in the vicinity of the departure is 15 mph.*

Option:

05 An Advisory Exit Speed or Advisory Ramp Speed sign may be used based on engineering judgment when the difference between the mainline roadway speed limit and the exit or ramp advisory speed in the vicinity of the departure is 10 mph or less.

*Guidance:*

05a *Where additional warning is needed for ramp curvature beyond the neutral area (gore), a curve warning sign and an advisory speed should be posted.*

Option:

06 The Combination Horizontal Alignment/Advisory Exit Speed (W13-6, W13-8, and W13-10) signs (see Figure 2C-1) may be used in lieu of the Advisory Exit Speed (W13-2) sign, and the combination Horizontal Alignment/Advisory Ramp Speed (W13-7, W13-9, and W13-11) signs (see Figure 2C-1) may be used in lieu of the Advisory Ramp Speed (W13-3) sign.

07 The Combination Truck Rollover/Advisory Exit Speed and Truck Rollover/Advisory Ramp Speed (W13-12 and W13-13) signs (see Figure 2C-1) may be used in lieu of the W13-2 and W13-3 signs respectively if the tip over condition is in the vicinity of the gore.

**Standard:**

08 **Roadway geometrics represented on the Combination Horizontal Alignment/Advisory Exit and Combination Horizontal Alignment/Advisory Ramp Speed signs (see Figure 2C-1) shall be limited to the standard signs shown in this Manual.**

*Guidance:*

09 *If used, the Advisory Exit Speed sign or the Combination Horizontal Alignment/Advisory Exit Speed sign should be installed ~~along the deceleration lane~~ on the right of right exit ramps or on the left of left exit ramps just beyond the neutral area (gore). The Advisory Exit Speed or the Combination Horizontal Alignment/Advisory Exit signs should be visible in time for the road user to decelerate and make an exiting maneuver.*

Support:

09a Refer to FHWA's List of Known Errors for error in Paragraph 9 text. Refer to Section 1A.04 for more details.

09b The W13-2 sign is not necessary for an exit ramp that has tangent alignment and terminates at a stop sign or a signal.

*Guidance:*

10 *Regulatory Speed Limit signs (see Section 2B.21) should not be located in the vicinity of exit ramps or deceleration lanes, particularly where they will conflict with the advisory speed displayed on the Advisory Exit or Ramp Speed signs.*

Support:

11 Section ~~2C.06~~ 2C.59 contains provisions for the determination of the displayed advisory speed.

12 ~~Table 2C-3 lists recommended advance sign placement distances for deceleration to various advisory speeds.~~

Option:

13 Where there is a need to remind road users of the recommended advisory speed, a horizontal alignment warning sign with an advisory speed plaque displaying the same advisory speed may be installed at a downstream location along

the ramp.

*Guidance:*

14 *If the ramp curvature changes to the extent that it warrants a lower advisory speed, a horizontal alignment warning sign with the new advisory speed should be displayed in advance of the change in curvature (refer to Figure 2C-3).*

Option:

15 The One-Direction Large Arrow (W1-6) sign may be installed beyond the exit gore on the outside of the curve to provide additional warning of an immediate change in curvature. When used in conjunction with the exit speed, the One-Direction Large Arrow (W1-6) sign may be supplemented with a Confirmation Advisory Speed (W13-1aP) plaque (see Figure 2C-1) when the plaque is not used with the Exit Gore (E5-1 series) sign.

*Guidance:*

16 *The horizontal alignment symbol displayed on the Combination Horizontal Alignment/Advisory Exit and Ramp Speed signs should be consistent with the horizontal geometry of the ramp.*

Support:

17 *Examples of advisory speed signing for exit ramps are shown in Figure 2C-3.*

18 Refer to FHWA's List of Known Errors for error in Paragraph 17 text. Refer to Section 1A.04 for more details.

## Section 2C.13 Vehicle Speed Feedback Sign and Plaque (W13-20 and W13-20aP)

Option:

01 A Vehicle Speed Feedback (W13-20) sign or (W13-20aP) plaque (see Figure 2C-4) that displays the speed of an approaching vehicle to the vehicle operator may be used to provide warning to drivers of their speed in relation to either a speed limit (R2-1) sign or a horizontal alignment warning sign assembly with a posted advisory speed.

**Standard:**

02 **When used to display the speed of an approaching vehicle in relation to the posted speed limit, the Vehicle Speed Feedback (W13-20aP) plaque shall be mounted below a Speed Limit (R2-1) sign (see Section 2B.21).**

03 **When used to supplement a horizontal alignment warning sign advisory speed, the Vehicle Speed Feedback (W13-20) sign shall be an independent installation near the point of curvature of a horizontal curve (see Section 2C.06).**

04 **The legend YOUR SPEED shall be a black legend on a yellow retroreflective background, except as provided in Sections 6H.01 and 7B.01. The changeable legend displaying the speed of the approaching vehicle shall be a yellow luminous legend on a black opaque background. The vehicle speed displayed on the changeable portion of the sign shall be displayed as an integer. The Vehicle Speed Feedback sign and plaque shall not flash, strobe, change color, or use other animated elements integrated into the changeable legend display. When no vehicles are approaching, the changeable display shall not display a legend.**

*Guidance:*

05 *The changeable portion of the Vehicle Speed Feedback legend should be approximately the same height, width, and stroke of those on the Speed Limit sign it supplements or is mounted below.*

06 *When a W13-20aP plaque is used with a Speed Limit sign it should be approximately the same width as the Speed Limit sign it is mounted below.*

# VERTICAL GRADE WARNING SIGNS AND PLAQUES

## Section 2C.14 Hill Signs (W7-1 and W7-1a)

*Guidance:*

01 *The Hill (W7-1) sign (see Figure 2C-5) should be used in advance of a downgrade where the length, percent of grade, horizontal curvature, and/or other physical features require special precautions on the part of road users.*

02 *The Hill sign and supplemental grade (W7-3P) plaque (see Figure 2C-5 and Section 2C.64) used in combination, or the W7-1a sign used alone, should be installed in advance of downgrades for the following conditions:*

*A. 5% grade that is more than 3,000 feet in length,*
*B. 6% grade that is more than 2,000 feet in length,*
*C. 7% grade that is more than 1,000 feet in length,*
*D. 8% grade that is more than 750 feet in length, or*
*E. 9% grade that is more than 500 feet in length.*

03 *These signs should also be installed for steeper grades or where crash experience and field observations indicate a need.*

04 *Supplemental plaques (see Sections 2C.57 and 2C.64) and larger signs should be used for emphasis or where special hill characteristics exist. On longer grades, the use of the Hill sign with a distance (W7-3aP) plaque or the combination distance/grade (W7-3bP) plaque (see Figure 2C-5) at periodic intervals of approximately 1-mile spacing should be considered.*

Option:

05 A USE LOW GEAR (W7-2P) or TRUCKS USE LOWER GEAR (W7-2bP) supplemental plaque (see Figure 2C-5) may be used to indicate a situation where downshifting as well as braking might be advisable.

06 The SLOW TRUCKS (W51(CA)) sign (refer to Figure 2C-5(CA)) may be used to inform drivers that slow moving trucks substantially interfere with the flow of traffic. The Next Distance (W7-3a) plaque may be used with the W51(CA) sign.

07 The WATCH DOWNHILL SPEED (SW4-1(CA)) sign (refer to Figure 2C-5(CA)) may be used on long downhill grades to remind motorists to maintain the posted speed.

## Section 2C.15 Truck Escape Ramp Signs (W7-4 Series)

*Guidance:*

01 *Where applicable, truck escape (or runaway truck) ramp advance warning signs (see Figure 2C-5) should be located approximately 1 mile and approximately ½ mile in advance of the grade, and of the escape ramp. An additional W7-4b or W7-4c sign should be placed at the gore.*

02 *A RUNAWAY VEHICLES ONLY (R4-10) sign (see Section 2B.41) should be installed near the escape ramp entrance to discourage other road users from entering the ramp. ~~No Parking (R8-3) signs should be placed near the ramp entrance.~~ NO STOPPING ANYTIME (R26A(S)(CA)) signs (refer to Section 2B.41) should be placed to keep motorists from stopping in the path of runaway trucks.*

**Standard:**

03 **When truck escape ramps are installed, at least one of the W7-4 series signs shall be used.**

Option:

04 A SAND (W7-4dP), GRAVEL (W7-4eP), or PAVED (W7-4fP) supplemental plaque (see Figure 2C- 5) may be used to describe the ramp surface. ~~State and local highway agencies~~ Caltrans (in accordance with CVC § 21400, refer to Section 2A.04) may develop appropriate word message signs for the specific situation.

**Standard:**

05 **The DEEP GRAVEL (W30B(CA)) sign (refer to Figure 2C-5(CA)) shall be placed on all truck escape ramps.**

*Guidance:*

06 *The W30B(CA) sign should be placed near the outside edge of the paved ramp prior to the beginning of the gravel bed.*

07 *The RIGHT (LEFT) EXIT (W30cP(CA)) plaque (refer to Figure 2C-5(CA)) should be used to indicate a right or left exit to a truck escape ramp.*

Support:

08 Erect the W30cP(CA) plaque below and on the same post with the first W7-4 sign.

09 Refer to Figure 3G-103(CA) for Runaway Truck Ramp sign and marking details.

## Section 2C.16 HILL BLOCKS VIEW Sign (W7-6)

Option:

01 A HILL BLOCKS VIEW (W7-6) sign (see Figure 2C-5) may be used on the approach to a crest vertical curve where the vertical curvature provides inadequate stopping sight distance at the posted speed limit.

*Guidance:*

02 *When a vertical curve results in a sight distance obstruction to a specific condition beyond the crest of the vertical curve, the warning sign for the specific condition beyond the vertical crest should be used rather than the HILL BLOCKS VIEW sign.*

03 *When a HILL BLOCKS VIEW sign is used, it should be supplemented by an Advisory Speed (W13-1P) plaque (see Figure 2C-1) indicating the recommended speed for traveling over the hillcrest based on available stopping sight distance.*

# ROADWAY GEOMETRY WARNING SIGNS

## Section 2C.17 ROAD NARROWS Sign (W5-1)

*Guidance:*

01 *Except as provided in Paragraph 2 of this Section, a ROAD NARROWS (W5-1) sign (see Figure 2C- 6) should be used in advance of a transition on two-lane roads where the pavement width is reduced abruptly to a width such that vehicles traveling in opposite directions cannot simultaneously travel through the narrow portion of the roadway without reducing speed.*

Option:

02 The ROAD NARROWS (W5-1) sign may be omitted on low-volume local streets that have speed limits of 30 mph or less.

03 Additional emphasis may be provided by the use of object markers and delineators (see Sections 2C.70 through 2C.73 and Chapter 3G). The Advisory Speed (W13-1P) plaque (see Figure 2C-1 and Section 2C.59) may be used to indicate the recommended speed.

## Section 2C.18 NARROW BRIDGE and NARROW UNDERPASS Signs (W5-2 and W5-2a)

*Guidance:*

01 *A NARROW BRIDGE (W5-2) sign (see Figure 2C-6) should be used in advance of any bridge or culvert having a two-way roadway horizontal clearance of 16 to 18 feet, or any bridge or culvert having a roadway horizontal clearance less than the width of the approach travel lanes. Where these conditions exist for an underpass, a NARROW UNDERPASS (W5-2a) sign (see Figure 2C-6) should be used.*

02 *Additional emphasis should be provided by the use of object markers, delineators, and/or pavement markings.*

Option:

03 A NARROW BRIDGE sign may be used in advance of a bridge or culvert on which the approach shoulders are narrowed or eliminated. Where these conditions exist for an underpass, a NARROW UNDERPASS sign may be used.

04 The NARROW BRIDGE or NARROW UNDERPASS sign may be omitted on low-volume rural roads where there is adequate sight distance to the bridge, culvert, or underpass on both approaches.

Support:

05 Refer to Figure 3G-104(CA) for narrow bridge sign and marking details.

Option:

06 The TUNNEL (SW37(CA)) sign (refer to Figure 2C-6(CA)) may be used to warn road user that there is a tunnel ahead.

## Section 2C.19 ONE LANE BRIDGE and ONE LANE UNDERPASS Signs (W5-3 and W5-3a)

*Guidance:*

01 *A ONE LANE BRIDGE (W5-3) sign (see Figure 2C-6) should be used on two-way roadways in advance of any bridge or culvert:*

- *A. Having a roadway horizontal clearance of less than 16 feet, or*
- *B. Having a roadway horizontal clearance of less than 18 feet when commercial vehicles constitute a high proportion of the traffic, or*
- *C. Having a roadway horizontal clearance of 18 feet or less where the sight distance on the approach is less than that shown in Condition A of Table 2C-3.*

02 *Where these conditions exist for an underpass, a ONE LANE UNDERPASS (W5-3a) sign (see Figure 2C-6) should be used.*

03 *Additional emphasis should be provided by the use of object markers, delineators, and/or pavement markings.*

Option:

04 The ONE LANE BRIDGE or ONE LANE UNDERPASS sign may be omitted on low-volume rural roads where there is adequate sight distance to the bridge, culvert, or underpass on both approaches.

05 STOP (R1-1) or YIELD (R1-2) signs (see Sections 2B.04 and 2B.05) and related pavement markings (see Sections 3B.21 and 3B.22) may be used when conditions A, B, or C in Paragraph 1 of this Section apply.

## Section 2C.20 Divided Highway Sign (W6-1)

*Guidance:*

01 *A Divided Highway (W6-1) sign (see Figure 2C-6) should be used on the approaches to a section of highway (not an intersection or junction) where the opposing flows of traffic are separated by a median or other physical barrier.*

**Standard:**

02 **The Divided Highway (W6-1) sign shall not be used instead of a Keep Right (R4-7 series) sign on the approach end of a median island.**

## Section 2C.21 Divided Highway Ends Sign (W6-2)

*Guidance:*

01 *A Divided Highway Ends (W6-2) sign (see Figure 2C-6) should be used in advance of the end of a section of physically divided highway (not an intersection or junction) as a warning of two-way traffic ahead.*

02 *The Two-Way Traffic (W6-3) sign (see Section 2C.51) should be used to give warning and notice of the transition to a two-lane, two-way section.*

## Section 2C.22 Freeway or Expressway Ends Signs (W19 Series)

Option:

01 A FREEWAY ENDS XX MILES (W19-1) sign or a FREEWAY ENDS (W19-3) sign (see Figure 2C-6) may be used in advance of the end of a freeway.

01a At problem locations, a W19-1 or W19-3 sign may include dual installations. Yellow flashing beacons may be considered.

Support:

01b Refer to Section 2B.109(CA) for the END FREEWAY (R58(CA)) sign.

Option:

02 An EXPRESSWAY ENDS XX MILES (W19-2) sign or an EXPRESSWAY ENDS (W19-4) sign (see Figure 2C-6) may be used in advance of the end of an expressway.

03 The rectangular W19-1 and W19-2 signs may be post-mounted or may be mounted overhead for increased emphasis.

*Guidance:*

04 *If the reason that the freeway is ending is that the next portion of the freeway is not yet constructed and as a result all traffic must use an exit ramp to leave the freeway, an ALL TRAFFIC MUST EXIT (W19-5) sign (see Figure 2C-6) should be used in addition to the Freeway Ends signs in advance of the downstream end of the freeway.*

Option:

05 A distance plaque may be used with a W19-3 or a W19-4 sign.

## Section 2C.23 Double Arrow Sign (W12-1)

Option:

01 The Double Arrow (W12-1) sign (see Figure 2C-6) may be used to advise road users that traffic is permitted to pass on either side of an island, obstruction, or gore in the roadway. Traffic separated by this sign may either rejoin or change directions.

*Guidance:*

02 *If used on an island, the Double Arrow sign should be mounted near the approach end.*

03 *If used in front of a pier or obstruction, the Double Arrow sign should be mounted on the face of, or just in front of, the pier or obstruction. Where stripe markings are used on the pier or obstruction, they should be discontinued to leave a 3-inch space around the outside of the Double Arrow sign.*

## Section 2C.24 DEAD END, NO OUTLET, and ROAD ENDS Signs (W14-1, W14-1a, W14-2, W14-2a, W8-26, and W8-26a)

Option:

01 The DEAD END (W14-1) sign (see Figure 2C-6) may be used at the entrance to a single road or street that terminates without intersecting another street. The NO OUTLET (W14-2) sign (see Figure 2C-6) may be used at the entrance to a road or road network from which there is no other exit.

02 DEAD END (W14-1a) or NO OUTLET (W14-2a) signs (see Figure 2C-6) may be used in combination with Street

Name (D3-1) signs (see Section 2D.45) to warn turning traffic that the cross street ends in the direction indicated by the arrow.

03 At locations where the cross street does not have a name, a W14-1a or W14-2a sign may be used alone in place of a street name sign.

*Guidance:*

04 *When the W14-1 or W14-2 sign is used, the sign should be posted as near as practicable to the entry point or at a sufficient advance distance to permit the road user to avoid the dead end or no outlet condition by turning at the nearest intersecting street.*

**Standard:**

05 **The DEAD END (W14-1a) or NO OUTLET (W14-2a) sign shall not be used instead of the W14-1 or W14-2 signs where traffic can proceed straight through the intersection into the dead end street or no outlet area.**

Option:

06 The ROAD ENDS XX FT (W8-26) or STREET ENDS XX FT (W8-26a) sign (see Figure 2C-11) may be used on the approach to the end of a conventional road or street where the terminus is not apparent.

06a The Road Ends XX FT (W8-26) or STREET ENDS XX FT (W8-26a) sign may be used in advance of the END (W31(CA)) sign in combination with an end-of-roadway marker. Refer to Section 2C.73.

Support:

07 Information about the use of Type 4 object markers to mark the end of the road or street is contained in Section 2C.73.

**Standard:**

08 **The W8-26 and W8-26a signs shall not be used in place of a W14-1 or W14-2 sign at the entrance to such a road or street.**

Support:

09 Section 2C.22 contains information on signs for use on the approach to the end of a freeway or expressway.

Option:

10 The END (W31(CA)) sign (refer to Figure 2C-6(CA)) may be used where a street or highway ends.

Support:

11 Install the W31(CA) sign in a head-on position (left side) in combination with an end-of-roadway marker. Refer to Section 2C.73.

## Section 2C.25 Low Clearance Signs (W12-2, W12-2a, and W12-2b)

**Standard:**

01 **The Low Clearance Advance (W12-2) sign (see Figure 2C-6) shall be used to warn road users of vertical clearances less than ~~14~~ 15 feet 6 inches, or vertical clearances less than 12 inches above the statutory maximum vehicle height, whichever is greater.**

01a **The Low Clearance Advance (W12-2) sign shall be used to warn motorists of low structure clearances.**

01b **For clearance 15 feet 6 inch or less, in addition to the W12-2a sign, two Low Clearance Advance (W12-2) signs shall be installed on the right side of the roadway. The first W12-2 sign shall be placed in advance of the nearest intersecting street or highway or wide point in the road at which a motorist can detour or safely turn around. See paragraph 04.**

01c **The second W12-2 sign shall be placed in advance of the structure.**

~~*Guidance:*~~

02 **The actual clearance ~~should~~ shall be displayed on the Low Clearance (W12-2, W12-2a, and W12-2b) sign to the nearest 1 inch not exceeding the actual clearance. However, in areas that experience changes in temperature causing frost action, a reduction, not exceeding 3 inches, should be used for this condition.**

*Guidance:*

03 *Clearances should be evaluated periodically to determine if additional low clearance signing is necessary, particularly when resurfacing operations have occurred, on routes onto which over-height vehicles are normally directed under the permit process, and structures that are susceptible to catastrophic failure when struck by over-height vehicles.*

04 *The W12-2 sign with a supplemental distance plaque should also be placed at the nearest intersecting road or wide point in the road at which a vehicle can detour or turn around.*

05 *Where there is a need to warn of a low clearance on an intersecting road or off a freeway or expressway exit, a rectangular warning sign with an appropriate word legend should be used rather than a W12-2 sign.*

**Standard:**

05a **The CAUTION, VERTICAL CLEARANCE ___' ___" Arrow (W34C(CA)) sign (refer to Figure 2C-6(CA)) shall be used on all blind approaches to structures with clearances 15 feet 6 inch or less.**

Support:

05b The W34C(CA) sign is used to warn motorists of low structure clearance around corners.

*Guidance:*

05c *The W34C(CA) sign should be placed at a location where the motorist can detour or safely turn around before making the turn.*

Option:

06 The Low Clearance Overhead (W12-2a or W12-2b) sign (see Figure 2C-6) may be installed on the structure to supplement the advance warning sign.

**Standard:**

06a **The Low Clearance Overhead (W12-2a or W12-2b) sign shall be used to warn motorists of structural clearance 15 feet 6 inch or less.**

*Guidance:*

06b *The W12-2a sign should be centered over the traveled way on the approach side of all underpasses, overheads, viaducts, overcrossings, undercrossings, and grade separations for State highways.*

**Standard:**

06c **The W12-2a sign shall not encroach over the shoulder area.**

Option:

07 In cases where physical conditions on a structure limit the width such that the W12-2a or W12-2b signs are physically unable to fit, a W12-2 sign may be installed overhead on the structure or post-mounted in front of the structure, in addition to the required W12-2 sign at the advance location.

*Guidance:*

08 *In the case of an arch, or other structure under which the clearance varies greatly, two or more Low Clearance Overhead (W12-2a or 12-2b) signs should be installed on the structure itself to give information as to the clearances over the low clearance portions of the roadway.*

**Standard:**

09 **If used, the Low Clearance Overhead (W12-2b) sign shall be placed over a lane or shoulder to indicate the portion of the structure with low clearance if the posted clearance does not apply to the entire structure.**

~~*Guidance:*~~

10 **The clearance shown on the Low Clearance Advance sign ~~should~~ shall match the clearance on the W12-2a or W12-2b sign or, if there are multiple W12-2b signs, shall match the lowest clearance.**

11 **The clearance shown on the W34C(CA) sign shall match the clearance on the W12-2a or W12-2b sign or, if there are multiple W12-2b signs, shall match the lowest clearance.**

## ROADWAY AND WEATHER-CONDITION WARNING SIGNS AND PLAQUES

### Section 2C.26 BUMP and DIP Signs (W8-1 and W8-2)

*Guidance:*

01 *BUMP (W8-1) and DIP (W8-2) signs (see Figure 2C-7) should be used in advance of a sharp rise or depression in the profile of the road.*

**Standard:**

01a **When used at a cattle guard, the BUMP (W8-1) or DIP (W8-2) signs shall be supplemented with a diagonal downward pointing arrow (W16-7p) plaque showing the location of the cattle guard.**

Option:

02 These signs may be supplemented with an Advisory Speed plaque (see Figure 2C-1 and Section 2C.59).

*Guidance:*

03 *The DIP sign should not be used in advance of a short stretch of depressed alignment that might momentarily hide a vehicle.*

04 *A short stretch of depressed alignment that might momentarily hide a vehicle should be treated as a no-passing zone when center line striping is provided on a two-lane or three-lane road (see Section 3B.03).*

### Section 2C.27 SPEED HUMP Sign (W17-1)

*Guidance:*

01 *The SPEED HUMP (W17-1) sign (see Figure 2C-7) should be used in advance of a vertical deflection in the roadway that is designed to limit the speed of traffic.*

02 *If used, the SPEED HUMP sign should be supplemented by an Advisory Speed plaque (see Figure 2C-1 and Section 2C.59).*

Option:

03 If a series of speed humps exists in close proximity, an Advisory Speed plaque may be eliminated on all but the first SPEED HUMP sign in the series.

04 The legend SPEED BUMP may be used instead of the legend SPEED HUMP on the W17-1 sign.

04a If a series of speed humps exist in close proximity, a SPEED HUMPS AHEAD (W84(CA)) sign (refer to Figure 2C-7(CA)) may replace the first SPEED HUMP sign in the series, provided additional warning of speed humps are provided through signs or pavement markings at the speed humps.

04b If speed humps exist on a network of streets within an area accessible by a limited number of access points to the area, an optional SPEED HUMP AREA (W85(CA)) sign (refer to Figure 2C-7(CA)) may be placed at each access point to the area, provided additional warning of speed humps are provided through signs or markings at the speed humps.

Support:

05 Speed humps generally provide more gradual vertical deflection than speed bumps. Speed bumps limit the speed of traffic more severely than speed humps. Other forms of speed humps include speed tables and raised crosswalks or intersections. However, these differences in engineering terminology are not well known by the public, so for signing purposes these terms are interchangeable.

06 Sections 3B.29 and 3B.30 contain information about the use of markings at and in advance of speed humps.

### Section 2C.28 PAVEMENT ENDS Sign (W8-3)

*Guidance:*

01 *A PAVEMENT ENDS (W8-3) sign (see Figure 2C-7) should be used where a paved surface changes to either a gravel treated surface or an earth road surface.*

Option:

02 An Advisory Speed plaque (see Figure 2C-1 and Section 2C.59) may be used when the change in roadway condition requires a reduced speed.

### Section 2C.29 Shoulder Signs (W8-4, W8-9, W8-17, W8-23, and W8-25)

Option:

01 The SOFT SHOULDER (W8-4) sign (see Figure 2C-7) may be used to warn of a soft shoulder condition.

02 The LOW SHOULDER (W8-9) sign (see Figure 2C-7) may be used to warn of a shoulder condition where there is

an elevation difference of 3 inches or less between the shoulder and the travel lane.

**Standard:**

02a **The black on yellow background LOW SHOULDER (W8-9) sign shall not be used on State highways.**

Support:

02b The low shoulder condition (elevation difference up to 3 inches) between shoulder and the travel lane) is not treated as a permanent condition on State highways.

02c Refer to Section 6H.26 for use of W8-9 on state highway construction zones

*Guidance:*

03 *The Shoulder Drop Off (W8-17) sign (see Figure 2C-7) should be used where an unprotected shoulder drop-off, adjacent to the travel lane, exceeds 3 inches in depth for a significant continuous length along the roadway, based on engineering judgment.*

Option:

04 A SHOULDER DROP-OFF (W8-17P) supplemental plaque (see Figure 2C-7) may be mounted below the W8-17 sign.

05 The NO SHOULDER (W8-23) sign (see Figure 2C-7) may be used to warn road users that a shoulder does not exist along a portion of the roadway.

06 The SHOULDER ENDS (W8-25) sign (see Figure 2C-7) may be used to warn road users that a shoulder is ending.

*Guidance:*

07 *Additional shoulder signs should be placed at appropriate intervals along the road where the condition continually exists.*

## Section 2C.30 Surface Condition Signs (W8-5, W8-7, W8-8, W8-11, W8-13, and W8-14)

Option:

01 The Slippery When Wet (W8-5) sign (see Figure 2C-7) may be used to warn of unexpected slippery conditions. Supplemental plaques (see Figure 2C-7) with legends such as ICE, WHEN WET, STEEL DECK, or EXCESS OIL may be used with the W8-5 sign to indicate the reason that the slippery conditions might be present.

01a The slippery When Wet (W8-5) sign may be used with the SNOW (SW46P(CA)) plaque to warn road users of conditions where snow may be on the roadway surface, but chains are not yet required. The combination may be placed in advance of areas where such conditions may exist, and intermittently as needed where such conditions may exist for long sections of highways.

01b The sign combination may be displayed when weather conditions are such that it would be reasonable to assume that snow on the roadway would be a possibility.

Support:

01c Refer to Section 2C.01 for information on when the seasonal snow condition no longer exists.

**Standard:**

01d **When used at a cattle guard, the Slippery When Wet (W8-5) signs shall be supplemented with a diagonal downward pointing arrow (W16-7p) plaque showing the location of the cattle guard.**

Option:

02 The LOOSE GRAVEL (W8-7) sign (see Figure 2C-7) may be used to warn of loose gravel on the roadway surface.

03 The ROUGH ROAD (W8-8) sign (see Figure 2C-7) may be used to warn of a rough roadway surface. It may be desirable to supplement this sign with an Advisory Speed (W13-1P) plaque. Where the rough road is 1 mile or more in length, the W8-8 sign may be supplemented with a Next Distance (W7-3a) plaque.

04 An UNEVEN LANES (W8-11) sign (see Figure 2C-7) may be used to warn of a difference in elevation between travel lanes.

05 The BRIDGE ICES BEFORE ROAD (W8-13) sign (see Figure 2C-7) may be used in advance of bridges to advise bridge users of winter weather conditions. The BRIDGE ICES BEFORE ROAD sign may be removed or covered during seasons of the year when its message is not relevant.

06 The FALLEN ROCKS (W8-14) sign (see Figure 2C-7) may be used in advance of an area that is adjacent to a hillside, mountain, or cliff where rocks frequently fall onto the roadway.

*Guidance:*

07 *When used, Surface Condition signs should be placed in advance of the beginning of the affected section (see Table 2C-3), and additional signs should be placed at appropriate intervals along the road where the condition exists.*

Option:

08 The SLIDE AREA (W38(CA)) sign (refer to Figure 2C-7(CA)) may be used in advance of where slides on the highway could be expected.

09 The SNOW SLIDE AREA (SW41(CA)) sign (refer to Figure 2C-7(CA)) may be used in areas of known snow slide or avalanche activity.

10 The Next Distance (W7-3a) plaque may be used below the W38(CA), W50-1(CA) and SW41(CA) signs.

11 The DRIFTING SAND (SW32(CA)) sign (refer to Figure 2C-7(CA)) may be used to warn traffic of drifting sand on the roadway.

## Section 2C.31 Warning Signs and Plaque for Motorcyclists (W8-15, W8-15aP, and W8-16)

Support:

01 The signs and plaques described in this Section are intended to give motorcyclists advance notice of surface conditions that might adversely affect their ability to maintain control of their motorcycle under wet or dry conditions. The use of some of the advance surface condition warning signs described in Section 2C.30, such as Slippery When Wet, LOOSE GRAVEL, or ROUGH ROAD, can also be helpful to motorcyclists if those conditions exist.

Option:

02 If a portion of a street or highway features a roadway pavement surface that is grooved or textured instead of smooth, such as a grooved skid resistance treatment for a horizontal curve or a brick pavement surface, a GROOVED PAVEMENT (W8-15) sign (see Figure 2C-7) may be used to provide advance warning of this condition to motorcyclists, bicyclists, and other road users. Alternate legends such as TEXTURED PAVEMENT or BRICK PAVEMENT may also be used on the W8-15 sign.

03 If a bridge or a portion of a bridge includes a metal or grated surface, a METAL BRIDGE DECK (W8-16) sign (see Figure 2C-7) may be used to provide advance warning of this condition to motorcyclists, bicyclists, and other road users.

04 A Motorcycle (W8-15aP) plaque (see Figure 2C-7) may be mounted below or above a W8-15 or W8- 16 sign if the warning is intended to be directed primarily to motorcyclists.

## Section 2C.32 NO CENTER LINE Sign (W8-12)

Option:

01 The NO CENTER LINE (W8-12) sign (see Figure 2C-7) may be used to warn of a roadway without center line pavement markings.

## Section 2C.33 NO TRAFFIC SIGNS Sign (W18-1)

Option:

01 The NO TRAFFIC SIGNS (W18-1) sign (see Figure 2C-6) may be used only on low-volume rural roads to advise road users that no signs are installed along the distance of the road. The sign may be installed at the point where road users would enter the low volume road or where, based on engineering judgment, the road user might need this information.

02 A W7-3aP (see Figure 2C-5), W16-2P (see Figure 2C-16), or W16-9P (see Figure 2C-16) supplemental plaque with the legend NEXT XX MILES, XX FEET, or AHEAD may be installed below the W18-1 sign when appropriate.

## Section 2C.34 Weather Condition Signs (W8-18, W8-19, W8-21, and W8-22)

Option:

01 The ROAD MAY FLOOD (W8-18) sign (see Figure 2C-7) may be used to warn road users that a section of roadway is subject to frequent flooding**.** A Depth Gauge (W8-19) sign (see Figure 2C-7) may also be installed within a roadway section that frequently floods.

*Guidance:*

02 *If used, the Depth Gauge sign should be in addition to the ROAD MAY FLOOD sign and should be mounted at the appropriate height to indicate the depth of the water at the deepest point on the roadway***.**

Option:

02c The FLASH FLOOD AREA (SW35(CA)) sign (refer to Figure 2C-7(CA)) may be used in advance of depressions in the highway alignment that are subject to flash flooding.

03 The GUSTY WINDS AREA (W8-21) sign (see Figure 2C-7) may be used to warn road users that wind gusts frequently occur along a section of highway that are strong enough to impact the stability of trucks, recreational

vehicles, and other vehicles with high centers of gravity**.** A NEXT XX MILES (W7-3aP) supplemental plaque (see Figure 2C-5) may be mounted below the W8-21 sign to inform road users of the length of roadway that frequently experiences strong wind gusts.

04 The FOG AREA (W8-22) sign (see Figure 2C-7) may be used to warn road users that foggy conditions frequently reduce visibility along a section of highway**.** A NEXT XX MILES (W7-3aP) supplemental plaque (see Figure 2C-5) may be mounted below the W8-22 sign to inform road users of the length of roadway that frequently experiences foggy conditions.

Support:

05 Chapter 2L contains provisions for the use of blank-out or changeable message signs that can be activated by detection of the applicable condition.

06 Refer to Chapter 6O for additional flooding signs.

# TRAFFIC CONTROL AND INTERSECTION WARNING SIGNS AND PLAQUES

## Section 2C.35 Advance Traffic Control Signs (W3-1, W3-2, W3-3, and W3-4)

**Standard:**

01 **The Stop Ahead (W3-1), Yield Ahead (W3-2), and Signal Ahead (W3-3) Advance Traffic Control signs (see Figure 2C-8) shall be installed on an approach to a primary traffic control device that is not visible for a sufficient distance to permit the road user to respond to the device (see Table 2C-3). The visibility criteria for a traffic control signal shall be based on having a continuous view of at least two signal faces for the distance specified in Table 4D-2.**

*Guidance:*

02 *Where intermittent obstructions occur, engineering judgment should determine the treatment to be implemented.*

Support:

03 Figure 2A-4 shows examples of the typical placement of an Advance Traffic Control sign.

04 Permanent obstructions causing the limited visibility might include roadway alignment or structures. Intermittent obstructions might include foliage or parked vehicles.

Option:

05 An Advance Traffic Control sign may be used for additional emphasis of the primary traffic control device, even when the visibility distance to the device is satisfactory.

Support:

06 Section 2C.65 contains information about the use of an advance street name plaque to identify an intersecting road.

Option:

07 A BE PREPARED TO STOP (W3-4) sign (see Figure 2C-8) may be used to warn of stopped traffic caused by a traffic control signal or a STOP sign.

08 A Warning Beacon (see Section 4S.03) or yellow LEDs within the border of the sign may be used with an Advance Traffic Control or BE PREPARED TO STOP sign.

08a Yellow flashing beacons may be used with Signal Ahead (W3-3) signs in advance of:

A. An isolated traffic signal on either a conventional highway or on an expressway in a rural area.
B. The first traffic signal approaching an urban area.
C. Any traffic signal with limited approach visibility, or where approach speeds exceed 50 mph.

08b On divided highways where the median is 8 feet wide, or greater, the installation may consist of:

A. Two Type 1 standards, each with a Signal Ahead (W3-3) sign and a 12-inch signal face, with one standard located in the median and the other off of the right shoulder; or
B. A Type 9 cantilever flashing beacon installation with a Signal Ahead (W3-3) sign and two 12-inch signal faces as shown in Caltrans' Standard Plans. Refer to Section 1A.05 for information regarding this publication.

**Standard:**

09 **When a BE PREPARED TO STOP sign is used in advance of a traffic control signal, it shall be used in addition to a Signal Ahead sign and shall be placed downstream from the Signal Ahead sign.**

~~*Guidance:*~~

10 ~~*When a Warning Beacon is interconnected with a traffic control signal or queue detection system, the BE PREPARED TO STOP sign should be supplemented with a WHEN FLASHING (W16-13P) plaque (see Figure 2C-16).*~~

10a **WHEN FLASHING (W16-13P) plaque shall not be used to supplement the BE PREPARED TO STOP (W3-4) sign.**

Support:

10b Studies indicate that the W16-13P plaque is generally not effective as a warning device for motorists approaching signalized intersections. Not using the W16-13P plaque also addresses the situation when a warning beacon is inoperative for any reason.

11 Section 2C.45 contains information regarding the use of a NO MERGE AREA (W4-5aP) supplemental plaque in conjunction with a Yield Ahead sign.

*Guidance:*

12 *An oversized square shape version of W1-1 should be used if installed on the outside curve in line with and at approximately a right angle to exiting traffic from a short ramp length with limiting curve near ramp terminal (refer to Figure 2C-3) where W3-1 and W3-3 signs have proven ineffective.*

**Standard:**

13 **A SIGNAL AHEAD (SW26aP(CA)) plaque or a STOP AHEAD (SW26bP(CA)) plaque (refer to Figure 2C-8(CA)) shall be**

**used below an oversized square shape version of W1-1 at short ramp lengths with limiting curve near ramp terminals to indicate that a signal or stop sign configuration is present at the terminal.**

*Guidance:*

14 *The W3-1 or W3-3 signs should be left in place when the oversized W1-1 sign with its accompanying plaque is placed.*

## Section 2C.36 DRAW BRIDGE Sign (W3-6)

**Standard:**

01 **A DRAW BRIDGE (W3-6) sign (see Figure 2C-8) shall be used in advance of movable bridge signals and gates (see Section 4Q.02) to give warning to road users.**

*Guidance:*

02 *Where physical conditions prevent a motorist driving at the legal speed limit from having a continuous view of at least one signal indication before reaching the stop line, an auxiliary device should be provided in advance of movable bridge signals and gates.*

Option:

03 This device may be either a supplemental signal or the mandatory DRAW BRIDGE (W3-6) sign to which has been added a flashing yellow beacon interconnected with movable bridge control.

## Section 2C.37 Advance Ramp Control Signal Signs (W3-7 and W3-8)

Support:

00 For State highways, refer to Caltrans' Ramp Metering Design Manual. Refer to Section 1A.05 for information regarding this publication.

Option:

01 A RAMP METER AHEAD (W3-7) sign (see Figure 2C-8) may be used to warn road users that a freeway entrance ramp is metered and that they will encounter a ramp control signal (see Chapter 4P).

*Guidance:*

02 *When the ramp control signals are in operation ~~operated only during certain periods of the day~~, a RAMP METERED WHEN FLASHING (W3-8) sign (see Figure 2C-8) or an overhead Activated Blank-Out "METER ON" message (W88-2(CA) and W88-3(CA)) sign, or "PREPARE TO STOP" message (W89(CA)) sign (refer to Figure 2C-8(CA)) should be installed in advance of the ramp control signal near the entrance to the ramp, or on the arterial on the approach to the ramp, to alert road users to the presence and operation of ramp meters. .*

**Standard:**

03 **The RAMP METERED WHEN FLASHING sign shall be supplemented with a Warning Beacon (see Section 4S.03) that flashes when the ramp control signal is in operation.**

## Section 2C.38 NEW TRAFFIC PATTERN and NEW SIGNAL OPERATION AHEAD Signs (W23-2 and W23-2a)

Option:

01 A NEW TRAFFIC PATTERN AHEAD (W23-2) sign (see Figure 2C-8) may be used on the approach to an intersection or along a section of roadway to provide advance warning of a change in traffic patterns, such as revised lane usage or roadway geometry.

02 A NEW SIGNAL OPERATION AHEAD (W23-2a) sign (see Figure 2C-8) may be used on the approach to a signalized intersection to provide advance warning of a change in signal phasing.

*Guidance:*

03 *The NEW TRAFFIC PATTERN or NEW SIGNAL OPERATION AHEAD sign should be removed when the traffic pattern returns to normal, when the changed pattern is no longer considered to be new, or within 12 months.*

## Section 2C.39 WATCH FOR STOPPED TRAFFIC Sign (W26-1)

Option:

01 The WATCH FOR STOPPED TRAFFIC (W26-1) sign (see Figure 2C-8) may be used to warn road users of the possibility of vehicles stopping abruptly in the travel lane due to recurring congested conditions.

02 The WATCH FOR STOPPED TRAFFIC (W26-1) sign may be used to alert road users in areas with limited sight distance where they could encounter stopped traffic unexpectedly.

03 A Warning Beacon (refer to Section 4S.03) or yellow LEDs within the border of the sign may be used with the WATCH FOR STOPPED TRAFFIC (W26-1) sign.

## Section 2C.40 Reduced Speed Limit Ahead and Speed Zone Signs (W3-5, W3-5a, W3-5b, and W3-5c)

*Guidance:*

01 *A Reduced Speed Limit Ahead (W3-5 or W3-5a) or Truck Speed Zone Ahead (W3-5c) sign (see Figure 2C-9) should be used to inform road users of a reduced speed zone where the speed limit is being reduced by more than 10 mph, or where engineering judgment indicates the need for advance notice to comply with the posted speed limit ahead.*

02 *A VARIABLE SPEED ZONE AHEAD (W3-5b) sign (see Figure 2C-9) should be used to inform road users of a zone where the speed limit is varied by time of day or as conditions change.*

**Standard:**

03 **If used, Reduced Speed Limit, Variable Speed Zone, or Truck Speed Zone Ahead signs shall be followed by a Speed Limit (R2-1) sign (see Figure 2B-3), with the Trucks ~~(R2-2P~~ M4-4P) plaque or the R6-3(CA) and R6-4(CA) signs (see Figure 2B- 3(CA)) on separate installations (refer to chapter 2B) if applicable, installed at the beginning of the zone where the speed limit applies.**

04 **The speed limit displayed on the W3-5, W3-5a, and W3-5c signs shall be identical to the speed limit displayed on the subsequent Speed Limit sign.**

## Section 2C.41 Intersection Warning Signs (W2-1 through W2-8)

Option:

01 A Cross Road (W2-1), Side Road (W2-2, W2-3, or W2-3a), T-Intersection (W2-4), or Y-Intersection (W2-5) sign (see Figure 2C-10) may be used in advance of an intersection to indicate the presence of an intersection and the possibility of turning or entering traffic.

02 The Circular Intersection (W2-6) sign (see Figure 2C-10) may be installed in advance of a circular intersection (see Figures 2B-21 through 2B-23).

*Guidance:*

03 *If an approach to a circular intersection has a statutory or posted speed limit of 40 mph or higher, the Circular Intersection (W2-6) sign should be installed in advance of the circular intersection.*

Option:

04 An educational plaque (see Figure 2C-10) with a legend such as TRAFFIC CIRCLE (W16-12P) or ROUNDABOUT (W16-12aP) may be mounted below a Circular Intersection sign.

Support:

05 Section 2C.65 contains information about the use of an advance street name plaque to identify an intersecting road.

*Guidance:*

06 *The Intersection Warning sign should illustrate and depict the general configuration of the intersecting roadway, such as a cross road, side road, T-intersection, or Y-intersection.*

07 *Intersection Warning signs, other than the Circular Intersection (W2-6) sign, the T-intersection (W2- 4) sign, and the Grade Crossing and Intersection Advance Warning (W10-2, W10-3, W10-4, W10-11, and W10-12) signs (see Figure 8B-4) should not be used on approaches controlled by STOP signs, YIELD signs, or signals.*

08 *If an Intersection Warning sign is used where the side roads are not opposite of each other, the Offset Side Roads (W2-7) sign (see Figure 2C-10) should be used instead of the Cross Road sign.*

09 *If an Intersection Warning sign is used where two closely-spaced side roads are on the same side of the highway, the Double Side Roads (W2-8) sign (see Figure 2C-10) should be used instead of the Side Road sign.*

10 *No more than two side roads should be depicted on the same side of the highway on a W2-7 or W2-8 sign, and no more than three side roads should be depicted on a W2-7 or W2-8 sign.*

~~Option:~~

11 ~~When at least one side road is shown, the stem of an additional side road representing a significantly lower relative volume may be depicted using a line that is two-thirds the width of the through road based on engineering judgment.~~

Support:

12 Figure 2A-4 shows examples of the typical placement of an Intersection Warning sign.

*Guidance:*

14 *The Cross Traffic Ahead (W70(CA)) sign (refer to Figure 2C-10(CA)) should be used to warn motorists that crossing at grade*

*can be expected at non-signalized intersections in an expressway corridor.*

Option:

15 If two freeway sections are connected by a short expressway segment or if multiple non-signalized intersections are close together, the Next Distance (W7-3aP) plaque may be placed below the W70(CA) sign.

16 Refer to Section 2C.24 for DEAD END (W14-1) sign.

## Section 2C.42 Actuated Advance Intersection Signs (W2-10 and W2-11)

~~Support:~~

01 ~~Actuated Advance Intersection signs are typically associated with restricted sight distance and gap selection at stop-controlled intersections.~~

~~Option:~~

02 ~~The TRAFFIC ENTERING WHEN FLASHING (W2-10) sign (see Figure 2C-10) may be used on the uncontrolled through roadway approach to a side or cross road stop controlled intersection to warn of entering traffic from the side or cross road.~~

03 ~~The TRAFFIC APPROACHING WHEN FLASHING (W2-11) sign (see Figure 2C-10) may be used on the side road stop controlled approach to warn of traffic approaching on the uncontrolled through road.~~

~~**Standard:**~~

04 ~~**When used, the TRAFFIC ENTERING WHEN FLASHING sign, and the TRAFFIC APPROACHING WHEN FLASHING sign shall be supplemented with a Warning Beacon (see Section 4S.03) that activates when a vehicle on a conflicting approach is detected.**~~

05 WHEN FLASHING is not used in California to address the situation when a warning beacon is inoperative for any reason.

## Section 2C.43 Two-Direction Large Arrow Sign (W1-7)

**Standard:**

01 **The Two-Direction Large Arrow (W1-7) sign (see Figure 2C-10) shall be a horizontal rectangle.**

02 **If used, the Two-Direction Large arrow sign shall be installed on the far side of a T-intersection in line with, and at approximately a right angle to, traffic approaching from the stem of the T- intersection.**

03 **The Two-Direction Large Arrow sign shall not be used where there is no change in the direction of travel such as at the beginnings and ends of medians or at center piers.**

*Guidance:*

04 *The Two-Direction Large Arrow sign should be visible for a sufficient distance to provide the road user with adequate time to react to the intersection configuration.*

05 *The OM1-3 object marker should be used below and on the same post as the W1-7 sign. Refer to Section 2C.70.*

## Section 2C.44 Traffic Signal Oncoming Extended Green Signs (W25-1 and W25-2)

~~**Standard:**~~

01 ~~**At locations where either a W25-1 or a W25-2 sign is required based on the provisions in Section 4F.01, the W25-1 or W25-2 sign (see Figure 2C-10) shall be installed near the left-most signal face for the approach.**~~

*Guidance:*

02 *The "yellow trap" should be eliminated rather than trying to correct it with these signs. Refer to Part 4.*

## MERGING, TWO-WAY TRAFFIC, AND NO PASSING WARNING SIGNS AND PLAQUES

### Section 2C.45 Merge Signs and Plaque (W4-1, W4-5, and W4-5aP)

Option:

01 A Merge (W4-1) sign (see Figure 2C-11) may be used to warn road users on the major roadway that merging movements might be encountered in advance of a point where lanes from two separate roadways converge as a single traffic lane and no turning conflict occurs.

*Guidance:*

01a *When installed at freeway entrance ramps, the W4-1 sign should be installed in advance of the paved gore area.*

02 A Merge sign may also be installed on the side of the entering roadway to warn road users on the entering roadway of the merge condition.

*Guidance:*

03 *The Merge sign should be installed on the side of the major roadway where merging traffic will be encountered and in such a position as to not obstruct the road user's view of entering traffic.*

04 *When a Merge sign is installed on a major roadway, the symbol should be oriented right or left as appropriate to depict the side from which the merge occurs, with the arrow representing the major roadway and the curved stem representing the entering roadway (see Figure 2C-11).*

05 *When a Merge sign is to be installed on an entering roadway that curves before merging with the major roadway, such as a ramp with a curving horizontal alignment as it approaches the major roadway, the Entering Roadway Merge (W4-5) sign (see Figure 2C-11) should be used to better portray the actual geometric conditions to road users on the entering roadway.*

06 *Where two roadways of approximately equal importance converge and merging movements are required, a Merge sign should be placed on each roadway.*

07 *The Merge sign should not be used where two roadways converge and merging movements are not required.*

**Standard:**

08 **The Merge sign shall not be used in place of a Lane Ends (W4-2) sign (see Section 2C.47) where lanes of traffic moving on a single roadway must merge because of a reduction in the actual or usable pavement width.**

Option:

09 An Entering Roadway Merge (W4-5) sign with a NO MERGE AREA (W4-5aP) supplemental plaque (see Figure 2C-11) mounted below it may be used to warn road users on an entering roadway that they will encounter an abrupt merging situation without an acceleration lane at the downstream end of the ramp.

10 A Merge (W4-1) sign with a NO MERGE AREA (W4-5aP) supplemental plaque mounted below it may be used to warn road users on the major roadway that traffic on an entering roadway will encounter an abrupt merging situation without an acceleration lane at the downstream end of the ramp.

11 For a yield-controlled channelized right-turn movement onto a roadway without an acceleration lane, a NO MERGE AREA (W4-5aP) supplemental plaque may be mounted below a Yield Ahead (W3-2) sign and/or below a YIELD (R1-2) sign when engineering judgment indicates that road users would expect an acceleration lane to be present.

Support:

12 Examples of the use of Merge (W4-1) signs are shown in Drawing A in Figure 2C-12.

### Section 2C.46 Added Lane Signs (W4-3 and W4-6)

*Guidance:*

01 *The Added Lane (W4-3) sign (see Figure 2C-11) should be installed in advance of a point where two roadways converge and merging movements are not required. When possible, the Added Lane sign should be placed such that it is visible from both roadways; if this is not possible, an Added Lane sign should be placed on the side of each roadway.*

Support:

01a When installed at freeway entrance ramps, the sign should be installed in advance of the paved gore area.

*Guidance:*

02 *When an Added Lane (W4-3) sign is installed on a major roadway, the symbol should be oriented right or left as appropriate to depict the side from which the entering roadway converges, with the straight arrow representing the major roadway and the curved arrow representing the entering roadway. The sign should be located on the side of the major roadway from which the entering roadway converges.*

03 *When an Added Lane sign is to be installed on a roadway that curves before converging with another roadway that has a tangent alignment at the point of convergence, the Entering Roadway Added Lane (W4-6) sign (see Figure 2C-11) should be used to better portray the actual geometric conditions to road users on the curving roadway.*

Support:

04 Examples of the use of Added Lane (W4-3) and Entering Roadway Added Lane (W4-6) signs are shown in Drawing B in Figure 2C-12.

## Section 2C.47 Lane Ends Signs (W4-2 and W9-1)

Support:

01 The Lane Ends (W4-2) and RIGHT (LEFT) LANE ENDS (W9-1) signs (see Figure 2C-11) are used to warn of the reduction in the number of traffic lanes in the direction of travel.

02 The sequence of the W4-2 and W9-1 signs is illustrated in Figure 2C-13.

*Guidance:*

03 *The Lane Ends (W4-2) sign should be installed at the advance placement distance in accordance with Table 2C-3.*

~~Option:~~

04 *A RIGHT (LEFT) LANE ENDS (W9-1) sign ~~may~~ should be installed in advance of the Lane Ends sign to provide additional warning that a lane is ending and that a merging maneuver will be required.*

~~*Guidance:*~~

05 *If a W9-1 sign is installed, a Distance (W16-2P series or W16-3P series) plaque (see Figure 2C-16) should be installed below the W9-1 sign.*

06 *On one-way streets or on divided highways where the left-hand lane is ending and the width of the median will permit, the W9-1 and W4-2 signs should be placed facing approaching traffic on the left-hand side or median.*

Option:

07 Where a lane ends a distance beyond the intersection that is less than the advance placement distance indicated in Table 2C-3, the W4-2 sign may be located at the far side of the intersection (see Sheet 4 of Figure 2C-13).

*Guidance:*

08 *When the W4-2 sign is located at the far side of the intersection in accordance with Paragraph 7 of this Section, the W9-1 sign should be placed upstream of the intersection with the appropriate distance plaque.*

Support:

09 Section 3B.12 contains information regarding the use of pavement markings in conjunction with a lane reduction.

*Guidance:*

10 *Lane Ends signs should not be installed in advance of the downstream end of an acceleration lane.*

**Standard:**

11 **The W4-2 and W9-1 signs shall not be used in dropped lane situations. In dropped lane situations on conventional roads at intersections, regulatory signs (see Section 2B.28) shall be used to inform road users that a through lane becomes a mandatory turn lane.**

*Guidance:*

12 *The W74(CA) sign should not be used for a lane reduction.*

## Section 2C.48 Lanes Merge Signs (W9-4 and W4-8)

~~Support:~~

01 ~~The LANES MERGE (W9-4) and Single-Lane Transition (W4-8) signs (see Figure 2C-11) are used to warn of a merge of two lanes to one in the same direction of travel with a merging maneuver required for each lane (see Sheet 5 of Figure 2C-13). This type of merge is for a geometric condition where both approach lanes merge into a single lane, not where one lane merges into the other. Section 6H.08 contains information about the use of the late merge sign.~~

~~*Guidance:*~~

02 ~~*The Single-Lane Transition (W4-8) sign should be located at the advance placement distance in accordance with Table 2C-3.*~~

~~Option:~~

03 ~~The Lanes Merge (W9-4) sign may be used in advance of the W4-8 sign to provide additional warning that both lanes form a single lane and that a merging maneuver is needed for the traffic in each lane.~~

## Section 2C.49 HEAVY MERGE FROM LEFT (RIGHT) Sign (W4-7)

Option:

01 The HEAVY MERGE FROM LEFT (RIGHT) (W4-7) sign (see Figure 2C-11) may be used to supplement a W4-1 sign at multilane approaches to congested areas to inform road users that it is desirable for through traffic to move out of a lane that will be occupied by a high volume of entering traffic. If used, the W4-7 sign may be supplemented with a W16-2P series or W16-3P series plaque (see Section 2C.61).

**Standard:**

02 **If used, the W4-7 sign shall be installed at a location upstream from the location of the W4-1 sign.**

## Section 2C.50 RIGHT (LEFT) LANE FOR EXIT ONLY Sign (W9-7)

**Standard:**

00 **The THRU TRAFFIC MERGE LEFT (RIGHT) (W74(CA)) sign shall be used on freeways and expressways to inform motorists that the outside or inside lane is being dropped at the next exit, and through traffic must merge into the adjacent lane.**

Option:

01 The RIGHT (LEFT) LANE FOR EXIT ONLY (W9-7) sign (see Figure 2C-11) may be used to provide advance warning to road users that traffic in the right-hand (left-hand) lane of a roadway will be required to depart the roadway at the next exit.

**Standard:**

01a **The RIGHT (LEFT) LANE FOR EXIT ONLY (W9-7) sign shall be placed between the THRU TRAFFIC MERGE LEFT (RIGHT) (W74(CA)) sign (refer to Figure 2C-11(CA)) and the RIGHT (LEFT) LANE MUST EXIT (R3-33) sign, at locations where overhead Exit Only signs (E11-1 Series) are not in place for lane drops at freeway exit ramps.**

Option:

01b A RIGHT (LEFT) X LANES FOR EXIT ONLY (W73B(CA)) sign may be used in lieu of a W9-7 if more than one lane will be required to depart the roadway at the next exit.

*Guidance:*

02 *If used, the W9-7 sign should be installed upstream from the first overhead guide sign that contains an EXIT ONLY sign panel or upstream from the first RIGHT (LEFT) LANE MUST EXIT (R3-33) regulatory sign, if used, whichever is farther upstream from the exit.*

Option:

03 A legend or plaque displaying the distance may be added to the W9-7 sign where the distance along the dropped lane between the sign and the exit ramp is greater than 1 mile.

Support:

04 Section 2B.31 contains information regarding a regulatory sign that can be used for lane drops at grade-separated interchanges.

Option:

05 On expressways, the THRU TRAFFIC MERGE LEFT (RIGHT) (W74(CA)) sign (refer to Figure 2C-11(CA)) may be used in advance of the RIGHT(LEFT) LANE MUST TURN RIGHT(LEFT) sign (R3-7).

*Guidance:*

06 *On conventional highways, the RIGHT(LEFT) LANE TURNS RIGHT(LEFT) AHEAD (W73A(CA)) sign (refer to Figure 2C-8(CA)) should be used in advance of the RIGHT(LEFT) LANE MUST TURN RIGHT(LEFT) sign (R3-7).*

Option:

07 *A THRU TRAFFIC MERGE LEFT (RIGHT) (W74(CA)) sign may be placed in advance of the W73A(CA) sign.*

Support:

08 Refer to Figure 3B-11(CA) for lane drop markings at exit ramps.

## Section 2C.51 Two-Way Traffic Sign (W6-3)

*Guidance:*

01 *A Two-Way Traffic (W6-3) sign (see Figure 2C-11) should be used to warn road users of a transition from a multi-lane divided section of roadway to a two-lane, two-way section of roadway.*

02 *A Two-Way Traffic (W6-3) sign with an AHEAD (W16-9P) plaque (see Figure 2C-16) should be used to warn road users of a transition from a one-way street to a two-lane, two-way section of roadway (see Figure 2B-18).*

Option:

03 The Two-Way Traffic sign may be used at intervals along a two-lane, two-way roadway and may be used to supplement the Divided Highway (Road) Ends (W6-2) sign discussed in Section 2C.21.

Support:

04 Section 6H.17 contains information on a Narrow Two-Way Traffic (W6-4) sign for use in temporary traffic control situations.

*Guidance:*

05 *The Two-Way Traffic (W6-3) sign should also be used at locations where motorists could perceive that they are on a one-way roadway when, in fact, they are on a two lane, two-way highway. Following are some typical situations:*

*A. Construction sites where a two-lane highway is being converted to a freeway or an expressway.*
*B. Two-lane, two-way highways where ultimate freeway or expressway right-of-way has been purchased and grading for the full width has been completed.*
*C. Two-lane, two-way highways following long sections of multi-lane freeway or expressway.*
*D. Two-way highway with edge lines but with no centerlines.*

**Standard:**

06 **The TWO WAY TRAFFIC (W44aP(CA)) plaque (refer to Figure 2C-11(CA)), if used, shall be positioned below the W6-3, W6-5, and W6-5a signs.**

07 **The Black on Yellow PASS WITH CARE (W83P(CA)) plaque (refer to Figure 2C-11(CA)), when used, shall be positioned below the Two Way Traffic (W6-3) sign where two-way traffic is being routed over a single roadway of a divided highway and passing is permitted.**

Support:

08 Refer to Figure 3B-14(CA) for signing and marking applications for lane reductions.

09 Typical example of W6-3 sign application is shown in Figure 3B-103(CA).

## Section 2C.52 Two-Way Traffic on a Three-Lane Roadway Signs (W6-5 and W6-5a)

Option:

01 The Two-Way Traffic on a Three-Lane Roadway (W6-5 and W6-5a) signs (see Figure 2C-11) may be installed along three-lane roadways with two lanes in one direction and one in the opposing direction.

## Section 2C.53 NO PASSING ZONE Sign (W14-3)

**Standard:**

01 **The NO PASSING ZONE (W14-3) sign (see Figure 2C-11) shall be a pennant-shaped isosceles triangle with its longer axis horizontal and pointing to the right. When used, the NO PASSING ZONE sign shall be installed on the left-hand side of the roadway at the beginning of no-passing zones identified by pavement markings or DO NOT PASS signs or both (see Sections 2B.36 and 3B.03).**

Option:

02 The NO PASSING ZONE (W14-3) sign may be used at the beginning of no-passing zones identified by either pavement markings or DO NOT PASS signs or both (refer to Sections 2B.36 and 3B.03).

## MISCELLANEOUS WARNING SIGNS AND PLAQUES

### Section 2C.54 Vehicular Traffic Warning Signs (W8-6, W11-1, W11-5, W11-8, W11-10, W11-11, W11-12P, W11-14, W11-15, and W11-15a)

Option:

01 Vehicular Traffic Warning (W8-6, W11-1, W11-5, W11-8, W11-10, W11-11, W11-12P, W11-14, W11-15, and W11-15a) signs (see Figure 2C-14) may be used to alert road users to locations where unexpected entries into the roadway by trucks, bicycles, farm vehicles, emergency vehicles, golf carts, horse- drawn vehicles, or other vehicles might occur. The TRUCK CROSSING (W8-6) word message sign may be used as an alternate to the Truck (W11-10) symbol sign.

Support:

02 These locations might be relatively confined or might occur randomly over a segment of roadway.

*Guidance:*

03 *Vehicular Traffic Warning signs should be used only at locations where the road user's sight distance is restricted, or the condition, activity, or entering traffic would be unexpected.*

04 *If the condition or activity is seasonal or temporary, the Vehicular Traffic Warning sign should be removed or covered when the condition or activity does not exist.*

Option:

05 The Trail Crossing (W11-15) sign may be used where both bicyclists and pedestrians might be crossing the roadway, such as at an intersection with a shared-use path. A TRAIL X-ING (W11-15P) supplemental plaque (see Figure 2C-14) may be mounted below the W11-15 sign. The TRAIL CROSSING (W11-15a) sign may be used to warn of shared-use path crossings where pedestrians, bicyclists, and other user groups might be crossing the roadway.

06 The W11-1, W11-15, and W11-15a signs and their related supplemental plaques may have a fluorescent yellow-green background with a black legend and border.

07 Supplemental plaques (see Figure 2C-16 and Section 2C.57) with legends such as AHEAD, XX FEET, NEXT XX MILES, IN STREET, or IN ROAD may be mounted below Vehicular Traffic Warning signs to provide advance notice to road users of unexpected entries.

*Guidance:*

07a *On state highways, the IN STREET plaque should not be used.*

Support:

07b Refer to Section 2C.67 for more information for IN STREET and IN ROAD plaques.

*Guidance:*

08 *If used in advance of a trail crossing, a W11-15 or W11-15a sign should be supplemented with an AHEAD or XX FEET plaque to inform road users that they are approaching a point where crossing activity might occur.*

**Standard:**

09 **If a post-mounted W11-1, W11-11, W11-15, or W11-15a sign is placed at the location of the crossing point where golf carts, pedestrians, bicyclists, or other shared-use path users might be crossing the roadway, a diagonal downward-pointing arrow (W16-7P) plaque (see Figure 2C-16 and Section 2C.63) shall be mounted below the sign. If the W11-1, W11-11, W11-15, or W11-15a sign is mounted overhead, the W16-7P supplemental plaque shall not be used.**

10 **A Vehicular Traffic Warning sign assembly shall not be installed on an approach controlled by a STOP or a YIELD sign, except as provided in Paragraphs 11 and 12 of this Section.**

Option:

11 The Vehicular Traffic Warning sign assembly may be installed on an approach to a circular intersection controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point at the entrance to the circulatory roadway.

12 At a signalized or stop-controlled intersection the Vehicular Traffic Warning sign assembly may be installed on an approach to a channelized right-turn lane controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point.

13 The crossing location identified by a W11-1, W11-11, W11-15, or W11-15a sign may be defined with crosswalk markings (see Chapter 3C).

**Standard:**

14 **The Emergency Vehicle (W11-8) sign (see Figure 2C-14) with the EMERGENCY SIGNAL AHEAD (W11-12P) supplemental plaque (see Figure 2C-14) shall be placed in advance of all emergency-vehicle traffic control signals (see Chapter 4M).**

Option:

15 The Emergency Vehicle (W11-8) sign, or a word message sign indicating the type of emergency vehicle (such as rescue squad), may be used in advance of the emergency-vehicle station when no emergency- vehicle traffic control signal is present.

16 A Warning Beacon (see Section 4S.03) may be used with any Vehicular Traffic Warning sign to indicate specific periods when the condition or activity is present or is likely to be present, or to provide enhanced sign conspicuity.

17 ~~A supplemental WHEN FLASHING (W16-13P) plaque (see Figure 2C-16) may be used with any Vehicular Traffic Warning sign that is supplemented with a Warning Beacon to indicate specific periods when the condition or activity is present or is likely to be present.~~

**Standard:**

18 **WHEN FLASHING (W16-13P) plaque shall not be used to supplement any Vehicular Traffic Warning sign.**

Support:

19 Studies indicate that the W16-13P plaque is generally not effective as a warning device for motorists approaching signalized intersections. Not using the W16-13P plaque also addresses the situation when a warning beacon is inoperative for any reason.

Option:

20 The Golf Cart (W11-11) signs may be used to alert road users to locations where unexpected entries into the roadway by golf carts might occur, such as at golf cart crossings. Refer to CVC § 38025. Also refer to CVC § 21115.1.

21 The W11-11 sign may also be used in combination with the IN ROAD plaque sign at locations where a local agency permits the sharing of the roadway with slower moving golf carts. Refer to CVC § 21115.

22 The ALL TERRAIN VEHICLES (SW47A(CA)) sign (refer to Figure 2C-14(CA)) may be used in advance of a segment of highway that permits the use of regular vehicular traffic and also the driving of off highway motor vehicles on that portion of the highway.

*Guidance:*

23 *A Next Distance (W7-3a) plaque should supplement the SW47A(CA).*

Option:

24 The WATCH FOR SNOW REMOVAL EQUIPMENT (SW58(CA)) sign (refer to Figure 2C-14(CA)) may be used on highways leading to snow areas.

*Guidance:*

25 *The SW58(CA) sign should be covered or removed during the summer season.*

Support:

26 The SW58(CA) sign is normally placed at lower elevations where the first snow is usually encountered.

## Section 2C.55 Non-Vehicular Warning Signs (W11-2, W11-3, W11-4, W11-6, W11-7, W11-9, and W11-16 through W11-22)

Option:

01 Non-Vehicular Warning (W11-2, W11-3, W11-4, W11-6, W11-7, W11-9, and W11-16 through W11- 22 and W11-23(CA)) signs (see Figure 2C-15 and 2C-15(CA)) may be used to alert road users in advance of locations where unexpected entries into the roadway might occur or where shared use of the roadway by pedestrians, animals, or equestrians might occur.

Support:

01a Refer to CVC §§ 21364 and 21365 for the Cattle (W11-4) sign.

01b Refer to CVC § 21805 for the Equestrian (W11-7) sign.

*Guidance:*

01c *The Deer Crossing (W11-3) sign should be used only after confirmation from a Department of Fish and Wildlife warden having jurisdiction in the area that a substantial problem exists.*

Option:

01d The Bear (W11-16) sign (refer to Figure 2C-15) may be used in advance of an area known to be inhabited by bear and there have been reported instances where bears are crossing the roadway.

*Guidance:*

01e *The WILDLIFE CROSSING (W11-23(CA)) sign should be used to alert road users of multiple types of wild animals present in or by the sides of the roadways. The W11-23(CA) sign should not be used in lieu of the individual symbol signs for animals.*

Option:

01f The WILDLIFE CROSSING (W11-23(CA)) sign may be used to alert road users of a wild animal which may cause traffic safety hazard and for which there are currently no symbol signs available.

Support:

01g Since wildlife migration patterns can change over time, it is recommended that the placement of non-vehicular warning signs featuring wildlife be periodically reviewed to verify that they continue to reflect current crossing behavior and remain effective.

Option:

01h The DEAF CHILDREN NEAR (SW38(CA)) sign (refer to Figure 2C-15(CA)) may be used on city streets or county roads to indicate that a deaf child is near. Refer to CVC § 21351.7.

01i The SENIOR ZONE (SW50-1P(CA)) plaque or SENIOR (SW50-2P(CA)) plaque (refer to Figure 2C-15(CA)) may be used in combination, above the Speed Limit (R2-1 (25,20 or 15)) sign on any street or road, other than a State highway, with a speed limit greater than 25 mph that is adjacent to a senior citizen facility. Refer to CVC §§ 22352 and 22358.4.

*Guidance:*

01j *If used, the NEXT XX MILES supplemental plaque should be placed at approximately 5 mile intervals, or when intersecting major traffic generators.*

Support:

02 These conflicts might be relatively confined, or might occur randomly over a segment of roadway.

*Guidance:*

03 *If used in advance of a pedestrian, snowmobile, or equestrian crossing, the W11-2, W11-6, W11-7, and W11-9 signs should be supplemented with plaques (see Figure 2C-16 and Section 2C.61) with the legend AHEAD or XX FEET to inform road users that they are approaching a point where crossing activity might occur.*

**Standard:**

04 **If a post-mounted W11-2, W11-6, W11-7, or W11-9 sign is placed at the location of the crossing point where pedestrians, snowmobilers, or equestrians might be crossing the roadway, a diagonal downward-pointing arrow (W16-7P) plaque (see Figure 2C-16 and Section 2C.63) shall be mounted below the sign. If the W11-2, W11-6, W11-7, or W11-9 sign is mounted overhead, the W16-7P plaque shall not be used.**

05 **A Non-Vehicular Warning sign assembly shall not be installed on an approach controlled by a STOP or a YIELD sign, except as provided in Paragraphs 6 and 7 of this Section.**

Option:

06 The Non-Vehicular Warning sign assembly may be installed on an approach to a circular intersection controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point at the entrance to a circulatory roadway.

07 At a signalized or stop-controlled intersection the Non-Vehicular Warning sign assembly may be installed on an approach to a channelized right-turn lane controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point.

08 A Pedestrian Crossing (W11-2) sign may be placed overhead or may be post-mounted with a diagonal downward-pointing arrow (W16-7P) plaque at the crosswalk location where Yield Here To (Stop Here For) Pedestrians signs (see Section 2B.19) have been installed in advance of the crosswalk.

**Standard:**

09 **If a W11-2 sign has been post-mounted at the crosswalk location where a Yield Here To ~~(Stop Here For)~~ Pedestrians sign is used on the approach, the Yield Here To ~~(Stop Here For)~~ Pedestrians sign shall not be placed on the same post as the W11-2 sign.**

Option:

10 An advance Pedestrian Crossing (W11-2) sign with an AHEAD or a distance supplemental plaque may be used in conjunction with a Yield Here To ~~(Stop Here For)~~ Pedestrians sign on the approach to the same crosswalk.

11 The crossing location identified by a W11-2, W11-6, W11-7, or W11-9 sign may be defined with crosswalk markings (see Chapter 3C).

12 The W11-2 and W11-9 signs and their related supplemental plaques may have a fluorescent yellow- green

background with a black legend and border.

*Guidance:*

13 *When a fluorescent yellow-green background is used, a systematic approach featuring one background color within a zone or area should be used. The mixing of standard yellow and fluorescent yellow-green backgrounds within a selected site area should be avoided.*

Option:

14 A Warning Beacon (see Section 4S.03) may be used with any Non-Vehicular Warning sign to indicate specific periods when the condition or activity is present or is likely to be present, or to provide enhanced sign conspicuity.

15 ~~A supplemental WHEN FLASHING (W16-13P) plaque (see Figure 2C-16) may be used with any Non-Vehicular Warning sign that is supplemented with a Warning Beacon to indicate specific periods when the condition or activity is present or is likely to be present.~~

**Standard:**

16 **WHEN FLASHING (W16-13P) plaque shall not be used to supplement any Non-Vehicular Warning sign.**

Support:

17 Studies indicate that the W16-13P plaque is generally not effective as a warning device for motorists approaching signalized intersections. Not using the W16-13P plaque also addresses the situation when a warning beacon is inoperative for any reason.

## Section 2C.56 Playground Sign (W15-1)

Option:

01 The Playground (W15-1) sign (see Figure 2C-15) may be used to give advance warning of a designated children's playground that is located adjacent to the road.

02 The Playground sign may have a fluorescent yellow-green background with a black legend and border.

*Guidance:*

03 *If the access to the playground area requires a roadway crossing, the application of crosswalk pavement markings (see Chapter 3C) and Non-Vehicular Warning signs (see Section 2C.55) should be considered.*

04 *The PLAYGROUND (SW49P(CA)) plaque (refer to Figure 2C-15(CA)) should not be used alone.*

Option:

05 The SW49P(CA) plaque may be used in combination above the Speed Limit (R2-1 (25)) sign and WHEN CHILDREN ARE PRESENT (S4-2) sign on any street or road, other than a State highway, with a speed limit greater than 25 mph that is adjacent to a children's playground within a public park. Refer to CVC § 22357.1.

# SUPPLEMENTAL WARNING PLAQUES

## Section 2C.57 Use of Supplemental Warning Plaques

Option:

01 A supplemental warning plaque (see Figure 2C-16) may be displayed with a warning or regulatory sign when engineering judgment indicates that road users require additional warning information beyond that contained in the main message of the warning or regulatory sign.

**Standard:**

02 **Supplemental warning plaques shall be used only in combination with and installed on the same post(s) as warning or regulatory signs. They shall not be mounted alone or displayed alone.**

03 **Unless otherwise provided in this Manual for a particular plaque, supplemental warning plaques shall be mounted below the sign they supplement.**

## Section 2C.58 Design of Supplemental Warning Plaques

**Standard:**

01 **A supplemental warning plaque used with a warning sign shall have the same legend, border, and background color as the warning sign with which it is displayed. A supplemental warning plaque used with a regulatory sign shall have a black legend and border on a yellow background.**

02 **Supplemental warning plaques shall be square or rectangular.**

## Section 2C.59 Advisory Speed Plaque (W13-1P) and Confirmation Advisory Speed Plaque (W13-1aP)

Option:

01 The Advisory Speed (W13-1P) plaque (see Figure 2C-1) may be used to supplement an advance warning sign to indicate the advisory speed for a condition.

02 The Confirmation Advisory Speed (W13-1aP) plaque (see Figure 2C-1) may be used to supplement a One-Direction Large Arrow (W1-6) sign on the outside of a turn or curve in line with and at approximately a right angle to approaching traffic.

**Standard:**

03 **The use of the Advisory Speed and Confirmation Advisory Speed plaques for horizontal curves shall be in accordance with Section 2C.06 and Table 2C-6. The speed differential in Table 2C-6 shall be the difference between the advisory speed for the horizontal curve and the posted speed limit~~, statutory speed limit, or the 85th percentile speed on the approach to the curve~~. The Advisory Speed plaque shall also be used where an engineering study indicates a need to advise road users of the advisory speed for other roadway conditions.**

04 **The speed displayed on the Advisory Speed and Confirmation Advisory Speed plaques shall be a multiple of 5 mph.**

05 **Except in emergencies or when the condition is temporary, an Advisory Speed or Confirmation Advisory Speed plaque shall not be installed until the advisory speed has been determined by an engineering study.**

06 **The Advisory Speed plaque shall only be used to supplement an advance warning sign. The Advisory Speed plaque or the Confirmation Advisory Speed plaque shall not be installed as a separate sign installation.**

*Guidance:*

07 *The Advisory Speed plaque, if used with a sign that is also supplemented with another plaque, such as an Advance Street Name plaque (see Section 2C.65), should be mounted immediately below the primary warning sign with any other plaque mounted below the Advisory Speed plaque.*

**Standard:**

08 **The Confirmation Advisory Speed plaque shall only be used to supplement a One-Direction Large Arrow (W1-6) sign (see Section 2C.10) or an Exit Gore (E5-1 series) sign (see Section 2E.26) and shall not be installed as a separate sign installation.**

09 **The advisory speed shall be determined by an engineering study that follows established engineering practices.**

*Guidance:*

10 *The advisory speed should be determined based on free-flowing traffic conditions.*

11 *Because changes in conditions, such as roadway geometrics, surface characteristics, or sight distance, might affect*

*the advisory speed, each location should be evaluated periodically or when conditions change.*

Support:

12 Among the established engineering practices that are appropriate for the determination of the recommended advisory speed for a horizontal curve are the following:

A. Compass method
B. Safety-based method
C. Accelerometer method
D. Design equation method
E. Ball-bank method using the following criteria:
    1. 16 degrees of ball-bank for speeds of 20 mph or less
    2. 14 degrees of ball-bank for speeds of 25 to 30 mph
    3. 12 degrees of ball-bank for speeds of 35 mph and higher

13 The 16, 14, and 12 degrees of ball-bank criteria are comparable to the current AASHTO horizontal curve design guidance. Research has shown that drivers often exceed existing posted advisory curve speeds by 7 to 10 mph.

**Standard:**

14 **If used, the speed shown on the W13-1P plaque shall not be in excess of the posted or maximum speed limit.**

15 **The Advisory Speed plaque shall not be used in conjunction with any sign other than a warning sign, nor shall it be used alone. When used, it shall be positioned below the warning sign.**

*Guidance:*

16 *In determining the need for curve or turn warning signs, consideration should be given to driver expectancy based on the driving environment. If the curve can be driven at legal speed without discomfort, there is normally no need for a sign. A curve warning sign should be considered in advance of any curve that produces a reading of 10 degrees on a Ball Bank Indicator at speeds lower than the approach speed. If a curve warning sign is needed, it should be supplemented with an advisory speed message.*

17 *A mechanical or electronic Ball Indicator should be used to determine the advisory speed for curves.*

Support:

18 This speed is shown on Advisory Exit and Ramp Speed Signs and Advisory Speed Plaques.

Option:

19 The Advisory Speed (W13-1P) plaque may also be used with a number of other warning signs.

Support:

20 One method of determining the advisory speed is to drive the curve at several selected uniform speeds and plot the Ball Bank Indicator readings as shown in Figure 2C-101(CA).

*Guidance:*

21 *A minimum of three speed runs should be made in each direction.*

## Section 2C.60 NEW Plaque (W16-15P)

Option:

01 A NEW (W16-15P) plaque (see Figure 2C-16) may be mounted above a regulatory sign when a new regulation takes effect in order to alert road users to the new traffic regulation. A NEW plaque may also be mounted above an advance warning sign (such as a Signal Ahead sign for a newly-installed traffic control signal) for a warning of a new traffic condition.

*Guidance:*

02 *The NEW plaque should be removed no later than ~~6~~ 12 months after it was installed.*

Support:

03 Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

## Section 2C.61 Distance Plaques (W16-2 Series, W16-3 Series, W16-4P, and W7-3aP)

Option:

01 The Distance Ahead (W16-2 series and W16-3 series) plaques (see Figure 2C-16) may be used to inform the road user of the distance to the condition indicated by the warning sign.

02 The Next Distance (W7-3aP and W16-4P) plaques (see Figures 2C-5 and 2C-16) may be used to inform road users of the length of roadway over which the condition indicated by the warning sign exists.

*Guidance:*

03 *When the distance is in miles, the mileage shown should be to the nearest 1/4 mile for a distance of less than 1 mile and to the nearest mile for distances over one mile. The text "MILE" should be used for a distance of one mile or less. The text "MILES" should be used for distances over one mile.*

## Section 2C.62 Supplemental Arrow Plaques (W16-5P and W16-6P)

*Guidance:*

01 *If the condition indicated by a warning sign is located on an intersecting road and the distance between the intersection and condition is not sufficient to provide adequate advance placement of the warning sign, a Supplemental Arrow (W16-5P or W16-6P) plaque (see Figure 2C-16) should be used below the warning sign.*

**Standard:**

02 **Supplemental Arrow plaques shall have the same legend design as the Advance Turn Arrow and Directional Arrow auxiliary signs (see Sections 2D.26 and 2D.28) except that they shall have a black legend and border on a yellow or fluorescent yellow or yellow-green background, as appropriate.**

## Section 2C.63 Diagonal Downward-Pointing Arrow Plaques (W16-7P and W16-7aP)

Support:

01 Diagonal downward-pointing arrow (W16-7P and W16-7aP) plaques (see Figure 2C-16) are used with certain Vehicular Traffic Warning signs (see Section 2C.54) and certain Non-Vehicular Warning signs (see Section 2C.55), and School Crossing signs (see Section 7B.03) to indicate the specific location of a crossing point.

02 The W16-7P plaque contains a single arrow pointing diagonally down to the right or left, toward the roadway, depending on which side of the roadway it is located.

Option:

03 A W16-7aP plaque may be used with a single crossing sign located on a narrow median separating two roadways with traffic in the same direction where the crossing traverses both roadways.

04 The Diagonal Downward-Pointing Arrow Plaque W16-7P may be used where object markers (refer to Sections 2C.70 and 2C.72) may be ineffective, with the downward arrow either left or right, to mark obstructions in the roadway where traffic is permitted to pass on one side only.

## Section 2C.64 Hill-Related Plaques (W7-2 Series and W7-3 Series)

*Guidance:*

01 *Hill-Related (W7-2 series and W7-3 series) plaques (see Figure 2C-5) or other appropriate legends and larger signs should be used for emphasis or where special hill characteristics exist.*

02 *On longer grades, the use of a distance (W7-3aP or W7-3bP) plaque (see Figure 2C-5) at periodic intervals of approximately 1-mile spacing should be considered.*

## Section 2C.65 Advance Street Name Plaques (W16-8P and W16-8aP)

Option:

01 An Advance Street Name (W16-8P or W16-8aP) plaque (see Figure 2C-16) may be used with any Intersection (W1-10 series, W2 series, W10-2, W10-3, or W10-4) or Advance Traffic Control (W3 series) sign to identify the name of the intersecting street.

**Standard:**

02 **The lettering on Advance Street Name plaques shall be composed of a combination of lower- case letters with initial upper-case letters.**

03 **If two street names are used on the Advance Street Name plaque, a directional arrow pointing in the direction of the street shall be placed next to each street name. Arrows pointing to the left shall be placed to the left of the street name, and arrows pointing to the right shall be placed to the right of the street name.**

~~*Guidance:*~~

04 **If two street names are used on the Advance Street Name plaque, the street names and associated arrows ~~should~~ shall be displayed in the following order:**

- **A. For a single intersection, the name of the street to the left ~~should~~ shall be displayed above the name of the street to the right; or**

**B. For two sequential intersections, such as where the plaque is used with an Offset Side Roads (W2-7) or a Double Side Road (W2-8) sign, the name of the first street encountered ~~should~~ shall be displayed above the name of the second street encountered, and the arrow associated with the second street encountered should shall be an advance arrow, such as the arrow shown on the W16-6P arrow plaque (see Figure 2C-16).**

## Section 2C.66 Traffic Does Not Stop Plaques (W4-4P Series)

Option:

01 The CROSS TRAFFIC DOES NOT STOP (W4-4P) plaque (see Figure 2C-10) may be used in combination with a STOP sign when engineering judgment indicates that conditions are present that are causing or could cause road users to misinterpret the intersection as an all-way stop.

*Guidance:*

01a *The CROSS TRAFFIC DOES NOT STOP (W4-4p) plaque should be used in combination with a STOP sign at two-way stop-controlled intersections when a conversion from four-way stop to two-way stop operation is implemented.*

Option:

02 The TRAFFIC FROM LEFT (RIGHT) DOES NOT STOP (W4-4aP) or ONCOMING TRAFFIC DOES NOT STOP (W4-4bP) plaque may be used when such messages more accurately describe the traffic controls established at the intersection.

*Guidance:*

03 *The W4-4aP and W4-4bP plaques should be used at intersections where STOP signs control all but one approach to the intersection, unless the only non-stopped approach is from a one-way street.*

**Standard:**

04 **If a W4-4P series plaque is used, it shall be mounted below the STOP sign.**

Support:

05 Section 9C.06 contains information for Bicycle Cross Traffic warning plaques that can be used below STOP signs on crossroads or driveways that intersect with bicycle facilities.

## Section 2C.67 IN ROAD and IN STREET Plaques (W16-1P and W16-1aP)

Option:

01 In situations where there is a need to warn drivers to watch for other slower forms of transportation traveling along the highway, such as bicycles, pedestrians, golf carts, horse-drawn vehicles, or farm machinery, an IN ROAD (W16-1P) plaque or IN STREET (W16-1aP) plaque (see Figure 2C-16) may be used.

*Guidance:*

01a *On state highways, the IN STREET plaque should not be used.*

**Standard:**

02 **The background color of the W16-1P or W16-1aP plaque shall match the background color of the warning sign with which it is displayed. If a W16-1P or W16-1aP plaque is used, it shall be mounted below either a Vehicular Traffic Warning sign (see Section 2C.54) or a Non-Vehicular Warning sign (see Section 2C.55), and shall not be mounted alone.**

Support:

03 Section 9B.14 contains information about the use of a Bicycles Allowed Use of Full Lane (R9-20) sign to inform drivers of the presence of bicycles in the roadway or where bicyclists are expected or preferred to use the full lane.

## Section 2C.68 EXCEPT BICYCLES Plaque (W16-20P)

Option:

01 Where it is desired to notify bicyclists that the conditions depicted by a warning sign are not applicable to bicycles, the EXCEPT BICYCLES (W16-20P) supplemental warning plaque (see Figure 2C- 16) may be mounted below the warning sign.

Support:

02 Examples of warning signs with which an EXCEPT BICYCLES (W16-20P) plaque can be mounted include DEAD END (W14-1) or NO OUTLET (W14-2) signs.

## Section 2C.69 Photo Enforced Plaques (W16-10P and W16-10aP)

Option:

01 A Photo Enforced (W16-10P) plaque or a PHOTO ENFORCED (W16-10aP) word message plaque (see Figure 2C-16) may be mounted below a warning sign to advise road users that the regulations associated with the condition being warned about (such as a traffic control signal or a toll plaza) are being enforced by photographic equipment.

# OBJECT MARKERS

## Section 2C.70 Object Marker Design and Placement Height

Support:

01 Types 1, 2, and 3 object markers are used to mark obstructions within or adjacent to the roadway. Type 4 object markers are used to mark the end of a roadway.

**Standard:**

02 **When used, object markers (see Figure 2C-17 and 2C-17(CA)) shall not have a border and shall consist of an arrangement of one or more of the following types:**

**Type 1—a diamond-shaped sign, at least 18 inches on a side, consisting of either a yellow (OM1-1) or black (OM1-2) sign with nine yellow retroreflective devices, each with a minimum diameter of 3 inches, mounted symmetrically on the sign, or an all-yellow retroreflective sign (OM1-3).**

**Type 2—either a marker (OM2-1V or OM2-1H) consisting of three yellow retroreflective devices, each with a minimum diameter of 3 inches, arranged either horizontally or vertically on a white sign measuring at least 6 x 12 inches; or an all-yellow horizontal or vertical retroreflective sign (OM2-2V or OM2-2H), measuring at least 6 x 12 inches.**

**Type 3—a striped marker, 12 x 36 inches, consisting of a vertical rectangle with alternating black and retroreflective yellow stripes sloping downward at an angle of 45 degrees toward the side of the obstruction on which traffic is to pass. The minimum width of the yellow and black stripes shall be 3 inches.**

**Type 4—a diamond-shaped sign, at least 18 inches on a side, consisting of either a red (OM4-1) or black (OM4-2) sign with nine red retroreflective devices, each with a minimum diameter of 3 inches, mounted symmetrically on the sign, or an all-red retroreflective sign (OM4-3).**

**Type L(CA) Utility Pole marker (refer to Figure 2C-17(CA)) shall be yellow retroreflective material consisting of three 2 x 12 inch horizontal rectangles arranged vertically on a utility pole.**

**Type Q(CA) object marker (refer to Figure 2C-17(CA)) shall be a vertical tubular marker, with a height of 18 to 24 inch and a minimum cross sectional dimension of 2 ¼ inch. The yellow retroreflective material shall consist of three bands, each 3 inch in height or a single band 9 inch in height.**

Support:

03 Type 3 object markers with stripes that begin at the upper right side and slope downward to the lower left side are designated as right object markers (OM3-R). Object markers with stripes that begin at the upper left side and slope downward to the lower right side are designated as left object markers (OM3-L). Object markers with chevron stripes that slope downward to both the lower left and lower right sides are designated as center object markers (OM3-C).

*Guidance:*

04 *When used for marking obstructions within the roadway or obstructions that are 8 feet or less from the shoulder or curb, the minimum mounting height, measured from the bottom of the object marker to the elevation of the near edge of the traveled way, should be 4 feet.*

05 *When used to mark obstructions more than 8 feet from the shoulder or curb, the clearance from the ground to the bottom of the object marker should be at least 4 feet.*

06 *Object markers should not present a vertical or horizontal clearance obstacle for pedestrians.*

Option:

07 When object markers or markings are applied to an obstruction that by its nature requires a lower or higher mounting, the vertical mounting height may vary according to need.

Support:

08 Section 9C.09 contains information regarding the use of object markers on shared-use paths.

## Section 2C.71 Object Markers for Obstructions Within the Roadway

**Standard:**

01 **Obstructions within the roadway shall be marked with a Type 1 or Type 3 object marker. In addition to markers on the face of the obstruction, warning of approach to the obstruction shall be given by appropriate pavement markings (see Section 3B.13).**

Option:

01a The Type Q(CA) object marker may be used to emphasize objects within the roadway, for example, curb noses, where it is

desirable that the marker be visible from all directions.

02 To provide additional emphasis, a Type 1 or Type 3 object marker may be installed at or near the approach end of a median island.

03 To provide additional emphasis, large surfaces such as bridge piers may be painted with diagonal stripes, 12 inches or greater in width, similar in design to the Type 3 object marker.

**Standard:**

04 **The alternating black and retroreflective yellow stripes (OM3-L, OM3-R) shall be sloped down at an angle of 45 degrees toward the side on which traffic is to pass the obstruction. If traffic can pass to either side of the obstruction, the alternating black and retroreflective yellow stripes (OM3-C) shall form chevrons that point upwards.**

*Guidance:*

04a *The OM3-L or OM3-R object marker should be in line with the inner edge of the obstruction.*

Option:

05 Appropriate signs (see Sections 2B.40 and 2C.23) directing traffic to one or both sides of the obstruction may be used instead of the object marker.

*Guidance:*

06 *If any object marker is located behind the guard rail, all of the marker panel should be visible to approaching traffic.*

## Section 2C.72 Object Markers for Obstructions Adjacent to the Roadway

Support:

01 Obstructions not actually within the roadway are sometimes so close to the edge of the road that they need a marker. These include underpass piers, bridge abutments, handrails, ends of traffic barriers, utility poles, and culvert headwalls. In other cases there might not be a physical object involved, but other roadside conditions exist, such as narrow shoulders, drop-offs, gores, small islands, and abrupt changes in the roadway alignment, that might make it undesirable for a road user to leave the roadway, and therefore would create a need for a marker.

Option:

02 Type 2 or Type 3 object markers may be used to mark an obstruction adjacent to the roadway.

*Guidance:*

03 *If a Type 2 or Type 3 object marker is used to mark an obstruction adjacent to the roadway, the edge of the object marker that is closest to the road user should be installed in line with the closest edge of the obstruction.*

04 *When a marker is applied to the approach ends of guardrail or crash cushion terminals it should have the appearance of a Type 3 object marker and should be directly affixed, without a substrate, to the approach end of the guardrail or crash cushion and generally conform to the size and shape of the approach end of the guardrail or crash cushion.*

**Standard:**

05 **Type 1 and Type 4 object markers shall not be used to mark obstructions adjacent to the roadway.**

*Guidance:*

06 *Standard warning signs in this Chapter should also be used where applicable.*

Option:

07 Objects in a paved area within 8 feet of the traveled way may be marked with a Type 3 object marker. Objects outside of the paved shoulder, within 12 feet of the traveled way, may be marked with Type 2 object markers.

08 Type 2 object markers may be placed in front of, alongside of, or attached to the object. Where objects are very close to each other, only the first object may need to be marked.

09 The Type L(CA) Utility Pole marker may be used to mark a utility pole.

*Guidance:*

10 *If used, the utility company should be responsible for installing and maintaining the Type L(CA) Utility Pole marker.*

Support:

11 Refer to Section 2C.10 and 2C.43 for use of Type 1 (OM1-3) object markers in conjunction with One-Directional Large Arrow (W1-6) and Two-Direction Large Arrow (W1-7) signs for abrupt changes in the roadway alignment.

12 Refer to Section 6H.104(CA) for use of Type 1 and Type 3 object markers for temporary traffic control.

Option:

13 If engineering judgment indicates that the exit gore at an interchange cannot be negotiated in a reasonable manner, then in addition to the Type F and G delineators, a OM3-C object marker may be used as shown in Figure 3G-102(CA).

## Section 2C.73 Object Markers for Ends of Roadways

Support:

01 The Type 4 object marker is used to warn and alert road users of the end of a roadway in other than construction or maintenance areas.

**Standard:**

02 **If an object marker is used to mark the end of a roadway, a Type 4 object marker shall be used.**

~~Option:~~

03 ~~The Type 4 object marker may be used in instances where there are no alternate vehicular paths.~~

03a **The Type 4 object marker shall be used at the end of a road or cul-de-sac street where there is no alternate vehicular path.**

Option:

04 Where conditions warrant, more than one marker, or a larger marker with or without a Type 3 Barricade (see Section 2B.75), may be used at the end of the roadway.

Support:

04a Refer to Section 2C.24 for use of end-of-roadway marker in conjunction with END (W31(CA)) sign.

**Standard:**

05 **The minimum mounting height, measured vertically from the bottom of a Type 4 object marker to the elevation of the near edge of the traveled way, shall be 4 feet.**

*Guidance:*

06 *Appropriate advance warning signs in this Chapter should be used.*

## Section 2C.101(CA) TRACTOR-SEMIS OVER ___ FEET KINGPIN TO REAR AXLE NOT ADVISED (SW48(CA))

Option:

01 The TRACTOR-SEMIS OVER ___ FEET KINGPIN TO REAR AXLE NOT ADVISED (SW48(CA)) sign (refer to Figure 2C-6(CA)) may be used on certain specified conventional highways and freeways that have restricted turning radii.

**Standard:**

02 **At freeway off-ramps to restricted conventional highways, the SW48(CA) sign shall be installed with a NEXT EXIT (SW48-1P(CA)) plaque.**

*Guidance:*

03 *The SW48(CA) sign should be located far enough in advance of the restricted area to allow the vehicle operator time to select an alternate route.*

Option:

04 The NEXT EXIT (SW48-1P(CA)) plaque (refer to Figure 2C-6(CA)) or Distance plaque may supplement the SW48(CA) sign, as appropriate. Alternate messages for the SW48-1P(CA) plaque may be NEXT RIGHT, SECOND EXIT, SECOND RIGHT, NEXT LEFT or SECOND LEFT.

## Section 2C.102(CA) Weight Limit signs (W20(CA) and W20A(CA))

Option:

01 The Weight Limit (W20(CA) and W20A(CA)) signs (refer to Figure 2C-6(CA)) may be used in combination with a Distance Plaque, far enough in advance to allow the vehicle operator to select an alternate route.

*Guidance:*

02 *An alternative route should be evaluated for height, weight and size restrictions. Appropriate signs should be posted along the route to advise motorists of any restrictions.*

Support:

03 Refer to Section 2B.64 for regulatory Weight Limit signs.

## Section 2C.103(CA) Safety Corridor Sign (SW33(CA))

Option:

01 The Safety Corridor (SW33(CA)) sign (refer to Figure 2C-6(CA)) may be installed at the written request of an official Corridor Safety Task Force on any roadway segment that is designated as a Safety Awareness Zone under the authority of SHS § 97.1.

Support:

02 More information on Highway Safety Corridors and Task Forces is available at:
http://www.chp.ca.gov/community/corridor.html

**Standard:**

03 **The SW33(CA) sign shall not be installed on freeways.**

*Guidance:*

04 *When used, one SW33(CA) sign should be posted at each end of the corridor. The SW33(CA) sign specifications should be as follows: Yellow background with black text having a primary safety message.*

**Standard:**


05 **A secondary message shall be agreed upon by the Task Force. The secondary message shall not cover more than 25 percent of the sign's surface area.**

06 **Caltrans shall purchase and install the SW33(CA) sign.**

*Guidance:*


07 *The Task Force is to advise Caltrans, in writing, as to how long the signs are to remain on the highway, but this time period should not exceed three years.*

## Figure 2C-1. Horizontal Alignment Signs and Plaques

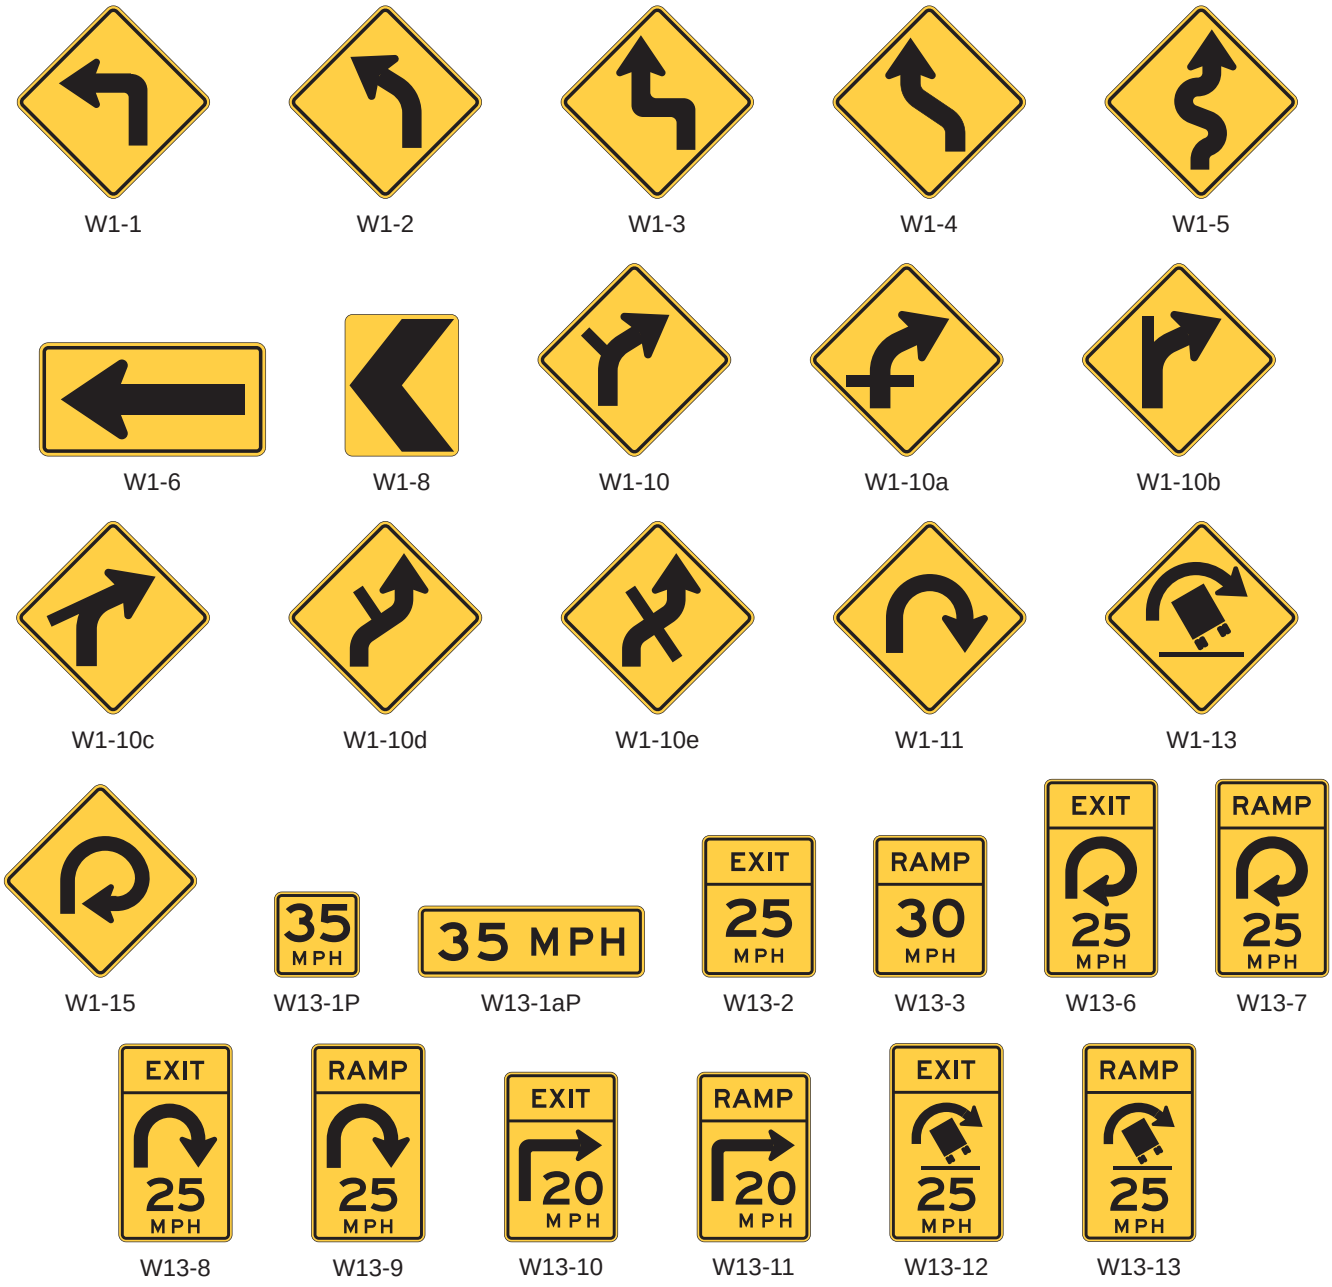



Note: Turn arrows and reverse turn arrows may be substituted for the curve arrows and reverse curve arrows on the W1-10 series signs where appropriate.

## Figure 2C-2. Examples of Warning Signs for Changes in Horizontal Alignment (Sheet 1 of 2)

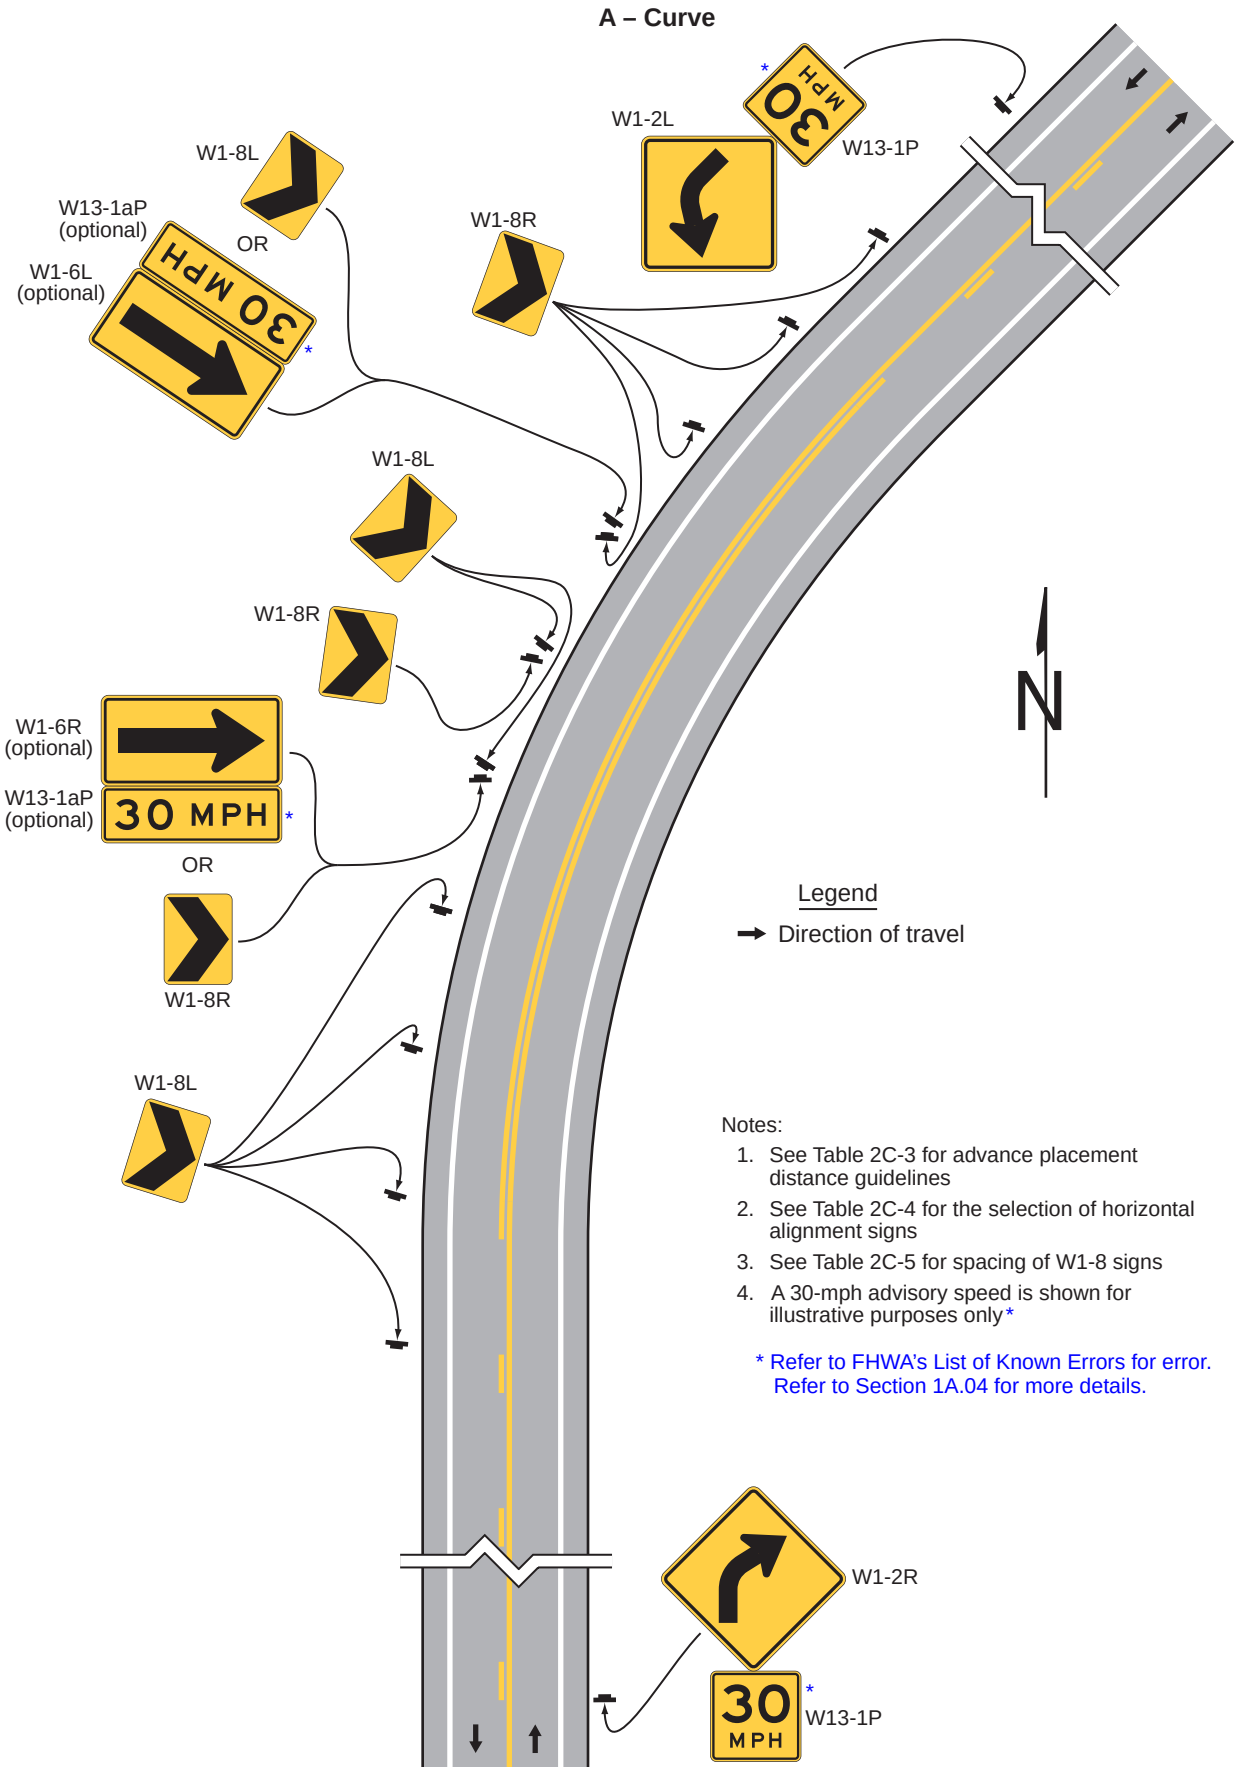

## Figure 2C-2. Examples of Warning Signs for Changes in Horizontal Alignment (Sheet 2 of 2)

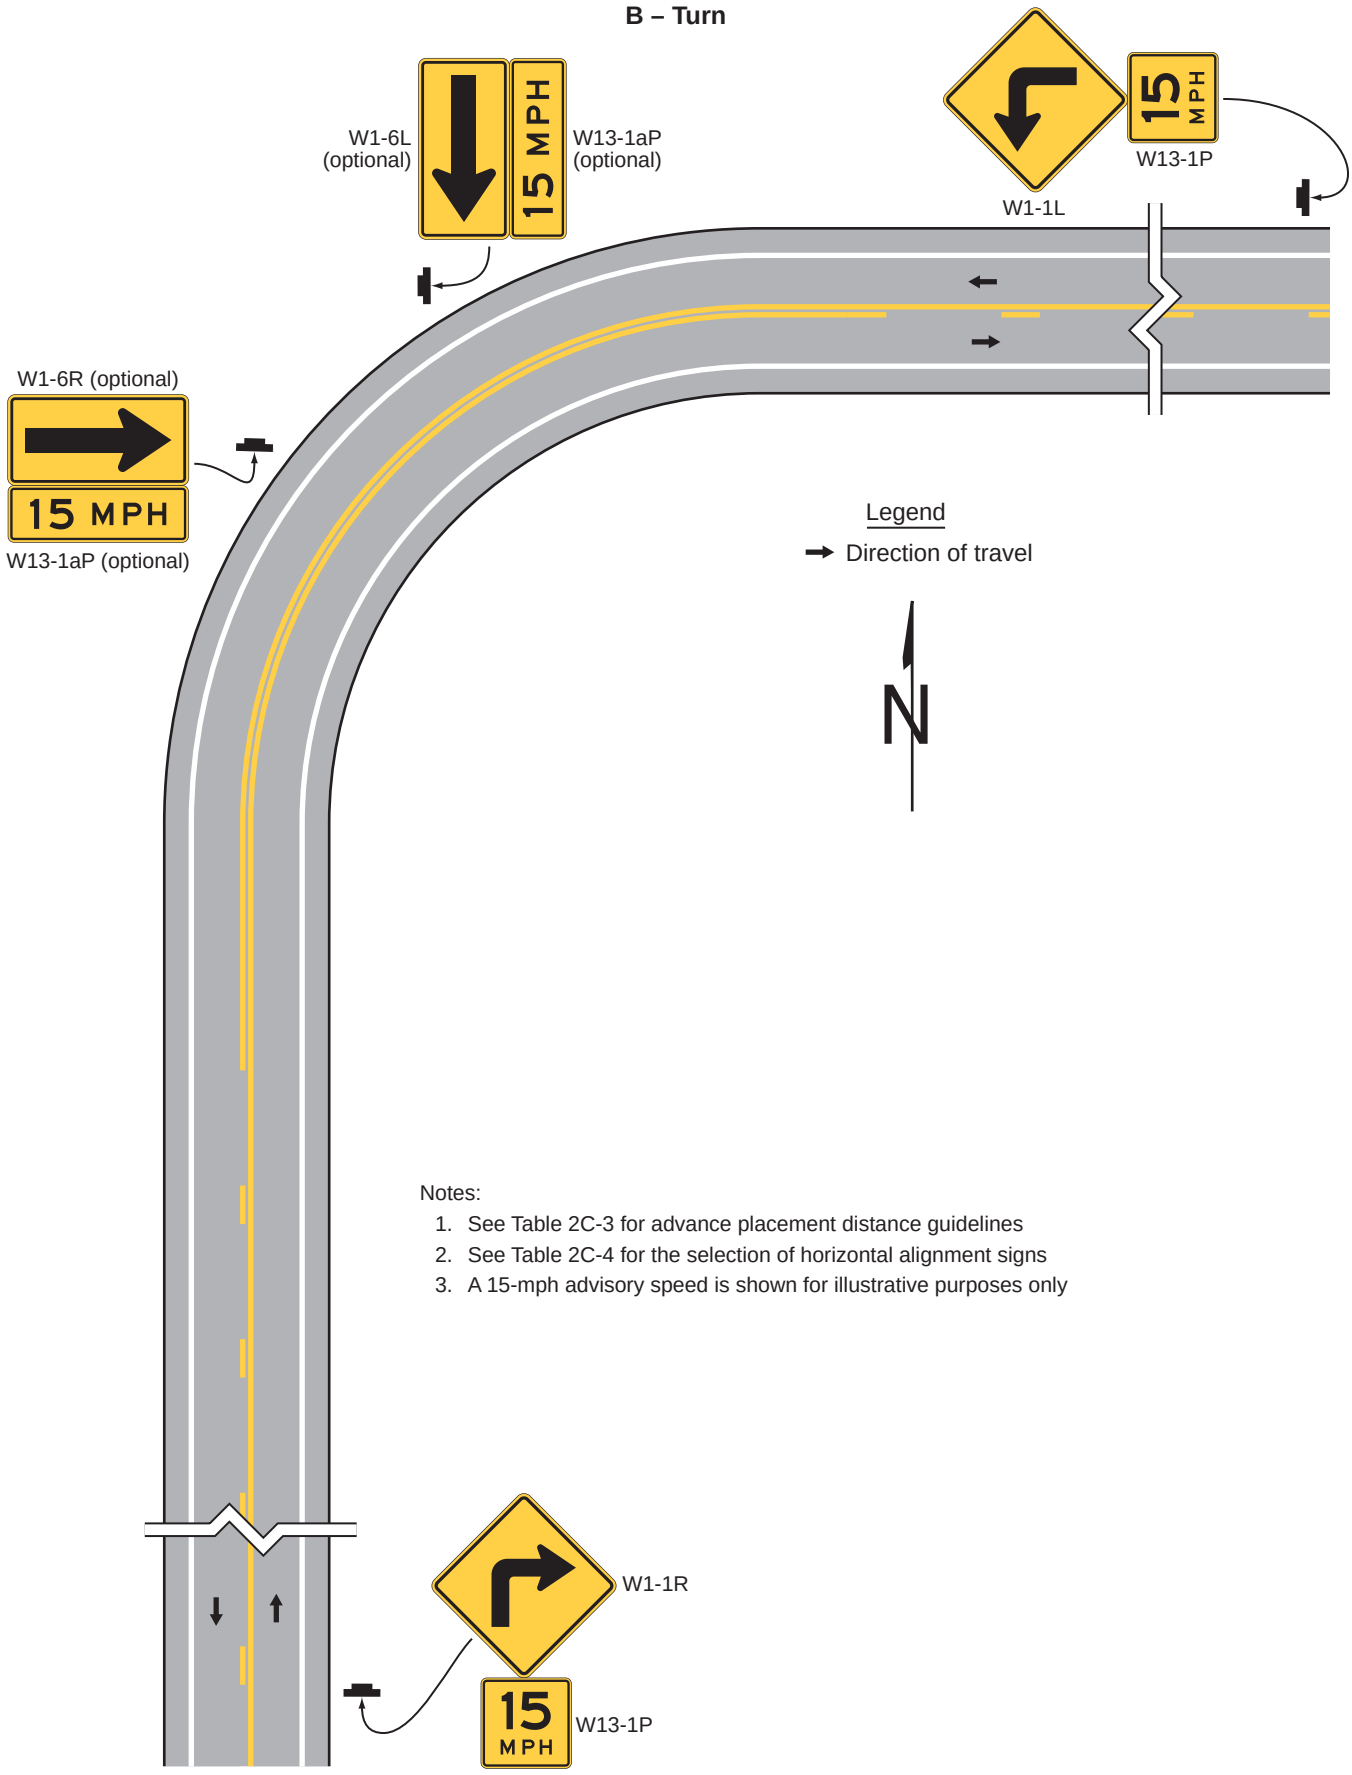



Notes:

1. See Table 2C-3 for advance placement distance guidelines
2. See Table 2C-4 for the selection of horizontal alignment signs
3. A 15-mph advisory speed is shown for illustrative purposes only


# Figure 2C-3. Examples of Exit Ramp Advisory Speed and Other Warning Signs (Sheet 1 of 5)

**A – Loop ramp with constant controlling curvature along ramp proper**

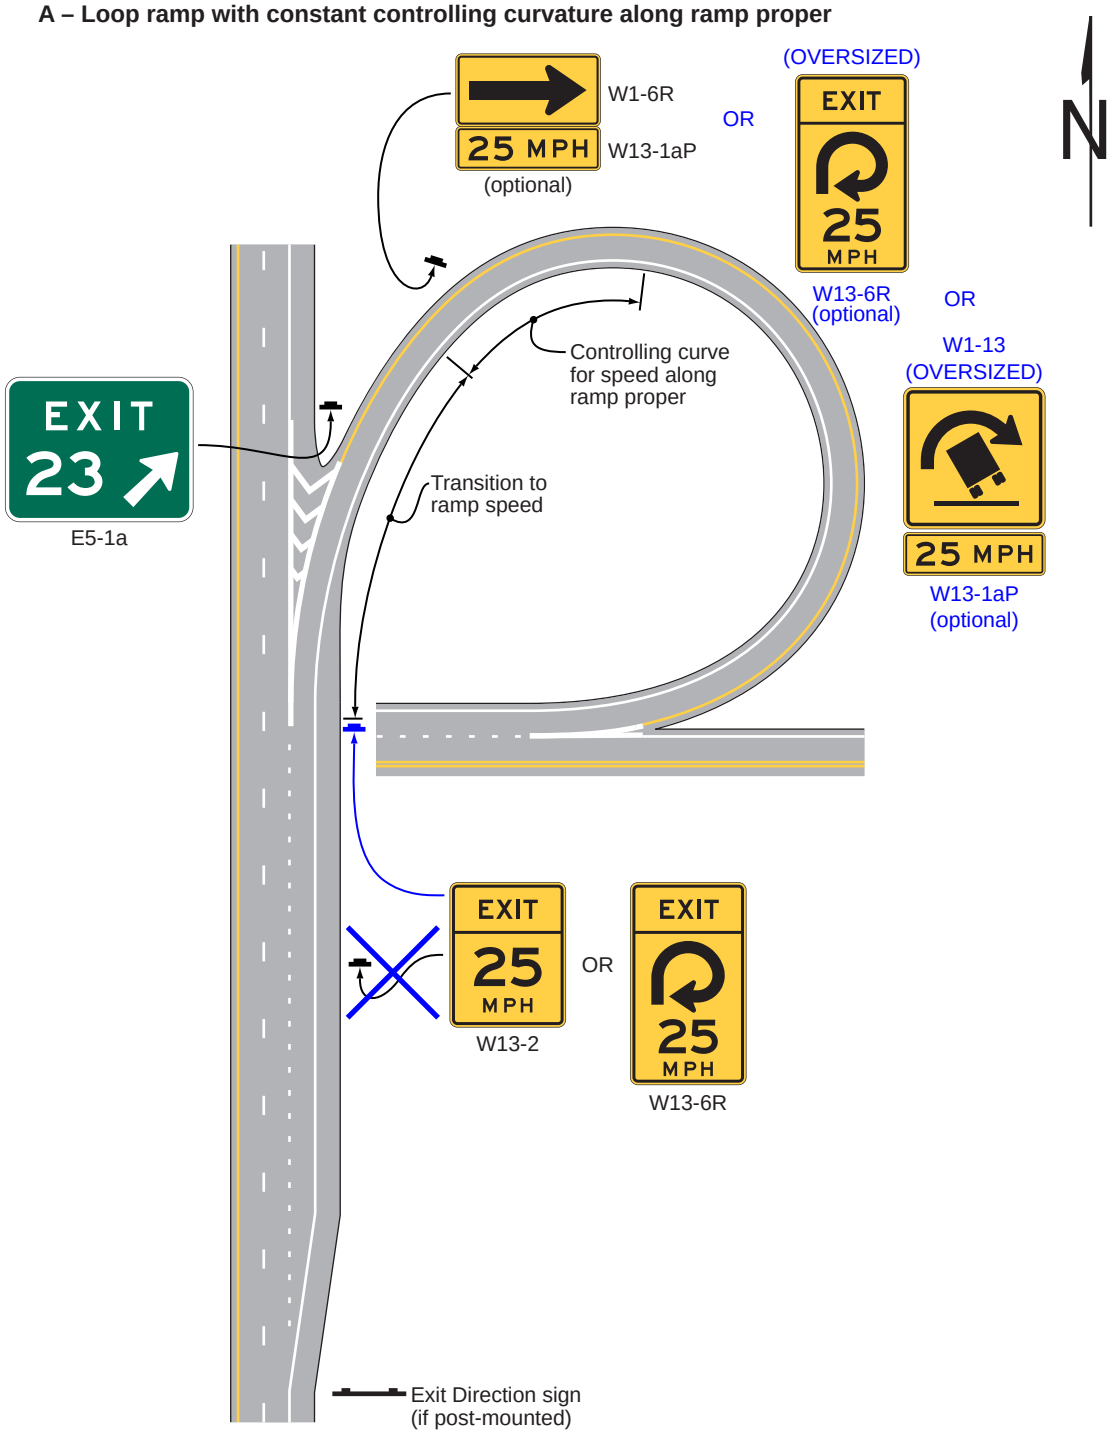


## Figure 2C-3. Examples of Exit Ramp Advisory Speed and Other Warning Signs (Sheet 2 of 5)

**B – Loop ramp with downstream limiting curvature**

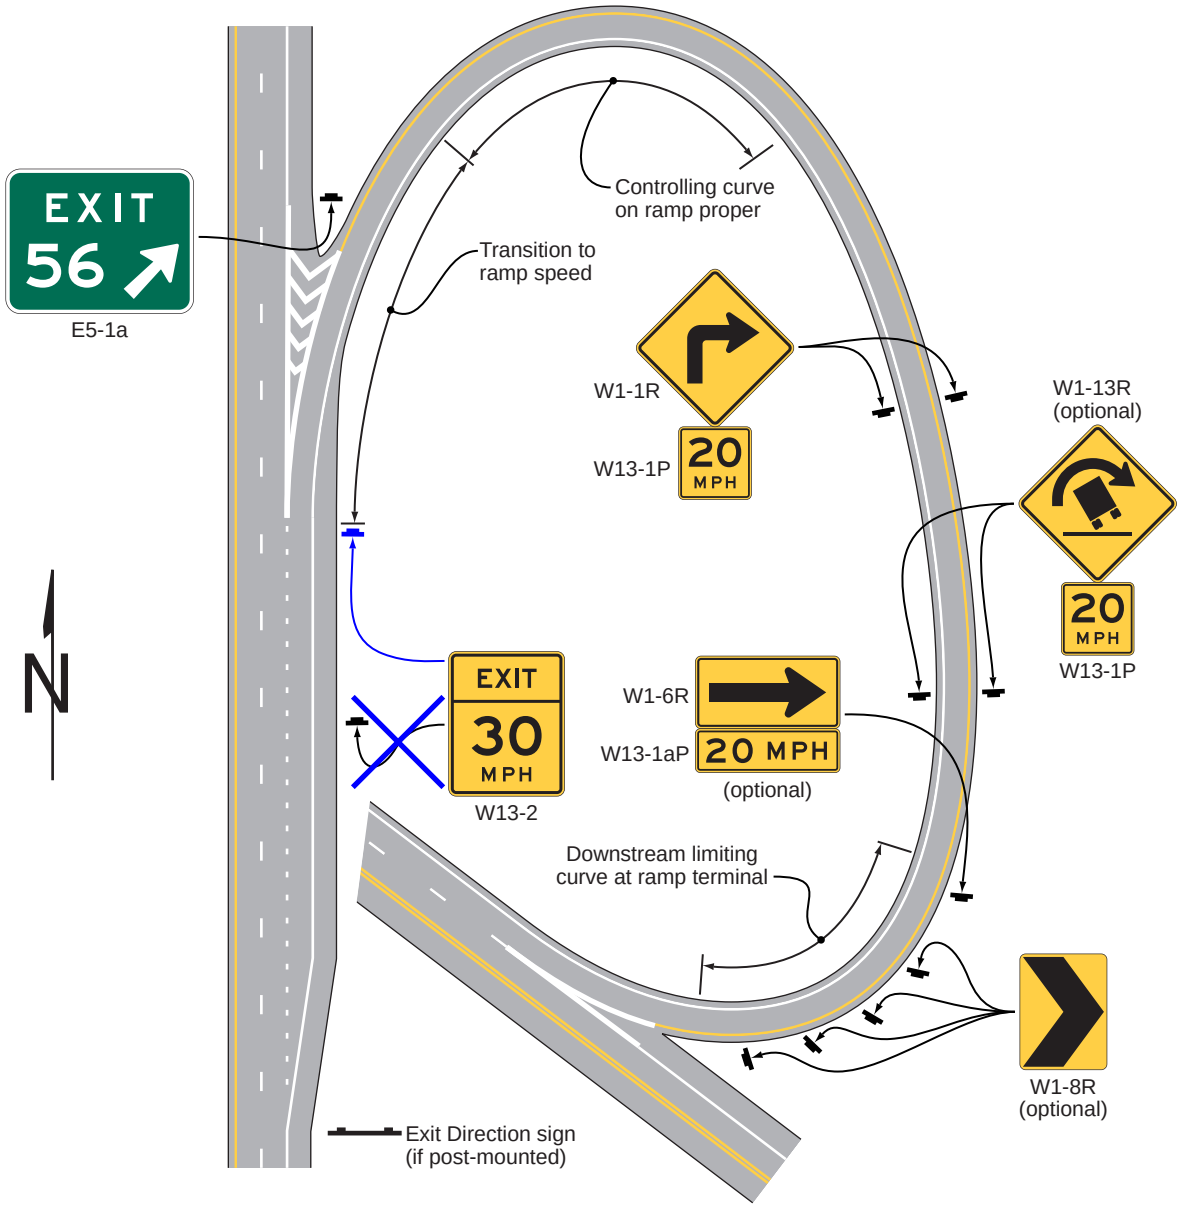


## Figure 2C-3. Examples of Exit Ramp Advisory Speed and Other Warning Signs (Sheet 3 of 5)

**C – Directional ramp**

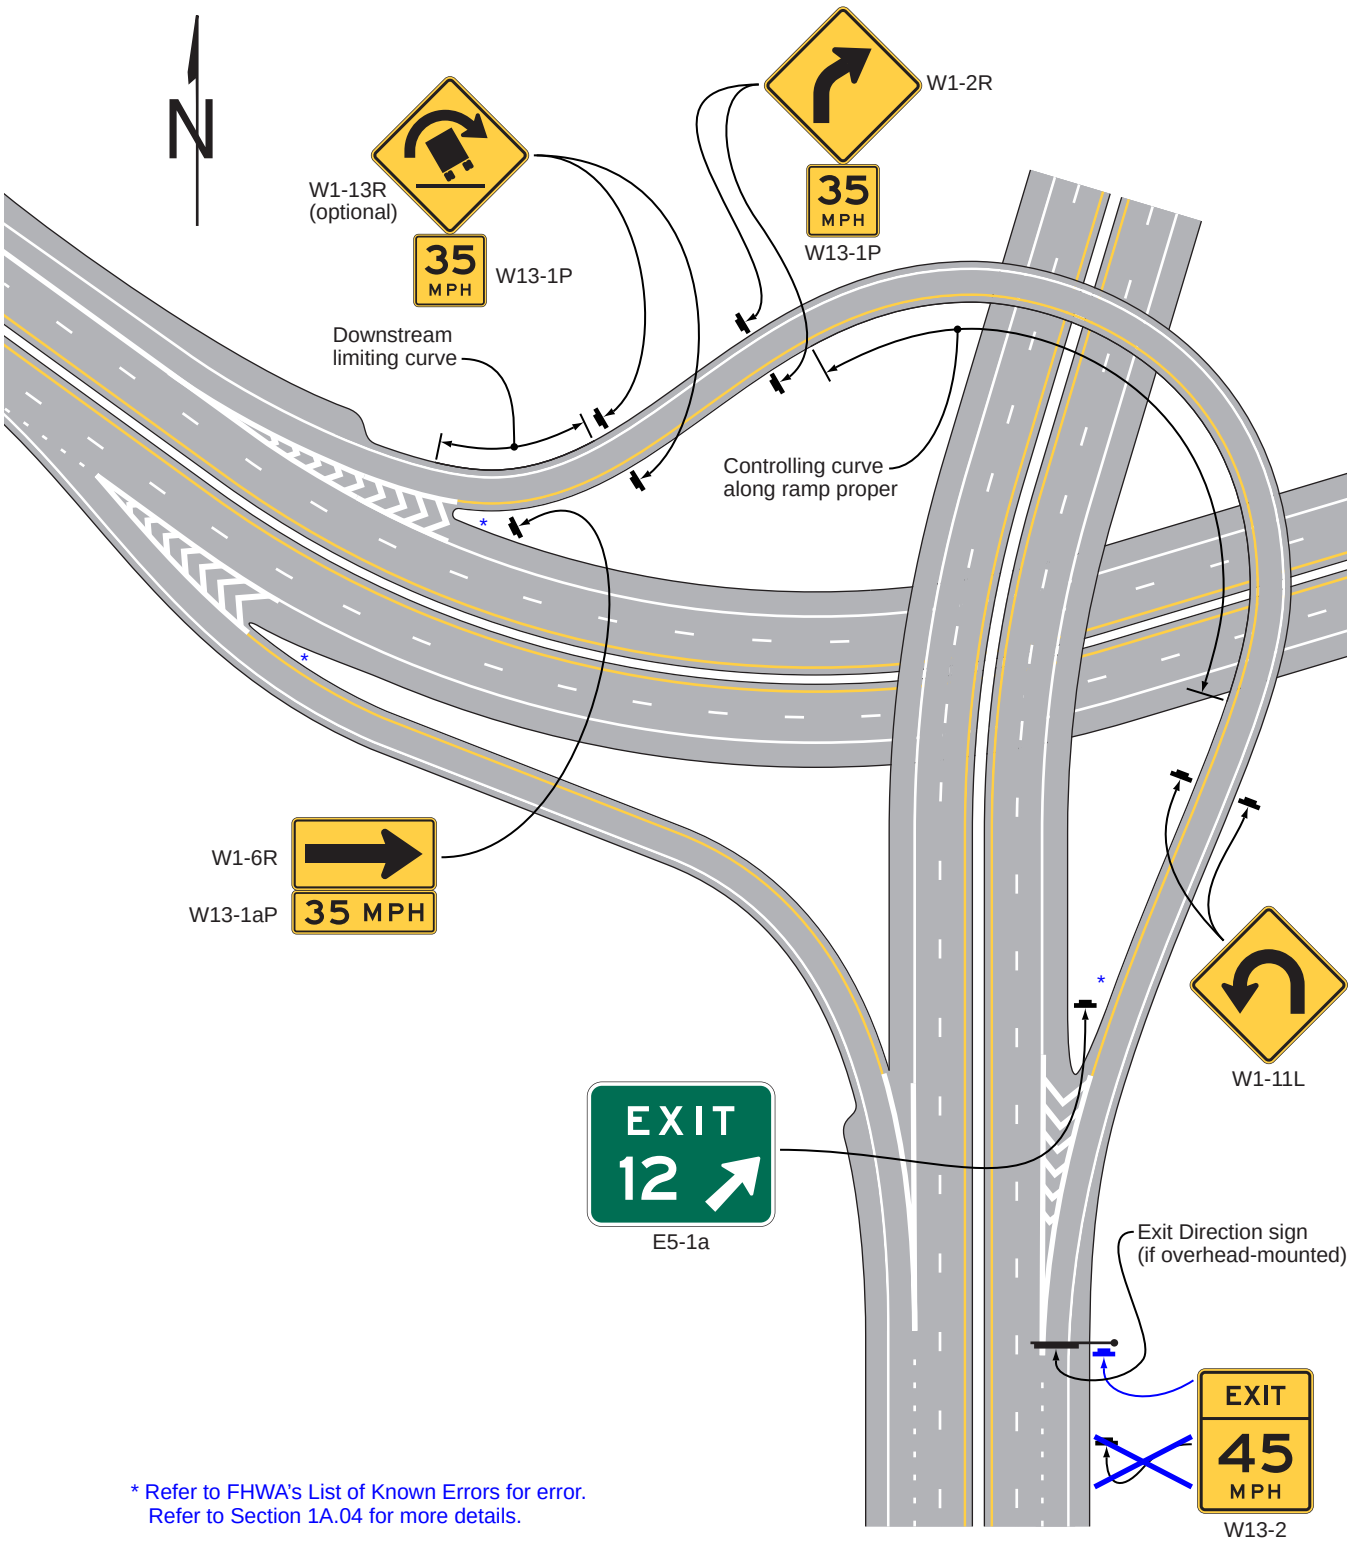

## Figure 2C-3. Examples of Exit Ramp Advisory Speed and Other Warning Signs (Sheet 4 of 5)

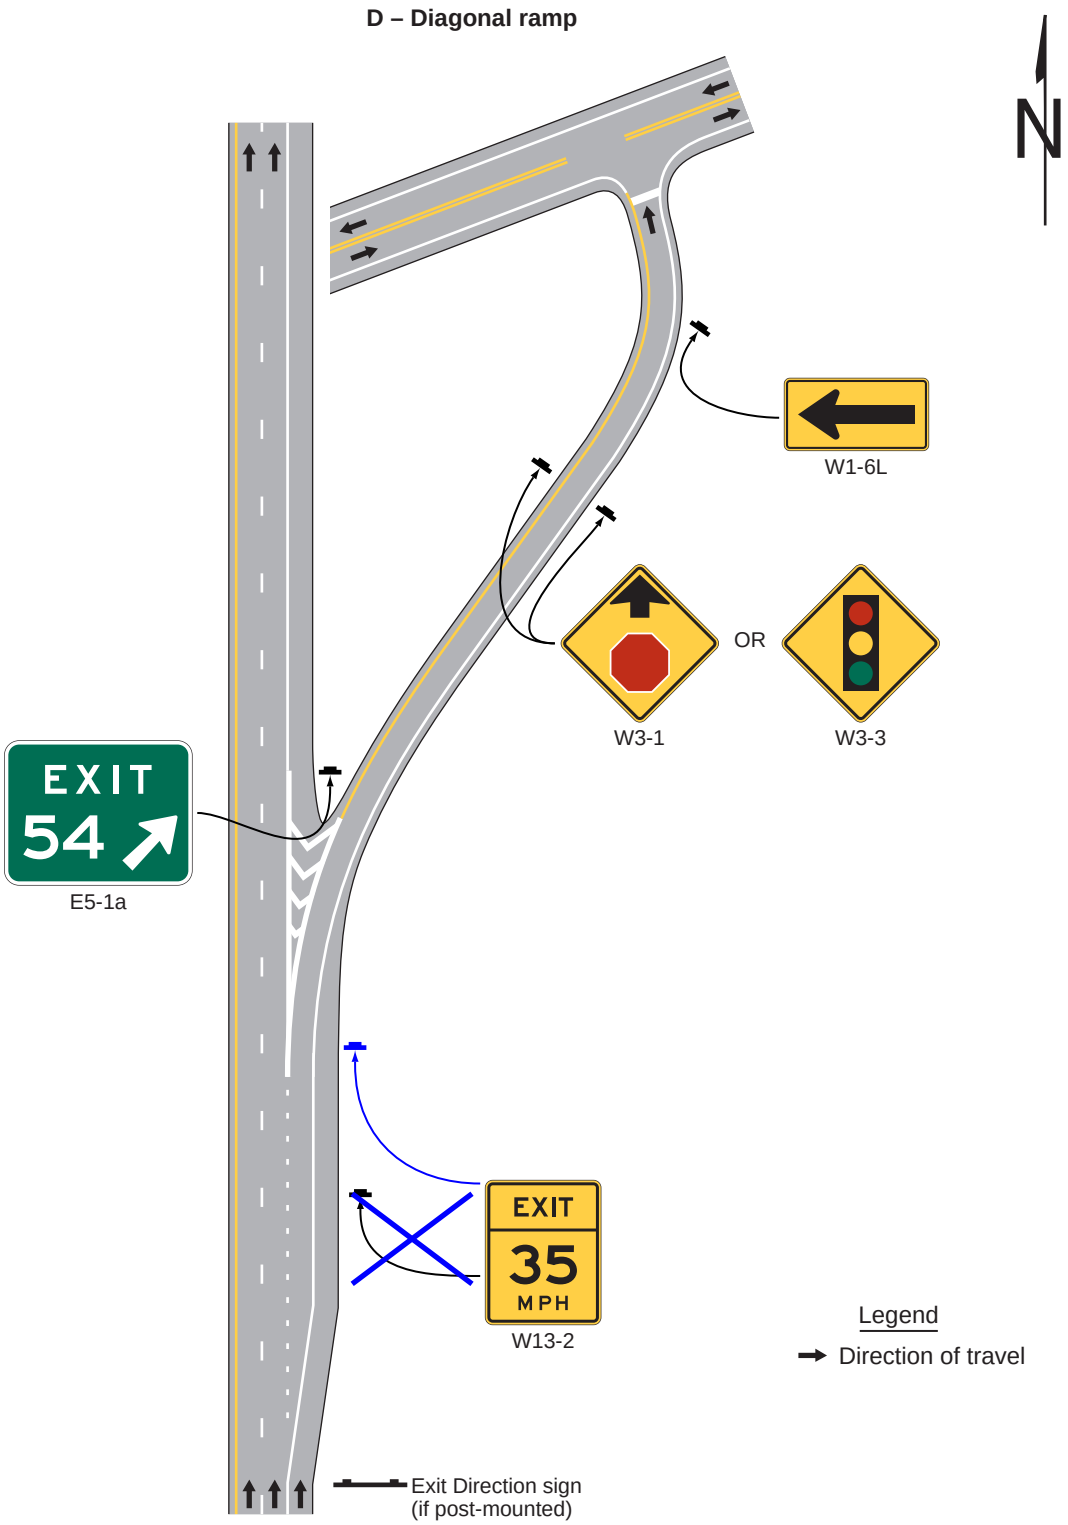

# Figure 2C-3. Examples of Exit Ramp Advisory Speed and Other Warning Signs (Sheet 5 of 5)

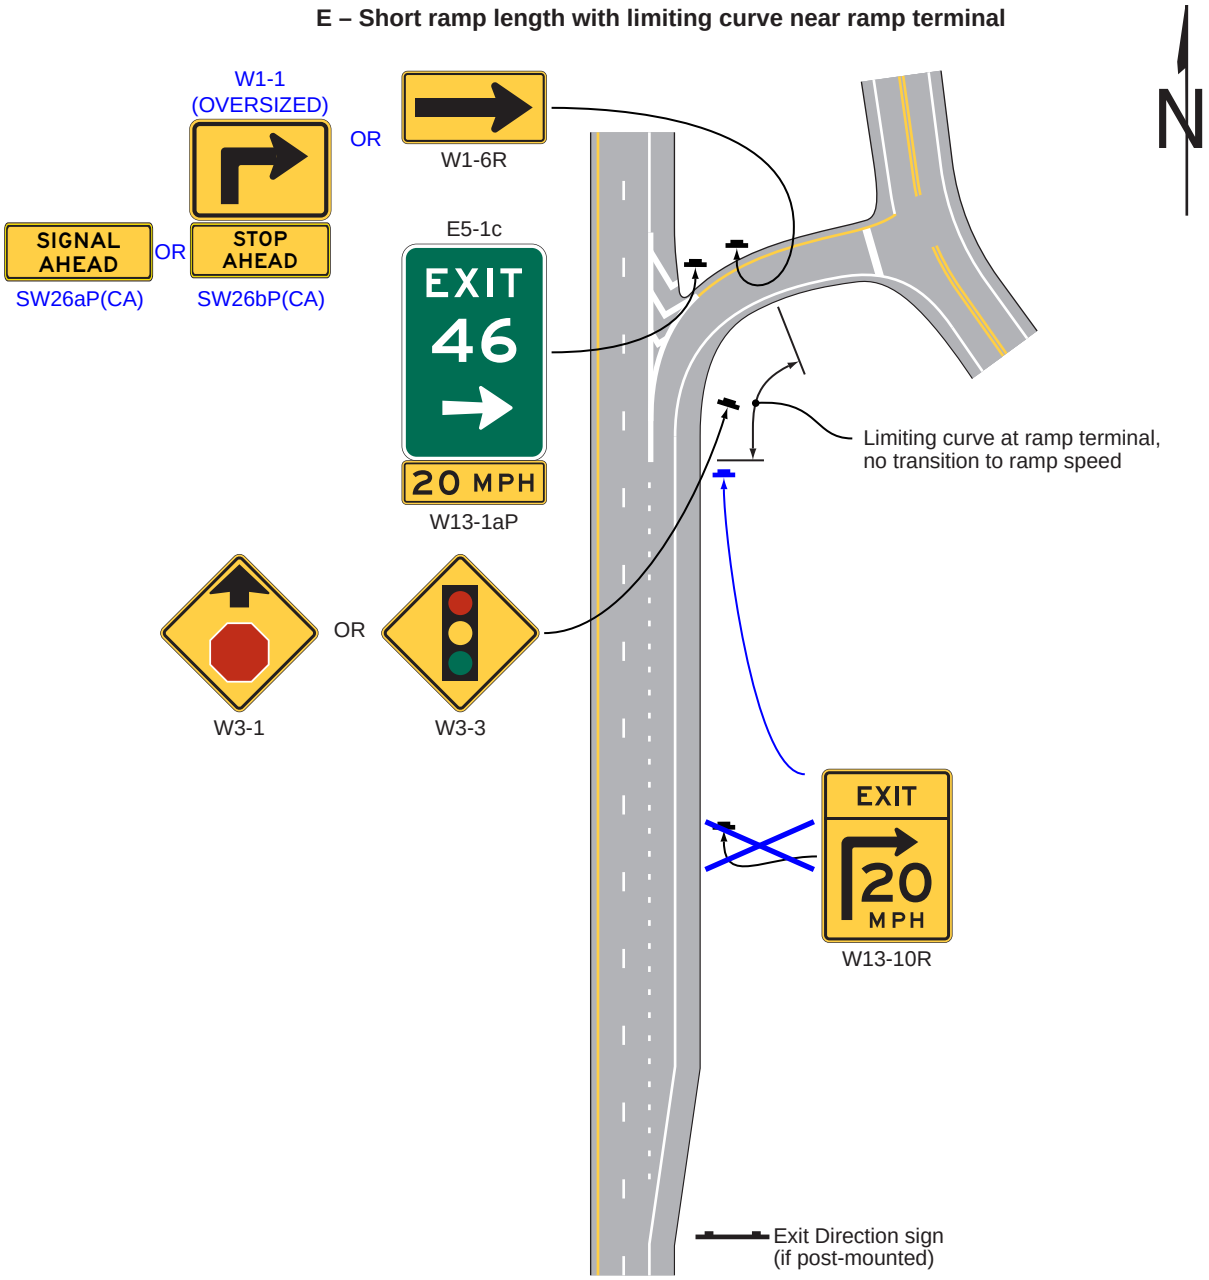



**Figure 2C-4. Vehicle Speed Feedback Signs**

**Sign and Plaque**




W13-20 W13-20aP

## Figure 2C-5. Vertical Grade Signs and Plaques

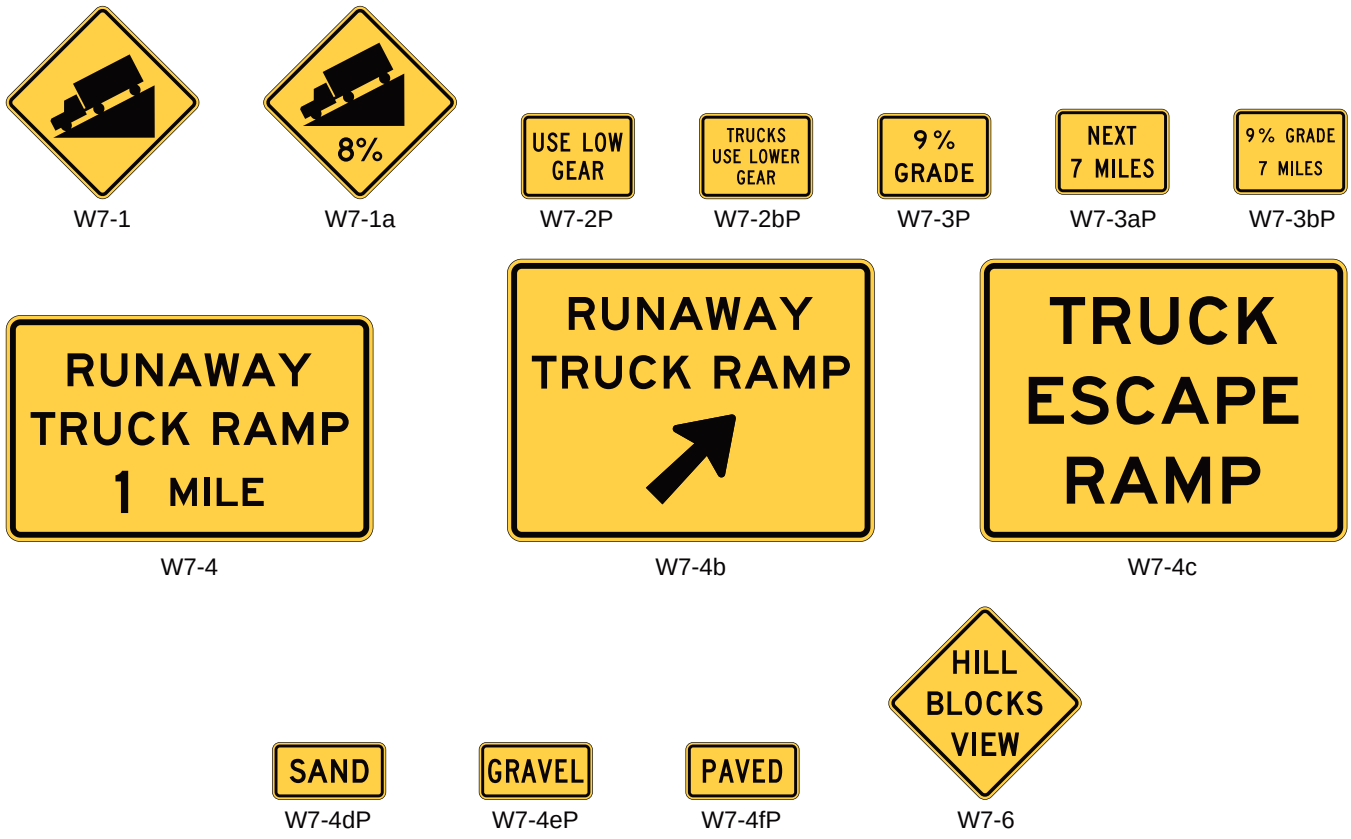



W7-1 W7-1a W7-2P W7-2bP W7-3P W7-3aP W7-3bP

W7-4 W7-4b W7-4c

W7-4dP W7-4eP W7-4fP W7-6

---

## *Figure 2C-5(CA). California Vertical Grade Signs and Plaques*

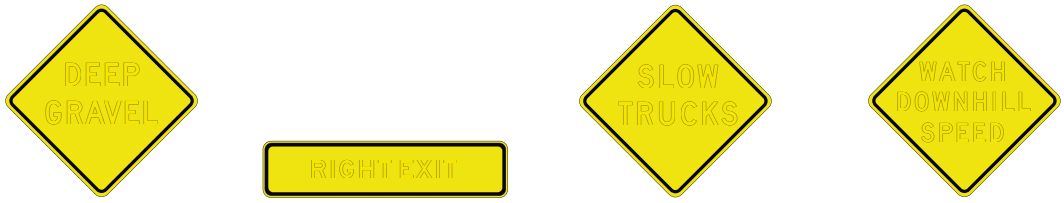


W30B(CA) W30cP(CA) W51(CA) SW4-1(CA)

## Figure 2C-6. Miscellaneous Warning Signs



## *Figure 2C-6(CA). California Miscellaneous Warning Signs*




W20(CA)




W20A(CA)




W31(CA)




W34C(CA)




SW33(CA)




SW37(CA)





SW48(CA)





SW48-1P(CA)

## Figure 2C-7. Roadway and Weather Condition Signs and Plaques

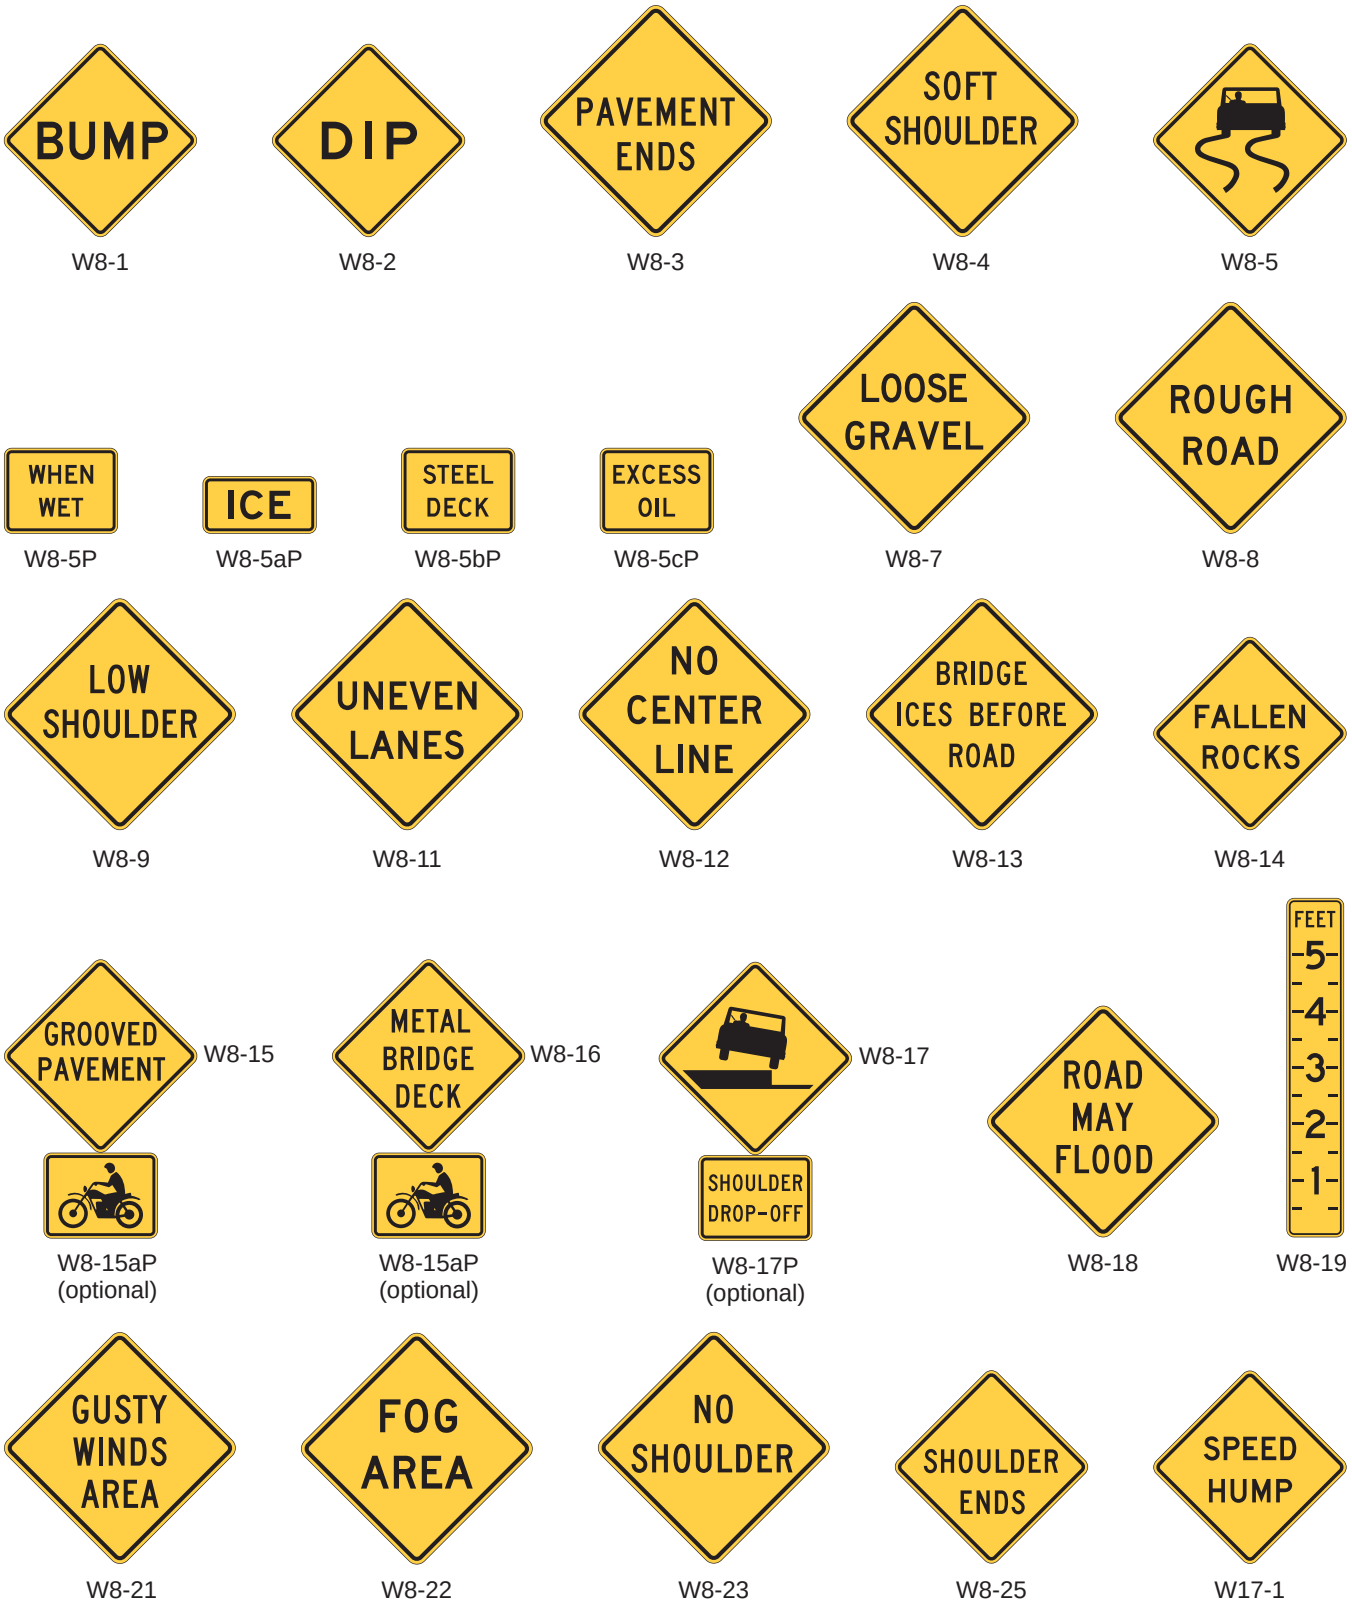

## *Figure 2C-7(CA). California Roadway and Weather Condition Signs and Plaques*

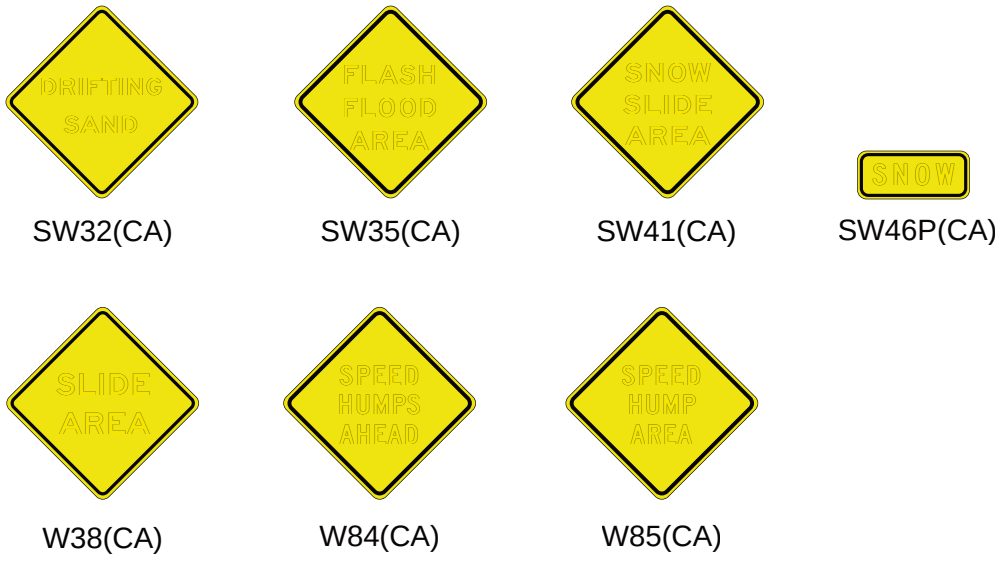


SW32(CA) SW35(CA) SW41(CA) SW46P(CA)

W38(CA) W84(CA) W85(CA)

## Figure 2C-8. Advance Traffic Control Signs



W3-1 W3-2 W3-3 W3-4 W3-6




W3-7 W3-8 W23-2 W23-2a W26-1

---

## *Figure 2C-8(CA). California Advance Traffic Control Signs*




SW26aP(CA)




SW26bP(CA)




W88-2(CA)
Activated Blank-Out




W88-3(CA)
Activated Blank-Out





W89(CA)
Activated Blank-Out

## Figure 2C-9. Reduced Speed Limit Ahead and Speed Zone Signs




W3-5 W3-5a W3-5b W3-5c

## Figure 2C-10. Intersection Warning Signs and Plaques

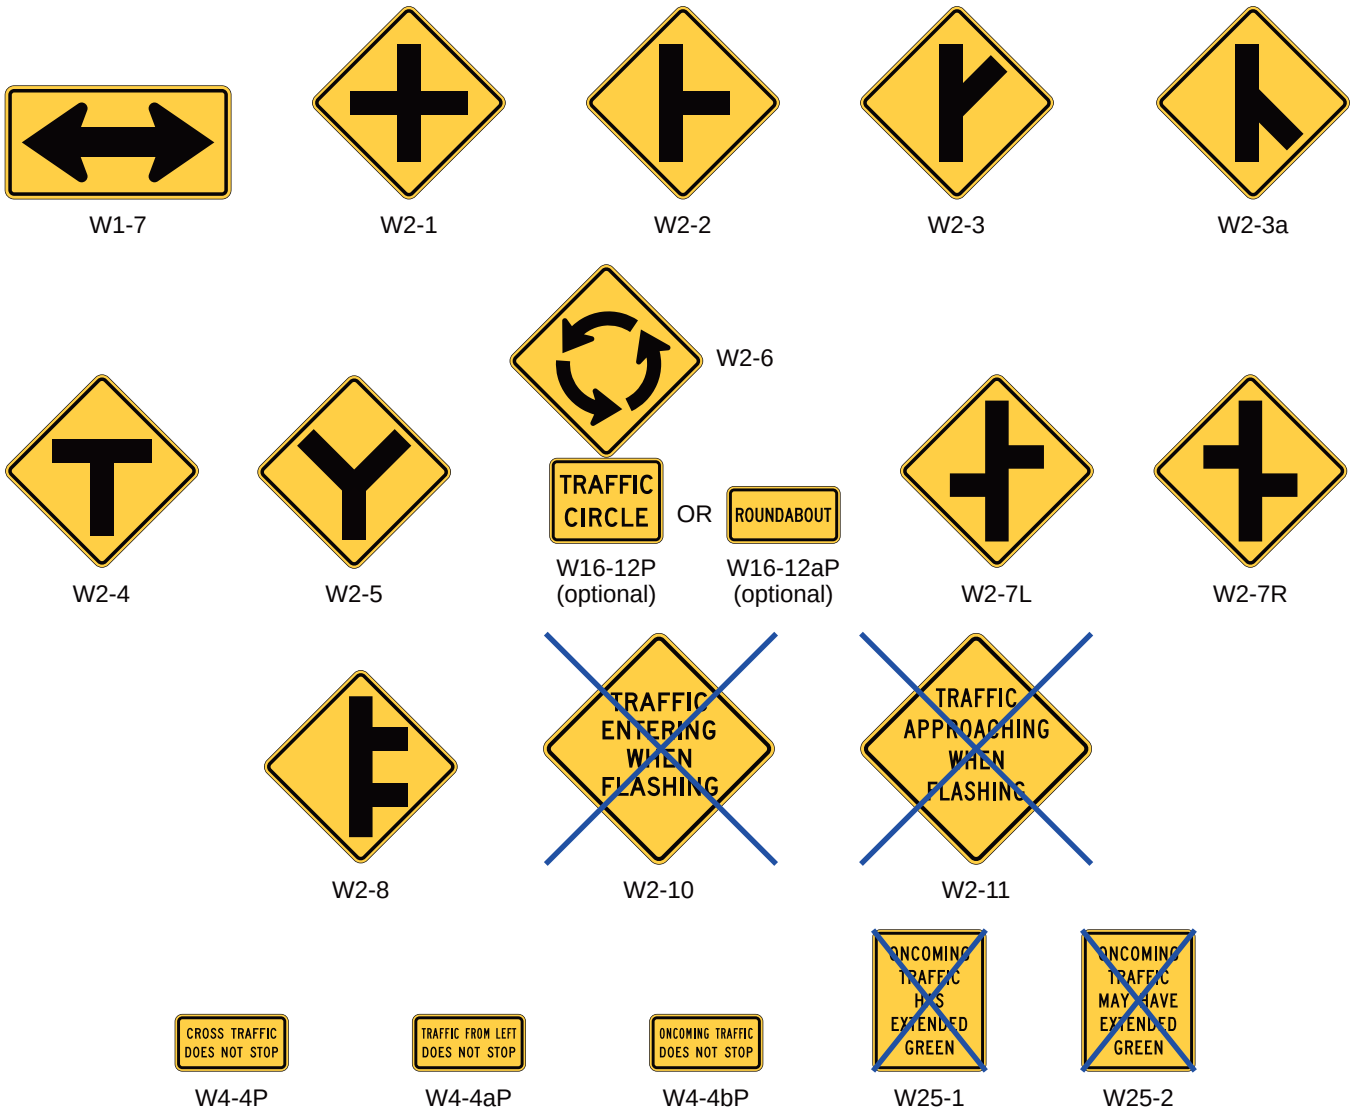



## *Figure 2C-10(CA). California Intersection Warning Signs and Plaques*




W70(CA)

## Figure 2C-11. Merging and Passing Signs and Plaques

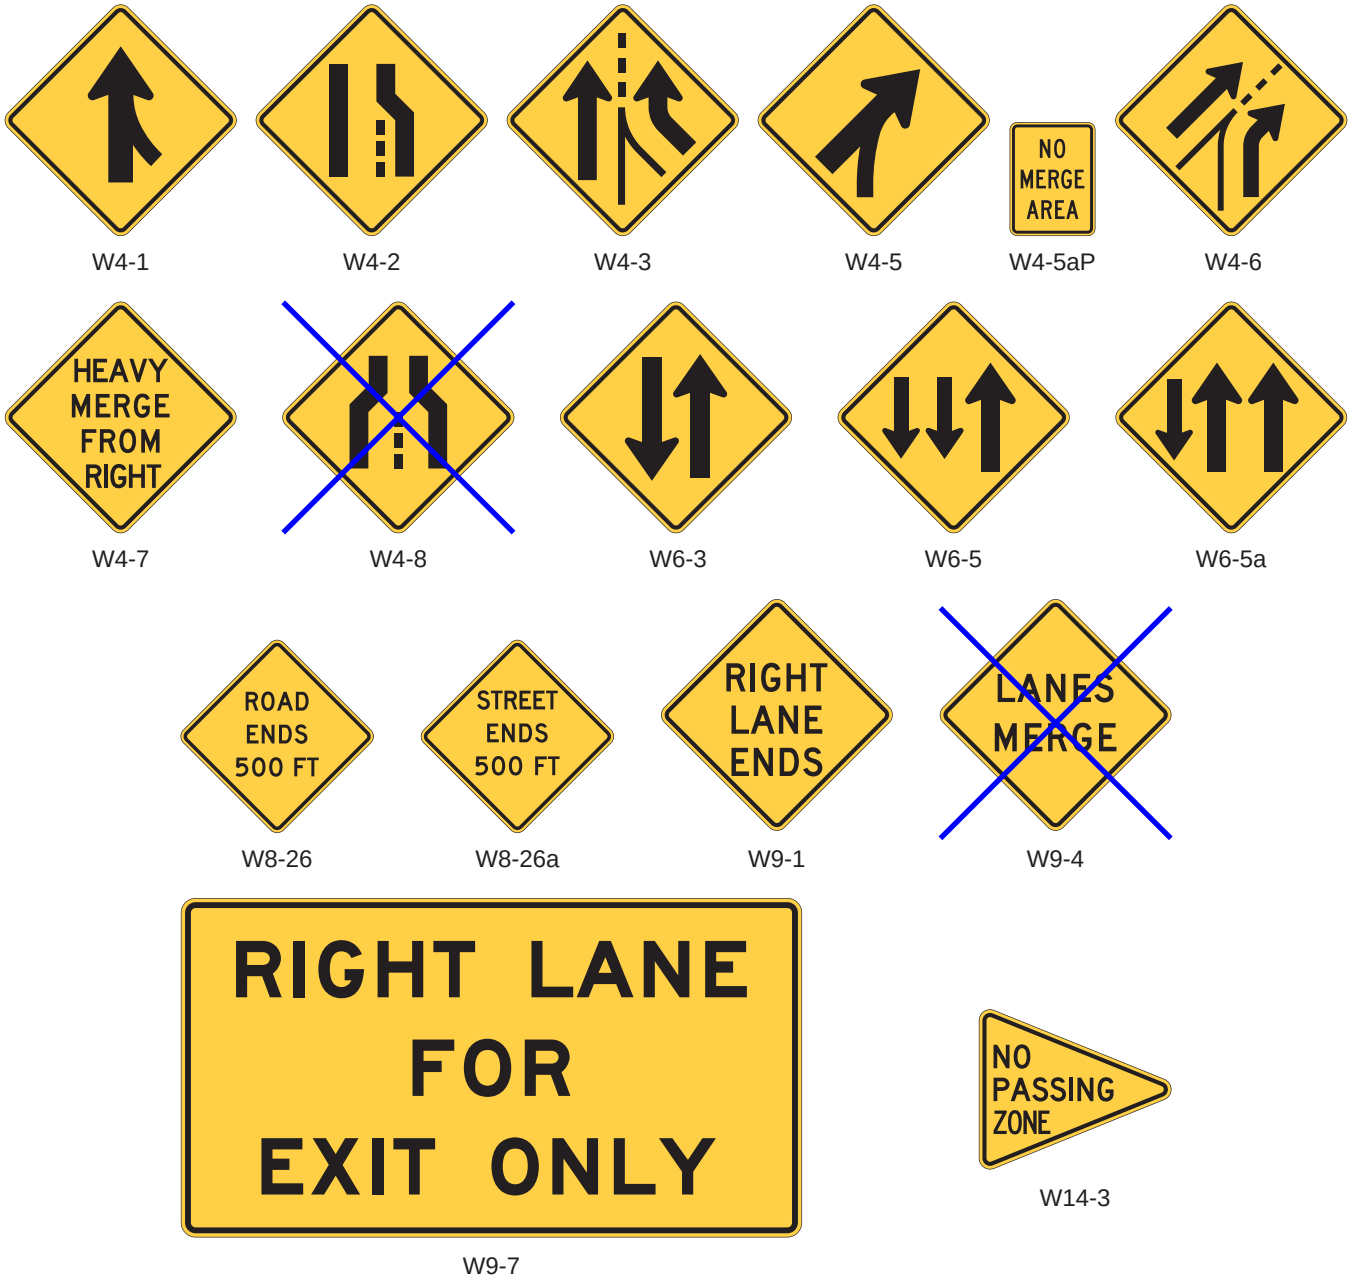


W4-1 W4-2 W4-3 W4-5 W4-5aP W4-6

W4-7 W4-8 W6-3 W6-5 W6-5a

W8-26 W8-26a W9-1 W9-4

W9-7

W14-3


## *Figure 2C-11(CA). California Merging and Passing Signs and Plaques*




W44aP(CA)





W73A(CA)




W74(CA)





W83P(CA)

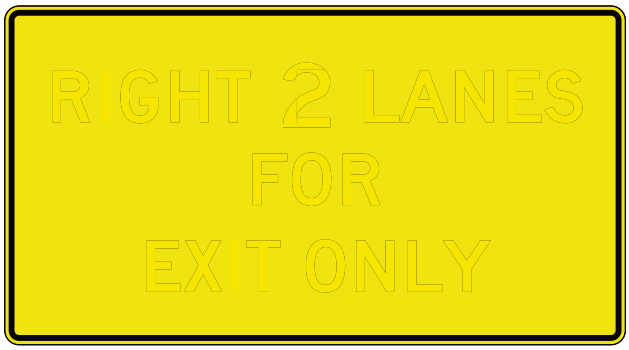



W73B(CA)

## Figure 2C-12. Examples of Merge and Added Lane Sign Placement for Entering and Converging Roadways


**A – Example for converging and entering roadways**

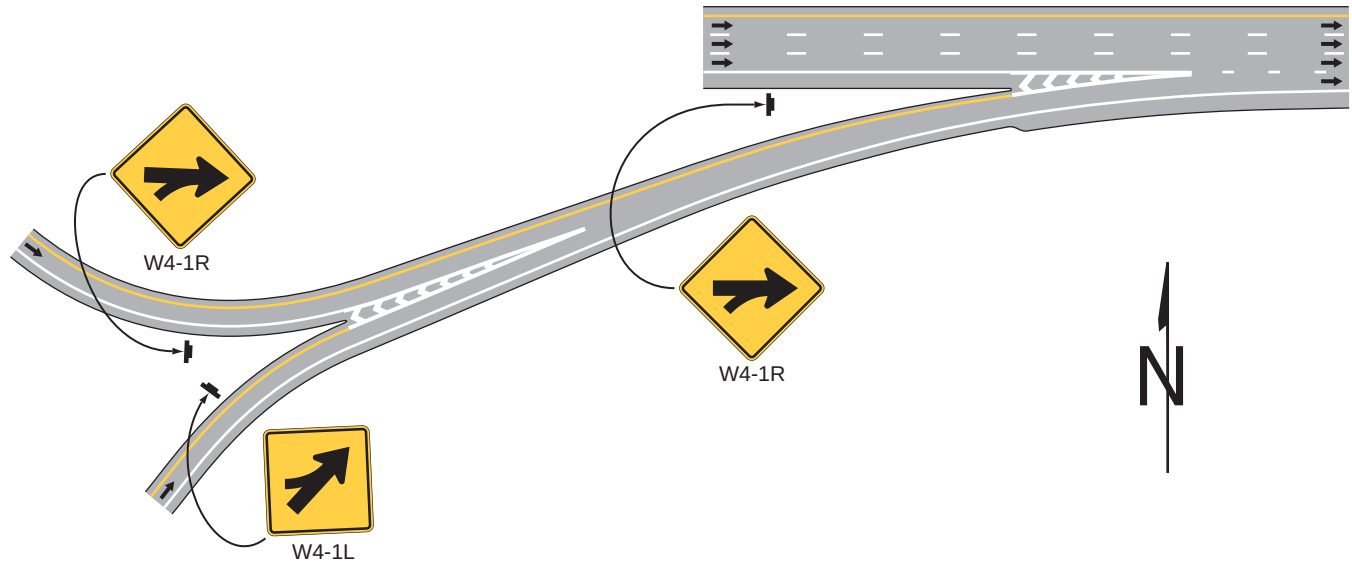


**B – Examples for an added lane**

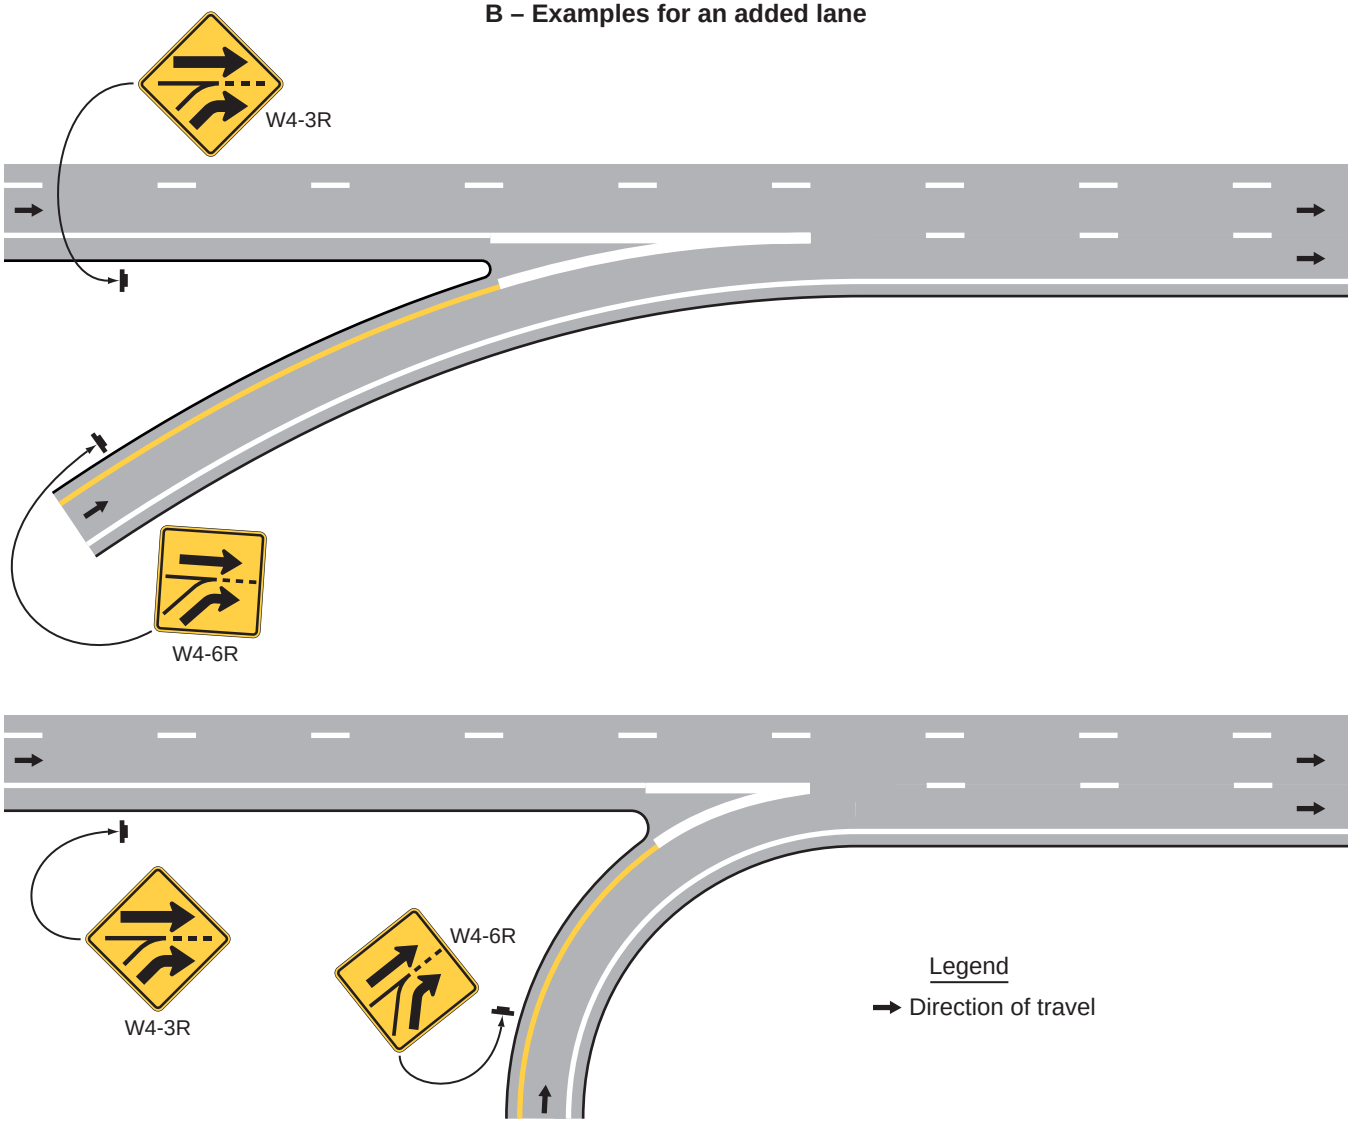


## Figure 2C-13. Example Sequences for Lane Ends and Lane Merge Signs (Sheet 1 of 5)

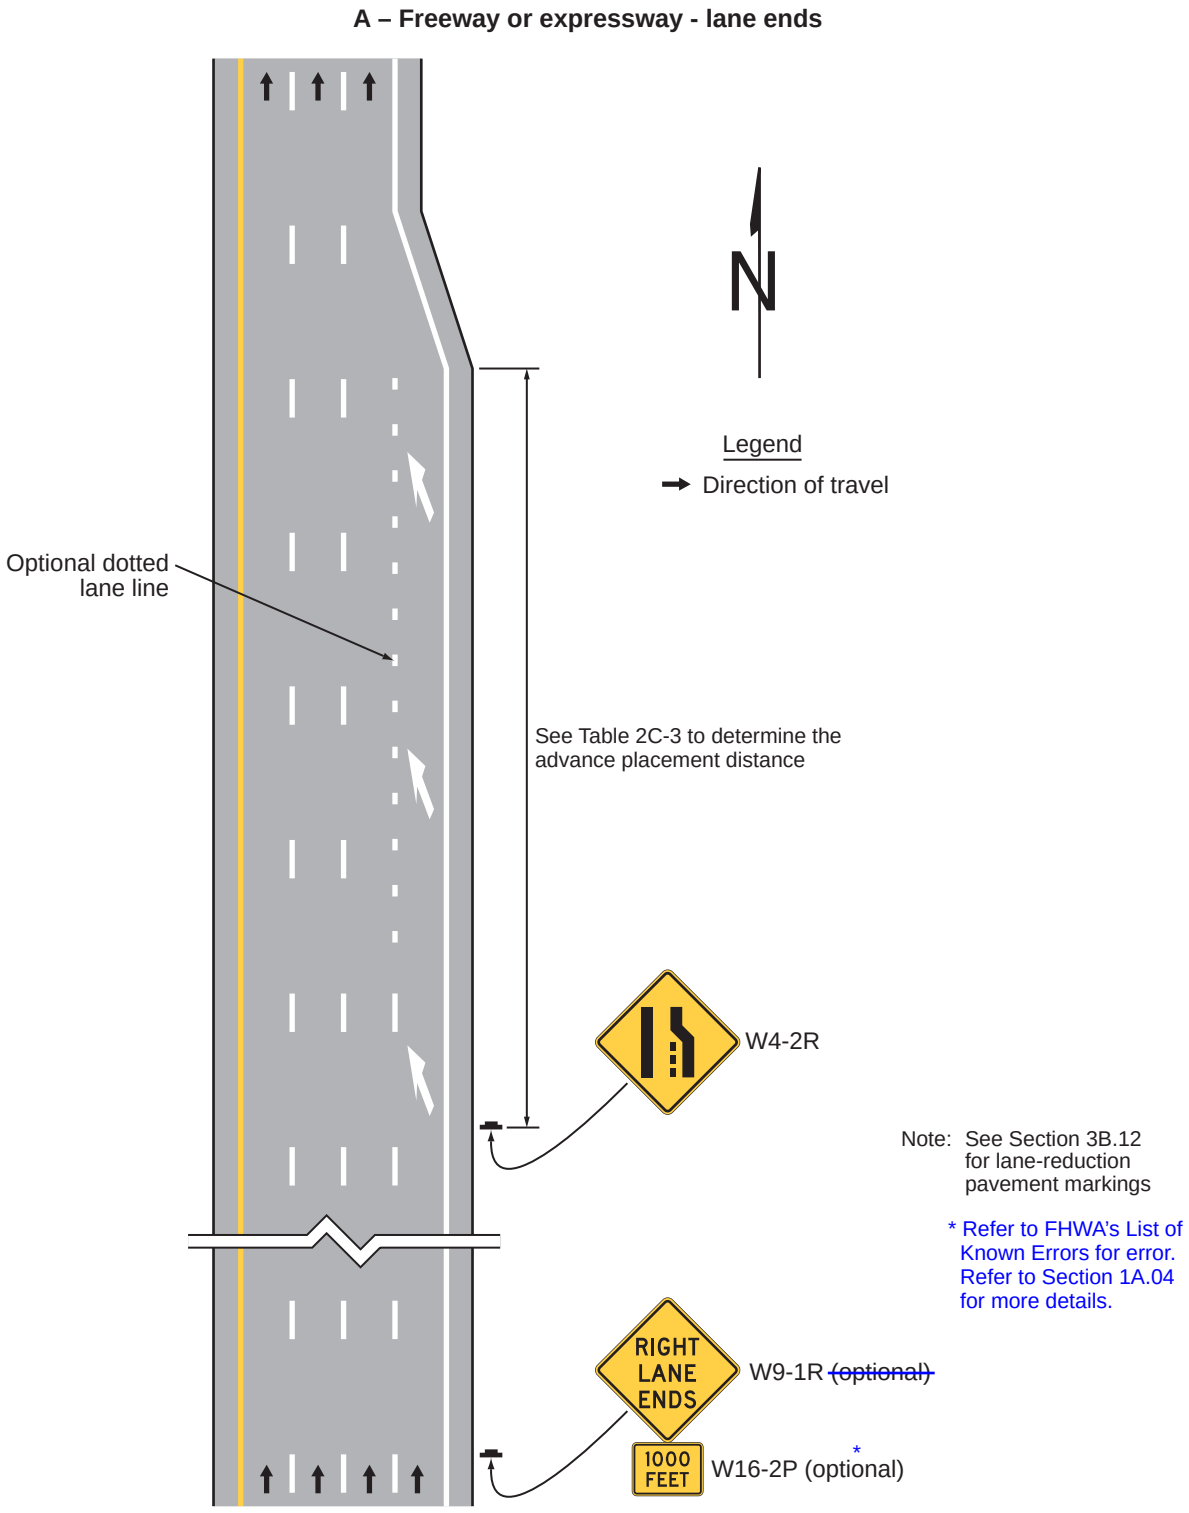


## Figure 2C-13. Example Sequences for Lane Ends and Lane Merge Signs (Sheet 2 of 5)

**B – Right lane on conventional road - lane ends**

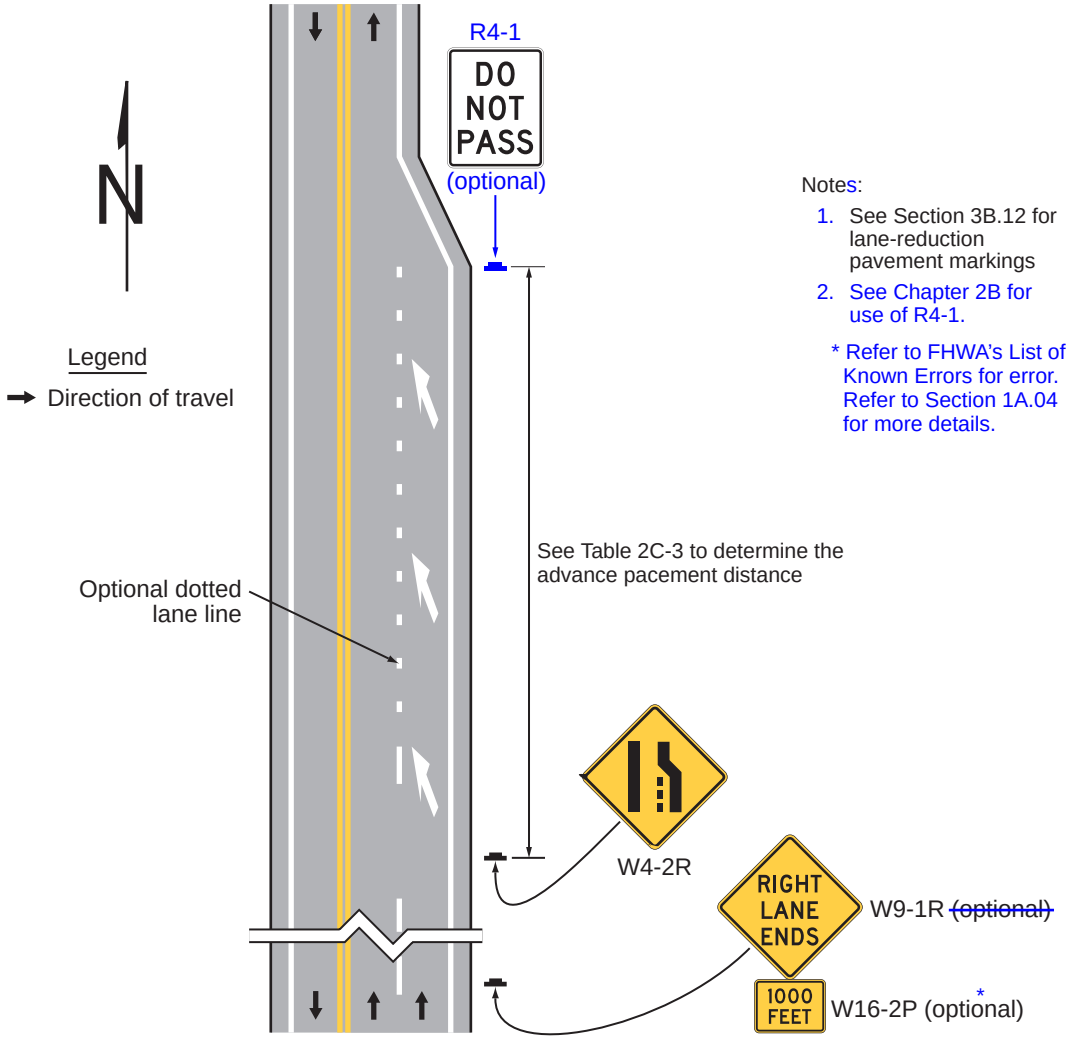


## Figure 2C-13. Example Sequences for Lane Ends and Lane Merge Signs (Sheet 3 of 5)

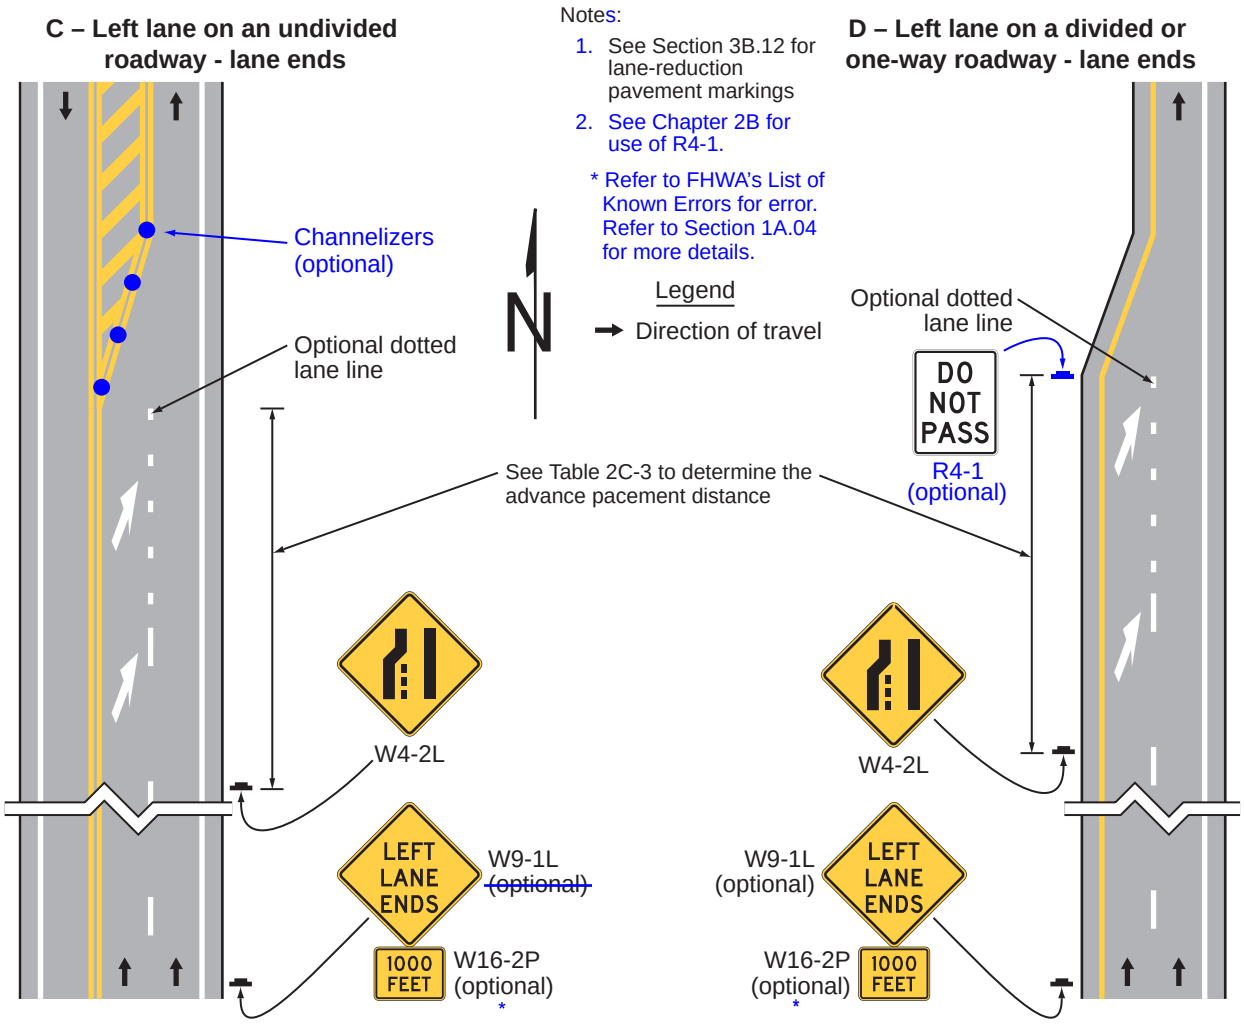


## Figure 2C-13. Example Sequences for Lane Ends and Lane Merge Signs (Sheet 4 of 5)

**E – Lane ends beyond major intersection or side road**

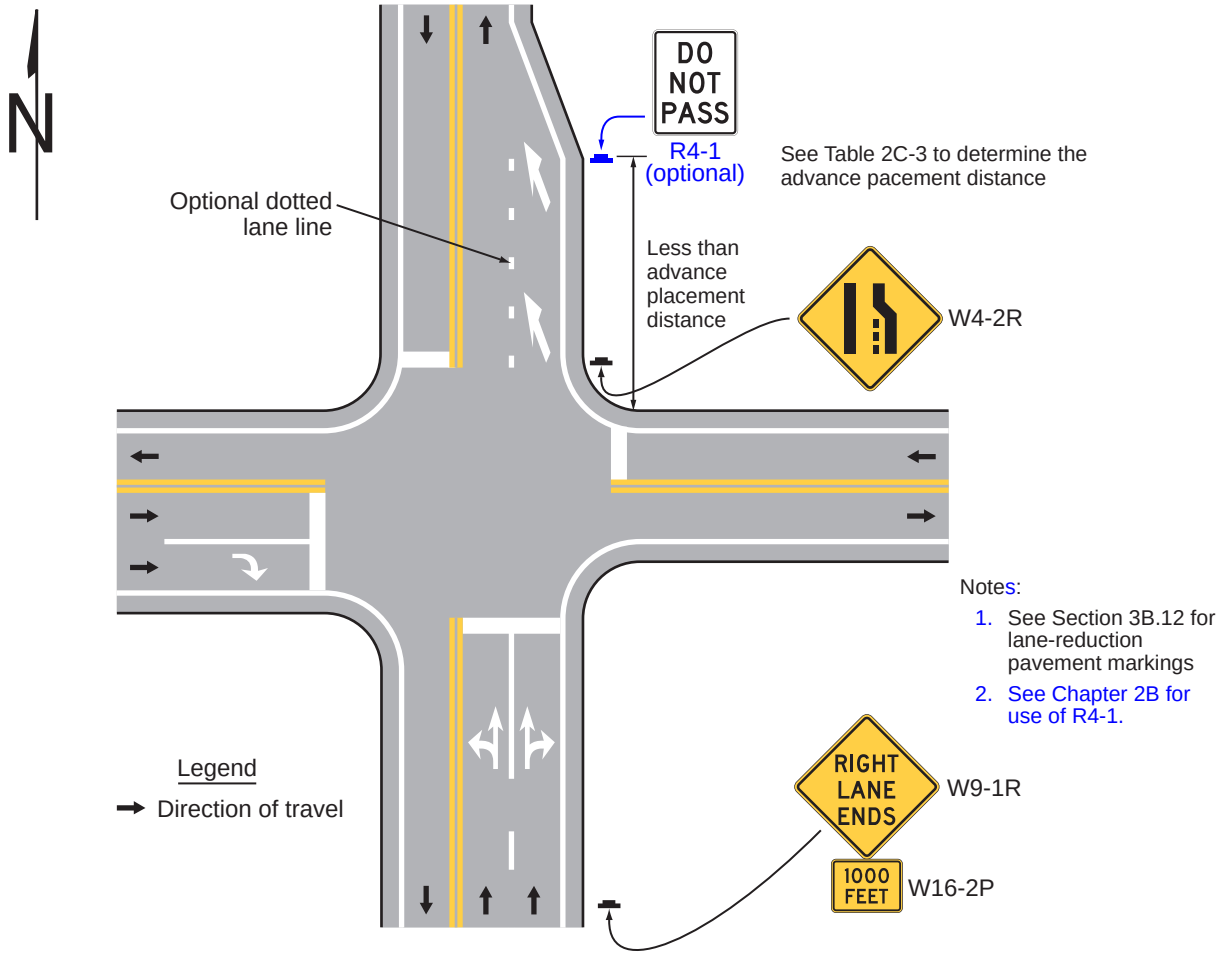

## Figure 2C-13. Example Sequences for Lane Ends and Lane Merge Signs (Sheet 5 of 5)


**F – Reduction of two lanes to one lane in the same direction of travel with merging maneuvers for each lane**

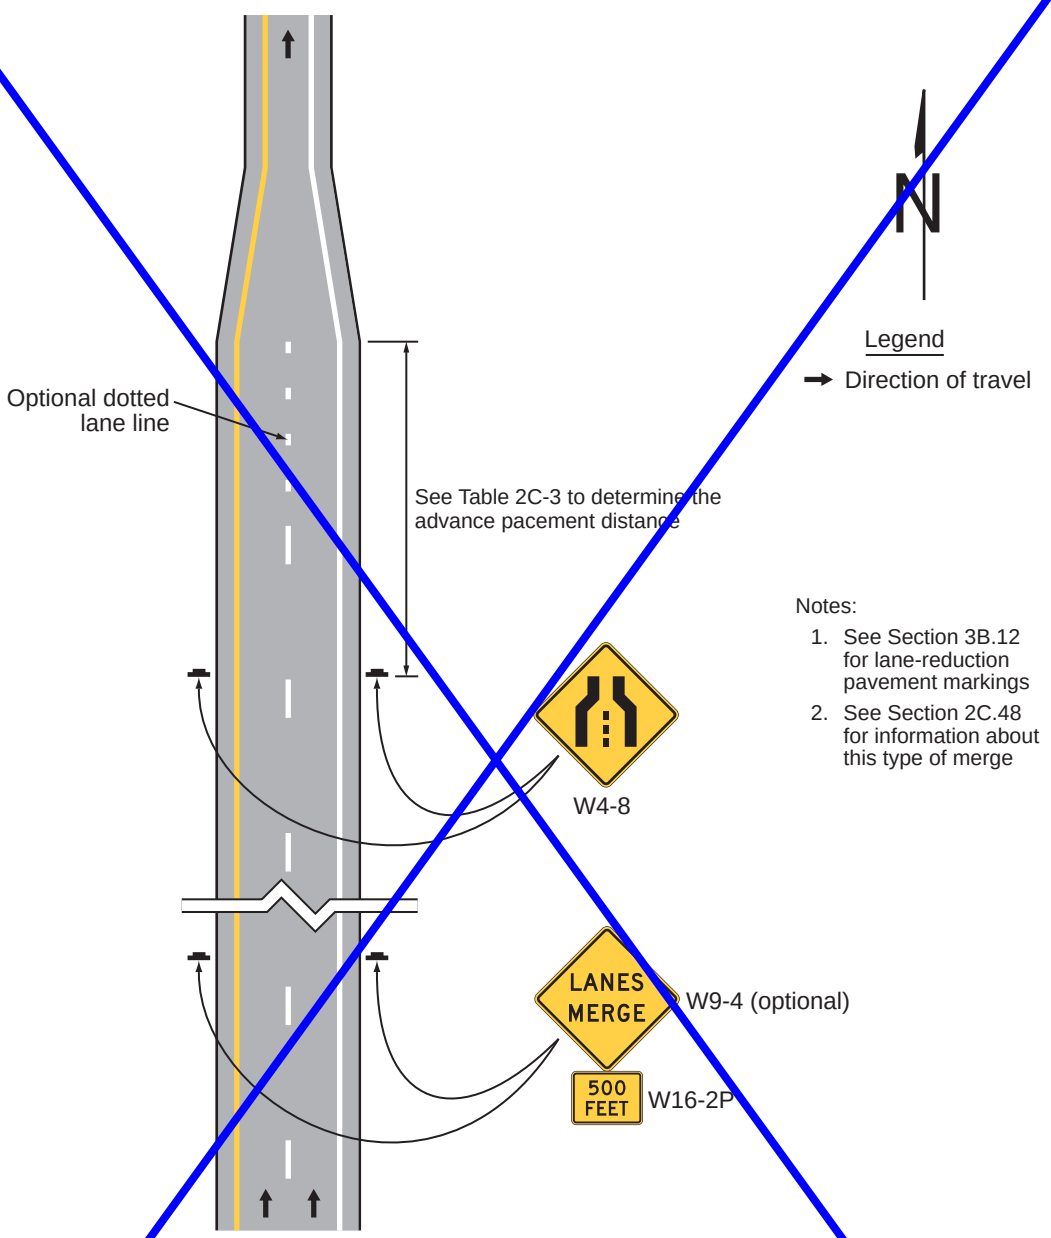


Notes:

1. See Section 3B.12 for lane-reduction pavement markings
2. See Section 2C.48 for information about this type of merge


## Figure 2C-14. Vehicular Traffic Warning Signs and Plaques

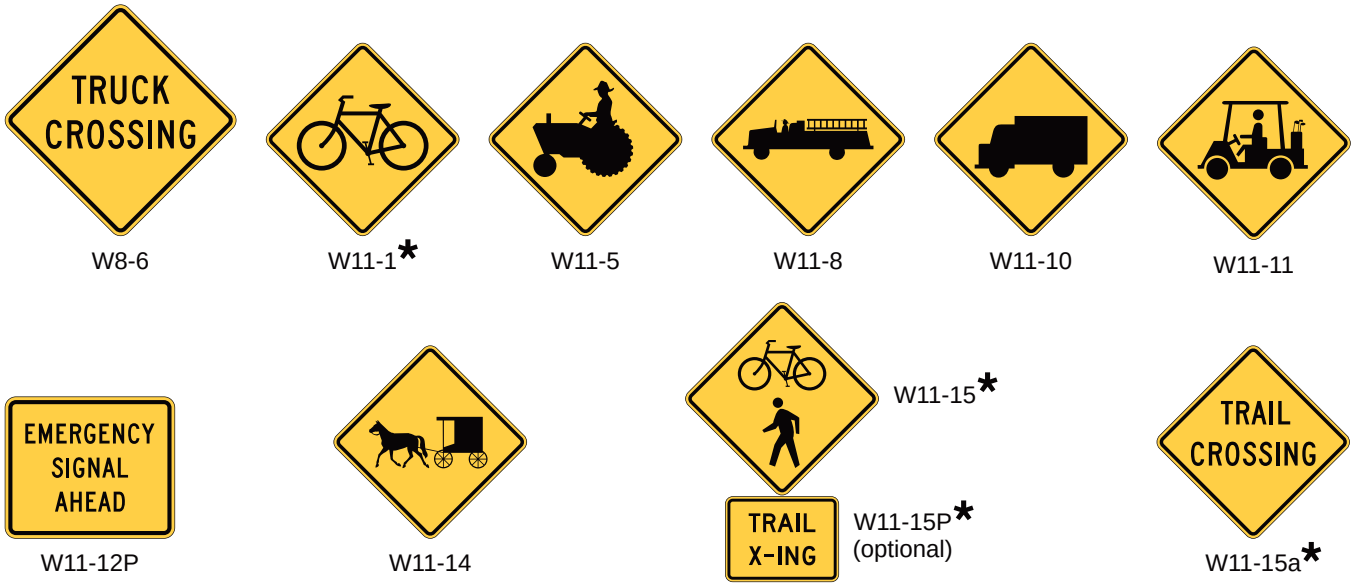



* A fluorescent yellow-green background color may be used for this sign or plaque.

---

## *Figure 2C-14(CA). California Vehicular Traffic Warning Signs and Plaques*



## Figure 2C-15. Non-Vehicular Warning Signs

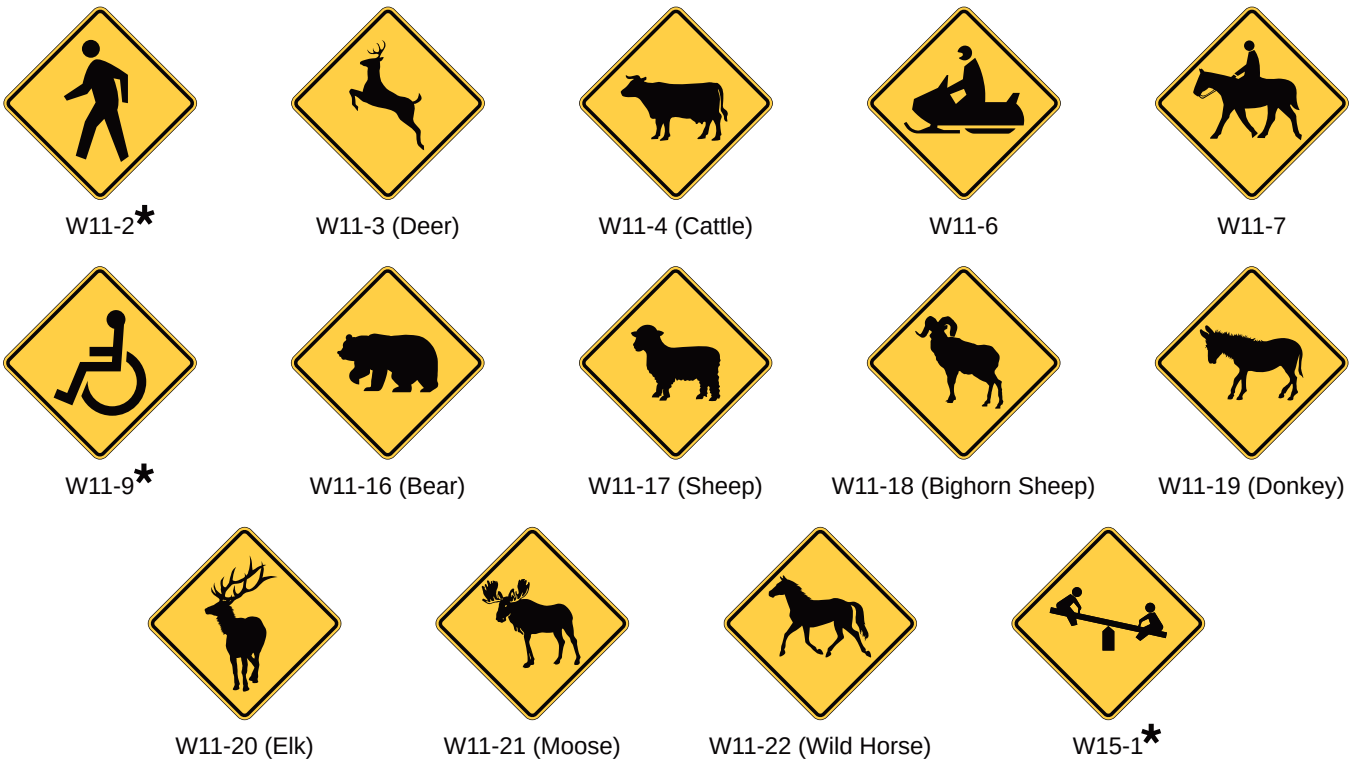

W11-2*
W11-3 (Deer)
W11-4 (Cattle)
W11-6
W11-7
W11-9*
W11-16 (Bear)
W11-17 (Sheep)
W11-18 (Bighorn Sheep)
W11-19 (Donkey)
W11-20 (Elk)
W11-21 (Moose)
W11-22 (Wild Horse)
W15-1*

* A fluorescent yellow-green background color may be used for this sign or plaque.


---

## *Figure 2C-15(CA). California Non-Vehicular Warning Signs*





SW38(CA)
SW49P(CA)
W11-23(CA)
SW50-1P(CA)
SW50-2P(CA)

## Figure 2C-16. Supplemental Warning Plaques

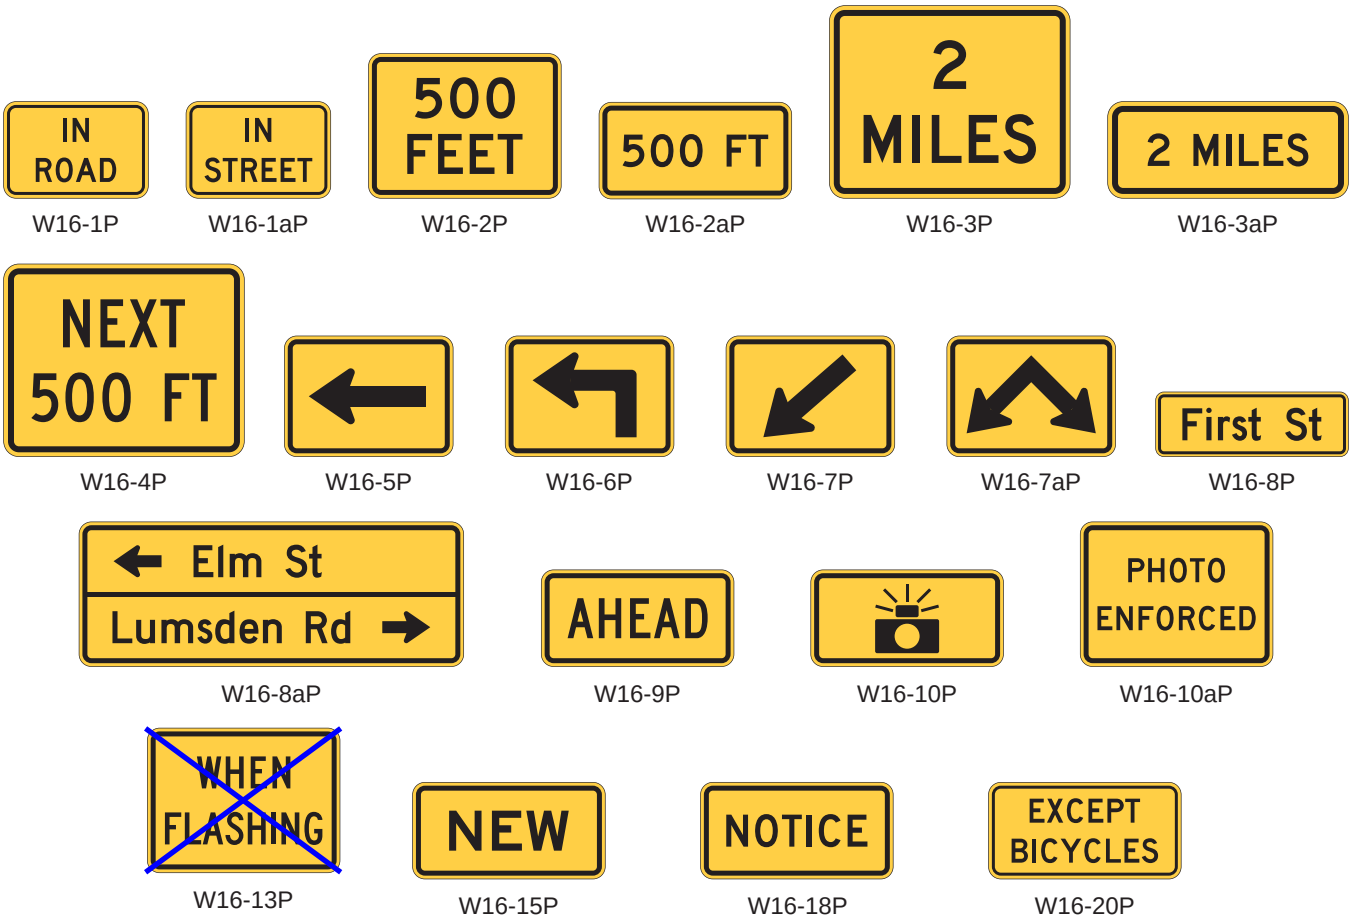



Note: The background color (yellow or fluorescent yellow-green) shall match the color of the warning sign that it supplements.

# Figure 2C-17. Object Markers

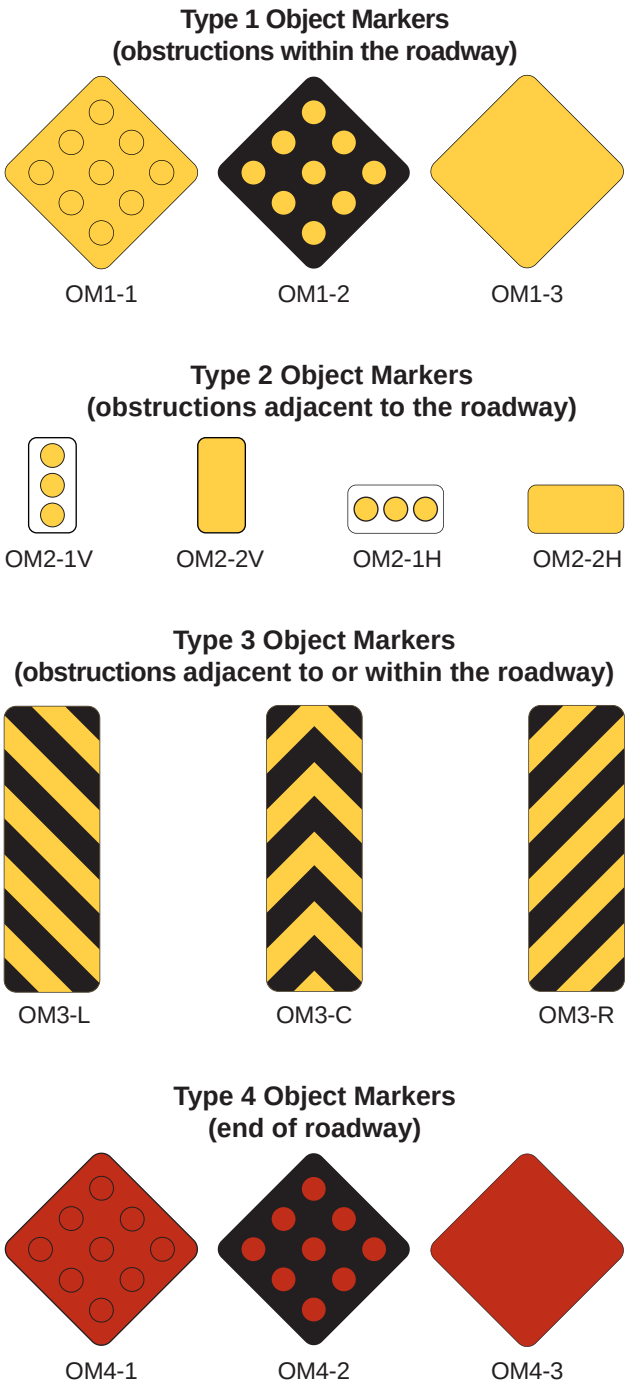


## *Figure 2C-17(CA). California Object Markers*

### Type Q(CA) Object Marker (Type 1)
### (obstructions within the roadway)

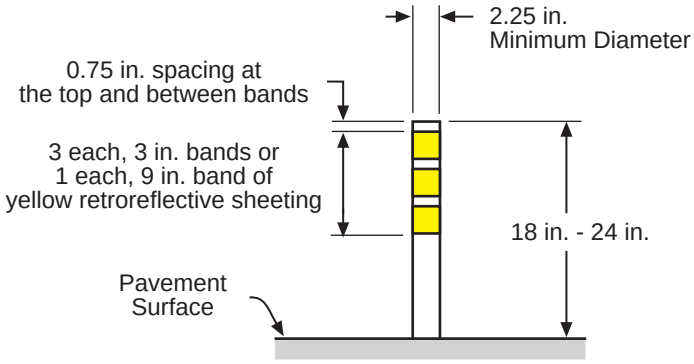


### Type L(CA) Object Marker (Type 2)
### (obstructions adjacent to the roadway)

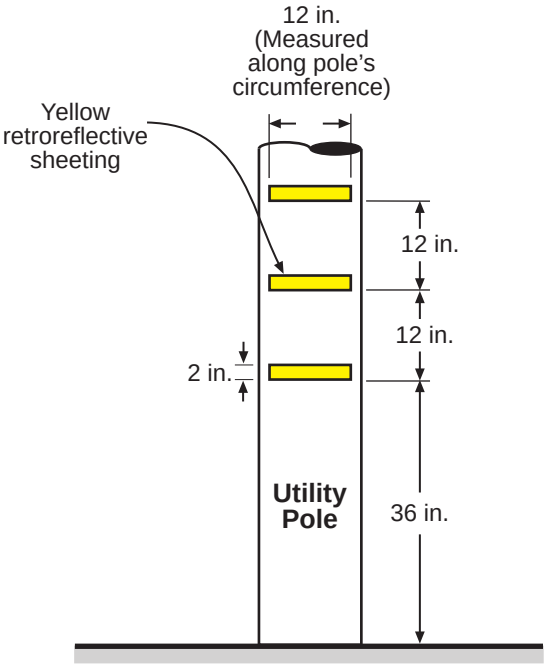


**NOT TO SCALE**


***Figure 2C-101(CA). Determination of Comfortable Speed From Ball Bank Indicator Readings***

Driver_____ Type of Pavement_____ Co.____Rte.____PM____

Observer_____ Condition of Pavement_____ Sta._____To_____

Vehicle_____ Min. Sight Dist. Thru Curve_____ Direction_____

Date_____ Approach Speed (Estimated or Observed)_____ Weather_____

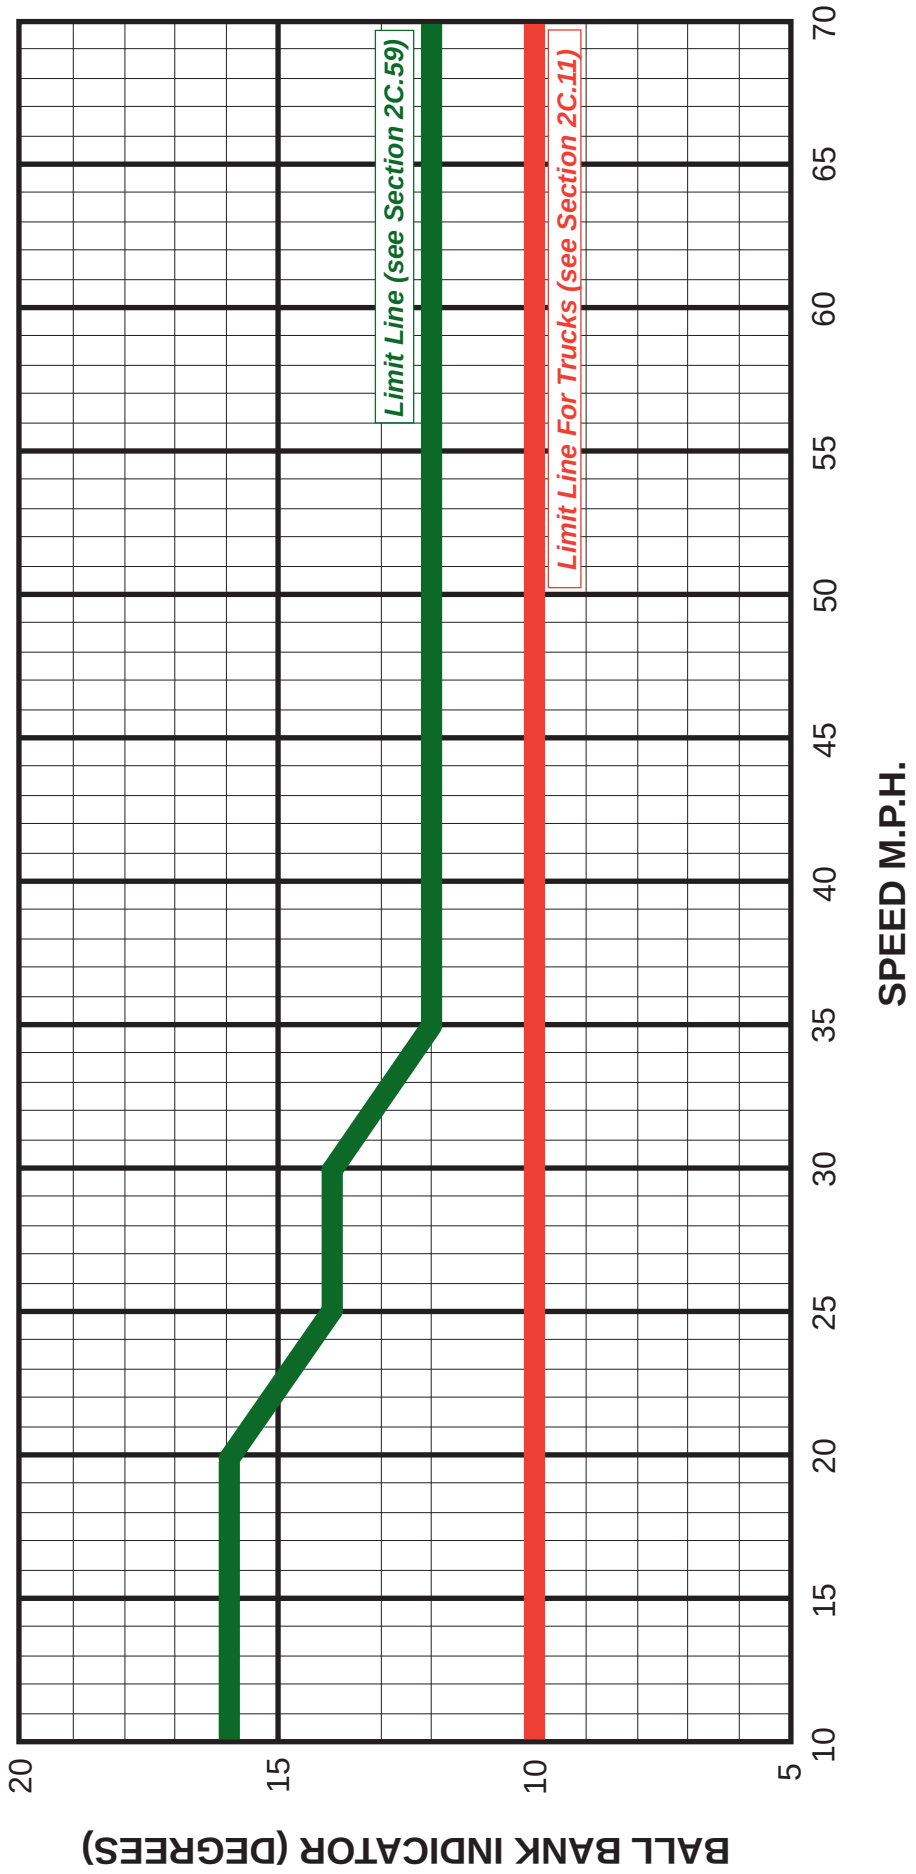

# Table 2C-1. Warning Sign and Plaque Sizes (Sheet 1 of 4)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Horizontal Alignment | W1-1,2,3,4,5 | 2C.07 | 30 x 30* | 36 x 36 | 36 x 36 | 36 x 36 | — | 48 x 48** |
| One-Direction Large Arrow | W1-6 | 2C.10 | 48 x 24 | 48 x 24 | 60 x 30 | 60 x 30 | — | 60 x 30 |
| Two-Direction Large Arrow | W1-7 | 2C.43 | 48 x 24 | 48 x 24 | — | — | — | 60 x 30 |
| Chevron Alignment | W1-8 | 2C.08 | 18 x 24 | 18 x 24 | 30 x 36 | 36 x 48 | — | 24 x 30 |
| Combination Horizontal Alignment/Intersection | W1-10,10a,10b, 10c,10d,10e | 2C.09 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | — | — |
| Hairpin Curve | W1-11 | 2C.07 | 30 x 30 | 30 x 30 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| Truck Rollover | W1-13 | 2C.11 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| 270-degree Curve | W1-15 | 2C.07 | 30 x 30 | 30 x 30 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| Intersection Warning | W2-1,2,3,3a, 4,5,6,7,8 | 2C.41 | 30 x 30 | 30 x 30 | 36 x 36 | — | 24 x 24 | 48 x 48 |
| ~~Traffic Entering When Flashing~~ | ~~W2-10~~ | ~~2C.42~~ | ~~36 x 36~~ | ~~36 x 36~~ | ~~48 x 48~~ | | | |
| Traffic Approaching When Flashing | ~~W2-11~~ | ~~2C.42~~ | ~~36 x 36~~ | ~~36 x 36~~ | ~~48 x 48~~ | — | — | — |
| Stop, Yield, Signal Ahead | W3-1,2,3 | 2C.35 | 30 x 30 | 30 x 30 | 48 x 48 | 48 x 48 | 30 x 30 | — |
| Be Prepared to Stop | W3-4 | 2C.35 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30 | — |
| Reduced Speed Limit Ahead | W3-5 | 2C.40 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| XX MPH Speed Zone Ahead | W3-5a | 2C.40 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Variable Speed Zone Ahead | W3-5b | 2C.40 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| XX MPH Truck Speed Zone Ahead | W3-5c | 2C.40 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Draw Bridge | W3-6 | 2C.36 | 36 x 36 | 36 x 36 | 48 x 48 | — | — | 60 x 60 |
| Ramp Meter Ahead | W3-7 | 2C.37 | 36 x 36 | 36 x 36 | — | — | — | — |
| Ramp Metered When Flashing | W3-8 | 2C.37 | 36 x 36 | 36 x 36 | — | — | — | — |
| Merge | W4-1 | 2C.45 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Lane Ends | W4-2 | 2C.47 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Added Lane | W4-3 | 2C.46 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Cross Traffic Does Not Stop (plaque) | W4-4P | 2C.66 | 24 x 12 | 24 x 12 | 36 x 18 | — | — | 48 x 24 |
| Traffic From Left (Right) Does Not Stop (plaque) | W4-4aP | 2C.66 | 24 x 12 | 24 x 12 | 36 x 18 | — | — | 48 x 24 |
| Oncoming Traffic Does Not Stop (plaque) | W4-4bP | 2C.66 | 24 x 12 | 24 x 12 | 36 x 18 | — | — | 48 x 24 |
| Entering Roadway Merge | W4-5 | 2C.45 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| No Merge Area (plaque) | W4-5aP | 2C.45 | 18 x 24 | 18 x 24 | 24 x 30 | 24 x 30 | — | — |
| Entering Roadway Added Lane | W4-6 | 2C.46 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Heavy Merge from Right (Left) | W4-7 | 2C.49 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | |
| ~~Single Lane Transition~~ | ~~W4-8~~ | ~~2C.48~~ | ~~36 x 36~~ | ~~36 x 36~~ | ~~36 x 36~~ | ~~48 x 48~~ | | ~~48 x 48~~ |
| Road Narrows | W5-1 | 2C.17 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Narrow Bridge | W5-2 | 2C.18 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Narrow Underpass | W5-2a | 2C.18 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | |
| One Lane Bridge | W5-3 | 2C.19 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| One Lane Underpass | W5-3a | 2C.19 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | |
| Divided Highway | W6-1 | 2C.20 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Divided Highway Ends | W6-2 | 2C.21 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Two-Way Traffic | W6-3 | 2C.51 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| Two-Way Traffic (3-Lane) | W6-5 | 2C.52 | 36 x 36 | 36 x 36 | 48 x 48 | — | — | — |
| Two-Way Traffic (3-Lane) | W6-5a | 2C.52 | 36 x 36 | 36 x 36 | 48 x 48 | — | — | — |
| Hill | W7-1 | 2C.14 | 30 x 30* | 36 x 36 | 36 x 36 | 36 x 36 | 24 x 24* | 48 x 48 |
| Hill with Grade | W7-1a | 2C.14 | 30 x 30* | 36 x 36 | 36 x 36 | 36 x 36 | 24 x 24* | 48 x 48 |

# Table 2C-1. Warning Sign and Plaque Sizes (Sheet 2 of 4)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Use Low Gear (plaque) | W7-2P | 2C.64 | 24 x 18 | 24 x 18 | — | — | — | — |
| Trucks Use Lower Gear (plaque) | W7-2bP | 2C.64 | 24 x 18 | 24 x 18 | — | — | — | — |
| XX% Grade (plaque) | W7-3P | 2C.64 | 24 x 18 | 24 x 18 | — | — | — | — |
| Next XX Miles (plaque) | W7-3aP | 2C.61 | 24 x 18 | 24 x 18 | — | — | — | — |
| XX% Grade, XX Miles (plaque) | W7-3bP | 2C.64 | 24 x 18 | 24 x 18 | — | — | — | — |
| Runaway Truck Ramp XX Miles | W7-4 | 2C.15 | 84 x 48 | 84 x 48 | 120 x 72 | 120 x 72 | — | — |
| Runaway Truck Ramp Entrance Direction | W7-4b | 2C.15 | 84 x 54 | 84 x 54 | 120 x 78 | 120 x 78 | — | — |
| Truck Escape Ramp | W7-4c | 2C.15 | 78 x 60 | 78 x 60 | 78 x 60 | 78 x 60 | — | — |
| Sand, Gravel, Paved (plaques) | W7-4dP, 4eP,4fP | 2C.15 | 24 x 12 | 24 x 12 | 24 x 12 | 24 x 12 | — | — |
| Hill Blocks View | W7-6 | 2C.16 | 30 x 30* | 36 x 36 | 36 x 36 | — | — | 48 x 48 |
| Bump or Dip | W8-1,2 | 2C.26 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Pavement Ends | W8-3 | 2C.28 | 36 x 36 | 36 x 36 | 48 x 48 | — | 30 x 30* | — |
| Soft Shoulder | W8-4 | 2C.29 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 24 x 24* | 48 x 48 |
| Slippery When Wet | W8-5 | 2C.30 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Road Condition (plaques) | W8-5P,5bP,5cP | 2C.30 | 24 x 18 | 24 x 18 | 30 x 24 | 36 x 30 | — | 36 x 30 |
| Ice (plaque) | W8-5aP | 2C.30 | 24 x 12 | 24 x 12 | 30 x 18 | 30 x 18 | — | — |
| Truck Crossing | W8-6 | 2C.54 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Loose Gravel | W8-7 | 2C.30 | 36 x 36 | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Rough Road | W8-8 | 2C.30 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Low Shoulder | W8-9 | 2C.29 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Uneven Lanes | W8-11 | 2C.30 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| No Center Line | W8-12 | 2C.32 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | — | — |
| Bridge Ices Before Road | W8-13 | 2C.30 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Fallen Rocks | W8-14 | 2C.30 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Grooved Pavement | W8-15 | 2C.31 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Motorcycle (plaque) | W8-15aP | 2C.31 | 24 x 18 | 24 x 18 | 30 x 24 | 36 x 30 | — | 36 x 30 |
| Metal Bridge Deck | W8-16 | 2C.31 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Shoulder Drop-Off | W8-17 | 2C.29 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Shoulder Drop-Off (plaque) | W8-17P | 2C.29 | 24 x 18 | 24 x 18 | 30 x 24 | 36 x 30 | — | 36 x 30 |
| Road May Flood | W8-18 | 2C.34 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Depth Gauge | W8-19 | 2C.34 | 12 x 72 | 12 x 72 | — | — | — | — |
| Gusty Winds Area | W8-21 | 2C.34 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Fog Area | W8-22 | 2C.34 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| No Shoulder | W8-23 | 2C.29 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Shoulder Ends | W8-25 | 2C.29 | 30 x 30* | 36 x 36 | 36 x 36 | 48 x 48 | 24 x 24* | 48 x 48 |
| Road Ends | W8-26 | 2C.24 | 30 x 30 | 36 x 36 | — | — | — | — |
| Street Ends | W8-26a | 2C.24 | 30 x 30 | 36 x 36 | — | — | — | — |
| Right (Left) Lane Ends | W9-1 | 2C.47 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 30 x 30* | 48 x 48 |
| Lanes Merge | W9-4 | 2C.48 | 36 x 36 | 36 x 36 | 36 x 36 | 48 x 48 | 30 x 30* | 48 x 48 |
| Right (Left) Lane for Exit Only | W9-7 | 2C.50 | 132 x 72 | 132 x 72 | 132 x 72 | 132 x 72 | — | — |
| Bicycle | W11-1 | 2C.54 | 30 x 30 | 30 x 30 | 36 x 36 | — | — | 48 x 48 |
| Pedestrian | W11-2 | 2C.55 | 30 x 30* | 36 x 36 | 36 x 36 | — | — | 48 x 48 |
| Large Animals | W11-3,4,16,17, 18,19,20,21,22 | 2C.55 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Farm Vehicle | W11-5 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Snowmobile | W11-6 | 2C.55 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Equestrian | W11-7 | 2C.55 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |

# Table 2C-1. Warning Sign and Plaque Sizes (Sheet 3 of 4)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Emergency Vehicle | W11-8 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Handicapped | W11-9 | 2C.55 | 30 x 30* | 36 x 36 | 36 x 36 | — | — | 48 x 48 |
| Truck | W11-10 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Golf Cart | W11-11 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Emergency Signal Ahead (plaque) | W11-12P | 2C.54 | 36 x 30 | 36 x 30 | 36 x 30 | — | — | — |
| Horse-Drawn Vehicle | W11-14 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Trail Crossing | W11-15 | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Trail Crossing | W11-15a | 2C.54 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Trail Crossing (plaque) | W11-15P | 2C.54 | 24 x 18 | 24 x 18 | 30 x 24 | — | — | 36 x 30 |
| Double Arrow | W12-1 | 2C.23 | 30 x 30* | 36 x 36 | 36 x 36 | — | — | — |
| Low Clearance Advance | W12-2 | 2C.25 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30* | — |
| Low Clearance Overhead | W12-2a | 2C.25 | 84 x 24 | 84 x 24 | 84 x 24 | 84 x 24 | — | — |
| Low Clearance - Lane Overhead | W12-2b | 2C.25 | 102 x 24 | 102 x 24 | 102 x 24 | 102 x 24 | — | — |
| Advisory Speed (plaque) | W13-1P | 2C.59 | 18 x 18 | 18 x 18 | 24 x 24 | 30 x 30 | — | 30 x 30 |
| Advisory Speed Confirmation (plaque) | W13-1aP | 2C.59 | 48 x 15 | 48 x 15 | 60 x 18 | 60 x 18 | 48 x 15 | 72 x 24 |
| Advisory Exit or Ramp Speed | W13-2,3 | 2C.12 | 24 x 30 | 24 x 30 | 36 x 48 | 36 x 48 | — | 48 x 60 |
| Combination Horizontal Alignment/Advisory Exit or Ramp Speed Loop | W13-6,7,8,9 | 2C.12 | 24 x 42 | 24 x 42 | 36 x 66 | 36 x 66 | — | ~~48 x 84~~ 72 x 126 |
| Combination Horizontal Alignment/Advisory Exit or Ramp Speed Turn | W13-10,11 | 2C.12 | 24 x 36 | 24 x 36 | 36 x 54 | 36 x 54 | — | 48 x 72 |
| Combination Horizontal Alignment/Advisory Exit or Ramp Speed - Truck Rollover | W13-12,13 | 2C.12 | 24 x 42 | 24 x 42 | 36 x 66 | 36 x 66 | — | ~~48 x 84~~ 72 x 126 |
| Vehicle Speed Feedback Sign | W13-20 | 2C.13 | 24 x 30 | 30 x 36 | 36 x 48 | 48 x 60 | — | — |
| Vehicle Speed Feedback (plaque) | W13-20aP | 2C.13 | 24 x 18 | 30 x 24 | 36 x 30 | 48 x 36 | — | — |
| Dead End, No Outlet | W14-1,2 | 2C.24 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| Dead End, No Outlet (with arrow) | W14-1a,2a | 2C.24 | 36 x 9 | 36 x 9 | — | — | — | — |
| No Passing Zone | W14-3 | 2C.53 | 48 x 48 x 36 | 48 x 48 x 36 | 64 x 64 x 48 | 64 x 64 x 48 | 40 x 40 x 30 | 64 x 64 x 48 |
| Playground | W15-1 | 2C.56 | 30 x 30* | 36 x 36 | 36 x 36 | — | 24 x 24* | 48 x 48 |
| In Road (plaque) | W16-1P | 2C.67 | 18 x 12 | 18 x 12 | 24 x 18 | — | — | 24 x 18 |
| In Street (plaque) | W16-1aP | 2C.67 | 18 x 12 | 18 x 12 | 24 x 18 | — | — | 24 x 18 |
| XX Feet (2-line plaque) | W16-2P | 2C.61 | 24 x 18 | 24 x 18 | 30 x 24 | 30 x 24 | — | 30 x 24 |
| XX Ft (1-line plaque) | W16-2aP | 2C.61 | 24 x 12 | 24 x 12 | — | — | — | 30 x 18 |
| XX Miles (2-line plaque) | W16-3P | 2C.61 | 30 x 24 | 30 x 24 | — | — | — | — |
| XX Miles (1-line plaque) | W16-3aP | 2C.61 | 30 x 12 | 30 x 12 | — | — | — | — |
| Next XX Feet (plaque) | W16-4P | 2C.61 | 30 x 24 | 30 x 24 | — | — | — | — |
| Supplemental Arrow (plaque) | W16-5P,6P | 2C.62 | 21 x 15 | 21 x 15 | — | — | — | 30 x 21 |
| Diagonal Downward Arrow (plaque) | W16-7P | 2C.63 | 21 x 15 | 21 x 15 | — | — | — | 30 x 21 |
| Dual Downward Diagonal Arrow (plaque) | W16-7aP | 2C.63 | 21 x 15 | 21 x 15 | — | — | — | 30 x 21 |
| Advance Street Name (1-line plaque) | W16-8P | 2C.65 | Varies x 8 | Varies x 8 | — | — | — | — |
| Advance Street Name (2-line plaque) | W16-8aP | 2C.65 | Varies x 15 | Varies x 15 | — | — | — | — |
| Ahead (plaque) | W16-9P | 2C.55 | 24 x 12 | 24 x 12 | 30 x 18 | — | — | 30 x 18 |
| Photo Enforced (symbol plaque) | W16-10P | 2C.69 | 24 x 12 | 24 x 12 | 36 x 18 | — | — | 48 x 24 |
| Photo Enforced (plaque) | W16-10aP | 2C.69 | 24 x 18 | 24 x 18 | 36 x 30 | — | — | 48 x 36 |

# Table 2C-1. Warning Sign and Plaque Sizes (Sheet 4 of 4)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Traffic Circle (plaque) | W16-12P | 2C.41 | 24 x 18 | 24 x 18 | — | — | — | — |
| Roundabout (plaque) | W16-12aP | 2C.41 | 24 x 12 | 24 x 12 | — | — | — | — |
| ~~When Flashing (plaque)~~ | ~~W16-13P~~ | ~~2C.55~~ | ~~24 x 18~~ | ~~24 x 18~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~—~~ |
| New (plaque) | W16-15P | 2C.60 | 24 x 12 | 24 x 12 | — | — | — | — |
| Notice (plaque) | W16-18P | 2A.11 | 24 x 12 | 24 x 12 | — | — | — | — |
| Except Bicycles (plaque) | W16-20P | 2C.68 | 24 x 12 | 24 x 12 | — | — | — | — |
| Speed Hump | W17-1 | 2C.27 | 30 x 30* | 36 x 36 | — | — | 24 x 24* | 48 x 48 |
| No Traffic Signs | W18-1 | 2C.33 | 30 x 30* | 36 x 36 | — | — | 24 x 24* | 36 x 36 |
| Freeway Ends XX Miles | W19-1 | 2C.22 | — | — | — | 144 x 48 | — | — |
| Expressway Ends XX Miles | W19-2 | 2C.22 | — | — | 144 x 48 | — | — | — |
| Freeway Ends | W19-3 | 2C.22 | — | — | — | 48 x 48 | — | — |
| Expressway Ends | W19-4 | 2C.22 | — | — | 48 x 48 | — | — | — |
| All Traffic Must Exit | W19-5 | 2C.22 | — | — | 90 x 48 | 90 x 48 | — | — |
| New Traffic Pattern Ahead | W23-2 | 2C.38 | 36 x 36 | 36 x 36 | — | — | — | — |
| New Signal Operation Ahead | W23-2a | 2C.38 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |
| ~~Oncoming Traffic Has (May Have) Extended Green~~ | ~~W25-1,2~~ | ~~2C.44~~ | ~~24 x 30~~ | ~~24 x 30~~ | ~~—~~ | ~~—~~ | ~~—~~ | ~~—~~ |
| Watch for Stopped Traffic | W26-1 | 2C.39 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | — |

* The minimum size required for diamond-shaped warning signs facing traffic on multi-lane conventional roads shall be 36 x 36 per Section 2C.03

** A rectangular 72 x 72 version may be used at freeway ramps

Notes:
1. Larger signs may be used when appropriate
2. Dimensions are shown as width x height, in inches

## Table 2C-1(CA). California Warning Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| WILDLIFE CROSSING | W11-23(CA) | 2C.55 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30 | — |
| Weight Limit | W20(CA) | 2C.102(CA) | 30 x 36 | 30 x 36 | 36 x 48 | 36 x 48 | — | — |
| Weight Limit | W20A(CA) | 2C.102(CA) | 30 x 30 | 30 x 30 | 36 x 40 | 36 x 40 | — | — |
| DEEP GRAVEL | W30B(CA) | 2C.15 | 36 x 36 | 36 x 36 | 36 x 36 | 36 x 36 | — | — |
| RIGHT(LEFT) EXIT (plaque) | W30cP(CA) | 2C.15 | — | — | 114 x 24 | 114 x 24 | 78 x 18 | — |
| END | W31(CA) | 2C.24, 2C.73 | 30 x 30 | 30 x 30 | 30 x 30 | 30 x 30 | 24 x 24 | — |
| CAUTION VERTICAL CLEARANCE __' __" Arrow | W34C(CA) | 2C.25 | 36 x 54 | 36 x 54 | 48 x 72 | 48 x 72 | — | — |
| SLIDE AREA | W38(CA) | 2C.30 | 30 x 30 | 30 x 30 | 48 x 48 | 48 x 48 | — | — |
| TWO-WAY TRAFFIC (plaque) | W44aP(CA) | 2C.51 | 36 x 24 | 36 x 24 | — | — | — | — |
| SLOW TRUCKS | W51(CA) | 2C.14 | 48 x 48 | 48 x 48 | 48 x 48 | 48 x 48 | — | 72 x 72 |
| CROSS TRAFFIC AHEAD | W70(CA) | 2C.41 | — | — | 60 x 60 | — | — | — |
| RIGHT(LEFT) LANE TURNS RIGHT(LEFT) AHEAD | W73A(CA) | 2C.50 | 36 x 36 | 36 x 36 | 48 x 48 | — | — | 60 x 60 |
| RIGHT(LEFT) __ LANES FOR EXIT ONLY | W73B(CA) | 2C.50 | — | — | 168 x 72 | 168 x 72 | — | — |
| THRU TRAFFIC MERGE LEFT (RIGHT) | W74(CA) | 2C.47, 2C.50 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | — | 60 x 60 |
| PASS WITH CARE (plaque) | W83P(CA) | 2C.51 | 24 x 30 | 24 x 30 | 36 x 45 | 36 x 45 | — | — |
| SPEED HUMPS AHEAD | W84(CA) | 2C.27 | 36 x 36 | 36 x 36 | — | — | 30 x 30 | — |
| SPEED HUMP AREA | W85(CA) | 2C.27 | 36 x 36 | 36 x 36 | — | — | 30 x 30 | — |
| "METER ON" Activated Blank- Out | W88-2(CA) | 2C.37 | — | — | 96 x 48 | 96 x 48 | — | — |
| "_____METER ON" Activated Blank-Out | W88-3(CA) | 2C.37 | — | — | 96 x 48 | 96 x 48 | — | — |
| "PREPARE TO STOP" Activated Blank-Out | W89(CA) | 2C.37 | — | — | 96 x 48 | 96 x 48 | — | — |
| WATCH DOWNHILL SPEED | SW4-1(CA) | 2C.14 | 72 x 72 | 72 x 72 | 72 x 72 | 72 x 72 | — | — |
| SIGNAL AHEAD (plaque) | SW26aP(CA) | 2C.35 | — | — | — | 72 x 30 (ramps) | — | — |
| STOP AHEAD (plaque) | SW26bP(CA) | 2C.35 | — | — | — | 72 x 30 (ramps) | — | — |
| DRIFTING SAND | SW32(CA) | 2C.30 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30 | — |
| Safety Corridor Sign | SW33(CA) | 2C.103(CA) | 102 x 48 | 102 x 48 | — | — | — | — |
| FLASH FLOOD AREA | SW35(CA) | 2C.34 | 36 x 36 | 36 x 36 | 36 x 36 | 36 x 36 | — | — |
| TUNNEL | SW37(CA) | 2C.18 | 30 x 30 | 30 x 30 | 30 x 30 | 30 x 30 | — | — |
| DEAF CHILDREN NEAR | SW38(CA) | 2C.55 | 30 x 30 | 30 x 30 | 30 x 30 | — | 24 x 24 | — |
| SNOW SLIDE AREA | SW41(CA) | 2C.30 | 36 x 36 | 36 x 36 | 48 x 48 | 48 x 48 | 30 x 30 | — |
| SNOW (plaque) | SW46P(CA) | 2C.30 | 24 x 12 | 24 x 12 | 30 x 18 | 30 x 18 | — | — |
| ALL TERRAIN VEHICLES | SW47A(CA) | 2C.54 | 36 x 36 | 36 x 36 | 36 x 36 | — | 30 x 30 | — |
| TRACTOR-SEMIS OVER ___ FEET KINGPIN TO REAR AXLE NOT ADVISED | SW48(CA) | 2C.101(CA) | 48 x 36 | 48 x 36 | 72 x 54 | 72 x 54 | — | — |
| NEXT RIGHT (plaque) | SW48-1P(CA) | 2C.101(CA) | 48 x 12 | 48 x 12 | 72 x 18 | 72 x 18 | — | — |
| PLAYGROUND (plaque) | SW49P(CA) | 2C.56 | 36 x 12 | 36 x 12 | 36 x 12 | — | — | — |
| SENIOR ZONE | SW50-1P(CA) | 2C.55 | 24 x 18 | 24 x 18 | 24 x 18 | — | — | — |
| SENIOR | SW50-2P(CA) | 2C.55 | 24 x 8 | 24 x 8 | 24 x 8 | — | — | — |
| WATCH FOR SNOW REMOVAL EQUIPMENT | SW58(CA) | 2C.54 | 36 x 36 | 36 x 36 | 54 x 48 | 54 x 48 | — | — |

# Table 2C-2. Minimum Size of Supplemental Warning Plaques

| Size of Warning Sign | Size of Supplemental Plaque | | | |
|---|---|---|---|---|
| | Rectangular | | | Square |
| | 1 Line | 2 Lines | Arrow | |
| 24 x 24 | 24 x 12 | 24 x 18 | 21 x 15 | 18 x 18 |
| 30 x 30 | | | | |
| 36 x 36 | 30 x 18 | 30 x 24 | 30 x 21 | 24 x 24 |
| 48 x 48 | | | | |

Notes:
1. Larger supplemental plaques may be used when appropriate
2. Dimensions are shown as width x height, in inches

# Table 2C-3. Guidelines for Advance Placement of Warning Signs

| Posted or 85th-Percentile Speed | Advance Placement Distance[1] | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Condition A: Speed reduction and lane changing in heavy traffic[2] | Condition B: Deceleration to the listed advisory speed (mph) for the condition | | | | | | | | |
| | | 0[3] | 10[4] | 20[4] | 30[4] | 40[4] | 50[4] | 60[4] | 70[4] | 80[4] |
| 20 mph | 225 ft | 115 ft | N/A[5] | — | — | — | — | — | — | — |
| 25 mph | 325 ft | 155 ft | N/A[5] | N/A[5] | — | — | — | — | — | — |
| 30 mph | 460 ft | 200 ft | N/A[5] | N/A[5] | — | — | — | — | — | — |
| 35 mph | 565 ft | 250 ft | N/A[5] | N/A[5] | N/A[5] | — | — | — | — | — |
| 40 mph | 670 ft | 305 ft | 100 ft[6] | 100 ft[6] | N/A[5] | — | — | — | — | — |
| 45 mph | 775 ft | 360 ft | 125 ft | 100 ft[6] | 100 ft[6] | N/A[5] | — | — | — | — |
| 50 mph | 885 ft | 425 ft | 200 ft | 175 ft | 125 ft | 100 ft[6] | — | — | — | — |
| 55 mph | 990 ft | 495 ft | 275 ft | 225 ft | 200 ft | 125 ft | N/A5 | — | — | — |
| 60 mph | 1,100 ft | 570 ft | 350 ft | 325 ft | 275 ft | 200 ft | 100 ft[6] | — | — | — |
| 65 mph | 1,200 ft | 645 ft | 450 ft | 400 ft | 350 ft | 275 ft | 200 ft | 100 ft[6] | — | — |
| 70 mph | 1,250 ft | 730 ft | 525 ft | 500 ft | 450 ft | 375 ft | 275 ft | 150 ft | — | — |
| 75 mph | 1,350 ft | 820 ft | 625 ft | 600 ft | 550 ft | 475 ft | 375 ft | 250 ft | 100 ft[6] | — |
| 80 mph | 1,475 ft | 910 ft | 725 ft | 700 ft | 625 ft | 550 ft | 450 ft | 350 ft | 200 ft | — |
| 85 mph | 1,600 ft | 1,010 ft | 825 ft | 800 ft | 750 ft | 675 ft | 575 ft | 450 ft | 300 ft | 150 ft |

[1] The distances are adjusted for a sign legibility distance of 180 feet for Condition A. The distances for Condition B (with the exception of the potential stop condition) have been adjusted for a sign legibility distance of 250 feet, which is appropriate for an alignment warning symbol sign. For Conditions A and B, warning signs with less than 6-inch legend or more than four words, a minimum of 100 feet should be added to the advance placement distance to provide adequate legibility of the warning sign.

[2] Typical conditions are locations where the road user must use extra time to adjust speed and change lanes in heavy traffic because of a complex driving situation. Typical signs are Merge and Right Lane Ends. The distances are determined by providing the driver a PRT of 14.0 to 14.5 seconds for vehicle maneuvers (2018 AASHTO Policy, Table 3-3, Decision Sight Distance, Avoidance Maneuver E) and adjusted for a legibility distance of 180 feet for the appropriate sign.

[3] A typical condition is the warning of a potential stop situation. Typical signs are Stop Ahead, Yield Ahead, Signal Ahead, and Intersection Warning signs. The distances are based on the 2018 AASHTO Policy, Table 3-1, Stopping Sight Distance, providing a PRT of 2.5 seconds, a deceleration rate of 11.2 feet/second$^2$.

[4] Typical conditions are locations where the road user must decrease speed to maneuver through the warned condition. Typical signs are Turn, Curve, Reverse Turn, or Reverse Curve. The distance is determined by providing a 2.5 second PRT, a vehicle deceleration rate of 10 feet/second$^2$, and adjusted for a sign legibility distance of 250 feet.

[5] No suggested distances are provided for these speeds, as the placement location is dependent on site conditions and other signing. An alignment warning sign may be placed anywhere from the point of curvature up to 100 feet in advance of the curve. However, the alignment warning sign should be installed in advance of the curve and at least 100 feet from any other signs.

[6] The minimum advance placement distance is listed as 100 feet to provide adequate spacing between signs.

Note: Warning signs that advise road users about conditions that are not related to a specific location, such as Deer Crossing or SOFT SHOULDER, can be installed in an appropriate location, based on engineering judgment.

# Table 2C-4. Application of Traffic Control Devices for Changes in Horizontal Alignment

## A - Determination of the Need for Devices for Changes in Horizontal Alignment[1]

| Roadway Type | AADT | | | |
|---|---|---|---|---|
| | Less than 1,000 | 1,000-2,999 | 3,000-3,999 | Greater than 3,999 |
| Freeways and Expressways | Required | Required | Required | Required |
| Arterial or Collector without Pavement Markings | Optional | Recommended | Required | Required |
| Arterial or Collector with Pavement Markings[2] | Optional | Recommended | Recommended | Required |
| All other roadways | Optional | Optional | Optional | Optional |

[1] If devices are determined to be needed, the selection of the device(s) is based on Chart B below.

[2] An arterial or collector is considered to have pavement markings when either a center line, edge lines, or both are present.

## B - Selection of Devices for Changes in Horizontal Alignment

| Speed Differential[3] | Devices for Change in Horizontal Alignment[3] |
|---|---|
| 5 mph | Pavement markings or advance horizontal alignment warning sign on paved roadways. Advance horizontal alignment warning sign on unpaved roadways.[4] |
| 10 mph | Advance horizontal alignment warning sign |
| 15 mph | Delineators[5] and advance horizontal alignment warning sign |
| 20 mph or more | Chevrons[5] and advance horizontal alignment warning sign |

[3] The provisions for the use of Horizontal Alignment warning signs and devices are contained in Section 2C.06. The need for devices is determined by Chart A above.

[4] A roadway is considered to have pavement markings when either a center line, edge lines, or both are present.

[5] Section 2C.06 contains information about the use of a One Direction Large Arrow (W1-6) sign in place of or to supplement delineators and chevrons.

## Table 2C-5. Typical Spacing of Chevron Alignment Signs on Horizontal Curves

| Advisory Speed | Curve Radius | Sign Spacing |
|---|---|---|
| 15 mph or less | Less than 200 feet | 40 feet |
| 20 to 30 mph | 200 to 400 feet | 80 feet |
| 35 to 45 mph | 401 to 700 feet | 120 feet |
| 50 to 60 mph | 701 to 1,250 feet | 160 feet |
| More than 60 mph | More than 1,250 feet | 200 feet |

Note: The relationship between the curve radius and the advisory speed shown in this table should not be used to determine the advisory speed.

## Table 2C-6. Use of Advisory Speed Plaque for Horizontal Alignment Changes

| Speed Differential | Use of Advisory Speed Plaque (W13-1P)[1] |
|---|---|
| 5 mph | Optional |
| 10 mph | Recommended |
| 15 mph or more | Required |

[1] See Section 2C.59

# CHAPTER 2D. GUIDE SIGNS—CONVENTIONAL ROADS

## Chapter 2D Subchapter and Section Organization

**GENERAL DESIGN**

2D.01 Scope of Conventional Road Guide Sign Standards and Application
2D.02 Color, Retroreflection, and Illumination
2D.03 Size of Signs
2D.04 Lettering Style
2D.05 Size of Lettering
2D.06 Amount of Legend
2D.07 Abbreviations
2D.08 Arrows

**ROUTE SIGNS AND AUXILIARY PLAQUES**

2D.09 Numbered Highway Systems
2D.10 Route Signs and Auxiliary Plaques
2D.11 Design of Route Signs
2D.12 Design of Route Sign Auxiliary Plaques
2D.13 Junction Auxiliary Plaque (M2-1P)
2D.14 Combination Junction Sign (M2-2)
2D.15 Cardinal Direction Auxiliary Plaques (M3-1P through M3-4P)
2D.16 Alternative Route Auxiliary Plaques (M4-1P through M4-4P)
2D.17 ALTERNATE Auxiliary Plaques (M4-1P and M4-1aP)
2D.18 BY-PASS Auxiliary Plaque (M4-2P)
2D.19 BUSINESS Auxiliary Plaque (M4-3P)
2D.20 TRUCK Auxiliary Plaque (M4-4P)
2D.21 TO Auxiliary Plaque (M4-5P)
2D.22 END Auxiliary Plaque (M4-6P)
2D.23 BEGIN Auxiliary Plaque (M4-14P)
2D.24 TEMPORARY Auxiliary Plaques (M4-7P and M4-7aP)
2D.25 Temporary Detour Signs and Auxiliary Plaques
2D.26 Advance Turn Arrow Auxiliary Plaques (M5-1P, M5-2P, and M5-3P)
2D.27 Lane Designation Auxiliary Plaques (M5-4P, M5-5P, and M5-6P)
2D.28 Directional Arrow Auxiliary Plaques (M6 Series)

**SIGN ASSEMBLIES**

2D.29 Route Sign Assemblies
2D.30 Junction Assembly
2D.31 Advance Route Turn Assembly
2D.32 Directional Assembly
2D.33 Confirming or Reassurance Assemblies
2D.34 Trailblazer Assembly

**DESTINATION AND DISTANCE SIGNS**

2D.35 Destination and Distance Signs
2D.36 Destination Signs (D1 Series)
2D.37 Overhead Arrow-per-Lane Destination Guide Signs
2D.38 Combination Lane-Use/Destination Overhead Guide Sign (D15-1)
2D.39 Destination Signs at Circular Intersections
2D.40 Destination Signs at Jughandles
2D.41 Destination Signs at Intersections with Indirect Turning Movements

2D.42 Location of Destination Signs
2D.43 Distance Signs (D2 Series)
2D.44 Location of Distance Signs

**STREET NAME AND PARKING SIGNS**
2D.45 Street Name Signs (D3-1 and D3-1a)
2D.46 Advance Street Name Signs (D3-2 Series)
2D.47 Parking Area Guide Sign (D4-1)
2D.48 PARK - RIDE Sign (D4-2)

**FREEWAY INTERCHANGE APPROACH SIGNS**
2D.49 Signing on Conventional Roads on Approaches to Interchanges
2D.50 Freeway Entrance Signs (D13-3 and D13-3a)

**WEIGH STATION, CROSSOVER, TRUCK AND PASSING LANE, AND EMERGENCY AND SLOW VEHICLE TURN-OUT SIGNS**
2D.51 WEIGH STATION Signing (D8 Series)
2D.52 Crossover Signs (D13-1 and D13-2)
2D.53 Truck and Passing Lane Signs (D17-1 through D17-4)
2D.54 Emergency and Slow Vehicle Turn-Out Signs (D17-5 through D17-7)

**OTHER GUIDE SIGNS**
2D.55 Community Wayfinding Signs
2D.56 Signing of Named Highways for Mapping and Address Purposes
2D.57 National Scenic Byways Sign and Plaque (M10-1 and M10-1aP)
2D.58 State-Designated Scenic Byway, Historic Trail, and Auto Tour Route Signs
2D.59 Emergency Routing Signs and Plaques (M4-11 and M4-12 Series)

**SIGNING AT AIRPORTS**
2D.60 Signing at Airports

**CALIFORNIA SECTION**
2D.101(CA) Intersection Number (G98A(CA)) Sign

# GENERAL DESIGN

## Section 2D.01 Scope of Conventional Road Guide Sign Standards and Application

**Standard:**

01 **The provisions of this Chapter shall apply to expressways, freeways, any road or street ~~other than expressways and freeways,~~ except as otherwise provided in this Manual.**

Support:

02 Guide signs direct road users along streets and highways; inform them of intersecting routes; direct them to cities, towns, villages, or other important destinations; identify nearby rivers and streams, parks, forests, and historical sites; and provide information that will help them along their way in the most simple and direct manner possible.

*Guidance:*

03 *The selection of primary or control destinations (those displayed consistently over longer distances along a route) displayed on guide signs should be meaningful to road users in navigation and orientation. The destinations selected should be identifiable on official maps.*

04 *The familiarity of the road users with the road should be considered in determining the need for guide signs on low-volume roads.*

Support:

05 Low-volume roads generally do not require guide signs to the extent that they are needed on higher classes of roads. Because guide signs are typically only beneficial as a navigational aid for road users who are unfamiliar with a low-volume road, guide signs might not be needed on low-volume roads that serve only local traffic.

06 Guide signs, other than Street Name signs, generally are not used on low-volume rural roads except as needed to guide road users back to the major roadways.

*Guidance:*

07 *If used on low-volume roads, destination names should be as specific and descriptive as possible. Destinations such as campgrounds, ranger stations, recreational areas, and the like should be clearly indicated so that they are not interpreted to be communities or locations with road user services.*

Option:

08 Guide signs may be used on low-volume roads at intersections to provide information for road users returning to a higher class of roads.

Support:

09 Chapter 2A addresses placement, location, and other general criteria for signs.

*Guidance:*

10 *A minimum spacing of 200 feet between guide signs should be maintained on conventional highways.*

11 *A minimum spacing of 800 feet between guide signs should be maintained on freeways and expressways.*

## Section 2D.02 Color, Retroreflection, and Illumination

Support:

01 Requirements for illumination, retroreflection, and color are stated under the specific headings for individual guide signs or groups of signs. General provisions are given in Sections 2A.06, 2A.21, and 2A.22.

**Standard:**

02 **Except as otherwise provided in this Manual for individual signs or groups of signs, guide signs on streets and highways shall have a white message and border on a green background. All messages, borders, and legends shall be retroreflective and all backgrounds shall be retroreflective or illuminated.**

Support:

03 Color coding is sometimes used to help road users distinguish between multiple potentially confusing destinations. Examples of valuable uses of color coding include guide signs for roadways approaching or inside an airport property with multiple terminals serving multiple airlines, and community wayfinding guide signs for various traffic generator destinations within a community or area.

**Standard:**

04 **Except as otherwise provided in this Manual, different color sign backgrounds shall not be used to provide color coding of destinations. The color coding shall be accomplished by the use of different colored square or rectangular sign panels on the face of the guide signs (see Figure 2D-1)**

Option:

05 The different colored sign panels on the face of a sign may include a black or white (whichever provides the better contrast with the panel color) letter, numeral, or other appropriate designation to identify an airport terminal or other destination.

Support:

06 Section 2D.55 contains specific provisions regarding Community Wayfinding guide signs.

07 Refer to the Caltrans' Traffic Operations Policy website for the most recent published memorandum regarding retroreflection and illumination requirements for State highways.

## Section 2D.03 Size of Signs

**Standard:**

01 **Except as provided in Section 2A.07, the minimum sizes of conventional road guide signs that have standardized designs shall be as shown in Table 2D-1 and Table 2D-1(CA).**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2D-1 and Table 2D-1(CA).

Option:

03 Signs larger than those shown in Table 2D-1 and Table 2D-1(CA) may be used (see Section 2A.07).

Support:

04 For other guide signs, the legends are so variable that a standardized design or size is not appropriate. The sign size is determined primarily by the length of the message, and the size of lettering and spacing necessary for proper legibility.

Option:

05 Reduced letter height, reduced interline spacing, and reduced edge spacing may be used on guide signs if sign size must be limited by factors such as lane width or vertical or lateral clearance.

*Guidance:*

06 *Reduced spacing between the letters or words on a line of legend should not be used as a means of reducing the overall size of a guide sign, except where determined necessary by engineering judgment to meet unusual lateral-space constraints. In such cases, the legibility distance of the sign legend should be the primary consideration in determining whether to reduce the spacing between the letters or the words or between the words and the sign border, or to reduce the letter height.*

07 *When a reduction in the prescribed size is necessary, the design used should be as similar as possible to the design for the standard size.*

Support:

08 Sign design details are provided in the "Standard Highway Signs" publication (FHWA) and in Caltrans' California Sign Specifications. Refer to Section 1A.05 for additional information.

## Section 2D.04 Lettering Style

**Standard:**

01 **The design of upper-case letters, lower-case letters, numerals, route shields, and spacing shall be as provided in the "Standard Highway Signs" publication (see Section 1A.05) and in Caltrans' California Sign Specifications.**

02 **The lettering for names of places, streets, and highways on conventional road guide signs shall be a combination of lower-case letters with initial upper-case letters (see Section 2A.08). The nominal loop height of the lower-case letters shall be ¾ the height of the initial upper-case letter. When a mixed- case legend letter height is specified referring only to the initial upper-case letter, the height of the lower-case letters that follow shall be determined by this proportion. When the height of a lower-case letter is referenced, the reference is made to the nominal loop height. The height of the initial upper-case letter shall also be determined by this proportion.**

03 **All other word legends on conventional road guide signs shall be in upper-case letters.**

04 **The unique letter forms for each of the Standard Alphabet series shall not be stretched, compressed, warped, or otherwise manipulated. Modifications to the length of a word for a given letter height and series shall be accomplished only by the methods described in Section 2D.03.**

## Section 2D.05 Size of Lettering

Support:

01 Sign legibility is a direct function of letter size and spacing. Legibility distance has to be sufficient to give road users enough time to read and comprehend the sign. Under optimum conditions, a guide sign message can be read and understood in a brief glance. The legibility distance takes into account factors such as inattention, blocking of view by other vehicles, unfavorable weather, inferior eyesight, or other causes for delayed or slow reading. Where conditions permit, repetition of guide information on successive signs gives the road user more than one opportunity to obtain the information needed.

**Standard:**

02 **Design layouts for conventional road guide signs showing interline spacing, edge spacing, and other specification details shall be as shown in the "Standard Highway Signs" publication (see Section 1A.05) and in Caltrans' California Sign Specifications.**

03 **Except as otherwise provided in this Manual, the principal legend on post-mounted guide signs shall be in letters and numerals at least 6 inches in height for all upper-case letters, or a combination of 6 inches in height for upper-case letters and 4.5 inches in nominal loop height (see Section 2D.04) for lower-case letters. On low-volume roads with speeds of 25 mph or less, and on urban streets with speeds of 25 mph or less, the principal legend on post-mounted guide signs shall be in letters at least 4 inches in height for all upper-case letters, or a combination of 4 inches in height for upper-case letters and 3 inches in nominal loop height for lower-case letters.**

04 **Except as otherwise provided in this Manual, the principal legend on overhead guide signs shall be in letters and numerals at least 6 inches in height for all upper-case letters, or a combination of 6 inches in height for upper-case letters and 4.5 inches in nominal loop height (see Section 2D.04) for lower-case letters.**

*Guidance:*

05 *Lettering sizes should be consistent on any particular class of highway.*

06 *The minimum lettering and numeral sizes provided in this Manual (see Table 2D-2) should be exceeded where conditions indicate a need for greater legibility.*

## Section 2D.06 Amount of Legend

Support:

01 The longer the legend on a guide sign, the longer it will take road users to recognize and comprehend it, regardless of letter size.

*Guidance:*

02 *Except where otherwise provided in this Manual, guide signs should be limited to no more than three lines of destinations, which include place names, route numbers, street names, and cardinal directions. Where two or more signs are included in the same overhead display, the amount of legend should be further minimized. Where appropriate, a distance message or action information, such as an exit number, NEXT RIGHT, or directional arrows, should be provided on guide signs in addition to the destinations.*

## Section 2D.07 Abbreviations

Support:

01 The use of commonly recognized abbreviations for certain words can be useful in reducing the reading time and improve quicker comprehension of a sign message. Descriptors and directional or quadrant orientations for street names and destinations, such as Boulevard (Blvd), North (N), and Southwest (SW), are some examples of commonly recognized abbreviations. Examples of the use of some guide sign abbreviations are shown in Figure 2D-2.

**Standard:**

02 **The words NORTH, SOUTH, EAST, and WEST shall not be abbreviated when used to indicate cardinal directions of numbered or named highways on guide signs.**

*Guidance:*

03 *Abbreviations should be kept to a minimum; however, they are useful when complete destination messages produce excessively long signs. If used, abbreviations should be unmistakably recognized by road users (see Section 1D.08). Longer commonly used words that are not part of a proper name and are readily recognizable, such as street name descriptors (such as Street, Boulevard, or Avenue), should be abbreviated as provided in Table 2D-3 to expedite recognition of the sign legend by reducing the amount and complexity of the legend. Shorter street name descriptors,*

*such as those shown in Table 2D-4, should not be abbreviated.*

04 *Periods, apostrophes, question marks, ampersands, or other punctuation or characters that are not letters, numerals, or hyphens should not be used in abbreviations, unless necessary to avoid confusion.*

05 *The solidus is intended to be used for fractions only and should not be used to separate words on the same line of legend. Instead, a hyphen should be used for this purpose, such as "TRUCKS – BUSES."*

## Section 2D.08 Arrows

Support:

01 Arrows are used for lane assignment and to indicate the direction toward designated routes or destinations. Figure 2D-3 shows the various standard arrow designs that have been approved for use on guide signs. Detailed drawings are shown for these arrows in the "Standard Highway Signs" publication (see Section 1A.05).

**Standard:**

02 **Except for Overhead Arrow-per-Lane signs (see Section 2D.37), on overhead signs where it is desirable to indicate a lane to be followed, a down arrow shall be positioned over the approximate center of the lane and shall point vertically downward toward the approximate center of that lane. Down arrows shall be used only on overhead guide signs that restrict the use of specific lanes to traffic bound for the destination(s) and/or route(s) indicated by these arrows. Down arrows shall not be used unless an arrow can be located over and pointed to the approximate center of each lane that can be used to reach the destination displayed on the sign.**

03 **If down arrows are used, having more than one down arrow pointing to the same lane on a single overhead sign (or on multiple signs on the same overhead sign structure) shall not be permitted.**

04 **Where a roadway is leaving the through lanes, a directional arrow shall point upward at an angle that approximates the alignment of the exit roadway in the vicinity of the point of departure.**

05 **The Type E directional arrow for circular intersections shall not be used on any sign that is not associated with a circular intersection.**

*Guidance:*

06 *The Type A directional arrow should be used on guide signs on freeways, expressways, and conventional roads to indicate the direction to a specific destination or group of destinations, except as otherwise provided in this Section and in Section 2E.18.*

07 *When a directional arrow in a vertical, upward-pointing orientation is placed to the side of a group of destinations to indicate a through movement, the Type A directional arrow should be used. When a directional arrow in a vertical, upward-pointing orientation is placed to the side of a single destination or under a destination or group of destinations, the Type B directional arrow should be used.*

08 *The Type B directional arrow should be used on guide signs on conventional roads when placed at any angle to the side of a single destination or when placed in a horizontal orientation to the side of a group of destinations.*

09 *The Type C advance turn directional arrow should be used on conventional road guide signs placed in advance of an intersection where a turn must be made to reach a posted destination or group of destinations.*

10 *The Type D directional arrow should be used primarily for sign applications other than guide signs, except as provided in Paragraph 15 of this Section.*

11 *If the Type E directional arrow is used, the principles set forth in Sections 2D.26 through 2D.29 should be followed.*

Option:

12 The Type A-Extended directional arrow may be used on guide signs where additional emphasis regarding the direction is needed relative to the amount of legend on the sign.

13 The Type C directional arrow may be used to the side of the legend of an overhead guide sign to accentuate a sharp turn exit maneuver from a mainline roadway (see Section 2E.25 for additional information regarding Exit Direction signs for low advisory ramp speeds).

14 On conventional roads on the approach to an intersection where the Combination Lane- Use/Destination overhead guide sign (see Section 2D.38) is not used, the Type C advance turn directional arrow may be used beneath the legend of an overhead guide sign to indicate the fact that a turn must be made from a mandatory movement lane over which the sign is placed to reach the destination or destinations displayed on the sign.

15 The Type D directional arrow may be used on post-mounted guide signs on conventional roads with lower operating speeds if the height of the text on the sign is 8 inches or less. Type D arrows may be used on a Street Name (D3-1 only) sign displaying two street names to indicate the different direction of travel for each street.

16 The Type E directional arrow may be used on guide signs on approaches to circular intersections to represent the intended driver paths to destinations involving left-turn movements around the circulatory island.

17 The directional and down arrows shown in Figure 2D-3 may be used on signs other than guide signs for the purposes of providing directional guidance and lane assignment.

*Guidance:*

18 *Arrows used on guide signs to indicate the directions toward designated routes or destinations should be pointed at the appropriate angle to clearly convey the direction to be taken. A horizontally-oriented directional arrow design should be used at right-angle intersections.*

19 *On a post-mounted guide sign, a directional arrow for a straight-through movement should point upward. Except as provided in Section 2D.50, for a turn, the arrow on a guide sign should point horizontally or at an upward angle that approximates the sharpness of the turn.*

20 *At an exit, an arrow should be placed at the side of the sign that will reinforce the movement of exiting traffic. The directional arrow design should be used.*

**Standard:**

21 **If used, the Type C advance turn directional arrow shall display a right or left arrow, the shaft of which is bent at a 90-degree or oblique angle.**

Option:

22 Arrows may be placed below the principal sign legend or on the appropriate side of the legend that is consistent with the direction of the movement.

23 On a post-mounted sign at an exit where placement of the arrow to the side of the legend farthest from the roadway would create an unusually wide sign that limits the road user's view of the arrow, the directional arrow may be placed at the bottom portion of the sign, centered under the legend.

*Guidance:*

24 *The width across the arrowhead for the Types A, B, and C directional arrows should be between 1.5 and 1.75 times the height of the upper-case letters of the principal legend on the sign. The width across the arrowhead for the Type D directional arrow should be at least equal to the height of the upper-case letters of the principal legend on the sign. For down arrows used on overhead signs, the width across the arrowhead should be approximately 2 times the height of the upper-case letters of the principal legend on the sign.*

Support:

25 Section 2D.37 contains the provisions for arrows used in Overhead Arrow-per-Lane signs on approaches to conventional road intersections. Section 2D.41 contains the provisions for arrows used in Diagrammatic Advance guide signing on approaches to conventional road intersections other than circular intersections. Section 2D.39 contains the provisions for diagrammatic arrows used in Destination signs on the approaches to circular intersections (see Figure 2D-11).

25a Refer to FHWA's List of Known Errors for error in Paragraph 25 text. Refer to Section 1A.04 for more details.

26 The "Standard Highway Signs" publication (see Section 1A.05) contains design details and standardized sizes of the various arrows based on ranges of letter heights of principal legends.

# ROUTE SIGNS AND AUXILIARY PLAQUES

## Section 2D.09 Numbered Highway Systems

Support:

01 The purpose of numbering and signing highway systems is to identify routes and facilitate travel.

02 The Interstate and United States (U.S.) highway systems are numbered by the American Association of State Highway and Transportation Officials (AASHTO) upon recommendations of the State highway organizations because the respective States own these systems. State and county road systems are numbered by the appropriate authorities.

03 The basic policy for numbering the Interstate and U.S. highway systems is contained in the following Purpose and Policy statements published by AASHTO:

A. "Establishment and Development of United States Numbered Highways," and
B. "Establishment of a Marking System of the Routes Comprising the National System of Interstate and Defense Highways."

*Guidance:*

04 *The principles of these policies should be followed in establishing the highway systems described in Paragraph 3 of this Section and any other systems, with effective coordination between adjacent jurisdictions. Care should be taken to avoid the use of numbers or other designations that have been assigned to Interstate, U.S., or State routes in the same geographic area. Overlapping numbered routes should be kept to a minimum.*

**Standard:**

05 **Route systems shall be given preference in this order: Interstate, United States, State, and county. The preference shall be given by installing the highest-priority route number on the top or the left of the sign, except as provided in Paragraph 7 of this Section.**

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

**Standard:**

06 **Interstate route numbering shall be approved by the FHWA.**

Option:

07 The prioritization of route systems may be modified when a different prioritization would better accommodate the expectancy of the road user and provide more effective direction, such as for separate decision points for routes that are encountered in a particular order.

Support:

08 Section 2D.56 contains information regarding the signing of unnumbered highways to enhance route guidance and facilitate travel.

09 The California Legislature designates all State highway routes and assigns their route numbers. General route descriptions and numbers are outlined in Chapter 2, Article 3, of the SHC. These route numbers are used for all administrative purposes.

## Section 2D.10 Route Signs and Auxiliary Plaques

**Standard:**

01 **Except as provided in Paragraph 9 of Section 2D.29, all numbered highway routes shall be identified by route signs and auxiliary plaques.**

02 **The signs for each system of numbered highways, which are distinctive in shape and color, shall be used only on that system and the approaches thereto.**

Option:

03 Route signs and auxiliary plaques may be proportionally enlarged where greater conspicuity or legibility is needed.

Support:

04 Route signs are typically mounted in assemblies with auxiliary plaques.

05 Section 2D.57 contains information regarding the signing for National Scenic Byways.

06 Section 2D.58 contains information regarding the signing for State-designated scenic byways, historic trails, and auto tour routes.

## Section 2D.11 Design of Route Signs

**Standard:**

01 **The design of standard route signs shall conform to the designs provided in the "Standard Highway Signs" publication (see Section 1A.05). The design of other route signs shall be established by the authority having jurisdiction and shall be in general conformance with the designs provided in the "Standard Highway Signs" publication.**

02 **Interstate Route (M1-1 (Shield) and M1-1a (Marker)) signs (see Figure 2D-4) shall be used on all Interstate routes and in connection with Route Sign assemblies on intersecting highways.**

03 **Except as otherwise provided in this Manual, a 24 x 24-inch minimum sign size shall be used for Interstate route numbers with one or two digits, and a 30 x 24-inch minimum sign size shall be used for Interstate route numbers having three digits.**

Option:

04 When the Interstate Route sign is used in a route sign assembly (see Section 2D.29), the M1-1a (Marker) sign, containing the State name in white upper-case letters on a blue background as detailed in the "Standard Highway Signs" publication (see Section 1A.05), may be used in place of the M1-1 (Shield) sign.

**Standard:**

05 **Use of the M1-1a (Marker) sign shall be limited to route sign assemblies.**

06 **Off-Interstate Business Route (M1-2 and M1-3) signs (see Figure 2D-4) shall consist of a cutout shield displaying the number of the connecting Interstate route and the words BUSINESS and either LOOP (when the route rejoins the same Interstate route) or SPUR (when the route leaves the corresponding Interstate route and does not rejoin) in upper-case letters. The legend and border shall be white on a green background, and the shield shall be the same shape and dimensions as the Interstate Route sign. In no instance shall the word INTERSTATE appear on the Off-Interstate Business Route sign.**

Option:

07 The Off-Interstate Business Route sign may be used on a major highway that is not a part of the Interstate system, but one that serves the business area of a city from an interchange on the system.

**Standard:**

08 **U.S. Route signs (Marker) (see Figure 2D-4) shall consist of black numerals on a white shield surrounded by a rectangular black background without a border. This sign shall be used on all U.S. routes and in connection with Route Sign assemblies on intersecting highways.**

09 **A 24 x 24-inch minimum sign size shall be used for U.S. route numbers with one or two digits, and a 30 x 24-inch minimum sign size shall be used for U.S. route numbers having three digits.**

10 **State Route signs shall be designed by the individual State highway agencies.**

11 **The legend on State Route signs shall conform to the Standard Alphabets contained in the "Standard Highway Signs" publication (see Section 1A.05).**

~~*Guidance:*~~

12 ~~*State Route signs (see Figure 2D-4) should be rectangular and should be approximately the same size as the U.S. Route sign. State Route signs should also be similar to the U.S. Route sign by containing approximately the same size black numerals on a white area surrounded by a rectangular black background without a border, and should be devoid of complex graphics. The shape of the white area should be circular in the absence of any determination to the contrary by the individual State concerned.*~~

12a **The State Route (Marker) sign (G28-2(CA)) shall be used in accordance with the sizes provided in Table 2D-1(CA). The State Route (Shield) sign (G28-1(CA)) shall be used in accordance with the sizes provided in the Caltrans' California Sign Specifications.**

13 **Where U.S. ~~or State~~ Route signs are used as components of guide signs, only the distinctive shape of the shield itself and the route numerals within should be used. The rectangular background upon which the distinctive shape of the shield is mounted, such as the black area around the outside of the shields on the M1-4 and ~~standard M1-5 signs~~, ~~should~~ shall not be included on the guide sign. Where U.S. ~~or State~~ Route signs are used as components of other signs of non-contrasting background colors, the rectangular background ~~should~~ shall be used so that recognition of the distinctive shape of the shield can be maintained.**

~~**Standard:**~~

14 **If county road authorities elect to establish and identify a special system of important county roads, a**

**statewide policy for such signing shall be established that includes a uniform numbering system to uniquely identify each route. The County Route (M1-6) sign (see Figure 2D-4) shall consist of a pentagon shape with a yellow county name and route number and border on a blue background. County Route signs shall be a minimum size of 24 x 24 inches.**

15 **If a jurisdiction uses letters instead of numbers to identify routes, all references to numbered routes in this Chapter shall be interpreted to also include lettered routes.**

*Guidance:*

16 *If used with other route signs in common assemblies, the County Route sign should be of a size compatible with that of the other route signs.*

**Standard:**

17 **The design of the National Forest Route (M1-7) sign (see Figure 2D-4) shall be as detailed in the "Standard Highway Signs" publication (see Section 1A.05). Route signs for other park and forest roads shall be designed with an appropriate level of distinctiveness and adequate legibility, but in general compliance with the design principles for route signs and of a size compatible with other route signs used in common assemblies.**

Support:

18 The State Route (Shield) sign is used on the face of guide signs. The State Route (Marker) sign is used for stand-alone assembly installations.

19 For U.S. Route (Shield) sign and both the State Route (Shield and Marker) signs, refer to Figure 2D-4(CA).

20 Standard details for State Route shields and markers are provided in Caltrans' California Sign Specifications.

## Section 2D.12 Design of Route Sign Auxiliary Plaques

**Standard:**

01 **Route sign auxiliary plaques displaying word legends, except the Junction (M2-1P) auxiliary plaque, shall have a minimum standard size of 24 x 12 inches. The Junction auxiliary plaque and those auxiliary plaques displaying arrows shall have a minimum standard size of 21 x 15 inches. All route sign auxiliary plaques shall match the color combination of the route sign that they supplement.**

*Guidance:*

02 *The background, legend, and border of a route sign auxiliary plaque should have the same colors as those of the route sign with which the auxiliary plaque is mounted in a route sign assembly (see Section 2D.29). For a route sign design that uses multiple background colors, such as the Interstate Route sign, the background color of the corresponding auxiliary plaque should be that of the background area on which the route number is placed on the route sign.*

Option:

03 A route sign and any auxiliary plaques used with it may be combined on a single sign as a guide sign.

**Standard:**

04 **If a route sign and its auxiliary plaques are combined to form a single guide sign, the background color of the sign shall be green and the design shall comply with the basic principles for the design of guide signs. The auxiliary messages shall be white legends placed directly on the green background. Auxiliary plaques shall not be mounted directly to a guide sign or other type of sign.**

Support:

05 Chapter 2F contains information regarding auxiliary plaques for toll highways.

## Section 2D.13 Junction Auxiliary Plaque (M2-1P)

**Standard:**

01 **The Junction (M2-1P) auxiliary plaque (see Figure 2D-5) shall display the abbreviated legend JCT and shall be mounted at the top of an assembly (see Section 2D.30) directly above the route sign, the sign for an alternative route (see Section 2D.17) that is part of the route designation, or the Cardinal Direction auxiliary plaque where access is available only to one direction of the intersected route. The minimum size of the Junction auxiliary plaque shall be 21 x 15 inches for compatibility with auxiliary plaques displaying arrow symbols.**

## Section 2D.14 Combination Junction Sign (M2-2)

Option:

01 As an alternative to the standard Junction assembly where more than one route is to be intersected or joined, a rectangular guide sign may be used displaying the word JUNCTION above the route numbers.

**Standard:**

02 **The Combination Junction (M2-2) sign (see Figure 2D-5) shall have a green background with white border and lettering for the word JUNCTION.**

*Guidance:*

03 *The Combination Junction sign should comply with the specific provisions of Section 2D.11 regarding the incorporation of the route signs as components of guide signs.*

04 *Although the size of the Combination Junction sign will depend on the number of routes involved, the numerals should be large enough for clear legibility and should be of a size comparable with those in the individual route signs.*

## Section 2D.15 Cardinal Direction Auxiliary Plaques (M3-1P through M3-4P)

*Guidance:*

01 *Cardinal Direction auxiliary plaques (see Figure 2D-5) displaying the legend NORTH, EAST, SOUTH, or WEST should be used to indicate the general direction of the entire route.*

**Standard:**

02 **To improve the readability and recognition of the cardinal directions, the first letter of the cardinal direction words shall be ten percent larger, rounded up to the nearest whole number size.**

03 **If used, the Cardinal Direction auxiliary plaque shall be mounted directly above a route sign or, if used, an auxiliary plaque for an alternative route.**

Option:

04 Cardinal Direction auxiliary plaque may be placed either above or to the right of the Route shield when used on the face of a guide sign.

Support:

05 For application of Cardinal Direction auxiliary plaques in Freeway Entrance sign package, refer to Section 2D.50.

## Section 2D.16 Alternative Route Auxiliary Plaques (M4-1P through M4-4P)

Option:

01 Alternative Route auxiliary plaques (see Figure 2D-5) displaying legends such as ALTERNATE, BY- PASS, BUSINESS, or TRUCK, may be used to indicate an alternate route of the same number between two points on that route.

**Standard:**

02 **If used, the Alternative Route auxiliary plaques shall be mounted directly above a route sign.**

## Section 2D.17 ALTERNATE Auxiliary Plaques (M4-1P and M4-1aP)

Option:

01 The ALTERNATE (M4-1P) or the ALT (M4-1aP) auxiliary plaque (see Figure 2D-5) may be used to indicate an officially designated alternate routing of a numbered route between two points on that route.

**Standard:**

02 **If used, the ALTERNATE or ALT auxiliary plaque shall be mounted directly above a route sign.**

03 **The M4-1P series plaques shall not be used to sign an alternative routing that is not officially designated and incorporated into the numbered highway system, such as alternative routings for incident management or emergency detours.**

*Guidance:*

04 *The shorter (time or distance) or better-constructed route should retain the regular route number, and the longer or worse-constructed route should be designated as the alternate route.*

## Section 2D.18 BY-PASS Auxiliary Plaque (M4-2P)

Option:

01 The BY-PASS (M4-2P) auxiliary plaque (see Figure 2D-5) may be used to designate a route that branches from the

numbered route through a city, bypasses a part of the city or congested area, and rejoins the numbered route beyond the city.

**Standard:**

02 **If used, the BY-PASS auxiliary plaque shall be mounted directly above a route sign.**

## Section 2D.19 BUSINESS Auxiliary Plaque (M4-3P)

Option:

01 The BUSINESS (M4-3P) auxiliary plaque (see Figure 2D-5) may be used to designate an alternate route that branches from a numbered route, passes through the business portion of a city or unincorporated area, and rejoins the numbered route beyond that area.

**Standard:**

02 **If used, the BUSINESS auxiliary plaque shall be mounted directly above a route sign.**

Support:

03 Refer to Chapter 20 of Caltrans' Highway Design Manual for guidance on establishing business routes.

## Section 2D.20 TRUCK Auxiliary Plaque (M4-4P)

Option:

01 The TRUCK (M4-4P) auxiliary plaque (see Figure 2D-5) may be used to designate an alternate route that branches from a numbered route, when it is desirable to encourage or require commercial vehicles to use the alternate route.

**Standard:**

02 **If used, the TRUCK auxiliary plaque shall be mounted directly above a route sign.**

## Section 2D.21 TO Auxiliary Plaque (M4-5P)

Option:

01 The TO (M4-5P) auxiliary plaque (see Figure 2D-5) may be used to provide directional guidance to a particular road facility from other highways in the vicinity (see Section 2D.34).

**Standard:**

02 **If used, the TO auxiliary plaque shall be mounted directly above a route sign or an auxiliary plaque for an alternative route. If a Cardinal Direction auxiliary plaque is also included in the assembly, the TO auxiliary plaque shall be mounted directly above the Cardinal Direction auxiliary plaque.**

## Section 2D.22 END Auxiliary Plaque (M4-6P)

*Guidance:*

01 *The END (M4-6P) auxiliary plaque (see Figure 2D-5) should be used where the route being traveled ends, usually at a junction with another route.*

**Standard:**

02 **If used, the END auxiliary plaque shall be mounted either directly above a route sign or above a sign for an alternative route that is part of the designation of the route being terminated.**

## Section 2D.23 BEGIN Auxiliary Plaque (M4-14P)

Option:

01 The BEGIN (M4-14P) auxiliary plaque (see Figure 2D-5) may be used where a route begins, usually at a junction with another route.

**Standard:**

02 **If used, the BEGIN auxiliary plaque shall be mounted at the top of the first Confirming assembly (see Section 2D.33) for the route that is beginning.**

*Guidance:*

03 *If a BEGIN auxiliary plaque is included in the first Confirming assembly, a Cardinal Direction auxiliary plaque should also be included in the assembly.*

**Standard:**

04 **If a Cardinal Direction auxiliary plaque is also included in the assembly, the BEGIN auxiliary plaque shall be mounted directly above the Cardinal Direction auxiliary plaque.**

## Section 2D.24 TEMPORARY Auxiliary Plaques (M4-7P and M4-7aP)

Option:

01 The TEMPORARY (M4-7P) or the TEMP (M4-7aP) auxiliary plaque (see Figure 2D-5) may be used for an interim period to designate a section of highway that is not planned as a permanent part of a numbered route, but that connects completed portions of that route.

**Standard:**

02 **If used, the TEMPORARY or TEMP auxiliary plaque shall be mounted directly above the route sign, above a Cardinal Direction auxiliary plaque, or above an auxiliary plaque for an alternate route that is a part of the route designation.**

03 **TEMPORARY or TEMP auxiliary plaques shall be promptly removed when the temporary route is abandoned.**

## Section 2D.25 Temporary Detour Signs and Auxiliary Plaques

Support:

01 Chapter 6F contains information regarding Temporary Detour signs and auxiliary plaques.

02 Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

## Section 2D.26 Advance Turn Arrow Auxiliary Plaques (M5-1P, M5-2P, and M5-3P)

**Standard:**

01 **If used, the Advance Turn Arrow auxiliary plaque (see Figure 2D-6) shall be mounted directly below the route sign in Advance Route Turn assemblies, and shall display a right or left arrow, the shaft of which is bent at a 90-degree angle (M5-1P) or at an oblique angle (M5-2P).**

02 **If used, the Circular Intersection Advance Turn Arrow (M5-3P) auxiliary plaque (see Figure 2D-6) shall be used only on the approach to a circular intersection to depict a movement along the circulatory roadway around the central island and to the left, relative to the approach roadway and entry into the intersection.**

*Guidance:*

03 *If the M5-3P plaque is used, then this arrow type should also be used consistently on any regulatory lane-use signs (see Chapter 2B), Destination signs (see Section 2D.36), and pavement markings (see Part 3) for a particular destination or movement.*

Option:

04 The Advance Turn (G22(CA)) sign (refer to Figure 2D-6(CA)) may be used to provide advance notice of a turnoff on expressways and high-speed two-lane roads.

*Guidance:*

05 *The G22(CA) sign should not be used on freeways. The G22(CA) sign should be installed on the right side of the roadway approximately 0.25 to 0.5 miles in advance of the turnoff.*

Option:

06 A Route shield and a Cardinal Direction auxiliary plaque may be included on the G22(CA) sign in lieu of the destination.

## Section 2D.27 Lane Designation Auxiliary Plaques (M5-4P, M5-5P, and M5-6P)

Option:

01 A Lane Designation (M5-4P, M5-5P, or M5-6P) auxiliary plaque (see Figure 2D-6) may be mounted directly below the route sign in an Advance Route Turn assembly on multi-lane roadways to allow road users to move into the appropriate lane prior to reaching the intersection or interchange.

**Standard:**

02 **If used, the Lane Designation auxiliary plaques shall be used only where the designated lane is a mandatory movement lane and shall be located adjacent to the full-width portion of the mandatory movement lane. The Lane Designation auxiliary plaques shall not be installed adjacent to a through lane in advance of a lane that is being added or along the taper for a lane that is being added.**

## Section 2D.28 Directional Arrow Auxiliary Plaques (M6 Series)

**Standard:**

01 **If used, the Directional Arrow auxiliary plaque (see Figure 2D-6) shall be mounted below the route sign and any other auxiliary plaques in Directional assemblies (see Section 2D.32), and shall display a single-headed or double-headed arrow pointing in the general direction that the route follows.**

02 **A Directional Arrow auxiliary plaque that displays a double-headed arrow shall not be mounted in any Directional assembly in advance of or at a circular intersection.**

Option:

03 The diagonal downward-pointing arrow auxiliary (M6-2aP) plaque may be used in a Directional assembly at the far corner of an intersection to indicate the immediate entry point to a freeway or expressway entrance ramp (see Section 2D.50).

**Standard:**

04 **The M6-2aP plaque shall not be used on the approach to or on the near side of an intersection, such as to designate an approach lane.**

Option:

05 The Directional Arrow auxiliary (G33-1P(CA)) plaque (refer to Figure 2D-6(CA)) may be used in lieu of the Directional Arrow auxiliary (M6 Series) signs.

Support:

06 The G33-1P(CA) plaque is used to reduce the overall height of the sign assembly when combined with other signs, such as general service, recreational, or cultural interest signs, particularly when installations are adjacent to pedestrian facilities.

# SIGN ASSEMBLIES

## Section 2D.29 Route Sign Assemblies

**Standard:**

01 **A Route Sign assembly shall consist of a route sign and auxiliary plaques that further identify the route and indicate the direction. Except as provided in Paragraph 9 of this Section, Route Sign assemblies shall be installed on all approaches to numbered routes that intersect with other numbered routes.**

02 **Where two or more routes follow the same section of highway, the route signs for Interstate, U.S., State, and county routes shall be mounted in that order from the left in horizontal arrangements and from the top in vertical arrangements. Subject to this order of precedence, route signs for lower- numbered routes shall be placed at the left or top.**

03 **Within groups of assemblies, information for routes intersecting from the left shall be mounted at the left in horizontal arrangements and at the top or center of vertical arrangements. Similarly, information for routes intersecting from the right shall be at the right or bottom, and for straight- through routes at the center in horizontal arrangements or top in vertical arrangements.**

04 **Route Sign assemblies shall be mounted in accordance with the general specifications for signs (Chapter 2A), with the lowest sign in the assembly at the height prescribed for single signs.**

*Guidance:*

05 *Assemblies for two or more routes, or for different directions on the same route, should be mounted in groups on a common support.*

06 *Where more than four route signs would be needed in a single Advance Route Turn or Directional assembly, the route signs should instead be mounted in a guide sign to minimize the need for repetition of the same information on multiple Cardinal Direction and Directional Arrow auxiliary plaques (see Figure 2D-7).*

Option:

07 Route Sign assemblies may be installed on the approaches to numbered routes on unnumbered roads and streets that carry an appreciable amount of traffic destined for the numbered route.

08 If engineering judgment indicates that groups of assemblies that include overlapping routes or multiple turns might be confusing, route signs or auxiliary signs may be omitted or combined, provided that clear directions are given to road users.

09 Route Sign assemblies may be omitted for routes that are part of an agency's internal numbering system, such as for maintenance or other purposes, and are not publicly mapped or intended to be used for navigational purposes by the general public. Similarly, numbered routes that are not maintained during certain times of year, such as not being plowed during winter months, may be omitted from Route Sign assemblies.

Support:

10 Figure 2D-8 shows typical placements of route signs.

**Standard:**

11 **On freeways, Route Sign (Marker) shall be installed beyond the end of the acceleration lane at all entrances to freeway-to-freeway interchanges, and at intermediate locations spaced at intervals at 3 to 5 miles.**

*Guidance:*

12 *On conventional highways, Route Sign (Marker) should be installed at important urban and rural intersections, as well as at intermediate locations spaced at 3 to 5 mile intervals in rural areas.*

13 *The Off-Interstate Business Loop (M1-2) (Marker) should not be placed on the interstate route itself.*

## Section 2D.30 Junction Assembly

**Standard:**

01 **A Junction assembly shall consist of a Junction auxiliary plaque (see Section 2D.13) and a route sign. The route sign shall display the number of the intersected or joined route.**

02 **The Junction assembly shall be installed in advance of every intersection where a numbered route is intersected or joined by another numbered route.**

*Guidance:*

03 *In urban areas, the Junction assembly should be installed in the block preceding the intersection. In urban areas*

*where speeds are low, the Junction assembly should not be installed more than 300 feet in advance of the intersection.*

04 *In rural areas, the Junction assembly should be installed at least 400 feet in advance of the intersection. In rural areas, the minimum distance between a Junction assembly and either a Destination sign or an Advance Route Turn assembly should be 200 feet.*

05 *Where speeds are high, greater spacings should be used.*

Option:

06 Where two or more routes are to be indicated, a single Junction auxiliary plaque may be used for the assembly and all route signs grouped in a single mounting, or a Combination Junction (M2-2) sign (see Section 2D.14) may be used.

## Section 2D.31 Advance Route Turn Assembly

**Standard:**

01 **An Advance Route Turn assembly shall consist of a route sign, an Advance Turn Arrow or word message auxiliary plaque, and a Cardinal Direction auxiliary plaque, if needed. It shall be installed in advance of an intersection where a turn must be made to remain on the indicated route.**

Option:

02 The Advance Route Turn assembly may be used to supplement the required Junction assembly in advance of intersecting routes.

~~*Guidance:*~~

**Standard:**

03 **Where a multi-lane highway approaches an interchange or intersection with a numbered route, the Advance Route Turn assembly ~~should~~ shall be used to provide advance notice so that road users know the correct lane(s) from which to make their turn**.

Option:

04 Lane Designation auxiliary plaques (see Section 2D.27) may be used in Advance Route Turn Assemblies in place of the Advance Turn Arrow auxiliary plaques where engineering judgment indicates that specific lane information associated with each route is needed and overhead signing is impracticable and the designated lane is a mandatory movement lane. An assembly with the Lane Designation auxiliary plaques may supplement or substitute for an assembly with Advance Turn Arrow auxiliary plaques.

*Guidance:*

05 *In low-speed areas, the Advance Route Turn assembly should be installed not less than 200 feet in advance of the turn. In high-speed areas, the Advance Route Turn assembly should be installed not less than 300 feet in advance of the turn. In rural areas, the minimum distance between an Advance Route Turn assembly and either a Destination sign or a Junction assembly should be 200 feet.*

**Standard:**

06 **An assembly that includes an Advance Turn Arrow auxiliary plaque shall not be placed where there is an intersection between it and the designated turn.**

*Guidance:*

07 *Sufficient distance should be allowed between the assembly and any preceding intersection that could be mistaken for the indicated turn.*

**Standard:**

08 **The Advance Lane Assignment (G20(CA) Series or G21(CA) Series) or Interchange Guide (G77(CA) Series or G78(CA) Series) signs (refer to Figure 2D-6(CA)) shall be used on multilane cross streets approaching a freeway interchange to indicate the proper lane for the desired freeway entrance. The principal message shall be route and cardinal direction.**

*Guidance:*

09 *The names of major or control cities should be included in the G20(CA) and G21(CA) Series signs.*

10 *The Interchange Guide (G77(CA) Series) sign should be used on two-lane cross streets at interchange areas to direct motorists from the cross street to the freeway ramp entrances.*

Option:

11 The G77(CA) Series sign may also be used at an exit ramp split.

12 The Interchange Guide (G78(CA) Series) signs (refer to Figure 2D-6(CA)) may be used to direct motorists to a single cardinal direction or destination.

Support:

13 The G78(CA) Series signs are ordinarily used as a follow-up to the G77(CA) Series sign.

14 The FREEWAY with Arrow (G82(CA)) sign (refer to Figure 2D-6(CA)) may be used to direct motorists to a freeway from a business route or from a community served by a single freeway.

15 The G82(CA) sign is formatted with the word FREEWAY and with a vertical, diagonal, or horizontal arrow on either side of the message.

Option:

16 The G82(CA) sign may be placed at appropriate locations to guide traffic to the freeway.

## Section 2D.32 Directional Assembly

**Standard:**

01 **A Directional assembly shall consist of a Cardinal Direction auxiliary plaque, if needed; a route sign; and a Directional Arrow auxiliary plaque. The uses of Directional assemblies shall comply with the following:**

- **A. Turn movements (indicated in advance by an Advance Route Turn assembly) shall be marked by a Directional assembly with a route sign displaying the number of the turning route and a single-headed arrow pointing in the direction of the turn. The beginning of a route (indicated in advance by a Junction assembly) shall be marked by a Directional assembly with a route sign displaying the number of that route and a single-headed arrow pointing in the direction of the route.**
- **B. An intersected route (indicated in advance by a Junction assembly) on a crossroad where the route is designated on both legs shall be designated by:**
  1. **Two Directional assemblies, each with a route sign displaying the number of the intersected route, a Cardinal Direction auxiliary plaque, and a single-headed arrow pointing in the direction of movement on that route; or**
  2. **A Directional assembly with a route sign displaying the number of the intersected route and a double-headed arrow, pointing at appropriate angles to the left, right, or ahead.**
- **C. An intersected route (indicated in advance by a Junction assembly) on a side road or on a crossroad where the route is designated only on one of the legs shall be designated by a Directional assembly with a route sign displaying the number of the intersected route, a Cardinal Direction auxiliary plaque, and a single-headed arrow pointing in the direction of movement on that route.**

*Guidance:*

02 *Straight-through movements should be indicated by a Directional assembly with a route sign displaying the number of the continuing route and a vertical arrow. A Directional assembly should not be used for a straight-through movement in the absence of other assemblies indicating right or left turns, as the Confirming assembly sign beyond the intersection normally provides adequate guidance.*

03 *Directional assemblies should be located on the near right corner of the intersection. At major intersections and at Y or offset intersections, additional Directional assemblies should be installed on the far right or left corner to confirm the near-side assemblies. When the near-corner position is impractical for Directional assemblies, the far right corner should be the preferred alternative, with oversized signs, if necessary, for legibility. Where unusual conditions exist, the location of a Directional assembly should be determined by engineering judgment with the goal being to provide the best possible combination of view and safety.*

Support:

04 It is more important that guide signs be readable, and that the information and direction displayed thereon be readily understood, at the appropriate time and place than to be located with absolute uniformity.

05 Figure 2D-8 shows typical placements of Directional assemblies.

## Section 2D.33 Confirming or Reassurance Assemblies

**Standard:**

01 **If used, Confirming or Reassurance assemblies shall consist of a Cardinal Direction auxiliary plaque and a route sign. Where the Confirming or Reassurance assembly is for an alternative route, the appropriate auxiliary plaque for an alternative route (see Section 2D.16) shall also be included in the assembly.**

*Guidance:*

02 *A Confirming assembly should be installed just beyond intersections of numbered routes. It should be placed 25 to*

*200 feet beyond the far shoulder or curb line of the intersected highway.*

03 *If used, Reassurance assemblies should be installed between intersections in urban areas as needed, and beyond the built-up area of any incorporated city or town.*

04 *Route signs for either confirming or reassurance purposes should be spaced at such intervals as necessary to keep road users informed of their routes.*

## Section 2D.34 Trailblazer Assembly

Support:

01 Trailblazer assemblies provide directional guidance to a particular road facility from other highways in the vicinity. This guidance is accomplished by installing Trailblazer assemblies at strategic locations to indicate the direction to the nearest or most convenient point of access. The use of the word TO indicates that the road or street where the sign is posted is not a part of the indicated route, and that a road user is merely being directed progressively to the route.

**Standard:**

**02 A Trailblazer assembly shall consist of a TO auxiliary plaque (see Section 2D.21), a route sign for a numbered or named highway (see Section 2D.56) or an identification sign for a byway, historic trail, or auto tour route sign (see Sections 2D.57 and 2D.58), and a single-headed Directional Arrow auxiliary plaque pointing in the direction leading to the route. Where the Trailblazer assembly is for an alternative route, the appropriate auxiliary plaque for an alternative route (see Section 2D.16) shall also be included in the assembly.**

Option:

03 A Cardinal Direction auxiliary plaque (see Section 2D.15) may be used in a Trailblazer assembly where the direction leading to the route provides access only to one direction of travel for that route.

*Guidance:*

04 *The TO auxiliary plaque, Cardinal Direction auxiliary plaque, and Directional Arrow auxiliary plaque should be of the standard size provided for auxiliary plaques of their respective type. The route sign should be the size provided in Section 2D.11.*

Option:

05 Trailblazer assemblies may be installed with other Route Sign assemblies, or alone, in the immediate vicinity of the designated facilities.

06 CVC § 21350 authorizes the State, with the consent of the local authorities, to place and maintain appropriate signs along city streets and county roads to direct traffic to State highways.

*Guidance:*

07 *Cooperation with local authorities should be sought when placing Trailblazer assembly.*

**Standard:**

08 **Permission shall be obtained from the appropriate local agency for all signs placed outside the State right-of-way.**

Support:

09 For all signs placed outside of the State right-of-way, refer to Section 2A.101(CA).

Option:

10 In metropolitan areas, freeway name may be used only if they are well known, commonly used, and omitting them would cause confusion.

**Standard:**

11 **The Trailblazer format shall include the appropriate route shield.**

# DESTINATION AND DISTANCE SIGNS

## Section 2D.35 Destination and Distance Signs

Support:

01 In addition to guidance by route numbers, it is desirable to supply the road user information concerning the destinations that can be reached by way of numbered or unnumbered routes. This is done by means of Destination signs and Distance signs.

01a For California Destination and Distance Signs (G1(CA) Series, G8(CA) Series, and G86(CA) Series), refer to Figure 2D-9(CA).

Option:

02 Route shields and cardinal directions may be included on the Destination sign with the destinations and arrows.

*Guidance:*

03 *If Route shields and cardinal directions are included on a Destination sign, the height of the Route shields should be at least two times the height of the upper-case letters of the principal legend and not less than 18 inches, and the letter height of cardinal directions should be at least the minimum letter height specified for these signs.*

04 *If used, destination names on low-volume rural roads should be as specific and descriptive as possible. Destinations such as campgrounds, ranger stations, and recreational areas should be clearly indicated so that they are not interpreted to be communities or locations with road user services.*

## Section 2D.36 Destination Signs (D1 Series)

**Standard:**

01 **Except on approaches to interchanges (see Section 2D.49), the Destination (D1-1 through D1-3) signs (see Figure 2D-9), if used, shall be a horizontal rectangle displaying the name of a city, town, village, or other traffic generator, and a directional arrow.**

Option:

02 The distance (see Section 2D.43) to the place named may also be displayed on the Destination (D1-1a through D1-3a) signs (see Figure 2D-9). If several destinations are to be displayed at a single point, the several names may be placed on a single sign with an arrow (and the distance, if desired) for each name. If more than one destination lies in the same direction, a single arrow may be used for such a group of destinations.

*Guidance:*

03 *Adequate separation should be made between any destinations or group of destinations in one direction and those in other directions by suitable design of the arrow, spacing of lines of legend, heavy lines entirely across the sign, or separate signs.*

Support:

04 Separation of destinations by direction by the use of a horizontal separator line can enhance the readability of a Destination sign by relating an arrow and its corresponding destination(s) and by eliminating the need for multiple arrows that point in the same direction and excessive space between lines of legend.

**Standard:**

05 **Except as otherwise provided in this Manual, an arrow pointing to the right shall be at the extreme right of the sign, and an arrow pointing left or up shall be at the extreme left. The distance numerals, if used, shall be placed to the right of the destination names.**

Option:

06 An arrow pointing up may be placed at the extreme right of the sign when the sign is mounted to the left of the traffic to which it applies.

*Guidance:*

07 *Unless a sloping arrow will convey a clearer indication of the direction to be followed, the directional arrows should be horizontal or vertical.*

08 *If several individual name signs are assembled into a group, all signs in the assembly should be of the same horizontal width.*

09 *Destination signs should be used:*

*A. At the intersections of U.S. or State numbered routes with Interstate, U.S., or State numbered routes; and*

*B. At points where they serve to direct traffic from U.S. or State numbered routes to the business section of towns, or to other destinations reached by unnumbered routes.*

**Standard:**

10 **Where a total of three or fewer destinations are displayed on the Advance guide (see Section 2E.23) and Supplemental guide (see Section 2E.51) signs, no more than three destination names shall be displayed on a Destination sign. Where four destinations are displayed on the Advance guide and Supplemental guide signs, no more than four destination names shall be displayed on a Destination sign.**

*Guidance:*

11 *If space permits, four destinations should be displayed on two separate signs at two separate locations.*

Option:

12 Where space does not permit, or where all four destinations are in one direction, a single sign may be used. Where a single sign is used and all destinations are in the same direction, the arrow may be placed below the destinations for the purpose of enhancing the conspicuity of the arrow.

**Standard:**

13 **Where a single four-name sign assembly is used, a heavy line approximating the width of the sign border entirely across the sign or separate signs shall be used to separate destinations by direction.**

*Guidance:*

14 *The closest destination lying straight ahead should be at the top of the sign or assembly, and below it the closest destinations to the left and to the right, in that order. The destination displayed for each direction should ordinarily be the next county seat or the next principal city, rather than a more distant destination. In the case of overlapping routes, only one destination should be displayed in each direction for each route.*

**Standard:**

15 **If more than one destination is displayed in the same direction, the name of a nearer destination shall be displayed above the name of a destination that is farther away.**

Support:

16 Overhead destination guide signs are sometimes helpful on multi-lane conventional roadways with complex or unusual roadway alignments or geometrics at intersecting highways to provide positive direction to destinations and to assign lanes to be used for destinations.

Option:

17 Overhead Destination signs may be used to provide lane assignment and destination information for some or all of the lanes on the approach to a multi-lane intersection. Destination information may include cardinal directions, route numbers, street names, and/or place names.

18 Overhead signs using the Arrow-per-Lane sign design configuration (see Figure 2D-10) may be used to provide lane assignments for some or all lane destinations at the approach to a multi-lane intersection (see Section 2D.37).

Support:

19 Refer to Section 2E.07 for the Designation of Destinations and control cities.

**Standard:**

20 **If there are more eligible destinations at a given intersection than can be accommodated (under the limitations mentioned in this section), they shall compete for signs on the basis of traffic volumes to these destinations.**

*Guidance:*

21 *Destinations should be signed by the route requiring the least amount of time to travel from the nearest State highway.*

**Standard:**

22 **Criteria for supplemental destination signs shall be as shown in Table 2D-101(CA).**

23 **Signs shall not be provided for privately owned, profit-making enterprises regardless of their size.**

Option:

24 If unusual operational or safety issues are identified that could mitigated by signing to the private enterprise, signs on State highways may be used with the approval of the Caltrans' District Director.

**Standard:**

25 **Signs to shopping centers shall not be allowed.**

26 **When a street or facility name change is made on an existing sign on a State highway primarily for the benefit of the requestor, with no or only minor improvement of traffic flow, the costs of materials and labor for such change, plus the current overhead assessment rate as determined by the Accounting Service Center to cover administrative overhead, shall be paid by the requestor. Such changes shall require approval of the Caltrans' District Director.**

Option:

27 Street name changes on signs on State highways that are clearly in the best interest of the motorists and the State may also be approved by the Caltrans' District Director.

**Standard:**

28 **New signs, if warranted, shall be installed at State expense.**

Option:

29 Signs to a public or nonprofit facility may be installed and maintained on conventional State highways in a "city street" configuration, by local governmental bodies under an encroachment permit.

31 The Veterans National Cemetery (G86-14(CA)) or the Veterans Home of California (G86-16(CA)) signs may be placed, one in each direction of travel from and on the nearest State highway, based upon a request from the Federal Department of Veterans Affairs.

## Supplemental Signing for City Civic Center Areas

Option:

32 Signs to City Civic Center areas may be installed on State highways for incorporated cities.

**Standard:**

33 **The city shall be incorporated and contiguous with the State highway right-of-way.**

34 **The city shall adopt a resolution requesting installation of signs on specific State highways for the purpose of guiding motorists to the city's civic center area, otherwise commonly referred to as downtown, central business district, city center, or city hall. The resolution shall include the appropriate wording for the legend on the sign.**

35 **The route from State highways to City Hall shall not be more than 3 miles.**

Option:

36 When requested by resolution, signs may be placed on all State highways, which are within 3 miles of City Hall.

**Standard:**

37 **Only one sign shall be installed in each direction of travel for each State highway so requested. If any portion of the route from a State highway to the Civic Center area is under the jurisdiction of another city, both cities shall agree in writing that signs can be installed on the State highway.**

*Guidance:*

38 *Trailblazer assemblies should be in place on local streets and roads prior to installation of signs on State highways.*

Option:

39 The legend may be "(city name) Civic Center", "Downtown (city name)," "(city name) Central Business District," "(city name) City Center," "(city name) City Hall," or a very similar message.

**Standard:**

40 **Only one legend shall be selected and used on all corresponding State highways for a particular Civic Center area.**

*Guidance:*

41 *Signs should be roadside signs. Where possible, signs should be supplemental plaques mounted on existing roadside Supplemental Destination (G86(CA) Series) signs and NEXT X EXITS (E9) signs.*

Option:

42 When this is not reasonable, signs may be separate roadside signs.

43 Signs may be mounted overhead if there is no reasonable roadside alternative.

**Standard:**

44 **The city shall have the signs installed under an encroachment permit and shall pay all costs for fabrication and installation. Caltrans shall maintain these signs.**

45 **Signs shall comply with this Manual, as well as applicable Caltrans' policies, specifications, and standards.**

## Bypassed Communities

46 § 100.9 of the SHC provides that appropriate directional signs shall be installed directing motorists to bypassed cities and business districts. This law requires that all signs, except Route shields, be left in place on the old highway, regardless of its status as a business route.

*Guidance:*

47 *When relinquishing any bypassed highway, the city or county concerned should be advised regarding continued maintenance of*

*such signs by the local agencies.*

**Signing for Indian Reservations and Rancherias**

**Standard:**

48 **Indian Reservations and Rancherias shall be signed in a like manner as cities and unincorporated communities for supplemental destination and miscellaneous guide signs. Only the official name of the federally recognized Indian Tribe, Reservation, or Rancheria shall be used on signs. The signs shall be white with retroreflective legend and border on green retroreflective background.**

49 **The signs and sign messages shall conform to the requirements of the California Outdoor Advertising Act, which prohibits advertising displays within the right-of-way of any State highway.**

## Section 2D.37 Overhead Arrow-per-Lane Destination Guide Signs

Support:

01 Overhead Arrow-per-Lane destination guide signs are sometimes used on multi-lane conventional roadways to provide positive direction to destinations and to indicate lanes to be used for those destinations. These locations typically include complex or unusual roadway alignments or geometrics. Overhead Arrow- per-Lane signs on conventional roads do not always have arrows for every lane. Sheet 2 of Figure 2A-4 and Sheet 1 of Figure 2D-10 show examples of the use of an Overhead Arrow-per-Lane Guide sign on a conventional road. Unlike the Combined Lane-Use/Destination (D15-1) sign (see Section 2D.38), Overhead Arrow-per-Lane signs can be used to provide lane assignments where the designated lane is not a mandatory movement lane.

Option:

02 At complex intersection approaches involving multiple lanes and destinations, an Overhead Arrow- per-Lane destination guide sign may be used to provide destination information for some or all lanes.

Destination information may include cardinal direction, route numbers, street names, and/or place names.

**Standard:**

03 **Overhead Arrow-per-Lane signs for conventional roads shall only be used for multi-lane approaches to intersections that have an option lane.**

04 **Overhead Arrow-per-Lane guide signs used on conventional roads shall include as a minimum one arrow above each mandatory turn lane and a bifurcated arrow for the option lane from which both the through and turning movements are allowed.**

*Guidance:*

05 *Displaying an arrow over each through movement lane that does not allow turning should be considered for providing additional positive guidance.*

**Standard:**

06 **Overhead Arrow-per-Lane signs for conventional roads shall be designed in accordance with the following criteria:**

- **A. The shaft of each arrow shall be located over the approximate center of the lane to which it applies.**
- **B. Arrows for continuing through lanes shall be vertically upward-pointing (see Figure 2D-10).**
- **C. The arrow for a lane that must turn shall be curved in the direction of the turn and shall be accompanied by a black-on-yellow ONLY (E11-1b) sign panel (see Figure 2E-17) adjacent to the lower end of the arrow shaft.**
- **D. The arrow for an optional exit lane that also carries the through route shall have a single shaft that bifurcates into a vertically upward-pointing arrow and a curving arrow corresponding to the configuration of the through and turn lanes.**
- **E. A vertical white line shall be used to separate the route shields and destinations for the two diverging movements from each other.**
- **F. The number of lanes displayed on a sign shall correspond to the number of lanes being signed for at the location of that sign. An advance sign shall not depict lanes that are added downstream of a sign location.**

*Guidance:*

07 *Overhead Arrow-per-Lane guide signs used on conventional roads should be designed in accordance with the following additional criteria:*

- *A. No more than one destination should be displayed for each movement, and no more than three destinations*

*should be displayed per sign.*

*B. The arrowhead(s) for the diverging movement should be positioned lower on the sign than the arrowhead(s) for the movement that continues straight ahead.*

*C. Route shields, cardinal directions, and destinations should be positioned on the sign such that they are clearly related to the arrowhead(s) for the movement to which they apply.*

*D. The vertical white line that is used to separate the route shields and destinations for the two diverging movements from each other should not descend below the top of the arrowheads for the through lanes, and should be positioned approximately halfway between the diverging arrowheads for the optional movement lane.*

08 *Destination information should be kept to a minimum necessary to provide positive guidance without overloading the road user.*

**Standard:**

09 **The minimum height of arrows on an Overhead Arrow-per-Lane sign used on a conventional road shall be as shown in Table 2D-5.**

*Guidance:*

10 *When letter heights and other sign legend elements are enlarged there should be an corresponding increase in the arrow size used.*

Option:

11 Curved-stem arrows may be substituted on Overhead Arrow-per-Lane Signs on multi-lane approaches to a circular intersection with an option lane (see Section 2D.39).

## Section 2D.38 Combination Lane-Use/Destination Overhead Guide Sign (D15-1)

Option:

01 At intersection approaches involving multiple turn lanes and destinations, a Combination Lane- Use/Destination (D15-1) overhead guide sign (see Figure 2D-9) that combines a lane-use regulatory sign with destination information such as a cardinal direction, a route number, a street name, and/or a place name may be used.

Support:

02 At such locations, the combined information on the D15-1 signs can be even more effective than separate lane-use and guide signs for conveying to unfamiliar drivers which lane or lanes to use for a particular destination.

03 Figure 2D-9 shows an example of a D15-1 sign that combines lane-use and street name information and an example of a D15-1 sign that combines lane-use, cardinal direction, and route number information.

**Standard:**

04 **The Combination Lane-Use/Destination (D15-1) overhead guide sign shall be used only where the designated lane is a mandatory movement lane. The D15-1 sign shall not be used for lanes with optional movements.**

05 **The D15-1 sign shall have a green background with a white border. As shown in Figure 2D-9, the lane-use sign (see Chapter 2B) shall be placed near the bottom of the sign and the destination information shall be placed near the top of the sign. The D15-1 sign shall be located over the approximate center of the lane to which it applies.**

## Section 2D.39 Destination Signs at Circular Intersections

**Standard:**

01 **Destination signs that are used at circular intersections shall comply with the provisions of Section 2D.36, except as provided in this Section.**

Option:

02 Exit Destination (D1-1d and D1-1e) signs (see Figure 2D-11) with diagonal upward-pointing arrows or Directional assemblies (see Section 2D.32) may be used to designate a particular exit from a circular intersection.

03 Destination (D1-2d and D1-3d) signs (see Figure 2D-11) with curved-stem arrows may be used on approaches to circular intersections to represent the left-turn movements.

04 Curved-stem arrows on circular intersection destination signs may point in diagonal directions to depict the location of an exit relative to the approach roadway and entry into the intersection.

05 An Overhead Arrow-per-Lane Destination sign (see Section 2D.37) with curved-stem arrows may be used on multi-lane approaches to circular intersections that have an option lane.

06 A Destination (D1-5 or D1-5a) sign (see Figure 2D-11) with a diagram of the circular intersection may be used on

approaches to circular intersections.

*Guidance:*

07 *If curved-stem arrows are used on destination signs, then this arrow type should also be used consistently on any regulatory lane-use signs (see Chapter 2B), Directional assemblies (see Section 2D.32), and pavement markings (see Part 3) for a particular destination or movement.*

Support:

08 Figure 2D-12 shows examples of guide signing for circular intersections.

09 Circular Intersection Diagrammatic (D1-5 or D1-5a) signs might be preferable where space is available and where the geometry of the circular intersection is non-typical, such as where more than four legs are present or where the legs are not at approximately 90-degree angles to each other. In such cases, minimizing the amount of legend for each destination and designing the sign so that the arrows for each destination clearly align with the roadway geometry will aid road user understanding of the sign and navigation through the area.

**Standard:**

10 **If used, the Circular Intersection Diagrammatic signs shall not depict the number of lanes within the circulatory roadway of the intersection, or on its approaches or exits, through the use of lane lines, multiple arrow shafts for the same movement, or other methods.**

Support:

11 Chapter 2B contains information regarding regulatory signs at circular intersections, Chapter 2C contains information regarding warning signs at circular intersections, and Chapter 3D contains information regarding pavement markings at circular intersections.

## Section 2D.40 Destination Signs at Jughandles

**Standard:**

01 **Destination signs that are used at jughandles shall comply with the provisions of Section 2D.36.**

Support:

02 Section 2B.35 contains information regarding regulatory signs for jughandle turns. Figure 2B-9 shows examples of regulatory and destination guide signing for various types of jughandle turns.

## Section 2D.41 Destination Signs at Intersections with Indirect Turning Movements

*Guidance:*

01 *A system of guide signs along with associated lane markings should be used to direct traffic through intersections with indirect turning movements.*

Support:

02 Figure 2D-13 shows examples of destination guide signing for intersections with indirect turning movements.

## Section 2D.42 Location of Destination Signs

*Guidance:*

01 *When used in high-speed areas, Destination signs should be located 200 feet or more in advance of the intersection, and following any Junction or Advance Route Turn assemblies that might be required. In rural areas, the minimum distance between a Destination sign and either an Advance Route Turn assembly or a Junction assembly should be 200 feet.*

Option:

02 In urban areas, advance distances shorter than those specified in Paragraph 1 of this Section may be used.

03 Because the Destination sign is of lesser importance than the Junction, Advance Route Turn, or Directional assemblies, the Destination sign may be eliminated where the distance in which to provide adequate sign spacing is limited.

Support:

04 Figure 2D-8 shows typical placements of Destination signs.

## Section 2D.43 Distance Signs (D2 Series)

**Standard:**

01 **If used, the Distance (D2-1 through D2-3) signs (see Figure 2D-9) shall be a horizontal rectangle of a size**

**appropriate for the required legend, displaying the names of no more than three cities, towns, junctions, or other traffic generators, and the distance (to the nearest mile) to those places.**

02 **The distance numerals shall be placed to the right of the destination names as shown in Figure 2D-9.**

*Guidance:*

03 *The distance displayed should be selected on a case-by-case basis by the jurisdiction that owns the road or by statewide policy. A well-defined central area or central business district should be used where one exists. In other cases, the layout of the community should be considered in relation to the highway being signed and the decision based on where it appears that most drivers would feel that they are in the center of the community in question.*

04 *The top name on the Distance sign should be that of the next place on the route having a post office or a railroad station, a route number or name of an intersected highway, or any other significant geographical identity. The bottom name on the sign should be that of the next major destination or control city. If three destinations are displayed, the middle line should be used to indicate communities of general interest along the route or important route junctions.*

Option:

05 The choice of names for the middle line may be varied on successive Distance signs to give road users additional information concerning communities served by the route.

*Guidance:*

06 *The control city should remain the same on all successive Distance signs throughout the length of the route until that city is reached.*

Option:

07 If more than one distant point may properly be designated, such as where the route divides at some distance ahead to serve two destinations of similar importance, and if these two destinations cannot appear on the same sign, the two names may be alternated on successive signs.

*Guidance:*

08 *On a route continuing into another State, destinations in the adjacent State ~~may~~ should be displayed.*

Support:

09 Refer to Section 2E.07 for the Designation of Destinations and control cities.

## Section 2D.44 Location of Distance Signs

*Guidance:*

01 *If used, Distance signs should be installed on important routes leaving municipalities and just beyond intersections of numbered routes in rural areas. If used, they should be placed just outside the municipal limits or at the edge of the built-up area if it extends beyond the limits.*

02 *Where overlapping routes separate a short distance from the municipal limits, the Distance sign at the municipal limits should be omitted. The Distance sign should be installed approximately 300 feet beyond the separation of the two routes.*

03 *Where, just outside of an incorporated municipality, two routes are concurrent and continue concurrently to the next incorporated municipality, the top name on the Distance sign should be that of the place where the routes separate; the bottom name should be that of the city to which the greater part of the through traffic is destined.*

Support:

04 Figures 2D-7 and 2D-8 show typical placements of Distance signs.

*Guidance:*

05 *The Distance (G5(CA)) sign should be placed at approximately 10- mile intervals, unless the destinations have changed. Distances to the same destinations should not be displayed more frequently than every 5 miles.*

Option:

06 The Destination and Street Name with Arrow (G8(CA) Series) signs may be used in advance of intersections on conventional highways.

# STREET NAME AND PARKING SIGNS

## Section 2D.45 Street Name Signs (D3-1 and D3-1a)

Support:

01 Street Name signs at intersections and along roadways provide road users with important navigation information. Section 2H.10 contains information about signs used to identify the names of grade-separated streets, railways, bikeways, or other transportation facilities.

*Guidance:*

02 *Street Name (D3-1 or D3-1a) signs (see Figure 2D-14) should be installed in urban areas at all street intersections regardless of other route signs that might be present and should be installed in rural areas to identify important roads that are not otherwise signed.*

*Guidance:*

03 *To minimize wrong-way movements onto freeway or expressway exit ramps, Street Name signs should not be used at the intersection of a freeway or expressway exit ramp with the crossroad to display the name of the freeway or expressway to traffic on the crossroad.*

Option:

04 For streets that are part of a U.S., State, or county numbered route, a D3-1a Street Name sign (see Figure 2D-14) that incorporates a route shield may be used to assist road users who might not otherwise be able to associate the name of the street with the route number.

**Standard:**

05 **The lettering for names of streets and highways on Street Name signs shall be composed of a combination of lower-case letters with initial upper-case letters (see Section 2A.08).**

*Guidance:*

06 *The determination of letter heights to be used on Street Name signs should be based on, but not limited to, the following considerations:*

- *A. Use of Advance Street Name signs (see Section 2D.46);*
- *B. Number of lanes on the intersection approach;*
- *C. Length of turn lanes;*
- *D. Distance the Street Name sign is located across the intersection (if a sign is not provided on the near side of the intersection).*

07 *Letter heights on street name signs should be as shown in Table 2D-6.*

Option:

08 For two-lane local roadways with speed limits of 25 mph or less, the lettering on post-mounted Street Name signs may be composed of initial upper-case letters at least 4 inches in height and lower-case letters at least 3 inches in nominal loop height.

Support:

09 The recommended minimum letter heights for Street Name signs are summarized in Table 2D-6. The speed limits specified and the recommended minimum letter heights provided in this Section apply to the roadway that each Street Name sign faces rather than to the street that has its name displayed on the Street Name sign. The letter heights specified in Table 2D-6 are the initial upper-case letter of a mixed-case legend.

09a Refer to FHWA's List of Known Errors for error in Paragraph 9 text. Refer to Section 1A.04 for more details.

10 A minimum upper-case letter height of 12 inches with a lower-case nominal loop height of 9 inches is recommended for all overhead Street Name signs regardless of posted speed limit as Street Name signs generally require greater legibility distances for road users to properly react.

Option:

11 Each Street Name sign in a sign assembly may use different letter heights determined by the speed limit of the street that each sign faces.

12 The letter height of the street name descriptor (such as St, Ave, or Rd), the directional legend (such as NW), or any other supplemental legend (such as block or house numbers) on the D3-1 and D3-1a signs may be smaller than that of the street name itself.

*Guidance:*

13 *The letter height of the street name descriptor, the directional legend, or any other supplemental legend on the D3-1*

*and D3-1a signs should be at least two-thirds of the letter height of the street name itself, but not less than 3 inches for the initial upper-case letters and not less than 2.25 inches for the nominal loop height of the lower-case letters.*

14 *Conventional abbreviations (see Section 1D.08) should be used except for the street name itself. Acceptable abbreviations for street name descriptors such as "Ave" for Avenue and "Blvd" for Boulevard should be as provided in Table 2D-3 (see Section 2D.07). The street name descriptors that are provided in Table 2D-4 should not be abbreviated (see Section 2D.07).*

Option:

15 Block or house numbers may be displayed as a supplemental legend on a Street Name sign to aid emergency responders and road users in locating addresses.

*Guidance:*

16 *If block or house numbers are displayed on a Street Name sign where only a single Street Name sign is provided for the crossroad, the block or house numbers for the left and right blocks should be positioned at the left and right sides of the sign, respectively.*

17 *If block or house numbers are displayed on a Street Name sign where two Street Name signs are provided for the crossroad, such as on diagonally opposite corners of an intersection, each Street Name sign should display only the block or house numbers associated with that block of the crossroad.*

Option:

18 A pictograph (see definition in Section 1C.02) representing the municipality, in accordance with the provisions of Section 2A.04 may be used on a D3-1 sign. For street networks under the primary jurisdiction of another governmental-approved entity, such as within a college or university campus, within a military base, or within a transportation facility (such as an airport or port), a pictograph representing that entity, in accordance with the provisions of Section 2A.04, may be used on a D3-1 sign within the jurisdictional boundaries of that entity.

**Standard:**

19 **Pictographs shall not be displayed on D3-1a or Advance Street Name (D3-2) signs (see Section 2D.46).**

20 **If a pictograph is used on a D3-1 sign, the height and width of the pictograph shall not exceed the upper-case letter height of the principal legend of the sign.**

*Guidance:*

21 *The pictograph should be positioned to the left of the street name.*

22 *Pictographs should not be used on a D3-1 sign that contains directional arrows.*

**Standard:**

23 **The Street Name sign shall be retroreflective or illuminated in accordance with the provisions of Section 2A.21.**

Option:

24 The border may be omitted from a post-mounted Street Name sign.

*Guidance:*

25 *The decision to omit the border from a post-mounted Street Name sign should be based on such factors as the visual complexity of the environment and the degree of conspicuity needed to provide for adequate recognition of the sign by the road user.*

Option:

26 An alternative background color (see Paragraph 28 of this Section) other than the standard guide sign color of green may be used for Street Name (D3-1 or D3-1a) signs where the highway agency determines this is necessary to assist road users in determining jurisdictional authority for roads.

**Standard:**

27 **Alternative background colors shall not be used for Advance Street Name (D3-2) signs (see Section 2D.46).**

28 **The only acceptable alternative background colors for Street Name (D3-1 or D3-1a) signs shall be blue, brown, or white. Regardless of whether green, blue, or brown is used as the background color for Street Name (D3-1 or D3-1a) signs, the legend (and border, if used) shall be white. For Street Name signs that use a white background, the legend (and border, if used) shall be black.**

*Guidance:*

29 *An alternative background color for Street Name signs, if used, should be applied to the Street Name (D3-1 or D3-1a) signs on all roadways under the jurisdiction of a particular highway agency.*

30 *In business or commercial areas and on principal arterials, Street Name signs should be placed at least on*

*diagonally opposite corners. In residential areas, at least one Street Name sign should be mounted at each intersection. Signs naming both streets should be installed at each intersection.*

**Standard:**

30a **~~They~~ Street Name signs ~~should~~ shall be mounted with their faces parallel to the streets they name.**

*Guidance:*

31 *Where used, Street Name signs should display their legends on both the front and back sides of the sign to facilitate navigation for pedestrians.*

Option:

32 To optimize visibility, Street Name signs may be mounted overhead. Street Name signs may also be placed above a regulatory or STOP or YIELD sign with no required vertical separation.

*Guidance:*

33 *In urban or suburban areas, especially where Advance Street Name signs for signalized and other major intersections are not used, the use of overhead Street Name signs should be strongly considered.*

Option:

34 At intersection crossroads where the same road has two different street names for each direction of travel, both street names may be displayed on the same Street Name (D3-1) sign along with Type D directional arrows, except where one arrow would point in a direction opposing the flow of traffic on a one- way street or where a turn in the direction of the arrow is not allowed.

35 On lower-speed roadways, historic street name signs within locally identified historic districts that are consistent with the criteria contained in 36 CFR 60.4 for such structures and districts may remain in service without complying with the provisions of Paragraphs 3, 4, 6, 9, 12 through 14, and 18 through 20 of this Section.

Support:

35a Refer to FHWA's List of Known Errors for error in Paragraph 35 text. Refer to Section 1A.04 for more details.

*Guidance:*

36 *Streets or segments of a street that have been memorialized or dedicated should not use a second Street Name sign to display the memorial or dedication name (see Section 2D.56). When signed, the Memorial or Dedication sign should be located to minimize its conspicuity to and potential for confusion.*

Support:

37 Information regarding the use of street names on supplemental plaques for use with intersection- related warning signs is contained in Section 2C.65.

38 Information regarding the identification of overcrossing and undercrossing roadways at grade separations is contained in Section 2H.10.

**Standard:**

39 **Street Name signs shall be placed where clearly visible to traffic approaching from all directions at all signalized intersections. Refer to CVC § 21366.**

Option:

40 Where structurally adequate luminaire poles are available, the street name signs may be mounted on these poles at a height of approximately 15 feet. Refer to Caltrans' Standard Plans.

## Section 2D.46 Advance Street Name Signs (D3-2 Series)

Support:

01 Advance Street Name (D3-2) signs (see Figure 2D-14) identify a downstream intersection. Although this is often the next intersection, it could also be several intersections away in cases where the next signalized intersection is referenced.

**Standard:**

02 **Advance Street Name (D3-2) signs, if used, shall supplement rather than be used instead of the Street Name (D3-1 or D3-1a) signs at the intersection.**

Option:

03 Advance Street Name (D3-2) signs may be installed in advance of signalized or unsignalized intersections to provide road users with advance information to identify the name(s) of the next intersecting street to prepare for crossing traffic and to facilitate timely deceleration and/or lane changing in preparation for a turn.

~~*Guidance:*~~

**Standard:**

04 **On arterial highways in rural areas, Advance Street Name signs ~~should~~ shall be used in advance of all signalized intersections and in advance of all intersections with mandatory turn lanes.**

*Guidance:*

05 *In urban areas, Advance Street Name signs should be used in advance of all signalized intersections on major arterial streets, except where signalized intersections are so closely spaced that advance placement of the signs is impracticable.*

06 *The heights of the letters on Advance Street Name signs should comply with the provisions of Section 2D.05.*

**Standard:**

07 **If used, Advance Street Name signs shall have a white legend and border on a green background. Alternative background colors shall not be used on Advance Street Name signs.**

08 **If used, Advance Street Name signs shall provide the name(s) of the intersecting street(s) on the top line(s) of the legend and the distance to the intersecting streets or messages such as NEXT SIGNAL, NEXT INTERSECTION, NEXT CIRCLE, or directional arrow(s) on the bottom line of the legend.**

09 **Pictographs shall not be displayed on Advance Street Name signs.**

Option:

10 Directional arrow(s) may be placed to the right or left of the street name or message such as NEXT SIGNAL, as appropriate, rather than on the bottom line of the legend. Curved-stem arrows may be used on Advance Street Name signs on approaches to circular intersections.

11 For intersecting crossroads where the same road has a different street name for each direction of travel, the different street names may be displayed on the same Advance Street Name sign along with directional arrows.

12 In advance of two closely-spaced intersections where it is impracticable to install separate Advance Street Name signs, the Advance Street Name sign may include the street names for both intersections along with appropriate supplemental legends for both street names, such as NEXT INTERSECTION, 2ND INTERSECTION, or NEXT LEFT and NEXT RIGHT, or directional arrows.

*Guidance:*

13 *If two street names are used on the Advance Street Name sign, the street names should be displayed in the following order:*

A. *For a single intersection where the same road has a different street name for each direction of travel, the name of the street to the left should be displayed above the name of the street to the right; or*
B. *For two closely-spaced intersections, the name of the first street encountered should be displayed above the name of the second street encountered, and the arrow associated with the second street encountered should be an advance arrow, such as the arrow shown on the W16-6P arrow plaque (see Figure 2C-16).*

Option:

14 An Advance Street Name (W16-8P or W16-8aP) plaque (see Section 2C.65) with black legend on a yellow background, installed to supplement an Intersection (W2 series) or Advance Traffic Control (W3 series) warning sign may be used instead of an Advance Street Name guide sign.

15 The Destination and Street Name with Arrow (G8(CA) Series) signs may be used in advance of intersections on conventional highways.

## Section 2D.47 Parking Area Guide Sign (D4-1)

Option:

01 The Parking Area (D4-1) guide sign (see Figure 2D-14) may be used to show the direction to a nearby public parking area or parking facility.

**Standard:**

02 **The smaller size of 18 x 15 inches for the Parking Area guide sign shall be limited to minor, low- speed streets.**

*Guidance:*

03 *If used, the Parking Area guide sign should be installed on major thoroughfares at the nearest point of access to the parking facility and where it can advise drivers of a place to park. The sign should not be used more than four blocks from the parking area.*

## Section 2D.48 PARK - RIDE Sign (D4-2)

Option:

01 A PARK - RIDE (D4-2) sign (see Figure 2D-14) may be used to direct road users to park-and-ride facilities.

**Standard:**

02 **The signs shall display the word message PARK - RIDE and direction information (arrow or word message).**

Option:

03 PARK - RIDE signs may display the local transit pictograph and/or carpool symbol.

**Standard:**

04 **If used, the local transit pictograph and/or carpool symbol shall be located in the top part of the sign above the message PARK - RIDE. In no case shall the vertical dimension of the local transit pictograph and/or carpool symbol exceed 18 inches.**

*Guidance:*

05 *If the function of the parking facility is to provide parking for persons using public transportation, the local transit pictograph should be used on the guide sign. If the function of the parking facility is to serve carpool riders, the carpool symbol should be used on the guide sign. If the parking facility serves both functions, both the pictograph and carpool symbol should be used.*

**Standard:**

06 **These signs shall have a white legend and border on a rectangular green background. The carpool symbol shall be as shown for the D4-2 sign. The color of the local transit pictograph shall be selected by the local transit authority.**

Option:

07 To increase the target value and contrast of the local transit pictograph, and to allow the local transit pictograph to retain its distinctive color and shape, the pictograph may be included within a white border or placed on a white background.

# FREEWAY INTERCHANGE APPROACH SIGNS

## Section 2D.49 Signing on Conventional Roads on Approaches to Interchanges

Support:

01 Because there are a number of different ramp configurations that are commonly used at interchanges with conventional roads, drivers on the conventional road cannot reliably predict whether they will be required to turn left or right in order to enter the correct ramp to access the freeway or expressway in the desired direction of travel. Consistently applied signing for conventional road approaches to freeway or expressway interchanges is highly desirable.

**Standard:**

02 **On multi-lane conventional roads approaching an interchange, guide signs shall be provided to identify which direction of turn is to be made and/or which specific lane to use for ramp access to each direction of the freeway or expressway.**

*Guidance:*

03 *The signing of conventional roads with one lane of traffic approaching an interchange should consist of a sequence containing the following signs (see Figure 2D-15):*

A. *Junction Assembly*
B. *Destination sign*
C. *Directional Assembly or Entrance Direction sign for the first ramp*
D. *Advance Route Turn Assembly or Advance Entrance Direction sign with an advance turn arrow*
E. *Directional Assembly or Entrance Direction sign for the second ramp*

**Standard:**

04 **If used, the Entrance Direction sign shall consist of a white legend and border on a green background. It shall contain the freeway or expressway route shield(s), cardinal direction, and directional arrow(s).**

Option:

05 The Entrance Direction sign may contain a destination(s) and/or an action message such as NEXT RIGHT.

06 At minor interchanges (see Section 2E.30), the following sequence of signs may be used (see Figure ~~2D-16~~ 2D-15):

A. Junction Assembly
B. Directional Assembly for the first ramp
C. Directional Assembly for the second ramp

*Guidance:*

07 *On multi-lane conventional roads approaching an interchange, the sign sequence should contain the following signs (see Figures 2D-17 through 2D-19):*

*A. Junction Assembly*
*B. Advance Entrance Direction sign(s) for both directions (if applicable) of travel on the freeway or expressway*
*C. Entrance Direction sign for first ramp*
*D. Advance Turn Assembly*
*E. Entrance Direction sign for the second ramp*

Support:

08 Advance Entrance Direction signs are used to direct road users to the appropriate lane(s).

**Standard:**

09 **The Advance Entrance Direction sign shall consist of a white legend and border on a green background. It shall contain the freeway or expressway route shield(s) and cardinal direction(s).**

Option:

10 The Advance Entrance Direction sign may have destinations, directional arrows, and/or an action message such as KEEP LEFT, NEXT LEFT, or SECOND RIGHT. Signs in this sequence may be mounted overhead to improve visibility as shown in Figures 2D-17 through 2D-19.

Support:

11 A post-mounted Advance Entrance Direction diagrammatic sign (see Figure 2D-20), within the sequence of approach guide signing described in Paragraphs 3, 6, and 7 of this Section, might be helpful in depicting the location of a freeway or expressway entrance ramp that is in close proximity to an intervening intersection on the same side of the approach roadway and where signing for only the ramp might cause confusion to road users.

**Standard:**

12 **If used, the post-mounted Advance Entrance Direction diagrammatic sign shall display only the two successive turns from the same side of the roadway, one of which shall be the entrance ramp. The post-mounted Advance Entrance Direction sign shall depict only the successive turns and shall not depict lane use with lane lines, multiple arrow shafts for the approach roadway, action messages, or other representations.**

Support:

13 Example guide signing for a transposed-alignment crossroad at a diamond interchange is shown in Figure 2D-21. Example guide signing for a single-point urban intersection at a diamond interchange is shown in Figure 2D-22.

14 Section 2D.50 contains information regarding the use of a Directional assembly or a FREEWAY ENTRANCE sign to mark the entrance to a freeway or expressway at the far corner of an intersection.

## Section 2D.50 Freeway Entrance Signs (D13-3 and D13-3a)

Option:

01 FREEWAY ENTRANCE (D13-3) signs or FREEWAY ENTRANCE with diagonal downward- pointing arrow (D13-3a) signs (~~see Figure 2D-18~~) may be used on entrance ramps near the crossroad to inform road users of the freeway or expressway entrance, as appropriate.

02 The D13-3 and D13-3a signs may display an alternate legend in place of FREEWAY, such as EXPRESSWAY or PARKWAY, as appropriate, or may display the name of an unnumbered highway.

03 A Directional assembly (see Section 2D.32) with a diagonal downward-pointing arrow (M6-2aP) auxiliary plaque (see Section 2D.28) may be used at the far left-hand corner of an intersection with a freeway or expressway entrance ramp as an alternative to the D13-3a sign, facing left-turning traffic on the conventional road approach to indicate the immediate point of entry to the freeway or expressway and distinguish the entrance ramp from an adjoining exit ramp terminal at the same intersection with the conventional road (~~see Figure 2D-18~~). A similar Directional assembly may be used at the far right-hand corner of an intersection with a freeway or expressway entrance ramp where the entrance ramp and a crossroad or side road follow one another in close succession on the conventional road approach and the point of entry to the freeway or expressway might be difficult for the road user to distinguish from the crossroad or side road on the conventional road approach (~~see Figure 2D-20~~).

Support:

03a A Freeway Entrance Package consists of a vertically arranged set of signs mounted on a single post. From top to bottom, it includes the FREEWAY ENTRANCE (D13-3) sign, a Cardinal Direction auxiliary plaque, a Route shield, and a Directional Arrow auxiliary plaque at the bottom.

03b Refer to Figure 2B-15(CA) for typical layouts and placement guidance for the Freeway Entrance Package.

04 Section 2B.48 contains information regarding the use of regulatory signs to deter wrong-way movements at intersections of freeway or expressway ramps with conventional roads, and in the area where entrance ramps intersect with the mainline lanes.

# WEIGH STATION, CROSSOVER, TRUCK AND PASSING LANE, AND EMERGENCY AND SLOW VEHICLE TURN-OUT SIGNS

## Section 2D.51 WEIGH STATION Signing (D8 Series)

Support:

01 Independent facilities or areas have been added along many highways where certain commercial vehicles are directed to stop to be weighed and/or inspected. These areas are sometimes permanent, such as in a roadside area, or temporary mobile facilities deployed along the roadway.

02 The general concept for signing permanent Weigh Stations is similar to signing Rest Areas (see Section 2I.05) because in both cases traffic using either area remains within the right-of-way.

**Standard:**

03 **The standard sequence of signs for a Weigh Station on a conventional highway shall include three basic signs (see Figure 2D-23):**

- **A. Weigh Station Advance (D8-1) sign,**
- **B. Weigh Station Advance Direction (D8-2) sign, and**
- **C. Weigh Station Entrance Direction (D8-3) sign.**

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3, Item A text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *A Gore sign with the same basic legend as the Weigh Station Entrance Direction (D8-3) sign should also be used to emphasize the entrance to the weigh station.*

Option:

05 ~~Where State law requires trucks of a certain weight to enter the Weigh Station, a Weigh Station (R13- 1) regulatory sign (see Section 2B.65) may be located following the Advance Weigh Station Ahead sign (see Figure 2D-23).~~

06 ~~Where only commercial vehicle inspections are conducted in the inspection area, the WEIGH STATION legend of the D8 series signs may be replaced with the alternate legend, COMMERCIAL VEHICLE INSPECTION.~~

*Guidance:*

07 *The Weigh Station Advance Direction (D8-2) Sign or the Weigh Station Advance (D8-1) sign should display, either on the sign or on a supplemental plaque or sign panel, the changeable legend OPEN or CLOSED.*

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 7 text. Refer to Section 1A.04 for more details.

**Standard:**

08 ~~**When the WEIGH STATION legend of the D8 series signs is replaced with the COMMERCIAL VEHICLE INSPECTION legend, as provided in Paragraph 6 of this Section, the WEIGH STATION legend of the R13-1 sign shall likewise be replaced with the alternate legend.**~~

Option:

09 The ALL TRUCKS – STOP AT SCALE (SR57-1(CA)) sign may be installed below the Weigh Station Advance Direction (D8-2) sign to inform drivers that all trucks are required to stop at the weigh station.

10 The NO PICKUPS (SR57-1P(CA)) plaque may be mounted below SR57-1(CA) sign at identified problem locations to advise motorists that pickup trucks are prohibited from entering weigh stations.

11 On State highways, an extinguishable message sign may be used in lieu of the OPEN/CLOSED supplemental plaque.

12 The VEHICLE INSPECTION ONLY NO LOITERING OR CAMPING (S22-1(CA)) sign may be installed at problem locations within areas designated for brake checks or safety inspections at weigh stations.

## Section 2D.52 Crossover Signs (D13-1 and D13-2)

Option:

01 Crossover signs may be installed on divided highways to identify median openings not otherwise identified by warning or other guide signs.

**Standard:**

02 **A Crossover (D13-1) sign (see Figure 2D-24) shall not be used to identify a median opening that is permitted to be used only by official or authorized vehicles.**

*Guidance:*

03 *If used, the Crossover sign should be installed immediately beyond the median opening, either on the right-hand side of the roadway or in the median.*

Option:

04 The Advance Crossover (D13-2) sign (see Figure 2D-24) may be installed in advance of the Crossover sign to provide advance notice of the crossover.

*Guidance:*

05 *The distance displayed on the Advance Crossover sign should be 1 MILE, ½ MILE, or ¼ MILE, unless unusual conditions require some other distance. If used, the sign should be installed either on the right- hand side of the roadway or in the median at approximately the distance displayed on the sign.*

## Section 2D.53 Truck and Passing Lane Signs (D17-1 through D17-4)

*Guidance:*

01 *If an extra lane has been provided to the right-hand side of the travel lane for use by trucks and other slow-moving traffic, an Advance Truck Lane (D17-2) sign (see Figure 2D-25) should be installed in advance of the lane.*

02 *If a series of truck lanes is provided along a highway, a Next Truck Lane (D17-1) sign (see Figure 2D-25) should be installed after each truck lane segment.*

03 *If an extra lane has been provided to the left-hand side of the travel lane for passing slower moving vehicles in the travel lane, an Advance Passing Lane Advance (D17-4) sign (see Figure 2D-25) should be installed in advance of the lane.*

04 *If a series of passing lanes are provided along a highway, a Next Passing Lane (D17-3) sign (see Figure 2D-25) should be installed after each passing lane segment.*

Support:

05 An example of signing for a truck lane is shown in Figure 2D-26. An example of signing for an intermittent passing lane is shown in Figure 2D-27.

06 Section 2B.38 contains information regarding regulatory signs for these types of lanes.

Option:

07 The DIVIDED ROAD (X MILES) AHEAD (G68(CA)) sign (refer to Figure 2D-101(CA)) may be used to indicate the distance to the next section of divided highway.

*Guidance:*

08 *The mileage shown should be rounded to the nearest one-fourth mile for distances up to one mile, and to the nearest whole mile for distances over one mile.*

Support:

09 The G68(CA) sign is used on a two-lane highway in advance of a divided section to encourage passing within the upcoming divided segment.

## Section 2D.54 Emergency and Slow Vehicle Turn-Out Signs (D17-5 through D17-7)

*Guidance:*

01 *If an emergency turn-out area has been provided where a shoulder is not available for emergency stopping or where there is part-time shoulder use by traffic (see Section 2G.23), Emergency Turn-Out signs should be installed. The Advance Emergency Turn-Out Advance (D17-5) sign (see Figure 2D-28) should be installed between ¼ mile and 500 feet in advance of the turn-out area. The Emergency Turn-Out Directional (D17-6) sign (see Figure 2D-28) should be installed near the beginning of the turn-out area.*

Support:

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

*Guidance:*

02 *If a slow vehicle turn-out area has been provided for slow-moving traffic, an Advance Slow Vehicle Turn-Out (D17-7) sign (see Figure 2D-28) should be installed in advance of the turn-out area.*

Support:

03 An example of signing for an emergency turn-out is shown in Figure 2D-29.

04 Section 2B.42 contains information regarding regulatory signs for slow vehicle turn-out areas.

# OTHER GUIDE SIGNS

## Section 2D.55 Community Wayfinding Signs

Support:

01 Community wayfinding guide signs are part of a coordinated and continuous system of signs that direct tourists and other road users to key civic, cultural, visitor, and recreational attractions and other similar secondary destinations within a city or a local urbanized or downtown area.

02 Community wayfinding guide signs are a type of destination guide sign for conventional roads with a common color and/or identification marker for destinations within an overall wayfinding guide sign plan for an area.

03 Figures 2D-30 through 2D-32 illustrate various examples of the design and application of community wayfinding guide signs.

**Standard:**

04 **The use of community wayfinding guide signs shall be limited to conventional roads. Community wayfinding guide signs shall not be installed on freeway or expressway mainlines or ramps. Direction to community wayfinding destinations from a freeway or expressway shall be limited to the use of a Supplemental guide sign (see Section 2E.51) on the mainline and a Destination sign (see Section 2D.36) on the ramp to direct road users to the area or areas within which community wayfinding guide signs are used. The individual wayfinding destinations shall not be displayed on the Supplemental guide and Destination signs except where the destinations are in accordance with the State or agency policy on Supplemental guide signs.**

05 **Community wayfinding guide signs shall not be used to provide direction to primary destinations or highway routes or streets. Destination or other guide signs shall be used for this purpose as described elsewhere in this Chapter and shall have priority over any community wayfinding sign in placement, prominence, and conspicuity.**

06 **Because regulatory, warning, and other guide signs have a higher priority, community wayfinding guide signs shall not be installed where adequate spacing cannot be provided between the community wayfinding guide sign and other higher-priority signs. Community wayfinding guide signs shall not be installed in a position where they would obscure the road users' view of other traffic control devices.**

07 **Community wayfinding guide signs shall not be mounted overhead.**

*Guidance:*

08 *If used, a community wayfinding guide sign system should be established on a local municipal or equivalent jurisdictional level or for an urbanized area of adjoining municipalities or equivalent that form an identifiable geographic entity that is conducive to a cohesive and continuous system of signs. Community wayfinding guide signs should not be used on a regional or statewide basis where infrequent or sparse placement does not contribute to a continuous or coordinated system of signing that is readily identifiable as such to the road user. In such cases, Destination or other guide signs detailed in this Chapter should be used to direct road users to an identifiable area in which the type of eligible destination described in Paragraph 1 of this Section is located.*

08a *On State highways, community wayfinding guide signs should be installed under an encroachment permit issued by Caltrans.*

**Standard:**

08b **Placement of community wayfinding guide signs shall be performed by the jurisdiction or agency making the request through the normal permit process, as a fee-exempt permit.**

08c **These signs shall be installed in accordance with this Manual and the Caltrans' Standard Plans.**

*Guidance:*

08d *Community wayfinding sign panels should be clearly marked to indicate ownership.*

09 *When a system of community wayfinding guide signs is being considered, the system of existing guide signs should be evaluated for applicability and general compliance with the provisions of this Manual to ensure road user directional guidance is adequately being addressed.*

Support:

10 The specific provisions of this Section regarding the design of community wayfinding sign legends apply to vehicular community wayfinding signs and do not apply to those signs that are intended only to provide information or direction to pedestrians or other users of a sidewalk or roadside area.

*Guidance:*

11 *Because pedestrian wayfinding signs typically use smaller legends that are inadequately sized for viewing by vehicular traffic and because they can provide direction to pedestrians that might conflict with that appropriate for vehicular traffic, wayfinding signs designed for and intended to provide direction to pedestrians or other users of a sidewalk or other roadside area should be located to minimize their conspicuity to vehicular traffic. Such signs should be located as far as practicable from the street, such as at the far edge of the sidewalk. Where locating such signs farther from the roadway is impracticable, the pedestrian wayfinding signs should have their conspicuity to vehicular traffic minimized by employing one or a combination of the following methods:*

*A. Locating signs away from intersections where high-priority traffic control devices are present.*
*B. Facing the pedestrian message toward the sidewalk and away from the street.*
*C. Cantilevering the sign over the sidewalk if the pedestrian wayfinding sign is mounted at a height consistent with vehicular traffic signs, removing the pedestrian wayfinding signs from the line of sight in a sequence of vehicular signs.*

12 *To further minimize their conspicuity to vehicular traffic during nighttime conditions, pedestrian wayfinding signs should not be retroreflective.*

Support:

13 Color coding is sometimes used on community wayfinding guide signs to help road users distinguish between multiple potentially confusing traffic generator destinations located in different neighborhoods or subareas within a community or area.

Option:

14 At the boundaries of the geographical area within which community wayfinding guide signing is used, an informational guide sign may be posted to inform road users about the presence of wayfinding signing and to identify the meanings of the various color codes or pictographs that are being used.

**Standard:**

15 **These informational guide signs shall have a white legend and border on a green background and shall have a design similar to that illustrated in Figure 2D-1 and shall be consistent with the basic design principles for guide signs. These informational guide signs shall not be installed on freeway or expressway mainlines or ramps.**

16 **The color coding or a pictograph of the identification markers of the community wayfinding guide signing system shall be included on the informational guide sign posted at the boundary of the community wayfinding guide signing area. The color coding or pictographs shall apply to a specific, identifiable neighborhood or geographical subarea within the overall area covered by the community wayfinding guide signing. Color coding or pictographs shall not be used to distinguish between different types of destinations that are within the same designated neighborhood or subarea. The color coding shall be accomplished by the use of different colored square or rectangular panels on the face of the informational guide sign, each positioned to the left of the neighborhood or named geographic area to which the color-coding panel applies. The height of the colored square or rectangular panels shall not exceed 2 times the height of the upper-case letters of the principal legend on the sign.**

Option:

17 The different colored square or rectangular panels may include either a black or a white (whichever provides the better contrast with the color of the panel) letter, numeral, or other appropriate designation to identify the destination.

18 Except for the informational guide sign posted at the boundary of the wayfinding guide sign area, community wayfinding guide signs may use background colors other than green in order to provide a color identification for the wayfinding destinations by geographical area within the overall wayfinding guide signing system. Color-coded community wayfinding guide signs may be used with or without the boundary informational guide sign displaying corresponding color-coding panels described in Paragraphs 13 through 16 of this Section. Except as provided in Paragraph 19 of this Section, in addition to the colors that are approved in this Manual for use on official traffic control signs (see Section 2A.06), other background colors may also be used for the color coding of community wayfinding guide signs.

**Standard:**

19 **The standard colors of red, orange, yellow, purple, or the fluorescent versions thereof, fluorescent yellow-green, and fluorescent pink shall not be used as background colors for community wayfinding guide signs, in order to minimize possible confusion with critical, higher-priority regulatory and warning sign color meanings**

**readily understood by road users.**

20 **The minimum contrast value of legend color to background color for community wayfinding guide signs shall be at least 0.70 (or 70%).**

21 **All messages, borders, legends, and backgrounds of community wayfinding guide signs and any identification markers shall be retroreflective (see Sections 2A.21 and 2A.22).**

22 **Community wayfinding guide signs, exclusive of any identification marker used, shall be rectangular in shape.**

*Guidance:*

23 *Simplicity and uniformity in design, position, and application as described in Section 2A.04 are important and should be incorporated into the community wayfinding guide sign design and location plans for the area.*

24 *Community wayfinding guide signs should be limited to three destinations per sign (see Section 2D.06).*

25 *Abbreviations (see Section 1D.08) should be kept to a minimum, and should include only those that are commonly recognized and understood.*

26 *Horizontal lines of a color that contrasts with the sign background color should be used to separate groups of destinations by direction from each other.*

Support:

27 The basic requirement for all highway signs, including community wayfinding signs, is that they be legible to those for whom they are intended and that they be understandable in time to permit a proper response. Section 2A.04 contains additional information on the design of signs, including desirable attributes of effective designs.

*Guidance:*

28 *Word messages should be as brief as practical and the lettering should be large enough to provide the necessary legibility distance.*

**Standard:**

29 **The minimum specific ratio of letter height to legibility distance shall comply with the provisions of Section 2A.08. The size of lettering used for destination and directional legends on community wayfinding signs shall comply with the provisions of minimum letter heights as provided in Section 2D.05.**

30 **Interline and edge spacing shall comply with the provisions of Section 2D.05.**

31 **Except as provided in Paragraph 34 of this Section, the lettering style used for destination and directional legends on community wayfinding guide signs shall comply with the provisions of Section 2D.04.**

32 **The lettering for destinations on community wayfinding guide signs shall be a combination of lower-case letters with initial upper-case letters (see Section 2D.04). All other word messages on community wayfinding guide signs shall be in all upper-case letters.**

*Guidance:*

33 *Except as provided in Paragraphs 34 and 35 of this Section, letters, numerals, and other characters should be composed of the Standard Alphabets as detailed in the "Standard Highway Signs" publication (see Section 1C.05).*

Support:

33a Refer to FHWA's List of Known Errors for error in Paragraph 33 text. Refer to Section 1A.04 for more details.

Option:

34 A lettering style other than the Standard Alphabets provided in the "Standard Highway Signs" publication (see Section 1C.05) may be used on community wayfinding guide signs if an engineering study determines that the legibility and recognition values for the chosen lettering style meet or exceed the values for the Standard Alphabets for the same legend height and stroke width.

Support:

34a Refer to FHWA's List of Known Errors for error in Paragraph 34 text. Refer to Section 1A.04 for more details.

**Standard:**

35 **If a lettering style other than the Standard Alphabets is used, the alternative lettering style shall be conventional in form. The letters, numerals, and other characters shall not be italic, oblique, script, highly decorative, or of other unusual forms.**

36 **In accordance with Section 2A.04, except for signs that are designed and located with the intent to be viewed only by pedestrians, bicyclists stopped out of the flow of traffic, or occupants of parked vehicles, Internet and e-mail addresses, including domain names and uniform resource locators (URL), and scanning graphics for the purpose of obtaining information (see Section 2A.04), shall not be displayed on any community wayfinding guide**

**sign or sign assembly.**

37 **The arrow location and priority order of destinations shall follow the provisions described in Sections 2D.08 and 2D.36. Arrows shall be of the designs provided in Section 2D.08.**

Option:

38 Pictographs (see definition in Section 1C.02) may be used on community wayfinding guide signs.

**Standard:**

39 **If a pictograph is used, its height shall not exceed 2 times the height of the upper-case letters of the principal legend on the sign.**

40 **Except for pictographs, symbols that are not approved in this Manual for use on guide signs shall not be used on community wayfinding guide signs.**

41 **Business logos, commercial graphics, or other forms of advertising (see Section 1D.07) shall not be used on community wayfinding guide signs or sign assemblies.**

Option:

42 Other graphics that specifically identify the wayfinding system, including identification markers, may be used on the overall sign assembly and sign supports.

Support:

43 An identification marker consists of a shape, color, and/or pictograph that is used as a visual identifier for the community wayfinding guide signing system for an area. Figure 2D-30 shows examples of identification marker designs that can be used with community wayfinding guide signs.

Option:

44 An identification marker may be used in a community wayfinding guide sign assembly, or may be incorporated into the overall design of a community wayfinding guide sign, as a means of visually identifying the sign as part of an overall system of community wayfinding signs and destinations.

**Standard:**

45 **The sizes and shapes of identification markers shall be smaller than the community wayfinding guide signs themselves. Identification markers shall not be designed to have an appearance that could be mistaken by road users as being a traffic control device.**

*Guidance:*

46 *The area of the identification marker should not exceed ⅕ of the area of the community wayfinding guide sign with which it is mounted in the same sign assembly.*

## Section 2D.56 Signing of Named Highways for Mapping and Address Purposes

Support:

01 A highway name is the officially designated name of a freeway, expressway, or conventional road for navigational, official mapping, and address purposes. Some highways are named in addition to or in lieu of being assigned a highway route number. Memorial, honorary, ceremonial, or other secondary names, such as touring route and byway names, are not considered to be highway names.

Option:

02 Guide signs may contain street or highway names if the purpose is to enhance driver communication and guidance; however, they are to be considered as supplemental information to route numbers.

**Standard:**

03 **Highway names shall not replace official numeral designations.**

04 **Memorial, honorary, or other secondary names (see Section 2M.10) shall not appear on supplemental signs or on any other information sign on or along the highway or its intersecting routes.**

05 **The use of route signs shall be restricted to signs officially used for guidance of traffic in accordance with this Manual and the "Purpose and Policy" statement of the American Association of State Highway and Transportation Officials that applies to Interstate and U.S. numbered routes.**

Option:

06 Unnumbered routes having major importance to proper guidance of traffic may be signed if carried out in accordance with the aforementioned policies. For unnumbered highways, a name to enhance route guidance may be used where the name is applied consistently throughout its length.

*Guidance:*

07 *Only one name should be used to identify any highway, whether numbered or unnumbered.*

Option:

08 The Named State Highway (SG1(CA)) sign may be used to identify a named State highway when required by legislation or when deemed necessary to provide traveler information.

## Section 2D.57 National Scenic Byways Sign and Plaque (M10-1 and M10-1aP)

Support:

01 Certain roads have been designated by the U.S. Secretary of Transportation as National Scenic Byways or All-American Roads based on their archeological, cultural, historic, natural, recreational, or scenic qualities.

Option:

02 State and local highway agencies may install the National Scenic Byways (M10-1) sign or (M10-1aP) plaque (see Figure 2D-33) at entrance points to a route that has been recognized by the U.S. Secretary of Transportation as a National Scenic Byway or an All-American Road. The M10-1 sign may be installed as independent Directional (see Section 2D.32) or Confirming (see Section 2D.33) assemblies at periodic intervals along the designated route and near intersections where the designated route turns or follows a different numbered highway. The M10-1aP plaque may be installed below a route sign in a Confirming assembly. At locations where roadside features have been developed to enhance the traveler's experience such as rest areas, historic sites, interpretive facilities, or scenic overlooks, the National Scenic Byways sign or plaque may be placed on the associated sign assembly to inform travelers that the site contributes to the byway travel experience.

*Guidance:*

03 *Where the byway is identified only by the National Scenic Byways sign, the Directional assembly should consist of the M10-1 sign and an M5 series or M6 series auxiliary plaque when indication of a turn is necessary to remain on the byway route.*

04 *Where the name of the byway is to be displayed on identification signs or plaques along the byway route, the name should be displayed in a Directional or Confirming assembly as follows (see Figure 2D-34):*

*A. On a Byway Identification (M10-2aP) plaque (see Section 2D.58) mounted below the M10-1 sign; or*

*B. On a Byway Identification (M10-2) sign (see Section 2D.58) with the M10-1aP plaque mounted below the sign.*

05 *In either case, the size of the National Scenic Byways (M10-1) sign, (M10-1aP) plaque, Byway Identification (M10-2) sign, and Byway Identification (M10-2aP) plaque should be consistent with that specified for route signs (see Section 2D.10) for the roadway classification .*

06 *Where the name of the byway is to be displayed along the byway route as provided in Paragraph 4 of this Section, the byway Directional or Confirming assemblies should be located separately from any route Sign assemblies or Destination guide signs.*

**Standard:**

07 **When a National Scenic Byways sign is installed on a National Scenic Byway or an All- American Road, the design shown for the M10-1 sign or M10-1aP plaque in Figure 2D-33 shall be used. Use of this design shall be limited to routes that have been designated as a National Scenic Byway or All-American Road by the U.S. Secretary of Transportation.**

08 **If used, the M10-1 sign or M10-1aP plaque shall be placed such that the highway route signs have primary visibility for the road user.**

09 **The M10-1 sign or the M10-1aP plaque shall not be installed as sign panels on a guide sign or as part of a guide sign assembly.**

## Section 2D.58 State-Designated Scenic Byway, Historic Trail, and Auto Tour Route Signs

Support:

01 Signing for State-designated scenic byways, historic trails, and auto tour routes, is similar in concept to that for National Scenic Byways as provided in Section 2D.57.

02 Named highways are officially designated and shown on official maps and serve the purpose of providing route guidance, primarily on unnumbered highways, and property addresses. A highway designated as a trail, auto tour route, or byway is not considered to be a highway name for the purposes of highway signing or road user navigation and orientation. Section 2D.56 contains provisions for the signing of named highways.

03 Section 1D.09 provides information on the authority for placement of traffic control devices within the highway right-of-way.

*Guidance:*

*04 Route Sign assemblies and Destination guide signs should have priority in visibility and location over signing related to historic trails, auto tour routes, and byways.*

Option:

05 Identification signs for a State scenic byway may be installed along conventional roads that have been designated as part of a State scenic byway system. A Byway Identification (M10-2) sign (see Figure 2D-34) with the name of the byway displayed may be installed in a Directional or Confirming assembly with the SCENIC BYWAY (M10-3bP) plaque (see Figure 2D-34) mounted below the M10-2 sign.

06 Where a National Scenic Byway is part of a State scenic byway system, the National Scenic Byways (M10-1aP) plaque (see Section 2D.57) may be installed in a Directional or Confirming assembly below the Byway Identification (M10-2) sign or State Scenic Byway (M10-3 or M10-3a) sign (see Figure 2D-34) for the State scenic byway.

07 A State Scenic Byway System (M10-3) sign may be installed in a Directional or Confirming assembly with the name of the byway displayed on a Byway Identification (M10-2aP) plaque below the sign (see Figure 2D-34).

08 A State Scenic Byway (M10-3a) sign with a simple graphic and the name of the byway displayed may be installed in a Directional or Confirming assembly with the SCENIC BYWAY (M10-3bP) plaque mounted below the M10-3a sign.

09 Identification signs for a historic trail, such as the National Historic Trails administered by the National Park Service, may be installed along segments of conventional roads that coincide with the original route of the trail. National Historic Trail Identification (M11-1) signs (see Figure 2D-34) may be installed in a Directional or Confirming assembly with a HISTORIC ROUTE (M11-1aP), CROSSING (M11-1bP), or AUTO TOUR ROUTE (M11-1cP) auxiliary plaque (see Figure 2D-34) mounted below the M11-1 sign. The beginning and end of a historic trail route or auto tour route may be indicated with a BEGIN (M4-14P) or END (M4-6P) auxiliary plaque (see Figure 2D-5) with a white legend and border on a brown background mounted above the historic trail identification sign. The length of the route may be identified by a NEXT XX MILES (M11-1dP) auxiliary plaque mounted below the M11-1aP or M11-1cP auxiliary plaque.

*Guidance:*

10 *The design and size of historic trail and State scenic byway identification or system signs should comply with the general provisions and principles for route signs (see Section 2D.10). Designs should be simple, dignified, and devoid of complex graphics. The size of the signs should not exceed the size of the route signs used along a particular route.*

**Standard:**

11 **Scenic byway, historic trail, and auto tour route sign designs shall not have a similar design to or resemble a highway route sign.**

*Guidance:*

12 *Where used, historic trail and State scenic byway identification signs should be installed as Directional (see Section 2D.32) or Confirming (see Section 2D.33) assemblies at independent locations, separate from other Route Sign assemblies and Destination guide signs. Where used, Confirming assemblies for the trail or byway should be installed at less frequent intervals than Confirming assemblies for the numbered route.*

Support:

13 Where all or part of the original route of a historic trail does not follow a roadway, an auto tour route is sometimes established along a conventional road in the general vicinity of the historical route of the trail. Examples include auto tour routes following other routes that parallel the original routes of the Lewis and Clark National Historic Trail, the Oregon National Historic Trail, and the Santa Fe National Historic Trail. The auto tour route is shown on touring maps along State or other highways and provides access to sites on the trail from those highways.

14 A system of signing providing direction along conventional roads for a historic trail with an auto tour route is shown in Figure 2D-35. Examples of Destination and Supplemental guide signs providing direction to historic trail sites from a freeway or expressway interchange are shown in Figure 2D-36.

*Guidance:*

15 *Signing for historic trails should be limited to Destination signs for the sites related to the trail and to Directional and Confirming assemblies for the original portions of the trail itself. If an auto tour route has been designated along other highways to provide access to sites along the original trail as described in Paragraph 13 of this Section, then the signing should be limited to Destination signs for those sites and directional signing to access the original route of the*

*trail. Identification signs for the auto tour route should not be installed. Instead, direction along the auto tour route should rely on the touring map and other directional signs for the highways that the auto tour route follows.*

Support:

15a Refer to Section 2M.09 for additional guidance on the design of signs for historic trails.

**Standard:**

16 **Identification signs for historic trails, auto tour routes, and scenic byways shall not be installed on freeways or expressways, except as necessary to provide continuity between discontinuous segments of conventional roadways that are designated as a trail, auto tour route, or byway, for which the freeway or expressway provides the only connection between the segments. If installed on freeways or expressways, the identification signs shall be installed as independent trailblazer assemblies (see Sections 2D.34 and 2E.55) and shall not be installed with other route signs or Confirming assemblies or on guide signs. If installed on freeways or expressways, the trailblazer assemblies for the trail, auto tour route, or byway shall be installed at less frequent intervals than Confirming assemblies for the highway route.**

17 **Identification signs for historic trails, auto tour routes, and scenic byways shall not be installed as sign panels on a guide sign or as part of a guide sign assembly.**

**Scenic Route (G30(CA) Series) Sign and Plaques**

Support:

18 A scenic route is defined as an officially designated portion of the State Highway System that traverses areas of outstanding scenic beauty and, together with the adjacent scenic corridors, requires special scenic conservation treatment. Refer to SHC, §§ 260 through 263.8.

**Standard:**

19 **The Scenic Route (G30(CA)) sign shall be used to identify routes that have been designated as official State Scenic Highways. The G30(CA) sign shall be installed on the right side of the roadway at the beginning of the scenic route.**

*Guidance:*

20 *The Scenic Route (G30aP(CA)) plaque for State routes and G30bP(CA) plaque for county routes, when used, should be placed below and on the same post with the Route shield signs.*

Option

21 The BEGIN (M4-14P) auxiliary plaque may be mounted above the G30(CA) sign at the beginning of the scenic route. Similarly, the END (M4-6P) auxiliary plaque may be mounted above the G30(CA) sign at the end of the scenic route.

Support:

22 Refer to Figure 2D-101(CA) for Scenic Route sign and associated plaques.

## Section 2D.59 Emergency Routing Signs and Plaques (M4-11 and M4-12 Series)

Support:

01 As part of an agency's transportation incident management plan it is sometimes desirable to permanently sign routes that provide rerouting of traffic around highway segments susceptible to traffic incidents. Permanently-installed Emergency Routing signs and plaques (see Figure 2D-37) provide direction on conventional roads from an exit located upstream of an area that can be susceptible to traffic incidents back to the original route at a point downstream of the incident-susceptible area.

Option:

02 EMERGENCY ROUTE (M4-11 and M4-11a) signs and EMERGENCY ROUTE TO (M4-11bP and M4-11cP) plaques mounted on a directional assembly may be permanently installed on conventional roadways to provide trailblazing along a designated diversionary route to bypass a traffic incident.

Support:

03 The purpose of Emergency Routing signs and plaques is for corridor management along routes that have recurring incidents and have reasonable rerouting paths available. These signs are intended to be permanently installed to provide instant rerouting guidance to road users when traffic congestion or backups first begin even before emergency responders could provide temporary traffic control for rerouting traffic. These signs can be used as a stand-alone system or be a part of a larger system which might also incorporate other devices such as changeable message signs. These signs provide road users assurance that a diversionary route will lead them back to their original route of travel.

**Standard:**

04 **Emergency Routing signs and plaques shall only be installed at departure points and along diversion routes for directing road users around highway segments in areas that are more susceptible to traffic incidents (see Figure 2D-38). EMERGENCY ROUTE and EMERGENCY ROUTE TO signs shall be placed at each turning decision point along the designated route until it rejoins the original route or until other directional signs leading back to the original route are provided.**

05 **Emergency Routing signs shall have a white legend and border on a green background.**

Option:

06 For additional emphasis the legend EMERGENCY ROUTE or EMERGENCY ROUTE TO may be displayed in a yellow panel with black letters near the top of the sign (see Figure 2D-37).

**Standard:**

07 **Orange or pink shall not be used as alternate colors on permanently-installed signs or plaques for rerouting traffic during an incident or other event. If a route shield is displayed as part of the message, the wording of the sign or plaque shall be EMERGENCY ROUTE TO as shown in Figure 2D-37.**

Option:

08 An EMERGENCY ROUTE TO plaque with either a white legend and border on a green background (M4-11bP) or black legend and border on a yellow background (M4-11cP) may be added to the top of a conventional Route assembly on a diversion route to provide direction back to the original route downstream of the incident (see Figures 2D-37 and 2D-38).

09 A combination warning and regulatory message sign with flashing beacons mounted above and the legend, WHEN FLASHING [ROUTE] CLOSED AHEAD/ USE EMERGENCY ROUTE [NEXT RIGHT or EXIT XX] may be used in advance of the emergency route entrance to inform road users of the closure and require exiting the primary route and use of the emergency route (see Figures 2D-37 and 2D-38).

10 The End Emergency Route (M4-12) sign may be used at a point along the emergency route just prior to the junction where traffic is to reenter the primary route past the closed section of roadway (see Figures 2D-37 and 2D-38).

# SIGNING AT AIRPORTS

## Section 2D.60 Signing at Airports

Support:

01 Many roadways within airport facilities (including terminal curbside roadways) are considered to be conventional roads because they typically have frequent driveways and at-grade intersections and might have pedestrian activity along and/or across them.

02 Some airport roadways have full or partial control of access and operating speeds higher than 45 mph and thus would be classified as freeways or expressways for signing purposes (see Chapter 2E). Freeway or expressway conditions typically exist on the approaches to the airport from other highways; on the approaches to access points to terminals, parking, and other patron facilities; and on roadways that provide exits from the airport facility to connect with the local or regional highway network.

02a Requirements for Exit Gore signs and Exit Number plaque on State highways are provided in Sections 2E.22, 2E.23, 2E.25, 2E.26, and 2M.09.

03 Roadways within airports and other similarly contained roadway networks with multiple closely- spaced access points to multiple destinations (such as terminals, parking facilities, rental car facilities, and other airport services) often present challenges for the application of guide signing. Closely-spaced signs, excessive sign messaging either co-located or in succession, and the resulting excessive informational load imposed on the road user are of particular concern for such roadways. The Transportation Research Board's Airport Cooperative Research Program Report 52, "Wayfinding and Signing Guidelines for Airport Terminal and Landside," contains additional information on the application of traffic control devices to the unique geometrics and roadway environment that are typical of airports.

04 An example of major guide signing on the approaches to and within an airport facility roadway network is shown in Figure 2D-39.

*Guidance:*

05 *If adequate sign spacing cannot be provided due to the site and roadway characteristics of an airport or similar facility, then measures should be taken to reduce the speeds of vehicles on the roadway to provide road users with adequate time to comprehend and respond to the sign messages. Consideration should also be given to increasing the sign letter heights to provide greater viewing distances and decision times. Where a single terminal serves a large number of airlines, the airline information should be displayed on separate signs that appear in sequence to limit the number of airlines displayed on a single sign or at a single location. Changeable message signs (see Chapter 2L) should not be used to rotate the display of airlines to an approaching road user.*

Support:

06 There are various methods that can be used to help reduce vehicle speeds, including roadway geometric changes, implementing traffic calming measures, and increased enforcement. Provisions on setting speed limits are found in Section 2B.21.

## Section 2D.101(CA) Intersection Number (G98A(CA)) Sign

Option:

01 The Intersection Number (G98A(CA)) sign (refer to Figure 2D-101(CA)) may be installed on any section of a highway route to number an intersection in order to assist road users in estimating their progress and identifying specific locations along the highway.

02 Intersection numbering may follow either a reference location numbering or consecutive numbering system.

Support:

03 Reference location numbering is preferred over consecutive numbering for two reasons:

A. If new intersections are added to the route, the highway agencies do not need to revise the existing numbering sequence.
B. Reference location numbering helps road users estimate destination distances and travel mileage more effectively.

04 The G98A(CA) signs provide a simple and effective method for tourists to navigate safely and efficiently along a highway route that features a high concentration of tourist destinations, either directly on or in close proximity to the route.

*Guidance:*

05 *If used, the G98A(CA) signs should be ground-mounted or mounted on traffic signal poles at signalized intersections.*

**Standard:**

06 **The G98A(CA) signs shall not be installed on a highway unless the intersection numbers are published in a tourist map.**

## Figure 2D-1. Examples of Color-Coded Destination Guide Signs



## Figure 2D-2. Examples of Uses of Abbreviations on Guide Signs

### A – Cardinal directions and orientations




"South" is the street name and shall not be abbreviated.

"EAST" is the cardinal direction of travel and shall not be abbreviated.

"Avenue" is the street name descriptor with a recognizable abbreviation* and should be abbreviated.




"South" is a cardinal direction and may be abbreviated. **

"EAST" is the cardinal direction of travel and shall not be abbreviated.

"Road" is the street name descriptor with a recognizable abbreviation* and should be abbreviated.

### B – Quadrant and cardinal directions




"Southeast" is a quadrant cardinal orientation and should be abbreviated.

"Boulevard" is the street name and shall not be abbreviated.




"Southeast" is the street name and shall not be abbreviated.

"Boulevard" is the street name descriptor with a recognizable abbreviation* and should be abbreviated.

### C – Other descriptors within proper names




"Peak" is a geographical feature as a descriptor within a proper name. When a geographical feature descriptor does not have a recognizable abbreviation, it shall not be abbreviated.




OR





"Mount" is a geographical feature as a descriptor within a proper name. When a geographical feature descriptor has a recognizable abbreviation, it may be abbreviated.

* See Tables 1D-1 and 2D-3 for the abbreviations that are acceptable for use on signs and see Tables 2D-4 for abbreviations that are not acceptable for use on signs.

** Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2D-3. Arrows for Use on Guide Signs

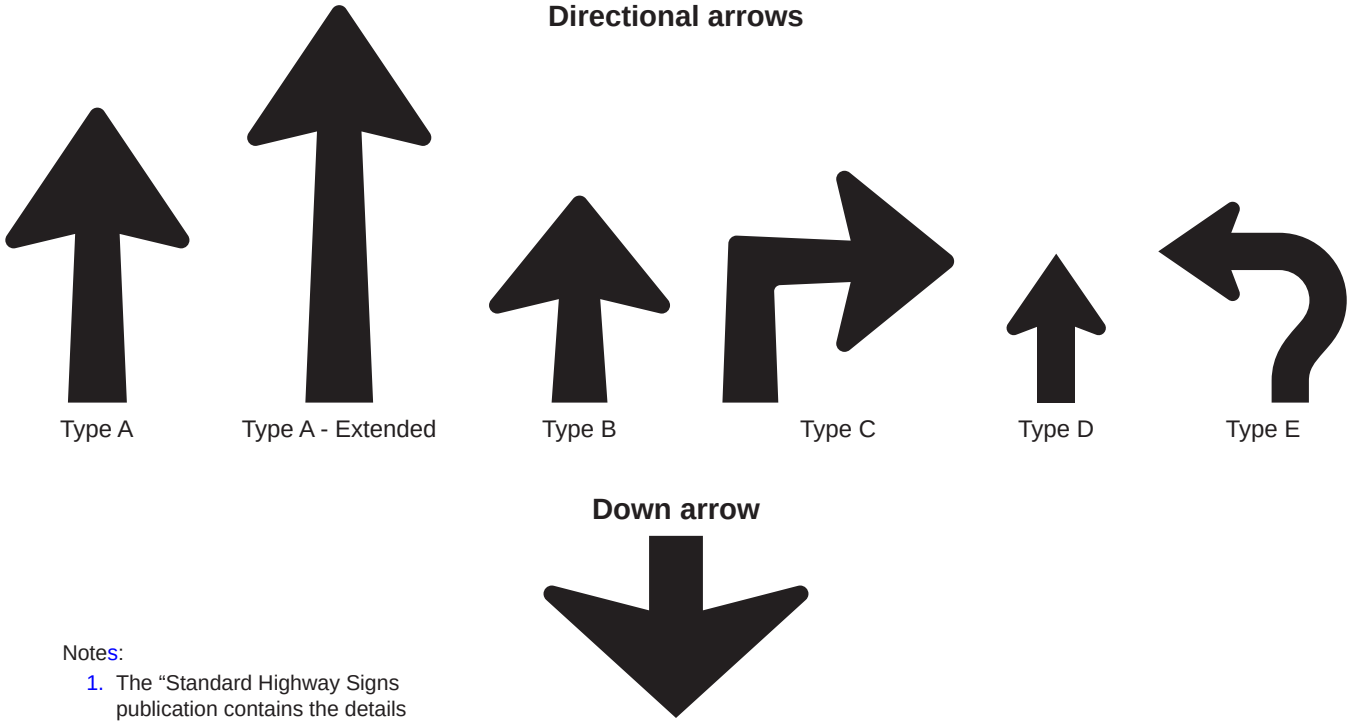


Notes:

1. The "Standard Highway Signs publication contains the details of these arrow designs.
2. Refer to Section 2D.08 for information and guidance.

## Figure 2D-4. Route Signs




Interstate Route Sign (Shield)
M1-1
(See Note 1)




Interstate Route Sign (Marker)
M1-1a
(See Note 2)





Off-Interstate Business Route Sign
M1-2 (Loop)
(See Note 3)




Off-Interstate Business Route Sign
M1-3 (Spur)
(See Note 3)




U.S. Route Sign (Marker)
M1-4
(See Note 2)




~~State Route Sign~~
~~M1-5~~




County Route Sign
M1-6
(See Note 3)




Forest Route Sign
M1-7
(See Note 3)

## *Figure 2D-4(CA). California Route Signs*




U.S. Route Sign Shield (For guide sign usage)
M1-4
(See Note 1)





State Route Sign (Shield)
G28-1(CA)
(See Note 1)




State Route Sign (Marker)
G28-2(CA)
(See Note 2)

Notes:
1. For guide sign use
2. For independent use
3. For guide sign and independent use

## Figure 2D-5. Route Sign Auxiliary Plaques and Combination Junction Sign

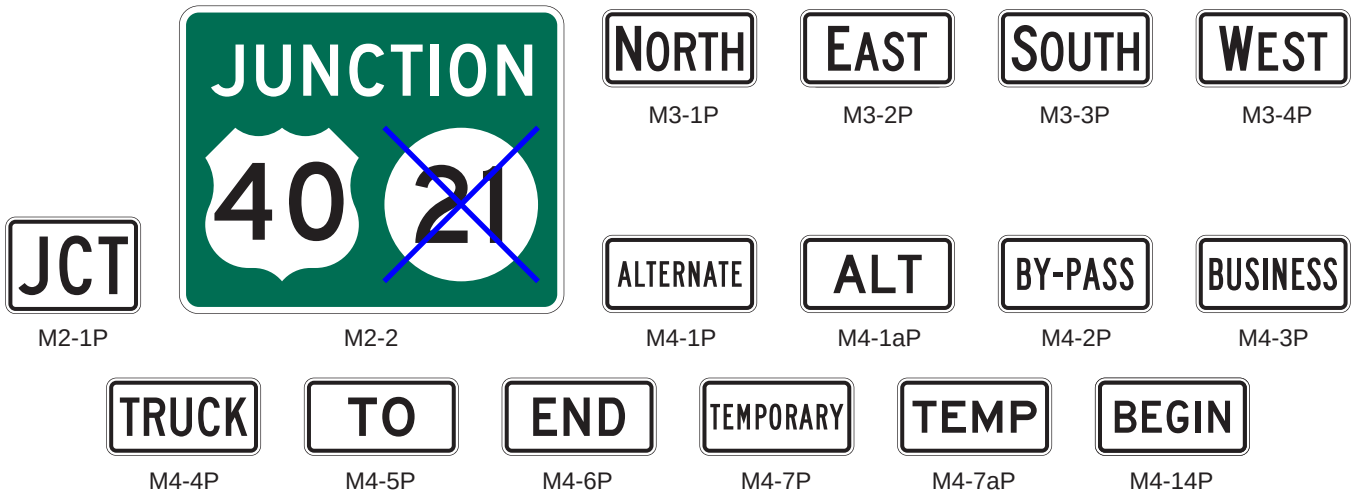


Note: Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.


---

## *Figure 2D-5(CA). California Route Sign Auxiliaries and Combination Junction Sign*




G76(CA)

## Figure 2D-6. Advance Turn and Directional Arrow Auxiliary Plaques

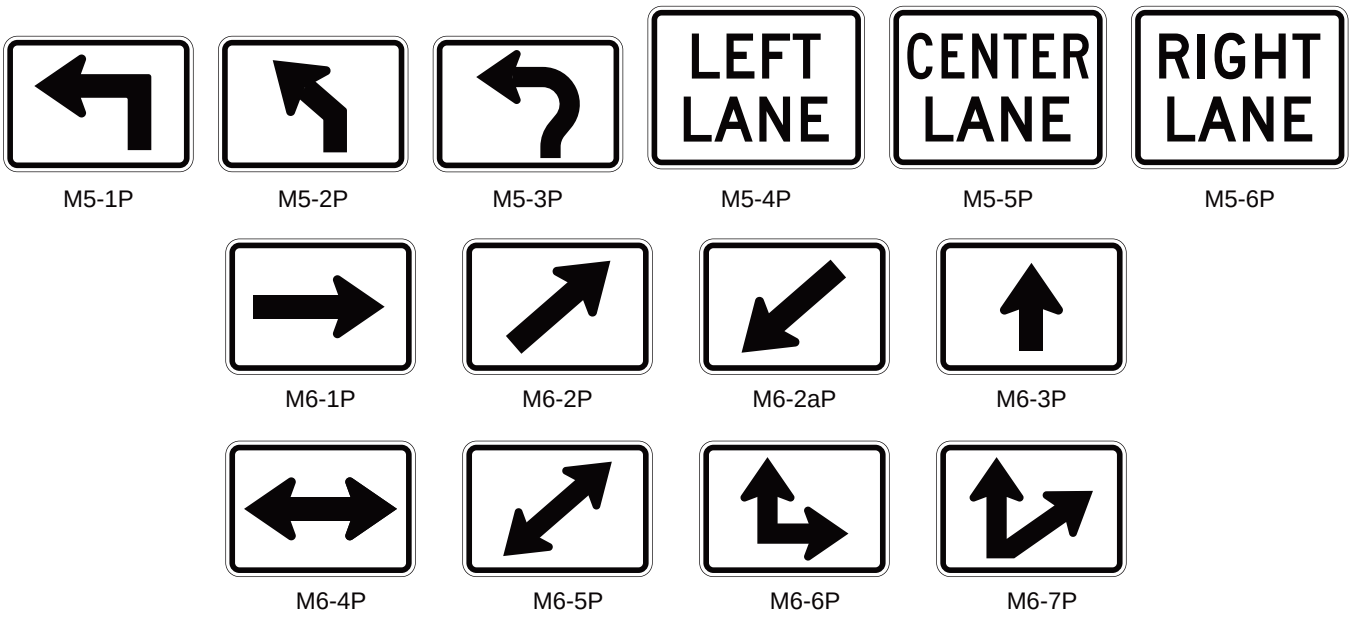



M5-1P M5-2P M5-3P M5-4P M5-5P M5-6P

M6-1P M6-2P M6-2aP M6-3P

M6-4P M6-5P M6-6P M6-7P

---

## *Figure 2D-6(CA). California Advance Turn and Directional Arrow Auxiliary Plaques*

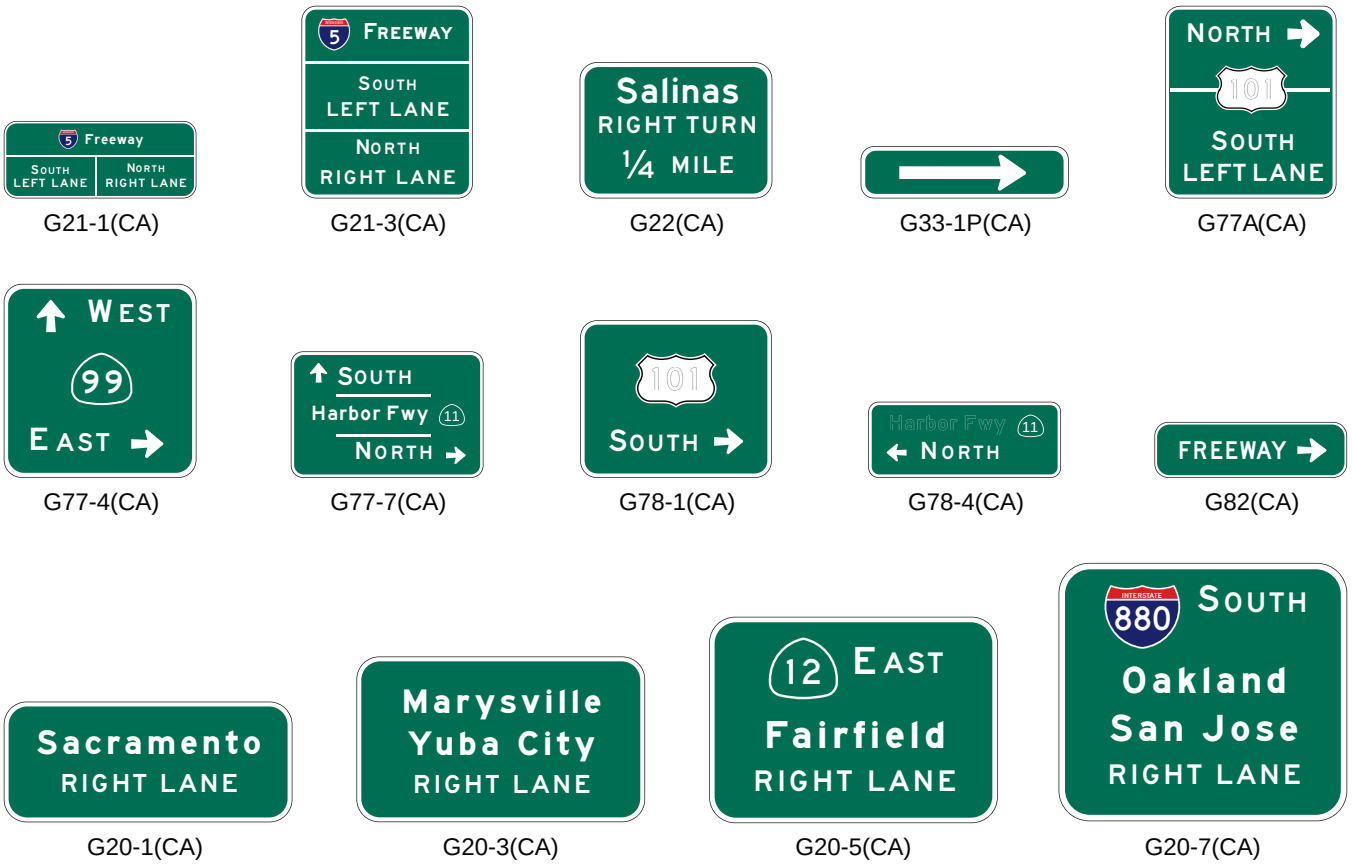



G21-1(CA) G21-3(CA) G22(CA) G33-1P(CA) G77A(CA)

G77-4(CA) G77-7(CA) G78-1(CA) G78-4(CA) G82(CA)

G20-1(CA) G20-3(CA) G20-5(CA) G20-7(CA)

# Figure 2D-7. Examples of Consolidation of Route Sign Assemblies into Guide Signs (Sheet 1 of 2)

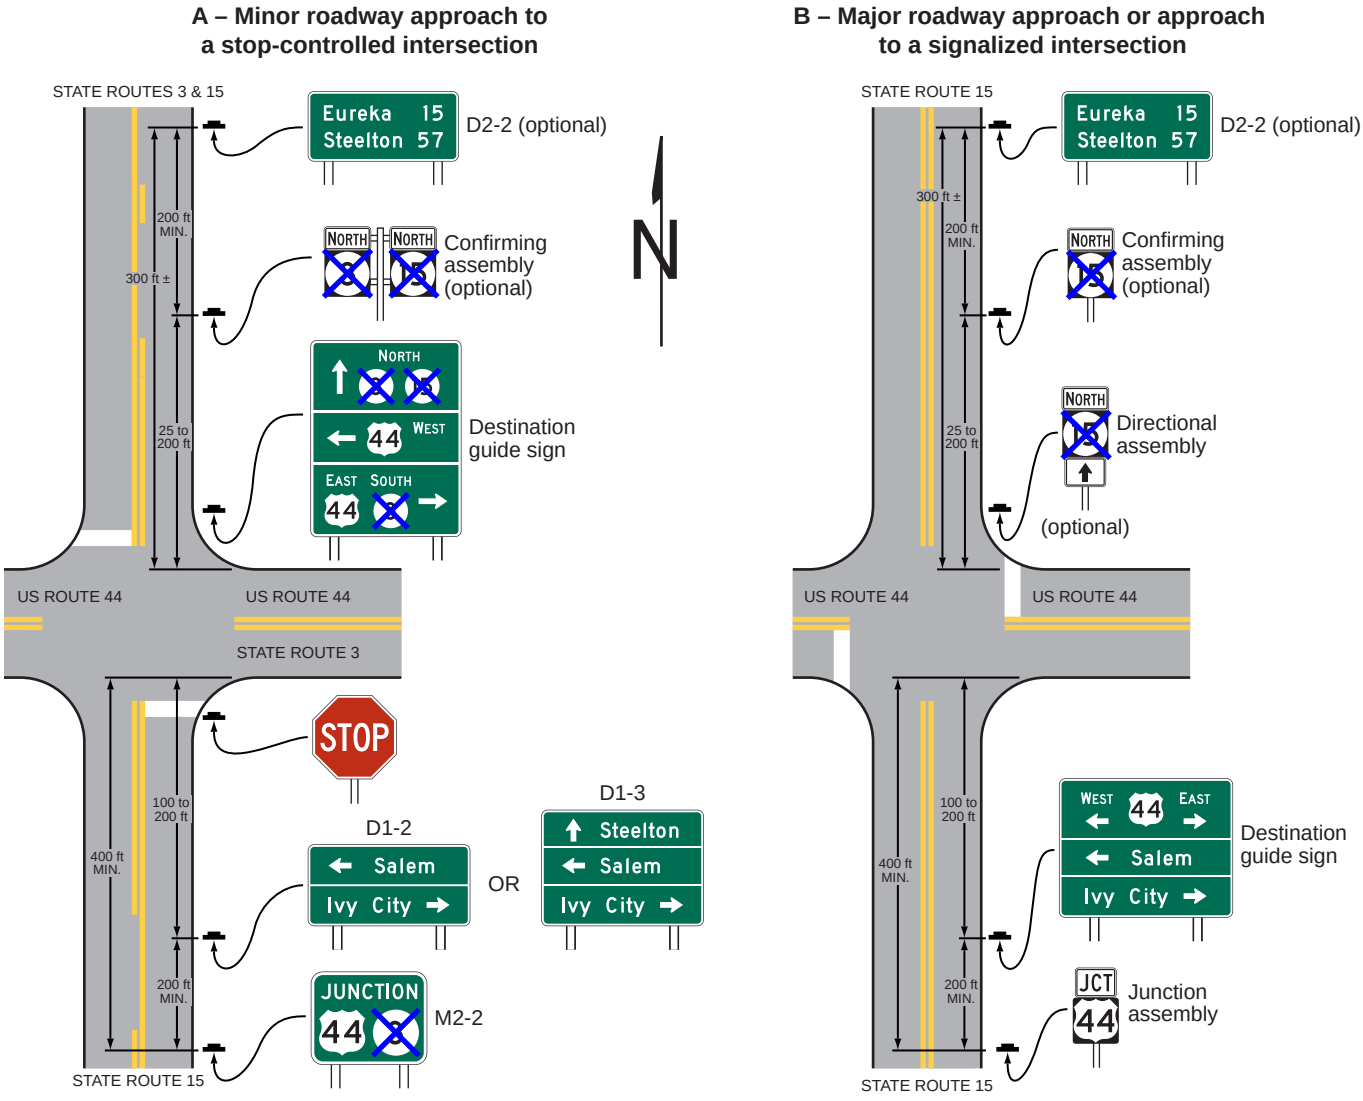



Notes:

1. Only one direction of travel and associated signs shown.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.

# Figure 2D-7. Examples of Consolidation of Route Sign Assemblies into Guide Signs (Sheet 2 of 2)


**C – Major roadway approach or approach to a signalized intersection where overlapping routes join or separate**

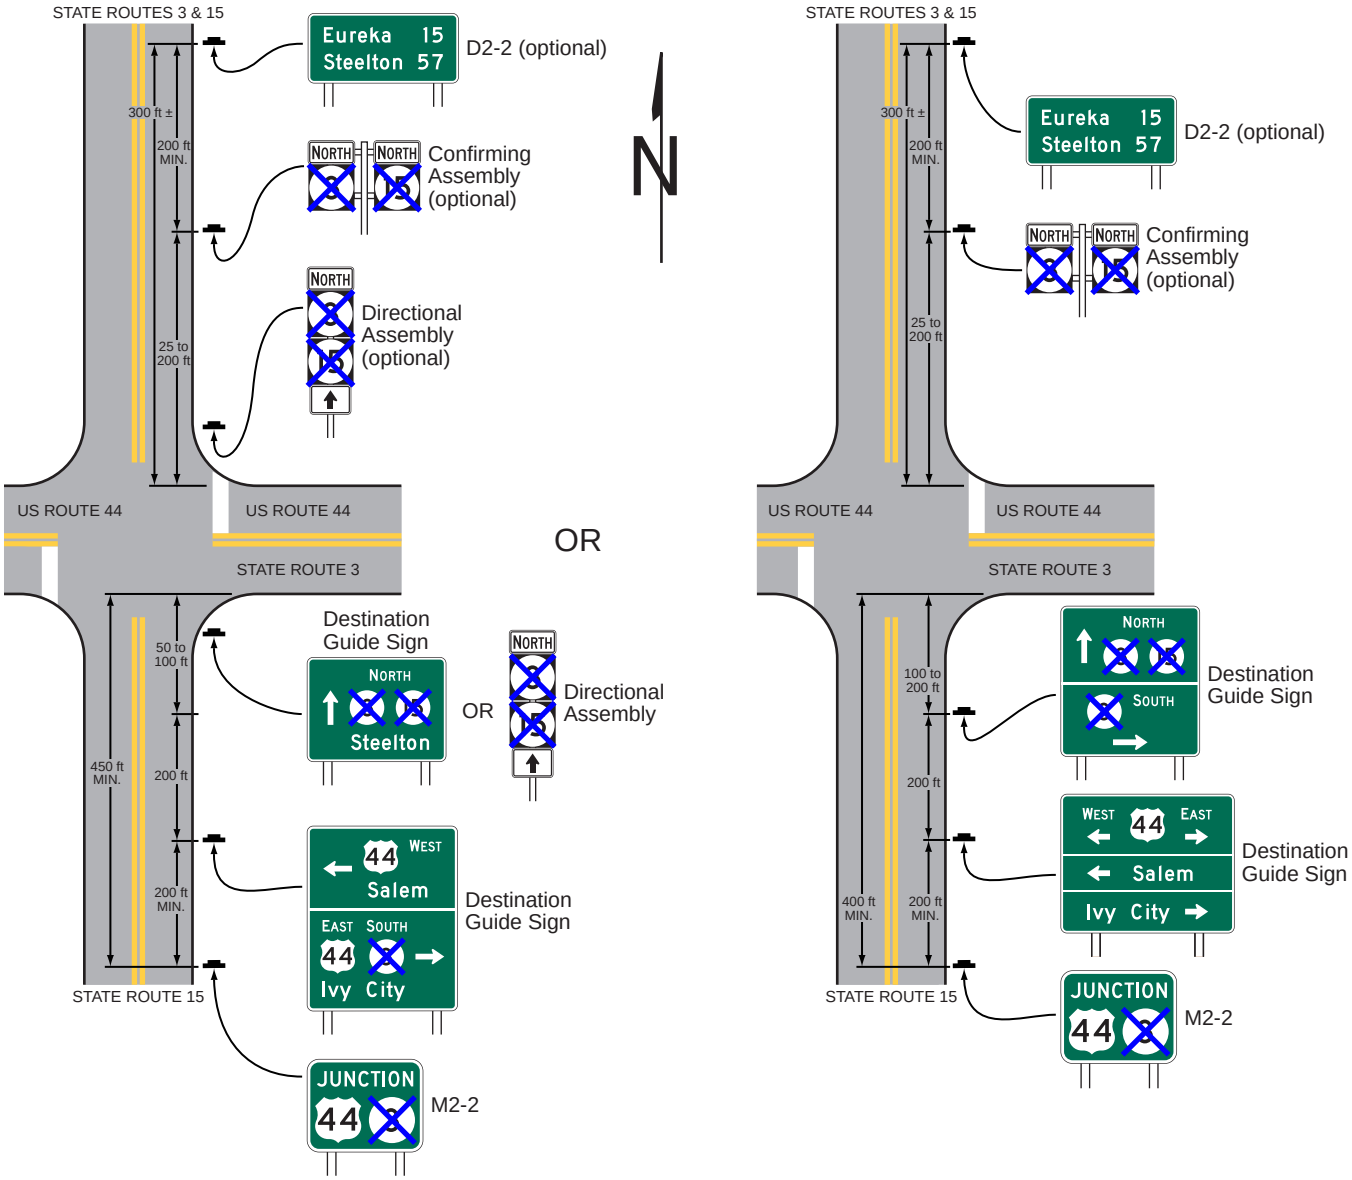


Notes:

1. Only one direction of travel and associated signs shown.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-8. Illustration of Directional Assemblies and Other Route Signs (Sheet 1 of 4)

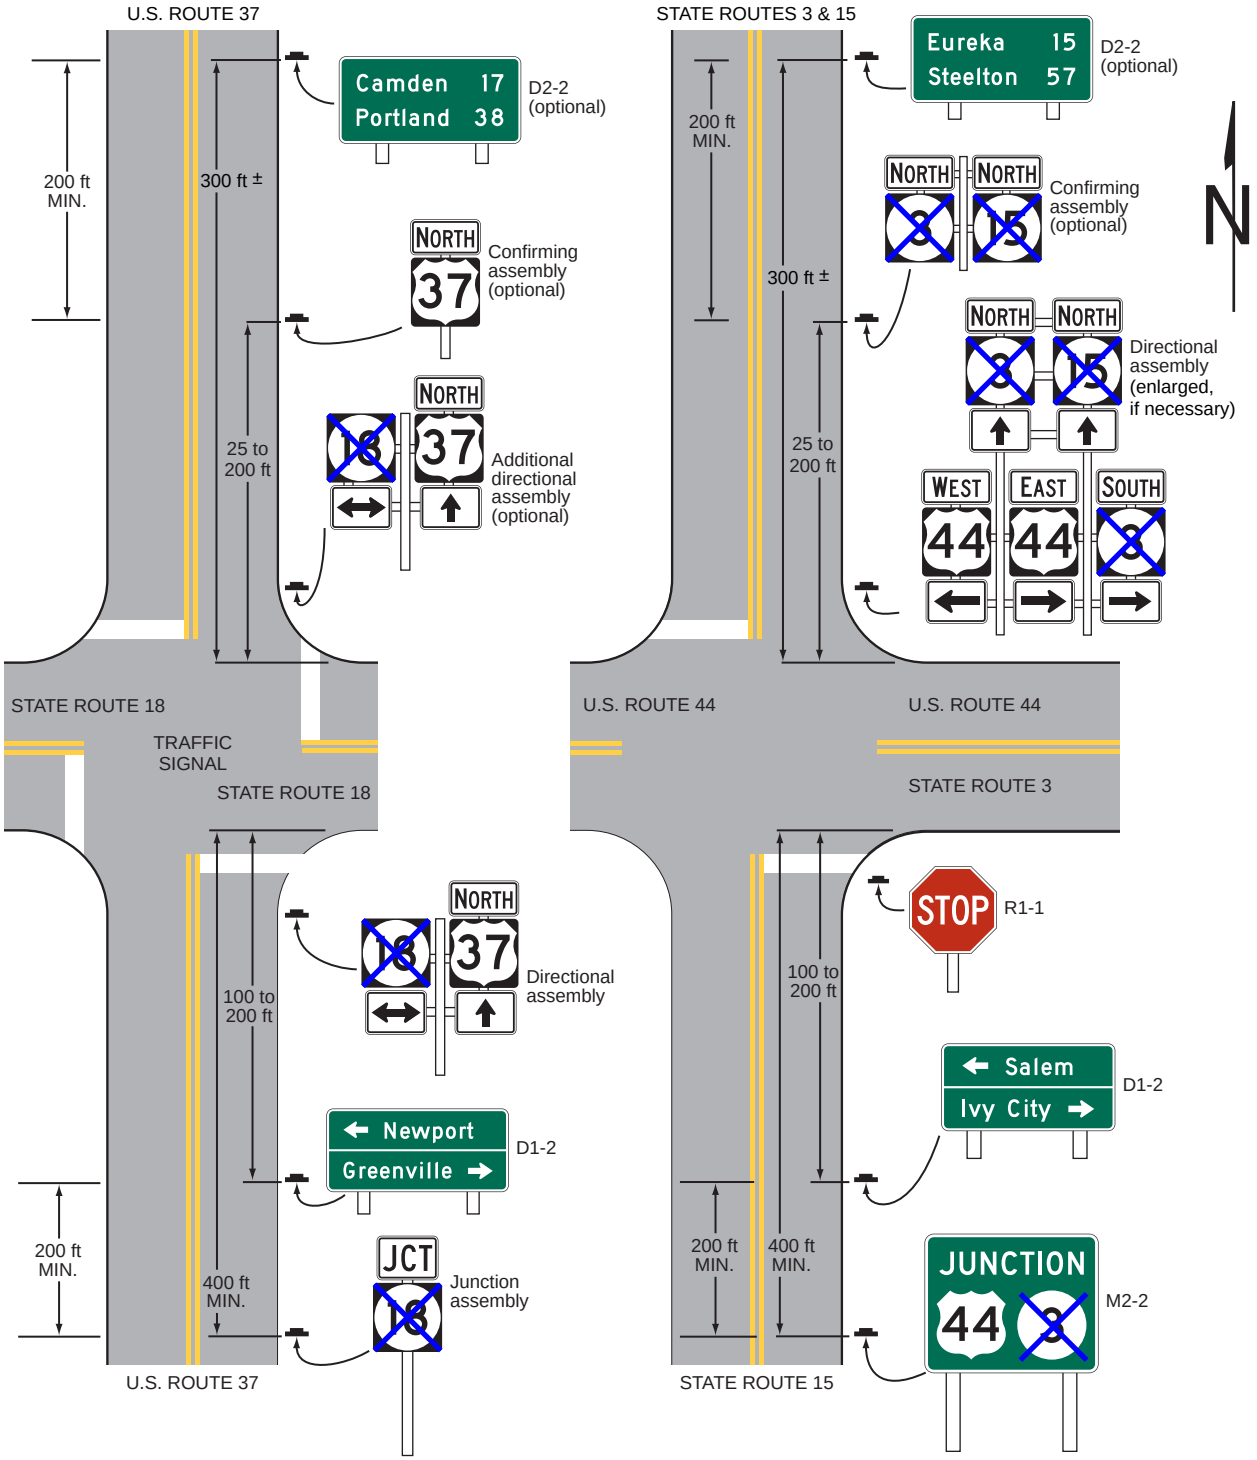


Notes:

1. Only the signs associated with the northbound direction of travel are shown on this figure.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-8. Illustration of Directional Assemblies and Other Route Signs (Sheet 2 of 4)

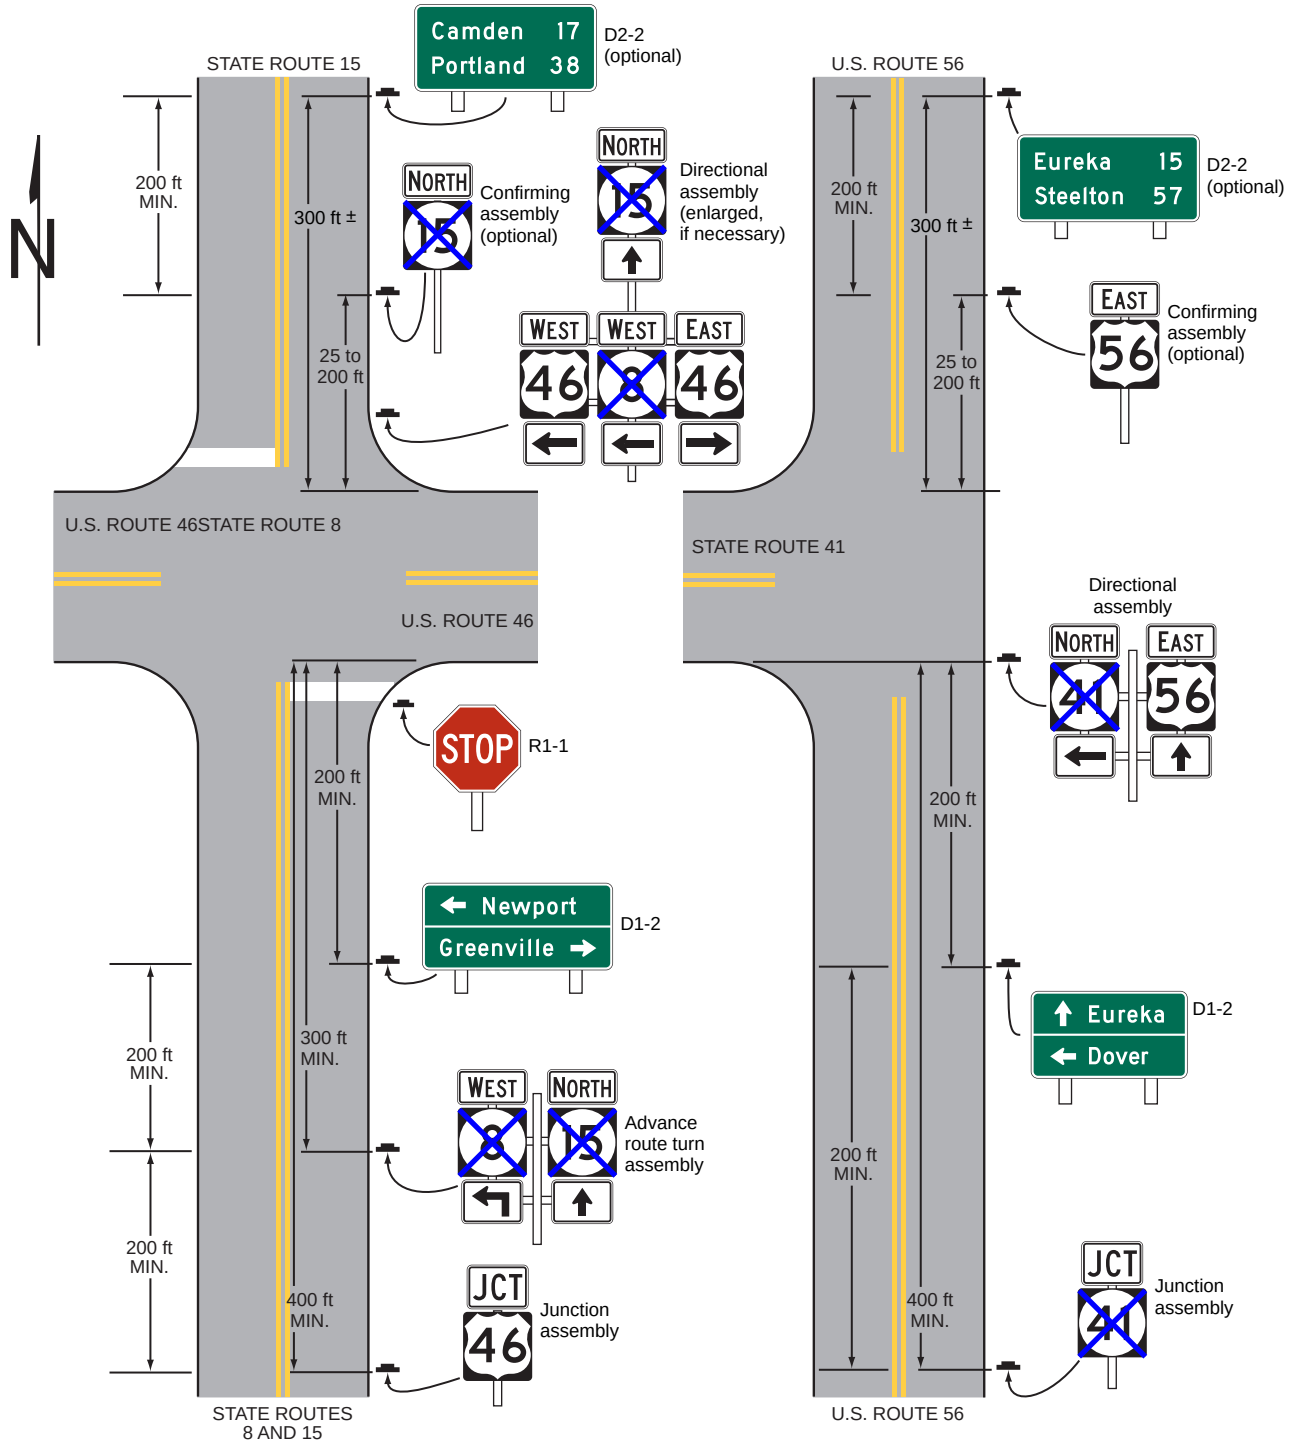


Notes:

1. Only the signs associated with the northbound direction of travel are shown on this figure.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. See Figures 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-8. Illustration of Directional Assemblies and Other Route Signs (Sheet 3 of 4)

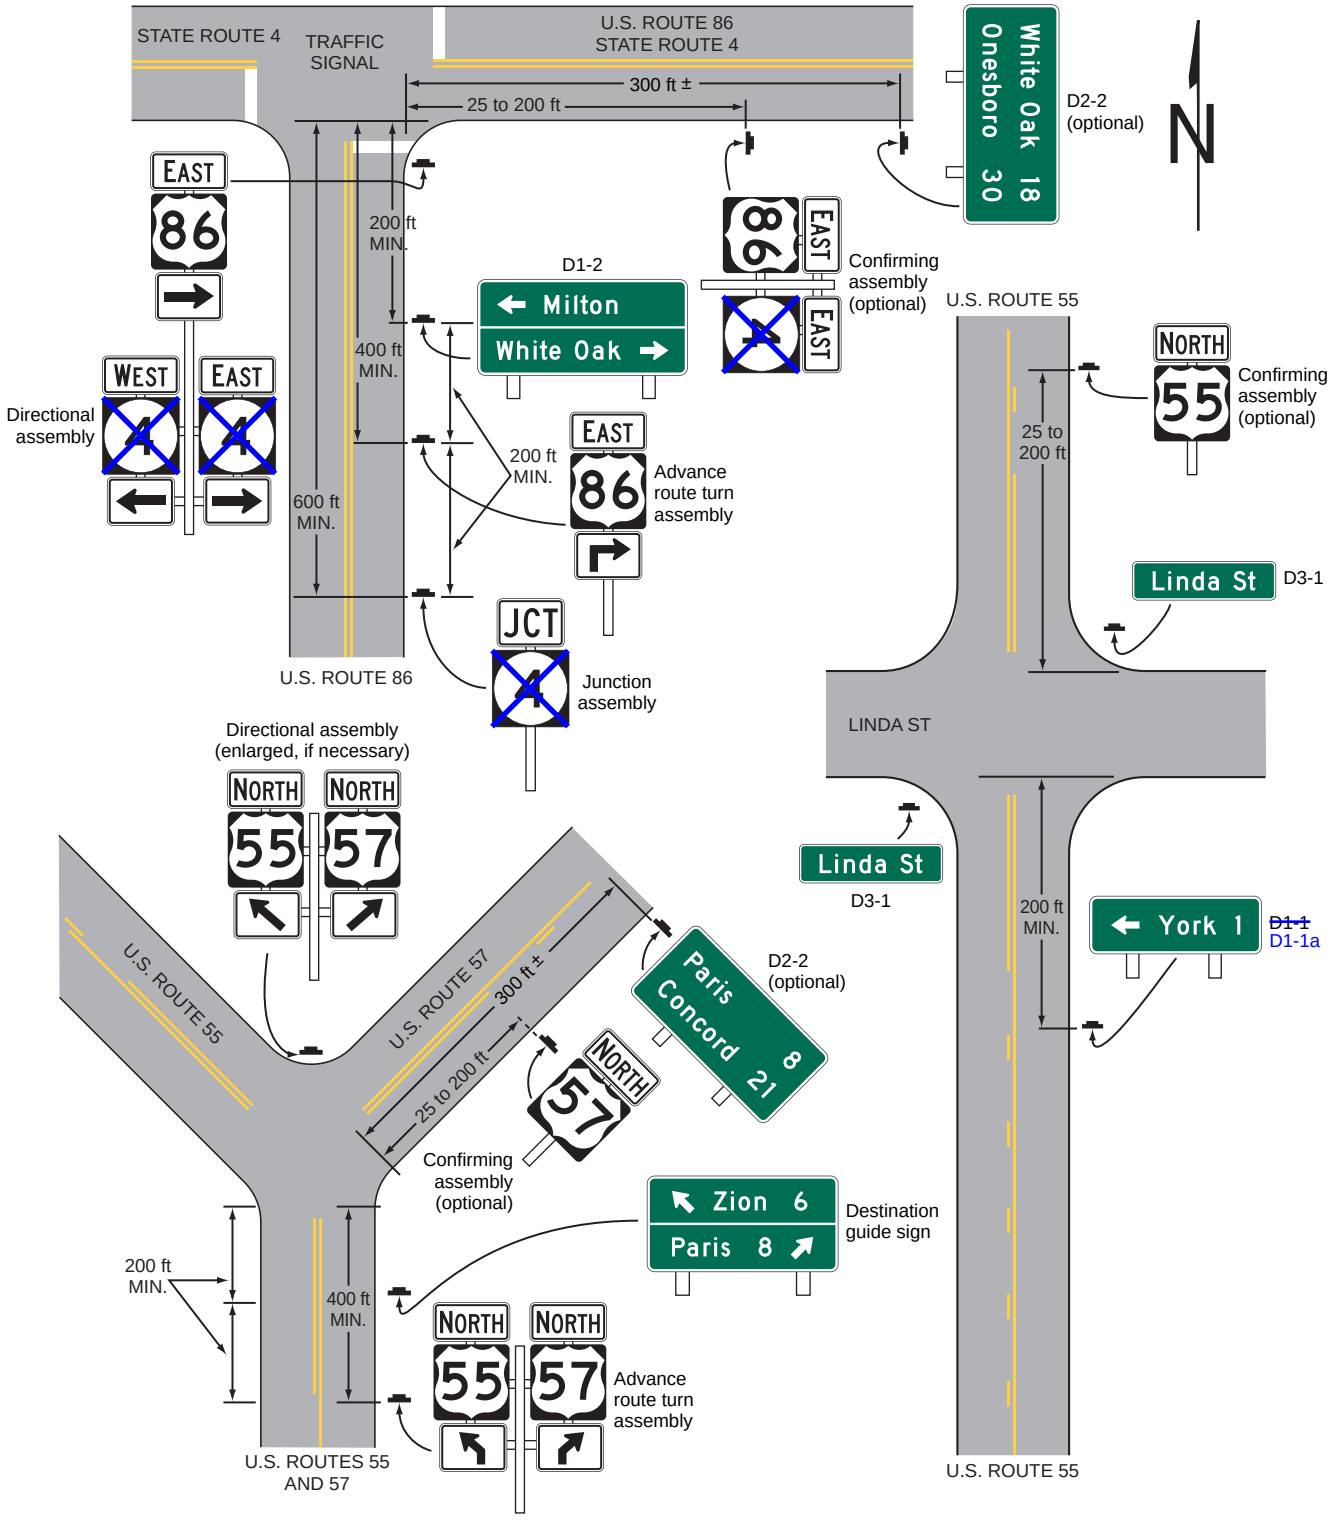


Notes:

1. Only the signs associated with the northbound direction of travel are shown on this figure.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-8. Illustration of Directional Assemblies and Other Route Signs (Sheet 4 of 4)

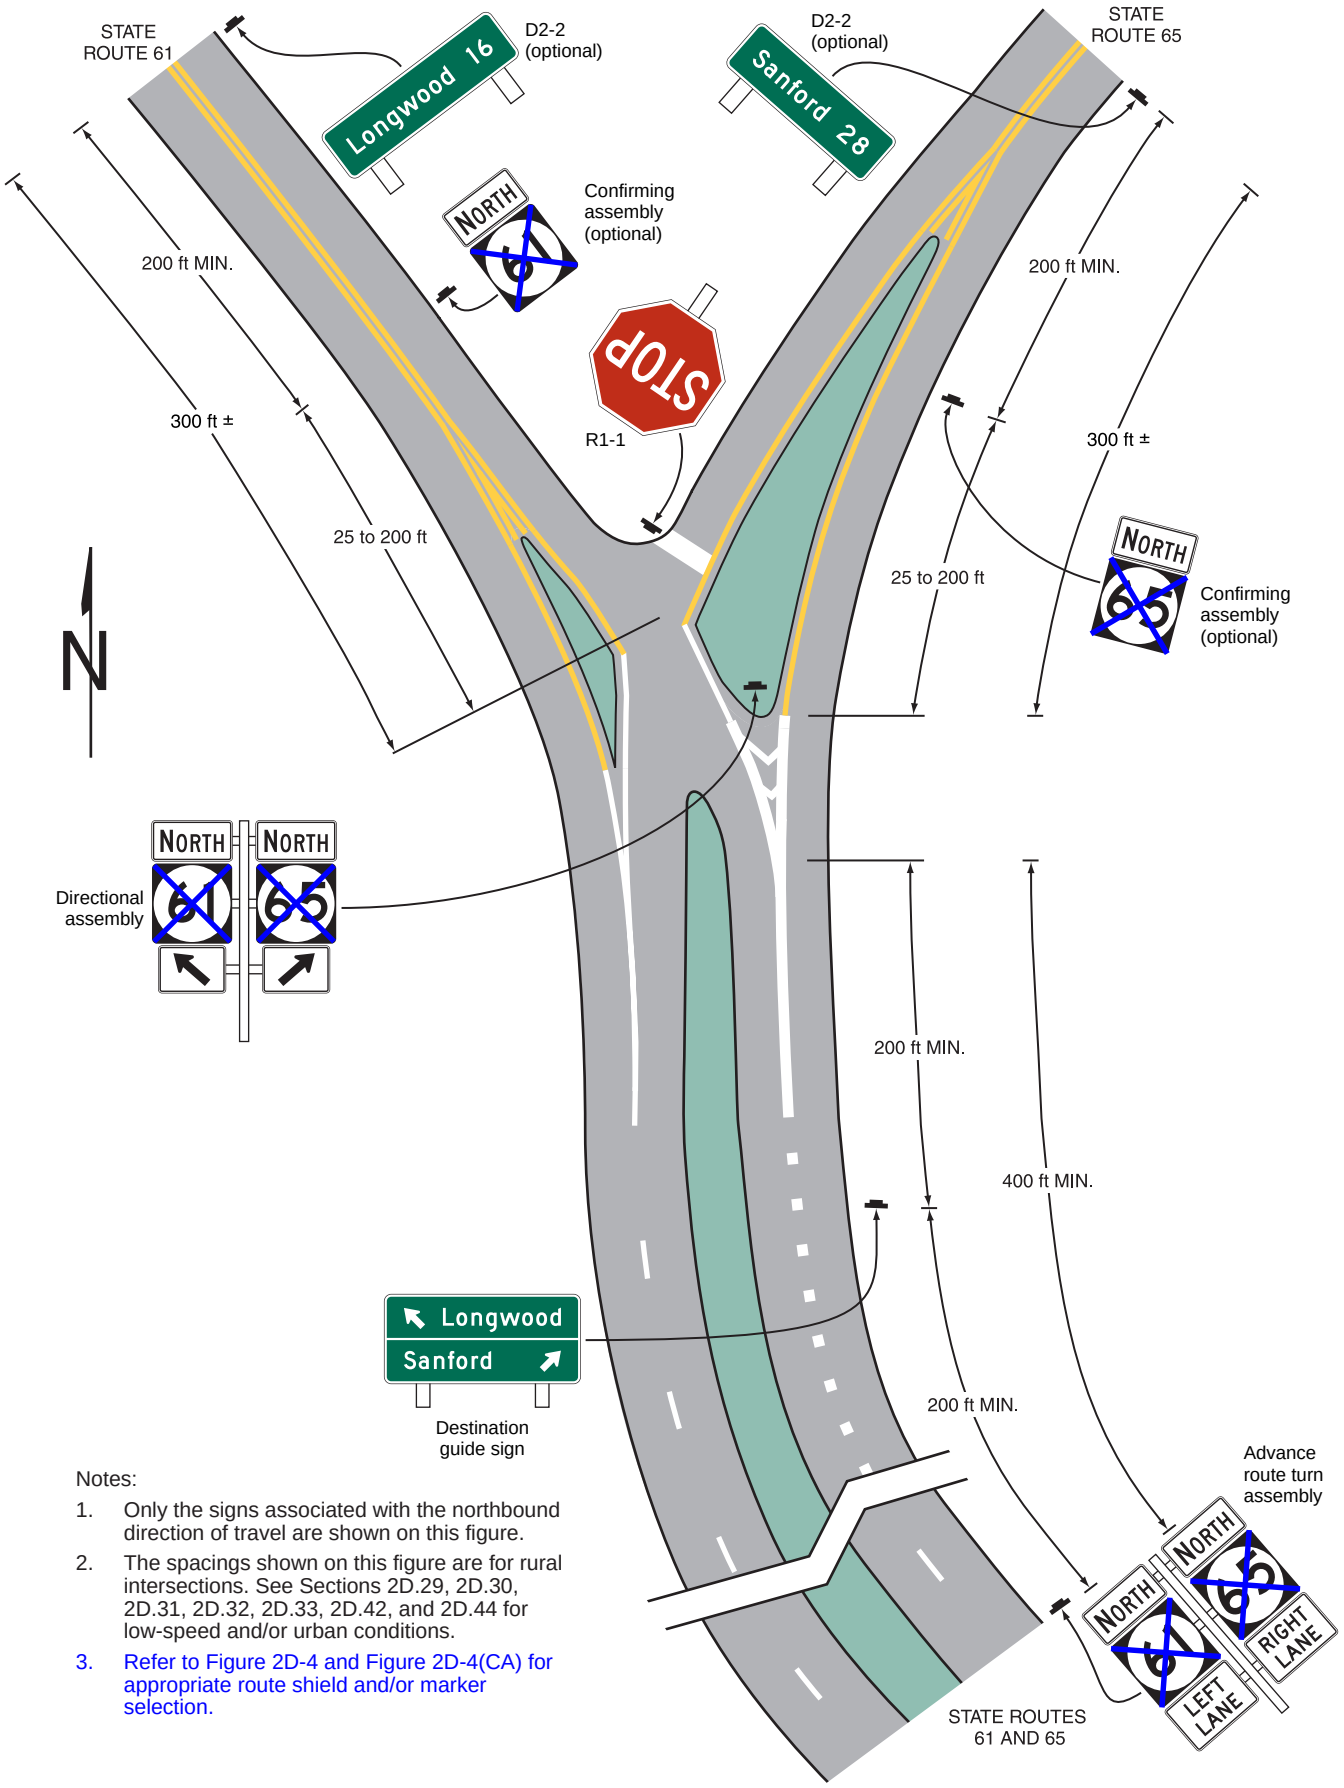


Notes:

1. Only the signs associated with the northbound direction of travel are shown on this figure.
2. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-9. Destination and Distance Signs

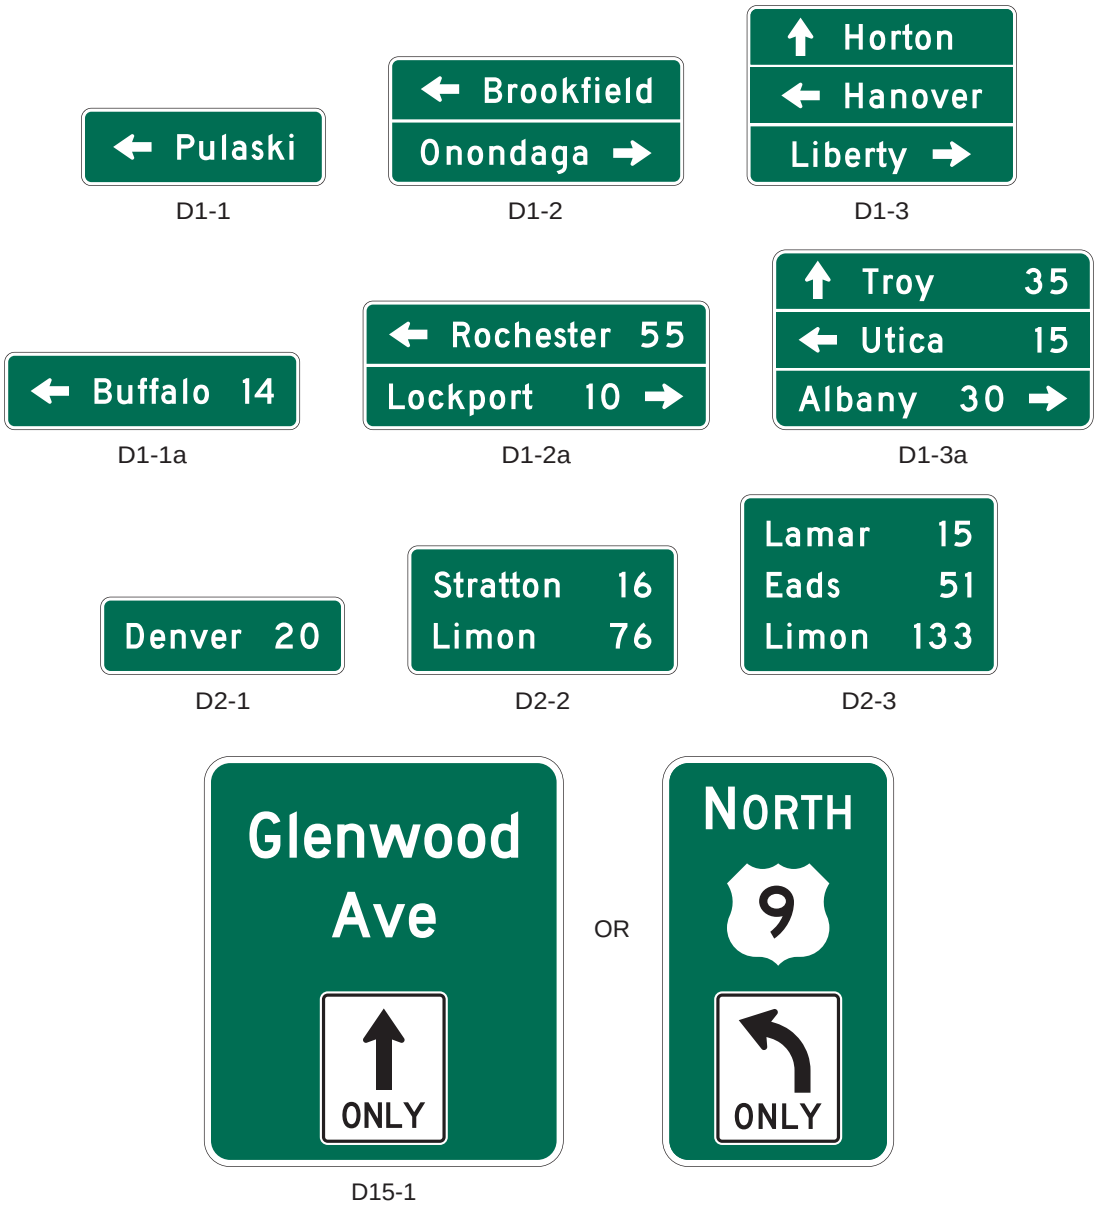

## *Figure 2D-9(CA). California Destination and Distance Signs*




G1-4(CA)




G1-10(CA)




G1-13(CA)




G1-19(CA)




G5(CA)




G8-4(CA)




G8-10(CA)




G8-13(CA)




G8-19(CA)




G8-22(CA)




G86-1(CA)




G86-3(CA)




G86-5(CA)




G86-7(CA)




G86-13(CA)





G86-14(CA)





G86-16(CA)

# Figure 2D-10. Examples of Overhead Signs at an Intersection (Sheet 1 of 3)

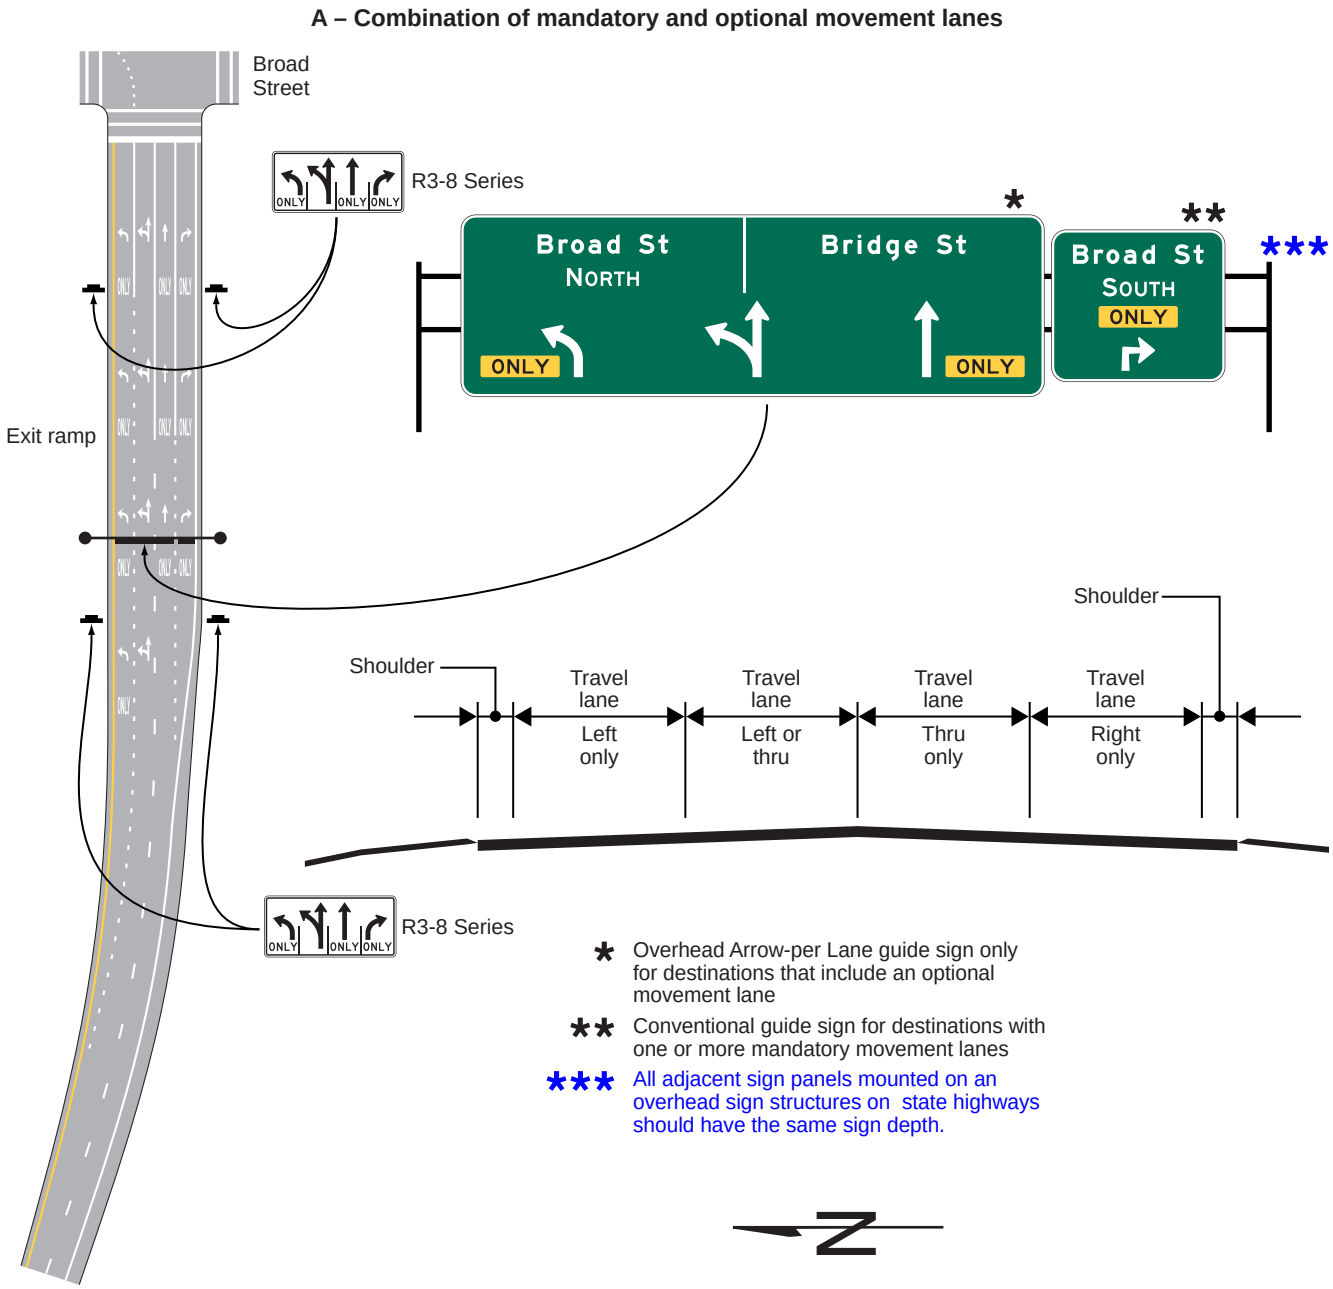


## Figure 2D-10. Examples of Overhead Signs at an Intersection (Sheet 2 of 3)

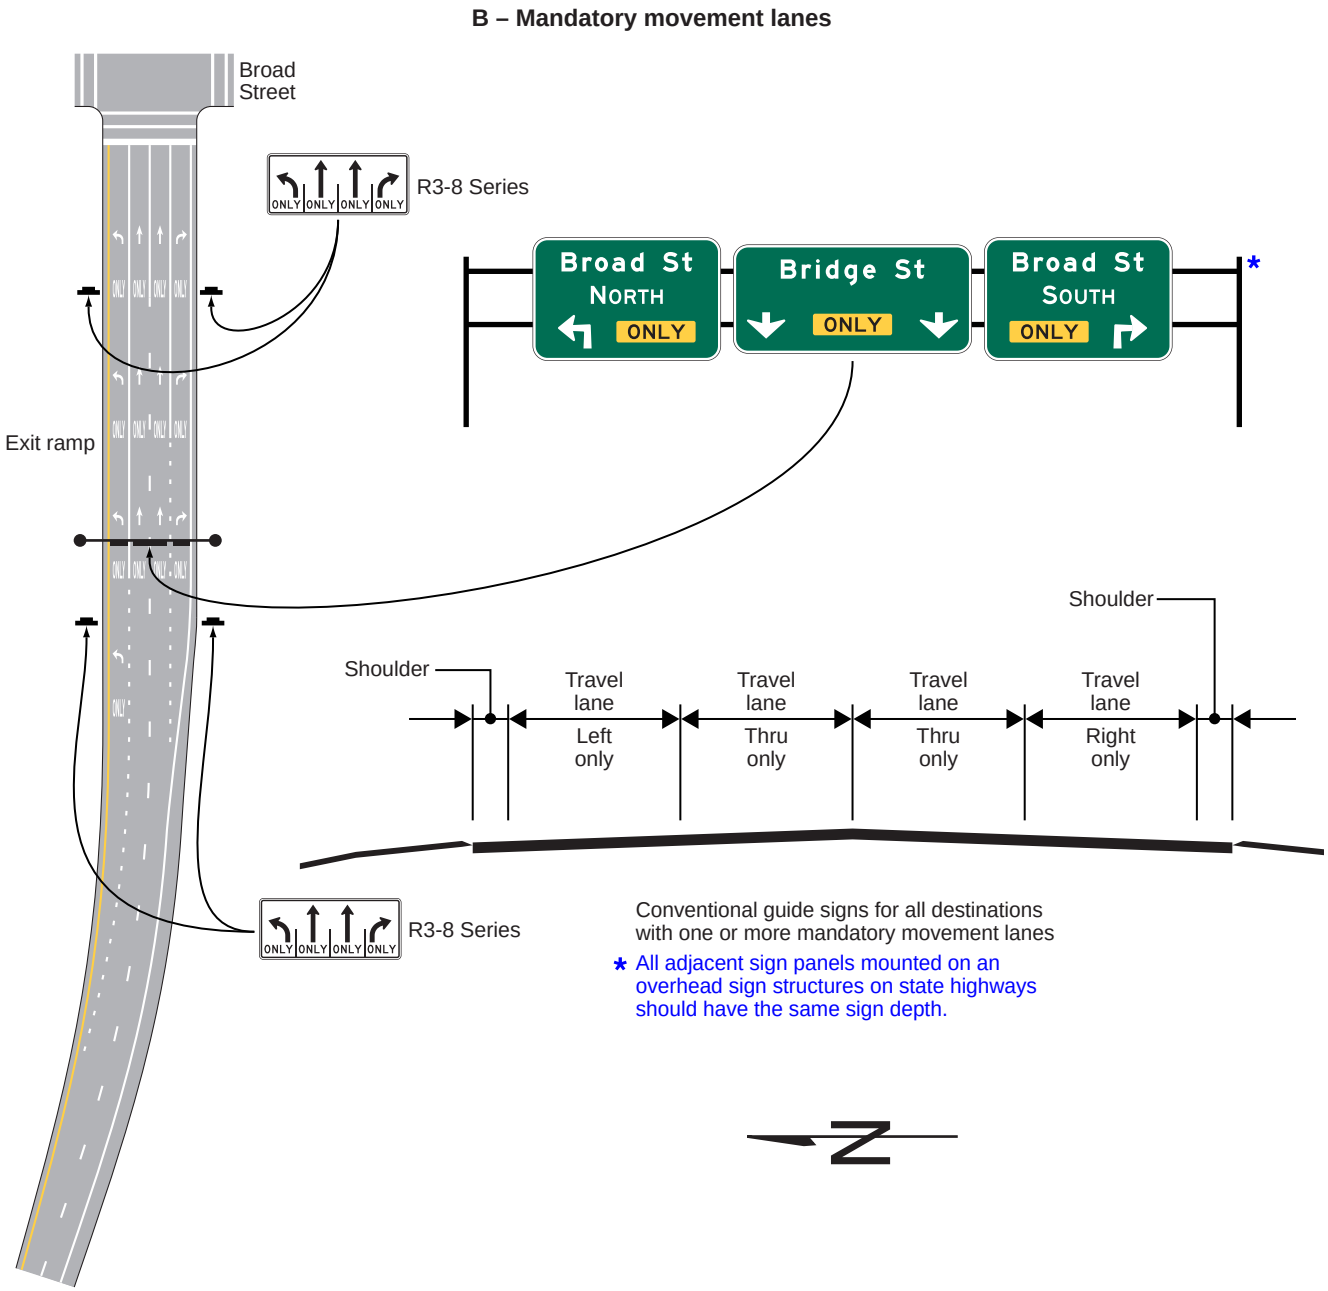


# Figure 2D-10. Examples of Overhead Signs at an Intersection (Sheet 3 of 3)

**C – Mandatory movement lanes with dual turn lanes**

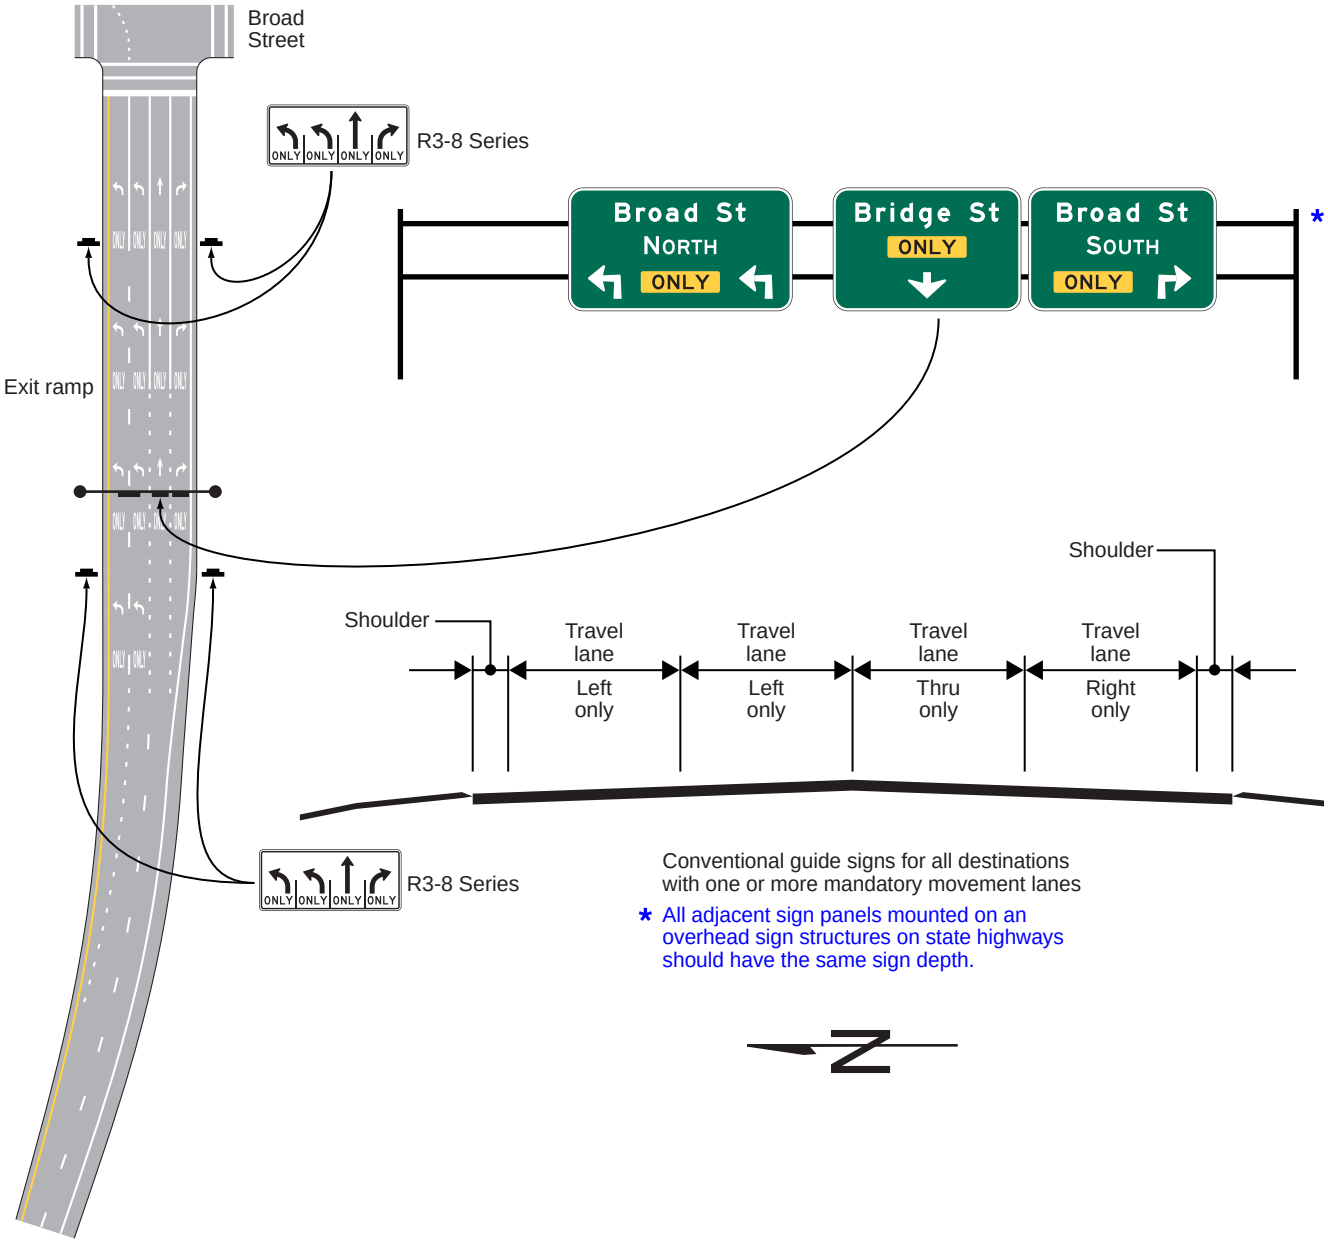

## Figure 2D-11. Destination Signs for Circular Intersections

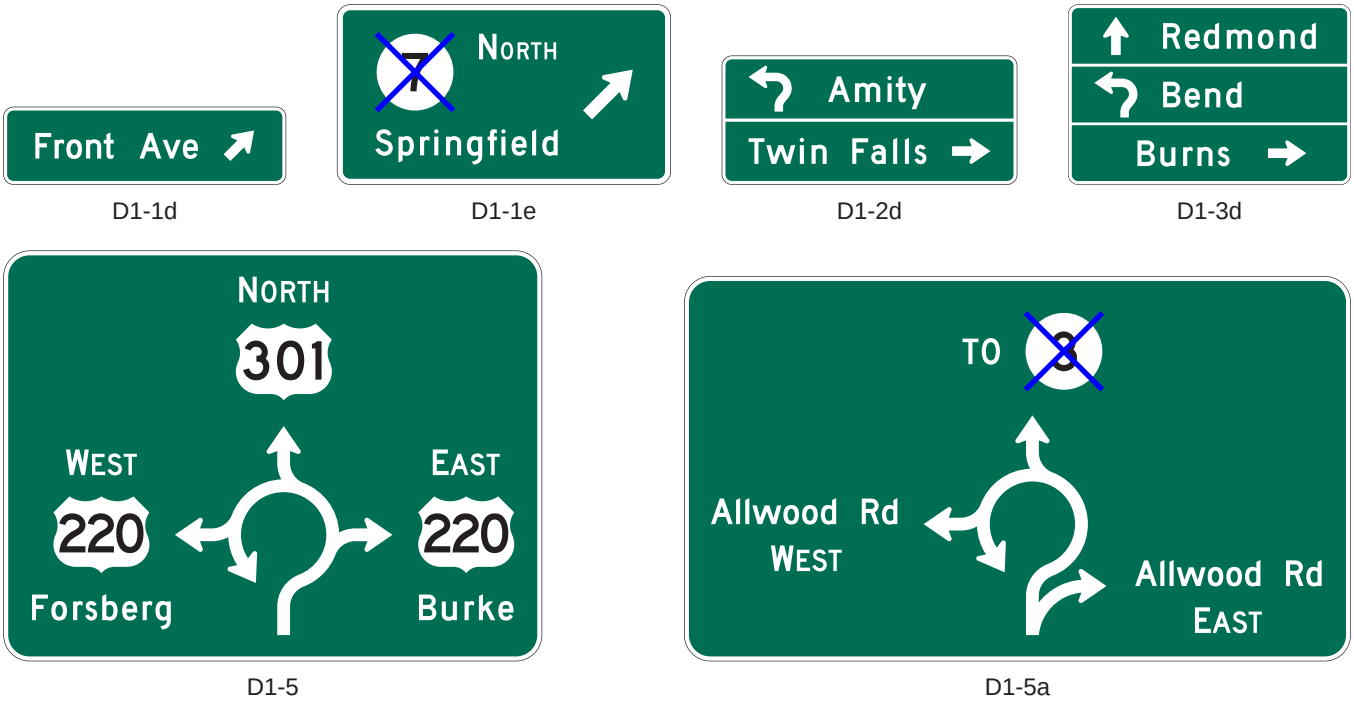



D1-1d D1-1e D1-2d D1-3d

D1-5

D1-5a

Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-12. Examples of Guide Signs for Circular Intersections (Sheet 1 of 4)

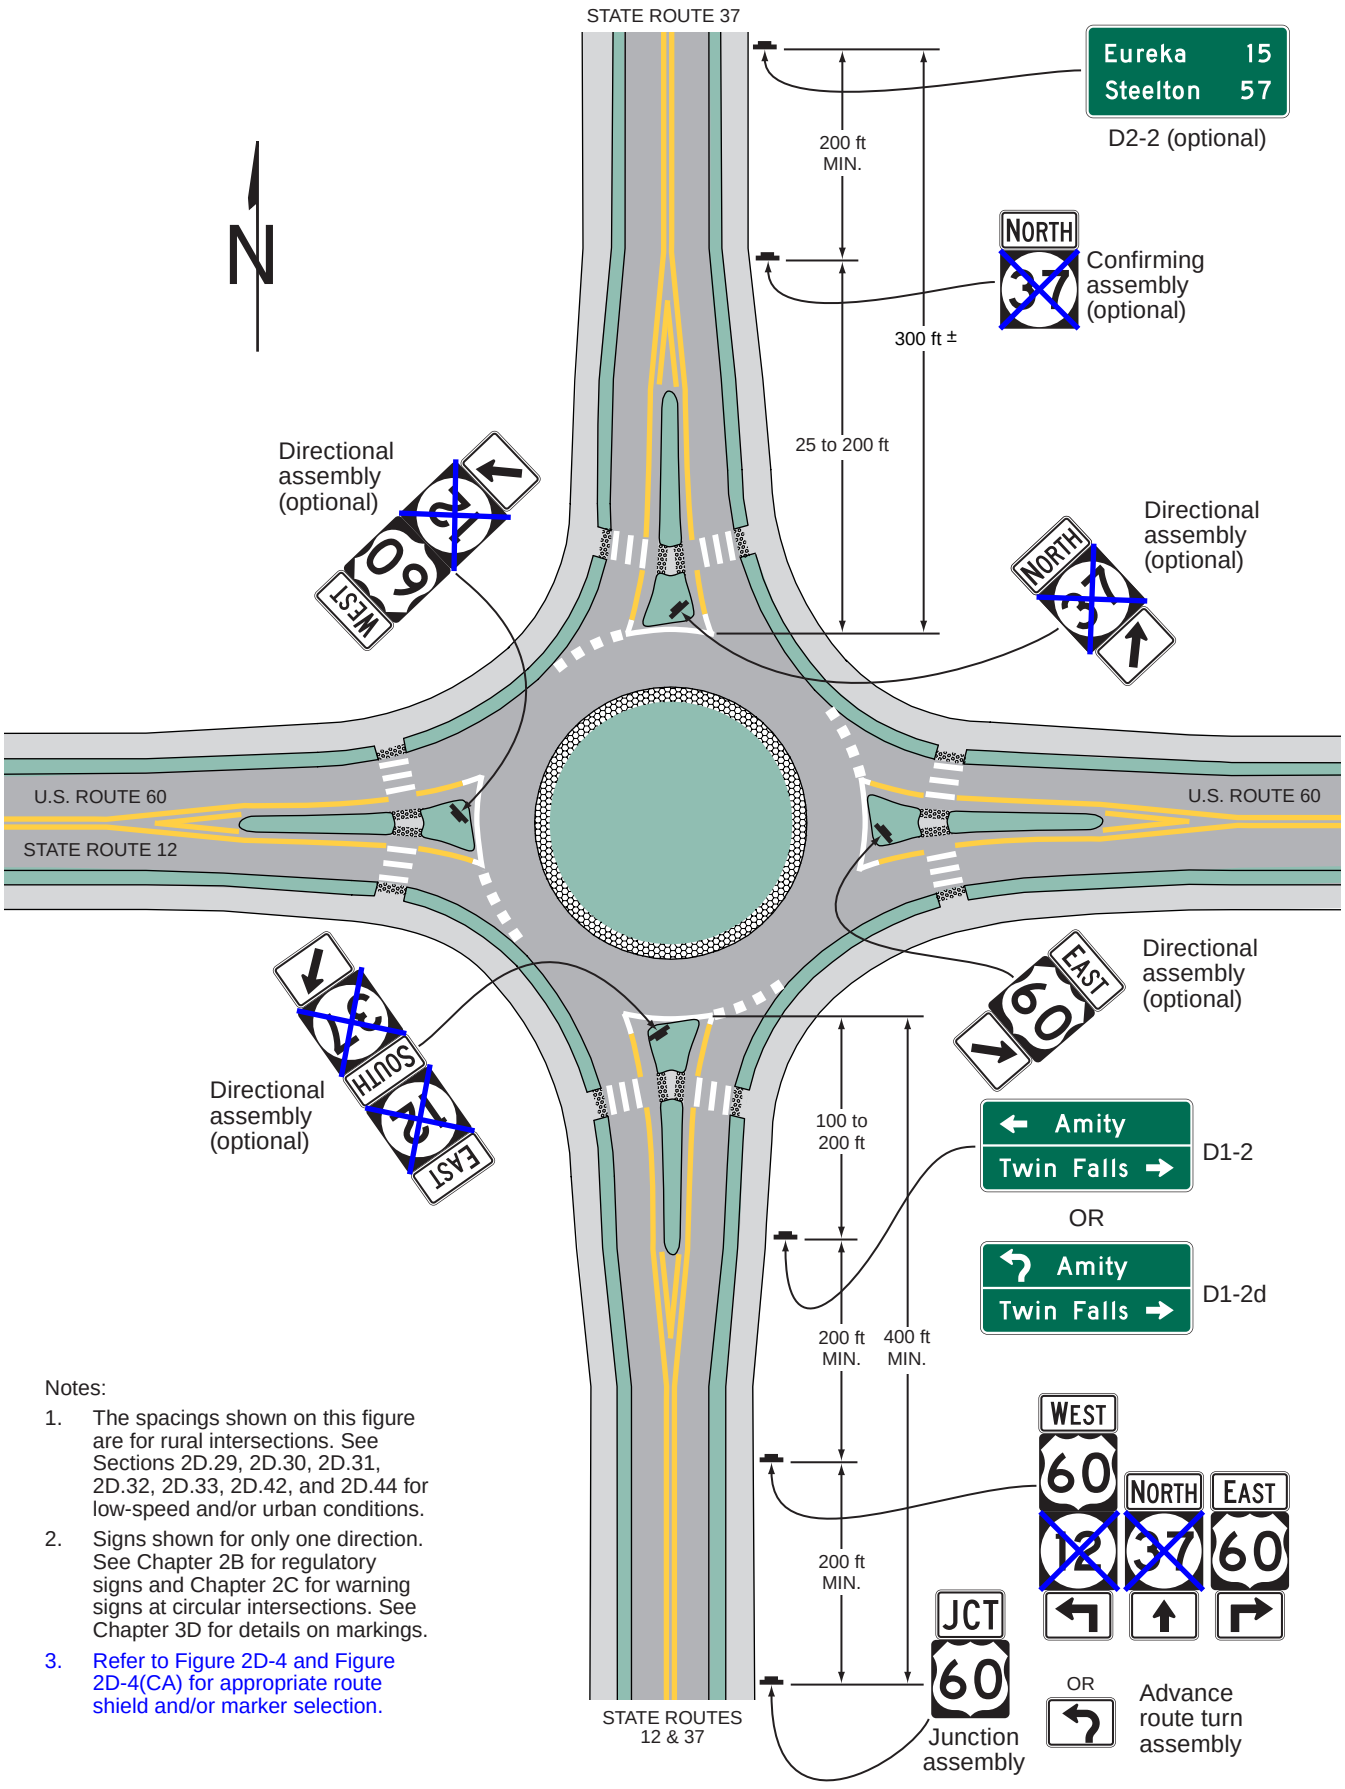


Notes:

1. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
2. Signs shown for only one direction. See Chapter 2B for regulatory signs and Chapter 2C for warning signs at circular intersections. See Chapter 3D for details on markings.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-12. Examples of Guide Signs for Circular Intersections (Sheet 2 of 4)

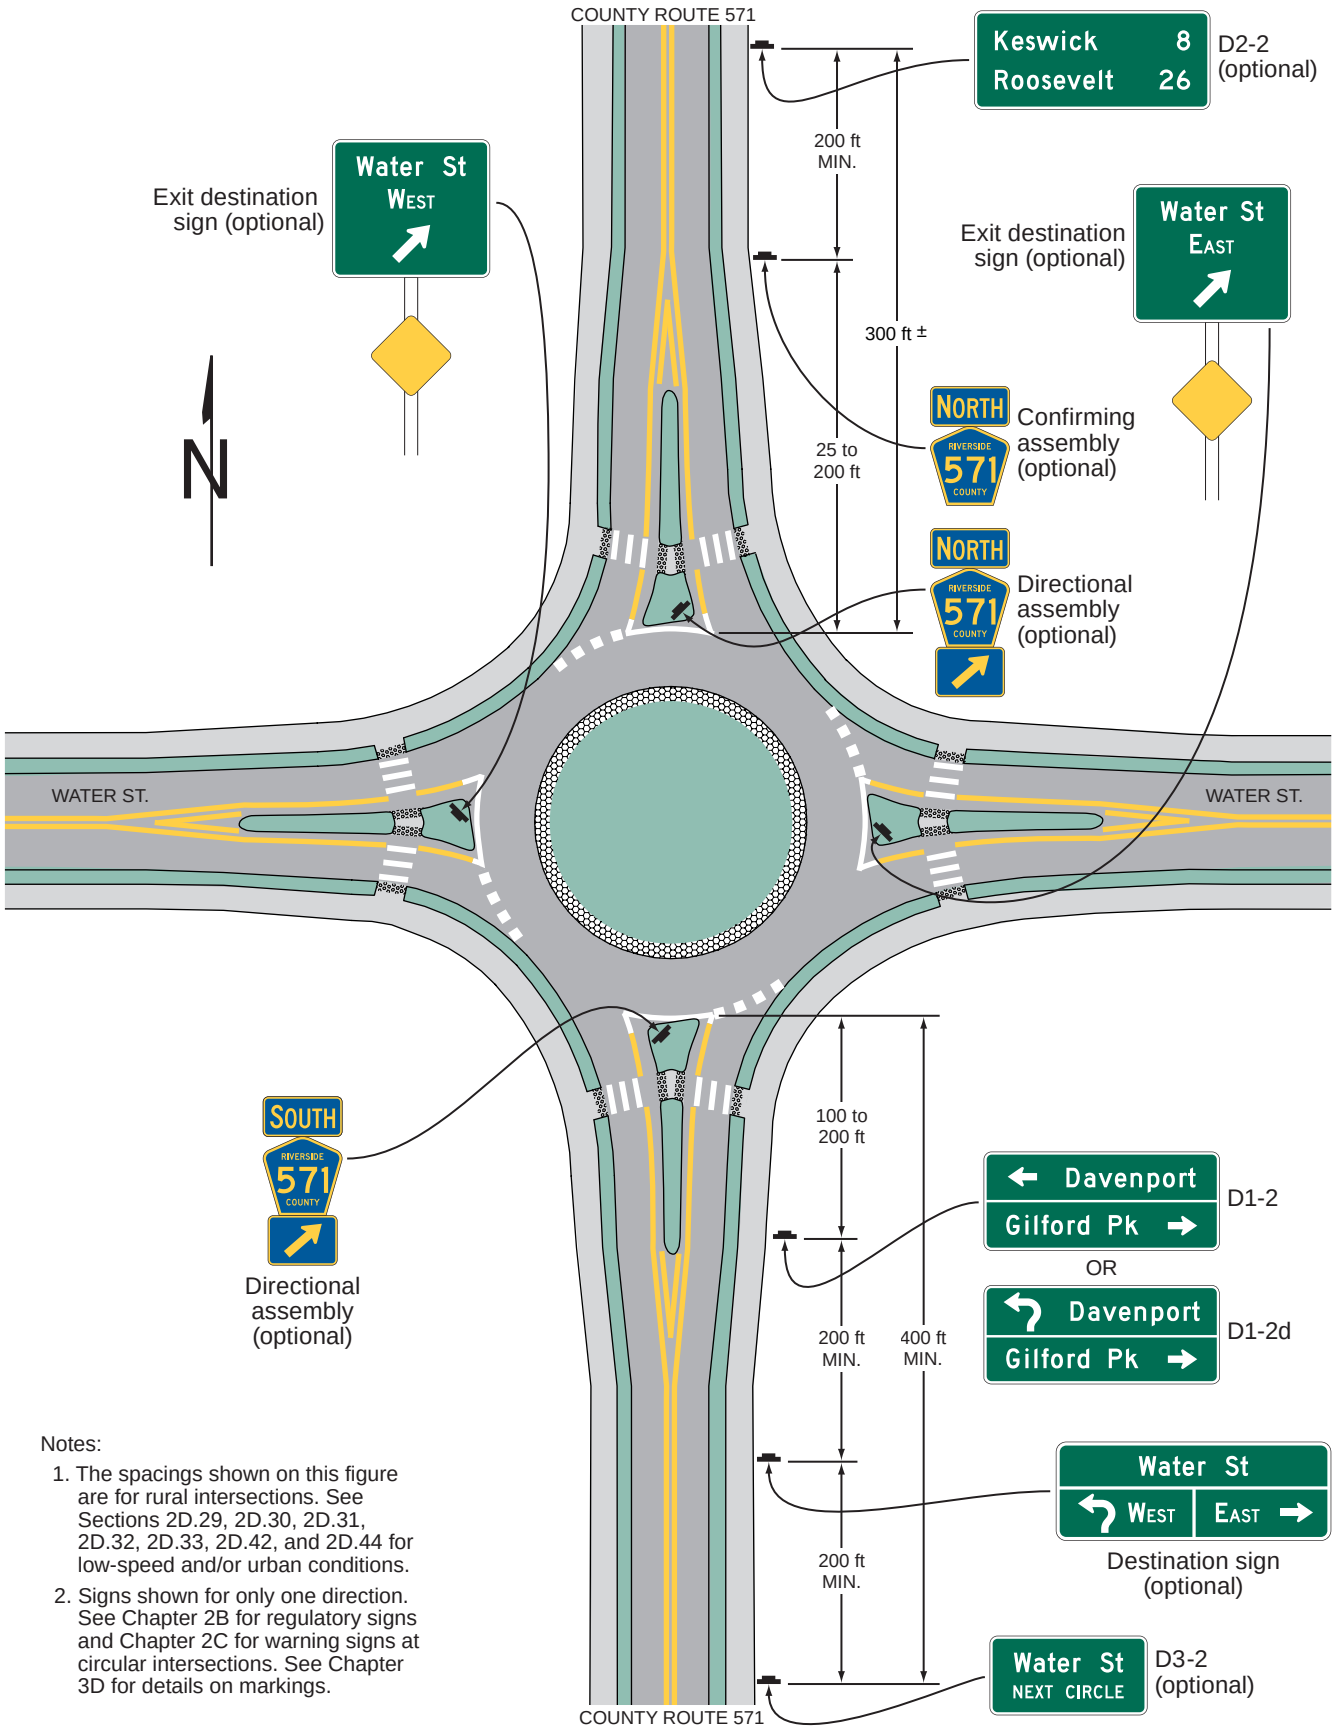


Notes:

1. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
2. Signs shown for only one direction. See Chapter 2B for regulatory signs and Chapter 2C for warning signs at circular intersections. See Chapter 3D for details on markings.


## Figure 2D-12. Examples of Guide Signs for Circular Intersections (Sheet 3 of 4)

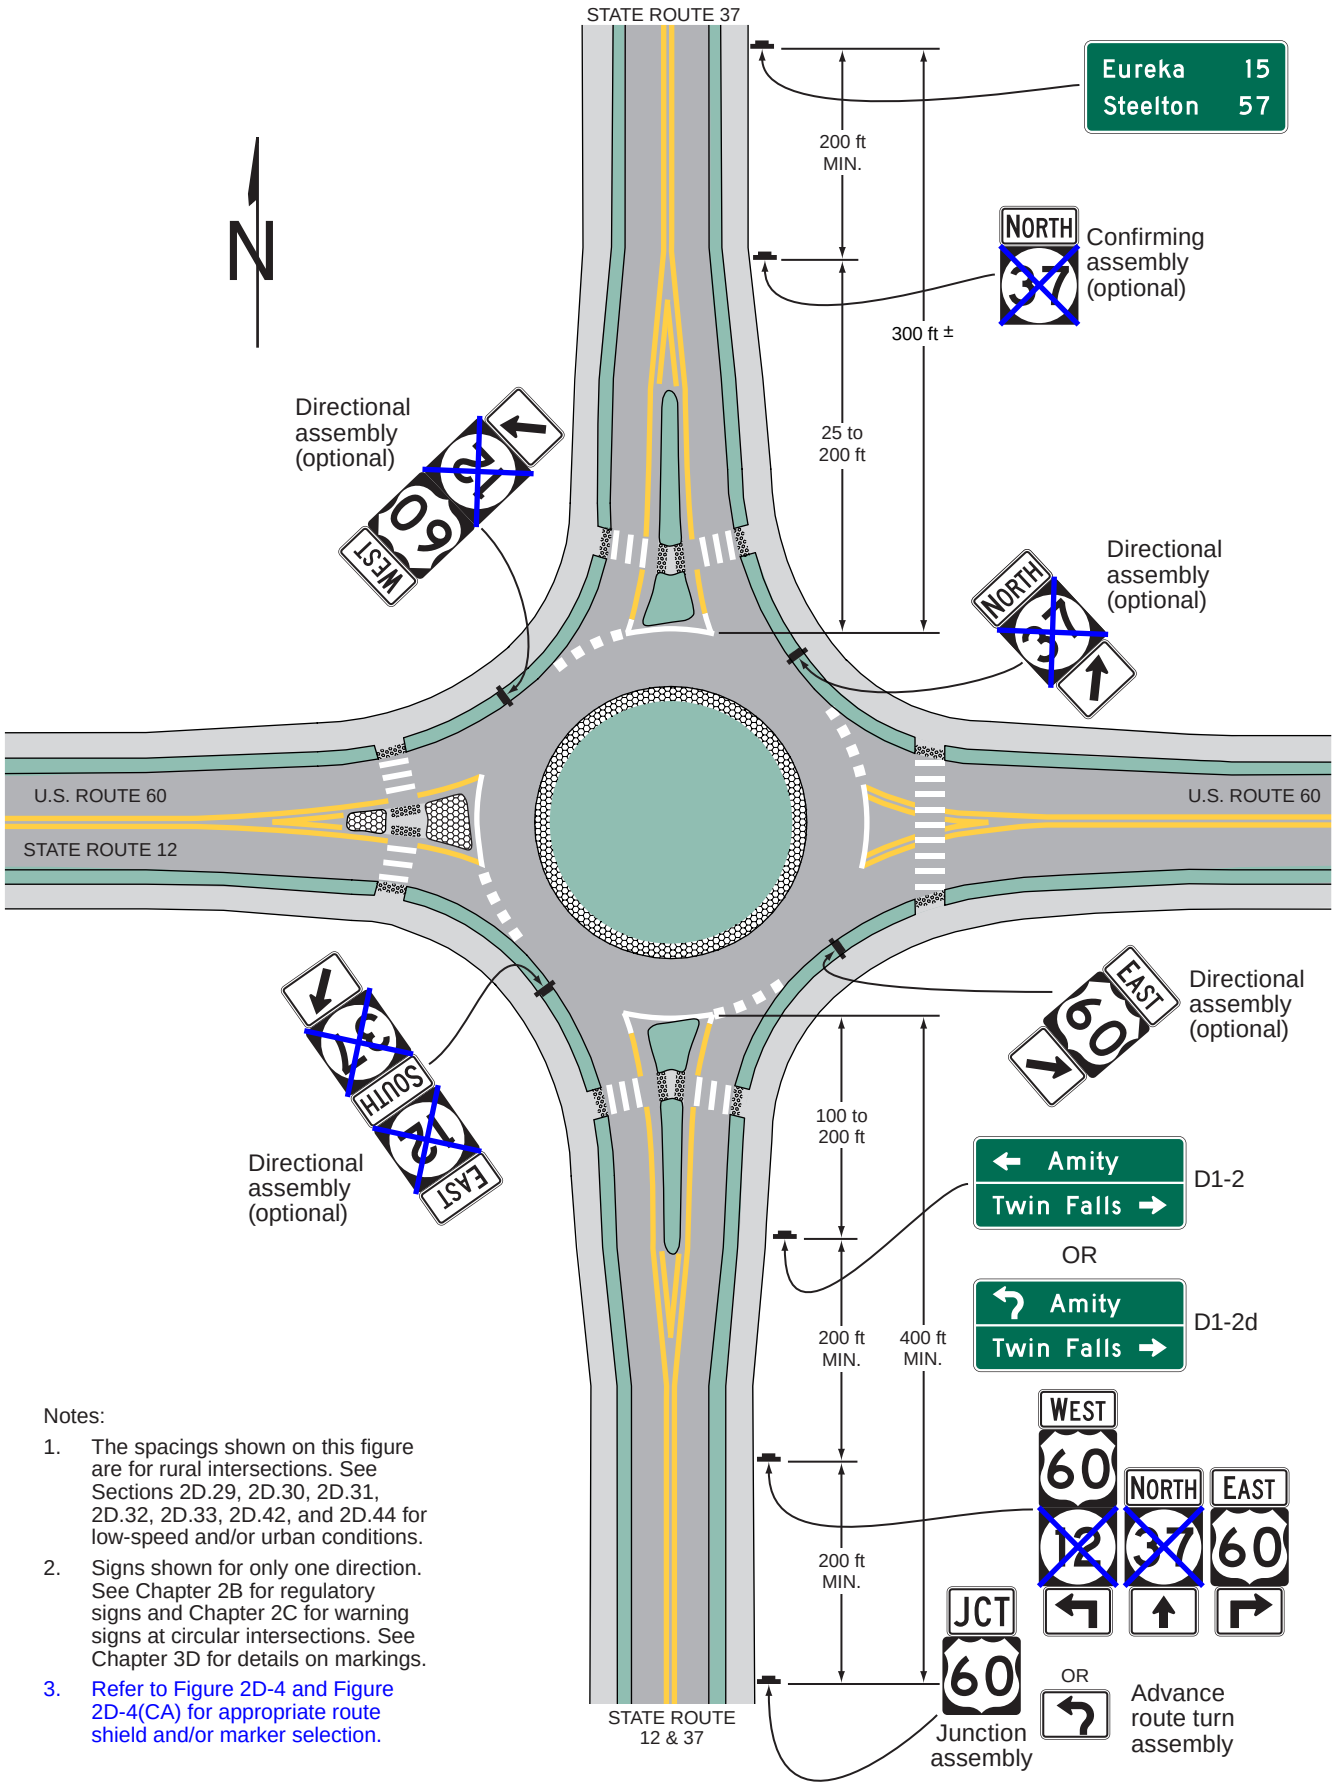


Notes:

1. The spacings shown on this figure are for rural intersections. See Sections 2D.29, 2D.30, 2D.31, 2D.32, 2D.33, 2D.42, and 2D.44 for low-speed and/or urban conditions.
2. Signs shown for only one direction. See Chapter 2B for regulatory signs and Chapter 2C for warning signs at circular intersections. See Chapter 3D for details on markings.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

## Figure 2D-12. Examples of Guide Signs for Circular Intersections (Sheet 4 of 4)

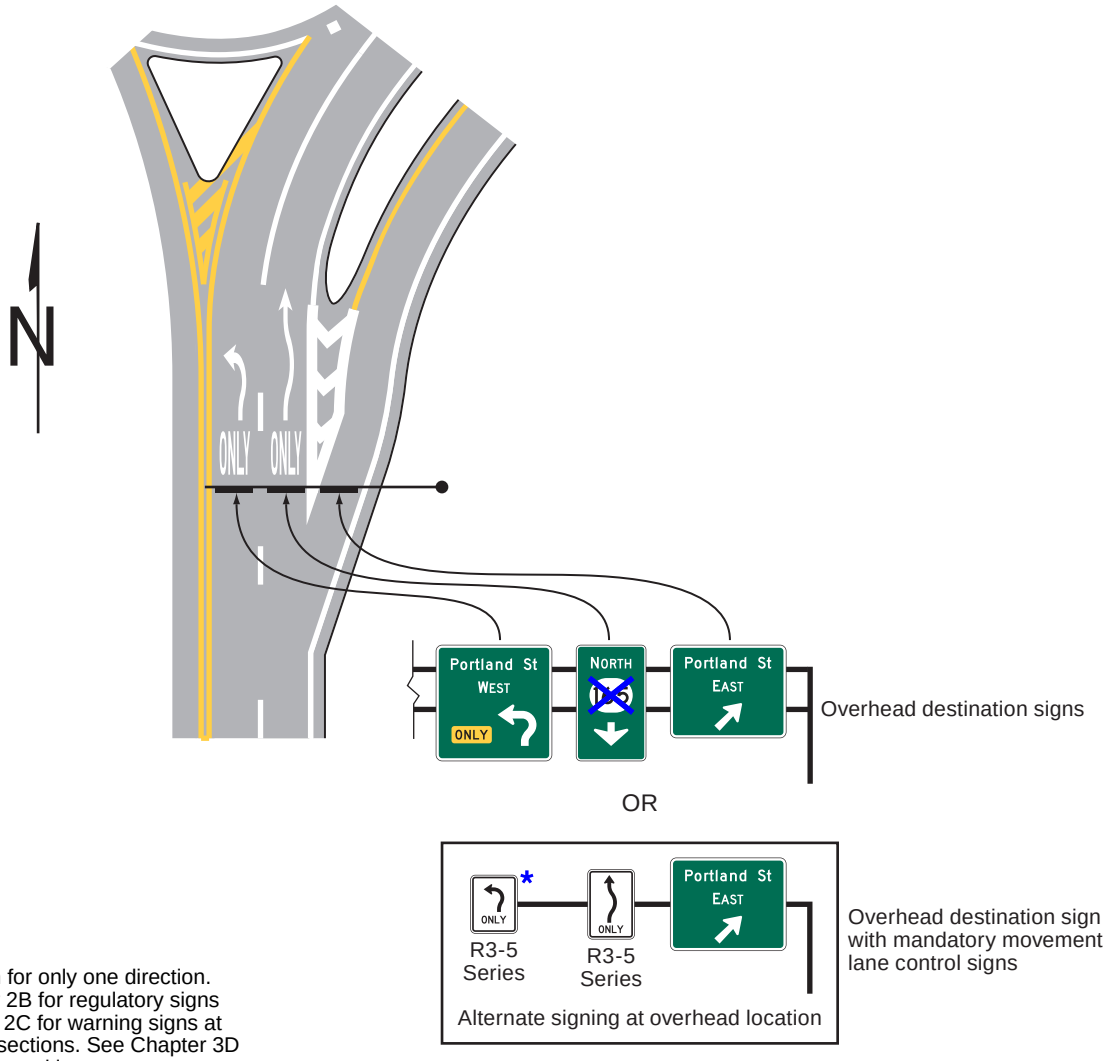



Notes:

1. Signs shown for only one direction. See Chapter 2B for regulatory signs and Chapter 2C for warning signs at circular intersections. See Chapter 3D for details on markings.
2. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropiate route shield and/or marker selection.


* See Figure 2B-5 for intersection lane control sign arrow options.

## Figure 2D-13. Examples of Signing for Intersections with Indirect Left Turns (Sheet 1 of 3)

**A – Intercepted crossroad with left turns prohibited**

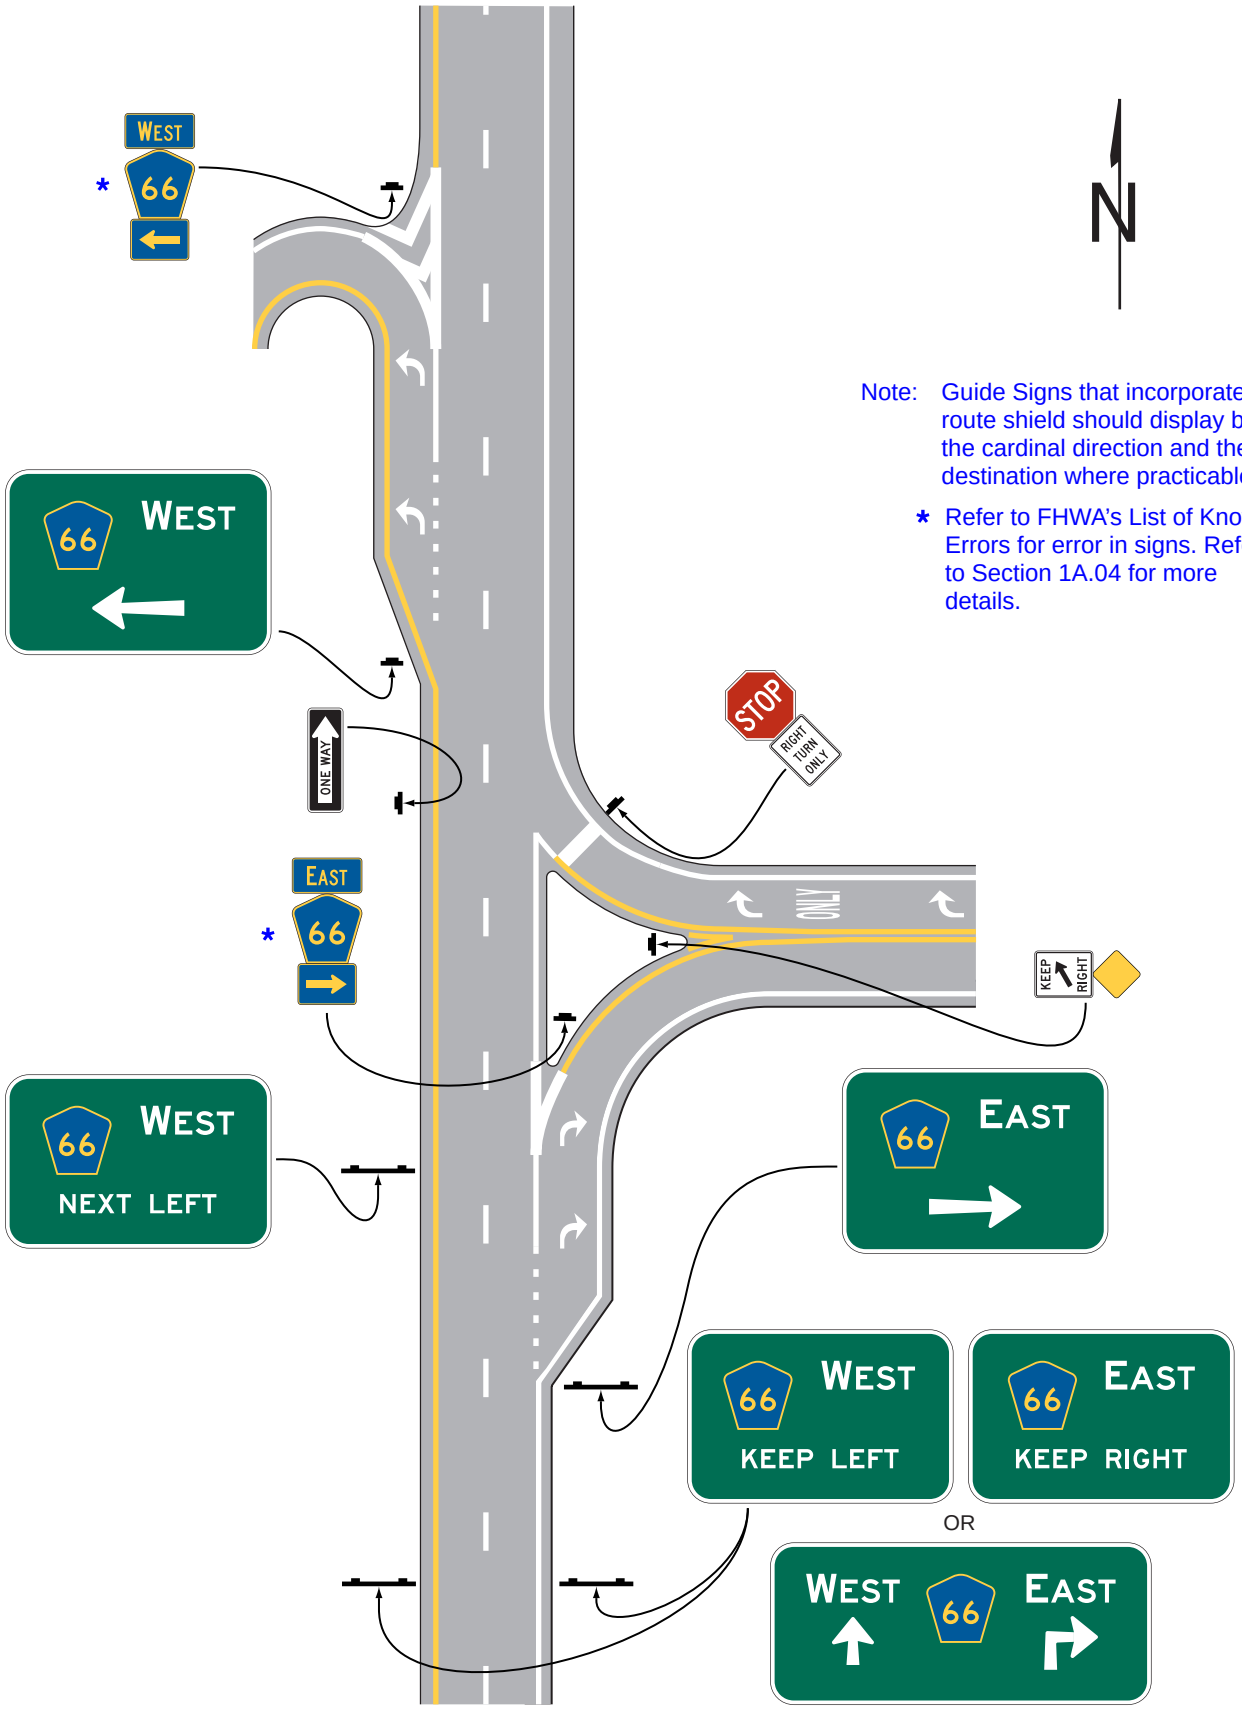


## Figure 2D-13. Examples of Signing for Intersections with Indirect Left Turns (Sheet 2 of 3)

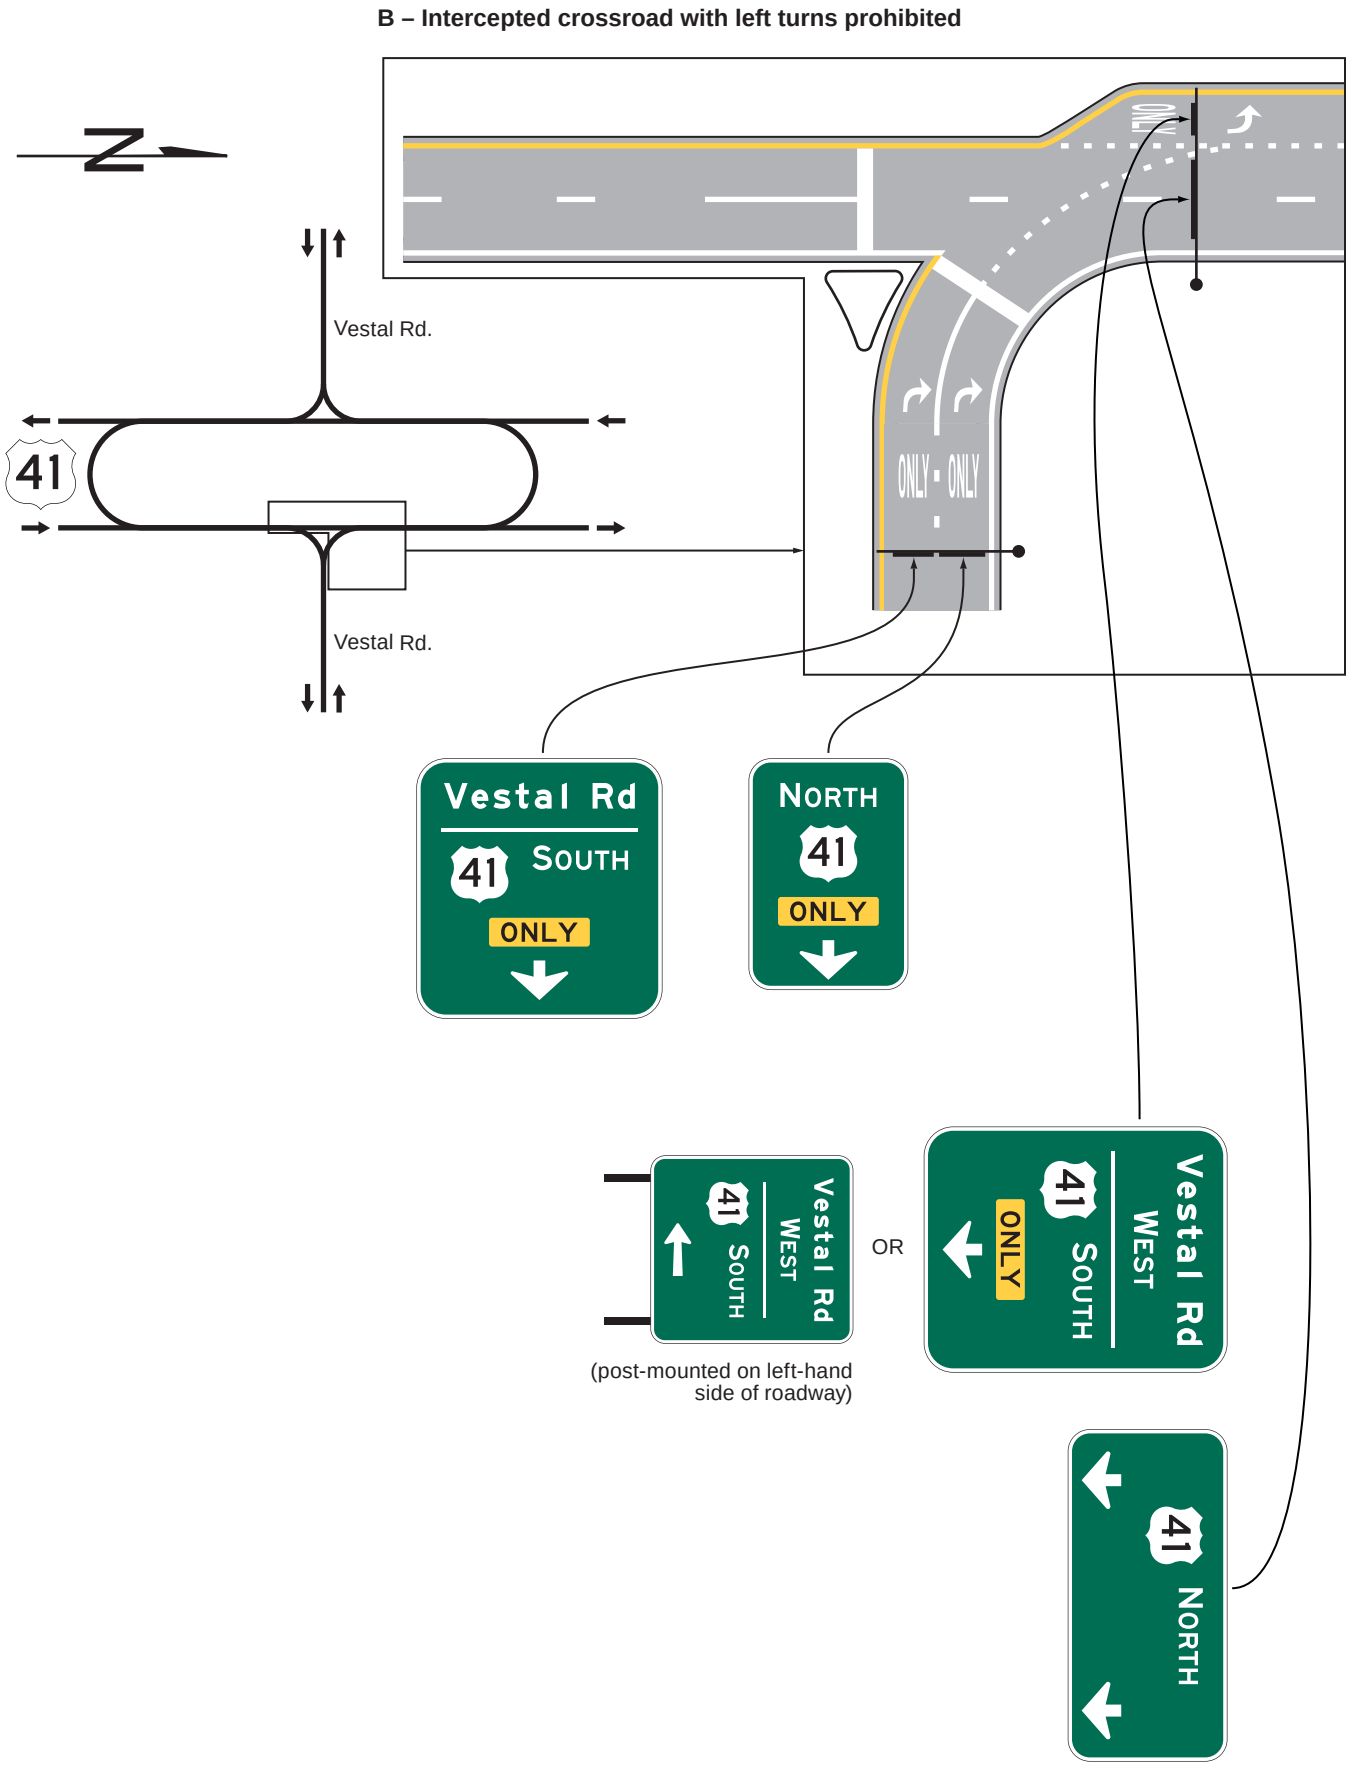


## Figure 2D-13. Examples of Signing for Intersections with Indirect Left Turns (Sheet 3 of 3)

**C – Continuous flow intersection**

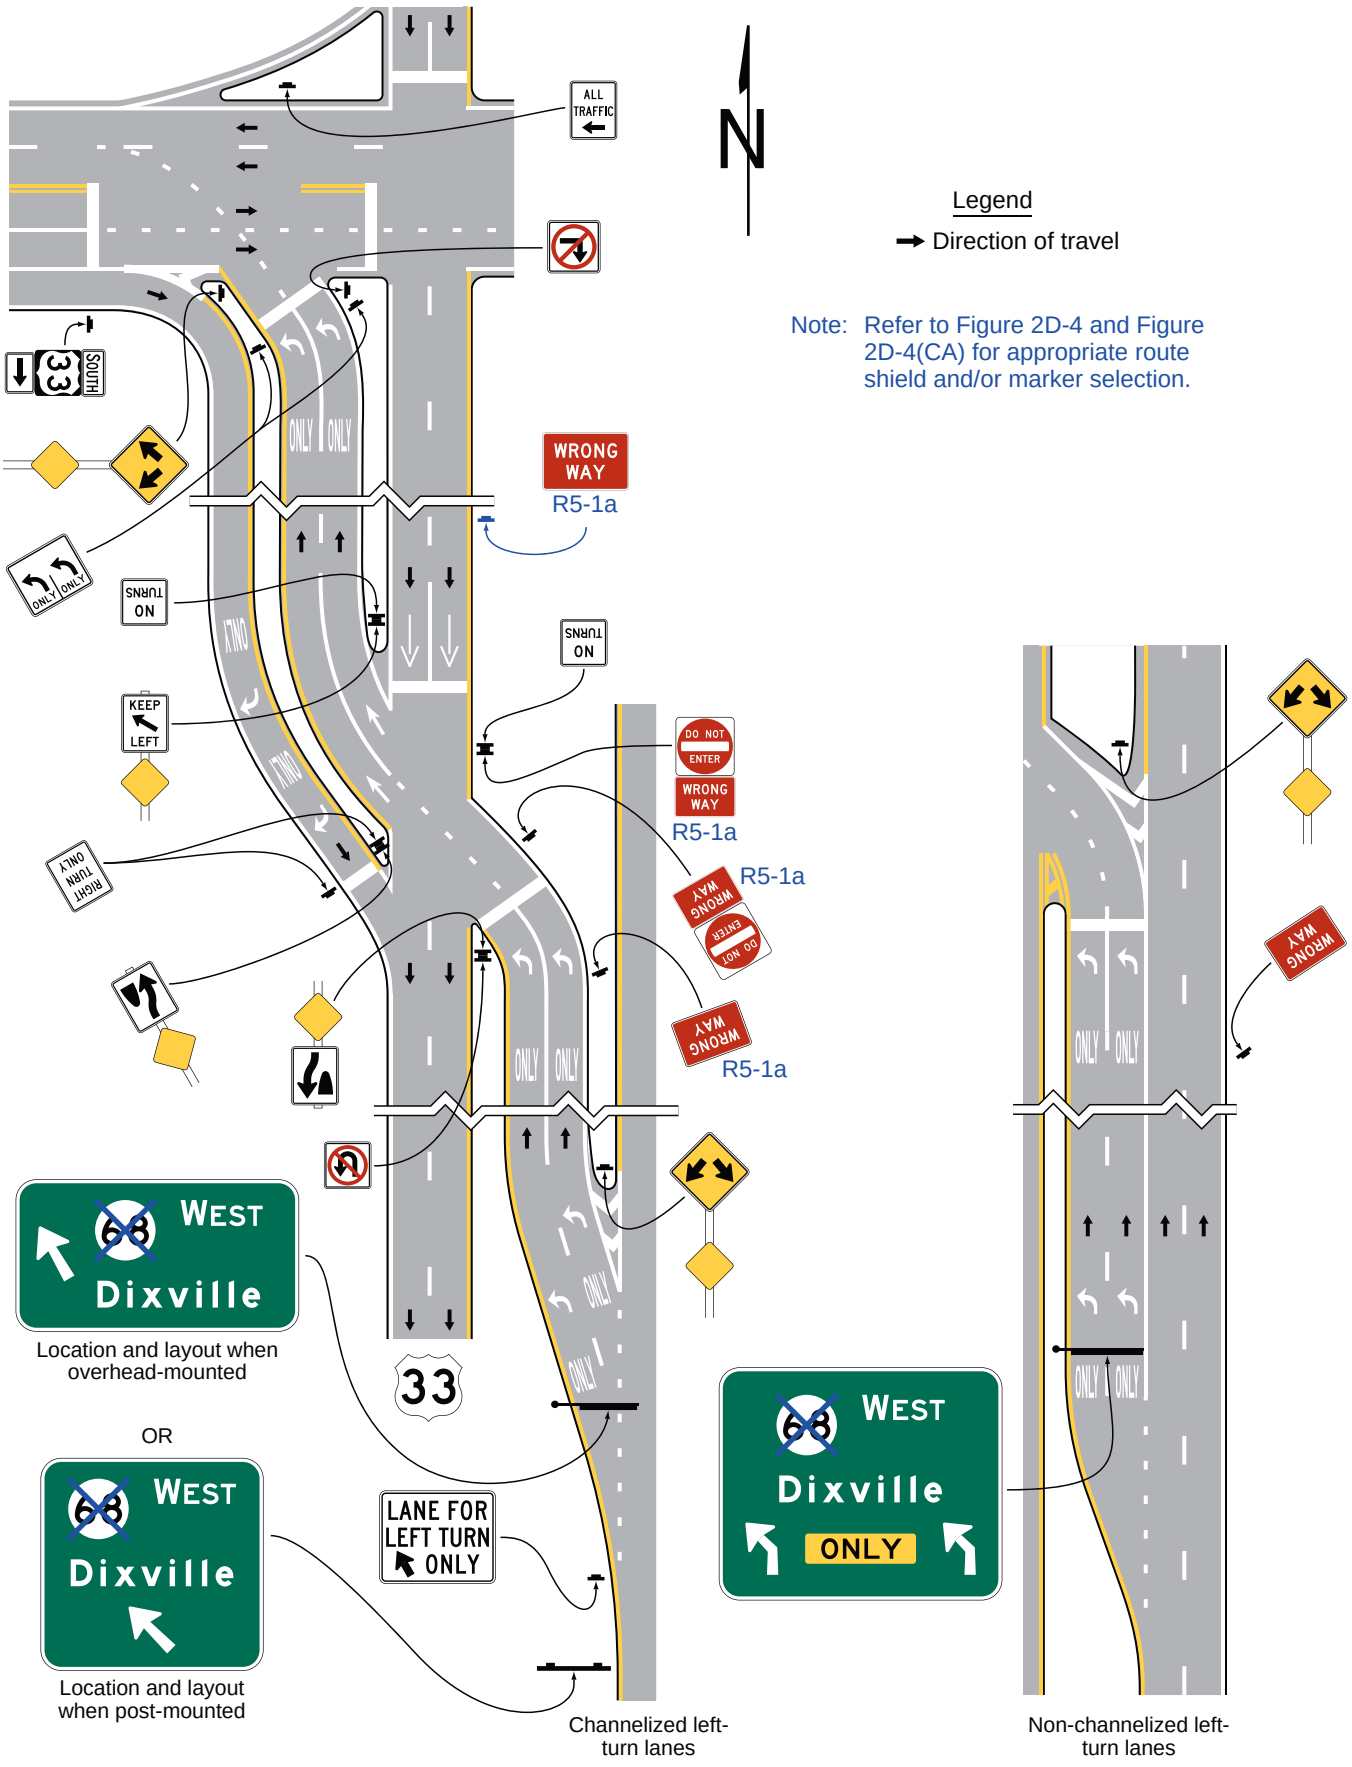


## Figure 2D-14. Street Name and Parking Signs

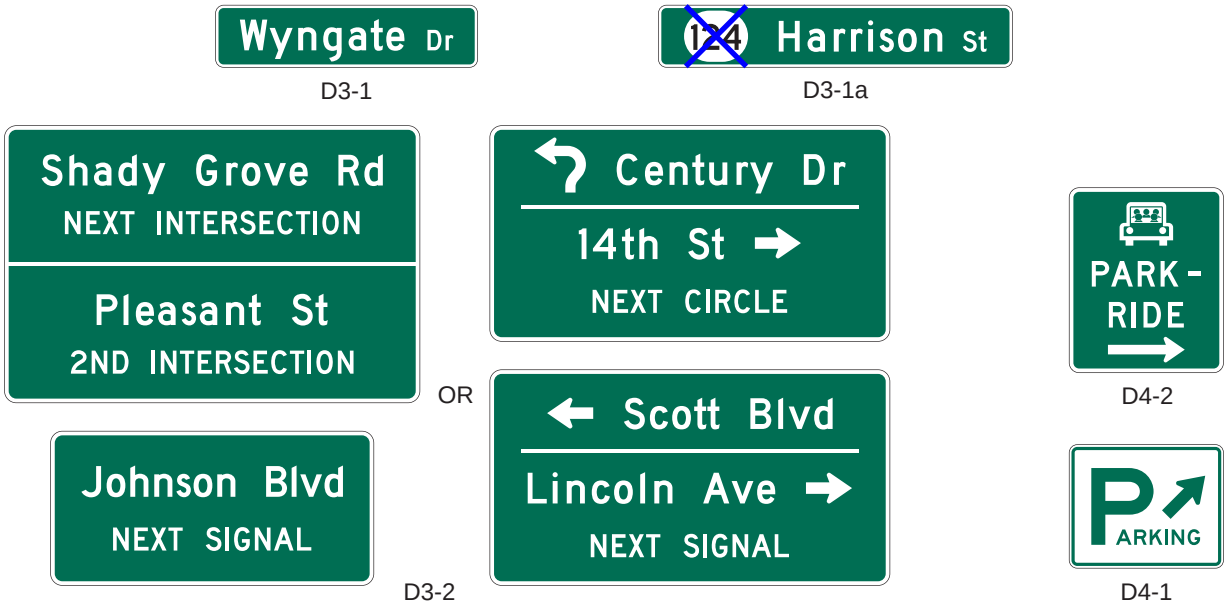


Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2D-15. Example of Interchange Crossroad Guide Signing for a One-Lane Approach

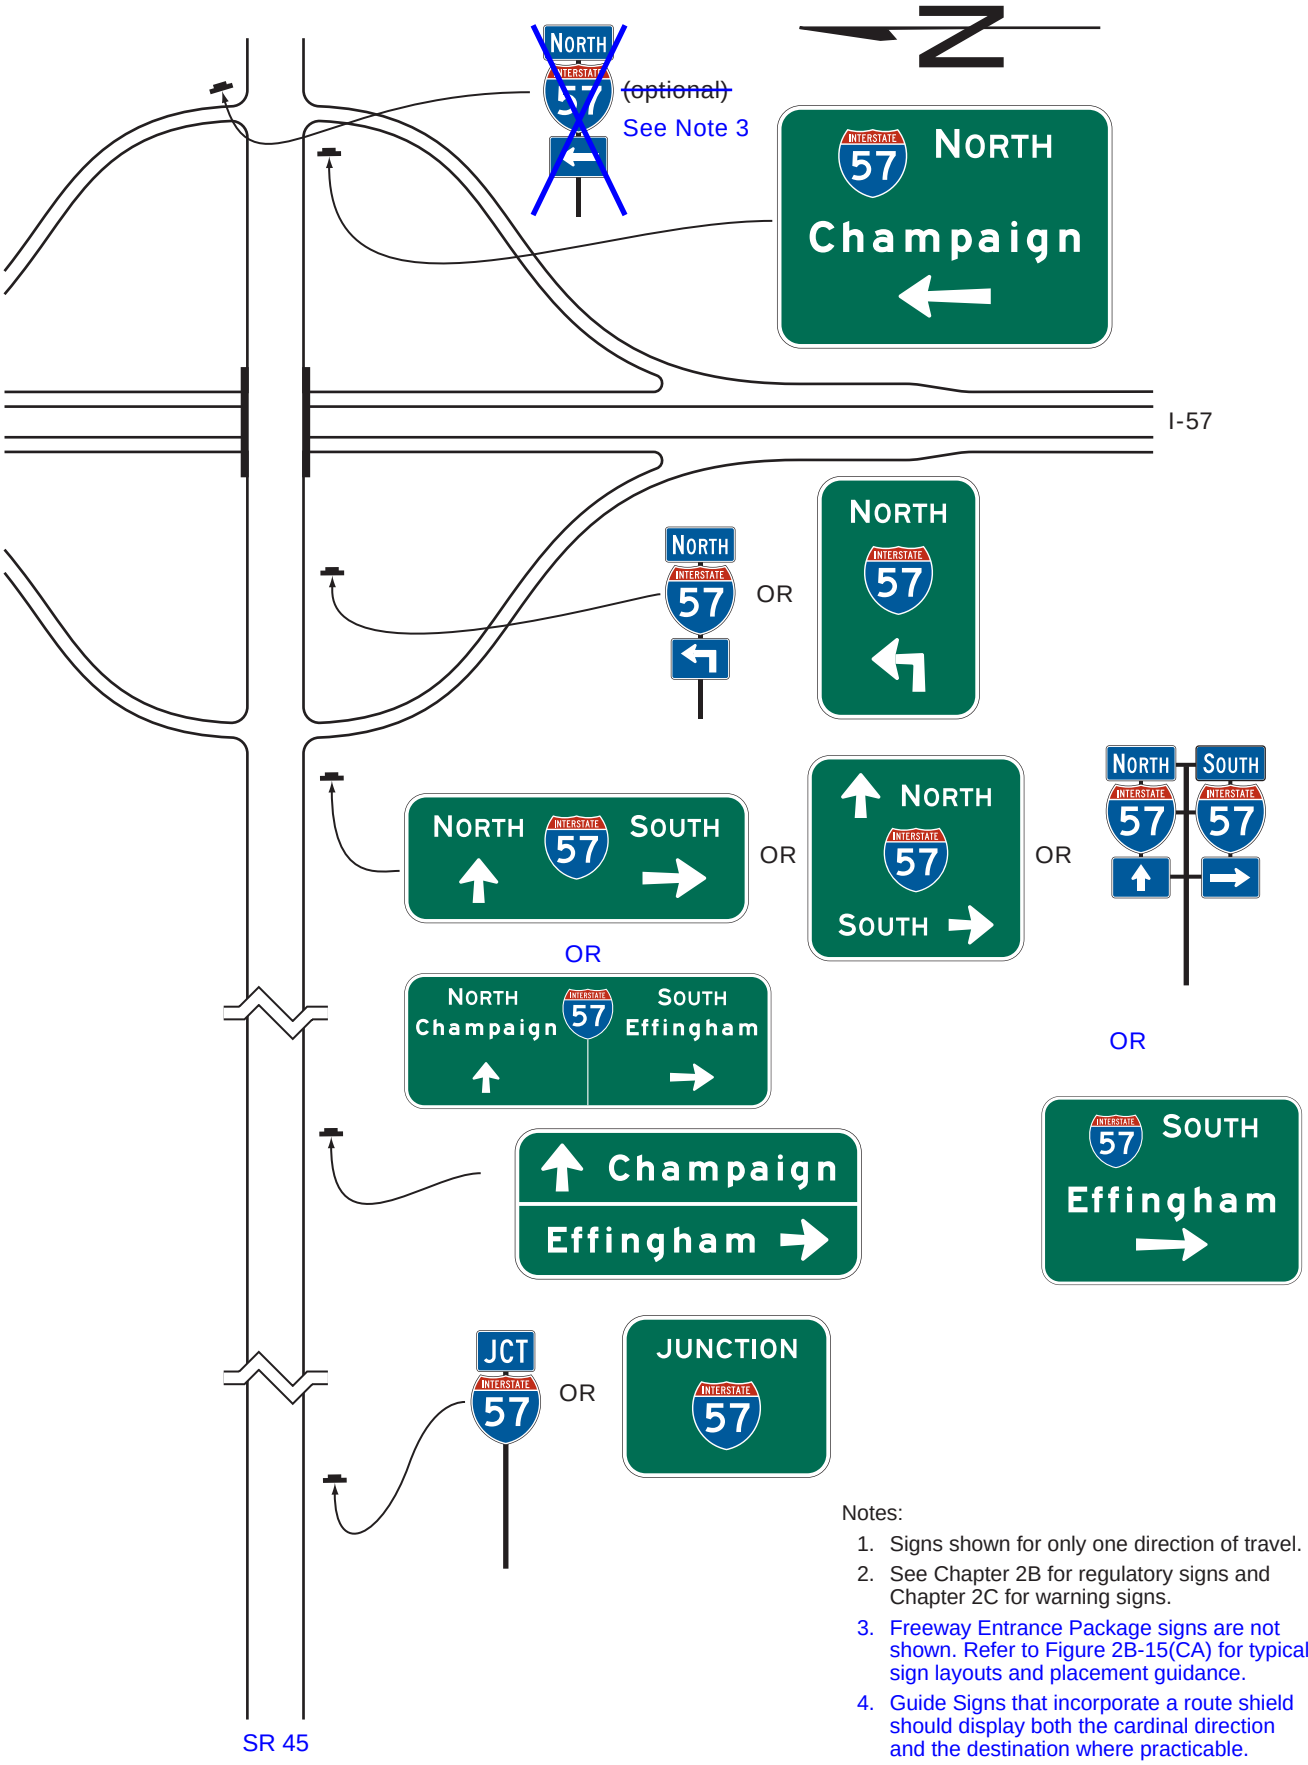


Notes:


1. Signs shown for only one direction of travel.
2. See Chapter 2B for regulatory signs and Chapter 2C for warning signs.
3. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.
4. Guide Signs that incorporate a route shield should display both the cardinal direction and the destination where practicable.

## Figure 2D-16. Example of Minor Interchange Crossroad Guide Signing

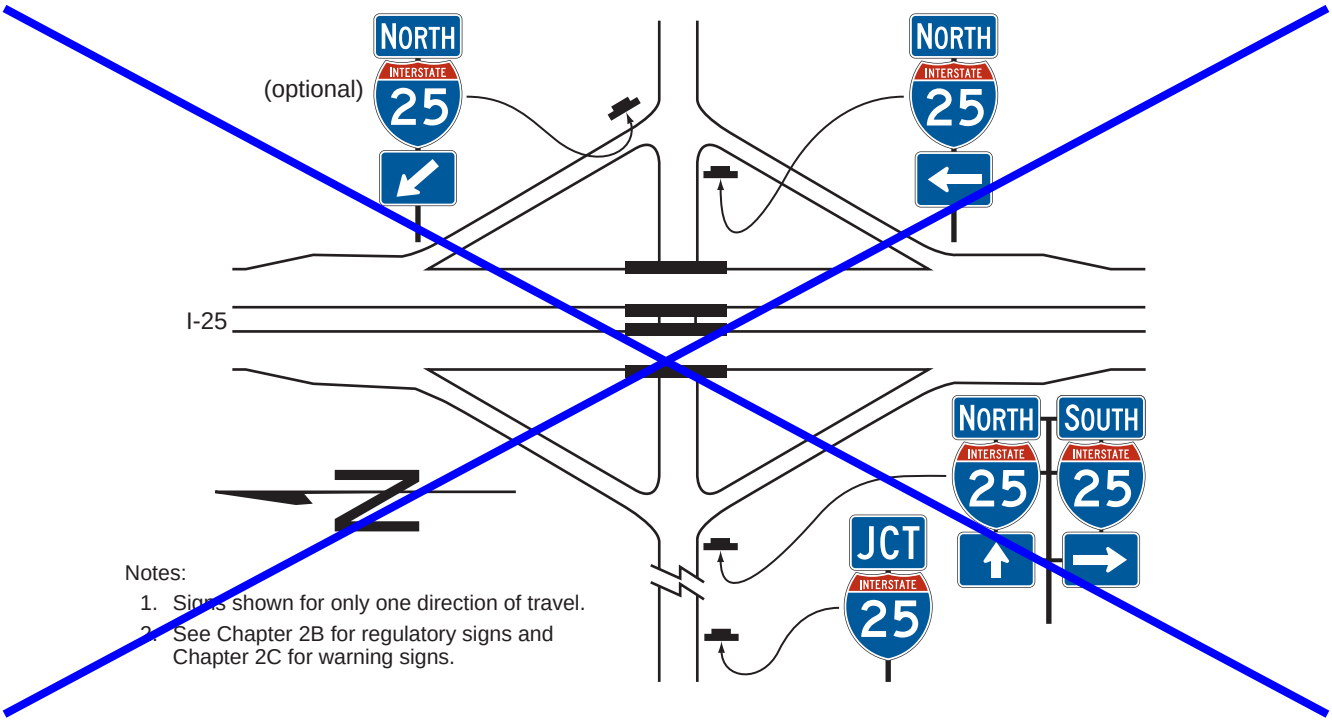


Note: Refer to Figure 2D-15.


## Figure 2D-17. Examples of Multi-Lane Crossroad Guide Signing for a Diamond Interchange

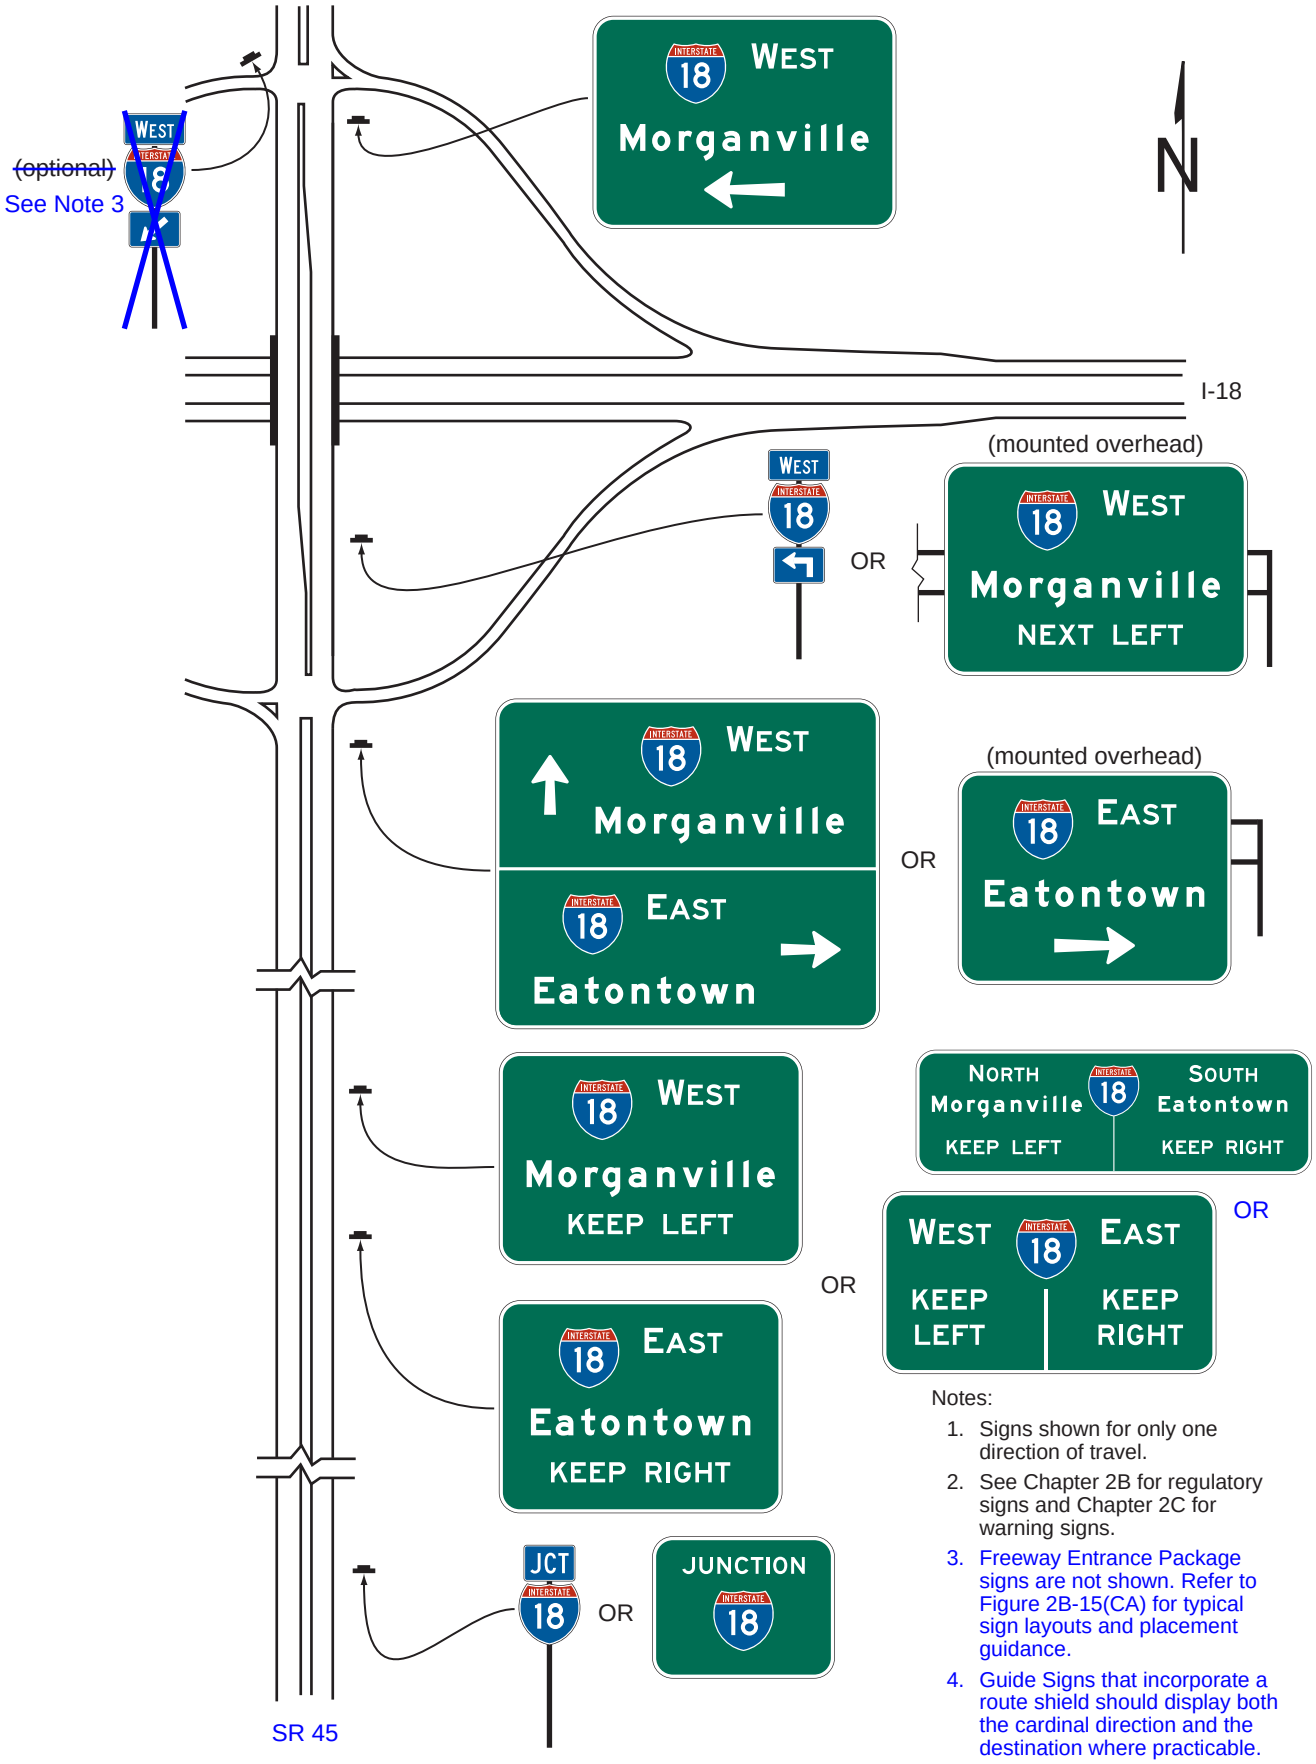


Notes:

1. Signs shown for only one direction of travel.
2. See Chapter 2B for regulatory signs and Chapter 2C for warning signs.
3. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.
4. Guide Signs that incorporate a route shield should display both the cardinal direction and the destination where practicable.


# Figure 2D-18. Examples of Multi-Lane Crossroad Guide Signing for a Partial Cloverleaf Interchange

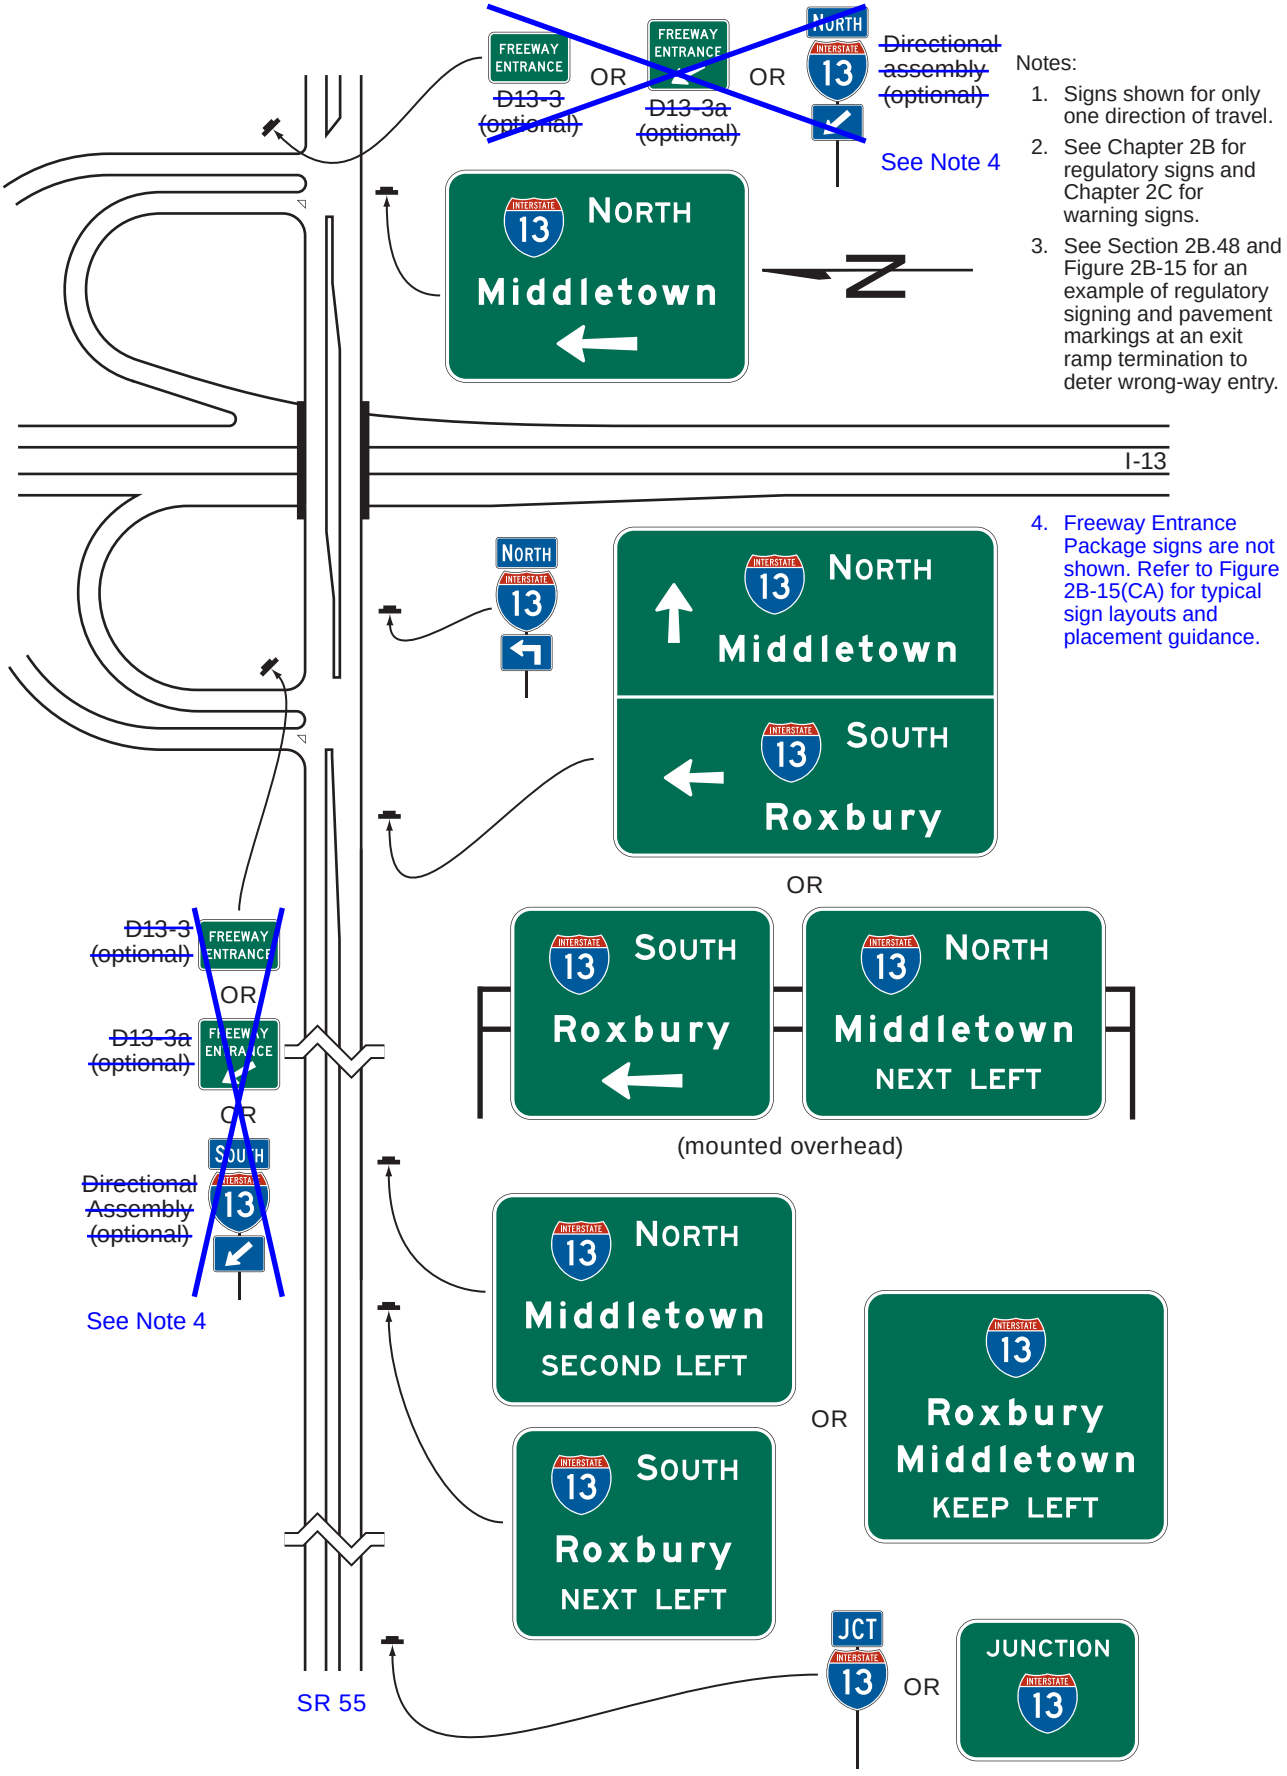


Notes:


1. Signs shown for only one direction of travel.
2. See Chapter 2B for regulatory signs and Chapter 2C for warning signs.
3. See Section 2B.48 and Figure 2B-15 for an example of regulatory signing and pavement markings at an exit ramp termination to deter wrong-way entry.
4. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.

## Figure 2D-19. Examples of Multi-Lane Crossroad Signing for a Cloverleaf Interchange

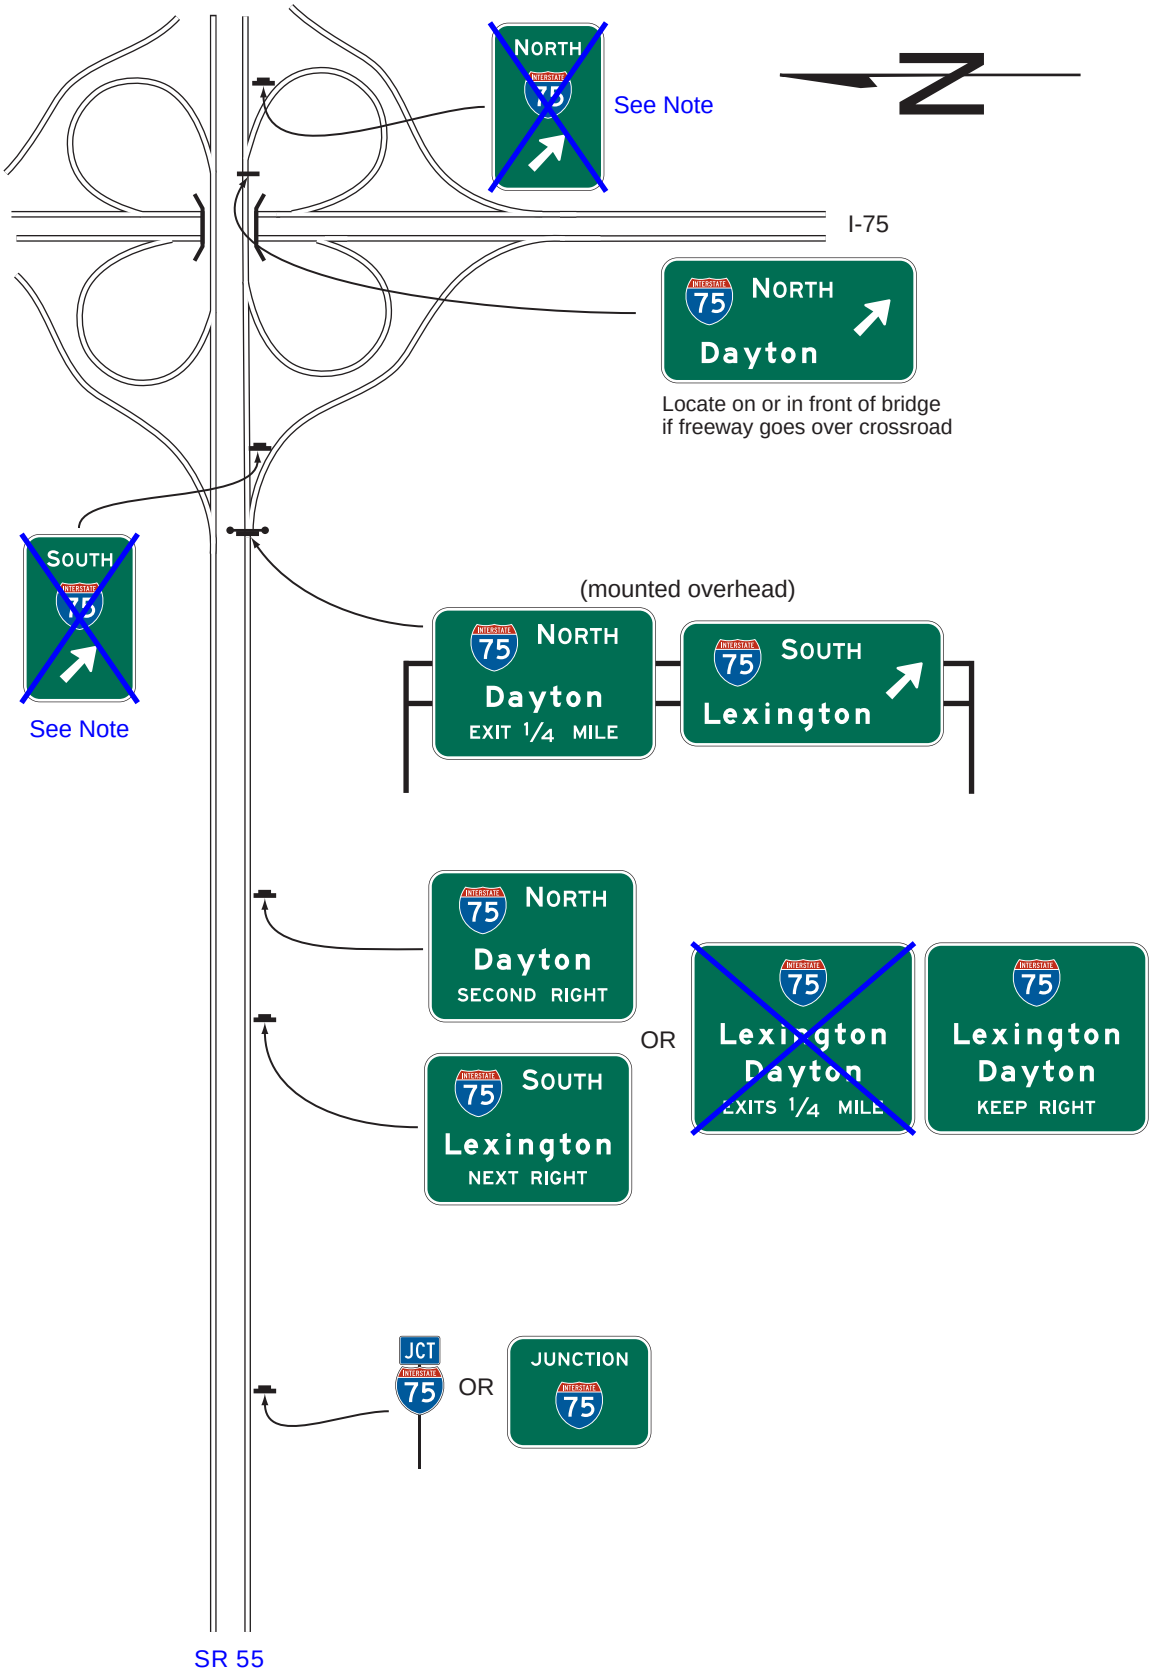


Note: Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.


## Figure 2D-20. Example of Crossroad Guide Signing for an Entrance Ramp with a Nearby Frontage Road

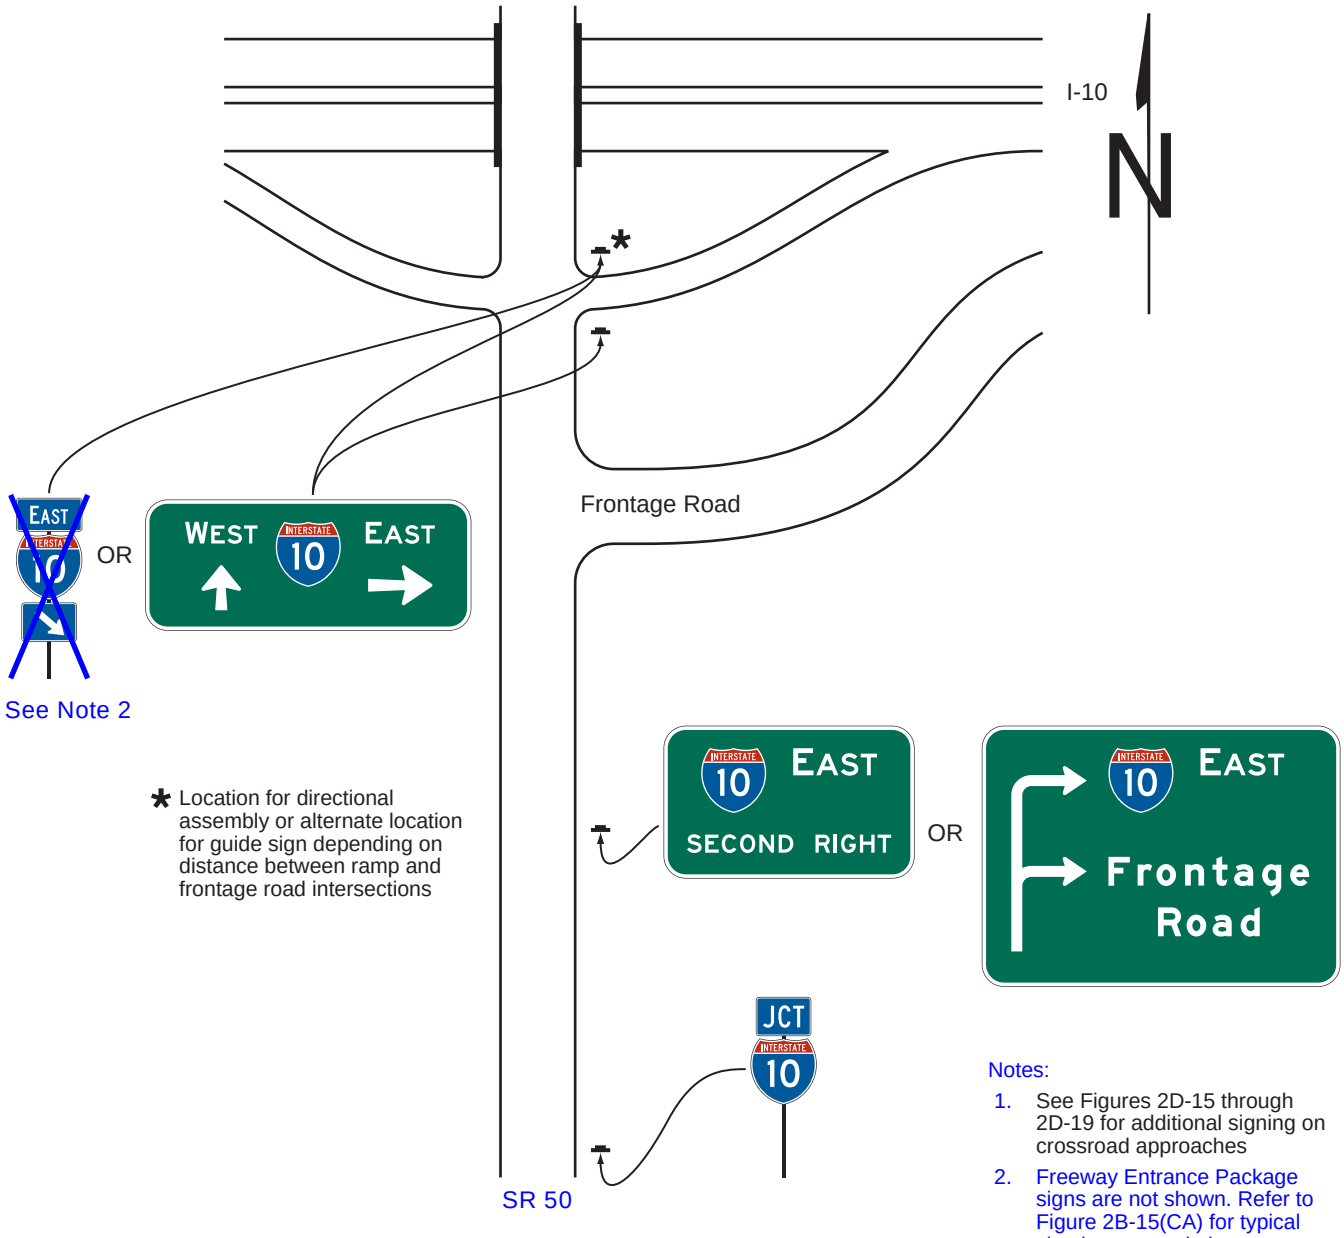


Notes:

1. See Figures 2D-15 through 2D-19 for additional signing on crossroad approaches
2. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.


## Figure 2D-21. Example of Transposed Alignment Crossroad Guide Signing at a Diamond Interchange

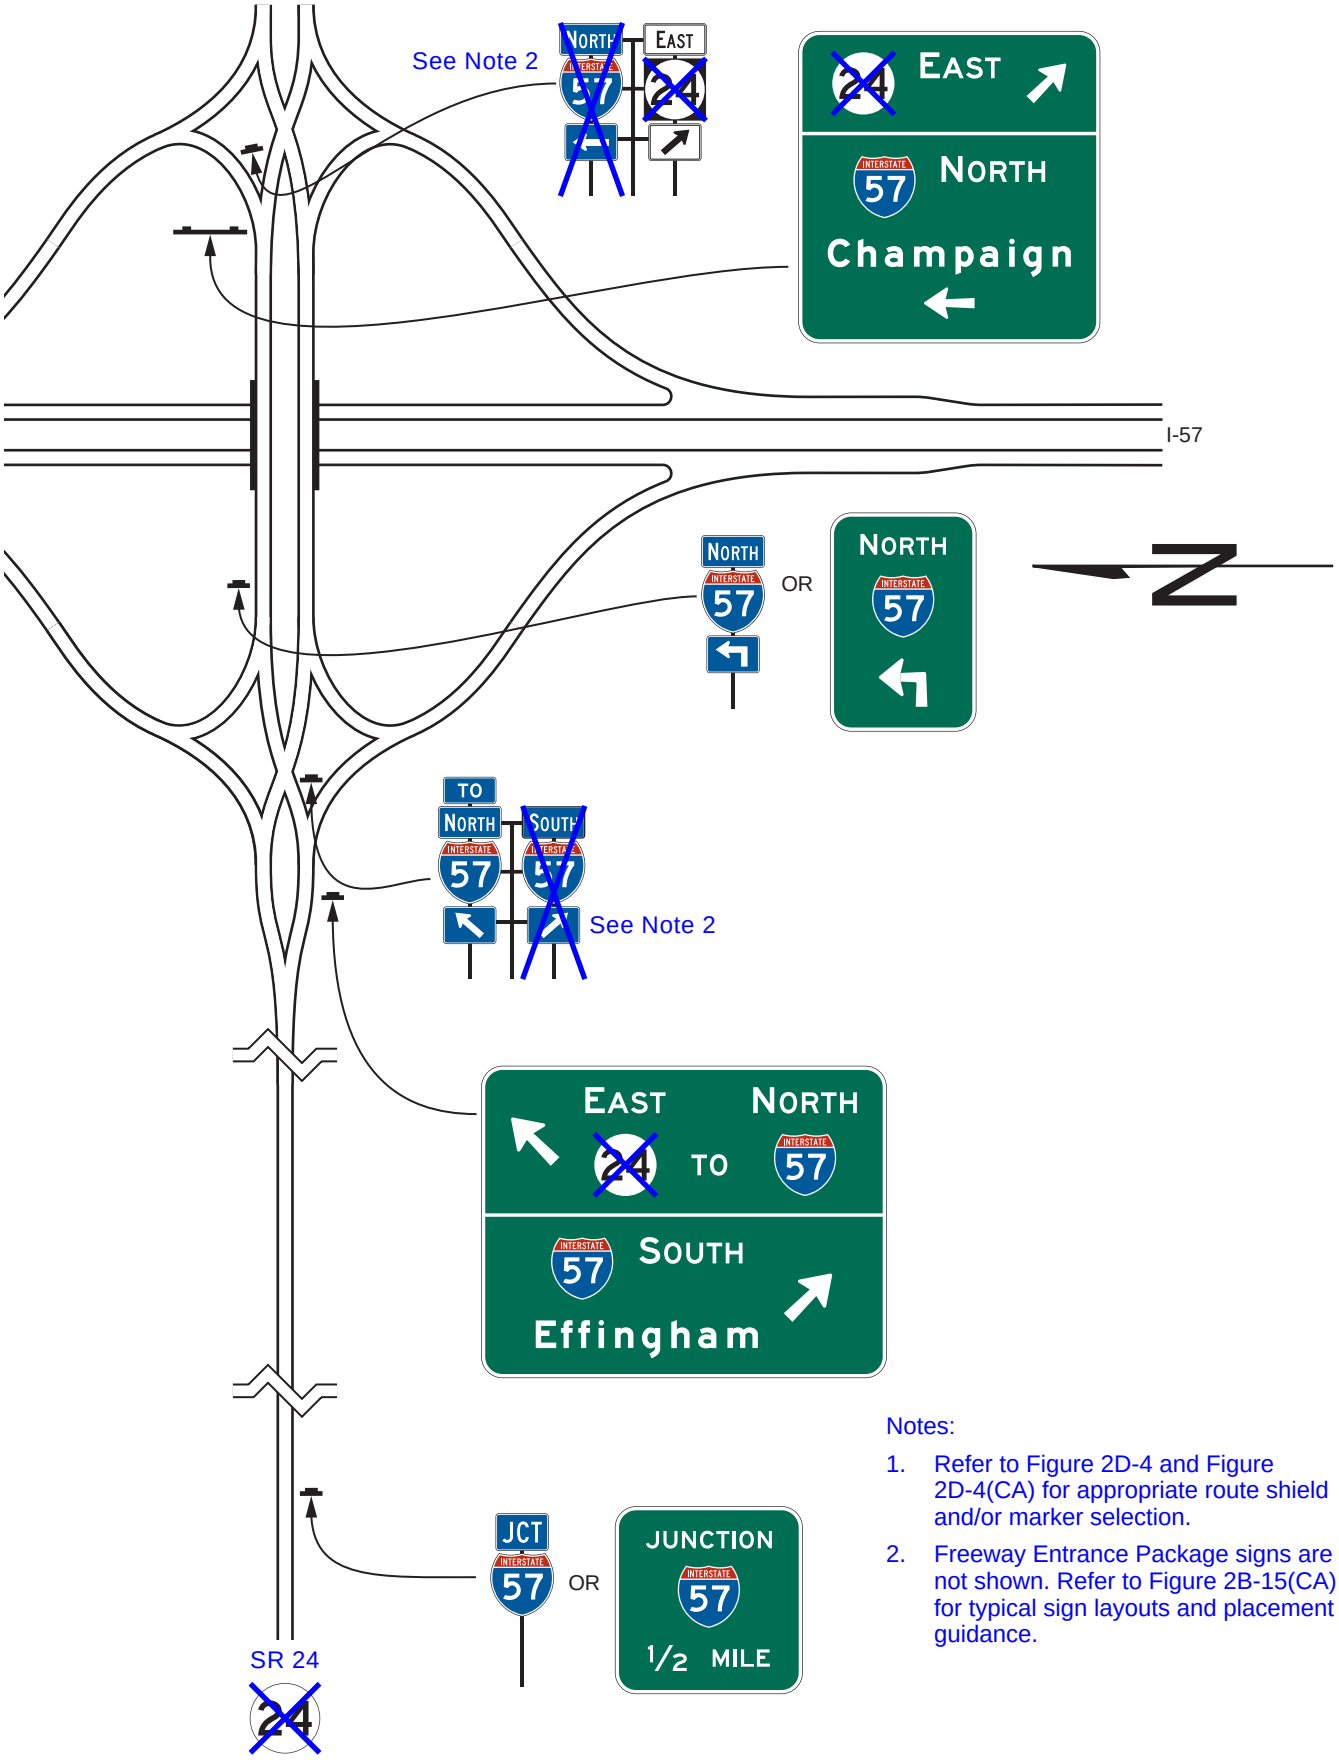


Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.


## Figure 2D-22. Example of Crossroad Intersection Guide Signs for a Single-Point Urban Interchange

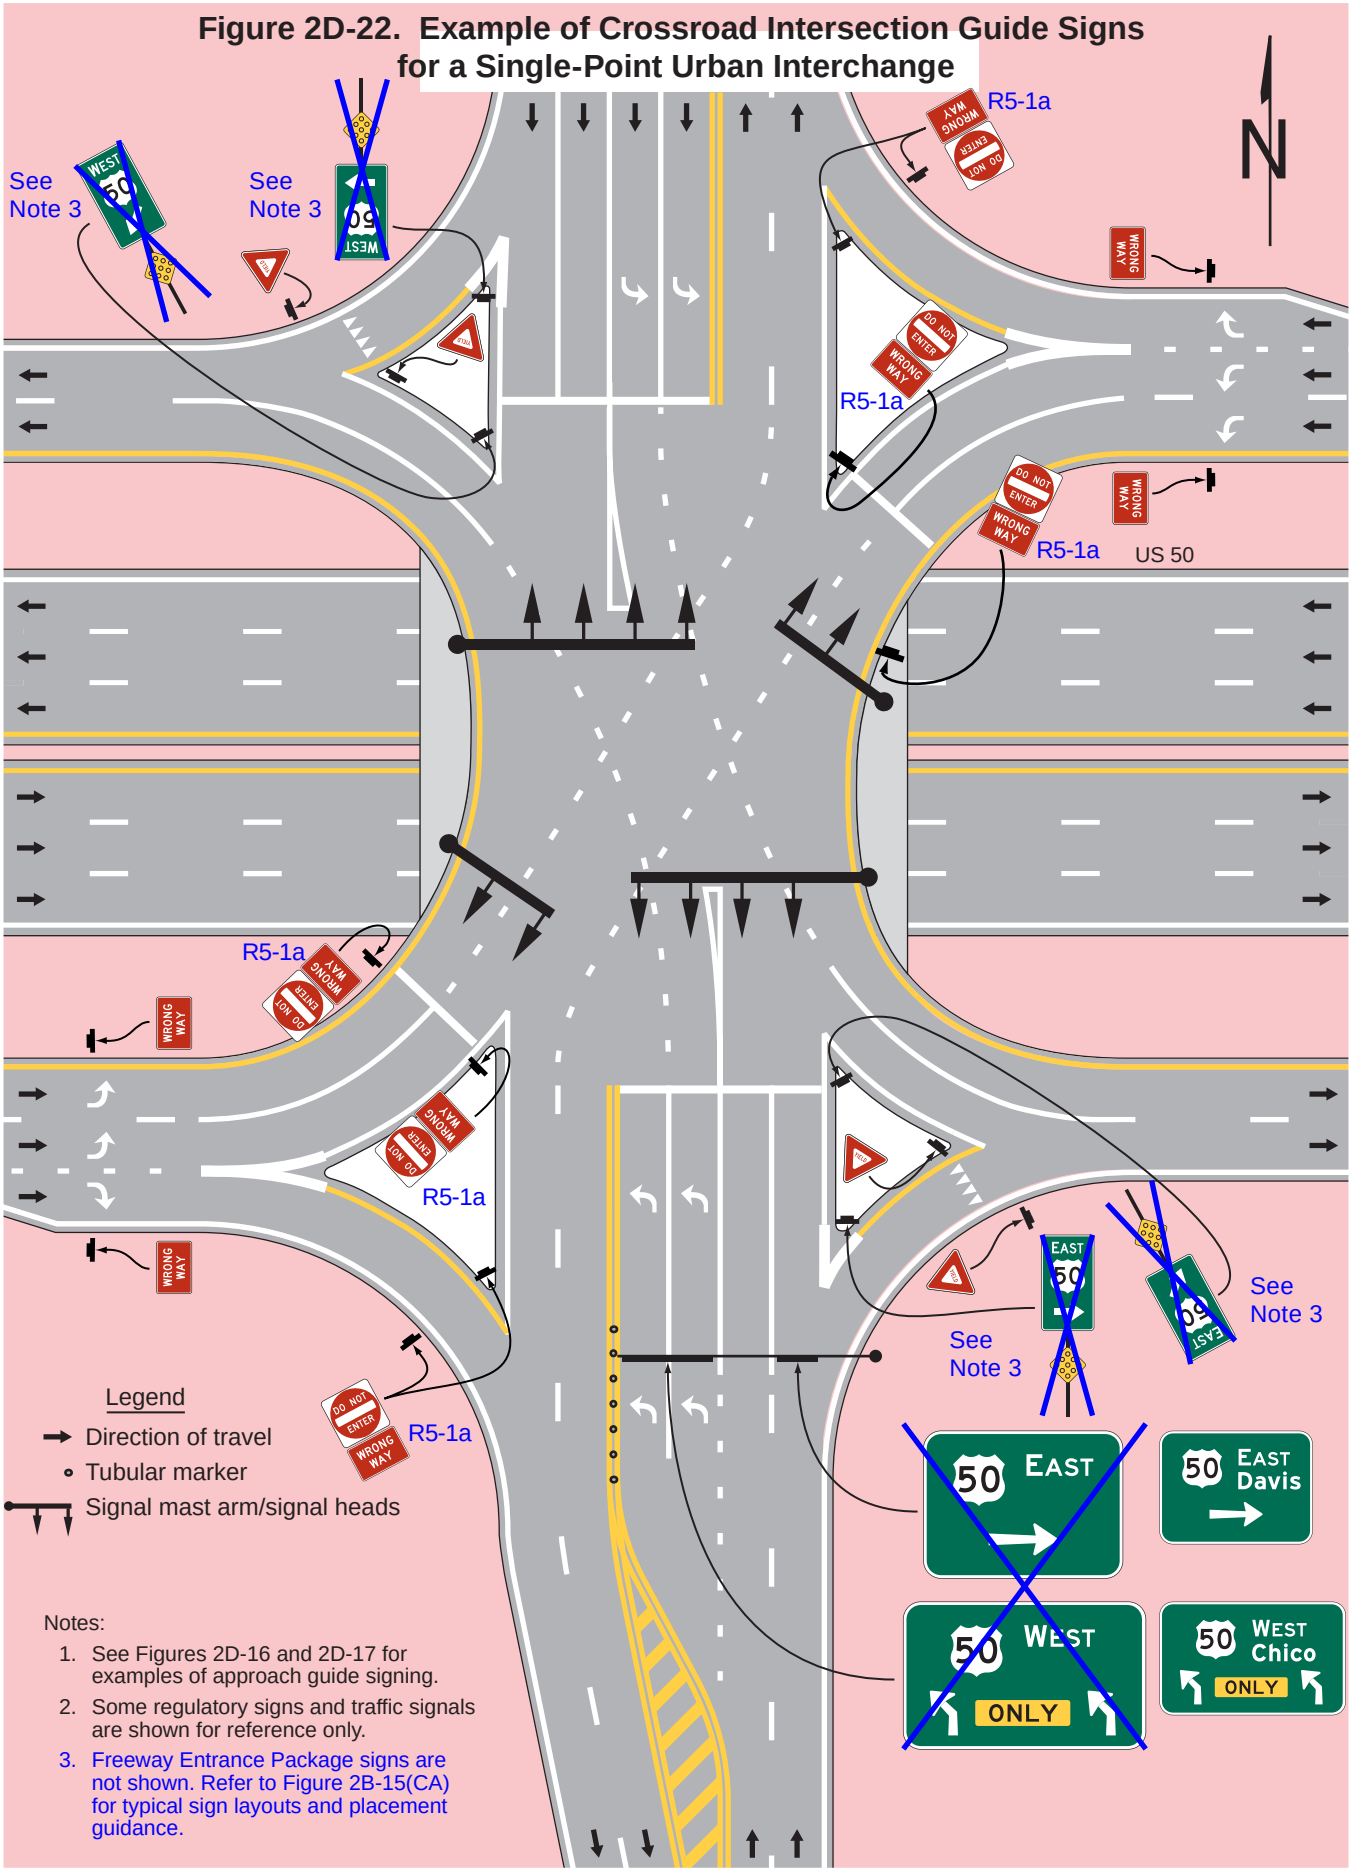


Notes:

1. See Figures 2D-16 and 2D-17 for examples of approach guide signing.
2. Some regulatory signs and traffic signals are shown for reference only.
3. Freeway Entrance Package signs are not shown. Refer to Figure 2B-15(CA) for typical sign layouts and placement guidance.

## Figure 2D-23. Example of Weigh Station Signing – Conventional Road

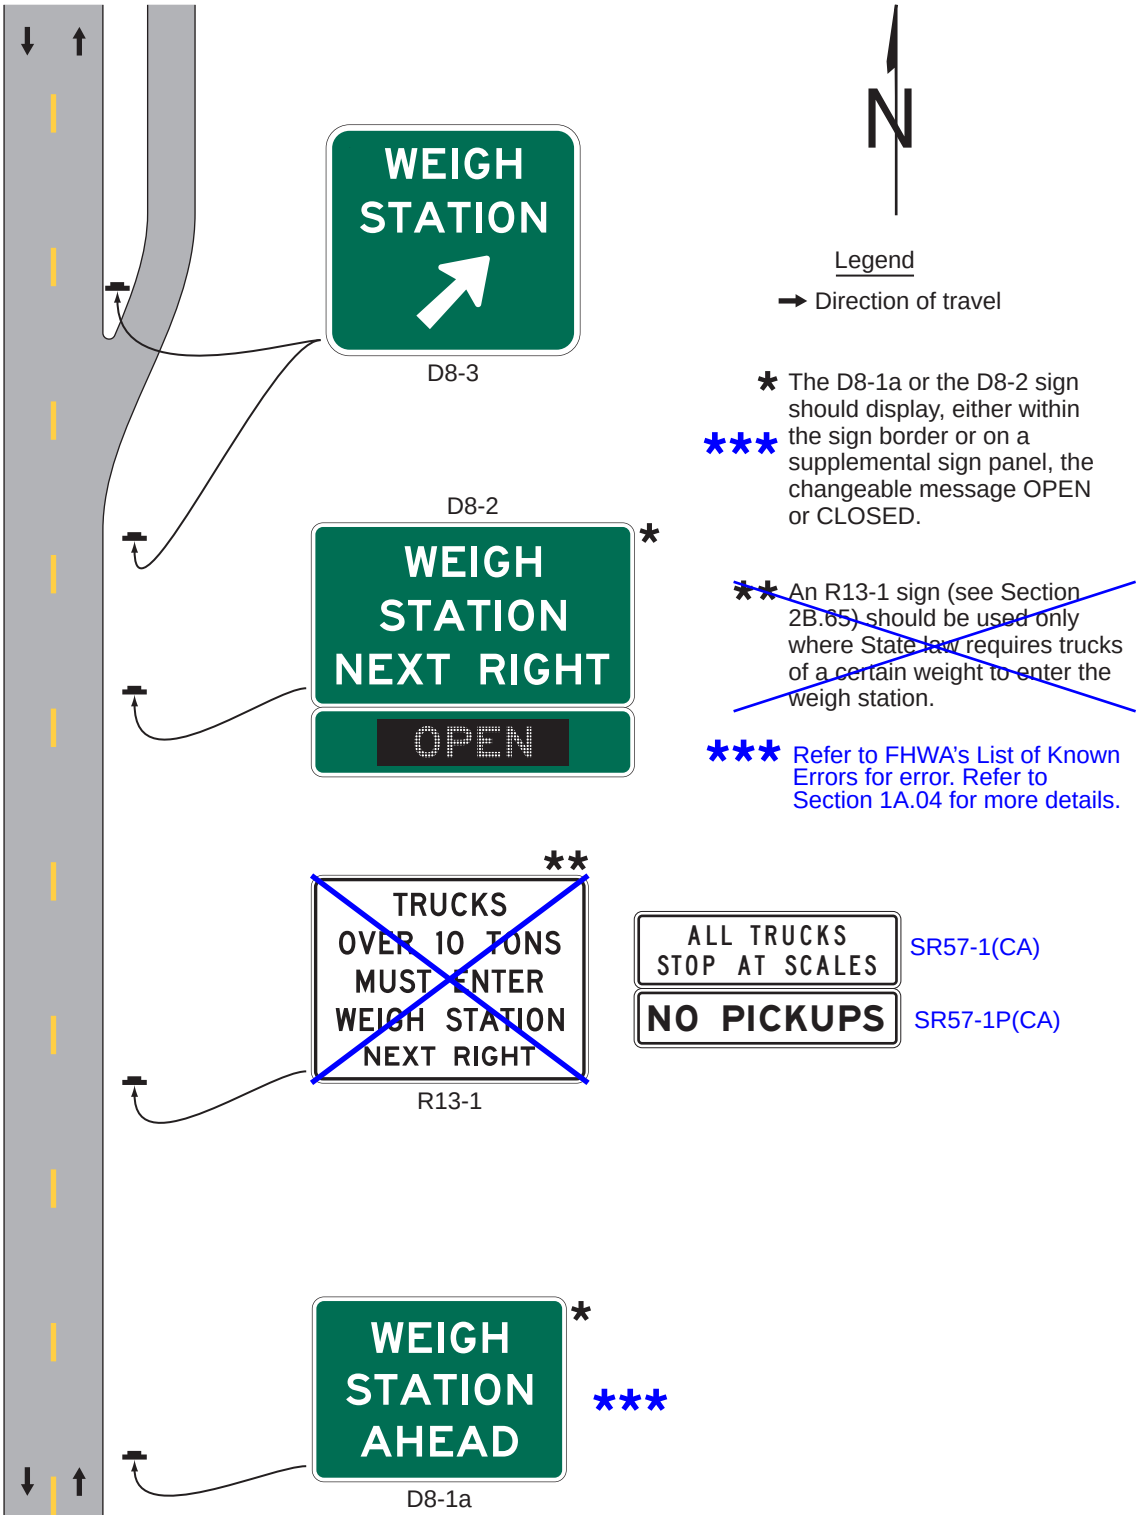

## Figure 2D-24. Crossover Signs




D13-1





D13-2

## Figure 2D-25. Truck and Passing Lane Signs




D17-1 D17-2 D17-3 D17-4

## Figure 2D-26. Example of Signing for a Truck Lane

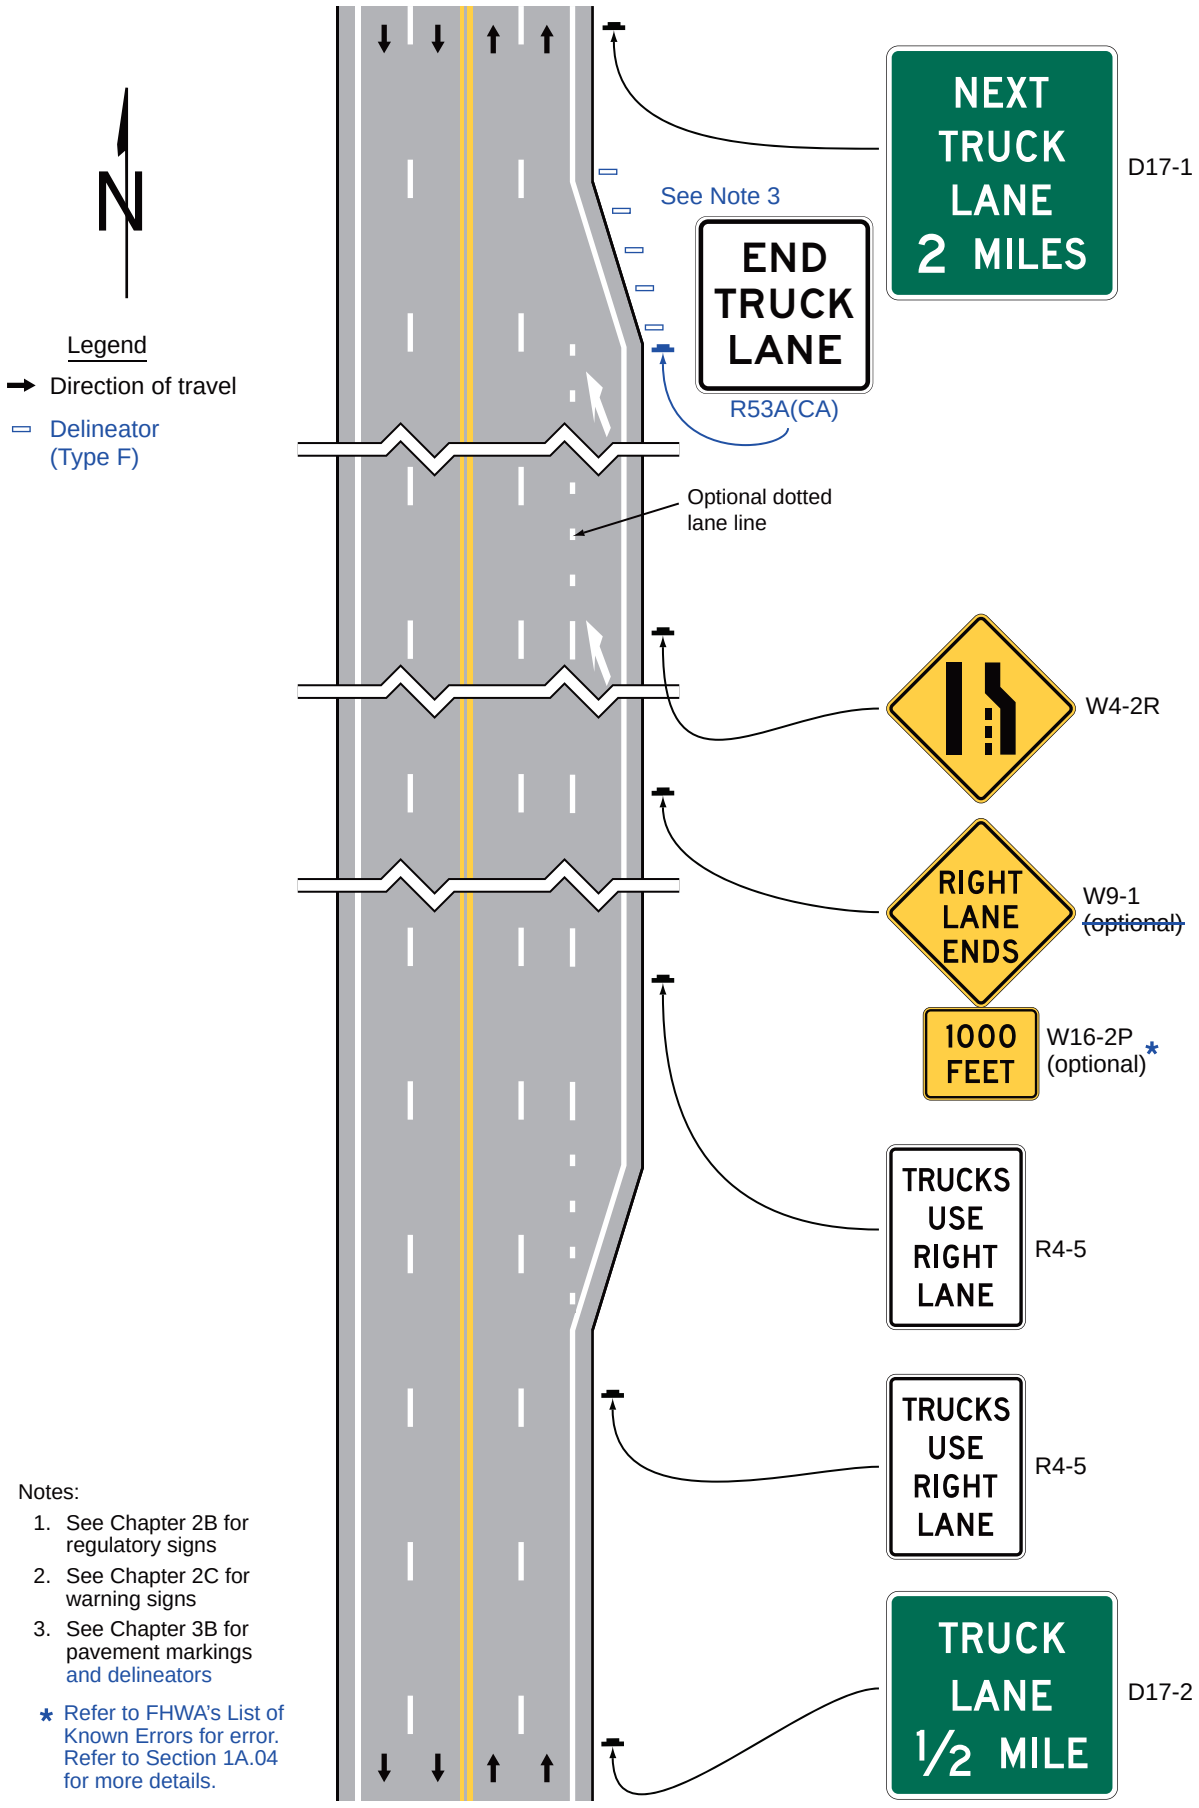



Notes:

1. See Chapter 2B for regulatory signs
2. See Chapter 2C for warning signs
3. See Chapter 3B for pavement markings and delineators

* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2D-27. Example of Signing for an Intermittent Passing Lane

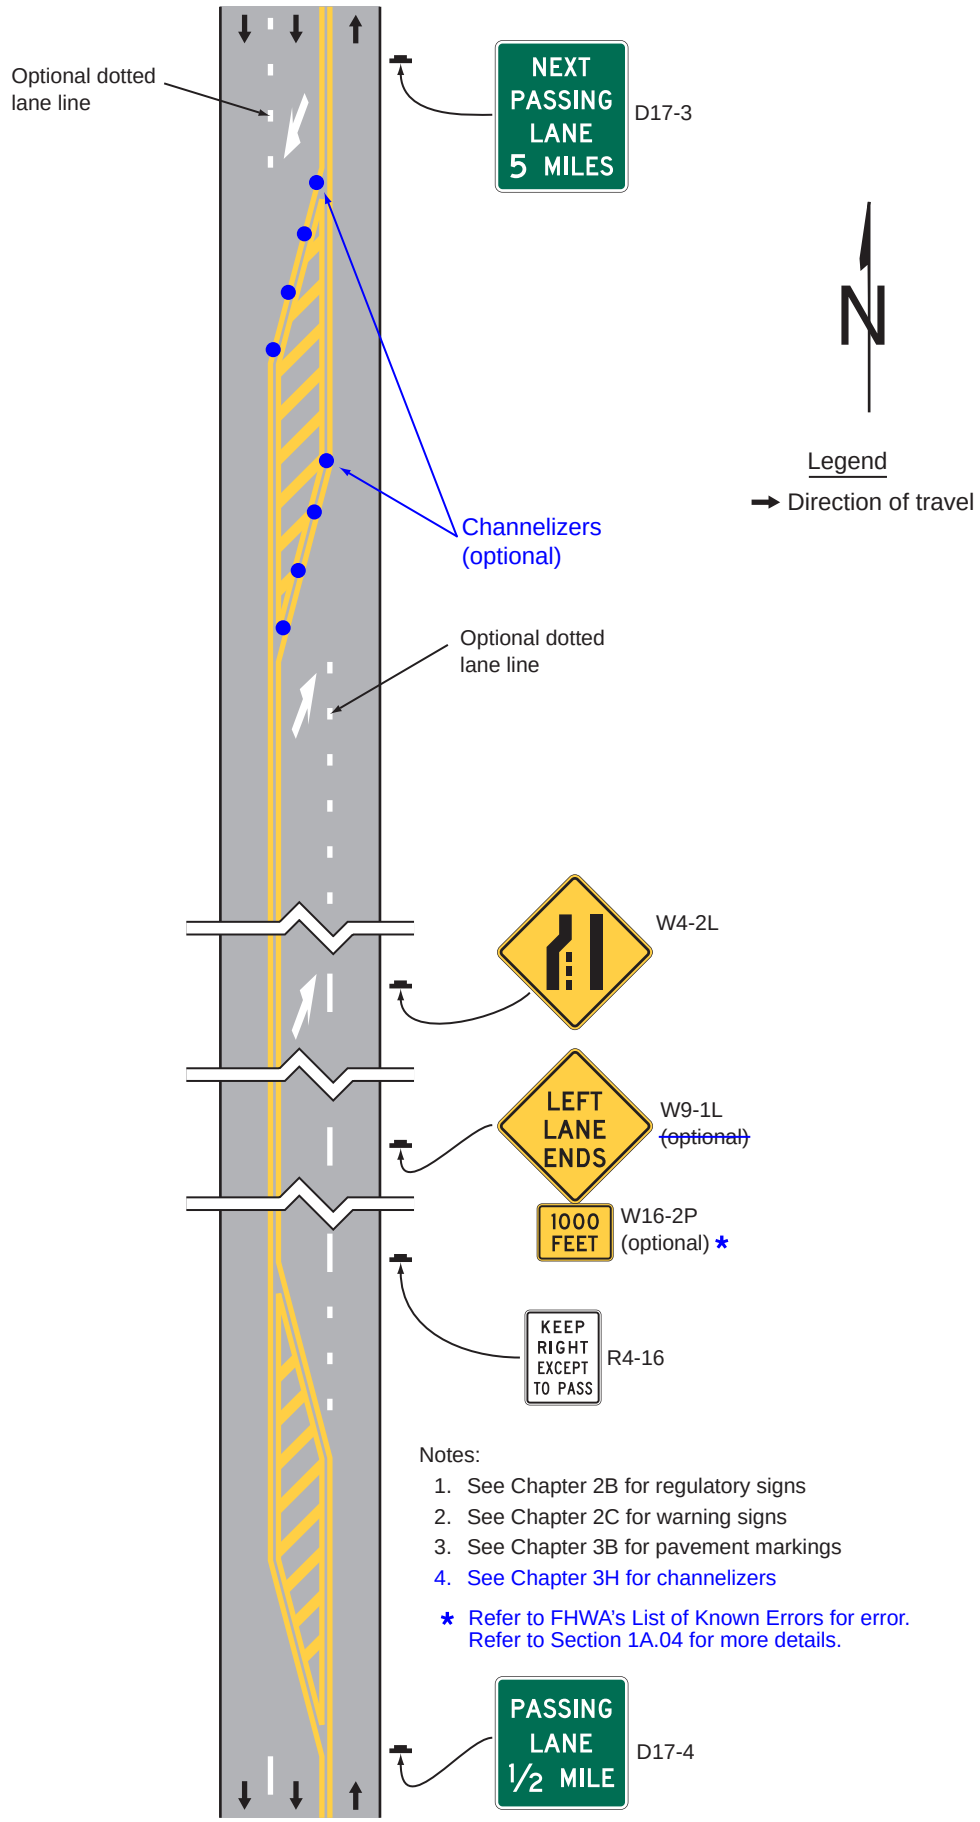


Notes:

1. See Chapter 2B for regulatory signs
2. See Chapter 2C for warning signs
3. See Chapter 3B for pavement markings
4. See Chapter 3H for channelizers

* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 2D-28. Emergency and Slow Vehicle Turn-Out Signs




D17-5





D17-6




D17-7


## Figure 2D-29. Example of Signing for an Emergency Turn-Out

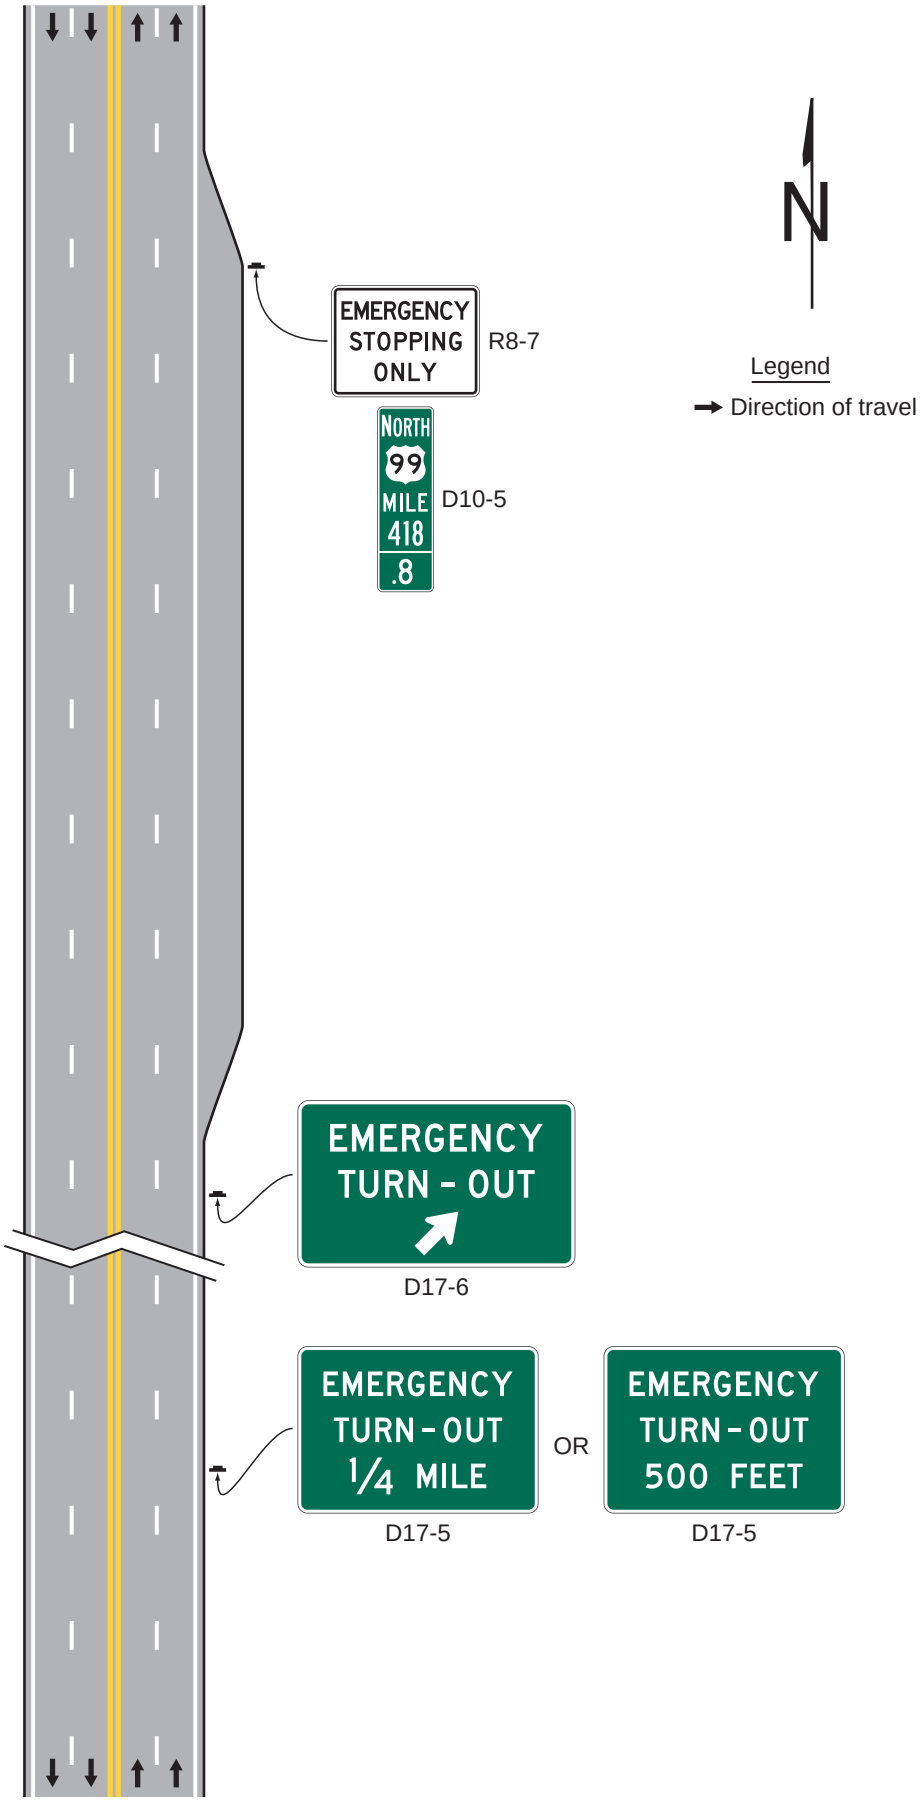


## Figure 2D-30. Examples of Community Wayfinding Guide Signs



## Figure 2D-31. Example of a Community Wayfinding Guide Sign System Showing Direction from a Freeway or Expressway

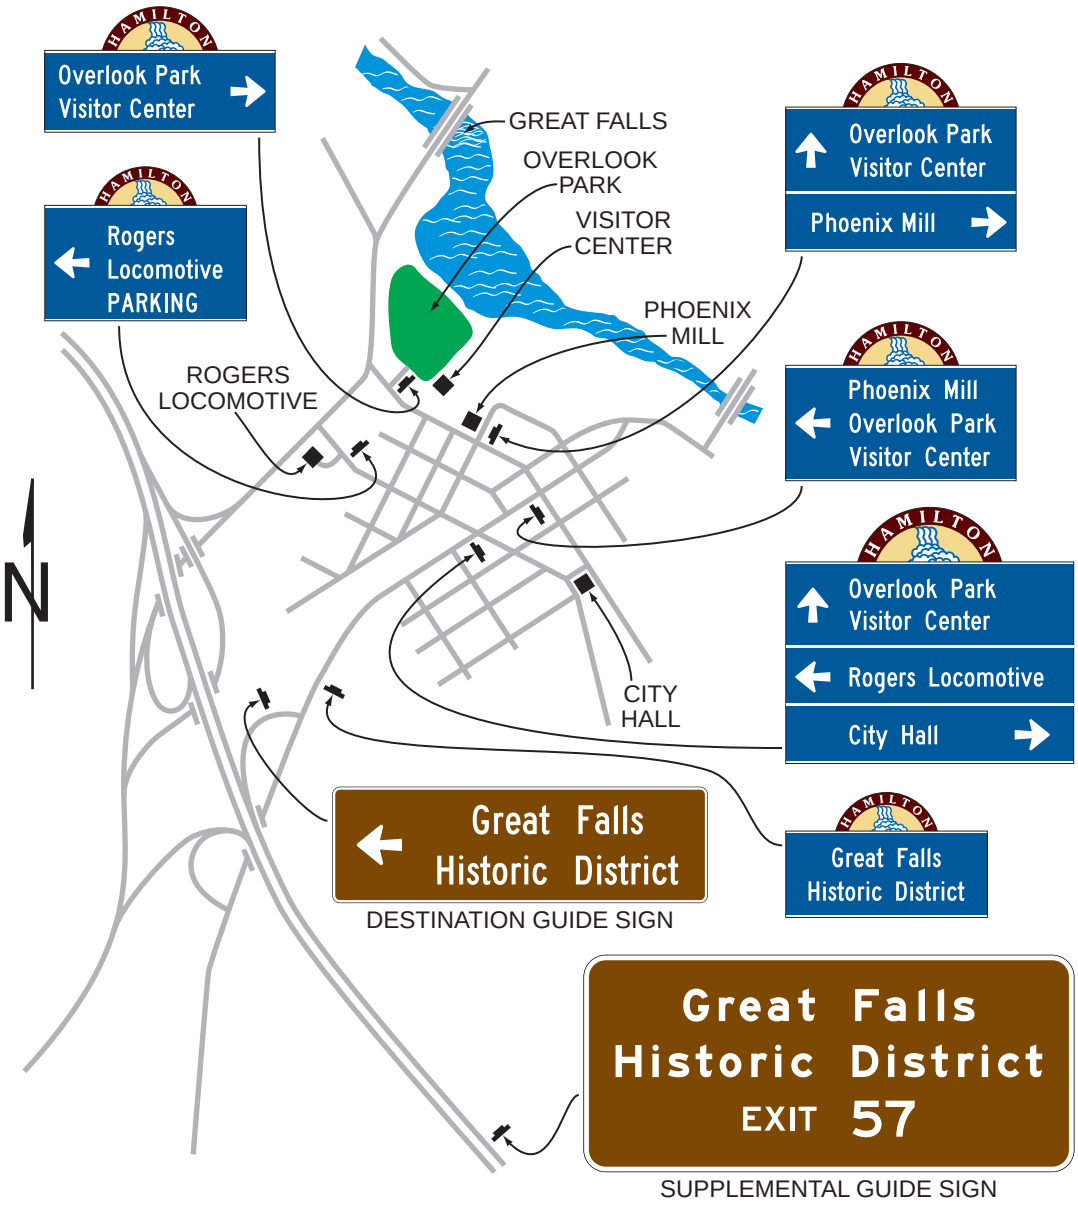


## Figure 2D-32. Example of a Color-Coded Community Wayfinding Guide Sign System

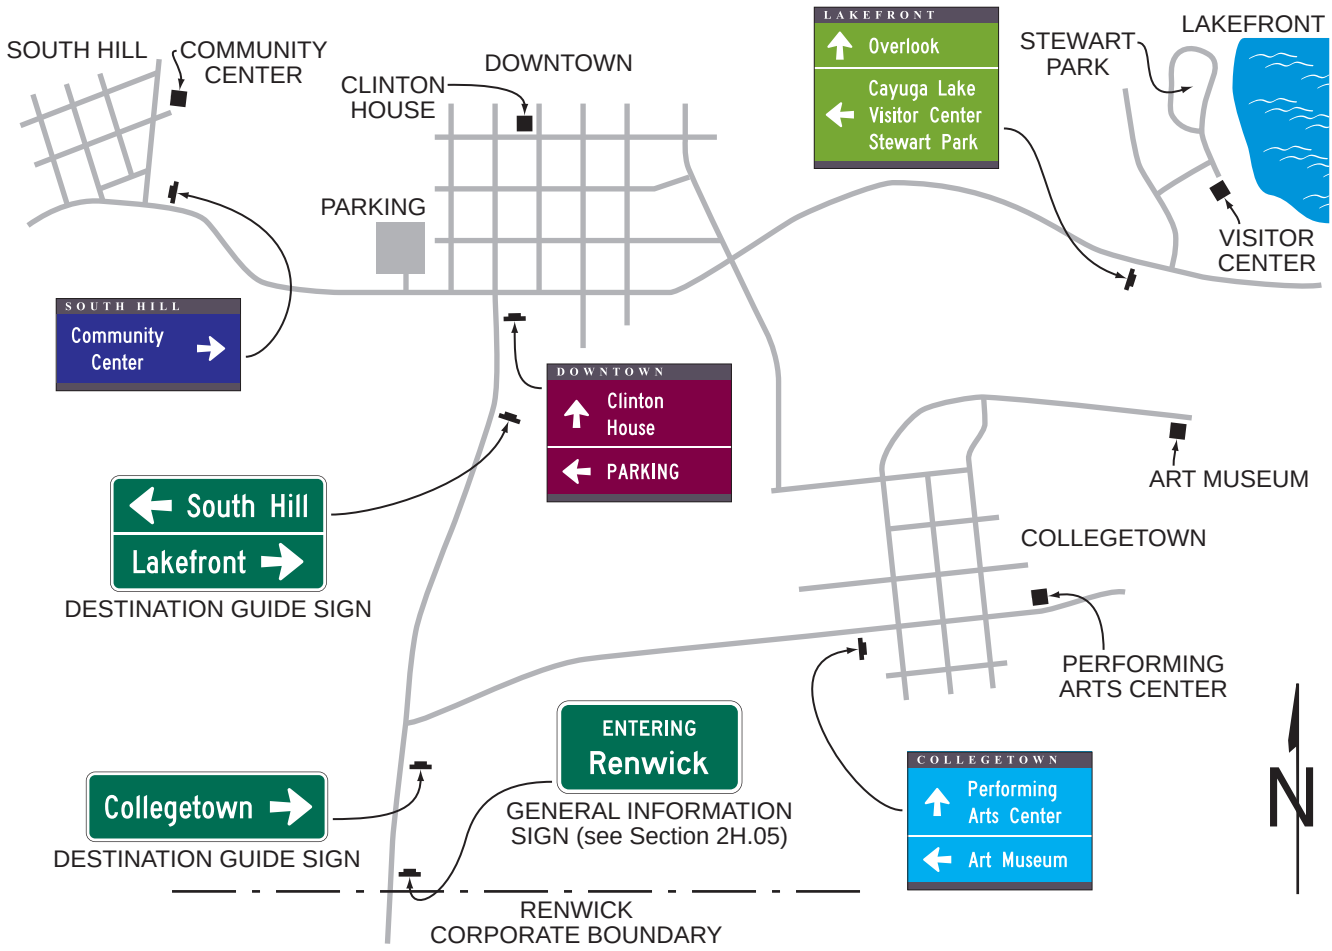


# Figure 2D-33. National Scenic Byways Sign and Plaque, and Examples of Use

**A – National Scenic Byways sign and plaque**

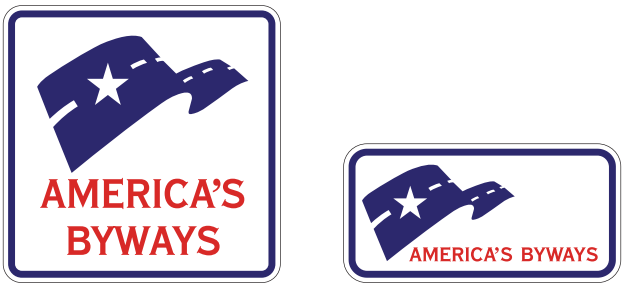


M10-1 M10-1aP

**B – Examples of use of the National Scenic Byways sign and plaque**

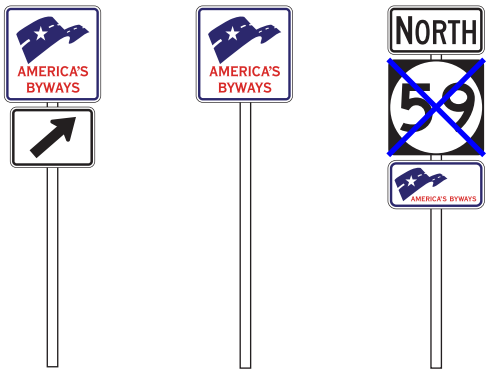


Independent Directional assembly


Independent Confirming assembly

Confirming assembly


Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

# Figure 2D-34. Byway Identification, State Scenic Byway, and National Historic Trail Signs and Plaques, and Examples of Use

## A – Byway Identification, State Scenic Byway, and National Historic Trails signs and plaques

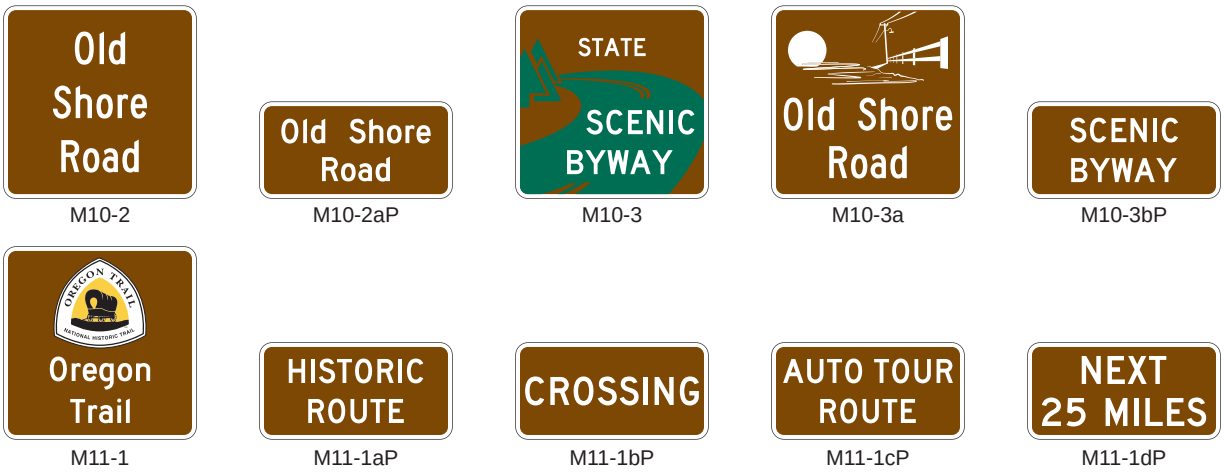



## B – Examples of Directional assemblies for National and State Scenic Byways

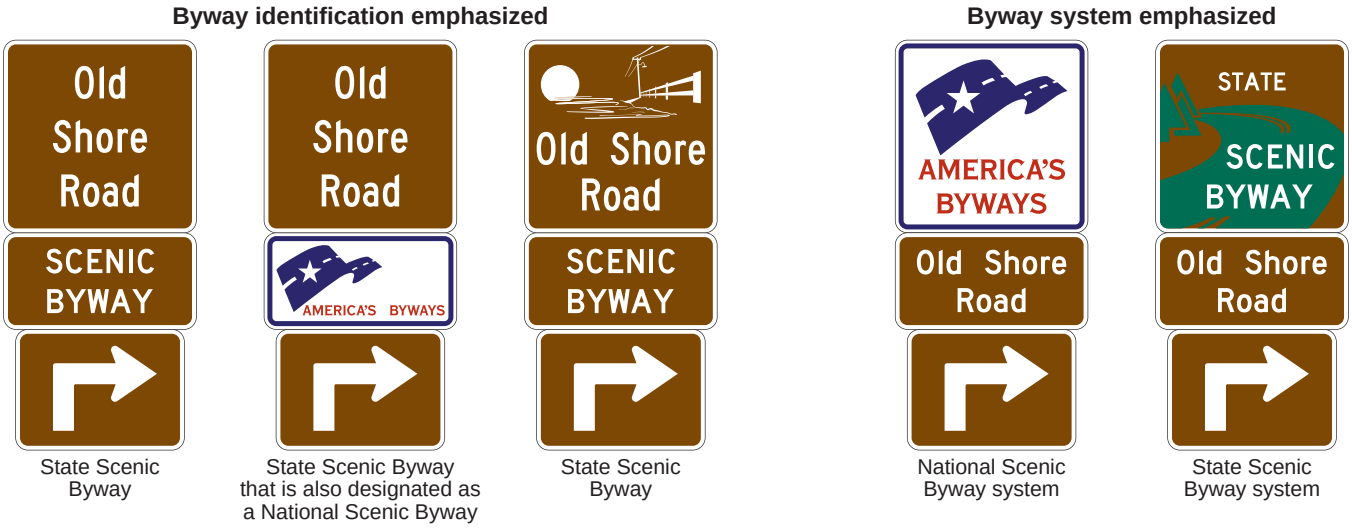



## C – Examples of Directional and Confirming assemblies for National Historic Trails



## Figure 2D-35. Example of Guide and Directional Signing for a National Historic Trail

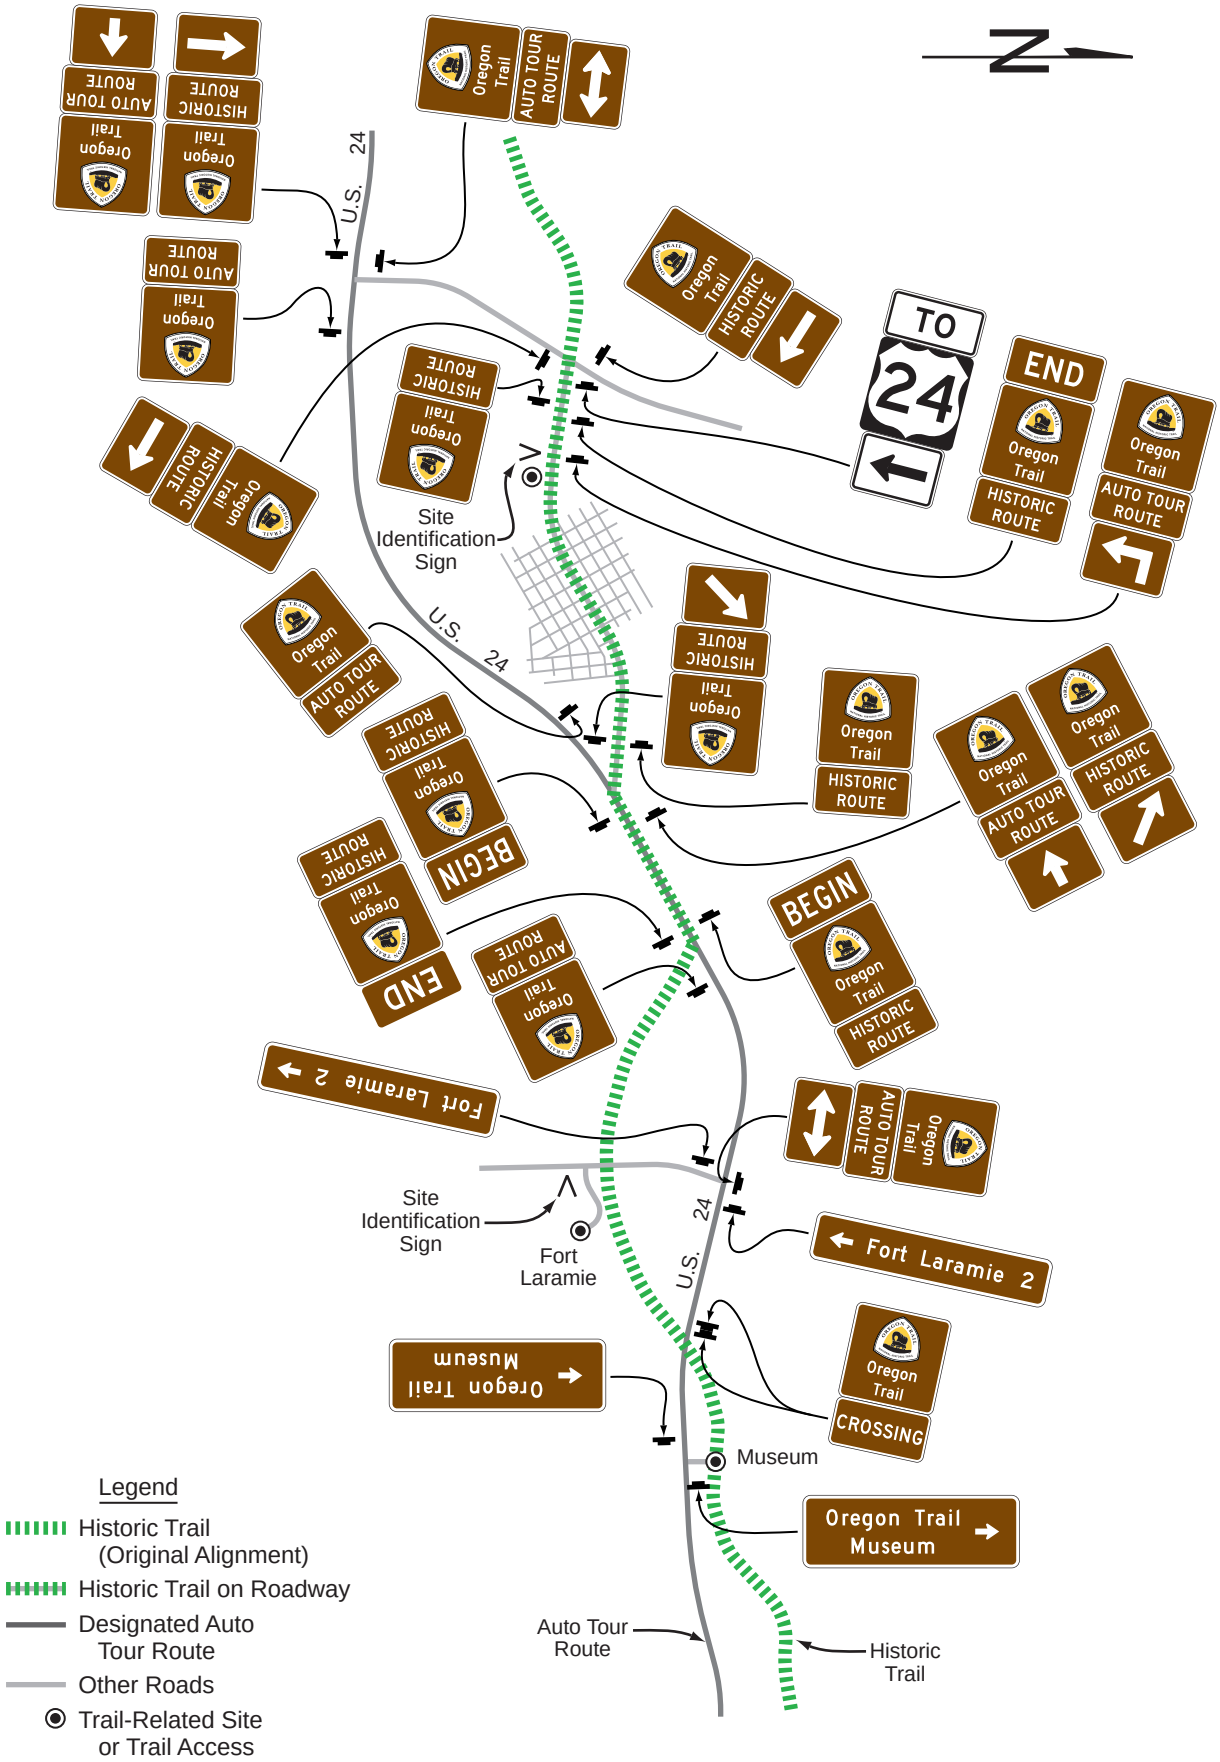

## Figure 2D-36. Example of Historic Trails Signing from an Expressway or Freeway

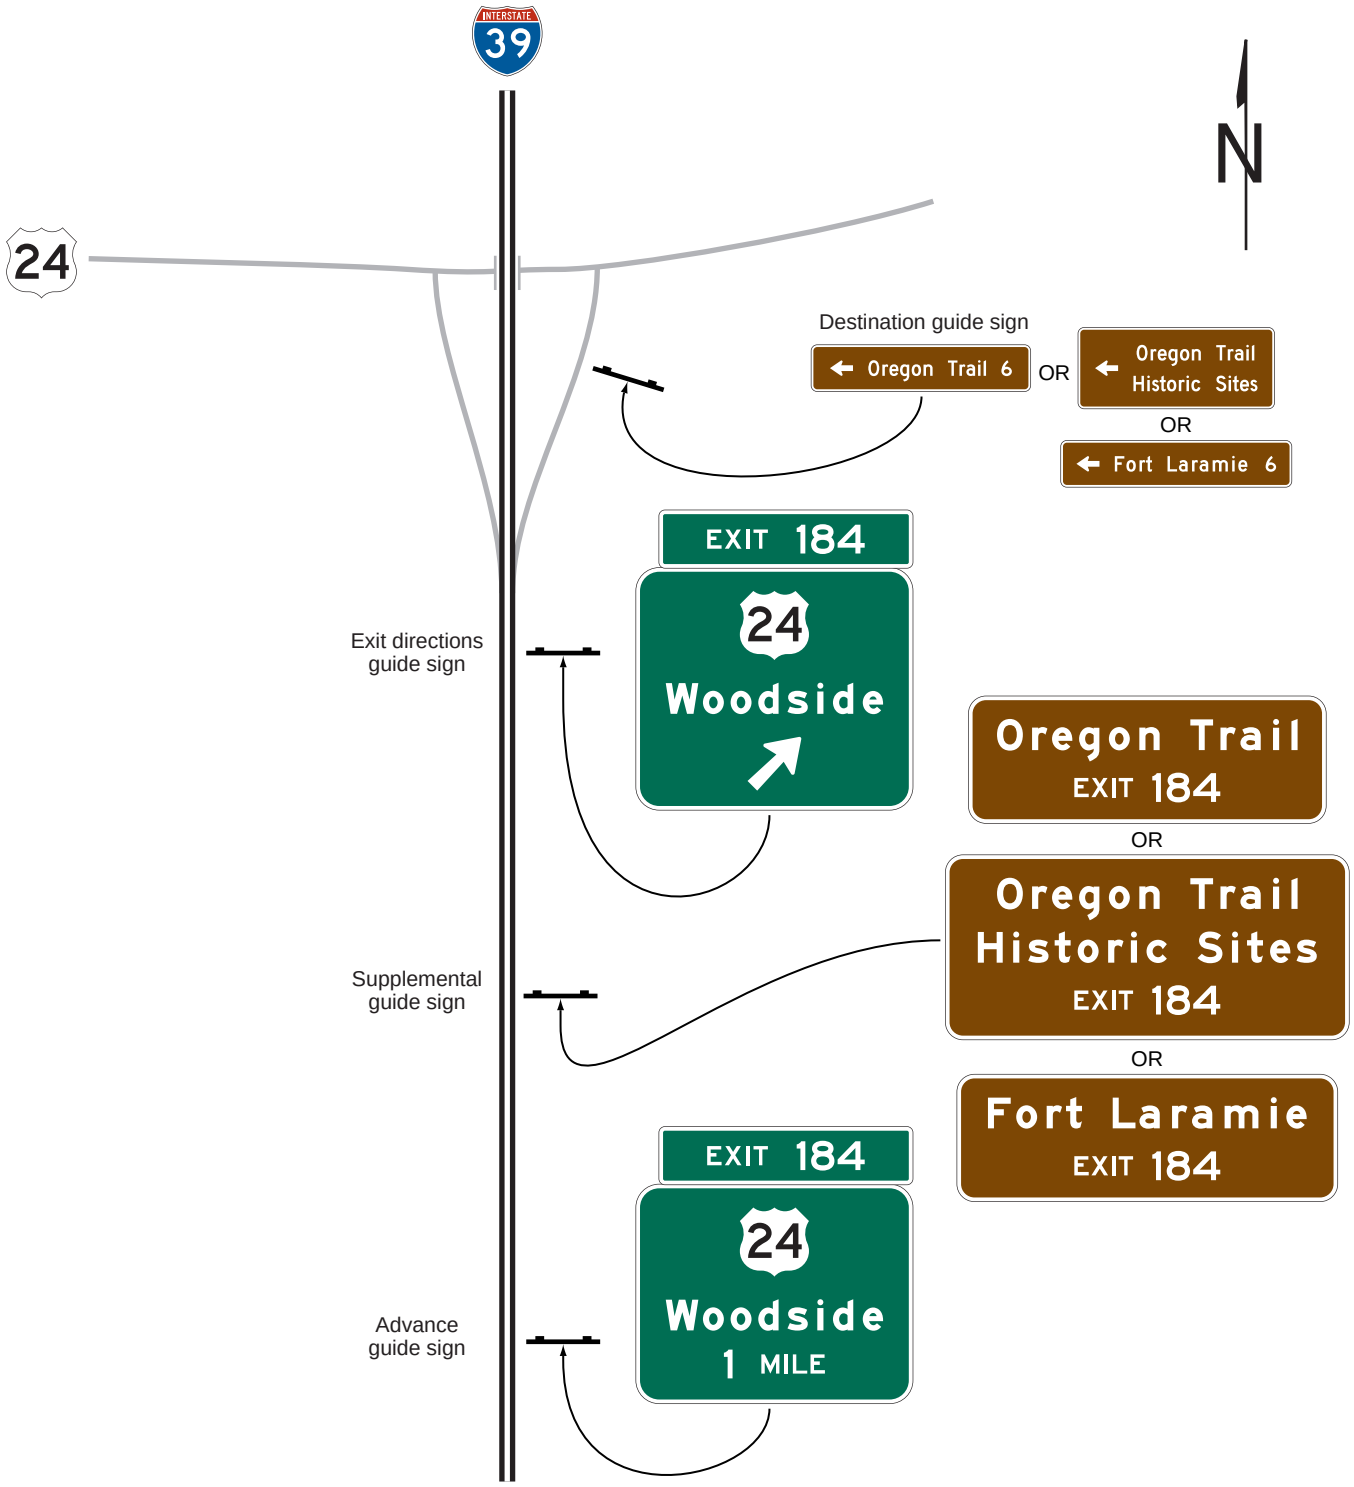

## Figure 2D-37. Signs and Plaques for Rerouting Because of Traffic Incidents




M4-11




M4-11bP




M4-12





M4-11cP




M4-11a





Examples of guide signs for rerouting

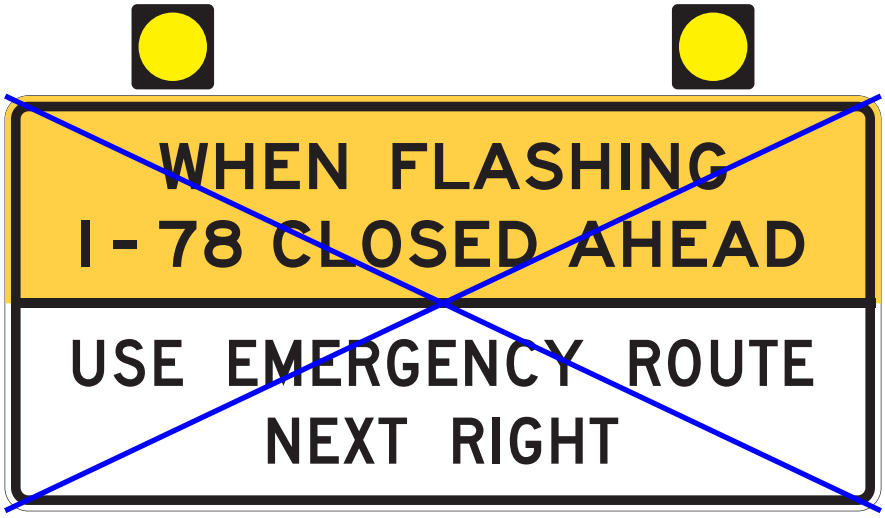



Example of advance sign for rerouting

# Figure 2D-38. Example of Permanent Guide Signing for Rerouting Because of Traffic Incidents

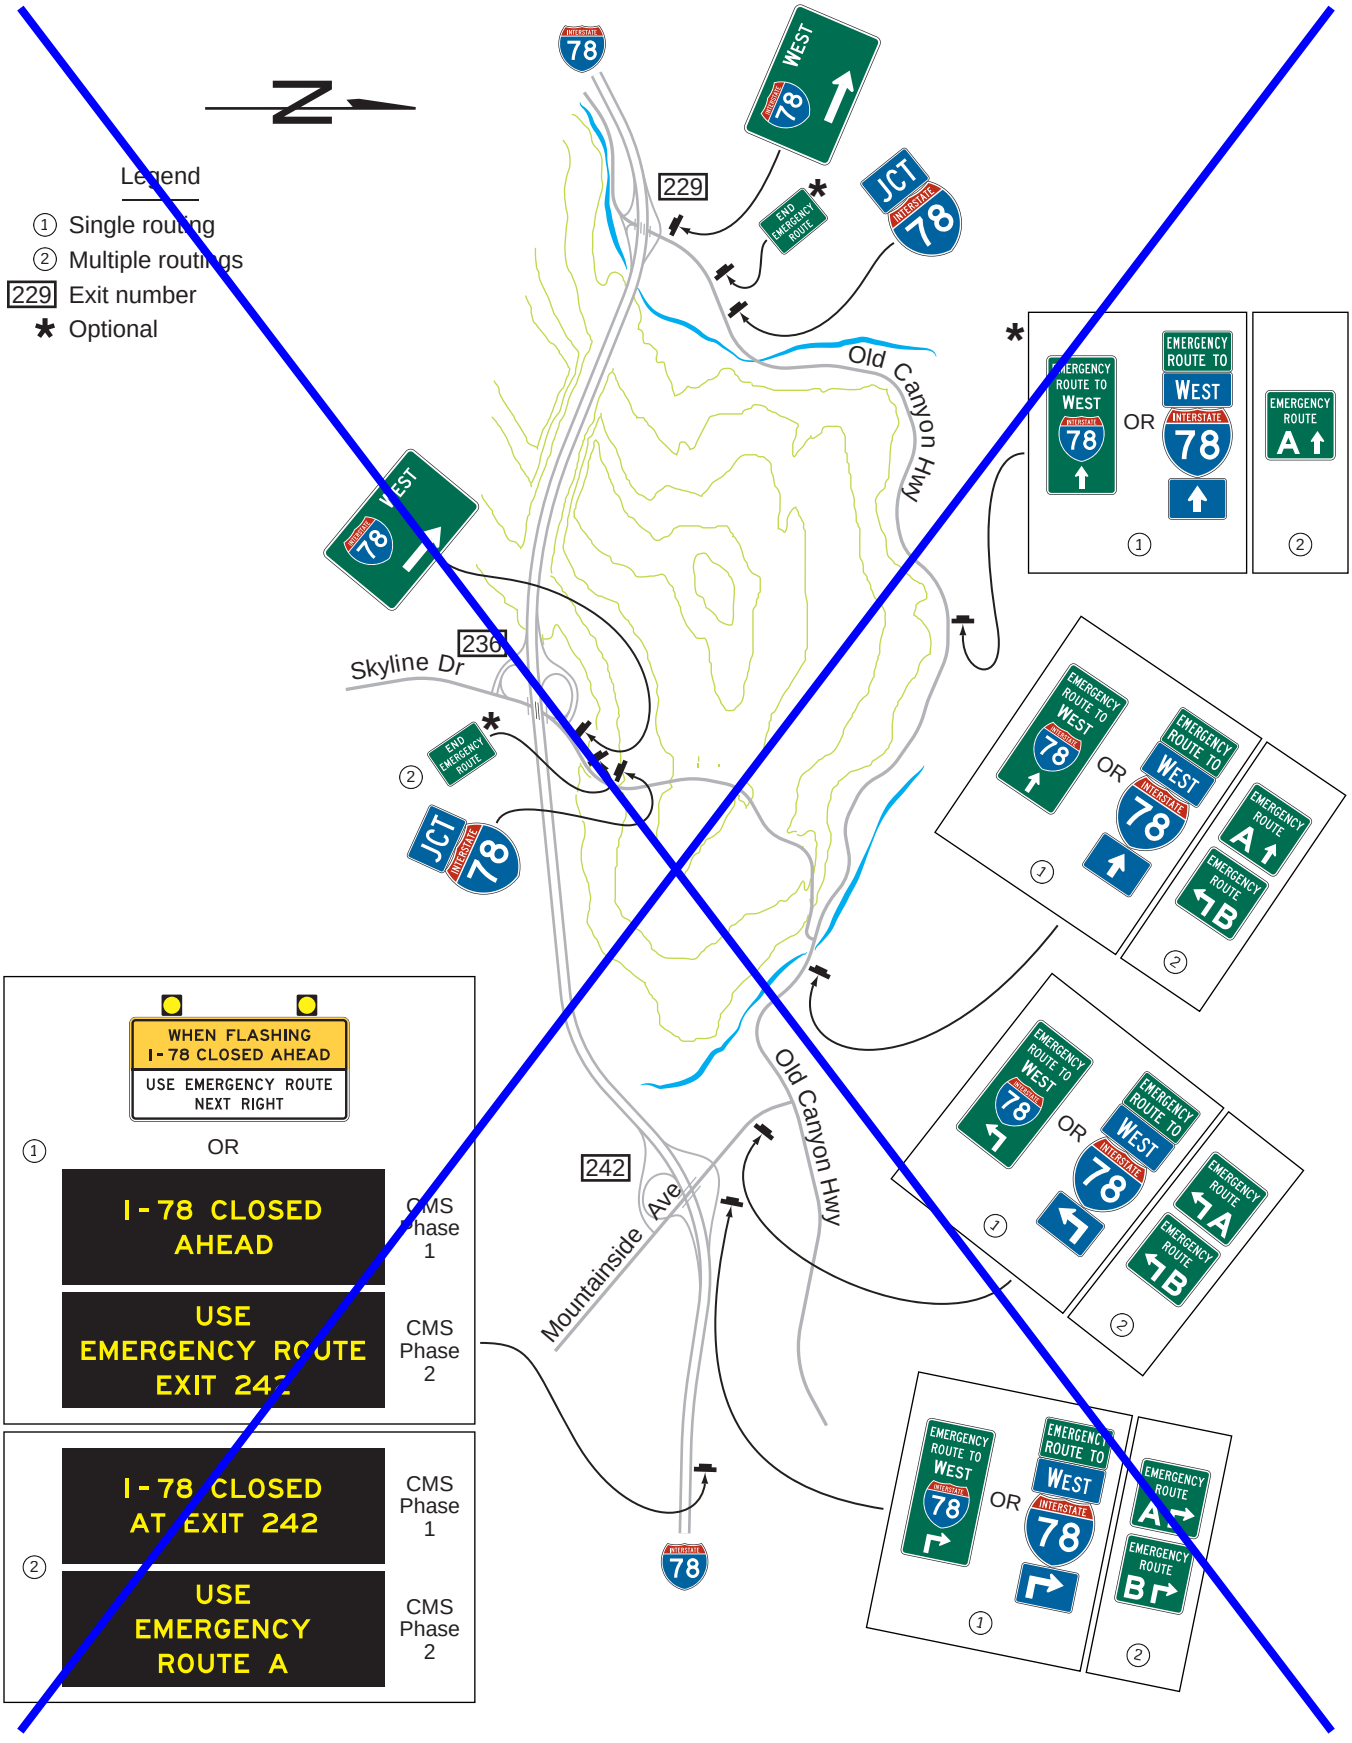

## Figure 2D-39. Example of a System of Major Guide Signs for an Airport Roadway Network (Sheet 1 of 3)

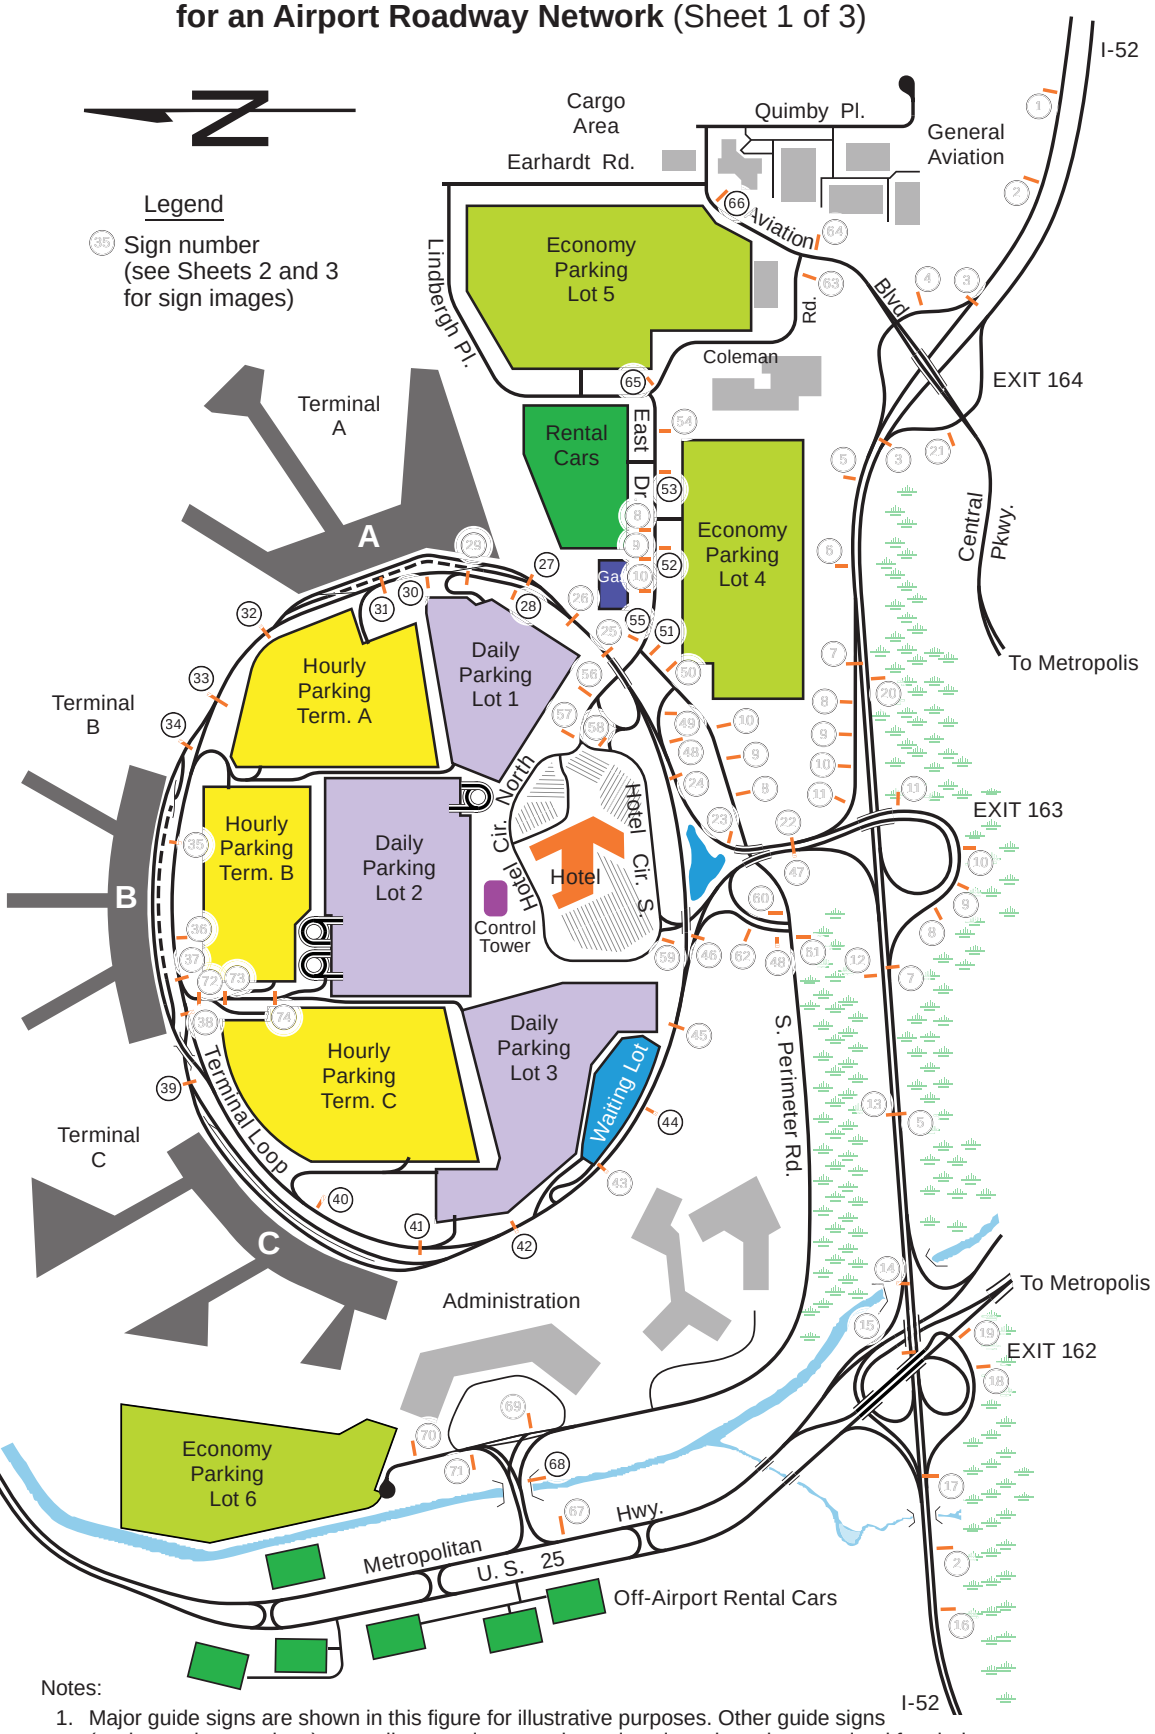



Notes:


1. Major guide signs are shown in this figure for illustrative purposes. Other guide signs (such as advance signs), as well as regulatory and warning signs, have been omitted for clarity.
2. Terminal loop is a one-way clockwise roadway.*

* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

# Figure 2D-39. Example of a System of Major Guide Signs for an Airport Roadway Network (Sheet 2 of 3)

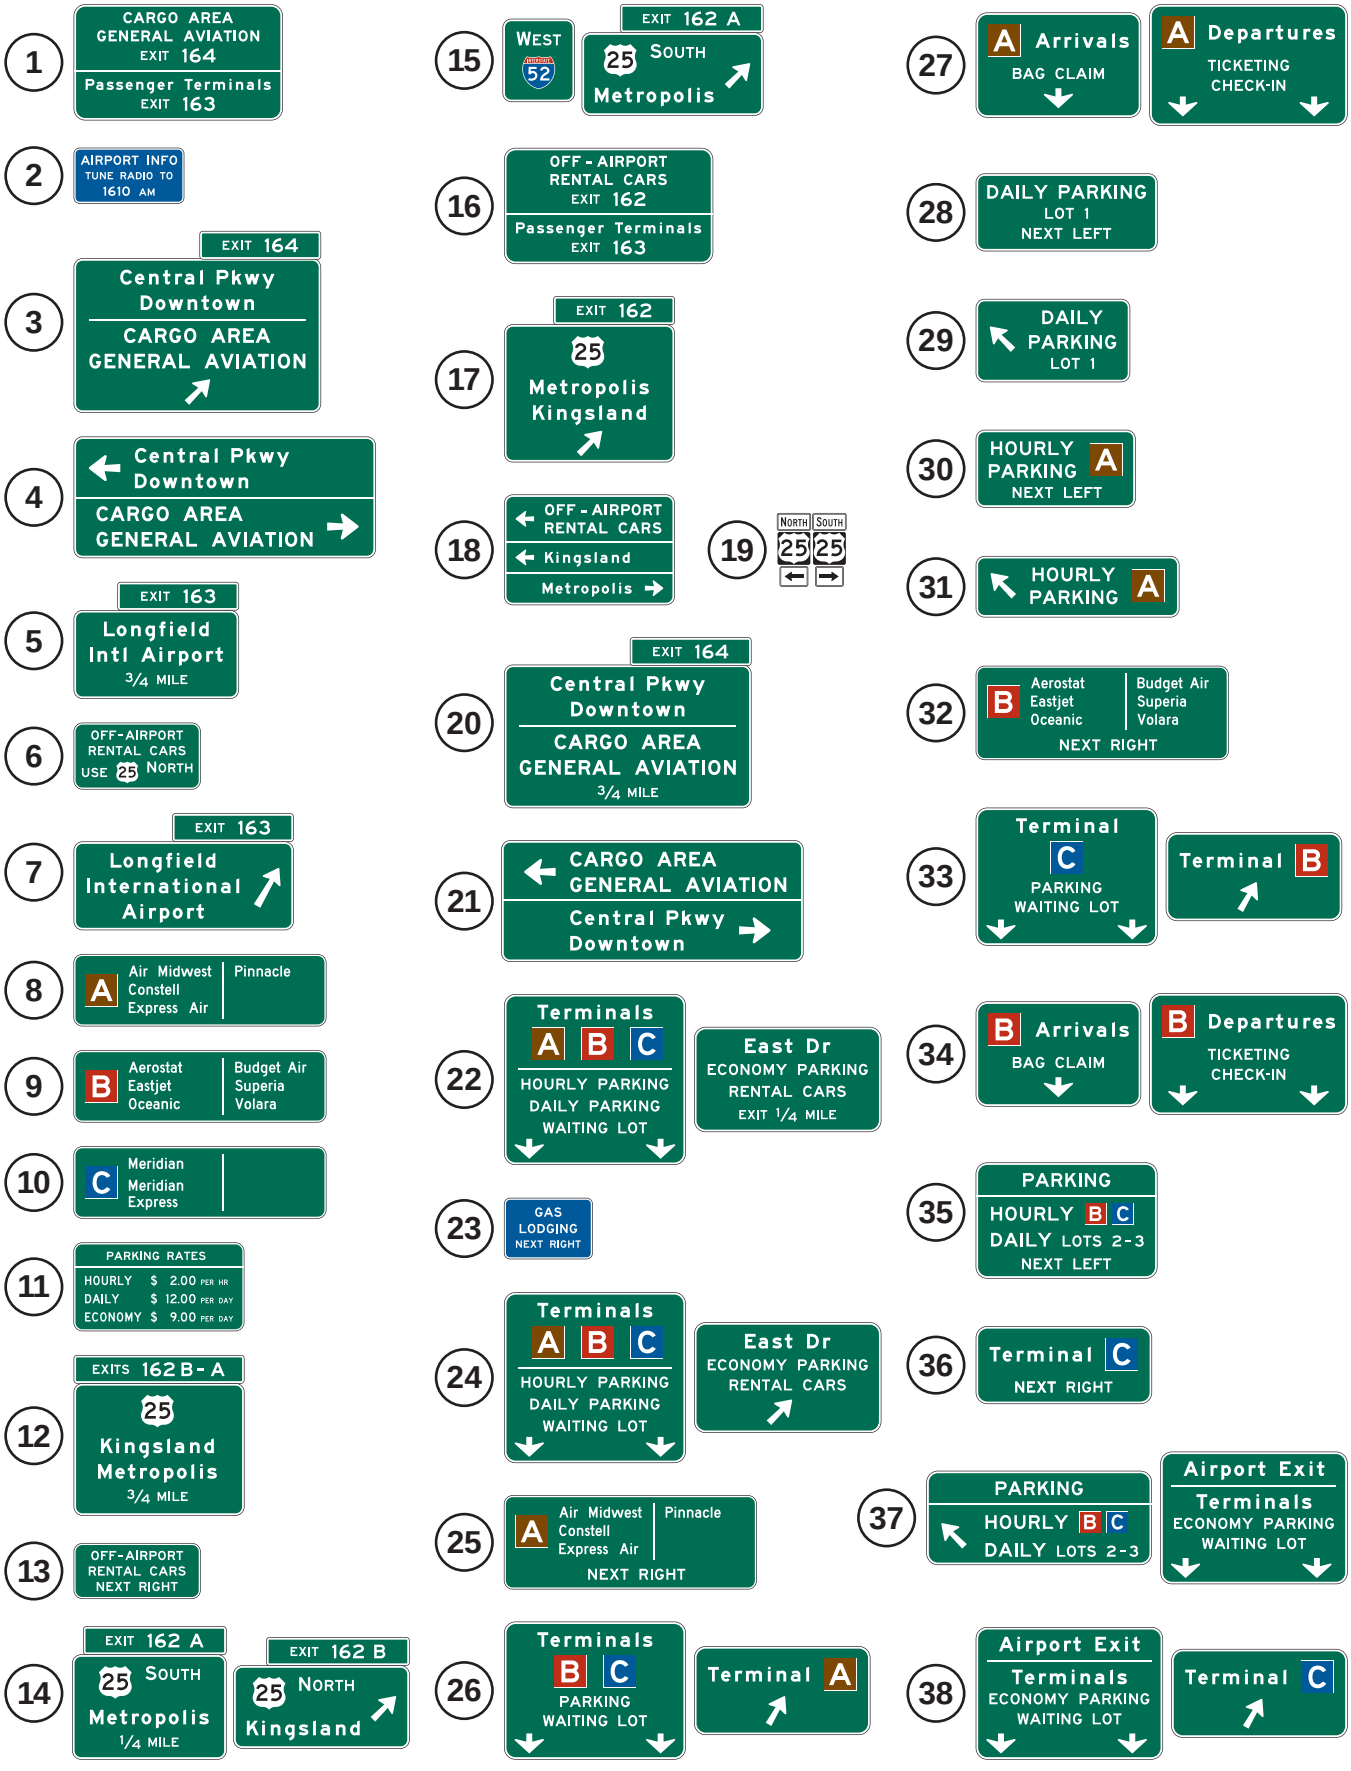

## Figure 2D-39. Example of a System of Major Guide Signs for an Airport Roadway Network (Sheet 3 of 3)

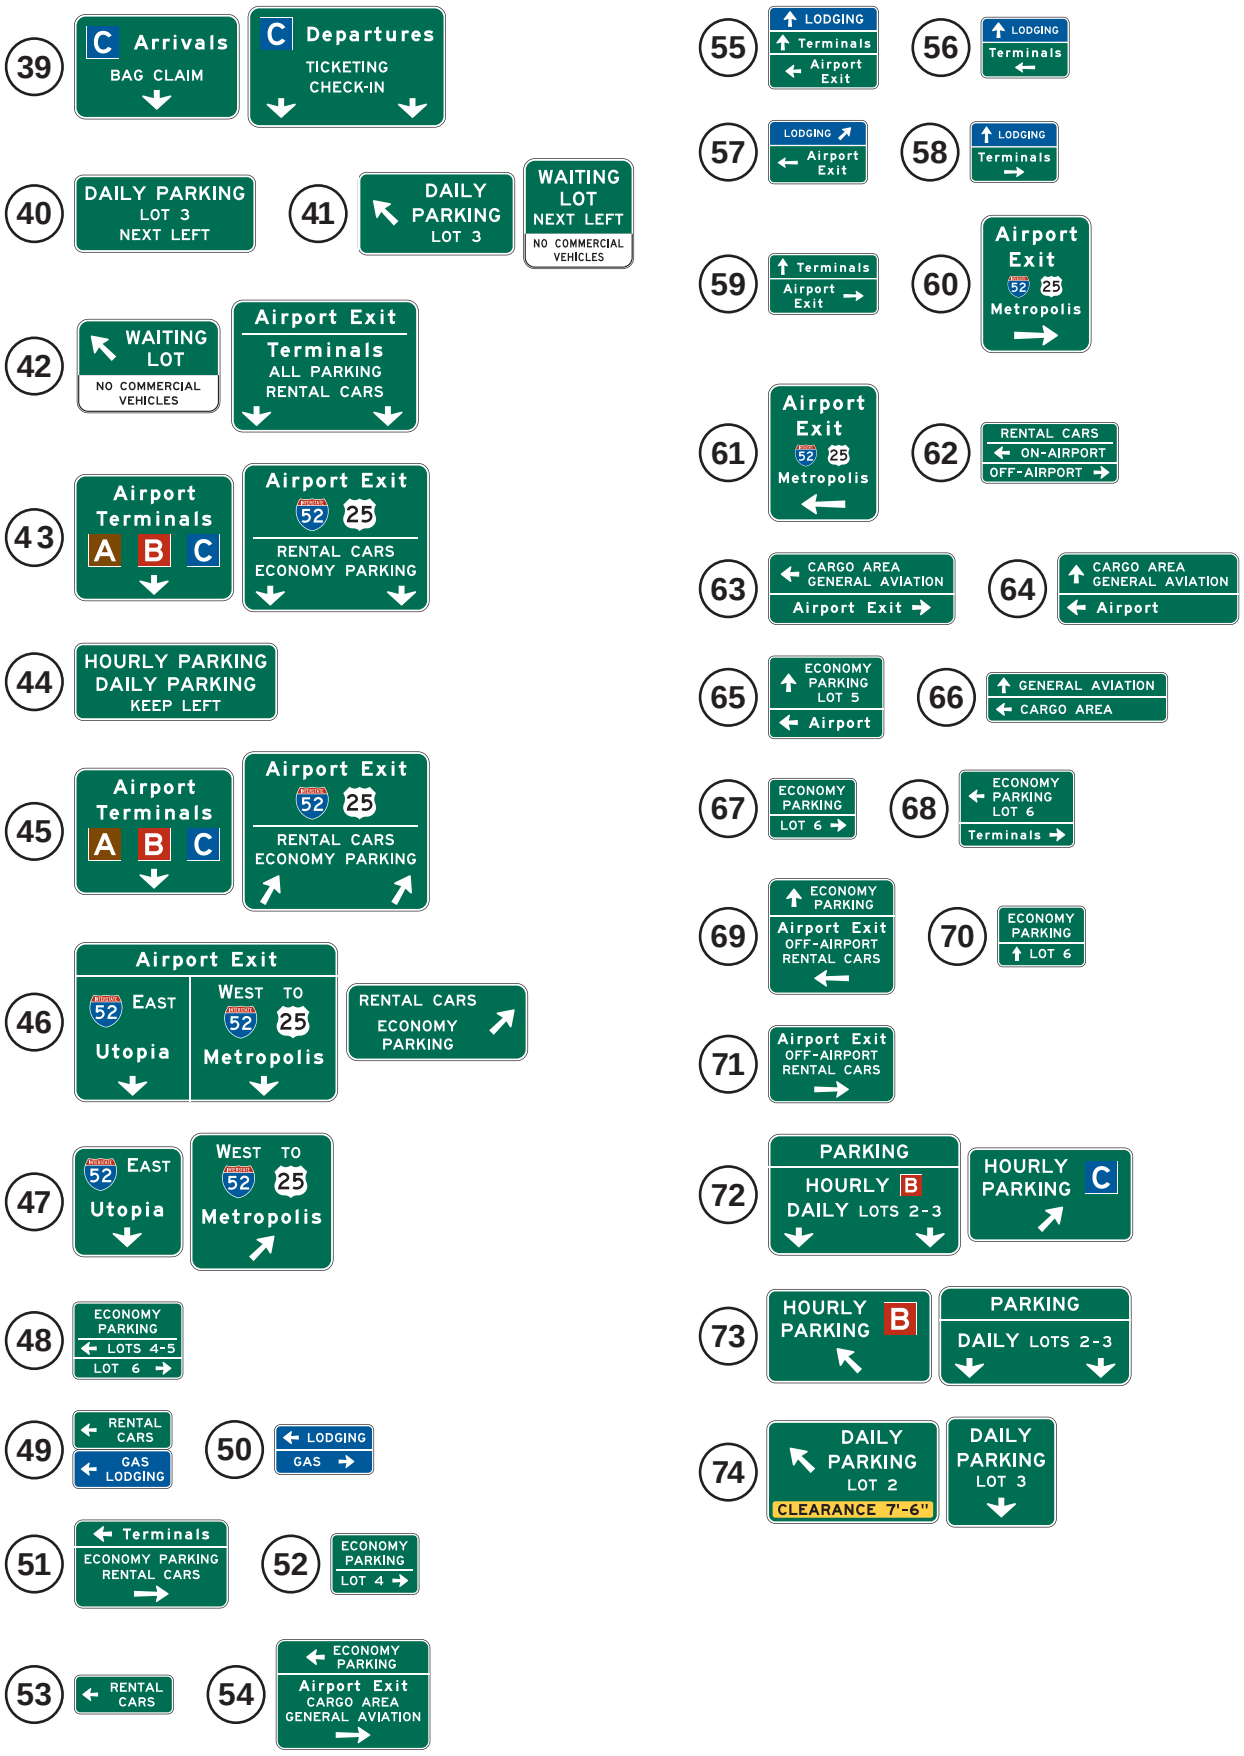

## *Figure 2D-101(CA). California Miscellaneous Guide Signs*




G30(CA)



G30aP(CA)



G30bP(CA)




G68(CA)




G98A(CA)




SG1(CA)

## Table 2D-1. Conventional Road Guide Sign and Plaque Sizes (Sheet 1 of 2)

| Sign or Plaque | Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| Interstate Route (1 or 2 digits) (Shield -1, Marker -1a) | M1-1,1a | 2D.11 | 24 x 24 | — | 36 x 36 |
| Interstate Route (3 digits) (Shield -1, Marker -1a) | M1-1,1a | 2D.11 | 30 x 24 | — | 45 x 36 |
| Off-Interstate Route (1 or 2 digits) (Shield or Marker) | M1-2,3 | 2D.11 | 24 x 24 | — | 36 x 36 |
| Off-Interstate Route (3 digits) (Shield or Marker) | M1-2,3 | 2D.11 | 30 x 24 | — | 45 x 36 |
| U.S. Route (1 or 2 digits) (Shield or Marker) | M1-4 | 2D.11 | 24 x 24 | — | 36 x 36 |
| U.S. Route (3 digits) (Shield or Marker) | M1-4 | 2D.11 | 30 x 24 | — | 45 x 36 |
| ~~State Route (1 or 2 digits)~~ | ~~M1-5~~ | ~~2D.11~~ | ~~24 x 24~~ | ~~—~~ | ~~36 x 36~~ |
| ~~State Route (3 digits)~~ | ~~M1-5~~ | ~~2D.11~~ | ~~30 x 24~~ | ~~—~~ | ~~45 x 36~~ |
| County Route (Shield or Marker) | M1-6 | 2D.11 | 24 x 24 | — | 36 x 36 |
| Forest Route (Shield or Marker) | M1-7 | 2D.11 | 24 x 24 | 18 x 18 | 36 x 36 |
| Junction (plaque) | M2-1P | 2D.13 | 21 x 15 | — | 30 x 21 |
| Combination Junction (2 route signs) | M2-2 | 2D.14 | 60 x 48* | — | — |
| Cardinal Direction (plaque) | M3-1P,2P,3P,4P | 2D.15 | 24 x 12 | — | 36 x 18 |
| Alternate (plaque) | M4-1P,1aP | 2D.17 | 24 x 12 | — | 36 x 18 |
| By-Pass (plaque) | M4-2P | 2D.18 | 24 x 12 | — | 36 x 18 |
| Business (plaque) | M4-3P | 2D.19 | 24 x 12 | — | 36 x 18 |
| Truck (plaque) | M4-4P | 2D.20 | 24 x 12 | — | 36 x 18 |
| To (plaque) | M4-5P | 2D.21 | 24 x 12 | — | 36 x 18 |
| End (plaque) | M4-6P | 2D.22 | 24 x 12 | — | 36 x 18 |
| Temporary (plaque) | M4-7P,7aP | 2D.24 | 24 x 12 | — | 36 x 18 |
| Emergency Route | M4-11 | 2D.59 | 30 x 30 | — | — |
| Emergency Route | M4-11a | 2D.59 | 30 x 30 | — | — |
| Emergency Route To (plaque) | M4-11bP, 11cP | 2D.59 | 30 x 18 | — | — |
| End Emergency Route | M4-12 | 2D.59 | 24 x 18 | — | — |
| Begin (plaque) | M4-14P | 2D.23 | 24 x 12 | — | 36 x 18 |
| Advance Turn Arrow (plaque) | M5-1P,2P,3P | 2D.26 | 21 x 15 | — | 30 x 21 |
| Lane Designation (plaque) | M5-4P,5P,6P | 2D.27 | 24 x 18 | — | 36 x 24 |
| Directional Arrow (plaque) | M6-1P,2P,2aP, 3P,4P,5P,6P,7P | 2D.28 | 21 x 15 | — | 30 x 21 |
| National Scenic Byway | M10-1 | 2D.57 | 24 x 24 | — | — |
| National Scenic Byway (plaque) | M10-1aP | 2D.57 | 24 x 12 | — | — |
| Byway Identification | M10-2 | 2D.58 | 24 x 24 | — | — |
| Byway Identification (plaque) | M10-2aP | 2D.58 | 24 x 12 | — | — |
| State Scenic Byway System | M10-3 | 2D.58 | 24 x 24 | — | — |
| State Scenic Byway - Simple Graphic and Byway Identification | M10-3a | 2D.58 | 24 x 24 | — | — |
| Scenic Byway (plaque) | M10-3bP | 2D.58 | 24 x 12 | — | — |
| National Historic Trail - Identification | M11-1 | 2D.58 | 24 x 24 | — | — |
| National Historic Trail - Historic Route (plaque) | M11-1aP | 2D.58 | 24 x 12 | — | — |
| National Historic Trail - Crossing (plaque) | M11-1bP | 2D.58 | 24 x 12 | — | — |
| National Historic Trail - Auto Tour Route (plaque) | M11-1cP | 2D.58 | 24 x 12 | — | — |
| National Historic Trail - Distance (plaque) | M11-1dP | 2D.58 | 24 x 12 | — | — |
| Destination (1 line) | D1-1 | 2D.36 | Varies x 18 | — | — |
| Destination and Distance (1 line) | D1-1a | 2D.36 | Varies x 18 | — | — |
| Circular Intersection Destination (1 line) | D1-1d | 2D.39 | Varies x 18 | — | — |
| Circular Intersection Departure Guide | D1-1e | 2D.39 | Varies x 42* | — | — |
| Destination (2 lines) | D1-2 | 2D.36 | Varies x 30 | — | — |
| Destination and Distance (2 lines) | D1-2a | 2D.36 | Varies x 30 | — | — |
| Circular Intersection Destination (2 lines) | D1-2d | 2D.39 | Varies x 30 | — | — |

## Table 2D-1. Conventional Road Guide Sign and Plaque Sizes (Sheet 2 of 2)

| Sign or Plaque | Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| Destination (3 lines) | D1-3 | 2D.36 | Varies x 42 | — | — |
| Destination and Distance (3 lines) | D1-3a | 2D.36 | Varies x 42 | — | — |
| Circular Intersection Destination (3 lines) | D1-3d | 2D.39 | Varies x 42 | — | — |
| Circular Intersection Diagrammatic Destination | D1-5 | 2D.39 | Varies x 72* | — | — |
| Circular Intersection Diagrammatic Destination, Right-Turn Bypass | D1-5a | 2D.39 | Varies x 78* | — | — |
| Distance (1 line) | D2-1 | 2D.43 | Varies x 18 | — | — |
| Distance (2 lines) | D2-2 | 2D.43 | Varies x 30 | — | — |
| Distance (3 lines) | D2-3 | 2D.43 | Varies x 42 | — | — |
| Street Name (1 line) | D3-1,1a | 2D.45 | Varies x 12 | Varies x 8 | Varies x 18 |
| Overhead Street Name (1 line) | D3-1,1a | 2D.45 | Varies x 24 | — | — |
| Street Name (2 lines) | D3-1,1a | 2D.45 | Varies x 24 | Varies x 15 | Varies x 33 |
| Overhead Street Name (2 lines) | D3-1,1a | 2D.45 | Varies x 48 | — | — |
| Advance Street Name (2 lines) | D3-2 | 2D.46 | Varies x 30 | — | — |
| Advance Street Name (3 lines) | D3-2 | 2D.46 | Varies x 42 | — | — |
| Advance Street Name (4 lines) | D3-2 | 2D.46 | Varies x 54 | — | — |
| Parking Area Directional | D4-1 | 2D.47 | 30 x 24 | 18 x 15 | — |
| Park - Ride | D4-2 | 2D.48 | 30 x 36 | 24 x 30 | 36 x 48 |
| Advance Weigh Station Distance | D8-1 | 2D.51 | 78 x 60 | 60 x 48 | 96 x 72 |
| Weigh Station Ahead | D8-1a | 2D.51 | 66 x 48 | 48 x 36 | — |
| Weigh Station Advance Direction | D8-2 | 2D.51 | 84 x 72 | 66 x 54 | 108 x 90 |
| Weigh Station Entrance Direction | D8-3 | 2D.51 | 66 x 60 | 48 x 42 | 84 x 78 |
| Crossover | D13-1,2 | 2D.52 | 60 x 30 | — | 78 x 42 |
| Freeway Entrance | D13-3 | 2D.50 | 48 x 30 | — | — |
| Freeway Entrance (Directional) | D13-3a | 2D.50 | 48 x 42 | — | — |
| Combination Lane Use / Destination | D15-1 | 2D.38 | Varies x 96 | — | — |
| Next Truck Lane | D17-1 | 2D.53 | 42 x 48 | — | 60 x 66 |
| Advance Truck Lane | D17-2 | 2D.53 | 42 x 42 | — | 60 x 54 |
| Next Passing Lane | D17-3 | 2D.53 | 42 x 48 | — | 60 x 66 |
| Advance Passing Lane | D17-4 | 2D.53 | 42 x 42 | — | 60 x 54 |
| Advance Emergency Turn-Out | D17-5 | 2D.54 | 60 x 36 | — | 78 x 54 |
| Emergency Turn-Out (Directional) | D17-6 | 2D.54 | 60 x 36 | — | 78 x 60 |
| Advance Slow Vehicle Turn-Out | D17-7 | 2D.54 | 72 x 36 | — | 96 x 54 |

## Table 2D-1(CA). California Conventional Road Guide Sign Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| Destination | G1-4(CA) | 2D.35 | VAR x 30 | VAR x 18 | VAR x 42 |
| Destination | G1-10(CA) | 2D.35 | VAR x 48 | VAR x 30 | VAR x 60 |
| Destination | G1-13(CA) | 2D.35 | VAR x 48 | VAR x 30 | VAR x 60 |
| Destination | G1-19(CA) | 2D.35 | VAR x 42 | VAR x 30 | VAR x 54 |
| Distance | G5(CA) | 2D.44 | VAR x 42 | VAR x 30 | VAR x 54 |
| Destination and Street Name with Arrow | G8-4(CA) | 2D.35, 2D.44, 2D.46 | VAR x 30 | VAR x 18 | VAR x 42 |
| Destination and Street Name with Arrow | G8-10(CA) | 2D.35, 2D.44, 2D.46 | VAR x 48 | VAR x 30 | VAR x 60 |
| Destination and Street Name with Arrow | G8-13(CA) | 2D.35, 2D.44, 2D.46 | VAR x 48 | VAR x 30 | VAR x 60 |
| Destination and Street Name with Arrow | G8-19(CA) | 2D.35, 2D.44, 2D.46 | VAR x 42 | VAR x 30 | VAR x 54 |
| Destination and Street Name with Arrow | G8-22(CA) | 2D.35, 2D.44, 2D.46 | VAR x 30 | VAR x 18 | VAR x 42 |
| Advance Lane Assignment | G21-1(CA) | 2D.31 | VAR x 60 | VAR x 60 | VAR x 72 |
| Advance Lane Assignment | G21-3(CA) | 2D.31 | VAR x 90 | VAR x 90 | VAR x 108 |
| Advance Turn | G22(CA) | 2D.26 | VAR x 48 | — | — |
| State Route (Shield) | G28-1(CA) | 2D.11 | 28 x 25 | 21 x 18 | 36 x 36 |
| State Route (Marker) | G28-2(CA) | 2D.11 | 28 x 25 | 21 x 18 | 36 x 36 |
| Scenic Route | G30(CA) | 2D.58 | 48 x 26 | — | — |
| Scenic Route (plaque) | G30aP(CA) | 2D.58 | 12 x 18 | 12 x 18 | 18 x 27 |
| Scenic Route (plaque) | G30bP(CA) | 2D.58 | 18 x 18 | 18 x 18 | 24 x 24 |
| Directional Arrow Auxiliary (plaque) | G33-1P(CA) | 2D.28 | 24 x 6 | 18 x 5 | 30 x 8 |
| DIVIDED ROAD (X MILES AHEAD) | G68(CA) | 2D.53 | 114 x 60 | — | — |
| Interchange Guide | G77-1(CA) | 2D.31 | VAR x 48 | VAR x 48 | VAR x 72 |
| Interchange Guide | G77-4(CA) | 2D.31 | VAR x 54 | VAR x 54 | VAR x 72 |
| Interchange Guide | G77-7(CA) | 2D.31 | VAR x 54 | VAR x 54 | VAR x 72 |
| Interchange Guide | G77A(CA) | 2D.31 | VAR x 66 | VAR x 66 | VAR x 90 |
| Interchange Guide | G78-1(CA) | 2D.31 | VAR x 42 | VAR x 42 | VAR x 54 |
| Interchange Guide | G78-4(CA) | 2D.31 | VAR x 42 | VAR x 42 | VAR x 48 |
| FREEWAY with Arrow | G82(CA) | 2D.31 | 42 x 12 | 42 x 12 | 54 x 15 |
| Supplemental Destination | G86-1(CA) | 2D.35, 2D.36 | VAR x 54 | VAR x 54 | VAR x 66 |
| Supplemental Destination | G86-3(CA) | 2D.35, 2D.36 | VAR x 96 | VAR x 96 | VAR x 110 |
| Supplemental Destination | G86-5(CA) | 2D.35, 2D.36 | VAR x 90 | VAR x 90 | VAR x 108 |
| Supplemental Destination | G86-7(CA) | 2D.35, 2D.36 | VAR x 90 | VAR x 90 | VAR x 96 |
| Exit Numbered Supplemental Destination | G86-13(CA) | 2D.35, 2D.36 | VAR x 78 | VAR x 78 | VAR x 90 |
| Veterans National Cemetery Sign | G86-14(CA) | 2D.35, 2D.36 | VAR x 66 | — | — |
| Veterans Home of California | G86-16(CA) | 2D.35, 2D.36 | VAR x 66 | | |
| Intersection Number | G98A(CA) | 2D.101(CA) | 18 x 12 | — | — |
| Named State Highway | SG1(CA) | 2D.56 | VAR x 20 | — | VAR x 30 |

# Table 2D-2. Recommended Minimum Letter and Numeral Sizes for Conventional Road Guide Signs According to Speed* (Sheet 1 of 2)
## A - Post-Mounted Signs

| Type of Sign | Single-Lane | | | Multi-Lane | | |
|---|---|---|---|---|---|---|
| | Less than 30 mph | 30-40 mph | Greater than 40 mph | Less than 30 mph | 30-40 mph | Greater than 40 mph |
| **A. Intersection or Interchange Advance Guide Signs and Entrance Direction Guide Signs** | | | | | | |
| Interstate or Off-Interstate Business Route Signs | | | | | | |
| Numerals** | 6 | 9 | 14 | 9 | 9 | 14 |
| 1- or 2-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 | 24 x 24 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 22.5 x 18 | 30 x 24 | 45 x 36 | 30 x 24 | 30 x 24 | 45 x 36 |
| U.S. or State Route Signs | | | | | | |
| Numerals | 9 | 12 | 18 | 12 | 12 | 18 |
| 1- or 2-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 | 24 x 24 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 22.5 x 18 | 30 x 24 | 45 x 36 | 30 x 24 | 30 x 24 | 45 x 36 |
| County Route Signs | | | | | | |
| Numerals | 6 | 8 | 10 | 8 | 8 | 10 |
| 1-, 2-, or 3-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 | 24 x 24 | 24 x 24 | 36 x 36 |
| U.S. or State Route Text Identification (Examples: U S 56, Md 2) | | | | | | |
| Numerals & Letters | 8 | 12 | 15 | 10 | 12 | 15 |
| Cardinal Directions (NORTH, SOUTH, EAST, WEST) | | | | | | |
| First Letter - Upper-Case | 6 | 8 | 10 | 8 | 8 | 10 |
| Rest of Word - Upper-Case | 5 | 6 | 8 | 6 | 6 | 8 |
| Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS) | | | | | | |
| Words - Upper-Case | 5 | 6 | 8 | 6 | 6 | 8 |
| Names of Destinations or Roads (Examples: Springfield, Main St, 2nd Ave) | | | | | | |
| Leading Upper-Case Letter or Numerals | 6 | 8 | 10.67 | 8 | 10.67 | 13.33 |
| Following Lower-Case Letters or Ordinals** | 4.5 | 6 | 8 | 6 | 8 | 10 |
| Distance or Action Messages (Examples: 2 MILES, 1/2 MILE, KEEP RIGHT) | | | | | | |
| Distance Numerals | 6 | 6 | 8 | 6 | 8 | 10 |
| Distance Fraction Numerals | 4.5 | 4.5 | 6 | 4.5 | 6 | 8 |
| Distance Words - Upper-Case | 4.5 | 4.5 | 6 | 4.5 | 6 | 8 |
| Action Message Words - Upper-Case | 6 | 6 | 8 | 6 | 8 | 10 |
| **B. Destination and Other Guide Signs** | | | | | | |
| Names of Destinations or Roads (Examples: Springfield, Main St, 2nd Ave) | | | | | | |
| Leading Upper-Case Letter or Numerals | 4 | 6 | 8 | 6 | 8 | 10.67 |
| Following Lower-Case Letters or Ordinals*** | 3 | 4.5 | 6 | 4.5 | 6 | 8 |
| Distance or Action Messages (Examples: 2 MILES, 1/2 MILE, KEEP RIGHT) | | | | | | |
| Distance Numerals **** | 5 | 6 | 8 | 5 | 6 | 8 |
| Distance Fraction Numerals **** | 4 | 4.5 | 6 | 4 | 4.5 | 6 |
| Distance Words - Upper-Case **** | 4 | 4.5 | 6 | 4 | 4.5 | 6 |
| Action Message Words - Upper-Case **** | 5 | 6 | 8 | 6 | 6 | 8 |

# Table 2D-2. Recommended Minimum Letter and Numeral Sizes for Conventional Road Guide Signs According to Speed* (Sheet 2 of 2)
## B - Overhead-Mounted Signs

| Type of Sign | Less than 35 mph | 35-55 mph | Greater than55 mph **** |
|---|---|---|---|
| **A. Intersection or Interchange Advance Guide Signs and Entrance Direction Guide Signs** | | | |
| Interstate, U.S., State, or Off-Interstate Business Route Signs **** | | | |
| Numerals** | 6 | 9 | 14 |
| 1- or 2-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 22.5 x 18 | 30 x 24 | 45 x 36 |
| U.S. or State Route Signs | | | |
| Numerals | 9 | 12 | 18 |
| 1- or 2-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 22.5 x 18 | 30 x 24 | 45 x 36 |
| County Route Signs | | | |
| Numerals | 6 | 8 | 10 |
| 1-, 2-, or 3-Digit Shields | 18 x 18 | 24 x 24 | 36 x 36 |
| U.S. or State Route Text Identification (Examples: U S 56, Md 2) | | | |
| Numerals & Letters | 8 | 12 | 15 |
| Cardinal Directions (NORTH, SOUTH, EAST, WEST) | | | |
| First Letter - Upper-Case | 6 | 8 | 12 |
| Rest of Word - Upper-Case | 5 | 6 | 10 |
| Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS) | | | |
| Words - Upper-Case | 5 | 6 | 10 |
| Names of Destinations or Roads (Examples: Springfield, Main St, 2nd Ave) | | | |
| Leading Upper-Case Letter or Numerals | 6 | 8 (min.)<br>10.67 (des.) | 13.33 (min.)<br>16 (des.) |
| Following Lower-Case Letters or Ordinals** | 4.5 | 6 (min.)<br>8 (des.) | 10 (min.)<br>12 (des.) |
| Distance or Action Messages (Examples: 2 MILES, 1/2 MILE, KEEP RIGHT) | | | |
| Distance Numerals | 6 | 6 (min.)<br>8 (des.) | 12 (min.)<br>15 (des.) |
| Distance Fraction Numerals **** | 4.5 | 4.5 (min.)<br>6 (des.) | 10 (min.)<br>12 (des.) |
| Distance Words - Upper-Case **** | 4.5 | 4.5 (min.)<br>6 (des.) | 10 (min.)<br>12 (des.) |
| Action Message Words - Upper-Case **** | 6 | 6 (min.)<br>8 (des.) | 12 (min.)<br>15 (des.) |
| **B. Destination and Other Guide Signs** | | | |
| Names of Destinations or Roads (Examples: Springfield, Main St, 2nd Ave) | | | |
| Leading Upper-Case Letter or Numerals | 6 | 8 (min.)<br>10.67 (des.) | 13.33 (min.)<br>16 (des.) |
| Following Lower-Case Letters or Ordinals** | 4.5 | 6 (min.)<br>8 (des.) | 10 (min.)<br>12 (des.) |
| Distance or Action Messages (Examples: 2 MILES, 1/2 MILE, KEEP RIGHT) | | | |
| Distance Numerals | 6 | 6 (min.)<br>8 (des.) | 12 (min.)<br>15 (des.) |
| Distance Fraction Numerals **** | 4.5 | 4.5 (min.)<br>6 (des.) | 10 (min.)<br>12 (des.) |
| Distance Words - Upper-Case **** | 4.5 | 4.5 (min.)<br>6 (des.) | 10 (min.)<br>12 (des.) |
| Action Message Words - Upper-Case **** | 6 | 6 (min.)<br>8 (des.) | 12 (min.)<br>15 (des.) |

* Except as provided otherwise in this Manual

** Minimum size listed for 3-digit shields. Larger numeral sizes used for 1-digit, some 2-digit, and some 3-digit shields. See the Standard Highways Signs publication for more information on Route Sign numeral heights and Standard Alphabet series.

*** Lower-case letter height (loop height) is determined by the initial upper-case letter height (see Sec. 2A.08)

**** Refer to FHWA's List of Known Errors for errors in row. Refer to Section 1A.04 for more details.

Notes: 1. Sizes are shown in inches and where applicable are shown as width x height
2. For Street Name (D3-1 Series) signs, see Table 2D-6
3. The 18-inch route shield size is not for independent use, such as in Directional or Confirmation Assemblies.

## Table 2D-3. Acceptable Abbreviations for Street Name Descriptors

| Descriptor | Standard Abbreviation |
|---|---|
| Avenue | Ave |
| Boulevard | Blvd |
| Bypass | Byp |
| Causeway | Cswy |
| Circle | Cir |
| Corner | Cor |
| Court | Ct |
| Crescent | Cres |
| Drive | Dr |
| East | E* |
| Expressway | Expwy |
| Extension | Ext |
| Freeway | Fwy |
| Highway | Hwy |
| Lane | La, Ln |
| Landing | Lndg |
| North | N* |
| Northeast | NE* |

| Descriptor | Standard Abbreviation |
|---|---|
| Northwest | NW* |
| Parkway | Pkwy |
| Place | Pl |
| Plaza | Plz |
| Road | Rd |
| Route | Rte |
| South | S* |
| Southeast | SE* |
| Southwest | SW* |
| Square | Sq |
| Street | St |
| Terrace | Ter |
| Thruway | Thwy |
| Trafficway | Trfwy |
| Trail | Tr |
| Turnpike | Tpk |
| West | W* |

* For pre-directional or post-directional designations or cardinal orientations, such as E Main St or 3rd St SW

## Table 2D-4. Street Name Descriptors Not Acceptable for Abbreviation

| Descriptor |
|---|
| Alley |
| Belt |
| Beltway |
| Close |
| Cove |
| Edge |
| Gate |
| Green |
| Grove |
| Hill |
| Loop |
| Mews |

| Descriptor |
|---|
| Oval |
| Pass |
| Passage |
| Path |
| Ridge |
| Row |
| Run |
| Trace |
| Turn |
| View |
| Vista |
| Walk |

## Table 2D-5. Overhead Arrow-per-Lane Arrow Height Based on Principal Legend Letter Height

| Principal Legend Letter Height | Straight Arrow | Turn Arrow |
|---|---|---|
| 10.67 - 13.33 * | 32 | 24 |
| 8 * | 24 | 18 |

Note: Letter and arrow heights are shown in inches.

* Refer to FHWA's List of Known Errors for errors in row. Refer to Section 1A.04 for more details.

## Table 2D-6. Minimum Letter Heights on Street Name Signs

| Type of Mounting | Type of Street or Highway | Speed Limit | Recommended Minimum Letter Height * | |
|---|---|---|---|---|
| | | | Initial Upper-Case | Lower-Case |
| Overhead | All types | All speed limits | 12 inches | 9 inches |
| Post-mounted | Multi-lane | More than 40 mph | 8 inches | 6 inches |
| Post-mounted | Multi-lane | 40 mph or less | 6 inches | 4.5 inches |
| Post-mounted | 2-lane | All speed limits | 6 inches** | 4.5 inches** |

* Letter heights shown are for the street name. Descriptors or other supplementary legend may be displayed in smaller lettering of at least 3 inches.
** On two-lane local streets with speed limits of 25 mph or less, 4-inch initial upper-case letters with 3-inch lower-case letters may be used.

## Table 2D-101(CA). Criteria for Supplemental Destination Signs

| Type of Destination | Specific Criteria | Major Metropolitan Areas | Urbanized Areas | Rural Areas |
|---|---|---|---|---|
| Post Secondary School, Public or Private | Minimum Enrollment: | | | |
| | Single Campus Locations (See Note 5) | 1,000 | 1,000 | 1,000 |
| | Maximum Miles from a Freeway (See Note 6) | 2 | 4 | 5 |
| State Special School | Maximum Miles from Highway (See Notes 2, 6, and 8) | 5 | 5 | 5 |
| Zoo, Stadium, or Sports Arena | Public Owned and Non-Profit: | | | |
| | Minimum Annual Attendance | 1,000,000 | 500,000 | 200,000 |
| | Maximum Miles from Highway (See Note 2) | 2 | 2 | 3 |
| Museum | Public Owned and Non-Profit: | | | |
| | Minimum Annual Attendance | 50,000 | 50,000 | 50,000 |
| | Maximum Miles from Highway (See Notes 2 and 9) | 5 | 5 | 5 |
| Convention Center | Public Owned and Non-Profit: | | | |
| | Minimum Annual Attendance | 500,000 | 250,000 | — |
| | Maximum Miles from Highway (See Note 2) | 3 | — | — |
| National Guard Armory | Only Emergency Center in the Area.<br>Easy Access to Primary Evacuation Route (See Note 2) | — | — | — |
| Fairgrounds | Publicly Owned and Operated.<br>Temporary sign only, unless there are year-round activities. | | | |
| | Minimum Annual Attendance | 500,000 | 200,000 | 200,000 |
| | Maximum Miles from Highway (See Note 2) | 2 | 4 | 5 |
| Federal or State Hospitals, Prisons, National Cemeteries, and Veteran Homes | Maximum Miles from Highway (See Note 2) | 1 | 3 | 5 |
| Government Centers | Number of Employees | 5,000 | 2,000 | 1,000 |
| | Maximum Miles from Highway (See Note 2) | 2 | 3 | 2 |
| California Welcome Centers | Easy Access from Nearest State Highway (See Notes 2 and 7) | — | — | — |
| Airports | Maximum Miles from Highway (See Note 2) | 1 | 3 | 5 |
| Rail and Light Rail Stations | Easy Access from Nearest State Highway (See Note 2) | — | — | — |

NOTES:
1. Meeting the above criteria does not guarantee placement of a sign. Limitations on the spacing between signs and the number of messages permitted, specified in Section 2A.08, 2D.05, and 2D.42, shall be observed. Eligible destinations must qualify for signing based on traffic service.
2. Any required follow-up signing shall be installed by local agencies before signs are placed on the State Highway.
3. If a stadium is located on a school campus for which signs already exist, a separate stadium sign will not be installed.
4. Definitions of Area Classifications:
   A. MAJOR METROPOLITAN AREA – An urbanized area, population density of at least 1,000 inhabitants per 2.6 $km^2$ (1 $mi^2$), not necessarily related to county boundaries, with a total population of at least 1,000,000 and an included central city with a population of at least 250,000.
   B. URBANIZED AREA – A geographic area with a total population of at least 50,000 and an included central city any population size.
   C. RURAL AREA – All areas outside of an urbanized area.
5. A public or private postsecondary education institution must have either 1,000 or more full-time students or an equivalent in part-time students. Refer to CVC Section 21375.
6. Signs directing motorists to a school will not be installed until private funding is obtained to cover fabrication and installation. If a school that previously had signs relocates for purposes deemed to improve the school (as determined by Caltrans), signs will be installed at the new location at no cost to the school.
7. Caltrans will bill the Welcome Center directly for sign fabrication and installation on the State Highway. Installation costs on local roads are the responsibility of the Welcome Center and the relevant local agency.
8. See California Streets and Highway Code, Division 1, Chapter 1, Article 3, Section 101.21.
9. See California Streets and Highway Code, Division 1, Chapter 1, Article 3, Section 101.18.

# CHAPTER 2E. GUIDE SIGNS—FREEWAYS AND EXPRESSWAYS

## Chapter 2E Subchapter and Section Organization

**GENERAL**
2E.01 Scope of Freeway and Expressway Guide Sign Standards
2E.02 Freeway and Expressway Signing Principles
2E.03 Guide Sign Classification
2E.04 Characteristics of Urban Signing
2E.05 Characteristics of Rural Signing
2E.06 Signing of Named Highways
2E.07 Designation of Destinations

**SIGN DESIGN**
2E.08 General
2E.09 Color of Guide Signs
2E.10 Retroreflection or Illumination
2E.11 Interchange Classification
2E.12 Size of Signs and Letters
2E.13 Interline and Edge Spacing
2E.14 Sign Borders
2E.15 Amount of Legend on Guide Signs
2E.16 Abbreviations
2E.17 Symbols
2E.18 Arrows for Interchange Guide Signs

**INSTALLATION**
2E.19 Overhead Sign Installations
2E.20 Lateral Offset

**GUIDE SIGNING FOR INTERCHANGES**
2E.21 Interchange Guide Signs
2E.22 Interchange Exit Numbering
2E.23 Interchange Advance Guide Signs (E1-1 through E1-3)
2E.24 Interchange Sequence Signs (E9-1 and E9-2)
2E.25 Exit Direction Signs (E4 Series)
2E.26 Exit Gore Signs and Plaque (E5-1 Series)
2E.27 Pull-Through Signs (E6-1 Series and E6-2 Series)
2E.28 Signing for Interchange Lane Drops without an Optional Exit Lane
2E.29 Signing by Type of Interchange
2E.30 Minor Interchange
2E.31 Diamond Interchange
2E.32 Diamond Interchange in Urban Area
2E.33 Cloverleaf Interchange
2E.34 Cloverleaf Interchange with Collector-Distributor Roadways
2E.35 Partial Cloverleaf Interchange
2E.36 Collector-Distributor Roadways for Successive Interchanges
2E.37 Freeway-to-Freeway Interchange
2E.38 Freeway Split with Dedicated Lanes
2E.39 Signing for Option Lanes at Splits and Multi-Lane Exits
2E.40 Design of Overhead Arrow-per-Lane Guide Signs for Option Lanes

2E.41 Design of Freeway and Expressway Diagrammatic Advance Guide Signs
2E.42 Signing for Intermediate and Minor Interchange Multi-Lane Exits with an Option Lane
2E.43 Number of Signs at an Overhead Installation and Sign Spreading
2E.44 Closely-Spaced Interchanges
2E.45 Guide Signing in Tunnels and Similar Structures

**OTHER GUIDE SIGNS**
2E.46 Next Exit Plaques (E2-1P and E2-1aP)
2E.47 Post-Interchange Signs
2E.48 Post-Interchange Distance Signs (E7-1 through E7-3)
2E.49 Post-Interchange Travel Time Sign (E7-4)
2E.50 Distance and Travel Time Sign (E7-5) and Comparative Travel Time Sign (E7-6)
2E.51 Supplemental Guide Signs (E3 Series)
2E.52 Community Interchanges Identification Signs (E9-4 and E9-5)
2E.53 Next Exits Signs (E9-3 and E9-3a)
2E.54 Weigh Station Signing
2E.55 Route Signs and Trailblazer Assemblies
2E.56 Eisenhower Interstate System Signs (M1-10 and ~~M1-10a~~)

**SIGNS FOR ROUTE DIVERSION BY VEHICLE CLASS**
2E.57 Signs for Route Diversion by Vehicle Class

**INTERFACE WITH CONVENTIONAL ROADWAYS**
2E.58 Signing on Conventional Road Approaches and Connecting Roadways
2E.59 Wrong-Way Traffic Control at Interchange Ramps

# GENERAL

## Section 2E.01 Scope of Freeway and Expressway Guide Sign Standards

Support:

01 The provisions of this Chapter provide a uniform and effective system of signing for high-volume, high-speed motor vehicle traffic on freeways and expressways. The requirements and specifications for expressway signing exceed those for conventional roads (see Chapter 2D), but are less than those for freeway signing. Since there are many geometric design variables to be found in existing roads, a signing concept commensurate with prevailing conditions is the primary consideration. Section 1C.02 includes definitions of freeway and expressway.

02 Guide signs for freeways and expressways are primarily identified by the name of the sign rather than by an assigned sign designation. Guidelines for the design of guide signs for freeways and expressways are provided in the "Standard Highway Signs" publication and in Caltrans' California Sign Specifications (see Section 1A.05).

**Standard:**

03 **The provisions of this Chapter shall apply to any highway that meets the definition of freeway or expressway facilities.**

## Section 2E.02 Freeway and Expressway Signing Principles

Support:

01 The development of a signing system for freeways and expressways is approached on the premise that the signing is primarily for the benefit and direction of road users who are unfamiliar with the route or area. The signing furnishes road users with clear instructions for orderly progress to their destinations. Sign installations are an integral part of the facility and, as such, are best planned concurrently with the development of highway location and geometric design. For optimal results, plans for signing are analyzed during the earliest stages of preliminary design, and details are correlated as final design is developed. The excessive signing found on many major highways usually is the result of using a multitude of signs that are too small and that are poorly designed and placed to accomplish the intended purpose.

02 Freeway and expressway signing is to be considered and developed as a planned system of installations. An engineering study is sometimes necessary for proper solution of the problems of many individual locations, but, in addition, consideration of an entire route is necessary.

*Guidance:*

03 *Road users should be guided with consistent signing on the approaches to interchanges, when they drive from one State to another, and when driving through rural or urban areas. Because geographical, geometric, and operating factors regularly create significant differences between urban and rural conditions, the signing should take these conditions into account.*

04 *Guide signs on freeways and expressways should serve distinct functions as follows:*

*A. Give directions to destinations, or to streets or highway routes, at intersections or interchanges;*
*B. Furnish advance notice of the approach to intersections or interchanges;*
*C. Direct road users into appropriate lanes in advance of diverging or merging movements;*
*D. Identify routes and directions on those routes;*
*E. Show distances to destinations;*
*F. Indicate access to general motorist services, rest, scenic, and recreational areas; and*
*G. Provide other information of navigational value to the road user.*

## Section 2E.03 Guide Sign Classification

Support:

01 Freeway and expressway guide signs are classified and addressed as follows:

A. Interchange signs (see Sections 2E.21 through 2E.23 and 2E.25 through 2E.44);
B. Interchange Sequence signs (see Section 2E.24);
C. Post-Interchange signs (see Sections 2E.47 through 2E.49);
D. Community Interchanges Identification signs (see Section 2E.52);
E. Next Exits signs (see Section 2E.53);
F. Weigh Station signs (see Section 2E.54);
G. Route signs and Trailblazer Assemblies (see Section 2E.55);

H. At-Grade Intersection signs (see Section 2E.58);
I. General Information signs (see Chapter 2H);
J. Reference Location signs (see Sections 2H.11 and 2H.12);
K. General Service signs (see Chapter 2I);
L. Rest and Scenic Area signs (see Section 2I.05);
M. Tourist Information and Welcome Center signs (see Section 2I.08);
N. Radio Information, Travel Information, and Roadside Assistance signs (see Sections 2I.09 through 2I.13);
O. Carpool and Ridesharing signs (see Section 2I.14);
P. Specific Service signs (see Chapter 2J); and
Q. Recreational and Cultural Interest Area signs (see Chapter 2M).

02 Refer to FHWA's List of Known Errors for error in Paragraph 1, Item H text. Refer to Section 1A.04 for more details.

## Section 2E.04 Characteristics of Urban Signing

Support:

01 Urban conditions are characterized not so much by city limits or other arbitrary boundaries as by the following features:

A. Mainline roadways with more than two lanes in each direction;
B. High traffic volumes on the through roadways;
C. High volumes of traffic entering and leaving interchanges;
D. Interchanges that are closely spaced;
E. Roadway and interchange lighting;
F. Three or more interchanges serving the major city;
G. A loop, circumferential, or spur route serving a sizable portion of the urban population; and
H. Visual clutter from roadside development.

02 Operating conditions and road geometrics on urban freeways and expressways usually make special sign treatments desirable, including:

A. Use of Interchange Sequence signs (see Section 2E.24);
B. Use of sign spreading to the maximum extent possible (see Section 2E.43);
C. Elimination of General Service or Specific Service signing (see Chapters 2I and 2J);
D. Reduction to a minimum of post-interchange signs (see Section 2E.47);
E. Display of advance signs at distances closer to the interchange, with appropriate adjustments in the legend (see Section 2E.23);
F. Use of overhead signs on roadway structures and independent sign supports (see Section 2E.19);
G. Use of Overhead Arrow-per-Lane guide signs in advance of interchanges with option lanes (see Section 2E.40), or Diagrammatic Advance guide signs in advance of interchanges with complex geometric configurations of ramp departures (see Section 2E.41); and
H. Frequent use of street names as the principal message in guide signs.

03 Lower speeds, which are often characteristic of urban operations, do not justify lower signing standards. Typical traffic patterns are more complex for the road user to negotiate, and large, easy-to-read legends are, therefore, just as necessary as on rural highways.

## Section 2E.05 Characteristics of Rural Signing

Support:

01 Rural areas ordinarily have greater distances between interchanges, which permits adequate spacing for the sequences of signs on the approach to and departure from each interchange. However, the absence of traffic in adjoining lanes and on entering or exiting ramps often adds monotony or inattention to rural driving. This increases the importance of signs that call for decisions or actions.

*Guidance:*

02 *Where there are long distances between interchanges and the alignment is relatively unchanging, signs should be positioned for their best effect on road users. The tendency to group all signing in the immediate vicinity of rural interchanges should be avoided by considering the entire route in the development of signing plans. Extra effort should be given to the placement of signs at natural target locations to command the attention of the road user, particularly*

*when the message requires an action by the road user.*

## Section 2E.06 Signing of Named Highways

*Guidance:*

01 *Signing of named highways on freeways and expressways should comply with the provisions of Section 2D.56.*

Support:

02 Section 2M.10 contains information regarding memorial or dedication signing of routes, bridges, or highway components.

Option:

03 At interchanges other than freeway-to-freeway, Interchange Guide (G77(CA) and G78(CA) series) signs may be used to direct traffic to the named freeway by displaying both the freeway name and the appropriate route shield.

04 In rural areas, ground-mounted freeway name signs may be installed beyond major freeway interchanges at approximately 10-mile intervals.

*Guidance:*

05 *Freeway names should not be used on signs directing motorists to freeways in rural areas.*

## Section 2E.07 Designation of Destinations

**Standard:**

01 **The direction of a freeway and the major destinations or control cities along it shall be clearly identified through the use of appropriate destination legends (see Section 2D.35). Successive freeway guide signs shall provide continuity in destination names and consistency with available map information. At any decision point, a given destination shall be indicated by way of only one route (see Figure 2E-1).**

*Guidance:*

02 *Control city legends should be used in the following situations along a freeway:*

- *A. At interchanges between freeways;*
- *B. At separation points of overlapping freeway routes;*
- *C. On directional signs on intersecting routes, to guide traffic entering the freeway;*
- *D. On Pull-Through signs; and*
- *E. On the bottom line of post-interchange distance signs.*

Support:

03 Continuity of destination names is also useful on expressways serving long-distance or intrastate travel.

04 The determination of major destinations or control cities is important to the quality of service provided by the freeway. Control cities on freeway guide signs are selected by the States and are contained in the "Guidelines for the Selection of Supplemental Guide Signs for Traffic Generators Adjacent to Freeways, 4th Edition/Guide Signs, Part II: Guidelines for Airport Guide Signing/Guide Signs, Part III: List of Control Cities for Use in Guide Signs on Interstate Highways," published by and available from the American Association of State and Highway Transportation Officials.

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

*Guidance:*

05 *Each Caltrans District should establish its list of control cities in coordination with neighboring districts and adjacent states to ensure consistent and uniform signage for through traffic on State highways. The same control cities should be used along a given route for each direction of travel.*

## SIGN DESIGN

### Section 2E.08 General

Support:

01 Effective signs are legible to road users approaching them, and are readable and comprehensible in the viewing time provided to permit proper responses. Desired design characteristics include: (a) long visibility distances; (b) large lettering, symbols, and arrows; and (c) short legends.

### Section 2E.09 Color of Guide Signs

**Standard:**

01 **Guide signs on freeways and expressways, except as otherwise provided in this Manual, shall have white letters, symbols, arrows, and borders on a green background.**

Support:

02 Color requirements for route signs and trailblazers; for signs with blank-out or changeable messages; for signs for services, rest areas, park and recreational areas; and for certain miscellaneous signs are provided in the individual Sections dealing with the particular sign or sign group.

### Section 2E.10 Retroreflection or Illumination

**Standard:**

01 **Letters, numerals, symbols, arrows, and borders of all guide signs shall be retroreflective. The background of all guide signs that are not independently illuminated shall be retroreflective.**

Support:

02 Where there is no serious interference from extraneous light sources, retroreflective post-mounted signs usually provide adequate nighttime visibility.

03 On freeways and expressways where much driving at night is done with low-beam headlights, the amount of headlight illumination incident to an overhead sign display is relatively small.

*Guidance:*

04 *Overhead sign installations should be illuminated (see Section 2A.21) unless an engineering study shows that retroreflection alone will perform effectively. The type of illumination chosen should provide effective and reasonably uniform illumination of the sign face and message.*

### Section 2E.11 Interchange Classification

Support:

01 For signing purposes, interchanges are classified as major, intermediate, and minor. Minimum letter and numeral sizes based on interchange classification are contained in Tables 2E-2 and 2E-4. Descriptions of these classifications are as follows:

A. Major interchanges are subdivided into two categories: (a) interchanges with other expressways or freeways, or (b) interchanges with high-volume multi-lane highways, principal urban arterials, or major rural routes where the volume of interchanging traffic is heavy or includes many road users unfamiliar with the area.
B. Intermediate interchanges are those with urban and rural routes not in the category of major or minor interchanges.
C. Minor interchanges include those where traffic is local and very light, such as interchanges with land service access roads. Where the sum of exit volumes is estimated to be lower than 100 vehicles per day in the design year, the interchange is classified as minor.

### Section 2E.12 Size of Signs and Letters

**Standard:**

01 **Except as provided in Section 2A.07, the sizes of freeway and expressway guide signs that have standardized designs shall be as shown in Table 2E-1.**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2E-1.

Option:

03 Signs larger than those shown in Table 2E-1 may be used (see Section 2A.07).

**Standard:**

04 **The nominal loop height of the lower-case letters shall be ¾ of the height of the initial upper- case letter (see Paragraph 3 of Section 2D.05 for additional information on the specification of letter heights). Other word legends such as cardinal directions, action messages, and special characters shall be composed of all upper-case letters with a minimum letter height of 8 inches. Interline and edge spacing shall be as provided in Section 2E.13.**

05 **For all freeway and expressway signs that do not have a standardized design, the message dimensions shall be determined first, and the outside sign dimensions secondarily. Minimum numeral and letter sizes for expressway guide signs according to interchange classification, type of sign, and component of sign legend shall be as shown in Tables 2E-2 and 2E-3. Minimum numeral and letter sizes for freeway guide signs according to interchange classification, type of sign, and component of sign legend shall be as shown in Tables 2E-4 and 2E-5. The minimum numeral and letter sizes for overhead- mounted expressway and freeway guide signs shall be those shown in the "Overhead" columns of Tables 2E-2 and 2E-4, respectively, except where a larger minimum numeral or letter height is provided in the columns for the applicable type of interchange (major, intermediate, or minor).**

06 **All names of places, streets, and highways on freeway and expressway guide signs shall be composed of lower-case letters with initial upper-case letters. The letters and the numerals used shall be FHWA Standard Alphabet Series E (modified) as provided in the "Standard Highway Signs" publication (see Section 1A.05).**

07 **Lettering size on freeway and expressway signs shall be the same for both rural and urban conditions.**

Support:

08 Sign size is determined primarily in terms of the length of the message and the size of the lettering necessary for proper legibility. Letter style and height, and arrow design have been standardized for freeway and expressway signs to assure uniform and effective application.

09 Designs for upper-case and lower-case FHWA Standard Alphabets, together with tables of recommended letter spacing, are shown in the "Standard Highway Signs" publication (see Section 1A.05).

*Guidance:*

10 *Freeway lettering sizes (see Tables 2E-4 and 2E-5) should be used when expressway geometric design is comparable to freeway standards.*

11 *Other sign letter size requirements not specifically identified elsewhere in this Manual should be guided by these specifications. Abbreviations should be kept to a minimum, except as provided in Section 2E.16.*

Support:

12 A sign mounted over a particular roadway lane to which it applies might have to be limited in horizontal dimension to the width of the lane, so that another sign can be placed over an adjacent lane. The necessity to maintain proper vertical clearance might also place a further limitation on the size of the overhead sign and the legend that can be accommodated.

## Section 2E.13 Interline and Edge Spacing

*Guidance:*

01 *Interline spacing of upper-case letters should be approximately ¾ of the average of upper-case letter heights in adjacent lines of letters.*

02 *The spacings to the top and bottom borders should be equal to the average of the letter height of the adjacent line of letters. The lateral spacing to the vertical borders should be essentially the same as the height of the largest letter.*

## Section 2E.14 Sign Borders

*Guidance:*

01 *For guide signs larger than 120 x 72 inches, the border should have a width of 2 inches. For smaller guide signs, a border width of 1.25 inches should be used. On unusually large signs with oversized letter heights, route shields, or other legend elements, the border should be 2.5 inches wide and should not exceed 3 inches in width. In all cases, the width of the border should not exceed the stroke width of the lettering of the principal legend on the sign.*

02 *Corner radii of sign borders should be approximately ⅛ of the minimum sign dimension on guide signs, except that the radii should not exceed 12 inches on any sign.*

Support:

03 The "Standard Highway Signs" publication (see Section 1A.05) contains detailed information on border widths and corner radii for ranges of sign sizes.

Option:

04 The sign material in the area outside of the corner radius may be trimmed.

## Section 2E.15 Amount of Legend on Guide Signs

*Guidance:*

01 *No more than two destination names or street names should be displayed on any Interchange Advance Guide sign or Exit Direction sign. A city name and street name on the same sign should be avoided. Where two or three signs are placed on the same supports, destinations or street names should be limited to one per sign, or to a total of three in the display. Sign legends should not exceed three lines of copy, exclusive of the exit number and action or distance information.*

Support:

02 Where only one interchange serves a community, the intersecting street name is generally superfluous to the city name on the Interchange Advance guide and Exit Direction signs. Where a community is served by multiple interchanges, the city name is typically displayed on either a Community Interchanges Identification sign (see Section 2E.52) or a Next Exits sign (see Section 2E.53). Each interchange is then identified by its intersecting roadway name on the Interchange Advance guide and Exit Direction signs rather than by the city name.

## Section 2E.16 Abbreviations

**Standard:**

01 **The use of abbreviations on freeway and expressway guide signs shall comply with the provisions of Section 2D.07 of this Manual.**

## Section 2E.17 Symbols

Support:

01 Symbols are not normally displayed on freeway and expressway guide signs. One exception is the PARK - RIDE Supplemental guide sign (see Section 2E.51), which displays the Carpool symbol. In some cases, General Information symbols (see Chapter 2H) might be included in the legend of a guide sign to shorten an unusually lengthy legend on the sign.

*Guidance:*

02 *When a General Information symbol is incorporated into the legend of a guide sign, all components of the legend should be balanced in size and arrangement for maximum legibility. The General Information (I series) sign, rather than the symbol alone, should be placed as a sign panel within the guide sign so that adequate recognition of the symbol is provided by the border. The General Information sign panel should be positioned to the left of the legend to which it applies. The size of the General Information sign panel should be similar in size to that specified for a route shield for the type of guide sign on which it is displayed.*

## Section 2E.18 Arrows for Interchange Guide Signs

**Standard:**

01 **Arrows used on interchange guide signs shall be of the types shown in Figure 2D-3 and shall comply with the provisions of this Section and Section 2D.08.**

02 **Except on Overhead Arrow-per-Lane guide signs (see Section 2E.40) and on Exit Direction signs for lane drops (see Section 2E.28), and except as provided in Paragraph 5 of this Section, directional arrows on all overhead and post-mounted Exit Direction signs shall point diagonally upward. Directional arrows on overhead Exit Direction signs shall be located on the side of the sign consistent with the direction of the exiting movement. Directional arrows on post-mounted Exit Direction signs shall be located at the bottom portion of the sign and centered under the legend.**

Option:

03 On overhead Exit Direction signs that are located fully over the tapered portion of the exit ramp at the theoretical gore, and where a directional arrow to the side of the legend farthest from the roadway might create an unusually wide

sign that limits the road user's view of the arrow, the directional arrow may be placed at the bottom portion of the sign, centered under the legend.

**Standard:**

04 **Directional arrows on guide signs for multi-lane exits shall be positioned below the legend over the approximate center of each lane to which the arrow applies (see Figure 2E-38).**

05 **Down arrows shall only be used on overhead signs to indicate a lane to be followed and shall be positioned over the approximate center of each lane pointing vertically downward toward the approximate center of that lane. Down arrows shall be used only on overhead guide signs that restrict the use of specific lanes to traffic bound for the destination(s) and/or route(s) indicated by these arrows. Down arrows shall not be used unless an arrow can be located over and pointed to the approximate center of each lane that can be used to reach the destination displayed on the sign.**

06 **If down arrows are used, having more than one down arrow pointing to the same lane on a single overhead sign (or on multiple signs on the same overhead sign structure) shall not be permitted.**

Support:

06a Refer to Section 2B.38 and Figure 2B-10(CA) for sign options that allow trucks to legally use a lane other than the rightmost lane. This is accomplished by placing the TRUCKS (R70A(CA)) and OK (R70B(CA)) sign panels adjacent to a down arrow.

07 Directional and down arrows for use on guide signs are shown in Figure 2D-3. Detailed drawings and standardized sizes based on ranges of letter heights for these arrows are provided in the "Standard Highway Signs" publication (see Section 1A.05). Information on the dimensions for arrows used in Overhead Arrow- per-Lane and Diagrammatic Advance guide signing is also provided in the "Standard Highway Signs" publication (see Section 1A.05).

# INSTALLATION

## Section 2E.19 Overhead Sign Installations

Support:

01 Specifications for the design and construction of structural supports for signs have been standardized by the American Association of State Highway and Transportation Officials (AASHTO). Overcrossing structures can often serve for the support of overhead signs, and might in some cases be the only practical location that will provide adequate viewing distance. Use of these structures as sign supports will eliminate the need for additional sign supports along the roadside. Conditions that might warrant the installation of overhead signs are given in Section 2A.14 and throughout this Chapter. Vertical clearance of overhead signs is discussed in Section 2A.15.

## Section 2E.20 Lateral Offset

**Standard:**

01 **Except where shielded by a rigid traffic barrier, the minimum lateral offset outside the usable roadway shoulder for post-mounted freeway and expressway signs or for overhead sign supports, either to the right-hand or left-hand side of the roadway, shall be 6 feet. This minimum clearance shall also apply outside of a curb. If located within the clear zone, the signs shall be mounted on crashworthy (see definition in Section 1C.02) supports or shielded by appropriate crashworthy barriers.**

*Guidance:*

02 *Where practicable, a sign should not be less than ~~10~~ 12 feet from the edge of the nearest traffic lane. Large guide signs especially should be farther removed, preferably 30 feet or more from the nearest traffic lane.*

03 *Where an expressway median is 12 feet or less in width, consideration should be given to spanning both roadways without a center support.*

04 *Where an overhead sign support cannot be placed sufficiently far away from the line of traffic, it should either be designed to minimize the impact forces, or be adequately shielded by a traffic barrier of suitable design.*

**Standard:**

05 **Butterfly-type sign supports and other overhead non-crashworthy sign supports shall not be installed in gores or other unshielded locations within the clear zone.**

Option:

06 Lesser clearances, but not generally less than 6 feet, may be used on connecting roadways or ramps at interchanges.

Support:

07 Refer to Section 2A.16 for additional information about lateral offset.

# GUIDE SIGNING FOR INTERCHANGES

## Section 2E.21 Interchange Guide Signs

Support:

01 For some applications, guide signing for interchanges depends upon the interchange classifications that are described in Section 2E.11. Provisions on guide signing for interchanges that are based on interchange classifications are found in Sections 2E.23 through 2E.26, 2E.46 through 2E.48, and 2E.51 through 2E.53.

**Standard:**

02 **The signs at interchanges and on their approaches shall include Advance Interchange guide signs and Exit Direction signs. Consistent destination messages shall be displayed on these signs.**

*Guidance:*

03 *New destination information should not be introduced into the major sign sequence for one interchange, nor should destination information be dropped.*

04 *Guide signs placed in advance of an interchange deceleration lane should be spaced at least 800 feet apart.*

05 *Use of Supplemental guide signing should be minimized as provided in Section 2E.51.*

Support:

06 Figure 2E-2 shows a typical sequence of interchange guide signs.

07 In some instances the interchange that provides the most direct or preferred access to a destination might be different in opposing directions of travel due to circumstances such as the configuration of the crossroads, or the fact that an interchange is a partial interchange.

*Guidance:*

08 *For each direction of travel, guide signing to a destination should be via the exit with the most direct or preferred access, even when this results in a destination being served by different interchanges for opposing directions of travel (see Figure 2E-1).*

Support:

09 Refer to Section 2D.31 for additional Interchange Guide signs.

*Guidance:*

10 *Exits should be identified on signs using street names, community names, control cities and/or route markers.*

11 *When an interchange provides more than one exit to the same street, cardinal direction identifiers should be included on the signs to distinguish between the exits.*

Option:

12 The Destination and Street Name with Arrow (G8(CA) series) signs may be used in freeway interchange areas.

## Section 2E.22 Interchange Exit Numbering

**Standard:**

01 **Interchange exit numbering shall use the reference location sign exit numbering method. The consecutive exit numbering method shall not be used. The exit numbers shall correspond to the posted Reference Location or Enhanced Reference Location signs.**

Support:

02 Reference location sign exit numbering assists road users in determining their destination distances and travel mileage, assists road users in reporting their location in the event of an incident or breakdown, assists responders in responding to incidents, and assists highway agencies because the exit numbering sequence does not have to be changed if new interchanges are added to a route.

03 Interchange exit numbering provides valuable orientation for the road user on a freeway or expressway. The feasibility of numbering interchanges or exits on an expressway will depend largely on the extent to which grade separations are provided. Where there is appreciable continuity of interchange facilities, interrupted only by an occasional intersection at grade, the numbering will be helpful to the expressway user.

**Standard:**

04 **Interchange exit numbering shall be used in signing each freeway interchange exit. Interchange exit numbers shall be displayed with each Interchange Advance Guide sign, Exit Direction sign, and Exit Gore sign. The exit number shall be displayed on a separate plaque on top (above and abutting) of the Interchange Advance Guide or**

**Exit Direction sign. The Exit Number (E1-5P series) plaque (see Figure 2E-9) shall include the word EXIT(S) and the appropriate exit number(s) in a single-line format.**

04a **Rest areas, vista points, weigh stations, HOV facility exits, and HOV-to-HOV system connector ramps are not considered interchange exits and shall not be assigned or signed with exit numbers.**

05 **Suffix letters shall only be used to supplement exit numbers where there is more than one exit associated with the reference mile points of the freeway. Suffix letters shall not be used for an exit ramp for the purpose of identifying a downstream ramp split providing access to multiple highways or different directions on the same highway. The suffix letter shall also be included on the Exit Number plaque and shall be separated from the exit number by a space having a width of between ½ and ¾ of the height of the suffix letter. The suffix letters assigned shall be in ascending alphabetical order starting with the letter A for ramps in the direction of travel with increasing exit numbers, and in descending alphabetical order ending in the letter A in the opposite direction of travel. Exit numbers shall not include the cardinal direction initials corresponding to the directions of the cross route. The minimum numeral and letter sizes shall be as given in Tables 2E-2 through 2E-5. If used, the exit numbering system for expressways shall comply with the provisions prescribed for freeways.**

06 **Where suffix letters are used for exit numbering, an exit of the same number without a suffix letter shall not be used on the same route in the same direction. For example, if an exit is designated as EXIT 256 A, then there shall not be an exit designated as EXIT 256 on the same route in the same direction.**

*Guidance:*

07 *To the extent practical, exit numbering should be determined based upon the location of the crossroad with respect to reference location signs as given in the following examples:*

- *A. If a crossroad intersects the mainline approximately at or after Mile 15 and before Mile 16, the interchange should be designated as EXIT 15 (see Drawings A and B in Figure 2E-3).*
- *B. If the interchange crossroad is split into two roadways by direction where one direction of the crossroad is downstream of Mile 18 and the other direction is upstream of Mile 18, the interchange exit number should be EXIT 18 (see Drawings A and B in Figure 2E-3).*
- *C. If there are three closely-spaced interchanges, such as less than 1 mile apart, starting before Mile 16 and ending near or at Mile 17, the interchanges should be designated as EXIT 15, EXIT 16, and EXIT 17.*
- *D. If there are multiple interchanges so closely spaced together that it is impracticable to designate the exit numbers by the freeway mainline reference mile numbers, suffix letters should be used as provided in this Section (see Drawings C and D in Figure 2E-3).*

Option:

08 Exit numbers may also be used with Supplemental guide signs in compliance with the provisions of Section 2E.51, and Motorist Service signs in compliance with the provisions of Chapters 2I and 2J.

**Standard:**

09 **Where exit suffix letters are used and the number of exits is not equal in both directions of travel, the exit suffix lettering for each direction shall be based on the number of exits in that direction. For example, if in the northbound direction of a freeway there are three exits for Mile 25 and two exits in the southbound direction, the exit numbers northbound shall be EXIT 25 A, EXIT 25 B, and EXIT 25 C; and the exit numbers southbound shall be EXIT 25 B followed by EXIT 25 A (see Drawing D in Figure 2E-3).**

10 **Except as provided in Section 2E.36 for Collector-Distributor Roadways or as otherwise provided for in this Chapter, exit numbers and suffix letters shall only be used to designate individual exit departure points directly from the freeway mainline. Exit numbers and suffix letters shall not be used for designating ramp splits into two ramps after leaving the mainline.**

11 **The Exit Number (E1-5P) plaque shall be positioned above the top right-hand edge (above and abutting) of the sign for an exit to the right (see Figure 2E-9).**

12 **Because road users might not expect an exit to the left and might have difficulty in maneuvering to the left, a Left Exit Number (~~E1-5bP~~ E1-5fP to E1-5kP) plaque (see Figure 2E-9) shall be added above the top left-hand edge (above and abutting) of the sign for all numbered left-hand exits (see Figures 2E-18 and 2E-34). The word LEFT on the Left Exit Number plaque shall be a black legend on a yellow rectangular sign panel and shall be centered above the word EXIT.**

Support:

13 Example Exit Number plaque designs are shown in Figure 2E-9. The incorporation of Exit Number plaques on

guide signs is illustrated in Figures 2E-9, 2E-9(CA), 2E-12, 2E-12(CA), 2E-14, 2E-35, 2E-36(CA), and 2E-41.

14 Figure 2E-4 provides an example of Interstate route loops and spurs around major metropolitan areas. The general plan for numbering interchange exits is shown in Figures 2E-5 through 2E-8. Figure 2E-5 shows a circumferential route, which is a route that makes a complete circle around a city or town and usually has two interchanges (one on each side of the city or town) with each of the mainline routes that travel through the city or town. Figure 2E-6 shows a loop route, which is a route that departs from a mainline route and then rejoins the same mainline route at a subsequent point downstream. For the purpose of Interstate route numbering, a three-digit Interstate route that provides connectivity between two different Interstate routes is also defined as a loop (see Figure 2E-4). Figure 2E-7 shows a spur route, which is a route that departs from a mainline route and never rejoins the same mainline route. Figure 2E-8 shows two mainline routes that overlap each other.

**Standard:**

15 **Regardless of whether a mainline route originates within a State or crosses into the State from an adjacent State, the southernmost or westernmost terminus within that State shall be the beginning point for interchange exit numbering.**

16 **For circumferential routes, interchange exit numbering shall be in a clockwise direction. The numbering shall begin with the first interchange west of the south end of an imaginary north-south line bisecting the circumferential route, at a radial freeway or other Interstate route, or some other conspicuous landmark in the circumferential route near a south polar location (see Figure 2E-5).**

17 **The interchange exit numbers on loop routes shall begin at the loop interchange nearest the south or west junction and increase in magnitude toward the north or east junction (see Figure 2E-6).**

18 **Spur route interchanges shall be numbered in ascending order starting at the interchange where the spur leaves the mainline route (see Figure 2E-7).**

19 **If a circumferential, loop, or spur route crosses State boundaries, the numbering sequence shall be coordinated by the States to provide continuous interchange exit numbering.**

20 **Where numbered routes overlap, continuity of interchange exit numbering shall be established for only one of the routes (see Figure 2E-8). If one of the routes is an Interstate and the other route is not an Interstate, the Interstate route shall maintain continuity of exit interchange numbering.**

Support:

20a Refer to FHWA's List of Known Errors for error in Paragraph 20 text. Refer to Section 1A.04 for more details.

*Guidance:*

21 *The route chosen for continuity of interchange exit numbering should also have reference location sign continuity (see Figure 2E-8).*

**Standard:**

22 **Caltrans shall utilize mileage-based interchange exit numbering to identify the location of each interchange exit on the California Freeway System. A statewide listing of freeway exit numbers, indexed by route and direction, shall be available at the following website: https://dot.ca.gov/programs/safety-programs/exit**

23 **The placement and location of interchange exit numbers on State highways shall conform to the database maintained by Caltrans' Division of Safety Programs for reference posts. This database is distinct from the TASAS Highway database.**

## Section 2E.23 Interchange Advance Guide Signs (E1-1 through E1-3)

Support:

01 An Interchange Advance guide sign (see Figure 2E-9 and Figure 2E-9(CA)) gives notice well in advance of the exit point of the principal destinations served by the next interchange and the distance to that interchange.

**Standard:**

02 **Except as provided in Paragraph 16 of this Section, and in Paragraph 18 of Section 2E.25, at least one Interchange Advance guide sign shall be used for all interchange classifications.**

*Guidance:*

03 *At major and intermediate interchanges (see Section 2E.11), at least two Interchange Advance guide signs should be used, placed at ½ mile and at 1 mile in advance of the exit. A third Interchange Advance guide sign should be placed at 2 miles in advance of the exit if spacing permits.*

04 *At minor interchanges, the Interchange Advance guide sign should be located ½ to 1 mile from the exit gore.*

Support:

05 Sections 2E.29 through 2E.44 contain additional provisions regarding the number, location, and mounting of Interchange Advance guide signs for certain interchange configurations.

**Standard:**

06 **Except as provided in Section 2E.28, the legend on Interchange Advance guide signs shall contain the distance message. For each direction of travel, the legend on the Interchange Advance guide signs shall be the same as the legend on the Exit Direction sign, except that the last line shall be the distance message. The distance message shall read XX MILE(S) where exit numbers are used. Where exit numbers are not used, the distance message shall read EXIT XX MILE(S) for an interchange with one exit ramp, and EXITS XX MILE(S) for an interchange with two or more exit ramps.**

*Guidance:*

07 *Where an Interchange Advance guide sign is located more than 1,000 feet to ½ mile but not more than 1 mile from the exit, the distance displayed should be to the nearest ¼ mile. Where the distance to be displayed on an Interchange Advance guide sign is 1,000 feet or less, the distance should be displayed in feet, rather than miles, to the nearest 100 feet.*

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 7 text. Refer to Section 1A.04 for more details.

**Standard:**

08 **When a distance is displayed in miles, fractions of a mile, rather than decimals, shall be displayed in all cases.**

09 **For numbered exits, the exit number used with the Interchange Advance guides signs shall be displayed using an Exit Number plaque above and abutting the Interchange Advance guide sign.**

10 **For numbered exits to the right, an Exit Number (E1-5P through E1-5eP) plaque (see Figure 2E-9) shall be added to the top right-hand edge (above and abutting) of the sign.**

11 **For numbered exits to the left, a Left Exit Number (E1-5fP through E1-5kP) plaque (see Figure 2E-9) shall be added above the top left-hand edge (above and abutting) of the sign (see Figures 2E-18 and 2E-34).**

12 **For unnumbered exits to the left, a LEFT (E1-5mP) plaque (see Figure 2E-9) shall be added to the top left-hand edge of the sign, abutting the sign.**

Support:

13 Section 2E.22 contains additional information regarding exit numbering.

**Standard:**

14 **Interchange Advance guide signs for multi-lane exits having an optional exit lane that also carries the through route at major interchanges (see Figures 2E-36, 2E-36(CA), 2E-37, and 2E-42) and for splits with an option lane (see Figures 2E-38, and 2E-39) shall be Overhead Arrow-per-Lane signs designed in accordance with Sections 2E.39 and 2E.40.**

Option:

15 Where the distance between interchanges is more than 1 mile, but less than 2 miles, the first Interchange Advance guide sign may be closer than 2 miles, but not placed so as to overlap the signing for the preceding exit. Duplicate Interchange Advance guide signs or Interchange Sequence Series signs may be placed in the median on the opposite side of the roadway and are not included in the minimum requirements of interchange signing.

*Guidance:*

16 *Where there is less than 800 feet between the theoretical gores of successive interchange entrance or exit ramps, Interchange Sequence Series signs (see Section 2E.24) should be used instead of Interchange Advance guide signs for the affected interchanges.*

17 *The Interchange Advance guide signs for the last exit from a highway before it becomes a facility on which toll payments are required should include the LAST EXIT BEFORE TOLL (W16-16P) plaque (see Section 2F.10 and Figure 2F-4). The plaque should be installed above the Interchange Advance guide signs, but below the Exit Number or LEFT plaque, if used.*

Option:

18 The W16-16P plaque may be formatted as a header panel within the guide sign.

## Section 2E.24 Interchange Sequence Signs (E9-1 and E9-2)

Support:

01 Interchanges are sometimes closely spaced, particularly through large urban areas, so that typical guide signs cannot be adequately spaced. In such cases, Interchange Sequence signs identifying the next two (E9-1 or G23-7(CA)) or three (E9-2) interchanges (see Figure 2E-10 and 2E-10(CA)) can provide the necessary exit destination guidance.

*Guidance:*

02 *Where there is less than 800 feet between the theoretical gores of successive interchange entrance or exit ramps, Interchange Sequence signs should be used instead of Interchange Advance guide signs for the affected interchanges.*

03 *If used, Interchange Sequence (E9-1 or E9-2) signs should be used over the entire length of a route in an urban area.*

Support:

04 Interchange Sequence signs generally supplement Interchange Advance guide signs. Signing of this type is illustrated in Figure 2E-11, and is compatible with the sign spreading concept described in Paragraph 3 of Section 2E.43.

**Standard:**

05 **Interchange Sequence signs shall be installed in a series. Interchange Sequence signs shall display the next two or three interchanges by name or route number with distances to the nearest ¼ mile.**

06 **The first Interchange Sequence sign in the series shall be located in advance of the first Interchange Advance guide sign for the first interchange.**

07 **Where the exit direction is to the left, a LEFT (E11-2) sign panel (see Figure 2E-17) shall be displayed on the same line immediately to the right of the interchange name or route number.**

08 **Interchange Sequence signs shall not be substituted for Exit Direction signs.**

*Guidance:*

09 *Interchange Sequence signs should be located in the median. After the first sign of the series, subsequent Interchange Sequence signs should be placed approximately midway between interchanges.*

**Standard:**

10 **Interchange Sequence signs located in the median shall be installed at overhead sign height (see Section 2A.14).**

Support:

10a Refer to FHWA's List of Known Errors for error in Paragraph 10 text. Refer to Section 1A.04 for more details.

Option:

11 ~~Interchange numbers may be displayed to the left of the interchange name or route number.~~

Support:

11a Refer to FHWA's List of Known Errors for error in Paragraph 11 text. Refer to Section 1A.04 for more details.

Option:

12 The Interchange Sequence (G23-7(CA)) sign (see Figure 2E-10(CA)) may be used to display two successive interchanges when one of the interchanges includes a cross street with different names on opposite sides of the freeway. A horizontal white line may be used to separate the exits for the two interchanges. For the interchange with two exit names, the names may be combined and shown with a single distance, placed either above or below the horizontal separator.

## Section 2E.25 Exit Direction Signs (E4 Series)

Support:

01 The Exit Direction sign (see Figure 2E-12 and 2E-12(CA)) repeats the route and destination information that was displayed on the Interchange Advance guide sign(s) for the next exit, and thereby assures road users of the destination served and indicates whether they exit to the right or left for that destination.

**Standard:**

02 **Exit Direction signs shall be used at major and intermediate interchanges. Populations or other similar information shall not be displayed on Exit Direction signs.**

*Guidance:*

03 *Exit Direction signs should be used at minor interchanges (see Section 2E.30).*

Support:

04 Sections 2E.28, 2E.30, 2E.31, 2E.33 through 2E.35, 2E.38, and 2E.40 through 2E.42 illustrate the use, location, and mounting of Exit Direction signs for certain interchange configurations. The placement location of the Exit Direction

sign at the interchange depends on the type of mounting, post-mounted or overhead, and whether there is a deceleration lane (see Figure 2E-13).

*Guidance:*

05 *When post-mounted, the Exit Direction sign should be installed at the beginning of the deceleration lane taper. When mounted overhead, the Exit Direction sign should be installed over the exiting lane in the vicinity of the theoretical gore. If there is less than 300 feet from the beginning of the taper to the theoretical gore, the Exit Direction sign should be installed overhead (see Figure 2E-13).*

**Standard:**

06 **Except where Overhead Arrow-per-Lane guide signs are used (see Sections 2E.40 and 2E.42, and Paragraph 7 of this Section), where a through lane is being terminated (dropped) at an exit, the Exit Direction sign shall be placed overhead at the theoretical gore (see Figures 2E-18, 2E-19, 2E-33, 2E-42, and 2E-46).**

07 **Except as provided in Paragraph 4 of Section 2E.40, where Overhead Arrow-per-Lane guide signs are used for the Interchange Advance guide sign(s) for a multi-lane exit having an optional exit lane that also carries the through route or for a split with an option lane (see Section 2E.40), an Overhead Arrow-per-Lane guide sign shall also be used instead of the Exit Direction sign and located near, but not downstream from, the point where the outside edge of the dropped lane begins to diverge from the main roadway (see Figures 2E-36 through 2E-38). The Overhead Arrow-per-Lane guide sign shall be designed in accordance with the provisions of Section 2E.40.**

08 **The following provisions shall govern the design and application of overhead Exit Direction signs:**

**A. The sign shall display the Exit Number plaque (if exit numbering is used), the route number, cardinal direction, and destination, as applicable, with a diagonally upward-pointing directional arrow (see Figure 2E-12 and Figure 2E-12(CA)).**

**B. The message EXIT ONLY in black on a yellow sign panel (E11-1d or E11-1e) shall be used on the overhead Exit Direction sign to advise road users of a lane drop situation (see Figures 2E-18, 2E-19, 2E-42, and 2E-44). The sign shall comply with the provisions of Section 2E.28.**

09 **For numbered exits to the right, an Exit Number (E1-5P through E1-5eP) plaque (see Figure 2E-9) shall be added above the top right-hand edge (above and abutting) of the sign.**

10 **For numbered exits to the left, a Left Exit Number (E1-5fP through E1-5kP) plaque (see Figure 2E-9) shall be added above the top left-hand edge (above and abutting) of the sign.**

11 **For unnumbered exits to the left, a LEFT (E1-5mP) plaque (see Figure 2E-9) shall be added above the top left-hand edge (above and abutting) of the sign.**

11a **The ONLY (E11-1b) sign panel shall not be used without the EXIT (E11-1a) sign panel.**

Support:

12 Section 2E.22 contains additional information regarding exit numbering.

*Guidance:*

13 *At multi-exit interchanges, the Exit Direction sign should be located directly over the exiting lane for the first exit, in accordance with this Section. An Interchange Advance guide sign for the second exit should be installed at the same location, normally over the right-hand through lane. Only for those conditions where the through movement is not evident should a confirmatory message (a Pull-Through sign as shown in Figure 2E-16 and Figure 2E-16(CA)) be used over the left-hand lane(s) to guide road users traveling through an interchange (see Section 2E.43 for additional information on sign spreading).*

14 *Where the freeway or expressway is on an overpass, the Exit Direction sign for the second exit should be installed on an overhead support over the exit lane in advance of the gore point, as near as practicable to the theoretical gore. Where the freeway or expressway passes under the crossroad and the exit ramp is located beyond the overcrossing structure, the overhead Exit Direction sign for the second exit should be placed either on the overcrossing structure (see Figures 2E-29 through 2E-31) or on a separate structure located immediately in front of the overcrossing structure.*

Option:

15 Where extra emphasis of an especially low advisory ramp speed is needed, an Exit Direction Advisory Speed (E13-2) sign panel (see Figure 2E-14) may be placed at the bottom of the Exit Direction sign to supplement, but not to replace, the exit or ramp advisory speed warning signs.

16 Warning Beacons in compliance with Paragraph 17 of this Section may be used with the E13-2 sign panel.

**Standard:**

17 **Where Warning Beacons are used in conjunction with the E13-2 sign panel within a guide sign (see Figure**

**2E-14), the nearest edges of the beacons shall be placed at least 12 inches from the edges of the E13-2 sign panel, from the edges of the guide sign, and from any other legend within the guide sign. The design and operation of Warning Beacons shall otherwise comply with the provisions of Chapter 4S of this Manual.**

Option:

18 In cases, where sight distance is restricted because of structures or unusual alignment, principally in urban areas, making it impossible to locate the Exit Direction sign without violating the required minimum spacing between major guide signs (see Section 2E.23), Interchange Sequence signs (see Section 2E.24) may be substituted for an Interchange Advance guide sign.

*Guidance:*

19 *At the last exit from a highway before it becomes a facility on which toll payments are required, the LAST EXIT BEFORE TOLL (W16-16P) plaque (see Section 2F.10 and Figure 2F-4) should be installed above the Exit Direction sign, but below the Exit Number or LEFT plaque, if used.*

Option:

20 The W16-16P plaque may be formatted as a header panel within the guide sign.

## Section 2E.26 Exit Gore Signs and Plaque (E5-1 Series)

Support:

01 The Exit Gore sign (see Figure 2E-15) in the gore indicates the exiting point or the place of departure from the main roadway. Consistent application of this sign at each exit is important to provide adequate visibility of the departure of the exit roadway from the main roadway.

**Standard:**

02 **The gore shall be defined as the area located between the main roadway and the ramp just beyond where the ramp branches from the main roadway. An Exit Gore sign shall be located in the gore for each ramp that departs from the main roadway of a freeway or expressway, or departs from a collector-distributor roadway, and shall display the word EXIT (E5-1) if interchange exit numbering is not used or EXIT XX (E5-1a or E5-1c) if interchange exit numbering is used, and an appropriate diagonally upward-pointing arrow. If suffix letters are used for exit numbering at a multi-exit interchange, the suffix letter shall also be included on the Exit Gore (E5-1a or E5-1c) sign ~~or Exit Gore Number (E5-1bP) plaque~~ and shall be separated from the exit number by a space having a width of between ½ and ¾ of the height of the suffix letter. Breakaway or yielding supports shall be used.**

*Guidance:*

03 *The arrow should be aligned to approximate the angle of departure. Each gore should be treated similarly, whether the interchange has one exit roadway or multiple exits.*

Option:

04 The Narrow Exit Gore (E5-1c) sign (see Figure 2E-15) may be used in gore areas of limited width where the width of the Exit Gore (E5-1a) sign would not permit sufficient lateral offset (see Section 2A.16), such as for ramp departures that are nearly parallel to the main roadway where the Exit Gore sign would be mounted on a narrow island or barrier. Where the E5-1c sign is mounted at a height of 14 feet or more from the roadway, the directional arrow may point diagonally downward.

*Guidance:*

05 *The E5-1c sign should not be used in gore areas where an E5-1a sign could be installed with sufficient lateral offset.*

Option:

06 Where extra emphasis of an especially low advisory ramp speed is needed, the Confirmation Advisory Speed (W13-1aP) plaque (see Section 2C.59) indicating the advisory speed may be mounted below the Exit Gore sign (see Figure 2E-15) to supplement, but not to replace, the exit or ramp advisory speed warning signs.

07 To improve the visibility of the gore for exiting drivers, a Type 1 object marker (see Chapter 2C) may be installed 4 feet above the ground line on each sign support below the Exit Gore sign.

08 ~~An Exit Gore Number (E5-1bP) plaque (see Figure 2E-15) may be installed above an existing Exit Gore (E5-1) sign when an unnumbered exit is converted to a numbered exit until such time as an E5-1 sign is being replaced for other reasons (see Paragraph 9 of this Section).~~

**Standard:**

09 **An Exit Gore (E5-1a) sign shall be used when the replacement of an existing assembly of an E5- 1 sign and**

**E5-1bP plaque becomes necessary.**

10 **An Exit Gore (E5-1a) sign shall replace an existing Exit Gore (E5-1) sign when an unnumbered exit is converted to a numbered exit.**

## Section 2E.27 Pull-Through Signs (E6-1 Series and E6-2 Series)

Support:

01 Pull-Through (E6-1 series and E6-2 series) signs (see Figure 2E-16 and Figure 2E-16(CA)) are overhead guide signs intended for through traffic.

*Guidance:*

02 *Pull-Through signs should be used where the geometrics of a given interchange are such that it is not clear to the road user as to which is the through roadway, or where additional route guidance is desired. Pull-Through signs with down arrows should be used where the alignment of the through lanes is curved and the exit direction is straight ahead, where the number of through lanes is not readily evident, and at multi- lane exits where there is a reduction in the number of through lanes. Pull-Through signs should not be used at exits with option lanes where full-width Overhead Arrow-per-Lane signs are being used.*

**Standard:**

03 **When used, Pull-Through signs shall display the route shield and the cardinal direction for the through route.**

Option:

04 Pull-Through signs may display the control city and down arrows (see Figure 2E-16, 2E-16(CA), and Section 2E.18).

04a Pull-Through signs may also display the control city and LEFT/RIGHT __ LANES legend instead of using down arrows (refer to Figure 2E-16(CA)).

Support:

05 Sections 2E.28, 2E.39, and 2E.40 contain information regarding the use of Overhead Arrow-per-Lane guide signs at multi-lane exits where there is a reduction in the number of through lanes and a through lane becomes an interior option lane for through or exiting traffic.

## Section 2E.28 Signing for Interchange Lane Drops Without an Optional Exit Lane

**Standard:**

01 **The provisions of this Section shall only apply to lane drops at exits that do not have an optional exit lane. At exits that have an optional exit lane in addition to the dropped lane, the provisions of Sections 2E.39 through 2E.42 shall apply.**

Support:

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

**Standard:**

02 **Except as provided in Paragraph 15 of this Section, major guide signs for all lane drops at interchanges shall be mounted overhead. An EXIT ONLY sign panel shall be used for all interchange lane drops at which the through route is carried on the main roadway.**

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

**Standard:**

03 **Except on Overhead Arrow-per-Lane and Diagrammatic Advance guide signs (see Sections 2E.39 through 2E.41), the EXIT ONLY (down arrow) (E11-1 or E11-1f) sign panel (see Figure 2E-17) shall be used on all overhead Advance guide signs of lane drops (see Figures 2E-18, 2E-19, and 2E-34). The number of arrows on each sign shall correspond to the number of dropped lanes at the location of each sign. Placement of the down arrow shall comply with the provisions of Section 2E.18.**

04 **For lane drops, the bottom portion of the overhead Exit Direction sign shall be yellow with a black border and shall include a diagonally upward-pointing black directional arrow (left or right, as appropriate) for each lane dropped at the exit (see Figures 2E-18 and 2E-19). The sign shall be designed and placed so that each arrow is located over the approximate center of each lane being dropped. Except as provided in Paragraph 5 of this Section, the words EXIT and ONLY shall be positioned to the left and right, respectively, of the arrow on the E11-1d sign panel (see Figure 2E-17) for a single-lane drop. For a two-lane drop, the words EXIT ONLY shall be located between the two arrows on the E11- 1e sign panel (see Figure 2E-17). The number of arrows on the sign**

**shall correspond to the number of dropped lanes at the location of the sign.**

04a **The ONLY (E11-1b) sign panel shall not be used without the EXIT (E11-1a) sign panel.**

Option:

05 Where an existing sign structure length or adjacent signs constrain the width or placement of the Interchange Advance guide sign on that structure, the down arrow may be positioned to the right or left of the words EXIT ONLY, instead of between the words, to allow for the positioning of the arrow over the approximate center of the lane. Where the width of the Exit Direction sign extends over the adjacent lane, the directional arrow may be placed to the right of the words EXIT ONLY for an exit to the right, or to the left of the words EXIT ONLY for an exit to the left, to allow for the positioning of the arrow over the dropped lane.

06 EXIT ONLY messages of either the combination of E11-1a and E11-1b, or the E11-1c sign panels (see Figure 2E-17) may be used to retrofit existing signing to warn of a lane drop situation ahead.

**Standard:**

07 **If used to retrofit an existing guide sign, the E11-1a and E11-1b sign panels (see Figure 2E-17) shall be placed on either side of a white down arrow on an Interchange Advance guide sign and on either side of a white directional arrow on an Exit Direction sign. The E11-1c sign panel (see Figure 2E- 17), if used to retrofit an existing Interchange Advance guide sign, shall be placed between the lower destination message and the white down arrow.**

07a **The ONLY (E11-1b) sign panel shall not be used without the EXIT (E11-1a) sign panel.**

*Guidance:*

08 *Except as provided in Paragraph 9 of this Section for an auxiliary lane, Interchange Advance guide signs for lane drops within 1 mile of the interchange should not display the distance message.*

09 *Where the dropped lane is an auxiliary lane that is provided between successive entrance and exit ramps of two separate interchanges and the distance between the two ramps is less than 1 mile, the first Interchange Advance guide sign in the sequence downstream from the entrance ramp should display the distance message (see Figures 2E-20 and 2E-21).*

10 *Where the dropped lane carries the through route, signs should be used without the EXIT ONLY sign panel.*

Support:

11 Figures 2E-20 and 2E-21 show examples of guide sign for a dropped auxiliary lane between separate interchanges using post-mounted and overhead guide signs, respectively. Figure 2E-22 shows guides signs used for an auxiliary lane that is ½ mile or longer.

11a Refer to FHWA's List of Known Errors for error in Paragraph 11 text. Refer to Section 1A.04 for more details.

12 Sections 2E.39 through 2E.42 contain information on the signing of lane drops at exits that also have an option lane.

13 Section 2B.31 contains information regarding regulatory signs that can also be used for freeway lane drop situations and Section 2C.50 contains information regarding warning signs that can also be used for freeway lane drop situations.

*Guidance:*

14 *In limited cases in which conditions are so constrained that it is impossible to locate an Interchange Advance guide sign either overhead or partly over the dropped lane, precluding positioning of the down arrow as provided in Paragraph 3 of this Section, a sign panel displaying the legend RIGHT (LEFT) LANE ONLY in a black legend on a yellow background should be substituted for the EXIT ONLY panel on that sign. In such cases, the Interchange Advance guide signs should be alternated with RIGHT (LEFT) LANE FOR EXIT ONLY (W9-7) signs (see Section 2C.50).*

15 *Where a mainline lane is terminated immediately after an exit ramp, overhead and/or post mounted warning signs should be used to warn traffic as shown in Figure 2E-23.*

## Section 2E.29 Signing by Type of Interchange

Support:

01 Road users need signs to help identify the location of the exit, as well as to obtain route, direction, and destination information for specific exit ramps. Figures 2E-26 through 2E-33 show examples of guide signs for common types of interchanges. The interchange layouts shown in most of the figures illustrate only the major guide signs for one direction of traffic on the freeway and on the exit ramps. Section 2D.49 contains information regarding the signing of the crossroad approaches and connecting roadways to freeways and expressways.

*Guidance:*

02 *The signing layout for all interchanges of the same type should be similar. For the purpose of uniform application,*

*the significant features of the signing layout for each of the more frequent types of interchanges (illustrated in Figures 2E-26 through 2E-33 should be followed as closely as possible. Even when unusual geometric features exist, variations in signing layout should be held to a minimum.*

03 *Where a single interchange combines a different type of ramp configuration for each direction of travel, the main roadway major guide signing should be determined by the specific interchange type for that direction of travel.*

Support:

04 Figure 2E-24 shows an example of signing for a complex interchange that combines intermediate interchange ramps within a major interchange.

05 Figure 2E-25 shows an example of signing for an interchange exit ramp with a downstream split.

## Section 2E.30 Minor Interchange

Option:

01 Less signing may be used for minor interchanges because such interchanges customarily serve low volumes of mostly local traffic.

Support:

02 An example of guide signs for a minor interchanges is shown in Figure 2E-26.

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

**Standard:**

03 **In accordance with the provisions of Sections 2E.23 and 2E.26, at least one Interchange Advance guide sign and an Exit Gore sign shall be used at a minor interchange.**

*Guidance:*

04 *An Exit Direction sign in compliance with Section 2E.25 should also be used.*

## Section 2E.31 Diamond Interchange

Support:

01 An example of guide signs for a diamond interchange is shown in Figure 2E-27.

02 The typical diamond interchange ramp departs from the main roadway such that a speed reduction generally is not necessary in order for a driver to negotiate an exit maneuver from the main roadway onto the ramp roadway. Section 2C.12 contains provisions for the use of an Advisory Exit Speed (W13-2) sign for situations where a speed reduction is necessary.

*Guidance:*

03 *When a speed reduction is not necessary, an Advisory Exit Speed sign should not be used.*

04 *The Advisory Exit Speed sign, if used, should be located along the deceleration lane or along the ramp such that it is visible to the driver far enough in advance to allow the driver to decelerate before reaching the curve associated with the exiting maneuver. Use and placement of the Advisory Exit Speed sign should otherwise comply with Section 2C.12 of this Manual.*

Option:

05 A Stop Ahead (W3-1) or Signal Ahead (W3-3) warning sign (see Section 2C.35) may be placed, where engineering judgment indicates a need, along the ramp in advance of the crossroad, to give notice to the driver.

*Guidance:*

06 *When used on two-lane ramps, Stop Ahead or Signal Ahead signs should be used in pairs with one sign on each side of the ramp.*

07 *Where the exit ramp allows traffic to turn in either direction onto the crossroad, a Destination (D1 series) sign (see Section 2D.36) that includes each destination displayed on the Advance, Exit Direction, and Supplemental guide signs along the main roadway for that exit should be placed along the ramp.*

## Section 2E.32 Diamond Interchange in Urban Area

Support:

01 An example of guide signs for a diamond interchange in an urban area is shown in Figure 2E-28. This example includes the use of the Community Interchanges Identification sign (see Section 2E.52), which might be useful if two or more interchanges serve the same community.

02 In urban areas, street names are often displayed as the principal message in destination signs.

Option:

03 If interchanges are too closely spaced to locate the Interchange Advance guide signs at the distances specified in Section 2E.23, they may be placed closer to the exit with the distances displayed adjusted accordingly.

## Section 2E.33 Cloverleaf Interchange

Support:

01 A cloverleaf interchange has two exits for each direction of travel. The exits are closely spaced and have common Advance guide signs. An example of guide signs for a cloverleaf interchange is shown in Figure 2E-29.

*Guidance:*

02 *The Advance guide signs should include two place names, one corresponding to each exit ramp, with the name of the place served by the first exit on the upper line.*

**Standard:**

03 **An overhead guide sign assembly shall be placed at the theoretical gore of the first exit ramp, with an Exit Direction sign for the first exit and an Interchange Advance guide sign for the second exit, as shown in Figure 2E-29. The second exit shall be indicated by an overhead Exit Direction sign over the auxiliary lane.**

04 **Interchanges with more than one exit from the main roadway shall be numbered as described in Section 2E.22 with an appropriate suffix.**

05 **Diagrammatic Advance signs shall not be used for cloverleaf interchanges except as otherwise provided in Section 2E.41.**

*Guidance:*

06 *Where the main roadway passes under the crossroad and the exit roadway is located beyond the overcrossing structure, the placement of the overhead Exit Direction sign for the second exit should comply with Section 2E.25 (see Figure 2E-29).*

## Section 2E.34 Cloverleaf Interchange with Collector-Distributor Roadways

Support:

01 An example of guide signs for a full cloverleaf interchange with collector-distributor roadways is shown in Figure 2E-30.

*Guidance:*

02 *Destination names and route numbers shown on the collector-distributor roadway signing should be the same as those used on the upstream Interchange Advance guide signs on the main roadway.*

**Standard:**

03 **Exit Direction signs at exits from the collector-distributor roadways shall be overhead and located at the theoretical gore of the collector-distributor roadway and the exit ramp.**

*Guidance:*

04 *Exits from the collector-distributor roadways should be numbered with an appropriate suffix. If the exits from a collector-distributor roadway are numbered, the Interchange Advance guide and Exit Direction signs on the main roadway should include, in addition to two place names, their corresponding exit number and suffixes with the plural EXITS in the Exit Number (E1-5P series) plaque. If only the exit from the main roadway is numbered, the Interchange Advance guide and Exit Direction signs on the main roadway should use the singular EXIT in the Exit Number plaque. If interchange exit numbering is not used, the Interchange Advance guide signs on the main roadway should use the singular EXIT in the distance messages.*

## Section 2E.35 Partial Cloverleaf Interchange

Support:

01 An example of guide signs for a partial cloverleaf interchange is shown in Figure 2E-31.

*Guidance:*

02 *For a partial cloverleaf with only one exit roadway in a direction of travel, where the main roadway passes under the crossroad and the exit roadway is located beyond the overcrossing structure, the overhead Exit Direction sign should be placed either on the overcrossing structure (see Figure 2E-31) or on a separate structure located immediately in front of the overcrossing structure.*

Support:

03 Partial cloverleaf interchanges with successive exit ramps from the same direction of travel are signed the same as cloverleaf interchanges for that direction of travel (see Section 2E.33).

## Section 2E.36 Collector-Distributor Roadways for Successive Interchanges

Support:

01 Examples of guide signs for a collector-distributor roadway that provides access to multiple interchanges are shown in Figure 2E-32. Section 2J.09 contains provisions for General Service and Specific Service signs.

*Guidance:*

02 *Where access to successive interchanges is provided from a single collector-distributor roadway, the number of lines of destination information displayed on the major guide signs on the main roadway approach to the collector-distributor roadway should comply with the provisions of Section 2E.15. Where additional destinations are displayed on the main roadway, those destinations should be displayed on Supplemental guide signs (see Section 2E.51) on the approach to the collector-distributor roadway.*

03 *Where exit numbering is used, the exit numbers for exits accessed from the collector-distributor roadway should be displayed on the main roadway guide signs.*

04 *An Exit Gore sign (see Section 2E.26) should be placed in the gore where the collector-distributor roadway departs from the main roadway.*

05 *Interchange guide signing along the collector-distributor roadway should comply with the provisions for interchange signing in this Chapter.*

## Section 2E.37 Freeway-to-Freeway Interchanges

Support:

01 Freeway-to-freeway interchanges are major decision points where the effect of taking a wrong ramp cannot be easily corrected. Reversing direction on the connecting freeway or reentering to continue on the intended course is usually not possible. Examples of guide signs for freeway-to-freeway interchanges are shown in Figure 2E-33.

*Guidance:*

02 *The sign messages should contain only the route shield, cardinal direction, and the name of the next control city on the route. Arrows should point as indicated in Section 2D.08, except where Overhead Arrow- per-Lane or Diagrammatic Advance signs are used in accordance with the provisions of Sections 2E.39 through 2E.41.*

Support:

03 An off-route movement is the movement that does not follow the through route. Drivers might not expect the off-route movement to be to the left or an optional lane at a split (see Figures 2E-38 and 2E-39). Section 2E.22 contains information about the use of the Left Exit Number (E1-5fP through E1-5kP) plaque at splits where the off-route movement is to the left. Sections 2E.39 and 2E.40 contain information about the use of Overhead Arrow-per-Lane guide signs for freeway splits with an option lane and for multi-lane freeway-to- freeway exits having an option lane. Section 2E.41 contains information about the use of a Diagrammatic Advance guide sign for complex geometric configurations at ramp departures.

**Standard:**

04 **The roadway for the off-route shall be signed as an exit. If exit numbering is used, the signs shall comply with the provisions of Section 2E.22. Distance messages on the Advance guide signs shall comply with the provisions of Section 2E.23.**

05 **Overhead signs shall be used at a distance of 1 mile and at the theoretical gore of each connecting ramp. When Overhead Arrow-per-Lane or Diagrammatic Advance guide signs are used, they shall be located in accordance with the provisions of Sections 2E.40 and 2E.41, respectively.**

Option:

06 The Advance guide signs at the ½-mile and 2-mile locations may also be mounted overhead.

*Guidance:*

07 *An Advisory Exit Speed (W13-2) sign should be used where an engineering study shows that it is necessary to display a speed reduction message for ramp signing (see Section 2C.12).*

## Section 2E.38 Freeway Split with Dedicated Lanes

**Standard:**

01 **Signing for freeway splits with dedicated lanes shall use the sign designs shown in Figure 2E-34.**

02 **The arrows on each Interchange Advance guide sign shall match the number of lanes present at the location of the Advance guide sign.**

03 **The signs for this application shall be mounted overhead. When arrows are used, each arrow shall be located over the approximate center of the lane to which it applies.**

04 **Where one roadway of the split carries the through route, the other roadway of the split shall be signed as an exit. If exit numbering is used, the signs shall comply with the provisions of Section 2E.22. Distance messages on the Advance guide signs shall comply with the provisions of Section 2E.23.**

05 **The number and location of Advance guide signs shall comply with the provisions of Section 2E.23.**

*Guidance:*

06 *The Exit Direction and Pull-Through signs should be located at the theoretical gore.*

07 *The Exit Direction and Pull Through signs should display down arrows if the alignment is straight or diagonal upward-pointing directional arrows if the alignment is curved (see Section 2D.08).*

**Standard:**

08 **The Exit Direction sign shall contain the EXIT ONLY (E11-1 series) sign panel (see Section 2E.28).**

## Section 2E.39 Signing for Option Lanes at Splits and Multi-Lane Exits

Support:

01 Some freeway and expressway splits or multi-lane exit interchanges contain an interior option lane serving both movements in which traffic can either leave the route or remain on the route, or choose either destination at a split, from the same lane.

**Standard:**

02 **On freeways and expressways, either the Overhead Arrow-per-Lane guide sign designs as provided in Sections 2E.40 and 2E.41 shall be used for all multi-lane exits at major interchanges (see Section 2E.11) that have an optional exit lane that also carries the through route (see Figures 2E-36, 2E-36(CA), 2E- 37, and 2E-42) and for all splits that include an option lane (see Figure 2E-38). Overhead Arrow-per- Lane guide signs shall not be used on freeways and expressways for any other types of exits or splits, including single-lane exits and splits that do not have an option lane.**

Support:

02a Refer to FHWA's List of Known Errors for errors in Paragraph 2 text. Refer to Section 1A.04 for more details.

*Guidance:*

03 *The Overhead Arrow-per-Lane guide sign design (see Section 2E.40) should also be considered for multi-lane exits with an option lane at intermediate interchanges (see Section 2E.11) based on such factors as the extent of the need to optimize the mainline operation by maximizing the usage of the option lane, the extent of the period(s) of the day during which the exiting volumes warrant the multi-lane exit arrangement, and the nature of the traffic that primarily uses the option lane during the high-volume periods.*

04 *Signing at intermediate interchanges (see Section 2E.11) that have an optional exit lane at which it has been determined that the Overhead Arrow-per-Lane guide sign design is not warranted or at multi-lane exits at minor interchanges (see Section 2E.11) that have an optional exit lane should use signing in accordance with the provisions of Section 2E.42.*

## Section 2E.40 Design of Overhead Arrow-per-Lane Guide Signs for Option Lanes

Support:

01 Overhead Arrow-per-Lane guide signs (see Figure 2E-35) are used where an option lane is present at freeway and expressway multi-lane exit interchanges and splits. They display an upward-pointing arrow above each lane that conveys the direction(s) of travel that the lane serves at the point of departure. At locations where an option lane is present at a multi-lane exit or split, Overhead Arrow-per-Lane guide signs have been shown to be superior to other guide sign designs because they convey positive direction about which destination and direction each approach lane serves, particularly for the option lane, which is otherwise difficult to clearly sign.

**Standard:**

02 **Overhead Arrow-per-Lane guide signs as provided in Section 2E.39 shall be used at all new or reconstructed freeway and expressway locations and at freeway and expressway locations where replacement of existing sign support structures is necessitated by reconstruction. The Overhead Arrow- per-Lane guide sign at the exit or split shall be located at or in the immediate vicinity of the point where the exiting lanes begin to diverge from the through lanes or, for a split, at the point where the approach lanes begin to diverge from one another, preserving the relation of the arrows displayed on the sign to their respective lanes. The Overhead Arrow-per-Lane guide sign at the exit shall not be located at or near the theoretical gore.**

Option:

03 At existing or non-reconstructed locations where an overhead Exit Direction sign exists at the theoretical gore, and the existing sign support structure is retained, an overhead Exit Direction sign may continue to be used on the existing sign support structure in conjunction with a replacement of the advance signs using the Overhead Arrow-per-Lane guide sign design.

**Standard:**

04 **If an existing Exit Direction sign is being retained at an interchange as provided in Paragraph 3 of this Section, an Overhead Arrow-per-Lane guide sign shall not be used at the location of the Exit Direction sign at or in the vicinity of the theoretical gore. New installations of Exit Direction and Pull- Through signs shall not be permitted in conjunction with Overhead Arrow-per-Lane guide signs on new or reconstructed facilities.**

*Guidance:*

05 *Overhead Arrow-per-Lane guide signs should be located at approximately ½ mile and 1 mile in advance of the exit or split, and at approximately 2 miles in advance of the exit or split where space is available and conditions allow.*

**Standard:**

06 **Overhead Arrow-per-Lane guide signs used on freeways and expressways shall be designed in accordance with the following criteria:**

- **A. Except as provided in Section 2E.42 for partial width Overhead Arrow-per-Lane signs, the sign shall include an upward-pointing (vertical, curved, or bifurcated) arrow for each lane of the approach to the split or exit.**
- **B. The shaft of each arrow shall be located over the approximate center of the lane to which it applies.**
- **C. Arrows for continuing through lanes shall be vertically upward-pointing (see Figure 2E-36 and Figure 2E-36(CA)) unless the continuing through lanes are on a significantly curved alignment beyond the theoretical gore (see Figure 2E-37).**
- **D. The arrow for a lane that must exit shall be curved in the direction of the exit and shall be accompanied by black-on-yellow EXIT (E11-1a) and ONLY (E11-1b) sign panels adjacent to the lower end of the arrow shaft. The E11-1a and E11-1b sign panels shall not be used for a split of two overlapping routes where neither of the diverging routes is designated as an exit. Where the through lanes curve and the exit continues on a straight alignment, upward-pointing vertical arrows shall be used for the exiting movement and curved arrows for the through movement (see Figure 2E-37).**
- **E. The arrow for an optional exit lane that also carries the through route shall have a single shaft that bifurcates into a vertically upward-pointing arrow and a curving arrow corresponding to the configuration of the through and exit lanes.**
- **F. For splits with an option lane, the arrow for the lane from which either direction of the split can be accessed shall have a single shaft that bifurcates into two upward-pointing curving arrows (see Figure 2E-38).**
- **G. A vertical white line shall be used to separate the route shields and destinations for the two diverging movements from each other.**
- **H. The distance to the exit or split shall be displayed below the off-movement destination on the advance signs at the 1-mile and 2-mile locations.**
- **I. The number of lanes displayed on a sign shall correspond to the number of lanes at the location of that sign. An advance sign shall not depict lanes that are added downstream of the sign location.**
- **J. For numbered exits, the Exit Number (E1-5P) or Left Exit Number (E1-5bP) plaque shall be used at the top (above and abutting) of the sign in accordance with Section 2E.23. For unnumbered exits to the left, a LEFT (E1-5mP) plaque shall be added on the top left-hand edge of and adjacent (above and abutting) to**

**the sign.**

06a **The ONLY (E11-1b) sign panel shall not be used without the EXIT (E11-1a) sign panel.**

*Guidance:*

07 *Overhead Arrow-per-Lane guide signs used on freeways and expressways should be designed in accordance with the following additional criteria:*

*A. No more than one destination should be displayed for each movement, and no more than two destinations should be displayed per sign.*

*B. The arrowhead(s) for the diverging movement should be positioned lower on the sign than the arrowhead(s) for the movement that continues straight ahead, independent of which movement carries the through route. Where the movements are freeway or expressway splits rather than exits, the arrowheads should be positioned at approximately the same height on the sign.*

*C. Route shields, cardinal directions, and destinations should be positioned on the sign such that they are clearly related to the arrowhead(s) for the movement to which they apply.*

*D. The cardinal direction should be placed adjacent to the route shield for exits or splits leading in a single cardinal direction.*

*E. The vertical white line that is used to separate the route shields and destinations for the two diverging movements from each other should not descend below the top of the arrowheads for the through lanes, and should be positioned approximately halfway between the diverging arrowheads for the optional movement lane (see Figure 2E-35).*

**Standard:**

08 **Overhead Arrow-per-Lane guide signs shall not be used to depict a downstream split of an exit ramp on a sign located on the mainline.**

Support:

09 Specific guidelines for more detailed design of Overhead Arrow-per-Lane guide signs are contained in the "Standard Highway Signs" publication (see Section 1A.05).

**Standard:**

10 **The arrow heights for Overhead Arrow-per-Lane guide signs on freeways and expressways shall be as shown in Table 2E-6.**

Option:

11 Where extra emphasis of an especially low advisory ramp speed is needed, an EXIT XX MPH (E13- 2) sign panel (see Figure 2E-14) may be placed below the applicable destination legend to supplement, but not to replace, the exit or ramp advisory speed warning signs.

12 Warning Beacons in compliance with the provisions of Section 2E.25 may be used with the E13-2 sign panel.

Support:

13 An example of guide signing for a narrow gore at a split with an option lane is shown in Figure 2E-39, and an example of guide signing for a narrow gore at a two-lane exit with an option lane is shown in Figure 2E-40.

Option:

14 Where there is 800 feet or more between the beginning of the lane diverge and the theoretical gore, signs indicating the destinations allowed by each lane may be added in the vicinity of the theoretical gore to reinforce positive guidance (see Figures 2E-39 and 2E-40).

## Section 2E.41 Design of Freeway and Expressway Diagrammatic Advance Guide Signs

Support:

01 The Diagrammatic Advance guide sign (~~see Figure 2E-41~~) is a guide sign that shows a simplified graphic view of the exit departure arrangement in relationship to the main highway at an interchange. Its purpose is to provide advance notice of complex or unexpected road geometry or ramp departures at an interchange and/or depict successive decision points where additional context might be helpful to interpreting the subsequent primary Interchange Advance guide signs. Unlike Diagrammatic signs that were included in previous editions of this Manual, the Diagrammatic Advance guide sign does not depict which or the number of specific lanes that serve a particular destination or depict lanes added or reduced.

Option:

02 A Diagrammatic Advance guide sign may be used in advance of the interchange guide sign sequence, or in lieu of an

Interchange Advance guide sign located 2 miles in advance of the exit, to supplement conventional or Overhead Arrow-per-Lane guide signs used for a downstream interchange.

**Standard:**

03 **Diagrammatic Advance guide signs shall be designed in accordance with the following criteria:**

- **A. The graphic legend shall be of a plan view showing a simplified schematic graphic of the relative through and off-ramp movements.**
- **B. No symbols or route shields shall be used as a substitute for arrowheads.**
- **C. They shall not be installed at the Exit Direction sign location (see Section 2E.25).**
- **D. The EXIT ONLY sign panel shall not be used on Diagrammatic Advance guide signs in advance of the interchange.**
- **E. For numbered exits, the Exit Number (E1-5P) or Left Exit Number (E1-5bP) plaque shall be used at the top (above and abutting) of the sign in accordance with Section 2E.22. For unnumbered left exits, the LEFT (E1-5aP) plaque shall be used at the top left edge (above and abutting) of the sign.**
- **F. The graphic shall not depict deceleration or auxiliary lanes.**
- **G. Arrow shafts shall not contain lane lines.**
- **H. Destination legends for off-movements shall be positioned to the side of the arrow from which the ramp departs.**

*Guidance:*

04 *Diagrammatic Advance guide signs used on freeways and expressways should be designed in accordance with the following additional criteria:*

- *A. No more than one destination should be displayed for each movement.*
- *B. The arrowhead for the diverging movement should be positioned lower on the sign than the arrowhead for the movement that continues straight ahead, independent of which movement carries the through route (~~see Figure 2E-42~~). Where the movements are freeway or expressway splits rather than exits, the arrowheads should be positioned at approximately the same height on the sign.*
- *C. Arrow shaft widths should not vary for different movements.*
- *D. Route shields, cardinal directions, and destinations should be positioned on the sign such that they are clearly related to the arrowhead(s), and the arrowhead for the off movement should point toward the route shield or, for unnumbered routes, the upper line of destination legend for the off movement.*
- *E. For exits or splits leading in a single direction, the cardinal direction should be placed adjacent to the route shield, and the destination should be placed below the route shield and cardinal direction.*
- *F. Where two exits are displayed on a Diagrammatic Advance guide sign, the control destination for the through route should be omitted from the sign.*
- *G. The distance legend should be placed below the exit destination legend. For splits where neither direction carries a through route, the distance legend should be centered below the diagrammatic arrow. Where successive exits from the same side of the roadway are displayed, the distance legend should be placed below the destination legend for the first exit, with the distance to the second exit omitted. Where successive exits from opposite sides of the roadway are displayed, the distance to the first exit should be centered below the diagrammatic arrow, with the distance to the second exit omitted.*

**Standard:**

05 **Diagrammatic Advance guide signs shall not be used at cloverleaf interchanges for the purpose of depicting separate downstream departures from a collector-distributor roadway.**

06 **Diagrammatic Advance guide signs located on the main roadway shall not be used to depict a downstream split of an exit ramp.**

Support:

07 Specific guidelines for more detailed design of Diagrammatic Advance guide signs are contained in the "Standard Highway Signs" publication (see Section 1A.05).

Option:

08 Where extra emphasis of an especially low advisory ramp speed is needed, an EXIT XX MPH (E13- 2) sign panel (see Figure 2E-14) may be placed below the applicable destination legend to supplement, but not to replace, the exit or ramp advisory speed warning signs.

09 Warning Beacons in compliance with the provisions of Section 2E.25 may be used with the E13-2 sign panel.

10 Diagrammatic Advance guide signs may be used on any class of roadway and may be modified to depict relative movements for intersections on conventional roads.

## Section 2E.42 Signing for Intermediate and Minor Interchange Multi-Lane Exits with an Option Lane

Support:

01 Intermediate and minor multi-lane exits might have an operational need for the presence of an option lane for only the peak period during which excessive queues might otherwise develop if the option lane were not available. In such cases, the Overhead Arrow-per-Lane guide signing described for option lanes in Sections 2E.39 and 2E.40 might not be practical, depending on the level of use of the option lane and the spacing of nearby interchanges, particularly in non-rural areas.

*Guidance:*

02 *When full-width Overhead Arrow-per-Lane guide signing is not practical, as described in Paragraph 1 of this Section, signing for an intermediate or minor interchange that has a multi-lane exit with an option lane that also carries the through route should use a partial-width form of the Overhead Arrow-per-Lane guide sign (see Figures 2E-43 through 2E-45(CA)). The partial-width Overhead Arrow-per-Lane sign should display arrows only for the option lane and the mandatory exit lane(s) using the same bifurcated arrow type for the option lane and curved arrow type for the exit only lane(s) as are used for the full-width Overhead Arrow-per-Lane sign. The legend displayed for the exit movement should be clearly aligned with the arrows pointing in the direction of the exit and not with the vertical arrow head of the bifurcated arrow depicting the through movement.*

**Standard:**

03 **The through route and/or destination shall not be displayed on the partial-width Overhead Arrow-per-Lane guide sign.**

04 **Partial-width Overhead Arrow-per-Lane signs shall be located in compliance with the provisions of Section 2E.40 for full-width Overhead Arrow-per-Lane signs (see Figures 2E-44 and 2E- 45).**

Option:

05 At an intermediate or minor interchange that has a multi-lane exit with an option lane that also carries the through route, where full-width Overhead Arrow-per-Lane guide signing is not practical, conventional signing as provided in Paragraphs 7 through 9 of this Section may be used (see Figures 2E-46 and 2E-47).

06 When either full-width or partial-width Overhead Arrow-per-Lane signing is used at existing or non- reconstructed locations where an overhead Exit Direction sign exists at the theoretical gore, and the existing sign support structure is retained, an overhead Exit Direction sign may continue to be used on the existing sign support structure in conjunction with a replacement of the advance signs using the partial-width Overhead Arrow-per-Lane guide sign design (see Figure 2E-44).

Support:

06a Refer to FHWA's List of Known Errors for error in Paragraph 6 text. Refer to Section 1A.04 for more details.

*Guidance:*

07 *When conventional signing is used, the option lane should not be signed on the Interchange Advance guide signs. For such exits that involve the addition of an auxiliary lane that is not present at the Interchange Advance guide sign locations, but do not involve a lane drop (see Figure 2E-47), a sequence of post-mounted or overhead-mounted Interchange Advance guide signs should be used, located in accordance with the interchange classification (see Section 2E.11). The Exit Direction sign should be located at the theoretical gore and should display a diagonally upward-pointing directional arrow above each lane that departs from the mainline alignment. The Exit Direction sign should not contain the EXIT ONLY legend.*

08 *For such interchanges that also have a lane drop (see Figure 2E-46), the Interchange Advance guide and Exit Direction signs should follow the provisions of Section 2E.28. The Exit Direction sign should be located at the theoretical gore and should contain the EXIT ONLY (E11-1e) sign panel.*

09 *Where the modified Overhead Arrow-per-Lane guide signs are not used, the presence of the option lane should be conveyed by the use of post-mounted lane-use (R3-8 series) signs (see Section 2B.30). When used, the R3-8 signs should be of an appropriate size for their application to optimize their conspicuity. The signs should be located in succession with the Interchange Advance guide signs, where the option and exit lanes have developed (see Figure 2E-46). In cases where the exiting lane or lanes have not developed and the option lane is created by the addition of an auxiliary lane that exits, the R3-8 signs should be located only adjacent to where the lanes have been fully developed and not in*

*advance of the lane or along its transition (see Figure 2E-47).*

Support:

09a Refer to FHWA's List of Known Errors for error in Paragraph 9 text. Refer to Section 1A.04 for more details.

10 The use of a down arrow on overhead freeway or expressway guide signs has been shown to be misinterpreted by road users as an indication of a dedicated lane.

**Standard:**

11 **Interchange Advance guide signs that are mounted overhead shall not display a down arrow over an option lane.**

## Section 2E.43 Number of Signs at an Overhead Installation and Sign Spreading

*Guidance:*

01 *If overhead signs are warranted, as set forth in Section 2A.13, the number of signs at these locations should be limited to only those essential in communicating pertinent destination information to the road user. Exit Direction signs for a single exit and the Interchange Advance Guide signs should have only one sign with one or two destinations. Regulatory signs, such as speed limits, should not be used in conjunction with overhead guide sign installations. Because road users have limited time to read and comprehend sign messages, there should not be more than three guide signs displayed at any one location either on the overhead structure or its support.*

Support:

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

Option:

02 At overhead locations, more than one sign may be installed to advise of a multiple exit condition at an interchange. If the roadway ramp or crossroad has complex or unusual geometrics, additional signs with confirming messages may be provided to properly guide the road user.

Support:

03 Sign spreading is a concept where major overhead signs are spaced so that road users are not overloaded with a group of signs at a single location. Figure 2E-48 illustrates an example of sign spreading.

*Guidance:*

04 *Where overhead signing is used, sign spreading should be used at all single-exit interchanges and to the extent possible at multi-exit interchanges. Sign spreading should be accomplished by use of the following:*

*A. The Exit Direction sign should be the only guide sign used in the vicinity of the gore (other than the Exit Gore sign). It should be located overhead near the theoretical gore and generally on an overhead sign support structure.*

*B. The Interchange Advance guide sign to indicate the next interchange exit should be placed near the crossroad location. If the crossroad goes over the mainline, the Interchange Advance guide sign should be placed on the overcrossing structure or on a separate structure immediately in front of the overcrossing structure.*

## Section 2E.44 Closely-Spaced Interchanges

Support:

01 Section 2E.43 contains information regarding sign spreading where the Exit Direction sign and the Interchange Advance guide sign for the next interchange are mounted overhead. Sign spreading is particularly beneficial where interchanges are closely spaced and overhead signing is used in conjunction with Interchange Sequence signs as provided in Paragraph 2 of this Section.

*Guidance:*

02 *Interchange Sequence signs (see Section 2E.24) should be used at closely-spaced interchanges. When used, they should identify and show street names and distances for the next two or three exits as shown in Figure 2E-11.*

**Standard:**

03 **Interchange Advance guide signs for closely-spaced interchanges shall show information for only one interchange.**

## Section 2E.45 Guide Signing in Tunnels and Similar Structures

Support:

01 The application of the provisions for freeway and expressway guide signs in tunnels and other similar structures can

present unique challenges not encountered elsewhere due to the extended and continuous distances of constrained vertical and horizontal clearances in which to place signs. The effect of these constraints is particularly evident when there are interchange exit ramps inside the tunnel that require guide signing. As a result, it might not always be possible to use the typical layouts for guide signs inside a tunnel. In addition, interchange guide signs might need to be limited to one destination only, with other destinations displayed separately on Supplemental guide signs (see Section 2E.51). Acceptable methods to modify the layout of a sign to fit the space available in a tunnel are provided in Paragraph 2 of this Section.

Option:

02 Overhead-mounted guide signs in tunnels, or in other similar structures with extended constrained vertical and horizontal clearances, may be modified in accordance with the following when needed to accommodate limited vertical clearance available for signs:

A. Some sign legend elements may be arranged side by side, such as by placing route shields to the left of the destination instead of above.
B. The Exit Number plaque (see Section 2E.22) may be placed at the right-hand edge of the sign for right exits or at the left-hand edge of the sign for left exits instead of at the top edge of the sign. The legend of the Exit Number plaque may use a reduced letter height of not less than 6 inches for the word EXIT(S) and not less than 12 inches for numerals and suffixes.
C. Destination and roadway names may be displayed in reduced letter heights of not less than 10.67 inches, when determined acceptable based on consideration of reduced speed and other relevant factors, while maintaining adequate space between the legend and edges of the sign to ensure legibility and quick recognition.
D. Unusually long destination and roadway names that cannot be adequately shortened or otherwise acceptably abbreviated may be displayed using Series D letters in lieu of Series E(modified).

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2, Item C text. Refer to Section 1A.04 for more details.

**Standard:**

03 **Applicability of the provisions of Paragraph 2 of this Section shall be limited to those signs within the limits of the tunnel or other similar structure and shall not be extended to the approaches to or departures from the tunnel.**

Support:

04 Unlike typical guide signs that are exposed to rain, guide signs in tunnels accumulate grime and residue quickly. This accumulation can reduce visual contrast between legend and background and reduce the retroreflectivity of the sign sheeting. Therefore, guide signs in tunnels generally need more maintenance.

*Guidance:*

05 *Overhead signs in tunnels should have external or internal sign illumination to ensure adequate visibility between scheduled maintenance and cleanings.*

06 *One or more Interchange Sequence signs (see Section 2E.24) should be used on the approach to the tunnel entrance to display the distances to the next interchanges that have exit ramps inside the tunnel or immediately following the end of the tunnel.*

07 *Supplementary pavement markings, such as word, arrow, and/or route shield markings, should be considered inside the tunnel in addition to the basic lane and edge line markings.*

## OTHER GUIDE SIGNS

### Section 2E.46 Next Exit Plaques (E2-1P and E2-1aP)

Option:

01 Where the distance to the next interchange is unusually long, a Next Exit (E2-1P or E2-1aP) plaque (see Figure 2E-49) may be installed to inform road users of the distance to the next interchange.

*Guidance:*

02 *The Next Exit plaque should not be used unless the distance between successive interchanges is more than 5 miles.*

03 *Where the Next Exit plaque is used, the E2-1P plaque should be used where the width of the Interchange Advance guide sign is equal to or greater than the width of the E2-1P plaque. The E2-1aP plaque should be used where the width of the E2-1P plaque exceeds the width of the Interchange Advance guide sign.*

**Standard:**

04 **The Next Exit plaque shall display the legend NEXT EXIT XX MILES. If the Next Exit plaque is used, it shall be placed below the Interchange Advance guide sign nearest the interchange. It shall be mounted so as to not adversely affect the breakaway feature of the sign support structure.**

### Section 2E.47 Post-Interchange Signs

*Guidance:*

01 *If space between interchanges permits, as in rural areas, and where undue repetition of messages will not occur, a fixed sequence of signs should be displayed beginning 500 feet beyond the downstream end of the acceleration lane. At this point a Route Sign assembly should be installed followed by a Speed Limit sign and a Distance sign, each at a spacing of 1,000 feet (see Figure 2E-2).*

02 *If space between interchanges does not permit placement of these three post-interchange signs without encroaching on or overlapping the Advance guide signs necessary for the next interchange, or in rural areas where the interchanging traffic is primarily local, one or more of the post-interchange signs should be omitted.*

Option:

03 Usually the Distance sign will be of less importance than the other two signs and may be omitted, especially if Interchange Sequence signs are used. If the sign for through traffic on an overhead assembly already contains the route sign, the post-interchange route sign assembly may also be omitted.

### Section 2E.48 Post-Interchange Distance Signs (E7-1 through E7-3)

**Standard:**

01 **If used, the Post-Interchange Distance sign (see Figure 2E-50) shall consist of a one-line, two- line, or three-line sign displaying the names of significant destination points and the distances to those points. The top line of the sign shall identify the next meaningful interchange with the name of the community ~~near or~~ through which the route passes, or if there is no community, the route number or name of the intersected highway.**

Support:

02 The minimum sizes of the route shields identifying a significant destination point are prescribed in Tables 2E-3 and 2E-5.

Option:

03 The text identification of a route may be displayed instead of a route shield, such as "U S XX," "[State abbreviation] XX" (such as "Del XX"), or "County XX."

*Guidance:*

04 *If a second line is used, it should be reserved for communities of general interest that are located on or immediately adjacent to the route or for major traffic generators along the route.*

Option:

05 The choice of names for the second line, if it is used, may be varied on successive Distance signs to give road users maximum information concerning communities served by the route.

**Standard:**

06 **The third, or bottom line, shall contain the name and distance to a control city (if any) that has national significance for travelers using the route.**

*Guidance:*

07 *Distances to the same destinations should not be shown more frequently than at 5-mile intervals. The distances displayed on these signs should be the actual distance to the destination points and not to the exit from the freeway or expressway. The distance displayed for each community should comply with the provisions of Section 2D.43.*

Support:

08 Refer to Section 2D.43 for additional guidance on distance legends.

09 Refer to Section 2D.44 for additional guidance on the placement of distance signs.

## Section 2E.49 Post-Interchange Travel Time Sign (E7-4)

Support:

01 At certain locations, it might be more meaningful to recurrent road users to display the travel time rather than the distance to a destination. Such instances might be areas of adverse roadway conditions due to weather, such as in mountain passes or high elevations, congestion that occurs during peak travel seasons, or recurring congestion.

02 Section 2E.50 contains information on Distance and Travel Time and Comparative Travel Time signs.

**Standard:**

03 **If used, the Post-Interchange Travel Time (E7-4) sign (see Figure 2E-51) shall replace of the Post-Interchange Distance sign in the series of post-interchange signs (see Section 2E.47).**

04 **The Post-Interchange Travel Time sign shall comply with the provisions of Paragraph 1 of Section 2E.47 with the following exceptions:**

**A. The distance shall be replaced with a changeable message element to display the current travel time to the applicable destination; and**

**B. The abbreviation MINS shall follow the changeable message element.**

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

**Standard:**

05 **Travel times shall not be used on Interchange guide signs (see Section 2E.21).**

## Section 2E.50 Distance and Travel Time Sign (E7-5) and Comparative Travel Time Sign (E7-6)

Support:

01 Some locations might benefit from a travel time message displayed with the distance, or comparative travel times displayed for alternative routes to a common destination. These locations are often in advance of an urbanized area where interchanges become more closely spaced and/or in advance of a circumferential or other alternative route(s) where the road user can decide to divert depending on the destination. Nonetheless, these signs are typically located in advance of a decision point where the road user can divert to an alternate route to avoid recurring congestion.

02 Section 2E.49 contains information on Post-Interchange Travel Time signs.

03 Section 2G.19 contains information on Comparative Travel Time signs for parallel lanes within the same highway route, such as for general-purpose lanes and managed lanes.

**Standard:**

04 **The Distance and Travel Time (E7-5) sign (see Figure 2E-52) shall display a major destination, landmark, or junction; a distance message; and a travel time message, each on a separate line. The distance units shall be displayed in the distance message. The travel time shall be displayed in a changeable message element and the abbreviation MINS shall follow the changeable message element. The Distance and Travel Time sign shall not display distance and time to more than one destination or junction.**

05 **The Comparative Travel Time (E7-6) sign (see Figure 2E-52) shall display a major destination, landmark, or junction, and two alternative routes with travel time messages. Each alternative route and associated travel time message shall be on a separate line. The travel time shall be displayed in a changeable message element and the abbreviation MINS shall follow the changeable message element.**

06 **Comparative travel times shall not be used to promote different modes of travel, such as personal vehicle highway travel compared with transit, or different forms of transit.**

*Guidance:*

07 *Where used, the Distance and Travel Time sign should be located between interchanges and away from the sequence of interchange guide signs or other major signs.*

08 *Where used, the Comparative Travel Time sign should be located in advance of the sequence of interchange guide signs to provide adequate time for the road user to decide whether to reroute.*

## Section 2E.51 Supplemental Guide Signs (E3 Series)

Support:

01 Supplemental guide signs (see Figure 2E-53) can be used to provide information regarding destinations accessible from an interchange, other than places displayed on the standard interchange signing. However, such Supplemental guide signing can reduce the effectiveness of other more important guide signing because of the possibility of overloading the road user's capacity to receive visual messages and make appropriate decisions. "The AASHTO Guidelines for the Selection of Supplemental Guide Signs for Traffic Generators Adjacent to Freeways" is incorporated by reference in this Section.

*Guidance:*

02 *Use of Supplemental guide signs should be limited to situations where there is a demonstrated need to sign for more destinations from an interchange than those that are displayed on the Interchange Advance guide and Exit Direction signs.*

03 *A Supplemental guide sign should not be installed unless a destination meets the criteria established by the State or agency policy. States and other agencies should adopt an appropriate policy for installing Supplemental guide signs using the "AASHTO Guidelines for the Selection of Supplemental Guide Signs for Traffic Generators Adjacent to Freeways." In developing policies for such signing, such items as population, amount of traffic generated, distance from the route, and the significance of the destination, should be taken into account.*

04 *No more than one Supplemental guide sign should be used on each interchange approach.*

05 *A Supplemental guide sign should display no more than two destinations and no more than three lines of destination names. Destination names should be followed by the interchange number (and suffix), or if interchanges are not numbered, by the legend NEXT RIGHT or SECOND RIGHT or both, as appropriate. The Supplemental guide sign should be installed as an independent guide sign assembly.*

06 *Where two or more Interchange Advance guide signs are used, the Supplemental guide sign should be installed approximately midway between two of the Interchange Advance guide signs. If only one Interchange Advance guide sign is used, the Supplemental guide sign should follow it by at least 800 feet. If the interchanges are numbered, the interchange number should be used for the action message.*

07 *A Supplemental guide sign should not be installed in the same location with or where it will detract from guide signs for a different interchange.*

Support:

07a Refer to Section 2D.36 and Table 2D-101(CA) for additional guidance and specific criteria regarding Supplemental guide signs.

**Standard:**

08 **No more than two supplemental traffic generator destinations shall be signed from a single interchange approach and four from a single interchange along the main roadway (see Paragraphs 4 and 5 of this Section regarding the number of Supplemental guide signs at an interchange and the number of destinations displayed on a Supplemental guide sign).**

09 **Supplemental guide signs shall not be placed at the same location as Interchange Advance guide, Exit Direction, or other signs related to an exit or interchange.**

10 **Guide signs for park-and-ride facilities shall be considered as Supplemental guide signs (see Figure 2E-54 and Figure 2E-54(CA)).**

11 **Guide signs for recreational or cultural interest destinations (see Chapter 2M) shall be considered as Supplemental guide signs, except where the interchange provides direct access to such a destination and the destination is instead displayed on the Interchange Advance guide and Exit Direction signs.**

Option:

12 The pictograph of a transit provider (see definition in Section 1C.02) may be displayed on the Park – Ride Supplemental guide sign or on a Supplemental guide sign for a transit facility.

*Guidance:*

13 *The use of a transit pictograph and/or the carpool symbol on the PARK – RIDE Supplemental guide sign should comply with the provisions of Paragraph 5 of Section 2D.48.*

**Standard:**

14 **When a transit pictograph is displayed on the PARK – RIDE Supplemental guide sign, it shall be located on the same line as the carpool symbol, if used, above the word legend.**

15 **The maximum dimension (height or width) of a pictograph on a sign shall not exceed two times the upper-case letter height of the destination or PARK – RIDE legend.**

Option:

16 The PARK - RIDE (G95eP(CA)) plaque (refer to Figure 2E-54(CA)) may be installed below the Advance Guide (G83(CA) Series) signs on freeways and expressways to direct motorists to ridesharing parking lots.

17 The PARK - RIDE Supplemental Guide (G95A-1(CA)) sign (refer to Figure 2E-54(CA)) may be installed separately on freeways and expressways when it is not possible to use the G95eP(CA) plaque.

**Standard:**

18 **The following criteria shall be met for a privately owned facility to qualify for Park and Ride signing:**

- **A. The parking area must have reasonably convenient access to the major transportation facility it is intended to serve.**
- **B. The Park and Ride Facility must be accessible 24 hours a day, 7 days a week.**
- **C. A minimum of 50 parking spaces must be contributed.**
- **D. If needed, "Follow-Up" signing shall be provided between the exit point of the major transportation system and the Park and Ride facility by placing a PARK - RIDE (D4-2) sign at appropriate locations prior to the installation of the G95A-1(CA) sign on the major transportation system.**

Option:

19 The BUS SERVICE (G95dP(CA)) plaque (refer to Figure 2E-54(CA)) may be installed below the G95A-1(CA) sign at locations where bus service is available at a specific Park and Ride facility.

*Guidance:*

20 *If both transit and carpool parking are available, the local transit logo or symbol should be displayed to the left of the standard carpool symbol. If only transit parking is available, the local transit symbol or logo should be used in lieu of the carpool symbol.*

Option:

21 A Park and Ride supplemental destination guide sign may be formatted and combined with another supplemental destination guide sign on the same panel. The PARK - RIDE legend should appear at the top, separated by a horizontal white line, and both destinations must reference the same exit number or turn.

22 Supplemental guide signs may be omitted at low-traffic-volume interchanges or at major interchanges spaced 0.5 miles or less apart. Additionally, they may be omitted at interchanges 1 mile or less apart where Interchange Sequence signs are installed.

## Section 2E.52 Community Interchanges Identification Signs (E9-4 and E9-5)

Support:

01 For suburban or rural communities served by two or three interchanges, Community Interchanges Identification (E9-4 and E9-5) signs (see Figure 2E-55) reduce the amount of information displayed on the Interchange Advance guide and Exit Direction signs by eliminating repetition of the same destinations for separate interchanges.

*Guidance:*

02 *In these cases, the name of the community followed by the word EXITS should be displayed on the top line; the lines below should display the destination, road name or route number, and the corresponding distances to the nearest ¼ mile.*

03 *The sign should be located in advance of the first Interchange Advance guide sign for the first interchange within the community (see Figure 2E-56).*

04 *The legend displayed on the Interchange Advance guide and Exit Direction signs for each interchange should be consistent with the interchange names displayed on the Community Interchanges Identification sign. The name of the community displayed on the Community Interchanges Identification signs should be omitted from the legends of the Interchange Advance guide and Exit Direction signs.*

Option:

05 If interchanges are not conveniently identifiable or if there are more than three interchanges to be identified, the Next Exits sign (see Section 2E.53) may be used.

## Section 2E.53 Next Exits Signs (E9-3 and E9-3a)

Support:

01 Many freeways or expressways pass through historical or recreational regions, or urban areas served by a succession of several interchanges.

Option:

02 Such regions or areas may be indicated by a Next Exits (E9-3 or E9-3a) sign (see Figure 2E-57) located in advance of the Advance guide sign or signs for the first interchange.

*Guidance:*

03 *The sign legend should identify the region or area followed by the words NEXT XX EXITS.*

04 *The legend displayed on the Interchange Advance guide and Exit Direction signs for each interchange should not display the region or area name that is displayed on the Next Exits sign (see Figure 2E-58).*

## Section 2E.54 Weigh Station Signing

Support:

01 Independent facilities or areas have been added along many highways where certain commercial vehicles are directed to stop to be weighed or inspected. These areas are sometimes permanent, such as in a roadside area, or temporary mobile facilities deployed along the roadway.

02 The general concept for signing permanent Weigh Stations is similar to Rest Area signing (see Section 2I.05) because in both cases traffic using either area remains within the highway right-of-way.

**Standard:**

03 **The standard sequence of signs for a Weigh Station on an expressway or freeway shall include four basic signs (see Figure 2E-59):**

- **A. An Advance Weigh Station Distance (D8-1) sign with the distance 1 MILE displayed,**
- **B. An Advance Weigh Station Distance (D8-1) sign with the distance ½ MILE displayed, or a Weigh Station Advance Direction (D8-2) sign,**
- **C. A Weigh Station Entrance Direction (D8-3) sign, and**
- **D. A Weigh Station Gore sign (with the same legend as the Entrance Direction (D8-3) sign).**

Option:

04 When spacing of 1 mile and ½ mile are not practical for the D8-1 signs, the 1 MILE and ½ MILE distances on the D8-1 signs may be adjusted to match the spacing determined by engineering judgment.

05 ~~Where State law requires trucks of a certain weight to enter the weigh station, a Weigh Station (R13-1) regulatory sign (see Section 2B.65) may be added to the sign sequence as shown in Figure 2E-59.~~

06 Where only commercial vehicle inspections are conducted in the inspection area and vehicles are not weighed, the WEIGH STATION legend of the D8 series signs may be replaced with the alternate legend, COMMERCIAL VEHICLE INSPECTION AREA.

**Standard:**

07 ~~**When the WEIGH STATION legend of the D8 series signs is replaced with COMMERCIAL VEHICLE INSPECTION AREA legend as provided for in Paragraph 6 of this Section, the WEIGH STATION legend of the R13-1 sign shall be replaced with the alternate legend INSPECTION AREA.**~~

08 **A changeable legend display that displays either OPEN or CLOSED shall be included in the signing sequence to indicate when trucks are required to enter the weigh station.**

*Guidance:*

09 *The required changeable legend display OPEN or CLOSED describe in Paragraph 8 of this Section should be displayed within and at the bottom of the Weigh Station Advance Direction (D8-2) sign or the Advance Weigh Station Distance (D8-1) sign, or on a supplemental plaque or sign panel.*

Option:

10 A plaque with the legend OPEN WHEN FLASHING may be added to one of the Advance Weigh Station Distance signs along with associated flashing beacons, in place of the changeable legend OPEN or CLOSED sign, to indicate when commercial vehicles are required to enter the weigh station.

Support:

11 Weigh Station Area sign layouts for freeway and expressway applications are shown in the "Standard Highway Signs" publication (see Section 1A.05). An example of weigh station signing for use on freeways and expressways is

shown in Figure 2E-59.

## Section 2E.55 Route Signs and Trailblazer Assemblies

*Guidance:*

01 *Route signs (see Figure ~~2E-60~~ 2D-4 and Figure 2D-4(CA)) should be incorporated as cut-out shields or other distinctive shapes on large directional guide signs. Where the Interstate shield is displayed in an assembly or on the face of a guide sign with U.S. or State Route signs, the Interstate numeral should be at least equal in size to the numerals on the other Route signs. The use of independent Route signs should be limited primarily to route confirmation assemblies.*

02 *Route signs and auxiliary plaques showing junctions and turns should be used for guidance on approach roads, for route confirmation just beyond entrances and exits, and for reassurance along the freeway or expressway. When used along the freeway or expressway, the Route signs should be enlarged to a 36 x 36-inch minimum size for route numbers with one or two digits and to a 45 x 36-inch minimum size for route numbers with three digits as shown in the "Standard Highway Signs" publication (see Section 1A.05). When independently-mounted Route signs are used in place of Pull-Through signs (see Section 2E.27), they should be located just beyond the exit.*

Option:

03 The standard Trailblazer Assembly (see Section 2D.34) may be used on roads leading to the freeway or expressway. Component messages of the Trailblazer Assembly may be incorporated into a single sign in accordance with the provisions of Section 2D.12. Independently-mounted Route signs may be used instead of Pull-Through signs as confirmation information.

Support:

04 Section 2D.58 contains information regarding the design of signs for Auto Tour Routes.

Option:

05 The commonly-used name or trailblazer route sign for a toll highway (see Chapter 2F) may be displayed on non-toll sections of the Interstate Highway System at:

A. The last exit before entering a toll section of the Interstate Highway System;
B. The interchange or connection with a toll highway, whether or not the toll highway is a part of the Interstate Highway System; and
C. Other locations within a reasonable approach distance of toll highways when the name or trailblazer symbol for the toll highway would provide better guidance to road users unfamiliar with the area than would place names and route numbers.

06 The toll highway name or route sign may be included as a part of the guide sign installations on intersecting highways and approach roads to indicate the interchange with a toll section of an Interstate route. Where needed for the proper direction of traffic, a trailblazer for a toll highway that is part of the Interstate Highway System may be displayed with the Interstate Trailblazer Assembly.

Support:

07 Chapter 2F contains additional information regarding signing for toll highways.

## Section 2E.56 Eisenhower Interstate System Signs (M1-10 ~~and M1-10a~~)

Option:

01 The Eisenhower Interstate System (M1-10 ~~and M1-10a~~) signs (see Figure 2E-61) may be used, in accordance with Paragraphs 2 and 3 of this Section, on Interstate highways at periodic intervals and in rest areas, scenic overlooks, or other similar roadside facilities on the Interstate Highway System.

**Standard:**

02 **If used, the ~~M1-10a~~ M1-10 sign shall be used only in rest areas or other similar facilities where the sign can be viewed by occupants of parked vehicles or by pedestrians. The ~~M1-10a~~ M1-10 sign shall not be installed on Interstate highway mainlines, ramps, or other roadways where it can be viewed by vehicular traffic.**

03 **The M1-10 ~~and M1-10a~~ signs shall not be used as part of a Junction, Advance Route Turn, Directional, or Trailblazer Assembly, or as part of a guide sign or similar assembly providing direction to a route or destination.**

# SIGNS FOR ROUTE DIVERSION BY VEHICLE CLASS

## Section 2E.57 Signs for Route Diversion by Vehicle Class

Support:

01 On some highways, a physical condition or highway feature might limit certain types or classes of vehicles from proceeding along that route through the site of that condition beyond which those vehicles are otherwise allowed. Examples include, but are not limited to, a restriction on taller legal-height vehicles through a tunnel with a low clearance; a restriction of hazardous materials through a tunnel or over a bridge; and a restriction on wider vehicles, such as large trucks, over a viaduct with narrow lanes. In such cases, the restricted vehicles might be diverted along another route to reach a destination beyond the location of the limiting condition.

*Guidance:*

02 *Where certain vehicles are prohibited at a downstream location along a route and those vehicles must divert to reach a through destination beyond that location, regulatory, warning, and/or guide signs advising those vehicle operators of the diversion should be installed in advance of the decision point to leave the through route for the diversion route.*

Option:

03 The interchange and pull-through guide signs for the last point at which restricted vehicles must exit may be modified to incorporate regulatory and/or warning panels with word legends to display the regulations and/or warning messages relative to the vehicle class restriction.

04 Standard post-mounted regulatory and warning signs, such as the No Hazardous Materials (R14-3) or Advance Low Clearance (W12-2) signs, may be used as provided elsewhere in this Manual at independent locations to supplement the regulatory and warning signs and panels referenced in Paragraphs 2 and 3 of this Section.

Support:

05 An example of signing for a route diversion by vehicle class is shown in Figure 2E-62.

## INTERFACE WITH CONVENTIONAL ROADWAYS

### Section 2E.58 Signing on Conventional Road Approaches and Connecting Roadways

Support:

01 Section 2D.49 contains information regarding the signing on conventional roads on the approaches to interchanges and the signing on connecting roadways.


### Section 2E.59 Wrong-Way Traffic Control at Interchange Ramps

Support:

01 Section 2B.48 contains information regarding the use of regulatory signs to deter wrong-way movements at intersections of freeway or expressway ramps with conventional roads, and in the area where entrance ramps intersect with the mainline lanes.


02 Section 2D.50 contains information regarding the use of a Directional assembly or a guide sign to mark the entrance to a freeway or expressway from a conventional road.

## Figure 2E-1. Designation of Destination for Interchanges in Opposing Directions of Travel

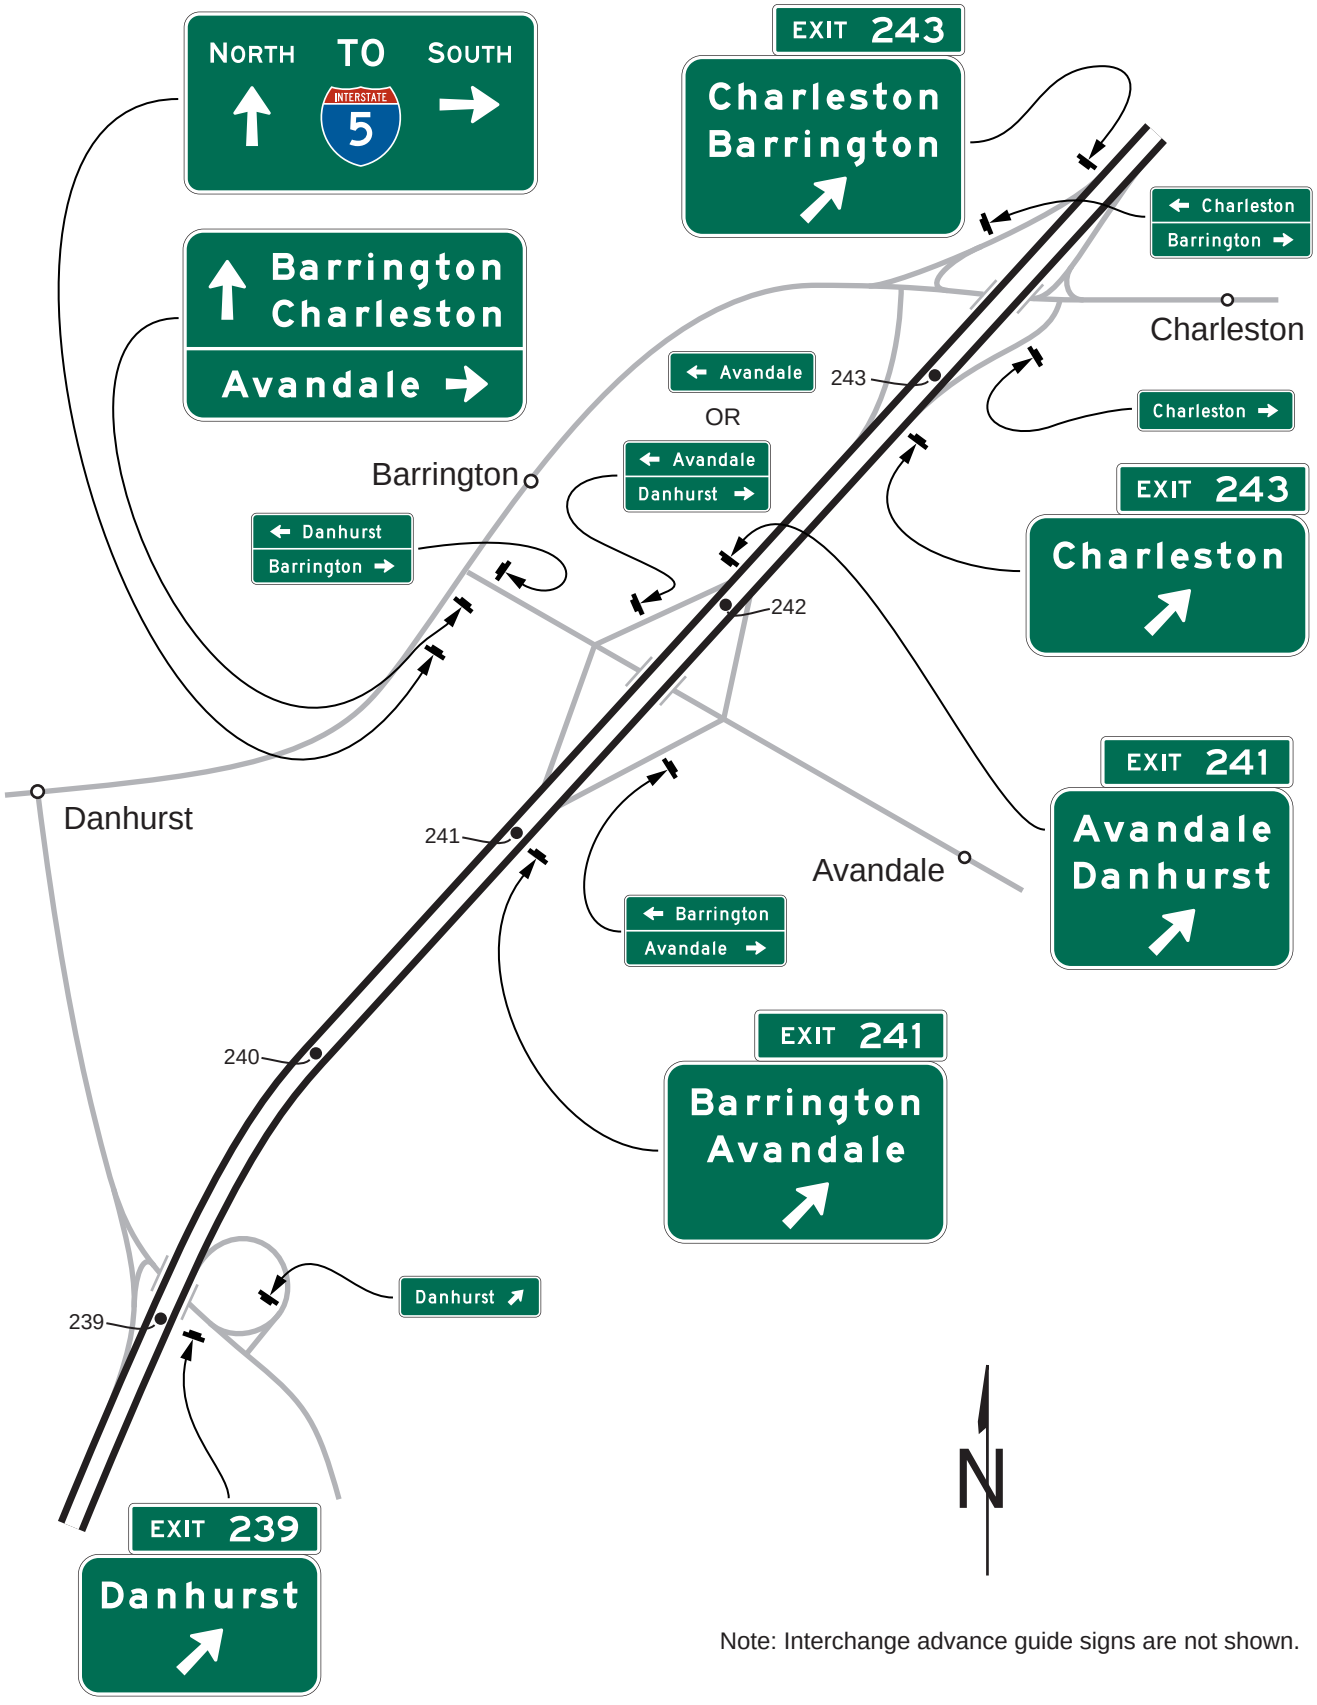



Note: Interchange advance guide signs are not shown.

# Figure 2E-2. Typical Sequence of Interchange Guide Signs

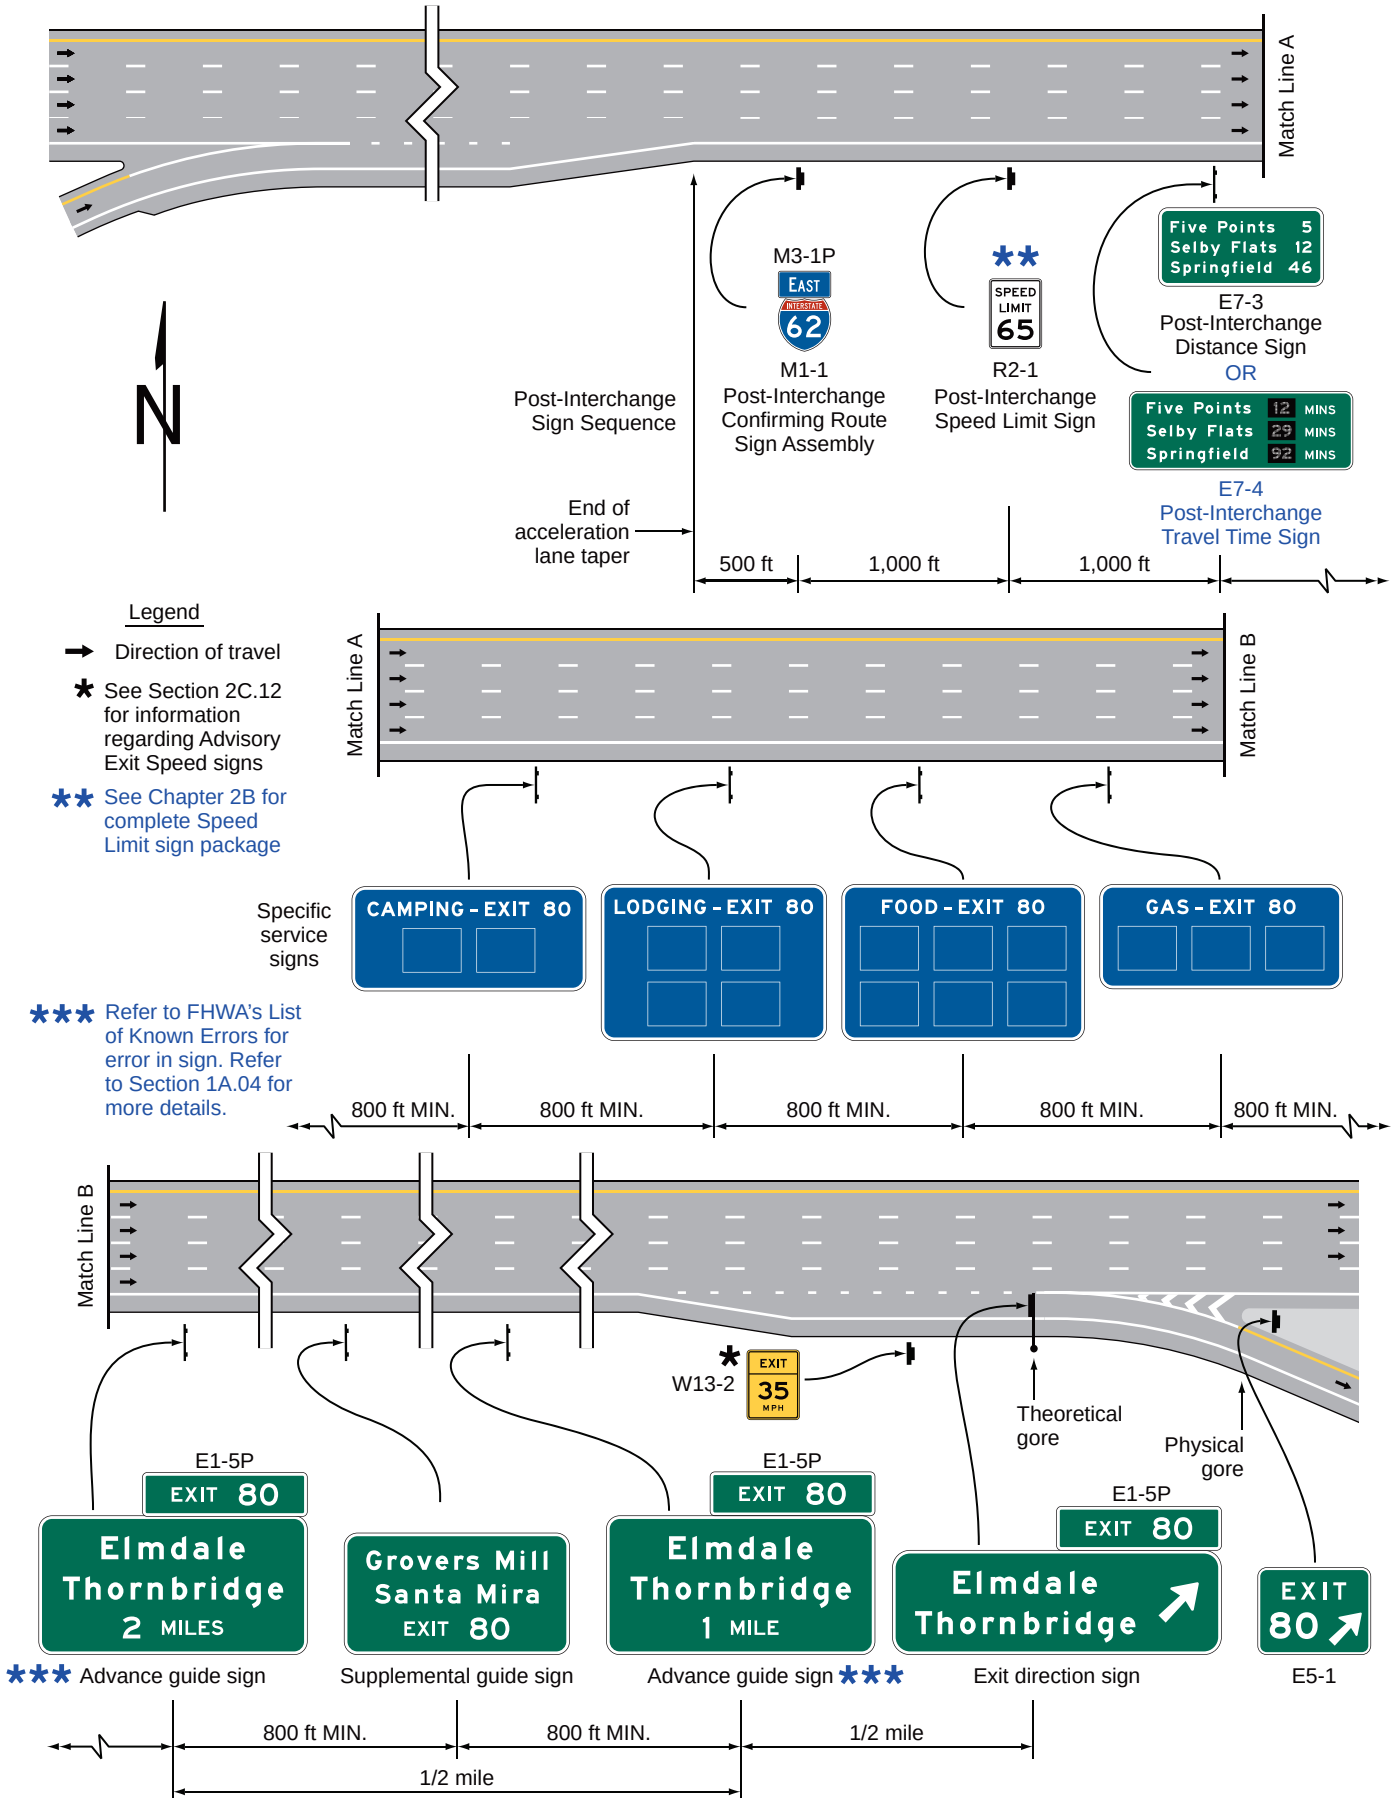


# Figure 2E-3. Examples of Interchange Exit Numbering

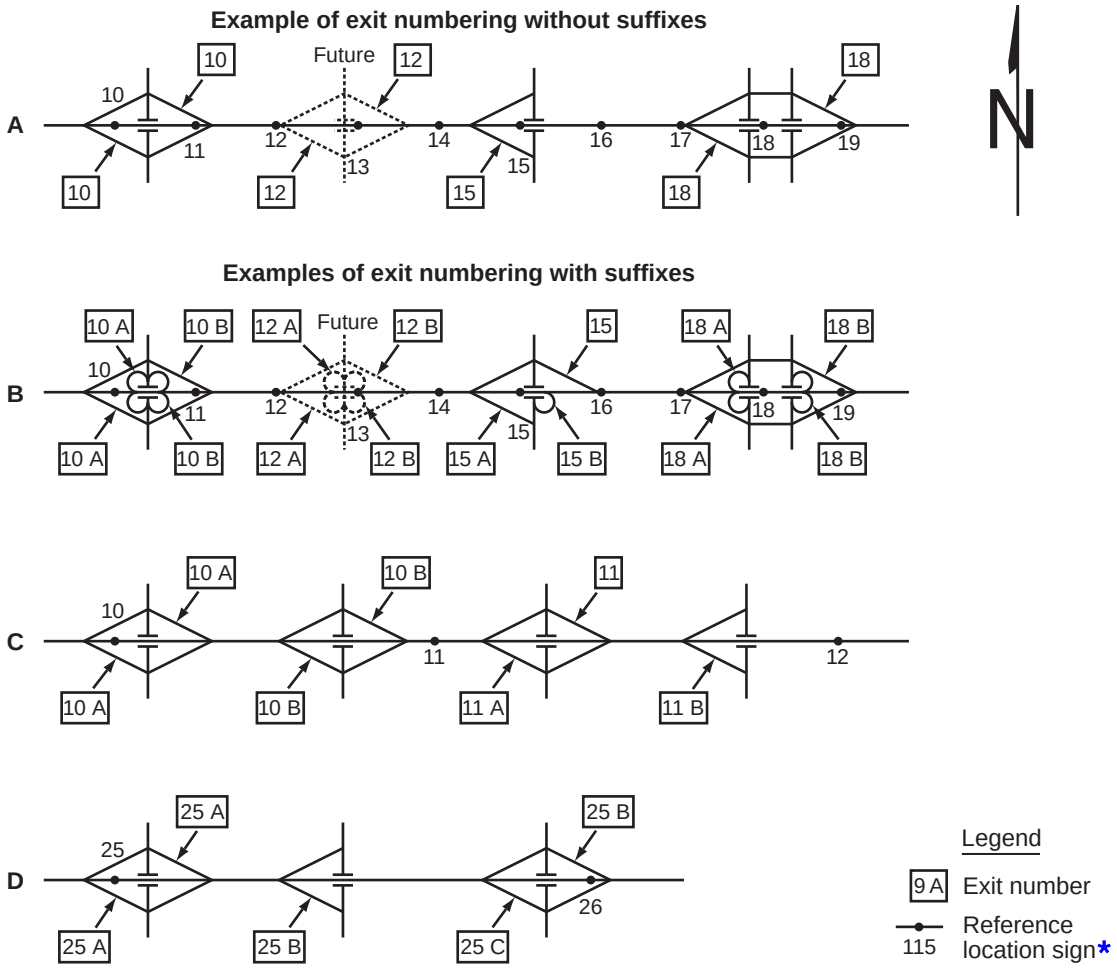



Note: See California Numbered Exit Uniform System (Cal-NExUS) for information on interchange exit numbering in California.

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

## Figure 2E-4. Example of Interstate Loops and Spurs

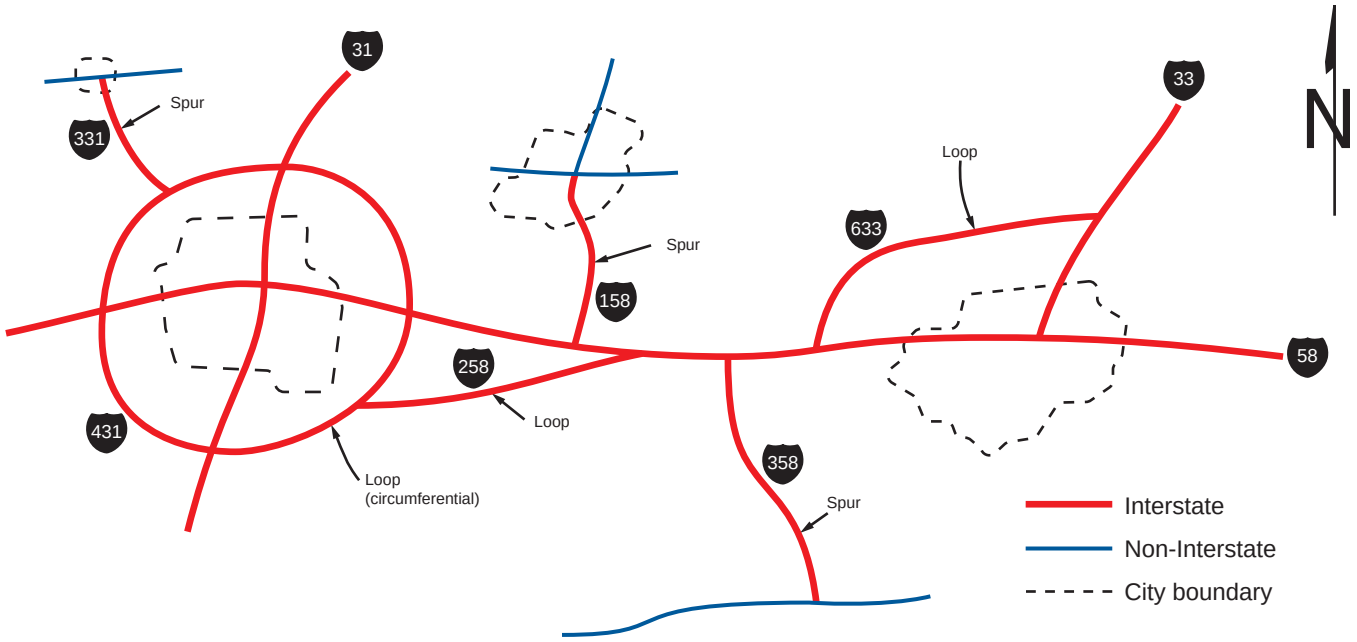


## Figure 2E-5. Example of Interchange Numbering for Mainline and Circumferential Routes

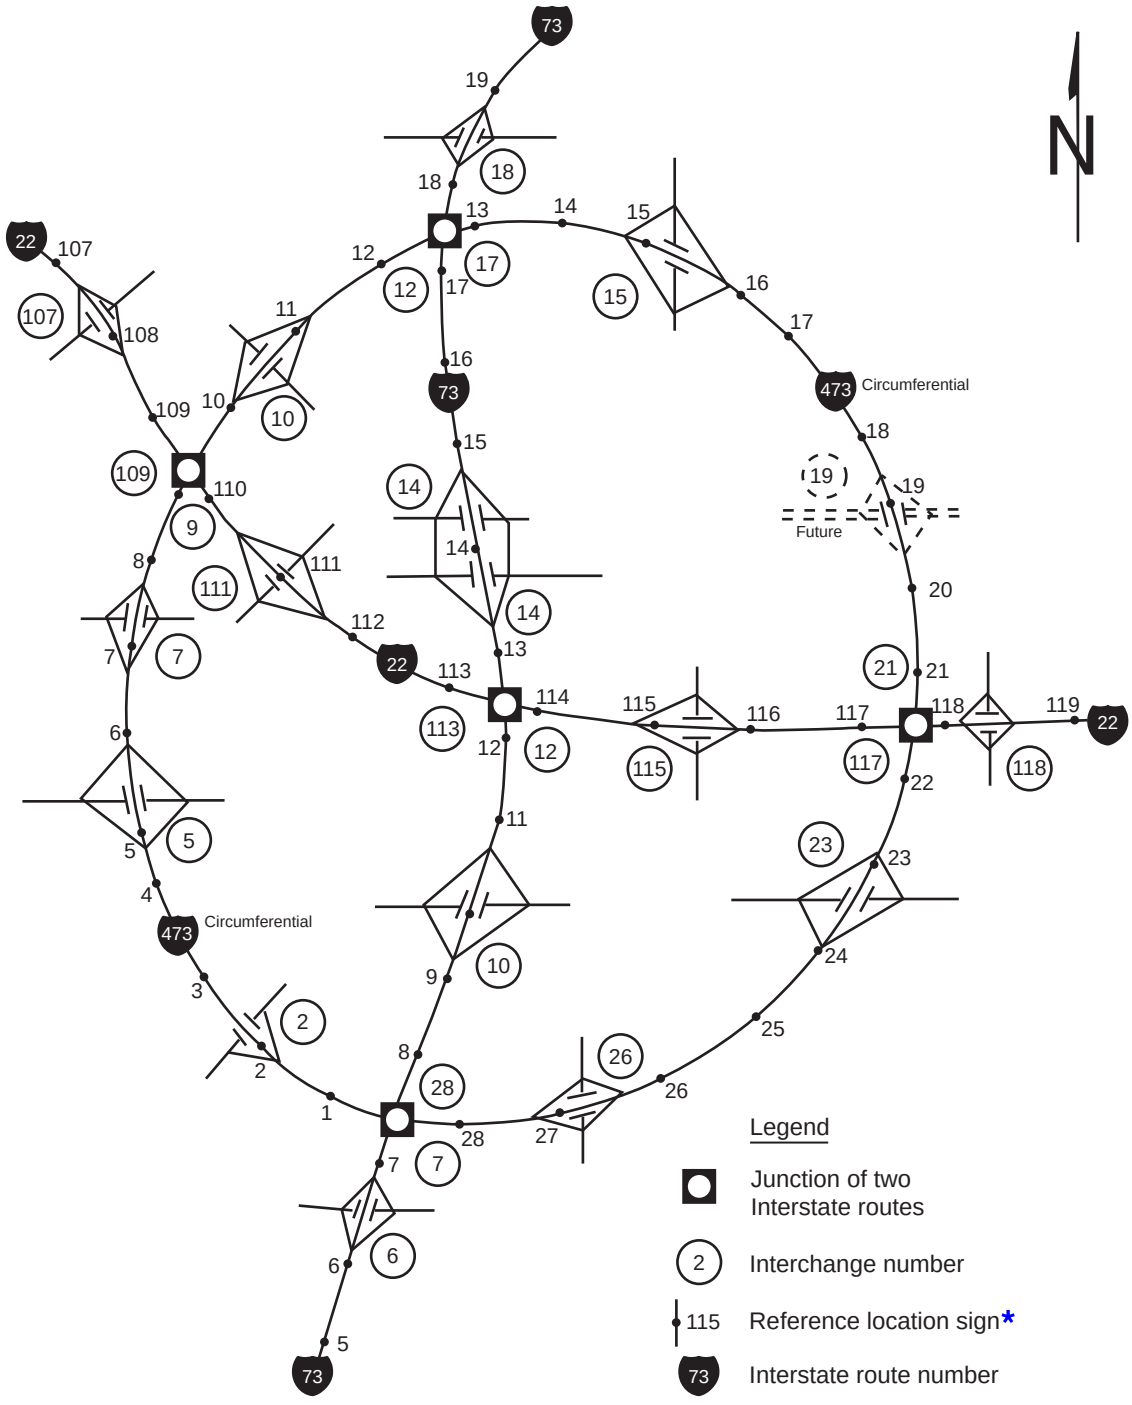


Note: See California Numbered Exit Uniform System (Cal-NExUS) for information on interchange exit numbering in California.

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

# Figure 2E-6. Example of Interchange Numbering for Mainline and Loop Routes

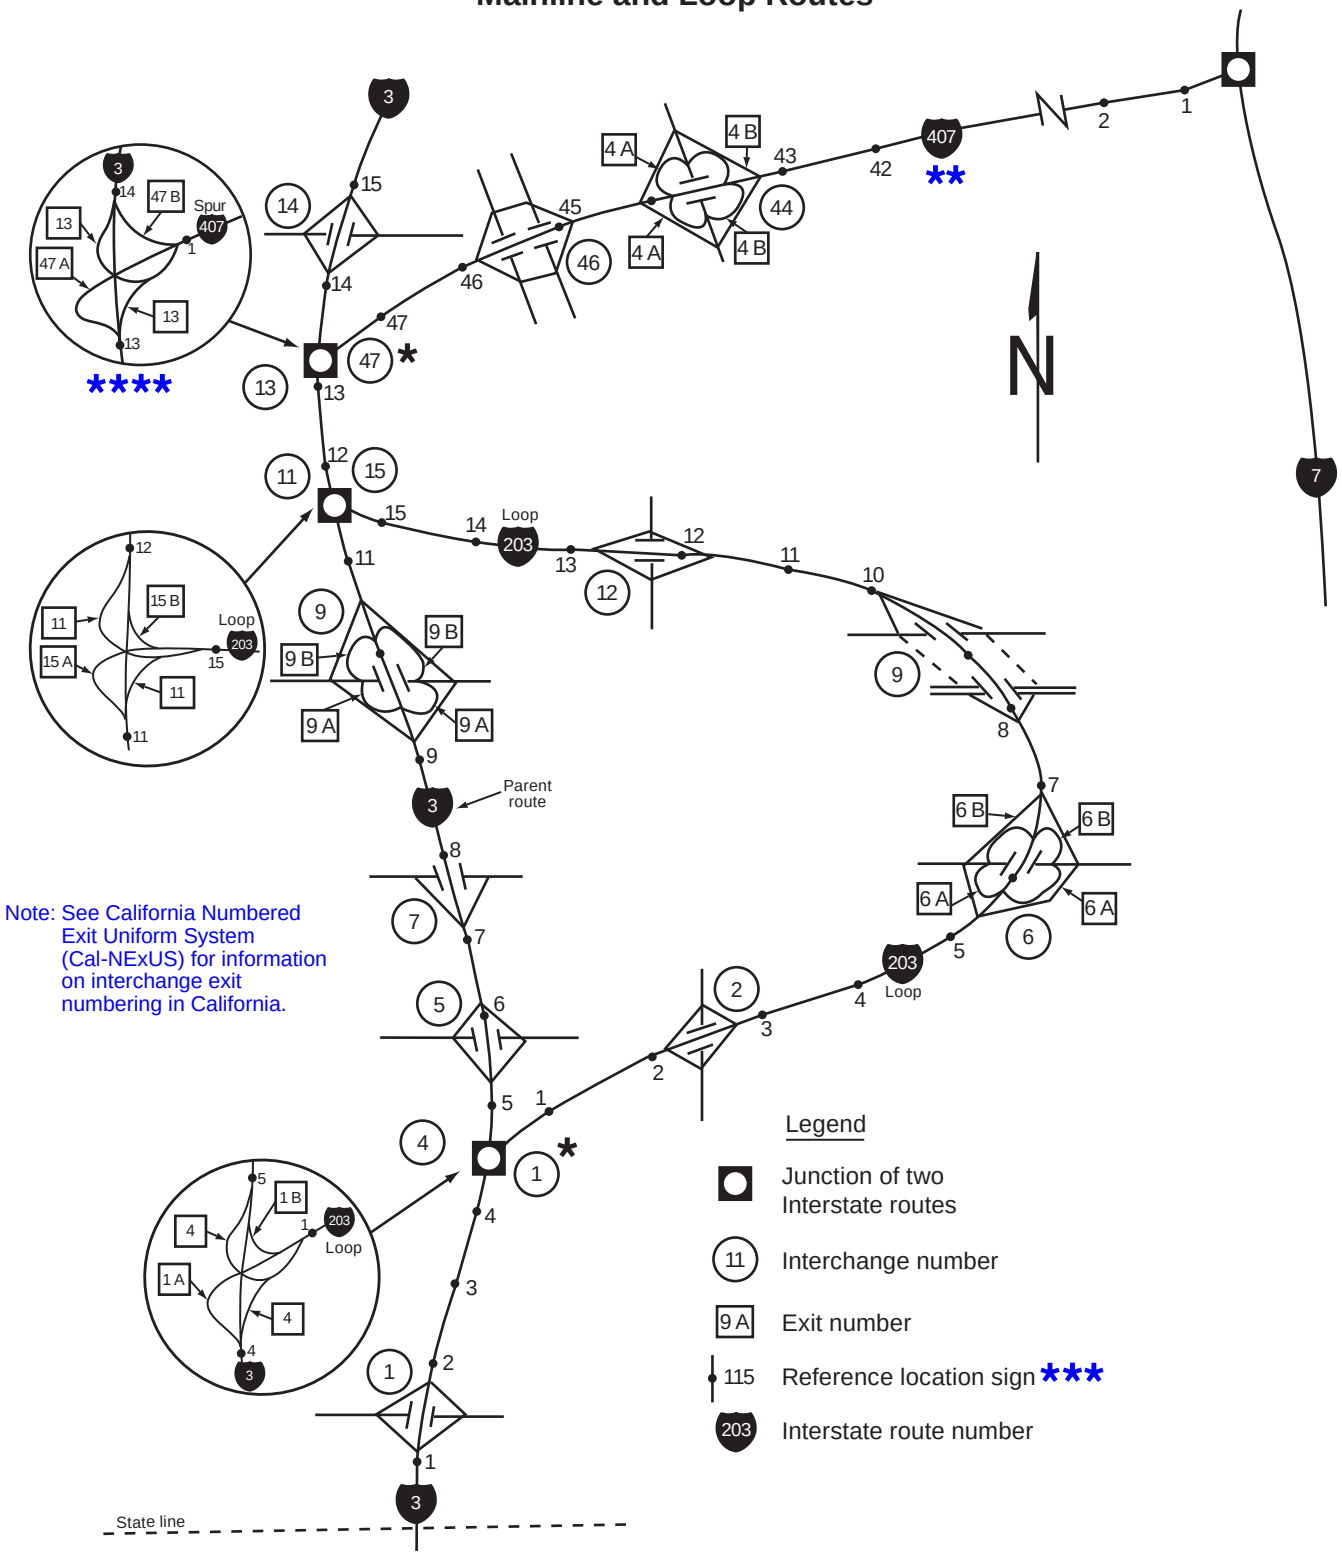



* The freeway/freeway interchange where the beginning of the loop or spur route intersects with the mainline route may be called either Exit 1 or Exit 0 on the loop or spur route.

** Refer to FHWA's List of Known Errors for error in reference location numbers and associated interchange and exit numbers. Refer to Section 1A.04 for more details.

*** Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

**** Refer to FHWA's List of Known Errors for error in inset. Refer to Section 1A.04 for more details.

# Figure 2E-7. Example of Interchange Numbering for Mainline and Spur Routes

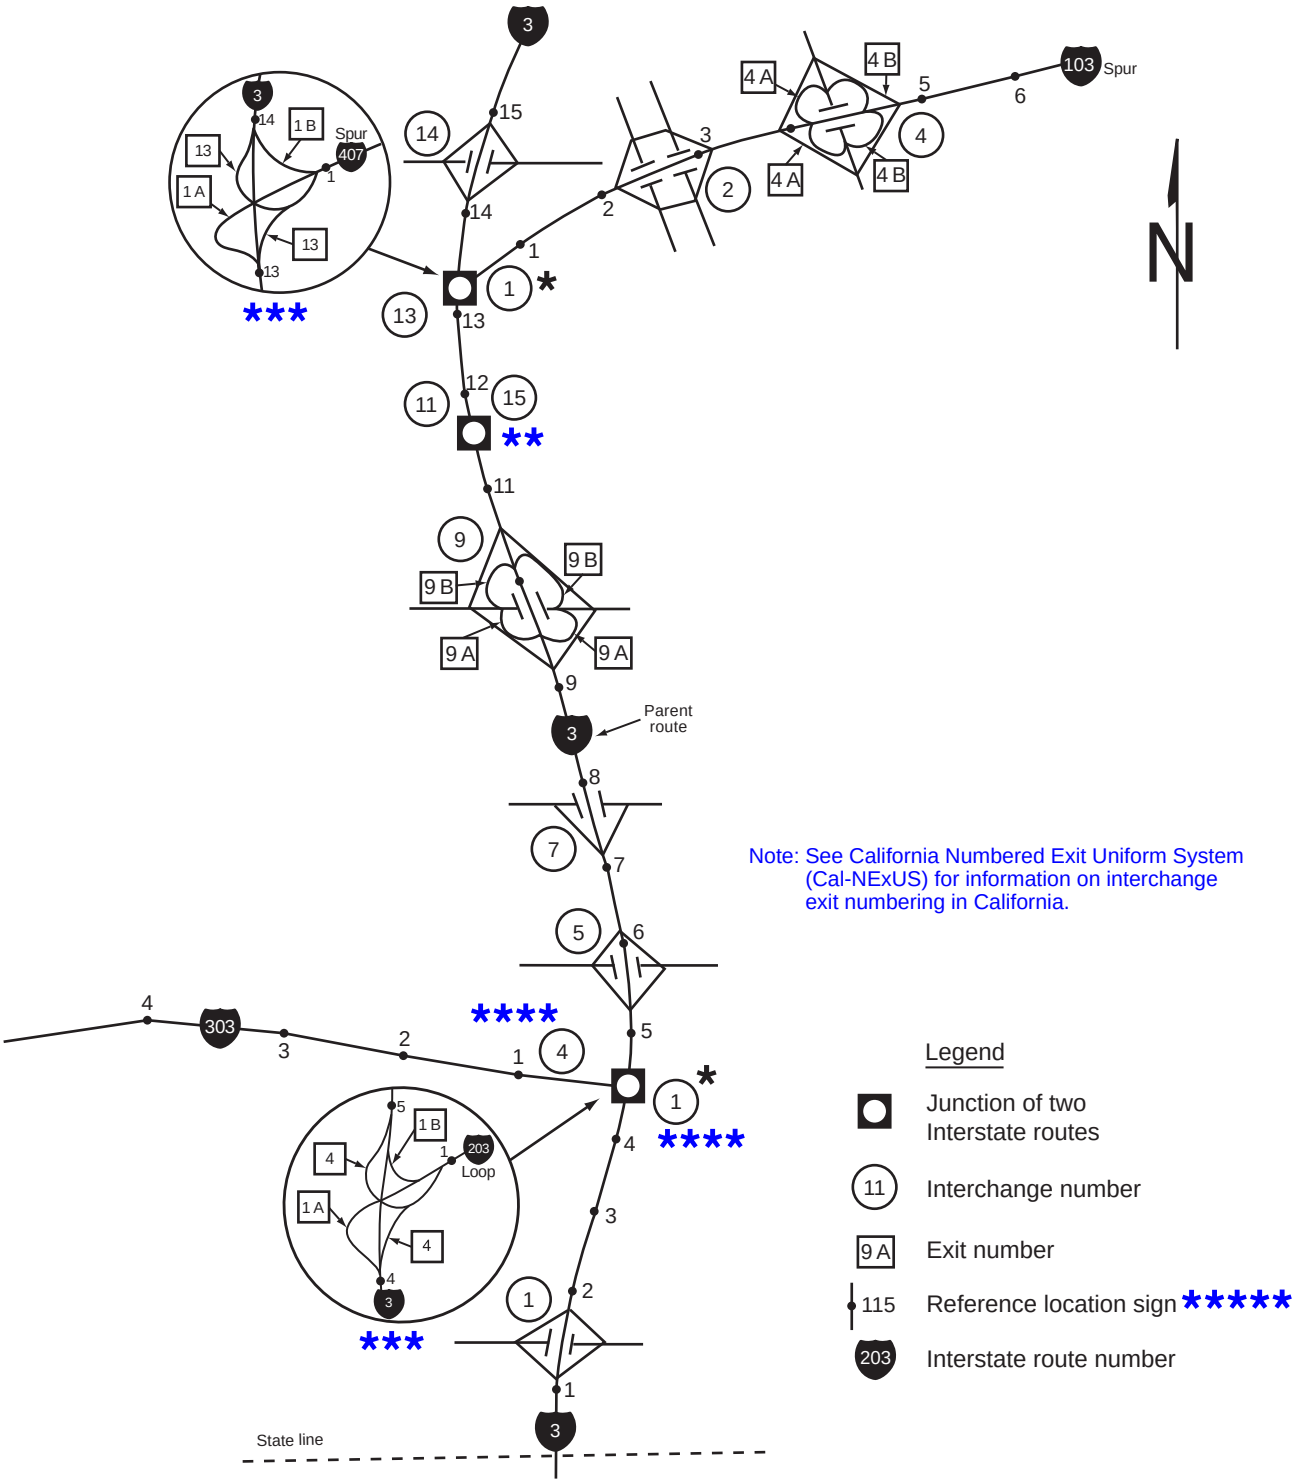


* The freeway/freeway interchange where the beginning of the loop or spur route intersects with the mainline route may be called either Exit 1 or Exit 0 on the loop or spur route.


** Refer to FHWA's List of Known Errors for errors. Refer to Section 1A.04 for more details.

*** Refer to FHWA's List of Known Errors for errors in insets. Refer to Section 1A.04 for more details.

**** Refer to FHWA's List of Known Errors for errors in Interchange numbers. Refer to Section 1A.04 for more details.

***** Refer to FHWA's List of Known Errors for errors in Legend text. Refer to Section 1A.04 for more details.

## Figure 2E-8. Example of Interchange Numbering for Overlapping Routes

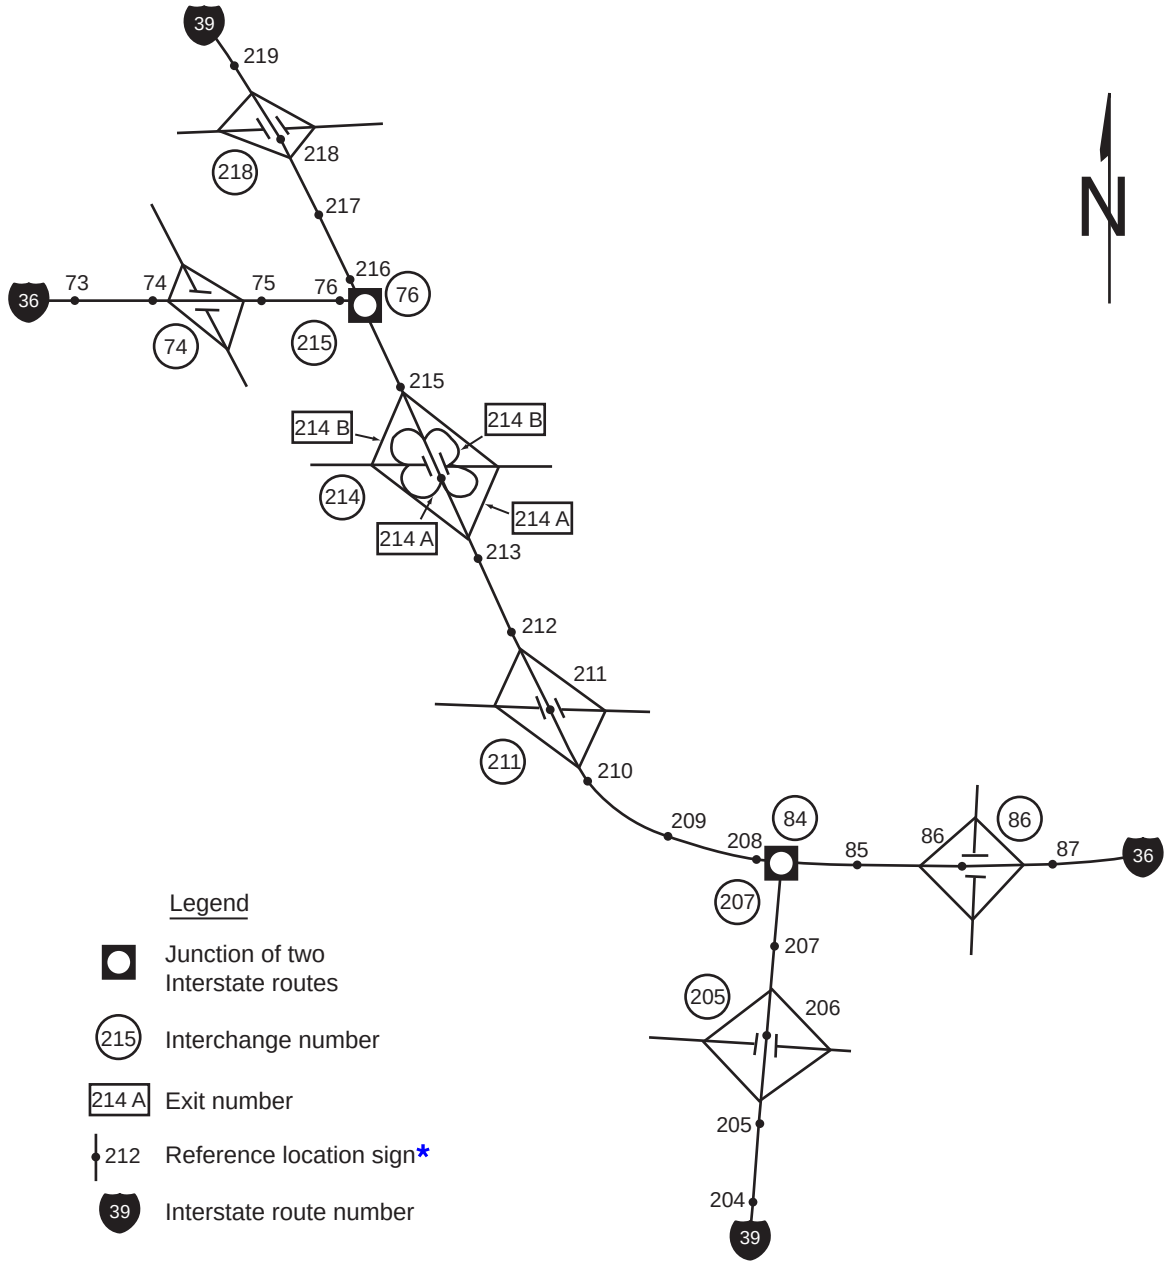


Note: See California Numbered Exit Uniform System (Cal-NExUS) for information on interchange exit numbering in California.

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

## Figure 2E-9. Examples of Interchange Advance Guide Signs, Exit Number Plaques, and LEFT Plaque







Notes:

1. Delete word EXIT(S) if exit number is used.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.










E1-5P




E1-5aP




E1-5bP




E1-5cP




E1-5dP




E1-5eP




E1-5fP




E1-5gP




E1-5hP




E1-5iP




E1-5jP




E1-5kP




E1-5mP

## *Figure 2E-9(CA). California Examples of Interchange Advance Guide Signs, Exit Number Plaques, and LEFT Plaque*




G20-1(CA)




G20-3(CA)




G20-5(CA)




G20-7(CA)




G83-2(CA)




G83-4(CA)




G83-5(CA)




G88-1(CA)




G88-2(CA)

Note: Where exit numbering is used, signs must include the appropriate Exit Number or LEFT Exit Number plaque (refer to Figure 2E-9).

**Figure 2E-10. Example of an Interchange Sequence Sign**




E9-2


---

***Figure 2E-10(CA). California Example of an Interchange Sequence Sign***





G23-6(CA)

## Figure 2E-11. Example of Using a Series of Interchange Sequence Signs for Closely-Spaced Interchanges

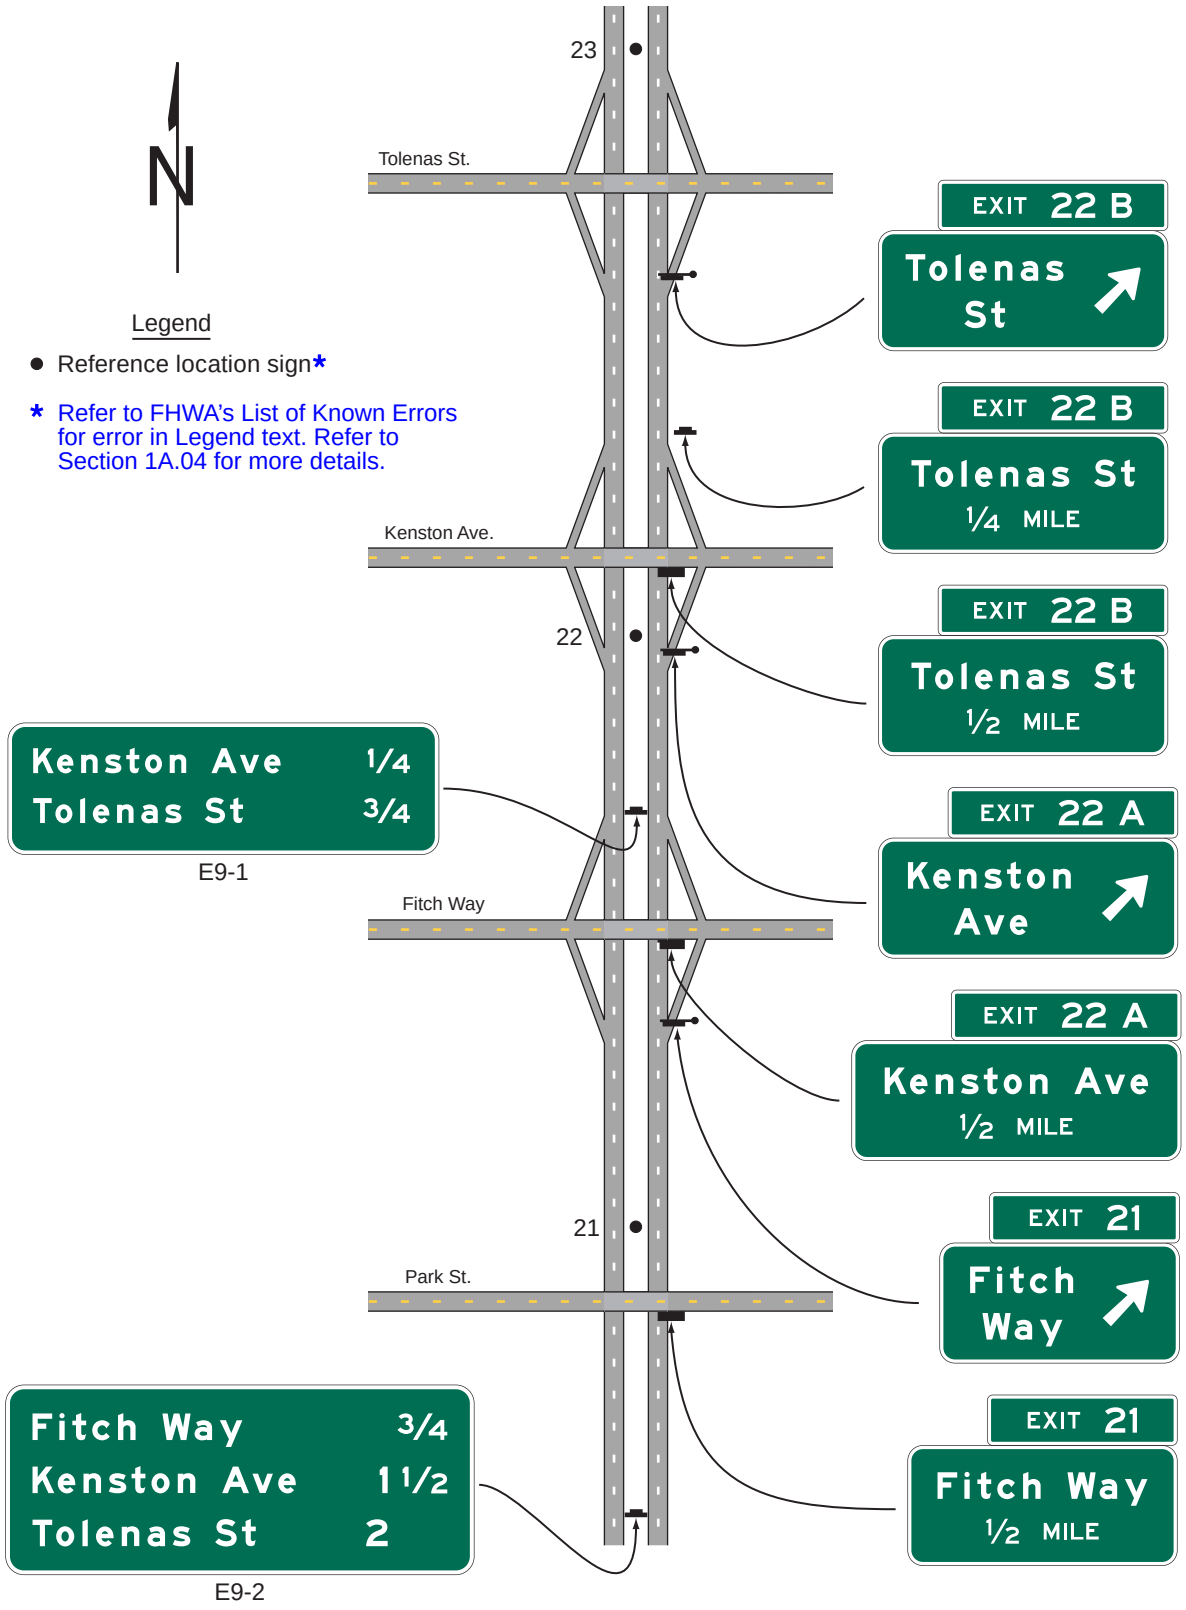

## Figure 2E-12. Examples of Exit Direction Signs

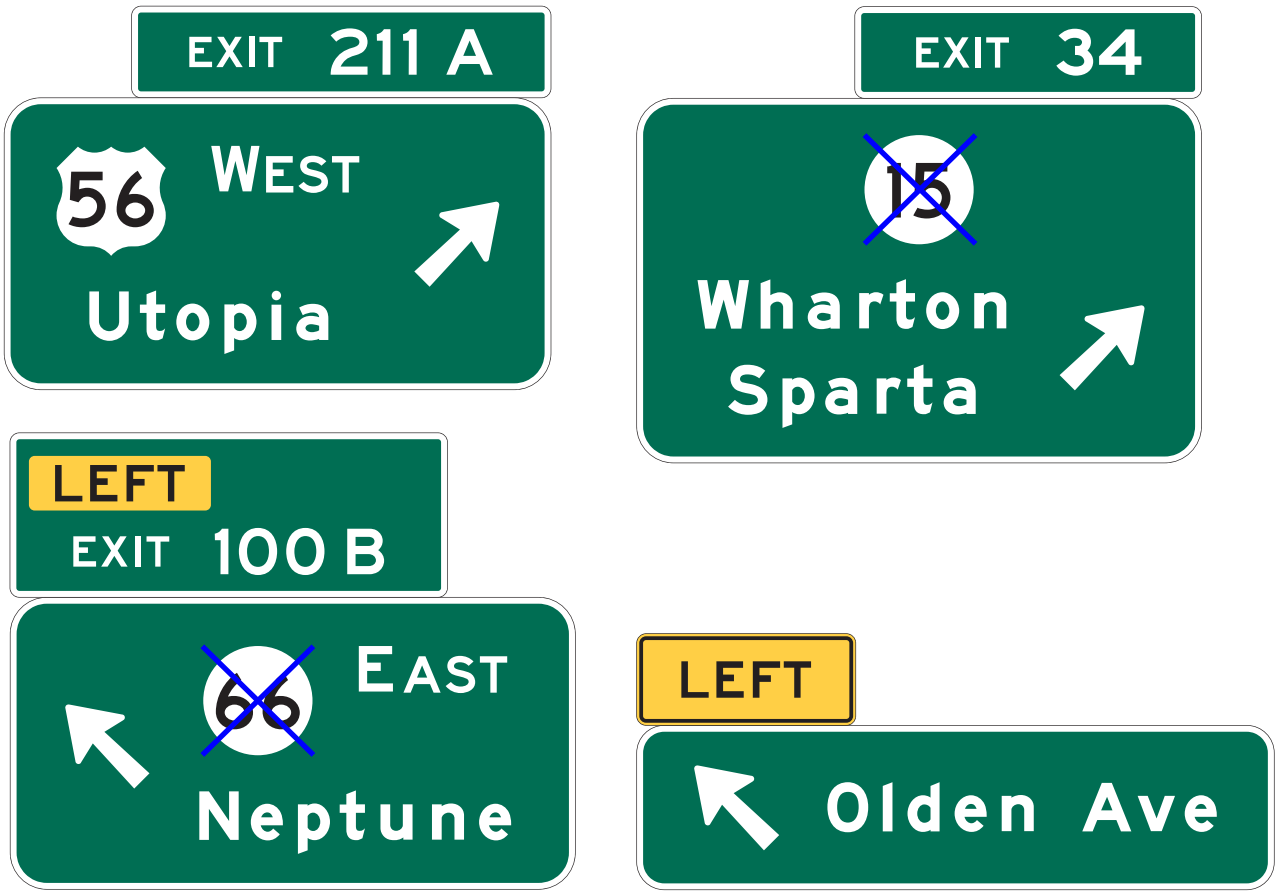


Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker

## *Figure 2E-12(CA). California Examples of Interchange Exit Direction Signs*




G85-2(CA)




G85-3(CA)




G85-4(CA)




G85-5(CA)




G85-6(CA)




G85-11(CA)





G88-13(CA)





G88-14(CA)

Note: Where exit numbering is used, signs must include the appropriate Exit Number or LEFT Exit Number plaque (refer to Figure 2E-9).

## Figure 2E-13. Exit Direction Sign Placement

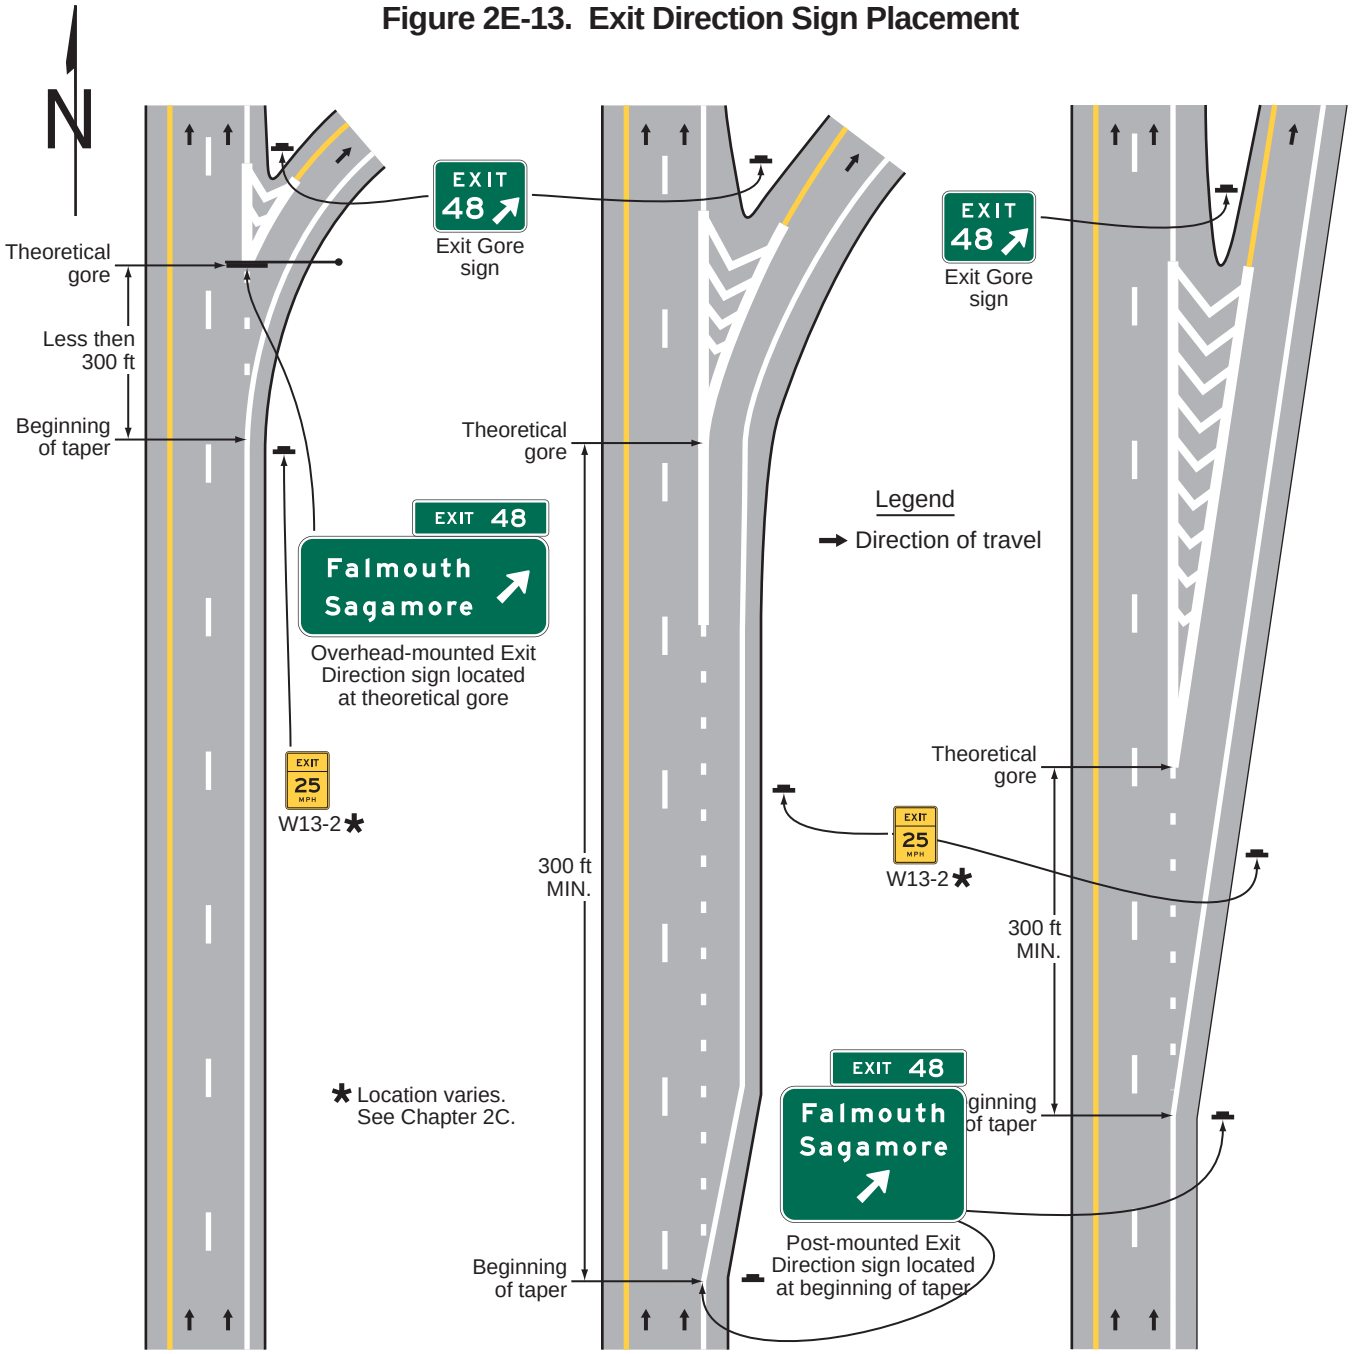

## Figure 2E-14. Examples of Exit Direction Signs with Advisory Speed Panels and Flashing Yellow Beacons

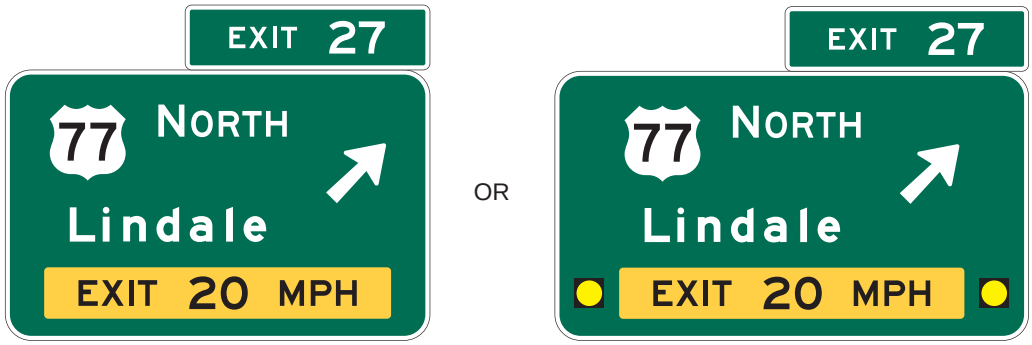



Exit Direction sign with E13-2 sign panel

Exit Direction sign with E13-2 sign panel and flashing yellow beacons

Note: "RAMP" may be used in place of "EXIT" on the E13-2 sign panel, where applicable.

## Figure 2E-15. Exit Gore Signs and Plaques

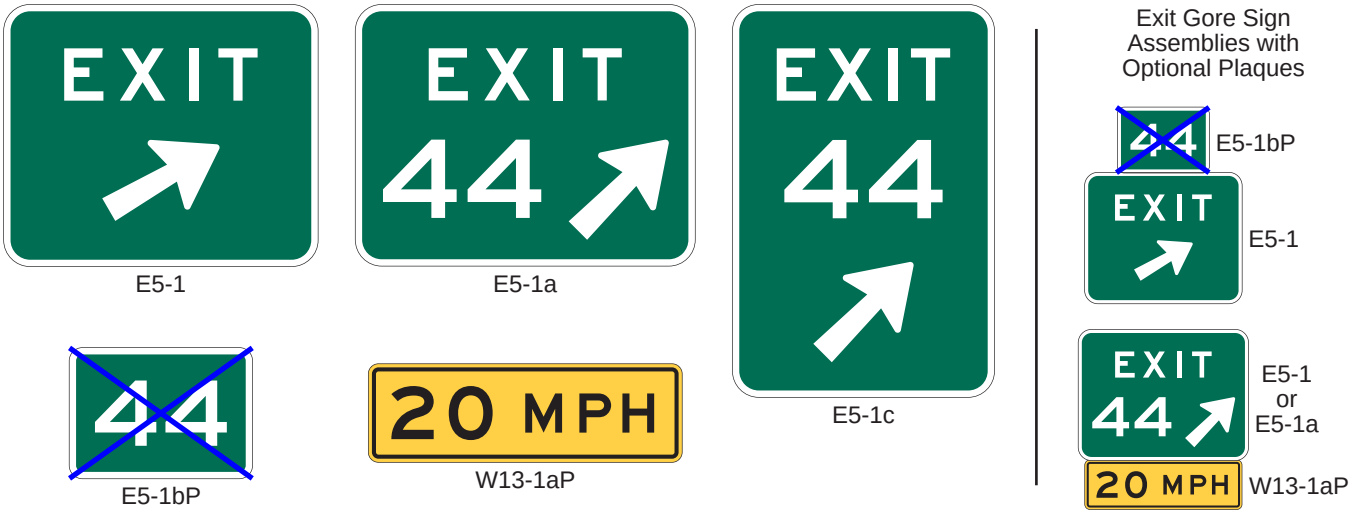

## Figure 2E-16. Examples of Pull-Through Signs




E6-1




E6-1a

Note: The E6-2 and E6-2a sign designs correspond to the E6-1 and E6-1a sign designs, respectively, but with the addition of a down arrow on each.

---

## *Figure 2E-16(CA). California Examples of Pull-Through Signs*




G24-1(CA)




G24-3(CA)




G24-4(CA)




G24-5(CA)





G24-6(CA)





G24-7(CA)


## Figure 2E-17. EXIT ONLY and LEFT Sign Panels

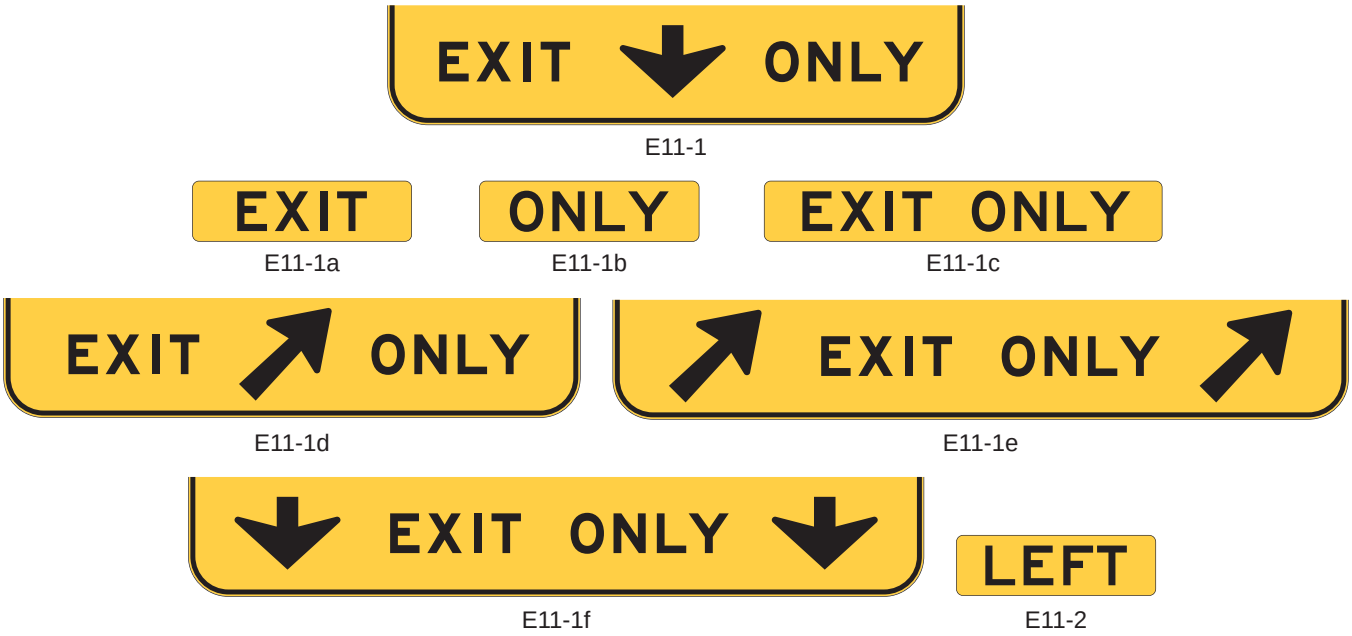

## Figure 2E-18. Guide Signs for a Single-Lane Exit to the Left with a Dropped Lane

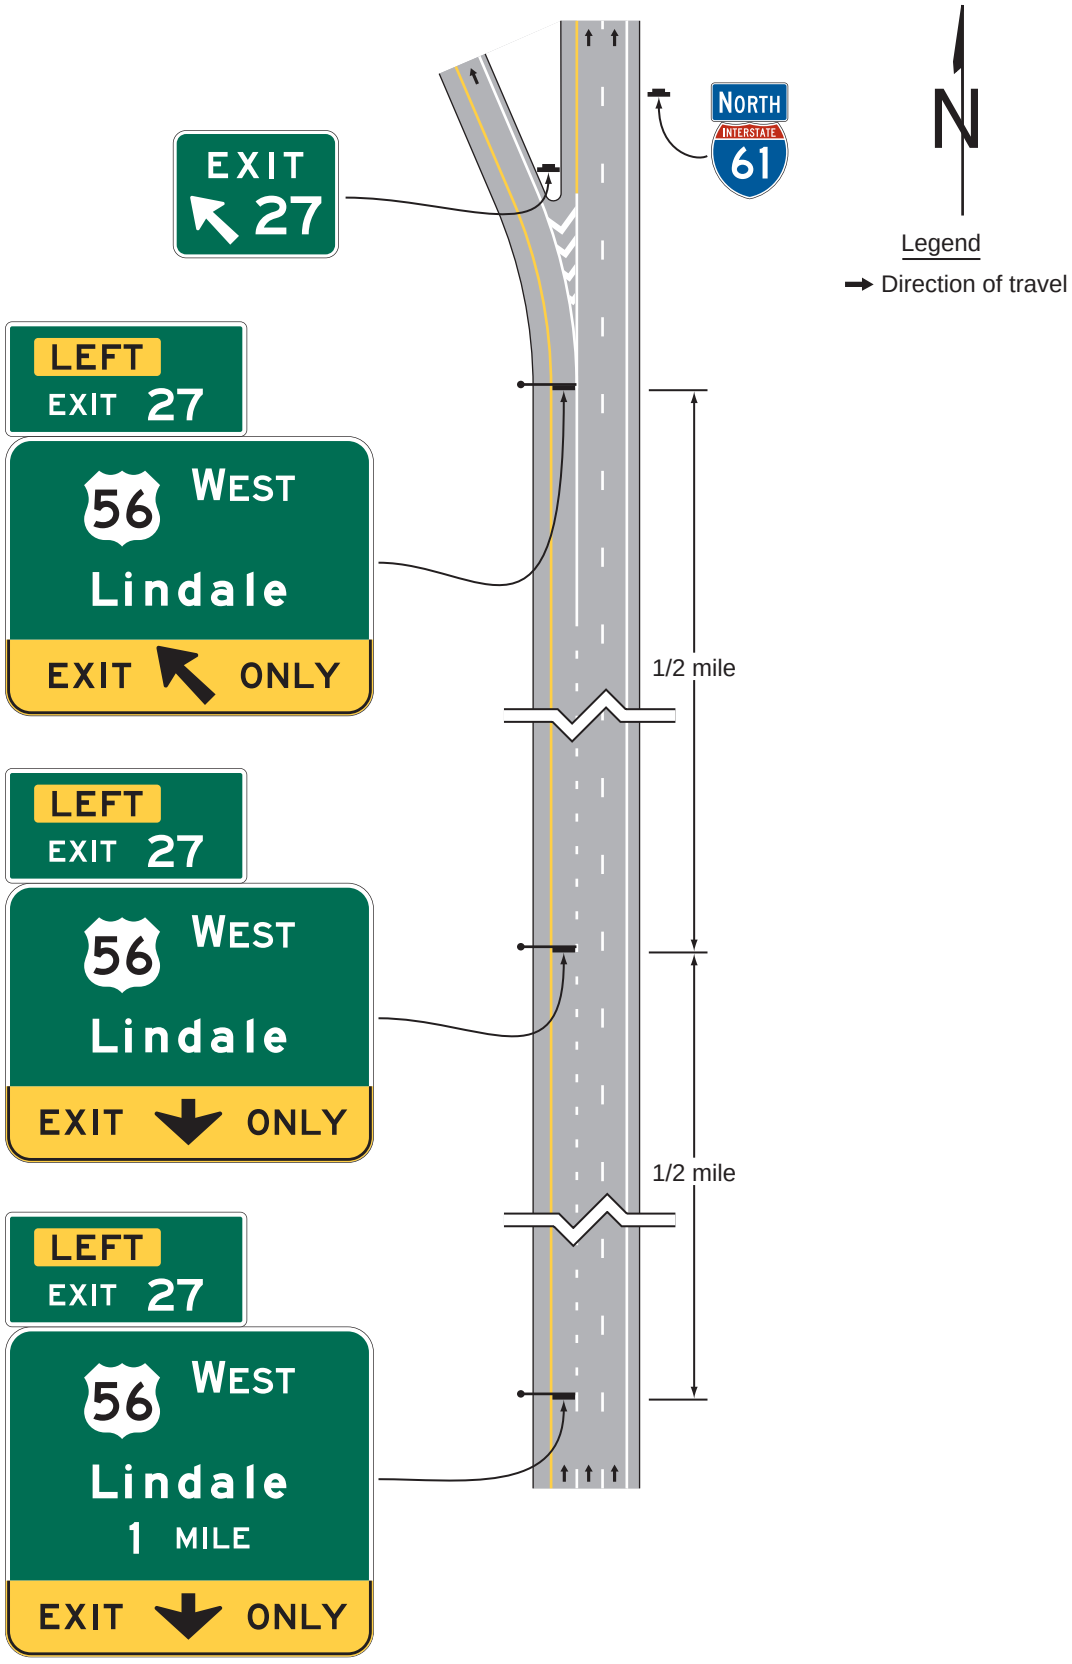


## Figure 2E-19. Guide Signs for a Single-Lane Exit to the Right with a Dropped Lane

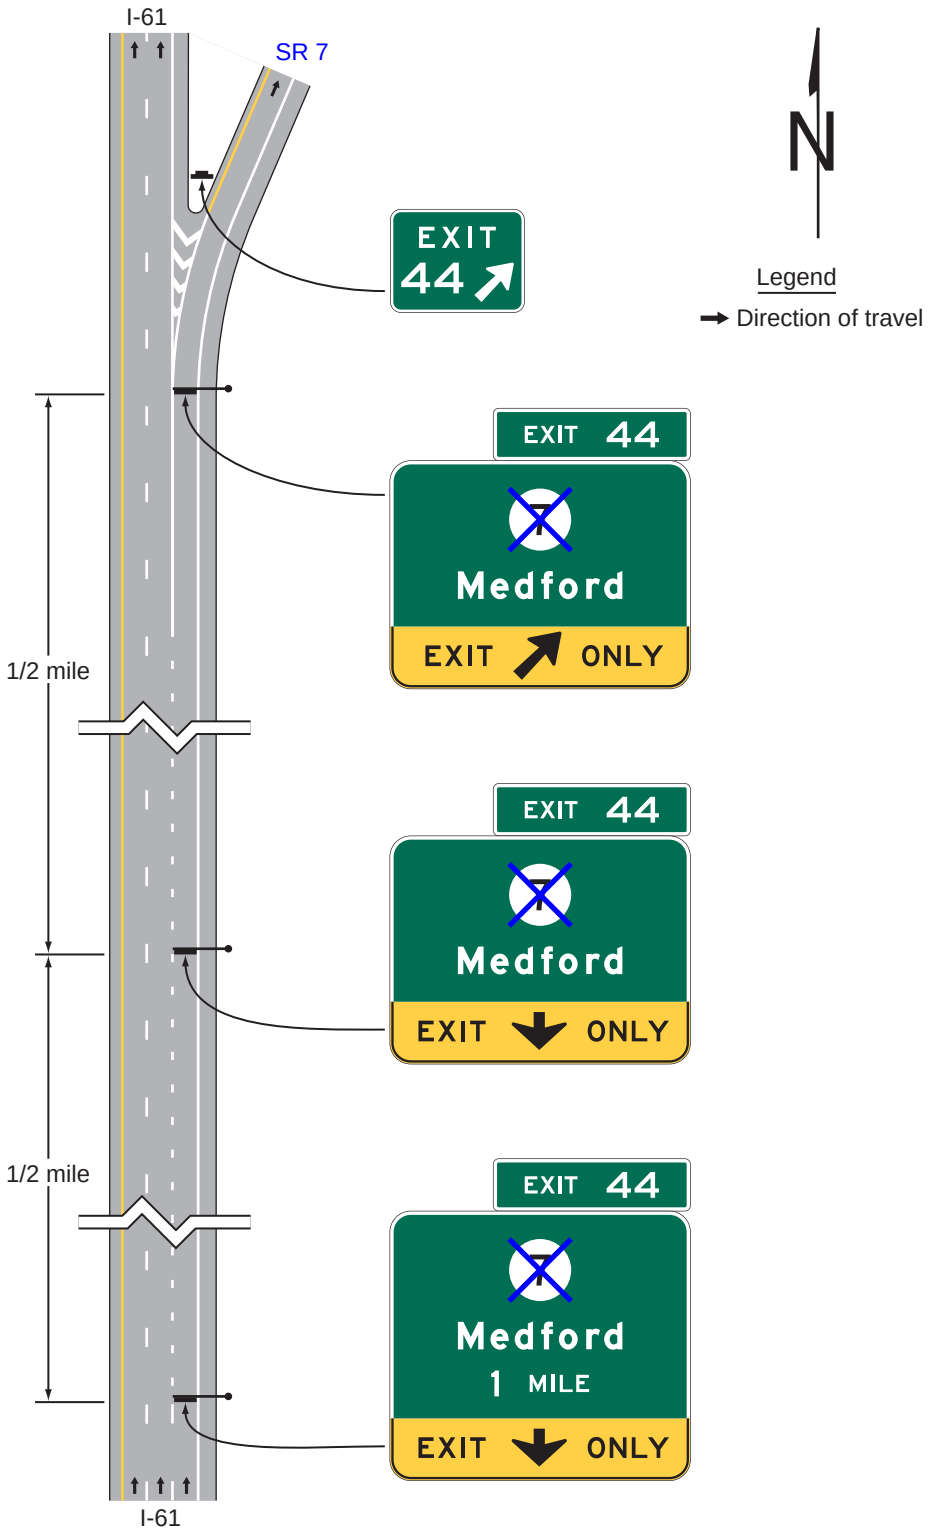


Notes:

1. Refer to Figures 2D-4 and 2D-4(CA) for applicable route shield option for use on guide signs.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.

## Figure 2E-20. Example of Overhead Guide Signs for a Dropped Auxiliary Lane between Separate Interchange Ramps

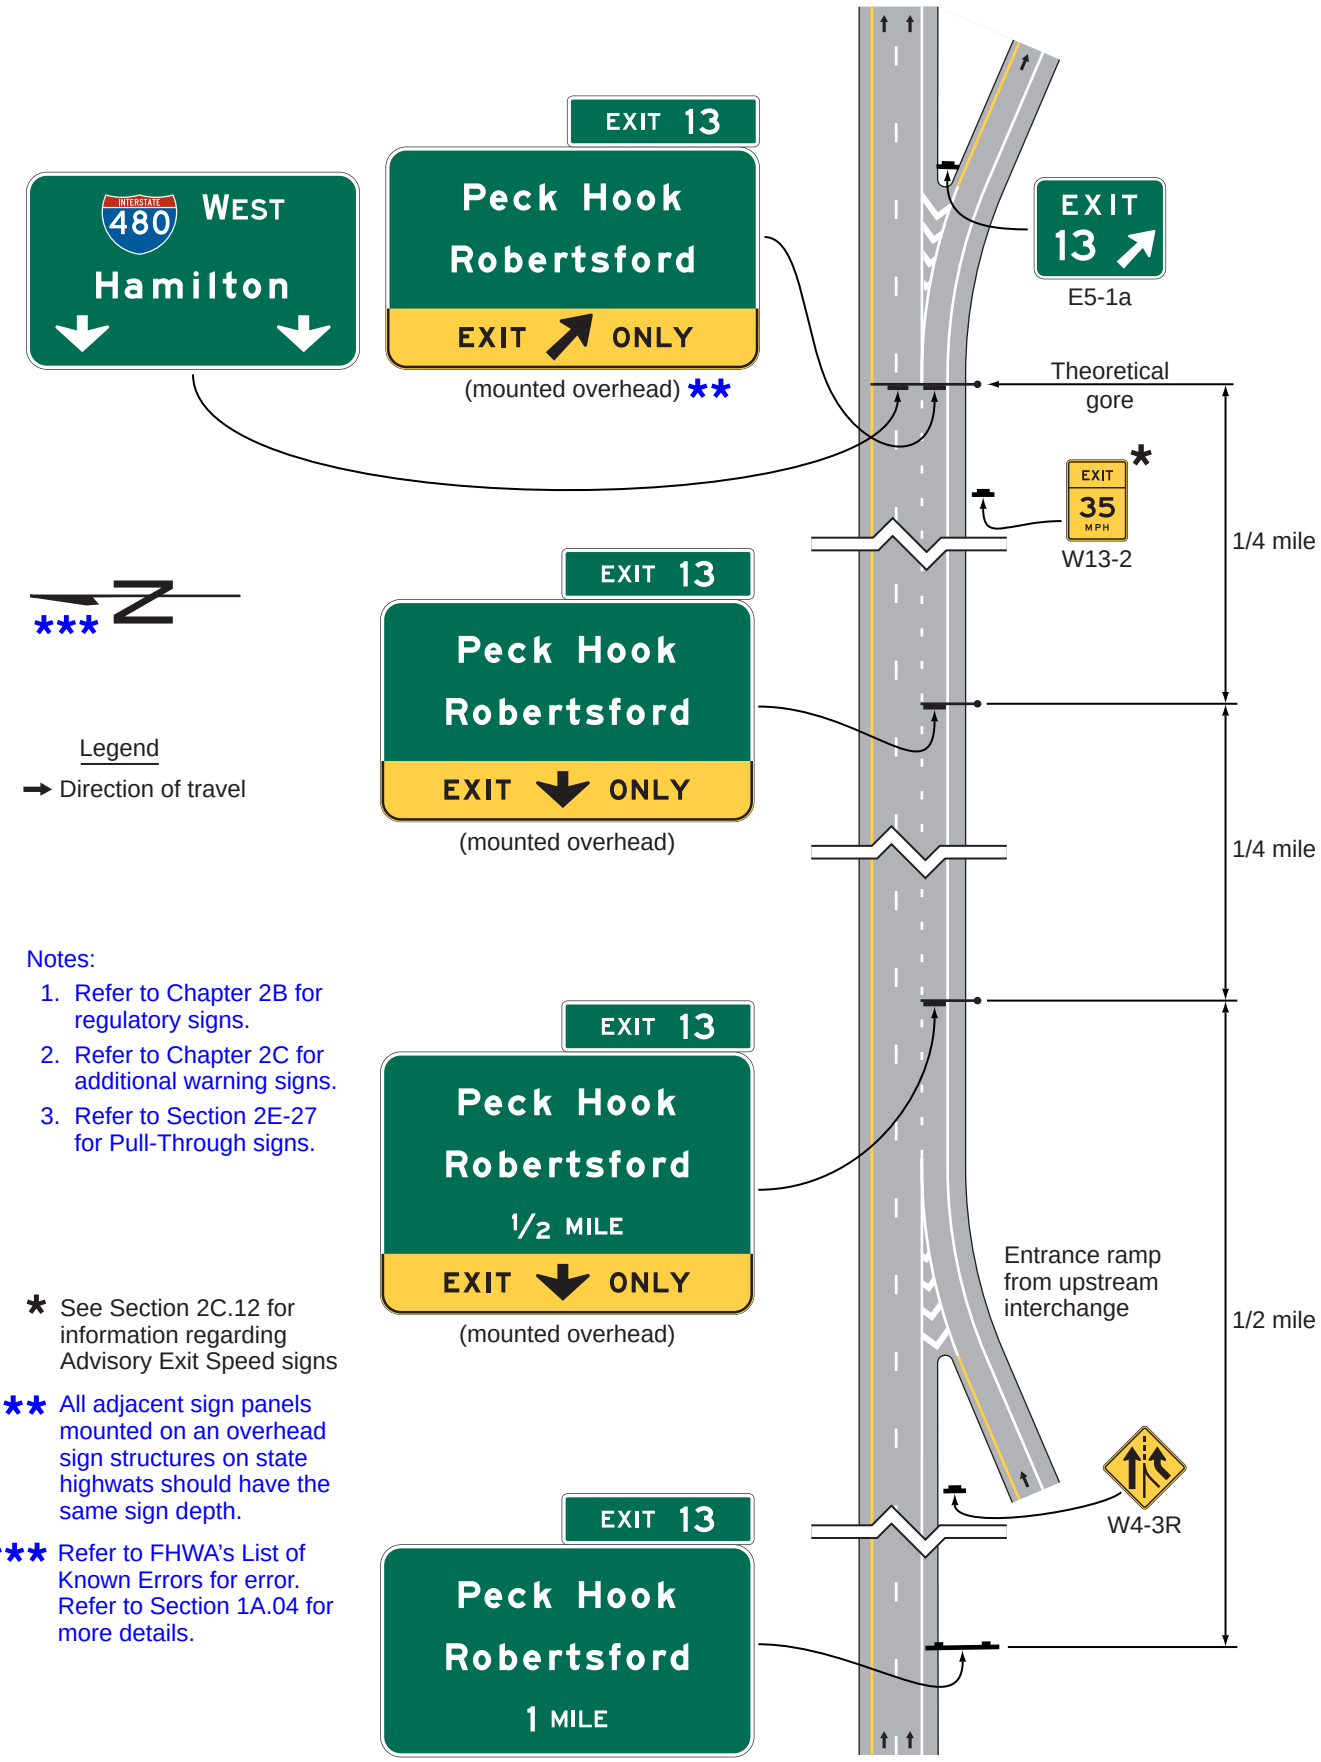


Notes:


1. Refer to Chapter 2B for regulatory signs.
2. Refer to Chapter 2C for additional warning signs.
3. Refer to Section 2E-27 for Pull-Through signs.

* See Section 2C.12 for information regarding Advisory Exit Speed signs

** All adjacent sign panels mounted on an overhead sign structures on state highwats should have the same sign depth.

*** Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.


## Figure 2E-21. Example of Post-Mounted Advance Guide and Supplemental Warning Signs for a Dropped Auxiliary Lane between Separate Interchange Ramps

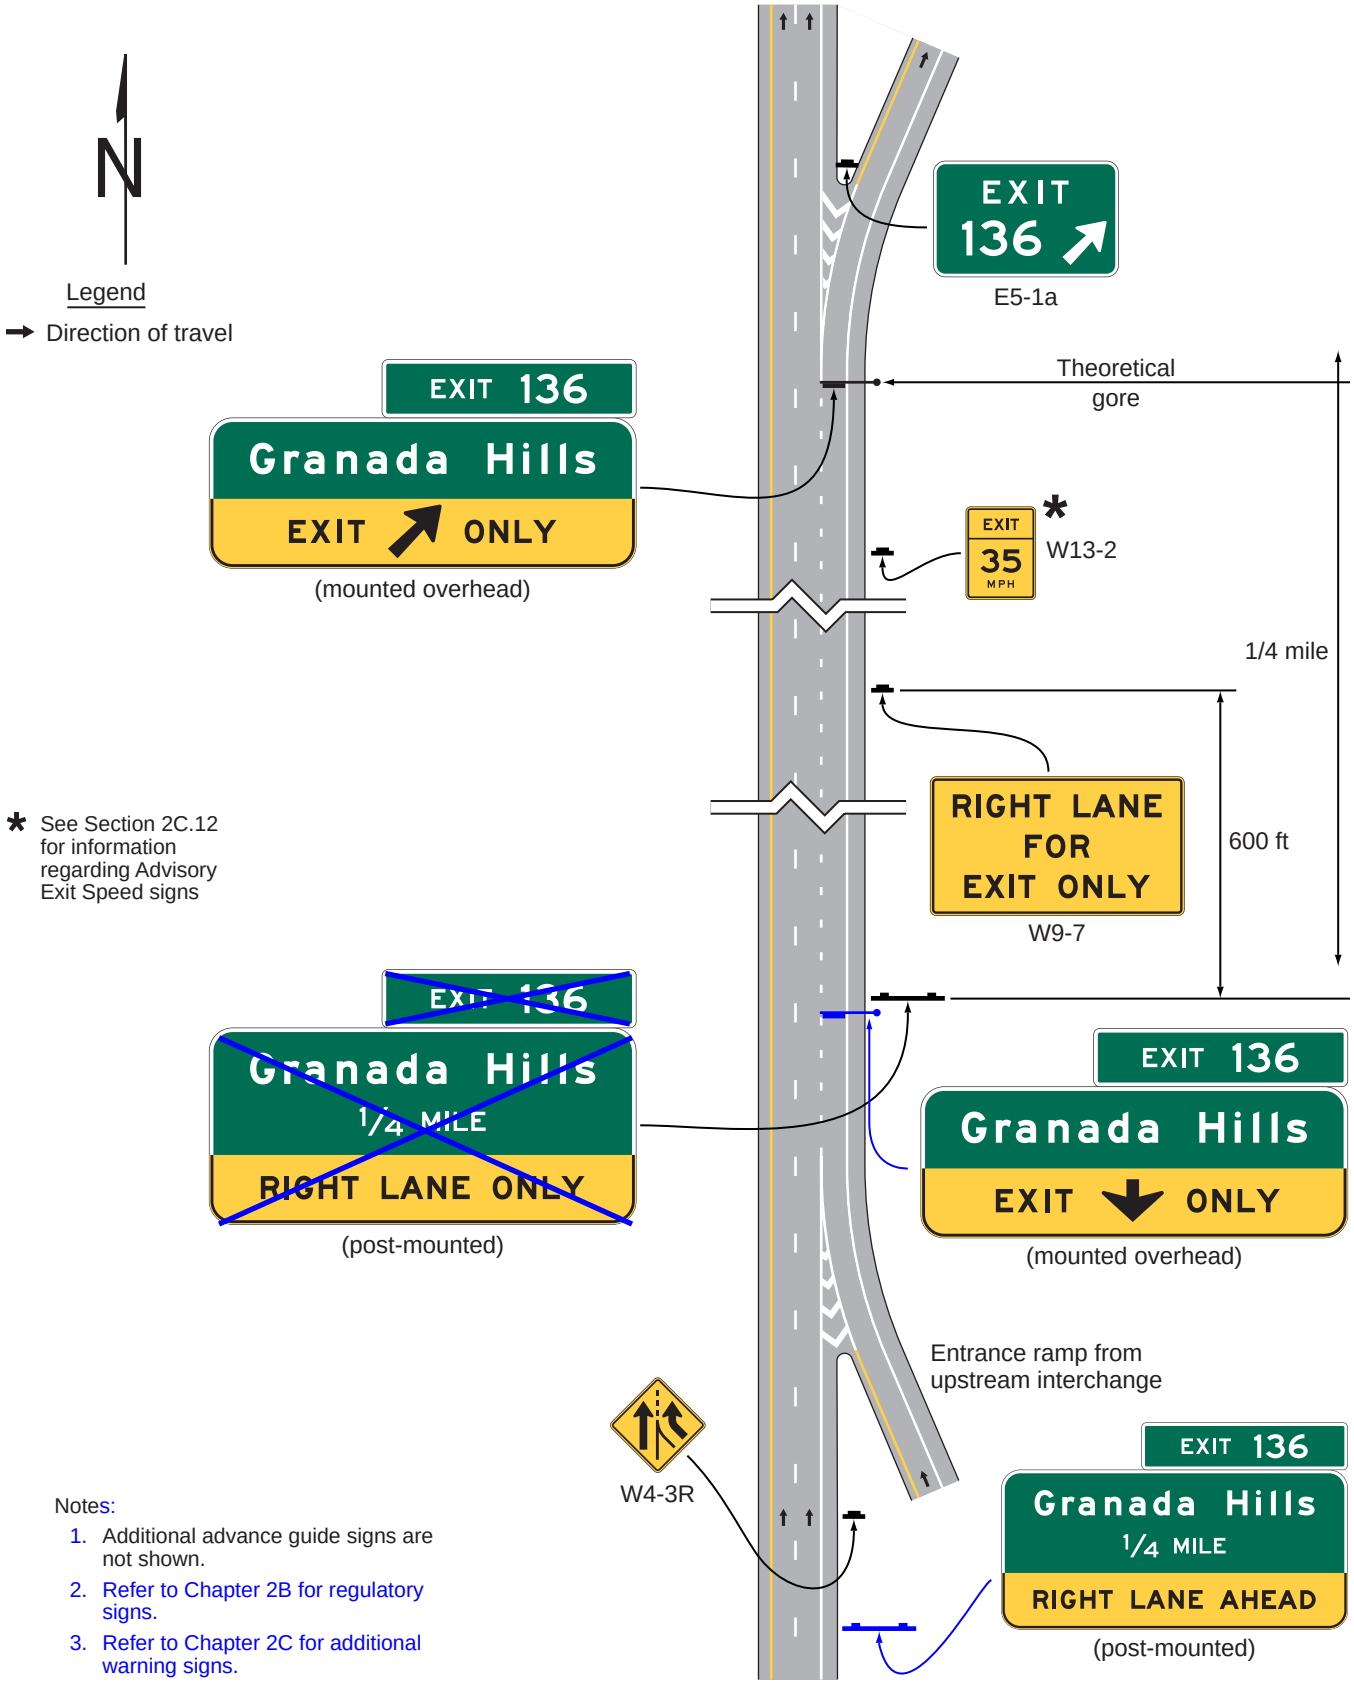


Notes:

1. Additional advance guide signs are not shown.
2. Refer to Chapter 2B for regulatory signs.
3. Refer to Chapter 2C for additional warning signs.


## Figure 2E-22. Example of Guide Signs for an Auxiliary Lane of at Least One-Half Mile in Length

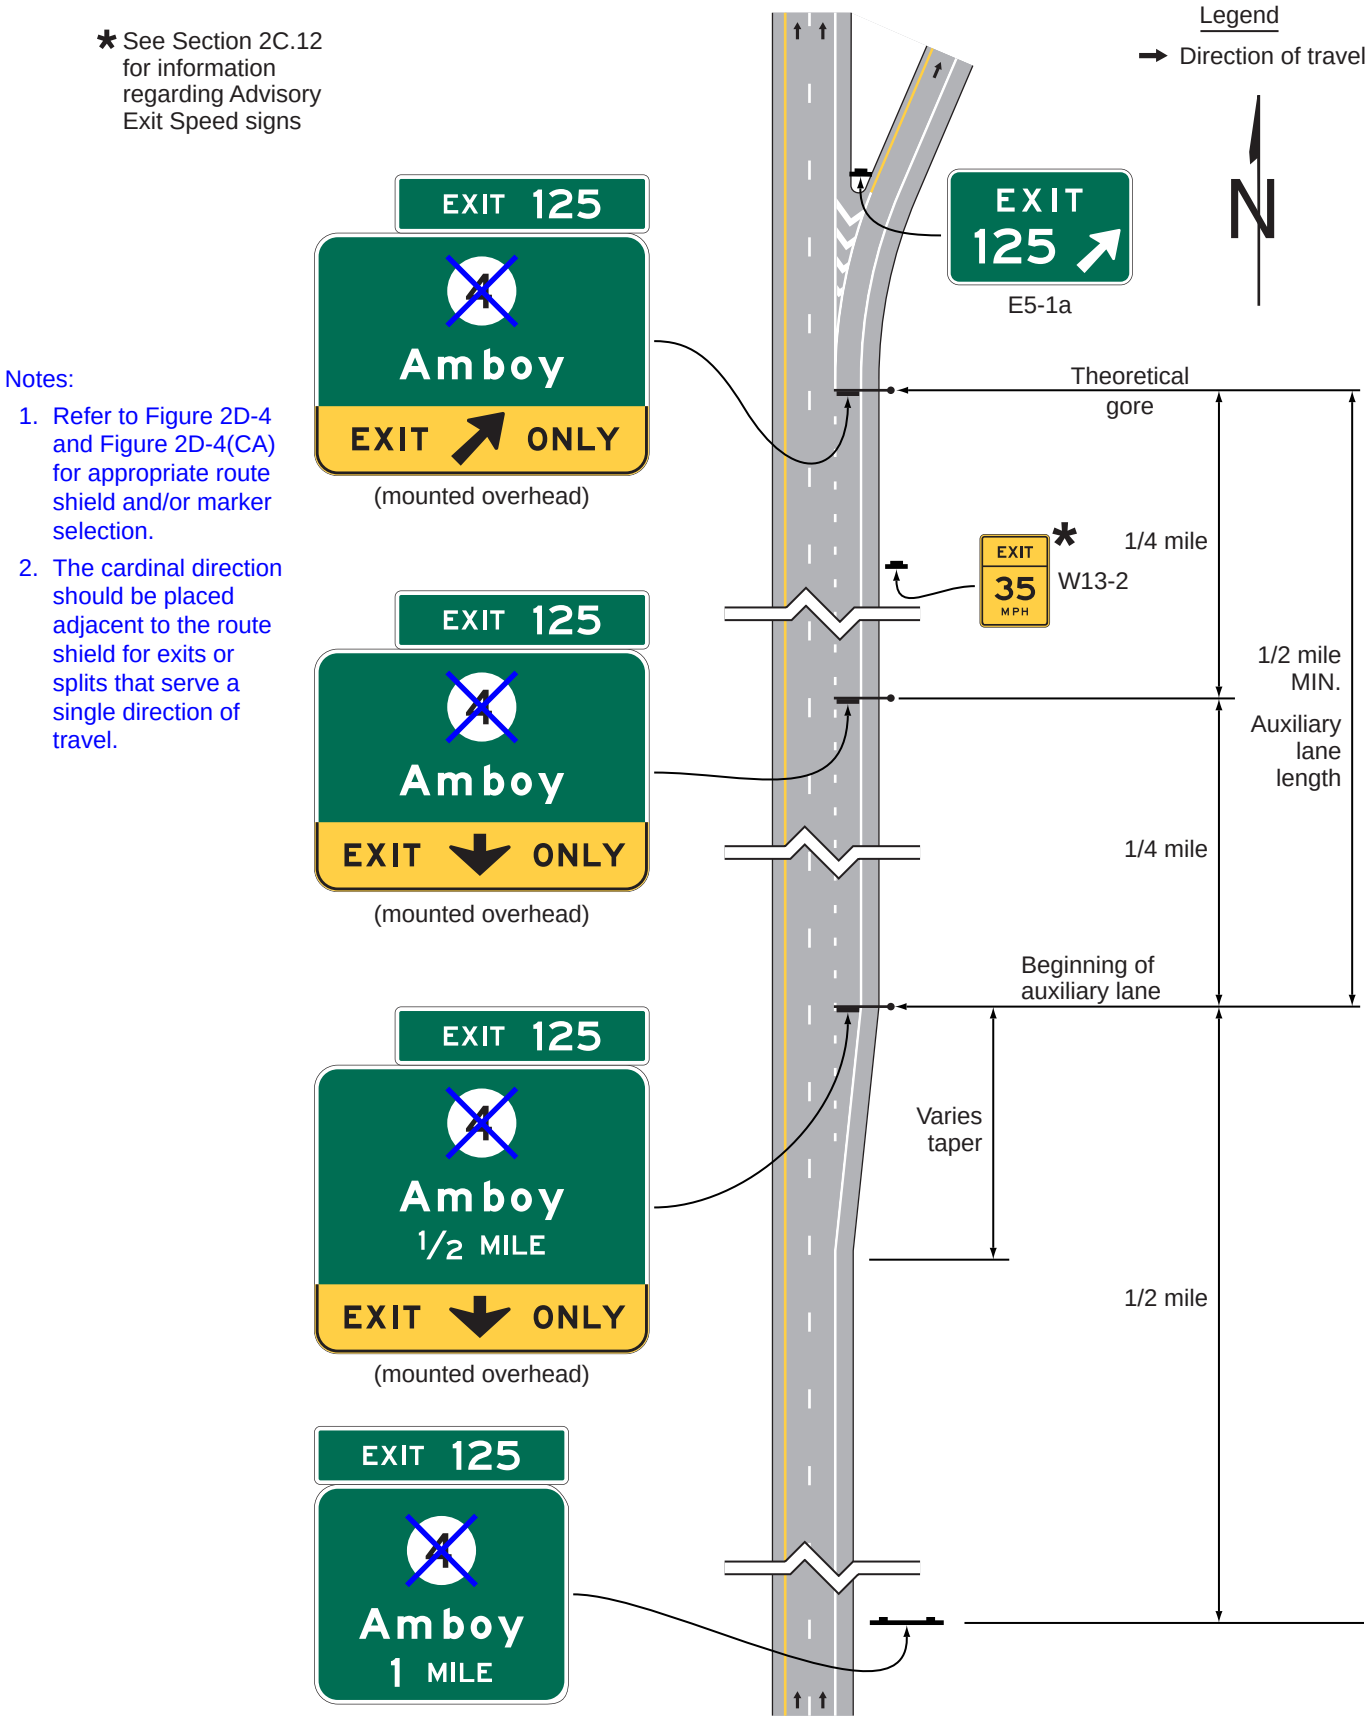


Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.

## Figure 2E-23. Examples of Signing for Mainline Terminations within an Interchange

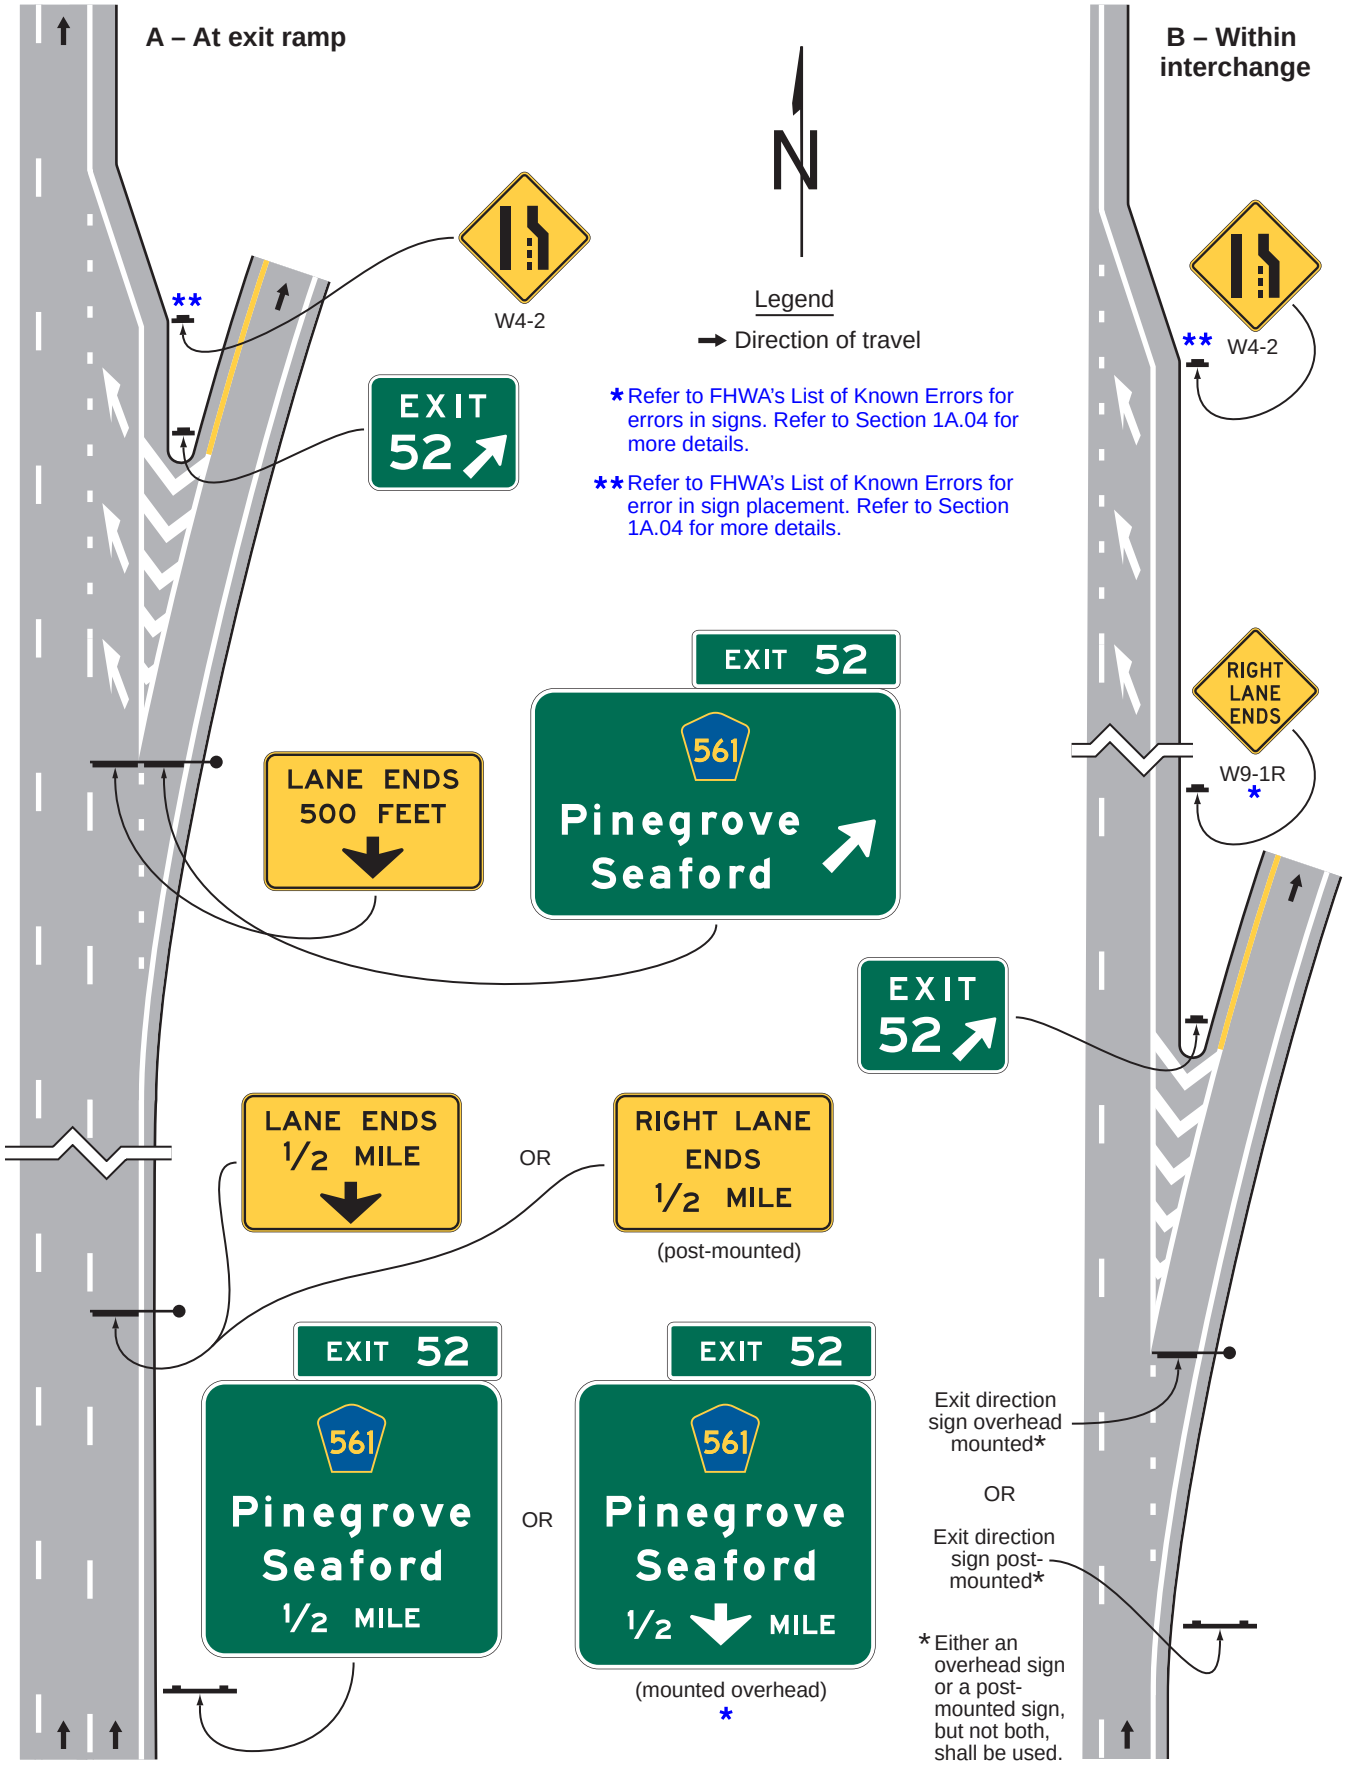

## Figure 2E-24. Example of Signing for an Intermediate Interchange within a Major Interchange



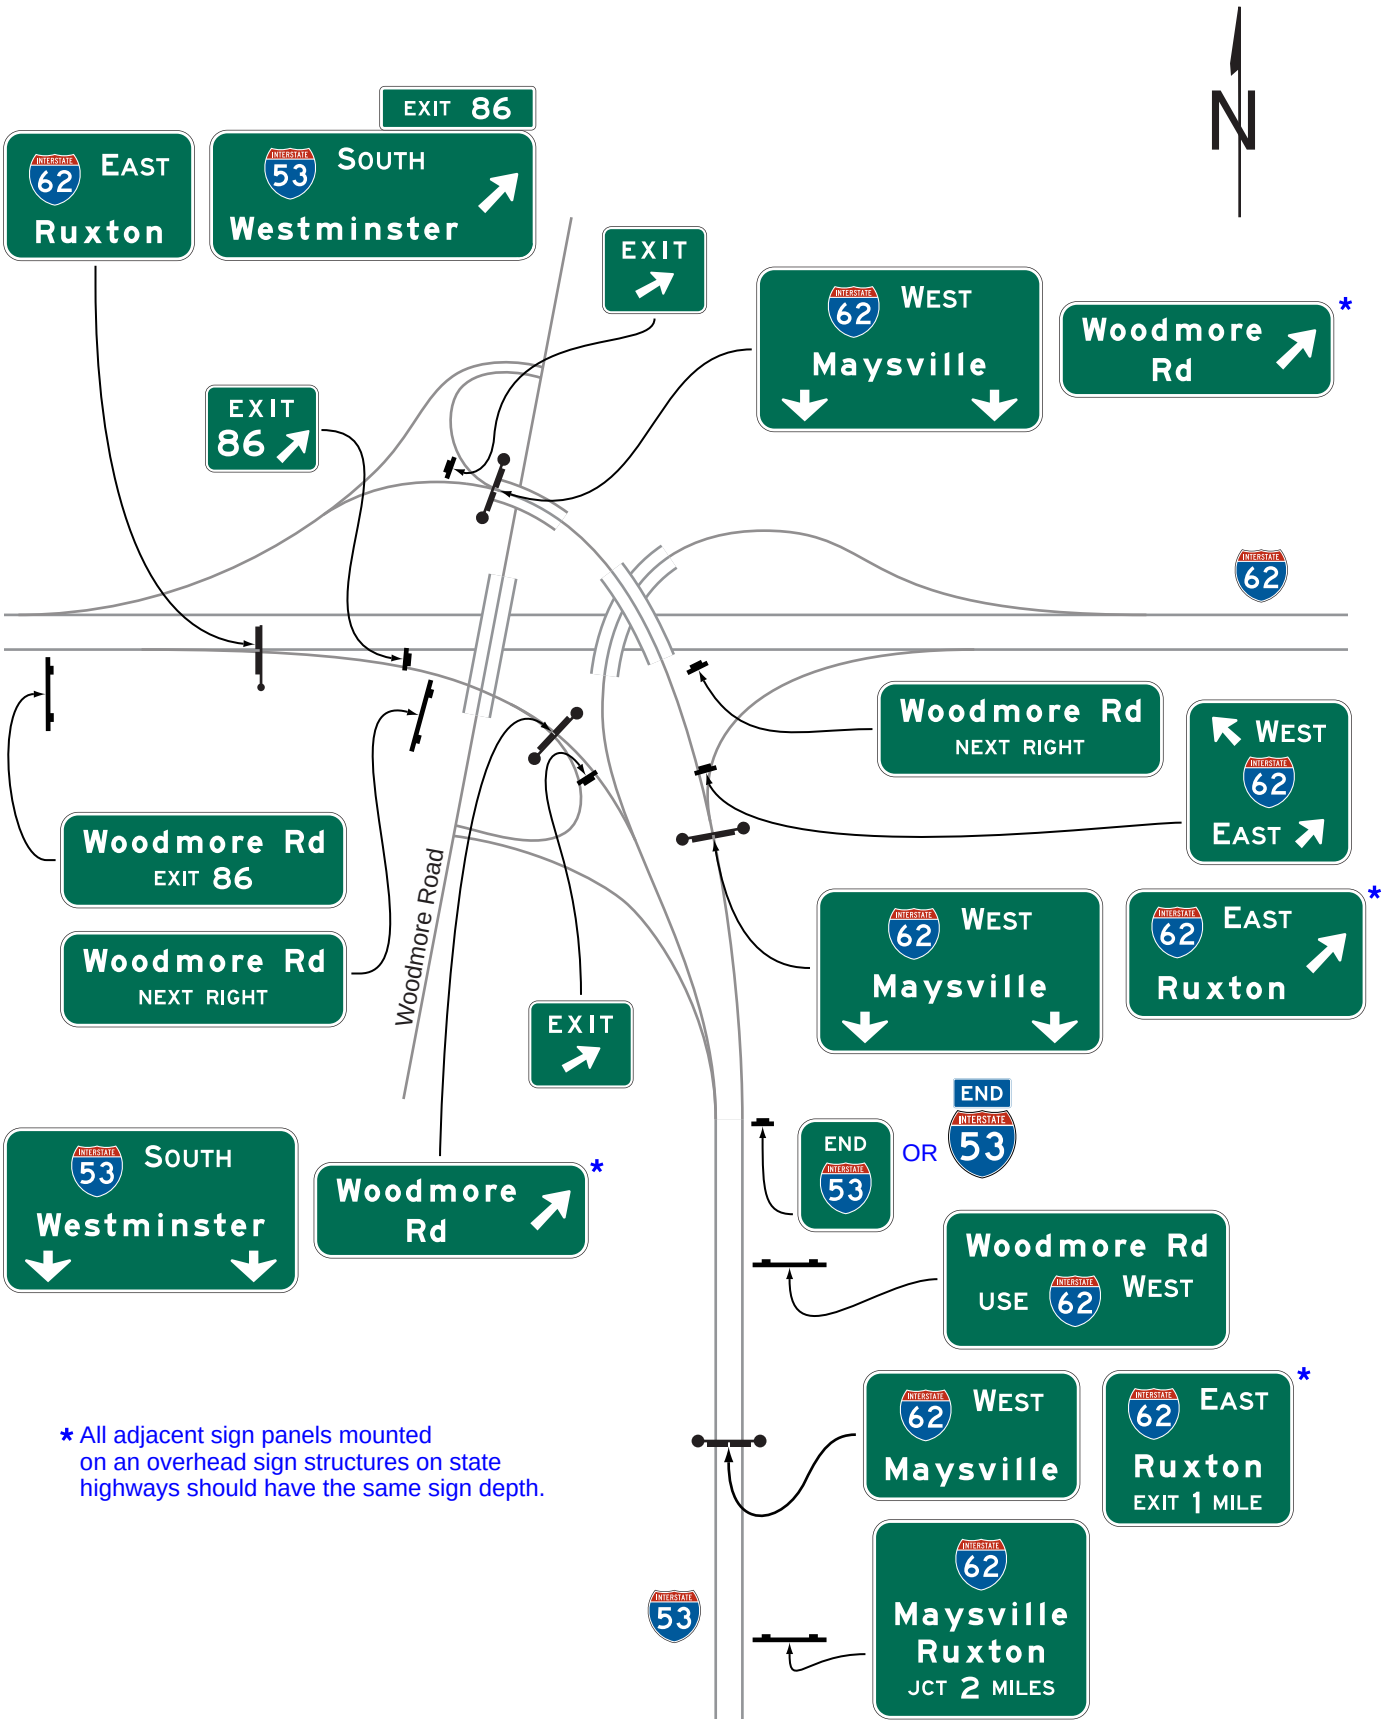


**Figure 2E-25. Examples of Signing for an Interchange Exit Ramp with a Downstream Split** (Sheet 1 of 2)

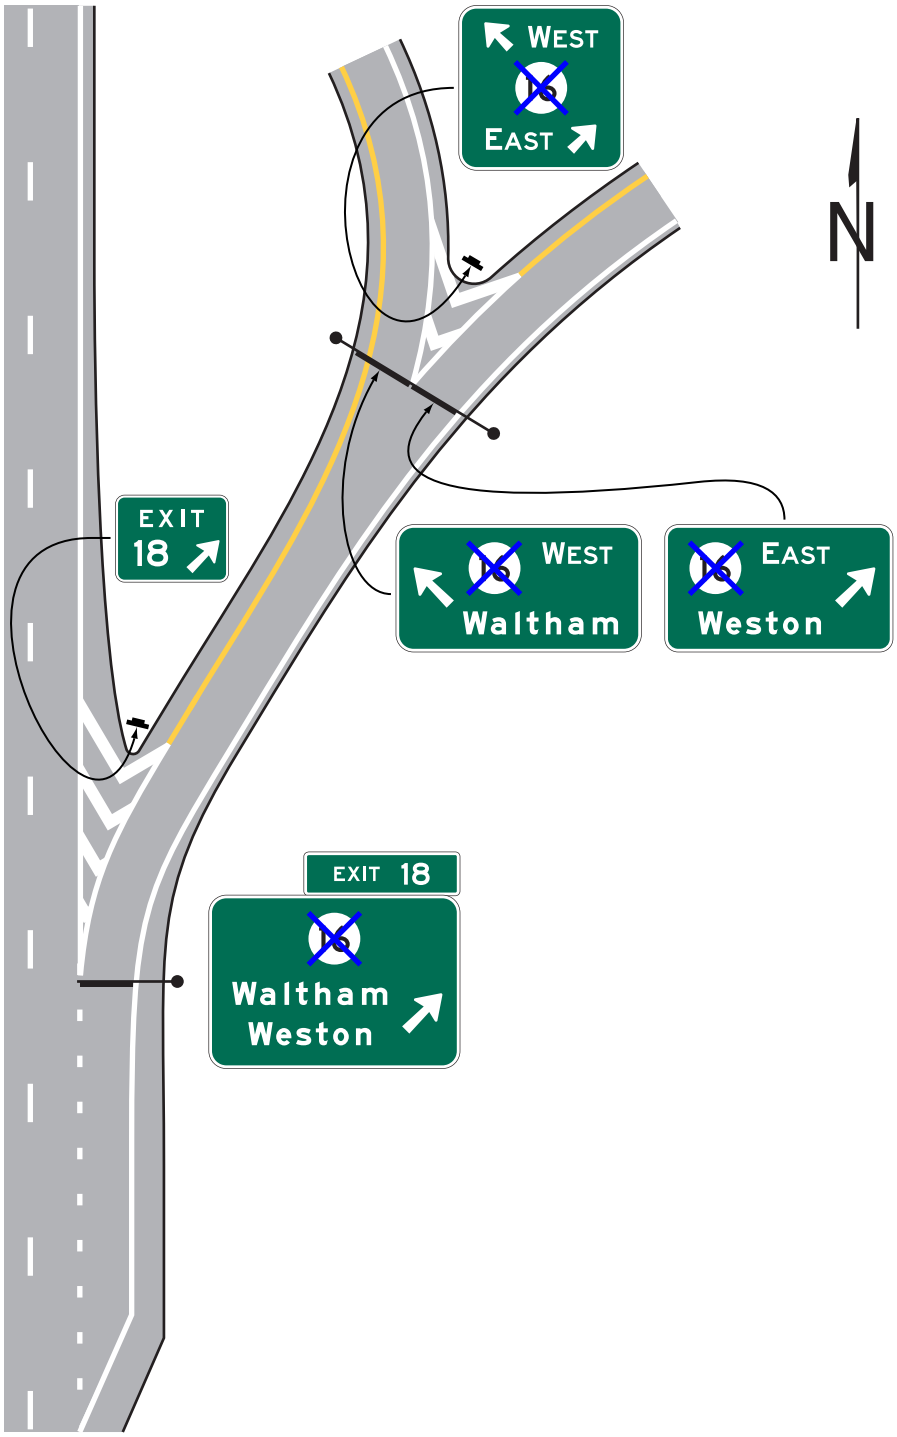


Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker

## Figure 2E-25. Examples of Signing for an Interchange Exit Ramp with a Downstream Split (Sheet 2 of 2)

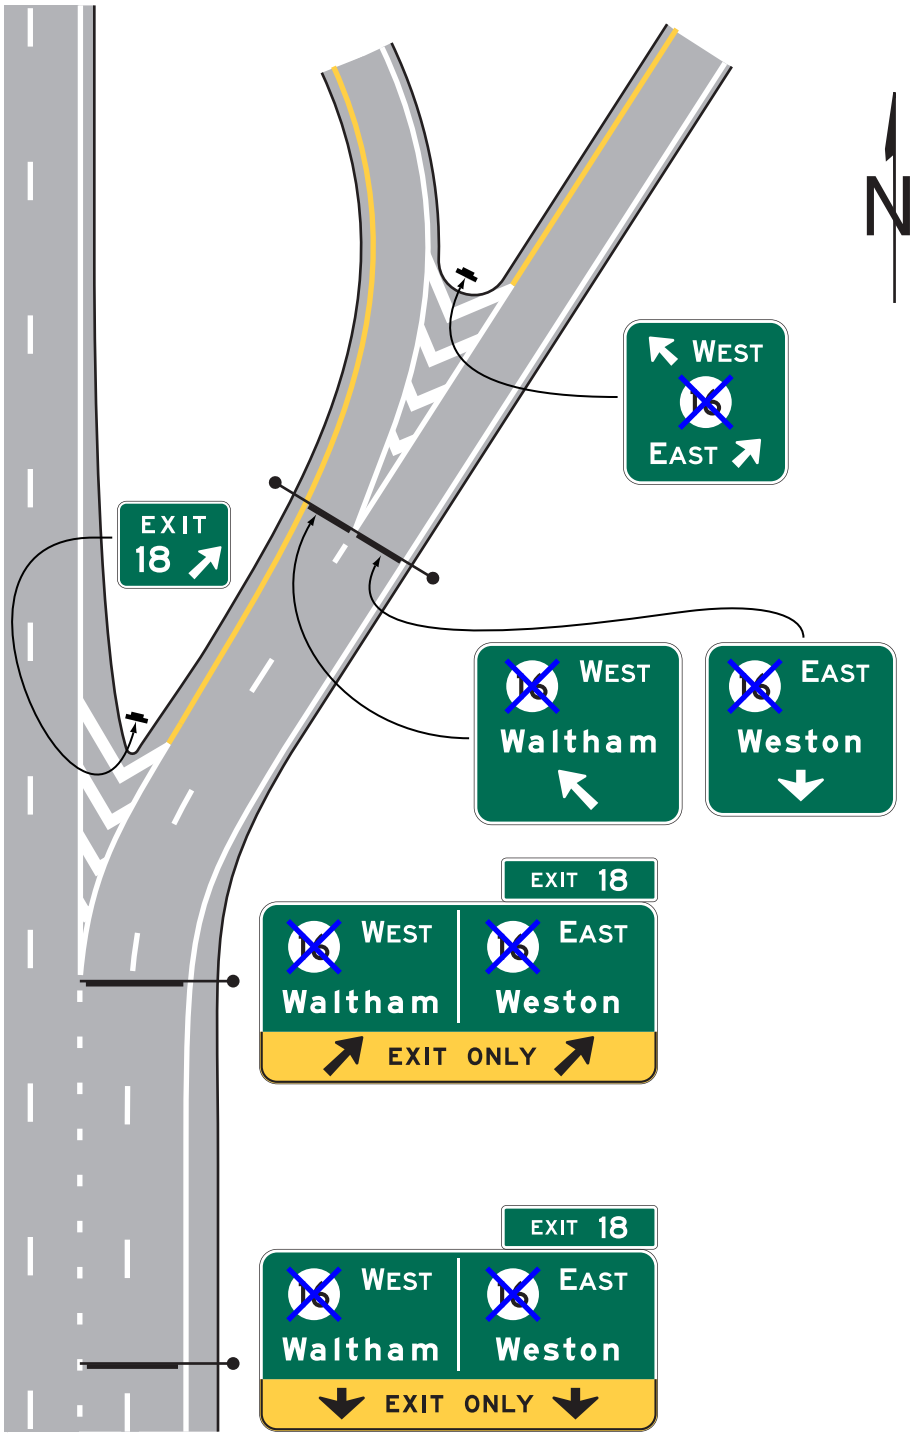



Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

2. A vertical white line shall be used to separate the route shields and destinations associated with each of the two diverging movements.


## Figure 2E-26. Examples of Guide Signs for a Minor Interchange

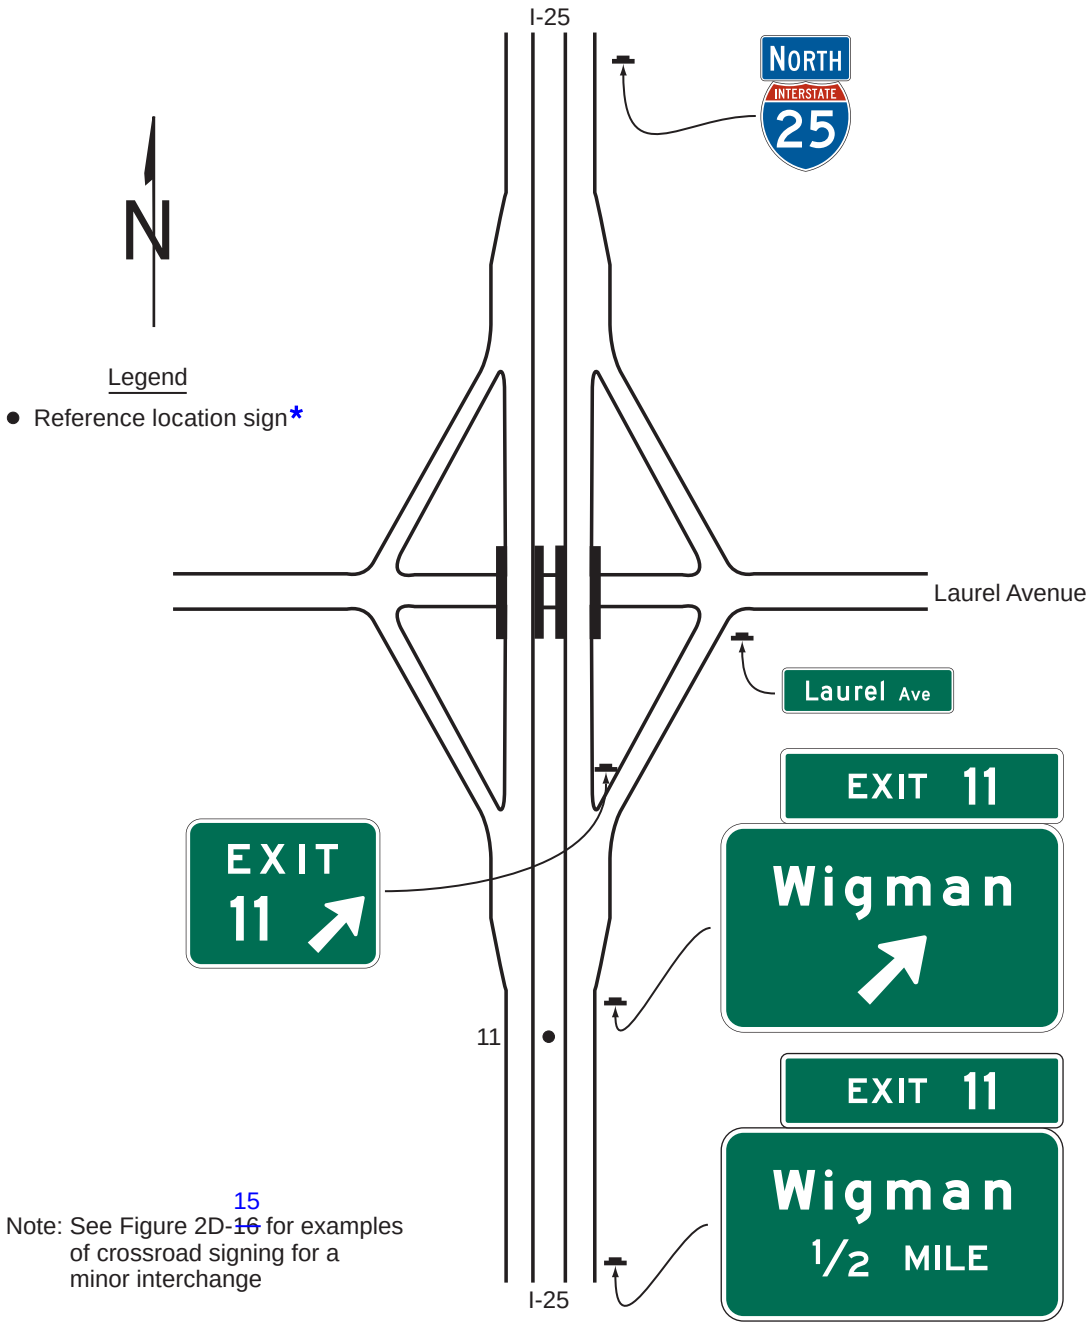


Note: See Figure 2D-~~16~~ 15 for examples of crossroad signing for a minor interchange

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.


## Figure 2E-27. Example of Guide Signs for a Diamond Interchange

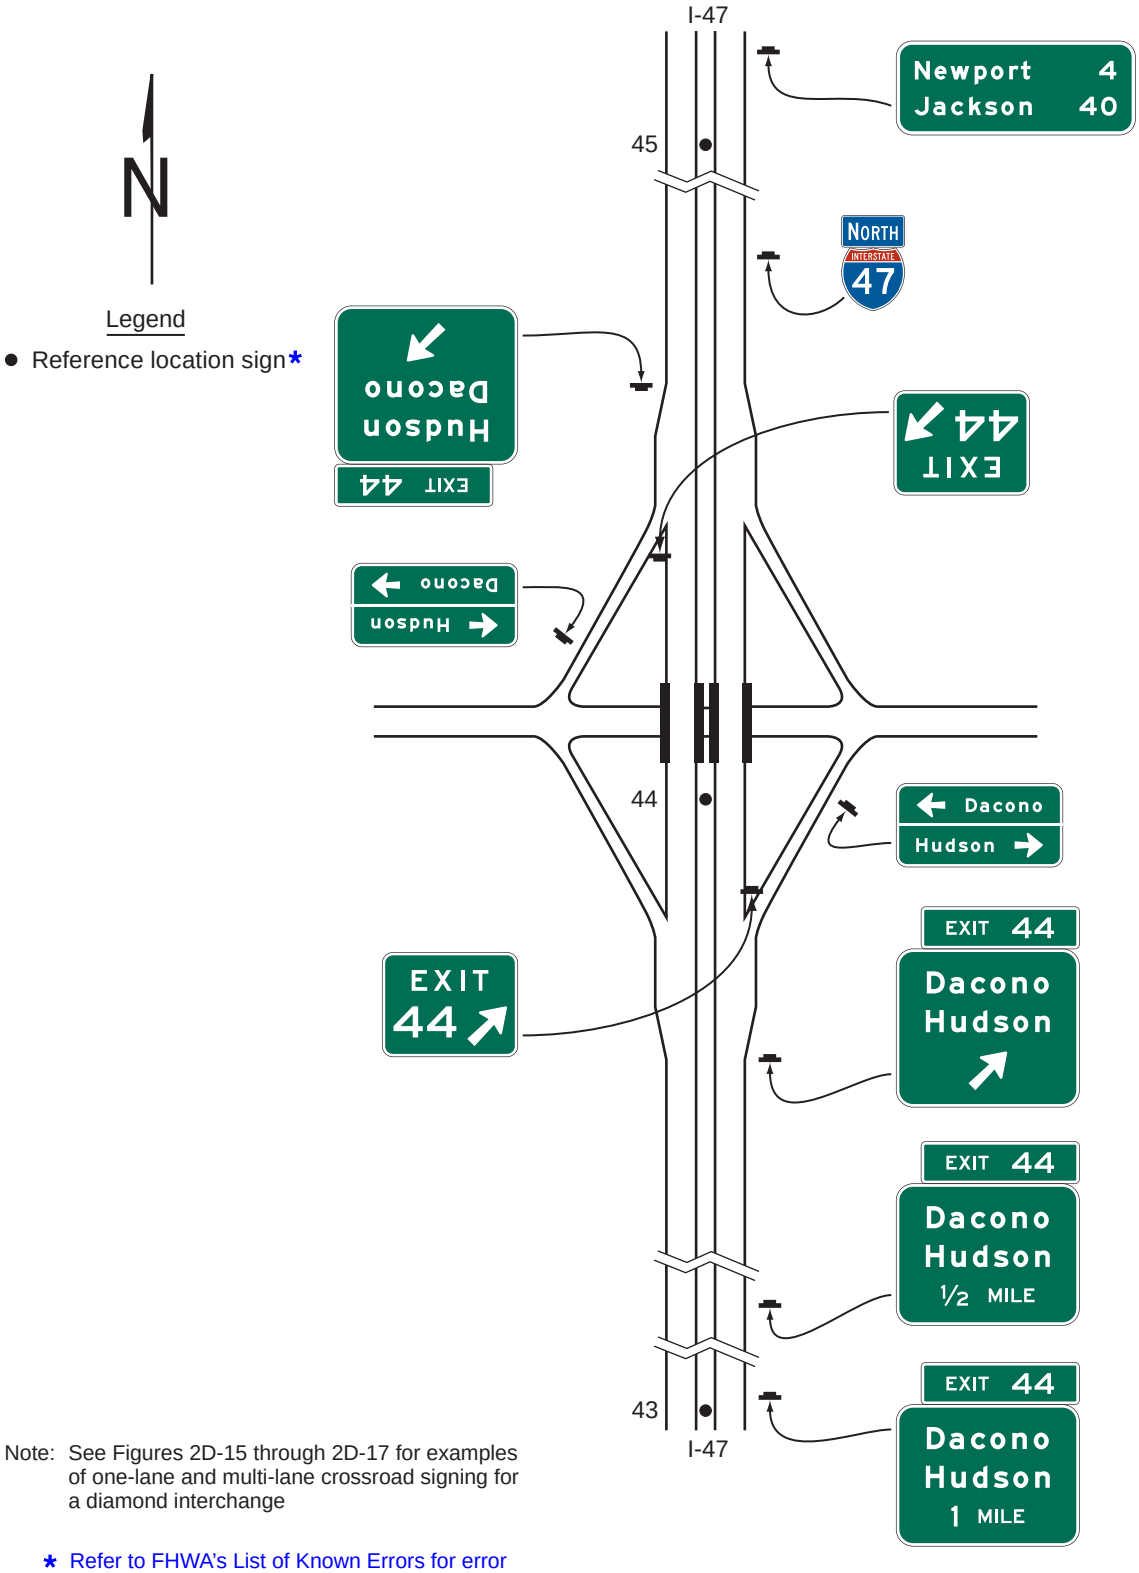


Note: See Figures 2D-15 through 2D-17 for examples of one-lane and multi-lane crossroad signing for a diamond interchange

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.


## Figure 2E-28. Example of Guide Signs for a Diamond Interchange in an Urban Area

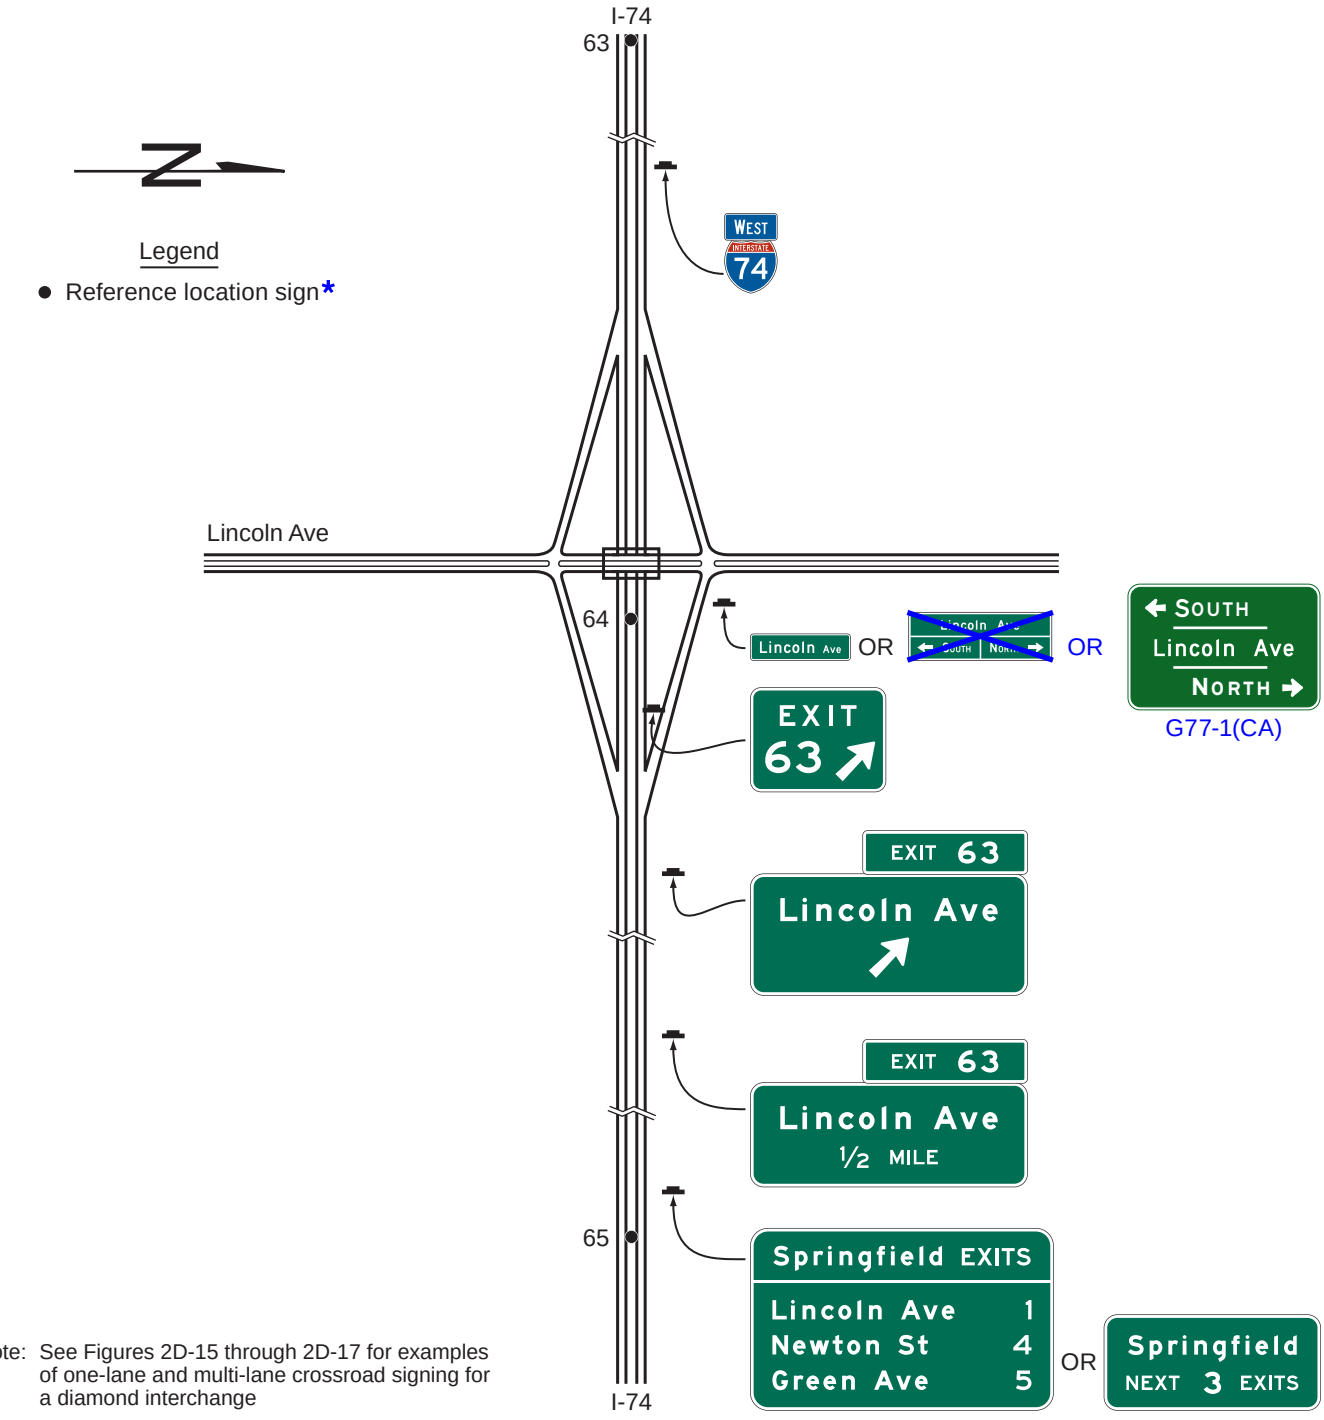



Note: See Figures 2D-15 through 2D-17 for examples of one-lane and multi-lane crossroad signing for a diamond interchange

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.


## Figure 2E-29. Example of Guide Signs for a Full Cloverleaf Interchange

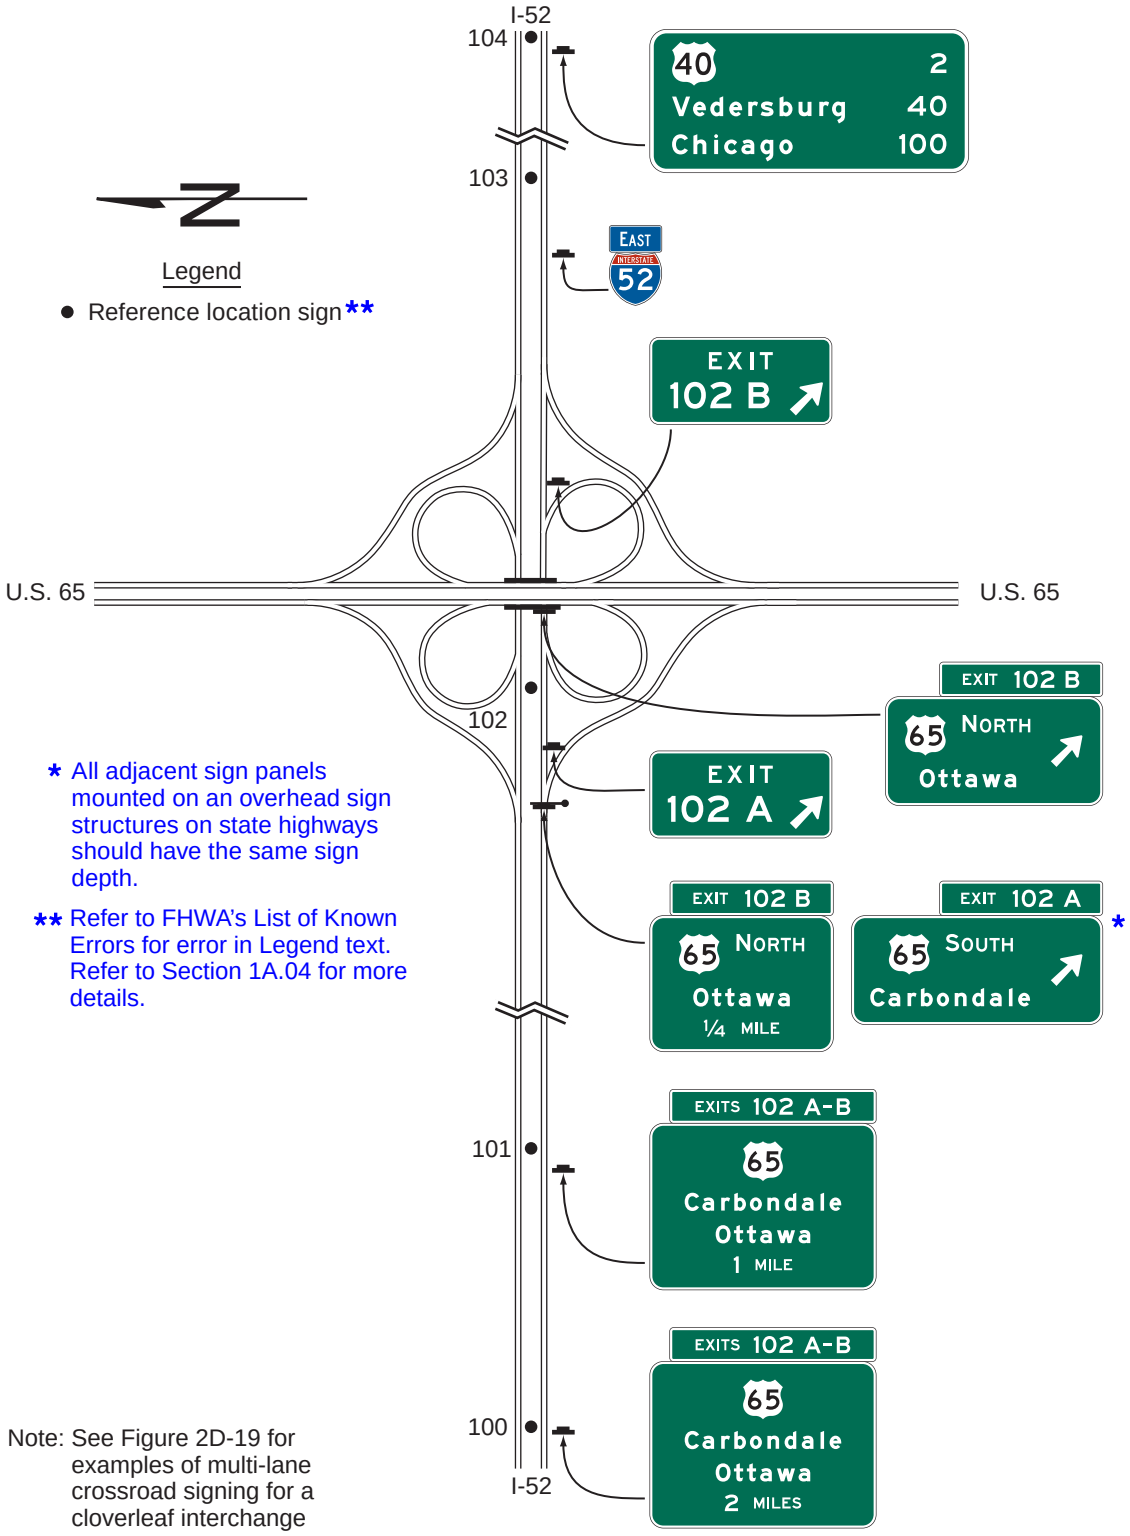

# Figure 2E-30. Example of Guide Signs for a Full Cloverleaf Interchange with Collector-Distributor Roadways

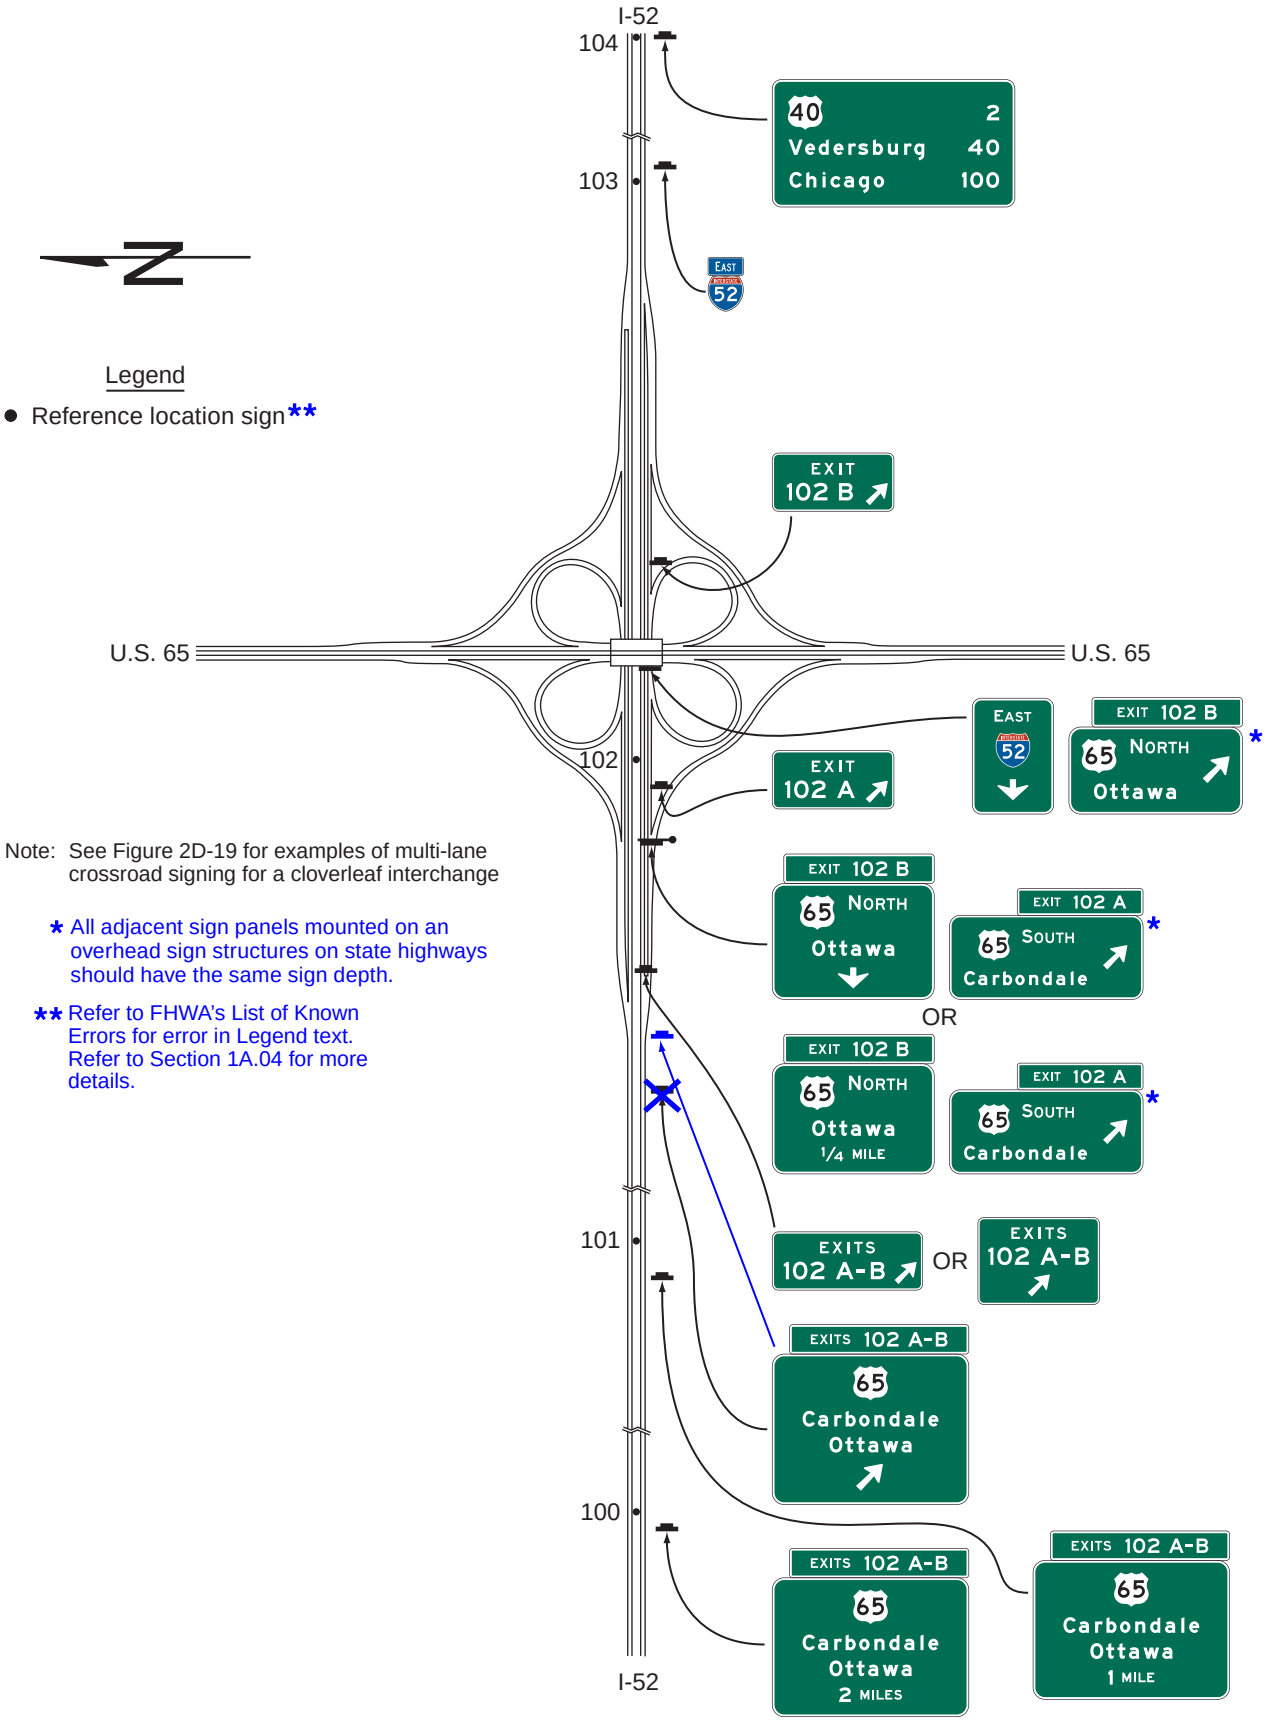

# Figure 2E-31. Example of Guide Signs for a Partial Cloverleaf Interchange

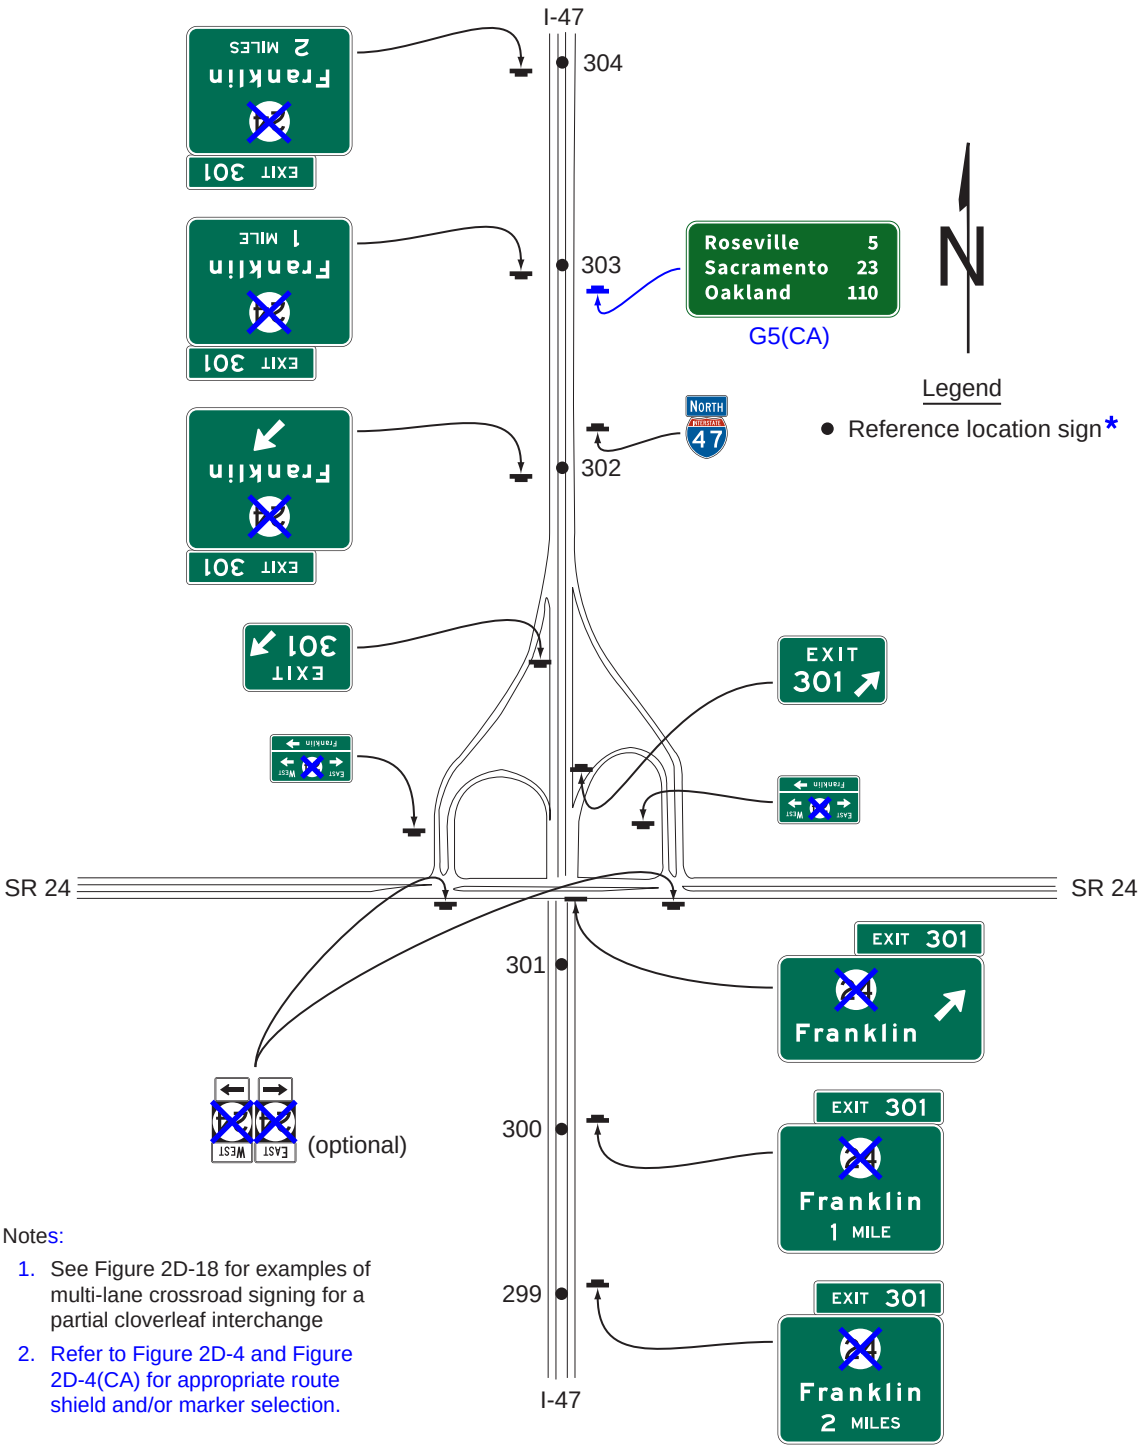



Notes:


1. See Figure 2D-18 for examples of multi-lane crossroad signing for a partial cloverleaf interchange
2. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

## Figure 2E-32. Examples of Guide Signs for Successive Interchanges with Collector-Distributor Roadways (Sheet 1 of 2)

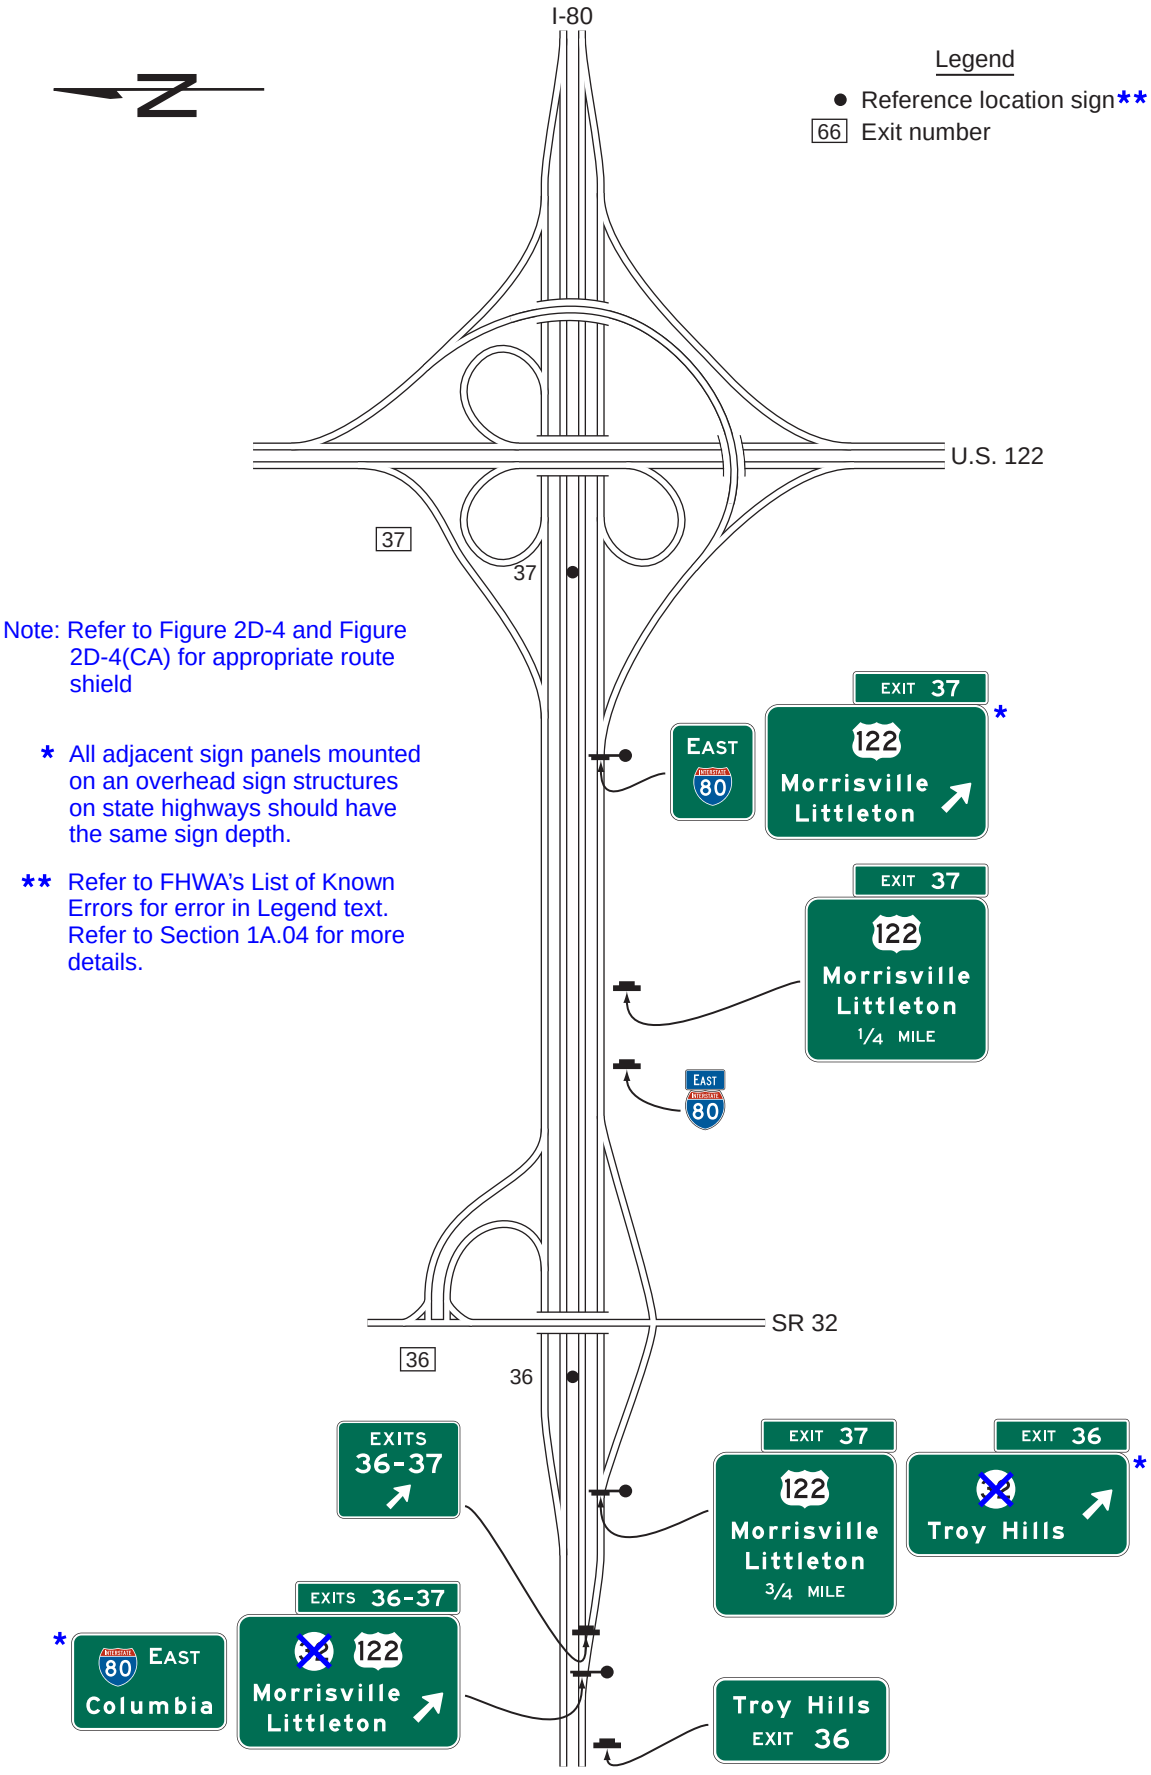

## Figure 2E-32. Examples of Guide Signs for Successive Interchanges with Collector-Distributor Roadways (Sheet 2 of 2)

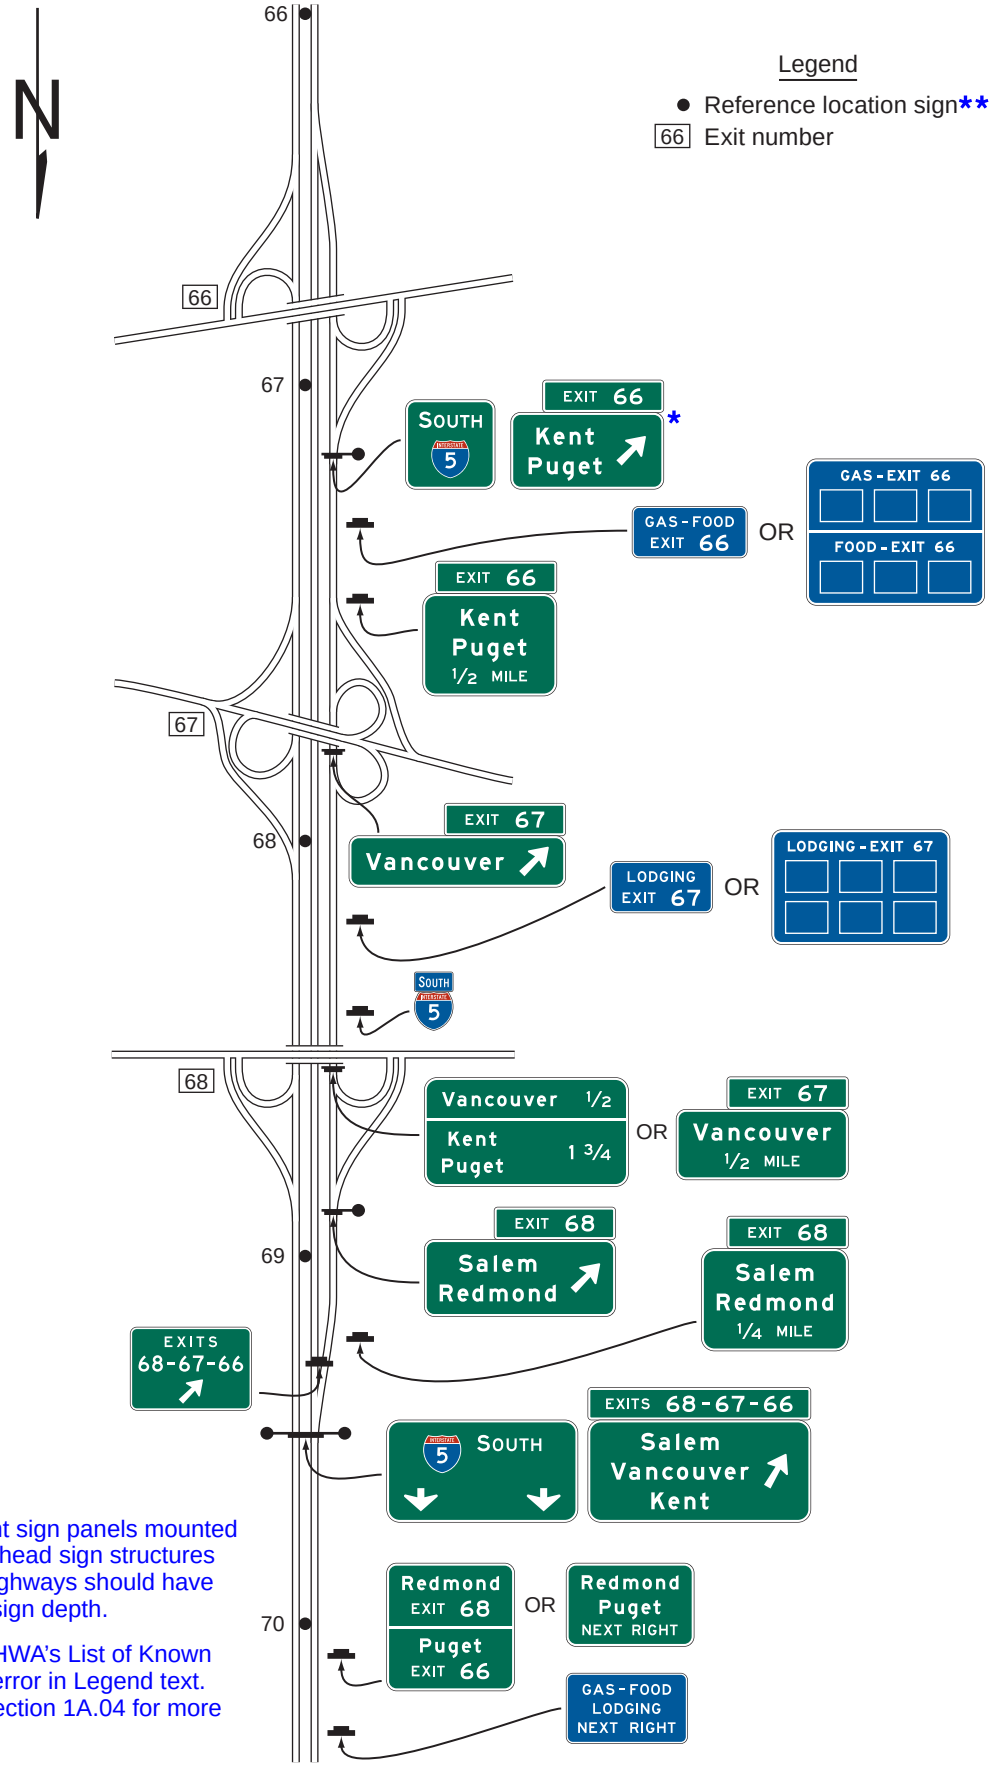



* All adjacent sign panels mounted on an overhead sign structures on state highways should have the same sign depth.

** Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.


# Figure 2E-33. Examples of Guide Signs for a Freeway-to-Freeway Interchange
(Sheet 1 of 2)

**A – Example of signing for a two-lane exit ramp with two dropped lanes and a bifurcation beyond the mainline gore**

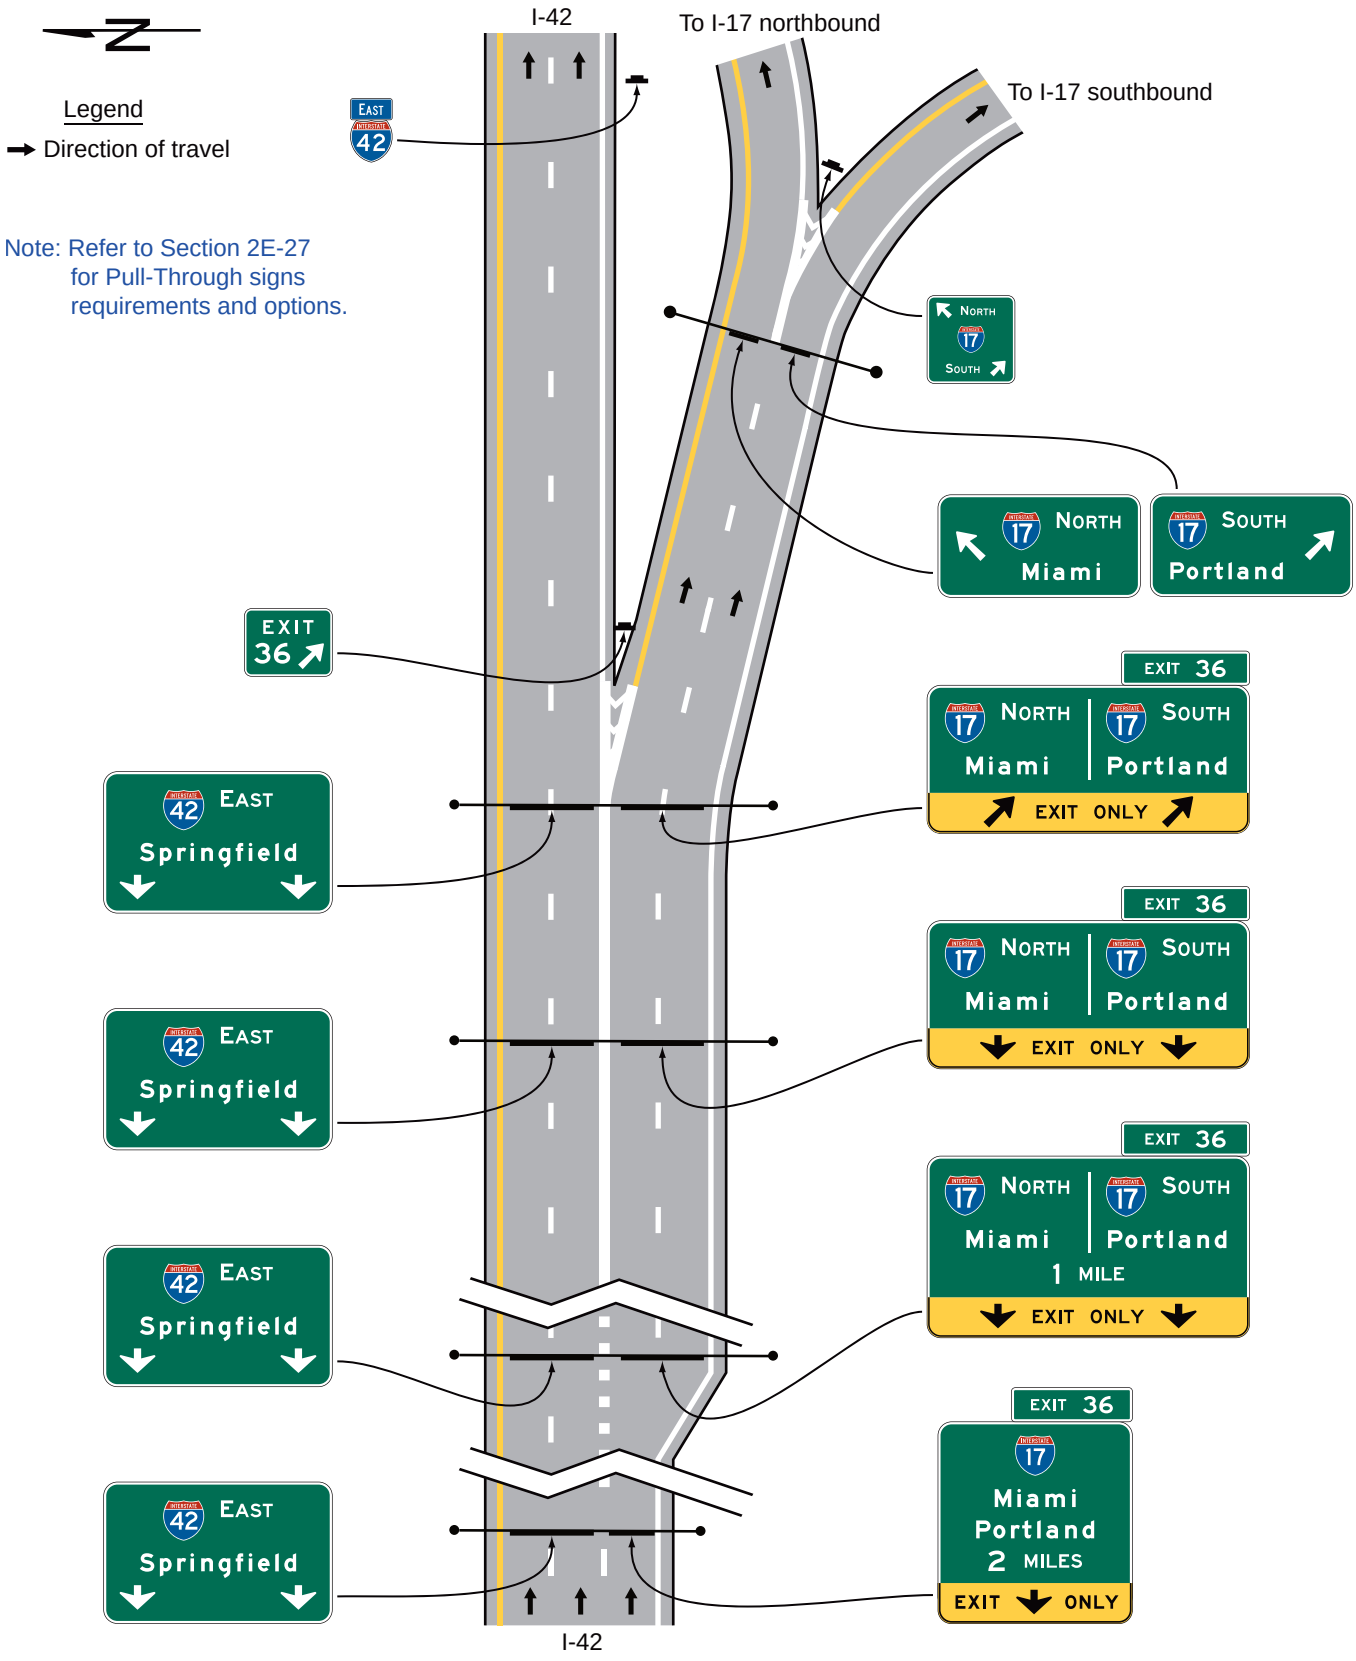


## Figure 2E-33. Examples of Guide Signs for a Freeway-to-Freeway Interchange
(Sheet 2 of 2)


**B – Example of signing for successive exit ramps with a dropped lane at the second exit**

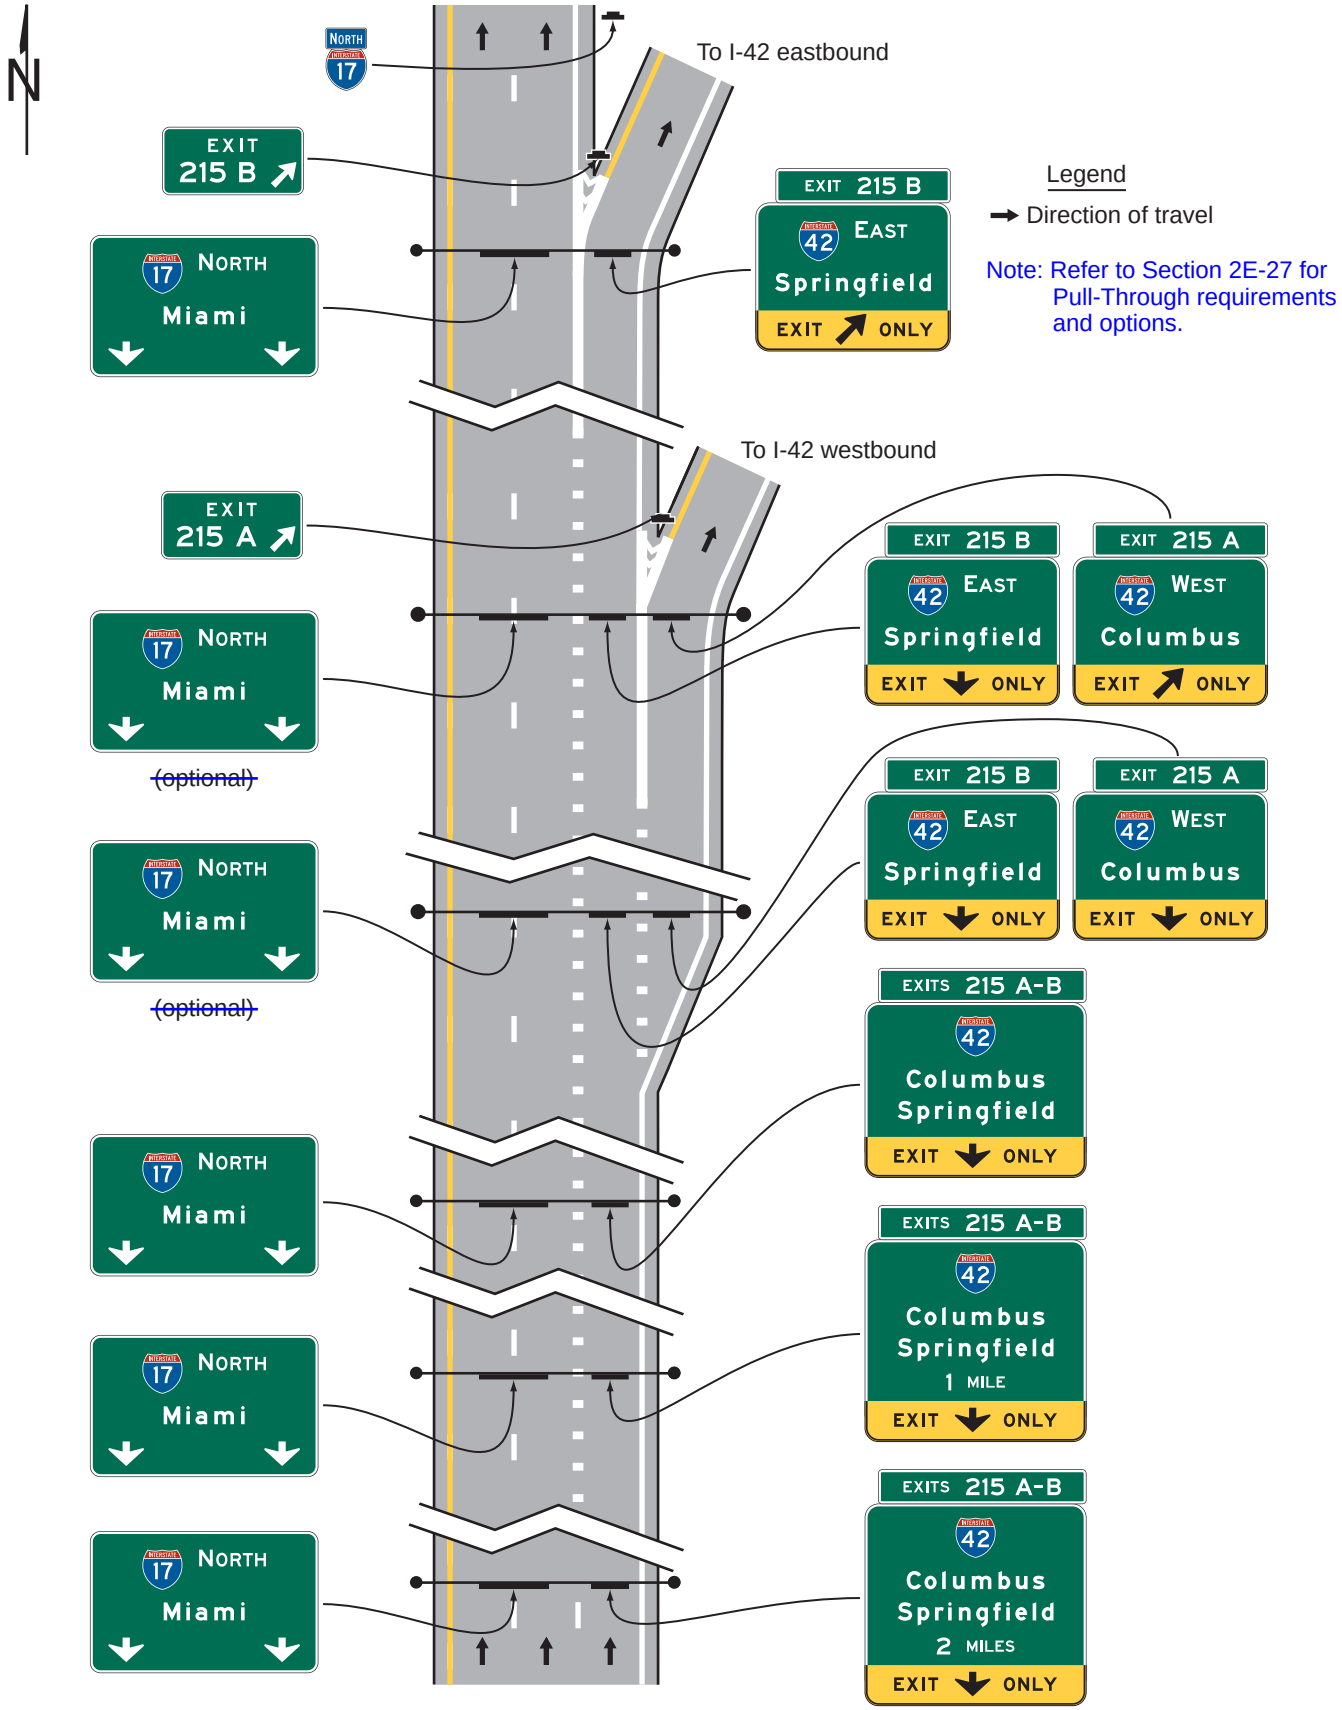

## Figure 2E-34. Example of Guide Signs for a Split with Dedicated Lanes

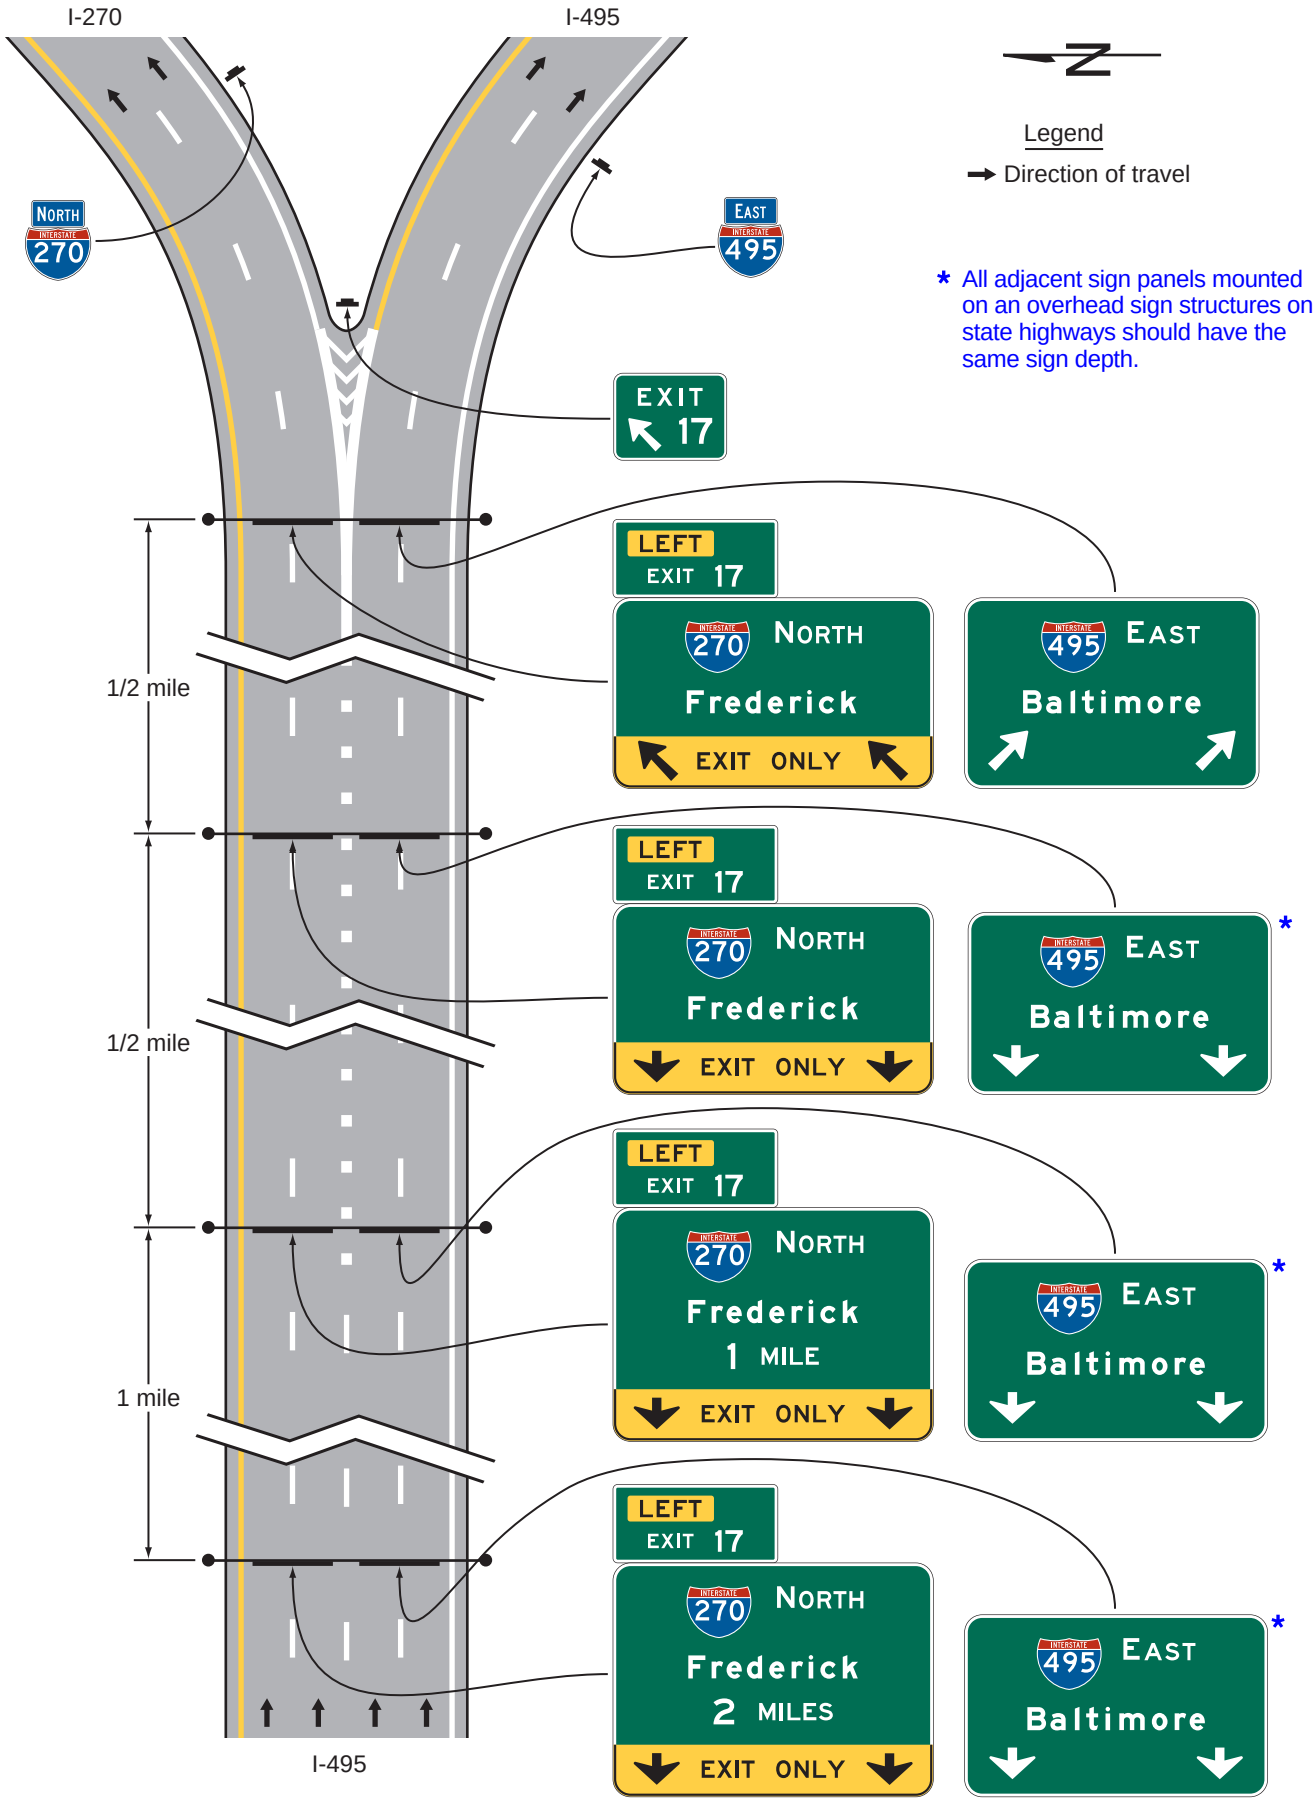


## Figure 2E-35. Example of an Overhead Arrow-per-Lane Guide Sign for a Multi-Lane Exit with an Option Lane

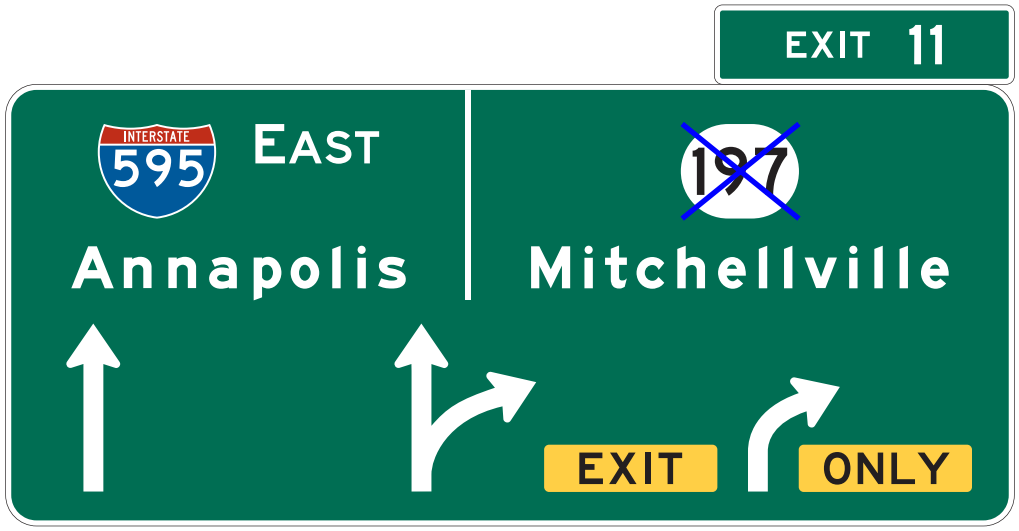



Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.


## Figure 2E-36. Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane

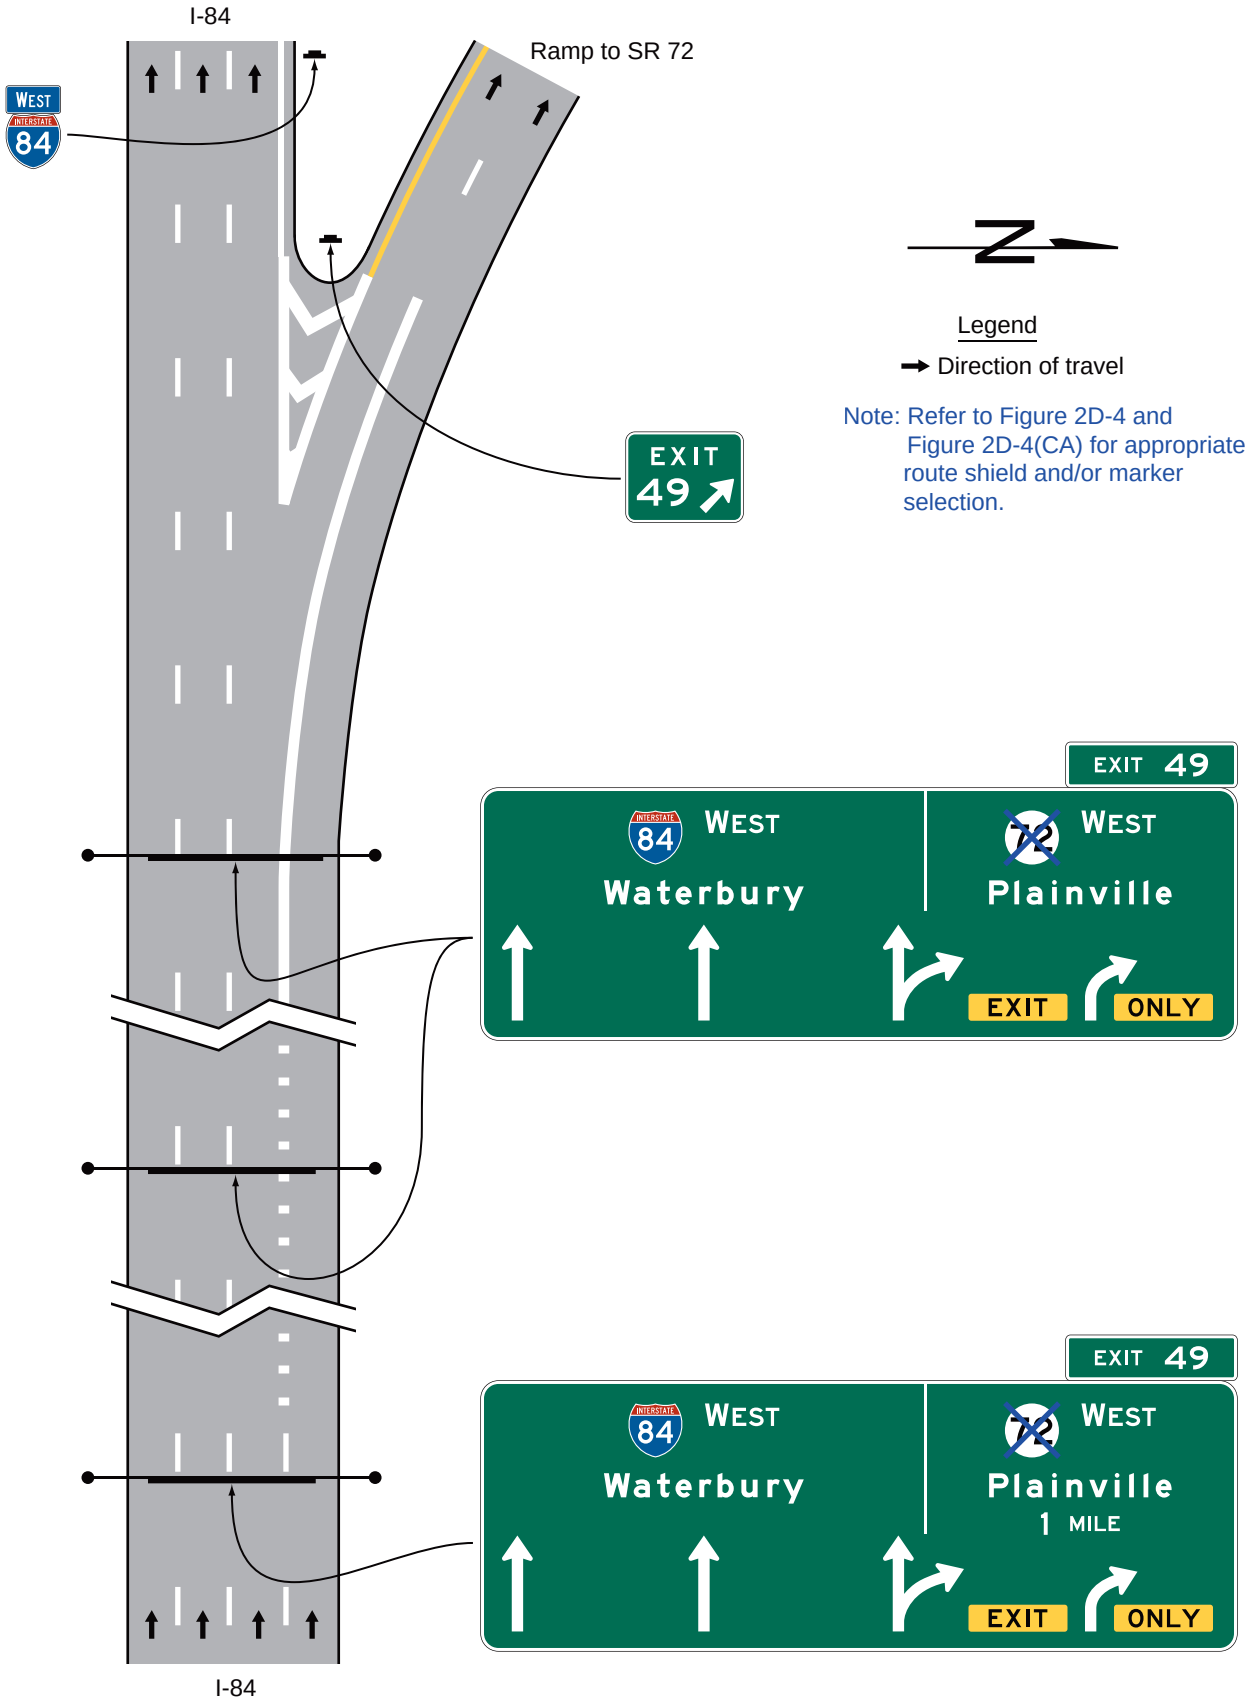


## *Figure 2E-36(CA). California Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane*

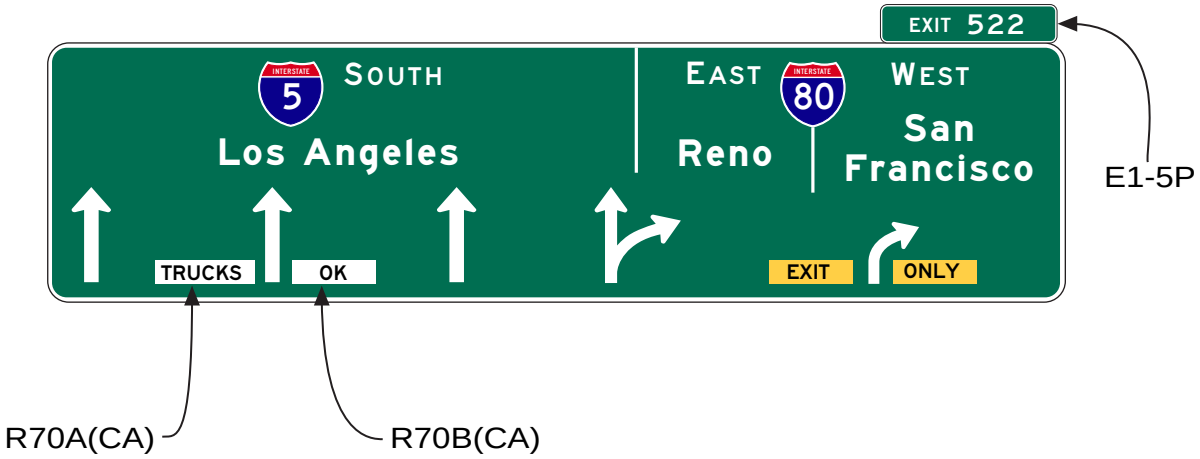


## Figure 2E-37. Example of Overhead Arrow-per-Lane Guide Signs for a Two-Lane Exit to the Right with an Option Lane (Through Lanes Curve to the Left)

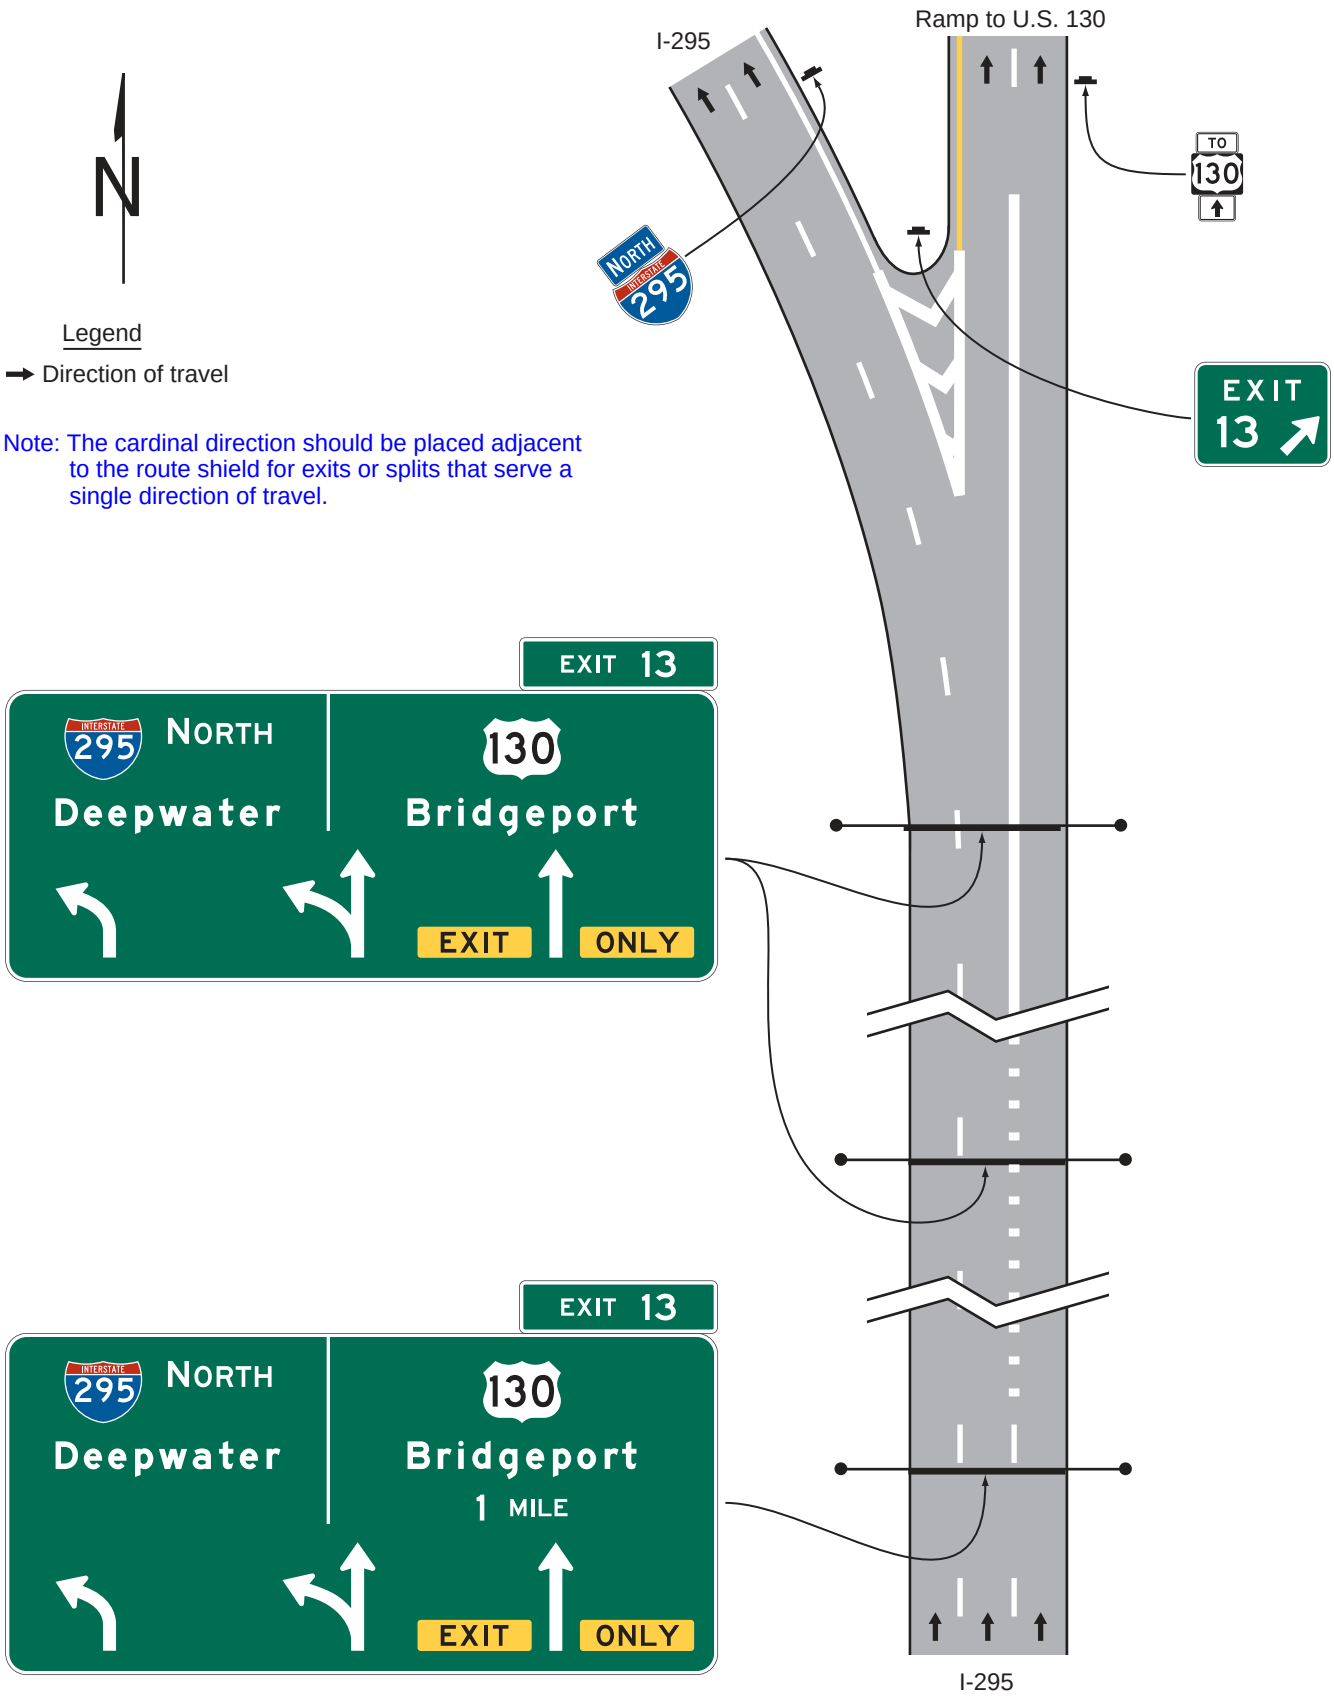

## Figure 2E-38. Example of Overhead Arrow-per-Lane Guide Signs for a Split with an Option Lane

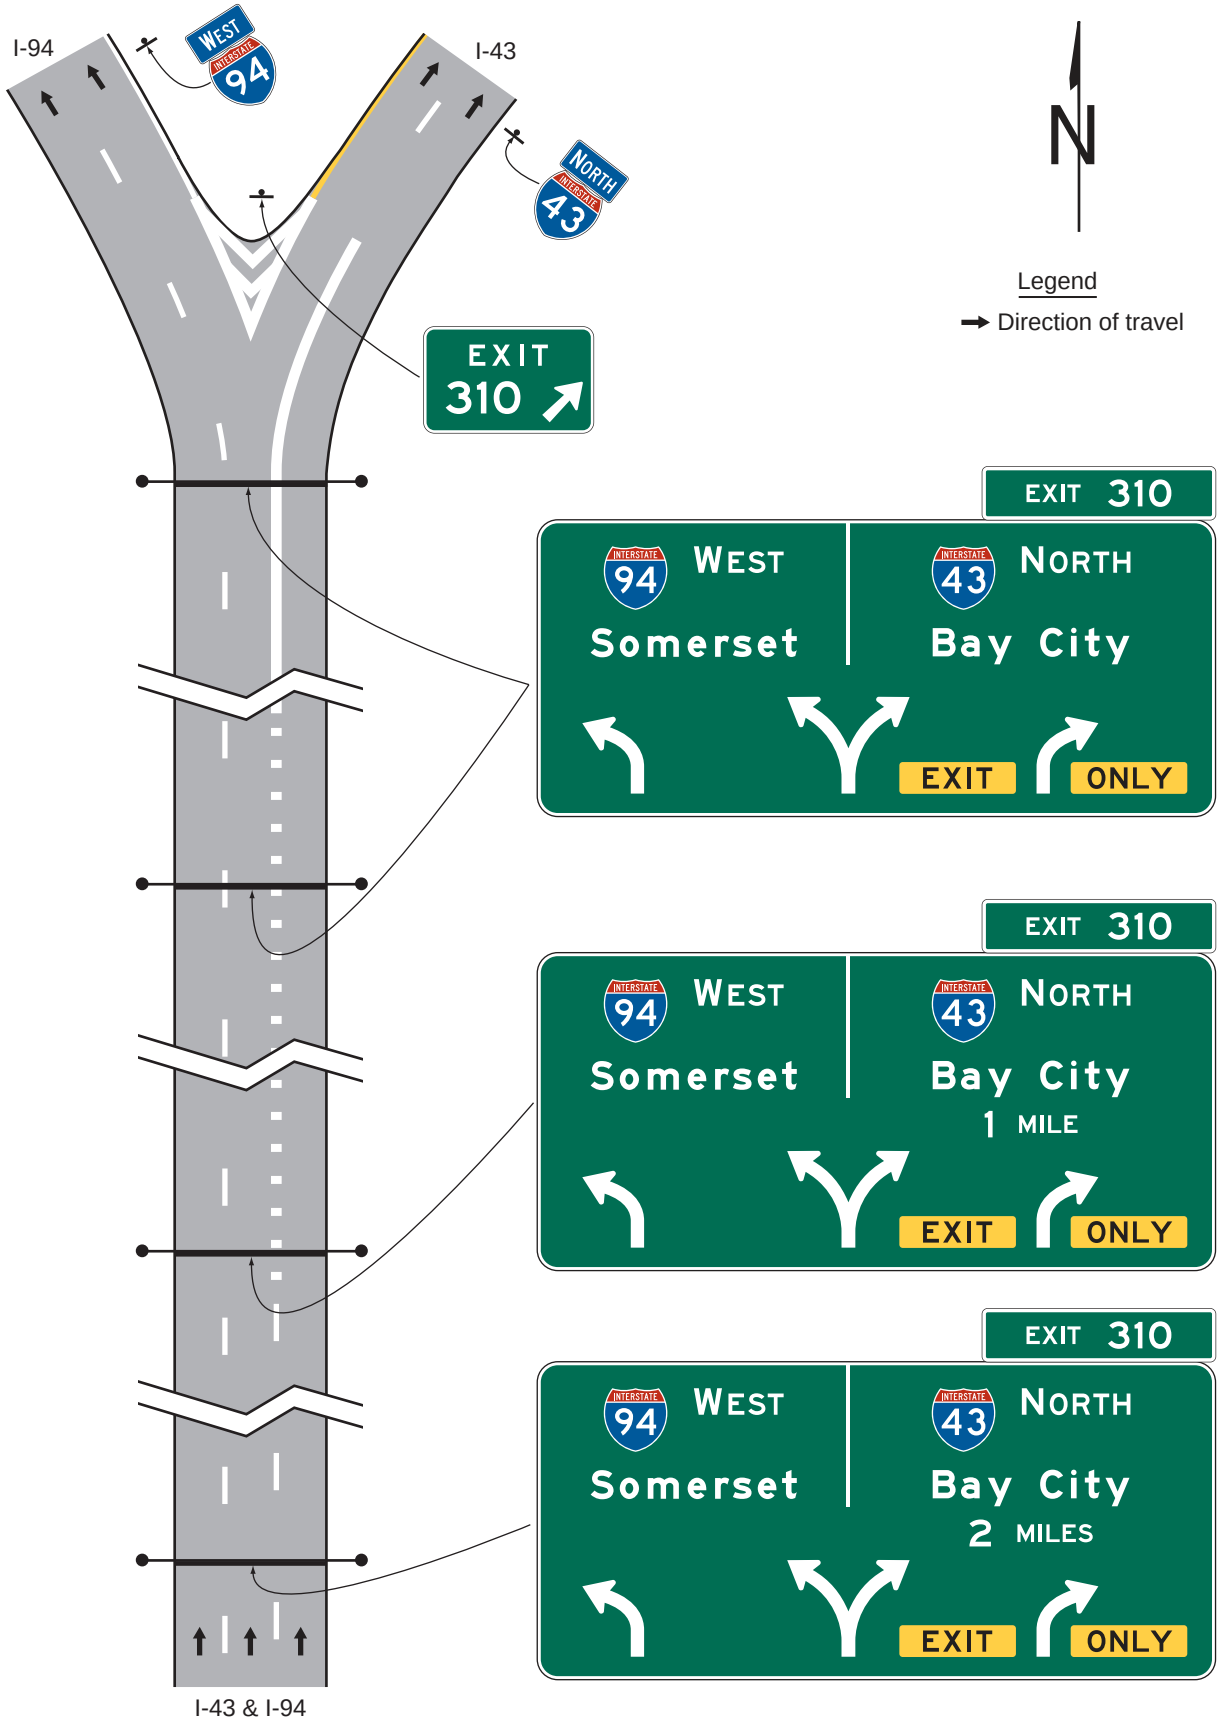


## Figure 2E-39. Example of Guide Signing for a Narrow Gore at a Split with an Option Lane

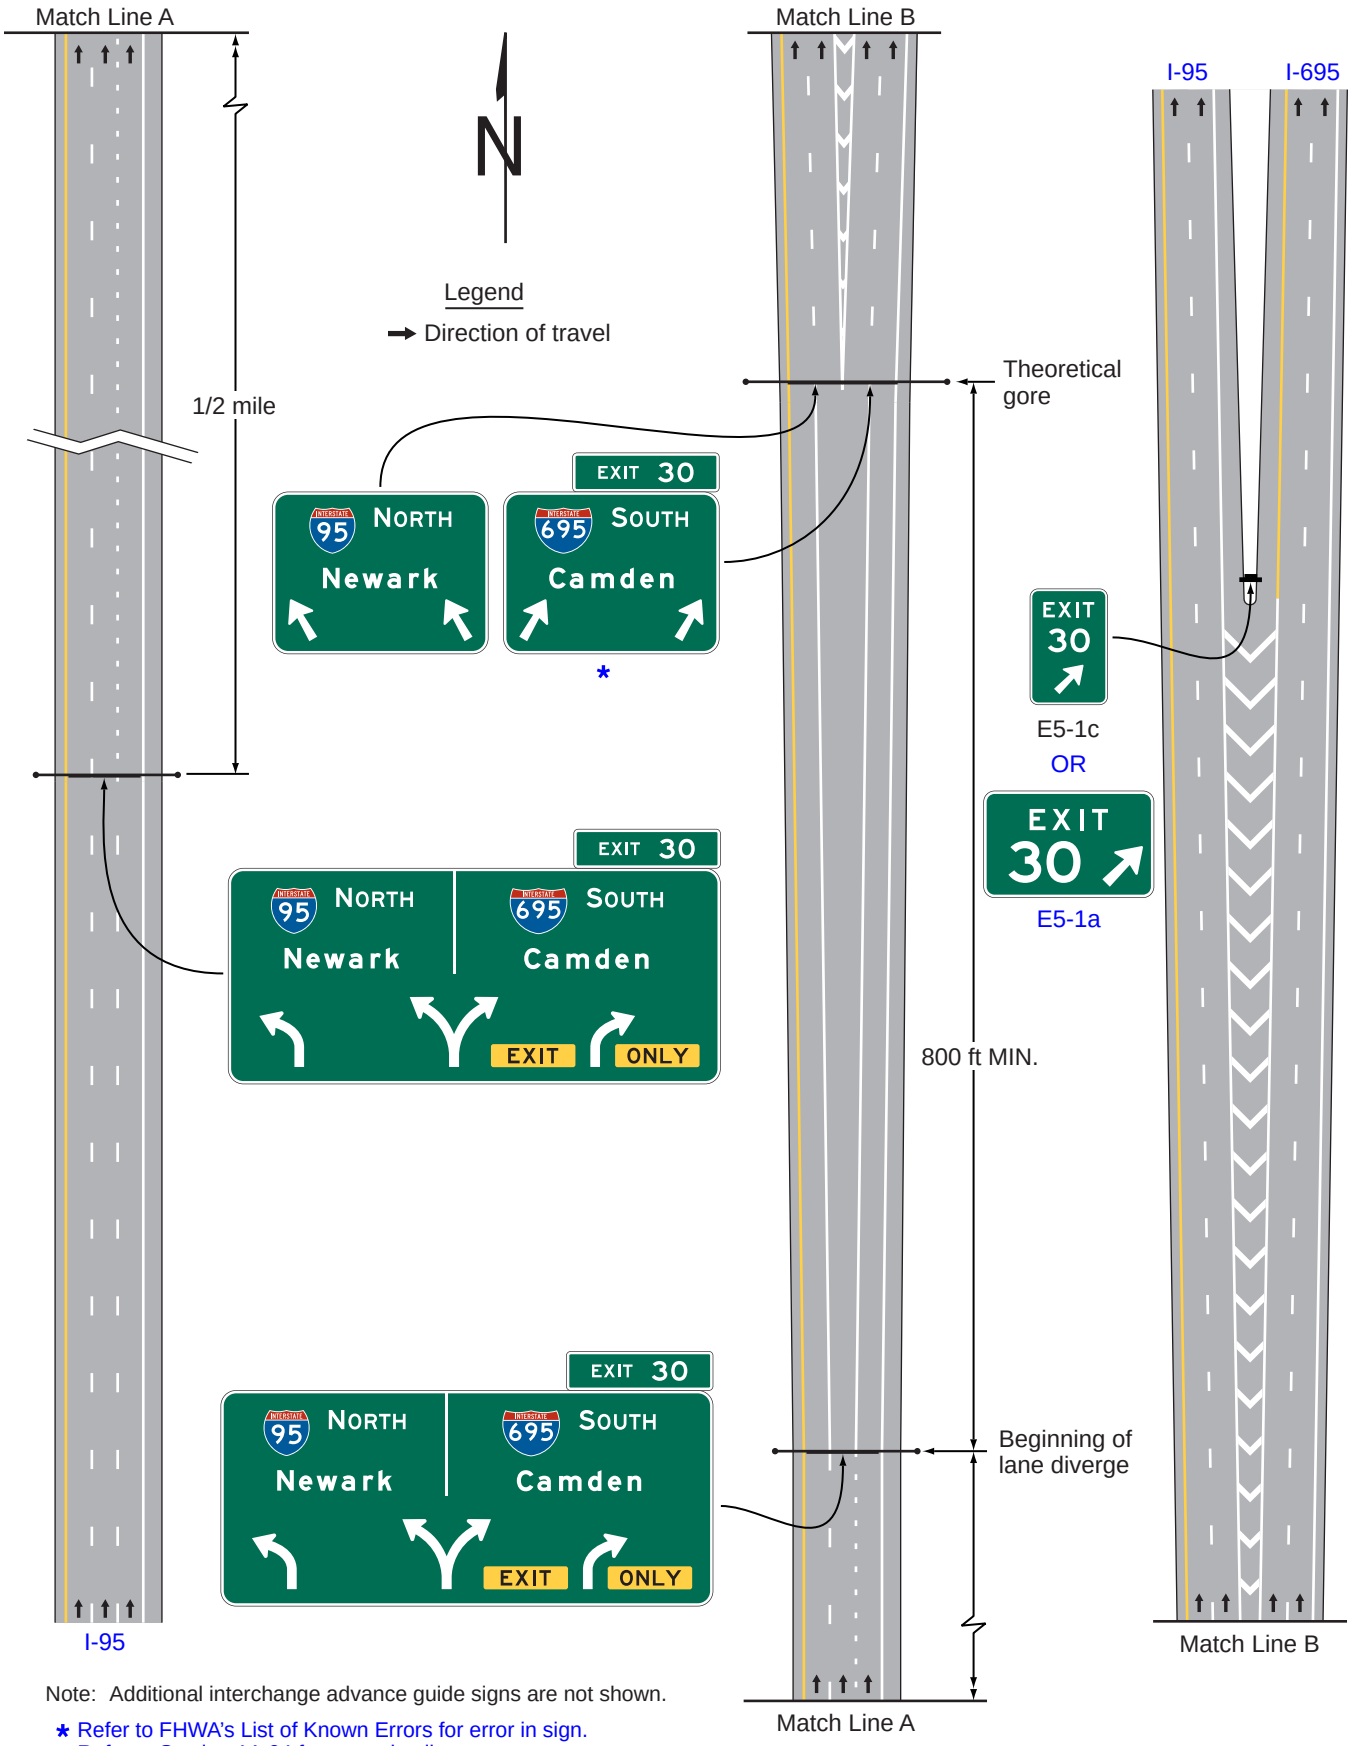


Note: Additional interchange advance guide signs are not shown.

* Refer to FHWA's List of Known Errors for error in sign.
Refer to Section 1A.04 for more details.


# Figure 2E-40. Example of Guide Signing for a Narrow Gore at a Two-Lane Exit with an Option Lane

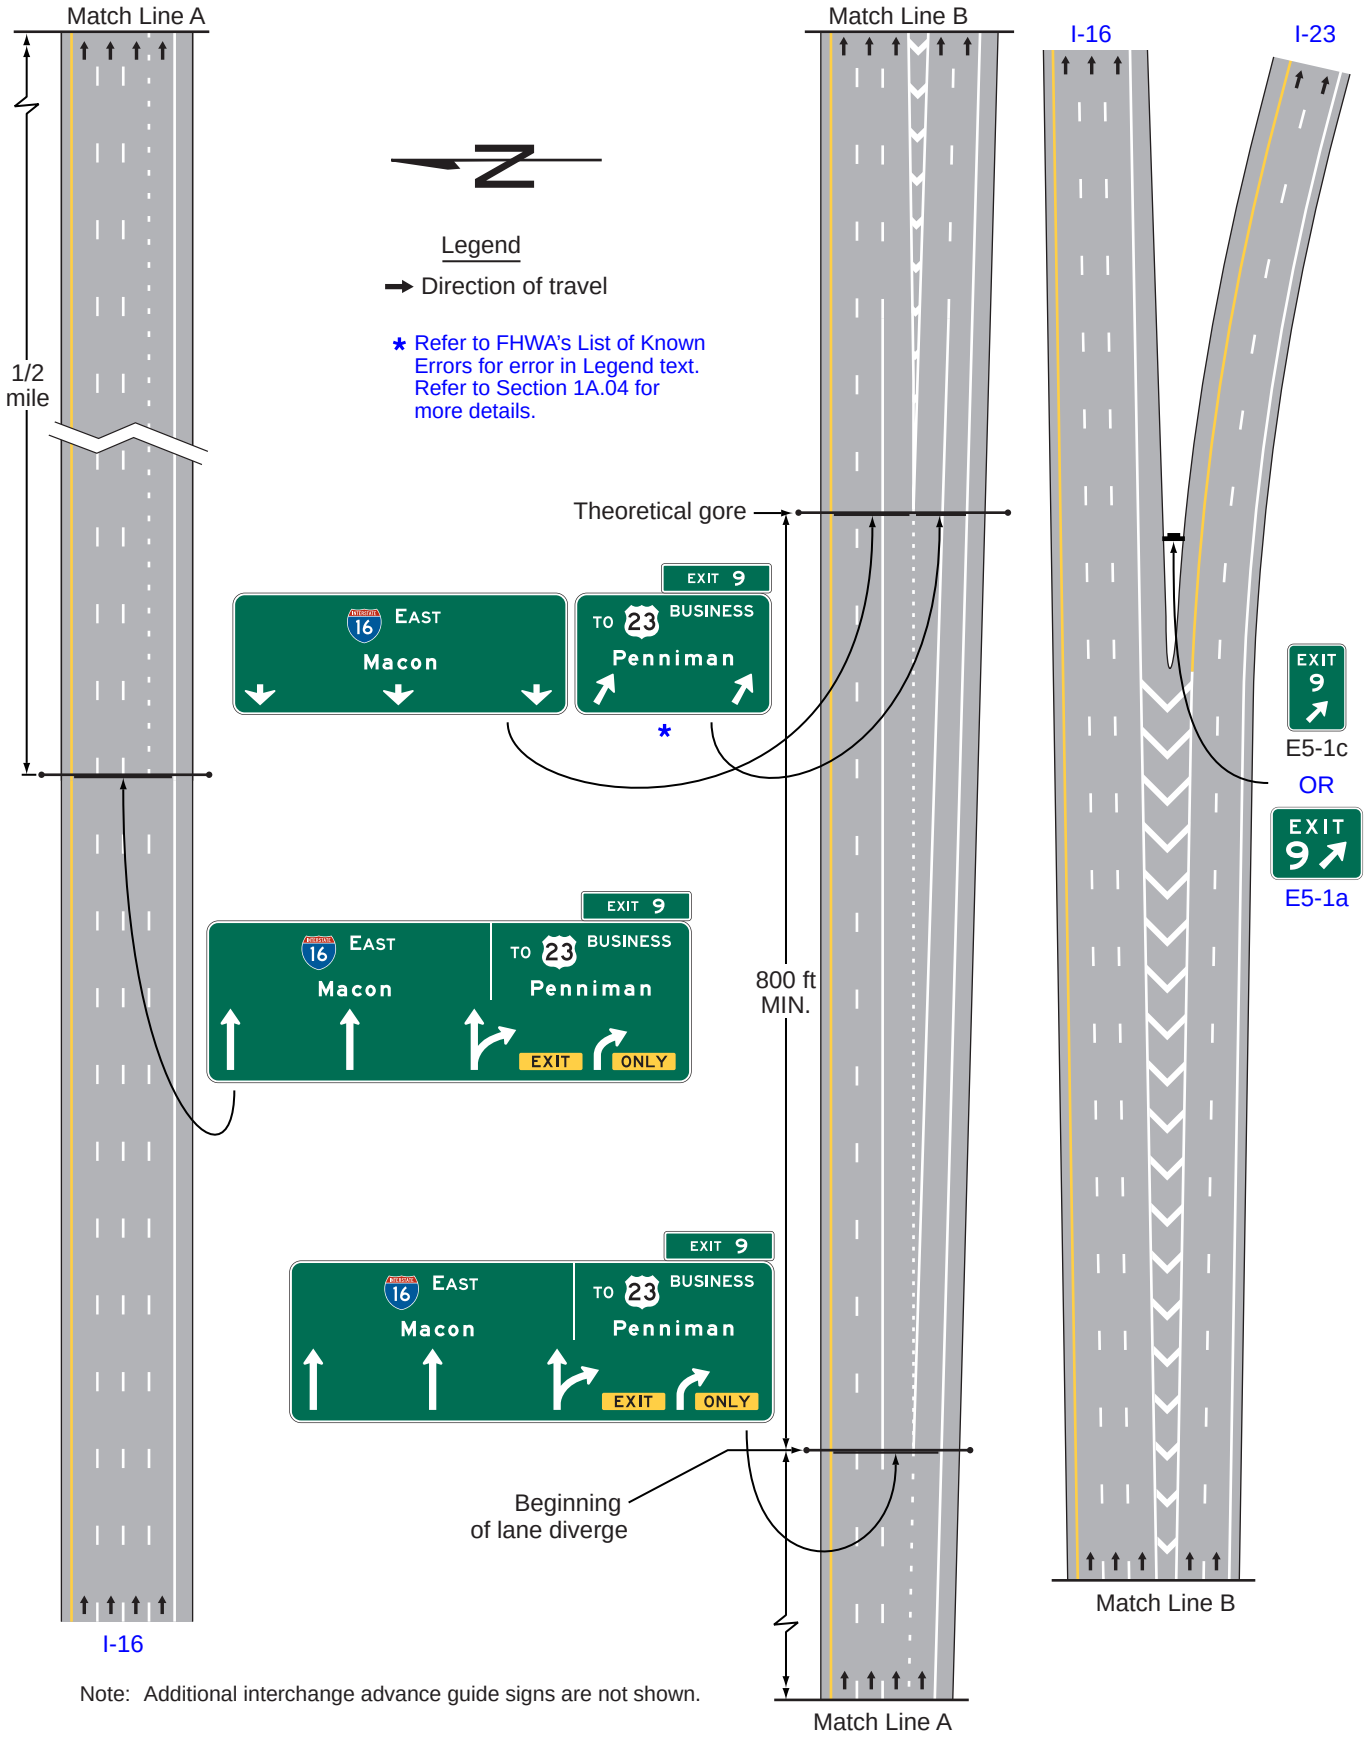



Note: Additional interchange advance guide signs are not shown.

## Figure 2E-41. Examples of Diagrammatic Advance Guide Signs


**A – Through route on an off-movement**

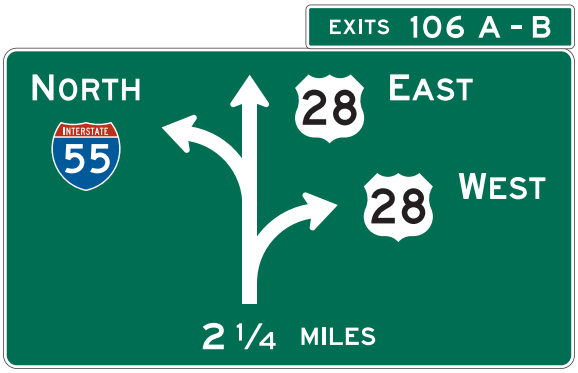



**B – Through route with complex geometry and reduced speed on an off-movement**

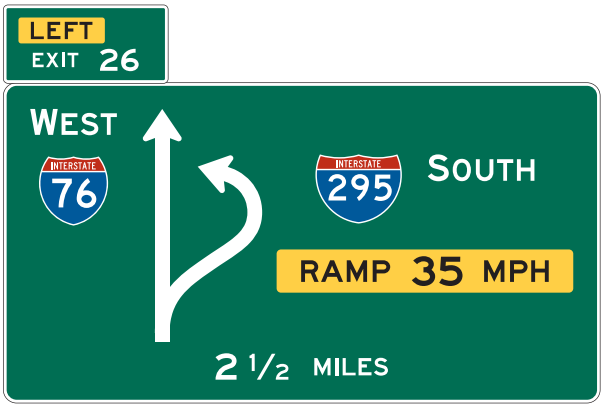


**C – Split at terminus of an expressway route**





**D – Successive exit ramps from opposite sides of a roadway**

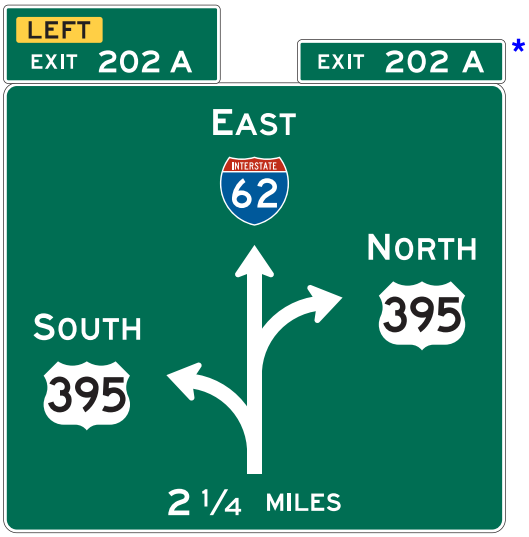



* Refer to FHWA's List of Known Errors for error in Legend text. Refer to Section 1A.04 for more details.

## Figure 2E-42. Example of Diagrammatic Advance Guide Sign Use

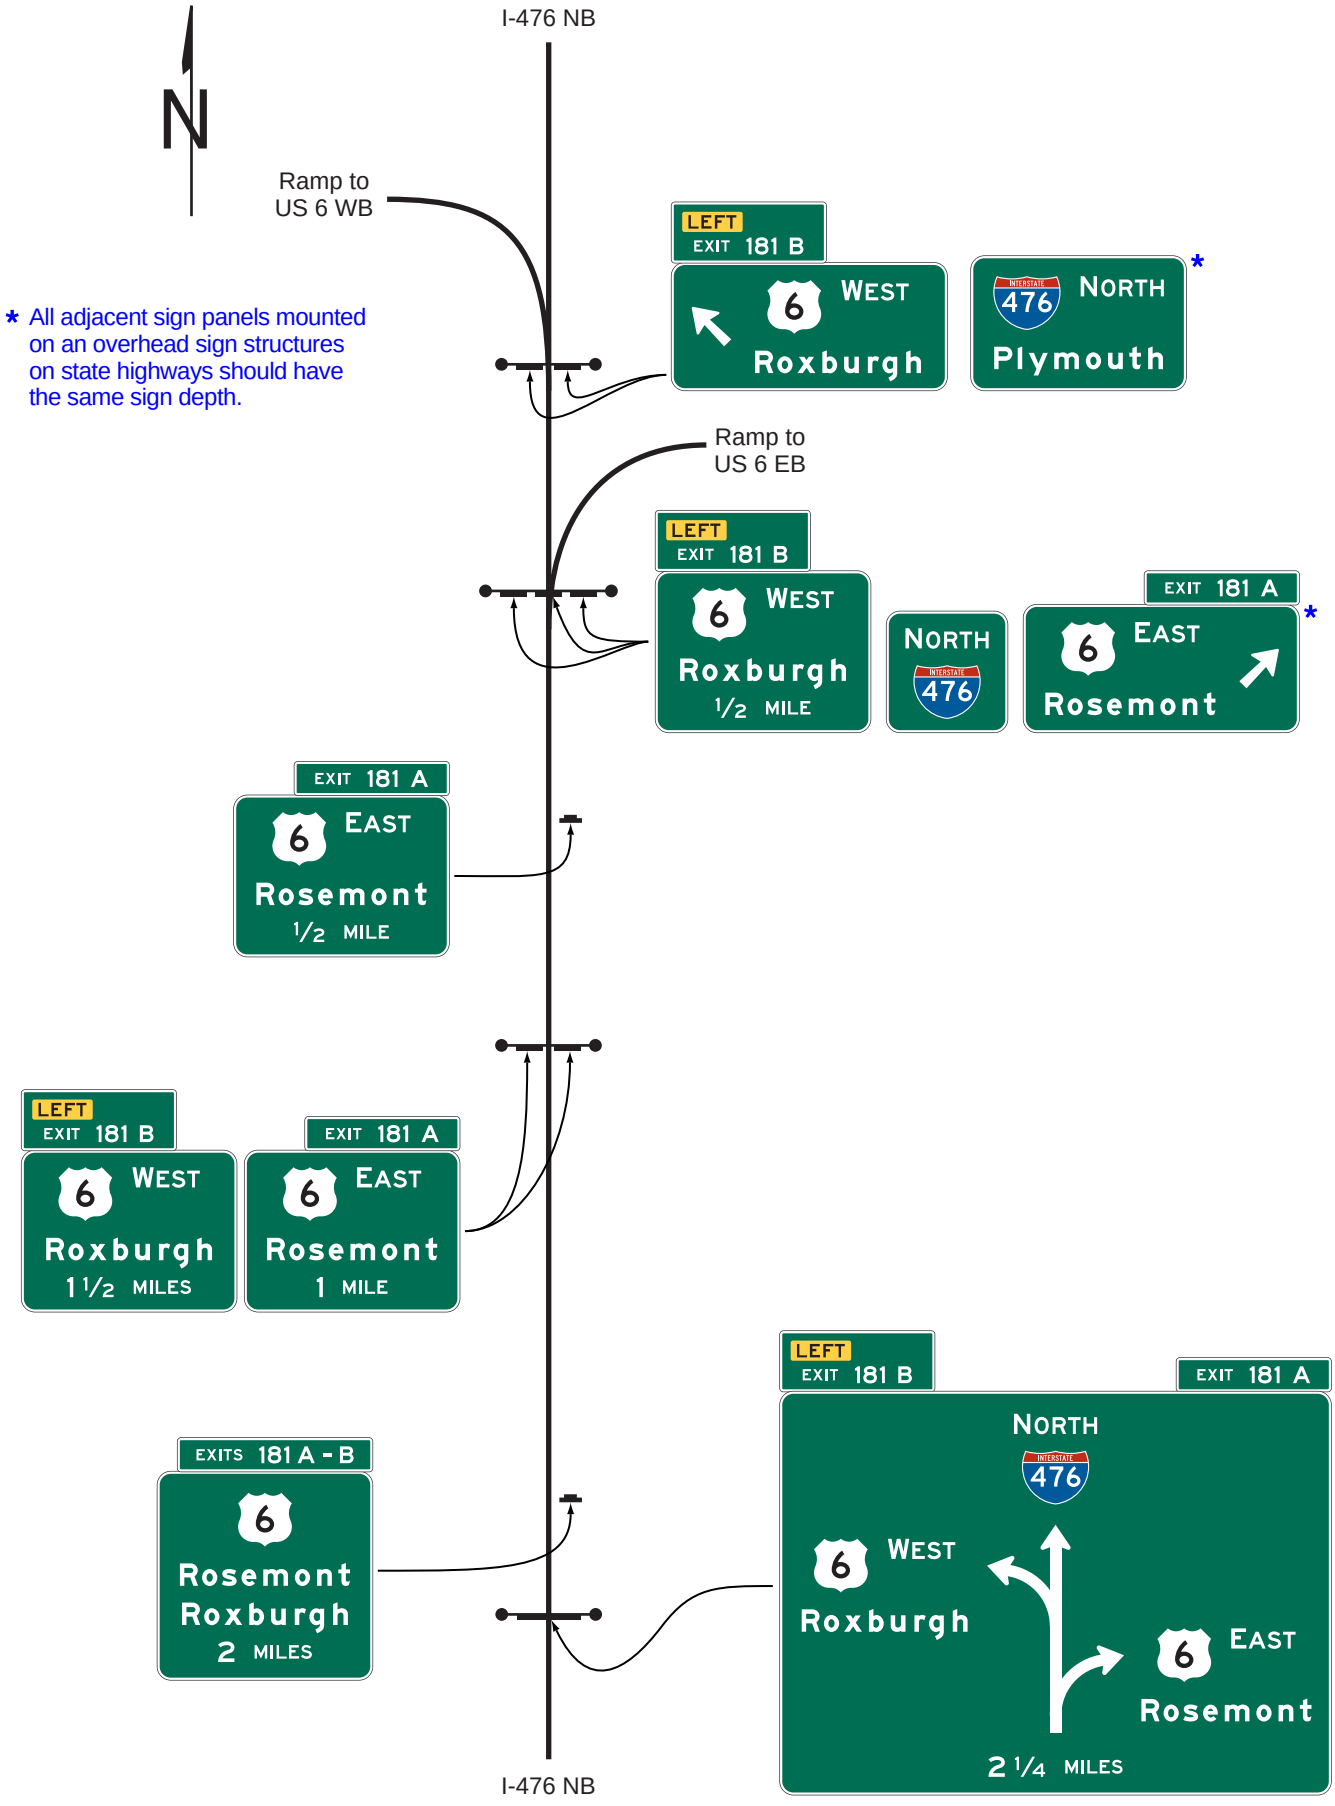


## Figure 2E-43. Example of a Partial-Width Overhead Arrow-per-Lane Guide Sign for Intermediate or Minor Interchanges

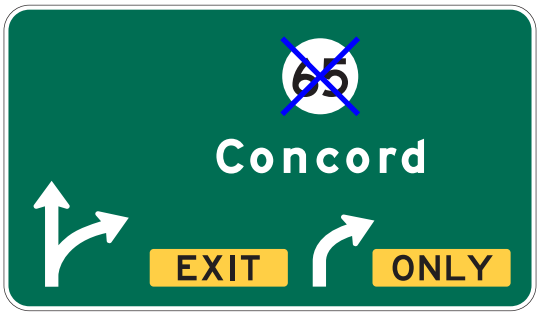


Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.


## Figure 2E-44. Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with an Option Lane and a Dropped Lane using Partial-Width Overhead Arrow-per-Lane Signs

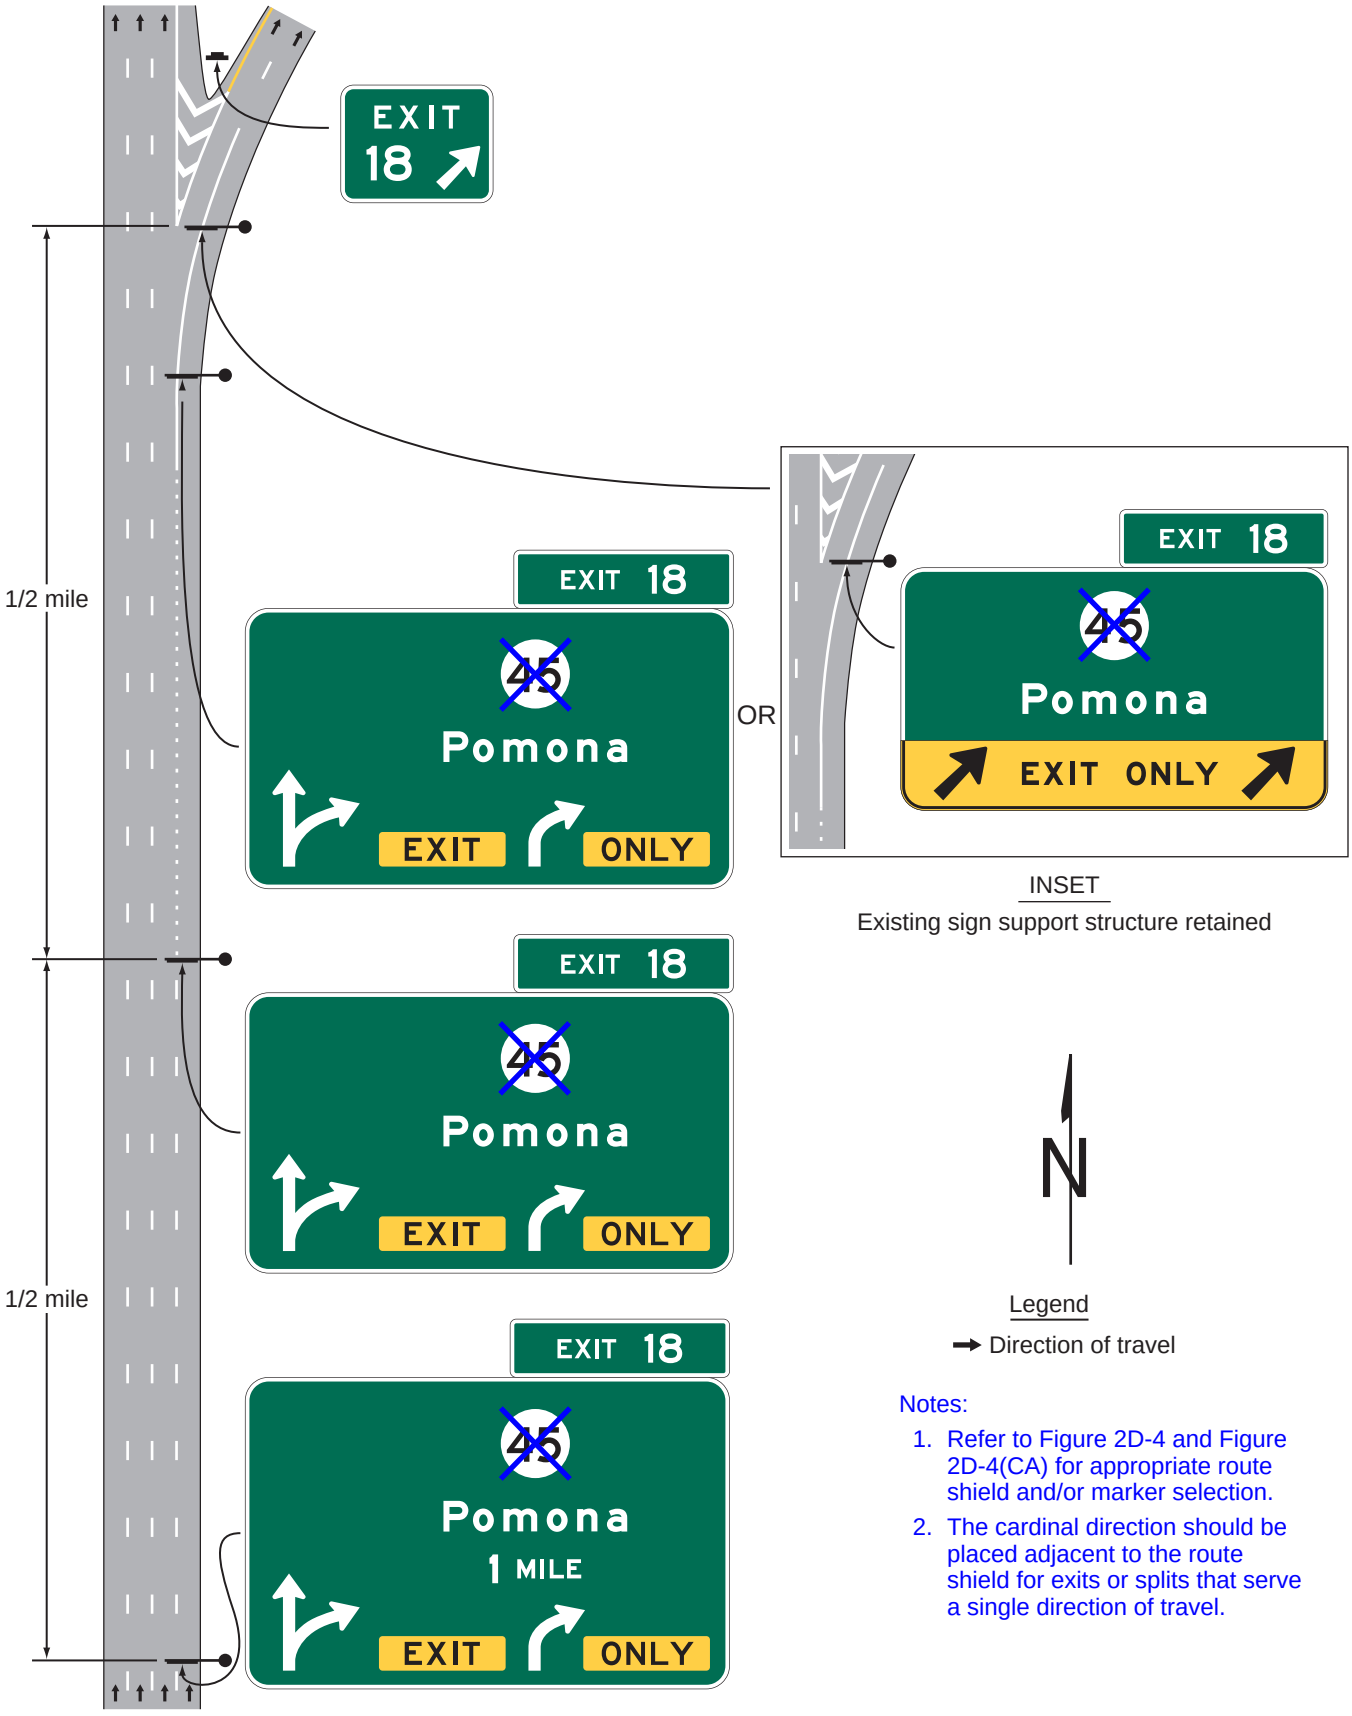



Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. The cardinal direction should be placed adjacent to the route shield for exits or splits that serve a single direction of travel.


**Figure 2E-45. Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes using Partial-Width Overhead Arrow-per-Lane Signs**

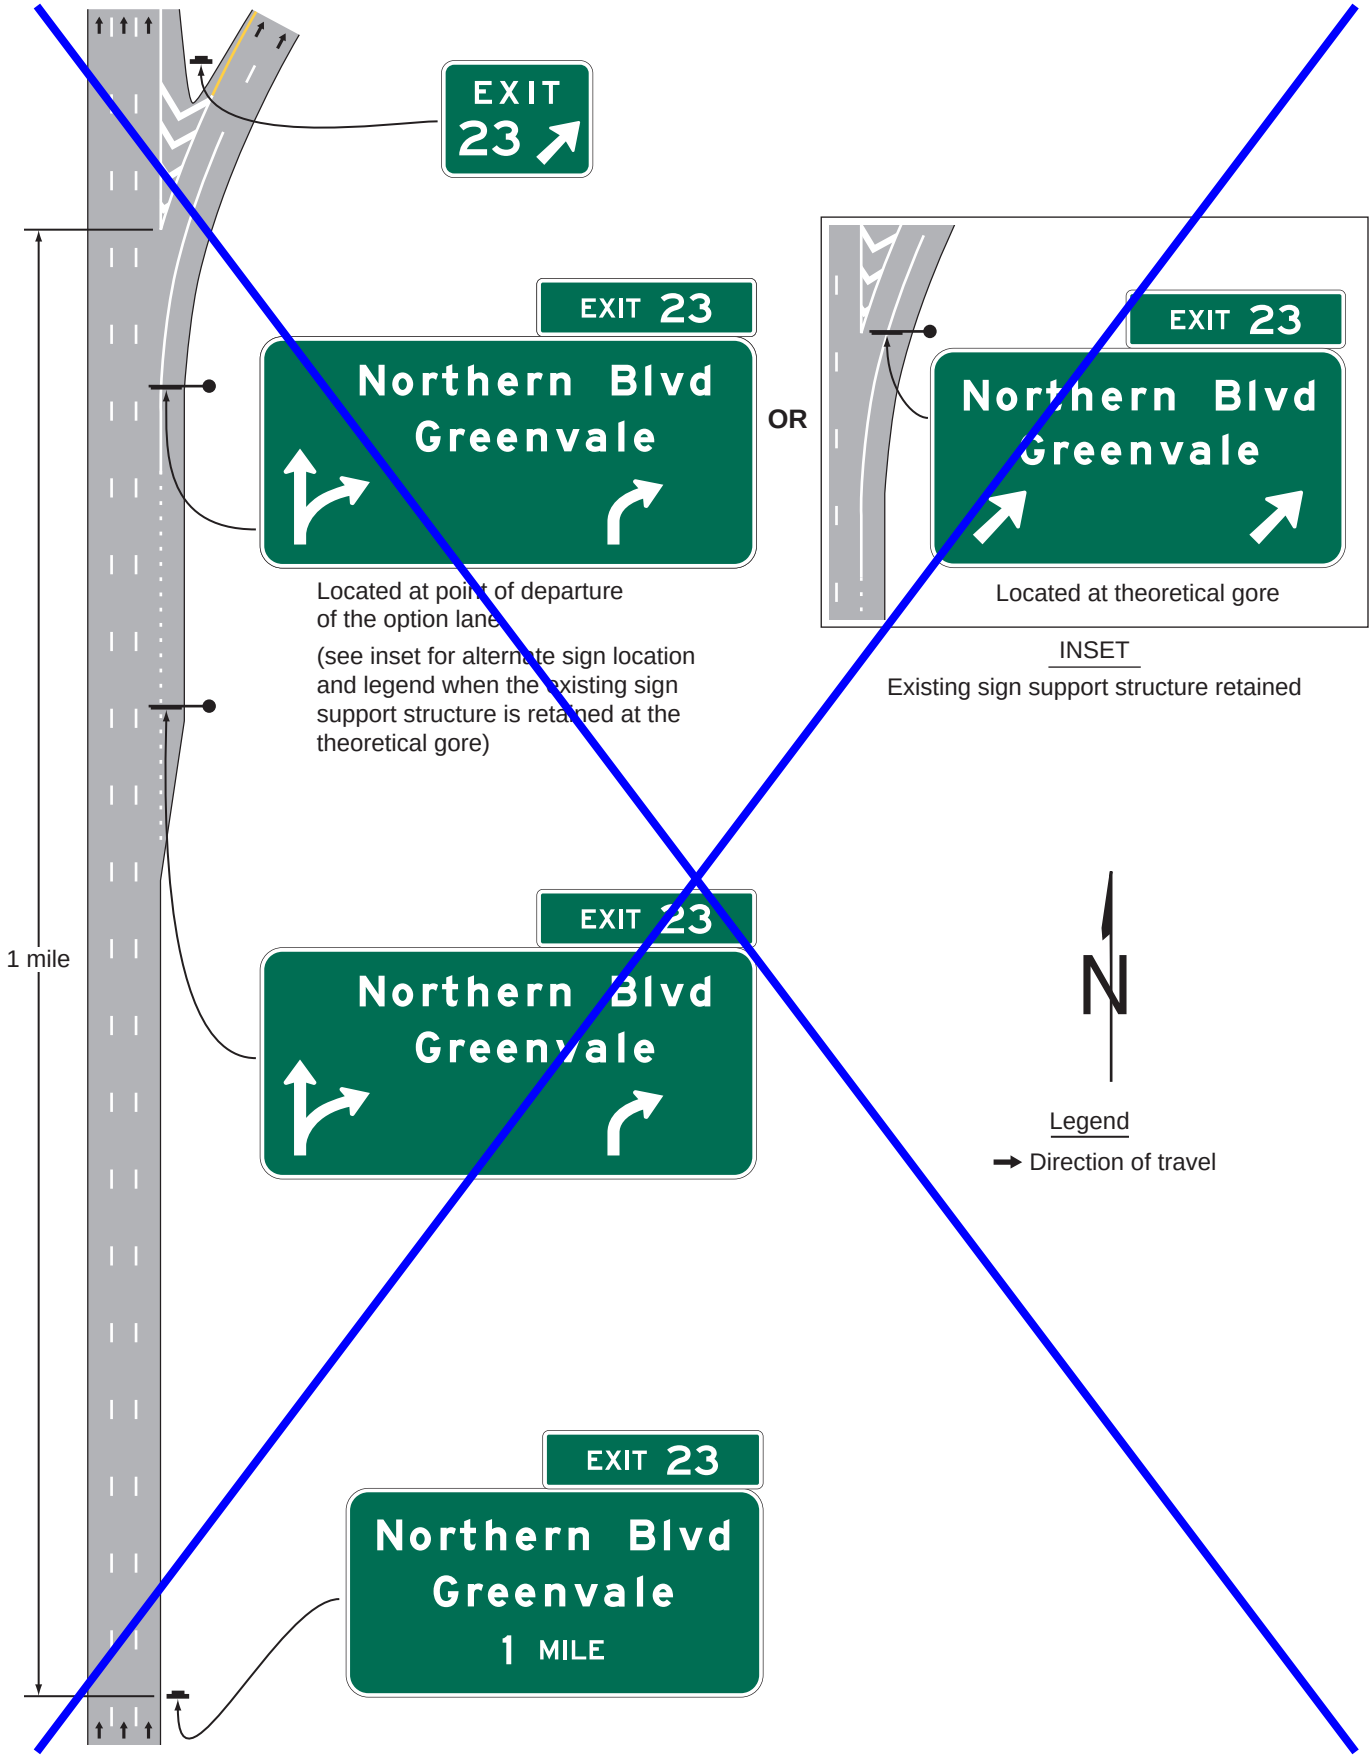


## *Figure 2E-45(CA). California Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes using Partial-Width Overhead Arrow-per-Lane Signs*

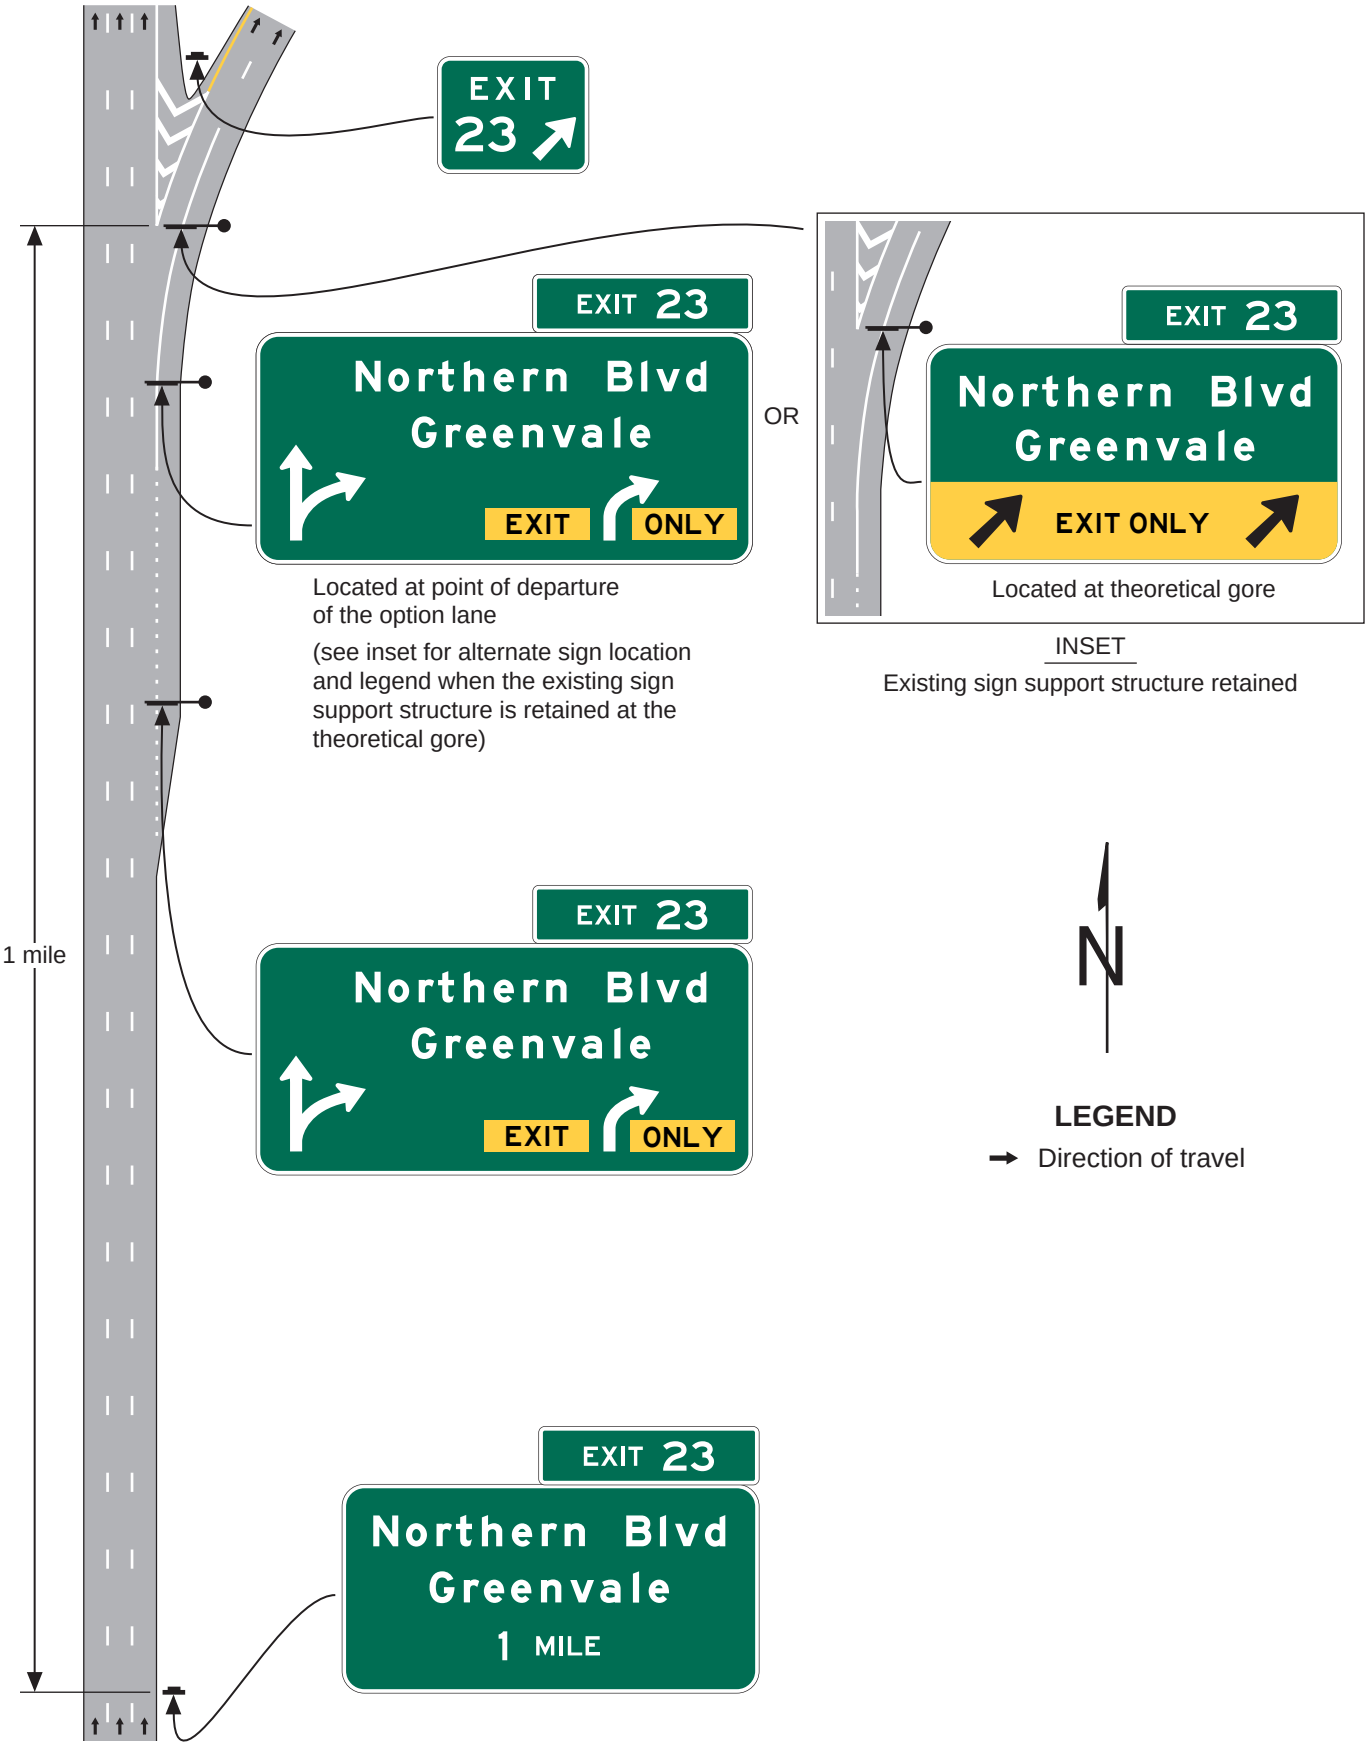


## Figure 2E-46. Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with an Option Lane and a Dropped Lane

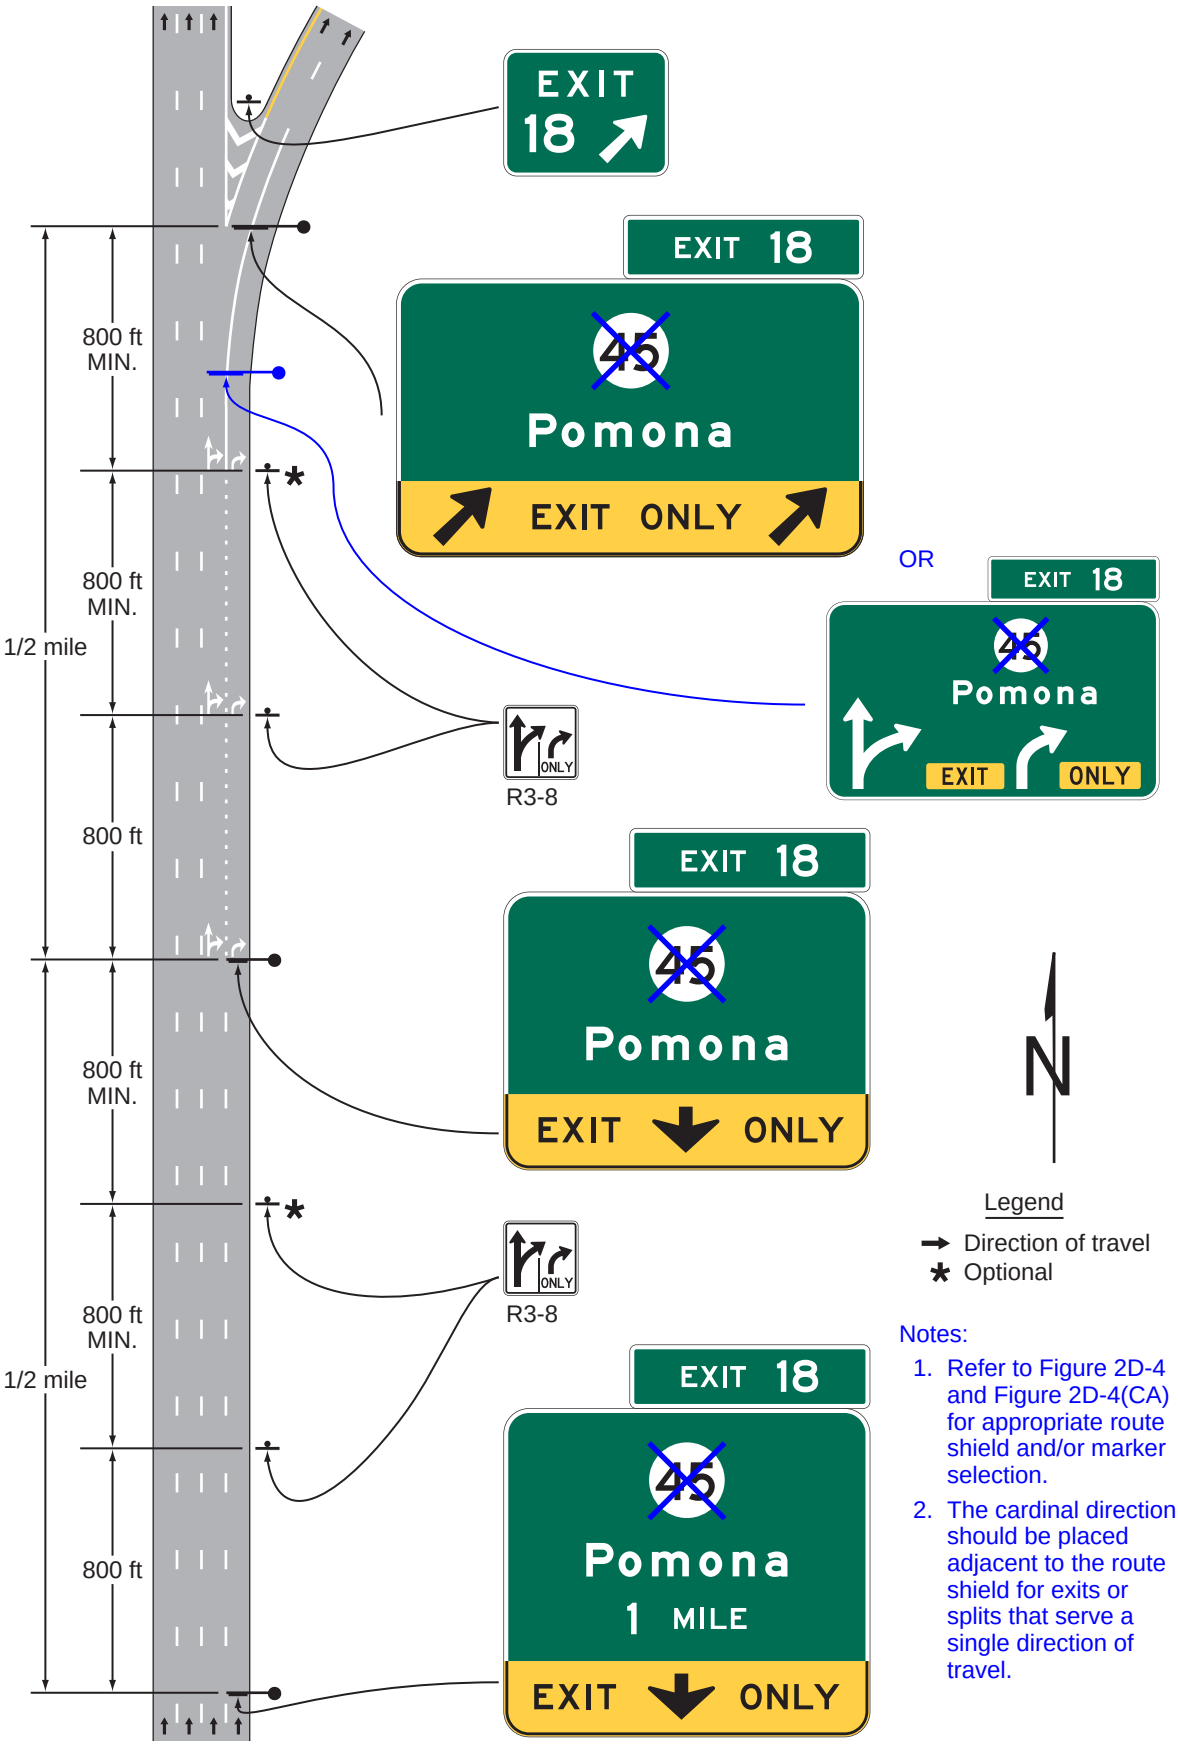

## Figure 2E-47. Example of Signing for a Two-Lane Intermediate or Minor Interchange Exit with Option and Auxiliary Lanes

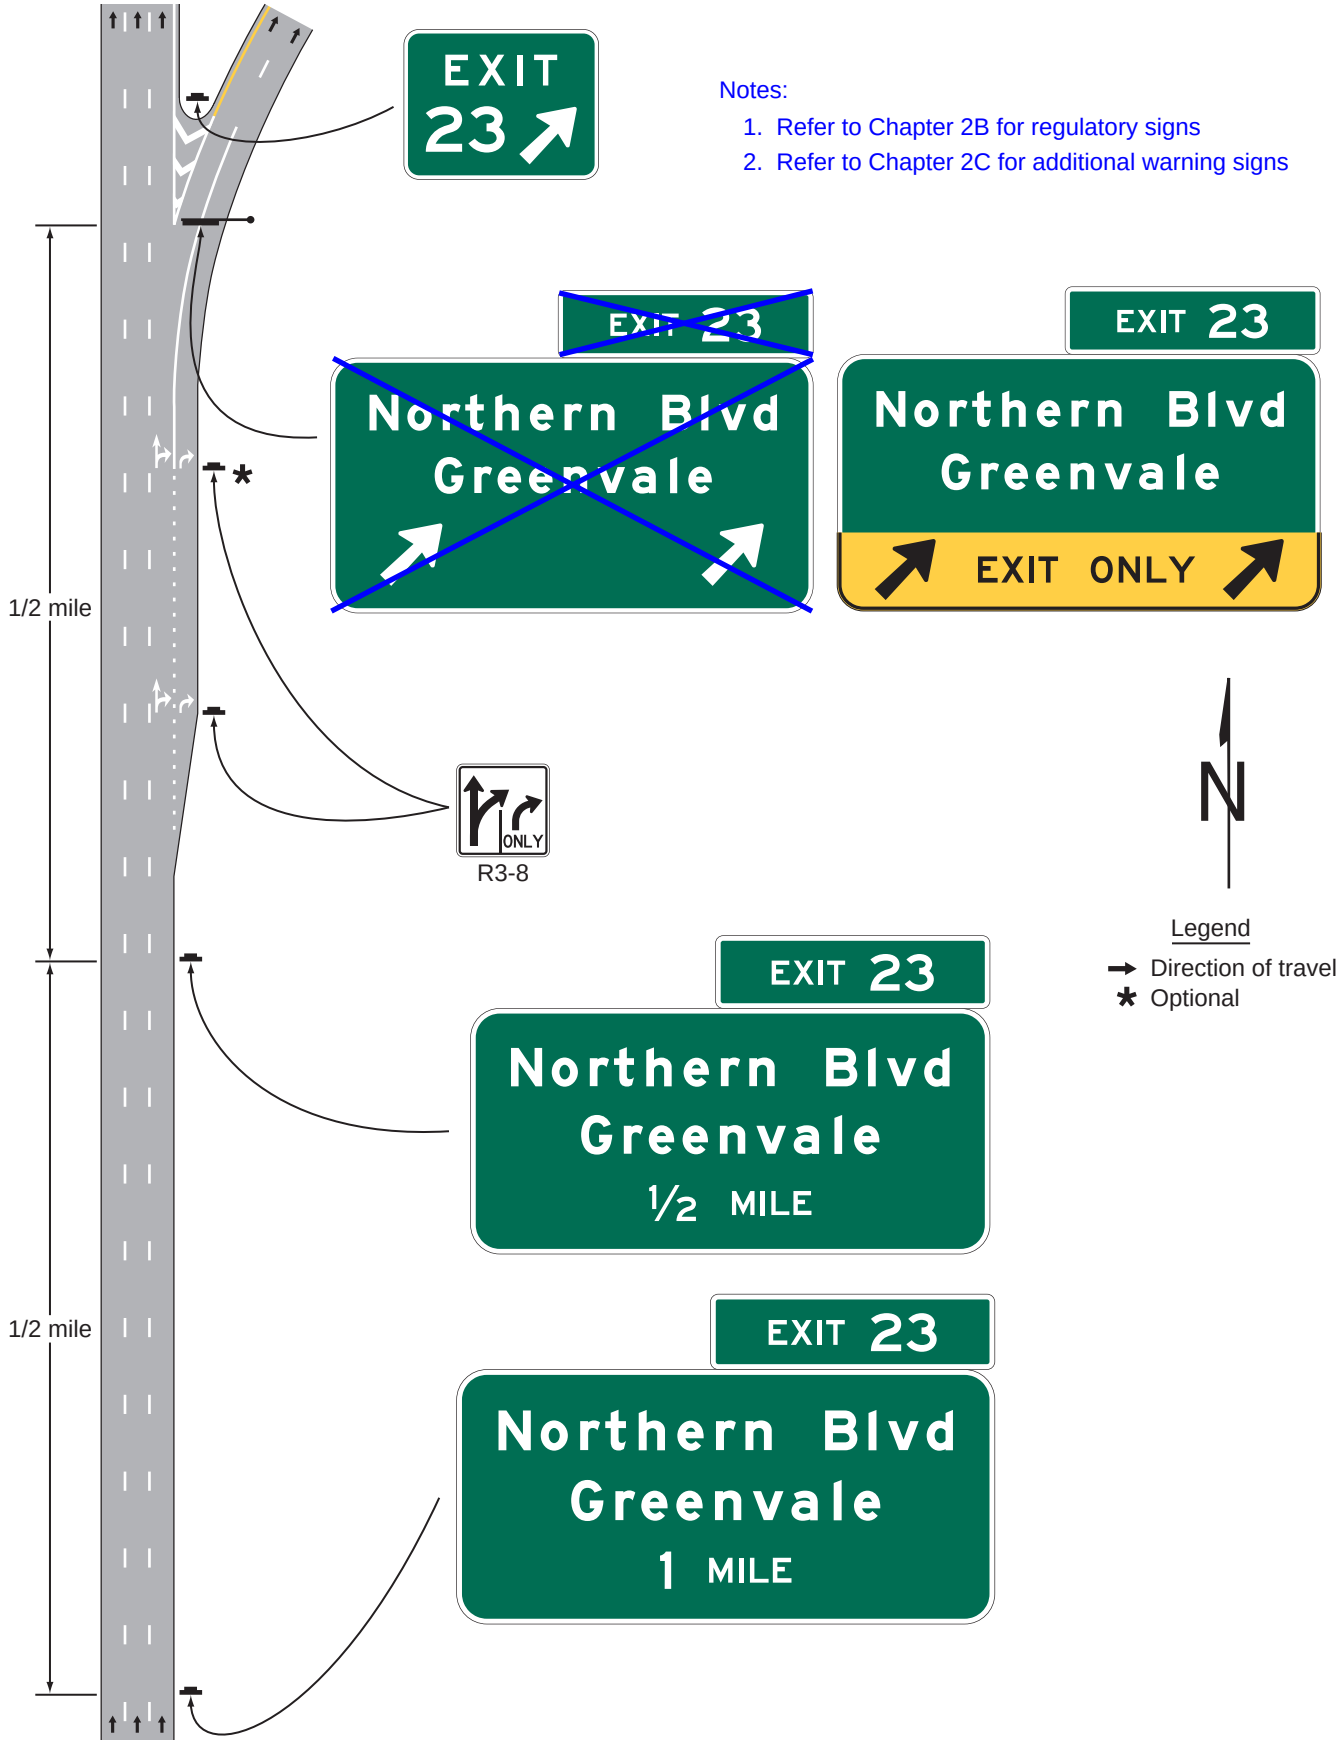

# Figure 2E-48. Example of Sign Spreading

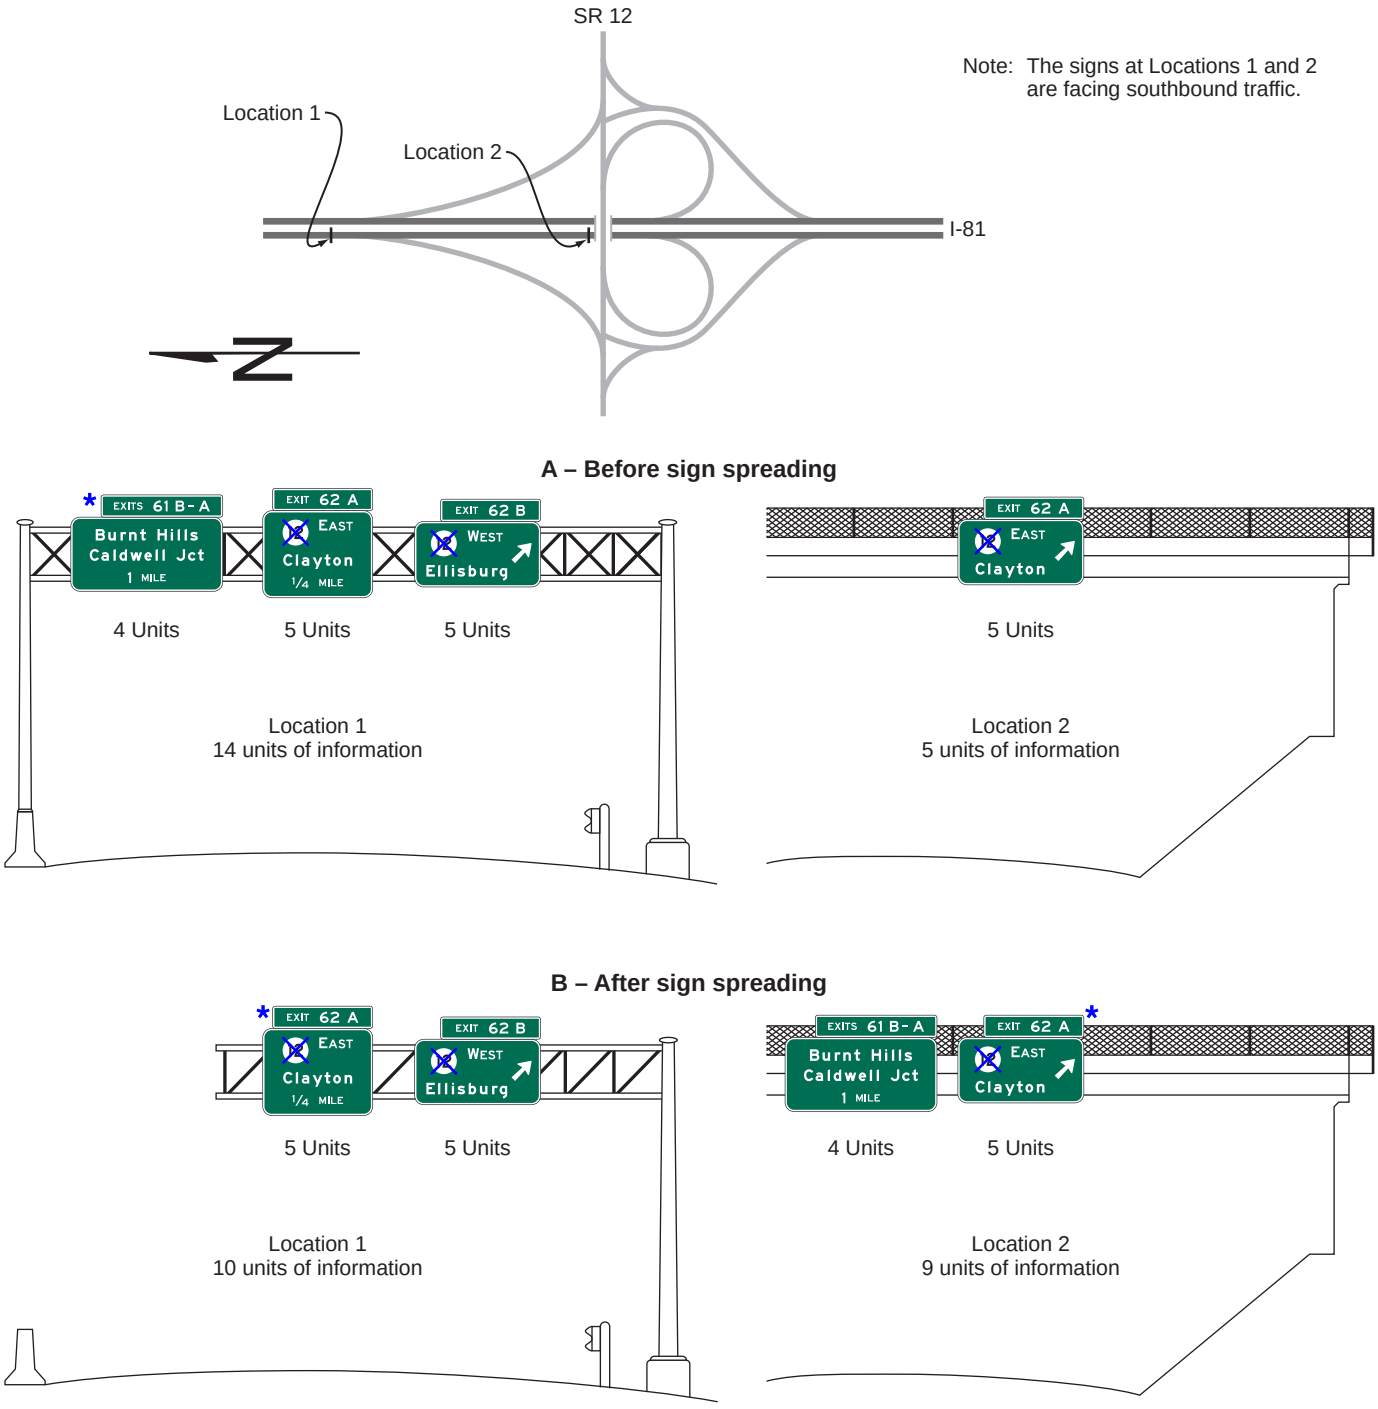


Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* All adjacent sign panels mounted on an overhead sign structures on state highways should have the same sign depth.

## Figure 2E-49. Next Exit Plaques




E2-1P




E2-1aP

## Figure 2E-50. Example of a Post-Interchange Distance Sign




E7-3

Note: The one-line version (E7-1) and two-line version (E7-2) of the Post-Interchange Distance signs are not shown.

## Figure 2E-51. Example of a Post-Interchange Travel Time Sign




E7-4

Note: The three-line version of the Post-Interchange Travel Time signs are not shown.


## Figure 2E-52. Examples of Travel Time Signs

**A – Distance and Travel Time signs**




E7-5

**B – Comparative Travel Time sign**

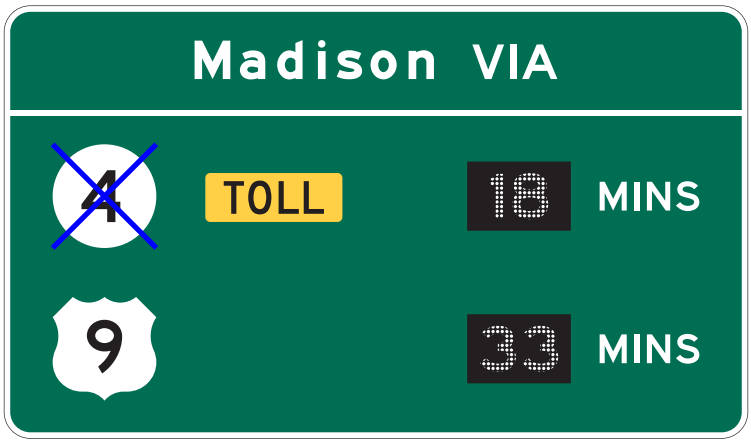


E7-6

Notes:

1. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.
2. The acronym "JCT" should be added adjacent to route shields, where applicable. Refer to Figure 2E-50 for reference.

## Figure 2E-53. Example of a Supplemental Guide Sign for a Multi-Exit Interchange



## Figure 2E-54. Examples of Supplemental Guide Signs for a Park-and-Ride Facility

**A – Route with exit numbering**




**B – Route without exit numbering**




---

## *Figure 2E-54(CA). California Examples of Supplemental Guide Signs for a Park-and-Ride Facility*




G95A-1(CA)





G95dP(CA)





G95eP(CA)

## Figure 2E-55. Example of a Community Interchanges Identification Sign

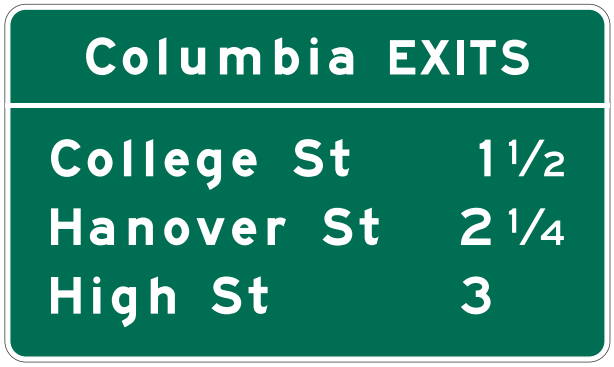

## Figure 2E-56. Example of the Use of a Community Interchanges Identification Sign

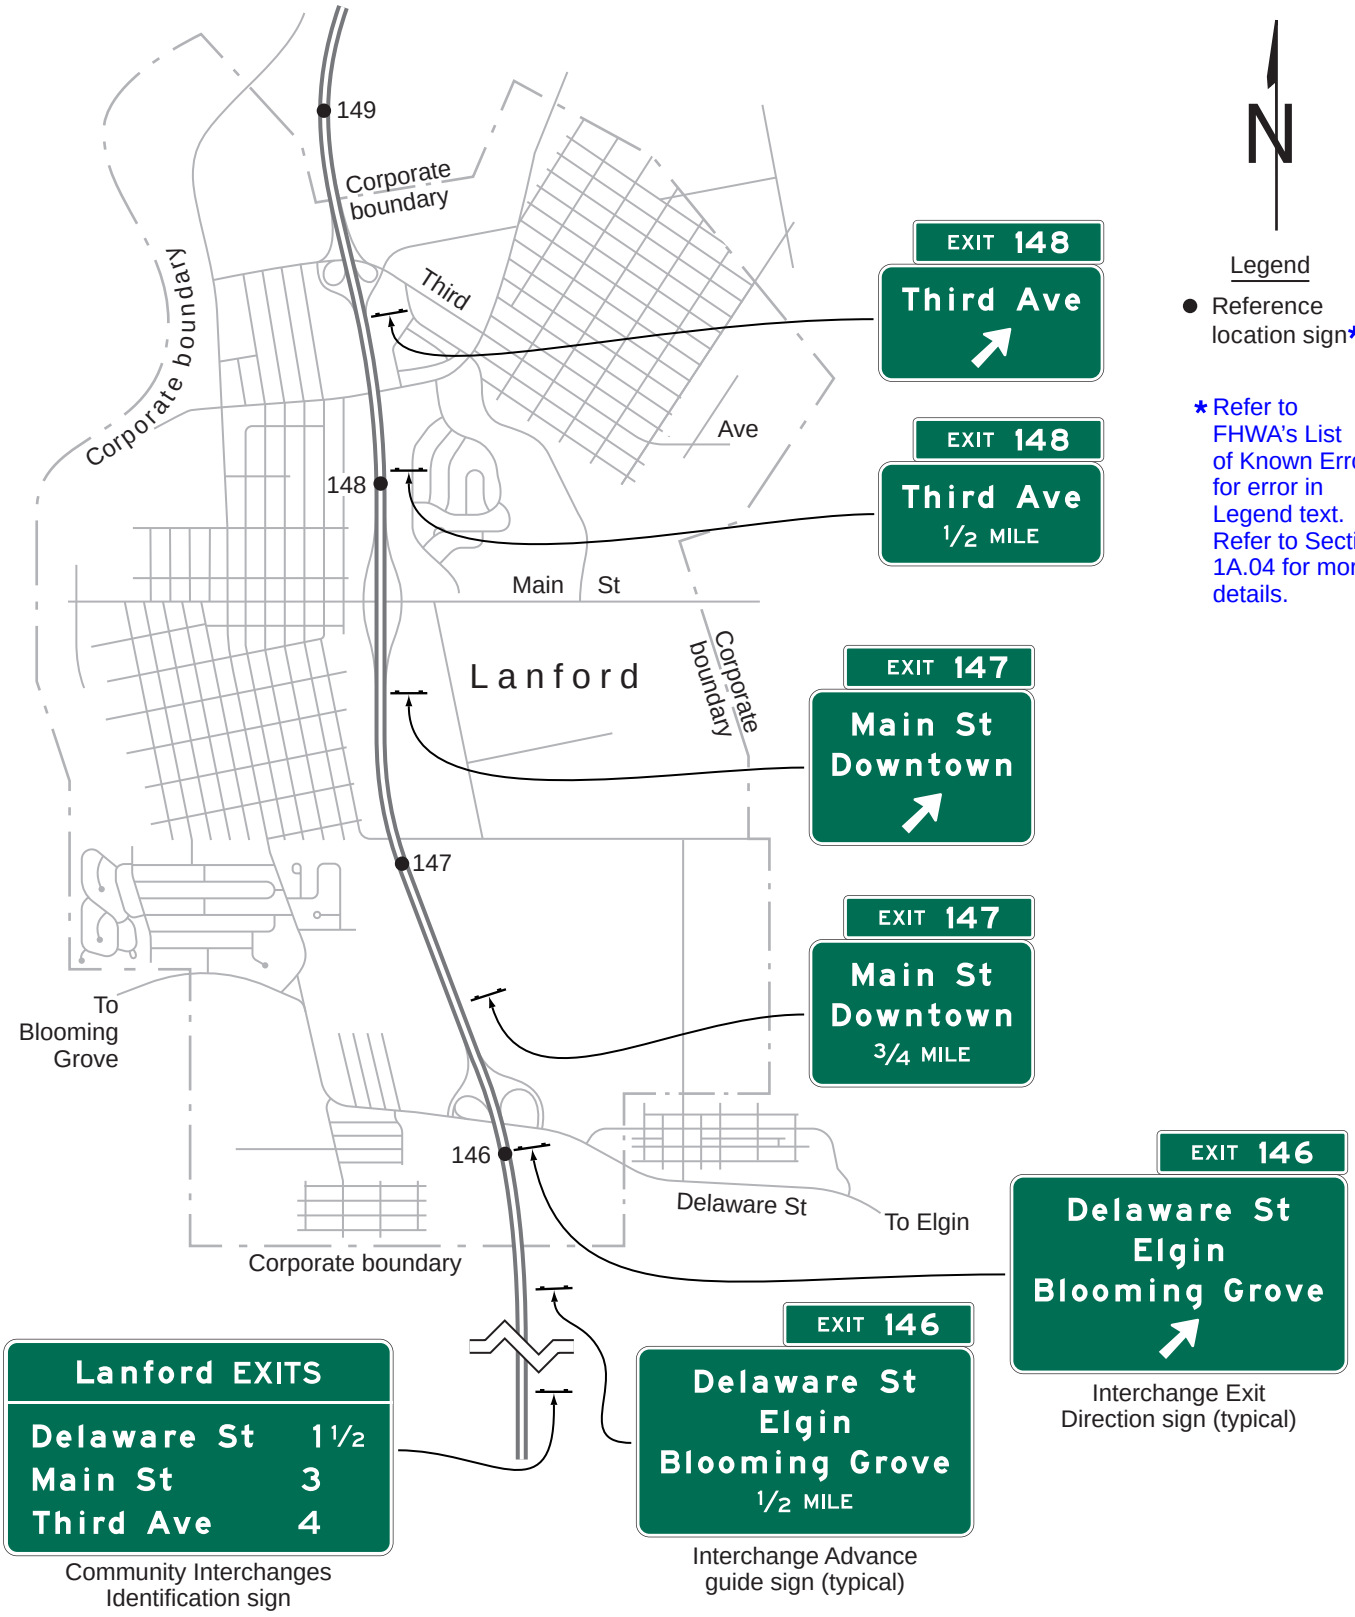


## Figure 2E-57. Example of a Next Exits Sign





E9-3

## Figure 2E-58. Example of the Use of a Next Exits Sign

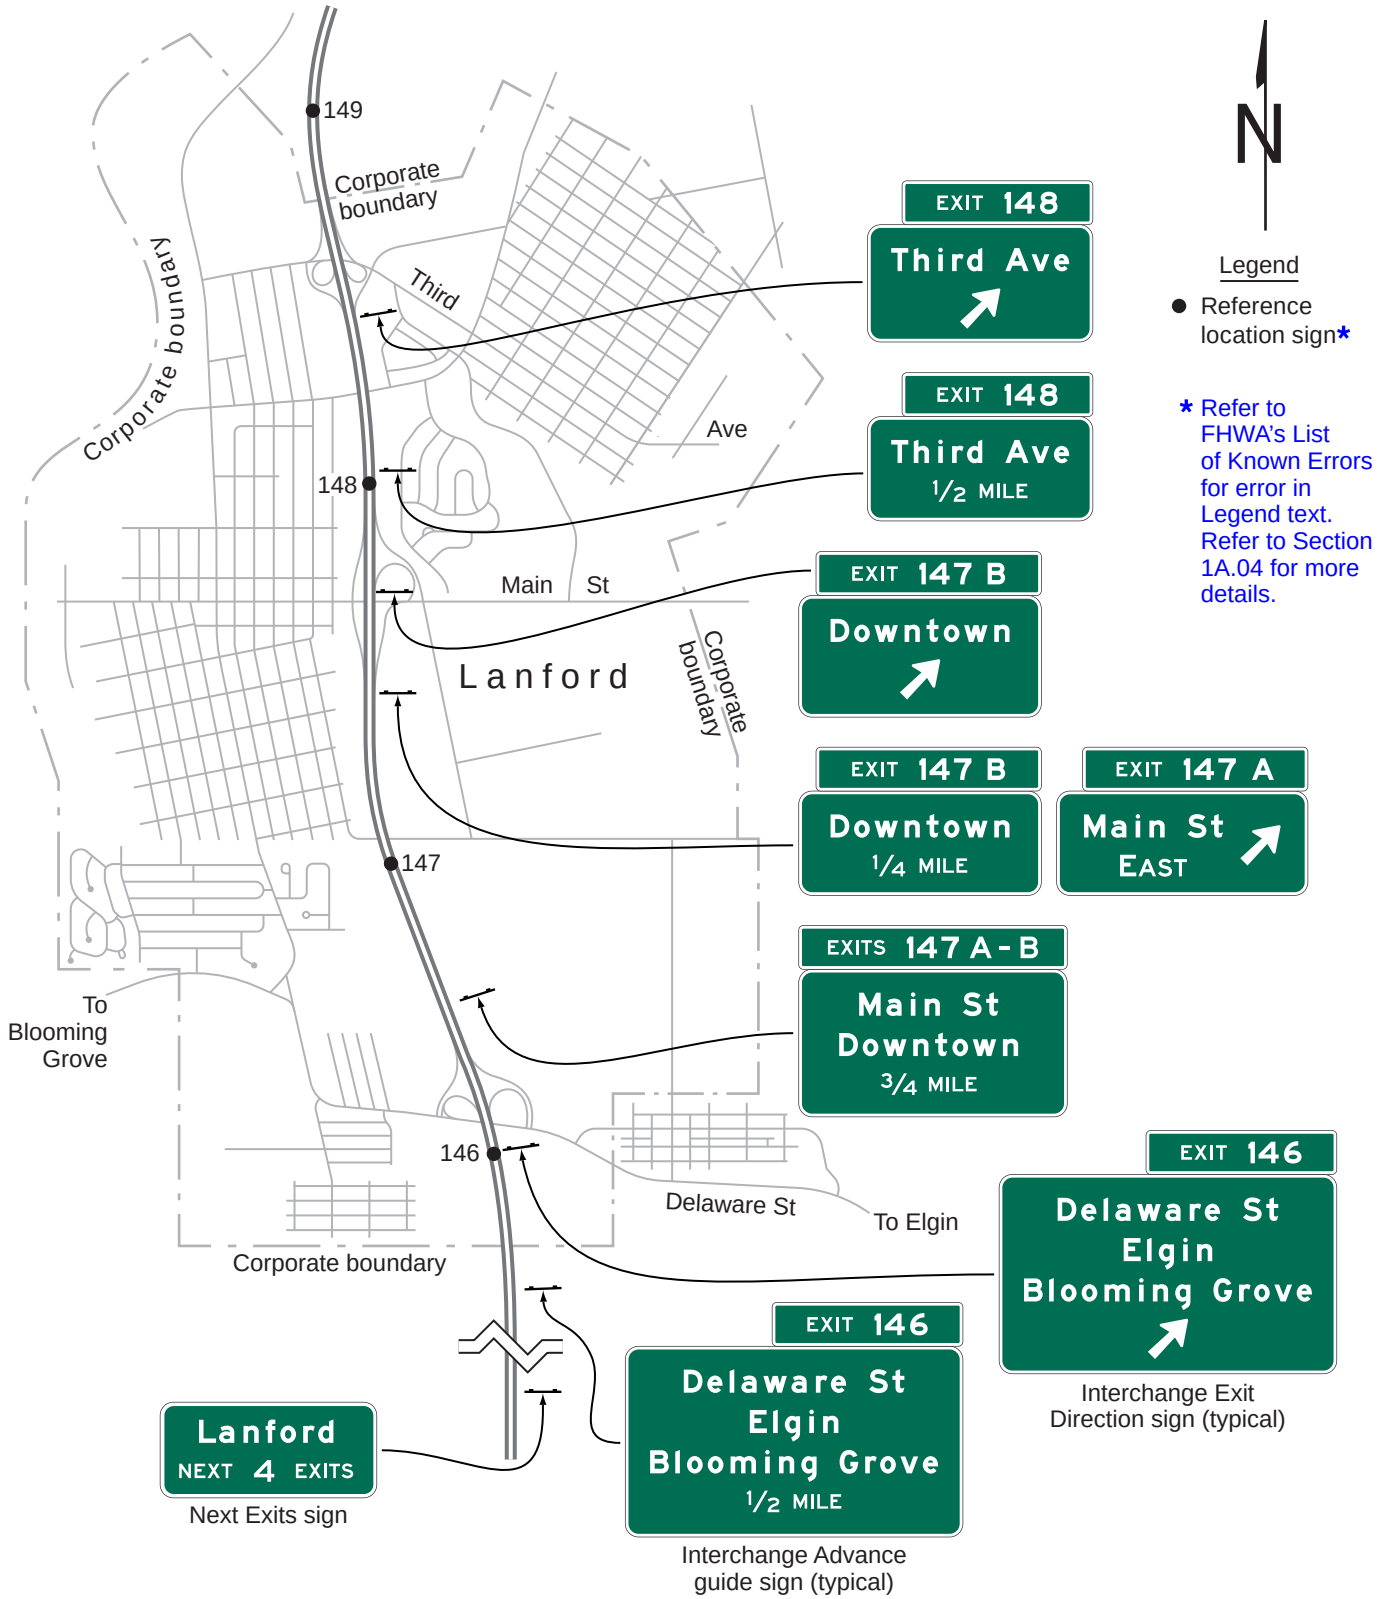

## Figure 2E-59. Example of Weigh Station Signing on Freeways

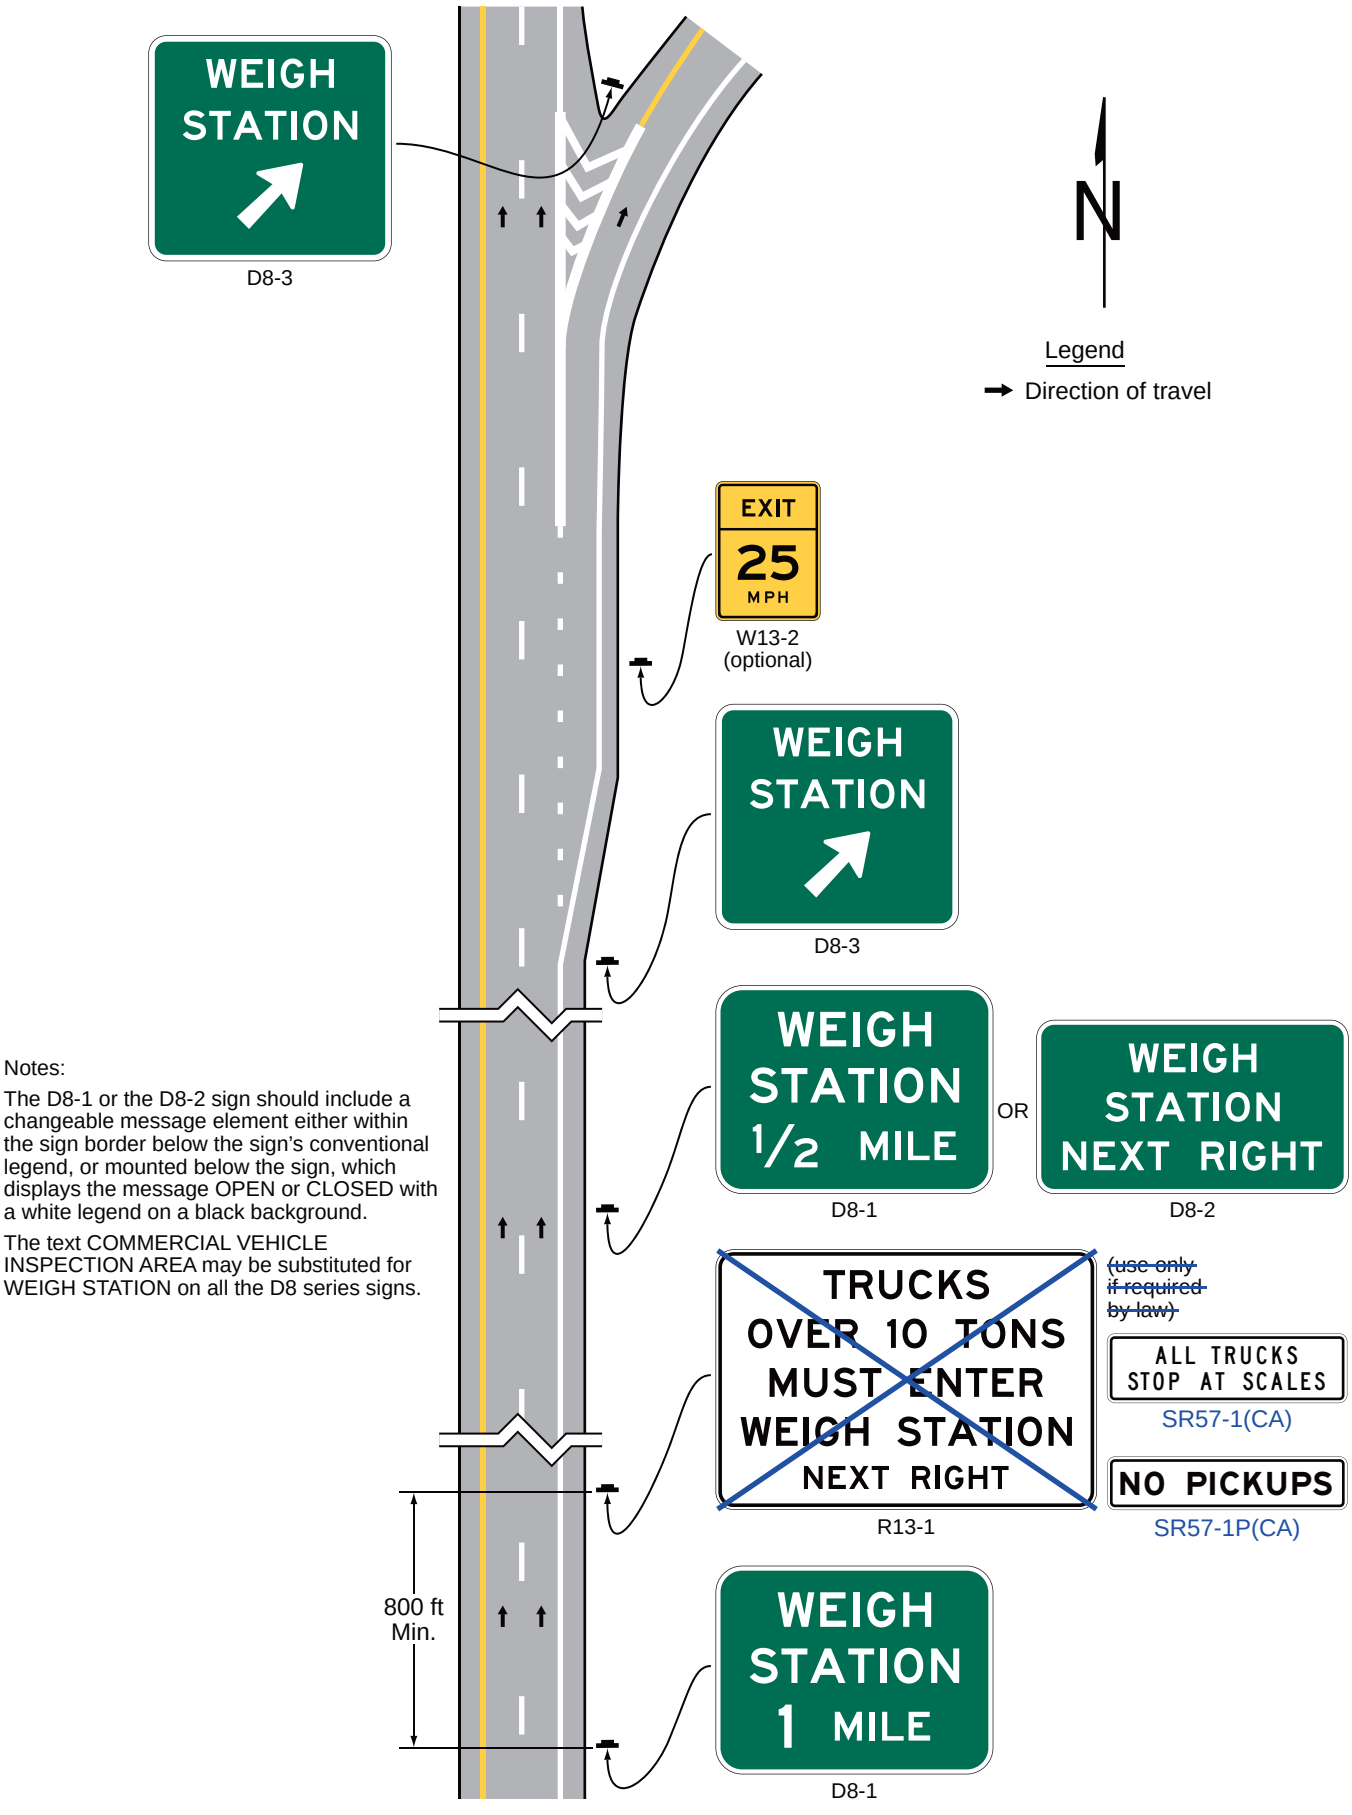



Notes:

The D8-1 or the D8-2 sign should include a changeable message element either within the sign border below the sign's conventional legend, or mounted below the sign, which displays the message OPEN or CLOSED with a white legend on a black background.


The text COMMERCIAL VEHICLE INSPECTION AREA may be substituted for WEIGH STATION on all the D8 series signs.

## Figure 2E-60. Interstate, Off-Interstate, and U.S. Route Signs

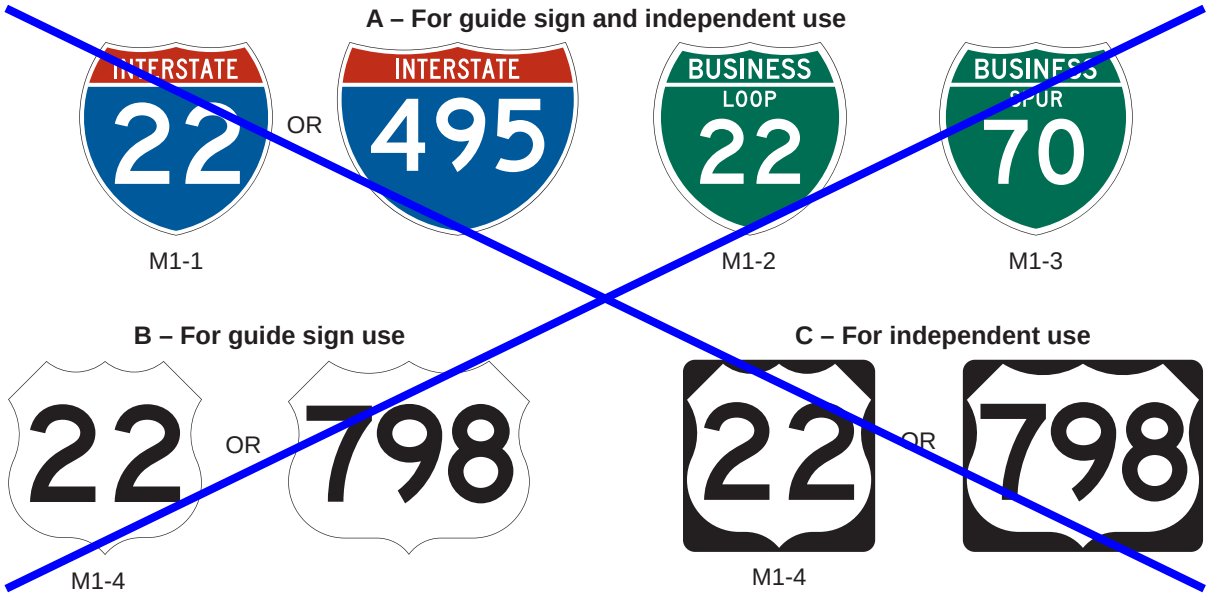



Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

## Figure 2E-61. Eisenhower Interstate System Signs




M1-10 M1-10a

## Figure 2E-62. Example of Signing for Route Diversion by Vehicle Class

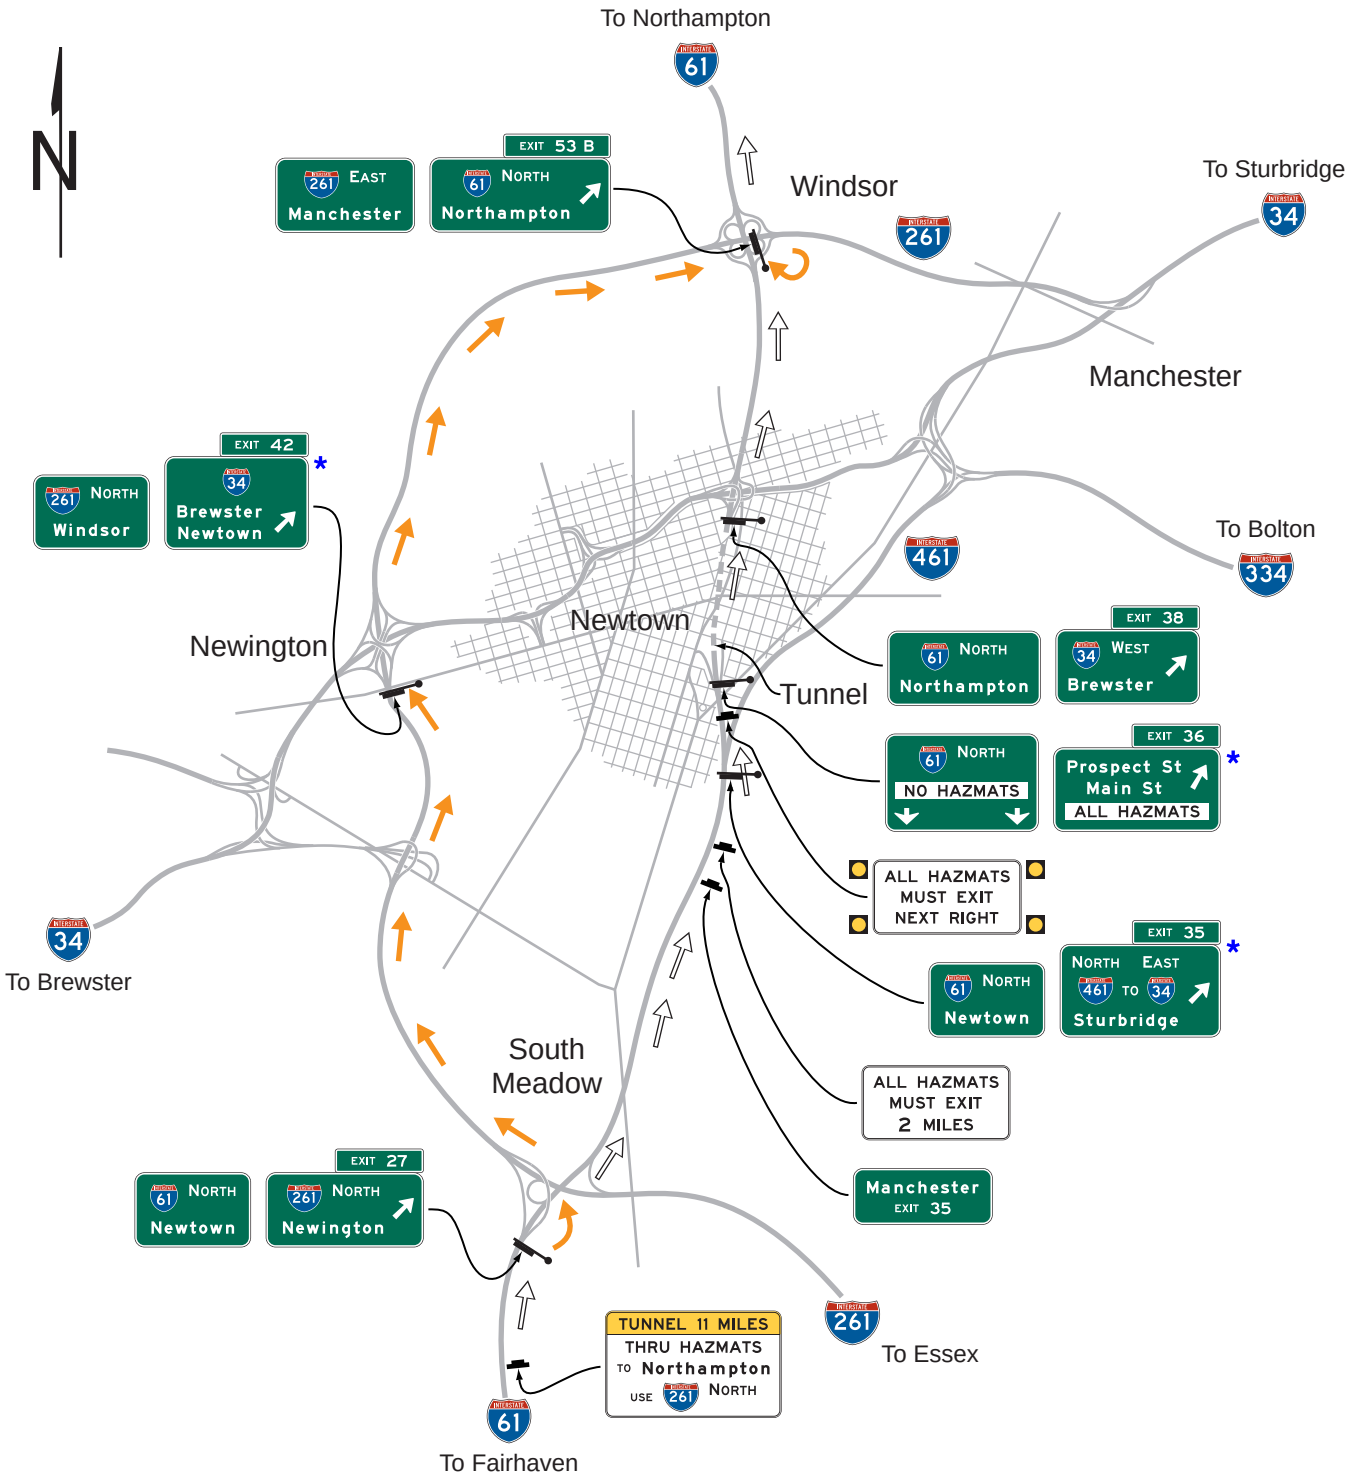


Legend

⇨ Direct through route

→ Route for diverted vehicles

* All adjacent sign panels mounted on an overhead sign structures on state highways should have the same sign depth.

Note: Some interchange advance guide signs are not shown.

## Table 2E-1. Freeway or Expressway Guide Sign and Plaque Sizes (Sheet 1 of 3)

| Sign or Plaque | Sign Designation | Section | Minimum Size |
|---|---|---|---|
| Interchange Advance Guide (1 destination) | E1-1 | 2E.23 | Varies |
| Interchange Advance Guide (2 destinations) | E1-2 | 2E.23 | Varies |
| Interchange Advance Guide (3 destinations) | E1-3 | 2E.23 | Varies |
| Exit Number (plaque) | | | |
| 1-, 2-Digit Exit Number | E1-5P | 2E.23 | 114 x 30 |
| 3-Digit Exit Number | E1-5aP | 2E.23 | 132 x 30 |
| 1-, 2-Digit Exit Number (with single-letter suffix) | E1-5bP | 2E.23 | 138 x 30 |
| 3-Digit Exit Number (with single-letter suffix) | E1-5cP | 2E.23 | 156 x 30 |
| 1-, 2-Digit Exit Number (with dual-letter suffix) | E1-5dP | 2E.23 | 168 x 30 |
| 3-Digit Exit Number (with dual-letter suffix) | E1-5eP | 2E.23 | 186 x 30 |
| Left Exit Number (plaque) | | | |
| 1-, 2-Digit Exit Number | E1-5fP | 2E.23 | 114 x 54 |
| 3-Digit Exit Number | E1-5gP | 2E.23 | 132 x 54 |
| 1-, 2-Digit Exit Number (with single-letter suffix) | E1-5hP | 2E.23 | 138 x 54 |
| 3-Digit Exit Number (with single-letter suffix) | E1-5iP | 2E.23 | 156 x 54 |
| 1-, 2-Digit Exit Number (with dual-letter suffix) | E1-5jP | 2E.23 | 168 x 54 |
| 3-Digit Exit Number (with dual-letter suffix) | E1-5kP | 2E.23 | 186 x 54 |
| Left (plaque) | E1-5mP | 2E.23 | 72 x 30 |
| Next Exit (1 line) (plaque) | E2-1P | 2E.46 | Varies x 24 |
| Next Exit (2 lines) (plaque) | E2-1aP | 2E.46 | Varies x 36 |
| Supplemental (1 destination) | E3-1 | 2E.51 | Varies |
| Supplemental (2 destinations) | E3-2 | 2E.51 | Varies |
| Exit Direction (1 destination) | E4-1 | 2E.25 | Varies |
| Exit Direction (2 destinations) | E4-2 | 2E.25 | Varies |
| Exit Direction (3 destinations) | E4-3 | 2E.25 | Varies |
| Exit Gore | E5-1 | 2E.26 | 72 x 60 |
| Exit Gore (with exit number) | | | |
| 1-, 2-Digit Exit Number | E5-1a | 2E.26 | 78 x 60 |
| 3-Digit Exit Number | E5-1a | 2E.26 | 96 x 60 |
| 1-Digit Exit Number (with single-letter suffix) | E5-1a | 2E.26 | 90 x 60 |
| 2-Digit Exit Number (with single-letter suffix) | E5-1a | 2E.26 | 108 x 60 |
| 3-Digit Exit Number (with single-letter suffix) | E5-1a | 2E.26 | 126 x 60 |
| 1-Digit Exit Number (with dual-letter suffix) | E5-1a | 2E.26 | 120 x 60 |
| 2-Digit Exit Number (with dual-letter suffix) | E5-1a | 2E.26 | 138 x 60 |
| 3-Digit Exit Number (with dual-letter suffix) | E5-1a | 2E.26 | 156 x 60 |
| Exit Number (plaque) | | | |
| ~~1-, 2-Digit Exit Number~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~42 x 30~~ |
| ~~3-Digit Exit Number~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~60 x 30~~ |
| ~~1-Digit Exit Number (with single-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~54 x 30~~ |
| ~~2-Digit Exit Number (with single-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~72 x 30~~ |
| ~~3-Digit Exit Number (with single-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~90 x 30~~ |
| ~~1-Digit Exit Number (with dual-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~84 x 30~~ |
| ~~2-Digit Exit Number (with dual-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~102 x 30~~ |
| ~~3-Digit Exit Number (with dual-letter suffix)~~ | ~~E5-1bP~~ | ~~2E.26~~ | ~~120 x 30~~ |
| Narrow Exit Gore | E5-1c | 2E.26 | 60 x 90* |
| Pull-Through | E6-1 | 2E.27 | Varies |
| Pull-Through (Destination) | E6-1a | 2E.27 | Varies |
| Pull-Through (Down Arrows) | E6-2 | 2E.27 | Varies |

## Table 2E-1. Freeway or Expressway Guide Sign and Plaque Sizes (Sheet 2 of 3)

| Sign or Plaque | Sign Designation | Section | Minimum Size |
|---|---|---|---|
| Pull-Through (Destination, Down Arrows) | E6-2a | 2E.27 | Varies |
| Post-Interchange Distance | E7-1 | 2E.48 | Varies |
| Post-Interchange Distance | E7-2 | 2E.48 | Varies |
| Post-Interchange Distance | E7-3 | 2E.48 | Varies |
| Post-Interchange Travel Time | E7-4 | 2E.49 | Varies |
| Distance and Travel Time | E7-5 | 2E.50 | Varies |
| Comparative Travel Time | E7-6 | 2E.50 | Varies |
| Interchange Sequence (2 interchanges) | E9-1 | 2E.24 | Varies |
| Interchange Sequence (3 interchanges) | E9-2 | 2E.24 | Varies |
| Next Exits (1 destination) | E9-3 | 2E.53 | Varies |
| Next Exits (2 destinations) | E9-3a | 2E.53 | Varies |
| Community Interchanges (2 interchanges) | E9-4 | 2E.52 | Varies |
| Community Interchanges (3 interchanges) | E9-5 | 2E.52 | Varies |
| Exit Only (with arrow) | E11-1,1d | 2E.28 | 174** x 36 |
| Exit | E11-1a | 2E.28 | 66 x 18 |
| Only | E11-1b | 2E.28 | 66 x 18 |
| Exit Only | E11-1c | 2E.28 | 120 x 18 |
| Exit Only (with two arrows) | E11-1e,1f | 2E.28 | 222** x 36 |
| Left (panel) | E11-2 | 2E.24 | 60 x 18 |
| Exit Direction Advisory Speed (panel) | E13-2 | 2E.25 | 162 x 24 |
| Interstate Route (1, 2 digits) (Shield) | M1-1 | 2E.55 | 36 x 36 |
| Interstate Route (3 digits) (Shield) | M1-1 | 2E.55 | 45 x 36 |
| Off-Interstate Route (1, 2 digits) | M1-2,3 | 2E.55 | 36 x 36 |
| Off-Interstate Route (3 digits) | M1-2,3 | 2E.55 | 45 x 36 |
| U.S. Route (1, 2 digits) (Shield or Marker) | M1-4 | 2E.55 | 36 x 36 |
| U.S. Route (3 digits) (Shield or Marker) | M1-4 | 2E.55 | 45 x 36 |
| ~~State Route (1, 2 digits)~~ | ~~M1-5~~ | ~~2D.11~~ | ~~36 x 36~~ |
| ~~State Route (3 digits)~~ | ~~M1-5~~ | ~~2D.11~~ | ~~45 x 36~~ |
| County Route | M1-6 | 2D.11 | 36 x 36 |
| Forest Route | M1-7 | 2D.11 | 36 x 36 |
| Eisenhower Interstate System | M1-10,~~10a~~ | 2E.56 | 36 x 36 |
| Junction (plaque) | M2-1P | 2D.13 | 30 x 21 |
| Combination Junction (2 route signs) | M2-2 | 2D.14 | 60 x 48* |
| Cardinal Direction (plaque) | M3-1P,2P,3P,4P | 2D.15 | 36 x 18 |
| Alternate (plaque) | M4-1P,1aP | 2D.17 | 36 x 18 |
| By-Pass (plaque) | M4-2P | 2D.18 | 36 x 18 |
| Business (plaque) | M4-3P | 2D.19 | 36 x 18 |
| Truck (plaque) | M4-4P | 2D.20 | 36 x 18 |
| To (plaque) | M4-5P | 2D.21 | 36 x 18 |
| End (plaque) | M4-6P | 2D.22 | 36 x 18 |
| Temporary (plaque) | M4-7P,7aP | 2D.24 | 36 x 18 |
| Begin (plaque) | M4-14P | 2D.23 | 36 x 18 |
| Advance Turn Arrow (plaque) | M5-1P,2P,3P | 2D.26 | 30 x 21 |
| Lane Designation (plaque) | M5-4P,5P,6P | 2D.27 | 36 x 24 |
| Directional Arrow (plaque) | M6-1P,2P, 2aP,3P,4P,5P,6P,7P | 2D.28 | 30 x 21 |
| National Scenic Byway | M10-1 | 2D.57 | 24 x 24 |
| National Scenic Byway (plaque) | M10-1aP | 2D.57 | 24 x 12 |
| Destination (1 line) | D1-1 | 2D.36 | Varies x 24 |

## Table 2E-1. Freeway or Expressway Guide Sign and Plaque Sizes (Sheet 3 of 3)

| Sign or Plaque | Sign Designation | Section | Minimum Size |
|---|---|---|---|
| Destination and Distance (1 line) | D1-1a | 2D.36 | Varies x 24 |
| Destination (2 lines) | D1-2 | 2D.36 | Varies x 42 |
| Destination and Distance (2 lines) | D1-2a | 2D.36 | Varies x 42 |
| Destination (3 lines) | D1-3 | 2D.36 | Varies x 60 |
| Destination and Distance (3 lines) | D1-3a | 2D.36 | Varies x 60 |
| Distance (1 line) | D2-1 | 2D.43 | Varies x 24 |
| Distance (2 lines) | D2-2 | 2D.43 | Varies x 36 |
| Distance (3 lines) | D2-3 | 2D.43 | Varies x 48 |
| Street Name (1 line) | D3-1,1a | 2D.45 | Varies x 18 |
| Overhead Street Name (1 line) | D3-1,1a | 2D.45 | Varies x 24 |
| Street Name (2 lines) | D3-1,1a | 2D.45 | Varies x 33 |
| Overhead Street Name (2 lines) | D3-1,1a | 2D.45 | Varies x 48 |
| Advance Street Name (2 lines) | D3-2 | 2D.46 | Varies x 36 |
| Advance Street Name (3 lines) | D3-2 | 2D.46 | Varies x 48 |
| Advance Street Name (4 lines) | D3-2 | 2D.46 | Varies x 66 |
| Park - Ride | D4-2 | 2D.48 | 36 x 48 |
| Advance Weigh Station Distance | D8-1 | 2E.54 | 96 x 72 (F)<br>78 x 60 (E) |
| Weigh Station Advance Direction | D8-2 | 2E.54 | 108 x 90 (F)<br>84 x 72 (E) |
| Weigh Station Entrance Direction | D8-3 | 2E.54 | 84 x 78 (F)<br>66 x 60 (E) |
| Crossover | D13-1,2 | 2D.52 | 78 x 42 |
| Freeway Entrance | D13-3 | 2D.50 | 48 x 30 |
| Freeway Entrance (Directional) | D13-3a | 2D.50 | 48 x 42 |
| Combination Lane Use / Destination | D15-1 | 2D.38 | Varies x 96 |
| Next Truck Lane | D17-1 | 2D.53 | 60 x 66 |
| Advance Truck Lane | D17-2 | 2D.53 | 60 x 54 |
| Next Passing Lane | D17-3 | 2D.53 | 60 x 66 |
| Advance Passing Lane | D17-4 | 2D.53 | 60 x 54 |
| Advance Emergency Turn-Out | D17-5 | 2D.54 | 78 x 54 |
| Emergency Turn-Out (Directional) | D17-6 | 2D.54 | 78 x 60 |
| Advance Slow Vehicle Turn-Out | D17-7 | 2D.54 | 96 x 54 |

* The size shown is for a typical sign as illustrated in the figures in Chapters 2D and 2E. The size should be determined based on the amount of legend required for the sign.

** The width shown represents the minimum dimension. The width shall be increased as appropriate to match the width of the guide sign.

Notes:
1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height
3. Where two sizes are shown, the larger size is for freeways (F) and the smaller size is for expressways (E)

## Table 2E-1(CA). California Freeway or Expressway Guide Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Minimum |
|---|---|---|---|
| Advance Lane Assignment | G20-1(CA) | 2D.31 | Varies x 30 |
| Advance Lane Assignment | G20-3(CA) | 2D.31 | Varies x 42 |
| Advance Lane Assignment | G20-5(CA) | 2D.31 | Varies x 54 |
| Advance Lane Assignment | G20-7(CA) | 2D.31 | Varies x 60 |
| Intersection Sequence | G23-7(CA) | 2E.24 | Varies x 90 |
| Pull-Through | G24-1(CA) | 2E.27 | Varies x 80 |
| Pull-Through | G24-3(CA) | 2E.27 | Varies x 110 |
| Pull-Through | G24-4(CA) | 2E.27 | Varies x 120 |
| Pull-Through | G24-5(CA) | 2E.27 | Varies x 110 |
| Pull-Through | G24-6(CA) | 2E.27 | Varies x 110 |
| Pull-Through | G24-7(CA) | 2E.27 | Varies x 110 |
| Advance Guide | G83-2(CA) | 2E.23 | Varies x 110 |
| Exit Numbered Advance Guide | G83-4(CA) | 2E.22, 2E.23 | Varies x 108 |
| Exit Numbered Advance Guide | G83-5(CA) | 2E.22, 2E.23 | Varies x 78 |
| Exit Numbered Exit Direction | G85-2(CA) | 2E.25 | Varies x 48 |
| Exit Numbered Exit Direction | G85-3(CA) | 2E.25 | Varies x 108 |
| Exit Numbered Exit Direction | G85-4(CA) | 2E.25 | Varies x 138 |
| Exit Numbered Exit Direction | G85-5(CA) | 2E.25 | Varies x 80 |
| Exit Numbered Exit Direction | G85-6(CA) | 2E.25 | Varies x 80 |
| Exit Numbered Exit Direction | G85-11(CA) | 2E.25 | Varies x 78 |
| Exit Numbered Exit Direction | G85-13(CA) | 2E.25 | Varies x 80 |
| Exit Numbered Exit Direction | G85-14(CA) | 2E.25 | Varies x 110 |
| Exit Numbered Advance Guide | G88-1(CA) | 2E.22, 2E.23 | Varies x 80 |
| Exit Numbered Advance Guide | G88-2(CA) | 2E.22, 2E.23 | Varies x 110 |
| PARK - RIDE Supplemental Guide | G95A-1(CA) | 2E.51 | 96 x 60 |
| BUS SERVICE (plaque) | G95dP(CA) | 2E.51 | 96 x 24 |
| PARK - RIDE (plaque) | G95eP(CA) | 2E.51 | 120 x 24 |

# Table 2E-2. Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Interchange Classification

| Type of Sign | Type of Interchange (see Section 2E.11) | | | | Overhead* |
|---|---|---|---|---|---|
| | Major | | Intermediate | Minor | |
| | Category a | Category b | | | |
| **A. Advance Guide, Exit Direction, and Overhead Guide Signs** | | | | | |
| Exit Number Plaques | | | | | |
| Words | 10 | 10 | 10 | 8 | 10 |
| Numerals & Letters | 15 | 15 | 15 | 12 | 15 |
| Interstate Route Signs | | | | | |
| Numerals | 14** | — | — | — | 14** |
| 1- or 2-Digit Shields | 36 x 36 | — | — | — | 36 x 36 |
| 3-Digit Shields | 45 x 36 | — | — | — | 45 x 36 |
| U.S. or State Route Signs | | | | | |
| Numerals | 18 | 18 | 18 | 12 | 18 |
| 1- or 2-Digit Shields | 36 x 36 | 36 x 36 | 36 x 36 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 45 x 36 | 45 x 36 | 45 x 36 | 30 x 24 | 45 x 36 |
| U.S. or State Route Text Identification (Example: US 56) | | | | | |
| Numerals & Letters | 18 | 15 | 15 | 12 | 15 |
| Cardinal Directions | | | | | |
| First Letters | 18 | 15 | 12 | 10 | 15 |
| Rest of Word | 15 | 12 | 10 | 8 | 12 |
| Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS) | | | | | |
| Words | 15 | 12 | 10 | 8 | 12 |
| Names of Destinations | | | | | |
| Upper-Case Letters | 20 | 16 | 13.33 | 10.67 | 16 |
| Lower-Case Letters | 15 | 12 | 10 | 8 | 12 |
| Distance Numbers | 18 | 15 | 12 | 10 | 15 |
| Distance Fraction Numerals | 12 | 10 | 10 | 8 | 10 |
| Distance Words | 12 | 10 | 10 | 8 | 10 |
| Action Message Words | 10 | 10 | 10 | 8 | 10 |
| **B. Gore Signs** | | | | | |
| Words | 10 | 10 | 10 | 8 | — |
| Numerals & Letters | 12 | 12 | 12 | 10 | — |

* Where a larger size is shown for the interchange classification of the interchange, that larger size is used for overhead-mounted guide signs for that interchange.

** Minimum size listed for 3-digit shields. Larger numeral sizes used for 1-digit, some 2-digit, and some 3-digit shields. See the Standard Highways Signs publication for more information on Route Sign numeral heights and Standard Alphabet series.

Note: Sizes are shown in inches and, where applicable, are shown as width x height

# Table 2E-3. Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Sign Type

| Type of Sign | Minimum Size |
|---|---|
| **A. Pull-Through Signs** | |
| Destinations — Upper-Case Letters | 13.33 |
| Destinations — Lower-Case Letters | 10 |
| Route Signs | |
| Numerals | 14* |
| 1- or 2-Digit Shields | 36 x 36 |
| 3-Digit Shields | 45 x 36 |
| Cardinal Directions — First Letters | 12 |
| Cardinal Directions — Rest of Word | 10 |
| **B. Supplemental Guide Signs** | |
| Exit Number — Words | 8 |
| Exit Number — Numerals and Letters | 12 |
| Place Names — Upper-Case Letters | 10.67 |
| Place Names — Lower-Case Letters | 8 |
| Action Messages | 8 |
| Route Signs | |
| Numerals | 9* |
| 1- or 2-Digit Shield | 24 x 24 |
| 3-Digit Shield | 30 x 24 |
| **C. Interchange Sequence or Community Interchanges Identification Signs** | |
| Words — Upper-Case Letters | 10.67 |
| Words — Lower-Case Letters | 8 |
| Numerals | 10.67 |
| Fraction Numerals | 8 |
| Route Signs | |
| Numerals | 9* |
| 1- or 2-Digit Shield | 24 x 24 |
| 3-Digit Shield | 30 x 24 |
| **D. Next XX Exits Sign** | |
| Place Names — Upper-Case Letters | 10.67 |
| Place Names — Lower-Case Letters | 8 |
| NEXT XX EXITS — Words | 8 |
| NEXT XX EXITS — Number | 12 |

| Type of Sign | Minimum Size |
|---|---|
| **E. Distance Signs** | |
| Words — Upper-Case Letters | 8 |
| Words — Lower-Case Letters | 6 |
| Numerals | 8 |
| Route Signs | |
| Numerals | 6* |
| 1- or 2-Digit Shield | 18 x 18 |
| 3-Digit Shield | 22.5 x 18 |
| **F. General Service Signs (see Chapter 2I)** | |
| Exit Number — Words | 8 |
| Exit Number — Numerals and Letters | 12 |
| Services | 8 |
| **G. Rest Area, Scenic Area, and Roadside Area Signs (see Chapter 2I)** | |
| Words | 10 |
| Distance Numerals | 12 |
| Distance Fraction Numerals | 8 |
| Distance Words | 8 |
| Action Message Words | 10 |
| **H. Reference Location Signs (see Chapter 2H)** | |
| Words | 4 |
| Numbers | 10 |
| **I. Boundary and Orientation Signs (see Chapter 2H)** | |
| Words — Upper-Case Letters | 8 |
| Words — Lower-Case Letters | 6 |
| **J. Next Exit and Next Services Signs** | |
| Words and Numbers | 8 |
| **K. Exit Only Signs** | |
| Words | 12 |
| **L. Overhead Arrow-per-Lane and Diagrammatic Signs** | |
| See Table 2E-5 | |

* Minimum size listed for 3-digit shields. Larger numeral sizes used for 1-digit, some 2-digit, and some 3-digit shields. See the Standard Highways Signs publication for more information on Route Sign numeral heights and Standard Alphabet series.

Note: Sizes are shown in inches and where applicable are shown as width x height

# Table 2E-4. Minimum Letter and Numeral Sizes for Freeway Guide Signs According to Interchange Classification

| Type of Sign | Type of Interchange (see Section 2E.11) | | | | Overhead ** |
|---|---|---|---|---|---|
| | Major | | Intermediate | Minor | |
| | Category a | Category b | | | |
| **A. Advance Guide, Exit Direction, and Overhead Guide Signs** | | | | | |
| Exit Number Plaques | | | | | |
| Words | 10 | 10 | 10 | 10 | 10 |
| Numerals & Letters | 15 | 15 | 15 | 15 | 15 |
| Interstate Route Signs | | | | | |
| Numerals | 18/14* | — | — | — | 14* |
| 1- or 2-Digit Shields | 48 x 48/<br>36 x 36 | — | — | — | 36 x 36 |
| 3-Digit Shields | 60 x 48/<br>45 x 36 | — | — | — | 45 x 36 |
| U.S. or State Route Signs | | | | | |
| Numerals | 24/18 | 18 | 18 | 12 | 18 |
| 1- or 2-Digit Shields | 48 x 48/<br>36 x 36 | 36 x 36 | 36 x 36 | 24 x 24 | 36 x 36 |
| 3-Digit Shields | 60 x 48/<br>45 x 36 | 45 x 36 | 45 x 36 | 30 x 24 | 45 x 36 |
| U.S. or State Route Text Identification (Example: US 56) | | | | | |
| Numerals & Letters | 18 | 18/15 | 15 | 12 | 15 |
| Cardinal Directions | | | | | |
| First Letters | 18 | 15 | 15 | 10 | 15 |
| Rest of Words | 15 | 12 | 12 | 8 | 12 |
| Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS) | | | | | |
| Words | 15 | 12 | 12 | 8 | 12 |
| Names of Destinations | | | | | |
| Upper-Case Letters | 20 | 20 | 16 | 13.33 | 16 |
| Lower-Case Letters | 15 | 15 | 12 | 10 | 12 |
| Distance Numbers | 18 | 18/15 | 15 | 12 | 15 |
| Distance Fraction Numerals | 12 | 12/10 | 10 | 8 | 10 |
| Distance Words | 12 | 12/10 | 10 | 8 | 10 |
| Action Message Words | 12 | 12/10 | 10 | 8 | 10 |
| **B. Gore Signs** | | | | | |
| Words | 12 | 12 | 12 | 8 | — |
| Numeral & Letters | 18 | 18 | 18 | 12 | — |

* Minimum size listed for 3-digit shields. Larger numeral sizes used for 1-digit, some 2-digit, and some 3-digit shields. See the Standard Highways Signs publication for more information on Route Sign numeral heights and Standard Alphabet series.

** Refer to FHWA's List of Known Errors for error in column. Refer to Section 1A.04 for more details.

Notes: 1. Sizes are shown in inches and, where applicable, are shown as width x height
2. Slanted line (/) signifies separation of desirable and minimum sizes

# Table 2E-5. Minimum Letter and Numeral Sizes for Freeway Guide Signs According to Sign Type

| Type of Sign | Minimum Size |
|---|---|
| **A. Pull-Through Signs** | |
| Destinations — Upper-Case Letters | 16 |
| Destinations — Lower-Case Letters | 12 |
| Route Signs | |
| Numerals | 14* |
| 1- or 2-Digit Shields | 36 x 36 |
| 3-Digit Shields | 45 x 36 |
| Cardinal Directions — First Letter | 15 |
| Cardinal Directions — Rest of Word | 12 |
| **B. Supplemental Guide Signs** | |
| Exit Number Words | 10 |
| Exit Number Numerals and Letters | 15 |
| Place Names — Upper-Case Letters | 13.33 |
| Place Names — Lower-Case Letters | 10 |
| Action Messages | 8 |
| Route Signs | |
| Numerals | 9* |
| 1- or 2-Digit Shield | 24 x 24 |
| 3-Digit Shield | 30 x 24 |
| **C. Interchange Sequence or Community Interchanges Identification Signs** | |
| Words — Upper-Case Letters | 13.33 |
| Words — Lower-Case Letters | 10 |
| Numerals | 13.33 |
| Fraction Numerals | 10 |
| Route Signs | |
| Numerals | 9* |
| 1- or 2-Digit Shield | 24 x 24 |
| 3-Digit Shield | 30 x 24 |
| **D. Next X Exits Sign** | |
| Place Names — Upper-Case Letters | 13.33 |
| Place Names — Lower-Case Letters | 10 |
| NEXT X EXITS — Words | 10 |
| NEXT X EXITS — Number | 15 |
| **E. Distance Signs** | |
| Words — Upper-Case Letters | 8 |
| Words — Lower-Case Letters | 6 |
| Numerals | 8 |
| Route Signs | |
| Numerals | 6* |
| 1- or 2-Digit Shield | 18 x 18 |
| 3-Digit Shield | 22.5 x 18 |

| Type of Sign | Minimum Size |
|---|---|
| **F. General Service Signs (see Chapter 2I)** | |
| Exit Number Words | 10 |
| Exit Number Numerals and Letters | 15 |
| Services | 10 |
| **G. Rest Area, Scenic Area, and Roadside Area Signs (see Chapter 2I)** | |
| Words | 12 |
| Distance Numerals | 15 |
| Distance Fraction Numerals | 10 |
| Distance Words | 10 |
| Action Message Words | 12 |
| **H. Reference Location Signs (see Chapter 2H)** | |
| Words | 4 |
| Numerals | 10 |
| **I. Boundary and Orientation Signs (see Chapter 2H)** | |
| Words — Upper-Case Letters | 8 |
| Words — Lower-Case Letters | 6 |
| **J. Next Exit and Next Services Signs** | |
| Words and Numerals | 8 |
| **K. Exit Only Signs** | |
| Words | 12 |
| **L. Overhead Arrow-per-Lane Signs**** | |
| Arrowhead (Type D Directional Arrow) *** | 21 |
| Arrow Shaft Width *** | 7.75 |
| Arrow Height | |
| Through *** | 48/40 |
| Left Only *** | 36/30 |
| Right Only *** | 36/30 |
| Optional-Diverge (Through with Left or Right) *** | 48/40 |
| Optional-Split (Left and Right) *** | 22/33.33 |
| Vertical Separator Width | 2 |
| Vertical Space between Vertical Separator and Top of Nearest Arrow | 6.5/5.0 |
| Horizontal Space between Vertical Separator and Top of Nearest Through Arrow | 12/9 |
| Horizontal Space between Arrow Shaft and EXIT and ONLY Panels | 12 |
| EXIT and ONLY Panels | 54 x 18 |
| **M. Diagrammatic Signs** | |
| Arrowhead (Type D Directional Arrow) | 13.5 |
| Stem Height to Upper Point of Departure | 30 |
| Horizontal Space between Arrowhead and Route Shield or Destination | 12 |

* Minimum size listed for 3-digit shields. Larger numeral sizes used for 1-digit, some 2-digit, and some 3-digit shields. See the Standard Highways Signs publication for more information on Route Sign numeral heights and Standard Alphabet series.

** Overhead Arrow-per-Lane sign example layouts and design elements sizing are provided in the Standard Highway Sign publication. Sizes shown as XX/XX correspond to 20-inch/16-inch destination letter legend sizes respecitvely.

*** Refer to FHWA's List of Known Errors for error in row. Refer to Section 1A.04 for more details.

Note: Sizes are shown in inches and where applicable are shown as width x height.

## Table 2E-6. Overhead Arrow-per-Lane Arrow Height Based on Principal Legend Letter Height

| Principle Legend Letter Height * | Through Arrow | Turn Arrow | Through with Turn Arrow | Split Arrow |
|---|---|---|---|---|
| 20 * | 48 | 36 | 48 | 44 |
| 16 or less * | 40 | 30 | 40 | 33.33 |

Note: Letter and arrow heights are shown in inches.

* Refer to FHWA's List of Known Errors for error in row. Refer to Section 1A.04 for more details.

# CHAPTER 2F. TOLL ROAD SIGNS

## Chapter 2F Subchapter and Section Organization

**GENERAL**
2F.01 Scope
2F.02 Sizes of Toll Road Signs and Electronic Toll Collection (ETC) System Pictographs
2F.03 Use of Color on Toll Signs

**REGULATORY SIGNS**
2F.04 Regulatory Signs for Toll Plazas
2F.05 Electronic Toll Collection (ETC) Account-Only Regulatory Sign and Plaque (R3-31 and R3- 32P)

**WARNING SIGNS**
2F.06 Pay Toll and Take Ticket Advance Warning Signs (W9-6 and W9-6e)
2F.07 Pay Toll and Take Ticket Advance Warning Plaques (W9-6bP and W9-6gP)
2F.08 Stop Ahead Pay Toll and Take Ticket Warning Signs (W9-6a and W9-6f)
2F.09 Stop Ahead Pay Toll and Take Ticket Warning Plaques (W9-6cP and W9-6hP)
2F.10 LAST EXIT BEFORE TOLL Warning Plaques (W16-16P and W16-16aP)
2F.11 TOLL Warning Plaque (W16-17P)

**GUIDE SIGNS**
2F.12 Toll Facility and Toll Plaza Guide Signs – General
2F.13 Electronic Toll Collection (ETC) Signs – General
2F.14 Advance Signs for Conventional Toll Plazas
2F.15 Advance Signs for Toll Plazas on Diverging Alignments from Open-Road ETC Account- Only Lanes
2F.16 Toll Plaza Canopy Signs
2F.17 Guide Signs for Entrances to Electronic Toll Collection (ETC) Only Facilities
2F.18 Guide Signs for ETC-Only Entrance Ramps to Non-Toll Highways
2F.19 ETC Account Program Information Signs

# GENERAL

## Section 2F.01 Scope

Support:

01 Toll highways are typically limited-access freeway or expressway facilities. A portion of or an entire route might be a toll highway, or a bridge, tunnel, or other crossing point might be the only toll portion of a highway at which a toll is collected. A toll highway might be a conventional road. The general signing requirements for toll roads will depend on the type of facility and access (freeway, expressway, or conventional road). The provisions of Chapters 2D and 2E will generally apply for guide signs along the toll facility that direct road users within and off the facility where exit points and geometric configurations are not dependent specifically on the collection of tolls. The aspect of tolling and the presence of toll plazas or collection points necessitate additional considerations in the typical signing needs. The notification of the collection of tolls in advance of and at entry points to the toll highway also necessitates additional modifications to the typical signing.

02 The scope of this Section applies to a route or facility on which all lanes are tolled. Chapter 2G contains provisions for the signing of managed lanes within an otherwise non-toll facility that employ tolling or pricing as an operational strategy to manage congestion levels.

**Standard:**

03 **Except where specifically provided in this Chapter, the provisions of other Chapters in Part 2 shall apply to toll roads.**

## Section 2F.02 Sizes of Toll Road Signs and Electronic Toll Collection (ETC) System Pictographs

**Standard:**

01 **Except as provided in Section 2A.07, the minimum sizes of toll road signs that have standardized designs shall be as shown in Table 2F-1.**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2F-1. Option:

03 Signs larger than those shown in Table 2F-1 may be used (see Section 2A.07).

**Standard:**

04 **The ETC system pictograph (see Section 2A.04) shall be of a size that makes it a prominent feature of the sign legend as necessary for conspicuity for those road users with registered ETC accounts seeking such direction, as well as for those road users who do not have ETC accounts so that it is clear to them to avoid such direction when applicable.**

*Guidance:*

05 *Except as provided in Paragraph 6 of this Section, an ETC pictograph that is in the shape of a horizontally-oriented rectangle should have a minimum height of 1.5 times the upper-case letter height of the principal legend on the sign. The width of an ETC pictograph in the shape of a horizontal rectangle should be between approximately 2 and 3 times the height of the pictograph.*

06 *When the pictograph is the principal legend on the sign, such as for advance guide signs for open- road tolling lanes (see Section 2F.15), the minimum height of a horizontally-oriented rectangular ETC pictograph should be consistent with that of a route shield prescribed for the particular application and type of sign.*

07 *For ETC pictographs whose shape is square, circular, or otherwise similar in height and width, or is a vertically-oriented rectangle, the same basic principles for conspicuity and placement should be followed. ETC pictographs whose shape is not in that of a horizontally-oriented rectangle should be suitably sized to facilitate conspicuity as described in Paragraph 4 of this Section and should be of a similar approximate area as the horizontally-oriented rectangular pictographs designed in accordance with the height and width as provided in Paragraph 5 of this Section.*

## Section 2F.03 Use of Color on Toll Signs

**Standard:**

01 **Use of the color purple on any sign shall comply with the provisions of Sections 1D.05 and 2A.06. Except as provided in Sections 2F.05 and 2F.16, purple as a background color shall be used only when the information associated with the appropriate ETC account is displayed on that portion of the sign. The background color of**

**the remaining portion of such signs shall comply with the provisions of Sections 1D.05 and 2A.06 as appropriate for a regulatory, warning, or guide sign. Purple shall not be used as a background color to display a destination, action message, or other legend that is not a display of the requirement for all vehicles to have a registered ETC account.**

02 **If only vehicles with registered ETC accounts are allowed to use a highway lane, a toll plaza lane, an open-road tolling lane, or all lanes of a toll highway or connection, the guide signs for such lanes or highways shall incorporate the pictograph (see Section 2A.04) adopted by the toll facility's ETC payment system and the regulatory message ONLY. Except for ETC pictographs whose predominant background color is purple, if incorporated within the green background of a guide sign, the ETC pictograph shall be on a white rectangular or square panel set on a purple underlay panel with a white border. For rectangular ETC pictographs whose predominant background color is purple, a white border shall be used at the outer edges of the purple rectangle to provide contrast between the pictograph and the sign background color.**

03 **If an ETC pictograph is used on a separate plaque in a route sign assembly (see Section 2F.05) or on a header panel within a guide sign, the plaque or the header panel shall have a purple background with a white border and the ETC pictograph shall have a white border to provide contrast between the pictograph and the background of the plaque or header panel.**

04 **Purple underlay panels for ETC pictographs or purple backgrounds for plaques and header panels shall only be used in the manner described in Paragraphs 1 through 3 of this Section to convey the requirement of a registered ETC account on signs for lanes reserved exclusively for vehicles with such an account and on directional signs to an ETC account-only facility from a non-toll facility or from a toll facility that accepts multiple payment forms.**

Support:

05 Figure 2F-1 shows examples of ETC account pictographs, their use with various background colors, and modifications involving underlay panels.

06 Section 2F.02 contains provisions regarding the size of pictographs for ETC accounts.

# REGULATORY SIGNS

## Section 2F.04 Regulatory Signs for Toll Plazas

Support:

01 Toll plaza operations often include lane-specific restrictions on vehicle type, forms of payment accepted, and speed limits or required stops. Vehicles are typically required to come to a stop to pay the toll or receive a toll ticket in the attended and exact change or automatic lanes. Electronic toll collection (ETC) lanes with favorable geometrics typically allow vehicles to move through the toll plaza without stopping, but usually within a set regulatory speed limit or advisory speed. In some ETC lanes and in most lanes that accommodate non-ETC vehicles, a stop might be required while the ETC payment is processed because of geometric or other conditions.

*Guidance:*

02 *Regulatory signs applicable only to a particular lane or lanes should be located in a position that makes their lane applicability clear to road users approaching the toll plaza.*

03 *Regulatory signs, or regulatory panels within guide signs, indicating restrictions on vehicle type and forms of toll payment accepted at a specific toll plaza lane should be installed over the applicable lane either on the toll plaza canopy or on a separate structure immediately in advance of the canopy located in a manner such that each sign is clearly related to an individual toll lane.*

Support:

04 Section 2F.12 contains information regarding the incorporation of regulatory messages into guide signs for toll plazas.

05 Section 2F.16 contains information regarding the design and use of toll plaza canopy signs.

*Guidance:*

06 *One or more Speed Limit (R2-1) signs (see Section 2B.21) should be installed in the locations provided in Paragraph 8 of this Section for an ETC-Only lane at a toll plaza in which an enforceable regulatory speed limit is established for a lane in which it is intended that vehicles move through the toll plaza without stopping while toll payments requiring stops occur in other lanes at the toll plaza. The speed limit displayed on the signs should be based on an engineering study taking into account the geometry of the toll plaza and the lanes, as well as other appropriate safety and operational factors.*

07 *A Speed Limit (R2-1) sign should not be installed for a toll plaza lane that is controlled by a STOP (R1-1) sign or where a stop is required.*

08 *Where speed limit signs are installed over a toll plaza lane on the toll plaza canopy, on the approach end of the toll booth island, on the toll booth itself, or on a vertical element of the canopy structure, then down arrows or diagonally downward-pointing directional arrows should be used to supplement the speed limit signs if there is a need to clarify the applicability of a sign to a specific lane or to improve compliance.*

**Standard:**

09 **A STOP (R1-1) sign shall not be installed for a toll plaza lane that is operated as an ETC-Only lane and that is designed for tolls to be collected while vehicles continue moving.**

Option:

10 A STOP (R1-1) sign may be installed to require all vehicles to come to a complete stop to pay a toll in an attended or exact change lane, even if that lane is also available for optional use by vehicles with registered ETC accounts. A PAY TOLL (R3-29P) or TAKE TICKET (R3-30P) plaque (see Figure 2F-2), as appropriate to the operation, may be installed directly under the STOP (R1-1) sign for a toll plaza lane, if needed.

11 The mounting height of the STOP sign and any supplemental plaque may be less than the normal mounting height requirements if constrained by the physical features of the toll island or toll plaza.

12 The lateral offset of a STOP or other regulatory sign located within a toll plaza island may be reduced to a minimum of 1 foot from the face of the toll island or raised barrier to the nearest edge of the sign.

*Guidance:*

13 *If used, a STOP (R1-1) sign for a toll plaza cash payment lane should be located in a longitudinal position as near as practical to the point where a vehicle is expected to stop to pay the toll or take a ticket.*

Option:

14 A Toll Rate (R3-28) sign (see Figure 2F-2) may be installed in advance of the toll plaza to indicate the toll

applicable to the various vehicle types.

*Guidance:*

15 *If used, the Toll Rate (R3-28) sign should be located between the toll plaza and the first advance sign informing road users of the toll plaza.*

16 *The R3-28 sign should not contain more than three lines of legend. Each line that shows a toll amount should display only a single toll amount.*

Option:

17 Additional toll rate information exceeding three lines of legend may be displayed on the toll booth adjacent to the payment window of an attended lane or the payment receptacle of an exact change or automatic lane where it is visible to a road user who has stopped to pay the toll, but is not visible to approaching road users who have not yet entered the toll lane.

## Section 2F.05 Electronic Toll Collection (ETC) Account-Only Regulatory Sign and Plaque (R3-31 and R3-32P)

**Standard:**

01 **In any route sign assembly providing directions to a toll facility, or to a tolled segment of a highway, where electronic toll collection (ETC) is the only payment method accepted and all vehicles are required to have a registered ETC account, the ETC Account-Only (R3-31) sign (see Figure 2F-3) shall be mounted directly below the route sign of the numbered or named toll facility. The R3-31 sign shall have a white border and purple background and incorporate the pictograph adopted by the toll facility's ETC payment system and the word ONLY in black letters on a white panel set on the purple background of the sign.**

Option:

02 The NO CASH (R3-32P) plaque (see Figure 2F-3) with a black legend and border on a white background may be mounted directly below the R3-31 sign in a Directional or other sign assembly.

# WARNING SIGNS

## Section 2F.06 Pay Toll and Take Ticket Advance Warning Signs (W9-6 and W9-6e)

**Standard:**

01 **The Pay Toll (W9-6) and Take Ticket (W9-6e) Advance Warning signs shall display the distance to the toll plaza and, except for toll-ticket facilities, the toll for passenger or 2-axle vehicles (see Figure 2F-4). Where the toll for passenger or 2-axle vehicles is variable by time of day, a changeable message element shall be incorporated into the W9-6 sign to display the toll in effect.**

*Guidance:*

02 *The Pay Toll Advance Warning (W9-6) sign should be installed at approximately 1 mile and ½ mile in advance of mainline toll plazas at which some or all lanes are required to come to a stop to pay a toll (see Sections 2F.14 and 2F.15).*

03 *The Take Ticket Advance Warning (W9-6e) sign should be installed overhead at approximately 1 mile and ½ mile in advance of mainline toll plazas at which some or all lanes are required to come to a stop to take a toll ticket (see Sections 2F.14 and 2F.15).*

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *The Pay Toll and Take Ticket Advance Warning signs should be mounted overhead.*

Option:

05 If there is insufficient space for the W9-6 or W9-6e sign at the 1-mile or ½-mile advance location, the Pay Toll or Take Ticket Advance Warning (W9-6bP or W9-6gP) plaque (see Section 2F.07) may be installed at those advance locations above the appropriate guide sign(s) that relate to toll payment types.

05a The W9-6bP and W9-6gP plaques may be formatted as a header panel within the guide sign.

06 An additional W9-6 or W9-6e sign may be installed approximately 2 miles in advance of a mainline toll plaza. This sign may be either mounted overhead or post-mounted.

07 If the visibility of a ramp toll plaza at which some or all lanes are required to come to a stop to pay a toll or take a ticket is limited, the W9-6 or W9-6e sign may also be installed in advance of the ramp toll plaza.

## Section 2F.07 Pay Toll and Take Ticket Advance Warning Plaques (W9-6bP, W9-6dP, and W9-6gP)

Option:

01 The Pay Toll or Take Ticket Advance Warning (W9-6bP and W9-6gP) plaques (see Figure 2F-4) may be installed above the appropriate guide sign(s) relating to toll payment types at the 1-mile and/or ½-mile advance locations on the approach to a toll plaza if there is insufficient space for the W9-6 or W9-6e sign (see Section 2F.06) at those advance locations.

01a The W9-6bP and W9-6gP plaques may be formatted as a header panel within the guide sign.

**Standard:**

02 **The W9-6bP and W9-6gP plaques shall display the distance to the toll plaza and, except for toll-ticket facilities, the toll for passenger or 2-axle vehicles. Where the toll for passenger or 2-axle vehicles is variable by time of day, a changeable message element shall be incorporated into the W9-6bP plaque to display the toll in effect.**

Option:

03 The distance to the toll plaza may be omitted from the W9-6bP and W9-6gP plaques if the distance is displayed on the guide sign that the plaque accompanies.

04 The Pay Toll (W9-6dP) plaque may be used if the toll information is displayed on the guide sign that the plaque accompanies.

05 The toll for passenger or 2-axle vehicles may be omitted from the W9-6bP plaque if the toll information is displayed on the guide sign that the plaque accompanies.

## Section 2F.08 Stop Ahead Pay Toll and Stop Ahead Take Ticket Warning Signs (W9-6a and W9-6f)

Support:

00 Refer to FHWA's List of Known Errors for error in the Section Title. Refer to Section 1A.04 for more details.

**Standard:**

01 **The Stop Ahead Pay Toll (W9-6a) warning sign (see Figure 2F-4) shall display the toll for passenger or 2-axle vehicles. Where the toll for passenger or 2-axle vehicles is variable by time of day, a changeable message element shall be incorporated into the W9-6a sign to display the toll in effect.**

*Guidance:*

02 *The Stop Ahead Pay Toll (W9-6a) sign should be installed downstream from the W9-6 sign that is ½ mile in advance of a mainline toll plaza where some or all of the lanes are required to come to a stop to pay a toll (see Sections 2F.14 and 2F.15).*

03 *The Stop Ahead Take Ticket (W9-6f) warning sign (see Figure 2F-4) should be installed downstream from the W9-6e sign that is ½ mile in advance of a mainline toll plaza where some or all of the lanes are required to come to a stop to take a toll ticket (see Sections 2F.14 and 2F.15).*

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *The W9-6a and W9-6f signs should be mounted overhead. The location of the overhead sign should coincide with the approximate location where the mainline lanes begin to widen on the approach to the toll plaza lanes.*

05 *Where open-road tolling is used in addition to a toll plaza at a particular location, the W9-6a or W9- 6f sign should be located such that the message is clearly related to the lanes that access the toll plaza and not to the open-road tolling lanes.*

Option:

06 If there is insufficient space for the W9-6a or W9-6f sign at the recommended location, the Stop Ahead Pay Toll (W9-6cP) or the Stop Ahead Take Ticket (W9-6hP) plaque (see Section 2F.09) may be installed at that location above the appropriate guide sign that relates to toll payment types.

06a The W9-6cP and W9-6hP plaques may be formatted as a header panel within the guide sign.

07 If the visibility of a ramp toll plaza at which some or all lanes are required to come to a stop to pay a toll or take a ticket is limited, the W9-6a or W9-6f sign may also be installed in advance of the ramp toll plaza.

## Section 2F.09 Stop Ahead Pay Toll and Stop Ahead Take Ticket Warning Plaques (W9- 6cP and W9-6hP)

Support:

00 Refer to FHWA's List of Known Errors for error in the Section Title. Refer to Section 1A.04 for more details.

Option:

01 The Stop Ahead Pay Toll (W9-6cP) warning plaque (see Figure 2F-4) may be installed above the appropriate guide sign at the location specified for the Stop Ahead Pay Toll (W9-6a) sign (see Section 2F.08) if there is insufficient space for the W9-6a sign at that location and the toll information is displayed on the guide sign that the plaque accompanies.

02 The Stop Ahead Take Ticket (W9-6hP) warning plaque (see Figure 2F-4) may be installed above the appropriate guide sign at the location specified for the Stop Ahead Take Ticket (W9-6f) sign (see Section 2F.08) if there is insufficient space for the W9-6f sign at that location.

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2. Refer to Section 1A.04 for more details.

Option:

03 The W9-6cP and W9-6hP plaques may be formatted as a header panel within the guide sign.

## Section 2F.10 LAST EXIT BEFORE TOLL Warning Plaques (W16-16P and W16-16aP)

*Guidance:*

01 *The LAST EXIT BEFORE TOLL (W16-16P or W16-16aP) warning plaque (see Figure 2F-4) should be used to notify road users of the last exit from a highway before it becomes a facility on which toll payments are required. The plaque should be installed above the appropriate guide signs for the exit (see Sections 2E.23 and 2E.25), but below the*

*Exit Number or LEFT plaque if used.*

Option:

02 The W16-16P plaque may be formatted as a header panel within the guide sign.

## Section 2F.11 TOLL Warning Plaque (W16-17P)

**Standard:**

01 **The TOLL (W16-17P) warning plaque (see Figure 2F-3) shall have a black legend and border on a yellow background and shall be mounted directly above the route sign of a numbered toll highway or, if used, above the cardinal direction and alternative route auxiliary signs, in any route sign assembly providing direction to a toll highway or to a segment of a highway on which the payment of a toll is required.**

# GUIDE SIGNS

## Section 2F.12 Toll Facility and Toll Plaza Guide Signs – General

Support:

01 Toll plazas are used on many toll highways, bridges, and tunnels for collection of tolls from road users. Electronic toll collection and/or open-road tolling might also be used on such facilities, either in addition to or in place of collecting toll payments at toll plazas.

02 Chapter 2G contains information regarding signs for preferential and managed lanes that are applicable to toll roads.

03 Chapter 3E contains information regarding pavement markings for certain toll plaza applications.

**Standard:**

04 **Directional assemblies for entrances to a toll highway, or to a road leading directly to a toll highway with no opportunity to exit before paying or being charged a toll, shall clearly indicate that the facility is a toll facility. Except where the State Toll Route sign (see Paragraph 8 of this Section) is used, the TOLL (W16-17P) warning plaque (see Section 2F.11) shall be used above the route sign of a numbered toll facility in any route sign assembly that provides directions to the toll route from another highway (see Figure ~~2F-5~~ 2F-6 and Figure 2F-101(CA)).**

05 **Except where the State Toll Route sign (see Paragraph 8 of this Section) is used and on Exit Gore signs or destination guide (D1 series) signs, a rectangular panel with the black legend TOLL on a yellow background shall be incorporated into the guide signs leading road users to a tolled highway (see Figures 2F-6 through 2F-8).**

06 **Guide signs for toll highways, toll plazas, and tolled or priced managed lanes (see Chapter 2G) shall have white legends and borders on green backgrounds, except as specifically provided by Sections 2F.12 through 2F.16.**

Option:

07 A State Toll Route sign (see Paragraph 8 of this Section) may be used in lieu of the State Route (M1- 5) sign in combination with the TOLL (W16-17P) warning plaque or the TOLL panel (see Paragraphs 10 and 11 of this Section).

**Standard:**

08 **A State Toll Route sign shall incorporate into its design the word TOLL using the same letter height, legend, background colors, and overall plaque dimensions specified for the W16-17P warning plaque.**

09 **The Interstate, Off-Interstate, and U.S. Route signs shall not be modified for tolled facilities.**

Option:

10 Where conditions do not accommodate separate signs, or where it is important to associate a particular regulatory or warning message with specific guidance information, regulatory and/or warning messages may be combined with guide signs for toll plazas using plaques, header panels, or rectangular regulatory or warning panels incorporated within the guide signs, as long as the proper legend and background colors are preserved.

**Standard:**

11 **When regulatory messages are incorporated within a guide sign, they shall be on a rectangular panel with a black legend on a white background. When warning messages are incorporated within a guide sign, they shall be on a rectangular panel with a black legend on a yellow background.**

*Guidance:*

12 *Guide signs for toll plazas should be designed in accordance with the general principles of guide signs and the specific provisions of Chapter 2E.*

13 *Signs for toll plazas should systematically provide road users with advance and toll plaza lane- specific information regarding:*

- *A. The amount of the toll, the types of payment accepted, and the type(s) of registered ETC accounts accepted for payment;*
- *B. Which lane or lanes are required or allowed to be used for each available payment type; and*
- *C. Restrictions on the use of a toll plaza lane or lanes by certain types of vehicles (such as cars only or no trucks).*

**Standard:**

14 **Signs for attended lanes at toll plazas shall incorporate the Toll Collector (M4-17) symbol panel (see Figure 2F-9).**

Option:

15 Signs for attended lanes at toll plazas may also display word legends, such as FULL SERVICE, CASH, CHANGE, or RECEIPTS (see Figure 2F-9), to supplement the required symbol panel when lanes have different services available through them.

**Standard:**

16 **Signs for Exact Change lanes at toll plazas shall incorporate the Exact Change (M4-18) symbol panel and, except for ticketed systems, display the amount of the toll for passenger vehicles (see Figure 2F-9).**

Option:

17 Signs for Exact Change lanes at toll plazas may include an appropriate word legend, such as EXACT CHANGE (see Figure 2F-9), to supplement the required symbol panel.

**Standard:**

18 **When used, the M4-17 and M4-18 symbol panels shall be used only as panels within guide signs. The M4-17 and M4-18 symbols or panels shall not be used as an independent sign or within a sign assembly.**

19 **If only vehicles with registered ETC accounts are allowed to use a toll plaza lane, the signs for such lanes shall incorporate the pictograph adopted by the toll facility's ETC payment system and the regulatory message ONLY (see Figures 2F-1 and 2F-8 through 2F-11). The use, size, and placement of the ETC pictograph shall comply with the provisions of Sections 2F.02 and 2F.03.**

20 **An Overhead Arrow-per-Lane guide sign (see Figure 2F-10) shall be used in advance of a location where the mainline lanes split to separate traffic entering Open-Road ETC lanes from lanes entering a toll plaza where other methods of payment are accepted and an option lane is provided at the split (see Figure 2F-11). An Overhead Arrow-per-Lane guide sign shall not be used if there is no option lane at the split.**

Option:

21 The ETC payment system's pictograph, without a purple underlay or purple header panel, may be used on signs for Exact Change or attended lanes at toll plazas to indicate that vehicles with registered ETC accounts may also use those lanes.

## Section 2F.13 Electronic Toll Collection (ETC) Signs – General

Support:

01 Figure 2F-8 shows examples of guide signs for entrances to various types of toll highways and for ETC account-only entrances to non-toll highways.

**Standard:**

02 **Signing for entrances to toll highways where ETC is employed only through license plate character recognition such that road users are not required to establish a toll account or register their vehicle equipment shall comply with the provisions of Paragraphs 4 and 5 of Section 2F.12.**

Support:

03 Figure 2F-12 shows examples of guide signs for the entrance to a toll highway on which tolls are collected electronically only and registration in a toll-account program is not required.

**Standard:**

04 **If only vehicles with registered ETC accounts are allowed to use a toll highway, the guide signs for entrances to such facilities shall incorporate the pictograph adopted by the toll facility's ETC payment system and the regulatory message ONLY (see Figures 2F-1 and 2F-8 through 2F-12). The use, size, and placement of the ETC pictograph and the use and color of the background and underlay panel shall comply with the provisions of Sections 2F.02 and 2F.03.**

Support:

05 Sections 2F.05, 2F.11, and 2F.17 contain additional provisions regarding signs for toll highways that only accept ETC payments.

06 Sections 2G.16 through 2G.19 contain additional provisions regarding signs for priced managed lanes that only accept ETC payments.

07 Figure 2F-13 shows an example of guide signs for alternative toll and non-toll ramp connections to a non-toll highway (see Section 2F.18).

08 Many different ETC payment systems are used by the various toll facility operators. Some of these systems accept

payment from other systems' accounts.

Option:

09 Where a facility will accept payments from other systems' accounts in addition to its primary ETC- account payment system, such information may be displayed on a separate information sign near the entrances to such a facility or in advance of a toll plaza or open-road tolling lanes, as space allows between primary signs.

## Section 2F.14 Advance Signs for Conventional Toll Plazas

*Guidance:*

01 *For conventional toll plazas (those without a divergence onto a separate alignment from mainline- aligned open-road tolling or ETC-only lanes), one or more sets of overhead advance guide signs complying with the provisions of this Section should be provided. The advance guide signs for multi-lane toll plazas should provide information regarding which lanes to use for all of the toll payment methods accepted at the toll plaza. These signs should include toll plaza lane numbers (if used), or action messages or lane-use information such as LEFT LANE(S), CENTER LANE(S), RIGHT LANE(S), or down arrows over the approximate center of each applicable lane. These signs should also incorporate regulatory messages indicating any restrictions or prohibitions on the use of the lanes associated with the various types of payment methods by certain types of vehicles. For mainline toll plazas, these signs should be at least ½ mile in advance of the toll plaza, and farther if practical.*

02 *Additional guide signs with lane information for the toll payment types should be provided between approximately ¼ mile and 800 feet in advance of the toll plaza at a location that avoids or minimizes obstruction of toll plaza canopy signs (see Section 2F.16) and lane-use control signals.*

03 *The number, mounting, and/or spacing of sets of advance signs for approaches to toll plazas on ramps, toll bridges, or tunnels, to accommodate a limited distance to the plaza from an intersection or from the start of the approach road to the bridge or tunnel, should be based on an engineering study or engineering judgment.*

Support:

04 Figure 2F-14 shows examples of advance signs for a conventional toll plaza.

## Section 2F.15 Advance Signs for Toll Plazas on Diverging Alignments from Open-Road ETC Account-Only Lanes

Support:

01 Open-Road ETC lanes are sometimes located on the normal mainline alignment while the lanes for other toll payment methods are located at a toll plaza on a separate alignment (see Figure 2F-15). Since road users paying cash tolls must diverge from the mainline alignment, similar to a movement for an exit, it is important that the guide signs in advance of and at the point of divergence clearly indicate the required lane use and/or movements.

*Guidance:*

02 *For toll plazas located on a separate alignment that diverges from mainline-aligned Open-Road ETC lanes where vehicles are required to have a registered ETC account to use the Open-Road Tolling lanes, overhead advance signs should be provided at approximately 1 mile and ½ mile in advance of the divergence point. Both the 1-mile and ½-mile advance signs should include:*

- *A. The ETC (pictograph) Account-Only guide sign (see Figures 2F-9 and 2F-15) with a down arrow over the approximate center of each lane that will become an Open-Road ETC lane;*
- *B. For the lane or lanes which will diverge to a toll plaza, guide signs conforming to the provisions of Section 2F.12, indicating which lane or lanes will diverge to the toll plaza for the various cash toll payment methods; and*
- *C. Regulatory signs, plaques, or panels within the guide signs, indicating any restrictions or prohibitions of certain types of vehicles from toll plaza lanes associated with the various types of payment methods.*

03 *At or near the theoretical gore of the divergence point, an additional set of overhead guide signs should be provided and should include:*

- *A. The ETC (pictograph) Account-Only guide sign (see Figures 2F-9 and 2F-15) with a down arrow over the approximate center of each Open-Road ETC lane;*
- *B. Guide signs conforming to the provisions of Section 2F.12 and 2F.13, with diagonally upward- pointing directional arrow(s) over the approximate center of each lane indicating the direction of the divergence, and providing lane information for all types of payment methods accepted at the toll plaza; and*

*C. Regulatory signs, plaques, or panels within the guide signs, indicating any restrictions or prohibitions on the use of the toll plaza lanes associated with the various types of payment methods by certain types of vehicles.*

04 *Approximately 800 feet in advance of the toll plaza at a location that avoids or minimizes any obstruction of the toll plaza canopy signs (see Section 2F.16) and lane-use control signals, an additional set of overhead advance signs with lane information for the toll payment types should be provided.*

**Standard:**

05 **The use of down and directional arrows on the signs at the locations described in Paragraphs 2 through 4 of this Section shall comply with the provisions of Section 2D.08.**

Support:

06 Figure 2F-15 shows an example of advance signs for toll plazas on a diverging alignment from Open- Road ETC Account-Only Lanes.

07 Section 4R.02 contains information regarding the use of lane-use control signals for Open-Road ETC lanes for temporary lane closure purposes.

## Section 2F.16 Toll Plaza Canopy Signs

**Standard:**

01 **A sign complying with the provisions of Section 2F.12 shall be provided above the approximate center of each lane that is not an Open-Road ETC lane, mounted on or suspended from the toll plaza canopy, or on a separate structure immediately in advance of the plaza located such that each sign is clearly related to an individual toll lane, indicating the payment type(s) accepted in the lane and any restrictions or prohibitions of certain types of vehicles that apply to the lane. Except for toll-ticket systems, the toll for passenger or 2-axle vehicles shall be included on the canopy sign or on a separate sign mounted on the upstream side of the tollbooth.**

02 **The background color of a canopy sign for an ETC Account-Only toll plaza lane shall be purple (see Figure 2F-16).**

Option:

03 Where vehicles are required to have a registered ETC account to use the lane, one or two flashing yellow beacons (see Section 4R.03) may supplement a canopy sign over an ETC Account-Only lane to call special attention to the location of the ETC Account-Only lane within the plaza.

04 The canopy sign for an ETC Account-Only toll plaza lane in which a regulatory speed limit is not posted and in which vehicles are not required to stop may display an advisory speed within a horizontal rectangular panel with a black legend and yellow background within the bottom portion of the canopy sign.

**Standard:**

05 **Flashing beacons supplementing a canopy sign over an ETC Account-Only lane shall be mounted directly above or alongside the sign in a manner that is separated from any lane-use control signals for that lane (see Figure 2F-16).**

06 **For multi-lane toll plazas, lane-use control signals (see Section 4R.02) shall be provided above the approximate center of each toll plaza lane that is not an Open-Road ETC lane to indicate the open or closed status of each lane. Lane-use control signals shall not be used to call attention to a lane for a specific toll payment type such as ETC Account-Only lanes.**

Support:

07 Part 6 contains information regarding the closing of a lane for temporary traffic control purposes.

08 Figure 2F-16 shows examples of toll plaza canopy signs.

## Section 2F.17 Guide Signs for Entrances to Electronic Toll Collection (ETC) Only Facilities

Support:

01 Some toll highways, bridges, and tunnels are restricted to use only by vehicles with a specific registered ETC account, referred to as ETC Account-Only facilities. Other facilities collect tolls electronically using license plate character recognition in which the registered vehicle owner is then billed by postal mail and registration in an ETC account program is not required but could be an optional payment method. These facilities are commonly referred to as All-Electronic Tolling (AET) or Cashless Tolling.

**Standard:**

02 **Guide signs for facilities that only collect tolls electronically shall comply with the applicable provisions of**

**Chapter 2E and Section 2F.13.**

03 **Guide signs for the entrance ramps to ETC Account-Only facilities shall incorporate the pictograph of the toll facility's primary ETC payment system and the word ONLY in a header panel or plaque designed in accordance with the provisions of Section 2F.13 (see Figure 2F-8).**

Option:

04 A separate information sign displaying the route number, the TOLL warning panel (see Section 2F.11), and the legend NO CASH may be located within the sequence of the Advance guide signs on the approach to the entrance to an ETC Account-Only facility.

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4. Refer to Section 1A.04 for more details.

Option:

05 Exit Gore signs for entrance ramps to such ETC Account-Only facilities may incorporate the pictograph of the toll facility's ETC payment system and the word ONLY in a header panel or plaque designed in accordance with the provisions of Section 2F.13 (see Figure 2F-13 and Drawing B in Figure 2F- 12).

06 If more than one ETC account program is accepted for toll payments on an ETC Account-Only facility, the additional accepted ETC account program pictographs may be displayed on a separate informational guide sign with the legend, ALSO ACCEPTED, within the sequence of advance guide signs for the entrance to the facility.

Support:

07 Section 2F.05 contains information regarding ETC Account-Only signs and plaques for use with route signs in route sign assemblies.

**Standard:**

08 **Where vehicles are not required to have a registered ETC account to use an ETC-Only facility, guide signs for the facility shall comply with the applicable provisions of Chapter 2E and specifically with the applicable provisions of Section 2F.13.**

09 **Advance and Exit Direction guide signs for the entrances to facilities that do not require registration in an ETC toll account program shall not display a pictograph of an accepted ETC payment system or use purple as a background color on any portion of the signs.**

10 **Information on accepted toll payment methods for a facility that does not require registration in an ETC toll account program shall only be provided on a separate informational guide sign, if used, that displays one of the following legends (see Drawing C in Figure 2F-12):**

**A. TOLL BILLED BY MAIL ONLY, if there is no alternative payment method; or**

**B. TOLL BILLED BY MAIL OR [ETC Account Pictograph], if the facility also accepts payments from registered users of an ETC account program.**

Option:

11 If there is more than one ETC toll account program accepted, all ETC account program pictographs of the accepted ETC accounts may be displayed on the separate informational guide sign below the TOLL BILLED BY MAIL OR legend. A plaque with the legend NO CASH may be added below the signs described in Paragraph 10 of this Section.

*Guidance:*

12 *The signs described in Paragraph 10 of this Section should be located within the sequence of Advance Guide signs for the entrance to the facility and/or at a location along the facility itself (see Drawing C in Figure 2F-12).*

Option:

13 If the ETC-Only facility also accepts payments from multiple ETC account programs, but does not require registration in the primary ETC account program associated with the facility in order to use the facility, then the pictographs of the other accepted ETC account programs may be displayed on the separate information sign beneath the legend TOLL BILLED BY MAIL and the word OR.

14 If, in addition to a toll, a nominal surcharge (not a fine, penalty, or violation) is assessed road users not registered in the toll account program, or registered toll account users are assessed a discounted toll, such information may be displayed on a separate information sign on the approach to the entrance to the facility.

## Section 2F.18 Guide Signs for ETC-Only Entrance Ramps to Non-Toll Highways

Support:

01 In some cases, access to or from a non-toll route might be provided by a ramp on which a toll is charged in order to

manage congestion, limit access, or for other reasons. The toll ramp might be provided as an alternative to or in lieu of a ramp providing similar access without charging a toll. Figures 2F-8 and 2F-13 show examples of guide signs for a ramp on which a toll is charged to enter a non-toll route.

**Standard:**

02 **Guide signs for ETC-Only Entrance Ramps to non-toll highways shall comply with the provisions of Section 2F.17.**

Option:

03 A NO TOLL panel with a black legend and a yellow background may be included on the top section of the Exit Gore sign for an exit that provides access to the facility without charging a toll.

Support:

04 Refer to FHWA's List of Known Errors for error in Paragraph 3. Refer to Section 1A.04 for more details.

## Section 2F.19 ETC Account Program Information Signs

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, signs that inform road users of telephone numbers, Internet addresses, including domain names and uniform resource locators (URLs), or e-mail addresses for enrolling in an ETC account program of a toll facility or managed lane, obtaining an ETC transponder, and/or obtaining ETC account program information shall only be installed in rest areas, parking areas, or similar roadside facilities where the signs are viewed only by pedestrians or occupants of parked vehicles.**

Option:

02 ETC account program information signs displaying telephone numbers that have no more than four characters may be installed on roadways in locations where they will not obscure the road user's view of higher priority traffic control devices and that are removed from key decision points where the road user's view is more appropriately focused on other traffic control devices, roadway geometry, or traffic conditions, including exit and entrance ramps, intersections, toll plazas, temporary traffic control zones, and areas of limited sight distance.

## Section 2F.101(CA) TOLL BRIDGE Advance Warning Sign (SW95(CA))

**Standard:**

01 **The TOLL BRIDGE (SW95(CA)) Advance Warning sign (see Figure 2F-102(CA)) shall have a black legend and border on a yellow background and shall be installed in advance of a toll bridge in both directions of travel, regardless of whether only one direction is tolled. SW95(CA) sign shall display the distance to the start of the toll bridge.**

*Guidance:*

02 *The SW95(CA) sign should be installed as an overhead sign approximately 1 mile in advance of the mainline approach to the toll bridge.*

Option:

03 An alternate one-line message, such as "AHEAD", may be used in place of the distance on line 3 of the SW95(CA) sign.

04 An additional SW95(CA) sign may be installed approximately 2 miles in advance of a mainline approach to the toll bridge. This sign may be mounted either overhead or post-mounted.

Support:

05 The TOLL BRIDGE Advance Warning sign is used to notify road users that they are approaching or crossing a toll bridge. Refer to CVC § 23300.

**Standard:**

06 **If no toll is charged in a particular direction of travel, a NO TOLL (SW95aP(CA) plaque (see Figure 2F-102(CA)) shall be mounted directly below the SW95(CA) sign in that direction to indicate access to the facility without a toll charge. The SW95aP(CA) plaque shall have a black legend and border on a yellow background.**

Option:

07 The SW95aP(CA) plaque may be formatted as a footer panel at bottom portion of the SW95(CA) sign.

# Figure 2F-1. Examples of ETC Account Pictographs and Use of Purple Backgrounds and Underlay Panels

**A – Pictograph design with a purple background and a white contrasting border**




**1. Pictograph on a purple or other non-contrasting background**




**2. Pictograph on a white or other contrasting background**

**B – Pictograph design with a background color other than purple, shown in a purple underlay panel with a white contrasting border**




**1. Pictograph on a purple background**




**2. Pictograph with a purple underlay on a non-contrasting background**




**3. Pictograph with a purple underlay panel on a white or other contrasting background**

## Figure 2F-2. Toll Plaza Regulatory Signs and Plaques




R3-28 R3-29P R3-30P


## Figure 2F-3. ETC Account-Only Auxiliary Signs for Use in Route Sign Assemblies




R3-31

R3-32P

Note: The ETC pictograph shown is an example only. The pictograph for the toll facility's adopted ETC system shall be used.

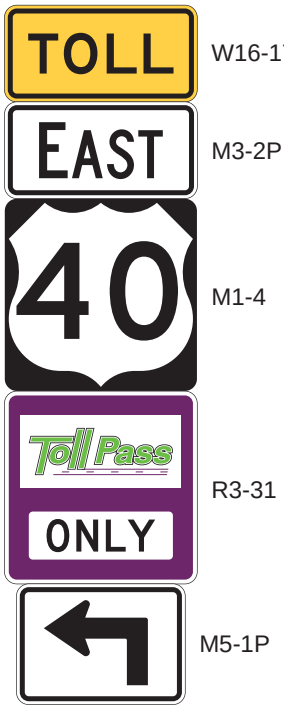


W16-17P

M3-2P


M1-4

R3-31


M5-1P

Example route sign assembly

## Figure 2F-4. Toll Plaza Warning Signs and Plaques

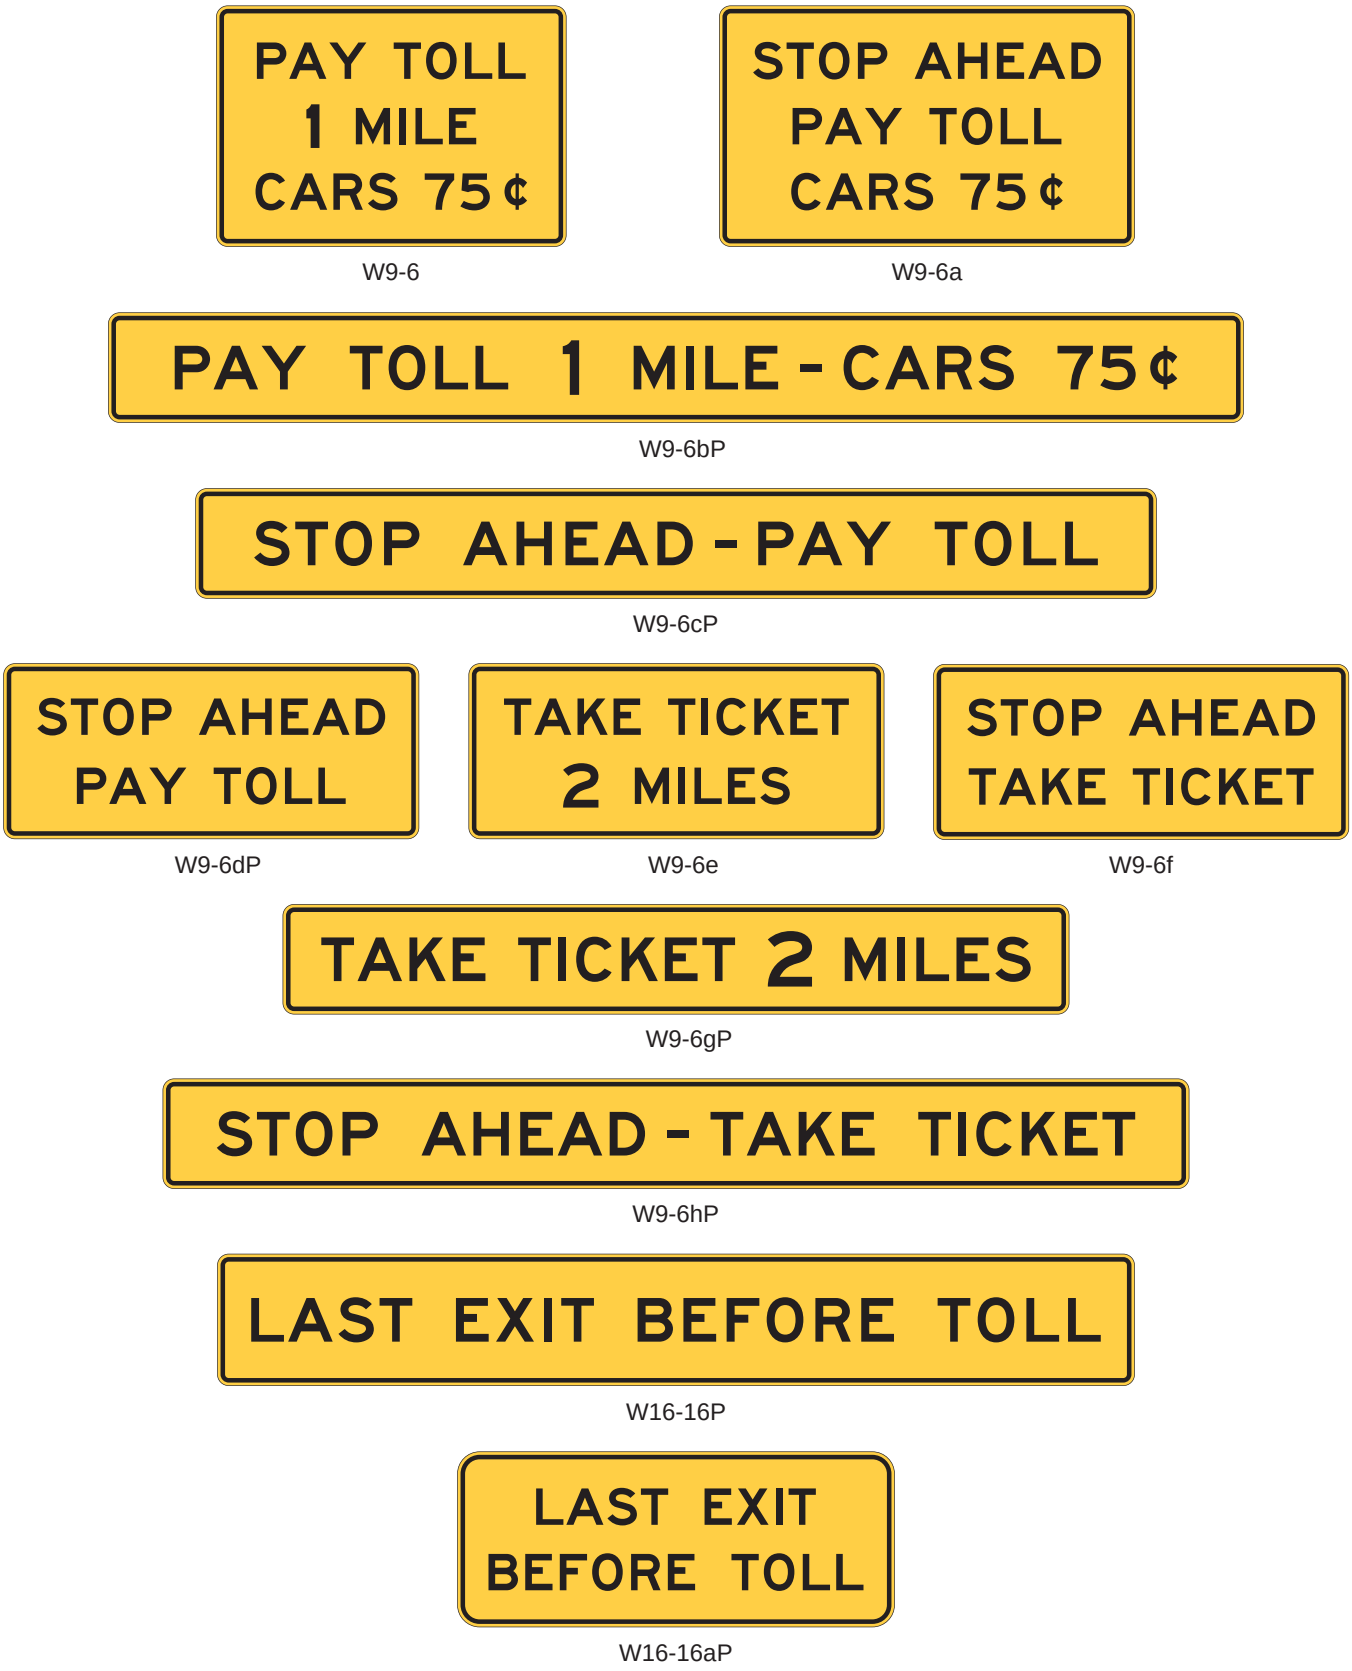


## Figure 2F-5. Example of Minor Interchange Crossroad Signing for an Approach to a Toll Highway

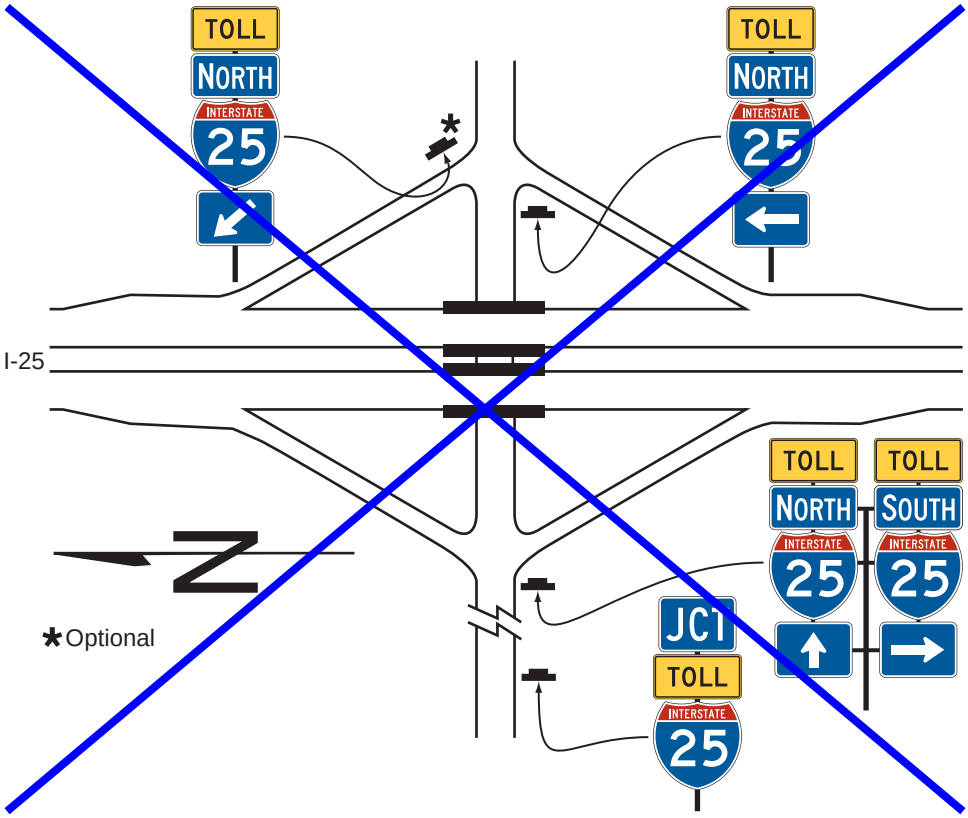



Note: Refer to Figure 2F-6 for typical sign layouts and placement guidance.

## Figure 2F-6. Example of Interchange Crossroad Signing for a One-Lane Approach to a Toll Highway

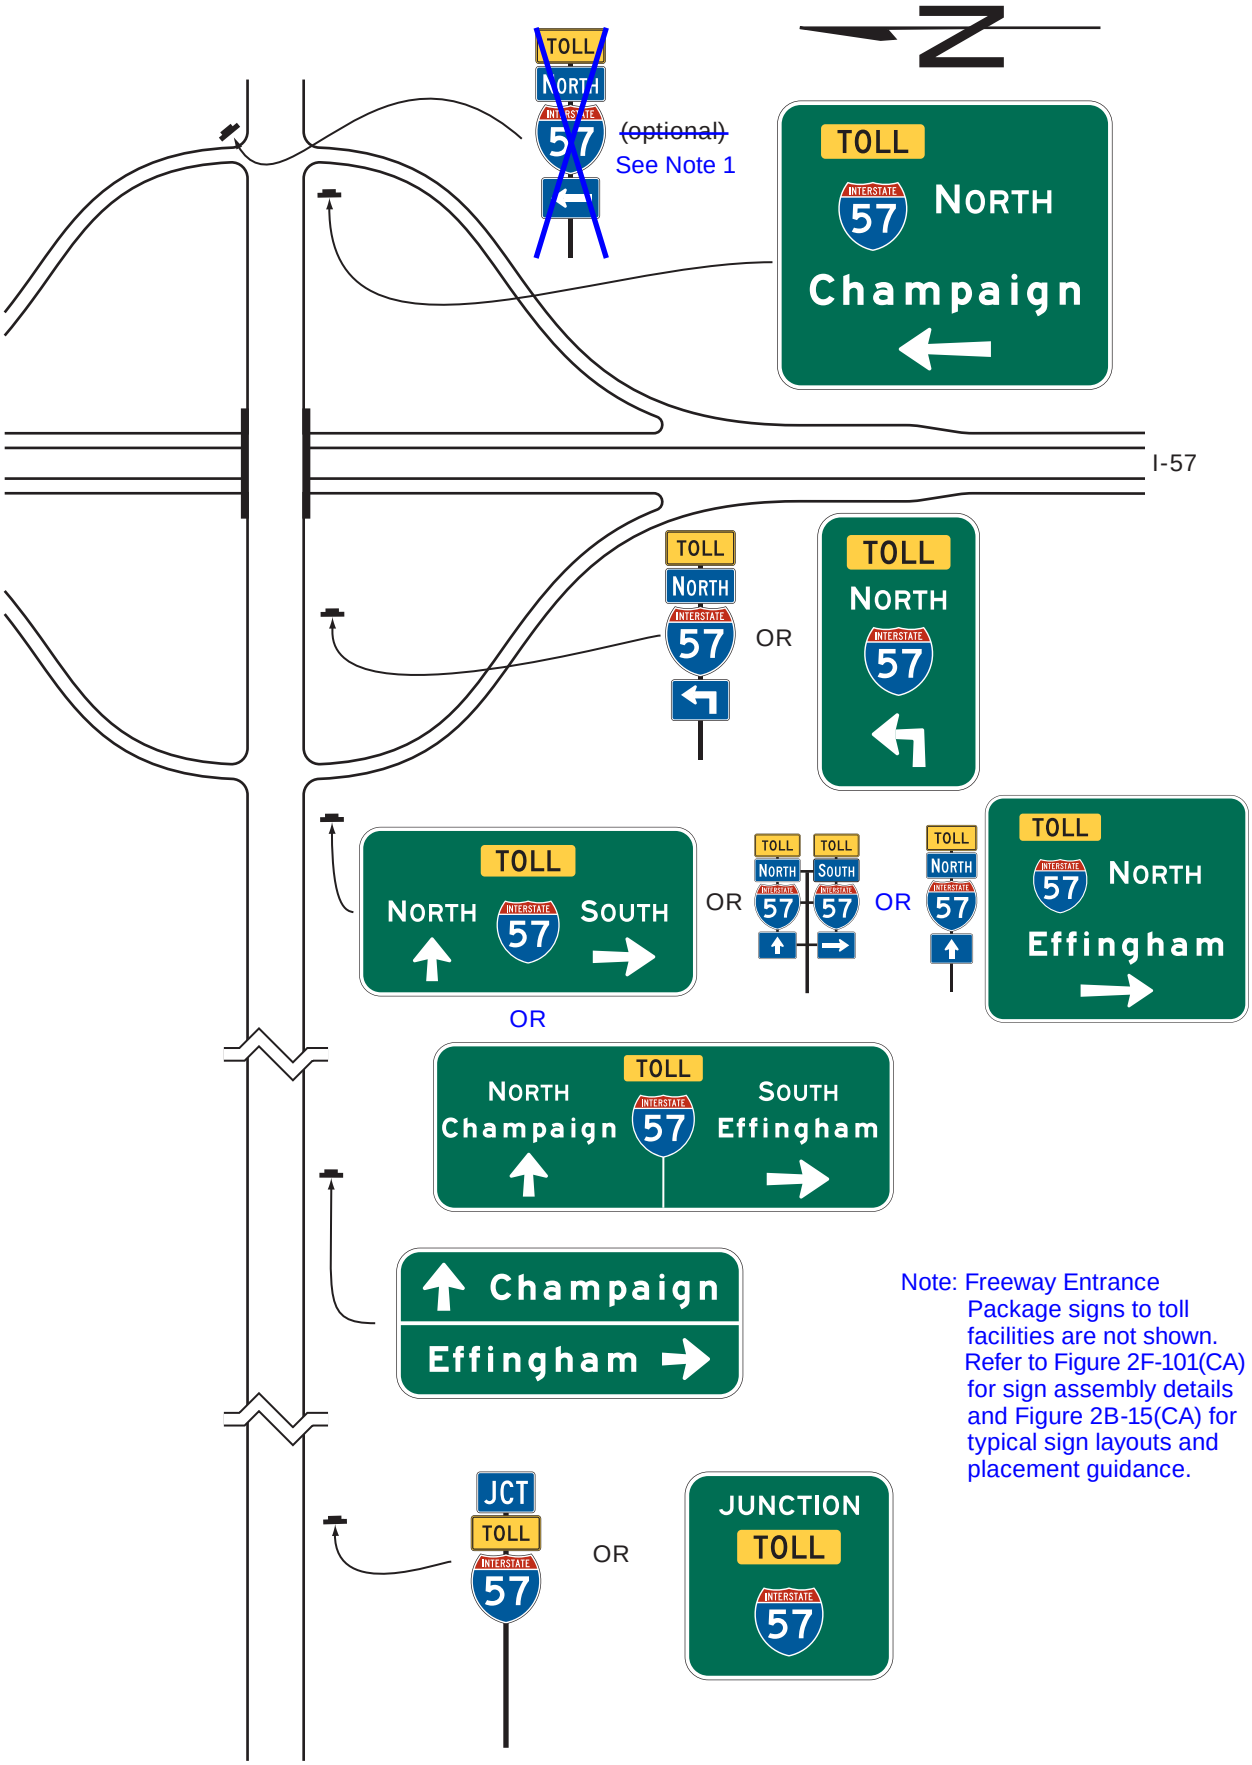


Note: Freeway Entrance Package signs to toll facilities are not shown. Refer to Figure 2F-101(CA) for sign assembly details and Figure 2B-15(CA) for typical sign layouts and placement guidance.

## Figure 2F-7. Examples of Multi-Lane Crossroad Signing for a Diamond Interchange

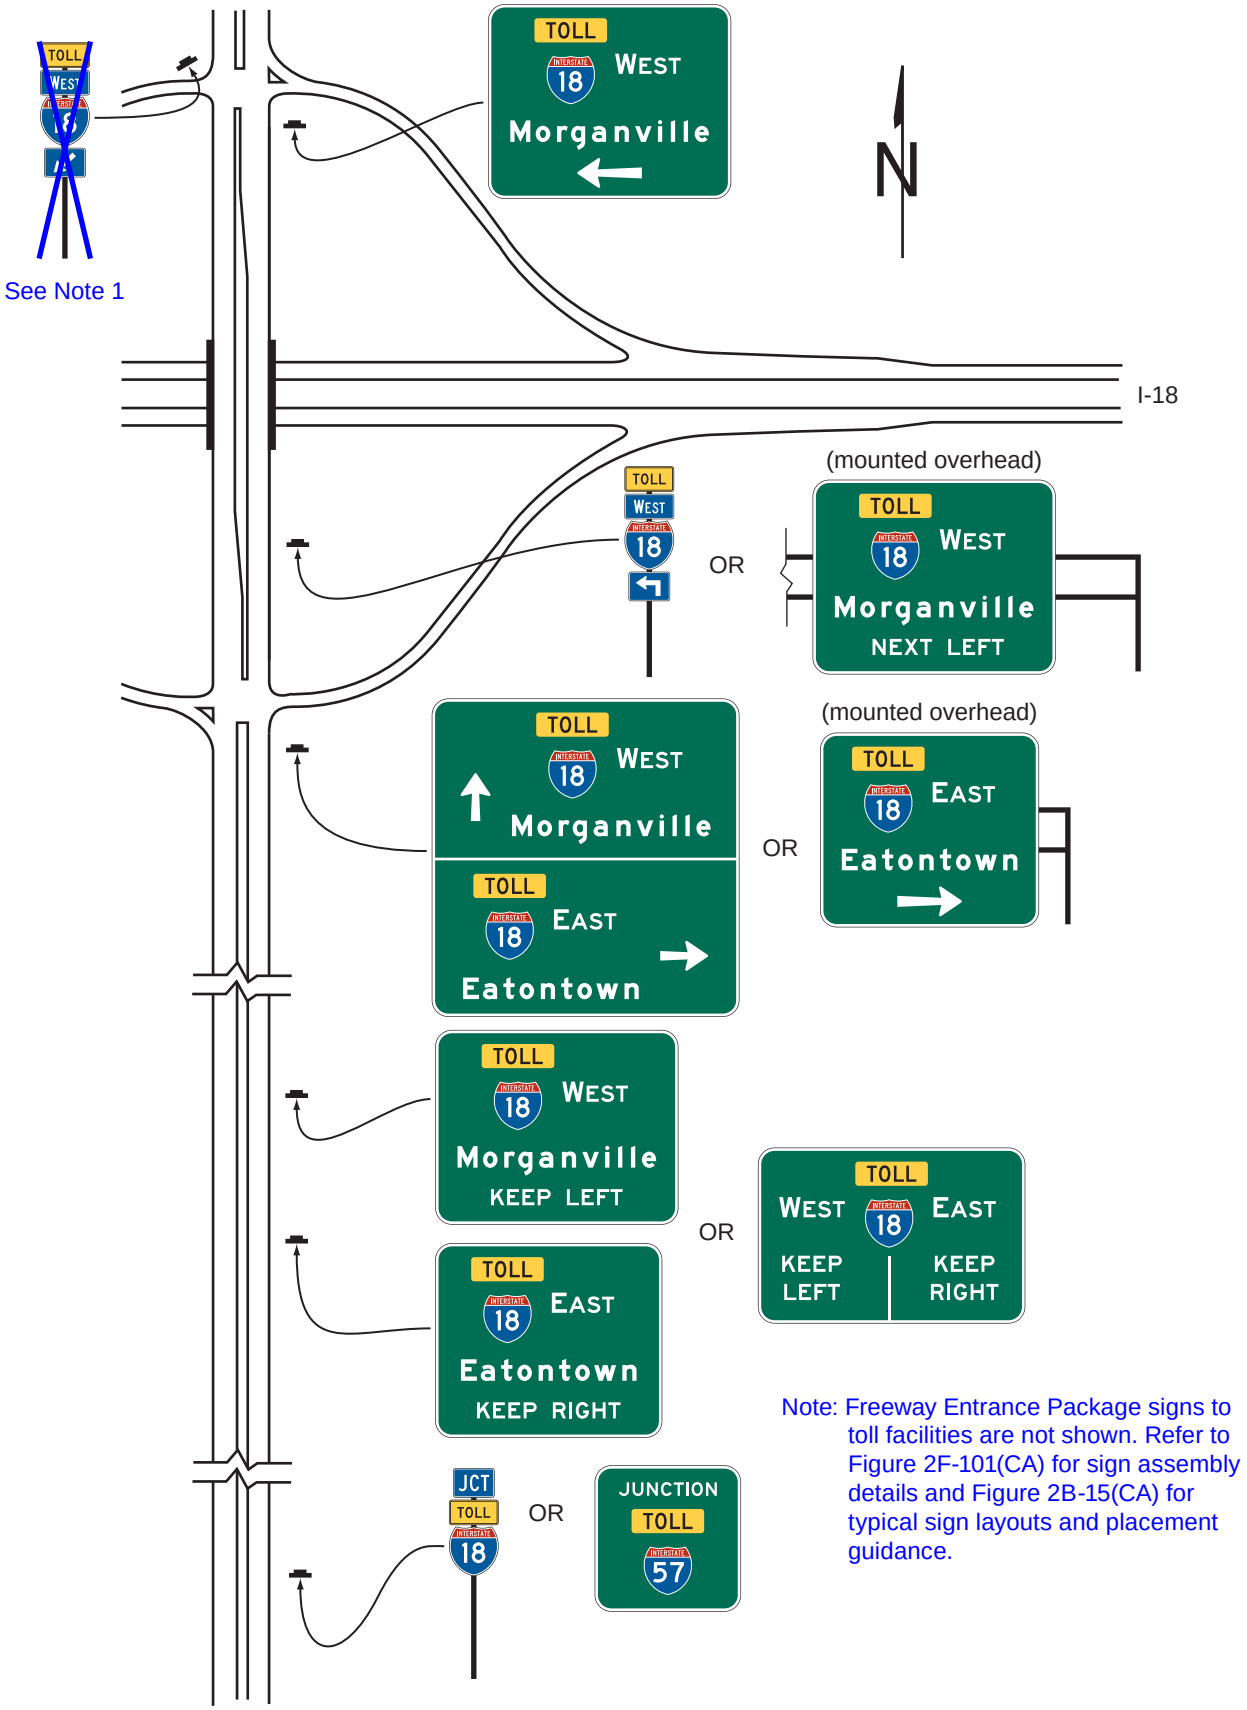


Note: Freeway Entrance Package signs to toll facilities are not shown. Refer to Figure 2F-101(CA) for sign assembly details and Figure 2B-15(CA) for typical sign layouts and placement guidance.

# Figure 2F-8. Examples of Guide Signs for Entrances to Toll Highways or Ramps


**A – Entrance to a toll highway on which registration in a toll account program is not required**





**B – Entrance to an ETC Account-Only toll highway or entrance to a toll highway via an ETC Account-Only ramp**




**C – Entrance to a non-toll highway via an ETC Account-Only toll entrance ramp**




(the toll entrance is the only connection provided in the vicinity)

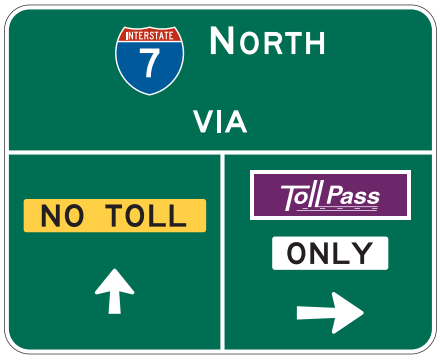



(an alternate non-toll entrance is provided in the vicinity)

Notes:

1. The ETC pictographs shown are examples only. The pictograph for the toll facility's adopted ETC system shall be used.
2. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.


## Figure 2F-9. Examples of Conventional Toll Plaza Advance Signs



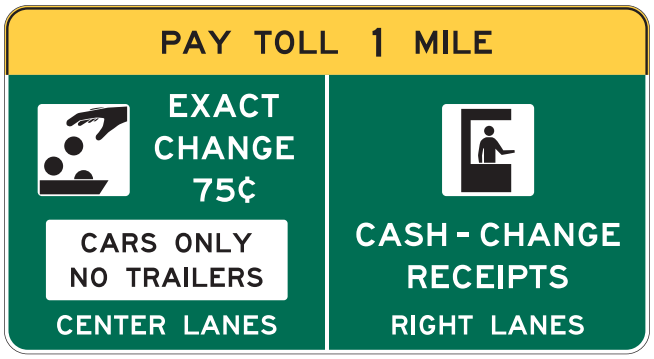




Note: The ETC pictograph that is shown is only an example. The pictograph for the toll facility's adopted ETC system shall be used.
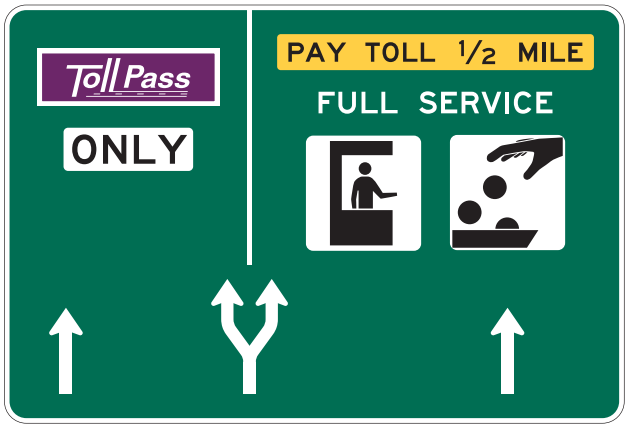
## Figure 2F-10. Example of an Overhead Arrow-per-Lane Guide Sign and Arrow for a Split with an Option Lane





Example of an Overhead Arrow-per-Lane guide sign for a split with an option lane



Arrow for the option lane (see the "Standard Highway Signs" publication for details)

Note: The ETC pictograph that is shown is only an example. The pictograph for the toll facility's adopted ETC system shall be used.

## Figure 2F-11. Examples of Guide Signs for a Split with an Option Lane for a Mainline Toll Plaza on a Diverging Alignment from Open-Road ETC Lanes

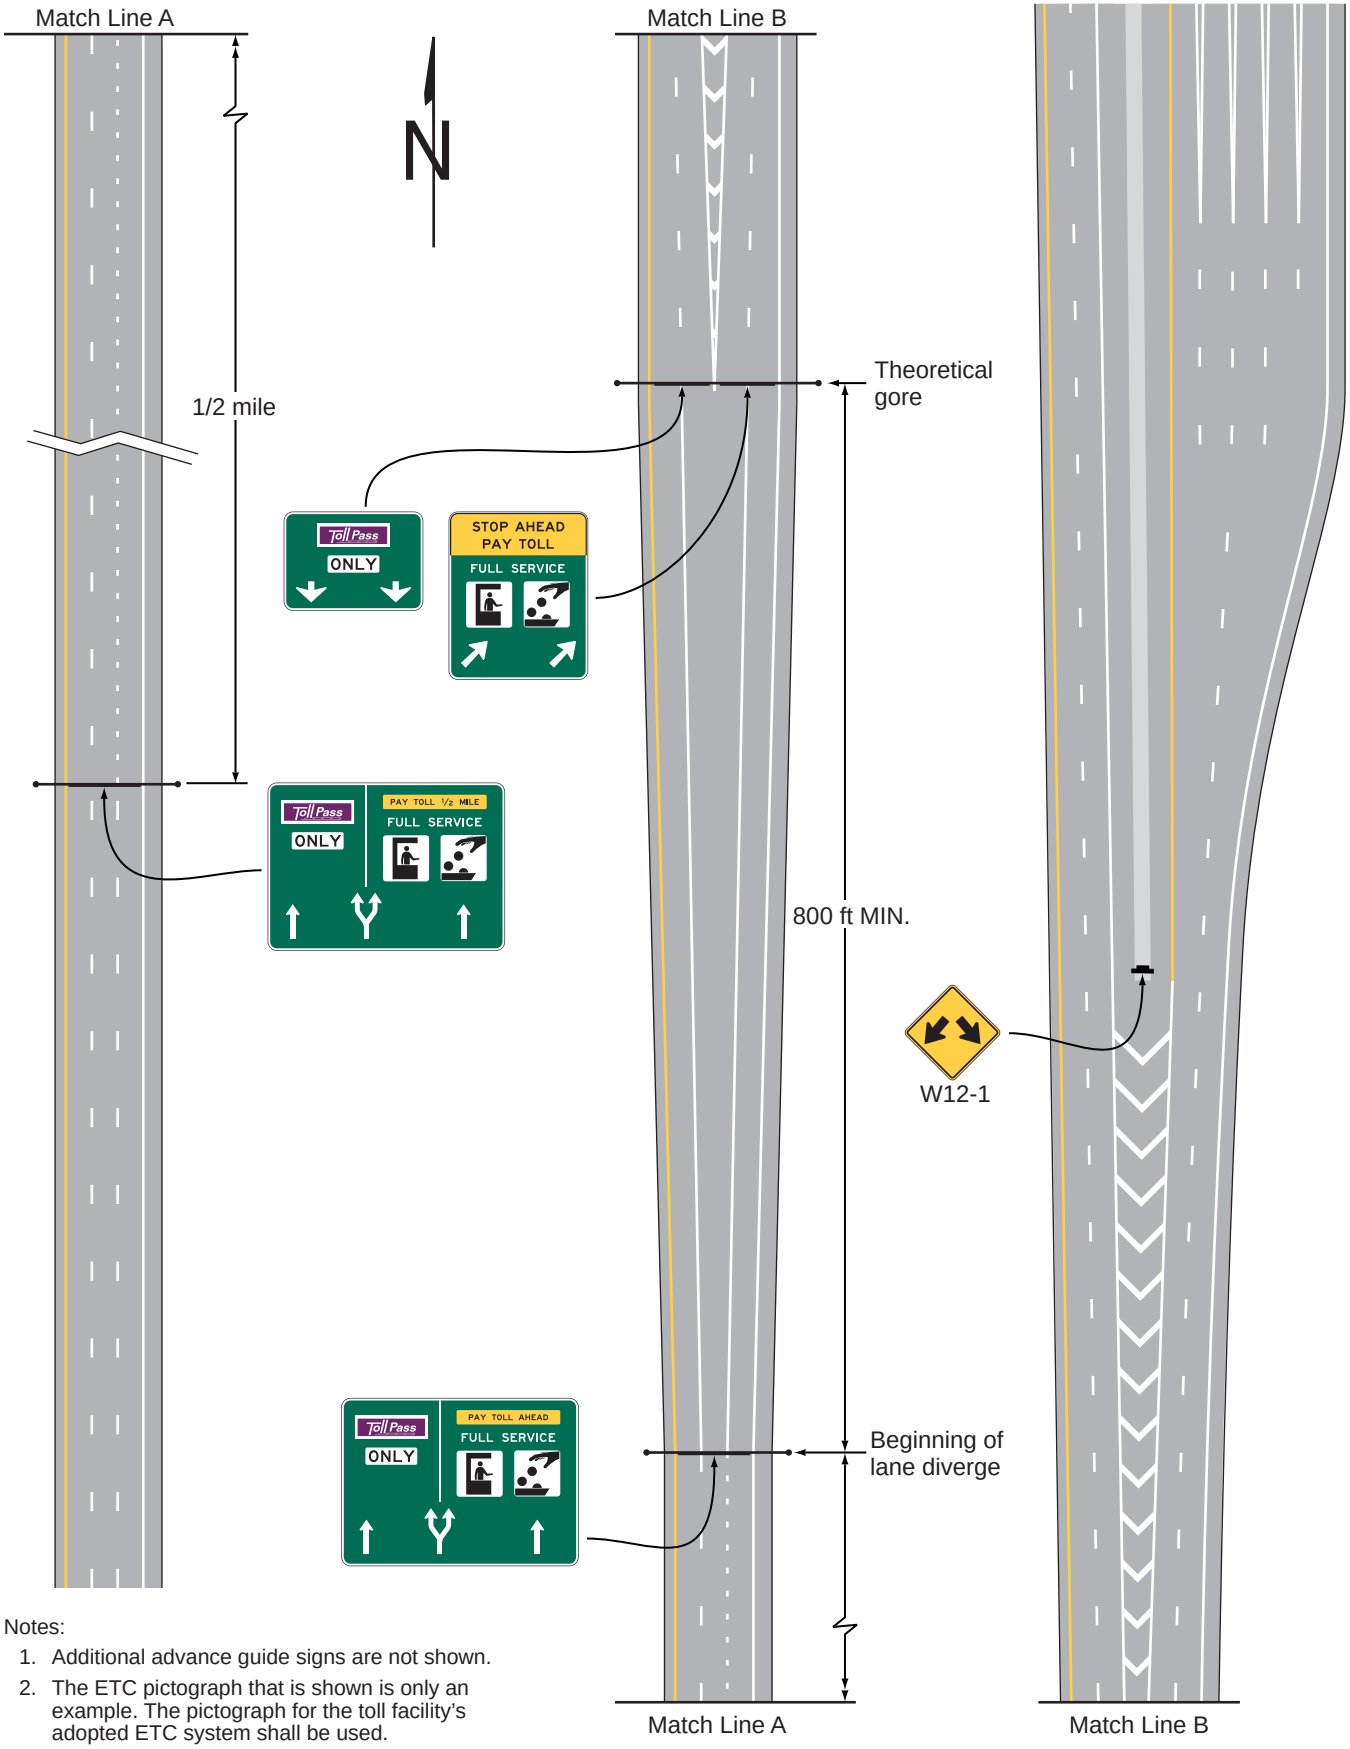



Notes:

1. Additional advance guide signs are not shown.
2. The ETC pictograph that is shown is only an example. The pictograph for the toll facility's adopted ETC system shall be used.

## Figure 2F-12. Examples of Guide Signs for the Entrance to a Toll Highway on which Tolls are Collected Electronically Only (Sheet 1 of 3)

**A – All tolls are billed through a license plate character recognition system**

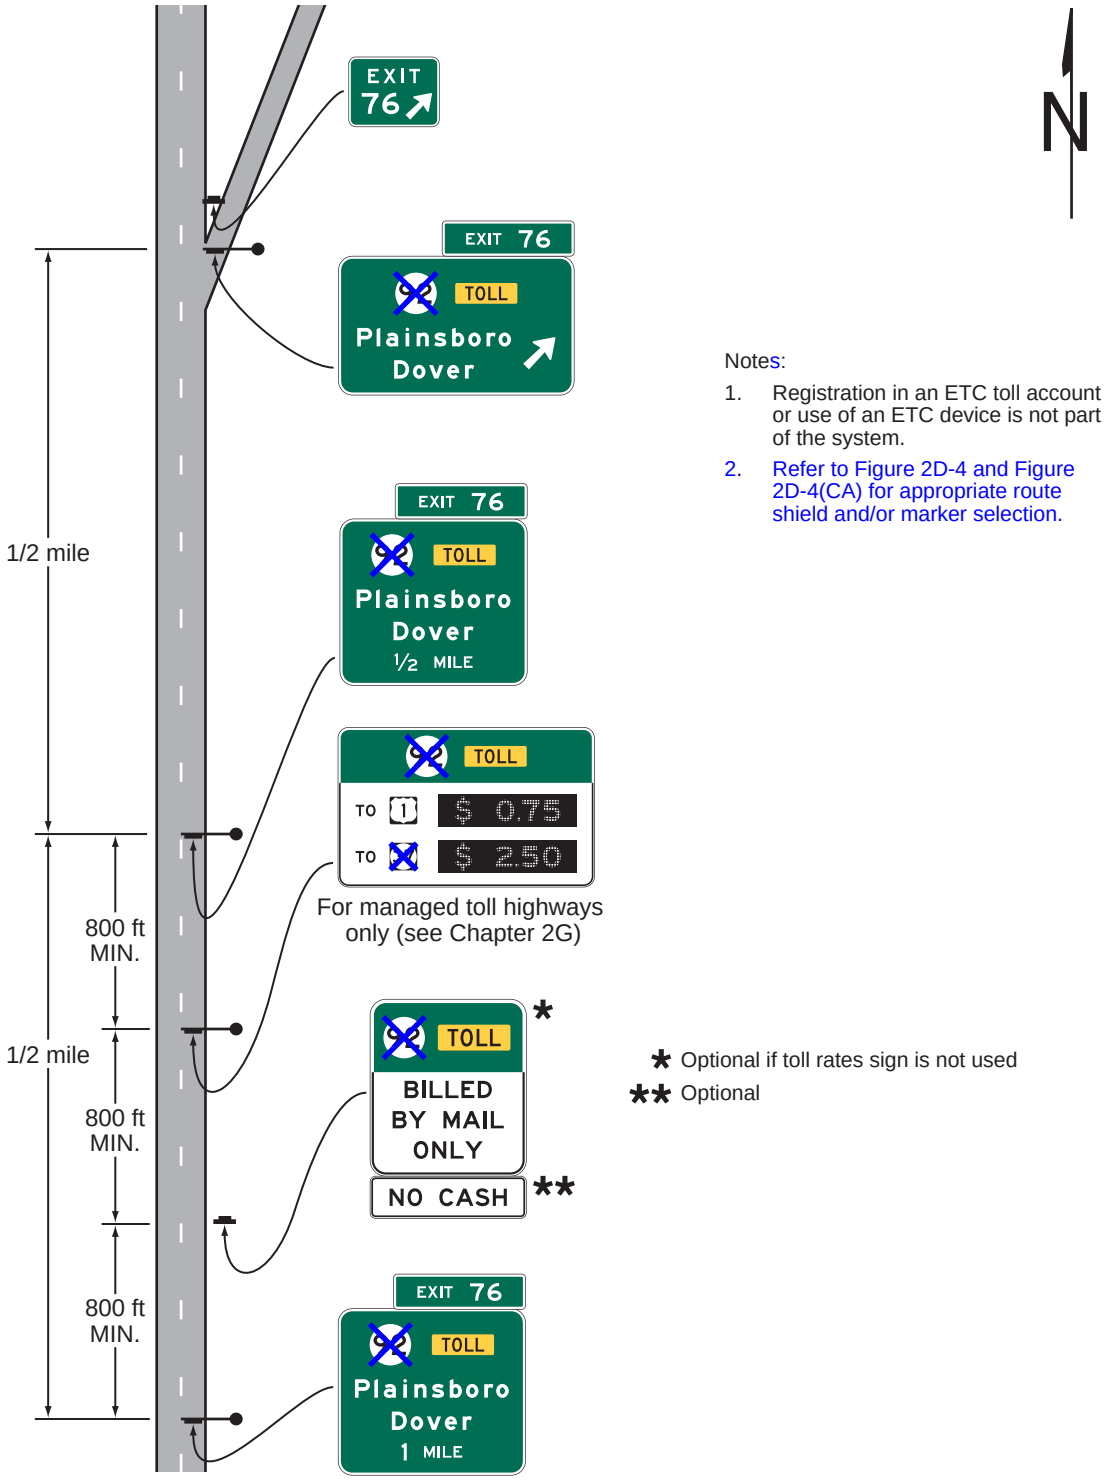



Notes:

1. Registration in an ETC toll account or use of an ETC device is not part of the system.
2. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* Optional if toll rates sign is not used
** Optional

# Figure 2F-12. Examples of Guide Signs for the Entrance to a Toll Highway on which Tolls are Collected Electronically Only (Sheet 2 of 3)

**B – Registration in an ETC account program is required for using the tollway**

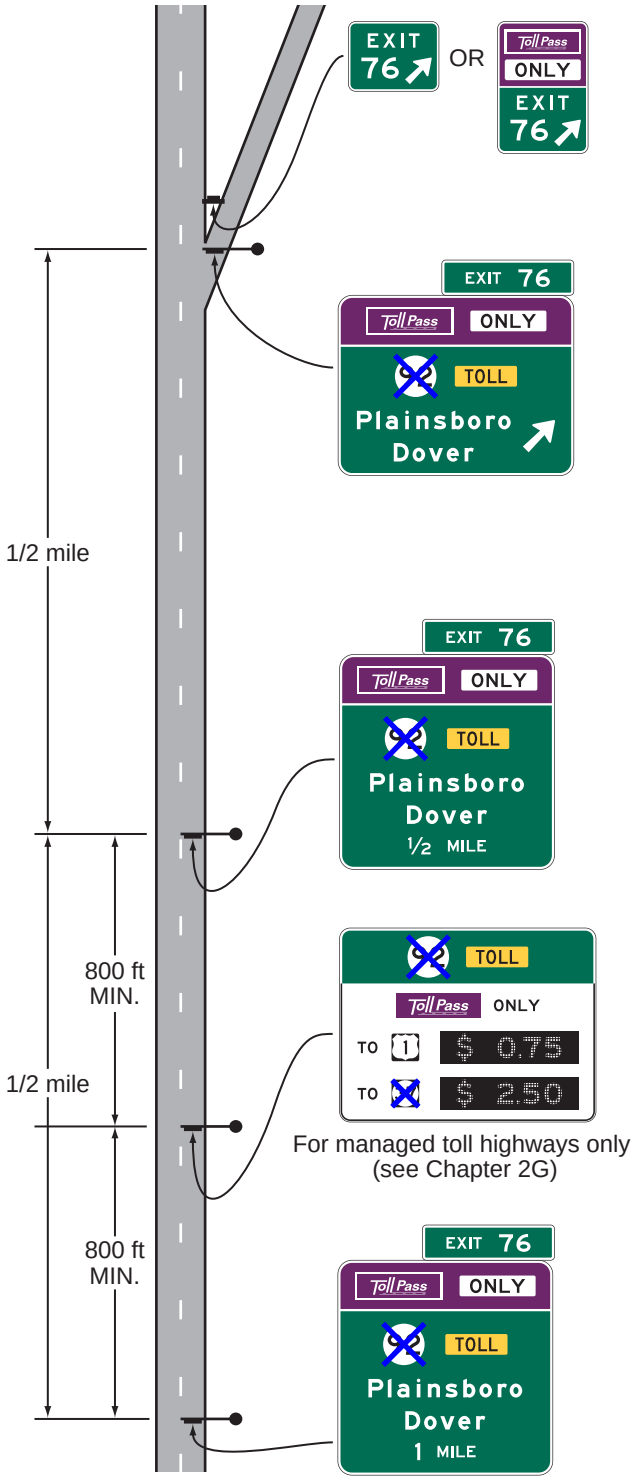



Notes:

1. Tolls are processed though an ETC device and/or license plate recognition for vehicles registered in the ETC program.
2. The ETC pictographs shown are only examples. The pictograph for the toll facility's adopted ETC system shall be used.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

# Figure 2F-12. Examples of Guide Signs for the Entrance to a Toll Highway on which Tolls are Collected Electronically Only (Sheet 3 of 3)

**C – Tolls are billed through either a license plate character recognition system or an ETC account device**

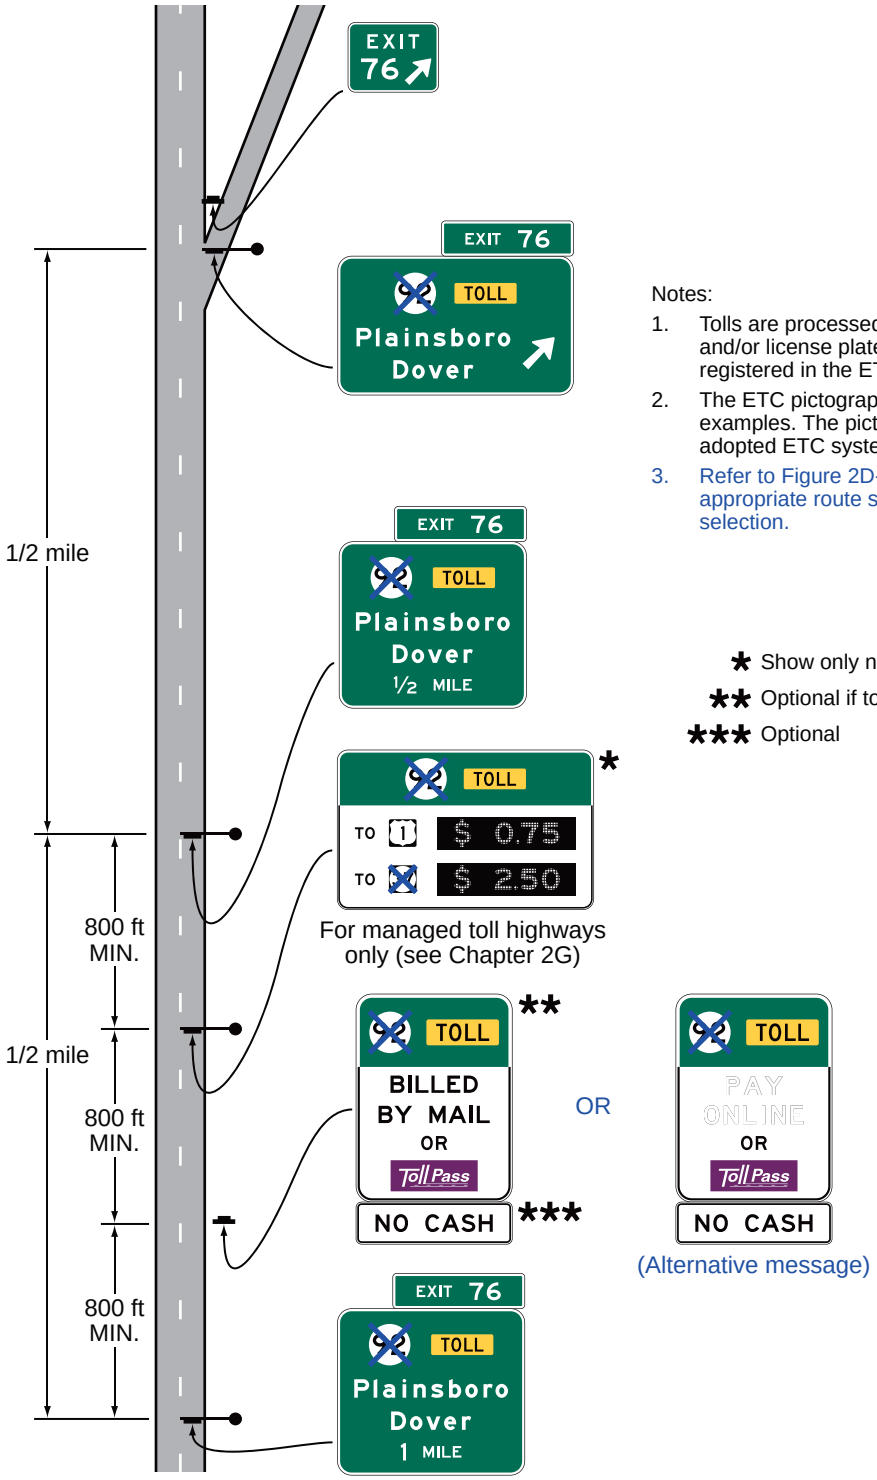



Notes:

1. Tolls are processed though an ETC device and/or license plate recognition for vehicles registered in the ETC program.
2. The ETC pictographs shown are only examples. The pictograph for the toll facility's adopted ETC system shall be used.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* Show only non-discounted rates
** Optional if toll rates sign is not used
*** Optional


## Figure 2F-13. Examples of Guide Signs for Alternative Toll and Non-Toll Ramp Connections to a Non-Toll Highway

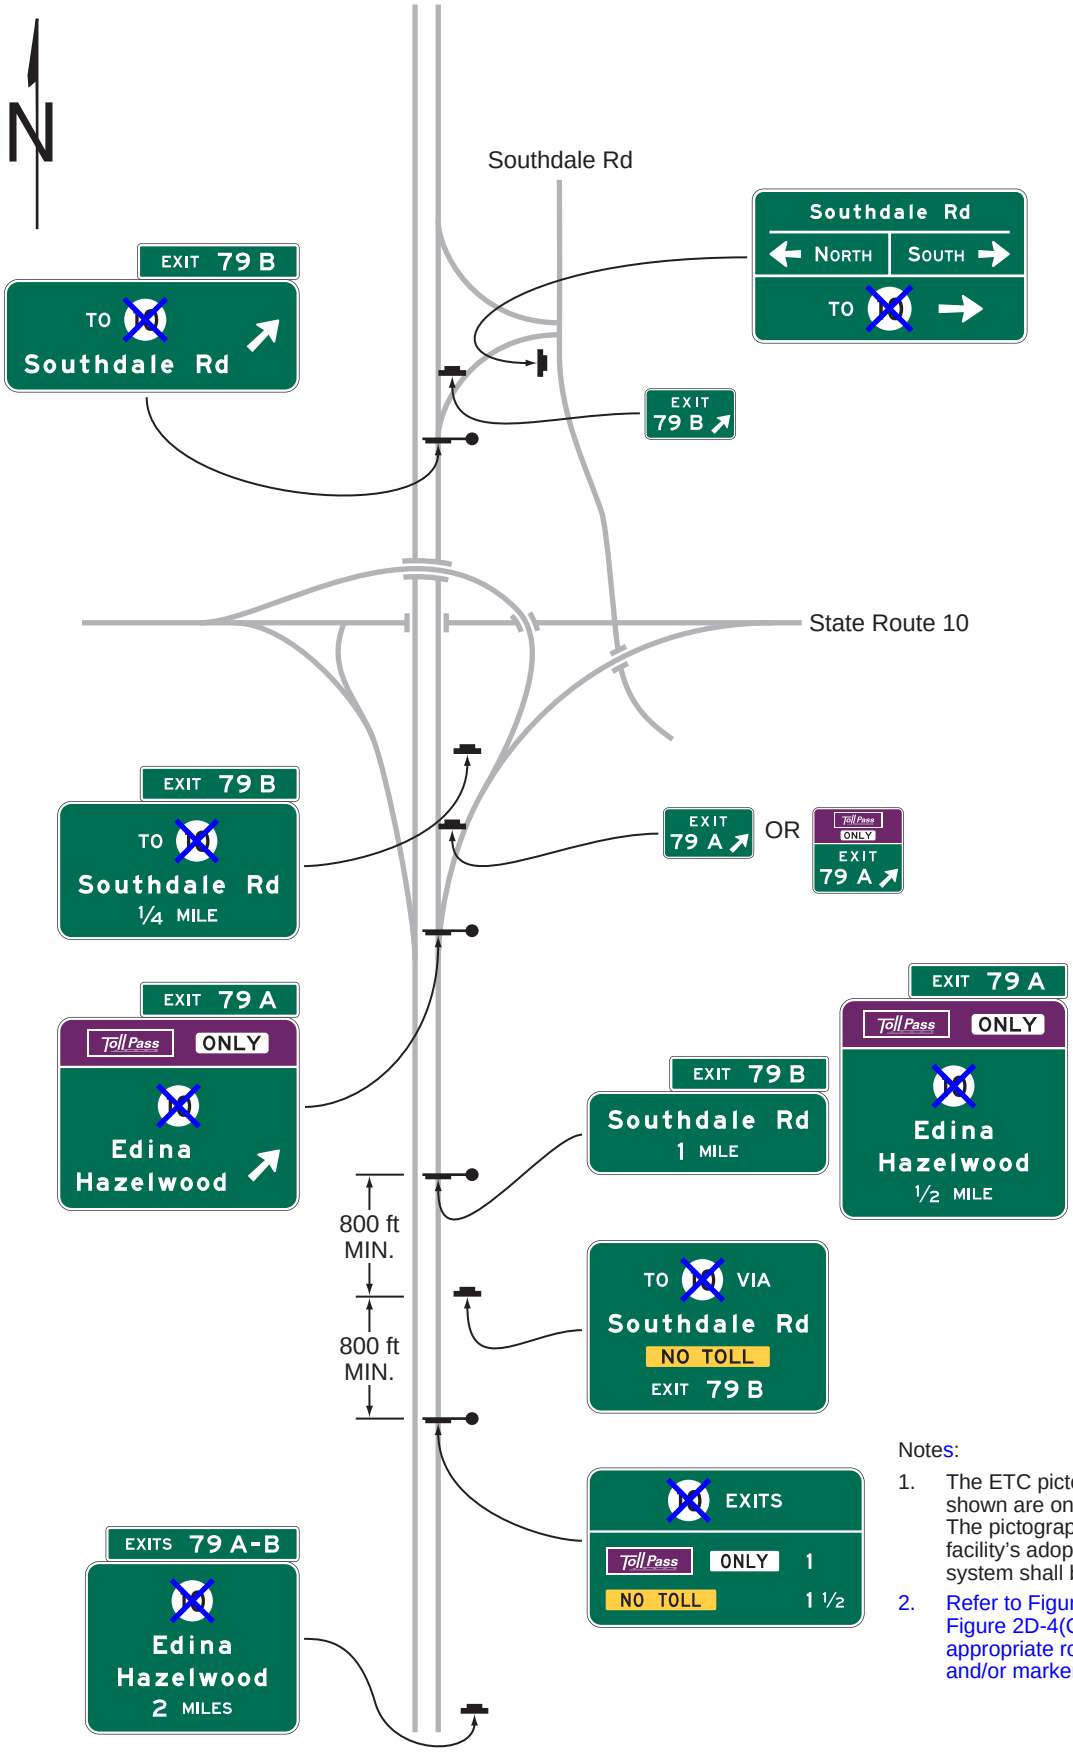



Notes:

1. The ETC pictographs shown are only examples. The pictograph for the toll facility's adopted ETC system shall be used.
2. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

# Figure 2F-14. Examples of Mainline Toll Plaza Approach and Canopy Signing

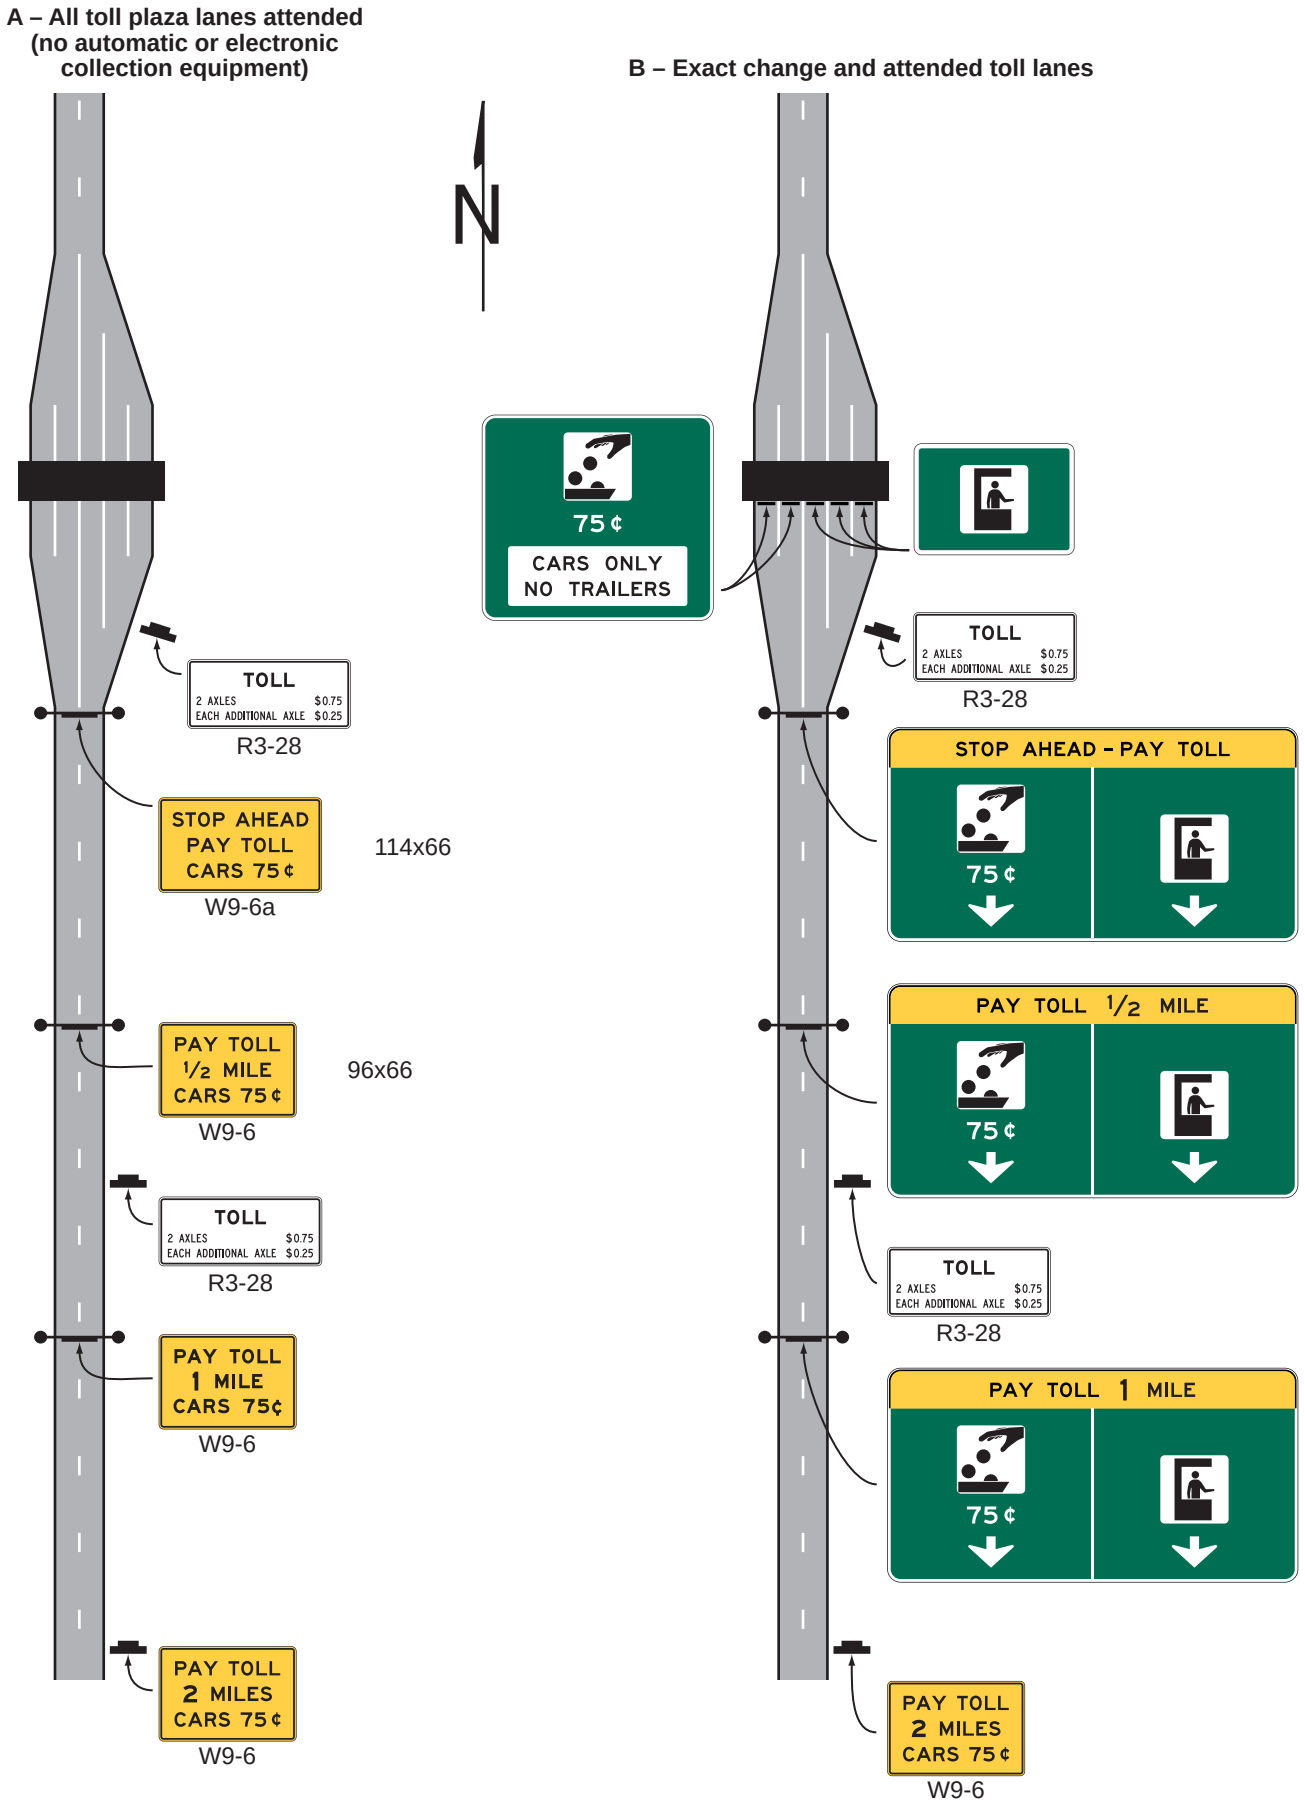

## Figure 2F-15. Examples of Guide Signs for a Mainline Toll Plaza on a Diverging Alignment from Open-Road ETC Lanes

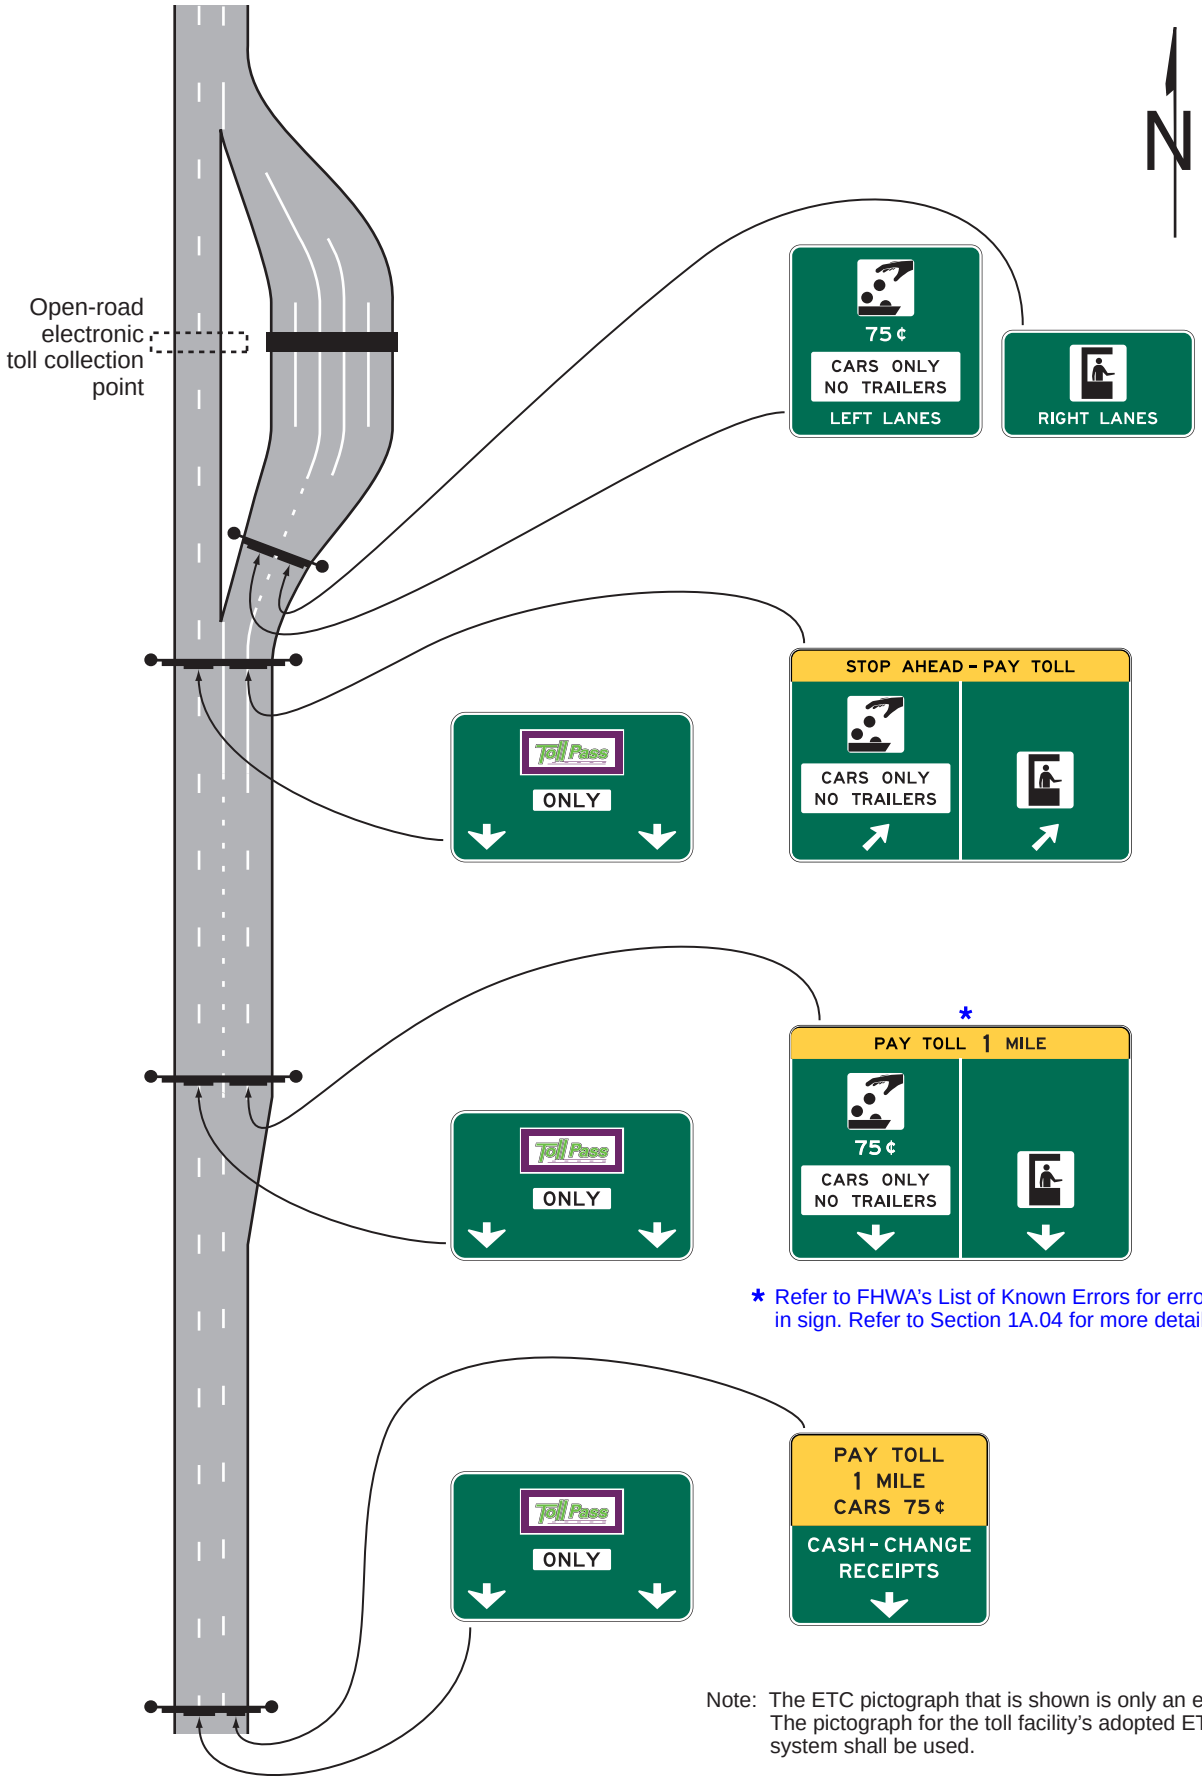



* Refer to FHWA's List of Known Errors for error in sign. Refer to Section 1A.04 for more details.

Note: The ETC pictograph that is shown is only an example. The pictograph for the toll facility's adopted ETC system shall be used.


## Figure 2F-16. Examples of Toll Plaza Canopy Signs




Attended lane with an
M4-17 Toll Collector symbol




Exact Change or ETC Account lane with an
M4-18 Exact Change symbol





ETC Account-Only lane

* Optional flashing yellow beacons that are separated from any lane-use control signals for the lane (see Section 2F.16)

** The ETC pictographs that are shown are only examples. The pictograph for the toll facility's adopted ETC system shall be used.

## *Figure 2F-101(CA). California Freeway Entrance Package to Toll Facilities*

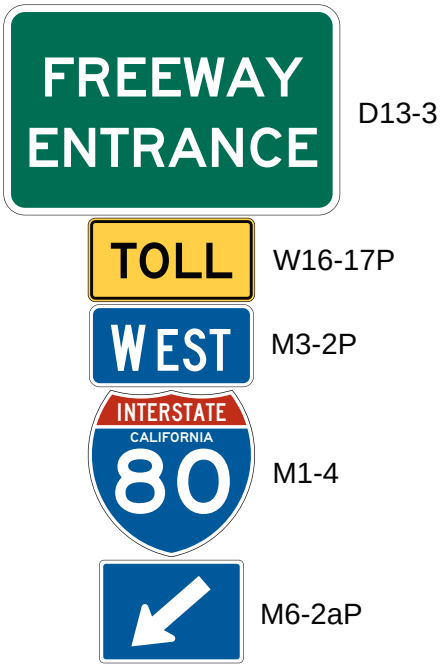


**Example Route Sign Assembly**

Note: Toll freeway entrance signage package should be installed at each on-ramp within a toll facility and at the final upstream on-ramp that provides direct access to the toll facility.

## *Figure 2F-102(CA). California Example of Warning Sign and Plaque for Toll Crossings*




SW95(CA)




SW95aP(CA)

## Table 2F-1. Toll Road Sign and Plaque Minimum Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| Toll Rate | R3-28 | 2F.04 | — | — | 114 x 48 | 114 x 48 | — | — |
| Pay Toll (plaque) | R3-29P | 2F.04 | — | — | 24 x 18 | 24 x 18 | — | — |
| Take Ticket (plaque) | R3-30P | 2F.04 | — | — | 24 x 18 | 24 x 18 | — | — |
| ETC Account-Only | R3-31 | 2F.05 | 24 x 24 | 24 x 24 | 36 x 36 | 36 x 36 | 24 x 24 | 36 x 36 |
| No Cash (plaque) | R3-32P | 2F.05 | 24 x 12 | 24 x 12 | 36 x 18 | 36 x 18 | 24 x 12 | 36 x 18 |
| Pay Toll XX Miles Cars (price) | W9-6 | 2F.06 | 96 x 66 | 96 x 66 | 96 x 66 | 96 x 66 | — | — |
| Stop Ahead Pay Toll Cars (price) | W9-6a | 2F.08 | 114 x 66 | 114 x 66 | 114 x 66 | 114 x 66 | — | — |
| Pay Toll XX Miles Cars (price) (plaque) | W9-6bP | 2F.07 | 312* x 30 | 312* x 30 | 312* x 30 | 312* x 30 | — | — |
| Stop Ahead Pay Toll (plaque) | W9-6cP | 2F.09 | 264* x 30 | 264* x 30 | 264* x 30 | 264* x 30 | — | — |
| Stop Ahead Pay Toll (plaque) | W9-6dP | 2F.09 | 114 x 48 | 114 x 48 | 114 x 48 | 114 x 48 | — | — |
| Take Ticket XX Miles | W9-6e | 2F.06 | 114 x 48 | 114 x 48 | 114 x 48 | 114 x 48 | — | — |
| Stop Ahead Take Ticket | W9-6f | 2F.08 | 114 x 48 | 114 x 48 | 114 x 48 | 114 x 48 | — | — |
| Take Ticket XX Miles (plaque) | W9-6gP | 2F.07 | 216 x 30 | 216 x 30 | 216 x 30 | 216 x 30 | — | — |
| Stop Ahead Take Ticket (plaque) | W9-6hP | 2F.09 | 282 x 30 | 282 x 30 | 282 x 30 | 282 x 30 | — | — |
| Last Exit Before Toll (1-line plaque) | W16-16P | 2F.10 | — | — | 252* x 36 | 252* x 36 | — | — |
| Last Exit Before Toll (2-line plaque) | W16-16aP | 2F.10 | — | — | 144 x 54 | 144 x 54 | — | — |
| Toll (plaque) | W16-17P | 2F.11 | 24 x 12 | 24 x 12 | 36 x 18 | 36 x 18 | 24 x 12 | 36 x 18 |
| Toll Collector Symbol Panel | M4-17 | 2F.12 | — | — | 48 x 48 | 48 x 48 | — | — |
| Exact Change Symbol Panel | M4-18 | 2F.12 | — | — | 48 x 48 | 48 x 48 | — | — |

* The width shown represents the minimum dimension. The width shall be increased as appropriate to match the width of the guide sign.

Notes: 1. Larger signs may be used when appropriate
2. Dimensions are shown as width x height, in inches

## Table 2F-1(CA). California Toll Road Sign and Plaque Minimum Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | | |
| NO TOLL (plaque) | SW95aP(CA) | 2F.101(CA) | 54 x 18 | 54 x 18 | 72 x 24 | 72 x 24 | — | — |
| TOLL BRIDGE XX MILES | SW95(CA) | 2F.101(CA) | 54 x 48 | 54 x 48 | 72 x 66 | 72 x 66 | — | — |

Note: If mounted on an Overhead Sign Structure, the signs listed in Table 2F-1(CA) should have the same sign depth as adjacent sign panels if applicable.

# CHAPTER 2G. PREFERENTIAL AND MANAGED LANE SIGNS

## Chapter 2G Subchapter and Section Organization

**GENERAL**
2G.01 Scope
2G.02 Sizes of Preferential and Managed Lane Signs

**REGULATORY SIGNS**
2G.03 Regulatory Signs for Preferential Lanes – General
2G.04 Vehicle Occupancy Definition Signs (R3-10 Series and R3-13 Series)
2G.05 Preferential Lane Operation Signs (R3-11 Series and R3-14 Series)
2G.06 Preferential Lane Advance Signs (R3-12, R3-12e, R3-12f, R3-15, R3-15a, and R3-15d)
2G.07 Preferential Lane Ends Signs (R3-12a, R3-12b, R3-12c, R3-12d, R3-12g, R3-12h, R3-15b, R3-15c, and R3-15e)

**WARNING SIGNS AND PLAQUE**
2G.08 Warning Signs on Median Barriers for Preferential Lanes
2G.09 High-Occupancy Vehicle (HOV) Plaque (W16-11P)

**GUIDE SIGNS**
2G.10 Preferential Lane Guide Signs – General
2G.11 Signing for Initial Entry Points to Preferential Lanes
2G.12 Signing for Intermediate Entry Points to Preferential Lanes
2G.13 Signing for Egress from Preferential Lanes to General-Purpose Lanes
2G.14 Signing for Direct Entrances to Preferential Lanes from Another Highway
2G.15 Signing for Direct Exits from Preferential Lanes to Another Highway

**MANAGED LANE SIGNS, PLAQUES, AND LANE-USE CONTROL SIGNALS**
2G.16 Signs for Managed Lanes – General
2G.17 Signs for Priced Managed Lanes – General
2G.18 Regulatory Signs for Priced Managed Lanes
2G.19 Guide Signs for Priced Managed Lanes
2G.20 Signs for Part-Time Travel on a Shoulder – General
2G.21 Regulatory Signs and Plaques for Part-Time Travel on a Shoulder
2G.22 Warning Signs for Part-Time Travel on a Shoulder
2G.23 Guide Signs for Part-Time Travel on a Shoulder
2G.24 Lane-Use Control Signals for Part-Time Travel on a Shoulder
2G.25 Lane-Use Control Signals for Active Lane Management on Freeways and Expressways
2G.26 Variable Speed Limits for Active Traffic Management on Freeways and Expressways

# GENERAL

## Section 2G.01 Scope

Support:

01 Preferential lanes are lanes designated for special traffic uses such as high-occupancy vehicles (HOVs), light rail, buses, or taxis. Preferential lane treatments might be as simple as restricting a turning lane to a certain class of vehicles during peak periods, or as sophisticated as providing a separate roadway system within a highway corridor for certain vehicles.

02 Preferential lanes might be barrier-separated (on a separate alignment or physically separated from the other travel lanes by a barrier or median), buffer-separated (separated from the adjacent general-purpose lanes only by a narrow buffer area created with longitudinal pavement markings), or contiguous (separated from the adjacent general-purpose lanes only by a lane line). Preferential lanes might allow continuous access with the adjacent general-purpose lanes or restrict access only to designated locations. Preferential lanes might be operated in a constant direction or operated as reversible lanes. Some reversible preferential lanes on a divided highway might be operated counter-flow to the direction of traffic on the immediately adjacent general- purpose lanes.

03 Preferential lanes might be operated on a 24-hour basis, for extended periods of the day, during peak travel periods only, during special events, or during other activities.

04 Open-road tolling lanes and toll plaza lanes that segregate traffic based on payment method are not considered preferential lanes. Chapter 2F contains information regarding signing of open-road tolling lanes and toll plaza lanes.

05 Managed lanes typically restrict access with the adjacent general-purpose lanes to designated locations only.

06 Under certain operational strategies, such as the occupancy requirement of an HOV lane changing in response to actual congestion levels, a managed lane is a special type of preferential lane (see Sections 2G.03 through 2G.07).

07 A managed lane operated on a real-time basis in response to changing conditions might be operated as an HOV lane for a period of time as needed to manage congestion levels.

08 Sections 2G.17 through 2G.19 contain additional information regarding signs for managed lanes that use tolling or pricing as a management strategy.

09 Section 9B.04 contains information regarding Preferential Lane signs for bicycle lanes.

**Standard:**

10 **Unless otherwise provided, the provisions of this Chapter shall not apply to bicycle lanes.**

## Section 2G.02 Sizes of Preferential and Managed Lane Signs

**Standard:**

01 **Except as provided in Section 2A.07, the minimum sizes of preferential and managed lane signs that have standardized designs shall be as shown in Table 2G-1.**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2G-1.

Option:

03 Signs larger than those shown in Table 2G-1 may be used (see Section 2A.07).

04 Signs listed in Table 2G-1 that are post-mounted on a median barrier may use the smaller size specified in the table, where applicable.

# REGULATORY SIGNS

## Section 2G.03 Regulatory Signs for Preferential Lanes – General

**Standard:**

01 **When a preferential lane is established, the Preferential Lane regulatory signs (see Figure 2G-1 and Figure 2G-1(CA)) and pavement markings (see Chapter 3E) for these lanes shall be used to advise road users.**

Support:

02 Preferential Lane (R3-10, R3-11 series through R3-15 series, R33(CA) series, R82(CA) series, R88(CA), R90-1(CA), R91(CA) series, R94(CA), SR50(CA) series, and the SR60(CA) series) regulatory signs (see Figure 2G-1 and Figure 2G-1(CA)) consist of several different general types of regulatory signs as follows:

A. Vehicle Occupancy Definition signs define the vehicle occupancy requirements applicable to an HOV lane (such as "2 OR MORE PERSONS PER VEHICLE") or types of vehicles not meeting the minimum occupancy requirement (such as motorcycles or Inherently Low Emission Vehicles (ILEVs)) that are allowed to use an HOV lane (see Section 2G.04).
B. Preferential Lane Operation signs notify road users of the days and hours during which the preferential restrictions are in effect (see Section 2G.05).
C. Preferential Lane Advance signs notify road users that a preferential lane restriction begins ahead (see Section 2G.06).
D. Preferential Lane Ends signs notify users of the termination point of the preferential lane restrictions (see Section 2G.07).

**Standard:**

03 **Regulatory signs applicable only to a preferential lane shall be distinguished from regulatory signs applicable to general-purpose lanes by the inclusion of the applicable symbol(s) and/or word(s) (see Figure 2G-1 and Figure 2G-1(CA)).**

Support:

04 The symbol and word message displayed on a particular Preferential Lane regulatory sign will vary based on the specific type of allowed traffic and on other related operational constraints that have been established for a particular lane, such as an HOV lane, a bus lane, or a taxi lane.

Option:

05 Changeable message signs may supplement, substitute for, or be incorporated into static Preferential Lane regulatory signs where travel conditions change or where multiple types of operational strategies (such as variable occupancy requirements or vehicle types) are used and varied throughout the day or week, or on a real-time basis, to manage the use of, control of, or access to preferential lanes.

Support:

06 Figure 2G-1 illustrates examples of changeable messages incorporated into static Preferential Lane regulatory signs displaying open and closed status using lane-use control signal indications (see Chapter 4T).

**Standard:**

07 **When changeable message signs (see Chapter 2L) are used as regulatory signs for preferential lanes, they shall be the required sign size and shall display the required letter height and legend format that corresponds to the type of roadway facility and design speed.**

*Guidance:*

08 *When Preferential Lane regulatory signs are used on conventional roads, the decision regarding whether to use a post-mounted or overhead version of a particular type of sign should be based on an engineering study that considers the available space, the existing signs for the adjacent general-purpose traffic lanes, roadway and traffic characteristics, the proximity to existing overhead signs, the ability to install overhead signs, and any other unique local factors.*

09 *If overhead regulatory signs applicable only to a preferential lane are located in approximately the same longitudinal position along the highway as overhead signs applicable only to the general-purpose lanes, the signs for the preferential lane should be separated laterally from the signs for the general-purpose lanes to the maximum extent practicable to minimize conflicting information, while maintaining their visual relationship to the lanes below necessitated by specific legend or arrows indicating lane assignment.*

**Standard:**

10 **If used, overhead Preferential Lane (R3-13 series, R3-14 series, ~~and~~ R3-15 series) regulatory signs shall be installed on the side of the roadway where the entrance to the preferential lane is located and any appropriate adjustments shall be made to the sign message.**

Option:

11 Where a median of sufficient width is available, the R3-13 series and R3-15 series signs may be post- mounted.

Support:

12 The sizes for Preferential Lane regulatory signs will differ to reflect the design speeds for each type of roadway facility. Table 2G-1 provides sizes for each type of roadway facility.

*Guidance:*

13 *The edges of Preferential Lane regulatory signs that are post-mounted on a median barrier should not project beyond the outer edges of the barrier, including in areas where lateral clearance is limited.*

Option:

14 Where lateral clearance is limited, Preferential Lane regulatory signs that are post-mounted on a median barrier and that are 72 inches or less in width may be skewed up to 45 degrees in order to fit within the barrier width or may be mounted higher, such that the vertical clearance to the bottom of the sign, light fixture, or structural support, whichever is lowest, is not less than 17 feet above any portion of the pavement and shoulders. For mounting heights on State highways, refer to Section 2A.15.

**Standard:**

15 **Where lateral clearance is limited, Preferential Lane regulatory signs that are post-mounted on a median barrier and that are wider than 72 inches shall be mounted with a vertical clearance that complies with the provisions of Section ~~2A.14~~ 2A.15 for overhead mounting if any portion of the sign extends over the roadway or shoulder.**

Support:

15a Refer to FHWA's List of Known Errors for errors in Paragraph 15 text. Refer to Section 1A.04 for more details.

*Guidance:*

16 *On conventional roadways, Preferential Lane regulatory sign spacing should be determined by engineering judgment based on speed, block length, distances from adjacent intersections, and other site- specific considerations.*

Support:

17 Sections 2G.04 and 2G.05 contain provisions regarding the placement of Preferential Lane regulatory signs on freeways and expressways.

**Standard:**

18 **The signs illustrated in Figure 2G-1 and Figure 2G-1(CA) that incorporate the diamond symbol shall be used exclusively with preferential lanes for high-occupancy vehicles to indicate the particular occupancy requirement and time restrictions applying to that lane. The signs illustrated in Figure 2G-1 that do not have a diamond symbol shall be used with preferential lanes that are not HOV lanes, but are designated for use by other types of vehicles (such as bus and/or taxi use).**

19 **The diamond symbol shall not be used on the bus, taxi, or bicycle Preferential Lane signs.**

20 **Vehicle Occupancy Definition, Preferential Lane Operation, and Preferential Lane Advance regulatory signs for HOV lanes shall display the minimum allowable vehicle occupancy requirement established for each HOV lane, displayed immediately after the word message HOV.**

Support:

21 The agencies that own and operate HOV lanes have the authority and responsibility to determine how they are operated and the minimum occupancy requirements. Information about federal requirements for certain types of vehicles not meeting the minimum occupancy requirement to be eligible to use HOV lane that receive Federal-aid program funding and about requirements associated with proposed significant changes to the operation of an existing HOV lane and certain vehicles are contained in the "Federal-Aid Highway Program Guidance on High Occupancy Vehicle (HOV) Lanes."

22 Figures 2G-2 and 2G-3 illustrate the use of regulatory signs for the beginning, along the length, and at the end of contiguous or buffer-separated preferential lanes that provide continuous access with the adjacent general-purpose lanes.

23 For State highways, refer to Caltrans' Managed Lanes Guidelines. Refer to Section 1A.05 for more information about this publication.

24 Refer to CVC § 21655.5 regarding Exclusive- or Preferential-Use Lanes for High Occupancy Vehicles.

## Section 2G.04 Vehicle Occupancy Definition Signs (R3-10 Series and R3-13 Series)

**Standard:**

01 **The R3-10, R3-13, and R3-13a Vehicle Occupancy Definition signs (see Figure 2G-1) shall be used where agencies determine that it is appropriate to provide a sign that defines the minimum occupancy of vehicles that are allowed to use an HOV lane.**

*Guidance:*

02 ~~*The Inherently Low Emission Vehicle (ILEV) (R3-10a) sign (see Figure 2G-1) should be used when it is permissible for a properly labeled and certified ILEV, regardless of the number of occupants, to use an HOV lane. When used, the ILEV signs should be post-mounted in advance of and at intervals along the HOV lane based upon engineering judgment and the placement of other Preferential Lane regulatory signs. The R3-10a sign is only applicable to HOV lanes and should not be used with other preferential lane applications.*~~

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

03 ~~ILEVs are defined by the Environmental Protection Agency (EPA) as vehicles having no fuel vapor (hydrocarbon) emissions and are certified by the EPA as meeting the emissions standards and requirements specified in 40 CFR §88.311-93 and 40 CFR §88.312-93(c).~~

Option:

03a The AUTOS/PICKUPS 2 SEATERS WITH 2 PERSONS OK (R91bP(CA)) plaque may be installed below the R3-10 sign for preferential lane facilities at toll plazas that require three or more persons per vehicle, but can also be utilized by vehicles designed by the manufacturer to be occupied by no more than two persons. Refer to Streets & Highways Code, § 30101.8.

Support:

04 Section 2G.18 contains information regarding the legends of Vehicle Occupancy Definition signs for a priced managed lane that has an occupancy requirement for non-toll travel.

**Standard:**

05 **For barrier-separated, buffer-separated, or contiguous preferential lanes where access between the preferential and general-purpose lanes is restricted to designated locations on freeways and expressways, an overhead Vehicle Occupancy Definition (R3-13 or R3-13a) sign shall be installed at least ½ mile in advance of the beginning of or initial entry point to an HOV lane. These signs shall only be displayed in advance of the beginning of or initial or intermediate entry point to HOV lanes.**

*Guidance:*

05a *The R3-13 or R3-13a sign should be installed at least 1/4 mile in advance of any intermediate access points or gaps in the barrier where vehicles legally permitted to enter the access-restricted preferential lanes.*

**Standard:**

06 **For buffer-separated or contiguous HOV lanes where access is restricted to designated locations on freeways and expressways, the sequence of a post-mounted Preferential Lane Operation (R3-11a) sign (see Section 2G.05) followed by a post-mounted Vehicle Occupancy Definition (R3-10) sign shall be located at intervals not greater than ½ mile along the length of designated gaps where vehicles are allowed to legally access the HOV lane, and within designated enforcement areas as defined by the operating agency.**

Option:

07 For buffer-separated or contiguous HOV lanes where access is restricted to designated locations on freeways and expressways, the sequence of a post-mounted Preferential Lane Operation (R3-11a) sign (see Section 2G.05) followed by a post-mounted Vehicle Occupancy Definition (R3-10) sign may be located at intervals of approximately ½ mile along the length of the HOV lane.

08 For barrier-separated HOV lanes on freeways and expressways, the sequence of a post-mounted Preferential Lane Operation (R3-11a) sign (see Section 2G.05) followed by a post-mounted Vehicle Occupancy Definition (R3-10) sign may be located at intervals of approximately ½ mile along the length of the HOV lane, at intermediate entry points, and at designated enforcement areas as defined by the operating agency.

Support:

08a Refer to Figure 2G-1 for other post-mounted Preferential Lane Operation signs used in lieu of the R3-11a sign.

**Standard:**

09 **For buffer-separated or contiguous HOV lanes where continuous access with the adjacent general-purpose lanes is provided on freeways and expressways, the sequence of a post-mounted Preferential Lane Operation (R3-11a) sign (see Section 2G.05) followed by a post-mounted Vehicle Occupancy Definition (R3-10) sign, ~~and ILEV (R3-10a) signs, if appropriate,~~ shall be located at intervals not greater than ½ mile along the length of the HOV lane.**

*Guidance:*

10 *On freeways and expressways, the signs within each Preferential Lane regulatory sign sequence should be separated by a minimum distance of 800 feet and a maximum distance of 1,000 feet.*

11 *On conventional roads, the distance between Preferential Lane regulatory signs within each sequence should be determined by engineering judgment based on speed, block length, distances from adjacent intersections, and other site-specific considerations.*

Support:

011a Buffer-separated preferential lanes that have continuous access with adjacent general-purpose lanes are not used on State Highways in California.

011b Refer to Figure 2G-1 for other post-mounted Preferential Lane Operation signs used in lieu of the R3-11a sign.

**Standard:**

12 **For all types of direct access ramps that provide access to or lead to HOV lanes, ~~a post-mounted~~ an overhead Vehicle Occupancy Definition (~~R3-10~~ R3-13a) sign, ~~and an ILEV (R3-10a) sign, if appropriate,~~ shall be used at the beginning or initial entry point for the direct access ramp. Refer to Figure 2G-16(CA).**

Option:

13 The (HOV) NO TRUCKS 3 AXLES OR MORE – NO VEHICLES WITH TRAILERS (R91-4(CA)) sign may be placed adjacent to the HOV lane, as needed, in locations where trucks or vehicles with trailers are frequently observed using the HOV lanes. It may also be used on surface streets approaching direct access ramps that lead to HOV lanes.

## Section 2G.05 Preferential Lane Operation Signs (R3-11 Series and R3-14 Series)

Support:

01 The standardized sizes of post-mounted Preferential Lane Operation (R3-11 series) signs are consistent to accommodate any future addition or removal of a single line of legend for each sign. Each size accommodates two lines of legend for the times of day and days of week that the regulation is in effect. Consistent sign sizes are beneficial for agencies when ordering sign materials, as well as when making legend changes to existing signs if changes occur to operating times or occupancy restrictions in the future.

*Guidance:*

02 *Where the regulation is in effect during more than one time period of the day, such as during the morning and afternoon peak periods, the height of the R3-11 and R3-14 series signs should be suitably increased to accommodate the additional line(s) of legend.*

**Standard:**

03 **When used, the post-mounted Preferential Lane Operation (R3-11 series, SR60-4(CA), and SR60-6(CA)) signs shall be located adjacent to the preferential lane, and the overhead Preferential Lane Operation (R3-14 series and SR60-8(CA)) signs shall be mounted directly over the lane.**

04 **The legend format of the post-mounted Preferential Lane Operation (R3-11 series, SR60-4(CA), and SR60-6(CA)) signs shall have the following sequence:**

- **A. Top Lines: Lanes applicable, such as "RIGHT LANE" or "2 RIGHT LANES"**
- **B. Middle Lines: Eligible uses, such as "HOV 2+ ONLY" (or 3+ or 4+, if appropriate), ~~or~~ "BUSES ONLY", "BUSES-TAXIS ONLY", "TRAINS ONLY" or other applicable uses or eligible turning movements**
- **C. Bottom Lines: Applicable times and days, such as "7 AM – 9 AM" or "6:30 AM – 9:30 AM, MON-FRI" or "24 HOURS"**

05 **The legend format of the overhead Preferential Lane Operation (R3-14 series and SR60-8(CA)) signs shall have the following sequence:**

- **A. Top Lines: Eligible uses, such as "HOV 2+ ONLY" (or 3+ or 4+, if appropriate), ~~or~~ "BUSES ONLY", "BUSES-TAXIS ONLY", "TRAINS ONLY" or other applicable uses or eligible turning movements**
- **B. Bottom Lines: Applicable times and days, with the time and day placed above the down arrow, such as "7**

**AM – 9 AM" or "6:30 AM – 9:30 AM, MON-FRI." When the operating periods exceed the available line width, the hours and days of the week shall be stacked as shown for the R3-14a sign in Figure 2G-1.**

06 **For preferential lane restrictions that are in effect on a full-time (24 hours per day, seven days per week) basis, the Preferential Lane Operation (R3-11b, R3-11c, R3-11e, ~~R3-11g,~~ R3-14b, ~~R3-14e, and R3-14g~~ SR60-4(CA), and SR60-6(CA)) signs that include a period of operation legend shall be modified to display no legend relative to the period of operation except as provided in Paragraph 7 of this Section.**

Support:

06a Refer to FHWA's List of Known Errors for errors in Paragraph 6 text. Refer to Section 1A.04 for more details.

Option:

07 In lieu of removing the period of operation text from the Preferential Lane Operation signs for full-time operation, the legend 24 HOURS may be substituted for the times and days of the week on the Preferential Lane Operation (R3-11, R3-11a, R3-11d, R3-11f, R3-11g, R3-14, R3-14a, R3-14c, ~~R3-14d,~~ and ~~R3-14f~~ SR60-8(CA)) signs for preferential lane restrictions that are in effect on a full-time basis.

Support:

07a Refer to FHWA's List of Known Errors for errors in Paragraph 7 text. Refer to Section 1A.04 for more details.

08 The 24 HOURS legend displayed on the ~~R3-11c sign~~ Preferential Lane Operation (R3-11 and R3-14 series) signs reinforces the full-time operation where several facilities in the same area have different hours of operation—some part time, others full time, or where the same lane changes from part-time to full-time operation somewhere along its length.

08a Refer to FHWA's List of Known Errors for error in Paragraph 8 text. Refer to Section 1A.04 for more details.

**Standard:**

09 **The full-time Preferential Lane Operation (R3-11b, R3-11c, R3-11e, ~~R3-11g,~~ and R3-14b~~, R3-14e, and R3-14g~~) signs that do not display a period of operation legend, as described in Paragraph 6 of this Section, shall not be used where the preferential lane restriction is in effect only on a part-time basis.**

Support:

09a Refer to FHWA's List of Known Errors for errors in Paragraph 9 text. Refer to Section 1A.04 for more details.

Option:

10 Where additional movements are allowed from a preferential lane on an approach to an intersection by vehicles not meeting the preferential lane regulation, the format and words used in the legend in the middle lines on the post-mounted Preferential Lane Operation (R3-11 series) signs and on the top line of the overhead Preferential Lane Operation (R3-14 series) signs may be modified to accommodate the allowable movements (such as "HOV 2+ AND RIGHT TURNS ONLY").

10a The Mandatory/Optional HOV Movement Lane Control (R94(CA)) sign may be installed on local streets when one of the mandatory turn lanes (left or right) is designated as a HOV-only lane.

11 The MOTORCYCLES ALLOWED (R3-11hP) plaque (see Figure 2G-1) may be used where motorcycles, regardless of the number of occupants, are allowed to use an HOV lane.

**Standard:**

12 **If used, the MOTORCYCLES ALLOWED plaque shall be mounted below a post-mounted Preferential Lane Operation (R3-11, R3-11a, or R3-11b) sign.**

13 **For all barrier-separated or buffer-separated or contiguous preferential lanes where access is restricted to designated locations, an overhead Preferential Lane Operation (R3-14 series or SR60-8(CA)) sign shall be used at the beginning or initial entry point on freeways, expressways, and at locations on conventional roadways where the preferential lane is not the outermost (far right or far left) lane of the roadway, and at any intermediate entry points or gaps in the barrier or buffer where vehicles are allowed to legally enter the access-restricted preferential lanes. For all barrier-separated and buffer-separated preferential lanes, post-mounted Preferential Lane Operation (R3-11 series, SR60-4(CA), and SR60-6(CA)) signs shall be used only as a supplement to the overhead signs on freeways, expressways, and at locations on conventional roadways where the preferential lane is not the outermost lane of the roadway at the beginning or initial entry point, or at any intermediate entry points or gaps in the barrier or buffer.**

14 **For buffer-separated or contiguous preferential lanes where continuous access with the adjacent general-purpose lanes is provided, including those where a preferential lane is added to the roadway (see Figure 2G-2 for HOV lanes) and those where a general-purpose lane transitions into a preferential lane (see Figure 2G-3 for HOV lanes), an overhead Preferential Lane Operation (R3-14 series) sign shall be used at the beginning or initial**

**entry point of the preferential lane on freeways and expressways.**

Option:

15 On conventional roads where preferential lane operations exist, R3-11 series post-mounted signs may be used in lieu of or in addition to overhead R3-14 series signs, except where overhead signs are required as provided in Paragraph ~~14~~13 of this Section.

Support:

15a Refer to FHWA's List of Known Errors for error in Paragraph 15 text. Refer to Section 1A.04 for more details.

Option:

16 Additional overhead (R3-14 series and SR60-8(CA)) or post-mounted (R3-11 series) Preferential Lane Operation signs may be provided along the length of any type of preferential lane.

Support:

016a Buffer-separated preferential lanes that have continuous access with adjacent general-purpose lanes are not used on State Highways in California.

**Standard:**

17 **For all types of direct access ramps that provide access to or lead to preferential lanes, a post-mounted Preferential Lane Operation (R3-11 series) sign shall be used at the beginning or initial entry point of the direct access ramp.**

Option:

18 For direct access ramps to preferential lanes, an overhead Preferential Lane Operation (R3-14 series) sign may be used at the beginning or initial entry point to supplement the required post-mounted signs.

19 Lane-use control signals (see Chapter 4T) may be used at access points to preferential lanes to indicate that a ramp or access roadway leading to the preferential lane or facility, or one or more specific lanes of the facility, are open or closed (see Figure 2G-1).

## Section 2G.06 Preferential Lane Advance Signs (R3-12, R3-12e, R3-12f, R3-15, R3-15a, and R3-15d)

~~*Guidance:*~~

**Standard:**

01 **The Preferential Lane Advance (R3-12, R3-12f, R3-15, ~~and~~ R3-15d, SR60-1(CA), and SR60-2(CA)) signs (see Figure 2G-1 and Figure 2G-1(CA)) ~~should~~ shall be used for advance notification of a barrier-separated, buffer-separated, or contiguous preferential lane that is added to the general-purpose lanes (see Figure 2G-2).**

02 **The Preferential Lane Advance (R3-12e and R3-15a) signs (see Figure 2G-1) ~~should~~ shall be used for advance notification of a general-purpose lane that becomes a preferential lane (see Figure 2G-3).**

Option:

03 The legends on the R3-12f and R3-15d signs may be modified to suit the type of preferential lane.

*Guidance:*

04 *On conventional roads, for general-purpose lanes that become preferential lanes, a post-mounted (R3-12e) or overhead (R3-15a) Preferential Lane Advance sign should be installed in advance of the beginning of or initial entry point to the preferential lane at a distance determined by engineering judgment based on speed, traffic characteristics, and other site-specific considerations. The distance selected should provide adequate opportunity for ineligible vehicles to vacate the lane prior to the beginning of the restriction.*

05 *On freeways and expressways, for general-purpose lanes that become preferential lanes, an overhead Preferential Lane Advance (R3-15a) sign should be installed at least 1 mile in advance of the beginning of the preferential lane restriction.*

Option:

06 Additional post-mounted or overhead Preferential Lane Advance signs may be placed farther in advance of or closer to the beginning or initial entry points to a preferential lane.

**Standard:**

07 **A Specific Hours/Days (R82aP(CA) or R82bP(CA)) plaque shall be used to designate the periods of operation for preferential lanes that operate on a part-time basis.**

*Guidance:*

08 *When used, the Specific Hours/Days plaque should be placed below the R3-12, R3-12e, R3-12f, SR60-1(CA), and SR60-2(CA) signs.*

## Section 2G.07 Preferential Lane Ends Signs (R3-12a, R3-12b, R3-12c, R3-12d, R3-12g, R3- 12h, R3-15b, R3-15c, and R3-15e)

**Standard:**

01 **A post-mounted Preferential Lane Ends (R3-12b or R3-12h) sign (see Figure 2G-1) shall be installed at least ½ mile in advance of the termination of a preferential lane on freeways and expressways.**

02 **Except as provided in Paragraph 7 of this Section, a post-mounted Preferential Lane Ends (R3- 12a or R3-12g) sign shall be installed at the point where a preferential lane and restriction end and traffic must merge into the general-purpose lanes.**

03 **A post-mounted Preferential Lane Ends (R3-12d) sign (see Figure 2G-1) shall be installed at least ½ mile in advance of the point where a preferential lane restriction ends and the lane becomes a general-purpose lane on freeways and expressways.**

04 **Except as provided in Paragraph 8 of this Section, a post-mounted Preferential Lane Ends (R3- 12c) sign shall be installed at the point where a preferential lane restriction ends and the lane becomes a general-purpose lane.**

*Guidance:*

05 *On conventional roads, the distance at which Preferential Lane Ends signs are installed in advance of the termination of a preferential lane and/or restriction should be determined by engineering judgment.*

Option:

06 The legends on the R3-12g and R3-15e signs may be modified to suit the type of preferential lane.

07 An overhead Preferential Lane Ends (R3-15b or R3-15e) sign may be installed instead of or in addition to a post-mounted R3-12a or R3-12g sign at the point where a preferential lane and restriction ends and traffic must merge into the general-purpose lanes.

08 An overhead Preferential Lane Ends (R3-15c) sign may be installed instead of or in addition to a post- mounted R3-12c sign at the point where the preferential lane restriction ends and the lane becomes a general- purpose lane.

# WARNING SIGNS AND PLAQUE

## Section 2G.08 Warning Signs on Median Barriers for Preferential Lanes

Option:

01 When a warning sign applicable only to a preferential lane is installed on a median barrier with limited lateral clearance to the adjacent travel lanes or shoulders, the warning sign may have a vertically- oriented rectangular shape. For a high-occupancy vehicle lane, such signs may be used instead of using the HOV (W16-11P) plaque (see Section 2G.09) with a standard diamond-shaped warning sign.

**Standard:**

02 **When a vertically-oriented rectangular-shaped warning sign applicable only to a preferential lane is installed on a median barrier, the top portion of the sign shall be comprised of a white symbol or legend denoting the type of preferential lane (such as the diamond symbol for HOV or the legend BUS LANE) on a black background with a white border, and the bottom portion of the sign shall be comprised of the standard word message or symbol of the standard warning sign as a black legend on a yellow background with a black border (see Figure 2G-4).**

*Guidance:*

03 *Where lateral clearance is limited, such as when a post-mounted warning sign applicable only to a preferential lane is installed on a median barrier, the edges of the sign should not project beyond the outer edges of the barrier.*

Option:

04 Where lateral clearance is limited, warning signs applicable only to a preferential lane that are post- mounted on a median barrier and that are 72 inches or less in width may be skewed up to 45 degrees in order to fit within the barrier width or may be mounted higher, such that the vertical clearance to bottom of the sign, light fixture, or its structural support, whichever is lowest, is not less than 17 feet above any portion of the pavement and shoulders. For mounting heights on State highways, refer to Section 2A.15.

**Standard:**

05 **Where lateral clearance is limited, Preferential Lane warning signs that are post-mounted on a median barrier and that are wider than 72 inches shall be mounted with a vertical clearance that complies with the provisions of Section 2A.15 for overhead mounting.**

*Guidance:*

06 *The HOV Lane Reduction (W11-1(CA)) sign (refer to Figure 2G-4) should be used to warn motorists of a reduction in the number of HOV lanes.*

07 *The HOV Merge (W59-1(CA)) sign (refer to Figure 2G-4) should be used in advance of locations where HOV lanes converge. This includes HOV direct access ramps where high speeds and volumes prevail, and merging or weaving must be accomplished in a relatively short distance.*

08 *When used, the HOV Advisory Exit (Ramp) Speed (W72B(CA)) sign (refer to Figure 2G-4) should be placed on the left of an HOV drop ramp or freeway-to-freeway connector to advise motorists of the speed at which the roadway can be comfortably negotiated.*

09 *The HOV THRU TRAFFIC MERGE LEFT (RIGHT) (W74-1(CA)) sign (refer to Figure 2G-4) should be used to inform motorists that the inside or outside lane of an HOV facility with two or more directional HOV lanes is being dropped at the next exit, and through HOV traffic must merge into the adjacent HOV lane. This sign should not be used to indicate a general lane reduction.*

## Section 2G.09 High-Occupancy Vehicle (HOV) Plaque (W16-11P)

Option:

01 In situations where there is a need to warn drivers in an HOV lane of a specific condition, the HOV (W16-11P) plaque (see Figure 2G-4) may be used above a warning sign. The HOV plaque may be used to differentiate a warning sign applicable to the HOV lanes when the sign is also visible to traffic on the adjacent general-purpose roadway. Among the warning signs that may be possible applications of the HOV plaque are the Advisory Exit Speed, Added Lane, and Merge signs.

02 The diamond symbol may be used instead of the word message HOV on the W16-11P plaque. When appropriate, the words LANE or ONLY may be used on this plaque.

Support:

03 Section 2G.08 contains information regarding warning signs that can be mounted on barriers for HOV or other types of preferential lanes.

# GUIDE SIGNS

## Section 2G.10 Preferential Lane Guide Signs – General

Support:

01 Preferential lanes are used on freeways, expressways, and conventional roads. Except as otherwise provided, Sections 2G.10 through 2G.15 apply only to guide signs for preferential lanes on freeways and expressways.

*Guidance:*

02 *On conventional roads, guide signs applicable only to preferential lanes are ordinarily not needed, but if used, they should comply with the provisions for guide signs in Chapter 2D and any principles for Preferential Lane guide signs in Sections 2G.10 through 2G.15 that engineering judgment finds to be appropriate for the conditions.*

Support:

03 Additional guidance and standards related to the designation, operational considerations, signs, pavement markings, and other considerations for preferential lanes are provided in Sections 2G.03 through 2G.07, 2G.09, and Chapter 3E.

*Guidance:*

04 *The appropriate combinations of pavement markings and standard overhead and post-mounted regulatory, warning, and guide signs for a specific preferential lane application should be selected based on an engineering study.*

05 *If overhead signs applicable only to a preferential lane are located in approximately the same longitudinal position along the highway as overhead signs applicable only to the general-purpose lanes, the signs for the preferential lane should be separated laterally from the signs for the general-purpose lanes to the maximum extent practicable to minimize conflicting information.*

06 *The Preferential Lane signs should be designed and located to avoid overloading the road user. The order of priority of guide signs should be Advance Guide, Preferential Lane Entrance Direction, and finally Preferential Lane Exit Destination Supplemental guide signs.*

**Standard:**

07 **Signs applicable only to a preferential lane shall be distinguished from signs applicable to general-purpose lanes by the inclusion of the applicable symbol(s) and/or word(s).**

Support:

08 The symbol and/or word message that appears on a particular guide sign applicable only to a preferential lane will vary based on the specific type of traffic allowed and on other related operational constraints that have been established for a particular lane, such as an HOV lane, a bus lane, or a taxi lane.

**Standard:**

09 **For HOV lanes, the diamond symbol shall appear on each Advance Guide (E8-3) sign (see Figure 2G-5), Preferential Lane Entrance Direction (E8-2 or E8-2a) sign (see Figure 2G-6), and Preferential Lane Entrance Gore (E8-1 or E8-1a) sign (see Figure 2G-7) for the designated entry and exit points for barrier-separated and buffer-separated geometric configurations and direct access ramps to or from such lanes. The diamond symbol shall not be used with preferential lanes for other types of traffic, such as bus lanes or taxi lanes.**

10 **Signing for an HOV lane that is managed by means of varying the occupancy requirement in response to changing conditions shall also comply with these provisions.**

11 **The diamond symbol shall be displayed in the legend of each Preferential Lane guide sign at the designated entry and exit points for all types of HOV lanes (including barrier-separated, buffer- separated, contiguous, and direct access ramps) in order to alert motorists that there is a minimum allowable vehicle occupancy requirement for vehicles to use the HOV lanes. Guide signs shall not display the occupancy requirement or the period of operation for the preferential lane.**

12 **A combination of guide and regulatory signs shall be used in advance of and at the initial entry point and all intermediate entry points from general-purpose lanes or facilities to contiguous, barrier- separated, and buffer-separated preferential lanes where access between the preferential and general- purpose lanes is restricted to designated locations. The regulatory signs shall comply with the provisions of Sections 2G.03 through 2G.07.**

13 **Regulatory signs alone shall be used in advance of, at the beginning of, and at periodic intervals along contiguous or buffer-separated preferential lanes that provide continuous access between the adjacent general-purpose lanes and the preferential lane (see Figures 2G-2 and 2G-3). The design and placement of the regulatory signs shall comply with the provisions of Sections 2G.03 through 2G.07.**

14 **Except as otherwise provided in Sections 2G.10 through 2G.13, guide signs applicable to a preferential lane**

**with a vehicle occupancy requirement shall be distinguished from those applicable to general-purpose lanes by displaying the white diamond symbol on a black background at the left-hand edge of these signs.**

Option:

15 When post-mounted guide signs applicable only to a preferential lane are installed on a median barrier with limited lateral clearance to the adjacent travel lanes or shoulders, the guide signs may have a vertically- oriented rectangular shape.

Support:

015a Buffer-separated preferential lanes that have continuous access with adjacent general-purpose lanes are not used on State Highways in California.

**Standard:**

16 **When vertically-oriented rectangular-shaped guide signs applicable only to a preferential lane are installed on a median barrier, the top portion of the signs shall be comprised of the applicable white symbol or white word message that identifies the type of preferential lane (such as the diamond symbol for an HOV lane) on a black background with a white border, and the bottom portion of the sign shall be comprised of the appropriate guide sign legend on a green background with a white border (see Figures 2G-7 through 2G-9).**

*Guidance:*

17 *Where lateral clearance is limited, such as when a post-mounted Preferential Lane guide sign is installed on a median barrier, the edges of the sign should not project beyond the outer edges of the barrier.*

Option:

18 Where lateral clearance is limited, Preferential Lane guide signs that are 72 inches or less in width may be skewed up to 45 degrees in order to fit within the barrier width or may be mounted higher, such that the vertical clearance to the bottom of the sign, light fixture, or its structural support, whichever is lowest, is not less than 17 feet above any portion of the pavement and shoulders. For mounting heights on State highways, refer to Section 2A.15.

**Standard:**

19 **Where lateral clearance is limited, Preferential Lane guide signs that are post-mounted on a median barrier and that are wider than 72 inches shall be mounted with a vertical clearance that complies with the provisions of Section 2A.15 for overhead mounting.**

Option:

20 Lane-use control signals (see Chapter 4T) may be used at access points to preferential lanes to indicate that a ramp or access roadway leading to or from the preferential lane or facility, or one or more specific lanes of the facility, are open or closed.

21 Changeable message signs may supplement, substitute for, or be incorporated into static guide signs (see Figure 2G-6) where travel conditions change or where multiple types of operational strategies (such as variable occupancy requirements, vehicle types, or pricing policies) are used and varied throughout the day or week to manage the use of, control of, or access to preferential lanes.

**Standard:**

22 **When changeable message signs (see Chapter 2L) are used as guide signs for preferential lanes, they shall be the required sign size and shall display the required letter height and legend format that correspond to the type of roadway facility and design speed.**

23 **Advance Guide signs, Preferential Lane Entrance Direction signs, and Preferential Lane Entrance Gore signs for the initial entry point and intermediate entry points into a preferential lane from the general-purpose lanes on the same designated route shall not identify the entry point as an exit by using the word "EXIT" on the sign or on a plaque.**

*Guidance:*

24 *Advance Guide signs and Preferential Lane Entrance Direction signs for initial and intermediate entry points into a preferential lane should use the word "ENTRANCE," such as "HOV LANE ENTRANCE" (see Figures 2G-5 and 2G-6), to convey the fact that vehicles are not leaving the designated route.*

25 *Preferential Lane Entrance Gore signs (see Figure 2G-7) at the initial entry point to a preferential lane should use the word "ENTRANCE." Preferential Lane Entrance Gore signs at intermediate entry points to a barrier-separated preferential lane where the sign would be located immediately adjacent to and directly viewed by traffic in the preferential lane should not use the word "ENTRANCE."*

**Standard:**

26 **When the entry point is on the left-hand side of the general-purpose lanes, a LEFT (E1-5aP) plaque (see Figure 2E-9) shall be added to the top left edge (above and abutting) of the Advance Guide and Preferential Lane Entrance Direction signs. The LEFT plaque shall not be used on a preferential lane regulatory sign.**

## Section 2G.11 Signing for Initial Entry Points to Preferential Lanes

**Standard:**

01 **Except where a buffer-separated or contiguous preferential lane is added or where a general- purpose lane becomes a buffer-separated or contiguous preferential lane, and provides continuous access with the adjacent general-purpose lanes as illustrated in Figures 2G-2 and 2G-3, an Advance Guide sign shall be provided at least ½ mile prior to the initial entry point to all types of preferential lanes in any type of geometric configuration on freeways and expressways. A Preferential Lane Entrance Direction sign shall also be provided at the initial entry point. Advance Guide and Preferential Lane Entrance Direction signs for such entry points shall not include the word "EXIT" (see Section 2G.10).**

02 **Where a general-purpose lane becomes a preferential lane that does not provide continuous access with the adjacent general-purpose lanes, an Advance Guide sign shall also be provided at approximately 1 mile in advance of the initial entry point. The Advance Guide and Entrance Direction signs in this sequence shall include a panel at the bottom of the sign with a black legend and border on a yellow background displaying a down arrow and the word ONLY as illustrated in Figure 2G-8.**

*Guidance:*

03 *Unless an Advanced Guide Sign is already required in Paragraph 2 of this Section, an Advance Guide sign should also be installed and located approximately 1 mile in advance of the initial entry point to a preferential lane on freeways and expressways that restricts access to the adjacent general-purpose lanes.*

Option:

04 An Advance Guide sign may also be installed and located approximately 2 miles in advance of the initial entry point to a preferential lane that restricts access with the adjacent general-purpose lanes to designated locations.

Support:

04a Buffer-separated preferential lanes that have continuous access with adjacent general-purpose lanes are not used on State Highways in California.

**Standard:**

05 **For barrier-separated, buffer-separated, or contiguous preferential lanes where entry is restricted to only designated points on freeways and expressways, the Advance Guide and Preferential Lane Entrance Direction signs shall be mounted overhead.**

*Guidance:*

06 *Preferential Lane Exit Destination guide signs, identifying final destination and downstream exit locations accessible from the preferential lane (see Figures 2G-8, 2G-9, 2G-14, 2G-16, and 2G-17), should be installed in advance of the initial entry points to access-restricted preferential lanes (such as barrier-separated and buffer-separated).*

06a *These (Preferential Lane Exit Destination guide) signs should be located based on the priority of the message, the available space, the existing signs on adjacent general-purpose traffic lanes, roadway and traffic characteristics, the proximity to existing overhead signs, the ability to install overhead signs, and other unique local factors.*

**Standard:**

07 **Advance destination guide signs for preferential lanes shall include an upper section displaying a black legend that includes the type of preferential lane and the word "EXITS," such as "HOV EXITS," on a white background. For preferential lanes that incorporate a vehicle occupancy requirement, the white diamond symbol on a black background shall be displayed at the left-hand edge of this upper section (see Figure 2G-9). Advance destination guide signs for preferential lanes shall list only direct exits from the preferential lane to a street, another highway, or a destination such as a park-and-ride facility.**

Support:

08 Figure 2G-8 shows an example of signing for a general-purpose lane that becomes a preferential lane that does not provide continuous access with the adjacent general-purpose lanes.

09 Figure 2G-9 shows an example of signs for the initial entry point to a preferential lane.

## Section 2G.12 Signing for Intermediate Entry Points to Preferential Lanes

**Standard:**

01 **For barrier-separated, buffer-separated, and contiguous preferential lanes where entry is restricted only to designated points, an overhead Preferential Lane Entrance Direction sign shall be provided at intermediate entry points to the preferential lane from the general-purpose lanes.**

*Guidance:*

02 *For barrier-separated and buffer-separated preferential lanes where intermediate entry from the general-purpose lanes is provided via a separate lane or ramp (see Figure 2G-10), at least one Advance Guide sign should be provided in addition to the Preferential Lane Entrance Direction sign.*

03 *For access-restricted preferential lanes where intermediate entrance and egress are at the same designated access location, the Preferential Lane Entrance Direction sign should be located between ½ and ¼ of the length of the designated entry area, as measured from the downstream end of the entry area (see Figure 2G-11).*

**Standard:**

04 **The Advance Guide signs, if used for intermediate entry points to a preferential lane from the general-purpose lanes, shall be overhead.**

Option:

05 Advance Guide signs may be provided at approximately ½ mile, 1 mile, and 2 miles in advance of intermediate entry points from the general-purpose lanes to a preferential lane.

**Standard:**

06 **Advance Guide and Preferential Lane Entrance Direction signs for intermediate entry points shall not include the word "EXIT" (see Section 2G.10).**

*Guidance:*

07 *Exit Destination guide signs, identifying the final destination and downstream exit locations accessible from the preferential lane, should be installed in advance of intermediate entry points from the general-purpose lanes to access-restricted preferential lanes.*

Support:

08 Section 2G.11 contains information on the design and placement of Preferential Lane Exit Destination guide signs.

09 Figures 2G-10 and 2G-11 show examples of signs for various geometric configurations of intermediate entry to a barrier-separated or buffer-separated preferential lane where access is restricted to designated locations.

## Section 2G.13 Signing for Egress from Preferential Lanes to General-Purpose Lanes

**Standard:**

01 **Except as provided in Paragraphs 4 and 5 of this Section, for barrier-separated, buffer- separated, and contiguous preferential lanes where egress is restricted only to designated points, post- mounted Advance Guide (E8-6) and post-mounted Intermediate Egress Direction (E8-5) signs (see Figure 2G-12) shall be installed in the median or on median barriers that separate two directions of traffic prior to and at the intermediate exit points from the preferential lanes to the general-purpose lanes (see Figure 2G-11).**

02 **The legends of these signs shall refer to the next exit or exits from the general-purpose lanes by displaying the appropriate destination information, exit number(s), or both. The Intermediate Egress Direction signs for egress from the preferential lanes to the general-purpose lanes shall not refer to the egress as an exit.**

Support:

03 Section 2G.10 contains information on the design of post-mounted guide signs applicable to a preferential lane when installed on a median barrier. Figures 2G-11 and 2G-13 show examples of signs for various geometric configurations of intermediate egress from a barrier-separated or buffer-separated preferential lane where access is restricted to designated locations.

*Guidance:*

04 *Where two or more adjacent preferential lanes are present in a single direction, consideration should be given to the use of overhead guide signs to display the information related to egress from the preferential lanes.*

05 *For barrier-separated and buffer-separated preferential lanes where egress from a preferential lane to the general-purpose lanes is restricted only to designated points via a separate lane or ramp, the Advance Guide and Intermediate Egress Direction signs for the egress should be mounted overhead and a Pull- Through sign should be mounted with the Intermediate Egress Direction sign (see Figure 2G-13).*

**Standard:**

06 **For preferential lanes that incorporate a vehicle occupancy requirement, the design of the overhead Advance Guide and Egress Direction signs for intermediate egress from the preferential lanes to the general-purpose lanes shall display a white diamond symbol on a black background at the left- hand edge of the signs.**

07 **The design of Pull-Through signs when used in conjunction with an Egress Direction sign at an intermediate egress from the preferential lanes to the general-purpose lanes shall be distinguished from those applicable to general-purpose lanes by inclusion of an upper section with the applicable black legend on a white background, such as HOV LANE. For preferential lanes that incorporate a vehicle occupancy requirement, the white diamond symbol on a black background shall be displayed at the left-hand edge of this upper section.**

## Section 2G.14 Signing for Direct Entrances to Preferential Lanes from Another Highway

**Standard:**

01 **For direct access ramps to preferential lanes from a transit facility (such as a park-and-ride lot or a transit station or terminal) that is accessible from surface streets, advance guide signs shall be provided along the adjoining surface streets to direct traffic into and through the transit facility to the preferential lane (see Figure 2G-14).**

01a **The HOV Direct Entrance Guide (G20-10(CA)) sign (refer to Figure 2G-6(CA) and Figure 2G-16(CA)) shall be used on a multilane cross street in advance of a direct-access ramp to an HOV lane.**

01b **The HOV LANE ENTRANCE (G92-1(CA)) sign (refer to Figure 2G-6(CA) and Figure 2G-16(CA)) shall be used at the entrance of a direct access ramp from park-and-ride lot or a transit station or terminal leading to an HOV lane. The G92-1(CA) sign is similar in design and application to the FREEWAY ENTRANCE (D13-3)) sign and shall be used in the same manner. Refer to Sections 2A.15 and 2B.48 for additional details.**

Support:

02 Figure 2G-14 provides examples of recommended uses and layouts of signs for HOV lanes for direct access ramps, park-and-ride lots, and access from surface streets.

## Section 2G.15 Signing for Direct Exits from Preferential Lanes to Another Highway

**Standard:**

01 **For contiguous preferential lanes on the left-hand side of the roadway, Advance Guide signs, Exit Direction signs, and Exit Gore (E8-4) signs (see Figure 2G-15 and Figure 2G-15(CA)) specifically applicable to the preferential lanes shall be used for exits to direct access ramps, such as HOV lane ramps (see Figure 2G-16) or ramps to park-and-ride facilities.**

02 **The design of Advance Guide, Exit Direction, and Pull-Through signs for direct exits from preferential lanes shall be distinguished from those applicable to general-purpose lanes by inclusion of an upper section with the applicable black legend on a white background, such as HOV LANE (for Pull-Through signs) or HOV EXIT (for Advance Guide and Exit Direction signs). For preferential lanes that incorporate a vehicle occupancy requirement, the white diamond symbol on a black background shall be displayed at the left-hand edge of this upper section (see Figures 2G-16 and 2G-17).**

**Standard:**

02a **The HOV Exit with Arrow (E8-4) sign shall be used as an exit gore sign for direct-access ramp exits from an HOV lane.**

*Guidance:*

02b *The arrow on the E8-4 sign should be oriented to match the approximate angle of departure and positioned to avoid confusion that the exit serves mainline traffic.*

03 *Advance Guide ~~and Exit Direction signs~~ for exits to direct access ramps from a preferential lane should be mounted overhead. A Pull-Through sign over the preferential lane should be used with the Exit Direction sign at exits to direct access ramps.*

**Standard:**

03a **The HOV Advance Guide (G86-15(CA) and G83-6(CA)) and Exit Direction (G85-12(CA)) signs for exits to direct-access ramps from a preferential lane shall be mounted overhead.**

04 **Post-mounted guide signs in a vertically-oriented rectangular shape installed on a median barrier shall not be used for the Advance Guide and Exit Direction signs for exits to direct access ramps.**

05 **Because direct access ramps for preferential lanes at interchanges connecting two freeways are typically left-**

**hand side exits and typically have design speeds similar to the preferential lane, overhead Advance Guide signs and overhead Exit Direction signs shall be provided in advance of and at the entry point to each freeway-to-freeway preferential lane ramp (see Figure 2G-17).**

*Guidance:*

06 *The use of guide signs for preferential lanes at freeway interchanges should comply with the provisions for guide signs established in Chapter 2E of this Manual.*

Support:

07 Guide signs for direct access ramps for preferential lanes at interchanges connecting two freeways are similar to those for a connecting ramp between two freeway facilities.

# MANAGED LANE SIGNS, PLAQUES, AND LANE-USE CONTROL SIGNALS

## Section 2G.16 Signs for Managed Lanes – General

**Standard:**

01 **The provisions of Sections 2G.03 through 2G.07 regarding regulatory signs for preferential lanes shall apply to managed lanes operated at all times or at certain times by varying vehicle occupancy requirements (HOV) or by using vehicle type restrictions as a congestion management strategy. Such managed lanes shall use changeable message signs or changeable message elements within static signs to display the appropriate regulatory sign messages only when they are in effect.**

02 **When certain types of vehicles (such as trucks) are prohibited from using a managed lane or when a managed lane is restricted to use by only certain types of vehicles during certain operational strategies, regulatory signs or regulatory panels within the appropriate guide signs that include changeable message elements shall be used to display the open/closed status of the managed lane for such vehicle types.**

03 **When the vehicle occupancy required for use of an HOV lane is varied as a part of a managed lane operational strategy, regulatory signs that include changeable message elements shall be used to display the required minimum vehicle occupancy in effect.**

Support:

04 Section 2G.18 contains information about regulatory signs for managed lanes that use tolling or pricing as a congestion management strategy, either exclusively or with other management strategies.

## Section 2G.17 Signs for Priced Managed Lanes – General

Support:

01 A priced managed lane is a managed lane that employs tolling or pricing, typically through electronic toll collection, to manage congestion levels and maintain a certain level of service for users of the facility. A priced managed facility typically provides a less-congested alternative to adjacent lanes along the same designated route, or to a nearby facility, that experience recurring congestion during peak periods. A priced managed lane might allow non-toll travel by certain vehicles based on occupancy or other criteria. A variety of operational management strategies might be used in conjunction with tolling or pricing.

02 The number and combination of operational strategies that are applied to a managed lane to manage congestion or improve efficiency might be practically limited by the amount of information that can be legibly displayed on signs or in signing sequences and still be readily comprehended by road users. Such factors to consider when evaluating alternatives for managed lanes are locations of signs for general-purpose interchanges and for other roadway conditions, the number of intermediate access points between the managed and general-purpose lanes and the need to repeat the operational information, and the distance over which a signing sequence that displays all of the eligibility requirements can be displayed.

03 Because managed lanes have the capability to employ a variety of operational strategies on a changing basis, it is not practical to assign a naming convention to such lanes for the purpose of signing based on the specific operational management strategies, as is more readily accomplished with other types of preferential lanes, such as HOV, bus, or bicycle lanes. Instead, the various requirements, restrictions, and eligibility criteria are more appropriately conveyed through a sequence of regulatory and guide signs with a more encompassing designation for the purpose of providing directional information.

04 As priced managed lanes have become prevalent as an operational strategy, it is important to maintain a uniform naming convention to distinguish those lanes that are an alternative to travel on adjacent general- purpose lanes on the same designated route to effectively communicate to motorists the range of basic requirements for similar facilities in different regions.

**Standard:**

05 **Priced managed lanes that are adjacent to general-purpose lanes along the same designated route shall be signed using the legend EXPRESS or EXPRESS LANE(S) as provided in this Chapter. This provision shall apply when any of the following operational strategies is used for a managed lane:**

- **A. All users of the managed lane are charged a fixed or variable toll;**
- **B. General-purpose traffic using the managed lane is charged a fixed or variable toll, but HOV traffic is allowed to travel without being charged a toll on either a full-time or part-time basis;**

**C. General-purpose traffic using the managed lane is charged a fixed or variable toll, but HOV traffic is offered a discounted toll on either a full-time or part-time basis; or**

**D. General-purpose traffic using the managed lane is charged a fixed or variable toll, but HOV traffic registered with a local program travels at a discounted toll or without being charged a toll on either a full-time or part-time basis (a transponder or other identifier is typically required of HOVs to indicate registration in conjunction with electronic or visual enforcement and verification of vehicle occupancy).**

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

**Standard:**

06 **The legends EXPRESS and EXPRESS LANE(S) shall not be used on signs for entrances to highways on which all lanes are managed and there are no adjacent general-purpose lanes on the same designated route. The legends EXPRESS and EXPRESS LANE(S) shall not be used on signs for a managed ramp connection that provides an alternative to a general-purpose ramp connection (see Figure 2F-13), except where the ramp leads directly to a managed lane as described in Section 2G.14. The legends EXPRESS and EXPRESS LANE(S) shall not be used on signs for open-road tolling lanes that bypass a conventional toll plaza (see Chapter 2F).**

## Section 2G.18 Regulatory Signs for Priced Managed Lanes

**Standard:**

01 **Except as otherwise provided in this Section, the provisions of Sections 2G.03 through 2G.07 regarding regulatory signs for Preferential lanes shall apply to priced managed lanes operated at all times or at certain times with a toll payment requirement of some or all vehicles to use the lane(s). Such managed lanes shall use changeable message signs or changeable message elements within static signs to display the appropriate regulatory sign messages only when they are in effect.**

02 **Regulatory signs for preferential lanes shall be appropriately modified for adaptation to a priced managed lane, where applicable, as shown in Figure 2G-18.**

03 **Regulatory signs shall be used to indicate the toll charged. If the toll varies the R3-48 and R3- 48a signs that are shown in Figure 2G-18 shall be used to display the actual toll amount in effect at any given time.**

*Guidance:*

03a *When two destinations are included on the R3-28 or R3-48a signs, one must be the farthest destination along the route. The other destination should be an intermediate interchange, selected based on local factors such as the relative importance of nearby interchanges. The choice of intermediate destination should be made on a case-by-case basis using engineering judgment.*

**Standard:**

04 **When only vehicles with a registered ETC account are allowed to use a managed lane where some or all vehicles are charged a toll, regulatory signs to indicate such a restriction shall be provided and shall incorporate the pictograph adopted by the toll facility's ETC payment system and the word ONLY (see Section 2G.19 for the incorporation of such regulatory legends into the guide signs for the entrances to such facilities). The display of the ETC system pictograph shall comply with the provisions of Sections 2F.02 and 2F.03 as shown in Figures 2G-18 and 2G-19.**

05 **When HOV traffic is allowed to use a priced managed lane without paying a toll and registration in a local program is not required to receive the toll exemption, the Vehicle Occupancy Definition (R3-10 or R3-13) signs (see Section 2G.04) shall be modified to delete the diamond symbol to create priced managed lane Vehicle Occupancy Definition (R3-40 and R3-43) signs to indicate the minimum occupancy related to the management strategy (see Figure ~~2G-19~~ 2G-18).**

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

**Standard:**

06 **A ~~p~~Priced ~~m~~Managed ~~lane HOV~~ Lane Operation (R3-44 ~~or~~, R3-44a, or R3-44b) sign (see Figure 2G-18) shall be installed at the beginning or initial entry point, and at any intermediate entry points where vehicles are allowed to legally enter an access-restricted priced managed lane.**

Support:

06a Refer to FHWA's List of Known Errors for error in Paragraph 6 text. Refer to Section 1A.04 for more details.

**Standard:**

07 **When the vehicle occupancy required for non-toll use of a managed lane is varied as a part of a priced managed lane operational strategy, regulatory signs that include changeable message elements shall be used to display the required vehicle occupancy in effect for non-toll travel.**

Option:

08 Where registration in a local program or ETC account is required for HOV traffic to travel in a priced managed lane without being charged a toll or by being charged a discounted toll, such information may be displayed on a separate sign within the sequence of the required regulatory and guide signs.

**Standard:**

09 **R3-42 series and R3-45 series signs (see Figure 2G-18) shall be installed in accordance with the provisions of Section 2G.07 to indicate the termination of a priced managed lane or restriction. The R3- 42, R3-42a, and R3-45 signs shall be used only where the managed lane and restriction end and traffic must merge into the general-purpose lanes. The R3-42b, R3-42c, and R3-45a signs shall be used only where the managed lane restriction ends and the lane becomes a general-purpose lane.**

## Section 2G.19 Guide Signs for Priced Managed Lanes

**Standard:**

01 **Except as otherwise provided in this Section, guide signs for barrier-separated, buffer- separated, and contiguous managed lanes shall follow the specific provisions for Preferential Lane guide signs contained in Sections 2G.10 through 2G.15. Except as otherwise provided in this Section, guide signs for highways on which all lanes are managed shall follow the general provisions for freeway and expressway guide signs as contained in Chapter 2E as a whole. Guide signs for highways on which all lanes are managed and tolling or pricing is used as a management strategy shall follow the applicable provisions for toll road guide signs as contained in Chapter 2F, in addition to the general provisions of Chapter 2E.**

02 **If fixed or variable tolls are used as an operational strategy for a managed lane, the guide signs shall comply with the provisions of Sections 2F.02, 2F.03, and 2F.17 regarding the use, size, and placement of ETC-account pictographs.**

03 **Guide signs at the initial and intermediate entry points to a priced managed lane in which all general-purpose passenger vehicles are allowed shall include the legend EXPRESS LANE(S). Except as provided in Paragraph 5 of this Section, the guide signs shall incorporate the pictograph of the ETC account system into a header panel within the guide sign in accordance with Sections 2F.02, 2F.03, and 2F.17. For a priced managed lane that allows non-toll travel by HOV traffic without registration in a local program, the header panel shall be modified to a regulatory format to display both the pictograph of the ETC account system and the minimum occupancy requirement for non-toll travel with a black legend on a white background (see Figure 2G-19).**

04 **Guide signs at the initial and intermediate entry points to a managed lane that allows only HOV traffic with either a fixed or variable occupancy requirement shall follow the provisions of Sections 2G.10 through 2G.12 and 2G.14.**

05 **If registration in a toll-account program is not required for travel in a managed lane in which tolls are charged, then the ETC-account pictographs shall not be displayed on primary guide signs directing traffic to the managed lane. In such cases, the purple header panel shall be replaced with a warning header panel with a black legend and border on a yellow background displaying the word TOLL as illustrated in Figure 2G-20.**

Option:

06 If the managed lane does not accept toll payments from an ETC account system and collects tolls only by post-travel billing of registered vehicle owners, then the legend TOLL BILLED BY MAIL ONLY may be displayed on a separate information sign within the sequence of primary guide signs in advance of the entrance to the managed lane.

07 If the managed lane accepts payments from registered ETC accounts, but does not require registration to use the lane, then the pictographs of the accepted ETC account programs may be displayed on a separate information sign within the sequence of primary guide signs in advance of the entrance to the managed lane. The information sign may also display the legend TOLL BILLED BY MAIL OR in addition to the pictograph of the accepted ETC account program.

Support:

08 Figure 2G-19 shows examples of Guide signs for entrances to priced managed lanes and other ETC account-only

toll facilities that incorporate header panels with ETC account pictographs and regulatory legends.

09 Figures 2G-21 through 2G-24 show examples of guide signs for various configurations of initial and intermediate entrances to a priced managed lane.

*Guidance:*

10 *Exit Destination supplemental guide signs, identifying final destination and downstream exit locations accessible from the managed lane (see Figure 2G-25), should be installed in advance of the initial entry points to priced managed lanes. These signs should be located in accordance with the provisions of Paragraph 6 of Section 2G.11.*

11 *For managed lanes that are available as an alternative to travel on adjacent general-purpose lanes on the same designated route, changeable message signs indicating the comparative travel times or congestion levels using the managed lanes versus the general-purpose lanes (see Figure 2G-26) should be installed in advance of the initial and intermediate entry points to the managed lanes.*

Option:

12 Changeable message signs may also be used on non-managed highways to display comparative travel times or congestion levels for a nearby managed highway.

**Standard:**

13 **The use and locations of guide signs for intermediate egress locations and direct exits from a priced managed lane (see Figures 2G-24 and 2G-27 through 2G-29) shall comply with the provisions of Sections 2G.13 and 2G.15. The signs shall be suitably modified to display header messages of white legend on a green background that relate the guide sign legends to the managed lane(s) as appropriate in accordance with the following:**

- **A. Post-mounted or overhead-mounted Advance Guide signs for intermediate egress to the general-purpose lanes shall include the legend LOCAL EXITS in a header panel within the guide signs, destination information or the exit number(s) for the next exit(s) accessible from the general-purpose lanes, and the appropriate distance information to the location of the egress (see Figure 2G-27).**
- **B. Post-mounted or overhead-mounted Intermediate Egress Direction signs shall include the legend LOCAL EXITS in a header panel within the signs, the destination information or the exit number(s) of the next exit(s) accessible from the general-purpose lanes, and a diagonally upward-pointing directional arrow (see Figure 2G-27).**
- **C. For direct exits to another roadway, the legend EXPRESS EXIT shall be used on the Advance Guide and Exit Direction signs (see Figure 2G-28).**
- **D. For Pull-Through signs, the legend EXPRESS LANE(S) shall be used, either as a header panel within the Pull-Through sign or as the principal legend of the sign without a header panel (see Figures 2G-27 through 2G-29).**

Support:

14 Section 2G.13 contains information on the use of overhead-mounted guide signs for intermediate egress to the general-purpose lanes.

15 Figures 2G-30 and 2G-31 show examples of guide signing for direct entrances to a priced managed lane from a crossroad or surface street.

**Standard:**

16 **The G92-1(CA) sign shall be used for direct entrances to a priced managed lane from a crossroad or surface street. When used for this purpose, the sign shall be modified in accordance with the provisions of this section.**

## Section 2G.20 Signs for Part-Time Travel on a Shoulder – General

Support:

01 In some cases, paved shoulders are allowed to be used for driving use during peak periods to manage congestion. Configurations might be on freeways and expressways, as well as on conventional roads. Travel on the shoulder during these periods might be restricted to certain classes of vehicles, such as buses or HOV, or might be open to general traffic. When the part-time travel on a shoulder is limited to certain classes of vehicles, the signing is similar to that for preferential lanes. ~~Additional signing is typically used to advise road users that the shoulder is not available for emergency use during these periods.~~ Part-time travel on a shoulder might also employ lane-use control signals and/or blank-out signs to inform traffic of the allowable use of the shoulder. Depending on the design of exit ramp terminals and auxiliary lanes, guide signs must account for exit maneuvers during both shoulder use conditions and might necessitate changeable legend elements. However, additional guide signs are not normally necessary specifically for the

condition when the shoulder is used for travel. The pavement markings might also be modified where travel allowed on the shoulder begins and ends.

02 Figure 2G-32 shows an example of signing for part-time travel on a shoulder.

**Standard:**

03 **A shoulder that has been opened to travel on a permanent, full-time basis shall be considered a travel lane and shall be signed and marked in accordance with other provisions of this Manual.**

Support:

04 Section 3E.04 contains provisions regarding the placement of markings on paved shoulders that are open for part-time travel.

## Section 2G.21 Regulatory Signs and Plaques for Part-Time Travel on a Shoulder

**Standard:**

01 **Regulatory signs shall be used to notify road users of the periods of operation that travel is allowed on a paved shoulder. The Part-Time Travel on Shoulder Operation (R3-51) sign (see Figure 2G-32) shall be used where traffic is allowed to travel on the shoulder during certain fixed periods of operation. The Part-Time Travel on Shoulder Variable Operation (R3-51d) sign (see Figure 2G-32) with two flashing beacons (see Chapter 4S) mounted above it shall be used when the period of operation is variable.**

01a **The AUTHORIZED BUSES ONLY SPECIFIC HOURS/DAYS (R130(CA)) sign (refer to Figure 2G-101(CA)) shall be used where travel on the shoulder is restricted to certain classes of vehicles. The R130(CA) sign shall be placed at intervals not exceeding ½ mile along the length of the shoulder where travel is permitted. The EMERGENCY STOPPING ALLOWED Plaque R130P(CA) plaque shall be installed below the R130(CA) sign.**

02 **If certain classes of vehicles are not allowed to use the shoulder during these periods, then a Selective Exclusion (R3-51aP or R3-51bP) plaque shall be mounted below the R3-51 or R3-51d sign. If the travel on the shoulder is restricted to certain classes of vehicles, then the regulatory signs shall display that information.**

Option:

03 The EMERGENCY STOPPING ONLY OTHER TIMES (R3-51cP) plaque may be mounted below the R3-51 and R3-51d ~~sign~~ signs if the R3-51aP or R3-51bP plaque is not used.

*Guidance:*

04 *The ~~TRAVEL ON SHOULDER BEGINS ½ MILE~~ Part-Time Travel on Shoulder Begins Advance (R3-52c) sign should be used in advance of the location where part-time travel on shoulder first begins and followed by the DO NOT DRIVE ON SHOULDER (R4-17) sign appropriately spaced downstream.*

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

*Guidance:*

04b *The BUSES TRAVEL ON SHOULDER BEGINS ½ MILE (R131(CA)) sign (refer to Figure 2G-101(CA)) should be installed in advance of the location where part-time bus travel on shoulder begins.*

**Standard:**

05 **Approximately ½ mile from where part-time travel on shoulder ends, the ~~TRAVEL ON SHOULDER ENDS~~ Part-Time Travel on Shoulder Ends Advance (R3-52a) sign shall be used. At the location provided for traffic to transition from shoulder travel back to permanent highway lane travel, an ~~END TRAVEL ON SHOULDER~~ Part-Time Travel on Shoulder Ends (R3-52) sign shall be used. After this transition location a DO NOT DRIVE ON SHOULDER (R4-17) sign shall be used.**

Support:

05a Refer to FHWA's List of Known Errors for errors in Paragraph 5 text. Refer to Section 1A.04 for more details.

**Standard:**

05a **Approximately ½ mile before the end of part-time bus travel on the shoulder lane, the BUSES ON SHOULDER ENDS ½ MILE (R132(CA)) sign (refer to Figure 2G-101(CA)) shall be installed. At the location where buses transition from shoulder travel back to general-purpose lane, the END BUSES ON SHOULDER (R133(CA)) sign shall be installed.**

*Guidance:*

06 *Where a shoulder that allows part-time travel is interrupted by a deceleration lane for an exit, the BEGIN EXIT LANE (R3-56) sign should be used at the beginning of the deceleration lane where traffic is allowed to enter during the periods that travel is prohibited on the shoulder.*

07 *On a conventional road where a shoulder that is open to part-time travel becomes a mandatory turn lane, the BEGIN RIGHT TURN LANE (R3-20R) sign should be post-mounted on the right-hand side of the roadway at the upstream end of the turn lane taper of a mandatory right-turn lane. Where the shoulder is on the left-hand side of the roadway, the BEGIN LEFT TURN LANE (R3-20L) sign may be post-mounted on a median (or on the left-hand side of the roadway for a one-way street) at the upstream end of the turn lane taper of a mandatory left-turn lane.*

08 *Where turn-outs are provided for emergency stopping during periods when travel is allowed on the shoulder, the EMERGENCY STOPPING ONLY (R8-7) sign (see Section 2B.52) should be used adjacent to the turn-out (see Drawing D in Figure 2G-32).*

09 *Where traffic on an entrance ramp is required to yield to traffic using the shoulder of the freeway or expressway mainline during the periods when travel is allowed on the shoulder, the TO TRAFFIC ON SHOULDER (R3-57P) plaque should be mounted below the YIELD (R1-2) sign (see Section 2B.05 and Drawing C in Figure 2G-32).*

## Section 2G.22 Warning Signs for Part-Time Travel on a Shoulder

*Guidance:*

01 *The Traffic Using Shoulder (W3-9) or BUSES USING SHOULDER (W130(CA)) sign should be used on a ramp that enters a freeway or expressway on which part-time travel is allowed on the shoulder. When used, the W3-9 or W130(CA) sign should be located on the right-hand side of the ramp from which the shoulder traffic approaches (see Drawing C in Figure 2G- 32).*

Option:

02 A second W3-9 or W130(CA) sign may be used on the left-hand side of the ramp opposite the W3-9 or W130(CA) sign on the right-hand side of the ramp to provide greater visibility to oncoming traffic.

03 The W3-9 or W130(CA) sign may be used on a conventional road that is required to stop for or yield to the through street or highway on which part-time travel is allowed on the shoulder.

## Section 2G.23 Guide Signs for Part-Time Travel on a Shoulder

Support:

01 Guide signs for part-time travel on a freeway or expressway shoulder generally consist of the typical interchange guide sign sequence (see Chapter 2E). While specialized guide signs are not normally necessary, modifications to the typical guide signs might be necessary, especially where an interchange lane drop is created only during the periods when the shoulder is open to travel.

**Standard:**

02 **Where an interchange lane drop is created only during the periods when a shoulder is open to travel, the Advance and Exit Direction guide signs (see Sections 2E.23 and 2E.25) shall be overhead- mounted and shall be modified to include a blank-out or changeable EXIT ONLY message that complies with the provisions of Section 2E.28 and is displayed only during the periods that the shoulder is open to travel (see Drawing E in Figure 2G-32).**

03 **Guide signs located in conjunction with part-time travel on a shoulder shall otherwise comply with the provisions of Chapters 2D and 2E.**

*Guidance:*

04 *Where turn-outs are provided for emergency stopping during periods when travel is allowed on the shoulder, the Advance Emergency Turn-Out (D17-5) sign and Emergency Turn-Out Directional (D17-6) sign (see Drawing D in Figure 2G-32) should be used as provided in Section 2D.54.*

Support:

05 Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

## Section 2G.24 Lane-Use Control Signals for Part-Time Travel on a Shoulder

Support:

01 Lane-use control signals (see Chapter 4T) are sometimes used for part-time travel on a paved shoulder (see Drawing A in Figure 2G-32), in addition to signs, to indicate the allowable use of the shoulder.

Option:

02 Overhead lane-use control signals may be used above a shoulder on which part-time travel is allowed.

**Standard:**

03 **Except as otherwise provided in this Section, lane-use control signals that are used for part-time travel on a shoulder shall comply with the provisions of Chapter 4T. When used for part-time travel on a shoulder, lane-use control signals shall not be required above the lanes adjacent to the shoulder. When used for part-time travel on a shoulder, a steady RED X signal indication shall be displayed when the shoulder is available for emergency stopping only and travel on the shoulder is otherwise prohibited.**

04 **When part-time travel on shoulder is allowed for variable periods of operation, lane-use control signals (see Chapter 4T) shall be used and evenly spaced approximately every ½ mile or less and centered over the shoulder to indicate when the shoulder is open or closed to vehicle travel. The lane- use control signals shall display a steady DOWNWARD GREEN ARROW signal indication during times when travel is allowed on the shoulder, followed by a steady YELLOW X signal indication just before the shoulder is to be closed to travel, and a steady RED X signal indication when shoulder travel is discontinued. Additionally, during the period when travel is allowed on the shoulder, a lane-use control signal that continuously displays a steady YELLOW X signal indication shall be used approximately ½ mile in advance of the location where part-time travel on the shoulder ends, and then displays a steady RED X signal indication when the travel on shoulder ends. A lane-use control signal with a steady RED X signal indication shall be displayed at all times at the location where part-time travel on the shoulder ends.**

Option:

05 For part-time travel on shoulder with variable periods of operation, post-mounted ~~TRAVEL ON SHOULDER ALLOWED WHEN FLASHING~~ Part-Time Travel on Shoulder Variable Operation (R3-51d) signs (see Drawing A in Figure 2G-32) with flashing beacons may be used in lieu of the lane-use control signals at the same intervals.

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

Option:

06 The ~~TRAVEL ON SHOULDER ON GREEN ARROW ONLY~~ Part-Time Travel on Shoulder on Green Arrow (R3-51e) sign (see Drawing A in Figure 2G-32) may be used with a lane-use control signal and may be mounted adjacent to the signal head, elsewhere on the signal support, or post-mounted next to, or in advance of, the signal.

Support:

07 Refer to FHWA's List of Known Errors for error in Paragraph 6 text. Refer to Section 1A.04 for more details.

## Section 2G.25 Lane-Use Control Signals for Active Lane Management on Freeways and Expressways

Support:

01 Active lane management is a component of active traffic management in which the use of travel lanes and speed limits might be varied in real time in response to traffic conditions to manage congestion. Active lane management might employ lane-use control signals (see Chapter 4T) and/or changeable message signs (see Chapter 2L). Figure 2G-33 shows an example of lane-use control signals and variable Speed Limit signs for active lane management during an incident

**Standard:**

02 **Except as otherwise provided in this Section, lane-use control signals that are used for active lane management shall comply with the provisions of Chapter 4T. When used for active lane management on a freeway or expressway, a steady YELLOW X signal indication shall be displayed to warn road users to vacate the lane when the next downstream lane-use control signal over the same lane is displaying a steady RED X signal indication.**

Option:

03 A steady YELLOW X signal indication may be displayed on one or more lane-use control signals in advance of the steady YELLOW X signal indication required by Paragraph 2 of this Section as conditions warrant to warn road users to vacate the lane.

Support:

04 Using too many steady YELLOW X signal indications could diminish the effectiveness of the steady YELLOW X signal indication in conveying the lane is closed a short distance ahead and the road user needs to vacate the lane soon.

**Standard:**

05 **When operated in conjunction with a temporary planned lane closure, lane-use control signals shall only**

**supplement the temporary traffic control devices as provided in Part 6 of this Manual.**

*Guidance:*

06 *Spacing of lane-use control signals for active lane management on freeways and expressways should be at ½-mile intervals. Closer spacing should be used where the viewing distance is limited by the roadway geometry, overcrossings or other sight obstructions, or where traffic entering from intervening interchange ramps is not adequately served by the ½-mile spacing.*

07 *Combining lane-use control signals with overhead sign support structures should be minimized to avoid overloading road users with too much information or conflicting or incorrect messages, such as exclusive lane use or lane drop implied by the display of a steady DOWNWARD GREEN ARROW signal indication below a guide sign.*

## Section 2G.26 Variable Speed Limits for Active Traffic Management on Freeways and Expressways

Support:

01 ~~Active traffic management on freeways and expressways might employ variable speed limits as an element of an overall congestion management plan using variable Speed Limit (R2-1) sign (see Section 2B.21).~~

02 Careful consideration is needed in locating variable Speed Limit signs along the roadway and potential positioning adjacent to guide signs or lane-use control signals so that the speed displayed is clearly associated with the lane or lanes intended to be regulated and not other adjacent lanes, ramps, or roadways. This might result in the need to place variable Speed Limit signs on separate supports away from guide and other signs or lane-use control signals.

**Standard:**

03 **The regulatory speed displayed on a variable Speed Limit sign shall comply with Paragraph 13 of Section 2B.21 and the "Standard Highway Signs" publication (see Section ~~1C.05~~ 1A.05).**

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

*Guidance:*

04 *The location and positioning of variable Speed Limit signs should clearly associate the speed displayed to the lane or lanes intended to be regulated such that it would not present a conflict or confusion with other posted speed limits or advisory speeds for adjacent lanes, ramps, or roadways. Variable Speed Limit signs should not be located on overhead guide sign installations (see Section 2E.43).*

05 *In addition to the post-interchange Speed Limit sign (see Paragraph 17 of Section 2E.47), the spacing of variable Speed Limit signs on freeways and expressways should be based on an engineering study that considers such factors as recurring congestion, high-volume interchanges, weaving sections, and other location-specific factors that are known to affect travel speeds. The variable Speed Limit signs should be placed far enough in advance of known congestion points to adequately adjust the operating speed to minimize the extent of vehicle queuing.*

## Section 2G.101(CA) Preferential Lane Enforcement Signing (SR50(CA) Series)

*Guidance:*

01 *The HOV VIOLATION $__ MINIMUM FINE (SR50-2(CA)) sign should be placed near the beginning of all HOV facilities and may also be placed at intermediate entry points or gaps in the barrier or buffer for all barrier- or buffer-separated HOV lanes.*

02 *The SR50-2(CA) sign should also be used on managed lane facilities that charge HOV users no toll or a discounted toll.*

Option:

03 The SR50-2(CA) sign may be repeated at 2-mile intervals or as needed at locations experiencing high violation rates.

04 The HOV VIOLATION $__ MINIMUM FINE (SR50-1(CA)) sign may be used to supplement the SR50-2(CA) sign on HOV facilities or priced managed lane facilities where violation rates are particularly high.

Support:

05 The SR50-1(CA) is normally placed onto an existing overhead sign structure if it can adequately support the additional sign.

**Standard:**

06 **These signs shall be modified to delete the diamond symbol when utilized on priced managed lanes.**

## Section 2G.102(CA) Regulatory Signs for Preferential Lanes at Metered On-Ramps

Support:

01 For State highways, refer to Caltrans' Ramp Metering Design Manual. Refer to Section 1A.05 for information regarding this publication.

02 Refer to CVC § 21655.5 for Exclusive- or Preferential-Use Lanes for High Occupancy Vehicles.

03 Refer to Section 2B.61 for additional regulatory signs to be used at metered on-ramps.

*Guidance:*

04 *The No Left Turn Specific Hours EXCEPT BUSES AND HOV __+ (R33B(CA)) sign should be installed on local streets (with concurrence of local agency) whenever left turns are restricted to buses and high-occupancy vehicles only during peak hours. The No Left Turn WHEN METERED EXCEPT BUSES AND HOV __+ (R33C(CA)) sign should be installed on local streets (with concurrence of local agency) whenever left turns are restricted to buses and high-occupancy vehicles only during periods of ramp metering.*

**Standard:**

05 **The LEFT (RIGHT OR CENTER) LANE DO NOT STOP (BUSES ONLY) (R88(CA)) sign shall be used for preferential lanes at metered on-ramps to indicate that the preferential lane is not required to stop.**

06 **The diamond symbol shall not be utilized on the R88(CA) if the preferential lane is not designated for HOV usage.**

*Guidance:*

07 *The R88(CA) sign should be placed on the same side as the preferential lane, upstream of the meter.*

08 *The ALL VEHICLES STOP ON RED (R90-1(CA)) sign should be placed when converting a non-metered preferential lane to a metered operation.*

Option:

09 The R90-1(CA) sign may also be used on new installations where potential for confusion exists.

**Standard:**

10 **The LEFT (RIGHT OR CENTER) HOV ___+ ___ OR MORE ONLY WHEN METERED (R91-1(CA)) sign shall be used for preferential lanes at metered on-ramps to clearly indicate the lane and minimum number of persons per vehicle required to use the lane.**

11 **The message "24 HOURS" shall be used instead of "WHEN METERED" if the preferential lane is in effect on a full-time basis.**

Option:


12 An alternate one-line message, such as "BUSES OK", may be used in place of "WHEN METERED" on line 6 of the R91-1(CA) sign.

*Guidance:*

13 *When used, the R91-1(CA) sign should be placed near a diamond symbol pavement marking.*

## Figure 2G-1. Preferential Lane Regulatory Signs and Plaque (Sheet 1 of 2)

### A – Post-mounted Preferential Lane regulatory signs and plaque

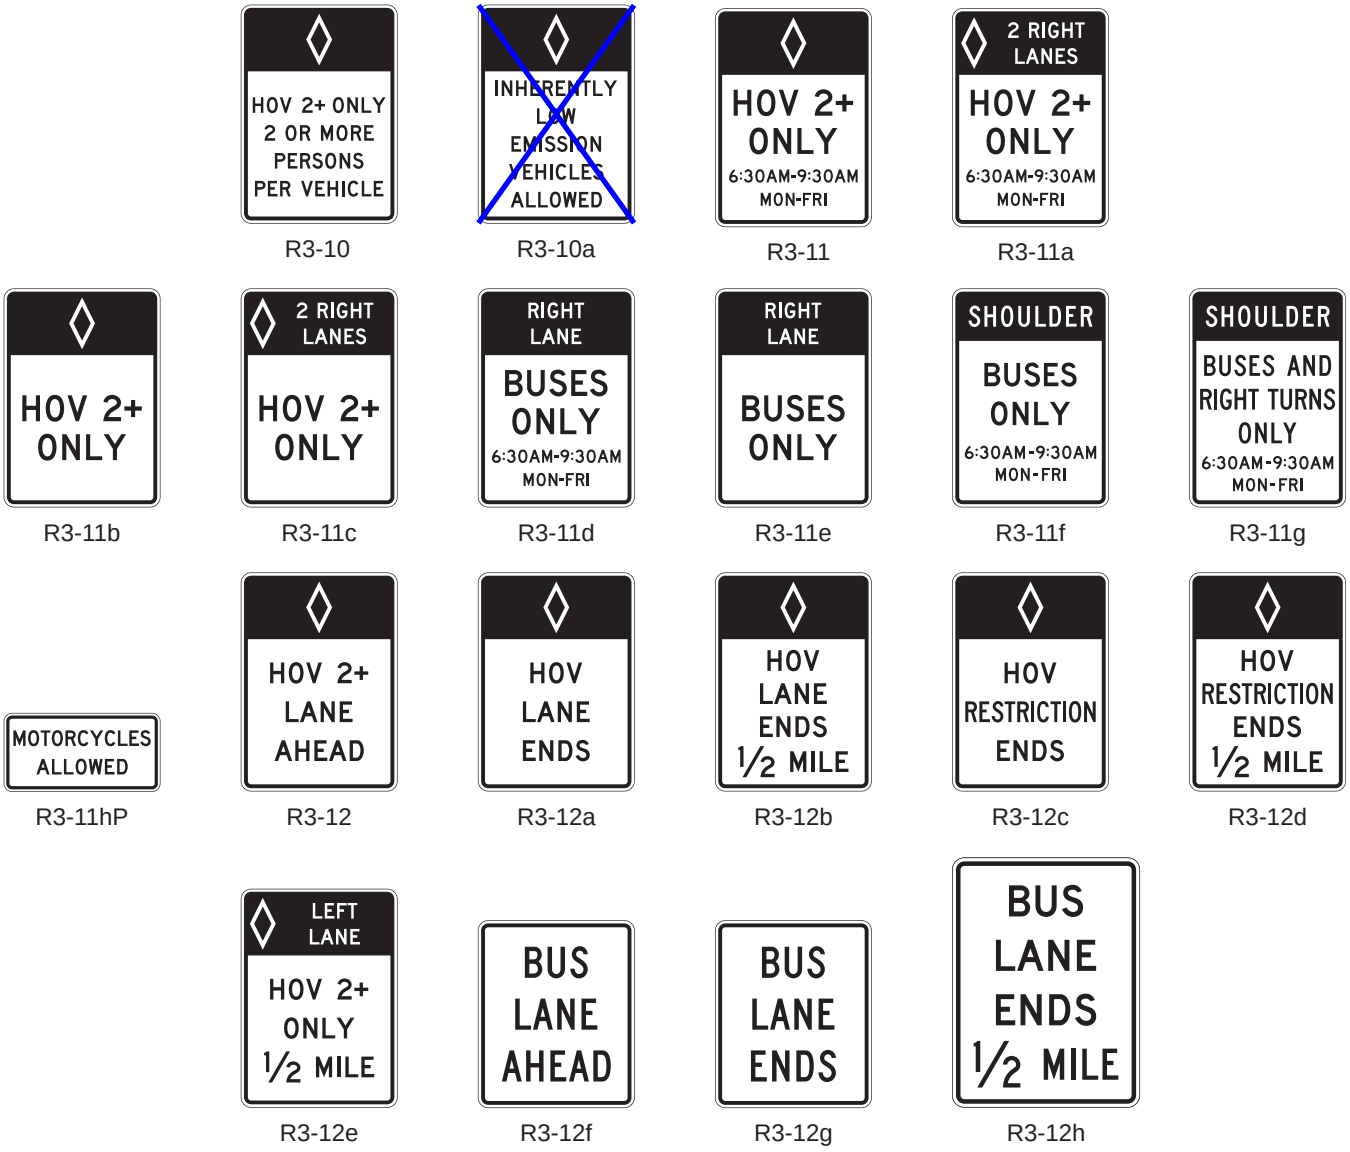



Notes:


1. The minimum vehicle occupancy requirement may vary for each facility (such as 2+, 3+, 4+).
2. The occupancy requirement may be added to the first line of the R3-12a, R3-12b, R3-12c, and R3-12d signs.
3. Some of the legends shown on these signs are for example purposes only. The specific legend for a particular application should be based upon local conditions, ordinances, and State statutes.

## Figure 2G-1. Preferential Lane Regulatory Signs and Plaque (Sheet 2 of 2)

### B – Overhead Preferential Lane regulatory signs

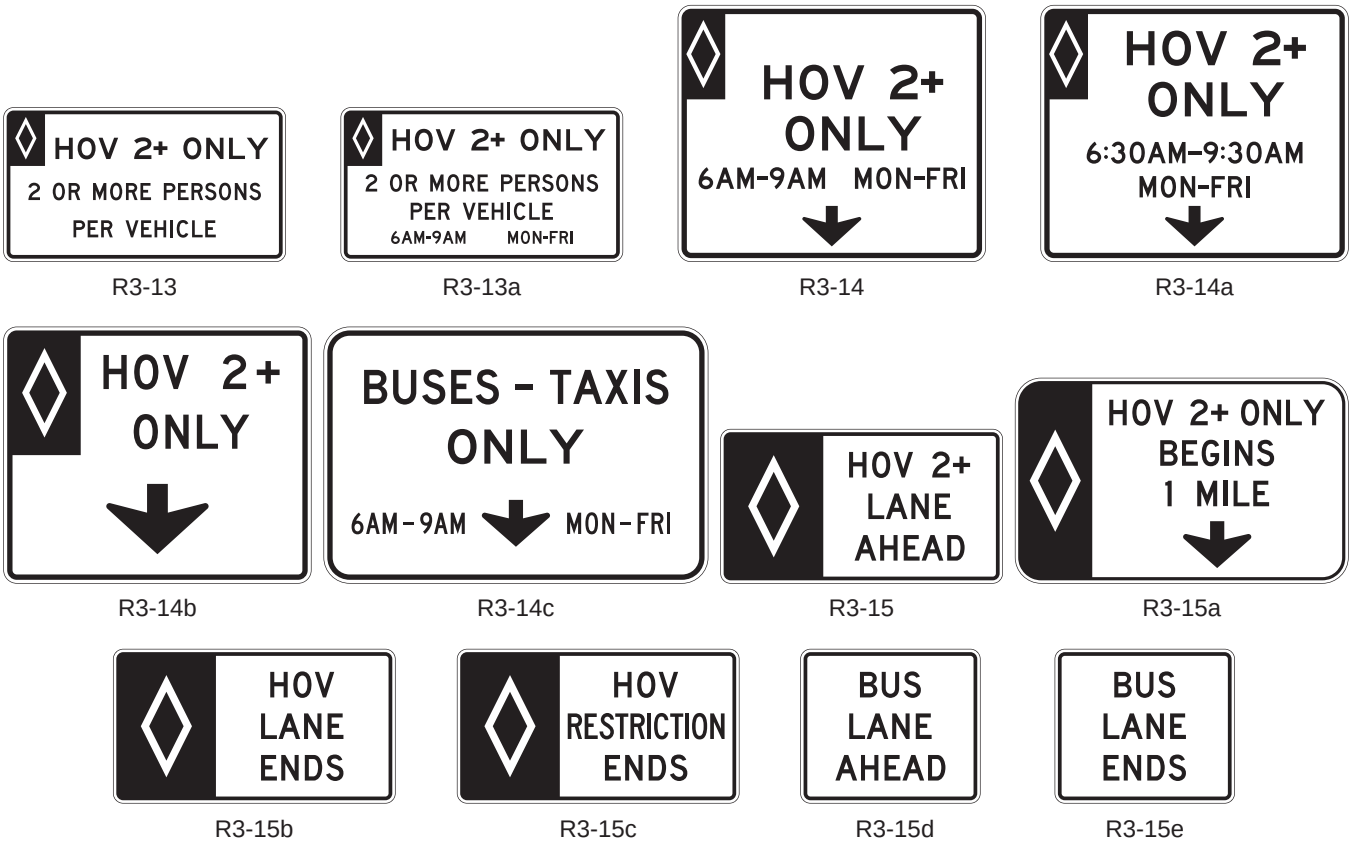


A lane-use control signal may be incorporated into an overhead preferential lane regulatory sign to indicate the status of a reversible operation as shown in the following example:

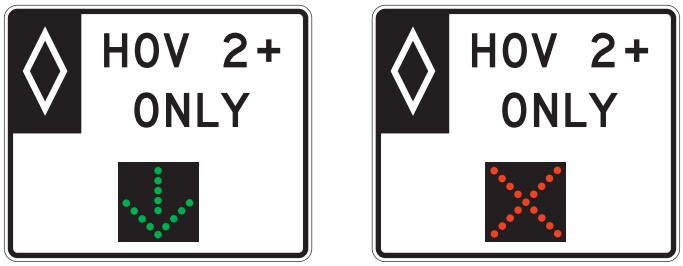


Notes:

1. The minimum vehicle occupancy requirement may vary for each facility (such as 2+, 3+, 4+).
2. The occupancy requirement may be added to the first line of the R3-15b and R3-15c signs.
3. Some of the legends shown on these signs are for example purposes only. The specific legend for a particular application should be based upon local conditions, ordinances, and State statutes.
4. Where sufficient median width is available, the R3-13 series and R3-15 series signs may be post-mounted.

## *Figure 2G-1(CA). California Preferential Lane Regulatory Signs and Plaques*





R33B(CA)




R33C(CA)




R82aP(CA)




R82bP(CA)




R88(CA)




R90-1(CA)





R91-1(CA)





R91-4(CA)




R91bP(CA)




R94(CA)




SR50-1(CA)




SR50-2(CA)




SR60-1(CA)




SR60-2(CA)




SR60-4(CA)





SR60-6(CA)




SR60-8(CA)

# Figure 2G-2. Example of Signing for an Added Continuous-Access Contiguous or Buffer-Separated HOV Lane

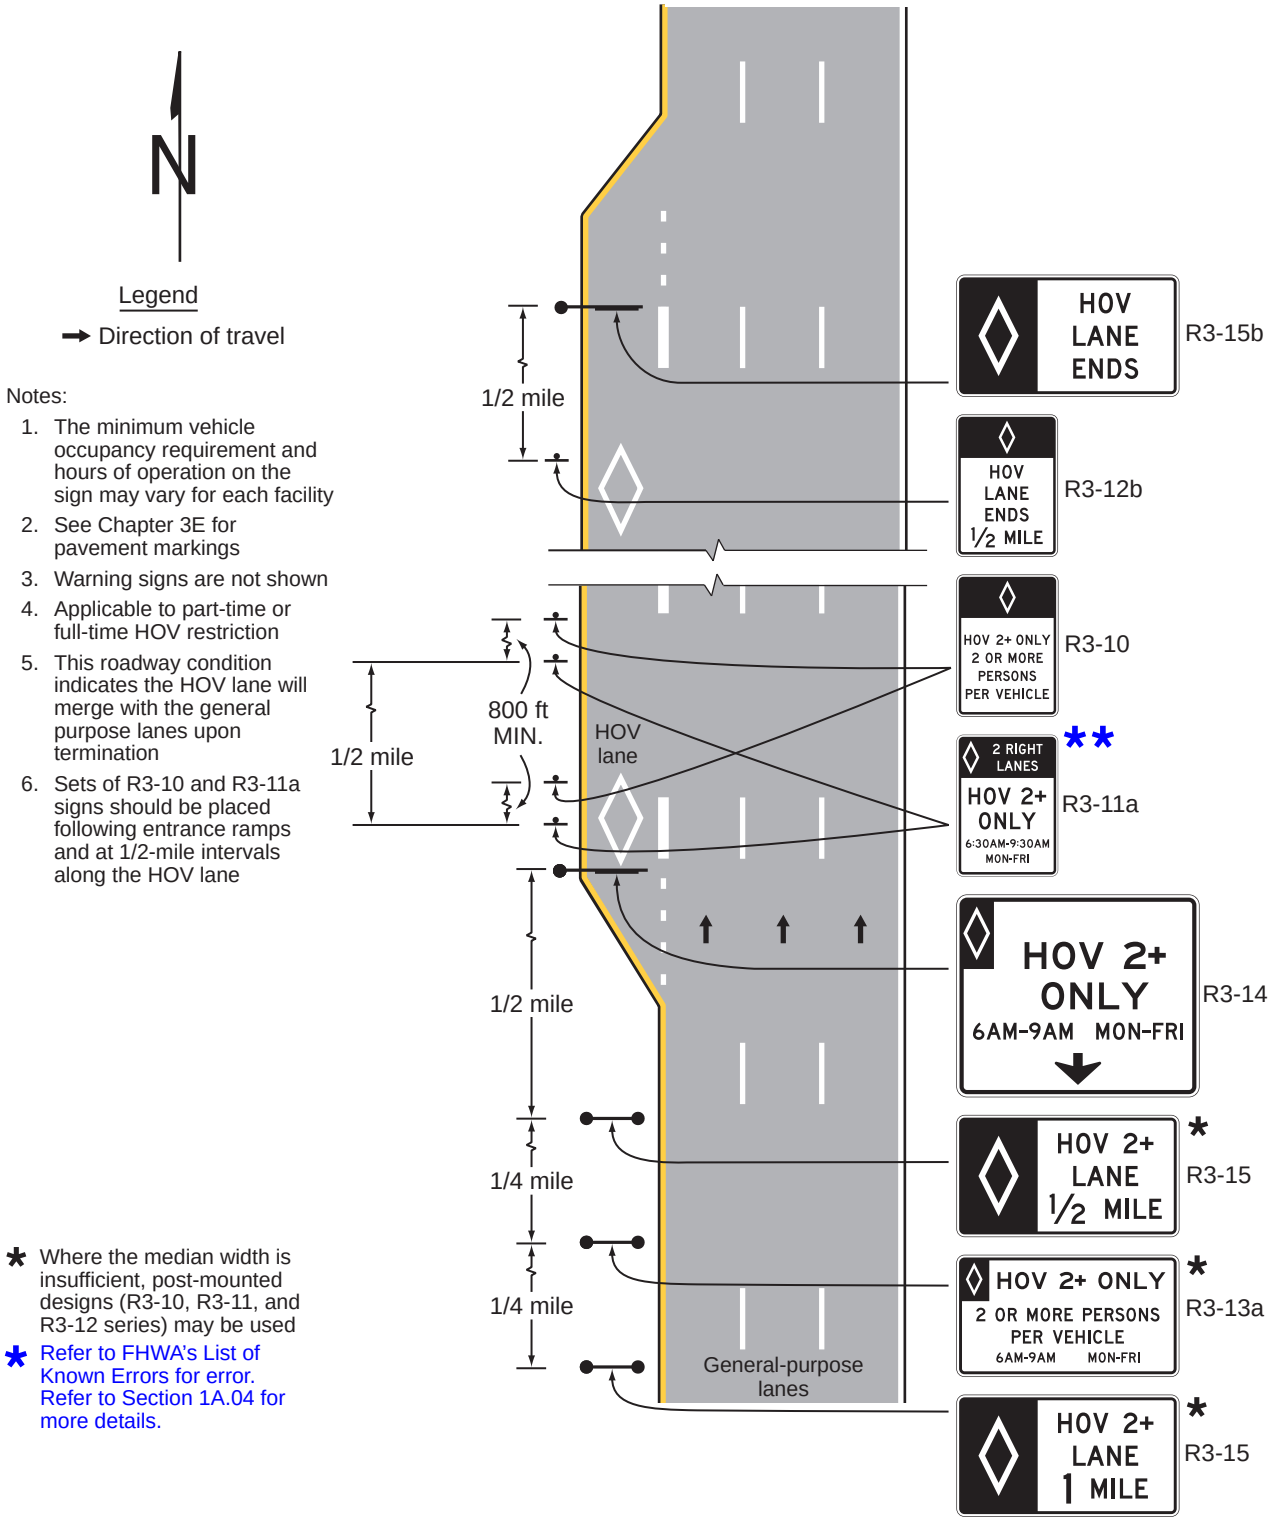



Notes:

1. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
2. See Chapter 3E for pavement markings
3. Warning signs are not shown
4. Applicable to part-time or full-time HOV restriction
5. This roadway condition indicates the HOV lane will merge with the general purpose lanes upon termination
6. Sets of R3-10 and R3-11a signs should be placed following entrance ramps and at 1/2-mile intervals along the HOV lane

* Where the median width is insufficient, post-mounted designs (R3-10, R3-11, and R3-12 series) may be used

** Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

# Figure 2G-3. Example of Signing for a General-Purpose Lane that Becomes a Continuous-Access Contiguous or Buffer-Separated HOV Lane

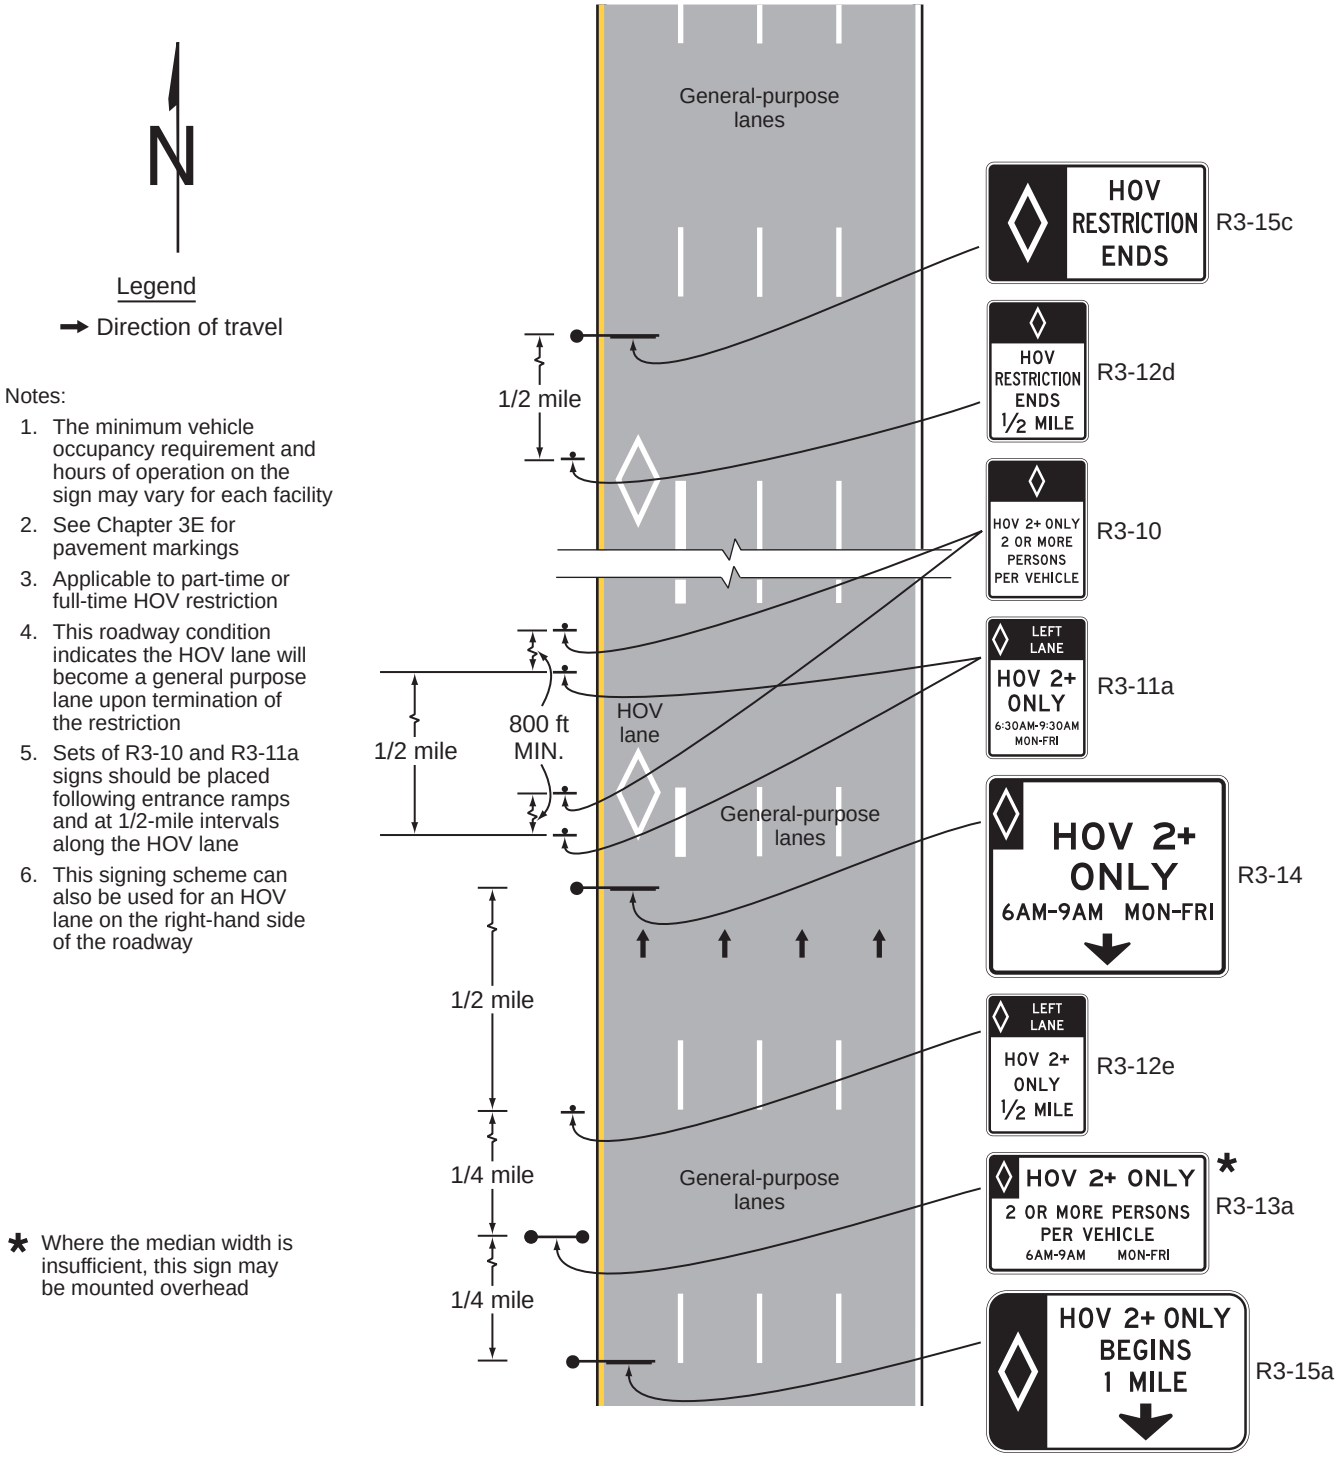


Notes:

1. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
2. See Chapter 3E for pavement markings
3. Applicable to part-time or full-time HOV restriction
4. This roadway condition indicates the HOV lane will become a general purpose lane upon termination of the restriction
5. Sets of R3-10 and R3-11a signs should be placed following entrance ramps and at 1/2-mile intervals along the HOV lane
6. This signing scheme can also be used for an HOV lane on the right-hand side of the roadway


* Where the median width is insufficient, this sign may be mounted overhead

# Figure 2G-4. Examples of Warning Signs and Plaques Applicable Only to Preferential Lanes

**A – Barrier-mounted rectangular warning signs**




~~W4-1L (modified)~~
W59-1(CA)

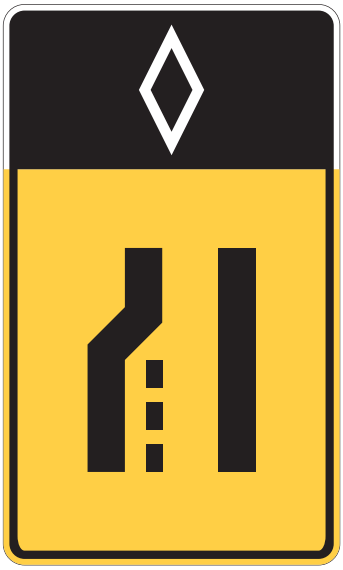

~~W4-2L (modified)~~
W11-1(CA)




~~W13-2 (modified)~~
W72B(CA)

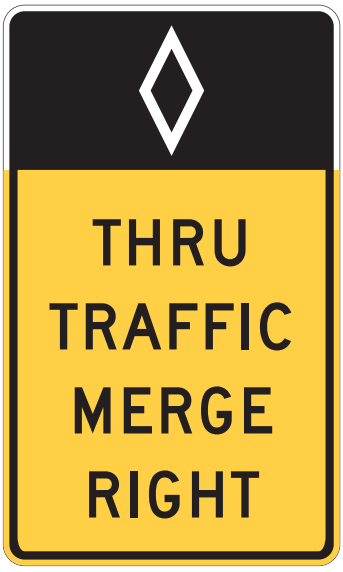


W74-1(CA)

**B – Warning plaque for use above standard diamond-shaped warning signs**




W16-11P

Note: An HOV lane example (diamond symbol) is illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) shall be displayed in white on the black background of the top portion of these signs.

## Figure 2G-5. Example of an Overhead Advance Guide Sign for a Preferential Lane Entrance




E8-3

Note: An example of an HOV lane (diamond symbol) sign is illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) is displayed in white on the black background of the left-hand portion of this sign.

## Figure 2G-6. Examples of Overhead or Post-Mounted Preferential Lane Entrance Direction Signs




E8-2
(overhead only)




E8-2a
(post-mounted only)

A changeable message sign may be incorporated into an overhead Preferential Lane guide sign to indicate the status of a reversible operation as shown in the following example:




Lane open




Lane closed

Note: Examples of HOV lane (diamond symbol) signs are illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) is displayed in white on the black background of the top left-hand portion of these signs.

---

## *Figure 2G-6(CA). California Examples of Overhead or Post-Mounted Preferential Lane Entrance Direction Signs*




G92-1(CA)




G20-10(CA)

## Figure 2G-7. Entrance Gore Signs for Barrier-Separated Preferential Lanes





E8-1




E8-1a

Note: Examples of HOV lane (diamond symbol) signs are illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) is displayed in white on the black background of the top portion of these signs.

# Figure 2G-8. Example of Advance Guide and Entrance Direction Signs for a General-Purpose Lane that Becomes a Preferential Lane

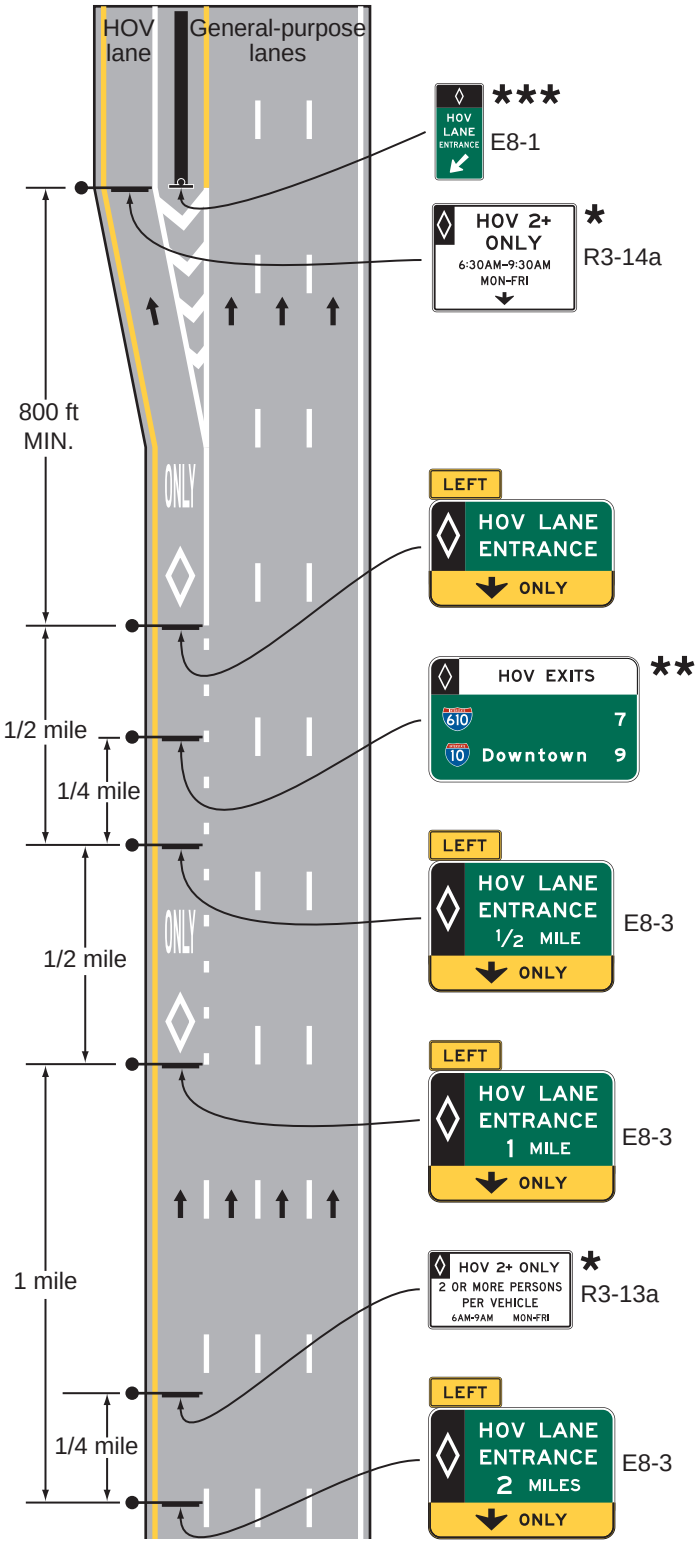





Legend

→ Direction of travel

* Potential location of a Changeable Message Sign (CMS) for reversible or counter-flow operations


** For access-restriced facilities. Destinations may be augmented to accompany routes on Interchange Sequence signs (see Figure 2E-10)

*** Barrier-separated facilities only

Notes:

1. For access to a managed lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings

# Figure 2G-9. Example of Signing for an Entrance to Access-Restricted HOV Lanes

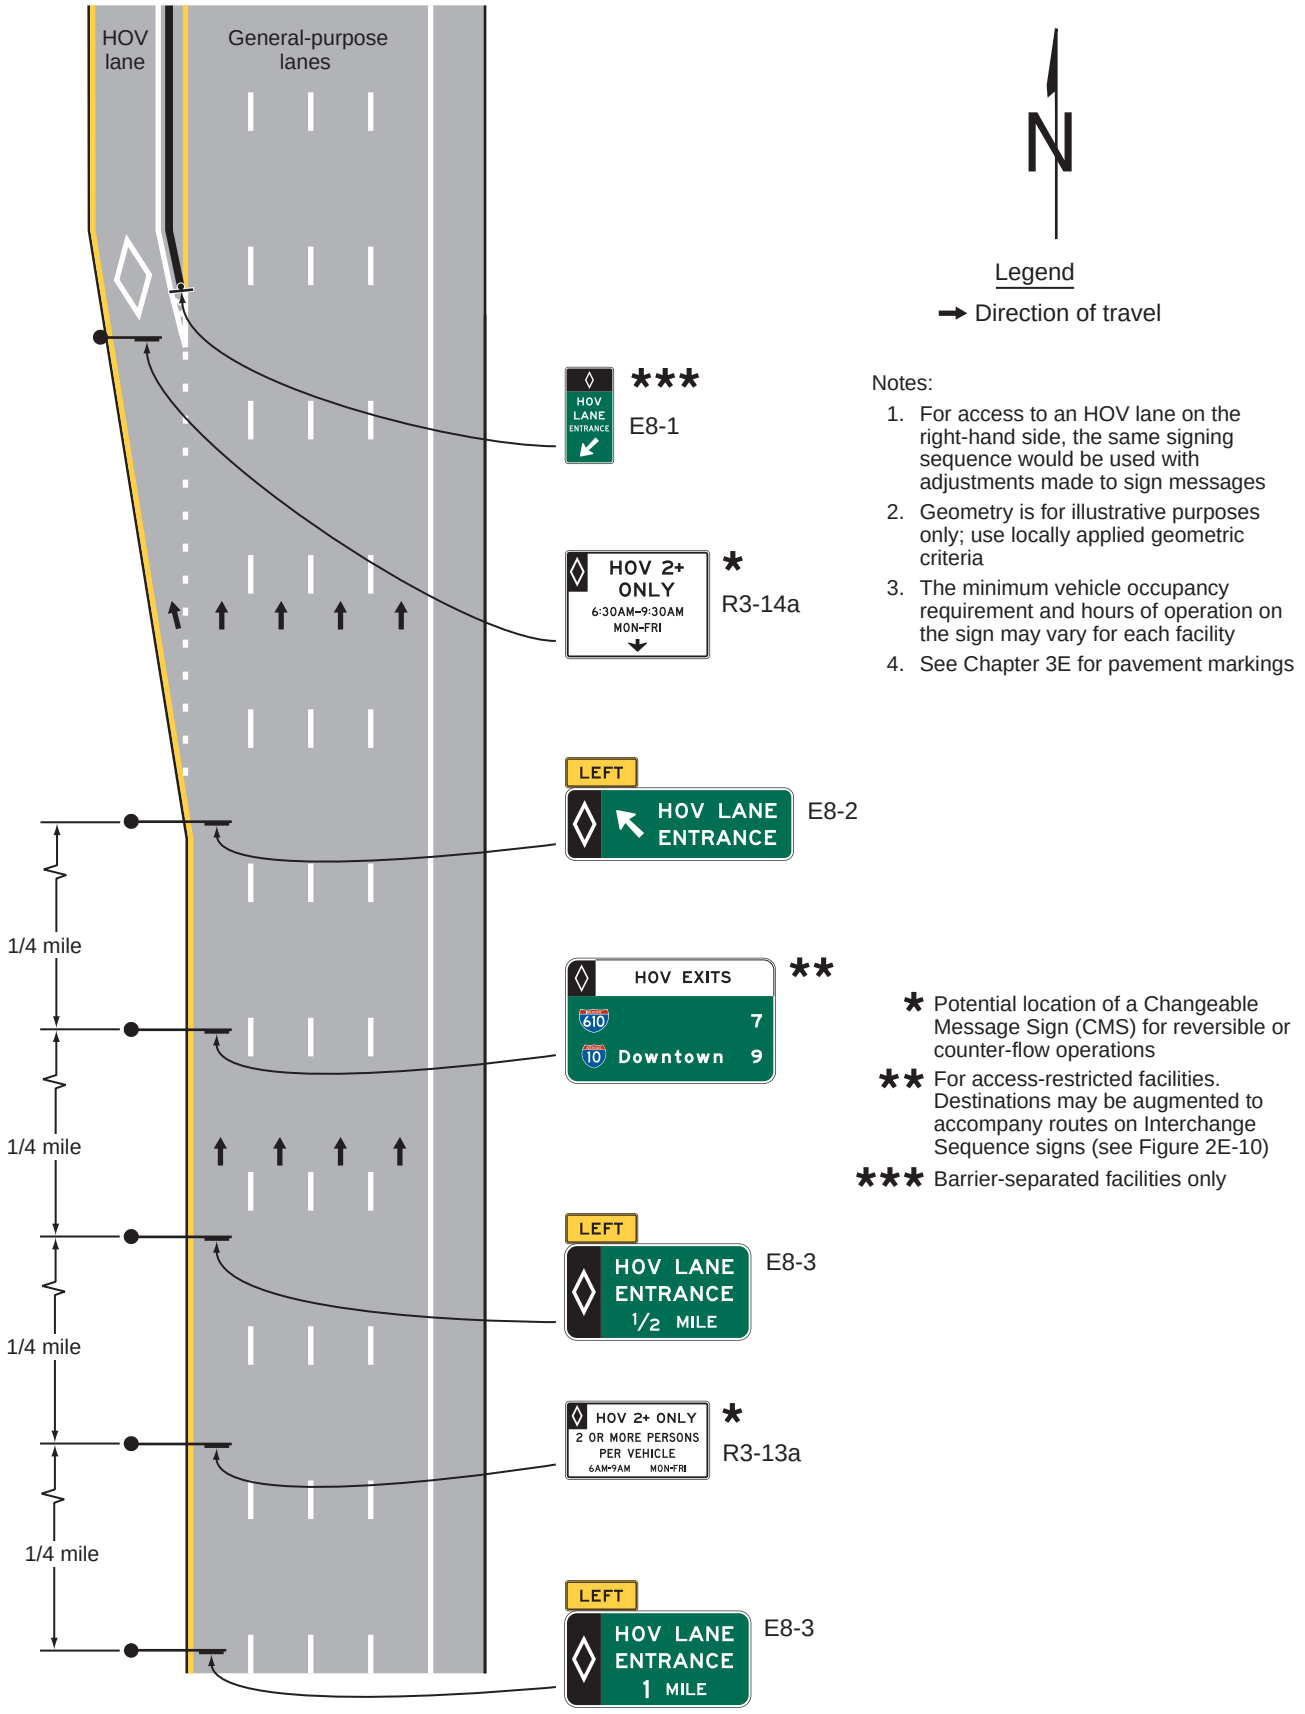


Notes:


1. For access to an HOV lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings

* Potential location of a Changeable Message Sign (CMS) for reversible or counter-flow operations

** For access-restricted facilities. Destinations may be augmented to accompany routes on Interchange Sequence signs (see Figure 2E-10)

*** Barrier-separated facilities only


# Figure 2G-10. Example of Signing for an Intermediate Entry to a Barrier-Separated or Buffer-Separated HOV Lane

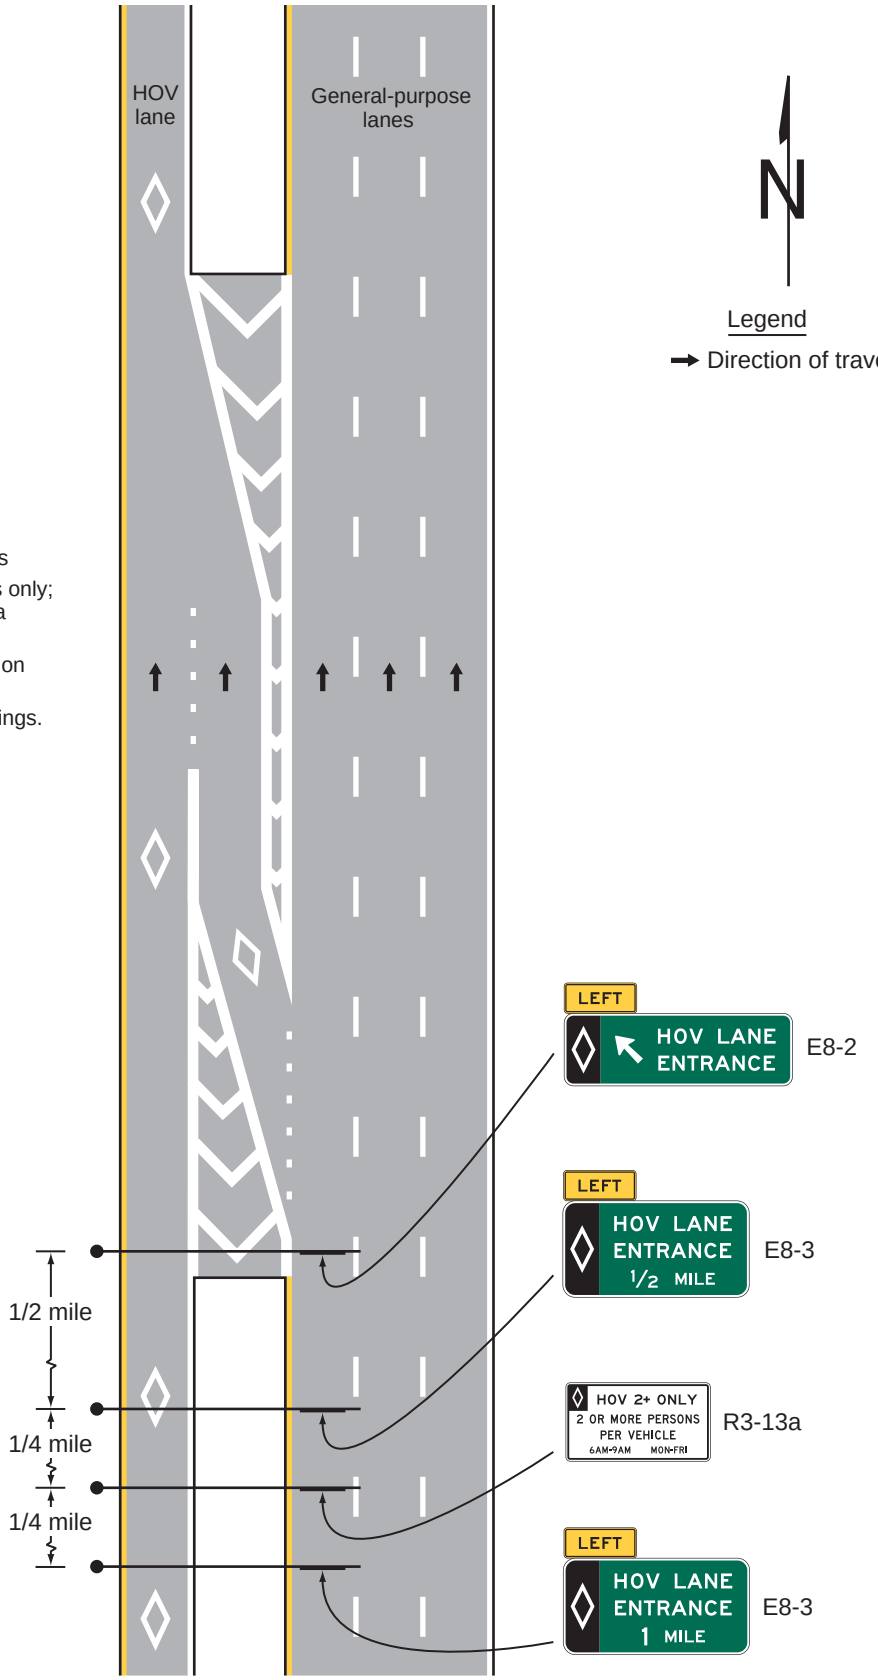



Notes:

1. For access to an HOV lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings.
5. Warning signs are not shown


# Figure 2G-11. Example of Signing for the Intermediate Entry to, Egress from, and End of Access-Restricted HOV Lanes

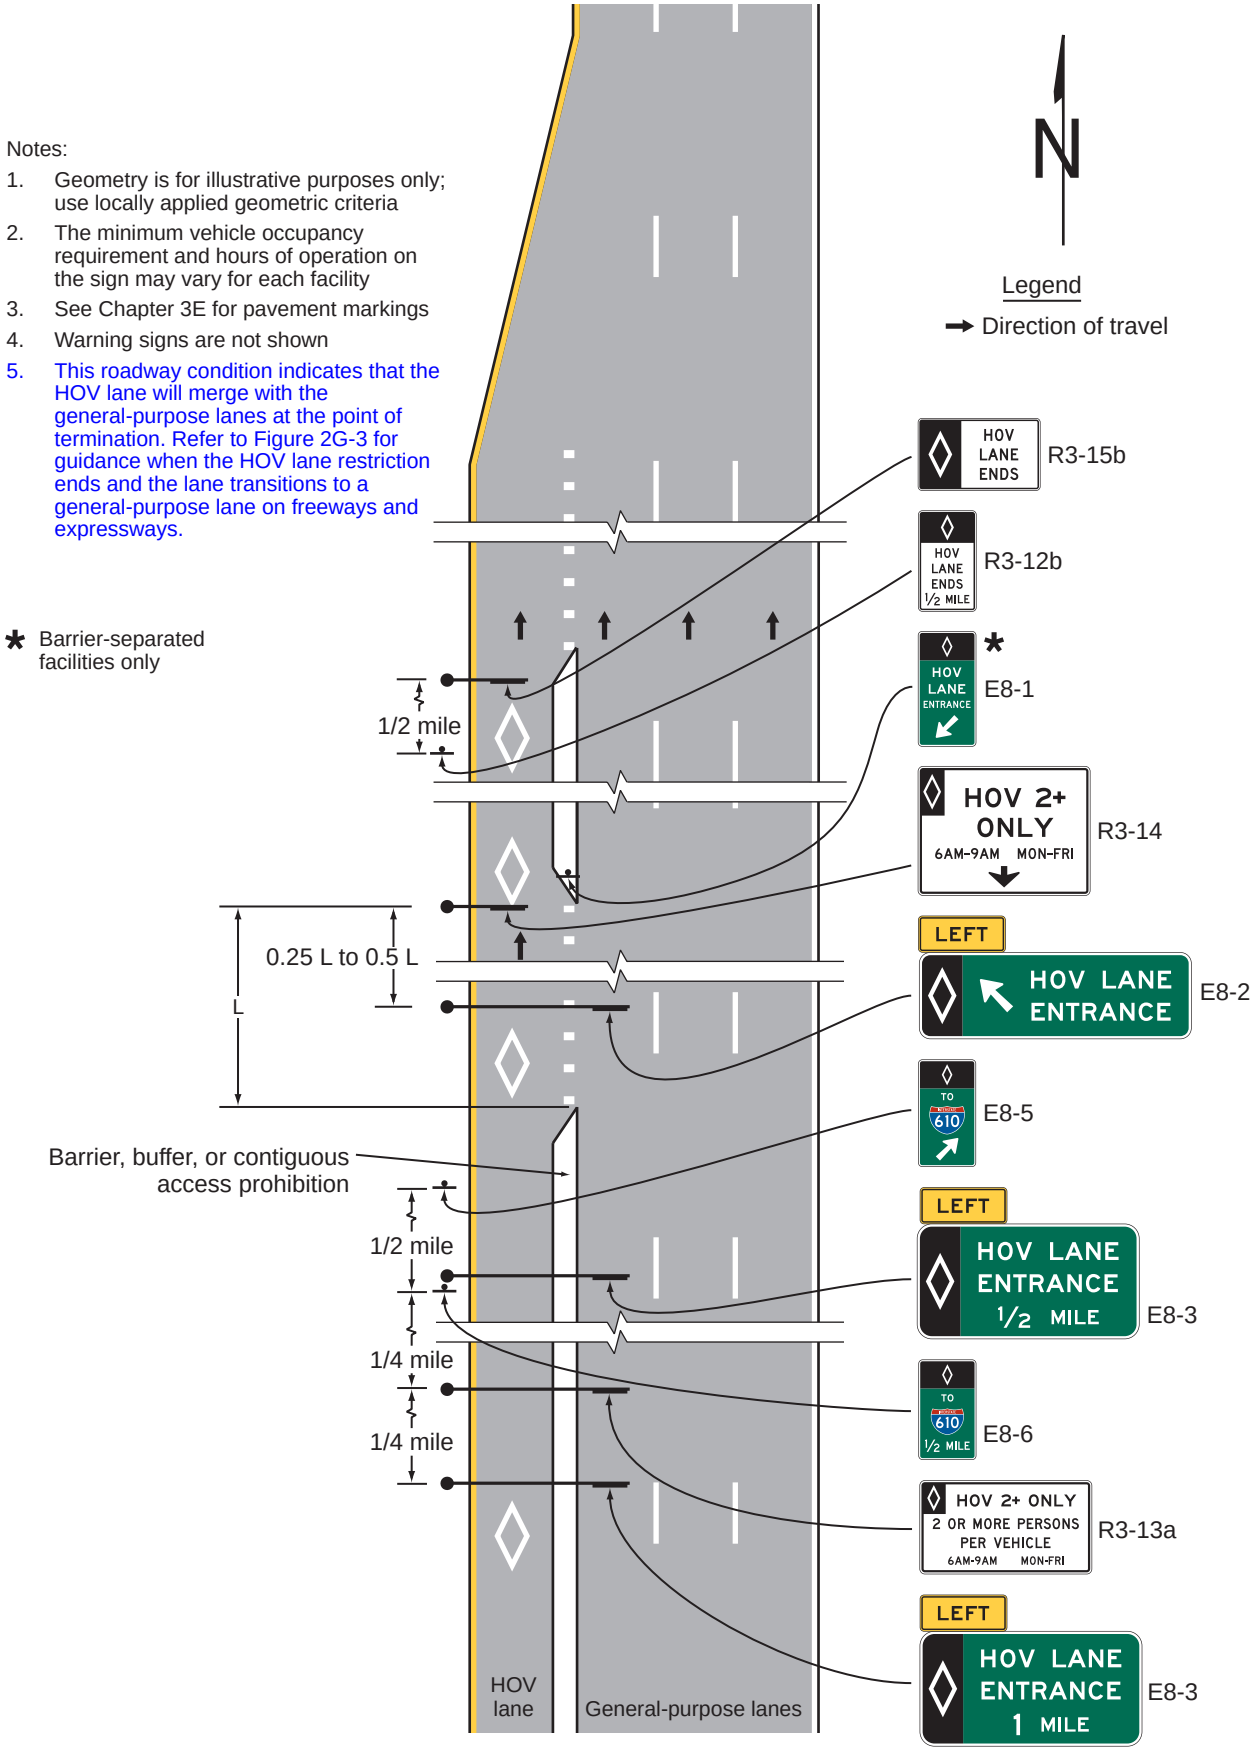

## Figure 2G-12. Examples of Barrier-Mounted Guide Signs for an Intermediate Egress from Preferential Lanes





E8-5




E8-6

Note: Examples of HOV lane (diamond symbol) signs are illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) is displayed in white on the black background of the top portion of these signs.


# Figure 2G-13. Examples of Signs for an Intermediate Egress from a Barrier-Separated or Buffer-Separated HOV Lane

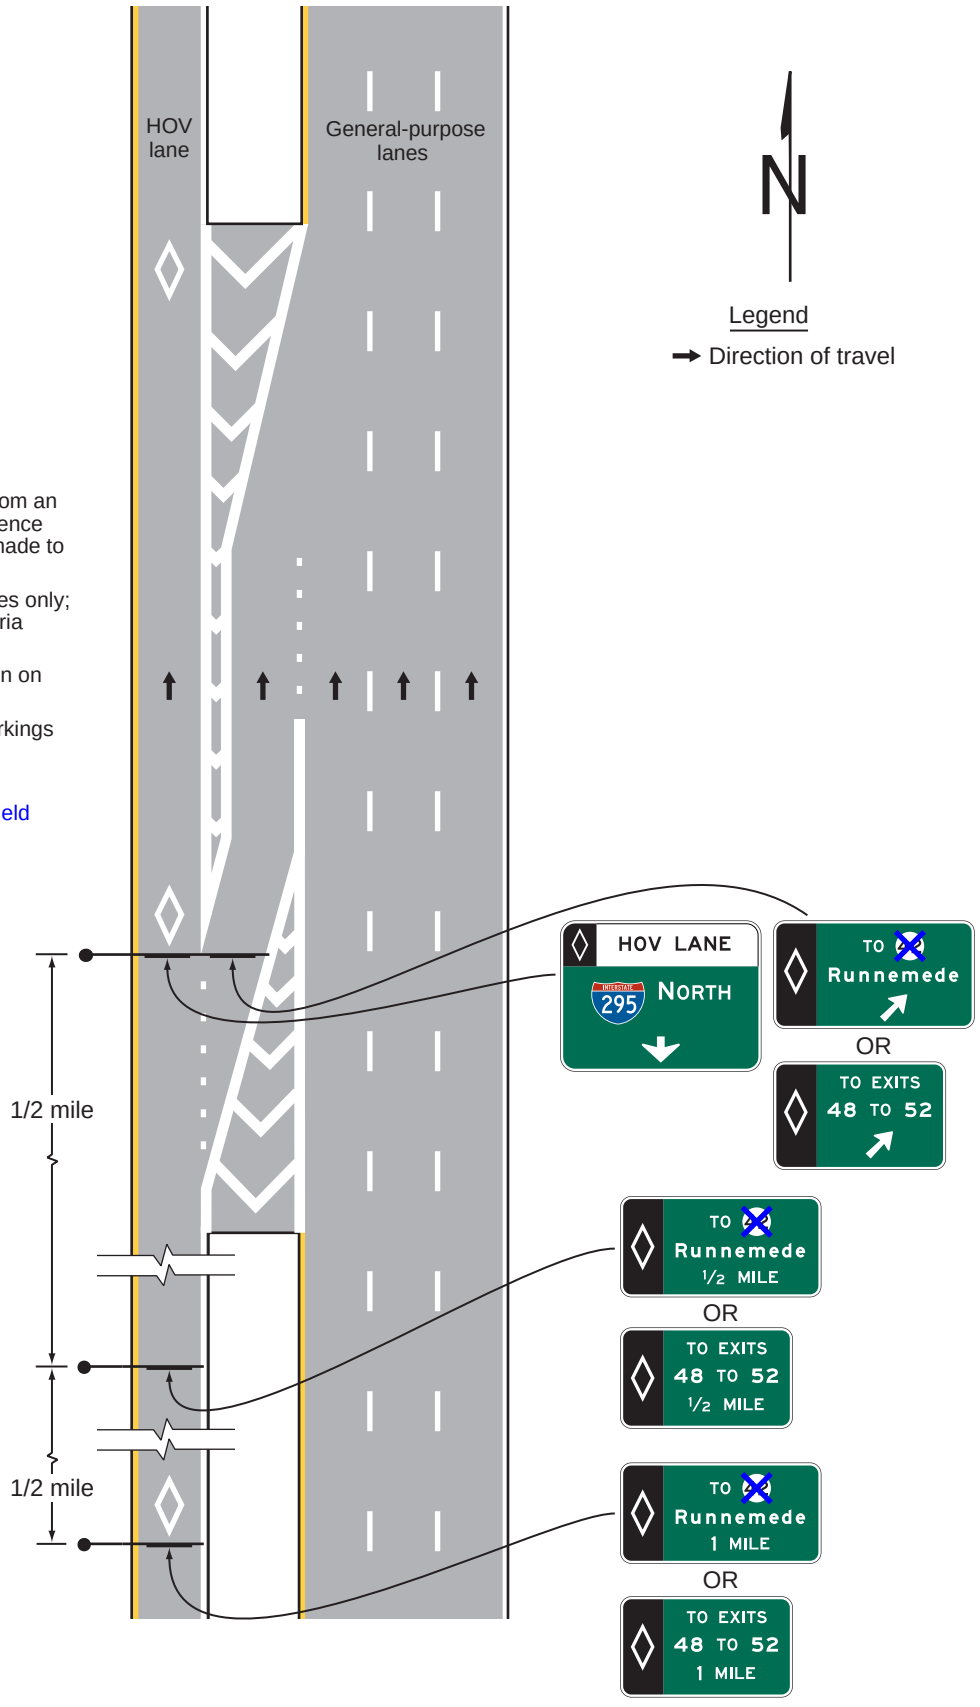


Notes:

1. For an exit on the left-hand side from an HOV lane, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings
5. Warning signs are not shown
6. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

## Figure 2G-14. Example of Signing for a Direct Entrance Ramp to an HOV Lane from a Park-and-Ride Facility and a Local Street

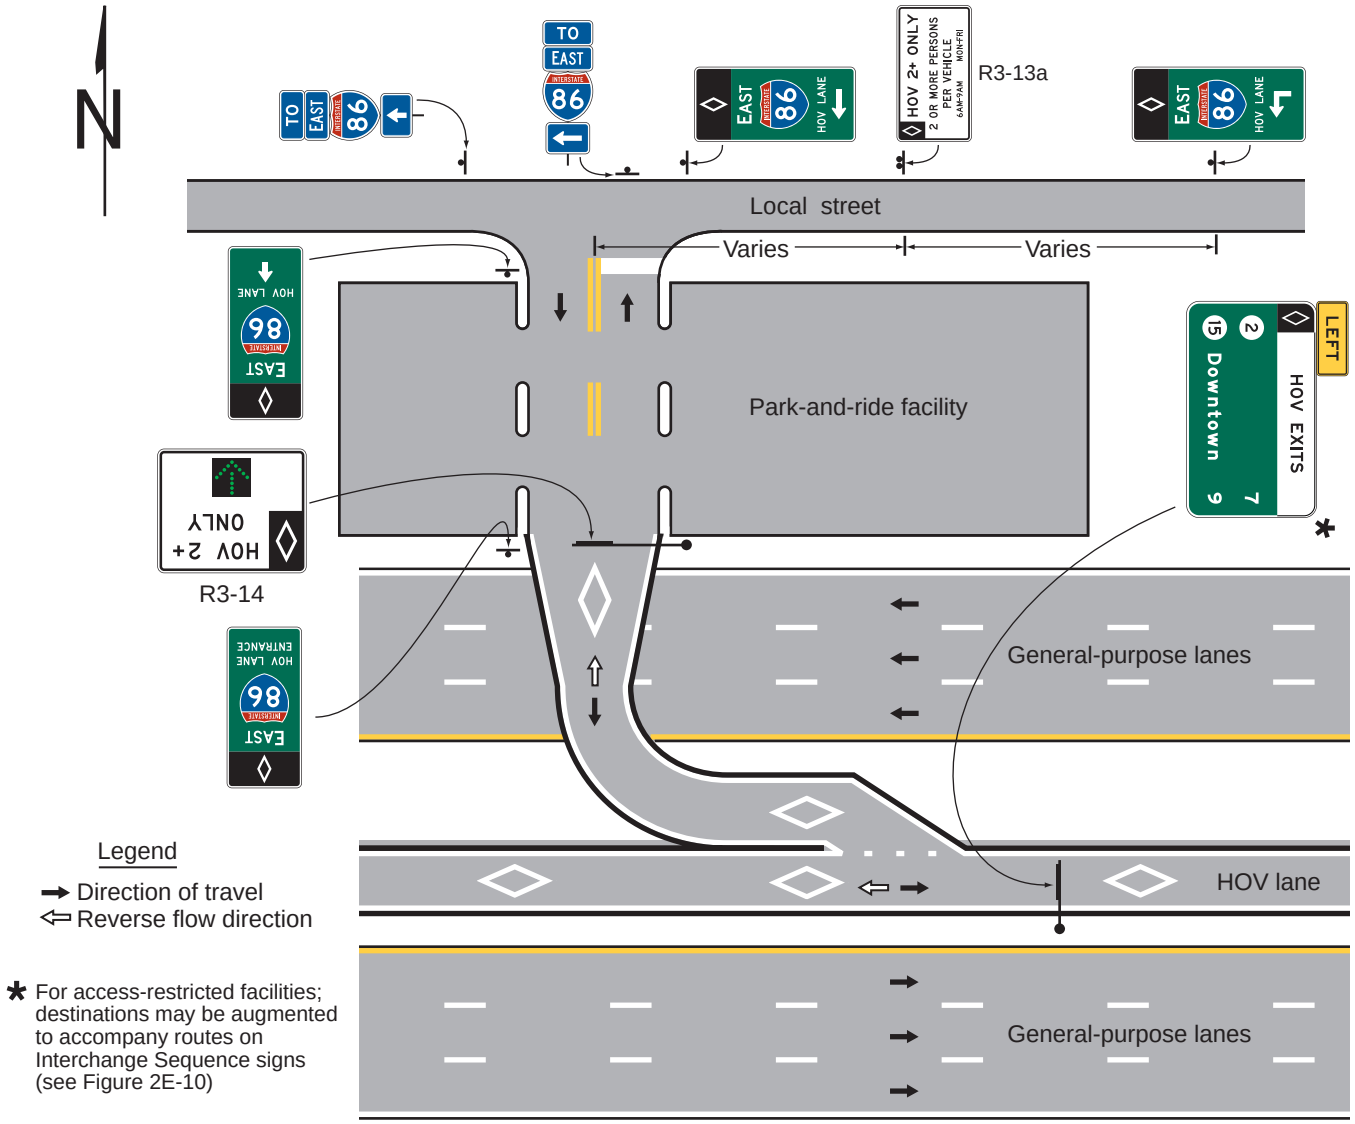


Notes:

1. The minimum vehicle occupancy requirement on the sign may vary for each facility
2. See Chapter 3E for pavement markings
3. Warning signs are not shown
4. Sign locations are approximate
5. Additional signs may be required to direct drivers from the surrounding streets into the park-and-ride lot and the HOV lane
6. Additional signs are required on the adjoining surface streets to inform non-HOVs that they should not enter the HOV facility
7. This figure illustrates a reversible HOV lane with a direct access ramp
8. The guide signs directing local street traffic to the HOV lane should include the word ENTRANCE when the direct access ramp does not traverse a park-and-ride facility

## Figure 2G-15. Exit Gore Sign for a Direct Exit from a Preferential Lane




E8-4

Note: An example of an HOV lane (diamond symbol) sign is illustrated. For other types of preferential lanes, the appropriate symbol or word message (see Section 2G.03) is displayed in white on the black background of the top portion of this sign.

---

## *Figure 2G-15(CA). California Exit Gore Sign for a Direct Exit from a Preferential Lane*




G83-6(CA)





G85-12(CA)




G86-15(CA)

# Figure 2G-16. Examples of Guide Signs for Direct HOV Lane Entrance and Exit Ramps

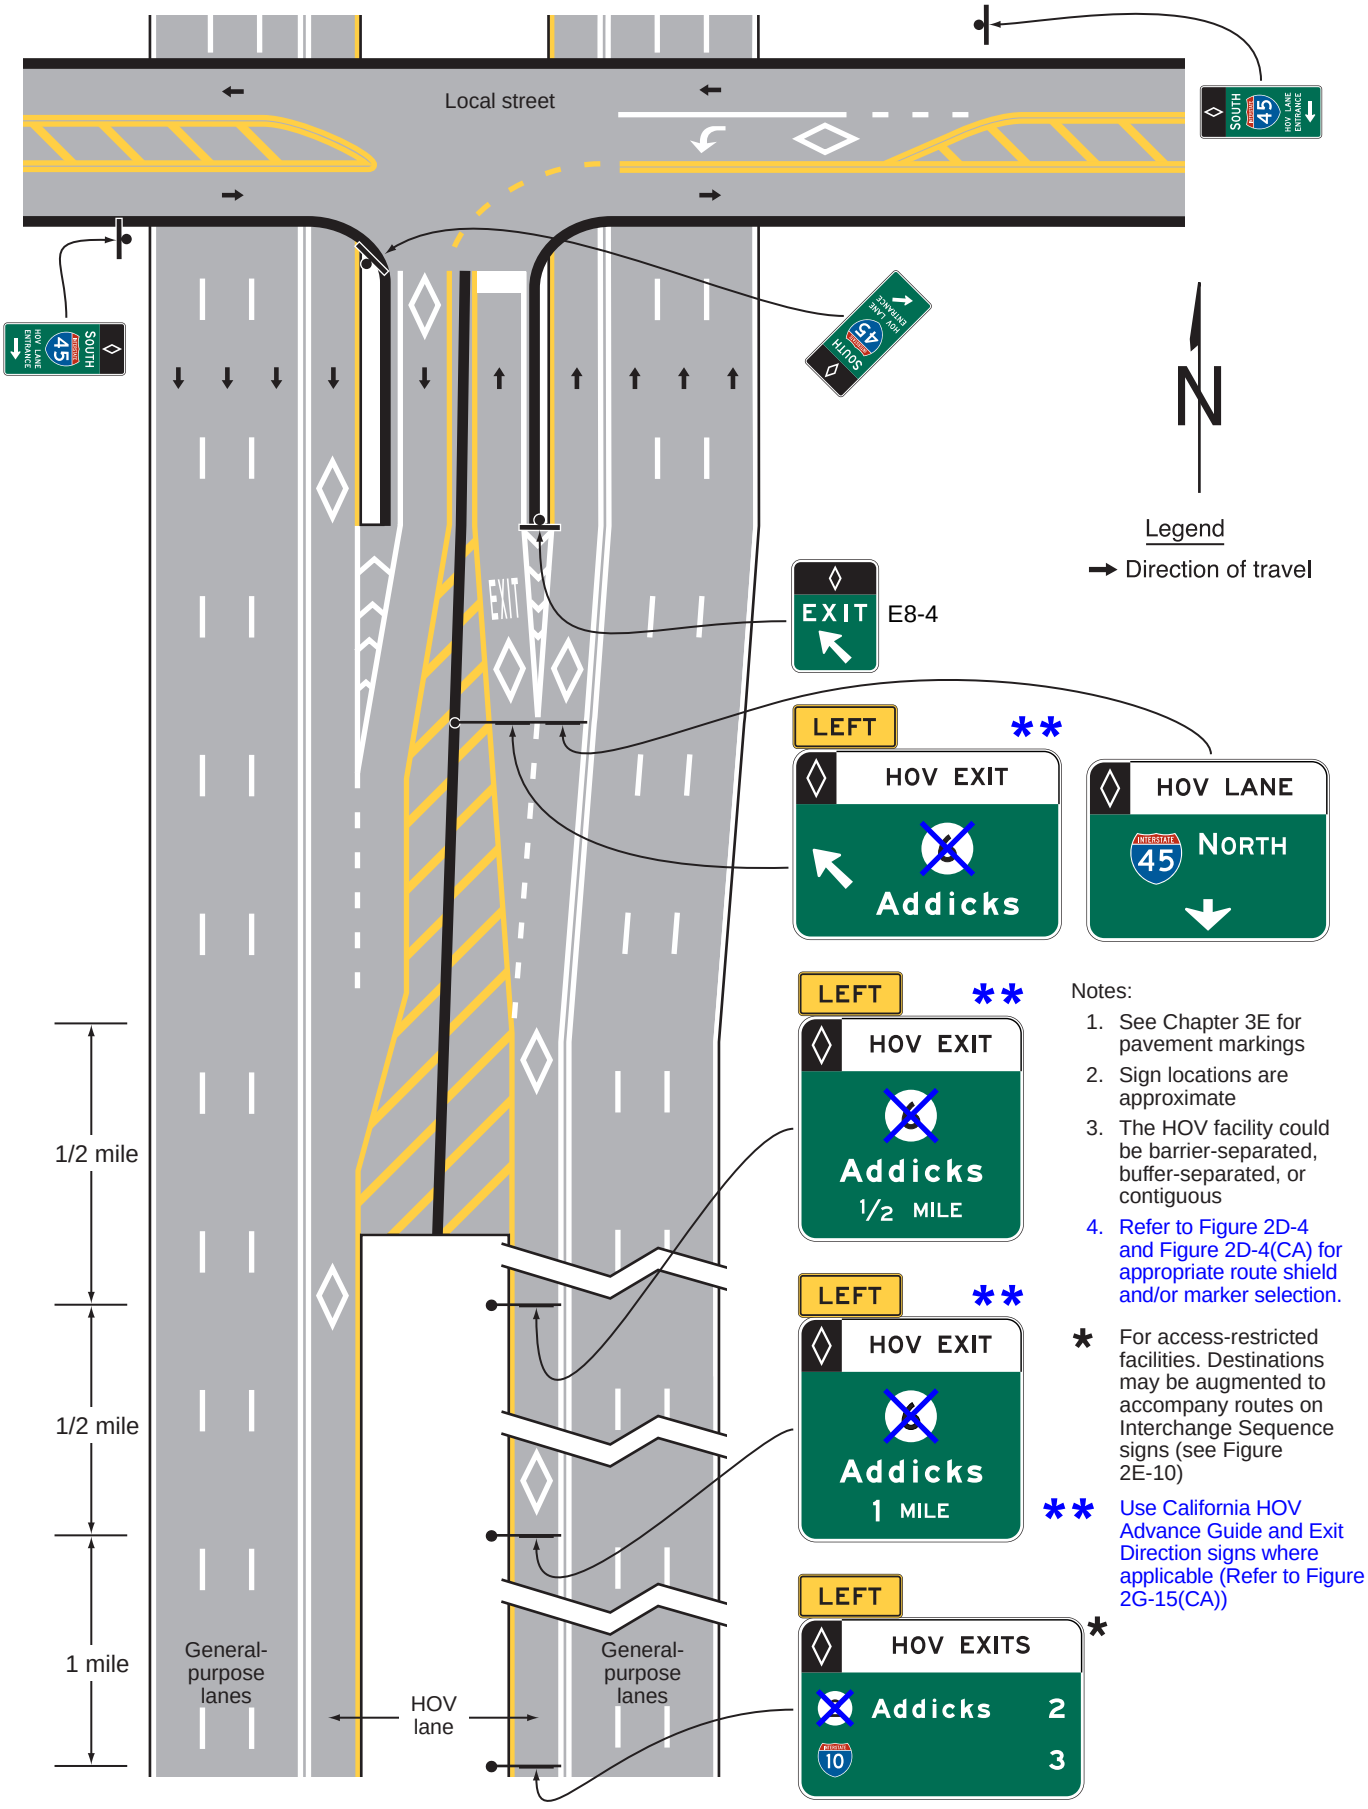



Notes:

1. See Chapter 3E for pavement markings
2. Sign locations are approximate
3. The HOV facility could be barrier-separated, buffer-separated, or contiguous
4. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* For access-restricted facilities. Destinations may be augmented to accompany routes on Interchange Sequence signs (see Figure 2E-10)

** Use California HOV Advance Guide and Exit Direction signs where applicable (Refer to Figure 2G-15(CA))

## *Figure 2G-16(CA). California Example of Guide Signs for Direct HOV Lane Entrance Ramp*

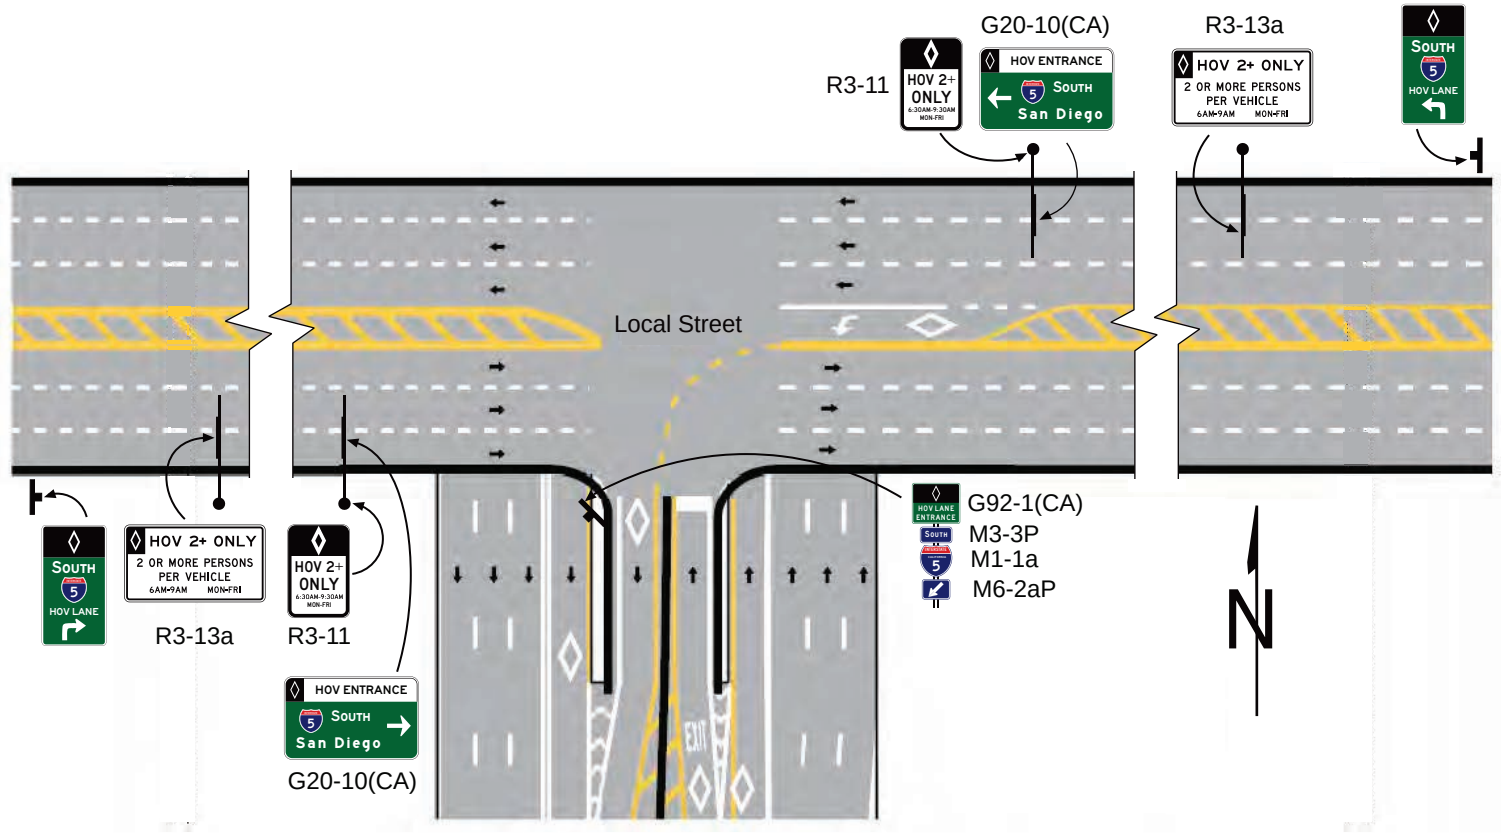



Notes:

1. Refer to Chapter 3D for pavement markings
2. Sign locations are approximate

**LEGEND**

→ Direction of Travel

# Figure 2G-17. Examples of Guide Signs for a Direct Access Ramp between HOV Lanes on Separate Freeways

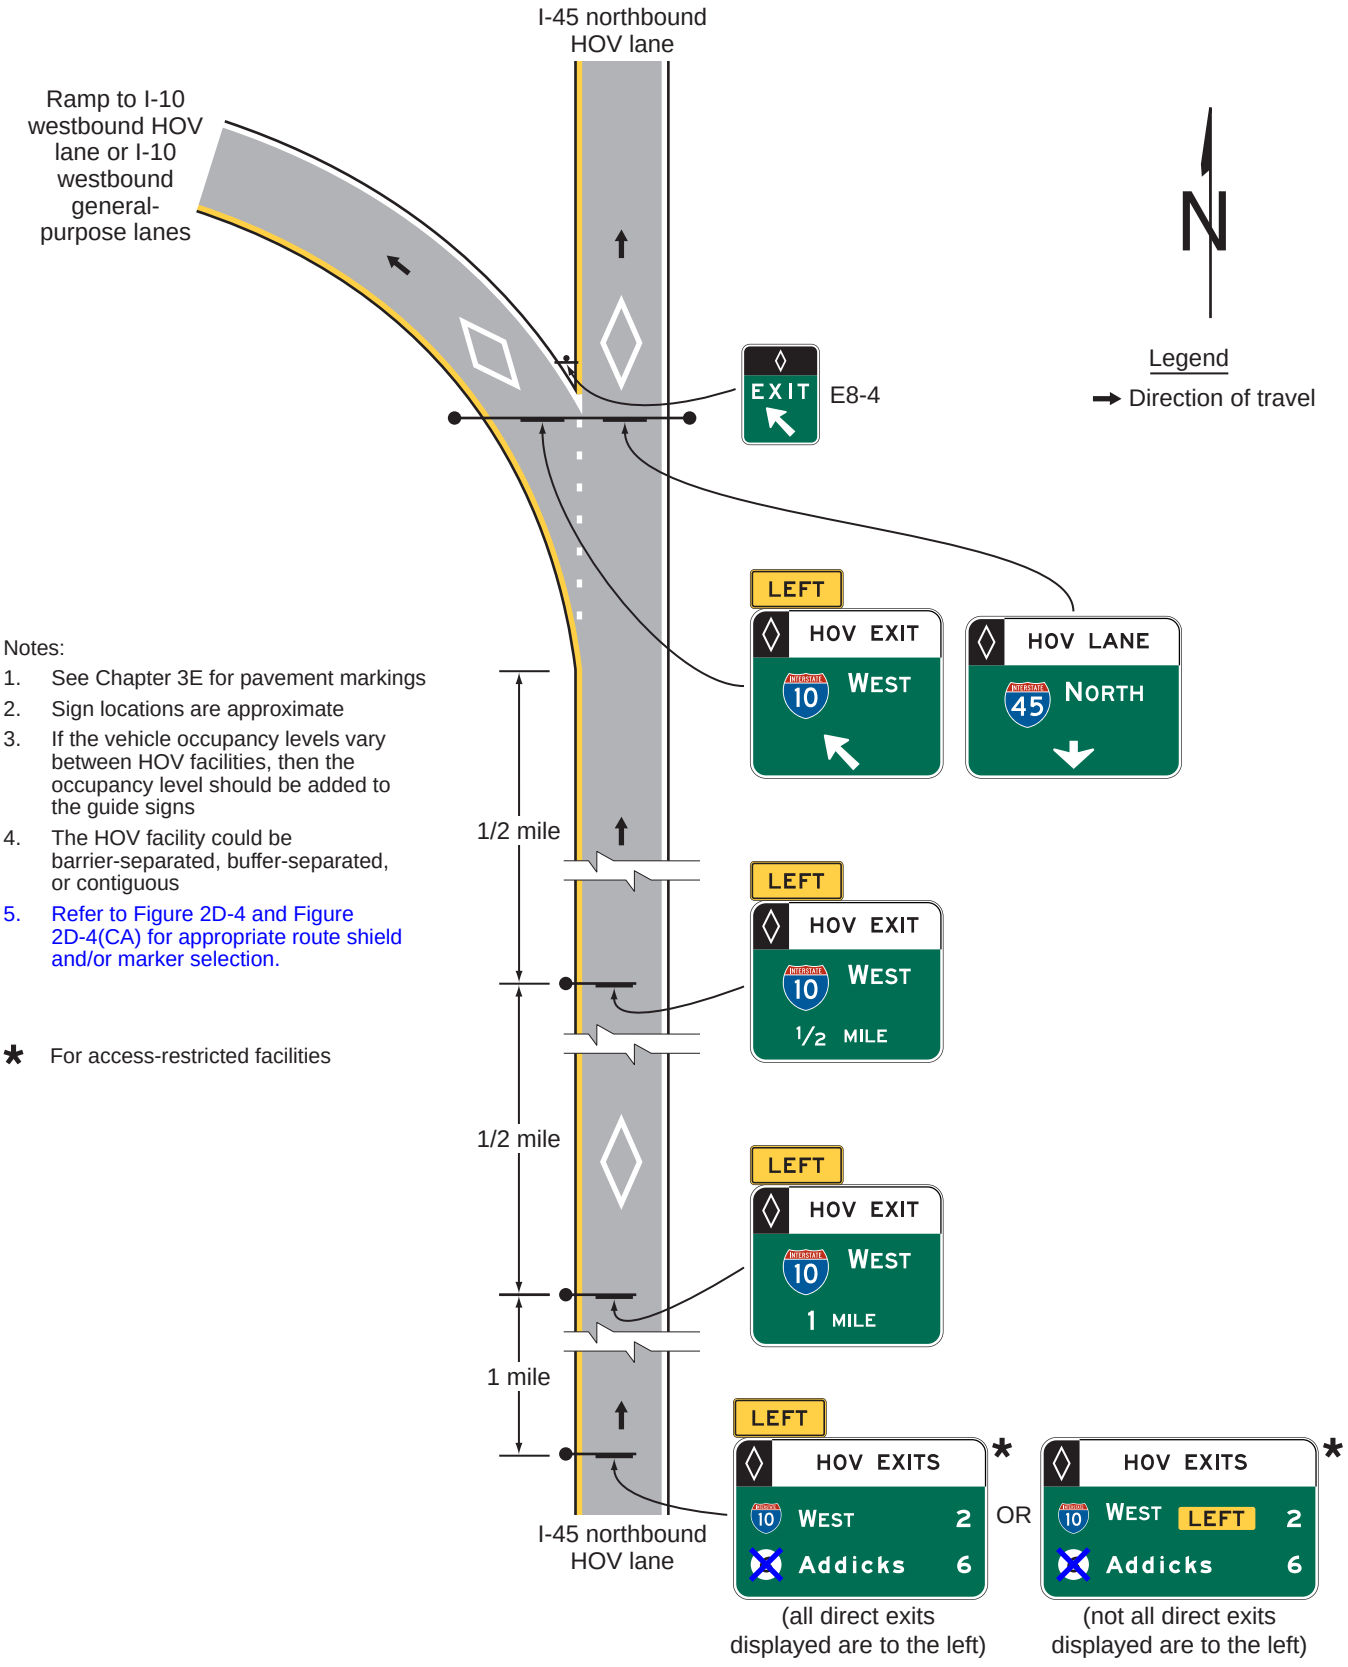


Notes:

1. See Chapter 3E for pavement markings
2. Sign locations are approximate
3. If the vehicle occupancy levels vary between HOV facilities, then the occupancy level should be added to the guide signs
4. The HOV facility could be barrier-separated, buffer-separated, or contiguous
5. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

★ For access-restricted facilities

## Figure 2G-18. Regulatory Signs for Managed Lanes




R3-40




R3-42




R3-42a




R3-42b




R3-42c




R3-43




R3-44




R3-44a

Notes:


1. The ETC pictograph shown is an example only. The pictograph for the toll facility's adopted ETC system shall be used.
2. Changeable message sign elements shall be used for the numerals displayed for the variable tolls.
3. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.





R3-45




R3-45a

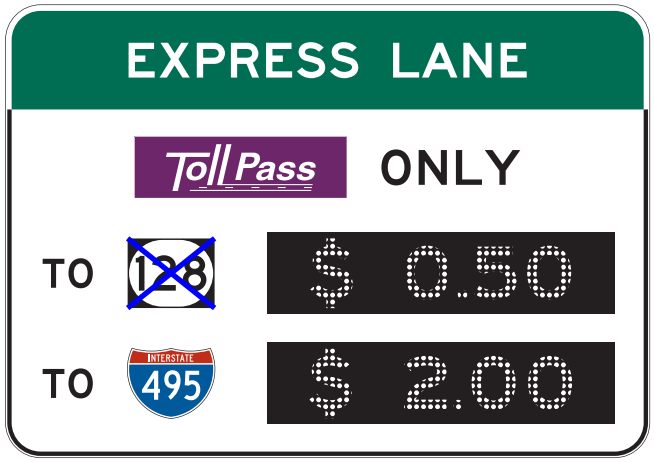



R3-48

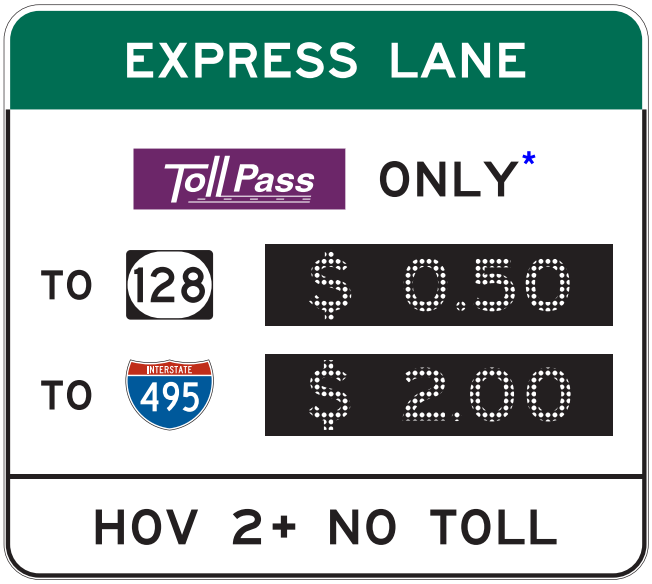


R3-48a

* Refer to FHWA's List of Known Errors for error in sign. Refer to Section 1A.04 for more details.

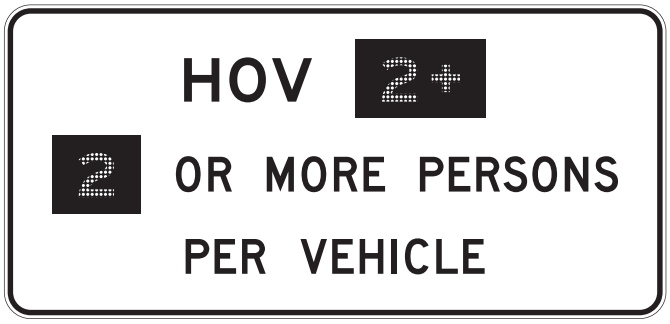


Example of a regulatory sign with changeable message elements

## Figure 2G-19. Examples of Guide Signs for Entrances to Priced Managed Lanes

**A – Entrance to a priced managed lane from a general-purpose lane**








**B – Direct entrance to a priced managed lane from a crossroad**




Notes:

1. The ETC pictographs shown are examples only. The pictograph for the toll facility's adopted ETC system shall be used.
2. The examples shown are for facilities on which registration in a toll account program is required for toll payments.

# Figure 2G-20. Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane on which Registration in a Toll Account Program Is Not Required

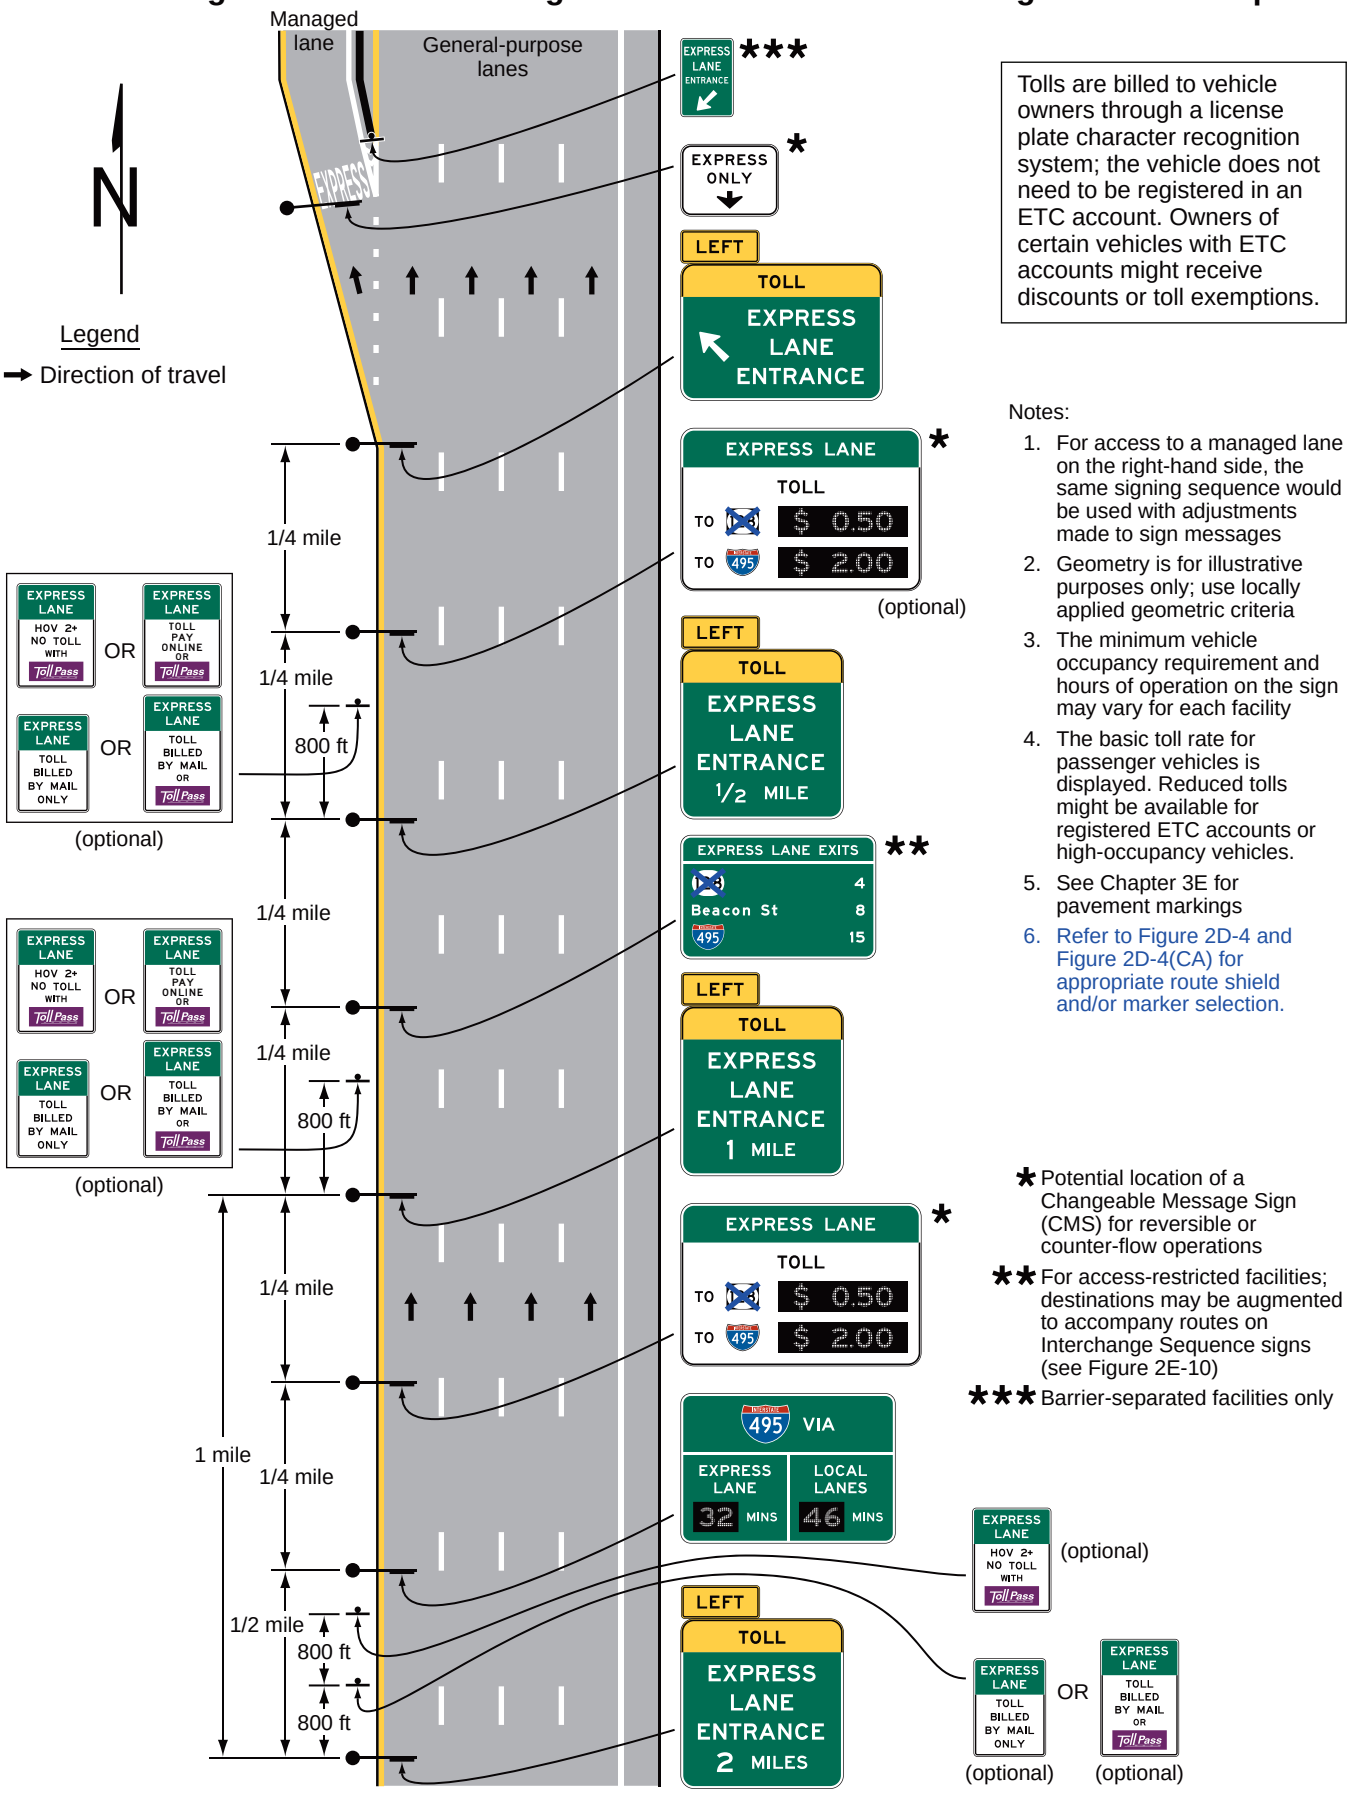


Tolls are billed to vehicle owners through a license plate character recognition system; the vehicle does not need to be registered in an ETC account. Owners of certain vehicles with ETC accounts might receive discounts or toll exemptions.

Notes:


1. For access to a managed lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. The basic toll rate for passenger vehicles is displayed. Reduced tolls might be available for registered ETC accounts or high-occupancy vehicles.
5. See Chapter 3E for pavement markings
6. Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

* Potential location of a Changeable Message Sign (CMS) for reversible or counter-flow operations

** For access-restricted facilities; destinations may be augmented to accompany routes on Interchange Sequence signs (see Figure 2E-10)

*** Barrier-separated facilities only

# Figure 2G-21. Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane – ETC Account Required

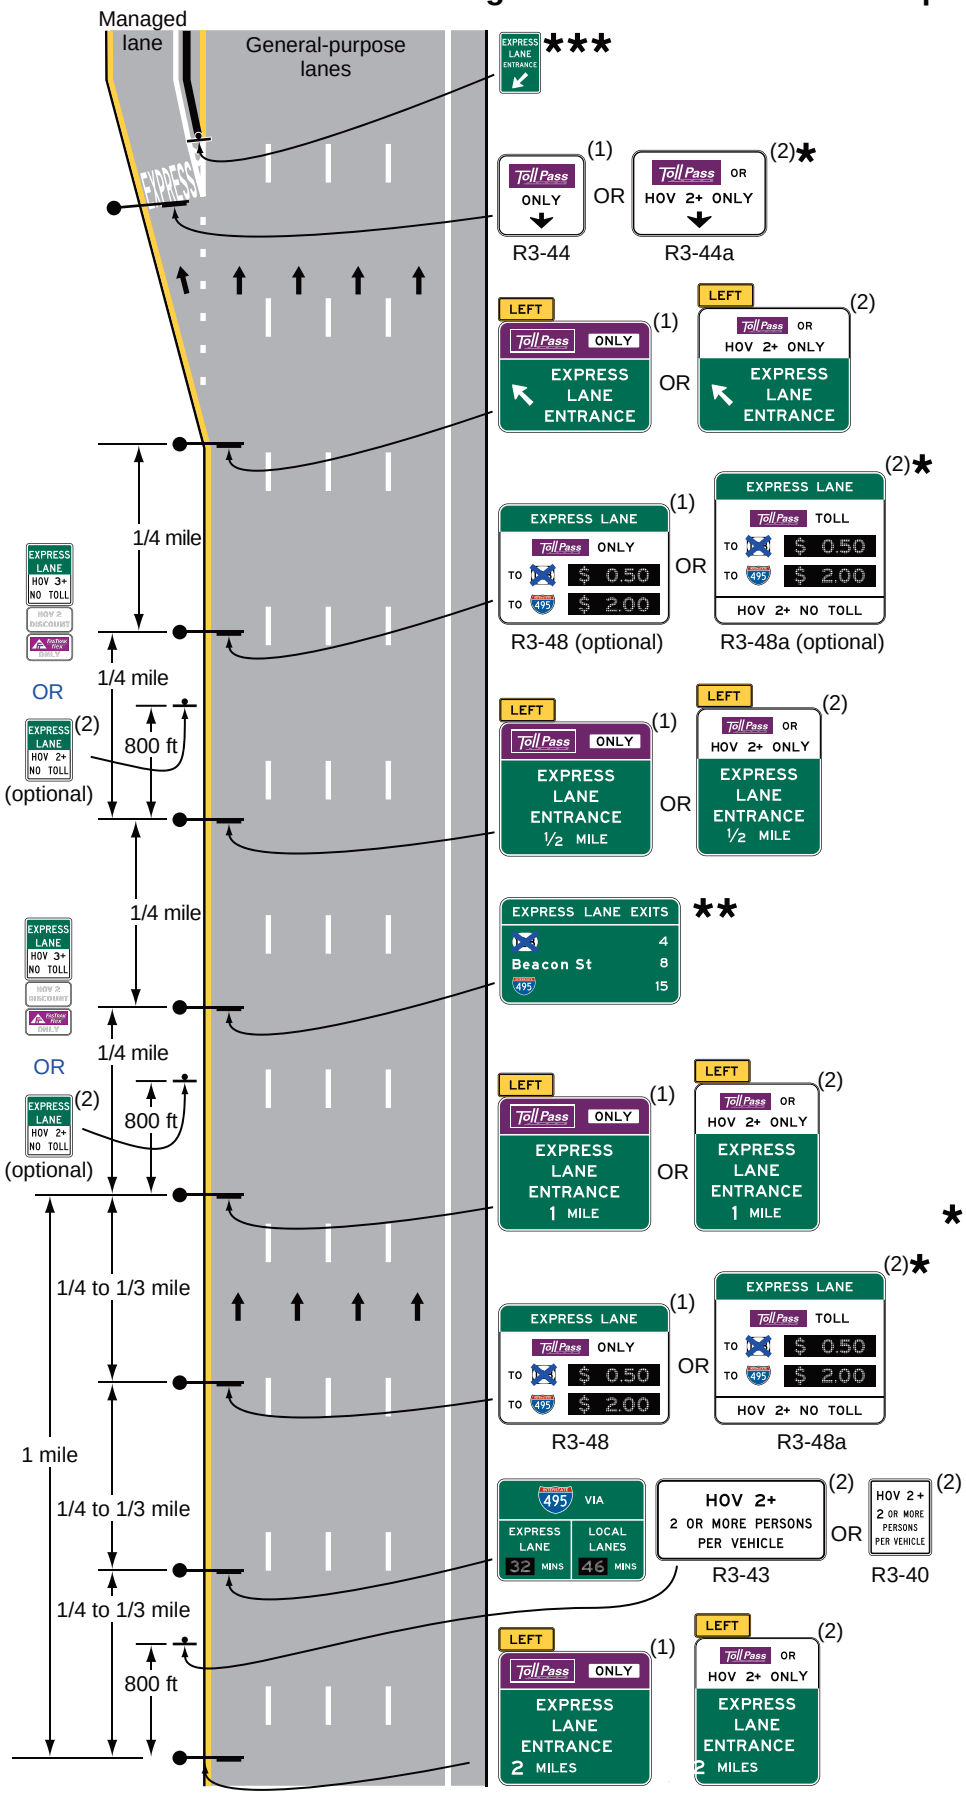


Legend

→ Direction of travel

Notes:

1. For access to a managed lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings
5. Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.

* Potential location of a Changeable Message Sign (CMS) for reversible or counter-flow operations


** For access-restricted facilities; destinations may be augmented to accompany routes on Interchange Sequence signs (see Figure 2E-10)

*** Barrier-separated facilities only

(1) All vehicles must have a registered ETC account. Toll discounts or exemptions through a registration program might be applicable for certain vehicles.

(2) All vehicles except HOVs must have a registered ETC account. If registration is required for non-toll travel by HOV traffic, case (1) signing shall be used.

# Figure 2G-22. Example of Signing for the Entrance to an Access-Restricted Priced Managed Lane Where a General-Purpose Lane Becomes the Managed Lane

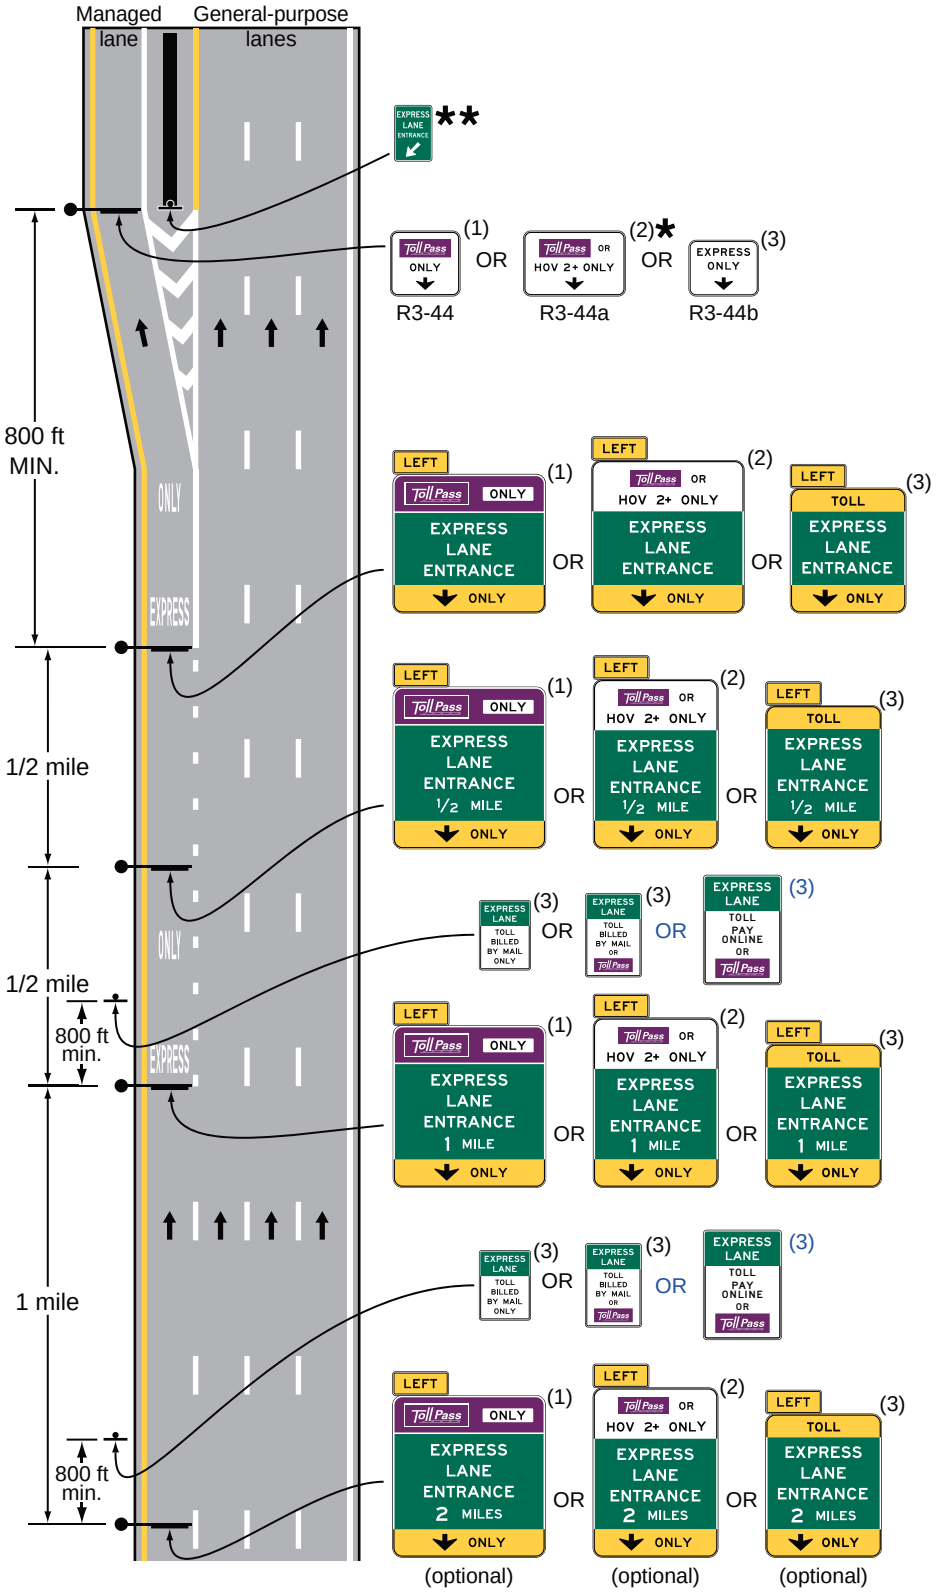


Legend

→ Direction of travel

(1) All vehicles must have a registered ETC account. Toll discounts or exemptions through a registration program might be applicable for certain vehicles.

(2) All vehicles except HOVs must have a registered ETC account. If registration is required for non-toll travel by HOV traffic, case (1) signing shall be used.

(3) No registration in an ETC account is required. Tolls are billed by mail or online to vehicle owners through a license plate recognition system. ETC account payment might also be accepted by the system.


* Potential location of a Changeable Message Sign (CMS) for reversible or counter-flow operations

** Barrier-separated facilities only

Notes:

1. For access to a managed lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings
5. See Figure 2G-21 for additional signing
6. Pricing signs not shown.

# Figure 2G-23. Example of Signing for an Intermediate Entry to a Barrier-Separated or Buffer-Separated Priced Managed Lane

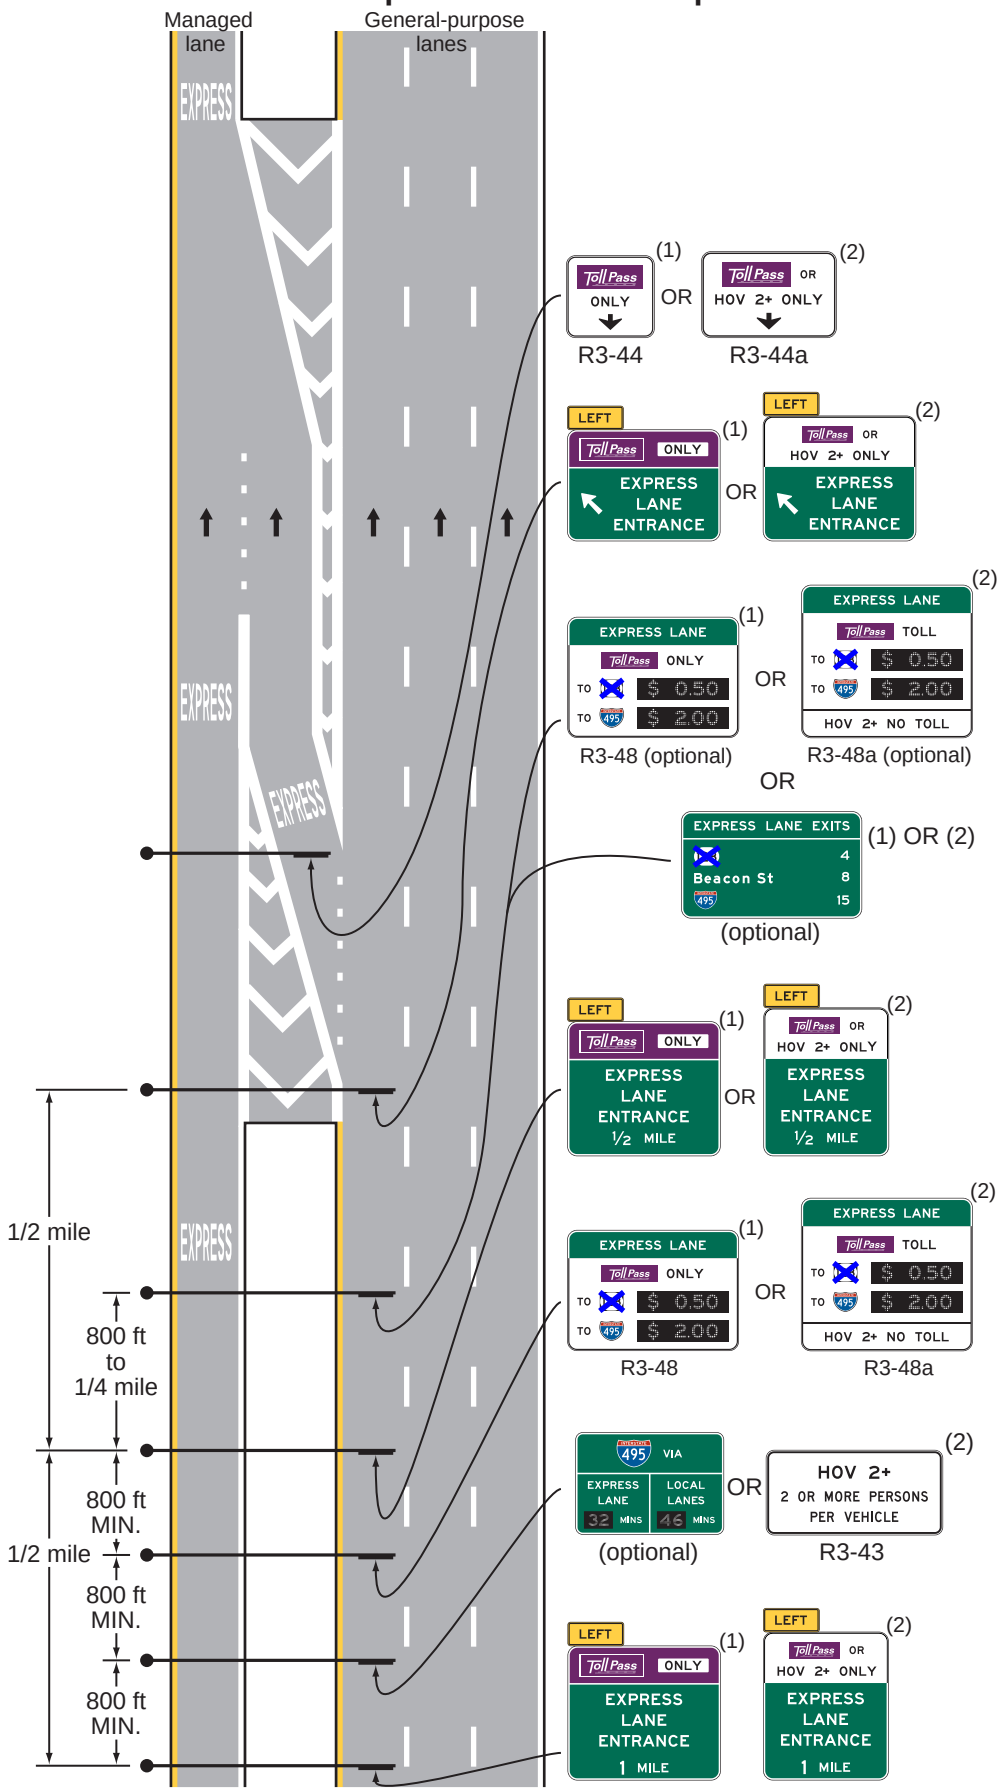



Notes:

1. For access to a managed lane on the right-hand side, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. The minimum vehicle occupancy requirement and hours of operation on the sign may vary for each facility
4. See Chapter 3E for pavement markings
5. Warning signs are not shown
6. Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.

(1) All vehicles must have a registered ETC account. Toll discounts or exemptions through a registration program might be applicable for certain vehicles.

(2) All vehicles except HOVs must have a registered ETC account. If registration is required for non-toll travel by HOV traffic, case (1) signing shall be used.

# Figure 2G-24. Example of Signing for the Intermediate Entry to, Egress from, and End of Access-Restricted Priced Managed Lanes

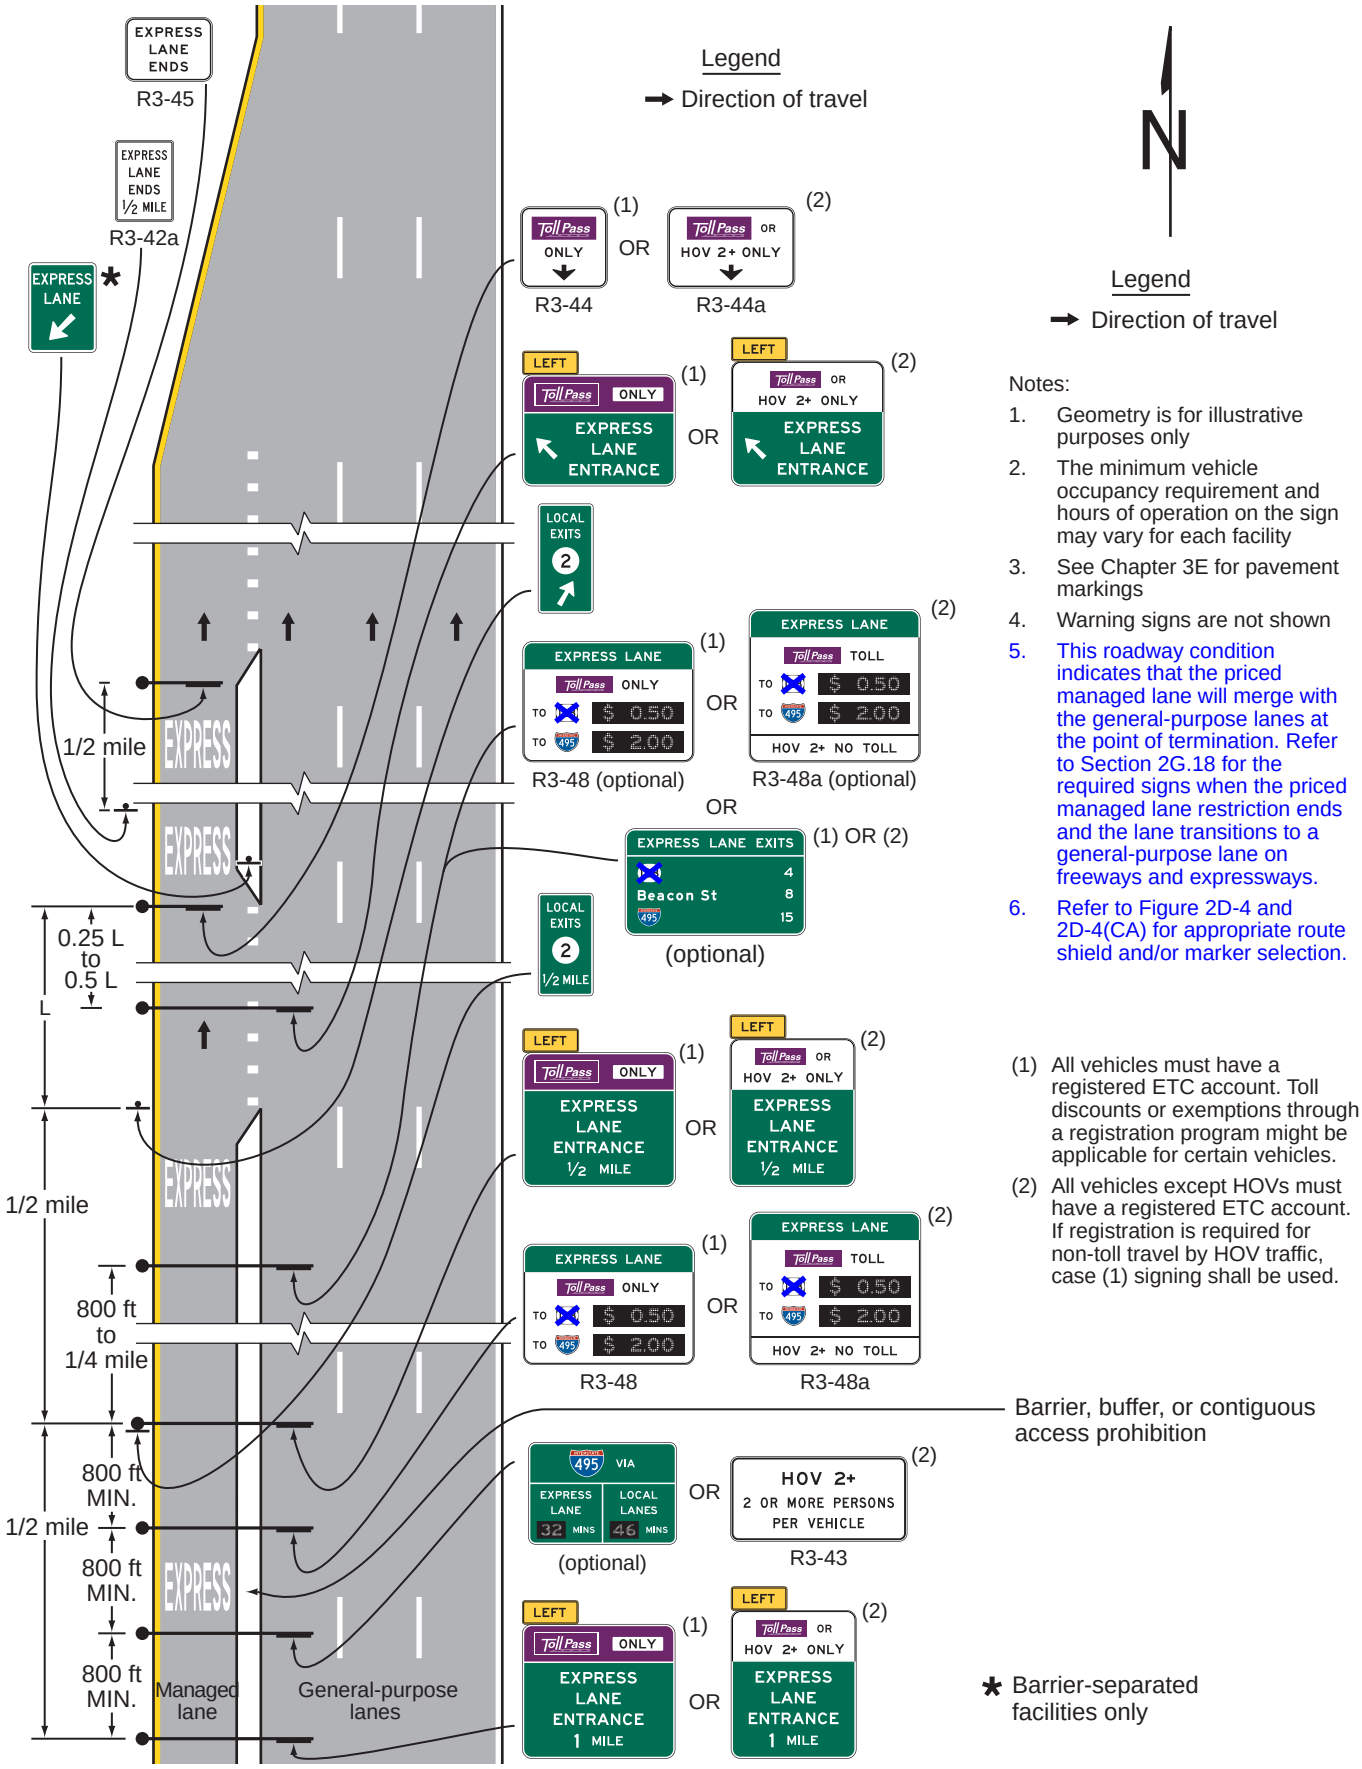

## Figure 2G-25. Example of an Exit Destinations Sign for a Managed Lane





Note: The acronym "JCT" should be added adjacent to route shields, where applicable. Refer to Figure 2E-50 for reference.

## Figure 2G-26. Example of a Comparative Travel Time Information Sign for Preferential or Managed Lanes




Note: CMS elements shall be used for the numerals displayed for the estimated travel times.


# Figure 2G-27. Examples of Guide Signs for an Intermediate Egress from a Barrier-Separated or Buffer-Separated Managed Lane

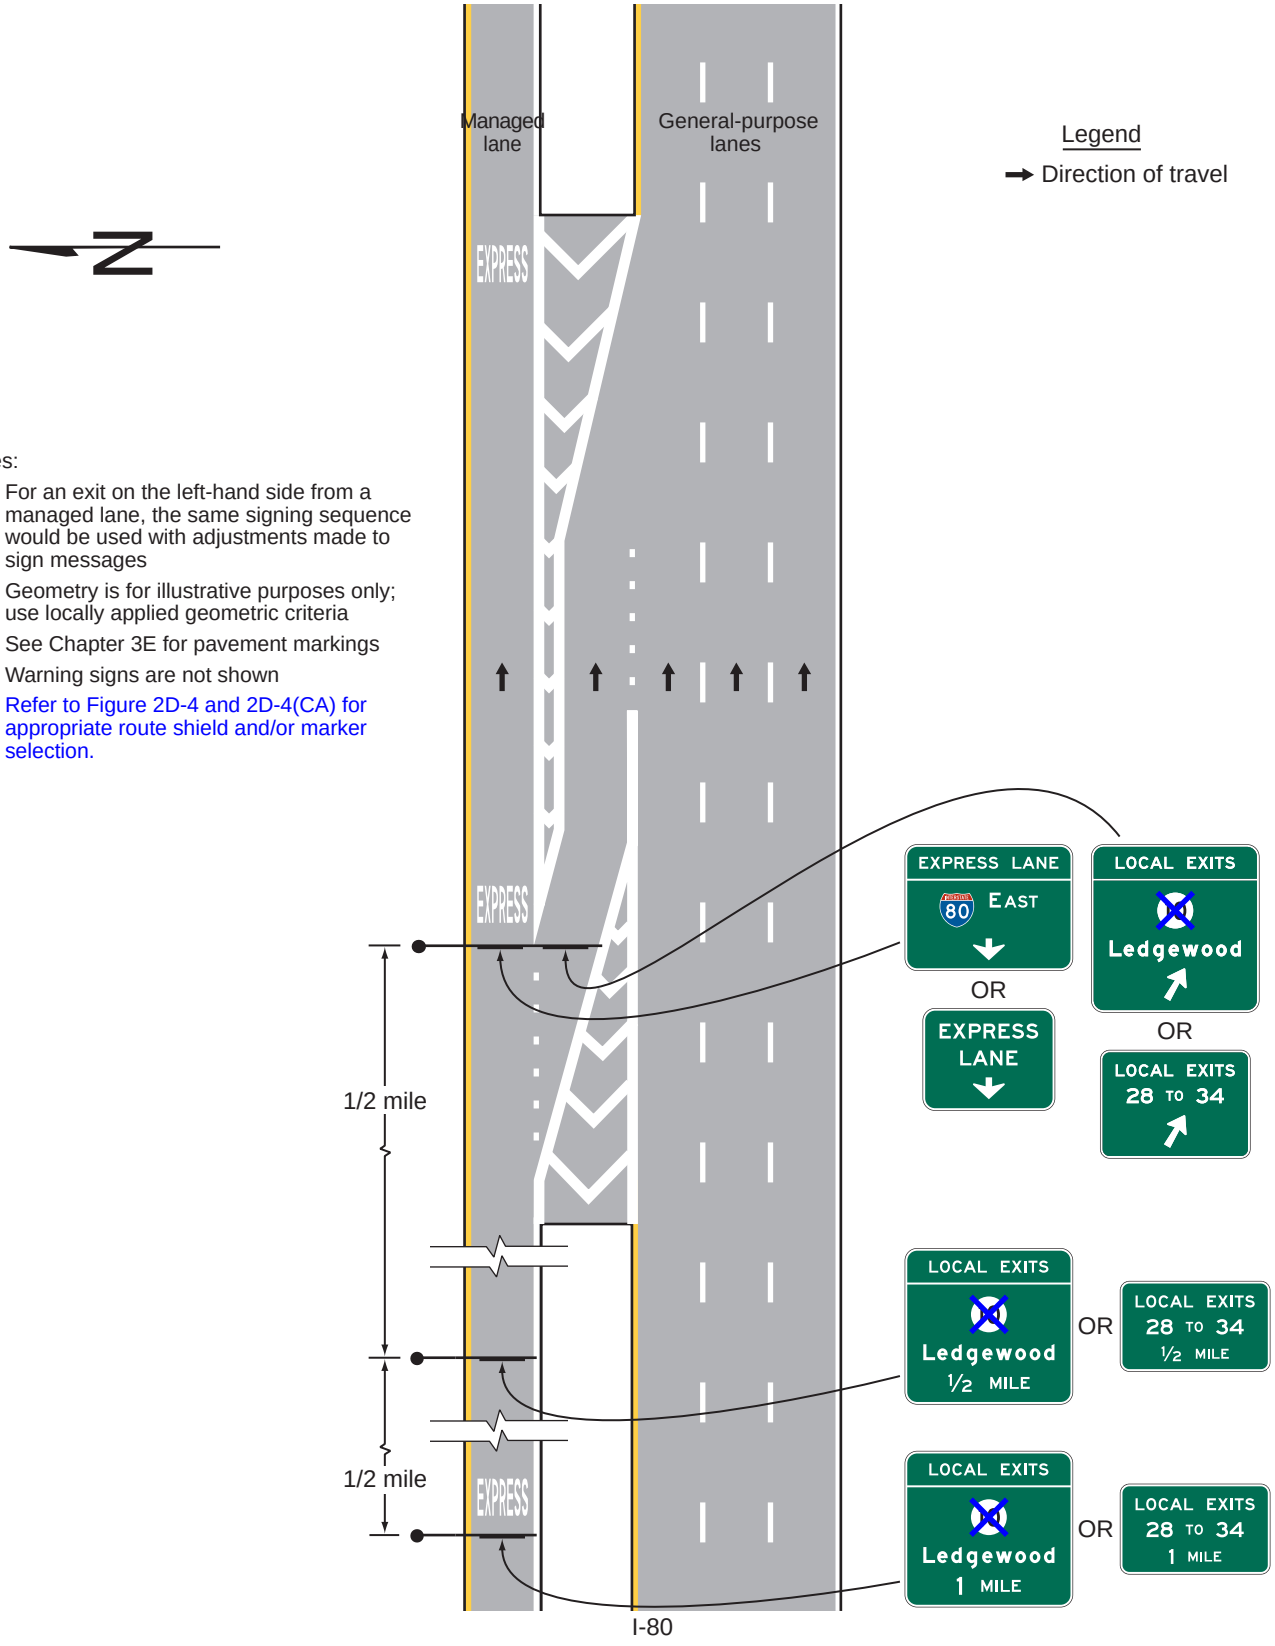



Notes:

1. For an exit on the left-hand side from a managed lane, the same signing sequence would be used with adjustments made to sign messages
2. Geometry is for illustrative purposes only; use locally applied geometric criteria
3. See Chapter 3E for pavement markings
4. Warning signs are not shown
5. Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.


# Figure 2G-28. Examples of Guide Signs for Direct Managed Lane Entrance and Exit Ramps

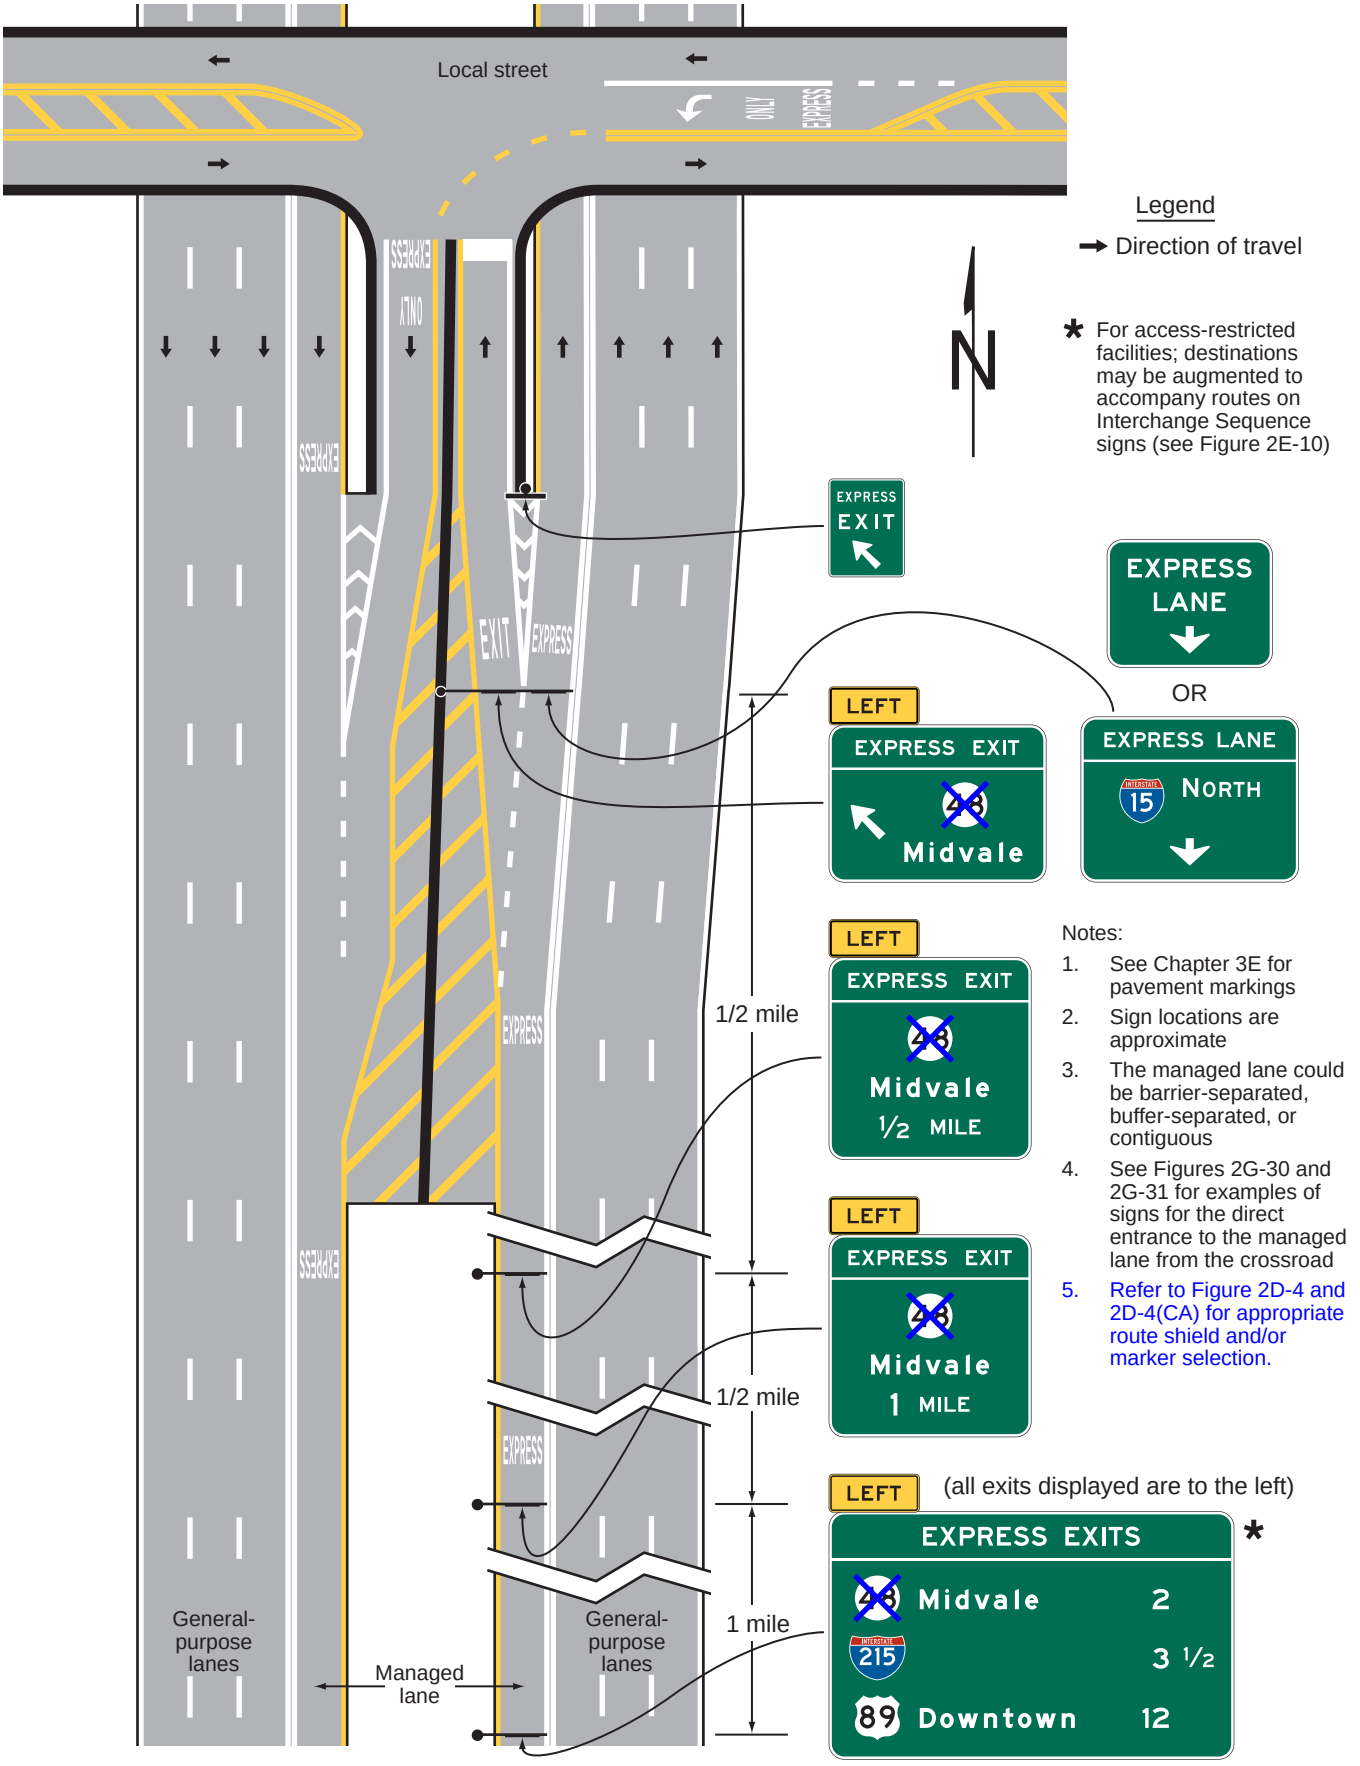


## Figure 2G-29. Examples of Guide Signs for a Direct Access Ramp between Managed Lanes on Separate Freeways

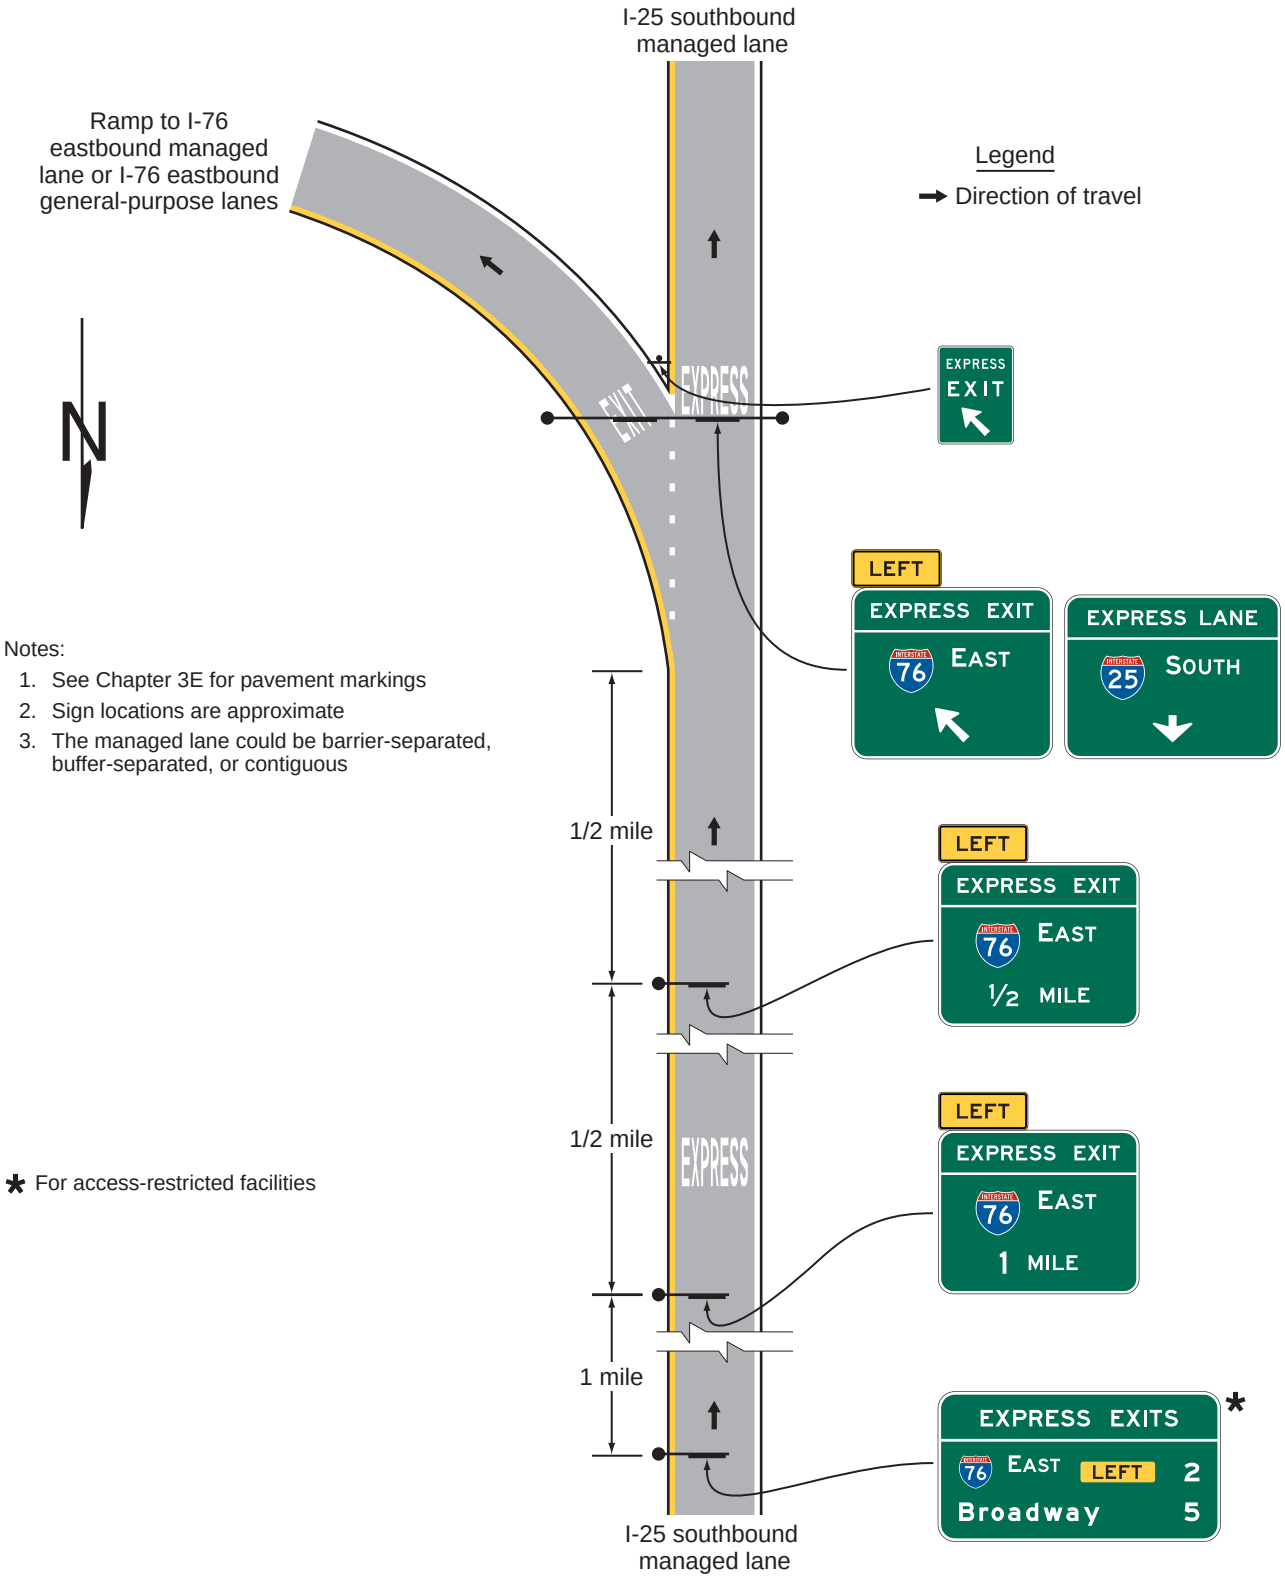

## Figure 2G-30. Examples of Guide Signs for a Direct Entrance Ramp to a Priced Managed Lane and Trailblazing to a Nearby Entrance to the General-Purpose Lanes

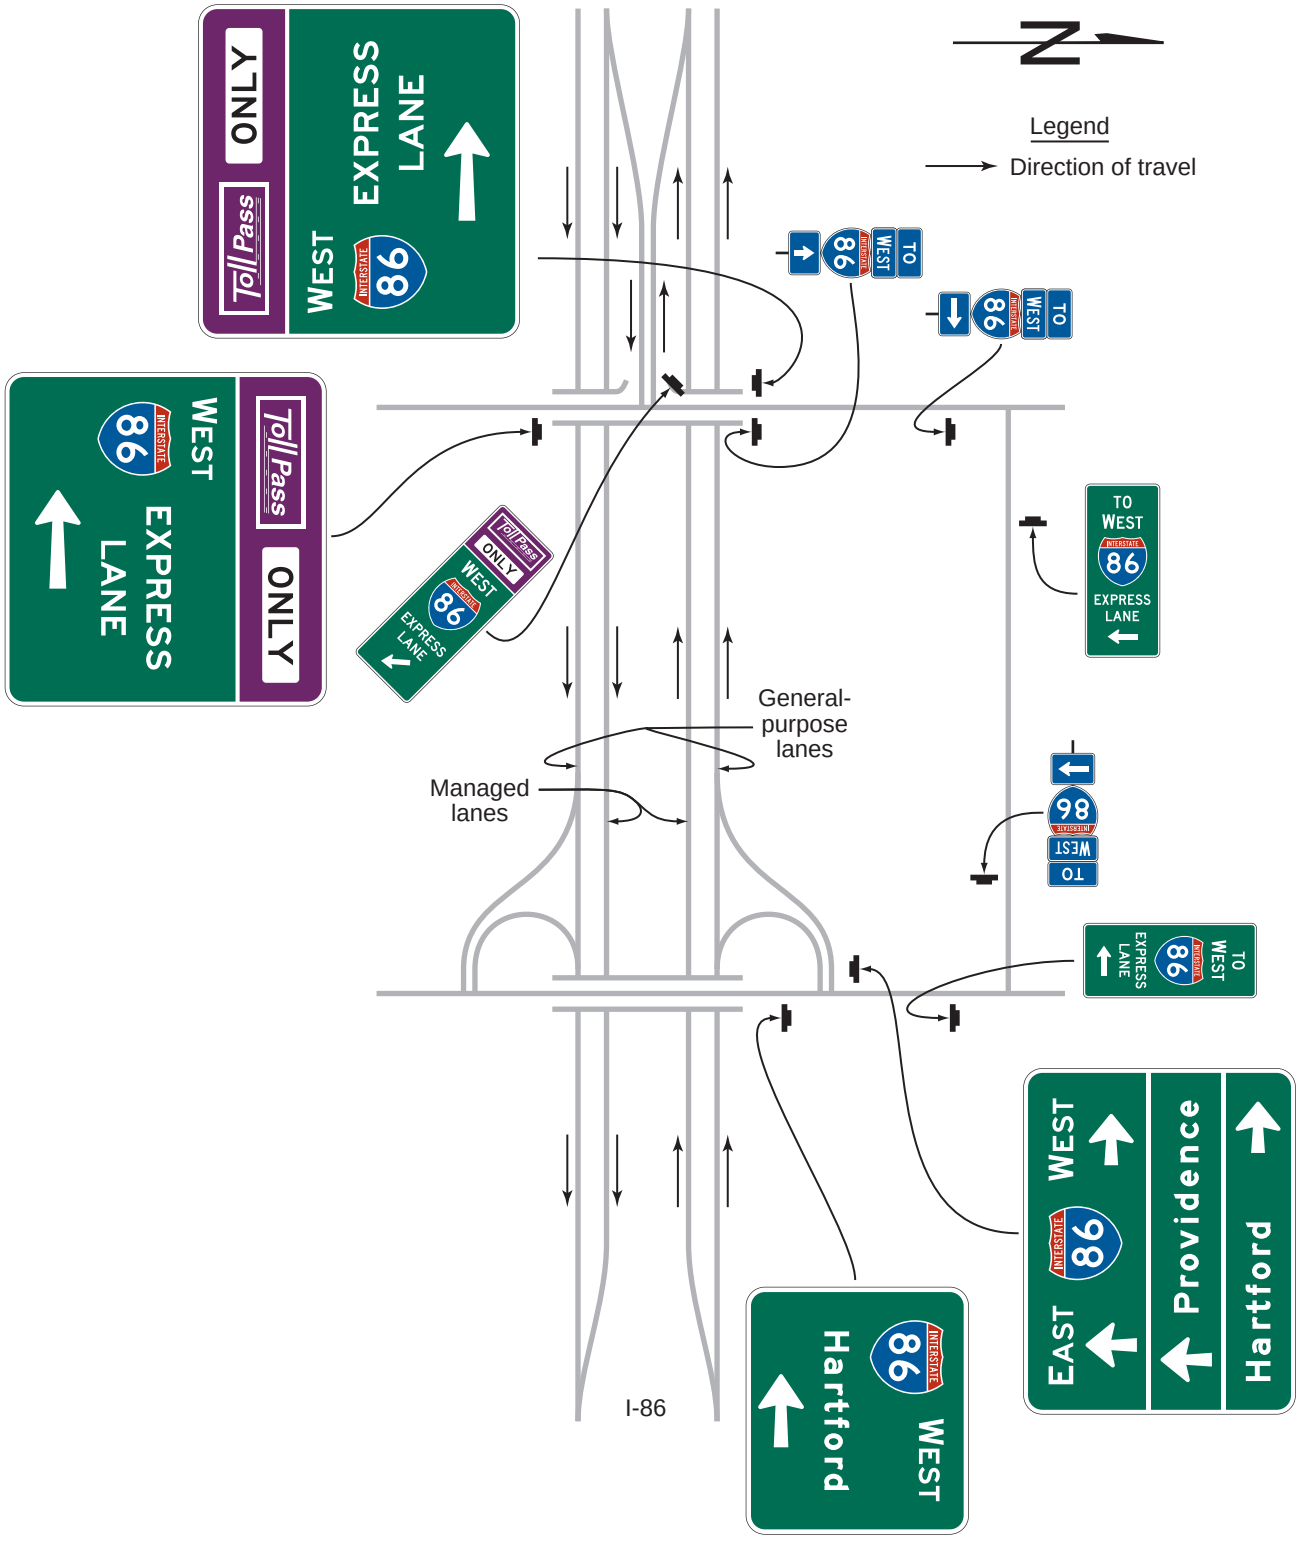


## Figure 2G-31. Examples of Guide Signs for Separate Entrance Ramps to General-Purpose and Priced Managed Lanes from the Same Crossroad

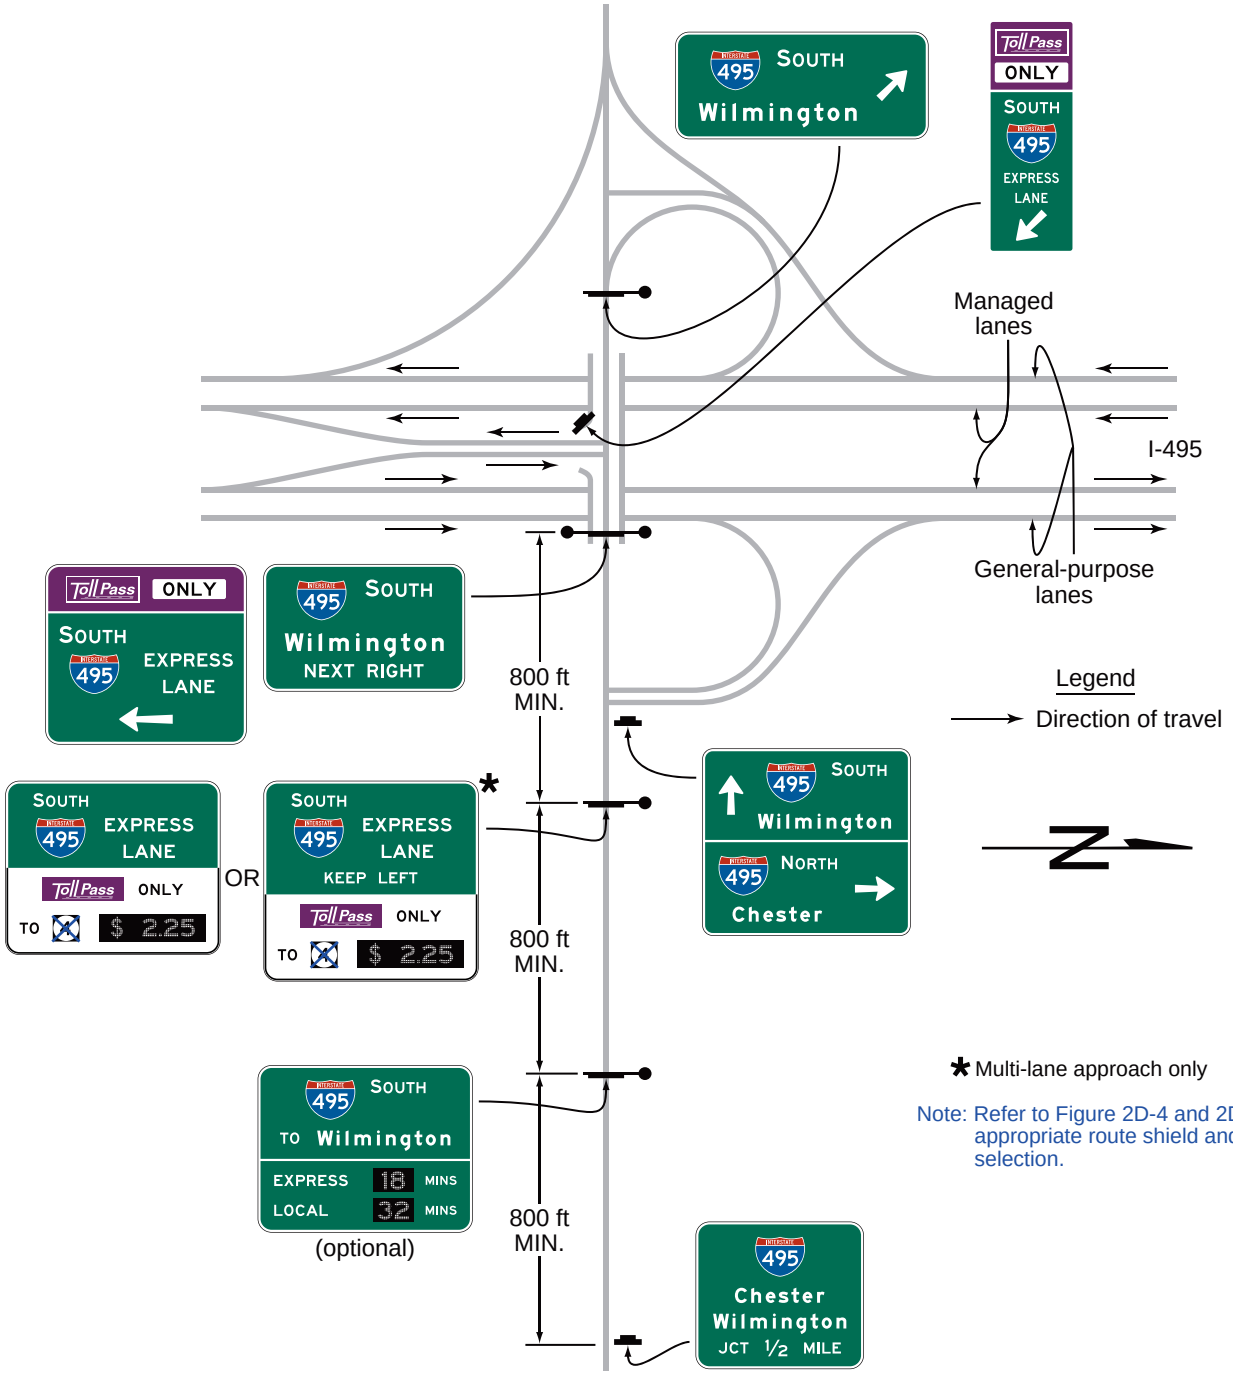


Note: Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.

## Figure 2G-32. Examples of Signing for Part-Time Travel on a Shoulder (Sheet 1 of 4)

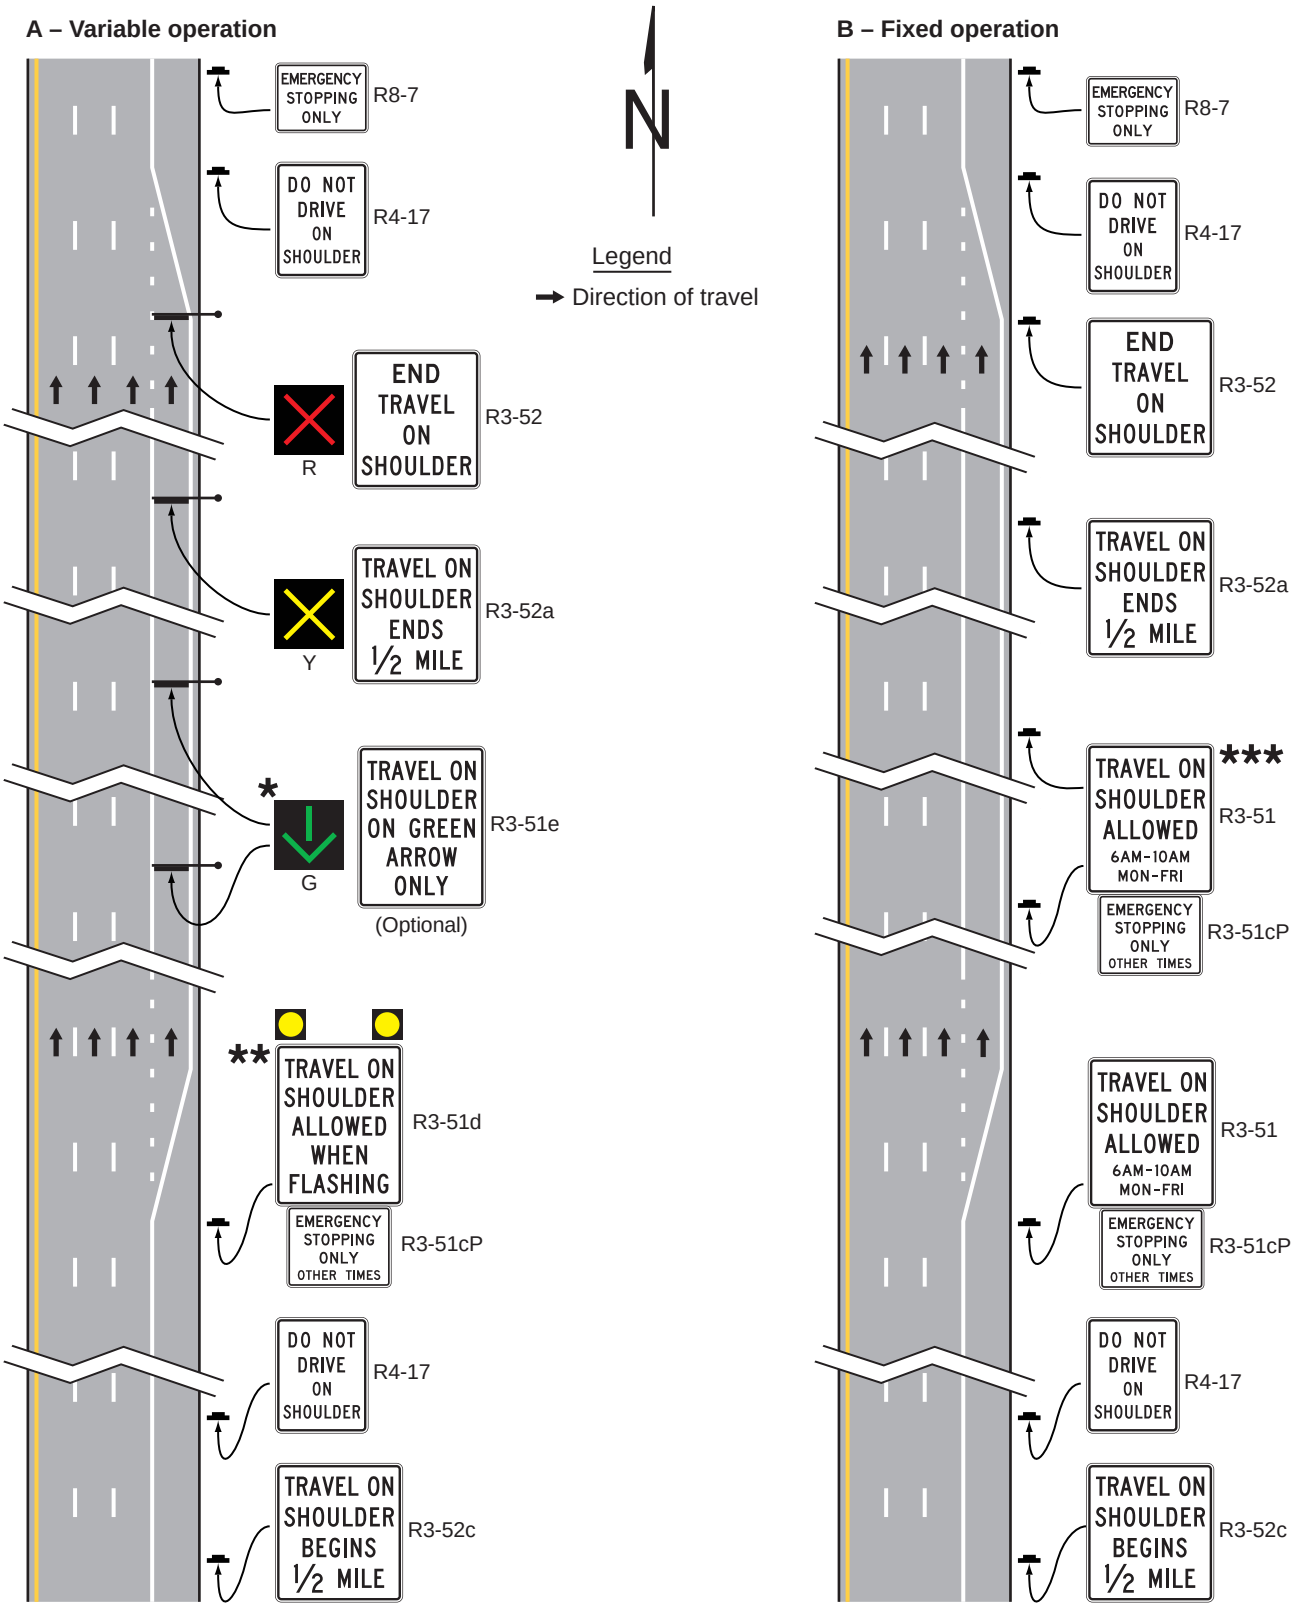


**** Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

Note: Consideration should be given to using blank-out signs in place of the R3-51 and R3-52 series conventional signs for part-time operations.


* Lane-use control signals (see Chapter 4T) located every 1/2 mile or less to reaffirm shoulder travel allowed (DOWNWARD GREEN ARROW) or prohibited (RED X).

** A post-mounted TRAVEL ON SHOULDER ALLOWED WHEN FLASHING sign (R3-51d) with beacons may be used lieu of lane-use control signals at the same intervals ****

*** The R3-51 sign is located every 1/2 mile or less to affirm when travel on shoulder is allowed for fixed period applications.

## Figure 2G-32. Examples of Signing for Part-Time Travel on a Shoulder (Sheet 2 of 4)

**C – Signing at interchange ramps**

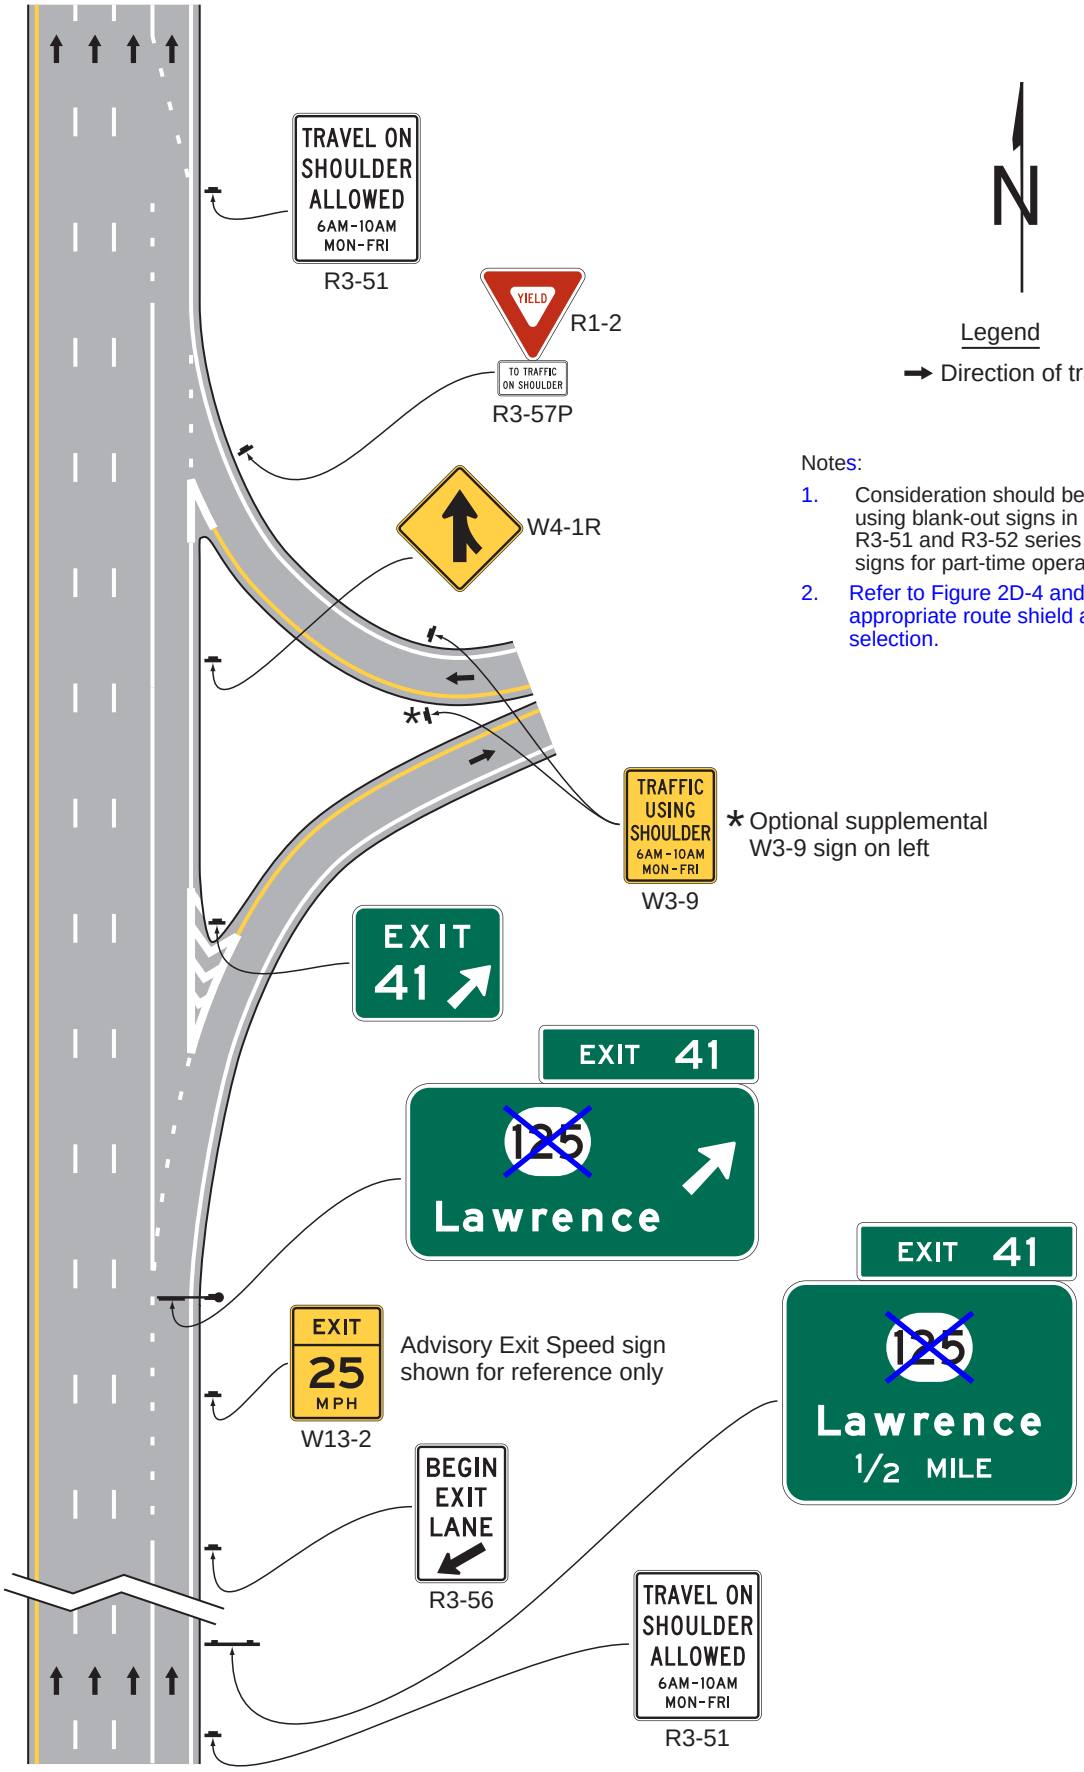



Notes:

1. Consideration should be given to using blank-out signs in place of the R3-51 and R3-52 series conventional signs for part-time operations.
2. Refer to Figure 2D-4 and 2D-4(CA) for appropriate route shield and/or marker selection.

## Figure 2G-32. Examples of Signing for Part-Time Travel on a Shoulder (Sheet 3 of 4)

**D – Emergency turnout signing for travel on shoulder applications**

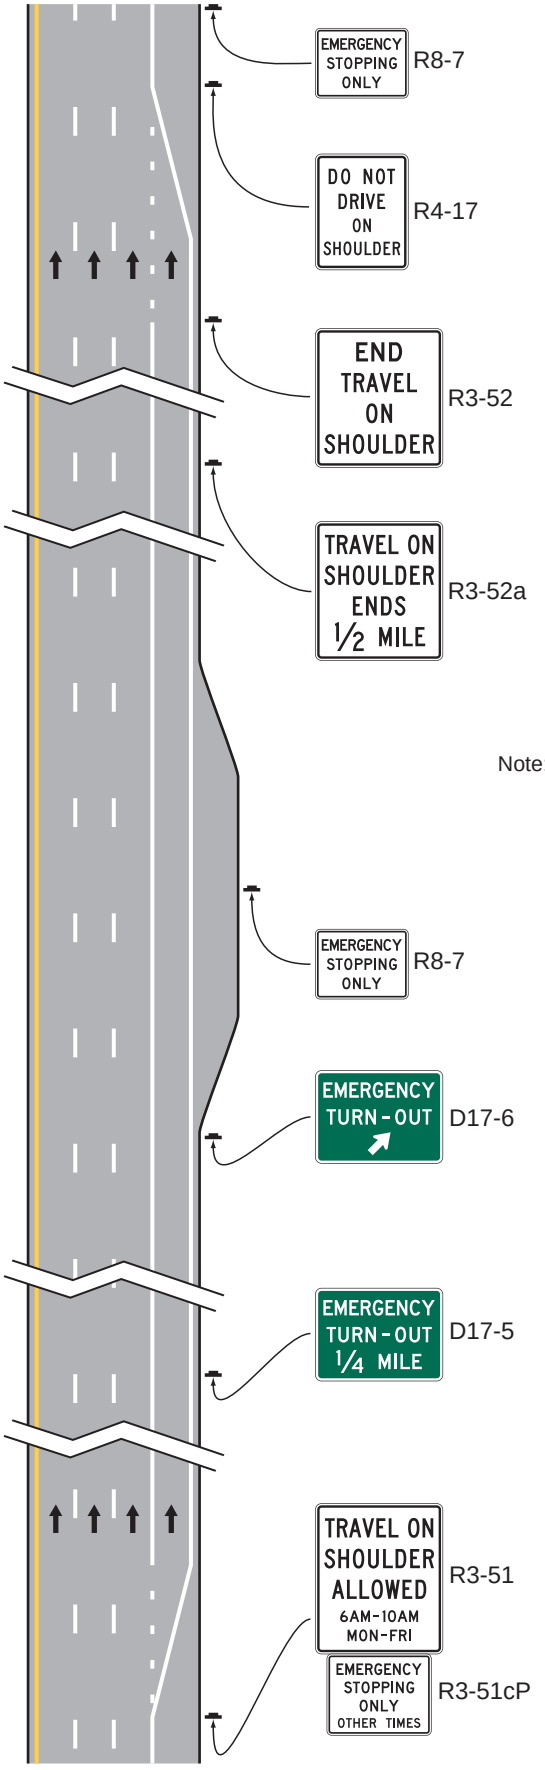






Legend

→ Direction of travel


Note: Consideration should be given to using blank-out signs in place of the R3-51 and R3-52 series conventional signs for part-time operations.

## Figure 2G-32. Examples of Signing for Part-Time Travel on a Shoulder (Sheet 4 of 4)

**E – Travel on shoulder ends at an interchange exit ramp**

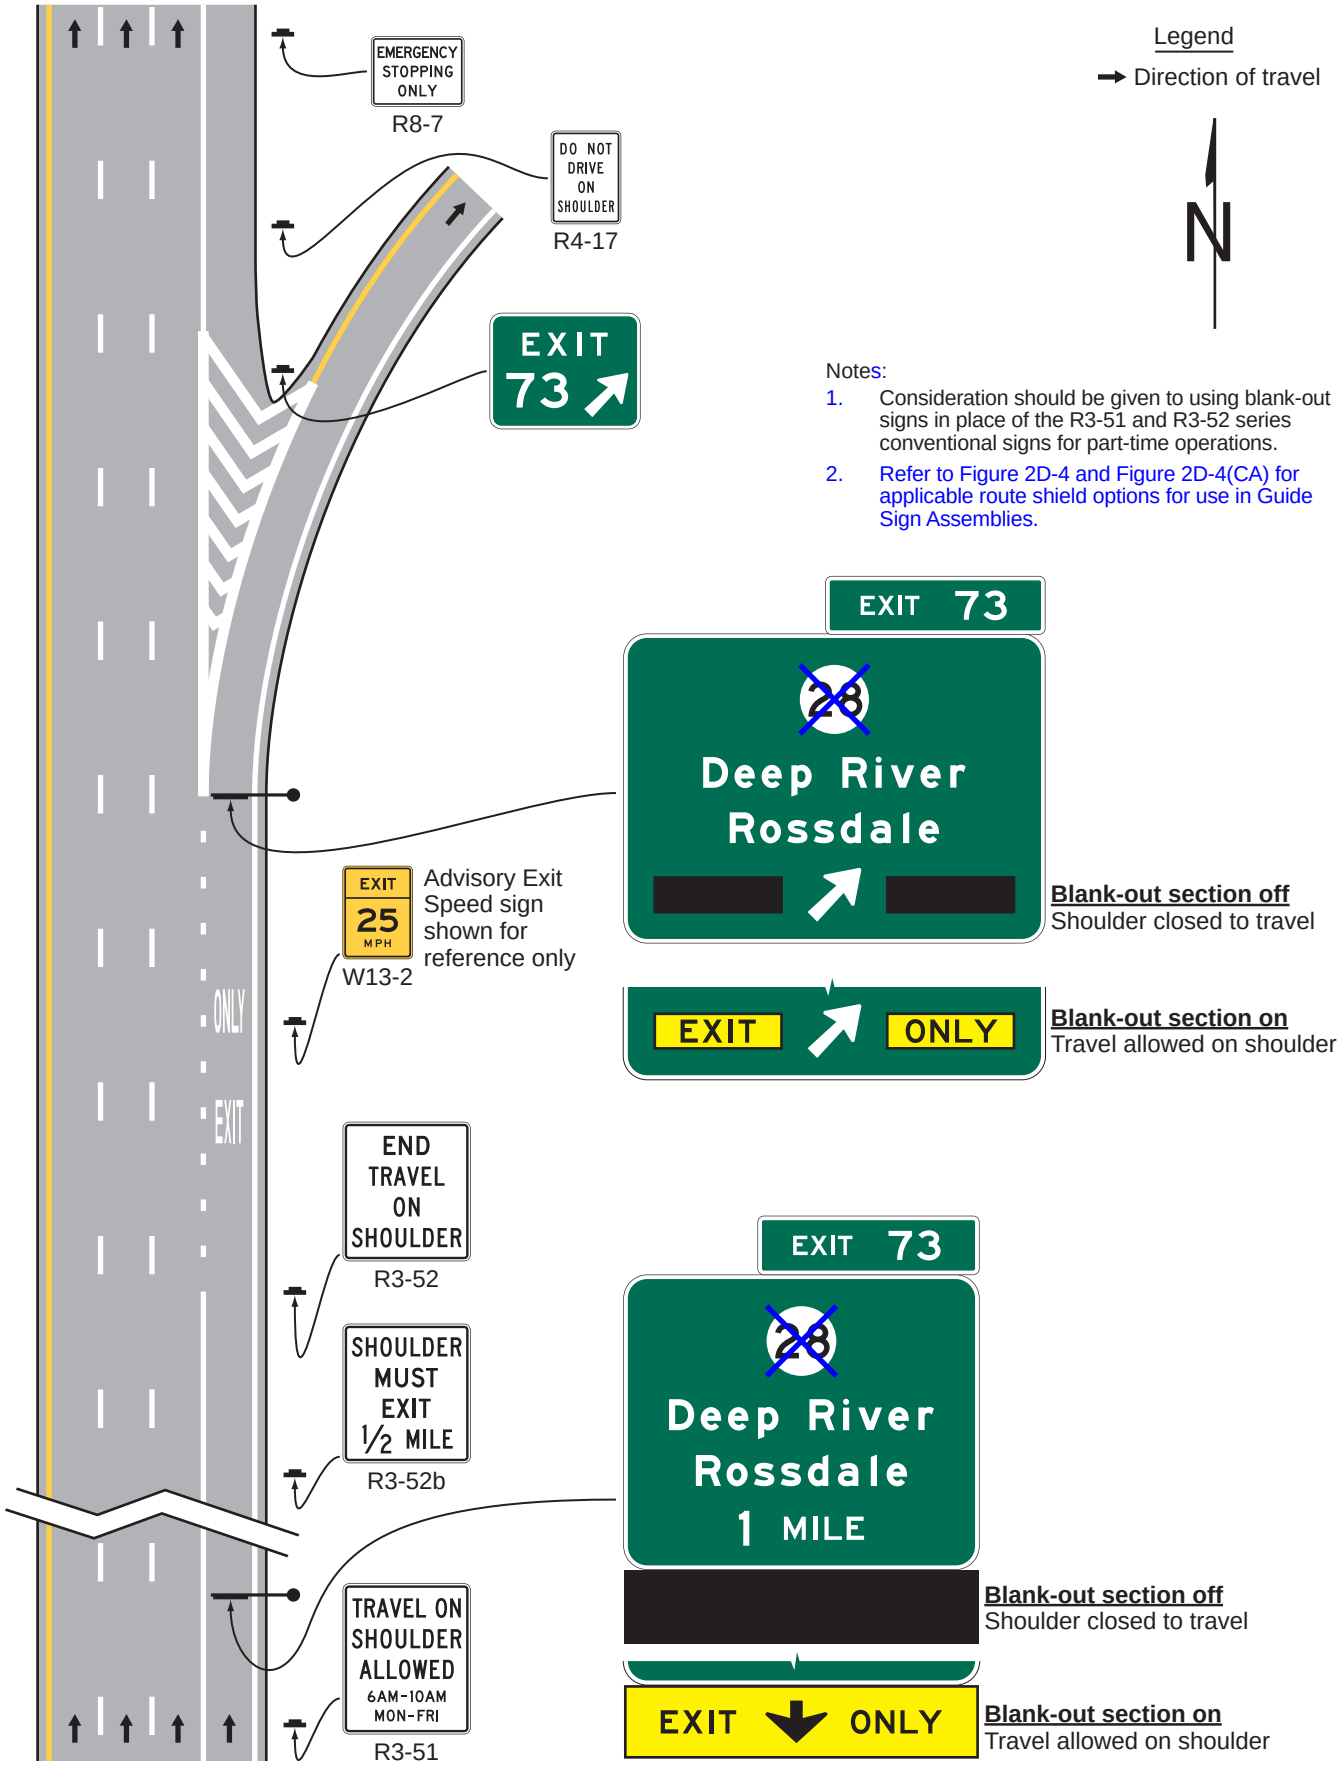


## *Figure 2G-32(CA). Examples of Signing for Part-Time Travel on a Shoulder*

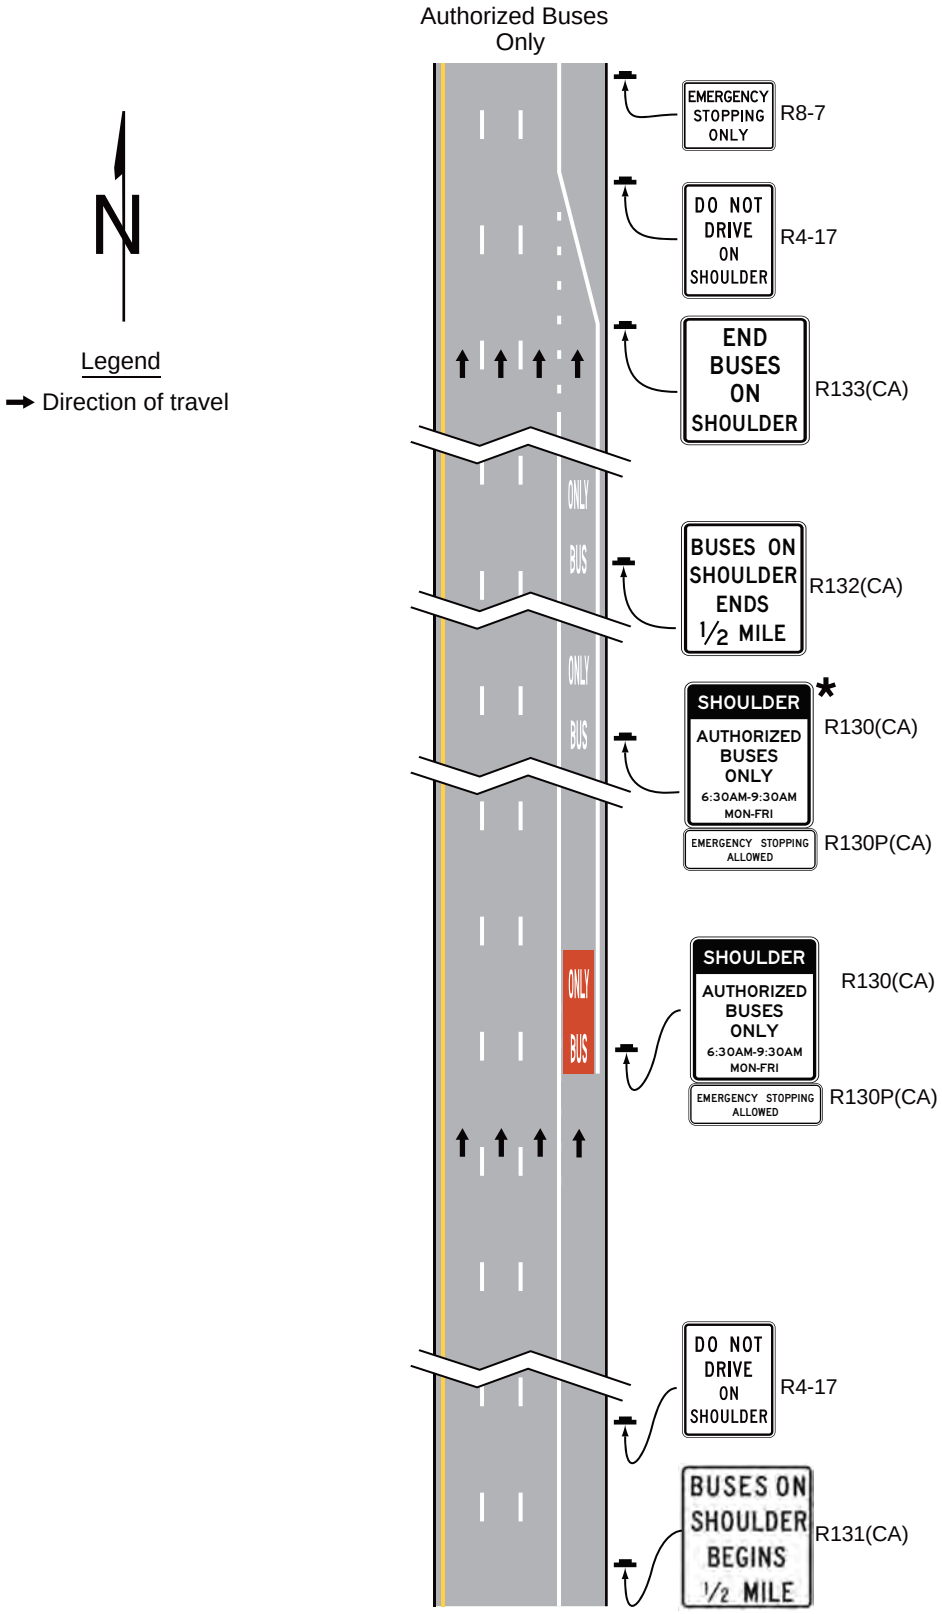


Note: Consideration should be given to using blank-out signs in place of the R130(CA), R131(CA), R132(CA) and R133(CA) conventional signs for part-time operations.

* The R130(CA) sign is located every 1/2 mile or less to affirm when travel on shoulder is allowed for fixed period applications.

## Figure 2G-33. Example of Lane-Use Control Signals and Variable Speed Limit Signs for Active Lane Management During an Incident

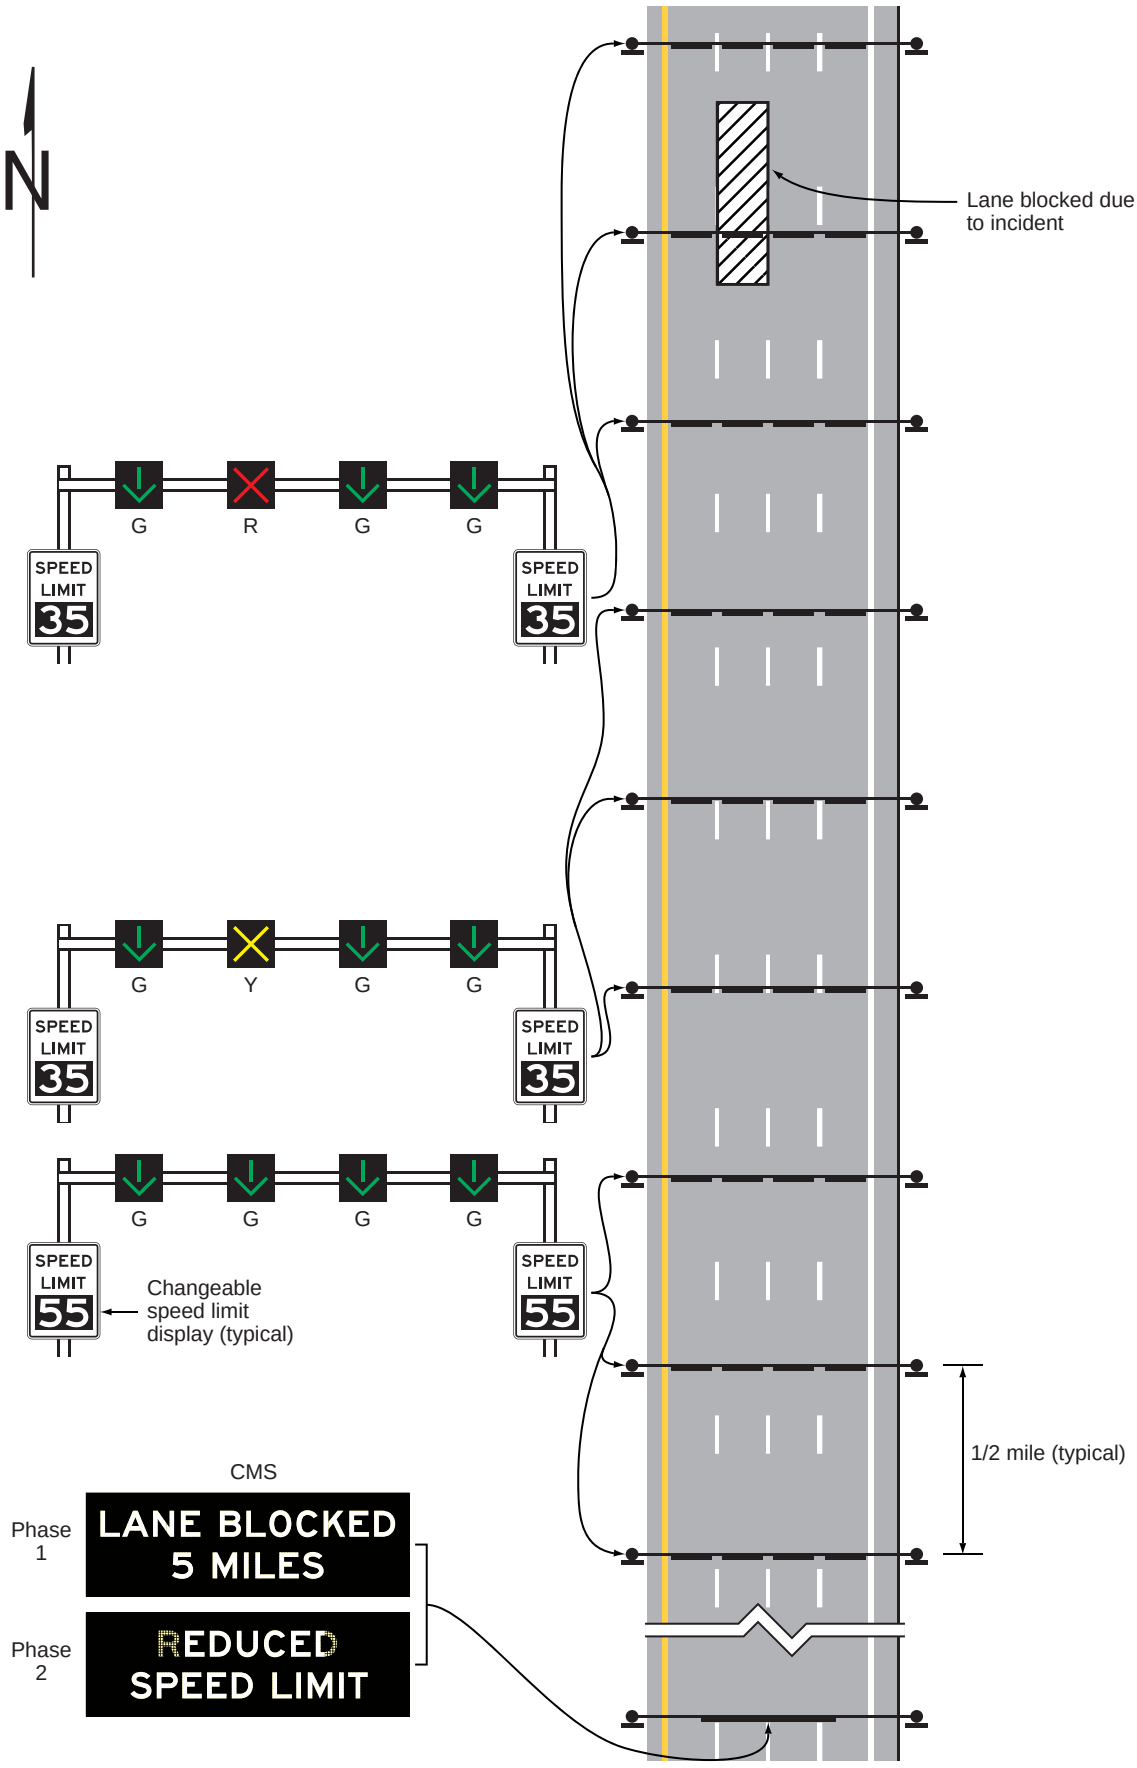

## *Figure 2G-101(CA). California Signs and Plaques for Part-Time Transit Bus on Shoulder*

### A. Regulatory Signs




R130(CA)




R130P(CA)




R131(CA)





R132(CA)




R133(CA)

### B. Warning Sign




W130(CA)

## Table 2G-1. Managed and Preferential Lanes Sign and Plaque Minimum Sizes (Sheet 1 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | |
| Preferential Lane Vehicle Occupancy Definition (post-mounted) | R3-10,~~10a~~ | 2G.04 | 30 x 42 | 30 x 42 | 36 x 60 | 78 x 96* | 78 x 96 |
| Preferential Lane Operation - High-Occupancy Vehicles (post-mounted) | R3-11 series | 2G.05 | 30 x 42 | 30 x 42 | 36 x 60 | 78 x 96* | 78 x 96 |
| Motorcycles Allowed (plaque) | R3-11hP | 2G.05 | 30 x 15 | 30 x 15 | 36 x 18 | 78 x 36* | 78 x 36 |
| Preferential Lane Ahead or Ends - High-Occupancy Vehicles (post-mounted) | R3-12, 12a, 12b, 12c, 12d, 12e | 2G.06 2G.07 | 30 x 42 | 30 x 42 | 36 x 60 | 48 x 84* | 48 x 84 |
| Preferential Lane Ahead or Ends (post-mounted) | R3-12f, 12g | 2G.06 2G.07 | 30 x 36 | 30 x 36 | 36 x 48 | 48 x 60* | 48 x 60 |
| Preferential Lane Ends (post-mounted) | R3-12h | 2G.07 | 36 x 48 | 36 x 48 | 48 x 66* | 60 x 84* | 60 x 84 |
| Preferential Lane Vehicle Occupancy Definition (overhead) | R3-13,13a | 2G.04 | 66 x 36 | 66 x 36 | 84 x 48 | 144 x 78 | 144 x 78 |
| HOV Lane Operation (overhead) | R3-14,14a | 2G.05 | 72 x 60 | 72 x 60 | 96 x 72 | 144 x 108 | 144 x 108 |
| HOV Lane Operation (overhead) | R3-14b | 2G.05 | 72 x 60 | 72 x 60 | 96 x 72 | 120 x 96 | 120 x 96 |
| Preferential Lane Operation (overhead) | R3-14c | 2G.05 | 90 x 60 | 90 x 60 | 108 x 72 | 156 x 102 | 156 x 102 |
| HOV Lane Ahead (overhead) | R3-15 | 2G.06 | 66 x 36 | 66 x 36 | 84 x 48 | 102 x 60 | 102 x 60 |
| HOV Lane Begins XX Miles (overhead) | R3-15a | 2G.06 | 78 x 48 | 114 x 72 | 144 x 84 | 150 x 108 | 150 x 108 |
| HOV Lane Ends (overhead) | R3-15b,15c | 2G.07 | 66 x 36 | 66 x 36 | 84 x 48 | 102 x 60 | 102 x 60 |
| Preferential Lane Ahead or Ends (overhead) | R3-15d,15e | 2G.06 2G.07 | 42 x 36 | 42 x 36 | 54 x 48 | 72 x 60 | 72 x 60 |
| Priced Managed Lane Vehicle Occupancy Definition (post-mounted) | R3-40 | 2G.18 | — | — | 54 x 66* | 54 x 66* | 66 x 78 |
| Priced Managed Lane Ends (post-mounted) | R3-42 | 2G.18 | — | — | 48 x 60* | 48 x 60* | 60 x 78 |
| Priced Managed Lane Ends Advance (post-mounted) | R3-42a | 2G.18 | — | — | 48 x 66* | 48 x 66* | 60 x 84 |
| Priced Managed Lane Restriction Ends (post-mounted) | R3-42b | 2G.18 | — | — | 48 x 60* | 48 x 60* | 60 x 78 |
| Priced Managed Lane Restriction Ends Advance (post-mounted) | R3-42c | 2G.18 | — | — | 48 x 66* | 48 x 66* | 60 x 84 |
| Priced Managed Lane Vehicle Occupancy Definition | R3-43 | 2G.18 | — | — | 138 x 66 | 138 x 66 | — |
| Priced Managed Lane Operation (overhead) | R3-44 | 2G.18 | — | — | 90 x 84 | 90 x 84 | — |
| Priced Managed Lane Operation (overhead) | R3-44a | 2G.18 | — | — | 132 x 84 | 132 x 84 | — |
| Priced Managed Lane Operation (overhead) | R3-44b | 2G.18 | — | — | 90 x 72 | 90 x 72 | — |
| Priced Managed Lane Ends (overhead) | R3-45 | 2G.18 | — | — | 90 x 66 | 90 x 66 | — |
| Priced Managed Lane Restriction Ends (overhead) | R3-45a | 2G.18 | — | — | 114 x 66 | 114 x 66 | — |
| Priced Managed Lane Toll Rate | R3-48 | 2G.18 | — | — | Varies | Varies | — |
| Priced Managed Lane Toll Rate | R3-48a | 2G.18 | — | — | Varies | Varies | — |
| Part-Time Travel on Shoulder Operation | R3-51 | 2G.21 | — | — | 66 x 78* | 66 x 78* | — |
| No Trucks (plaque) | R3-51aP | 2G.21 | — | — | 66 x 12* | 66 x 12* | — |
| No Trucks or Buses (plaque) | R3-51bP | 2G.21 | — | — | 66 x 24* | 66 x 24* | — |
| Emergency Stopping Only Other Times (plaque) | R3-51cP | 2G.21 | — | — | 54 x 42* | 54 x 42* | — |

## Table 2G-1. Managed and Preferential Lanes Sign and Plaque Minimum Sizes (Sheet 2 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | |
| Part-Time Travel on Shoulder Variable Operation | R3-51d | 2G.21 | — | — | 66 x 84* | 66 x 84* | — |
| Part-Time Travel on Shoulder on Green Arrow | R3-51e | 2G.24 | — | — | 66 x 84* | 66 x 84* | — |
| Part-Time Travel on Shoulder Ends | R3-52 | 2G.21 | — | — | 66 x 72* | 66 x 72* | — |
| Part-Time Travel on Shoulder Ends Advance | R3-52a | 2G.21 | — | — | 66 x 72* | 66 x 72* | — |
| Shoulder Must Exit Advance | R3-52b | 2G.21 | — | — | 66 x 72* | 66 x 72* | — |
| Part-Time Travel on Shoulder Begins Advance | R3-52c | 2G.21 | — | — | 66 x 72* | 66 x 72* | — |
| Begin Exit Lane | R3-56 | 2G.21 | — | — | 48 x 72* | 48 x 72* | — |
| To Traffic on Shoulder (plaque) | R3-57P | 2G.21 | — | — | 36 x 18 | 36 x 18 | — |
| Traffic Using Shoulder | W3-9 | 2G.22 | — | — | 36 x 48 | 48 x 60 | — |
| High-Occupancy Vehicles (plaque) | W16-11P | 2G.09 | 24 x 12 | 24 x 12 | 30 x 18 | 30 x 18 | 30 x 18 |
| Preferential Lane Entrance Gore | E8-1 | 2G.10 | — | — | 48 x 96 | 48 x 96 | — |
| Preferential Lane Intermediate Entrance Gore | E8-1a | 2G.10 | — | — | 48 x 84 | 48 x 84 | — |
| Preferential Lane Entrance Direction (overhead) | E8-2 | 2G.10 | — | — | 228 x 72 | 228 x 72 | — |
| Preferential Lane Entrance Direction (post-mounted) | E8-2a | 2G.10 | — | — | 186 x 108 | 186 x 108 | — |
| Preferential Lane Entrance Advance | E8-3 | 2G.10 | — | — | 186 x 96 | 186 x 96 | — |
| Preferential Lane Direct Exit Gore | E8-4 | 2G.15 | — | — | 60 x 78* | 60 x 78* | — |
| Preferential Lane Intermediate Egress Direction | E8-5 | 2G.13 | — | — | Varies x 90 | Varies x 90 | — |
| Preferential Lane Intermediate Egress Advance | E8-6 | 2G.13 | — | — | Varies x 84 | Varies x 84 | — |

Notes: 1. Larger signs may be used when appropriate
2. Dimensions are shown as width x height, in inches

* Smaller signs may be used or formatted for use on the median barrier

# Table 2G-1(CA). California Managed and Preferential Lane Signs and Plaques Minimum Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | |
| HOV Advance Lane Assignment | G20-10(CA) | 2G.14 | VAR x 110 | VAR x 110 | VAR x 110 | — | — |
| HOV LANE ENTRANCE | G92-1(CA) | 2G.14, 2G.19 | 36 x 36 | 36 x 36 | 48 x 42 | — | — |
| No Left Turn Specific Hours EXCEPT BUSSES AND HOV ___+ | R33B(CA) | 2G.03, 2G.102(CA) | 24 x 60 | 24 x 60 | — | — | — |
| No Left Turn WHEN METERED EXCEPT BUSES AND HOV ___+ | R33C(CA) | 2G.03, 2G.102(CA) | 24 x 60 | 24 x 60 | — | — | — |
| Specific Hours/Days (plaque) | R82aP(CA) | 2G.06 | 30 x 12 | 30 x 12 | 36 x 18 | 36 x 18 | 48 x 24 |
| Specific Hours/Days (plaque) | R82bP(CA) | 2G.06 | 30 x 24 | 30 x 24 | 36 x 24 | 36 x 24 | 48 x 36 |
| LEFT (CENTER OR RIGHT) LANE DO NOT STOP (BUSES ONLY) | R88(CA) | 2G.03, 2G.102(CA) | 30 x 30 | 30 x 30 | — | — | — |
| ALL VEHICLES STOP ON RED | R90-1(CA) | 2G.03, 2G.102(CA) | 24 x 30 | 24 x 30 | — | — | — |
| LEFT (CENTER OR RIGHT) LANE HOV ___+ OR MORE ONLY WHEN METERED (24 HOURS) | R91-1(CA) | 2G.03, 2G.102(CA) | 30 x 54 | 30 x 54 | — | — | — |
| (HOV) NO TRUCKS 2 AXLES OR MORE – NO VEHICLES WITH TRAILERS | R91-4(CA) | 2G.03, 2G.04 | 36 x 66 | 36 x 66 | 36 x 66 | 36 x 66 | 48 x 78 |
| AUTOS/PICKUPS 2 SEATERS WITH 2 PERSONS OK (plaque) | R91bP(CA) | 2G.03, 2G.04 | 30 x 18 | 36 x 18 | 36 x 18 | 36 x 18 | 48 x 24 |
| Mandatory/Optional HOV Movement Lane Control | R94(CA) | 2G.03, 2G.05 | 60 x 42 | 60 x 42 | — | — | — |
| Part-Time Bus Travel on Shoulder Operation | R130(CA) | 2G.21 | 36 x 42 | 36 x 42 | 42 x 60* | 78 x 90* | 78 x 90 |
| EMERGENCY Stopping Allowed (plaque) | R130P(CA) | 2G.21 | 36 x 12 | 36 x 12 | 42 x 15* | 78 x 24* | 78 x 24 |
| Part-Time Bus Travel on Shoulder Begins Advance | R131(CA) | 2G.21 | 36 x 42 | 36 x 42 | 54 x 66* | 78 x 84* | 78 x 84 |
| Part-Time Bus Travel on Shoulder Ends Advance | R132(CA) | 2G.21 | 36 x 42 | 36 x 42 | 54 x 66* | 78 x 84* | 78 x 84 |
| Part-Time Bus Travel on Shoulder Ends | R133(CA) | 2G.21 | 36 x 42 | 36 x 42 | 54 x 66* | 78 x 84* | 78 x 84 |
| HOV VIOLATION $___ MINIMUM FINE | SR50-1(CA) | 2G.101(CA) | — | — | 192 x 70 | 192 x 70 | — |
| HOV VIOLATION $___ MINIMUM FINE | SR50-2(CA) | 2G.101(CA) | 30 x 66 | 30 x 66 | 36 x 78 | 36 x 78 | 48 x 96 |
| RIGHT LANE BUS LANE AHEAD | SR60-1(CA) | 2G.06 | 30 x 42 | 30 x 42 | 30 x 42 | — | — |
| RIGHT LANE BUS LANE AHEAD ON X ST. | SR60-2(CA) | 2G.06 | 30 x 42 | 30 x 42 | 30 x 42 | — | — |
| RIGHT LANE BUSES TAXIS ONLY 24 HOURS | SR60-4(CA) | 2G.05 | 30 x 42 | 30 x 42 | 30x 42 | — | — |
| RIGHT LANE TRAINS RIGHT TURNS ONLY 24 HOURS | SR60-6(CA) | 2G.05 | 30 x 42 | 30 x 42 | 30 x 42 | — | — |
| RIGHT LANE BUSES TAXIS ONLY Specific Hours/Days with Downward Arrow | SR60-8(CA) | 2G.05 | 54 x 80 | 54 x 80 | 54 x 80 | — | — |
| (HOV) Lane Reduction | W11-1(CA) | 2G.08 | 30 x 60 | 30 x 60 | 36 x 60 | 36 x 60 | 48 x 72 |
| (HOV) Merge | W59-1(CA) | 2G.08 | 30 x 60 | 30 x 60 | 36 x 60 | 36 x 60 | 48 x 72 |
| (HOV) Advisory Exit (Ramp) Speed | W72B(CA) | 2G.08 | 36 x 66 | 36 x 66 | 48 x 78 | 48 x 78 | 60 x 102 |
| (HOV) THRU TRAFFIC MERGE LEFT (RIGHT) | W74-1(CA) | 2G.08 | 30 x 60 | 30 x 60 | 36 x 60 | 36 x 60 | 48 x 72 |
| BUSES USING SHOULDER | W130(CA) | 2G.22 | — | — | 36 x 48 | 48 x 60 | — |

* Smaller signs may be used or formatted for use on the median barrier

# CHAPTER 2H. GENERAL INFORMATION SIGNS

## Section 2H.01 Scope

Support:

01 General Information signs provide road users with navigational or orientation, geographic, or other information useful for traffic operational purposes. They include such items as State lines, city limits, time zones, stream names, elevations, landmarks, and similar geographic features. Chapter 2M contains recreational and cultural interest area symbol signs that are sometimes used in combination with General Information Signs. Section 1D.09 contains information on unnecessary traffic control devices. Section 2A.20 contains information on the excessive use of signs and sign clutter.

Option:

02 A General Information (I3-5 through I4-2) symbol sign (see Figure 2H-1) may be used to provide direction to a transportation (I3 series signs) or other (I4 series signs) facility. The symbol sign may be supplemented by an educational plaque where necessary. The name of the facility may be used, if needed, to distinguish between similar facilities in the same area.

03 The Advance Turn (M5 series) or Directional Arrow (M6 series) auxiliary plaques (see Figure 2H-1) with white arrows on green backgrounds may be used with General Information symbol signs to create a General Information Directional Assembly.

03a Refer to Section 2E.17 when a General Information symbol is incorporated into the legend of a guide sign.

04 The Recycling Center (I4-2) symbol sign may be used to direct road users to recycling centers.

*Guidance:*

05 *The Recycling Center symbol sign should not be used on freeways and expressways.*

Option:

06 The Passengers Only Ferry Terminal (I3-10) symbol sign may be used with the FERRY (I3-10P) plaque (see Figure 2H-1) mounted below it in a directional assembly to direct road users to passenger-only ferry terminals.

*Guidance:*

07 *General Information signs should not be installed within a series of guide signs, or at other equally critical locations, unless there are specific reasons for orienting the road user or identifying control points for activities that are clearly in the public interest. On all such signs, the designs should be simple and dignified, devoid of any tendency toward advertising, such as complex graphics or unnecessary messages, and in general compliance with other guide signing.*

**Standard:**

08 **Promotional descriptive messages that are not relevant to navigation and orientation, such as "Scenic" or "Historic," shall not be included in the legends of General Information signs, except as otherwise provided in this Chapter or in cases in which these terms are part of an official name, such as for a Scenic Byway or Historic District.**

09 **Except for State Welcome signs (see Section 2H.07), Acknowledgment signs (see Section 2H.13), and Alternative Fuels Corridor signs (see Section 2H.14), General Information signs shall have white legends and borders on green rectangular-shaped backgrounds.**

## Section 2H.02 Sizes of General Information Signs

**Standard:**

01 **Except as provided in Section 2A.07, the sizes of General Information signs that have a standardized design shall be as shown in Table 2H-1 and Table 2H-1(CA).**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2H-1.

Option:

03 Signs larger than those shown in Table 2H-1 may be used (see Section 2A.07), except where a maximum allowable size is specified.

## Section 2H.03 Airport Signs

Support:

00 Refer to FHWA's List of Known Errors for error in Paragraph 1 heading. Refer to Section 1A.04 for more details.

01 Guide signs for commercial service airports and general aviation airports may be provided from the nearest Interstate, other freeway, or conventional highway intersection directly to the airport, normally not to exceed 15 miles. The Airport (I3-5) symbol sign (see Figure 2H-1) along with a supplemental plaque may be used to indicate the specific name of the airport. An Airport symbol sign, with or without a supplemental name plaque or the word AIRPORT, and an arrow may be used as a trailblazer.

**Standard:**

02 **Airport pictographs or other graphical representation of the specific airport shall not be used with or in place of the specific airport name on guide signs.**

*Guidance:*

03 *If airport guide signs are used, adequate trailblazer signs should be used to provide motorist direction to the airport.*

Support:

04 Location and placement of all airport guide signs depends upon the availability of longitudinal spacing on highways.

05 Figure 2D-39 shows an example of the guide signing that is typically used for a large commercial airport.

Option:

06 The Airport (I3-5) symbol sign may be used for large or small commercial airports and airports which do not accommodate large commercial jet aircraft.

## Section 2H.04 Traffic Signal Speed Sign (I1-1)

~~Option:~~

01 ~~The Traffic Signal Speed (I1-1) sign (see Figure 2H-1) displaying the legend SIGNALS SET FOR XX MPH may be used to indicate a section of street or highway on which the traffic control signals are coordinated into a progressive system timed for a specified speed at all hours during which they are operated in a coordinated mode.~~

02 ~~If different system progression speeds are set for different times of the day, a changeable message element may be used for the numerals of the Traffic Signal Speed sign. If the system is operated in coordinated mode only during certain times, a blank-out version of the Traffic Signal Speed sign may be used to display the entire message only during those times.~~

~~**Standard:**~~

03 ~~**An electronic display changeable section of the Traffic Signal Speed sign shall be a white legend on a black opaque or green background.**~~

~~*Guidance:*~~

~~*If used, the Traffic Signal Speed sign should be mounted as near as practical to each intersection where the timed speed changes, and at intervals of several blocks throughout any section where the timed speed remains constant.*~~

Support:

04 The Traffic Signal Speed (I1-1) sign is not used in California because its displayed speed reflects an internal signal timing parameter rather than information intended for motorists.

## Section 2H.05 Jurisdictional Boundary Signs (I2-1)

Option:

01 The Jurisdictional Boundary (I2-1) sign may be used to mark the location of the jurisdictional boundary of a State, county, ~~or municipality or the limits of an unincorporated municipal-level community~~, federally recognized Tribal Nation, or governmental district where legal jurisdiction, road maintenance responsibility, or emergency response obligation changes.

01a The WHERE WE HONOR VETERANS (G10-4P(CA)) sign may be used below the Jurisdictional Boundary Sign (I2-1) in reference to a county line. Refer to SHC § 1978.

*Guidance:*

02 *If used, the Jurisdictional Boundary sign should be located at or as near as practicable to the jurisdictional boundary without interfering with higher-priority traffic control devices. Notices of statutes or local ordinances should*

*be located separately using regulatory signs (see Chapter 2B).*

03 ~~*If used for an unincorporated community, the community should be one that is readily identifiable on official maps and be consistent with postal mailing addresses.*~~

**Standard:**

04 **In accordance with Section 2H.01, the Jurisdictional Boundary sign shall be rectangular in shape and shall have a white legend on a green background. The sign shall display only the name of the State, county, ~~municipality~~, federally recognized Tribal Nation, or other identifiable community, and an appropriate legend such as ENTERING, STATE LINE, County, ~~or the municipal classification~~.**

05 **Names of elected officials or promotional messages, such as notable accomplishments or claims, shall not be displayed on a Jurisdictional Boundary sign or added as a supplemental sign or plaque.**

Option:

06 A pictograph representing the jurisdiction may be displayed on the Jurisdictional Boundary sign.

**Standard:**

07 **If a pictograph is displayed on the Jurisdictional Boundary sign, it shall be the official seal of the jurisdiction and shall comply with the provisions of Section 2A.04. The pictograph shall be placed to the left of the legend. The height of the pictograph shall not exceed 2 times the height of the initial upper-case letter of the principal legend.**

*Guidance:*

08 *Signs should not be used to identify the boundaries of special-purpose governmental districts, such as school districts, sanitary districts, or improvement districts, as such signs are generally promotional in nature and do not provide navigational or orientation assistance in conjunction with official maps that are available to the general public.*

Support:

09 Section 2H.07 contains information on State Welcome signs.

## Unincorporated Community and City Limit (G9-2(CA) and G9-5(CA)) Signs

**Standard:**

10 **The Unincorporated Community (G9-2(CA)) and City Limit (G9-5(CA)) signs shall be used to mark the limits of cities and to identify unincorporated towns. Refer to SHC § 101.1.**

*Guidance:*

11 *The G9-2(CA) signs should be placed on the right, as close as practical to the outer town limits of unincorporated towns, facing traffic entering the named town.*

12 *The G9-5(CA) sign should be placed on the right, as close as practical to the outer city limits of incorporated cities, facing traffic entering the named city.*

Option:

13 The population may be obtained from:

A. Federal census
B. California Dept. of Finance
C. County Board of Supervisors
D. County Planning Commission

14 The elevation shown may be that of the courthouse, post office, railroad station, or benchmark in the central district of the city.

Option:

15 On state highways Caltrans may place the state's 9-1-1 emergency telephone number on county, city, and town limits signs. Refer to § 101.1 of the SHC.

**Standard:**

16 **Caltrans, under certain conditions, shall replace any city limit signs. Refer to §§ 101.2 and 101.4 of the SHC.**

*Guidance:*

17 *If a city or community desires to install a distinctive type city limits or "Welcome" sign on conventional highways at its city limits in place of the standard G9-5(CA) sign, the following criteria should be followed:*

**Standard:**

**A. The signs shall be installed by local authorities at no expense to the State, and an approved encroachment permit will be obtained prior to installation. They shall be maintained by the permittee to the satisfaction of the permitter.**
**B. Such signs shall be installed in accordance with current Caltrans practices.**

**C. Signs shall be of reasonable size and proportional to other guide signs in the area.**
**D. Signs shall be positioned so they do not obstruct the view of official traffic control devices.**
**E. No moving or flashing displays or advertising of any kind will be permitted.**
**F. No sign shall encroach over the highway.**

Option:

G. Political jurisdiction logos may be displayed on the city limit signs, but the predominant characteristics of the sign will be white legend on a green rectangular shaped background. Distinctive type city limit signs not conforming to the above may remain in place until normal replacement is required.

## Section 2H.06 Geographical Feature Signs (I2-2)

Option:

01 The Geographical Feature (I2-2) sign may be used to mark the locations of land features such as river or stream crossings, and summits, that are identifiable on maps or serve as landmarks in providing navigational orientation or reference to the road user.

01a The Geographical Feature (I2-2) sign may be used to identify bridges or structures across rivers and creeks and provide motorist orientation that is not otherwise included in the primary signing.

*Guidance:*

01b *The I2-2 sign should be used on freeways to identify major river crossings.*

02 *If used, the Geographical Feature sign should display only the name of the geographical feature. Additional information that is unnecessary for navigational or orientation purposes, such as watershed or tributary names, should not be displayed on the sign.*

### Elevation (G16(CA) and G17(CA)) Signs

Option:

03 The Mountain Pass Elevation (G16(CA)) sign may be used at the summit to inform the public of a mountain pass name and elevation.

*Guidance:*

04 *The G16(CA) sign should be placed facing traffic in each direction on the right.*

Option:

05 The Elevation (G17(CA)) sign may be used to inform motorists of changes in elevation. Feet will be shown in multiples of 1,000 feet above sea level, and multiples of 100 feet below sea level.

*Guidance:*

06 *The G17(CA) sign should be placed facing traffic in each direction on the right.*

## Section 2H.07 State Welcome Signs

Support:

01 The design, placement, and function of State Welcome signs that are used to identify State lines differ from Jurisdictional Boundary (I2-1) signs (see Section 2H.05). Because of these differences, it is necessary to distinguish State Welcome signs from State line Jurisdictional Boundary signs.

Option:

02 A State Welcome sign may be located at or in the vicinity of the State boundary except as prohibited in Paragraph 4 of this Section.

03 State Welcome signs may display the State seal or the State flag, the officially-adopted State motto or slogan, and the name of the Governor, in addition to the State name. State Welcome signs may use legend and background colors that provide adequate visual contrast rather than the standard sign colors.

**Standard:**

04 **State Welcome signs shall be located separate from other signs where they will not interfere with or detract from other traffic control devices.**

05 **State Welcome signs shall not display changeable or other electronic-display messages (see Chapter 2L). State Welcome signs shall not display messages that emulate promotional advertising of any type. State Welcome signs shall not incorporate Acknowledgment signs or messages (see Section 2H.13), or business identification sign panels or logos (see Section 2J.03) into their legends or assemblies. In accordance with Section 2A.04 of this**

**Manual, telephone numbers, Internet addresses, and e-mail addresses, including domain names and uniform resource locators (URLs), and scanning graphics for the purpose of obtaining information shall not be displayed in the legends of State Welcome signs or on their supports.**

*Guidance:*

06 *State Welcome signs should be located farther from the edge of the roadway than other traffic control devices.*

07 *The maximum size of a State Welcome sign should be consistent with the prevailing size of other guide signs based on the roadway type.*

**Welcome to California (G10B(CA)) Sign**

*Guidance:*

08 *The Welcome to California (G10B(CA)) sign should be used to indicate the California State line. The sign should be placed on the right near the State boundary facing traffic entering the State.*

## Section 2H.08 Future Interstate Corridor Signs (I2-4 and I2-4a)

Option:

01 The Future Interstate Corridor (I2-4 and I2-4a) signs (see Figure 2H-2) may be used sparingly along an existing route that will be reconstructed as an Interstate route or along an existing route adjacent to a corridor through which an Interstate route will be constructed, in accordance with the Policy and Conditions stated in 23 CFR 470, Appendix C.

02 Where the route number has been approved by the FHWA, either the I2-4 or I2-4a sign may be used.

**Standard:**

03 **The I2-4a sign shall not be used where the route number has not been approved by the FHWA.**

04 **Future Interstate Corridor signs shall not be located where they could interfere with or detract from other traffic control devices. If used, Future Interstate Corridor signs shall be installed as independent, post-mounted sign assemblies.**

05 **Future Interstate Corridor signs shall not imply that an existing route has already been designated and marked as an Interstate route. Signs indicating that an existing route is designated as a future Interstate route or corridor shall not provide directional or distance information. Route Sign assemblies (see Section 2D.29) of any type shall not be used to sign a route as a future Interstate or other route. The Interstate route marker, or likeness thereof, shall not be displayed on the Future Interstate Corridor signs.**

*Guidance:*

06 *Future Interstate Corridor signs should be limited to strategic locations, such as at the beginning of the designated route or corridor, or beyond interchanges connecting from existing Interstate highways.*

## Section 2H.09 Project Information Sign (I2-5)

Support:

00 For Construction Project Funding Identification Signs, please refer to section 6I.101(CA).

01 The Project Information (I2-5) sign (see Figure 2H-3) provides limited information to road users about a highway construction project on which work is imminently forthcoming or ongoing.

**Standard:**

02 **The Project Information sign legend shall be limited to the following project information:**

- **A. The roadway name or route number,**
- **B. A brief description or title of the project,**
- **C. The completion date expressed in either a month or season (Spring, Summer, Fall, or Winter), and**
- **D. The agency name.**

Option:

03 Project Information signs installed more than one week prior to commencement of work may include a start date.

**Standard:**

04 **Project Information signs shall not be installed more than one month prior to the commencement of work. When installing Project Information signs prior to the commencement of work, the jurisdiction shall have a policy on when the Project Information signs are to be installed. Project Information signs shall be removed at the conclusion of work on the project, even if the final inspection or project closeout has not yet occurred.**

05 **The number of Project Information signs shall be limited to one per direction of travel on the roadway on which the project is based. The location of the Project Information sign shall not interfere with the temporary**

**traffic control zone devices.**

06 **The Project Information sign shall have a white legend on a green background and shall not display Internet addresses, e-mail addresses, or telephone numbers (see Section 2A.04).**

## Section 2H.10 Grade-Separated Roadway Identification Signs (I2-3 and I2-3a)

Option:

01 The Grade-Separated Roadway Identification (I2-3 and I2-3a) signs (see Figure 2H-4) may be used to identify a grade separation of another highway or other transportation facility such as a railway, bikeway, or pathway.

*Guidance:*

02 *Except as provided in Paragraph 4 of this Section, when used to identify an overcrossing structure, the I2-3 sign should be mounted above the travel lanes if no vertical clearance signs are present. If vertical clearance signs are present, the I2-3 sign should be mounted above the ~~or~~ shoulder (right or left) of the highway below, or over the median.*

03 *When used to identify an undercrossing structure, the I2-3 or I2-3a sign should be post-mounted in advance of the structure as near to it as practicable.*

Option:

04 When used to identify an overcrossing structure, the I2-3 or I2-3a sign may be post-mounted in front of an overcrossing or may be mounted to the abutment of the overcrossing facing approaching traffic.

## Section 2H.11 Reference Location Signs (D10-1 through D10-3) and Intermediate Reference Location Signs (D10-1a through D10-3a)

Support:

01 There are two types of reference location signs:

A. Reference Location (D10-1 through D10-3) signs (see Figure 2H-5) show an integer distance point along a highway, and
B. Intermediate Reference Location (D10-1a through D10-3a) signs (see Figure 2H-6) show the same information as Reference Location signs, but they also show a tenth-of-a-mile decimal so that they can be installed between integer distance points along a highway.

**Standard:**

02 **Except when Enhanced Reference Location signs (see Section 2H.12) are used instead, Reference Location (D10-1 through D10-3) signs shall be placed on all expressway facilities that are located on a route where there is reference location sign continuity and on all freeway facilities to assist road users in estimating their progress, to provide a means for identifying the location of emergency incidents and traffic crashes, and to aid in highway maintenance and servicing.**

Option:

03 Reference Location (D10-1 through D10-3) signs may be installed along any section of a highway route or ramp to assist road users in estimating their progress, to provide a means for identifying the location ~~of emergency incidents and traffic crashes, and to aid in highway maintenance and servicing.~~ on the highway.

04 To augment the Reference Location sign system, Intermediate Reference Location (D10-1a through D10-3a) signs, which show the tenth of a mile with a decimal point, may be installed at one tenth of a mile, two tenths of a mile, or one-half mile intervals.

**Standard:**

05 **When Intermediate Reference Location (D10-1a through D10-3a) signs are used to augment the reference location sign system, the reference location sign at the integer mile point shall display a decimal point and a zero numeral.**

06 **Reference Location and Intermediate Reference Location signs shall have a minimum mounting height of 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the roadway, and shall not be governed by the mounting height requirements prescribed in Section 2A.15.**

07 **The distance numbering shall be continuous for each route within a State, except where overlaps occur (see Section 2E.22). Where routes overlap, reference location sign continuity shall be established for only one of the routes. If one of the overlapping routes is an Interstate route, that route shall be selected for continuity of distance numbering.**

08 **The route selected for continuity of distance numbering shall also have continuity in interchange exit numbering (see Section 2E.22).**

*Guidance:*

09 *On a route without continuity of distance numbering, the first reference location sign beyond the overlap should indicate the total distance traveled on the route (including on the portion that did not have continuity of distance numbering) so that road users will have a means of correlating their travel distance between reference location signs with that shown on their odometer.*

**Standard:**

10 **For divided highways, the distance measurement shall be made on the northbound and eastbound roadways. The reference location signs for southbound or westbound roadways shall be set at locations directly opposite the reference location signs for the northbound or eastbound roadways.**

11 **Zero distance shall begin at the south and west State lines, or at the south and west terminus points where routes begin within a State.**

12 **Except as provided in Paragraph 13 of this Section, reference location signs shall be installed on the right-hand side of the roadway.**

Option:

13 Where conditions limit or restrict the use of reference location signs on the right-hand side of the roadway, they may be installed in the median. On two-lane conventional roadways, reference location signs may be installed on one side of the roadway only and may be installed back-to-back. Reference location signs may be placed up to 30 feet from the edge of the pavement.

14 If a reference location sign cannot be installed in the correct location, it may be moved in either direction as much as 50 feet.

*Guidance:*

15 *If a reference location sign cannot be placed within 50 feet of the correct location, it should be omitted.*

**Standard:**

16 **In California, reference posts shall be mileage based.**

17 **The placement and location of reference posts on State highways shall conform to the database maintained by Caltrans' Division of Traffic Operations for reference posts. This database is different from the TASAS Highway database.**

## Section 2H.12 Enhanced Reference Location Signs (D10-4) and Intermediate Enhanced Reference Location Signs (D10-5)

Support:

01 There are two types of enhanced reference location signs:

A. Enhanced Reference Location (D10-4) signs (see Figure 2H-7), and
B. Intermediate Enhanced Reference Location (D10-5) signs (see Figure 2H-7).

Option:

02 An Enhanced Reference Location (D10-4) sign, which enhances the reference location sign system by identifying the route, may be placed on freeways or expressways (instead of reference location signs) or on conventional roads.

03 To augment an enhanced reference location sign system, an Intermediate Enhanced Reference Location (D10-5) sign, which shows the tenth of a mile with a decimal point, may be installed along any section of a highway route or ramp at one tenth of a mile, two tenths of a mile, or one-half mile intervals.

**Standard:**

04 **When an Intermediate Enhanced Reference Location (D10-5) sign is used to augment the reference location sign system, the Enhanced Reference Location sign at the integer mile point shall display a decimal point and a zero numeral.**

05 **Except as provided in Paragraph 6 of this Section, if enhanced reference location signs are used, they shall be vertical signs having a green background with a white legend and border, except for the route shield, which shall be the standard color and shape. The top line shall display the cardinal direction for the roadway. The second line shall display the applicable route shield for the roadway. The third line shall identify the mile reference for the location and the bottom line of the Intermediate Enhanced Reference Location sign shall give the tenth of a mile reference for the location preceded by a decimal point.**

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

06 The provisions in Section 2H.11 regarding mounting height, distance numbering and measurements, mileage-based requirements, sign continuity, and placement with respect to the right-hand shoulder and/or median for reference location signs also apply to enhanced reference location signs.

## Section 2H.13 Acknowledgment Signs and Plaques (I20 Series)

Support:

01 Acknowledgment signs and plaques (see Figure 2H-8) are a way of recognizing a company, business, or volunteer group that provides or sponsors a highway-related service. Acknowledgment signs include sponsorship signs for adopt-a-highway litter removal programs, maintenance of a parkway or interchange, and other highway maintenance or beautification sponsorship programs.

*Guidance:*

02 *A State or local highway agency that elects to have a sponsorship acknowledgement program should develop a policy on Acknowledgment signs and plaques. The policy should require that eligible sponsoring organizations comply with State laws prohibiting discrimination based on race, religion, color, age, sex, national origin, and other applicable laws.*

**Standard:**

03 **The State or local acknowledgment sign policy shall include all of the provisions regarding placement and design of Acknowledgment signs and plaques that are contained in this Section.**

04 **Because regulatory, warning, and guide signs have a higher priority, Acknowledgment signs shall only be installed where adequate spacing is available between the Acknowledgment sign and other higher priority signs. Acknowledgment signs shall not be installed in a position where they would obscure the road users' view of other traffic control devices.**

05 **Acknowledgment signs shall not be installed at any of the following locations:**

- **A. On the front or back of, adjacent to, or around any other traffic control device, including traffic signs, highway traffic signals, and changeable message signs;**
- **B. On the front or back of, adjacent to, or around the supports or structures of other traffic control devices, or bridge piers; or**
- **C. At key decision points where a road user's attention is more appropriately focused on other traffic control devices, roadway geometry, or traffic conditions, including exit and entrance ramps, merging or weaving areas, lane terminations, intersections, grade crossings, toll plazas, temporary traffic control zones, and areas of limited sight distance.**

06 **Acknowledgment signs and plaques shall have a white legend and border on a blue background. Acknowledgment signs shall be independent post-mounted roadside installations only and shall not be mounted overhead.**

Option:

07 An Acknowledgment sign may be used to acknowledge the sponsor of a rest area or welcome center.

**Standard:**

08 **Acknowledgment signs for a rest area, when located on the highway mainline, shall be limited to one sign per direction of travel from which the rest area is accessible, shall be located at least 500 feet from other traffic control devices, and shall not display names or representations of specific products or services provided by the sponsor within the rest area. Acknowledgment signs for rest areas shall display the legend REST AREA as the program activity, such as REST AREA SPONSORED BY. In accordance with Paragraph 5 of this Section, the Rest Area and Welcome Center Acknowledgment (I20-4 and I20-4a) signs shall not be combined in the same sign assembly with or substitute for the Rest Area General Service guide signs (see Section 2I.05).**

Option:

09 An additional Acknowledgment sign may be used within the rest area provided that it is not visible from the highway mainline or ramps to and from the rest area.

10 If a State has officially adopted and is actively promoting a program to encourage the use of safety rest areas through the use of a program name, then that program name may be displayed in smaller lettering below the legend REST AREA on the Rest Area Acknowledgment sign.

**Standard:**

11 **Program names or slogans, as described in Paragraph 14 of this Section, shall not be displayed on the Rest Area General Service guide signs or other types of traffic signs.**

*Guidance:*

12 *The minimum spacing between Acknowledgment signs and any other traffic control signs, except parking regulation signs, should be:*

*A. 150 feet on roadways with speed limits of less than 30 mph,*
*B. 200 feet on roadways with speed limits of 30 to 45 mph, and*
*C. 500 feet on roadways with speed limits greater than 45 mph.*

13 *If the placement of a newly-installed higher-priority traffic control device, such as a higher-priority sign, a highway traffic signal, or a temporary traffic control device, conflicts with an existing Acknowledgment sign, the Acknowledgment sign should be relocated, covered, or removed.*

Option:

14 State or local highway agencies may use their own pictograph (see definition in Section 1C.02) and/or a brief jurisdiction-wide program name, such as "Adopt-A-Highway" or "Litter Removal," as part of any portion of the Acknowledgment sign, provided that the signs comply with the provisions for shape, sign and legend size, color, and lettering style in this Chapter and in Chapter 2A.

*Guidance:*

15 *Acknowledgment signs should clearly indicate the type of highway services provided by the sponsor.*

**Standard:**

16 **In addition to the general provisions for signs described in Chapter 2A and the sign design principles covered in the "Standard Highway Signs" publication (see Section 1A.05), Acknowledgment sign and plaque designs developed by State or local highway agencies shall comply with the following provisions:**

**A. Neither the sign or plaque design nor the sponsor acknowledgment name or logo shall contain any contact information, directions, slogans (other than a brief jurisdiction-wide program name, if used), telephone numbers, e-mail or Internet addresses, including domain names and uniform resource locators (URLs), metadata tags ("hash-tags"), or quick-response (QR) codes, bar codes, or similar scanning graphics (see Section 2A.04);**

**B. Except for the sponsor acknowledgment logo, all of the lettering shall be in upper-case letters of the Standard Alphabets as provided in the "Standard Highway Signs" publication (see Section 1A.05);**

**C. If a logo, instead of a word legend, is used to represent the sponsor, the logo shall be the primary logo that identifies the sponsoring entity. Secondary or alternate logos, slogans, products, mascots, spokespersons, or other items associated with the sponsoring entity's commercial advertising or marketing shall not be displayed on Acknowledgment signs or plaques;**

**D. In order to keep the main focus on the highway-related service and not on the sponsor acknowledgment name or logo, the area reserved for the sponsor acknowledgment name or logo shall not be located at the top of the sign or plaque, shall be a maximum of 8 square feet in area, and shall not exceed ⅓ of the total area of the sign;**

**E. The entire sign display area of an Acknowledgment sign assembly shall not exceed 24 square feet;**

**F. The sign or plaque shall not contain any messages, lights, symbols, or logos that resemble any official traffic control devices;**

**G. The sign or plaque shall not contain any external or internal illumination, light-emitting diodes, luminous tubing, fiber optics, luminescent panels, or other flashing, moving, or animated features;**

**H. The sign or plaque shall not distract from official traffic control messages such as regulatory, warning, or guidance messages;**

**I. The area of the plaque shall not exceed the lesser of ⅓ the area of the General Service sign below which it is mounted or 24 square feet;**

**J. The plaque size shall be based on the standard sizes as specified in Table 2H-1. If the size of the General Service sign is oversized for its application (greater than the size specified for the corresponding roadway**

**application in Table 2H-1), or if the size of the General Service sign increases due to modification of the sign legend, a corresponding increase in the size of the plaque shall not be allowed; and**

**K. The sign or plaque shall not display promotional or contact information about the agency's sponsorship program, including if the sign or plaque does not currently display a sponsor.**

Option:

17 If a specific outlet of a business with multiple locations in the same area is the sponsoring entity, such as a franchisee, the area reserved for the sponsor acknowledgment name or logo may include the name of the municipality or neighborhood in which the sponsoring entity is located.

18 An Acknowledgment plaque may be mounted below the following General Service signs to acknowledge the sponsor of a corridor-based or region-based highway-related service:

A. Radio-Weather Information (D12-1) sign (see Section 2I.09);
B. Radio-Traffic Information (D12-1a) sign (see Section 2I.09);
C. TRAVEL INFO CALL 511 (D12-5 and D12-5a) signs (see Section 2I.12); and
D. Roadside Assistance (D12-6) sign (see Section 2I.13).

19 **An Acknowledgment plaque shall not be mounted in conjunction with any other sign or traffic control device. An Acknowledgment plaque shall not be used alone or without one of the General Service signs specified in Paragraph 18 of this Section.**

20 **The general restrictions on the type of content allowed for display on Acknowledgment signs (see Paragraph 16 of this Section) shall apply to the legends of Acknowledgment plaques.**

Support:

21 The requirements in Section 2H.13 do not apply to State highways.

## Section 2H.14 Alternative Fuels Corridor Sign (D9-19)

Option:

01 The Alternative Fuels Corridor (D9-19) sign (see Figure 2H-9) may be used to inform motorists of an alternative fuels corridor highway segment that has been designated by the Secretary of Transportation as "Corridor Ready."

**Standard:**

02 **Alternative Fuels Corridor signs shall only be used to designate alternative fuels corridor highway segments that have been designated by the Federal Highway Administration as "Corridor Ready." The appropriate General Service signs or plaques identifying the alternative fuels available in the corridor shall be included with the Alternative Fuels Corridor sign in a sign assembly. The alternative fuel services for an alternative fuels corridor shall be limited to electric vehicle charging, compressed natural gas, liquid natural gas, liquified petroleum, and hydrogen.**

Support:

03 The General Service (D9-11a, D9-11b, D9-11d, D9-11e, and D9-11f) symbol signs for use with an Alternative Fuels Corridor sign are shown in Figure 2I-1.

**Standard:**

04 **Alternative Fuels Corridor signs shall only be post-mounted on the side of the road and shall not be mounted overhead.**

05 **State or agency variations of the Alternative Fuels Corridor sign shall not be allowed. Acknowledgments of sponsors shall not be allowed in Alternative Fuels Corridor sign assemblies.**

06 **Except as provided in Paragraph 7 of this Section, Alternative Fuels Corridor signs shall be limited to one sign at or near the beginning of the alternative fuels corridor in each direction of travel.**

Option:

07 For long corridors, such as segments connecting control cities or major urban areas, additional signs may be located beyond major intersections or major interchanges following the typical post-interchange sign sequence.

08 The beginning of an alternative fuels corridor may be indicated with a BEGIN (M4-14P) plaque (see Figure 2H-9) with a white legend and border on a blue background mounted above the alternative fuels corridor sign in the sign assembly.

Support:

08a Refer to FHWA's List of Known Errors for error in Paragraph 8 text. Refer to Section 1A.04 for more details.

Option:

09 The end of an alternative fuels corridor may be indicated with an END (M4-6P) plaque (see Figure 2H-9) with a white legend and border on a blue background mounted above the Alternative Fuels Corridor sign in the sign assembly.

**Standard:**

10 **The General Service signs shall not be used in the sign assembly indicating the end of a corridor.**

11 **When the availability of one or more of the alternative fuel facilities discontinues in an alternative fuels corridor, the LAST IN CORRIDOR (W16-19P) plaque (see Figure 2H-9) shall be included on the last General Service directional assembly on the approach to the interchange or intersection.**

Option:

12 When the availability of one or more of the alternative fuel facilities discontinues in an alternative fuels corridor, an Alternative Fuels Corridor sign with accompanying General Service signs indicating the types of fuels still available in the corridor may be provided beyond the intersection or interchange where the last discontinued fuel facilities were available.

13 When the distance between electric vehicle (EV) charging services in an alternative fuels corridor is greater than 50 miles, the Next EV Charging (D9-17a) sign (see Figure 2H-9) may be located after the EV charging directional assembly, but before the EV charging service exit or turn, to inform road users of the extended distance to the next EV charging service.

**Standard:**

14 **The Alternative Fuels Corridor (D9-19) sign shall not be used as a directional sign in a directional assembly, or be combined with other signs, except as provided in this Section.**

Option:

15 Up to three General Service symbol signs arranged horizontally displaying the alternative fuels available in the designated corridor may be installed below the Alternative Fuels Corridor sign (see Figure 2H-10).

**Standard:**

16 **The size of the General Service symbol signs for the alternative fuels available shall not exceed 18 x 18 inches when mounted with the 24 x 24-inch Alternative Fuels Corridor sign and 24 x 24 inches when mounted with the 36 x 36-inch Alternative Fuels Corridor sign.**

*Guidance:*

17 *When the number of eligible alternative fuels available in the corridor exceeds three, a separate plaque with the two-letter or three-letter designations (D9-19aP or D9-19bP) of each of the fuels available (see Figure 2H-9) should be used in place of the General Service symbol signs.*

**Standard:**

18 **When the Alternative Fuels Corridor sign is used in a designated corridor on a freeway or expressway, the applicable General Service signs shall be installed on the approach to an interchange in the corridor from which the designated fuel services are available. If the services are not visible from the ramp of a single-exit interchange, the service signing shall be repeated at the intersection of the exit ramp and the crossroad (see Figure 2H-10). Where the alternative fuel facility is not located along the crossroad, additional General Service directional assemblies shall be installed in advance of each subsequent turn to reach the facility (see Figure 2H-11).**

Support:

19 Because regulatory, warning, and guide signs are necessary for safe and efficient movement of traffic, they have a higher priority in placement location over Alternative Fuels Corridor signs.

**Standard:**

20 **Alternative Fuels Corridor sign assemblies shall be limited to those locations where adequate spacing is available between the Alternative Fuels Corridor sign and other signs. Alternative Fuels Corridor signs shall not be installed in a location where they might distract driver's attention from other traffic control devices or the roadway in a complex roadway environment. If the placement of a newly-installed, higher-priority traffic control device conflicts with an existing Alternative Fuels Corridor sign, the Alternative Fuels Corridor sign shall be relocated, covered, or removed.**

21 **Alternative Fuels Corridor signs shall not be installed on routes other than those officially designated as alternative fuels corridors, even if to provide directional information to such corridors.**

## Section 2H.101(CA) Coastal Access (SG28A(CA)) Sign

Option:


01 The Coastal Access (SG28A(CA)) sign may be used to identify only those improved coastal access points selected by the Coastal Commission in accordance with the agreement between the California Coastal Commission and Caltrans dated April 30, 1980.

## Section 2H.102(CA) The POST OFFICE (SG60A(CA)) Sign

Option:

01 The POST OFFICE SG60A(CA) sign may be used in conjunction with the Advance Turn (M5 series) or Directional Arrow (M6 series) auxiliary plaques to indicate the direction to a local post office which is located off the arterial network.

## Figure 2H-1. General Information and Miscellaneous Information Signs and Plaques

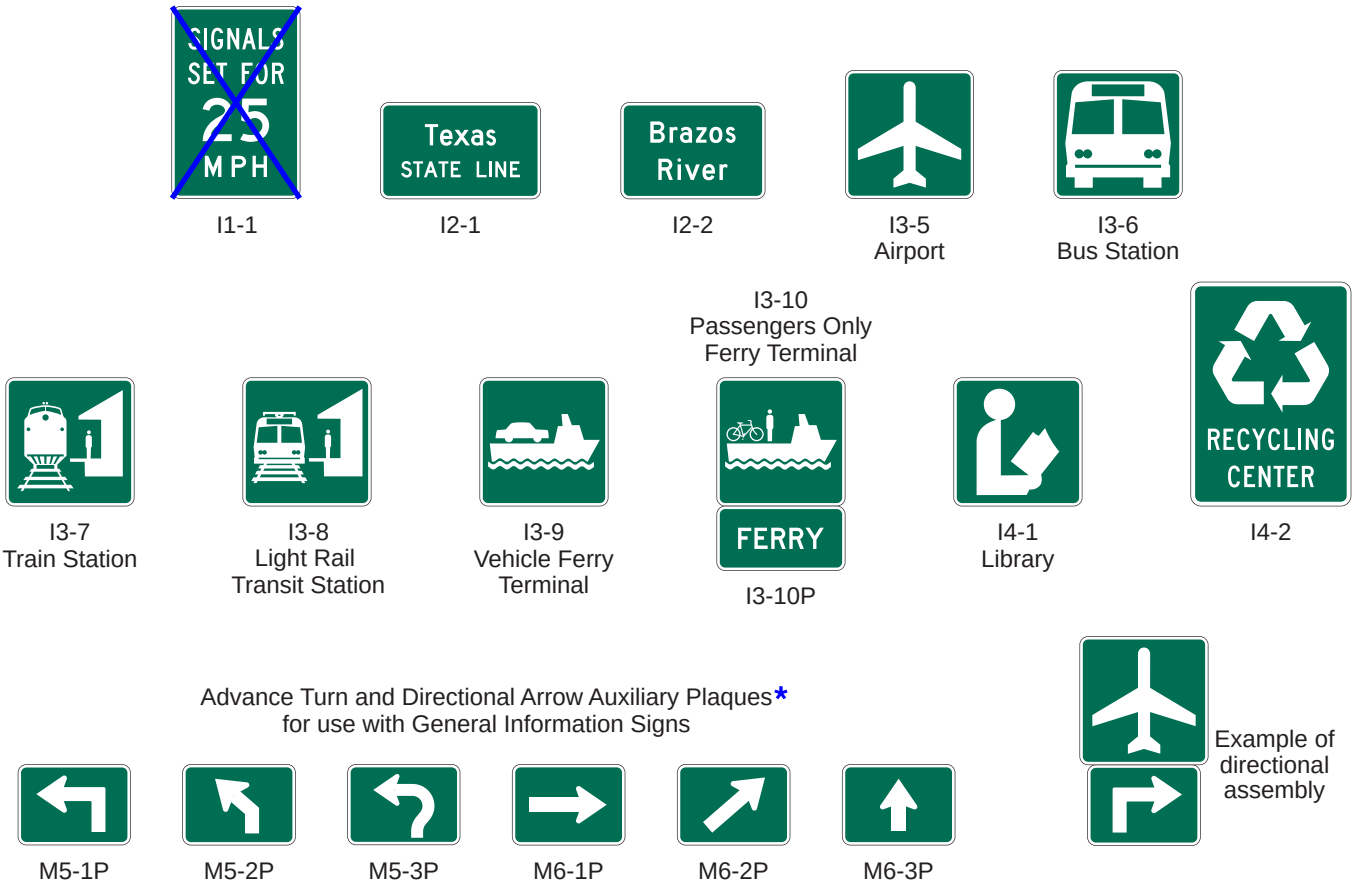


* Refer to FHWA's List of Known Errors for error in sign. Refer to Section 1A.04 for more details.

## *Figure 2H-1(CA). California General Information and Miscellaneous Information Signs and Plaques*




G9-2(CA)




G9-5(CA)




G10B(CA)




G10-4P(CA)




G16(CA)




G17(CA)




SG28A(CA)




SG60A(CA)

## Figure 2H-2. Future Interstate Signs (I2-4, I2-4a)




I2-4




I2-4a

## Figure 2H-3. Examples of Project Information Signs








* The actual name of the State where the improvements are being implemented should be used instead of "State".

Note: Refer to Part 6 for construction project identification signs.

## Figure 2H-4. Examples and Typical Placement of Grade Separation Identification Signs

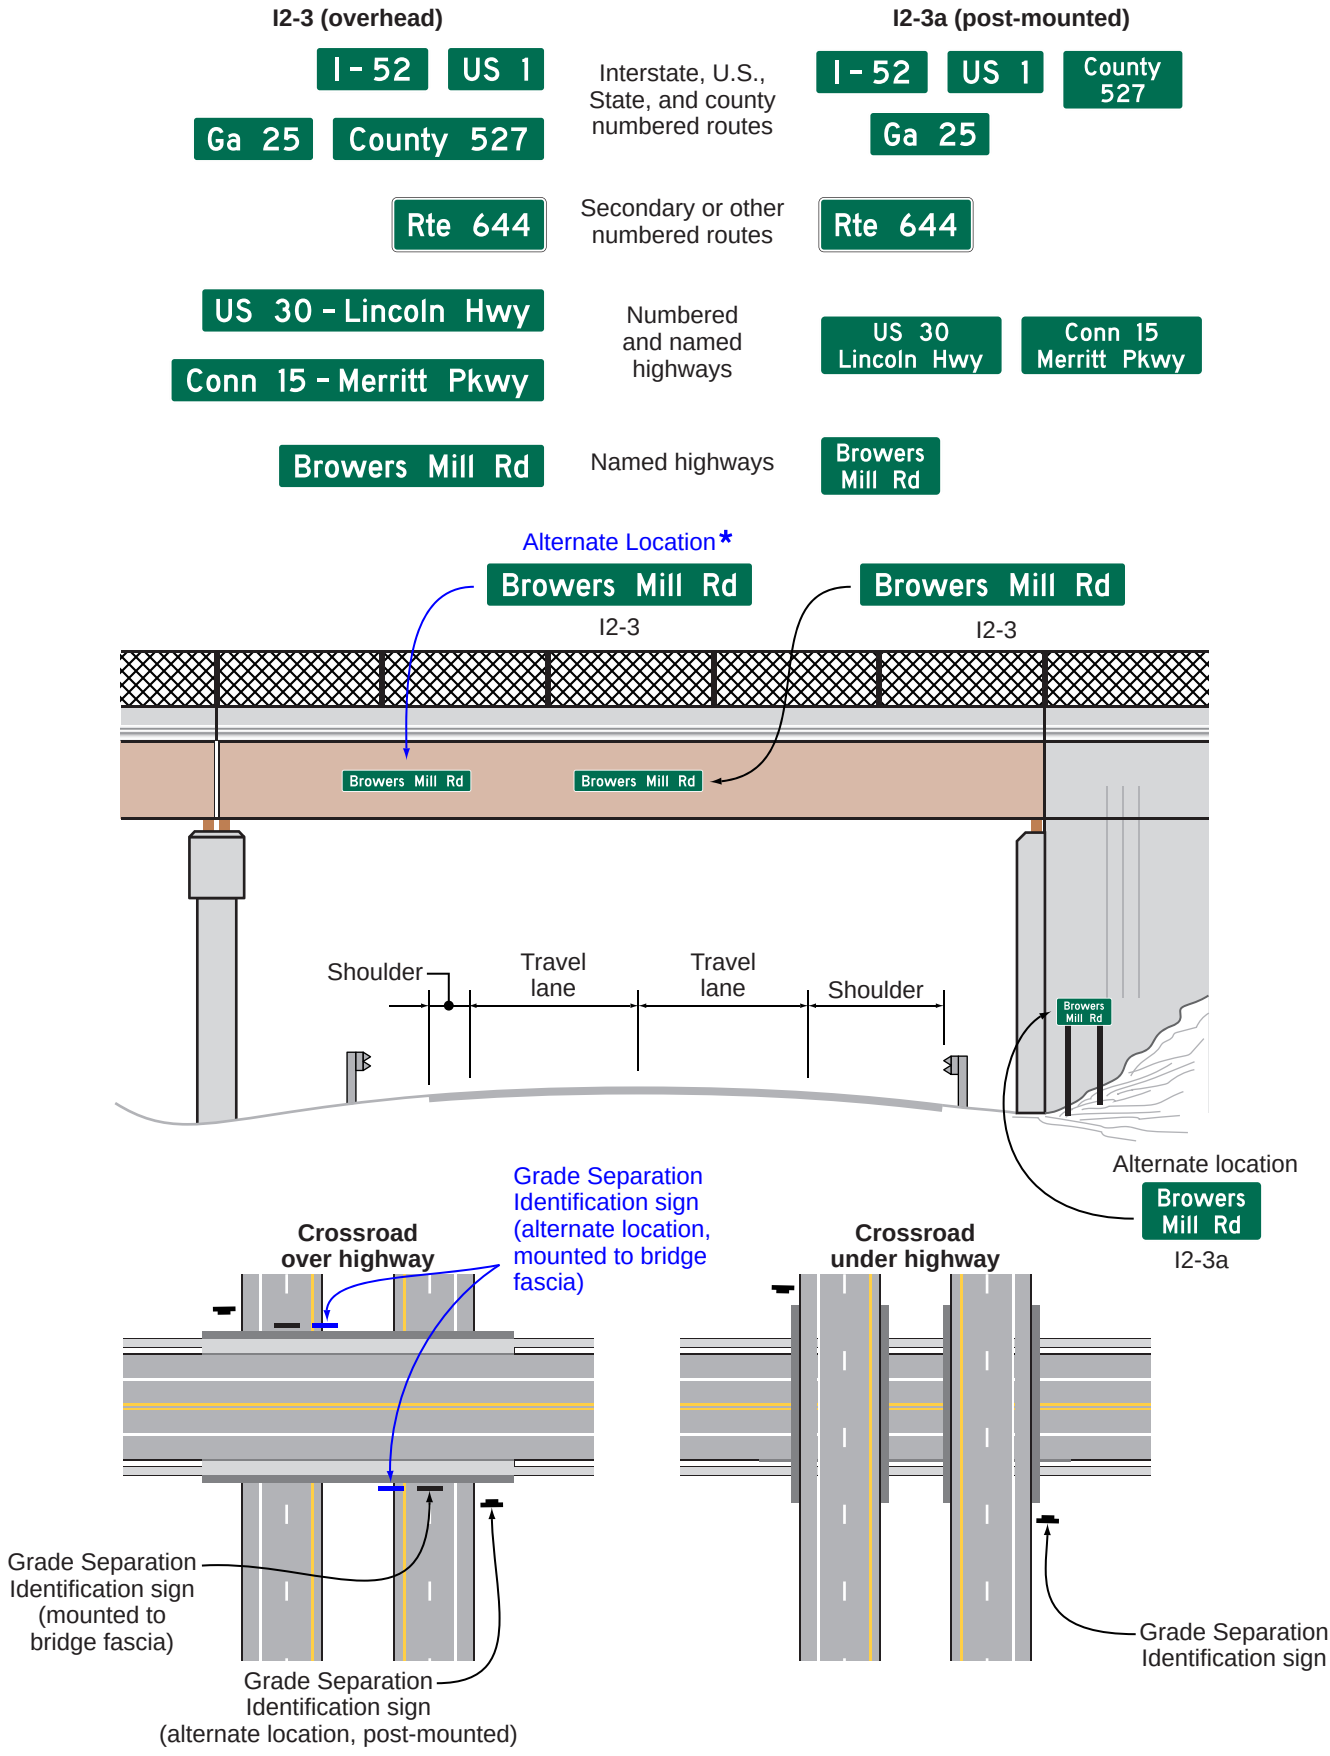



* Refer to Section 2H.10 for alternative locations when vertical clearance signs are present.

## Figure 2H-5. Reference Location Signs




D10-1 D10-2 D10-3

## Figure 2H-6. Intermediate Reference Location Signs

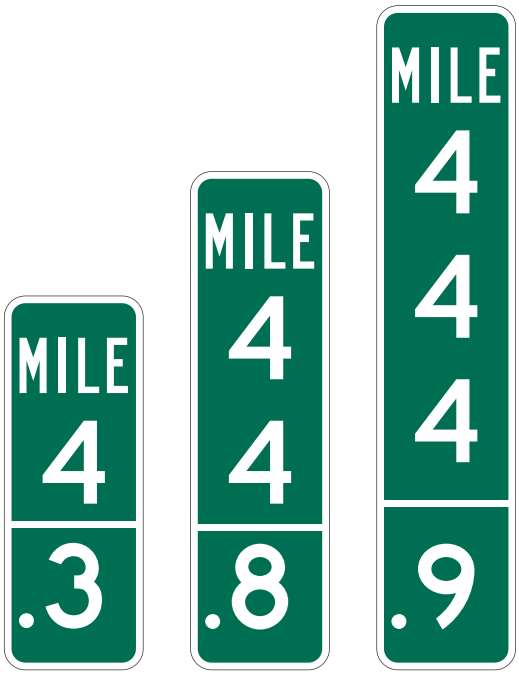


D10-1a D10-2a D10-3a

## Figure 2H-7. Enhanced Reference Location Signs




D10-4 D10-5

Note: Refer to Figure 2D-4 and 2D-4(CA) for applicable Route Shields to be used on guide signs.

## Figure 2H-8. Examples of Acknowledgment Sign Designs




* This is an example of an acknowledgment sign design that includes a business identification sign panel.

## Figure 2H-9. Examples of Signs for Alternative Fuels Corridors




D9-17a




D9-19




D9-19aP




D9-19bP




M4-6P





M4-14P





W16-19P

## Figure 2H-10. Example of Signing for an Alternative Fuels Corridor

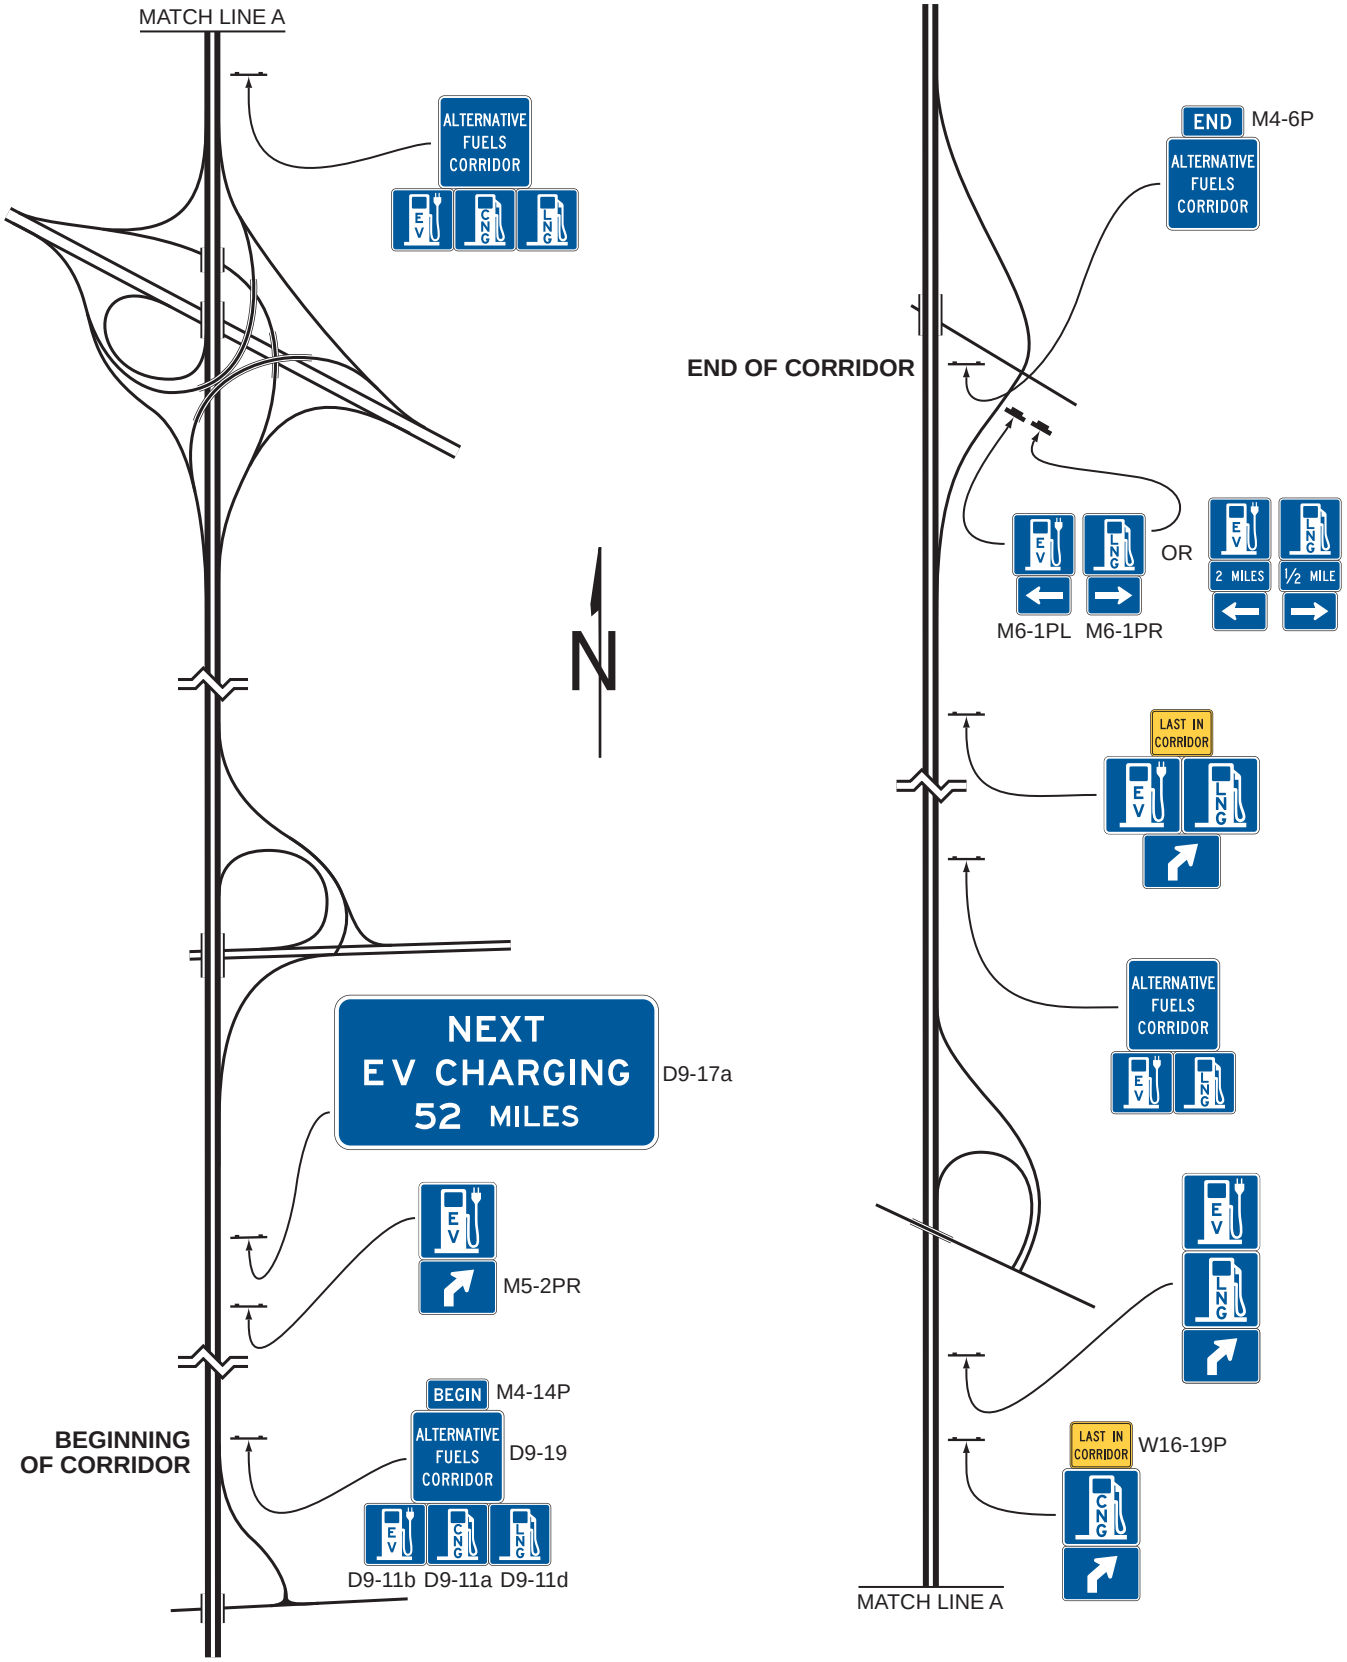


Note: Exit numbering may be used in place of directional arrows on the highway mainline.

## Figure 2H-11. Typical Signing from a Freeway Exit Ramp to a Service Facility

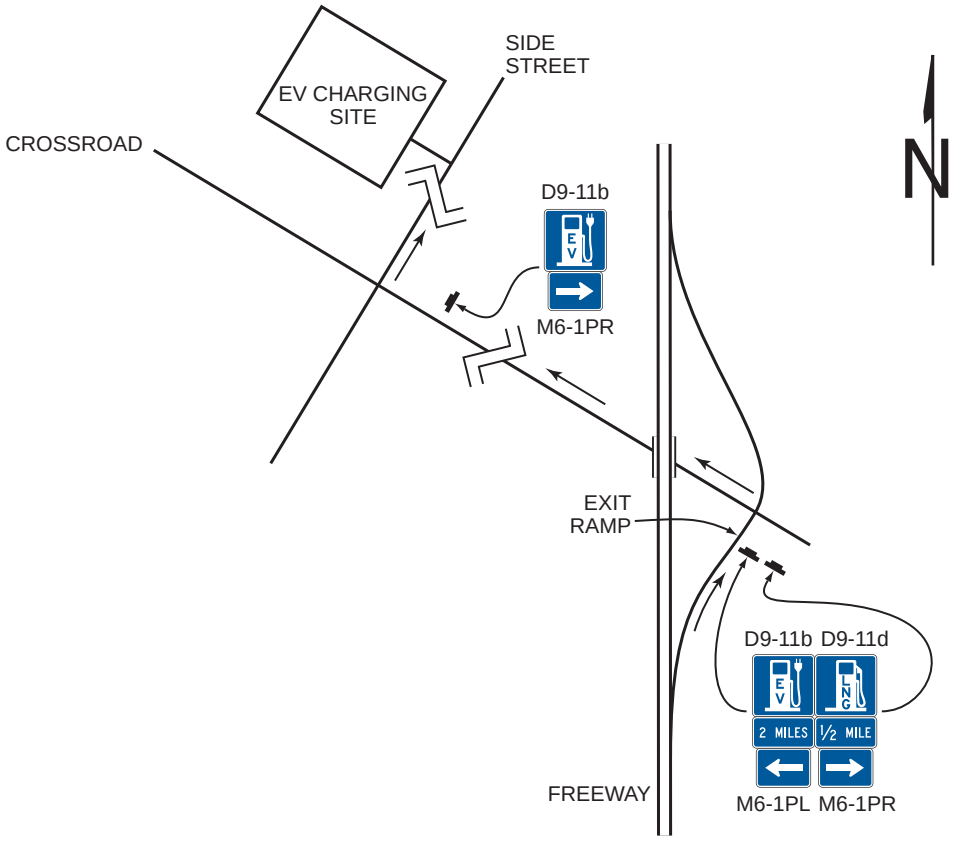

# Table 2H-1. General Information Sign and Plaque Sizes

| Sign **** | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Alternative Fuels Corridor | D9-19 | 2H.14 | 24 x 24 | 36 x 36 |
| Alternative Fuels Corridor (1 line) (plaque) | D9-19aP | 2H.14 | 30 x 9 | 42 x 12 |
| Alternative Fuels Corridor (2 lines) (plaque) | D9-19bP | 2H.14 | 30 x 12 | 42 x 18 |
| Reference Location (1 digit) | D10-1 | 2H.11 | 10 x 18 | 12 x 24 |
| Intermediate Reference Location (2 digits) | D10-1a | 2H.11 | 10 x 27 | 12 x 36 |
| Reference Location (2 digits) | D10-2 | 2H.11 | 10 x 27 | 12 x 36 |
| Intermediate Reference Location (3 digits) | D10-2a | 2H.11 | 10 x 36 | 12 x 48 |
| Reference Location (3 digits) | D10-3 | 2H.11 | 10 x 36 | 12 x 48 |
| Intermediate Reference Location (4 digits) | D10-3a | 2H.11 | 10 x 48 | 12 x 60 |
| Enhanced Reference Location | D10-4 | 2H.12 | 12 x 30<br>18 x 54 (O) | 18 x 54 |
| Intermediate Enhanced Reference Location | D10-5 | 2H.12 | 12 x 36<br>18 x 60 (O) | 18 x 60 |
| ~~Traffic Signal Speed~~ | ~~I1-1~~ | ~~2H.04~~ | ~~24 x 36~~ | |
| Jurisdictional Boundary | I2-1 | 2H.05 | Varies x 18**<br>Varies x 24 (O) | Varies x 36**<br>Varies x 42 (O) |
| Geographical Feature | I2-2 | 2H.06 | Varies x 18**<br>Varies x 24 (O) | Varies x 36** |
| Grade Separation Identification | I2-3 | 2H.10 | — | Varies x 18 |
| Grade Separation Identification (2 lines) | I2-3a | 2H.10 | — | Varies x 24 |
| Future Interstate Corridor | I2-4 | 2H.08 | 54 x 36 | 72 x 48 |
| Future I-XX Corridor | I2-4a | 2H.08 | 48 x 36 | 66 x 48 |
| Project Information | I2-5 | 2H.09 | 96 x 48 | 156 x 72 |
| Airport | I3-5 | 2H.01 | 24 x 24 | 30 x 30 |
| Bus Station | I3-6 | 2H.01 | 24 x 24 | 30 x 30 |
| Train Station | I3-7 | 2H.01 | 24 x 24 | 30 x 30 |
| Light Rail Transit Station | I3-8 | 2H.01 | 24 x 24 | — |
| Vehicle Ferry Terminal | I3-9 | 2H.01 | 24 x 24 | 30 x 30 |
| Passenger Only Ferry Terminal | I3-10 | 2H.01 | 24 x 24 | 30 x 30 |
| Ferry (plaque) | I3-10P | 2H.01 | 24 x 12 | 30 x 18 |
| Library | I4-1 | 2H.01 | 24 x 24 | — |
| Recycling Center | I4-2 | 2H.01 | 30 x 36 | — |
| Acknowledgment | I20-1 | 2H.13 | 36 x 30* | 72 x 48* |
| Acknowledgment | I20-2 | 2H.13 | 36 x 30* | 72 x 48* |
| Acknowledgment | I20-3 | 2H.13 | 42 x 24* | 96 x 36* |
| Acknowledgment - Rest Area | I20-4 | 2H.13 | 56 x 36* | 72 x 48* |
| Acknowledgment - Welcome Center | I20-4a | 2H.13 | 56 x 36* | 72 x 48* |
| Acknowledgment (plaque) | I20-5P | 2H.13 | Varies x Varies*** | Varies x Varies*** |
| Last In Corridor (plaque) | W16-19P | 2H.14 | 24 x 18 | 24 x 18 |

* The size shown is the maximum size for the corresponding roadway classification. The size of the sign and acknowledgment logo should be appropriately reduced where shorter legends are used.
** The size shown is for the typical sign illustrated in the figure. The size should be determined based on the number of lines of legend on the sign.
*** Limitations on the size of Acknowledgment plaques are provided in Section 2H.13.
**** Refer to FHWA's List of Known Errors for error in table. Refer to Section 1A.04 for more details.

Notes: 1. Larger signs may be used when appropriate, except for the I20 series signs and plaque
2. (O) denotes Oversized
3. Dimensions are in inches shown as width x height

## Table 2H-1(CA). California General Information Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Unincorporated Community | G9-2(CA) | 2H.05 | VAR x 18 | VAR x 30 |
| City Limit | G9-5(CA) | 2H.05 | VAR x 24 | VAR x 42 |
| Welcome to California | G10B(CA) | 2H.07 | 60 x 36 | 132 x 84 |
| WHERE WE HONOR VETERANS (plaque) | G10-4P(CA) | 2H.05 | 60 x 9 | 90 x 12 |
| Mountain Pass Elevation | G16(CA) | 2H.06 | VAR x 18 | VAR x 36 |
| Elevation | G17(CA) | 2H.06 | 36 x 18 | 72 x 36 |
| Coastal Access | SG28A(CA) | 2H.101(CA) | 30 x 24 | 48 x 36 |
| POST OFFICE | SG60A(CA) | 2H.102(CA) | 36 x 24 | — |

# CHAPTER 2I. GENERAL SERVICE SIGNS

## Section 2I.01 Sizes of General Service Signs

**Standard:**

01 **Except as provided in Section 2A.07, the sizes of General Service signs that have a standardized design shall be as shown in Table 2I-1 and Table 2I-1(CA).**

Support:

02 Section 2A.07 contains information regarding the applicability of the various columns in Table 2I-1.

Option:

03 Signs larger than those shown in Table 2I-1 may be used (see Section 2A.07).

## Section 2I.02 General Service Signs for Conventional Roads

Support:

01 On conventional roads, commercial services such as gas, food, and lodging generally are within sight and are available to the road user at reasonably frequent intervals along the route. Consequently, on this class of road there usually is no need for special signs calling attention to these services. Moreover, General Service signing is usually not needed in urban areas except for hospitals, law enforcement assistance, tourist information centers, and camping.

Option:

02 General Service signs (see Figure 2I-1 and Figure 2I-1(CA)) may be used on conventional roads where such services are infrequent and are found only on an intersecting highway or crossroad.

**Standard:**

03 **All General Service signs and supplemental sign panels shall have a white legend and border on a blue background.**

*Guidance:*

04 *General Service signs should be installed at a suitable distance in advance of the turn-off point or intersecting highway.*

05 *States that elect to provide General Service signing should establish a statewide policy or warrant for its use, and criteria for the availability of services. Local jurisdictions electing to use such signing should follow State policy for the sake of uniformity.*

Option:

06 Individual States may sign for whatever alternative fuels are available at appropriate locations.

**Standard:**

07 **To be eligible for an EV Charging General Service sign on a conventional road, the EV chargers provided shall meet the criteria for Direct Current Fast Chargers provided in 23 CFR 680.106 and be in continuous operation at least 16 hours per day, 7 days per week.**

08 **General Service signs, if used at intersections, shall be accompanied by a directional message.**

Option:

09 The Advance Turn (M5 series) or Directional Arrow (M6 series) auxiliary plaques (see Figure 2I-1) with white arrows on blue backgrounds may be used with General Service symbol signs to create a General Service directional assembly.

09a The NEXT RIGHT/LEFT (G58P(CA)) plaque may also be used in conjunction with the General Service signs.

10 The General Service sign legends may be either symbols or word messages.

**Standard:**

11 **Symbols and word message General Service legends shall not be intermixed on the same sign.**

12 **The Pharmacy (D9-20) sign shall only be used to indicate the availability of a pharmacy that is open, with a State-licensed pharmacist present and on duty, 24 hours per day, 7 days per week, and that is located within 3 miles of an interchange on the Federal-aid system. The D9-20 sign shall have a 24 HR (D9-20aP) plaque mounted below it.**

13 **Use of the Hospital (D9-2) sign or the HOSPITAL (D9-13aP) plaque (see Figure 2I-1) shall be limited to facilities that operate 24 hours per day, 7 days per week.**

Option:

14 The Emergency Medical Services (D9-13) sign (see Figure 2I-1 and Paragraph ~~20~~ 21 of this Section) may be used

for facilities that provide emergency medical care but do not operate on a full-time basis.

Support:

15 Formats for displaying different combinations of these services are described in Section 2I.03.

Option:

16 If the distance to the next point at which services are available is 10 miles or more, a Next Services Advance (D9-17P) plaque (see Figure 2I-2) may be installed below the General Service sign.

17 The International Symbol of Accessibility (D9-6) sign (see Figure 2I-1) may be used beneath General Service signs where paved ramps and rest room facilities accessible to, and usable by, persons with disabilities are provided.

*Guidance:*

18 *When the D9-6 sign is used in accordance with Paragraph 16 of this Section, and van-accessible parking is available at the facility, a VAN ACCESSIBLE (D9-6P) plaque (see Figure 2I-1) should be mounted below the D9-6 sign.*

Option:

19 The Recreational Vehicle Sanitary Station (D9-12) sign (see Figure 2I-1) may be used as needed to indicate the availability of facilities designed for the use of dumping wastes from recreational vehicle holding tanks.

20 The Litter Container (D9-4) sign (see Figure 2I-1) may be placed in advance of roadside turn-outs or rest areas, unless it distracts the driver's attention from other more important regulatory, warning, or directional signs.

21 The Emergency Medical Services (D9-13) symbol sign (see Figure 2I-1) may be used to identify medical service facilities that have been included in the Emergency Medical Services system under a signing policy developed by the State and/or local highway agency.

**Standard:**

22 **The Emergency Medical Services symbol sign shall not be used to identify services other than qualified hospitals, ambulance stations, and qualified free-standing emergency medical treatment centers. If used, the Emergency Medical Services symbol sign shall be supplemented by a sign or plaque, as provided in Paragraph ~~22~~ 23 of this Section, identifying the type of service provided.**

Option:

23 The Emergency Medical Services symbol sign may be used above the HOSPITAL (D9-13aP) plaque or above a plaque with the legend AMBULANCE STATION (D9-13bP), EMERGENCY MEDICAL CARE (D9-13cP), or TRAUMA CENTER (D9-13dP). The Emergency Medical Services symbol sign may also be used to supplement Telephone (D9-1), Channel 9 Monitored (D12-3) (see Figure 2I-8), or POLICE (D9-14) signs.

**Standard:**

24 **The legend EMERGENCY MEDICAL CARE shall not be used for services other than qualified free-standing emergency medical treatment centers.**

*Guidance:*

25 *Each State should develop a policy for the implementation of the Emergency Medical Services symbol sign.*

26 *The State should consider the following guidelines in the preparation of its policy:*

*A. AMBULANCE*
   *1. 24-hour service, 7 days per week.*
   *2. Staffed by two State-certified persons trained at least to the basic level.*
   *3. Vehicular communications with a hospital emergency department.*
   *4. Operator should have successfully completed an emergency-vehicle operator training course.*

*B. HOSPITAL*
   *1. 24-hour service, 7 days per week.*
   *2. Emergency department facilities with a physician (or emergency care nurse on duty within the emergency department with a physician on call) trained in emergency medical procedures on duty.*
   *3. Licensed or approved for definitive medical care by an appropriate State authority.*
   *4. Equipped for radio voice communications with ambulances and other hospitals.*

*C. Channel 9 Monitored*
   *1. Provided by either professional or volunteer monitors.*
   *2. Available 24 hours per day, 7 days per week.*
   *3. The service should be endorsed, sponsored, or controlled by an appropriate government authority to guarantee the level of monitoring.*

## Section 2I.03 General Service Signs for Freeways and Expressways

Support:

01 General Service (D9-18 series) signs (see Figure 2I-3) are generally not appropriate at major interchanges (see definition in Section 2E.11) and in urban areas.

**Standard:**

02 **General Service signs shall have a white legend and border on a blue background. Letter and numeral sizes shall comply with the minimum requirements of Tables 2E-2 through 2E-5. All approved symbols shall be permitted as alternatives to word messages, but symbols and word service messages shall not be intermixed on the same sign. If the services are not visible from the ramp of a single-exit interchange, the service signing shall be repeated in smaller size at the intersection of the exit ramp and the crossroad. Such service signs shall use arrows to indicate the direction to the services.**

*Guidance:*

03 *Where General Service signs are used along routes with exit numbering, the General Service sign should include the exit number within the sign face as shown in Figure 2I-3.*

04 *Distance to services should be displayed on General Service signs along the exit ramp where distances are more than ~~1~~ 0.5 mile from the ramp intersection with the crossroad.*

04a *To avoid misleading the road user, those services that are more than 0.5 miles from the access point on the major route to the service, should have a Distance with Arrow (G66-21aP(CA)) plaque installed below the service sign.*

Support:

04b Accordingly, it would be a disservice to the traveler to lead them off on to a minor road to a business providing a service when that same service can be obtained in a shorter distance by remaining on the major road.

*Guidance:*

05 *General Service signing should only be provided at locations where the road user can return to the freeway or expressway and continue in the same direction of travel.*

~~*Guidance:*~~

Support:

05a Refer to FHWA's List of Known Errors for error in heading between Paragraphs 5 and 6. Refer to Section 1A.04 for more details.

*Guidance:*

06 *Only services that fulfill the needs of the road user should be displayed on General Service signs. If State or local agencies elect to provide General Service signing, there should be a statewide policy for such signing and criteria for the eligibility and availability of the various types of services. The criteria should consider the following:*

- *A. Gas, diesel, and/or alternative fuels, except for electric vehicle (EV) charging, if all of the following are available:*
  1. *Vehicle services such as gas, oil, and water;*
  2. *Modern sanitary facilities and drinking water; and*
  3. *Continuous operations at least 16 hours per day, 7 days per week.*
- *B. Food if all of the following are available:*
  1. *Licensing or approval, where required;*
  2. *Continuous operation to serve at least two meals per day, at least 6 days per week; and*
  3. *Modern sanitary facilities.*
- *C. Lodging if all of the following are available:*
  1. *Licensing or approval, where required;*
  2. *Adequate sleeping accommodations; and*
  3. *Modern sanitary facilities.*
- *D. Public telephone if continuous operation, 7 days per week is available.*
- *E. Hospital if continuous emergency care capability, with a physician on duty 24 hours per day, 7 days per week is available. A physician on duty would include the following criteria and should be signed in accordance with the priority as follows:*
  1. *Physician on duty within the emergency department;*
  2. *Registered nurse on duty within the emergency department, with a physician in the hospital on call; or*
  3. *Registered nurse on duty within the emergency department, with a physician on call from office or home.*

*F. 24-Hour Pharmacy if a pharmacy is open, with a State-licensed pharmacist present and on duty, 24- hours per day, 7 days per week and is located within 3 miles of an interchange on the Federal-aid system.*

*G. Camping if all of the following are available:*

*1. Licensing or approval, where required;*

*2. Adequate parking accommodations; and*

*3. Modern sanitary facilities and drinking water.*

**Standard:**

07 **To be eligible for an EV Charging General Service sign on freeways and expressways, the EV chargers provided shall meet the criteria for Direct Current Fast Chargers provided in 23 CFR 680.106 and be in continuous operation at least 16 hours per day, 7 days per week.**

Support:

08 Motorist expectations for facilities providing alternative fuels, such as EV Charging, compressed natural gas, liquefied natural gas, liquefied petroleum gas, and hydrogen, vary considerably and alternative fuel vehicles might have different needs than conventional fuel vehicles.

*Guidance:*

09 *The policy criteria for alternative fuel vehicles should take into account the needs, convenience, and safety of alternative fuel vehicle users (see Section 2H.14).*

**Standard:**

10 **For any service that is operated on a seasonal basis only, the General Service signs shall be removed or covered during periods when the service is not available.**

11 **The General Service signs shall be mounted in an effective location, between the Advance Guide sign and the Exit Direction sign, in advance of the exit leading to the available services.**

Option:

12 If the distance to the next point where services are available is greater than 10 miles, a Next Services Advance (D9-17P) plaque (see Figure 2I-2) may be installed below the ~~Exit Direction~~ Advance Guide sign.

*Guidance:*

12a *Whenever possible, General Service signs should be placed below the ground mounted Advance Guide (G83(CA) Series) signs. No more than four symbols should be mounted beneath a single advance directional sign.*

Option:

12b If there are no ground mounted Advance Guide (G83(CA) Series) signs available, the General Service signs may be placed as separate installations with a Directional Arrow Auxiliary (M6 Series) sign or NEXT RIGHT/LEFT (G58P(CA)) plaque.

**Standard:**

13 **Signs for services shall comply with the format for General Service signs (see Section 2I.02) and as provided in this Manual. No more than six general road user services shall be displayed on one sign, which includes any appended supplemental signs or plaques. General Service signs shall display the legends for one or more of the following services: Food, Gas, EV Charging, Lodging, Camping, Phone, Hospital, 24-Hour Pharmacy, or Tourist Information.**

14 **The qualified services available shall be displayed at specific locations on the sign.**

*Guidance:*

15 *To provide for future services that might become available, the sign space normally reserved for a given service symbol or word should be left blank when that service is not present.*

16 *The standard display of word messages should be FOOD and PHONE in that order on the top line, and GAS and LODGING on the second line. If used, HOSPITAL, 24-HOUR PHARMACY, and CAMPING should be on separate lines (see Figure 2I-3).*

Option:

17 Signing for EV Charging, DIESEL, LP-GAS, or other alternative fuel services may be substituted for any of the general services or appended to such signs. The International Symbol of Accessibility (D9-6) sign (see Figure 2I-1) may be used for facilities that qualify.

*Guidance:*

18 *When symbols are used for the road user services, they should be displayed as follows:*

*A. Six services:*

*1. Top row—GAS, FOOD, and LODGING*

*2. Bottom row—PHONE, HOSPITAL, and CAMPING*

*B. Four services:*

*1. Top row—GAS and FOOD*

*2. Bottom row—LODGING and PHONE*

*C. Three services:*

*1. Top row—GAS, FOOD, and LODGING*

Option:

19 Substitutions of other services for any of the services described in Paragraph 18 of this Section may be made by placing the substitution in the lower right (four or six services) or extreme right (three services) portion of the sign. An action message or an interchange number may be used for symbol signs in the same manner as they are used for word message signs. The Diesel Fuel (D9-11) symbol or the LP-GAS (D9-11e) symbol may be substituted for the symbol representing fuel or appended to such assemblies. The Tourist Information (D9-10) or the 24-Hour Pharmacy (D9-20 and D9-20aP) symbol may be substituted on any of the configurations provided in Paragraph 18 of this Section.

*Guidance:*

20 *At rural interchange areas where limited road user services are available and where it is unlikely that additional services will be provided within the near future, a Rural Interchange General Services (D9-18dP, D9-18eP, or D9-18fP) plaque displaying one to three services (words or symbols) ~~may~~ should be mounted below a post-mounted Interchange Advance guide sign.*

**Standard:**

21 **If more than three services become available at rural interchange areas where limited road user services were anticipated, the appended supplemental plaque described in Paragraph 20 of this Section shall be removed and replaced with an independently mounted General Service sign as described in this Section.**

Option:

22 A separate Telephone Service (D9-1) sign (see Figure 2I-1) may be installed if telephone facilities are located adjacent to the route at places where public telephones would not normally be expected.

23 The Recreational Vehicle Sanitary Station (D9-12) sign (see Figure 2I-1) may be used as needed to indicate the availability of facilities designed for dumping wastes from recreational vehicle holding tanks.

24 In some locations, signs may be used to indicate that services are not available.

25 A separate Truck Parking (D9-16) sign (see Figure 2I-1) may be mounted below the other general road user services to direct truck drivers to designated parking areas.

26 A TRUCK EXTERNAL POWER (D9-16aP) plaque (see Figure 2I-1) may be mounted below the Truck Parking (D9-16) sign to indicate the availability of receptacles providing power for electrical devices within the truck.

Support:

26a Refer to FHWA's List of Known Errors for error in Paragraph 26. Refer to Section 1A.04 for more details.

Option:

27 General Service signs may be placed where appropriate, on freeways and expressways and for bypassed communities reasonably accessible from the highway.

Support:

28 General Service signs are not normally used on conventional highways except in rural areas where the service facilities are not visible from the highway or where commercial services are infrequent and the road users may need the information to enable them to plan their stops. Service signing is intended to be a service to the road user and not to be advertising for individual businesses. When private advertising for a service is provided, there is no need to place General Service signs.

29 In urban areas, commercial services (such as fuel, food, and lodging) are generally within sight and available to the road user at reasonably frequent intervals along the route. However, they can be desirable or necessary where services are infrequent or in areas that are predominantly residential or industrial, where such services are not readily apparent. Also, if the visibility of the private advertising signs have impaired or eliminated either by sound-walls or other items constructed on State right-of-way, or by landscaping or other vegetation that cannot be trimmed or removed, the location can qualify for General Service signing.

**Standard:**

30 **The following criteria shall apply to General Service signs:**

**1. The business shall be within 1,000 feet of the intersection.**

**2. All other qualifying criteria for Fuel, Food, and Lodging listed below shall be met.**

Support:

31 Except for the conditions stated above, General Service signing will not normally be provided in urban areas except for signs directing to a hospital and camping.

**Standard:**

32 **Follow-up signing, if necessary, shall be placed by local jurisdictions before General Service signs are placed on the State highway.**

33 **The maximum distance to a service station shall be 0.5 miles and have reasonably direct access from and return to the highway.**

Option:

34 Service may be signed to in bypassed communities, if the distance to the service is less than the distance to the next service on the through route.

**Standard:**

35 **Fuel, oil, compressed air, air gauge, radiator water, drinking water, telephone and restrooms shall be available during all service hours.**

*Guidance:*

36 *The station should be open at least 12 hours a day.*

**Standard:**

37 **Where gasoline is available, the Gas (D9-7) symbol sign shall be used.**

38 **Where gasoline and diesel are available, the Diesel Fuel (D9-11) symbol sign (with a superimposed "D") shall be used.**

Option:

39 Where biofuel is available, the Biofuel (D9-11g) sign may be used in addition to other appropriate service signs.

40 The ELECTRIC VEHICLE CHARGING (D9-11b) sign may be used for Electric Vehicle Charging Stations in compliance with paragraph 07 of this section or paragraph 07 of section 2I.02 for conventional highways.

41 The FAST (G66-21cP(CA)) header plaque may be used to supplement the D9-11b sign to indicate that a Fast Electric Vehicle Charging Station is located off the State highway.

Support:

42 A Fast Electric Vehicle Charging Station is where the rate of battery electric charging is at least 20 kWh in a 30-minute period. Fast charging stations include direct current (DC) fast charging and battery switching.

Option:

43 The Liquefied Petroleum Gas (D9-11e) sign may be used for Liquefied Petroleum Gas Refueling Stations within 3 miles of a State highway and be available to the public at least 16 hours a day.

44 Where methanol fuel is available, the Methanol Fuel (G66-11B(CA)) sign may be used in addition to other appropriate service signs.

45 The Compressed Natural Gas (D9-11a) sign may be used for Compressed Natural Gas Refueling Stations within 3 miles of a State highway and be available to the public at least 16 hours a day.

46 The Liquefied Natural Gas (D9-11d) sign may be used for Liquefied Natural Gas Refueling Stations within 3 miles of a State highway and be available to the public at least 16 hours a day.

47 Where ethanol E85 fuel is available, the Alternative fuel -Ethanol (D9-11c) symbol sign may be used in addition to the other appropriate signs.

48 Where hydrogen (HYD) fuel is available, the Hydrogen (D9-11f) symbol sign may be used within 3 miles of a State highway and be available to the public at least 16 hours a day, in addition to the other appropriate signs.

Support:

49 Refer to Section 2A.04 on the development of new word message signs for alternative fuels.

## Food or Lodging Signs (D9-8 and D9-9)

**Standard:**

50 **To qualify for food signs, single establishments shall be open to serve at least two meals a day. Both food and lodging establishments shall score at least 10 points in the following categories, including at least one point in Category 4, to qualify for signs.**

**1. Maximum distance from the highway exit to the first service facility:**

| | |
|---|---|
| **0 – 1 mile** | **3 Points** |
| **1 – 2 miles** | **2 Points** |
| **2 – 5 miles** | **1 Point** |
| **More than 5 miles** | **0 Points** |

**2. Number of traffic control devices (signals or stop signs) between the exit and the facility:**

| | |
|---|---|
| **0 - 1 Devices** | **3 Points** |
| **2 – 3 Devices** | **2 Points** |
| **4 – 4 Devices** | **1 Point** |
| **More than 5** | **0 Points** |

**3. Number of seats available in food facilities:**

| | |
|---|---|
| **50 or more** | **3 Points** |
| **30 – 49** | **2 Points** |
| **15 – 29** | **1 Point** |
| **Less than 15** | **0 Points** |

**4. Number of rooms available with private baths at lodging facilities:**

| | |
|---|---|
| **30 or more** | **3 Points** |
| **10 – 30** | **2 Points** |
| **2 – 10** | **1 Point** |
| **Less than 2** | **0 Points** |

**5. Distance to the next highway exit served by a food or lodging establishment:**

| | |
|---|---|
| **15 miles or more** | **3 Points** |
| **7 – 15 miles** | **2 Points** |
| **3 – 7 miles** | **1 Point** |
| **3 miles or less** | **0 Points** |

*Guidance:*

*6. Judgment factors include comfort, appearance, scope of service provided, etc., should be scored 0 to 3 points by the inspecting official.*

**Camping Signs (D9-3)**

Option:

51 The Camping (D9-3) sign may be placed for campgrounds providing individual service and utility hookups for one-night stops for travel trailers, campers and other recreational vehicles.

**Standard:**

52 **To qualify for the Camping (D9-3) sign, the facility shall meet all the following criteria:**

1. **It shall be licensed for private operation or be operated by a governmental agency.**
2. **It shall be accessible to and capable of handling all types of recreational vehicles.**
3. **It shall be open to the public for 24 hours each day during the time the signs are in place.**
4. **It shall be no more than 10 miles from the highway exit designated by the sign.**
5. **It shall be equipped to handle a minimum of 25 travel trailers, campers, and other recreational vehicles for overnight stops, including individual service, utility hook-ups and individual sewer connections or a central sewer holding tank.**

**Hospital Sign (D9-2 and D9-13)**

Option:

53 Hospitals, as defined in CCR, Title 22, Division 5, Chapter 1, Article 1, § 70005 and licensed by the Department of Health Services, which provide 24 hour inpatient care, in urban and rural areas which are located in close proximity to a highway and provide specified medical services, may qualify for the Hospital (D9-2) symbol sign.

54 The D9-2 signs may be provided for hospitals in urban areas within 1 mile of a highway, accept emergency cases and have a medical doctor in attendance 24 hours a day.

55 The D9-2 signs may be provided for hospitals in rural areas within 3 miles of a highway, accept emergency cases and have a doctor on call 24 hours a day.

56 Exceptions to the distance requirement may be made in areas where hospitals are a great distance apart.

**Telephone Sign (D9-1)**

57 The Telephone (D9-1) sign is placed where a telephone is available 24 hours a day and is located in a remote area where it would not be expected.

**STAA Truck Service and Terminal Access Signs (G66-55(CA) and G66-56(CA))**

58 The STAA Truck Service (G66-55(CA)) and STAA Truck Terminal Access (G66-56(CA)) signs may be placed by Caltrans on the National Network of Highways to identify locations where STAA trucks may leave the National Network to access services and terminals per CVC § 35401.5(c) and (d). The G66-55(CA) and G66-56(CA) signs may also be used on Terminal Access routes to indicate turns and access ending points.

Support:

59 More information on the National Network and State Terminal Access routes is available from the Office of Traffic Engineering in Caltrans' Division of Traffic Operations. Some of this information can also be accessed on the Internet at the following web site: http://www.dot.ca.gov/hq/traffops/engineering/trucks/

**STAA Definitions**

- **STAA** - Surface Transportation Assistance Act of 1982, federal funding authorization that declared, among other things;
  1. Semitrailers up to and including 48 feet in length are exempt from state kingpin to rear axle (KPRA) and overall combination length limits,
  2. Semitrailers over 48 feet long and up to and including 53 feet in length are exempt from state overall length limits. (These semitrailers are subject to state KPRA limits in California.),
  3. Double trailers in combination where each does not exceed 28.5 feet in length are exempt from any state overall length limits.
  4. Federal length rules apply to these combination vehicles only when operating on a federally declared system of highways called the National Network and the state and local determined terminal access and service access highways.

  Note: Tour buses up to 45 feet long (motorcoaches) were added to the federal regulations under the Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA). Motorhomes (housecars) up to 45 feet in length were legalized in California in October 2001. Although highway restrictions apply to both these vehicle types, they may operate beyond the STAA Network. However, the Motorcoach and Motorhome Network map defines highway access restrictions imposed at the limits of turning performance (i.e., the 45 feet vehicles would need to cross centerlines).
- **National Network** – federally designated state highways for STAA vehicles as defined and listed in the Federal Code of Regulations, Title 23, Part 658 (23CFR658) and 658.23 Appendix A.
- **Terminal Access** – state and local agency highways designated for "reasonable access" to/from the National Network by STAA vehicles as provided for in the CVC § 35401.5(c) and (d). All transitions (egress) from National Network to Terminal Access highways, critical decision points (all turns) and Terminal Access end points should be so designated with a G66-56(CA) sign.
- **STAA Network** – the California network of Terminal Access and National Network highways. A map and Truck Route List identifying the STAA Network (includes State highway system only, does not include local streets and roads) are available from Office of Traffic Engineering in Caltrans' Division of Traffic Operations.
- **Service Access (SA) –** state and local agency highways identified for service use by STAA vehicles. Service access is limited to 1 mile off the STAA network and must be "identified." Identification may include a map indicating service access for STAA vehicles, an approved list, or by G66-55(CA) signs.
- **STAA trucks** – are truck tractor-semitrailer combinations, or doubles with a long length configuration such that the vehicles may operate legally only on the STAA Network and SA routes.

**STAA Truck Service (G66-55(CA)) Sign**

Option:

60 The STAA Truck Service (G66-55(CA)) Sign may be placed on the STAA Network to identify locations where STAA trucks may exit the network to obtain services as provided for by CVC § 35401.5(c) and (d).

**Standard:**

61 **STAA trucks shall not exit the STAA Network to obtain services unless the G66-55(CA) sign indicates egress.**

62 **STAA Truck Service (G66-55(CA)) signs shall be provided as follows:**

1. **Access – All the following requirements shall be met:**
   - **Fuel, food, lodging and/or repair facilities shall be located within 1 mile of the point of ingress and egress from the designated system.**
   - **Ramps, intersections and streets shall have adequate turning radii and lane widths to safely accommodate STAA trucks.**
   - **The service being made accessible shall have parking provisions for STAA trucks, or alternative parking within 1 mile shall be identified.**
2. **Facilities – Two of the four services - fuel, food, lodging & repair - shall be provided:**
   - **Fuel (Diesel) - Fuel is available at least 12 hours during the working day.**
   - **Food - Conforms to requirements for Food (D9-8) signs in this section.**
   - **Lodging - Conforms to requirements for Lodging (D9-9) signs in this section.**
   - **Repair Services - Oil, tire repair, engine and brake services are available.**
3. **Concurrence:**
   - **The proposal for G66-55(CA) signing has written concurrence by the local jurisdiction(s) having responsibility for maintenance of the roadways within 1 mile of ingress/egress.**
4. **Sign Placement:**
   - **The G66-55(CA) sign on the STAA Network shall be displayed in advance of the ramp or intersection.**
   - **Although no follow-up signing is required, trailblazer signs may be used where applicable.**

## STAA Truck Terminal Access (G66-56(CA)) Sign

Option:

63 STAA Truck Terminal Access (G66-56(CA)) signs may be placed to identify Terminal Access routes leading from the National Network as trailblazers and to indicate the end of a Terminal Access route. STAA trucks can exit the National Network onto Terminal Access routes only where indicated by a G66-56(CA) sign. (Note: In California, no signs indicate the National Network routes.) State routes may be designated Terminal Access only if the curves, ramps, and intersections meet the geometric criteria for STAA trucks, including adequate turning radii and lane width.

Support:

64 The geometric criteria for using the STAA design vehicle to design or analyze the intersection, ramp, or curve are described in Topic 404 in the Caltrans Highway Design Manual. If the Terminal Access route ends without connecting to another STAA route, then the geometric criteria also include ensuring that an adequate turn-around location is available for all STAA vehicles 24 hours per day, 7 days per week.

**Standard:**

65 **STAA Truck Terminal Access (G66-56(CA)) signs shall be provided as follows:**

1. **On State Routes:**
   - **State route segments under consideration for Terminal Access shall meet all geometric criteria (see Paragraph 60) for STAA trucks.**
   - **The end of any Terminal Access route segment shall be signed as such.**
   - **Trail-blazing signs shall be placed at decision points indicating direction(s) a STAA truck may proceed.**
   - **The G66-56(CA) sign shall be placed in advance of the ramp or intersection where a STAA truck may exit the National Network or the designated Terminal Access routes.**
2. **On Local Routes:**
   - **Signing of egress from a State Terminal Access route to a local Terminal Access route shall be done by Caltrans, only if:**
     a) **The local agency has requested that Caltrans place the sign and,**
     b) **the local agency has informed Caltrans in writing that the local roads and intersections on the proposed local Terminal Access route meet all geometric criteria for STAA trucks and,**

**c) where the proposed Terminal Access route passes through more than one local jurisdiction, each affected agency has informed Caltrans in writing that the local roads and intersections on the proposed local Terminal Access route meet all geometric criteria for STAA trucks and,**

**d) Caltrans has verified that the State highway ramps or intersections meet all geometric criteria for STAA trucks.**

- **After steps a) through d) have been completed in item 2 "On Local Routes," the local agency or agencies shall place G66-56(CA) signs at every critical decision point on the Terminal Access route in their respective jurisdictions, including a G66-56(CA) sign with END Auxiliary (M4-6) sign at the 24-hour turn-around location where the Terminal Access route ends if it does not connect to another STAA route.**
- **After the local agency or agencies have placed all the required signs on the local Terminal Access routes, Caltrans shall place a G66-56(CA) sign on the State route in advance of the ramp or intersection to the local Terminal Access route.**

*Guidance:*

- *Local agencies should furnish Terminal Access route information to the Office of Commercial Vehicle Operations for web publication. Some examples are available on the following website: https://dot.ca.gov/programs/traffic-operations/legal-truck-access/local-truck-routes*

**NEXT EXIT OK Sign (G66-56aP(CA))**

Option:

66 The NEXT EXIT OK (G66-56aP(CA)) sign may be used below the appropriate G66-55(CA) or G66-56(CA) signs.

**Law Enforcement Signs (G66-57A(CA), G66-61A(CA) and D9-14**

67 The Highway Patrol (G66-57A(CA)) signs may be placed for California Highway Patrol offices located within 1 mile of a highway.

68 The Sheriff (G66-61A(CA)) sign may be placed for a sheriff's office located within 1 mile of a highway.

69 The Police (D9-14) sign may be placed for a police station located within 1 mile of a highway.

**Emergency Services Signs**

70 Emergency Service signs, such as DRINKING WATER, RADIATOR WATER; etc. may be placed when appropriate.

**Call Box Signs (SG25(CA) and SG41(CA))**

Support:

71 The Call Box (SG25(CA)) sign is used to designate call boxes on the county SAFE (Service Authority for Freeway Emergencies) Call Box System. The special sign sizes are intended for use only on scenic highways, within designated coastal zones and National or State parks, to keep signing compatible with scenic values.

72 The call box identification number is established by using the route number to the left of the hyphen. The first two numbers to the right of the hyphen are the post mile numbers (or three numbers if applicable); the last number locates the call box within the post mile.

73 For northbound and eastbound routes, this number will be 2 for the call box in the first quarter mile; 4 for the call box between one quarter and one half mile; 6 for the call box between one half and three quarter mile; and 8 for the call box between three quarter and one mile, within a given post mile. 0 will be used for infills or for call boxes at the post mile.

74 For southbound and westbound routes, this number will be 3 for the call box in the first quarter mile; 5 for the call box between one quarter and one half mile; 7 for the call box between one half and three quarter mile; and 9 for the call box between three quarter and one mile, within a given post mile. 1 will be used for infills or for call boxes at the post mile.

Option:

- A letter code may precede the post mile (R for realignment, etc.).

**Standard:**

- **Call boxes located in the median shall be designated by the letter "M" following the post mile.**
- **Call boxes located on a transition or connector shall be designated by the letter "T" following the post mile.**
- **Call boxes located at a park and ride lot shall be designated by the letter "A" following the post mile.**
- **Call boxes located on a carpool lane shall be designated by the letter "P" following the post mile.**
- **Call boxes located on a split (i.e. Cypress) shall be designated by the letter "S" following the post mile.**

Option:

75 The END CALL BOXES (SG41(CA)) sign may be used to inform motorists of the end of the SAFE Call Box System for a particular segment of highway.

**CAL Fire Station Signs (SG38A(CA) and SG39A(CA))**

Option:

76 The CAL FIRE STATION NEXT RIGHT (SG38A(CA)) sign may be used on freeways in rural areas to give advance notice of an exit to a California Department of Forestry Fire Station which is within 0.5 miles of the exit and is open 24 hours each day of the year.

77 The CAL FIRE STATION with Arrow (SG39A(CA)) sign may be used in rural areas on expressways, conventional highways and freeway ramp terminals in advance of the turn off to a California Department of Forestry Fire Station which is within 0.5 miles of the exit and is open 24 hours each day of the year.

## Section 2I.04 Interstate Oasis Signing (D5-12 Series)

Support:

01 An Interstate Oasis is a facility near an Interstate highway that provides products and services to the public, 24-hour access to public restrooms, and parking for automobiles and heavy trucks. Interstate Oasis guide signs inform road users on Interstate highways as to the presence of an Interstate Oasis at an interchange and which businesses have been designated by the State within which they are traveling as having met the eligibility criteria of the Federal Highway Administration's Interstate Oasis policy. The FHWA's policy, which is dated October 18, 2006, and which can be viewed on the MUTCD Web site at http://mutcd.fhwa.dot.gov/res-policy.htm, provides a more detailed definition of an Interstate Oasis and specifies the eligibility criteria for an Interstate Oasis designation in compliance with the requirements of laws enacted by Congress.

*Guidance:*

02 *If a State elects to provide or allow Interstate Oasis signing (see Figure 2I-4), there should be a statewide policy, program, procedures, and criteria for the designation and signing of a facility as an Interstate Oasis that complies with the FHWA's policy and with the provisions of this Section.*

03 *States electing to provide or allow Interstate Oasis signing should use the following signing practices on the freeway for any given exit to identify the availability of a designated Interstate Oasis:*

A. *If adequate sign spacing allows, a separate Interstate Oasis (D5-12) sign should be installed in an effective location with spacing of at least 800 feet from other adjacent guide signs, including any Specific Service signs. This Interstate Oasis sign should be located upstream from the Advance Guide sign or between the Advance Guide sign and the Exit Direction sign for the exit leading to the Interstate Oasis. The Interstate Oasis sign should display the words INTERSTATE OASIS and the exit number or, for an unnumbered interchange, an action message such as NEXT RIGHT.*

B. *If the spacing of the other guide signs precludes the use of a separate sign as described in Item A of this Paragraph, an INTERSTATE OASIS (D5-12aP) supplemental plaque should be mounted below an existing D9-18 series General Service sign for the interchange.*

Option:

04 If Specific Service signing is provided at the interchange, a business designated as an Interstate Oasis and having a business identification sign panel on the Food and/or Gas Specific Service signs may use the bottom portion of the business identification sign panel to display the word OASIS.

05 If Specific Service signing is not provided at the interchange, the name of the business designated as an Interstate Oasis may be displayed on a business identification sign panel, in compliance with the provisions of Sections 2J.03 through 2J.05, below the INTERSTATE OASIS legend on the D5-12 sign.

**Standard:**

06 **If Specific Service signs containing the OASIS legend as a part of the business identification sign panel(s) are not used on the ramp and if the Interstate Oasis is not clearly visible and identifiable from the exit ramp, an Interstate Oasis Directional (D5-12b) sign shall be provided on the exit ramp to indicate the direction and distance to the Interstate Oasis.**

07 **If needed, additional trailblazer guide signs shall be used along the crossroad to guide road users to an Interstate Oasis.**

## Section 2I.05 Rest Area and Other Roadside Area Signs (D5-1 through D5-11 Series)

**Standard:**

01 **Rest Area signs (see Figure 2I-5 and Figure 2I-5(CA)) shall have a retroreflective white legend and border on a blue background.**

02 **Signs that include the legend REST AREA shall be used only where parking and restroom facilities are available.**

*Guidance:*

03 *A roadside area that does not contain restroom facilities should be signed to indicate the major road user service that is provided. For example, the sign legends for an area with only parking should use the words PARKING AREA (D5-9 series) instead of REST AREA. The sign legends for an area with only picnic tables and parking should use words such as PICNIC AREA, ROADSIDE TABLE, or ROADSIDE PARK (D5- 10 series) instead of REST AREA.*

04 *Rest areas that have tourist information and welcome centers should be signed as provided in Section 2I.08.*

05 *Scenic area signing should be consistent with that provided for rest areas, except that the legends should use words such as SCENIC AREA, SCENIC VIEW, or SCENIC OVERLOOK (D5-11 series) instead of REST AREA.*

06 *If a rest area or other roadside area is provided on a conventional road, a D5-1 and/or D5-1a sign should be installed in advance of the rest area or other roadside area to permit the driver to reduce speed in preparation for leaving the highway. A D5-5 sign (or a D5-2 sign if an exit ramp is provided) should be installed at the turn-off point where the driver needs to leave the highway to access the rest area or other roadside area.*

07 *If a rest area or other roadside area is provided on a freeway or expressway, a D5-1 sign should be placed 1 mile and/or 2 miles in advance of the rest area.*

**Standard:**

07a **When rest areas are provided (or planned) on the same route, a NEXT REST (XX MILES) Plaque (G79aP(CA)) shall be placed below the REST AREA (XX MILES) (D5-1) sign.**

08 **A D5-2a sign shall be placed at the rest area or other roadside area exit gore.**

Option:

09 A D5-1a sign may be placed between the D5-1 sign and the exit gore on a freeway or expressway. A second D5-1 sign may be used in place of the D5-1a sign with a distance to the nearest ½ or ¼ mile displayed as a fraction rather than a decimal for distances of less than 1 mile.

10 To provide the road user with information on the location of succeeding rest areas, a Next Rest Area (D5-6) sign (see Figure 2I-5) may be installed independently or as a supplemental sign mounted below one of the REST AREA advance guide signs.

**Standard:**

11 **All signs on freeways and expressways for rest and other roadside areas shall have letter and numeral sizes that comply with the minimum requirements of Tables 2E-2 through 2E-5. The sizes for General Service signs that have standardized designs shall be as shown in Table 2I-1.**

Option:

12 If the rest area has facilities for persons with disabilities (see Section 2I.02), the International Symbol of Accessibility (D9-6) sign (see Figure 2I-1) may be placed with or beneath an advance guide sign for the rest area.

13 If telecommunication devices for the deaf (TDD) are available at the rest area, the TDD (D9-21) symbol sign (see Figure 2I-1) may be used to supplement the advance guide signs for the rest area.

14 If wireless Internet services are available at the rest area, the Wireless Internet (D9-22) symbol sign (see Figure 2I-1) may be used to supplement the advance guide signs for the rest area.

15 The PATROLLED BY HIGHWAY PATROL (G80B(CA)) sign may be used below the REST AREA (D5-2) sign where the California Highway Patrol has made an agreement with Caltrans to patrol a specific rest area.

16 The Highway Patrol PARKING ONLY (S34(CA)) sign may be used in a Safety Roadside Rest Area to designate a parking stall(s) dedicated for California Highway Patrol Vehicles only. The S34(CA) sign may be supplemented with a "CHP" pavement marking.

*Guidance:*

17 *When used, the pavement marking should be located so that it is visible when a vehicle is parked in the space.*

Option:

18 The Rest Area/Vista Point 8 HOUR PARKING (S23(CA)) sign may be used to discourage extended stays in roadside rests or

vista points for noncommercial vehicles. The 10-HOUR PARKING COMMERCIAL MOTOR VEHICLES (R39-3(CA)) may be used to allow ten total hours for parking for commercial vehicles. Refer to CVC § 22651(s)1 and CVC § 22651(s)2.

19 The NO SOLICITING (S24(CA)) sign may be used to prohibit the vending of merchandise, foodstuff, or services and the soliciting of money within any roadside rest areas or vista points. Refer to SHC § 225.5. Refer to Section 1A.05 for information regarding this publication.

20 The ALT FUEL VEHICLE PARKING ONLY (R116(CA)) sign may be used in a public parking facility or a park-and-ride lot to designate a parking stall(s) dedicated for alternatively fueled vehicles only.

Support:

21 Public Resource Code § 25722.9 (a) defines "alternatively fueled vehicles" as light-, medium-, and heavy-duty vehicles that reduce petroleum usage and related emissions by using advanced technologies and fuels, including those vehicles described in § 5205.5 of the CVC.

## Section 2I.06 Brake Check Area Signs (D5-13 and D5-14)

*Guidance:*

01 *If an area has been provided for drivers to pull off of the roadway to check the brakes on their vehicle, a Brake Check Area Advance (D5-13) sign (see Figure 2I-6) should be installed in advance of the brake check area.*

Support:

02 The Brake Check Area (G66-58(CA) sign (refer to Figure 2I-6(CA)) is provided to give notice to motorists, particularly truck operators, of an area provided to allow vehicle operators to stop and check the condition and adjustment of their brakes. These areas are generally provided just prior to a significant downgrade.

## Section 2I.07 Chain-Up Area Signs (D5-15 and D5-16)

*Guidance:*

01 *If an area has been provided for drivers to pull off of the roadway to install chains on their tires, a Chain-Up Area Advance (D5-15) sign (see Figure 2I-6) should be installed in advance of the chain-up area, and a D5-16 sign (see Figure 2I-6) should be placed at the entrance to the chain-up area.*

## Section 2I.08 Tourist Information and Welcome Center Signs (D5-7 Series and D5-8)

Support:

01 Tourist information and welcome centers have been constructed within rest areas on freeways and expressways and are operated by either a State or a private organization. Others have been located within close proximity to these facilities and operated by civic clubs, chambers of commerce, or private enterprise.

*Guidance:*

02 *The number of supplemental sign panels installed with Tourist Information or Welcome Center signs should be limited to three so as not to impose an undue informational load on the road user.*

**Standard:**

03 **Tourist Information or Welcome Center signs (see Figure 2I-7 and Figure 2I-7(CA)) shall have a white legend and border on a blue background. Continuously staffed or unstaffed operation at least 8 hours per day, 7 days per week, shall be required.**

04 **If operated only on a seasonal basis, the Tourist Information or Welcome Center signs shall be removed or covered during the off seasons.**

*Guidance:*

05 *For freeway or expressway rest area locations that also serve as tourist information or welcome centers, the following signing criteria should be used:*

*A. The locations for tourist information and welcome center Advance Guide, Exit Direction, and Exit Gore signs should meet the General Service signing requirements described in Section 2I.03.*

*B. If the signing for the tourist information or welcome center is to be accomplished in conjunction with the initial signing for the rest areas, the message on the Rest Area Tourist Info Center Advance (D5-7) sign should be REST AREA, TOURIST INFO CENTER, XX MILES or REST AREA, STATE NAME (optional), WELCOME CENTER XX MILES. On the Rest Area Tourist Info Center Entrance Direction (D5-8) sign the message should be REST AREA, TOURIST INFO CENTER with a diagonally upward-pointing directional arrow (or NEXT RIGHT), or*

*REST AREA, STATE NAME (optional), WELCOME CENTER with a diagonally upward-pointing directional arrow (or NEXT RIGHT).*

*C. If the initial rest area Advance Guide and Exit Direction signing is in place, these signs should include, on supplemental signs, the legend TOURIST INFO CENTER or STATE NAME (optional), WELCOME CENTER.*

*D. The Exit Gore sign should contain only the legend REST AREA with the arrow and should not be supplemented with any legend pertaining to the tourist information center or welcome center.*

Option:

06 As an alternative to the supplemental TOURIST INFO CENTER legend, the Tourist Information (D9-10) sign (see Figure 2I-1) may be appended beneath the REST AREA advance guide sign.

07 The name of the State or local jurisdiction may appear on the Advance Guide and Exit Direction tourist information/welcome center signs if the jurisdiction controls the operation of the tourist information or welcome center and the center meets the operating criteria set forth in this Manual and is consistent with State policies.

*Guidance:*

08 *For tourist information centers that are located off the freeway or expressway facility, additional signing criteria should be as follows:*

*A. Each State should adopt a policy establishing the maximum distance that a tourist information center can be located from the interchange in order to be included on official signs.*

*B. The location of signing should be in accordance with requirements pertaining to General Service signing (see Section 2I.03).*

*C. Signing along the crossroad should be installed to guide the road user from the interchange to the tourist information center and back to the interchange.*

Option:

09 As an alternative, the Tourist Information (D9-10) sign (see Figure 2I-1) may be appended to the guide signs for the exit that provides access to the tourist information center. As a second alternative, the Tourist Information sign may be combined with General Service signing.

## Tourist Information Signs (G81-21(CA) and G81-24(CA))

Option:

10 The TOURIST INFORMATION (G81-21(CA) and G81-24(CA)) signs may be placed directing to off-highway facilities.

Support:

11 These signed facilities need to have a principal function of providing local tourist information. Those facilities provided by local chamber of commerce (or other official body) representing a group of people or businesses need to be given initial priority for signing.

*Guidance:*

12 *The G81-21(CA) or G81-24(CA) signs should be placed on State highways only where privately-owned off-highway signs would not reasonably provide adequate directions to motorists. These signs should be restricted to those facilities which are spaced no closer than 15 miles apart in each direction along any highway. An excessive number of supplemental panels should not be installed with Tourist Information or Welcome Center signs so as not to overload the road user.*

13 *These signs should be placed beneath another primary guide sign.*

Option:

14 If no guide signs are available, the G81-21(CA) or G81-24(CA) signs may be placed as separate installations.

*Guidance:*

15 *Facilities should be within 0.5 miles of the highway and have reasonably direct access from, and return to, the highway.*

16 *Facilities should provide lighting, telephone and information on a 24-hour basis and cover the entire area served. Information should include area and regional maps, and 24-hour service information including, but not limited to medical, police, fire, restrooms, auto repair service and fuel. Outside maps and displays must be provided at all manned centers for use during periods when the facility is not manned.*

17 *Facilities should have adequate on premise and off right-of-way signing, where necessary, denoting "Tourist Information". Displays should be professionally designed and constructed and provide resistance to fading, chipping and vandalism.*

18 *For freeway or expressway rest area locations that also serve as tourist information centers, the following signing criteria should be used:*

*A. The locations for the Advance Guide (G83(CA) Series), Exit Direction (G85(CA) Series), and Exit Gore (E5-1) signs should meet the General Service signing requirements.*

*B. The TOURIST INFORMATION (G81-21(CA) and G81-24(CA)) signs should be placed beneath the REST AREA (D5-2) sign or other primary guide sign. If no guide signs are available, they may be placed as a separate installation.*

*C. The gore sign should contain only the legend REST AREA with the arrow and should not be supplemented with any legend pertaining to the tourist information.*

## California Welcome Center Signs (SG47(CA) Series)

Option:

19 The CALIFORNIA WELCOME CENTER (SG47(CA) Series) signs may be placed directing to a statewide network of visitor information centers as designated by the California Office of Tourism to encourage tourism in California and provide benefits to the State economy.

Support:

20 The facilities signed need to have a principal function of providing statewide tourist information. Centers that can be so designated need to include, but not be limited to, centers operated by convention centers and visitor bureaus, chambers of commerce, federal, state or local governments, or private entities.

**Standard:**

21 **Designation of an entity as a California Welcome Center shall be based on conditions established by the Office of Tourism through written agreement with the entity.**

22 **The SG47(CA) Series signs shall have a yellow welcome center logo, and a white legend and border on a blue background.**

*Guidance:*

23 *The SG47(CA) Series signs should be placed as separate installations with the individual welcome centers being charged directly for the initial and ongoing cost and fees related production, maintenance and permitting of the signs.*

24 *Facilities should be within 3 miles in urban areas and 5 miles of a State highway and have reasonably direct access from, and return to, the highway.*

**Standard:**

25 **Follow-up signing or trail blazers, if necessary, shall be placed by local jurisdictions before these signs are place on the State highway.**

26 **If operated only on a seasonal basis, where criteria cannot be met during closed periods, signs shall be covered or removed as directed by the Office of Tourism.**

Option:

27 The CALIFORNIA WELCOME CENTER X MILES (SG47A(CA)) sign may be placed on the nearest freeway approximately 2 miles, or more as appropriate, in advance of the exit to a California Welcome Center that has been established under the authority of the California Office of Tourism.

28 The CALIFORNIA WELCOME CENTER NEXT RIGHT (SG47B(CA)) sign may be placed on the nearest freeway, at the appropriate exit to a California Welcome Center that has been established under the authority of the California Office of Tourism.

29 The CALIFORNIA WELCOME CENTER with Arrow (SG47C(CA)) sign may be placed at a freeway ramp terminal, conventional highway or local road to provide direction to a California Welcome Center that has been established under the authority of the California Office of Tourism.

30 The CALIFORNIA WELCOME CENTER X MILES with Arrow (SG47D(CA)) sign may be placed at a freeway ramp terminal to provide direction and distance to a California Welcome Center that has been established under the authority of the California Office of Tourism.

*Guidance:*

31 *The distance on the SG47D(CA) sign should be no more than 3 miles from the State highway.*

Support:

32 The Welcome Center will be charged directly for the initial and ongoing cost and fees related to production, maintenance and permitting of the SG47A(CA), SG47B(CA), SG47C(CA) and SG47D(CA) signs.

## Section 2I.09 Radio Information Signing (D12-1 Series)

Option:

01 A Radio-Weather Information (D12-1) sign (see Figure 2I-8) may be used in areas where difficult driving conditions commonly result from weather systems. Radio-Traffic Information (D12-1a) signs may be used in conjunction with traffic management systems.

**Standard:**

02 **Radio-Weather and Radio-Traffic Information signs shall have a white legend and border on a blue background. Only the numerical indication of the radio frequency shall be used to identify a station broadcasting travel-related weather or traffic information. Stations shall broadcast on AM or FM frequencies licensed by the Federal Communications Commission (FCC) for traveler information stations. No more than three frequencies shall be displayed on each sign. Only radio stations whose signal will be of value to the road user and who agree to broadcast either of the following two items shall be identified on Radio-Weather and Radio- Traffic Information signs:**

- **A. Periodic weather warnings at a rate of at least once every 15 minutes during periods of adverse weather; or**
- **B. Driving condition information (affecting the roadway being traveled) at a rate of at least once every 15 minutes, or when required, during periods of adverse traffic conditions, and when supplied by an official agency having jurisdiction.**

03 **If a station to be considered operates only on a seasonal basis, its signs shall be removed or covered during the off season.**

*Guidance:*

04 *The radio station should have a signal strength to adequately broadcast at least 70 miles along the route. Signs should be spaced as needed for each direction of travel at distances determined by an engineering study. The stations to be included on the signs should be selected in cooperation with the association(s) representing major broadcasting stations in the area to provide: (1) maximum coverage to all road users on both AM and FM frequencies; and (2) consideration of 24 hours per day, 7 days per week broadcast capability.*

Option:

05 The URGENT MESSAGE WHEN FLASHING (D12-1bP) plaque may be mounted below the D12-1 or D12-1a sign if supplemented by Warning Beacons (see Section 4S.03) that flash only when a message related to adverse travel conditions is being broadcast.

05a The WHEN FLASHING (G81-64aP(CA)) plaque may be used with the D12-1, D12-1a, and the G81-65(CA) sign when messages are not broadcast full time and to accommodate "real-time" usage.

*Guidance:*

05b *The G81-64aP(CA) plaque should be placed with flashing yellow beacons above and on the same posts with the D12-1 and D12-1a sign.*

06 In roadway rest area locations, a smaller sign using a greater number of radio frequencies, but of the same general design, may be used.

**Standard:**

07 **Radio-Weather and Radio-Traffic Information signs installed in rest areas shall be positioned such that they are not visible from the main roadway.**

Support:

08 There are three types of radio information signs:

1. Radio – Weather Information (D12-1)
2. Radio – Traffic Information (D12-1a)
3. Radio – Recreational Information (G81-65(CA))

**Radio – Traffic Information (D12-1a)**

Option:

09 The D12-1a sign may be used to inform motorists of broadcasts about traffic conditions for highways and public inter-modal transportation facilities.

Support:

10 The radio station needs to be operated by the public agency having jurisdiction over the transportation facility. The agency operating the station will be responsible for monitoring and maintaining the system and changing the message content as situations warrant.

**Radio – Recreation Information (G81-65(CA))**

Option:

11 The G81-65(CA) sign (refer to Figure 2I-8(CA)) may be used on rural highways to inform travelers of broadcasts about State or federal parks and recreational facilities.

**Standard:**

12 **The G81-65(CA) sign shall have a white legend and border on a brown background. The sign and sign structure shall be free of extraneous messages or logos, and must stand alone with no external lights or flashing beacons. Only the numerical indication of the radio frequency shall be used to identify a station. No more than three frequencies shall be shown on each sign. Only radio stations whose signal will be of value to the road user and who agree to broadcast in accordance with the items below shall be identified on this sign:**

**A. Provides information about State or federal recreational facilities located in rural areas.**
**B. Message content is devoted to public highway purposes.**
**C. Broadcasts operate 24 hours per day and 7 days per week.**
**D. Broadcasts contain no commercial messages.**

Support:

13 For installation of G81-65(CA) sign on State highways, the sign needs to be installed by the permittee through Caltrans' encroachment permit process. The costs, conditions of operation, and specific message content needs to be clearly specified in the encroachment permit subject to the following terms and conditions:

A. The permittee is the State or federal agency that owns and/or operates the recreational facility.
B. The permittee possesses a valid FCC license to operate the radio station as a traveler information station.
C. The permittee is responsible for the accuracy of the message and message content.
D. The permittee bears all costs, including but not limited to, FCC approval and licensing; fabrication and installation of signs; and the installation, operation and maintenance of appurtenant radio equipment and facilities.

## Section 2I.10 Channel 9 Monitored Sign (D12-3)

Option:

01 A Channel 9 Monitored (D12-3) sign (see Figure 2I-8) may be installed as needed. Official public agencies or their designees may be displayed as the monitoring agency on the sign.

**Standard:**

02 **Only official public agencies or their designee shall be displayed as the monitoring agency on the Channel 9 Monitored sign.**

## Section 2I.11 EMERGENCY CALL 911 Sign (D12-4)

Option:

01 An EMERGENCY CALL 911 (D12-4) sign (see Figure 2I-8) may be used for cellular telephone communications.

*Guidance:*

01b *The* (D12-4) *sign should be installed as a separate installation in an appropriate location following the Welcome To California* (G10B(CA)) *sign.*

Option:

02 The EMERGENCY CALL 9-1-1 (G81-61P(CA)) plaque (refer to Figure 2I-8(CA)) may be placed below all new Unincorporated Community (G9-2(CA)), City Limit (G9-5(CA)) and Jurisdictional boundary I2-1 signs. The G81-61P(CA) may also be placed below the existing G9-2(CA), G9-5(CA) and I2-1 signs when they are changed for other purposes, such as updating population figures. The G81-61P(CA) plaque may be shorter than the G9-2(CA), G9-5(CA) and I2-1 sign panel under which it is placed.

*Guidance:*

03 *The G81-61P(CA) plaque should not be longer than the G9-2(CA), G9-5(CA) and I2-1 sign panel under which it is placed.*

**Standard:**

04 **The letter size used in the G81-61P(CA) sign shall not exceed that of the words "City Limit" on the G9-5(CA) sign or the words "COUNTY LINE" on the I2-1 sign.**

## Section 2I.12 TRAVEL INFO CALL 511 Signs (D12-5 and D12-5a)

Option:

01 A TRAVEL INFO CALL 511 (D12-5 or D12-5a) sign (see Figure 2I-8) may be installed if a 511 travel information services telephone number is available to road users for obtaining traffic, public transportation, weather, construction, or road condition information.

02 The pictograph of the transportation agency or the travel information service or program that is providing the travel information may be displayed in place of the 511 pictograph on the D12-5 sign above the TRAVEL INFO CALL 511 legend.

**Standard:**

03 **The logo of a commercial entity shall not be incorporated within the TRAVEL INFO CALL 511 signs.**

04 **If the pictograph of the transportation agency or the travel information service or program is used in place of the 511 pictograph on the D12-5 sign (see Paragraph 2 of this Section), the maximum height of the pictograph shall not exceed the height of the 511 pictograph on the standard sign size specified for the roadway classification in Table 2H-1.**

05 **The TRAVEL INFO CALL 511 signs shall have a white legend and border on a blue background.**

## Section 2I.13 Roadside Assistance Sign (D12-6)

Option:

01 A Roadside Assistance (D12-6) sign (see Figure 2I-8) displaying the Highway Assistance cellular telephone code designated for that roadway or jurisdiction may be used along a highway that is served by an authorized roadside assistance program with authorized service vehicles and personnel that provide roadside vehicle repair assistance to road users free of charge.

02 Roadside Assistance Sign (D12-6) may be installed on freeways if a Service Authority for Freeway Emergencies (SAFE) has established a mobile call box program, which is available to road users for obtaining roadside assistance such as tow service.

**Standard:**

03 **The pictograph of the SAFE that is providing the roadside assistance or the logo of a commercial entity shall not be incorporated within the sign.**

04 **The ### shall be replaced with the mobile call number applicable to the SAFE providing the roadside assistance.**

05 **The Post Mile plaque (SG49dP(CA)) shall be placed below the D12-6 to indicate the county, route, and post mile.**

Option:

06 A call box identification number (refer to Section 2I.03, Paragraph 72) may be included on the sign for location identification purpose when the sign has been placed at a location where a call box has been removed.

## Section 2I.14 Carpool and Ridesharing Signing (D12-2)

Option:

01 In areas having carpool matching services, a Carpool Information (D12-2) sign (see Figure 2I-8) may be provided adjacent to highways with preferential lanes or along any other highway.

02 Carpool Information signs may include an Internet domain name or telephone number of more than four characters within the legend.

**Standard:**

03 **If a local transit pictograph or carpool symbol is incorporated into the Carpool Information sign, the maximum vertical dimension of the pictograph or symbol shall not exceed 18 inches and the maximum horizontal dimension shall not exceed 30 inches.**

Option:

04 The Ridesharing Information (SG19(CA)) sign (refer to Figure 2I-8(CA)) may be placed at selected locations for incoming traffic in urban areas.

05 The Park & Ride Facility Information (SG20(CA)) sign (refer to Figure 2I-8(CA)) may be used to identify park and ride facilities

provided for the use of car-poolers and transit users.

*Guidance:*

06 *For freeways and expressways, the D12-2, SG19(CA), and SG20(CA) sign locations should be no closer than 10 miles apart.*

## Section 2I.15 Signing for Truck Parking Availability (D9-16b through D9-16e)

Option:

01 General Service signs may be used to display the number of available truck parking spaces at roadside areas such as rest areas, welcome centers, and weigh stations, and at facilities off a highway that are open to the public and provide parking for commercial vehicles 24 hours per day, 7 days per week.

**Standard:**

02 **The Truck Parking Availability General Service (D9-16b through D9-16e) signs (see Figure 2I- 9) shall include a changeable message element with a white changeable legend on a black opaque background that displays only the number of parking spaces currently available at each location or the legend FULL. The upper section of the sign shall display the Truck Parking (D9-16) symbol sign and the legend SPACES OPEN. The sign shall display the number of available truck parking spaces for no more than three parking facilities. Where two lines of legend, such as the location and a distance, are displayed for a parking facility, not more than two parking facilities shall be displayed on the sign.**

03 **Where the truck parking facility is located off the main highway and is accessed from the crossroad, directional assemblies with the Truck Parking (D9-16) sign shall be installed along the ramp and along crossroads where the route to the facility requires a turn, where it is unclear as to which roadway to follow, or where additional guidance is needed.**

Support:

04 Displaying the number of parking spaces available at a facility when the number is low could result in truckers choosing to continue to a distant facility that no longer has available space by the time they arrive.

Option:

05 The word FULL in a white legend may be displayed on changeable message elements of a Truck Parking Availability General Service sign when the number of truck parking spaces available at the associated facility reaches a predetermined lower threshold.

*Guidance:*

06 *Truck Parking Availability signs should be located 3 to 5 miles in advance of the nearest parking facility. The parking facilities displayed on the sign should be no more than 60 miles from the sign location.*

Support:

07 Examples of uses of Truck Parking Availability signs are shown in Figure 2I-10.

## Section 2I.101(CA) REPORT DRUNK DRIVERS CALL 911 (G81-66(CA)) Sign

Option:

01 The REPORT DRUNK DRIVERS CALL 911 (G81-66(CA)) Sign (refer to Figure 2I-8(CA)) may be installed on the roadway for safety enhancement.

## Section 2I.102(CA) PEDESTRIANS PROHIBITED CALL 911 (G81-67(CA)) Sign

Option:

01 When pedestrians are prohibited on the roadway, the PEDESTRIANS PROHIBITED CALL 911 (G81-67(CA)) Sign (refer to Figure 2I-8(CA)) may be installed to report the presence of pedestrians on highways by calling 911 to improve roadway safety.

# Figure 2I-1. General Service Signs and Plaques


D9-1
Telephone


D9-2
Hospital


D9-3
Camping


D9-4
Litter Container


D9-6
International Symbol of Accessibility



D9-6P


D9-7
Gas


D9-8
Food


D9-9
Lodging



D9-10
Tourist Information



D9-11
Diesel Fuel



D9-11a
Alternative Fuel-Compressed Natural Gas



D9-11b
Electric Vehicle Charging



D9-11bP
Electric Vehicle Charging




D9-11c
Alternative Fuel-Ethanol



D9-11d
Liquefied Natural Gas (LNG)*




D9-11e
Liquefied Petroleum Gas (LPG)*



D9-11f
Hydrogen Fuel (HYD)*



D9-11g
Biofuel (BIO)*


D9-12
RV Sanitary Station


D9-13
Emergency Medical Services



D9-13aP
Hospital



D9-13bP
Ambulance Station



D9-13cP
Emergency Medical Care



D9-13dP
Trauma Center



D9-14
Police



D9-16
Truck Parking



D9-16aP
Truck External Power



D9-20
Pharmacy



D9-20aP
24-Hour


D9-21
Telecommunications Device for the Deaf


D9-22
Wireless Internet

* Refer to FHWA's List of Known Errors for error in sign name. Refer to Section 1A.04 for more details.

Advance Turn and Directional Arrow auxiliary plaques for use with General Service signs


M5-1P


M5-2P


M5-3P


M6-1P


M6-2P


M6-3P


Example of directional assembly

## *Figure 2I-1(CA). California General Service Signs and Plaques*




G58P(CA)





G66-21aP(CA)




G66-21cP(CA)





G66-55(CA)




G66-56(CA)




G66-56aP(CA)




G66-11B(CA)




G66-57A(CA)




G66-61A(CA)




SG38A(CA)




SG39A(CA)

## Figure 2I-2. Example of Next Services Plaque




D9-17P

## Figure 2I-3. Examples of General Service Signs with and without Exit Numbering




D9-18




D9-18a




D9-18b




D9-18c



D9-18dP





D9-18eP





D9-18fP

## Figure 2I-4. Examples of Interstate Oasis Signs and Plaques

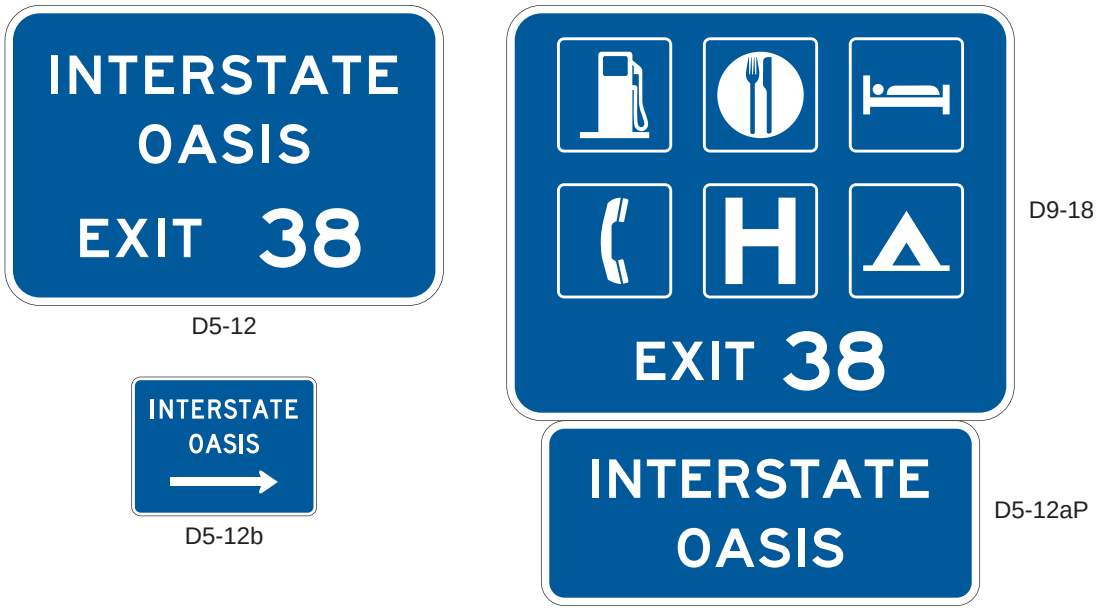

## Figure 2I-5. Rest Area and Other Roadside Area Signs

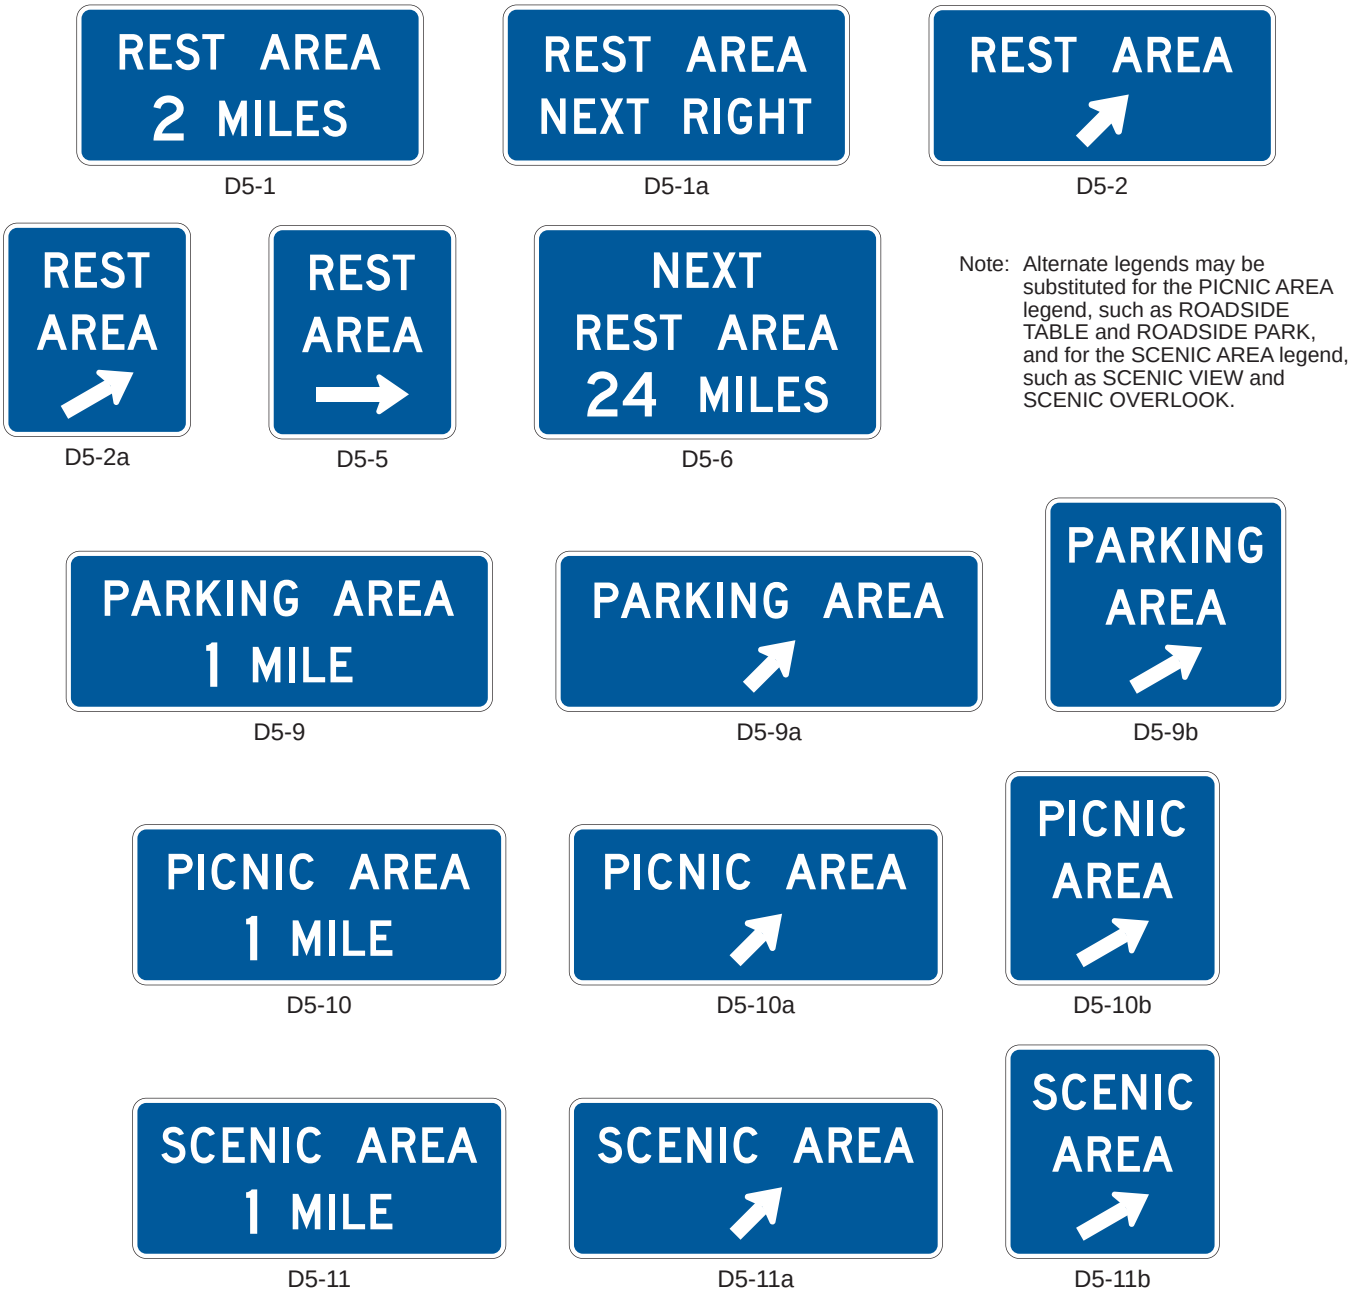

## *Figure 2I-5(CA). California Rest Area and Other Roadside Area Signs*




G79aP(CA)




G80bP(CA)




R39-3(CA)




R116(CA)




S23(CA)




S24(CA)




S34(CA)

## Figure 2I-6. Brake Check Area and Chain-Up Area Signs




D5-13




D5-14




D5-15




D5-16

---

## *Figure 2I-6(CA). California Brake Check Area and Chain-Up Area*




G66-58(CA)

## Figure 2I-7. Examples of Tourist Information and Welcome Center Signs




D5-7




D5-7a




D5-8

Note: Alternate legends may be substituted for the TOURIST INFO CENTER legend, such as WELCOME CENTER and (State Name) WELCOME CENTER.

---

## *Figure 2I-7(CA). California Examples of Tourist Information and Welcome Center Signs*




G81-21(CA)




G81-24(CA)




SG47A(CA)




SG47B(CA)




SG47C(CA)




SG47D(CA)

## Figure 2I-8. Radio, Telephone, and Carpool Information Signs




D12-1




D12-1a




D12-1bP




D12-2




D12-3




D12-4




D12-5*

*The pictograph of the transportation agency or the travel information service or program may be used in place of the 511 pictograph (see Section 2I.12)




D12-5a




D12-6

## *Figure 2I-8(CA). California Radio, Telephone, and Carpool Information Signs*




G81-61P(CA)




G81-64aP(CA)




G81-65(CA)




G81-66(CA)




G81-67(CA)




SG19(CA)




SG20(CA)




SG25(CA)





SG41(CA)






SG49dP(CA)

## Figure 2I-9. Examples of Truck Parking Availability Signs




D9-16b
Reference Location Sign
Exit Numbering Method





D9-16c
Unnumbered Exits









D9-16d
Rest Areas Only








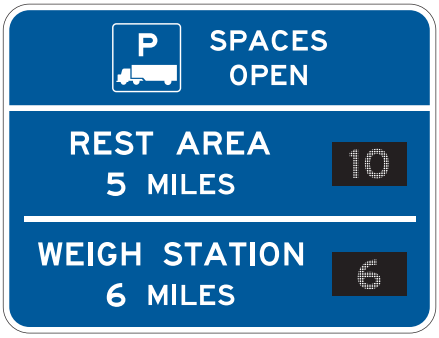


D9-16e
Combined Signing for Roadside Areas
and Off-System Sites

# Figure 2I-10. Examples of Use of Truck Parking Availability Signs

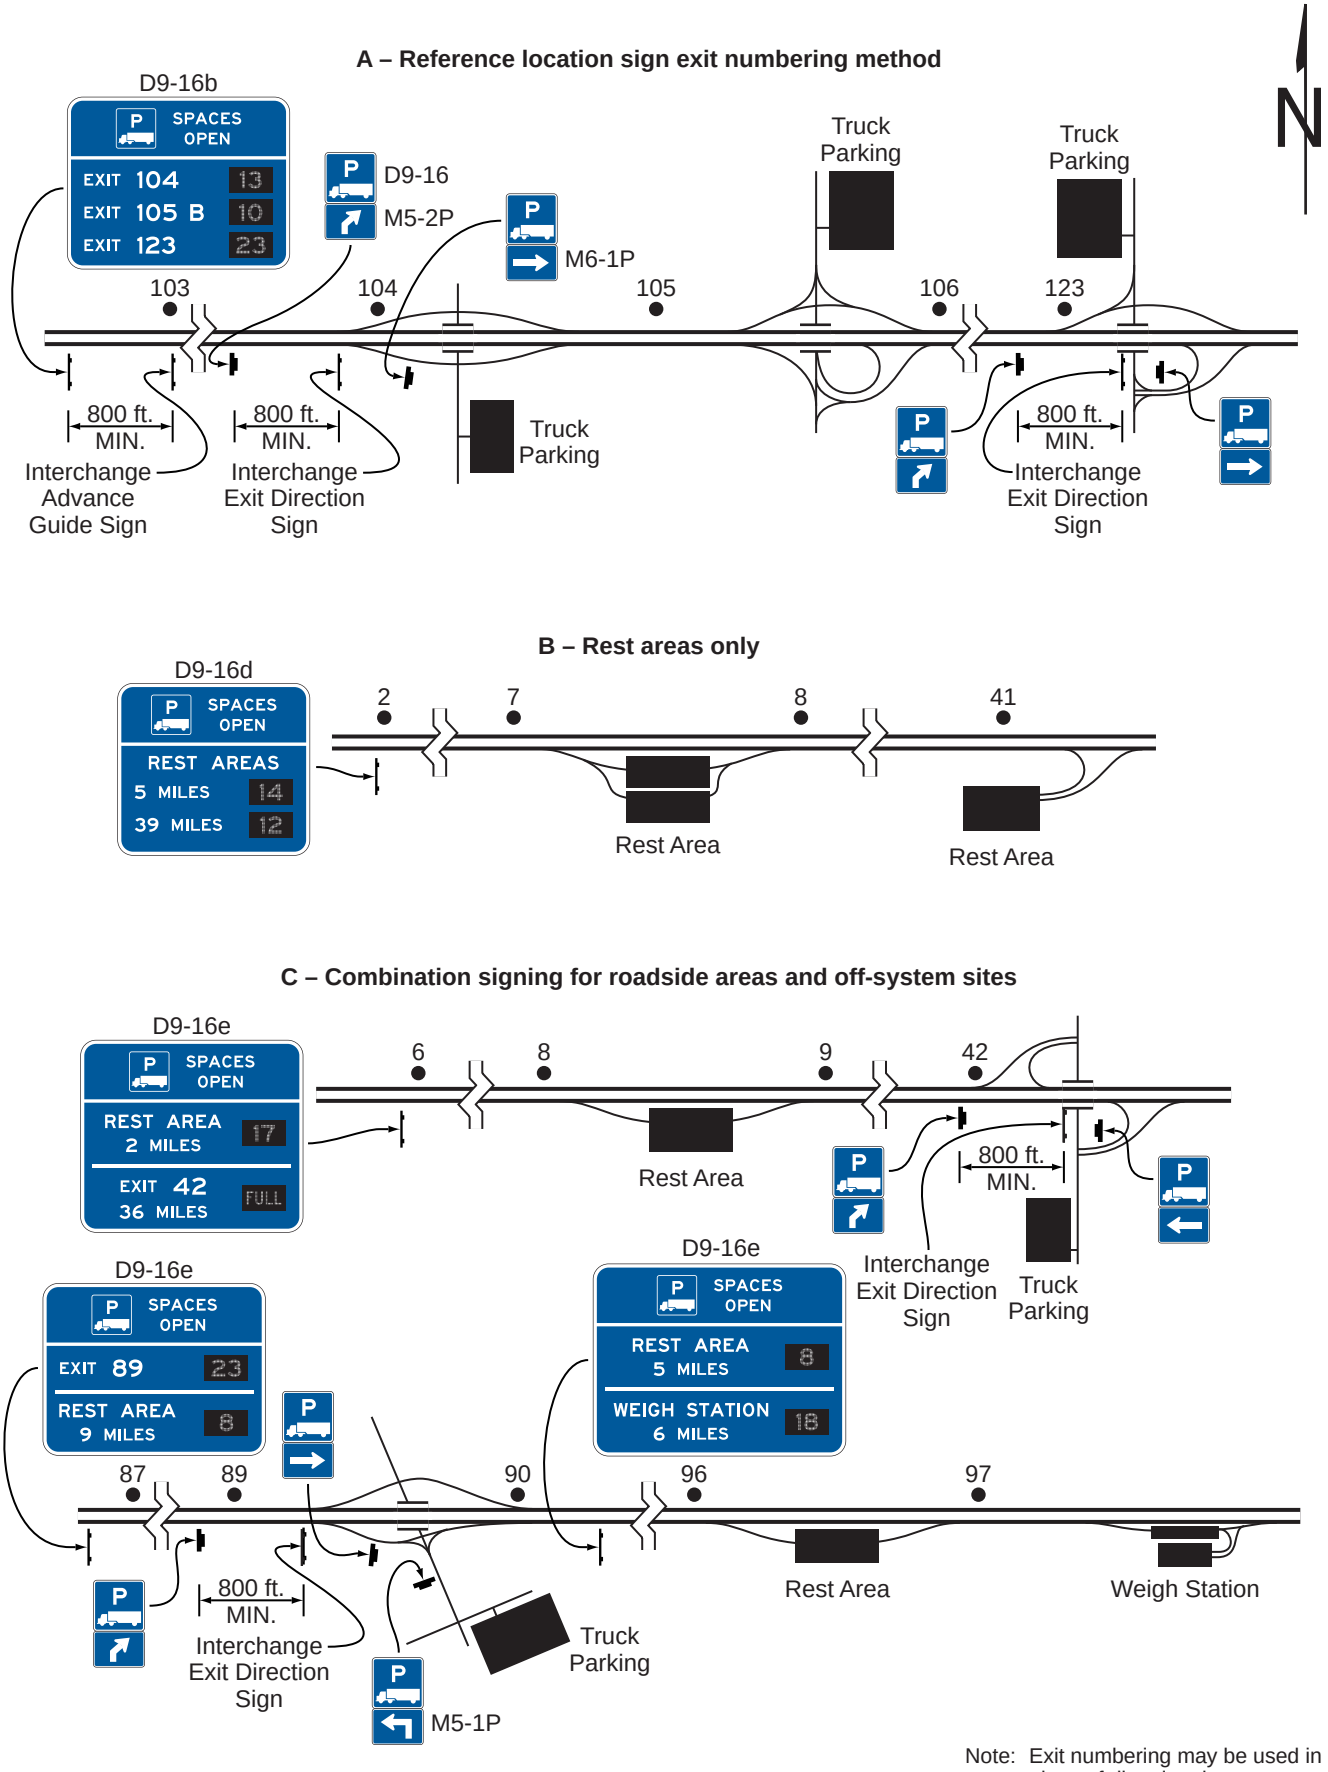


Note: Exit numbering may be used in place of directional arrows on the highway mainline.

## Table 2I-1. General Service Sign and Plaque Sizes (Sheet 1 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Rest Area Advance | D5-1 | 2I.05 | 78 x 36* | 132 x 60* (F)<br>114x 48* (E) |
| Rest Area Advance Direction | D5-1a | 2I.05 | 78 x 36* | 132 x 60* (F)<br>114 x 48* (E) |
| Rest Area Entrance Direction | D5-2 | 2I.05 | 78 x 36* | 132 x 66* (F)<br>114 x 60 (E) |
| Rest Area Gore **** | D5-2a | 2I.05 | 42 x 48* | 78 x 78* (F)<br>66 x 72* (E) |
| Rest Area Directional | D5-5 | 2I.05 | 42 x 48* | — |
| Next Rest Area | D5-6 | 2I.05 | 78 x 54* | 132 x 78* (F)<br>108 x 66* (E) |
| Rest Area Tourist Info Center Advance | D5-7 | 2I.08 | 90 x 72* | 156 x 108* (F)<br>132 x 96* (E) |
| Rest Area Tourist Info Center Advance Direction | D5-7a | 2I.08 | 90 x 72* | 156 x 108* (F)<br>132 x 96* (E) |
| Rest Area Tourist Info Center Entrance Direction | D5-8 | 2I.08 | 84 x 72* | 138 x 108* (F)<br>120 x 96* (E) |
| Parking Area Advance | D5-9 | 2I.05 | 96 x 36* | 162 x 60* (F)<br>138 x 48* (E) |
| Parking Area Entrance Direction | D5-9a | 2I.05 | 96 x 36* | 162 x 60* (F)<br>138 x 54* (E) |
| Parking Area Gore **** | D5-9b | 2I.05 | 62 x 48* | 108 x 78* (F)<br>88 x 66* (E) |
| Picnic Area (Roadside Table, Roadside Park) Advance | D5-10 | 2I.05 | 84 x 36* | 144 x 60* (F)<br>120 x 48* (E) |
| Picnic Area (Roadside Table, Roadside Park) Entrance Direction | D5-10a | 2I.05 | 84 x 36* | 144 x 60* (F)<br>120 x 54* (E) |
| Picnic Area (Roadside Table, Roadside Park) Gore **** | D5-10b | 2I.05 | 54 x 48* | 92 x 78* (F)<br>76 x 66* (E) |
| Scenic Area (Scenic View, Scenic Overlook) Advance | D5-11 | 2I.05 | 84 x 36* | 144 x 60* (F)<br>120 x 48* (E) |
| Scenic Area (Scenic View, Scenic Overlook) Entrance Direction | D5-11a | 2I.05 | 84 x 36* | 144 x 60* (F)<br>120 x 54* (E) |
| Scenic Area (Scenic View, Scenic Overlook) Gore **** | D5-11b | 2I.05 | 54 x 48* | 92 x 78* (F)<br>76 x 66* (E) |
| Interstate Oasis | D5-12 | 2I.04 | — | 198 x 60 (F)<br>162 x 48 (E) |
| Interstate Oasis (plaque) | D5-12aP | 2I.04 | — | 114 x 48 |
| Interstate Oasis Directional | D5-12b | 2I.04 | — | 48 x 36 |
| Brake Check Area Advance | D5-13 | 2I.06 | 96 x 54 | 132 x 66 |
| Brake Check Area Entrance Direction | D5-14 | 2I.06 | 96 x 54 | 132 x 78 |
| Chain-Up Area Advance | D5-15 | 2I.07 | 72 x 54 | 102 x 66 |
| Chain-Up Area Entrance Direction | D5-16 | 2I.07 | 72 x 54 | 102 x 78 |
| Telephone | D9-1 | 2I.02 | 24 x 24 | 30 x 30 |
| Hospital | D9-2 | 2I.02 | 24 x 24 | 30 x 30 |
| Camping | D9-3 | 2I.02 | 24 x 24 | 30 x 30 |
| Litter Container | D9-4 | 2I.02 | 24 x 30 | 36 x 48 |
| International Symbol of Accessibility | D9-6 | 2I.02 | 24 x 24 | 30 x 30 |
| Van Accessible (plaque) | D9-6P | 2I.02 | 18 x 9 | — |
| Gas | D9-7 | 2I.02 | 24 x 24 | 30 x 30 |
| Food | D9-8 | 2I.02 | 24 x 24 | 30 x 30 |
| Lodging | D9-9 | 2I.02 | 24 x 24 | 30 x 30 |
| Tourist Information | D9-10 | 2I.02 | 24 x 24 | 30 x 30 |
| Diesel Fuel | D9-11 | 2I.02 | 24 x 24 | 30 x 30 |
| Alternative Fuel - Compressed Natural Gas | D9-11a | 2I.02 | 24 x 24*** | 30 x 30*** |
| Electric Vehicle Charging | D9-11b | 2I.02 | 24 x 24*** | 30 x 30*** |
| Electric Vehicle Charging (plaque) | D9-11bP | 2I.02 | 24 x 18 | 30 x 24 |
| Alternative Fuel - Ethanol | D9-11c | 2I.02 | 24 x 24 | 30 x 30 |

## Table 2I-1. General Service Sign and Plaque Sizes (Sheet 2 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Alternative Fuel - Liquefied Natural Gas | D9-11d | 2I.02 | 24 x 24*** | 30 x 30*** |
| Alternative Fuel - Liquefied Petroleum Gas | D9-11e | 2I.02 | 24 x 24*** | 30 x 30*** |
| Alternative Fuel - Hydrogen | D9-11f | 2I.02 | 24 x 24*** | 30 x 30*** |
| Alternative Fuel - Biofuel | D9-11g | 2I.02 | 24 x 24 | 30 x 30 |
| RV Sanitary Station | D9-12 | 2I.02 | 24 x 24 | 30 x 30 |
| Emergency Medical Services | D9-13 | 2I.02 | 24 x 24 | 30 x 30 |
| Hospital (plaque) | D9-13aP | 2I.02 | 24 x 12 | 30 x 12 |
| Ambulance Station (plaque) | D9-13bP | 2I.02 | 24 x 12 | 30 x 15 |
| Emergency Medical Care (plaque) | D9-13cP | 2I.02 | 24 x 18 | 30 x 24 |
| Trauma Center (plaque) | D9-13dP | 2I.02 | 24 x 12 | 30 x 15 |
| Police | D9-14 | 2I.02 | 24 x 24 | 30 x 30 |
| Truck Parking | D9-16 | 2I.03 | 24 x 24 | 30 x 30 |
| Truck External Power (plaque) | D9-16aP | 2I.03 | 24 x 24 | 30 x 30 |
| Truck Parking Availability - Exit Number | D9-16b | 2I.15 | Varies x 144 | Varies x 144 |
| Truck Parking Availability - Distance | D9-16c | 2I.15 | Varies x 144 | Varies x 144 |
| Truck Parking Availability - Rest Area | D9-16d | 2I.15 | Varies x Varies | Varies x Varies |
| Truck Parking Availability - Combined | D9-16e | 2I.15 | Varies x Varies | Varies x Varies |
| Next Services Advance (plaque) | D9-17P | 2I.02 | 72 x 24 | 114 x 30 |
| Next EV Charging **** | D9-17a | 2H, 2J | — | 126 x 60 |
| General Services (up to 6 symbols) with Exit Number | D9-18 | 2I.03 | 108 x 84 | 132 x 114 (F)<br>132 x 108 (E) |
| General Services with Exit Number | D9-18a | 2I.03 | 72 x 60 | 132 x 108** (F)<br>102 x 84** (E) |
| General Services (up to 6 symbols) with Action Message | D9-18b | 2I.03 | 108 x 84 | 132 x 114 (F)<br>132 x 108 (E) |
| General Services with Action Message | D9-18c | 2I.03 | 72 x 60** | 132 x 108** (F)<br>102 x 84** (E) |
| Rural Interchange General Services (up to 3 symbols) (plaque) | D9-18dP | 2I.03 | — | 120 x 36 |
| Rural Interchange General Services (1 line) (plaque) | D9-18eP | 2I.03 | — | Varies x 24 |
| Rural Interchange General Services (2 line) (plaque) | D9-18fP | 2I.03 | — | Varies x 42 |
| Pharmacy | D9-20 | 2I.02 | 24 x 24 | 30 x 30 |
| 24-Hour (plaque) | D9-20aP | 2I.02 | 24 x 12 | 30 x 12 |
| Telecommunications Device for the Deaf | D9-21 | 2I.02 | 24 x 24 | 30 x 30 |
| Wireless Internet | D9-22 | 2I.02 | 24 x 24 | 30 x 30 |
| Radio - Weather Information | D12-1 | 2I.09 | 84 x 48 | 132 x 84 |
| Radio - Traffic Information | D12-1a | 2I.09 | 96 x 48 | 120 x 60 |
| Urgent Message When Flashing (plaque) | D12-1bP | 2I.09 | 84 x 30 | 108 x 36 |
| Carpool Information | D12-2 | 2I.14 | 60 x 42 | 96 x 66 |
| Channel 9 Monitored | D12-3 | 2I.10 | 84 x 48 | 132 x 84 |
| Emergency Call 911 | D12-4 | 2I.11 | 66 x 30 | 96 x 48 |
| Travel Info Call 511 (pictograph) | D12-5 | 2I.12 | 48 x 60 | 66 x 72 |
| Travel Info Call 511 | D12-5a | 2I.12 | 48 x 36 | 66 x 48 |
| Roadside Assistance | D12-6 | 2I.13 | 60 x 42 | 78 x 54 |

* The size shown is for a sign with a REST AREA, PARKING AREA, PICNIC AREA, SCENIC AREA, and/or TOURIST INFO CENTER legend. The size should be appropriately adjusted if an alternate legend is used.

** The size shown is for a sign with four lines of services. The size should be appropriately adjusted depending on the amount of legend displayed.

*** The Standard Highway Signs publication contains layouts for the 18 x 18-inch and 24 x 24-inch alternative fuels symbol signs mounted with the Alternative Fuels Corridor sign in accordance with Section 2H.14.

**** Refer to FHWA's List of Known Errors for error in sign. Refer to Section 1A.04 for more details.

Notes: 1. Larger signs may be used when appropriate.
2. Dimensions in inches are shown as width x height
3. Where two sizes are shown, the larger size is for freeways (F) and the smaller size is for expressways (E)

## Table 2I-1(CA). California General Service Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Next Right/Left (plaque) | G58P(CA) | 2I.02, 2I.03 | 30 x 24 | 30 x 24 |
| Methanol Fuel | G66-11B(CA) | 2I.03 | 24 x 24 | 30 x 30 |
| Distance with Arrow (plaque) | G66-21aP(CA) | 2I.03 | 24 x 16 | 30 x 18 |
| FAST (Header Plaque) (plaque) | G66-21cP(CA) | 2I.03 | 24 x 6 | 30 x 8 |
| STAA Truck Service | G66-55(CA) | 2I.03 | 24 x 24 | 30 x 30 |
| STAA Truck Terminal Access | G66-56(CA) | 2I.03 | 24 x 24 | 30 x 30 |
| NEXT EXIT OK (plaque) | G66-56aP(CA) | 2I.03 | 30 x 30 | 30 x 30 |
| Highway Patrol | G66-57A(CA) | 2I.03 | 24 x 24 | 30 x 30 |
| BRAKE CHECK AREA | G66-58(CA) | 2I.06 | VAR x 36 | VAR x 42 |
| Sheriff | G66-61A(CA) | 2I.03 | 24 x 24 | 30 x 30 |
| NEXT REST (X MILE) (plaque) | G79aP(CA) | 2I.05 | 72 x 12 | 144 x 24 |
| PATROLLED BY HIGHWAY PATROL (plaque) | G80bP(CA) | 2I.05 | 72 x 12 | 144 x 24 |
| TOURIST INFORMATION | G81-21(CA) | 2I.08 | 144 x 24 | 204 x 30 |
| TOURIST INFORMATION | G81-24(CA) | 2I.08 | 96 x 42 | 132 x 48 |
| EMERGENCY CALL 9-1-1 (plaque) | G81-61P(CA) | 2I.11 | VAR x 6 | VAR x 18 |
| WHEN FLASHING (plaque) | G81-64aP(CA) | 2I.09 | 84 x 12 | 108 x 18 |
| Radio-Recreation Information | G81-65(CA) | 2I.09 | 84 x 48 | 108 x 66 |
| REPORT DRUNK DRIVERS CALL 911 | G81-66(CA) | 2I.101(CA) | 36 x 36 | 48 x 48 |
| PEDESTRIANS PROHIBITED CALL 911 | G81-67(CA) | 2I.102(CA) | --- | 72 x 54 |
| ALT FUEL VEHICLE PARKING ONLY | R116(CA) | 2I.05 | 12 x 18 | --- |
| Ridesharing Information | SG19(CA) | 2I.14 | 48 x 30 | 72 x 42 |
| Park & Ride Facility Information | SG20(CA) | 2I.14 | 48 x 36 | 66 x 54 |
| Call Box | SG25(CA) | 2I.03 | 18 x 24 | 30 x 36 |
| CAL FIRE STATION NEXT RIGHT | SG38A(CA) | 2I.03 | 78 x 30 | 102 x 36 |
| CAL FIRE STATION with Arrow | SG39A(CA) | 2I.03 | 48 x 21 | 60 x 30 |
| END CALL BOXES | SG41(CA) | 2I.03 | 36 x 36 | 48 x 48 |
| CALIFORNIA WELCOME CENTER X MILES | SG47A(CA) | 2I.08 | 66 x 48 | 108 x 66 |
| CALIFORNIA WELCOME CENTER NEXT RIGHT | SG47B(CA) | 2I.08 | 66 x 48 | 108 x 66 |
| CALIFORNIA WELCOME CENTER with Arrow | SG47C(CA) | 2I.08 | 42 x 24 | 54 x 30 |
| CALIFORNIA WELCOME CENTER X MILES with Arrow | SG47D(CA) | 2I.08 | 42 x 28 | 54 x 36 |
| Rest Area/Vista Point 8 HOUR PARKING | S23(CA) | 2B.52, 2I.05 | 24 x 24 | --- |
| NO SOLICITING | S24(CA) | 2I.05 | 24 x 18 | --- |
| Highway Patrol PARKING ONLY | S34(CA) | 2I.05 | 12 x 18 | --- |
| 10 HOUR PARKING COMMERCIAL MOTOR VEHICLES | R39-3(CA) | 2B.52, 2I.05 | 24 x 18 | --- |

# CHAPTER 2J. SPECIFIC SERVICE SIGNS

## Section 2J.01 Eligibility

**Standard:**

01 **Specific Service signs shall be defined as guide signs that provide road users with business identification and directional information for eligible services. Eligible service categories shall be limited to ~~gas~~ fuel, food, lodging, camping, attractions, and electric vehicle (EV) charging.**

Support:

01a In California, the generic term FUEL is used for GAS.

~~*Guidance:*~~

**Standard:**

02 **The use of Specific Service signs ~~should~~ shall be limited to areas primarily rural in character with adequate space for all signs to be properly accommodated. Refer SHC, Division 1, Chapter 1, Article 3, § 101.7.**

Support:

03 When services at an interchange are abundant, this is an indication that the character of the area is no longer primarily rural and General Service signs would be more appropriate.

~~Option:~~

04 ~~Where an engineering study determines a need, Specific Service signs may be used on any class of highway, including freeways, expressways, and conventional roads.~~

04a SHC, Division 1, Chapter 1, Article 3, § 101.7 includes the use of specific service signs for freeways only.

~~*Guidance:*~~

**Standard:**

05 **Specific Service signs ~~should~~ shall not be installed at an interchange where the road user cannot conveniently reenter the freeway or expressway and continue in the same direction of travel.**

Support:

05a Refer to the CCR, Title 21, Division 2, Chapter 19, § 2108(d).

**Standard:**

06 **Eligible service facilities shall comply with laws concerning the provisions of public accommodations without regard to race, religion, color, age, sex, or national origin, and laws concerning the licensing and approval of service facilities.**

07 **The attraction services shall include only facilities that have the primary purpose of providing amusement, historical, cultural, or leisure activities to the public**.

~~*Guidance:*~~

08 ~~*Except as provided in Paragraph 9 of this Section, distances to eligible services should not exceed 3 miles in any direction.*~~

Support:

08a Refer to the CCR, Title 21, Division 2, Chapter 19, § 2111 for distances to eligible services.

~~Option:~~

09 ~~If, within the 3-mile limit, facilities for the services being considered are not available or choose not to participate in the program, the limit of eligibility may be extended in 3-mile increments until one or more facilities for the services being considered chooses to participate, or until 15 miles is reached, whichever comes first.~~

**Standard:**

10 **If State or local agencies elect to provide Specific Service signing, there shall be a statewide policy for such signing and criteria for the eligibility and availability of the various types of services.**

10a **Refer to the SHC, Division 1, Chapter 1, Article 3, § 101.7 and CCR, Title 21, Division 2, Chapter 19, §§ 2100 through 2120 for detailed policies on specific service signs. Refer to Section 1A.05 for information regarding these publications.**

*Guidance:*

11 *The criteria for the statewide policy should consider the following:*

*A. To qualify for a ~~GAS~~ FUEL business identification sign panel, a business should have:*

*1. Vehicle services including gasoline, oil, and water;*

*2. Continuous operation at least 16 hours per day, 7 days per week for freeways ~~and expressways, and continuous operation at least 12 hours per day, 7 days per week for conventional roads; and~~*

*3. Modern sanitary facilities and drinking water.*

*B. To qualify for a FOOD business identification sign panel, a business should have:*

*1. Licensing or approval, where required;*

*2. Continuous operations to serve at least 2 meals per day, at least 6 days per week; and*

*3. Modern sanitary facilities.*

*C. To qualify for a LODGING business identification sign panel, a business should have:*

*1. Licensing or approval, where required;*

*2. Adequate sleeping accommodations; and*

*3. Modern sanitary facilities.*

*D. To qualify for a CAMPING business identification sign panel, a business should have:*

*1. Licensing or approval, where required;*

*2. Adequate parking accommodations; and*

*3. Modern sanitary facilities and drinking water.*

*E. To qualify for an ATTRACTION business identification sign panel, a facility should have:*

*1. Regional significance, in compliance with the provisions of Paragraph 7 of this Section; and*

*2. Adequate parking accommodations.*

**Standard:**

12 **To be eligible for an Electric Vehicle (EV) CHARGING business identification sign panel, the EV chargers provided shall meet the criteria for Direct Current Fast Chargers provided in 23 CFR 680.106 and be in continuous operation at least 16 hours per day, 7 days per week.**

Option:

13 Business identification sign panels for a proprietary electric vehicle charging service may be included on an EV Charging Specific Service sign if it meets the eligibility criteria in Paragraph 12 of this Section and the criteria found in the CCR.

Support:

14 Section 2J.12 contains additional information on criteria for the statewide policy regarding signing.

15 Section 2I.04 contains information regarding the Interstate Oasis program.

**Standard:**

16 **Refer to the CCR, Title 21, Division 2, Chapter 19, §§ 2100 through 2120 for administration, standards, eligibility, and fees concerning the Logo Sign Program. See Section 1A.05 for information regarding these publications.**

## Section 2J.02 Application

Support:

01 Examples of Specific Service signs are shown in Figure 2J-1.

02 Examples of sign locations are shown in Figure 2J-2.

**Standard:**

03 **The number of Specific Service signs along an approach to an interchange ~~or intersection~~, regardless of the number of service types displayed, shall be limited to a maximum of four. Except as provided in Paragraph 4 of this Section, in the direction of traffic flow, successive Specific Service signs shall be for attraction, camping, lodging, food, EV charging, and ~~gas~~ fuel services, in that order.**

Option:

04 When spacing does not allow EV Charging Specific Service signs to be located as described in Paragraph 3 of this Section, then the EV Charging Specific Service signs may be located anywhere within the successive Specific Service sign order where adequate spacing between signs allows.

*Guidance:*

05 *The Specific Service signs should be located to take advantage of natural terrain, to have the least impact on the scenic environment, and to avoid visual conflict with other signs within the highway right-of- way.*

06 ~~*Where a service type is displayed on two signs, the signs for that service should follow one another in succession.*~~

**Standard:**

07 **A Specific Service sign shall display the word message ~~GAS~~ FUEL, EV CHARGING, FOOD, LODGING, CAMPING, or ATTRACTION, an appropriate directional legend such as the word message EXIT XX, NEXT RIGHT, SECOND RIGHT, or directional arrows, and the related business identification sign panels. Distances to eligible facilities shall not be displayed on the Specific Service signs on the approach to an interchange.**

08 ~~**A business that does not offer gasoline, but offers alternative fuels, shall not be signed using GAS Specific Service signs.**~~

Option:

09 A business that does not offer gasoline but offers alternative fuels may be signed using General Service signs for the alternative fuel provided.

Support:

10 General Service signs for facilities providing alternative fuels, including EV charging, **methanol,** compressed natural gas, liquefied natural gas, liquefied petroleum gas, and hydrogen, are provided in Chapter 2I.

*Guidance:*

11 *Due to the unique and widely varying characteristics of the services that qualify as attractions, and lesser recognition of their business identification sign panels (see Paragraph 12 of this Section), ATTRACTION Specific Service signs should have no more than four business identification sign panels.*

Support:

12 The types of services that meet the definition of attraction, such as those providing amusement, historical, cultural, or leisure activities to the public, vary considerably. In most cases, attractions do not include well-known services or easily recognizable logos, making it more difficult and requiring more time to distinguish between types of attractions shown on an ATTRACTION sign than for other categories of Specific Service signs.

**Standard:**

13 **No more than ~~three~~ two types of services shall be represented on any sign or sign assembly and no more than six business identification sign panels shall be displayed on any one sign. If ~~three~~ two types of services are displayed on one sign, then the business identification sign panels shall be limited to ~~two~~ three for each service type (for a total of six business identification sign panels) Refer to the CCR, Title 21, Division 2, Chapter 19, § 2110(f). ~~If two types of services are displayed on one sign, then the business identification sign panels shall be limited to either three for each service type, or four for one service type and two for the other service type (for a total of six business identification sign panels in either case).~~ The legend and business identification sign panels applicable to a service type shall be displayed such that the road user will not associate them with another service type on the same sign. Other configurations or arrangements of business identification sign panels shall not be allowed.**

14 **No service type shall appear on more than ~~two~~ one signs ~~(see Paragraph 6 of this Section)~~. Refer to the CCR, Title 21, Division 2, Chapter 19, § 2108(c).**

15 **The Specific Service signs shall have a blue background, a white border, and white legends of upper-case letters, numerals, and arrows.**

*Guidance:*

16 *If a service type is no longer available from an interchange or intersection, the Specific Service sign should be removed when the business identification sign panels are removed. If a sign is to remain, but the service type is no longer available, then the service type legend should be covered by a blue panel overlay or by another method so that road users do not misinterpret the sign as a General Service sign implying that the service is available.*

17 *A Specific Service sign should not be installed unless a service type is currently available from an interchange ~~or intersection.~~*

Option:

18 If there is indication that a service type will again be available in the near future, the sign may be covered, in accordance with Paragraph 16 of this Section, rather than removed.

19 Separate installations of General Service signs (see Figure 2J-3 and Sections 2I.02 and 2I.03) may be used in conjunction with Specific Service signs for eligible types of services that are not represented by a Specific Service sign.

## Section 2J.03 Logos and Business Identification Sign Panels

**Standard:**

01 **A business identification sign panel legend shall be either an identification trademark or a word message of the business's name. Each logo or word message shall be placed on a separate business identification sign panel that shall be attached to the Specific Service sign. Logos or trademarks used alone for a business identification sign panel shall be reproduced in the colors and general shape consistent with customary use, and any integral legend shall be in proportionate size. A logo that resembles an official traffic control device shall not be used.**

02 **Scanning graphics that are visible to the road user from the roadway for the purpose of obtaining information shall not be displayed on business identification sign panels, including on any logo displayed thereupon.**

*Guidance:*

03 *The logo or trademark used on a business identification sign panel should be consistent with the on- premise business identification signs at the location of the business that are visible from the roadway.*

04 *A word message business identification sign panel that does not use a logo or trademark should have a blue background with a white legend and border.*

Support:

05 Section 2J.05 contains information regarding the minimum letter heights for business identification sign panels.

Option:

06 A portion of a business identification sign panel may be used to display a supplemental message horizontally along the bottom of the business identification sign panel, provided that the message displays essential motorist information consistent with the service category type and related to the operation of the business (see Figure 2J-4).

**Standard:**

07 **All supplemental messages shall be displayed within the business identification sign panel and shall have letters and numerals that comply with the minimum height requirements shown in Table 2J-1. Supplemental messages promoting the availability of products, amenities, or services that are not directly related to the service category and/or those not available to non-patrons of the primary service provided for the service category, such as car wash, automated teller machines, Internet, lottery, or swimming pool, shall not be displayed on business identification sign panels.**

08 **Messages related to the promotion or availability of business identification sign panel space shall not be displayed on Specific Service signs.**

09 **To be eligible for an EV CHARGING supplemental message on a business identification sign panel, the business shall:**

- **A. Offer electric vehicle charging to the general public without purchasing the primary service (gas, food, lodging, camping, or attraction, as appropriate); and**
- **B. For the service categories of gas, food, and attraction, provide EV chargers meeting the criteria for Direct Current Fast Chargers (DCFC) provided in 23 CFR 680.106; or**
- **C. For the service categories of camping and lodging, provide EV chargers meeting the criteria for DCFCs provided in 23 CFR 680.106 and/or AC Level 2 Charging.**

Option:

10 A Supplemental message identifying an alternative fuel available may be added only to the business identification sign panels on the ~~GAS~~ FUEL Specific Services sign for gasoline facilities that provide the specified alternative fuel in addition to gasoline.

11 The Supplemental message EV CHARGING may be added to a business identification sign panel for the service categories of gas, food, lodging, or camping in accordance with the criteria in Paragraph 9 of this Section.

Support:

11a Refer to FHWA's List of Known Errors for error in Paragraph 11. Refer to Section 1A.04 for more details.

~~*Guidance:*~~

**Standard:**

12 **A business identification sign panel ~~should~~ shall not display more than one supplemental message.**

13 **The supplemental message ~~should~~ shall be displayed in a black legend on a yellow background for that portion of the business identification sign panel.**

*Guidance:*

14 *State or local agencies that elect to allow supplemental messages on business identification sign panels should develop a statewide policy for such messages.*

Support:

15 Typical supplemental messages might include DIESEL, LP-GAS, EV CHARGING, 24 HOURS, CLOSED SUNDAY, and RV ACCESS.

*Guidance:*

16 *If a State or local agency elects to display the designation of businesses as providing on-premise accommodations for recreational vehicles with the RV ACCESS supplemental message, there should be a statewide policy for such designation and criteria for qualifying businesses. The criteria should include such site conditions as access between the public roadway and the site, on-premise geometry, and parking.*

Option:

17 If a business designated as an Interstate Oasis (see Section 2I.04) has a business identification sign panel on the Food and/or ~~Gas~~ Fuel Specific Service signs, the word OASIS may be displayed on the bottom portion of the business identification sign panel for that business.

**Standard:**

18 **A business identification sign panel shall not display the identification logo/trademark or name of more than one business. A business identification sign panel shall not display more than one name or identification logo/trademark for the same business. Slogans, such as marketing slogans associated with the business, shall not be displayed on business identification sign panels or the Specific Service sign itself.**

## Section 2J.04 Number and Size of Signs and Business Identification Sign Panels

*Guidance:*

01 *Sign sizes should be determined by the amount and height of legend and the number and size of business identification sign panels attached to the sign. All business identification sign panels on a sign should be the same size.*

**Standard:**

02 **Each Specific Service sign or sign assembly shall be limited to no more than six business identification sign panels. There shall be no more than three logo panels for one of the two service types on the same sign or sign assembly. Refer to the CCR, Title 21, Division 2, Chapter 19, § 2110(f).**

~~Option:~~

03 ~~Where more than six businesses of a specific service type are eligible for business identification sign panels at the same interchange, additional business identification sign panels of that same specific service type may also be displayed in accordance with the provisions of Paragraph 4 of this Section. The additional business identification sign panels may be displayed either by placing more than one specific service type on the same sign (see Paragraph 13 of Section 2J.02) or by using a second Specific Service sign of that specific service type if the additional sign can be added without exceeding the limit of four Specific Service signs at an interchange or intersection approach (see Paragraph 3 of Section 2J.02).~~

~~**Standard:**~~

04 ~~**Where business identification sign panels for more than six businesses of a specific service type are displayed at the same interchange or intersection approach, the following provisions shall apply:**~~

- ~~**A. No more than 12 business identification sign panels of a specific service type shall be displayed on no more than two Specific Service signs or sign assemblies;**~~
- ~~**B. No more than six business identification sign panels shall be displayed on a single Specific Service sign; and**~~
- ~~**C. No more than four Specific Service signs shall be displayed on the approach.**~~

Support:

04a Refer to the CCR, Title 21, Division 2, Chapter 19, § 2108(c).

05 Section 2J.08 contains information regarding Specific Service signs for double-exit interchanges.

06 Section 2J.09 contains information regarding Specific Service signs for multiple interchanges that are accessed from collector-distributor roadways rather than from the highway mainline.

**Standard:**

07 **Each business identification sign panel attached to a Specific Service sign shall be a horizontally oriented**

**rectangle with a width longer than the height. A business identification sign panel on signs for freeways ~~and expressways~~ shall not exceed 60 inches in width and 36 inches in height (see Table 2J-2). A business identification sign panel on signs for ~~conventional roads and~~ freeway and ~~expressway~~ ramps shall not exceed 30 inches in width and 18 inches in height (see Table 2J-2). SHC, Division 1, Chapter 1, Article 3, § 101.7 includes the use of specific service signs for freeways only. The vertical and horizontal spacing between business identification sign panels shall not exceed 8 inches and 12 inches, respectively.**

07a **A logo panel on signs for the mainline shall be 48 inch in width and 36 inch in height.**

07b **A logo panel on signs for the ramps shall be 18 inch in width and 12 inch in height.**

Support:

08 Sections 2A.10, 2E.13, and 2E.14 contain information regarding borders, interline spacing, and edge spacing.

## Section 2J.05 Size of Lettering

**Standard:**

01 **All Specific Service signs and business identification sign panels shall have letter and numeral sizes that comply with the minimum requirements of Table 2J-1.**

*Guidance:*

02 *Any legend on a business identification graphic/trademark should be proportional to the size of the graphic trademark.*

## Section 2J.06 Signs at Interchanges

**Standard:**

01 **The Specific Service signs shall be installed between the preceding interchange and at least 800 feet in advance of the Exit Direction sign at the interchange from which the services are available (see Figure 2J-2).**

Option:

01a At the discretion of Caltrans, the location of the Specific Service signs with respect to their distances from the gore may be increased to avoid conflict with existing guide signs.

**Standard:**

02 **Specific Service signs shall not be used at freeway-to-freeway interchanges (see Section 2E.37), except where the exit ramp also provides direct access to a conventional road within that interchange (see Figure 2J-5).**

*Guidance:*

03 *There should be at least an 800-foot spacing between the Specific Service signs, except for Specific Service ramp signs. Excessive spacing should not be used between Specific Service signs, as this is not desirable either.*

04 *Specific Service ramp signs should be spaced at least 100 feet longitudinally beyond the Exit Gore sign, from each other, and from the ramp terminal. Specific Service ramp signs should be spaced at least 200 feet longitudinally from any Destination guide signs along the ramp. Longer longitudinal spacing should be provided between Specific Service ramp signs and any warning or regulatory signs along the ramp, and any intersection traffic control devices at the ramp terminal.*

05 *When the distance to the next exit providing access to EV charging service is 50 miles or greater, the Next EV Charging (D9-17a) sign should be used (see Figure 2H-9). When used, the Next EV Charging sign should be located directly after the General Service sign for the fuel type displayed in the signing sequence for the exit (see Figure 2H-10).*

## Section 2J.07 Single-Exit Interchanges

**Standard:**

01 **At numbered single-exit interchanges, the name of the service type followed by the exit number shall be displayed on one line above the business identification sign panels. At unnumbered interchanges, the directional legend NEXT RIGHT (LEFT) shall be used in place of the exit number.**

02 **At single-exit interchanges where traffic is allowed to turn onto the crossroad in either direction from the ramp, Specific Service ramp signs shall be installed along the ramp or opposite the ramp terminal for facilities that have business identification sign panels displayed along the main roadway if the facilities are not readily visible from the ramp terminal. Directions to the service facilities shall be indicated by arrows on the ramp signs. Business identification sign panels on Specific Service ramp signs shall be duplicates of those displayed on the Specific Service signs located in advance of the interchange, but shall be reduced in size (see Paragraph 7 of**

**Section 2J.04).**

Option:

03 Specific Service ramp signs may display distances (see Paragraphs 14 and 15 of Section 2A.08) to a service facility when the facility is not visible from ramp intersection with the crossroad.

*Guidance:*

04 *Distances of less than ¼ mile, when displayed, should be displayed to the nearest 1/10 mile.*

**Standard:**

05 **The Single-Exit Interchange (One Service) Mainline sign (SG42-1(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are at least four qualified facilities available with the possibility of more.**

06 **The Single-Exit Interchange (One Service) Mainline sign (SG42-2(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are one or two qualified facilities available and it is not likely that there will be more than three.**

07 **The Single-Exit Interchange (Two Services) Mainline sign (SG42-6(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are a limited number of services, three or four, in remote rural areas.**

08 **The Single-Exit Interchange (Two Services) Mainline sign (SG42-7(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are a limited number of services, one or two, in remote rural areas.**

09 **The Single-Exit Interchange (One Service) Mainline sign (SG42-9(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there is only one service, in remote rural areas.**

10 **The Single-Exit Interchange (One Service) Mainline sign (SG42-10(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are at least two qualified facilities and it is not likely that there will be more than four.**

## Section 2J.08 Double-Exit Interchanges

*Guidance:*

01 *At double-exit interchanges, the Specific Service signs should consist of two sections, one for each exit (see Figure 2J-1).*

**Standard:**

02 **At a double-exit interchange, the top section shall display the business identification sign panels for the first exit and the bottom section shall display the business identification sign panels for the second exit. At numbered interchanges, the name of the service type and the exit number shall be displayed above the business identification sign panels in each section. At unnumbered interchanges, the word message NEXT RIGHT (LEFT) and SECOND RIGHT (LEFT) shall be used in place of the exit number. The number of business identification sign panels on the sign (total of both sections) or the sign assembly shall be limited to six.**

~~*Guidance:*~~

03 ~~*At a double-exit interchange, where a service type is displayed on two Specific Service signs in accordance with the provisions of Section 2J.04, one of the signs should display the business identification sign panels for that service type for the businesses that are accessible from one of the two exits and the other sign should display the business identification sign panels for that service type for the businesses that are accessible from the other exit.*~~

Support:

03a Refer to the CCR, Title 21, Division 2, Chapter 19, § 2108(c).

~~Option:~~

04 ~~At a double-exit interchange where there are four business identification sign panels to be displayed for one of the exits and one or two business identification sign panels to be displayed for the other exit, the business identification sign panels may be arranged in three rows with two business identification sign panels per row.~~

04a Refer to the CCR, Title 21, Division 2, Chapter 19, § 2110(f).

Option:

05 At a double-exit interchange, where a service is to be signed for only one exit, one section of the Specific Service sign may be omitted, or a single exit interchange sign may be used.

06 Signs on ramps and crossroads as described in Section 2J.07 and Section 2J.101(CA) may be used at a double-exit interchange.

**Standard:**

07 **The Double-Exit Interchange Mainline sign (SG42-3(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there are one or two qualified facilities available from each exit and it is not likely that there will be more**

**than three from each exit.**

08 **The Double-Exit Interchange Mainline sign (SG42-11(CA)) shall be used for the Specific Service Signing Program (Logo Program) where there is at least one qualified facility available from each exit and it is not likely that there will be more that two from each exit.**

## Section 2J.09 Collector-Distributor Roadways for Successive Interchanges

Support:

01 Examples of Specific Service signs used in advance of interchanges for collector-distributor roadways that provide access to multiple interchanges are shown in Figure 2J-6.

Option:

02 If services are available from more than one of the interchanges along the collector-distributor roadway and those services are signed with Specific Service signs as described in Paragraph 4 of this Section, then Specific Service signs may be used on the mainline in conformance with the provisions of this Chapter.

**Standard:**

03 **No more than four Specific Service signs shall be displayed on a highway mainline approach to a collector-distributor roadway.**

04 **If Specific Service signs are located on the highway mainline for services accessed from the collector-distributor roadway, then the business identification sign panels displayed on the collector- distributor roadway shall be only duplicates of those displayed on the highway mainline.**

05 **If more than four Specific Services signs would be required on the mainline in advance of the collector-distributor roadway in order to display all the business identification sign panels used on Specific Service signs in advance of the collector-distributor roadway exits, then General Service signs shall be used on the mainline to identify the types of services displayed on Specific Service signs on the collector-distributor roadway.**

## Section 2J.10 Specific Service Trailblazer Signs

Support:

01 Specific Service trailblazer signs (see Figure 2J-7) are guide signs with one to four business identification sign panels that display business identification and directional information for services and eligible attractions. Specific Service trailblazer signs are for facilities that have installed along crossroads business identification sign panels displayed along the main roadway and ramp, and that require additional vehicle maneuvers or are a long distance from the ramp along the crossroad.

**Standard:**

02 **Specific Service trailblazer signs shall be installed along crossroads where the route to the business requires a direction change, where it is questionable as to which roadway to follow, or where additional guidance is needed. Where it is not feasible or practical to install Specific Service trailblazer signs to such businesses, those businesses shall not be considered eligible for signing from the ramp and main roadway. A Specific Service trailblazer sign shall not be required at the point where the business is visible from the roadway and its access is readily apparent.**

*Guidance:*

03 *If used, a Specific Service trailblazer sign should be located a maximum of 500 feet in advance of any required turn.*

**Standard:**

04 **The location of other traffic control devices shall take precedence over the location of a Specific Service trailblazer sign.**

05 **When used, each Specific Service trailblazer sign or sign assembly shall be limited to no more than four business identification sign panels. The business identification sign panels on Specific Service trailblazer signs shall be duplicates of those displayed on the Specific Service ramp signs.**

06 **Appropriate legends, such as directional arrows or the action message NEXT RIGHT or SECOND RIGHT, shall be displayed with the business identification sign panel to provide proper guidance. The directional legend and border shall be white and shall be displayed on a blue background.**

Option:

07 Specific Service trailblazer signs may contain various types of services on a single sign or on a sign assembly.

08 Specific Service trailblazer signs may be placed farther from the edge of the road than other traffic control signs.

## Section 2J.11 Signs at Intersections

~~*Guidance:*~~

01 ~~*If both tourist-oriented information (see Chapter 2K) and specific service information are proposed to be used at the same intersection, the tourist-oriented directional and Specific Service signs should be spaced sufficiently apart from one another, as well as apart from other guide, warning, and regulatory signs, to avoid confusion and allow sufficient time for road users to read and react to the information.*~~

~~**Standard:**~~

02 ~~**If sufficient space to provide appropriate reading and reaction to all proposed signs is not available, higher priority shall be given to guide, warning, and regulatory signs and either the tourist- oriented directional signs or the Specific Service signs, or both, shall not be used.**~~

~~*Guidance:*~~

03 ~~*If Specific Service signs are used on conventional roads or at intersections on expressways, they should be installed between the previous interchange or intersection and at least 300 feet in advance of the intersection from which the services are available.*~~

04 ~~*Business identification sign panels should not be displayed for a type of service for which a qualified facility is readily visible.*~~

~~**Standard:**~~

05 ~~**If Specific Service signs are used on conventional roads or at intersections on expressways, the name of each type of service shall be displayed above its business identification sign panel(s), together with an appropriate legend, such as NEXT RIGHT (LEFT) or a directional arrow, either displayed on the same line as the name of the type of service or displayed below the business identification sign panel(s).**~~

~~Option:~~

06 ~~Signs similar to Specific Service ramp signs as described in Section 2J.07 may be provided on the crossroad.~~

**Standard:**

07 **Per SHC, Division 1, Chapter 1, Article 3, § 101.7 includes the use of specific service signs for freeways only.**

08 **The tourist-oriented information and specific service information signs shall be separate installations. Refer SHC, Division 1, Chapter 1.5, Article 3, § 229.285.**

## Section 2J.12 Signing Policy

**Standard:**

01 **In addition to a statewide policy for eligibility of service providers (see Section 2J.01), each highway agency that elects to use Specific Service signs shall establish a signing policy.**

*Guidance:*

02 *The signing policy should include, at a minimum, the provisions of Section 2J.01 and at least the following criteria:*

- *A. Selection of eligible businesses;*
- *B. Distances to eligible services;*
- *C. The use of business identification sign panels, legends, and signs complying with the provisions of this Manual and State design requirements;*
- *D. Removal or covering of business identification sign panels during off seasons for businesses that operate on a seasonal basis;*
- *E. The circumstances, if any, under which Specific Service signs are permitted to be used in non-rural areas; and*
- *F. Determination of the costs to businesses for initial permits, installations, annual maintenance, and removal of business identification sign panels.*

Support:

03 SHC, Division 1, Chapter 1, Article 3, § 101.7 provides for placement of Specific Service Signs (Logo Sign Program) on all rural freeways in California. The term "rural" for this purpose means any area outside of an "urban" area. An urban area is an area encompassing a population of 5,000 or more.

04 CCR, Title 21, Division 2, Chapter 19, §§ 2100 through 2120 contain standards for the Specific Service Signs (Logo Sign Program).

**Standard:**

05 **No new Specific Service (SG42 Series(CA)) signs shall be installed in a geographic area with a population over 5,000 as identified on maps prepared by Caltrans based on the most recent United States Bureau of Census data.**

06 **Upon the district's determination to terminate the logo sign program within a specified geographic area, the district**

**shall cease the acceptance of new applications as well as the renewal of existing applications with immediate effect. Subsequently, the district must issue formal notification to all businesses currently participating in the program within the affected area. Such notification shall provide a minimum notice period of three months and shall stipulate that the removal of the specific service signs will become effective at the commencement of the following calendar year.**

Option:

07 General Service signs may be installed following the removal of specific service signs.

## Section 2J.101(CA) Signs at Ramps (SG42-4(CA), SG42-5(CA), SG42-8(CA) and SG42-12(CA))

**Standard:**

01 **Specific Service (Ramp) Signs shall be located on, opposite of, or at the terminus of an off-ramp, in the same direction of travel as the Specific Service (Mainline) Signs (Refer to Section 2J.07 and 2J.08). As viewed in the direction of travel, the successive signs shall be those for "ATTRACTION", "CAMPING", "LODGING", "FOOD", "EV CHARGING" and "FUEL" services in that order.**

Option:

02 When spacing does not allow EV Charging Specific Service Ramp Signs to be located as described in Paragraph 01 of this Section, then the EV Charging Specific Service Ramp Signs may be located anywhere within the successive Specific Service Ramp Sign order where adequate spacing between signs allows.

**Standard:**

03 **If either the business premises or an On-Site Sign of a Qualified Specific Service Business is not visible from any point on the off-ramp or from the terminus of the off-ramp, the Owner or Responsible Operator shall be required to make application to have a Logo Panel placed on a Specific Service (Ramp) Sign.**

Option:

04 If either the business premises or an on-site sign of a Qualified Specific Service Business is visible from any point on the off-ramp or from the terminus of the off-ramp, the Owner or Responsible Operator may apply for placement of a Logo Panel on the Specific Service (Ramp) Sign.

05 Caltrans may require that a Logo panel be placed on a Specific Service (Ramp) Sign when either the business premises or an On-Site Sign is visible from the off-ramp or from the terminus of the off-ramp, if a sign is necessary to avoid misdirection of the motorist because of the complexity of the interchange.

06 Appropriate trailblazers may be required by Caltrans along other public highways as necessary to adequately direct road users to the business referred to on any Logo Panel. Refer to Section 2J.10.

**Standard:**

07 **The Logo Panels fastened to a Specific Service (Ramp) Sign or a trailblazer sign shall be the same in shape, color, and message as those shown on the Specific Service (Mainline) Signs, but shall be of smaller size.**

Support:

08 The Specific Service Ramp sign (SG42-4(CA)) may be used for the Specific Service Signing Program (Logo Program) at an exit ramp where there are one or two qualified facilities available and it is not likely that there will be more than three in each direction.

09 The Specific Service Ramp sign (SG42-5(CA)) may be used for the Specific Service Signing Program (Logo Program) at an exit ramp where there are only one or two qualified facilities in only one direction.

10 The Specific Service Ramp sign (SG42-12(CA)) may be used for the Specific Service Signing Program (Logo Program) where there is only one qualified facility available and it is not likely that there will ever be more.


**Standard:**

11 **Ramp signs shall be installed along the ramp or at the ramp terminal for facilities that have logo panels displayed along the main roadway if the facilities are not readily visible from the ramp terminal. Directions to the service facilities shall be indicated by arrows on the ramp signs. Logo panels on Specific Service ramp signs shall be duplicates of those displayed on the mainline signs located in advance of the interchange, but shall be reduced in size.**


Support:

12 The Specific Service Ramp sign (SG42-8(CA)) may be used for the Specific Service Signing Program (Logo Program) in combination with a Directional Arrow Auxiliary (M6 Series) signs, at an exit ramp terminus, as a follow-up sign to freeway signs. A Mileage Plate may be applied to the sign panel, under the business logo where a business is not visible from the sign's location.

# Figure 2J-1. Examples of Business Identification Panel Arrangements on Specific Service Signs

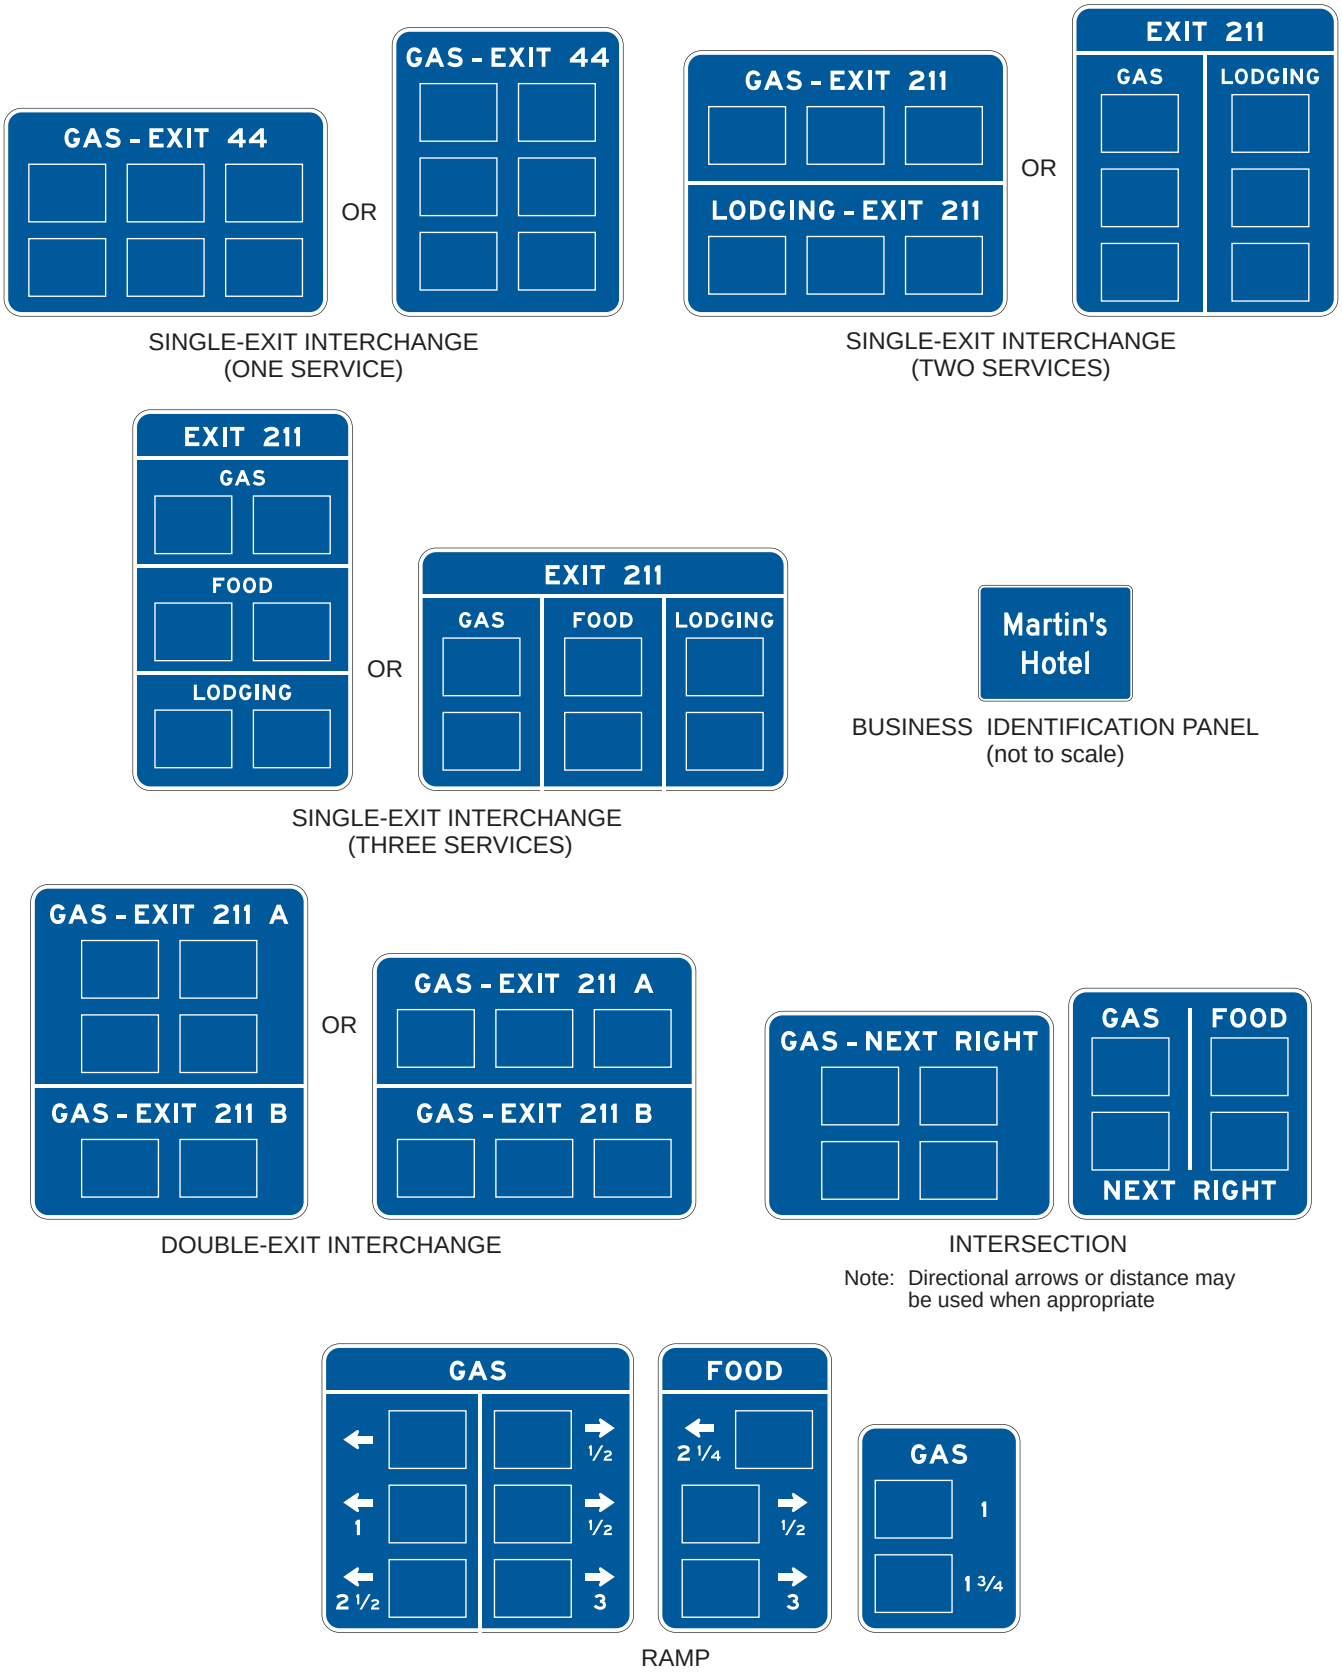


## *Figure 2J-1(CA). California Examples of Business Identification Panel Arrangements on Specific Service Signs*





SG42-1(CA)





SG42-2(CA)




SG42-3(CA)





SG42-4(CA)




SG42-5(CA)




SG42-6(CA)





SG42-7(CA)





SG42-8(CA)




SG42-9(CA)




SG42-10(CA)





SG42-11(CA)





SG42-12(CA)

# Figure 2J-2. Examples of Specific Service Sign Locations

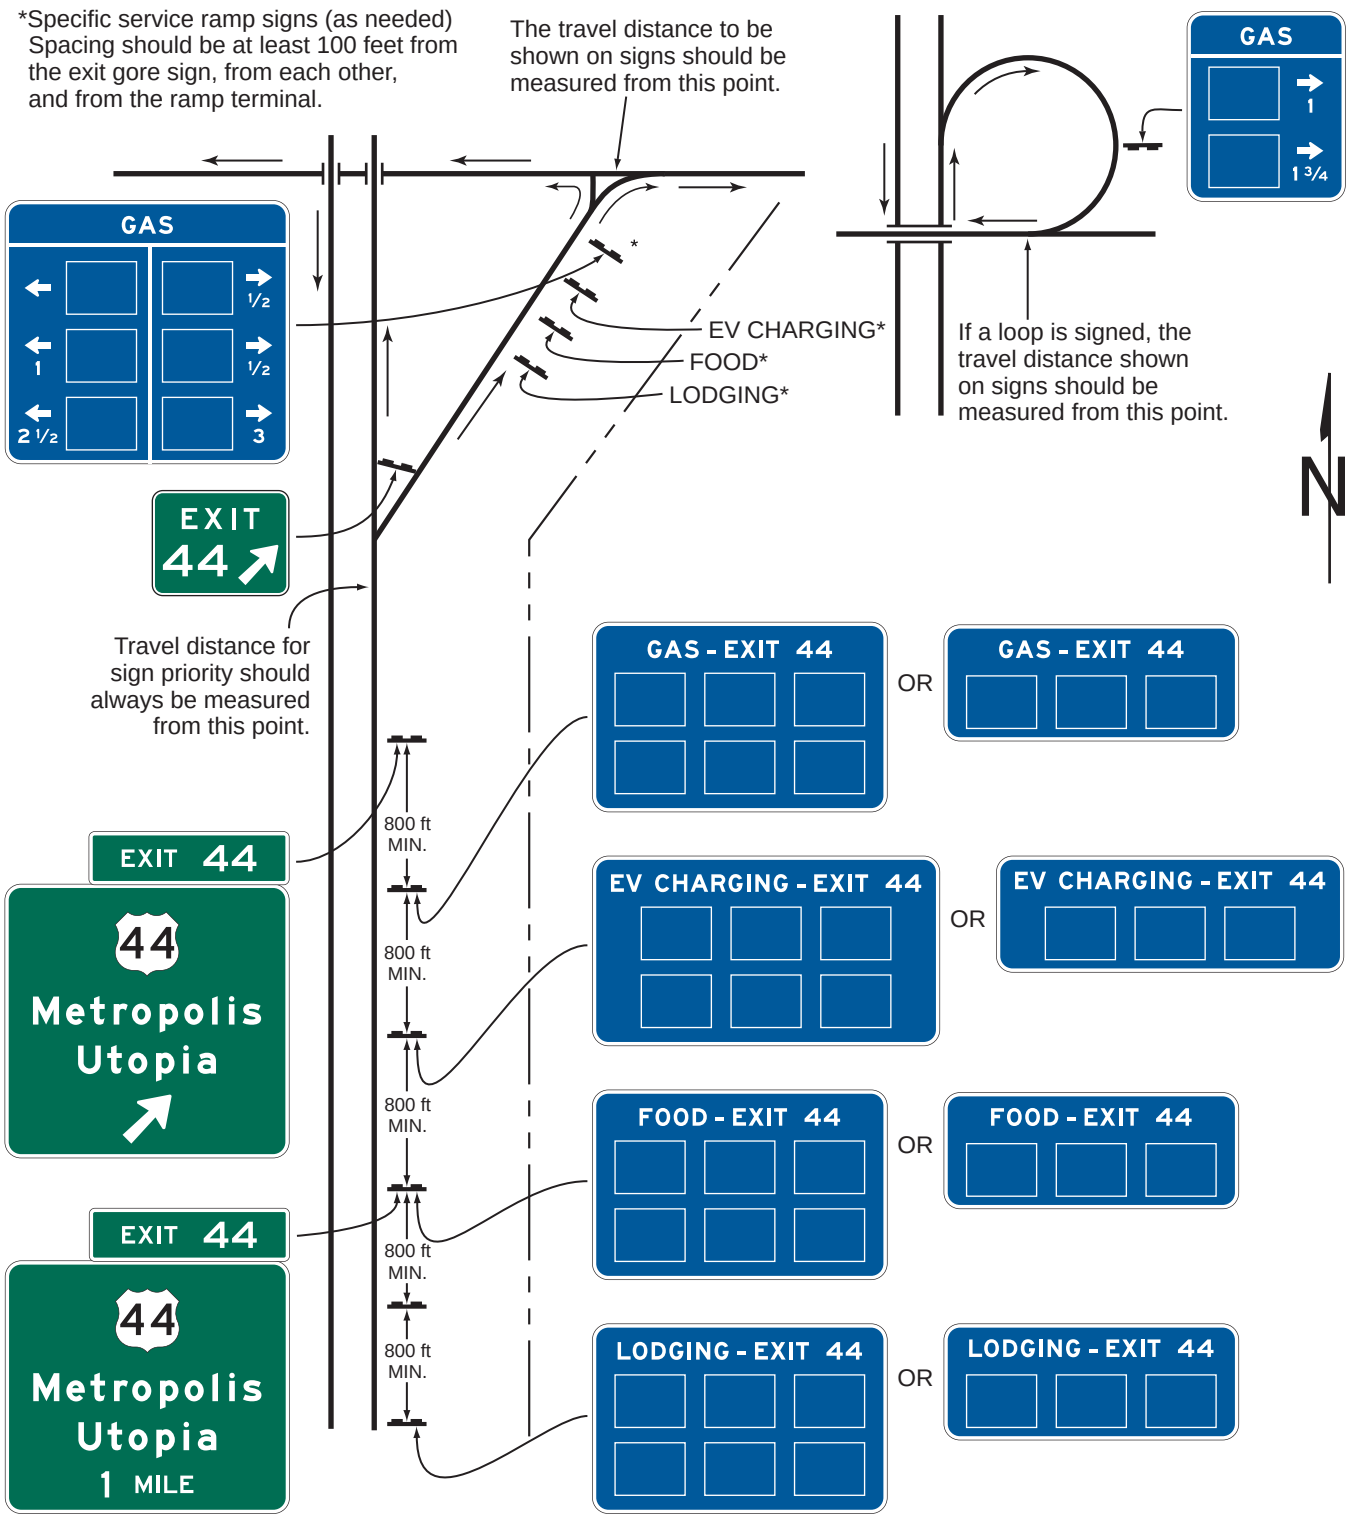

## Figure 2J-3. Example of General Service Signs Used in Conjunction with Specific Service Signs

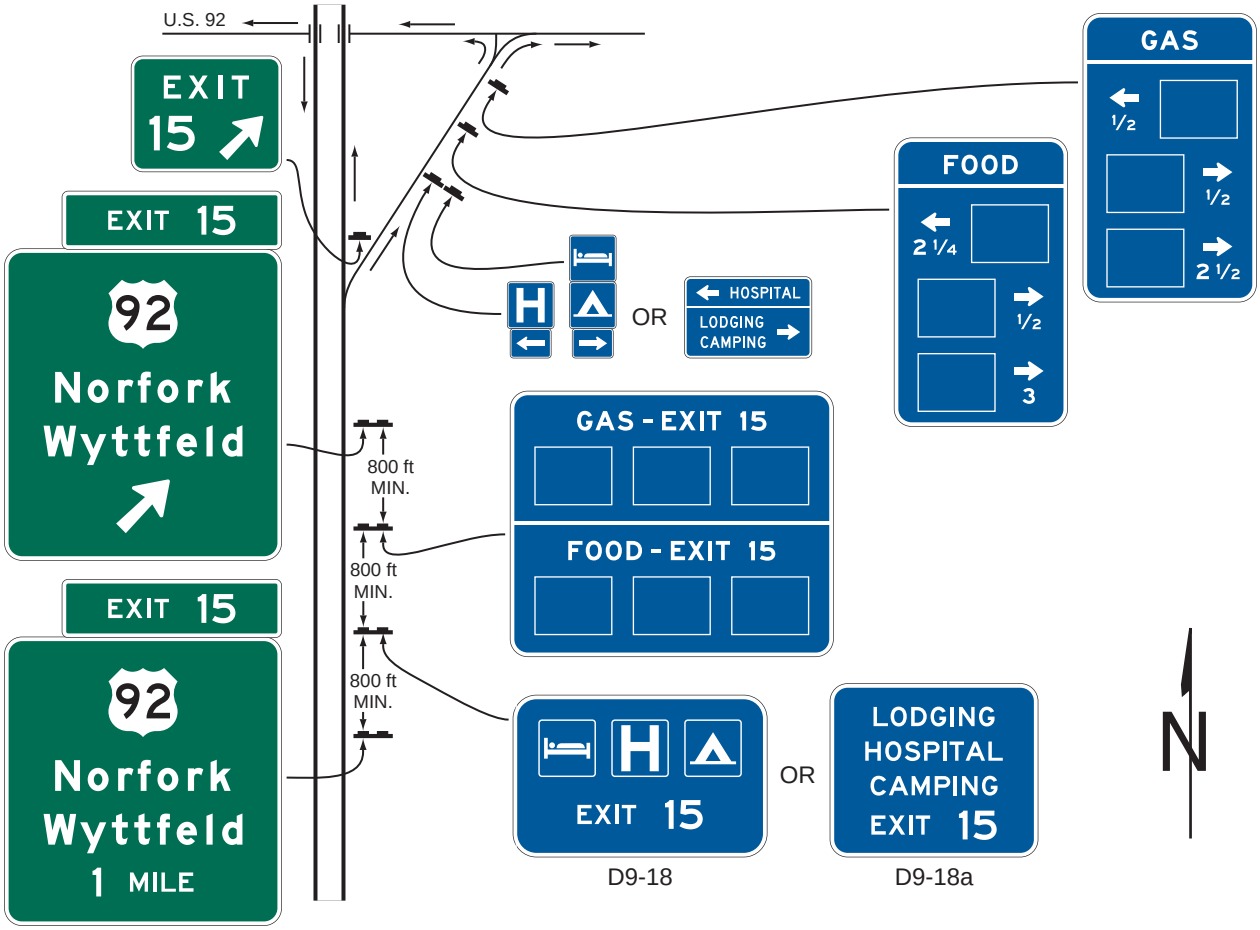



D9-18 D9-18a

Note: If specific service ramp signs are used, their spacing should be at least 100 feet from the exit gore sign, from each other, and from the ramp terminal.


## Figure 2J-4. Examples of Supplemental Messages on Business Identification Sign Panels



## Figure 2J-5. Example of Specific Services Signing for a Conventional Road Accessed within a Freeway-to-Freeway Interchange

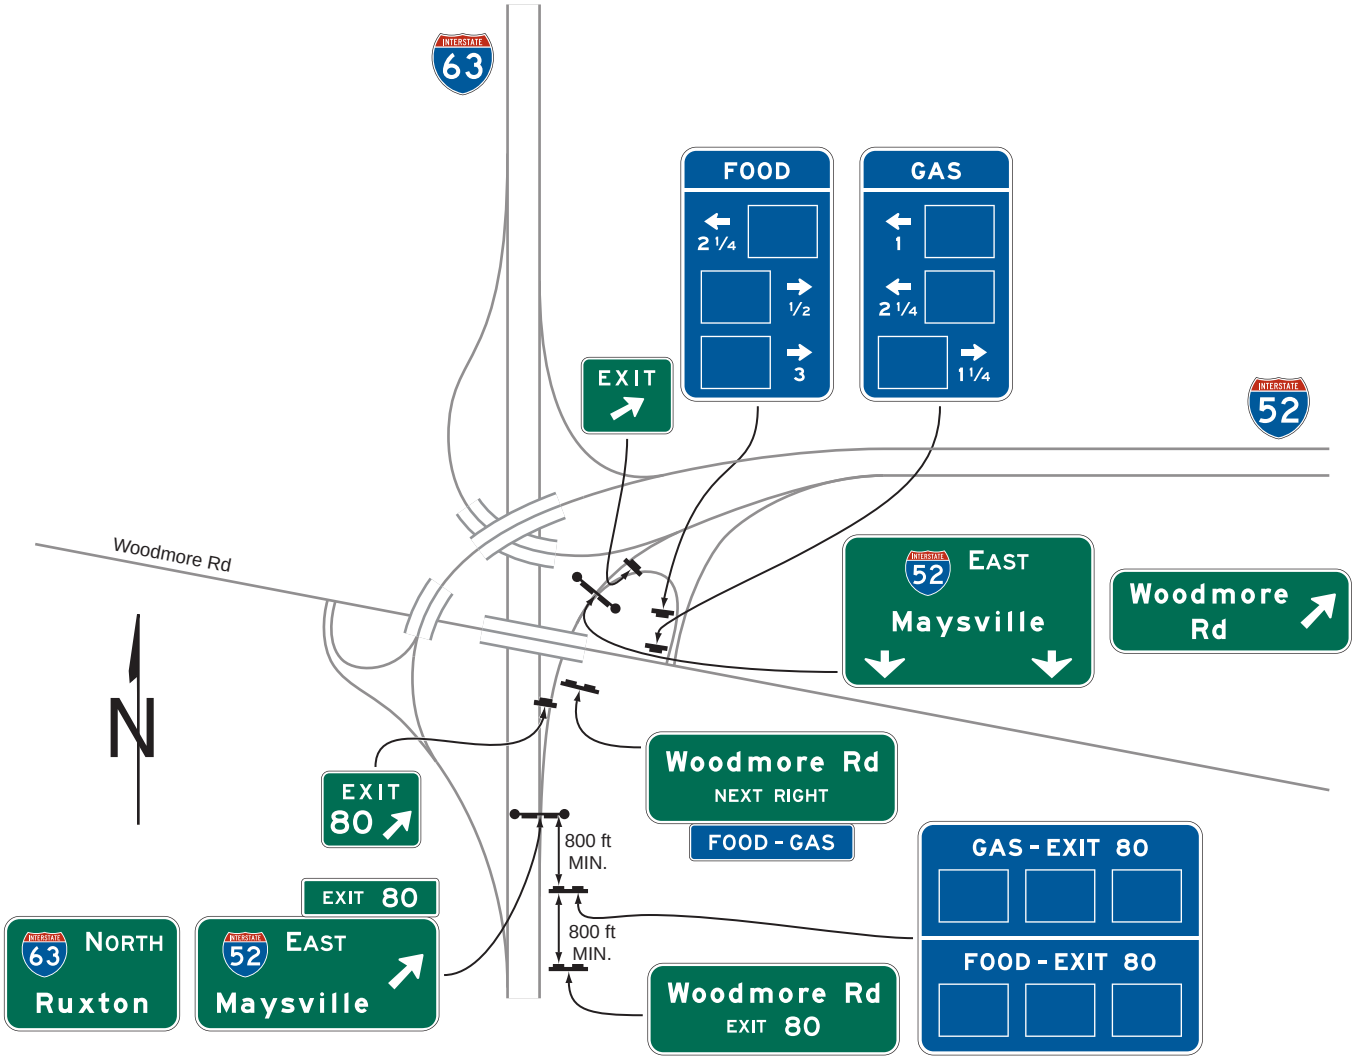


## Figure 2J-6. Example of Signing for Services Accessed from a Collector-Distributor Road Adjacent to a Freeway

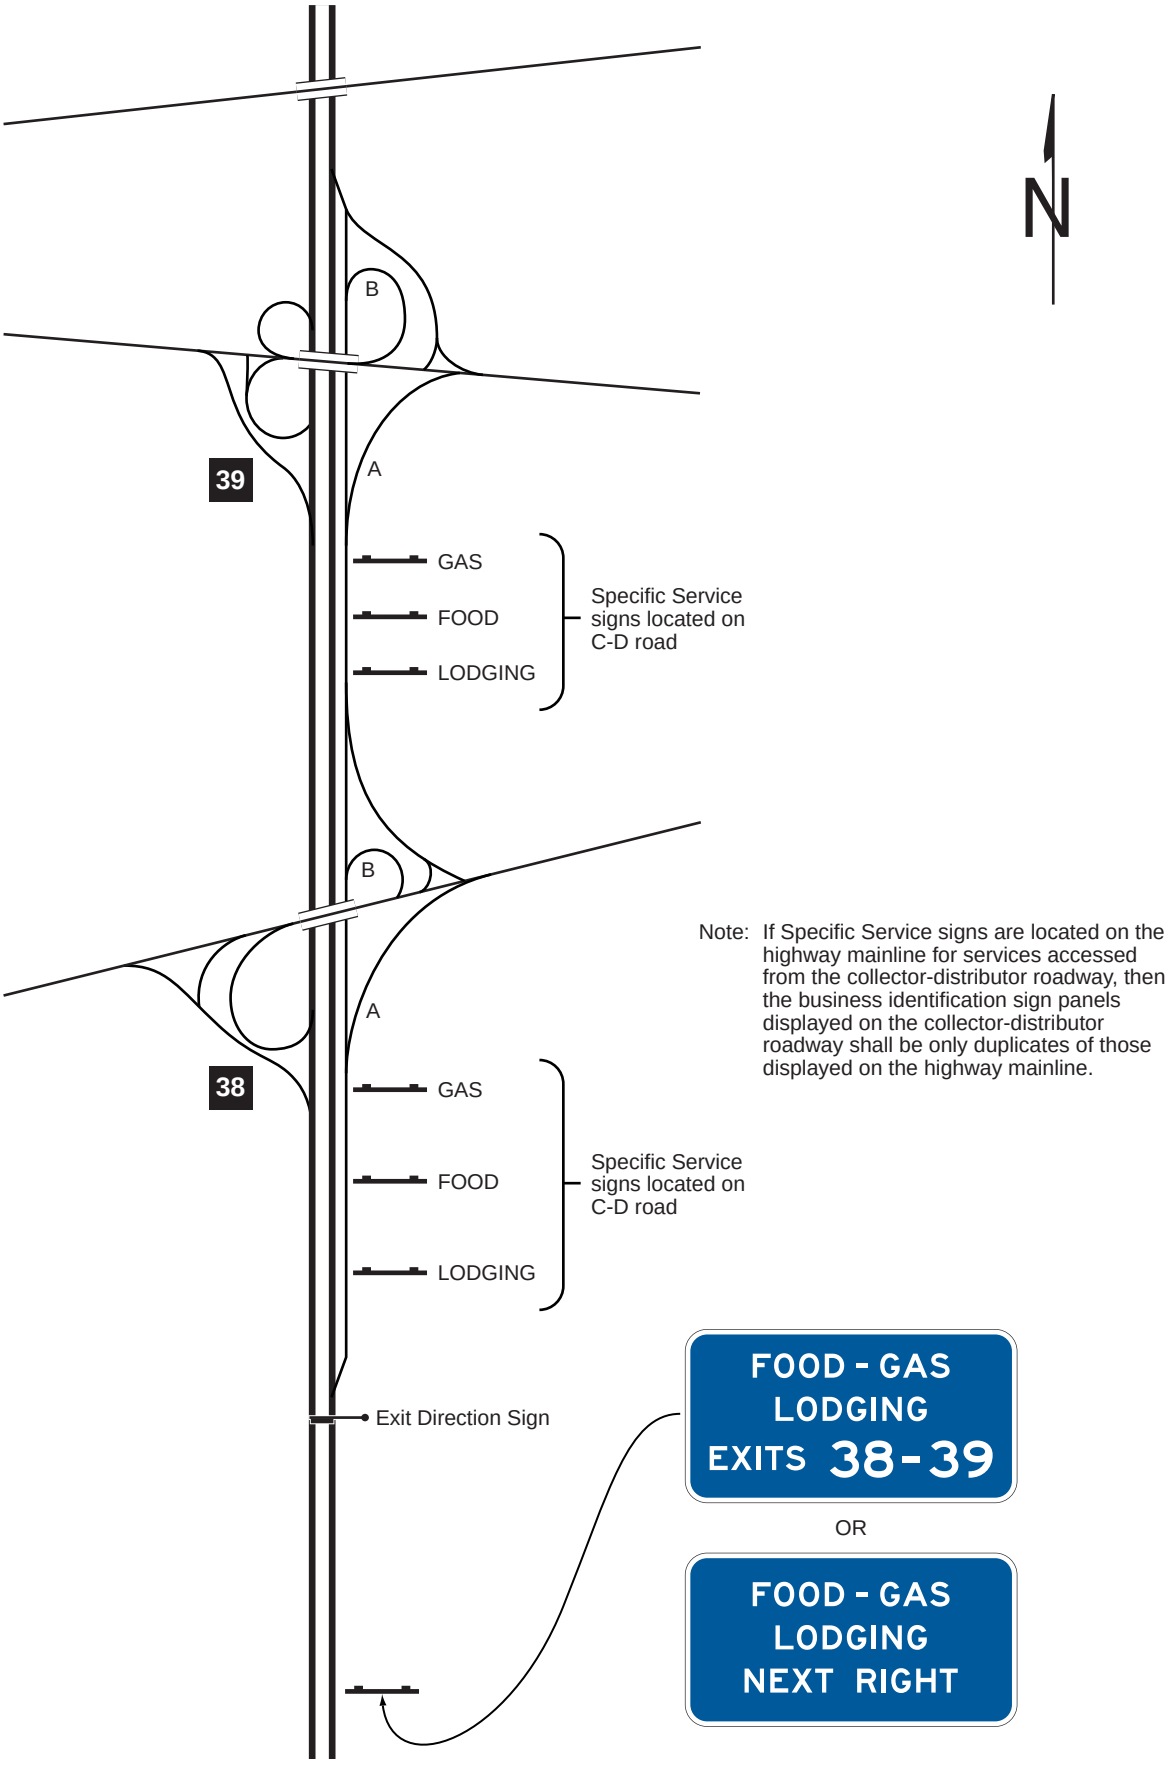


Note: If Specific Service signs are located on the highway mainline for services accessed from the collector-distributor roadway, then the business identification sign panels displayed on the collector-distributor roadway shall be only duplicates of those displayed on the highway mainline.

## Figure 2J-7. Examples of Specific Service Trailblazer Signs

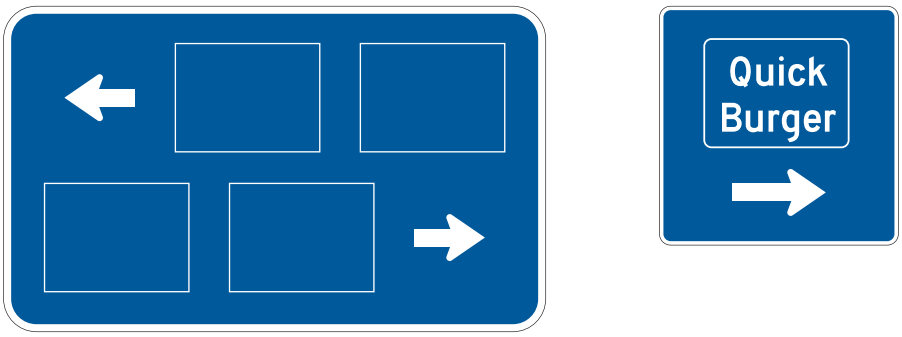

## Table 2J-1. Minimum Letter and Numeral Sizes for Specific Service Signs According to Sign Type

| Type of Sign | Freeway or Expressway | Conventional Road or Ramp |
|---|---|---|
| **A. Specific Service Signs** | | |
| Service Categories | 10 | 6 |
| Exit Number Words | 10 | — |
| Exit Number Numerals and Letters | 10 | — |
| Action Message Words | 10 | 6 |
| Distance Numerals | — | 6 |
| Distance Fraction Numerals | — | 4 |
| **B. Business Identification Sign Panels** | | |
| Words and Numerals (Non-Trademark/Graphic Logo) | 8 | 4 |
| Trademark/Graphic Logo | Proportional | Proportional |
| Supplemental Message Words and Numerals | 5 | 2.5 |

Note: Sizes are shown in inches

## Table 2J-2. Maximum Business Identification Sign Panel Sizes by Roadway Classification

| Roadway Classification | Sign Panel Size |
|---|---|
| Freeway or Expressway | 60 x 36 |
| Conventional Road or Ramp | 30 x 18 |

Note: Sizes are shown in inches as width x height

## Table 2J-101(CA). California Specific Service Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Single-Exit Interchange (One Service) Mainline | SG42-1(CA) | 2J.07 | 180 x 120 | 180 x 120 |
| Single-Exit Interchange (One Service) Mainline | SG42-2(CA) | 2J.07 | 180 x 72 | 180 x 72 |
| Double-Exit Interchange Mainline | SG42-3(CA) | 2J.08 | 180 x 144 | 180 x 144 |
| Specific Service Ramp | SG42-4(CA) | 2J.101(CA) | 84 x 54 | 84 x 54 |
| Specific Service Ramp | SG42-5(CA) | 2J.101(CA) | 66 x 36 | 66 x 36 |
| Single-Exit Interchange (Two Services) Mainline | SG42-6(CA) | 2J.07 | 138 x 138 | 138 x 138 |
| Single-Exit Interchange (Two Services) Mainline | SG42-7(CA) | 2J.07 | 138 x 90 | 138 x 90 |
| Specific Service Ramp | SG42-8(CA) | 2J.101(CA) | 30 x 30 | 30 x 30 |
| Single-Exit Interchange (One Service) Mainline | SG42-9(CA) | 2J.07 | 66 x 84 | 66 x 84 |
| Single-Exit Interchange (One Service) Mainline | SG42-10(CA) | 2J.07 | 126 x 120 | 126 x 120 |
| Double-Exit Interchange Mainline | SG42-11(CA) | 2J.08 | 126 x 144 | 126 x 144 |
| Specific Service Ramp | SG42-12(CA) | 2J.101(CA) | 48 x 36 | 48 x 36 |

# CHAPTER 2K. TOURIST-ORIENTED DIRECTIONAL SIGNS

## Section 2K.01 Purpose and Application

Support:

01 Tourist-oriented directional signs are post-mounted guide sign assemblies with one or more signs that display the ~~business identification of and~~ directional information for generic eligible business, service, and activity facilities.

**Standard***:*

02 **A facility shall be eligible for tourist-oriented directional signs only if it derives its major portion of income or visitors during the normal business season from road users not residing in the area of the facility.**

Option:

03 Tourist-oriented directional signs may include businesses involved with seasonal agricultural products.

**Standard:**

04 **The use of tourist-oriented directional signs shall be limited to rural highways (see definition in Section 1C.02). Tourist-oriented directional signs shall not be installed on conventional roads in urban or urbanized areas or on freeway or expressway main roadways or ramps.**

04a **The tourist-oriented information and specific service information signs shall be separate installations.**

Support:

04b Refer to the SHC, Division 1, Chapter 1.5, Article 3, § 229.285.

Option:

05 Tourist-oriented directional signs may be used in conjunction with General Service signs (see Section 2I.02).

Support:

06 Section 2K.07 contains information on the adoption of a State policy for States that elect to use tourist-oriented directional signs.

**Standard:**

07 **Refer to SHC, Division 1, Chapter 1.5 for administration, standards, eligibility, and fees concerning the tourist-oriented directional signs. Refer to Section 1A.05 for information regarding these publications.**

## Section 2K.02 Design

**Standard:**

01 **Tourist-oriented directional sign assemblies shall have one ~~or more~~ to three signs (see Figure ~~2K-1~~ 2K-1(CA)) for the purpose of displaying ~~the~~ generic business identification of and directional information for eligible facilities. Except as provided in Paragraph 7 of this Section, each sign shall be rectangular in shape and shall have a white legend and border on a blue background.**

02 **The content of the legend on each sign shall be limited to the generic identification and directional information for no more than one eligible business, service, or activity facility. The legends shall not include promotional advertising or gambling activities.**

*Guidance:*

03 *Each sign should have a maximum of two lines of legend including no more than one symbol (see Paragraph 4 of this Section), a separate directional arrow, and the distance to the facility displayed beneath the arrow. Arrows pointing to the left or up should be at the extreme left of the sign panel. Arrows pointing to the right should be at the extreme right of the sign panel. Symbols, when used, should be to the left of the word legend ~~or business identification sign panel (see Paragraphs 6 and 9 of this Section).~~*

Option:

04 The General Service sign symbols (see Section 2I.02) and the symbols for recreational and cultural interest area signs (see Chapter 2M) may be used on tourist-oriented directional signs.

05 ~~Based on engineering judgment, the hours of operation may be displayed on the sign.~~

06 ~~Business identification sign panels (see Section 2J.03) for specific businesses, services, and activities may be used in place of word legends on tourist-oriented direction signs.~~

**Standard:**

06a **The tourist-oriented directional signs shall not identify particular business or services by name, but rather shall be generic and identify only the type or nature of the business or service available.**

Support:

06b Refer to the SHC, Division 1, Chapter 1.5, Article 3, § 229.285.

**Standard:**

07 **When used, recreational and cultural interest area symbols shall be white on a brown background.**

08 **When used, symbols shall be an appropriate size (see Section 2K.04).**

09 ~~**When used, business identification sign panels shall not exceed 24 inches in width and 15 inches in height. Logos resembling official traffic control devices shall not be permitted.**~~

Option:

10 ~~The word message TOURIST ACTIVITIES may be displayed at the top of the tourist-oriented directional sign assembly~~.

Support:

10a The TOURIST ACTIVITIES word message unnecessarily increases the height of the sign.

~~**Standard:**~~

11 ~~**The TOURIST ACTIVITIES word message shall have a white legend in all upper-case letters and a white border on a blue background. If used, it shall be placed above and in addition to the directional signs.**~~

Support:

12 Examples of tourist-oriented directional signs are shown in Figures ~~2K-1 and 2K-2~~ 2K-1(CA).

## Section 2K.03 Style and Size of Lettering

*Guidance:*

01 *All letters and numbers on tourist-oriented directional signs, ~~except on the business identification sign panels~~, should be upper-case and at least 6 inches in height. ~~Any legend on a business identification sign panel should be proportional to the size of the business identification sign panel.~~*

**Standard:**

02 **Design standards for letters, numerals, and spacing shall be as provided in the "Standard Highway Signs" publication (see Section 1A.05).**

03 **Figure 2K-1(CA) and the Caltrans' California Sign Specifications for Tourist Oriented Directional signs shall be used for arrangement and size of tourist-oriented directional signs. A single sign arrangement is used in California for tourist-oriented directional signs.**

## Section 2K.04 Arrangement and Size of Signs

**Standard:**

01 **The total height of the tourist-oriented directional signs in a sign assembly shall be limited to a maximum of 6 feet excluding the mounting height measured vertically from the bottom of the sign assembly to the elevation of the near edge of the roadway.** ~~**Additional height shall be allowed to accommodate the addition of the optional TOURIST ACTIVITIES message provided in Section 2K.02 and the action messages provided in Section 2K.05.**~~

~~*Guidance:*~~

02 ~~*The number of intersection approach sign assemblies (one sign assembly for tourist-oriented destinations to the left, one for destinations to the right, and one for destinations straight ahead) installed in advance of an intersection should not exceed three.*~~

**Standard:**

02a **The number of signs installed in each assembly ~~should~~ shall not exceed three.**

Support:

02b Refer to the SHC, Division 1, Chapter 1.5, Article 3, § 229.28.

*Guidance*:

02c ~~*The signs for right-turn, left-turn, and straight-through destinations should be on separate sign assemblies. Signs for facilities in the straight-through direction should be considered only when there are signs for destinations in either the left or right direction.*~~

03 *If it has been determined to be appropriate to combine the left-turn and right-turn destination signs on a single sign assembly, the left-turn destination signs should be above the right-turn destination signs (see Figure 2K-1). When there are multiple destinations in the same direction, they should be in order based on their distance from the intersection. ~~Except as provided in Paragraph 5 of this Section, a straight-through sign should not be combined in a sign assembly~~*

~~*displaying left-turn and/or right-turn destinations.*~~

04 *The signs should not exceed the size necessary to accommodate two lines of legend without crowding. Symbols on a directional sign should not exceed the height of two lines of a word legend. All directional signs and other parts of the sign assembly should be the same width, which should not exceed 6 feet.*

~~Option:~~

**Standard:**

05 **At intersection approaches where three or fewer facilities are displayed, the left-turn, right-turn, and straight-through destination sign panels ~~may~~ shall be combined on the same sign assembly.**

06 **Figure 2K-1(CA) and the Caltrans' California Sign Specifications for Tourist Oriented Directional (SG44-1A(CA) and SG44-2A(CA)) signs shall be used for arrangement and size of tourist-oriented directional signs. A single sign arrangement is used in California for tourist-oriented directional signs.**

## Section 2K.05 Advance Signs

~~*Guidance:*~~

01 ~~*Advance signs should be limited to those situations where sight distance, intersection vehicle maneuvers, or other vehicle operating characteristics require advance notification of the destinations and their directions.*~~

02 ~~*The design of the advance sign should be identical to the design of the intersection approach sign. However, the directional arrows and distances to the destinations should be omitted and the action messages NEXT RIGHT, NEXT LEFT, or AHEAD should be placed on the sign above the business identification signs. The action messages should have the same letter height as the other word messages on the directional signs (see Figures 2K-1 and 2K-2).*~~

~~**Standard:**~~

03 ~~**The action message signs shall have a white legend in all upper-case letters and a white border on a blue background.**~~

~~Option:~~

04 ~~The legend RIGHT ½ MILE or LEFT ½ MILE may be used on advance sign assemblies when there are intervening minor roads.~~

05 ~~The height required to add the directional word messages recommended for the advance sign assembly may be added to the maximum sign height of 6 feet.~~

~~*Guidance:*~~

06 ~~*The optional TOURIST ACTIVITIES message, when used on an advance sign assembly, and the action message should be combined on a single sign with TOURIST ACTIVITIES as the top line and the action message as the bottom line (see Figure 2K-2).*~~

Support:

07 Advance signs are not used in California for tourist-oriented directional signs.

## Section 2K.06 Sign Locations

*Guidance:*

01 *If used, the intersection approach signs should be located at least 200 feet in advance of the intersection. Sign assemblies should be spaced ~~at least 200 feet apart and~~ at least 200 feet from other traffic control devices.*

02 ~~*If used, advance signs should be located approximately ½ mile from the intersection with 500 feet between these sign assemblies. In the direction of travel, the order of advance sign placement should be to show the destinations to the left first, then destinations to the right, and last, the destinations straight ahead (see Figure 2K-2).*~~

Support:

02a Advance signs are not used in California for tourist-oriented directional signs.

*Guidance:*

03 *Position, height, and lateral offset of sign assemblies should be governed by Chapter 2A except as permitted in this Section.*

Option:

04 Tourist-oriented directional signs may be placed farther from the edge of the road than other traffic control signs.

**Standard:**

05 **The location of other traffic control devices shall take precedence over the location of tourist- oriented directional signs.**

## Section 2K.07 State Policy

**Standard:**

01 **To be eligible for tourist-oriented directional signing, facilities shall comply with applicable State and Federal laws concerning the provisions of public accommodations without regard to race, religion, color, age, sex, or national origin, and with laws concerning the licensing and approval of service facilities. Each State that elects to use tourist-oriented directional signs shall adopt a policy that complies with these provisions.**

*Guidance:*

02 *The State policy should include:*

- *A. A definition of tourist-oriented business, service, and activity facilities.*
- *B. Eligibility criteria for signs for facilities.*
- *C. Provision for covering signs during off seasons for facilities operated on a seasonal basis.*
- *D. Provisions for signs to facilities that are not located on the crossroad when such facilities are eligible for signs.*
- *E. A definition of the immediate area in compliance with the provisions of Paragraph 2 of Section 2K.01.*
- *F. Maximum distances to eligible facilities. The maximum distance should be 5 miles.*
- *G. Provision for information centers (plazas) when the number of eligible sign applicants exceeds the maximum permissible number of sign panel installations.*
- *H. Provision for limiting the number of signs when there are more applicants than the maximum number of signs permitted.*
- *I. Criteria for use at intersections on expressways.*
- *J. Provisions for controlling or excluding those businesses which have illegal signs as defined by the Highway Beautification Act of 1965 (23 U.S.C. 131).*
- *K. Provisions for States to charge fees to cover the cost of signs through a permit system.*
- *L. A definition of the conditions under which the time of operation is displayed.*
- *M. Provisions for determining if advance signs will be permitted, and the circumstances under which they will be installed.*

Option:


03 The Tourist Oriented Directional signs may be placed at qualifying conventional rural highway intersections.

Support:


04 These qualifying intersections are described in Chapter 1.5 of the SHC.

05 Refer to the SHC, Division 1, Chapter 1.5 for administration, standards, eligibility, and fees concerning the tourist-oriented directional signs. Refer to Section 1A.05 for information regarding these publications.


## Figure 2K-1. Examples of Tourist-Oriented Directional Signs

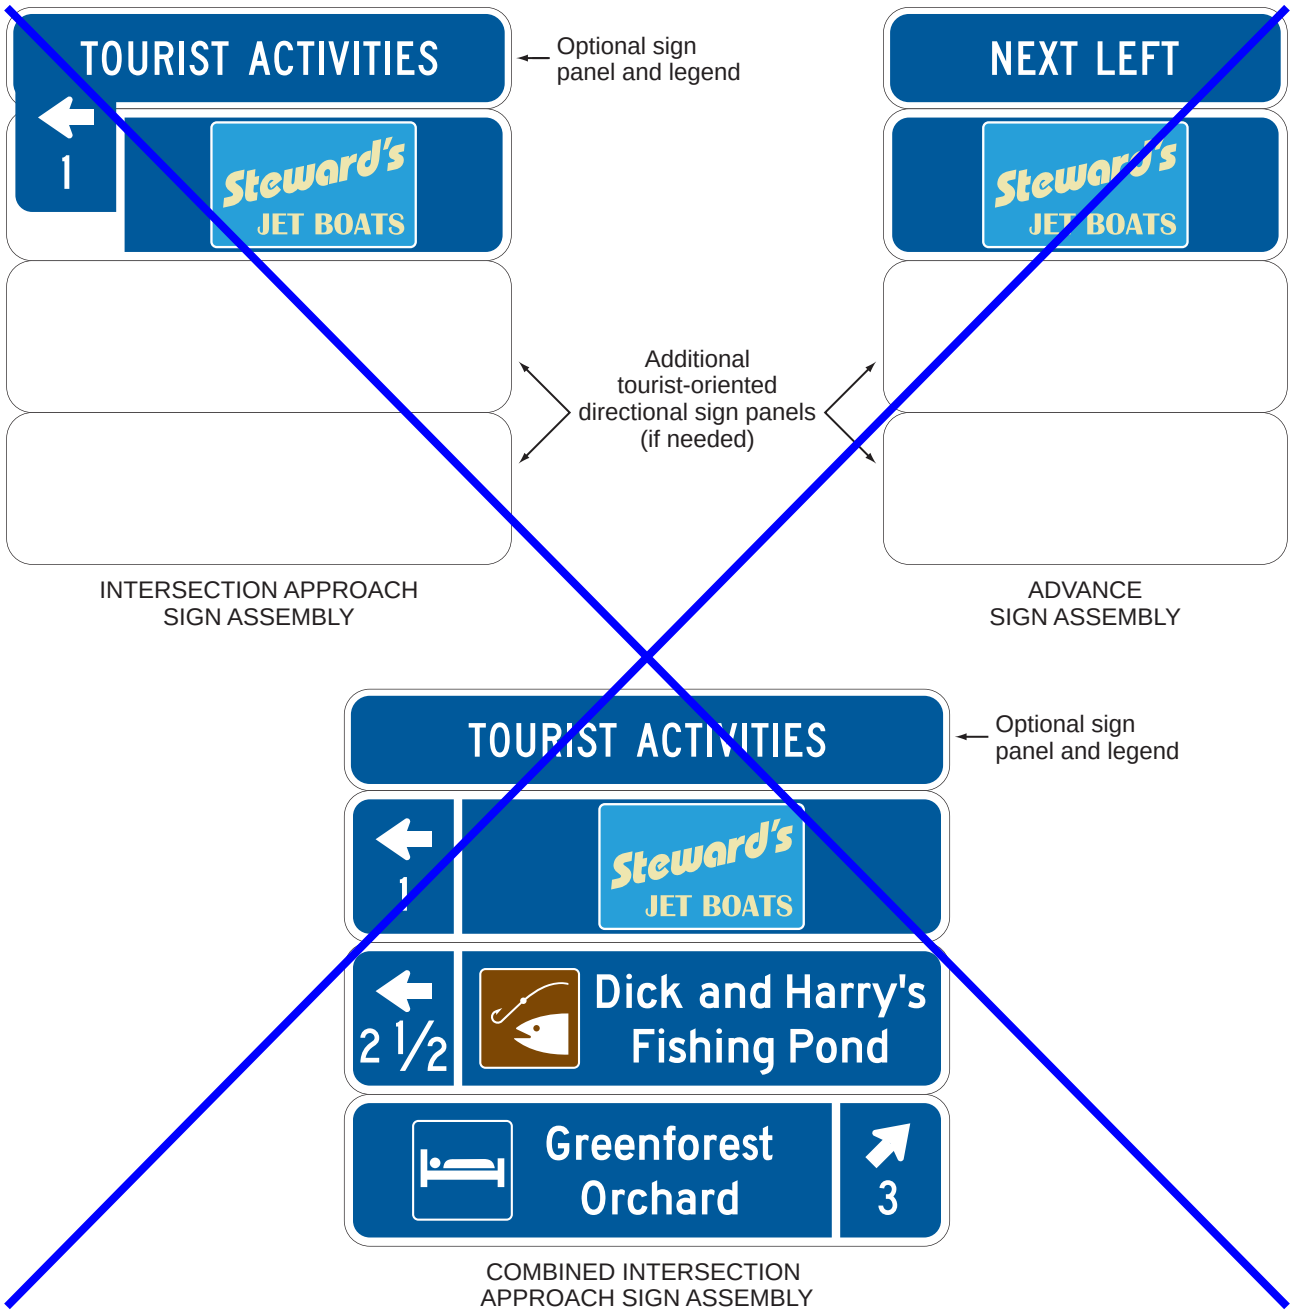

## *Figure 2K-1(CA). California Examples of Tourist-Oriented Directional Signs*

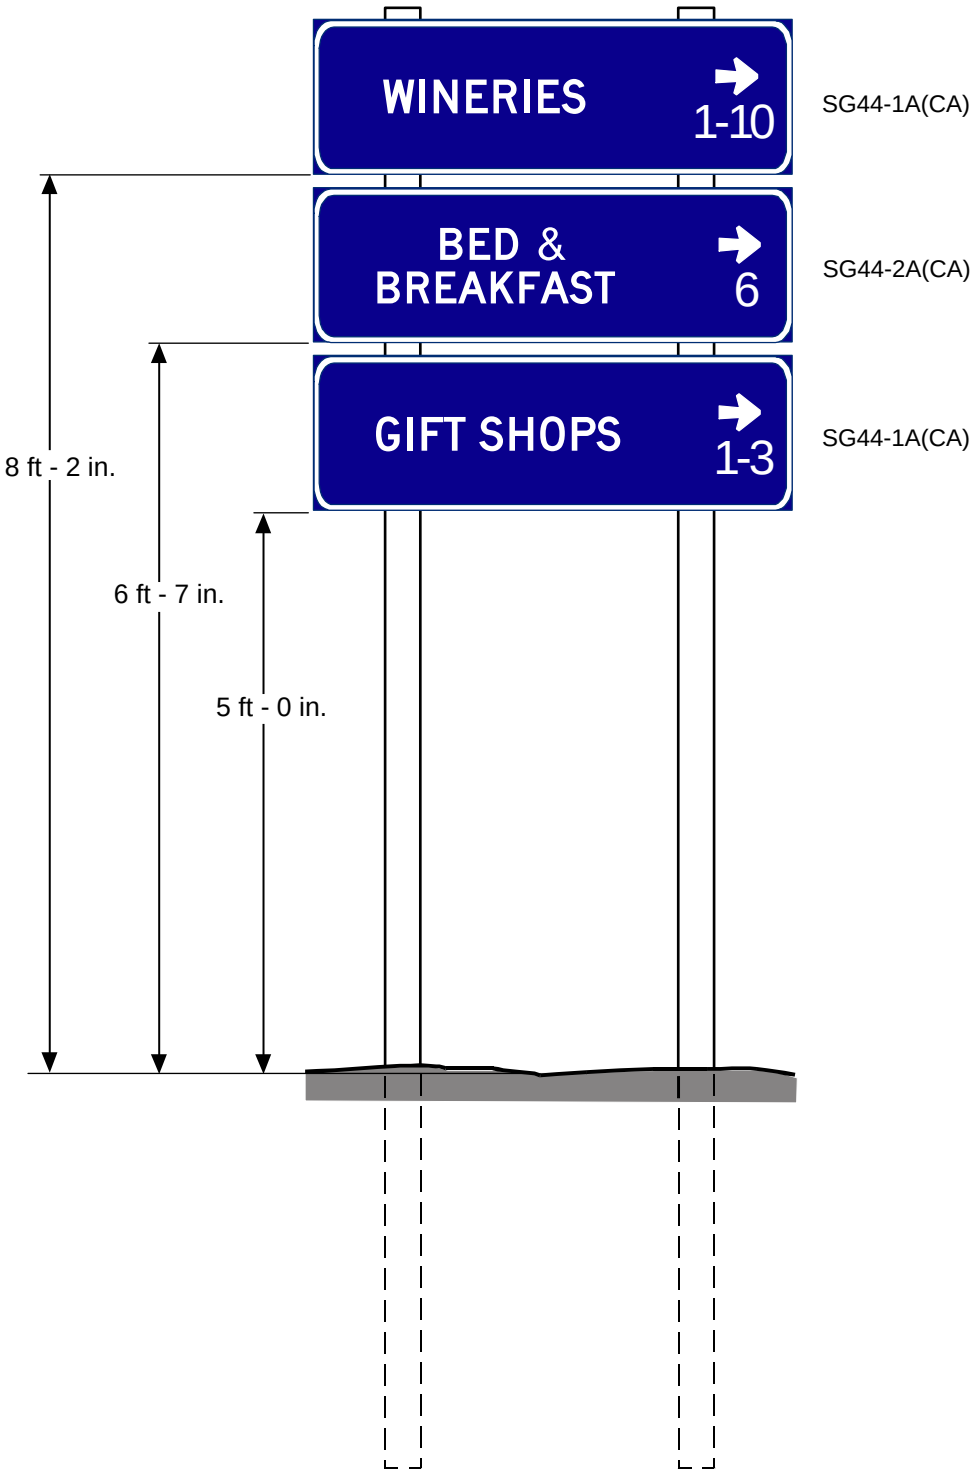

## Figure 2K-2. Examples of Tourist-Oriented Directional Signs on an Intersection Approach

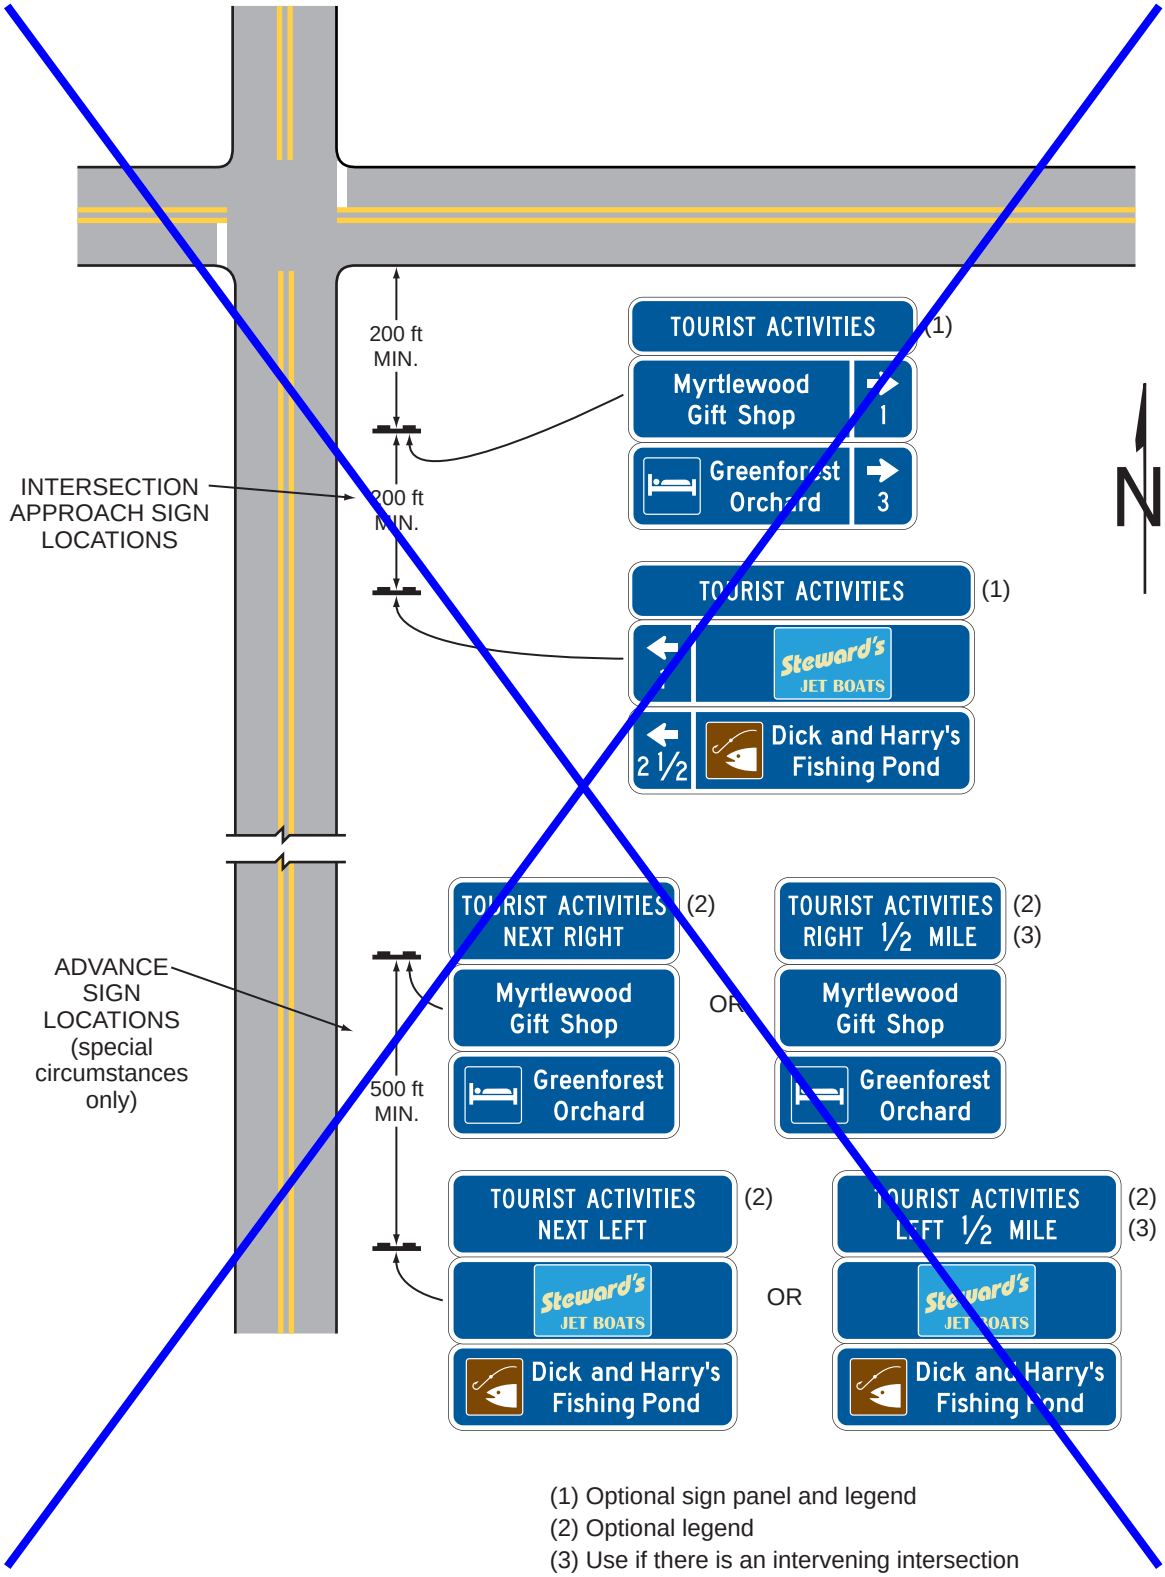


(1) Optional sign panel and legend
(2) Optional legend
(3) Use if there is an intervening intersection

## Table 2K-101(CA). California Tourist-Oriented Directional Sign Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road |
|---|---|---|---|
| Tourist-Oriented Directional Sign (TODS) | SG44-1A(CA) | 2K.04 | VARS x 18 |
| Tourist-Oriented Directional Sign (TODS) | SG44-2A(CA) | 2K.04 | VARS x 18 |

# CHAPTER 2L. CHANGEABLE MESSAGE SIGNS

## Section 2L.01 Description of Changeable Message Signs

Support:

01 A changeable message sign (CMS) is a traffic control device that is capable of displaying one or more alternative messages. Some CMS have a blank mode when no message is displayed, while others display multiple messages with only one of the messages displayed at a time (such as OPEN/CLOSED signs at weigh stations).

02 The provisions in this Chapter apply to both permanent (fixed) and portable changeable message signs with electronic displays or the electronic display portion of an otherwise conventional static sign. Additional provisions that only apply to portable changeable message signs (PCMS) can be found in Section 6L.05. The provisions in this Chapter generally do not apply to CMS with non-electronic displays that are changed either manually or electromechanically, such as a hinged-panel, rotating-drum, or back-lit curtain or scroll CMS.

03 The CMS is a traffic control device at all times regardless of the type of message being displayed. Accordingly, the limitations on design, format, and manner of display of a message conveyed on a conventional sign apply to CMS regardless of the type of message being displayed at any given time. Some of the general provisions regarding traffic control devices are reiterated in this Chapter. However, this Chapter is not an independent or stand-alone reference for CMS. Users of CMS are expected to consult the other chapters in this Manual for criteria on how to develop effective messages that comply with this Manual and that meet the expectancy and limitations of the road user. In this regard, the engineering processes applied to decisions about whether to use a particular sign, for example, are no different for the decisions about the type and content of the message under consideration for display on a CMS. The other limited-use messages allowed on CMS as provided for in this Chapter likewise fall under the same MUTCD provisions as the primary-use traffic operation regulatory, warning, and guidance messages except as stated otherwise in this Chapter.

04 CMS messaging can be subject to habituation, a phenomenon by which repeated exposure to a stimulus results in diminished response. CMS habituation can occur through repeated exposure to messages, especially those messages that might not be perceived as having relevance to the road user, resulting in diminished responsiveness of the road user to that message. Because messages can be changed or extinguished, the effectiveness of CMS is tied more to the messages displayed thereon, the frequency of displayed messages, and the relevance to the road user, rather than to the installation of the signs themselves.

*Guidance:*

05 *Changeable message signs should be used judiciously to avoid habituation and preserve their effectiveness during the display of real-time messages about traffic conditions or traffic advisories.*

**Standard:**

06 **The design of legends for non-electronic display CMS shall comply with the provisions of Chapters 2A through 2K, 2M, and 2N of this Manual. Other CMS shall comply with the design and application principles established in this Chapter, Chapter 2A, and provisions elsewhere in this Manual for specific signs.**

07 **No items other than inventory or maintenance-related information (see Section 2A.04) shall be displayed on the front or back of a CMS or portable CMS. Names or logos of the manufacturer, brand, or model shall not be displayed on a CMS or portable CMS, either in the message display itself or on the exterior housing.**

*Guidance:*

08 *Blank-out signs that display only single-phase, predetermined electronic-display legends that are limited by their composition and arrangement of pixels or other illuminated forms in a fixed arrangement (such as a blank-out sign indicating a part-time turn prohibition, a blank-out or changeable lane-use sign, or a changeable OPEN/CLOSED sign for a weigh station) should comply with the provisions of the applicable Section for the specific type of sign, provided that the letter forms, symbols, and other legend elements are duplicates of the conventional messages as detailed in the "Standard Highway Signs" publication (see Section 1A.05). Because such a sign is effectively an illuminated version of a conventional sign, the size of its legend elements, the overall size of the sign, and the placement of the sign should comply with the applicable provisions for the conventional version of the sign.*

## Section 2L.02 Applications of Changeable Message Signs

**Standard:**

01 **CMS shall display only traffic operational, regulatory, warning, and guidance information except as otherwise provided in this Chapter. Advertising or other messages not related to traffic control shall not be**

**displayed on a CMS or on its supports or other equipment.**

Option:

02 CMS may display traffic safety campaign messages (see Section 2L.07), transportation-related messages, emergency homeland security messages, and America's Missing: Broadcast Emergency Response (AMBER) alert messages, all as provided for in this Chapter.

03 Transportation-related messages for the purpose of improving traffic conditions, such as those providing information on alternative means of transportation, electronic toll collection, or carpooling may be displayed to remind or inform drivers of relevant options or opportunities for transportation.

Support:

04 Messages regarding broader transportation items not related to improving traffic conditions, such as reminders of driver's license or vehicle registration renewal, vehicle recall information, and vehicle maintenance, do not meet the purpose of a transportation-related message.

05 Examples of transportation-related messages include "STADIUM EVENT SUNDAY, DELAYS NOON TO 4 PM" and "OZONE ALERT—USE TRANSIT."

*Guidance:*

06 *A CMS should not be used to display a transportation-related message if doing so could adversely affect respect for the sign. "CONGESTION AHEAD" or other overly simplistic or vague messages should not be displayed alone. These messages should be supplemented with a message on the location or distance to the congestion or incident, delay and travel time, alternative route, or other similar messages.*

07 *CMS should not be used in place of conventional signs for conditions that do not change, except for blank-out type signs used to display regulatory, warning, and guidance information that routinely reoccurs, but only on a part-time basis. Similarly, when only certain elements of a message on a non-changeable sign are subject to change, only those elements of the sign should be in an electronic display, for example the prices shown on the R3-48 and R3-48a signs (see Figure 2G-18).*

Support:

08 The purpose of CMS is to provide real-time traffic regulatory, warning, or guidance messages as follows:

A. Incident management and route diversion;
B. Warning of adverse roadway travel conditions due to weather;
C. Special event applications associated with traffic control or conditions;
D. Lane, ramp, and roadway control;
E. Priced or other types of managed lanes;
F. Travel times;
G. Warning situations;
H. Traffic regulations;
I. Speed control or warning;
J. Variable destination guidance;
K. Supporting temporary traffic control; or
L. Active Traffic Management.

09 CMS provide significant flexibility and capability in communicating many types of real-time traffic control messages to road users. While their intended purpose is the display of traffic regulatory, warning, or guidance information, other limited uses are also allowed under certain conditions, as provided in this Chapter. Their integrity as an official traffic control device rests significantly on their judicious use and proper messaging format and content, regardless of the message type being displayed.

**Standard***:*

10 **State and local highway agencies that have permanently-installed (fixed) or positioned (portable) CMS shall issue and maintain a policy regarding the use and display of all types of messages to be used on their CMS. The policy shall define the types of messages that will be allowed, the priority of messages, the proper syntax of messages, the timing of messages, and other important messaging elements to ensure messages displayed meet the basic principles that govern the design and use of traffic control devices in general (see Section 1D.01) and traffic signs in particular as provided for in this Manual.**

*Guidance:*

11 *State and local agencies that use CMS, but do not have permanently-installed (fixed) or positioned (portable) signs, should develop and establish a policy as discussed in Paragraph 10 of this Section.*

12 *When CMS are used at multiple locations to address a specific situation, the message displays should be consistent along the roadway corridor and adjacent corridors, which might necessitate coordination among different operating agencies.*

13 *AMBER alerts (see Paragraph 2 of this Section), when displayed, should not preempt messages related to traffic or travel conditions. AMBER alert messages should be kept as brief as possible and, when possible, direct road users to another source, such as broadcast or highway advisory radio, for detailed information about the alert.*

**Standard:**

14 **Types of "alert" messages other than AMBER alerts that are unrelated to traffic or travel conditions shall not be displayed on CMS.**

15 **The format of CMS displays shall not be of a type that could be considered similar to advertising or promotional displays.**

Support:

16 In times of a declared state of emergency, it might be appropriate to display messages related to evacuation, homeland security, or emergency information. Traffic patterns, movement, or other situations might be atypical due to the emergency, necessitating unique messaging not specifically related to traffic conditions.

**Standard:**

17 **Homeland security and emergency messages shall only be displayed in declared states of emergency when there is an imminent threat to the general population. Generic security or personal safety messages shall not be displayed when there is no context of a declared state of emergency or known imminent national security threat. Homeland security and emergency messages shall not be promotional or advisory in nature, including the message design, layout, or manner of display.**

*Guidance:*

18 *Homeland Security and emergency messages should undergo significant levels of scrutiny prior to being approved for broadcast to ensure accuracy and consistency with emergency conditions. These messages should be designed to convey a clear and simple meaning in a similar format to traffic control messages.*

Support:

19 Section 2B.21 contains information regarding the design of CMS that are used to display variable speed limits that change based on ambient or operational conditions on the variable Speed Limit (R2-1) sign.

20 Section 2C.13 contains information regarding the design of CMS that are used to display the speed at which approaching vehicles are traveling on the Vehicle Speed Feedback (W13-20 and W13-20aP) sign and plaque.

21 Section 2H.04 contains information regarding the design of CMS that are used to display variable speeds for traffic signal progression on the Traffic Signal Speed (I1-1) sign.

22 Section 5B.01 contains provisions for LEDs used in electronic-display signs to accommodate driving automation systems.

## Caltrans' Policy regarding the use of CMS for AMBER alert messages on State Highways

Support:

23 A primary mission of Caltrans is the safe and orderly movement of traffic. It is the policy of Caltrans to display only real-time information that conveys current traffic safety and congestion information on CMS.

**Standard:**

24 **An exception to Caltrans policy on the use of CMS shall be made only for AMBER Alerts. Only credible real-time information, where it is crucial to the safety of the victim to disseminate the information to the public in the near term, shall be displayed on these CMS.**

Support:

25 Law enforcement activates an AMBER Alert when circumstances meet the following criteria: the person is confirmed missing; the law enforcement agency believes the person has been kidnapped; the agency believes the missing person is under threat of serious bodily harm or death.

**Standard:**

26 **The California Highway Patrol (CHP) shall consult with the investigating agency prior to requesting any CMS activation.**

**Caltrans shall only respond to AMBER alert requests from the CHP. Caltrans' District Traffic Management Center (TMC) staff and local CHP staff shall jointly agree upon the most appropriate CMS message content(s). The TMC staff shall also consult with CHP staff regarding the length of time to display messages (initially 2-3 hours), and extent of roadway system to display the messages (i.e. radius and/or directions and specific routes).**

*Guidance:*

27 *TMC personnel should discuss with CHP the limitations on message content, the number of signs that can be deployed within a given time period, conflicts with other necessary sign messages etc.*

Support:

28 There is a concern that messages that are too general in describing vehicles might result in inappropriate vigilantism. The preferred response is to display a radio frequency (thus referring the public elsewhere for details) – Caltrans' Highway Advisory Radios (HAR) or appropriate commercial radio. Alternatively, a license plate number (or partial number) might be displayed along with a vehicle description. The display of any contact phone number is not allowed.

29 Nothing in this policy suggests a requirement to pre-empt true road users safety messages, e.g. unexpected "end of queue" motorist alerts, severe weather advisories (fog, smoke), road closure and detour information etc.

Option:

30 It may be necessary to turn off an AMBER alert message that creates a traffic hazard.

Support:

31 This policy primarily applies to the use of fixed CMS. Should the use of portable CMS be necessary and appropriate at a specific location(s); Caltrans can expect CHP assistance with portable CMS deployment as needed.

*Guidance:*

32 *The TMCs should notify Caltrans' HQ Communications Center when responding to an AMBER alert request. The TMCs should monitor and save traffic data to determine if unintended consequences of displaying such a message occurred on the highway.*

**Standard:**

33 **A joint debriefing of Caltrans and CHP staff shall follow every event.**

34 **In all cases, messages shall maintain the credibility of the CMS.**

## Section 2L.03 Legibility and Visibility of Changeable Message Signs

Support:

01 The maximum distance at which a driver can first correctly identify letters and words on a sign is called the legibility distance of the sign. Legibility distance is affected by the characteristics of the sign design and the visual capabilities of drivers. Visual capabilities, and thus legibility distances, vary among drivers.

02 For the more common types of CMS, the longest measured legibility distances on sunny days occur during mid-day when the sun is overhead. Legibility distances are much shorter when the sun is behind the sign face, when the sun is on the horizon and shining on the sign face, or at night.

03 Visibility is the characteristic that enables a CMS to be seen. Visibility is associated with the point where the CMS is first detected, whereas legibility is the point where the message on the CMS can be read. Environmental conditions such as rain, fog, and snow impact the visibility of CMS and can reduce the available legibility distances. During these conditions, there might not be enough viewing time for drivers to read the message.

*Guidance:*

04 *CMS used on roadways with speed limits of 55 mph or higher should be visible from ½ mile under both day and night conditions. The message should be designed to be legible from a minimum distance of 600 feet for nighttime conditions and 800 feet for normal daylight conditions. When environmental conditions that reduce visibility and legibility are present, or when the legibility distances stated in the previous sentences in this paragraph cannot be practically achieved, messages composed of fewer units of information should be used and consideration should be given to limiting the message to a single phase (see Section 2L.05 for information regarding the lengths of messages displayed on CMS).*

05 *The electronic display of standardized regulatory and warning signs used individually or as part of the legend for a larger sign should meet the size and legend requirements for those specific signs in Chapters 2B and 2C.*

## Section 2L.04 Design Characteristics of Messages

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, messages shall not include animation, flashing, dissolving, exploding, scrolling, or other dynamic display elements.**

02 **When a portable CMS is used as an arrow board that uses a flashing or sequential display for a lane or shoulder closure, the display and operation shall be considered that of an arrow board and shall comply with the provisions of Sections 6L.05 and 6L.06.**

*Guidance:*

03 *In developing messages for display on CMS, the provisions of Section 1D.01 should be consulted for the principles of an effective traffic control device.*

**Standard:**

04 **All message displays on CMS, whether for traffic operational, regulatory, warning, or guidance information, or for the other allowable message types as defined in this Chapter, shall follow the same design and display principles found in this Manual used for other traffic control signs, except as provided elsewhere in this Chapter.**

*Guidance:*

05 *Except in the case of a limited-legend CMS (such as a blank-out or a part-time regulatory sign display) that is used in place of a conventional regulatory sign or an activated blank-out warning sign that supplements a conventional warning sign at a separate location, the signs should be used as a supplement to and not as a substitute for conventional signs and markings unless otherwise provided for in this Manual.*

Support:

06 When CMS are overused for messages not directly associated with real-time driving conditions, road users might pay less attention to the sign, thereby limiting their effectiveness as traffic control devices.

*Guidance:*

07 *Warning Beacons (see Section 4S.03) should not be installed on CMS, rather CMS should be used predominately to display messages that are critical to real-time travel conditions. CMS word messages should be limited to no more than three lines, with no more than 20 characters per line.*

08 *The spacing between characters in a word should be between 25 and 40 percent of the letter height. The spacing between words in a message should be between 75 and 100 percent of the letter height. Spacing between the message lines should be between 50 and 75 percent of the letter height. Table 2L-1 contains information for spacing between characters, words, and lines of text.*

09 *Except as otherwise provided in this Manual, word messages on CMS should be composed of all upper-case letters. The minimum letter height should be 18 inches for CMS on roadways with speed limits of 45 mph or higher. The minimum letter height should be 12 inches for CMS on roadways with speed limits of less than 45 mph. When a message is composed of two phases and higher informational load (see Section 2L.05), the letter height should be 18 inches, regardless of the speed limit, to optimize legibility distance and available viewing time.*

Option:

10 CMS used to replicate a conventional sign may use the character size of the conventional sign being replicated.

Support:

11 Using letter heights of more than 18 inches will not result in proportional increases in legibility distance.

*Guidance:*

12 *The width-to-height ratio of the sign characters should be between 0.7 and 1.0. The stroke width-to- height ratio should be 0.2.*

Support:

13 The width-to-height ratio is commonly accomplished using a minimum font matrix density of five pixels wide by seven pixels high.

**Standard:**

14 **CMS shall automatically adjust their brightness under varying light conditions to maintain legibility.**

*Guidance:*

15 *The luminance design of a CMS should meet industry criteria for daytime and nighttime conditions. Luminance contrast design should be between 8 and 12 for all conditions.*

Support:

16 CMS maintenance and replacement practices might need to account for the reduction of LED luminance and

luminance contrast that occurs naturally over time and might substantially impact legibility.

*Guidance:*

17 *Contrast orientation of CMS should always be positive, that is, with luminous characters on a dark or less-luminous background.*

Support:

18 Legibility distances for negative-contrast CMS are likely to be at least 25 percent shorter than those of positive-contrast messages. In addition, the increased light emitted by negative-contrast CMS has not been shown to improve detection distances and might visually overwhelm the darker characters of the sign legend.

**Standard**:

19 **The colors used for the legends and backgrounds on CMS shall be as provided in Table 2A-2 and Table 2A-2(CA).**

20 **Except as provided for in Paragraph 21 of this Section, if a black background is used, the color used for the legend on a CMS shall match the background color that would be used on a standard sign for that type of legend as specified in Table 2A-2 and Table 2A-2(CA).**

Option:

21 CMS that use only yellow or amber LEDs may display a yellow or amber legend that does not match the background color used on a standard sign for that type of legend as specified in Table 2A-2 and Table 2A-2(CA).

**Standard:**

22 **If a green background is used for a guide message on a CMS or if a blue background is used for a motorist services message on a CMS, the background color shall be provided by green or blue lighted pixels such that the entire CMS would be lighted, not just the white legend.**

Support:

23 Some CMS that employ newer technologies have the capability to display a near duplicate of a standard sign or other sign legend using standard symbols, the Standard Alphabets and letter forms, route shields, and other typical sign legend elements with no apparent loss of resolution or recognition to the road user when compared with a conventional version of the same sign legend. Such signs are of the full-matrix type and can typically display full-color legends. Figure 2L-1 shows comparative examples of the effects of varying pixel densities on legend form.

*Guidance:*

24 *If used, the CMS described in Paragraph 23 of this Section should not display symbols or route shields unless they can do so in the appropriate legend and background color combinations. Where an LED matrix is used to form the changeable legend, signs with pixel spacing greater than 20 millimeters should display only word legends and no symbols or route shields.*

25 *For a single-phase message where the Standard Alphabets and other legend elements of standard designs are used, the lettering style, size, and line spacing should comply with the applicable provisions for the type of message displayed as provided elsewhere in this Manual. For two-phase messages, larger legend heights should be used as described previously in this Section because of the need for such messages to be legible at a greater distance. Regardless of the number of phases, the CMS should comply with the legibility and visibility provisions of Section 2L.03.*

## Section 2L.05 Message Length and Units of Information

*Guidance:*

01 *The maximum length of a message should be dictated by the number of units of information contained in the message, in addition to the size of the CMS. A unit of information, which is a single answer to a single question that a driver can use to make a decision, should not be more than four words.*

Support:

02 In order to illustrate the concept of units of information, Table 2L-2 shows an example message that is comprised of four units of information.

03 The maximum allowable number of units of information in a CMS message is based on the principles described in this Section, the current highway operating speed, the legibility characteristics of the CMS, and the lighting conditions.

**Standard:**

04 **Each message shall consist of no more than two phases. A phase shall consist of no more than three lines of text. Each phase shall be understood by itself, and the meaning of the entire message shall be the same, regardless of the sequence in which the phases are read. Each line of legend shall be centered on the sign. Except for signs located on toll plaza structures or other facilities with a similar booth-lane arrangement, if more than one CMS is**

**visible to road users, then only one sign shall display a sequential message at any given time.**

Option:

05 A legend on a CMS that replicates a legend on a conventional sign that would not normally be center justified may be left justified or right justified as appropriate, such as a travel time or a variable rate toll display.

**Standard:**

06 **Abbreviations displayed on CMS shall comply with the provisions of Section 1D.08.**

*Guidance:*

07 *When designing and displaying messages on CMS, the following principles should be used:*

*A. The minimum time that an individual phase is displayed should be based on 1 second per word or 2 seconds per unit of information, whichever produces a lesser value. The display time for a phase should never be less than 2 seconds.*

*B. The maximum cycle time of a two-phase message should be 8 seconds.*

*C. The duration between the display of two phases should not exceed 0.3 seconds.*

*D. No more than three units of information should be displayed in a message phase.*

*E. No more than four units of information should be in a message when the traffic operating speeds are 35 mph or more.*

*F. No more than five units of information should be in a message when the traffic operating speeds are less than 35 mph.*

*G. Only one unit of information should appear on each line of the CMS.*

Support:

08 Table 2L-2 provides an example of the number of units of information in a message. Option:

09 A unit of information consisting of more than one word may be displayed on more than one line. An additional CMS at a downstream location may be used for the purpose of allowing the entire message to be read twice.

10 If more than two phases would be needed to display the necessary information, additional CMS may be used to display this information as a series of two distinct, independent messages with a maximum of two phases at each location, in accordance with the provisions of Paragraph 4 of this Section.

Support:

11 Tables 2L-3 and 2L-4 provide examples of message construction for CMS. Each example shows the message content, layout, and phasing for a potential message and an improved message. The improved message for each example has been optimized for recognition, comprehension, and effectiveness.

## Section 2L.06 Travel Time Messages

Support:

01 Travel times provide road users useful information about the level of congestion on segments of highways where motorists experience frequent incidents that slow traffic. Travel times are only helpful to the road user if they have a general understanding of the length of the road segment the travel time is related to so that they can compare that to the time it takes them to travel a similar distance on a highway without congestion. However, travel time messages require road users to read and process a significant amount of information and careful consideration is needed to ensure the overall message is not overloading the motorist.

*Guidance:*

02 *Travel times should be tied to the distance to a particular destination or junction so that road users can estimate the level of congestion based on the time to travel that distance. When travel times are displayed on CMS, such as during peak traffic conditions, the message should comply with the provisions of Sections 2E.49 and 2E.50. If both a travel time and a distance are displayed, the sign should display only one destination. A distance displayed as part of a travel time message should be rounded to the nearest whole mile.*

Option:

03 When comparative travel time displays are used providing travel times on different routes to one destination, distances to that destination may be eliminated.

04 A reference-location-based exit number (see Section 2E.22) may be displayed in lieu of a destination name or junction thereby providing the necessary distance information to the road user. If reference-location- based exit numbers are displayed, then up to two travel times may be displayed provided that the distance to the exit is not also displayed.

## Section 2L.07 Traffic Safety Campaign Messages

Support:

01 An allowable ancillary use of CMS is the display of traffic safety messages in conjunction with a traffic safety campaign that includes other forms of media as the primary communication and education mechanism.

**Standard:**

02 **Traffic control messages shall have priority over traffic safety campaign messages.**

*Guidance:*

03 *When a CMS is used to display a traffic safety campaign, the message should be simple, direct, brief, legible, and clear (see Section 1D.01). Traffic safety campaign messages should be relevant to the road user on the roadway on which the message is displayed. For example, messages regarding school bus stop safety should not be displayed on freeways where school bus stops are not found.*

04 *A CMS should not be used to display a traffic safety campaign message if doing so could adversely affect respect for the sign. Messages with obscure or secondary meanings, such as those with popular culture references, unconventional sign legend syntax, or that are intended to be humorous, should not be used as they might be misunderstood or understood only by a limited segment of road users and require greater time to process and understand. Similarly, slogan-type messages and the display of statistical information should not be used.*

05 *The broad traffic safety campaign marketing message should be appropriately shortened or otherwise modified to comply with the provisions of Section 2L.05 when a traffic safety campaign message is displayed on a CMS.*

06 *Traffic safety campaign messages should emphasize the applicable regulation or warning and should reference any penalties associated with violations of the regulation. Traffic safety campaigns using CMS should include coordinated enforcement efforts where penalties or enforcement type warnings are part of the message displayed on the CMS.*

07 *Traffic safety campaign messages should not be displayed on CMS unless they are part of an active, coordinated safety campaign that uses other media forms as the primary means of outreach. For consistency on a national level, traffic safety campaigns should be coordinated with those on the National Highway Transportation Safety Administration's annual communications calendar.*

Support:

08 Examples of traffic safety campaign messages include "UNBUCKLED SEAT BELTS FINE + POINTS" and "IMPAIRED DRIVERS LOSE LICENSE + JAIL."

## Section 2L.08 Permanently-Located (Fixed) Changeable Message Signs

Support:

01 Careful consideration of CMS installation location is important to having a safe and effective message, taking into account several factors. CMS message length and complexity will vary and often include two-phase displays, all of which might require longer glance times by motorists than would be required for conventional sign messages.

02 Permanently-located (Fixed) CMS (FCMS) are generally used on higher-speed, multi-lane facilities with high traffic volumes where more time might be required to properly respond to a message, such as by changing lanes or reducing speed. It also is common for other signs to be in the same vicinity of the desired location for a permanently-located (Fixed) CMS (FCMS) raising the concern of overloading road users with information.

*Guidance:*

03 *A CMS that is used in place of a conventional sign (such as a blank-out or variable legend regulatory sign) should be located in accordance with the provisions of Chapter 2A and the provisions for the conventional sign it replaces.*

04 *Permanently-located (Fixed) CMS (FCMS) should:*

- *A. Be located sufficiently upstream of known bottlenecks and high crash locations to enable road users to select an alternate route or take other appropriate action in response to a recurring condition.*
- *B. Be located sufficiently upstream of major diversion decision points, such as interchanges, to provide adequate distance over which road users can change lanes to reach one destination or the other.*
- *C. Not be located within an interchange except for toll plazas or managed lanes.*
- *D. Not be positioned at locations where the information load on drivers is already high because of guide signs and other types of information.*
- *E. Not be located in areas where drivers frequently perform lane-changing maneuvers in response to guide sign information, or because of merging or weaving conditions.*

Support:

05 Many of the factors in locating permanently-located (Fixed) CMS (FCMS) apply to PCMS. Information regarding the design and application of PCMS in temporary traffic control zones is contained in Section 6L.05.

## Section 2L.101(CA) Extinguishable Message Signs


Support:

01 Extinguishable message signs are designed to have one or more messages that can be displayed or deleted as required. Such a sign can be changed manually, by remote control, or by automatic controls that can "sense" the conditions that require special sign messages.

02 It is recognized that due to technological limitations, many extinguishable message signs cannot conform to the exact sign shape, color, and dimensions specified in these standards. Nevertheless, it is essential that extinguishable message signs ascribe to the principles established in this California MUTCD, and to the extent practicable, with the design and applications prescribed herein.

**Figure 2L-1. Example of CMS Capability to Display Sign Legends Based on Pixel Pitch**

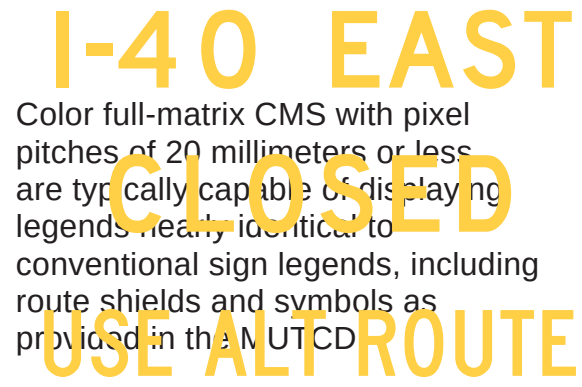


Color full-matrix CMS with pixel pitches of 20 millimeters or less are typically capable of displaying legends nearly identical to conventional sign legends, including route shields and symbols as provided in the MUTCD.




CMS with insufficient pixel density, typically with pixel pitches greater than 20 millimeters – whether full color or monochrome – are generally not capable of adequately displaying conventional sign legends with sufficient clarity and should only display monochrome word messages.

Notes:

1. Pixel pitch is the distance from the center of a pixel to the center of an adjacent pixel.
2. The pixel pitch is described in Metric units because sign manufacturers only use Metric units.

## Table 2L-1. Spacing between Message Characters, Words, and Lines of Text


| Height of Letters Used on CMS | Spacing between Characters in Words | Horizontal Spacing between Words | Vertical Spacing between Lines of Text |
|---|---|---|---|
| 12 | 3 - 5 | 9 - 12 | 6 - 9 |
| 18 | 4 ½ - 7 | 13 ½ - 18 | 9 - 13 ½ |

Note: All units are in inches

## Table 2L-2. Example of Units of Information

| Question | Answer | Number of Information Units |
|---|---|---|
| What happened? | MAJOR CRASH | 1 |
| Where? | AT EXIT 12 | 1 |
| Who is the advisory for? | Drivers heading TO NEW YORK | 1 |
| What is advised? | USE ROUTE 46 | 1 |

Note: The following is an example of a two-phase message that could be developed from the four information units shown in this table:




Phase 1 Phase 2

# Table 2L-3. Examples of Message Construction for CMS

| Example | Phase | Potential Message | Improved Message | Comments |
|---|---|---|---|---|
| 1 | 1<br>2 | EXIT 10<br>CLOSED<br>USE<br>EXIT 12 | EXIT 10<br>CLOSED<br>USE<br>EXIT 12 | **Diversionary message:**<br>Each message phase should convey a complete thought independent of the other message phase. The entire message should also make sense regardless of which phase is read first. |
| 2 | 1<br>2 | ROADWORK<br>AHEAD<br>CAUTION<br>CAUTION<br>CAUTION | ROAD WORK<br>AHEAD<br>FINES<br>DOUBLE | **Advance warning message:**<br>Condensing ROAD and WORK into single word is not necessary since sign width will accommodate the conventional 2-word message.<br>A general CAUTION message is not specific enough to be actionable by the road user.<br>Message should not be repeated to fill sign.<br>Phase 2 of the improved message can be eliminated without any loss of meaning to Phase 1. |
| 3 | 1<br>2 | RIGHT<br>LANE<br>CLOSED<br>1 MILE | RIGHT LANE<br>CLOSED<br>1 MILE<br>N/A<br>Single-Phase Message | **Advance warning message:**<br>Use of single phase message reduces time necessary to read and glances away from the road.<br>Second phase does not provide a complete message. |
| 4 | 1<br>2 | RT LN CLSD<br>1 MI<br>N/A<br>Single-Phase Message | RIGHT LANE<br>CLOSED<br>1 MILE<br>N/A<br>Single-Phase Message | **Advance warning message:**<br>Less common abbreviations (see Table 1D-2) are not warranted when the sign can accommodate the full message. Abbreviations in Table 1D-2 should be limited only to portable CMS where the number of characters per line is limited. |
| 5 | 1<br>2 | 9TH AVENUE<br>SOUTHWEST<br>KEEP RIGHT<br>N/A<br>Single-Phase Message | 9TH AVE SW<br>KEEP RIGHT<br>N/A<br>Single-Phase Message | **Directional message:**<br>Conventional abbreviations for street name descriptors (see Table 2D-3) are used for consistency with standard signs to improve recognition and reduce the apparent amount of legend. |
| 6 | 1<br>2 | EXPWY CONGESTED<br>USE 101<br>FOR AIRPORT<br>N/A<br>Single-Phase Message | US 19<br>CONGESTED<br>AIRPORT<br>USE EXIT 101 | **Diversionary message:**<br>Lack of Expressway route number is vague to unfamiliar road user.<br>Adding exit number for diversion route simplifies message.<br>Diversion message is stated in reverse order and requires more words as a result. |
| 7 | 1<br>2 | TRAVEL TIME TO<br>I-89<br>13 MINUTES<br>TRAVEL TIME TO<br>I-89<br>12 MILES | I-89 JCT<br>12 MILES<br>13 MINS<br>N/A<br>Single-Phase Message | **Travel time information:**<br>TRAVEL TIME legend is extraneous and out of context for the distance message.<br>Changing only one line of legend between phases compromises recognition of the message. |
| 8 | 1<br>2 | SEAT BELTS<br>SAVE LIVES<br>N/A<br>Single-Phase Message | STATE LAW<br>FASTEN<br>SEAT BELTS<br>N/A<br>Single-Phase Message | **Safety campaign regulatory message:**<br>Slogan-type message does not convey the legal requirement.<br>As an alternative, the STATE LAW legend could be eliminated and the fine for violations displayed on a second phase to convey the regulatory nature of the message. |
| 9 | 1<br>2 | DONT TEXT<br>JUST DRIVE<br>IT CAN WAIT | NO HAND-HELD<br>PHONE<br>BY DRIVER<br>$250 FINE<br>AND POINTS | **Regulatory message.**<br>Slogan-type message does not convey the legal requirement.<br>Phase 2 of the improved message can be eliminated without any loss of meaning to Phase 1. |

Note: Examples shown are for single-color CMS with pixel spacing greater than 20 mm and use all upper-case lettering. Multi-color, full- matrix CMS with pixel spacing of 20 mm or less should use upper- and lower-case lettering where appropriate and proper legend and background colors.

# Table 2L-4. Examples of Message Construction for Portable CMS*

| Example | Phase | Potential Message | Improved Message | Comments |
|---|---|---|---|---|
| 1 | 1 | EXIT 10 | EXIT 10<br>CLOSED | **Diversionary message:**<br>Each phase conveys a complete thought. |
| | 2 | CLOSED<br>USE<br>EXIT 12 | USE<br>EXIT 12 | |
| 2 | 1 | ROADWORK<br>AHEAD | ROAD<br>WORK<br>AHEAD | **Advance warning message:**<br>Condensing ROAD and WORK into a single word is unnecessary because the sign width will accommodate the conventional 2-word phrase.<br>A general CAUTION message is not specific enough to be useful to the road user.<br>Message should not be repeated to fill the sign.<br>Phase 2 of the improved message can be eliminated without any loss of meaning to Phase 1. |
| | 2 | CAUTION<br>CAUTION<br>CAUTION | FINES<br>DOUBLE | |
| 3 | 1 | RIGHT<br>LANE<br>CLOSED | RIGHT LN<br>CLOSED<br>1 MILE | **Advance warning message:**<br>Separation of the message into 2 phases is unnecessary. Second phase does not provide a complete message. |
| | 2 | 1 MILE | N/A<br>Single-Phase<br>Message | |
| 4 | 1 | RT LN<br>CLSD<br>1 MI | RIGHT LN<br>CLOSED<br>1 MILE | **Advance warning message:**<br>Less common abbreviations (see Table 1D-2) are not warranted when the sign can accommodate the full message. |
| | 2 | N/A<br>Single-Phase<br>Message | N/A<br>Single-Phase<br>Message | |
| 5 | 1 | 9TH<br>AVENUE<br>SW | 9 AVE SW<br>KEEP<br>RIGHT | **Directional message:**<br>Conventional abbreviations for street name descriptors (see Table 2D-3) are used for consistency with standard signs to improve recognition and reduce the apparent amount of legend. |
| | 2 | KEEP<br>RIGHT | N/A<br>Single-Phase<br>Message | |
| 6 ** | 1 | ROAD<br>WORK | ROADWORK<br>NEXT<br>3 MILE | **Advance warning message:**<br>Condensing ROAD and WORK into single word (see Table 1D-2) accommodates a single-phase message. |
| | 2 | NEXT<br>3<br>MILES | N/A<br>Single-Phase<br>Message | |
| 7 | 1 | SEAT<br>BELTS | FASTEN<br>SEAT<br>BELTS | **Safety campaign regulatory message:**<br>Slogan-type message does not convey the legal requirement.<br>As an alternative, the STATE LAW legend could be eliminated and the fine for violations displayed on a second phase to convey the regulatory nature of the message.<br>Phase 2 of the improved message can be eliminated without any loss of meaning to Phase 1. |
| | 2 | SAVE<br>LIVES | STATE<br>LAW | |
| 8 | 1 | DONT<br>TEXT | NO HAND-<br>HELD<br>PHONE | **Regulatory message:**<br>Slogan-type message does not convey the legal requirement. |
| | 2 | JUST<br>DRIVE | BY<br>DRIVER | |

* Examples shown are for a portable CMS where the display width is generally limited to 8 characters per line of legend.
** Refer to FHWA's List of Known Errors for error in row. Refer to Section 1A.04 for more details.

# CHAPTER 2M. RECREATIONAL AND CULTURAL INTEREST AREA SIGNS

## Section 2M.01 Scope

Support:

01 Recreational or cultural interest areas are attractions or traffic generators that are open to the general public for the purpose of play, amusement, or relaxation. Recreational attractions include such facilities as parks, campgrounds, game-hunting facilities, and ski areas, while examples of cultural attractions include museums, art galleries, and historical buildings or sites.

02 The purpose of recreation and cultural interest area signs is to guide road users to a general area and then to specific facilities or activities within the area.

Option:

03 Recreational and cultural interest area guide signs directing road users to significant traffic generators may be used on freeways and expressways where there is direct access to these areas as provided in Section 2M.09.

04 Recreational and cultural interest area signs may be used off the road network, as appropriate.

## Section 2M.02 Application of Recreational and Cultural Interest Area Signs

Support:

01 Provisions for signing recreational or cultural interest areas are subdivided into two different types of signs: (1) symbol signs and (2) destination guide signs.

*Guidance:*

02 *Highway agencies providing recreational and cultural interest area signing should establish a policy with signing criteria for the eligibility of the various types of services, accommodations, and facilities. These signs should not be used where they might be confused with other traffic control signs.*

Option:

03 Recreational and cultural interest area guide signs may be used in recreational or cultural interest areas for signing non-vehicular events and amenities such as trails, structures, and facilities.

Support:

04 Symbols for use only within recreational and cultural interest area facilities are noted in Table 2M-1.

05 Section 2A.09 contains information regarding the use of recreational and cultural interest area symbols on other types of signs.

06 The recreational and cultural interest area signs are supplemental signs and are subject to the same spacing and number of messages limitations set forth in Chapters 2A, 2D, and 2E. Under these limitations, the supplemental destination, recreational and cultural interest area signs compete for signing on the basis of traffic service.

*Guidance:*

07 *Recreational area signs to National Heritage Areas, National Parks, and State Parks should normally include the name of the area. County and City Park signs should not normally include the name.*

Option:

08 Recreational area signs may be placed for the following facilities:

A. National Parks or Monuments.
B. State Parks, when located within 5 miles of the highway.
C. County Parks, when located within 3 miles of the highway.
D. In urban areas, City Parks within 1 mile may be signed from conventional highways. Normally, City Parks will not be signed to or from metropolitan freeways.
E. Campgrounds in National Forests or State Parks may be signed from conventional highways when the entrances are located on the highway. An advance sign reading "Campground 1/4 mile" may be placed. Signs at the immediate entrance will be placed by the agency having jurisdiction over the campground.
F. Major rural recreational areas may be signed by name. When a recreational area is served by more than a single exit, the appropriate colored NEXT X EXITS (E9) sign may be used. Normally, the sign will include the name of the area and the text "RECREATIONAL AREA".
G. In rural recreational areas, guide signs may be supplemented with white on brown symbol signs mounted below indicating recreational facilities available to the road users.
H. National Heritage Areas, at or near the boundary or within the National Heritage Areas.

*Guidance:*

09 *On State highways, signs to major rural recreational areas that include a jurisdictional logo or are unique in shape should be placed under an encroachment permit from Caltrans.*

**Standard:**

10 **Placement of these signs to major rural recreational areas shall be by the jurisdiction or agency making the request through the normal permit process as a fee exempt permit.**

*Guidance:*

11 *These signs to major rural recreational areas should be limited to areas where they do not block or interfere with other signs necessary for safe and efficient operation of the highway. The sign panels should be clearly marked as to the ownership.*

**Standard:**

12 **The use of the following symbol signs shall conform to the warrants shown here and in Chapter 2I:**

**General Information**

Option:

13 The Lookout Tower (RS-006) sign may be used for lookout facilities that are publicly owned, within 3 miles of the highway, and open for visitors at least 8 hours per day, 180 days per year.

**Standard:**

14 **Follow up signs to the RS-006 sign, where required, shall be installed by the local authority having jurisdiction in the area.**

Option:

15 The Lighthouse (RS-007) sign may be used for lighthouse facilities that are within 3 miles of the highway and open for visitors at least 8 hours per day, 180 days per year.

16 The Deer Viewing Area (RS-011) sign may be placed to indicate an area which is determined by the Department of Fish and Wildlife to be particularly well suited for viewing deer and other wild life. This area should have adequate parking and be within 1 mile of the highway, via a well-maintained road.

17 The Information (D9-10) sign may be used to indicate publicly operated informational facilities that are located within 1 mile of the highway and open all year.

Option:

18 The Pick-Up Truck (RS-140) sign indicates that trucks may use the signed facility within a recreation area.

**Standard:**

19 **The RS-140 sign shall not be used on State highways.**

Option:

20 The Wildlife Viewing (RS-076) sign may be used to direct road users to the Wildlife Viewing Areas as published in the California Watchable Viewing Guide.

Support:

21 Refer to the following web link for more information:
http://www.cawatchablewildlife.org

**Standard:**

22 **The WILDLIFE VIEWING (G200-81aP(CA)) plaque shall be placed below the Wildlife Viewing (RS-076) sign.**

**Road User Services**

Option:

23 The Camping (Tent) (D9-3) sign may be used for campsite facilities, either public or private, located within 3 miles of the highway.

**Standard:**

24 **For the use of D9-3 sign, a minimum of 15 campsites shall be provided. Water and sanitary facilities shall be available, but not necessarily at each individual campsite.**

Option:

25 The Trailer Site (RS-040) sign may be used to indicate trailer site facilities within a public recreation area, located within 3 miles of the highway.

**Standard:**

26 **For the use of RS-040 sign, a minimum of 15 trailer sites shall be provided. Water and sanitary facilities shall be available.**

Option:

27 The Food Service (D9-8) sign may be used to sign for food service facilities in public recreation areas which meet the criteria for food (D9-8) signs in Chapter 2I. On State highways, only the D9-8 sign is used, where appropriate, to sign for food service facilities.

28 The Gas (D9-7) sign may be used to indicate fuel stations in public recreation areas, which meet the criteria for Gas (D9-7) signs in Chapter 2I. On State highways, only the D9-7 sign may be used where appropriate.

29 The Handicapped (D9-6) sign may be used in public recreation areas where paved ramps and rest room facilities accessible to, and usable by, the physically handicapped are provided. On State highways and at other State facilities, only the International Symbol of Accessibility for the Handicapped (D9-6) sign is to be used.

30 The Lodging (D9-9) sign may be used to indicate lodging facilities in public recreation areas, which meet the criteria for lodging (D9-9) signs in Section 2D.45. On State highways, only the D9-9 sign is used, where appropriate, to sign to lodging facilities.

31 The Picnic Site (RS-044) sign may be used for picnic areas, either public or private, located within 1 mile of the highway.

**Standard:**

32 **For the use of RS-044 sign, a minimum of 10 sites with tables shall be provided. Water and sanitary facilities shall be available.**

Option:

33 The Rest Room (RS-022) sign may be used to indicate free public access to a restroom within 0.25 miles of the highway where no other publicly accessible restroom is available within 10 miles.

34 The Telephone (D9-1) sign may be used within public recreation areas where a public telephone is available 24 hours a day and it is located in a remote area where it is not expected. On State highways, only the Telephone (D9-1) sign is used, where appropriate, to indicate the availability of a telephone.

35 The Viewing Area (RS-036) sign may be used to direct road users to public recreation area sites, located within 0.25 miles of the highway, which have significant views.

*Guidance:*

36 *For the use of RS-036 sign, the sites should have adequate parking and well maintained access. On freeways, the VISTA POINT (D5-1) sign should be used where appropriate. Refer to Chapter 2I.*

**Accommodation Services**

Option:

37 The Airport (I3-5) sign may be used in public recreation areas to direct road users to airports, which meet the criteria, specified for Airport (I3-5) signs. Only the I3-5 signs may be used on State highways to indicate nearby airports.

38 The Parking (RS-034) sign may be used to indicate public parking facilities less than 0.25 miles from a highway in recreation areas.

*Guidance:*

39 *Use of RS-034 signs should be restricted to locations outside of urbanized zones, where the Parking Area (D4-1) sign is inappropriate.*

**Land Recreation**

Option:

40 The Playground (W15-1) sign may be used to identify playgrounds within a recreation area and not more than 1 mile from the highway.

41 The Hiking Trail (RS-068) sign may be used for marked and maintained hiking trails.

**Standard:**

42 **For the use of RS-068 sign, the trailhead shall be within 1 mile of the highway, with sufficient parking to accommodate normal demand.**

Option:

43 The Horse Trail (RS-064) sign may be used for identifying horse trails located within public recreation areas.

*Guidance:*

44 *For the use of RS-064 sign, the trailhead should be within 3 miles of the highway.*

Option:

45 The All-Terrain Trail (RS-095) sign may be used to identify recreation vehicle trails located within public recreation areas.

46 The OHV TRAIL (S12(CA)) sign may be used to direct off highway vehicle operators to the location of a OHV trail. The S12(CA) sign may be supplemented by a white on brown Directional Arrow Auxiliary (M6 Series) sign.

*Guidance:*

47 *For the use of RS-095 sign, the trailhead should be 3 miles or less from the highway. For this application, the term "recreation*

*vehicle" is synonymous with "off highway vehicle" (OHV), which includes vehicles with two or more wheels. The OHV TRAIL (S12(CA)) sign should be used at points where off-highway vehicle trails intersect highways.*

Option:

48 The Tramway (RS-071) sign may be used to identify recreational tramways or gondolas that provide year-round service and are located within 5 miles of the highway.

49 The Golfing (RS-128) sign may be used to identify a 9 hole or more golf course within 3 miles on a conventional highway which does not have its main entrance adjacent to the highway. The RS-128 signs may be installed under permit by local agencies only.

**Standard:**

50 **The RS-128 signs shall not be used at driving ranges or miniature golf courses.**

**Water Recreation**

Option:

51 The Canoeing (RS-079) sign may be used to indicate where canoeing facilities and services are available within 3 miles of the highway.

52 The Diving (Scuba) (RS-060) sign may be used to indicate areas suitable for scuba diving within 3 miles of the highway.

53 The Fishing Area (RS-063) sign may be used to indicate a fishing area, either public or private, within 3 miles of the highway.

54 The Marina (RS-053) sign may be used to indicate an area where boats can be anchored and serviced within 3 miles of the highway.

55 The Motorboating (RS-055) sign may be used to indicate areas where motorboating facilities and services are available within 3 miles of the highway.

56 The Boat Ramp (RS-054) sign may be used to indicate boat launching facilities, either public or private, located within 3 miles of the highway.

57 The Waterskiing (RS-058) sign may be used to indicate areas where water-skiing facilities and services are available within 3 miles of the highway.

58 The Swimming (RS-061) sign may be used to indicate a swimming facility within a recreational area.

**Winter Recreation**

Option:

59 The Cross Country Skiing (RS-046) sign may be used to indicate cross country skiing facilities within 1 mile of the highway.

*Guidance:*

60 *For the use of RS-046 sign, there should be sufficient parking to accommodate normal demand.*

Option:

61 The Sledding (RS-049) sign may be used to indicate sledding facilities within 1 mile of the highway.

*Guidance:*

62 *For the use of RS-049 sign, there should be sufficient parking to accommodate normal demand.*

Option:

63 The Snowshoeing (RS-078) sign may be used to indicate an area within 1 mile of the highway where special facilities or services are available for Snowshoeing.

*Guidance:*

64 *For the use of RS-078 sign, there should be sufficient parking to accommodate normal demand.*

Option:

65 The Winter Recreation Area (RS-077) sign may be used to indicate a winter recreation area within 1 mile of the highway when other recreation symbols are not appropriate.

*Guidance:*

66 *For the use of RS-077 sign, there should be sufficient parking to accommodate normal demand.*

**Sno-Park Signs**

Option:

67 Only those specific parking areas designated by the Department of Parks and Recreation may be signed as Sno-Park parking areas. Parking is by permit only.

68 The SNO-PARK X MILE (SG30(CA)) sign may be used on expressways or conventional highways to give advance notice of a snow plowed parking area. The SNO-PARK with Arrow (SG32(CA)) sign may be used on expressways or conventional highways in advance of a turn off to a snow plowed parking area.

69 The SNO-PARK NEXT RIGHT (SG31(CA)) sign may be used on freeways to give advance notice of an exit to a snow plowed parking area. The SNO-PARK (SG34(CA)) sign may be placed below an existing Advance Guide (G83(CA) Series) or Supplemental

Destination (G86(CA) Series) sign on freeways to indicate an exit to a snow plowed parking area.

**Standard:**

70 **If the SG31(CA) or SG34(CA) sign is used, a SNO-PARK with Arrow (SG33(CA)) sign shall be placed at the ramp terminal.**

*Guidance:*

71 *If used, the PERMIT REQUIRED (SG35P(CA)) plaque should be placed below the SG30(CA) or SG31(CA) sign and the PERMIT REQUIRED NOV 1 TO MAY 30 (SG35-1P(CA)) plaque should be placed below the SG32(CA) or SG33(CA) sign. Placement should be under the sign, which is nearest to the Sno-Park entrance.*

72 *Between November 1 and May 30, during periods when snow is not available for recreational activities, the SG35P(CA) and SG35-1(CA) plaques should be covered.*

**Standard:**

73 **At the end of the Sno-Park season, May 30, the SG35P(CA) and SG35-1(CA) signs shall be covered or removed.**

## Section 2M.03 Regulatory and Warning Signs

**Standard:**

01 **All regulatory and warning signs installed on roads and streets open to public travel within recreational and cultural interest areas shall comply with the requirements elsewhere in this Manual.**

## Section 2M.04 General Design Requirements for Recreational and Cultural Interest Area Symbol Guide Signs

**Standard:**

01 **When a General Information symbol contained in Chapter 2H (see Figure 2H-1) is used in conjunction with recreational and cultural interest area signing on roadways outside a recreational and cultural interest area facility, the legend and background color of the General Information symbol sign shall be as prescribed in Chapter 2H.**

02 **When a General Service symbol contained in Chapter 2I (see Figure 2I-1) is used in conjunction with recreational and cultural interest area signing on roadways outside a recreational and cultural interest area facility, the legend and background color of the General Service symbol sign shall be as prescribed in Chapter 2I.**

Option:

03 For roadways inside a recreational and cultural interest area, General Information symbol signs and General Service symbol signs may have a white legend on a brown background (see Figures 2H-1 and 2I-1).

**Standard:**

04 **Except as provided in Section 2M.09, recreational and cultural interest area symbol guide signs shall be square or rectangular in shape and shall have a white symbol or message and white border on a brown background. The symbols shall be grouped into the following usage and series categories:**

- **A. General Applications,**
- **B. Accommodations,**
- **C. Services,**
- **D. Land Recreation,**
- **E. Water Recreation, and**
- **F. Winter Recreation.**

Support:

05 Table 2M-1 contains a listing of the symbols within each series category.

Option:

06 Mirror images of symbols may be used where the reverse image will better convey the message (see Section 2A.09).

## Section 2M.05 Symbol Sign Sizes

*Guidance:*

01 *Recreational and cultural interest area symbol signs should be 24 x 24 inches. Where greater visibility or emphasis is needed, larger sizes should be used. Symbol sign enlargements should be in 6-inch increments.*

02 *Recreational and cultural interest area symbol signs should be 30 x 30 inches when used on guide signs on freeways or expressways.*

Option:

03 A smaller size of 18 x 18 inches may be used on low-speed, low-volume roadways and on non-road applications.

## Section 2M.06 Use of Educational Plaques

*Guidance:*

01 *Educational plaques should accompany all initial installations of recreational and cultural interest area symbol signs. If used, the educational plaque should be the same width as the symbol sign.*

Option:

02 Symbol signs that are readily recognizable by the public may be installed without educational plaques.

Support:

03 Figure 2M-1 illustrates some examples of the use of educational plaques.

## Section 2M.07 Use of Prohibitive Circle and Diagonal for Non-Road Applications

**Standard:**

01 **Where it is necessary to indicate a prohibition of an activity or an item within a recreational or cultural interest area for non-road use and a standard regulatory sign for such a prohibition is not provided in Chapter 2B, the appropriate recreational and cultural interest area symbol shall be used in combination with a red prohibitive circle and diagonal. The recreational and cultural interest area symbol and the sign border shall be black and the sign background shall be white. The symbol shall be scaled proportionally to fit completely within the circle. The diagonal shall be oriented from the upper left to the lower right portions of the circle as shown in Figure 2M-1 and 2M-102(CA) and as detailed in the "Standard Highway Signs" publication.**

02 **Requirements for retroreflection of the red circle and diagonal shall be the same as those requirements for backgrounds, legends, symbols, arrows, and borders.**

03 **If used, Figure 2M-102(CA), Table 2M-1 (with annotations), and Table 2M-1(CA) shall identify eligible Prohibited Symbol (PS- (CA) series) signs and eligible Prohibited Recreation Educational Plaque (PREP- (CA) series) for use in California.**

Option:

04 Eligible Prohibited Recreation Educational Plaque (PREP(CA) series) are optional for use in California.

## Section 2M.08 Placement of Recreational and Cultural Interest Area Symbol Signs

**Standard:**

01 **If used, recreational and cultural interest area symbol signs shall be placed in accordance with the general requirements contained in Chapter 2A. The symbol(s) shall be placed as sign panels in the uppermost part of the sign and the directional information shall be placed below the symbol(s).**

02 **If the name of the recreational or cultural interest area facility or activity is displayed on a destination guide sign (see Section 2M.09) and a symbol is used, the symbol shall be placed below the name (see Figure 2M-2).**

Option:

03 The symbols displayed with the facility or activity name may be placed below the destination guide sign as illustrated in Figure 2M-2 instead of as sign panels placed with the destination guide sign.

04 Secondary symbols of a smaller size (18 x 18 inches) may be placed beneath the primary symbols (see Drawing A in Figure 2M-1), where needed.

**Standard:**

05 **Recreational and cultural interest area symbols installed for non-road use shall be placed in accordance with the general sign position requirements of the authority having jurisdiction.**

Support:

06 Figure 2M-3 illustrates typical height and lateral mounting positions. Figure 2M-4 illustrates some examples of the placement of symbol signs within a recreational or cultural interest area. Figures 2M-5 through 2M-10 illustrate some of the symbols that can be used.

*Guidance:*

07 *The number of symbols used in a single sign assembly should not exceed four.*

Option:

08 The Advance Turn (M5 series) or Directional Arrow (M6 series) auxiliary signs (see Figure 2D-6) with white arrows on brown backgrounds may be used with recreational and cultural interest area symbol guide signs to create a

recreational and cultural interest area directional assembly. The symbols may be used singularly, or in groups of two, three, or four on a single sign assembly (see Figures 2M-1, 2M-3, and 2M-4).

09 The NEXT RIGHT/LEFT (G58P(CA)) plaque (refer to Figure 2M-1(CA)) may also be used in conjunction with the recreational and cultural interest area signs.

## Section 2M.09 Destination Guide Signs

**Standard:**

01 **When recreational or cultural interest area destinations are displayed on a Supplemental guide sign (see Section 2E.51), the sign shall be rectangular in shape with a white legend on a ~~green or~~ brown background.**

Option:

02 Trapezoidal-shaped signs (see Figure 2M-2) may be used to display recreational and cultural interest area destinations on conventional roads.

**Standard:**

03 **Whenever the trapezoidal shape is used, the color combination shall be a white legend and border on a brown background. When the trapezoidal shape is used for a sign with a directional arrow, a right-angled trapezoid with the wider dimension of the bases (parallel sides) at the top of the sign shall be used. The diagonal leg of the trapezoid shall be oriented in the same direction as the directional arrow. When the trapezoidal shape is used for an advance sign legend, such as with a distance or action message, an isosceles trapezoid with the wider dimension of the bases at the top of the sign shall be used.**

Option:

04 Destination guide signs with a white legend and border on a brown background may be posted at the first point where an access or crossroad intersects a highway where recreational or cultural interest areas are a significant destination along conventional roads, expressways, or freeways. Supplemental guide signs with a white legend and border on a brown background may be used along conventional roads, expressways, or freeways to direct road users to recreational or cultural interest areas. Where access or crossroads lead exclusively to the recreational or cultural interest area, the Advance guide sign (see Section 2E.23) and the Exit Direction sign (see Section 2E.25) may have a white legend and border on a brown background.

04a The National/State Park (G72(CA)) sign may be installed at conventional road intersections to indicate the direction of a national or state park destination.

**Standard:**

05 **All Exit Gore (E5-1 series) signs (see Section 2E.26) shall have a white legend and border on a green background. The background color of the interchange Exit Number (E1-5P or E1-5bP) plaque (see Section 2E.22) shall match the background color of the guide sign above which it is mounted. Design characteristics of conventional road, expressway, or freeway guide signs shall comply with Chapter 2D or 2E except as provided in this Section for color combination.**

06 **The Advance guide sign and the Exit Direction sign shall retain the white-on-green color combination where the crossroad also leads to a destination other than a recreational or cultural interest area.**

Support:

07 Figure 2M-2 and 2M-2(CA) illustrates destination guide signs commonly used for identifying recreational or cultural interest areas or facilities.

08 The name of a community that is culturally unique and historically significant can be used on supplemental guide signs in accordance with the SHC § 101.12.

Option:

09 The Historic District Supplemental Destination (G86-11(CA)) signs may be placed directing traffic to a commercial or residential area that is of historic significance to a community and is recognized as such in the National Register of Historic Places.

**Standard:**

10 **For a Historic District to be signed from a State highway, its boundaries shall be within 3 miles of the highway. Only one sign, for each direction shall be allowed and it will be from the nearest State highway. The type of sign, whether it is a supplemental plate under an existing Supplemental Destination (G86(CA) Series) sign or a stand alone sign shall be determined by Caltrans. Any follow-up signs, if needed, shall be in place before the highway signs are installed.**

11 **The requesting local agency shall be responsible for consulting with the Department of Parks and Recreation, Office of Historic Preservation to verify the Historic District's official name and to insure there are no conflicts with existing historic**

**landmarks or points of historical interest signs which may already be in place.**

12 **When the above requirements are met, the requesting agency shall adopt a resolution, requesting Caltrans to place the signs. The cost of these signs and their installation shall be the responsibility of the requesting agency.**

## Section 2M.10 Memorial or Dedication Signing

Support:

01 Legislative bodies will occasionally adopt an act or resolution memorializing or dedicating a highway, bridge, or other component of the highway.

Option:

01a The Legislature, by legislative action, may designate names for State highways and bridges. The Legislature may request memorial named highway facilities to be designated with signs instead of a plaque and specify that the signs are to be furnished and installed "at no cost to the State".

Support:

02 Named highways (see Section 2D.56) are officially designated and shown on official maps and serve the purpose of providing route guidance, primarily on unnumbered highways, and property addresses. A highway designated as a memorial or dedication is not considered to be a named highway for the purposes of highway signing or road user navigation and orientation.

03 Section 2A.20 contains information regarding excessive use of signs. Because memorial or dedication names are not official highway names, memorial and dedication signing is not essential to providing navigational guidance.

*Guidance:*

04 *Such memorial or dedication names should not appear on or along a highway or be placed on bridges or other highway components. If a route, bridge, or highway component is officially designated as a memorial or dedication, and if notification of the memorial or dedication is to be made on the highway right- of-way, such notification should consist of installing a memorial or dedication marker in a rest area, scenic overlook, recreational area, or other appropriate location where parking is provided with the signing inconspicuously located relative to vehicle operations along the highway.*

05 *Memorial or dedication signs should have a white legend and border on a brown background. On all such signs, the design should be simple and dignified, devoid of any appearance of advertising, and in general compliance with other signing.*

06 *The lettering for the name of the person or entity being recognized should be composed of a combination of lower-case letters with initial upper-case letters.*

**Standard:**

07 **Where such memorial or dedication signs are installed on the highway mainline because the provisions of Paragraph 4 of this Section cannot be met, (1) memorial or dedication names shall not appear on directional guide signs, (2) memorial or dedication signs shall not interfere with the placement of any other traffic control devices, and (3) memorial or dedication signs shall not compromise the safety or efficiency of traffic flow. The memorial or dedication signing shall be limited to one sign at an appropriate location in each route direction except as noted in Paragraph 07a, each as an independent post-mounted sign installation.**

07a **When highway facilities are named by the Legislature, the following guidelines shall apply according to the type of facility:**

1. *Bridges.* **One sign (G11(CA) series) shall be placed at each approach end of the bridge, underpass, tunnel or other structure with the name of the memorialized individual.**
2. *Freeways and Highways.* **One sign (G12(CA) series) shall be placed at each terminal of the highway segment memorialized by the Legislature.**
3. *Rest Areas.* **One bronze plaque shall be installed at each legislatively named rest area. Memorial name signs shall not be installed in advance of rest areas.**
4. *Interchanges.* **One sign (G12(CA) series) shall be placed at a minimum of two approaches to the legislatively named interchange.**
5. *Vista Points.* **One bronze plaque shall be installed at each legislatively named vista point. Memorial name signs shall not be installed in advance of vista points.**
6. *Roundabout.* **One sign (G12(CA) series) shall be placed at a minimum of two approaches to the roundabout.**

**7.** *Bikeways.* **Refer to Chapter 9D.**

07b **The principal legend on post-mounted memorial or dedication signs shall be in letters and numerals 6 inches in height for upper-case letters and 4.5 inches in nominal loop height. Refer to Section 2D.05.**

*Guidance:*

07c *Bronze plaques normally should bear the name in 1 inch letters. However, the plaque should be no larger than 30 x 30 inches.*

Support:

07d Caltrans is authorized to expend reasonable sums for bronze plaques.

**Standard:**

08 **Memorial or dedication signs shall be rectangular in shape. The legend displayed on memorial or dedication signs shall be limited to the name of the person with an optional nickname in quotation marks if stated in the concurrent resolution, or entity being recognized and a simple message preceding the name, such as "DEDICATED TO." Additional legend, such as biographical information, shall not be displayed on memorial or dedication signs. Decorative or graphical elements, pictographs, logos, or symbols shall not be displayed on memorial or dedication signs. All letters and numerals displayed on memorial or dedication signs shall be as provided in the "Standard Highway Signs" publication (see Section 1A.05). The route number or officially mapped name of the highway shall not be displayed on the memorial or dedication sign.**

09 **Memorial or dedication signs shall not imply that a highway has been officially renamed.**

10 **Memorial or dedication names shall not appear on supplemental signs, street name signs or on any other information sign on or along the highway or its intersecting routes.**

10a **Memorial or dedication signs shall not be installed as overhead signs.**

*Guidance:*

11 *Freeways and expressways should not be signed as memorial or dedicated highways.*

12 *When used, memorial or dedication signs should be located in accordance with the provisions for excessive use of signs (see Section 2A.20).*

Support:

13 Paragraph 36 of Section 2D.45 contains provisions regarding the use of memorial or dedication signing in conjunction with Street Name signs.

Option:

14 The Memorial Bridge (G11-4A(CA) and G11-4B(CA)) signs (refer to Figure 2M-101(CA)) may be placed above an existing Inventory Marker (G11-1(CA), G11-2(CA), G11-4(CA) or G11-5(CA)) when an appropriate authority has requested that a highway facility be designated as a memorial facility.

25 The Memorial Bridge and Inventory Marker (G11-8(CA) and G11-9(CA)) combination signs (refer to Figure 2M-101(CA)) may be placed when an appropriate authority has requested that a highway facility be designated as a memorial facility.

*Guidance:*

16 *The Inventory Markers should be placed at each end of a structure, with the bottom of the sign even with the top of the bridge rail.*

Support:

17 The official name and number of structures on State highways are determined by Caltrans' Office of Structures Design.

**Victims Memorial Program Signs (S35(CA) Series)**

Support:

18 Refer to the SHC § 101.10.

Option:

19 The PLEASE DON'T DRINK AND DRIVE (S35(CA)) sign (refer to Figure 2M-101(CA)) may be placed on any state highway upon request from an immediate family member of a person who was killed by a driver intoxicated with drugs or alcohol, in memory of the victim.

**Standard:**

20 **The IN MEMORY OF XXX – 1 PERSON (S35-1P(CA)), IN MEMORY OF XXX – 2 PERSONS (S35-2P(CA)) or IN MEMORY OF XXX – 3 PERSONS (S35-3P(CA)) sign (refer to Figure 2M-101(CA)) shall be placed below the S35(CA) sign.**

21 **The following conditions shall be satisfied to qualify for a S35(CA) sign on a state highway:**

1. **At least one of the deceased victim's immediate family members requests a memorial sign. An immediate family member is a spouse, child, stepchild, brother, stepbrother, sister, stepsister, mother, stepmother, father or stepfather.**
2. **The accident occurred on or after January 1, 1991.**
3. **Either (a) or (b) is true:**
   a. **The intoxicated driver was convicted of second-degree murder, or gross vehicular manslaughter, or vehicular manslaughter.**
   b. **The intoxicated driver died or could not be prosecuted because of mental incompetence.**
4. **Note: An intoxicated driver who died does NOT qualify as a victim.**

22 **The placement of the S35(CA) sign on state highways shall be per the following requirements:**

1. **Signs will be installed in accordance with applicable Caltrans policies and standards for signs. This includes posts, hardware, materials, vertical, longitudinal, and lateral positioning.**
2. **Caltrans will NOT install or maintain a memorial sign if there is written opposition from any immediate family member.**
3. **Only one sign will be installed in one direction of travel on the right side of the state highway in close proximity to where the accident occurred at a location where it is safe and practical to do so.**
4. **Caltrans will maintain the sign for 7 years or until the condition of the sign has deteriorated to a point where it is no longer serviceable, whichever occurs first.**
5. **Only one sign will be installed per accident. Multiple victim names may appear on the sign.**
6. **A sign will NOT be installed in the median of any state highway.**

## Section 2M.101(CA) Historical Landmark Signs (G13-1A(CA), G13-2A(CA) and G14A(CA))

**Standard:**

01 **The Historical Landmark (G13-1A(CA) and G13-2A(CA)) signs and the Advance Historical Landmark (G14A(CA)) sign shall have a white legend and border on a brown colored background.**

Option:

02 The G13-1A(CA), G13-2A(CA) and G14A(CA) signs may be in addition to the normal compliment of signs, but minimum spacing will be maintained.

03 The G13-1A(CA), G13-2A(CA) and G14A(CA) signs may be placed directing to Historical Landmarks that are registered with the Department of Parks and Recreation.

**Standard:**

04 **On freeways, the G13-1A(CA), G13-2A(CA) and G14A(CA) signs shall be limited to those more important and better known landmarks where some physical evidence remains, such as missions, forts, state monuments, etc., rather than mere sites of former buildings or happenings.**

05 **The Office of Historic Preservation within the Department of Parks and Recreation (or the Resource Protection Division in the case of State Historic Park sites) shall be notified prior to the removal of existing G13-1A(CA), G13-2A(CA) and G14A(CA) signs.**

*Guidance:*

06 *The Historical Landmark (G13-1A(CA)) sign should be used on conventional highways to guide road users by the most direct route to registered historical landmarks which are located within 5 miles of the highway. The sign should be placed not more than 150 feet in advance of the intersection on the right.*

07 *The Historical Landmark (G13-2A(CA)) sign should be used on freeways to guide road users to the original 21 California Missions and other important well-known historical landmarks. Refer to § 123.5 of the SHC for signing to Missions. The G13-2A(CA) sign should also be used on freeways to guide road users to historical landmarks that have a profound impact on the history of California as a whole.*

Option:

08 Supplemental Destination (G86(CA) Series) signs (white text on green background) may be used on freeways where the landmark generates considerable traffic.

**Standard:**

09 **These G86(CA) Series signs shall be followed up by standard Historical Landmark signs on the next exit ramps.**

*Guidance:*

10 *The Advance Historical Landmark (G14A(CA)) sign should be used in advance of a registered historical landmark monument or plaque within or adjacent to the right of way. The sign should be placed 500 to 1500 feet in advance of the landmark or monument on the right, depending on the approach speed of traffic.*

## Section 2M.102(CA) POINT OF HISTORICAL INTEREST Sign (G15A(CA))

**Standard:**

01 **The POINT OF HISTORICAL INTEREST (G15A(CA)) sign shall have a white legend on a brown background.**

02 **The G15A(CA) sign shall not be used on freeways.**

Option:

03 The POINT OF HISTORICAL INTEREST (G15A(CA)) sign may be used to direct the public to a historical point of interest that has been registered with the Office of Historic Preservation, Department of Parks and Recreation. The G15A(CA) sign may be used on the right on city streets or conventional rural highways.

Support:

04 The G15A(CA) sign is placed when requested by local authorities, after markers or other identification have been placed at the location and follow-up signs, if necessary, have been installed.

## Section 2M.103(CA) Historic Route Signs (SG2(CA), SG2A(CA), S18(CA) and S25(CA))

*Guidance:*

01 *The EL CAMINO REAL (SG2(CA)) sign should be used in combination with the Mission Bell assembly, to identify the original route of El Camino Real.*

02 *The HISTORIC EL CAMINO REAL (SG2A(CA)) sign should be used in combination with the Mission Bell assembly, to identify Historic El Camino Real.*

Option:

03 The Historic Route (S18(CA)) sign may be used to identify a "Historic Route". Legislature may direct the use of this sign.

Support:

04 Caltrans and local agencies with portions of Historic Routes under their jurisdiction, upon application by an interested local agency or private group and receiving donations from non-State sources for the cost of the sign and their installation, can place these signs as requested.

05 The Historic Route 99 (S25(CA)) sign is used to identify "Historic Route 99".

06 Caltrans and local agencies with portions of former U.S. Route 99 currently under their jurisdiction, upon application by an interested local agency or private group and receiving donations from non-State sources for the cost of the sign and their installation, can place these signs as requested.

*Guidance:*

07 *Suggested placement should be staggered in each direction at approximately 10 mile intervals on conventional highways and 25 mile intervals on freeways for the S18(CA) and S25(CA) signs.*

## Section 2M.104(CA) Historic Bridge Signs (S29(CA), S29-1(CA) and S29-2(CA))

*Guidance:*

01 *The Historic Bridge (S29(CA) and S29-1(CA)) sign should be used to identify 280 bridges in the State that are of historical significance and appear in Caltrans' publication titled "Historical Highway Bridges of California". Refer to Section 1A.11 for information regarding this publication.*

02 *The Advance Historic Bridge (S29-2(CA)) sign should be used in advance of a historic bridge to direct the public to the historic bridge.*

Support:

03 The initial installation of the Historic Bridge signs was through a grant provided under the ISTEA Enhancement Program and administered by Caltrans' Environmental Program. Maintenance for the existing signs is borne by the agency responsible for the bridge.

## Figure 2M-1. Examples of Use of Arrows, Educational Plaques, and Prohibitive Circles and Diagonals




---


## *Figure 2M-1(CA). California Examples of Use of Arrows, Educational Plaques, and Prohibitive Circles and Diagonals*




G58P(CA)

## Figure 2M-2. Examples of Recreational and Cultural Interest Area Guide Signs

**A – Conventional roads**

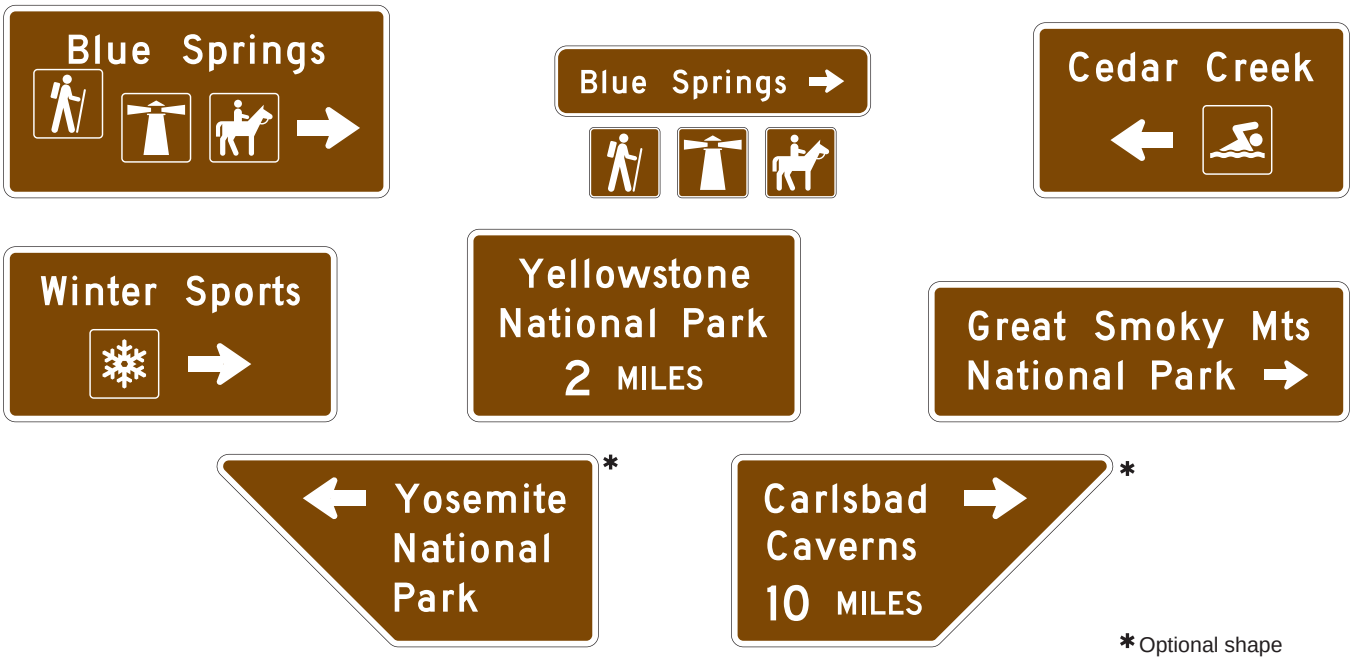


*Optional shape

**B – Expressways and freeways**




Supplemental guide sign




Exit Gore sign (E5-1a)




Exit Direction sign

## *Figure 2M-2(CA). California Examples of Recreational and Cultural Interest Area Guide Signs*




G13-1A(CA)




G13-2A(CA)




G14A(CA)




G15A(CA)




G72(CA)




G86-11(CA)




SG2(CA)




SG2A(CA)




S18(CA)




S25(CA)




S29(CA)





S29-1(CA)





S29-2(CA)

# Figure 2M-3. Arrangement, Height, and Lateral Position of Signs Located within Recreational and Cultural Interest Areas

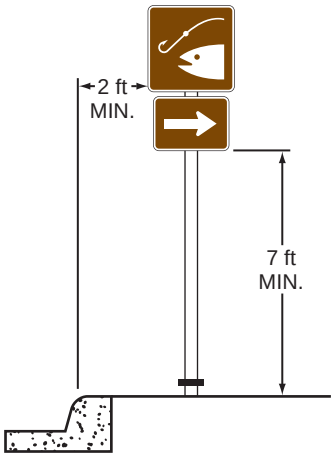



**A – Roadside assembly in a business, commercial, or residential area**

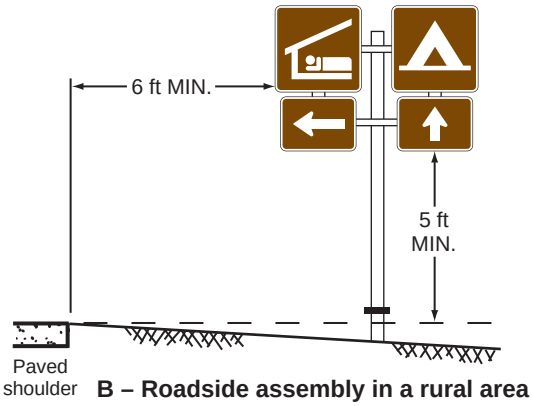



**B – Roadside assembly in a rural area**



OR

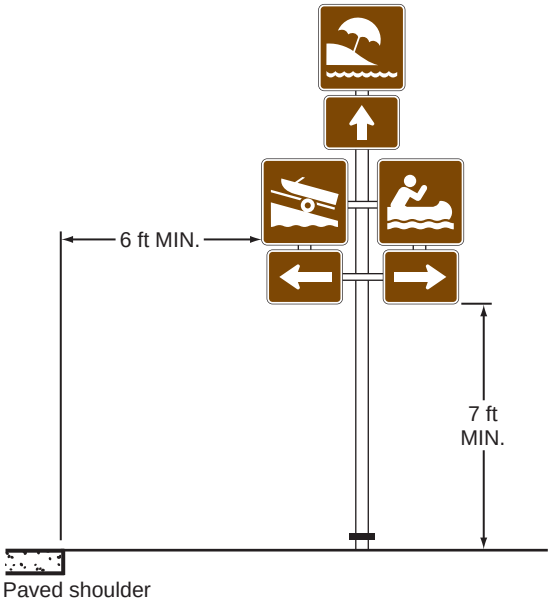



**C – Roadside assembly in a business, commercial, or residential area (without curb)**

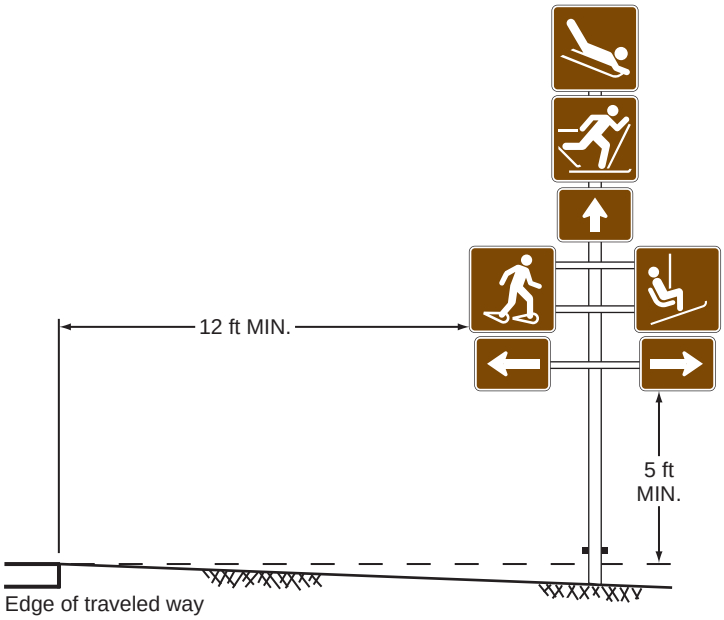


**D – Roadside assembly in a rural area**

Note: See Section 2A.16 for reduced lateral offset distances that may be used in areas where lateral offsets are limited, and in urban areas where sidewalk width is limited or where existing poles are close to the curb

## Figure 2M-4. Examples of Symbol and Destination Guide Signing Layout

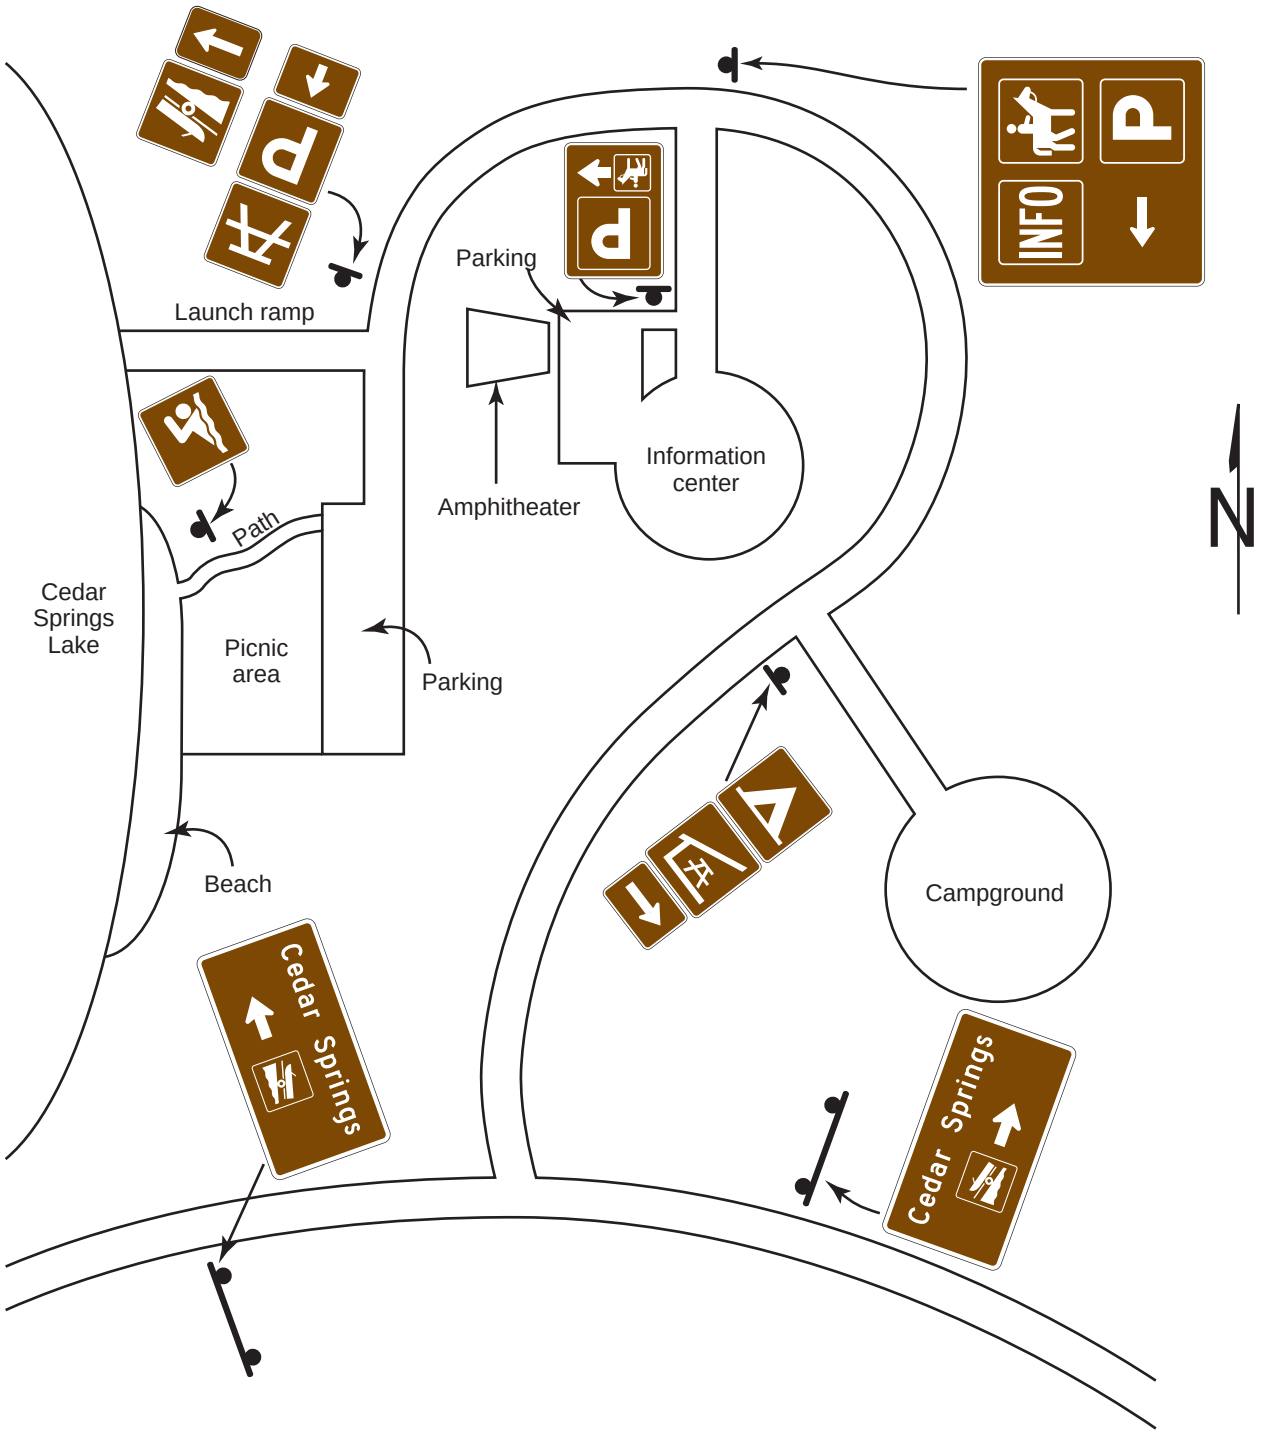

## Figure 2M-5. Recreational and Cultural Interest Area Symbol Signs for General Applications



RS-002*
Smoking



RS-005*
Tunnel



RS-006
Lookout Tower



RS-007
Lighthouse



RS-011
Deer Viewing Area



RS-012
Bear Viewing Area



RS-031*
Bus Stop



RS-036
Viewing Area



RS-042*
Campfires



RS-090*
Fire Extinguisher



RS-115
Sea Plane



RS-140*
Pick-Up Trucks




RS-141
Nature Study Area



RS-200*
Recycling

*For use only within recreational and cultural interest areas where speed limits are 25 mph or less.

## Figure 2M-6. Recreational and Cultural Interest Area Symbol Signs for Accommodations

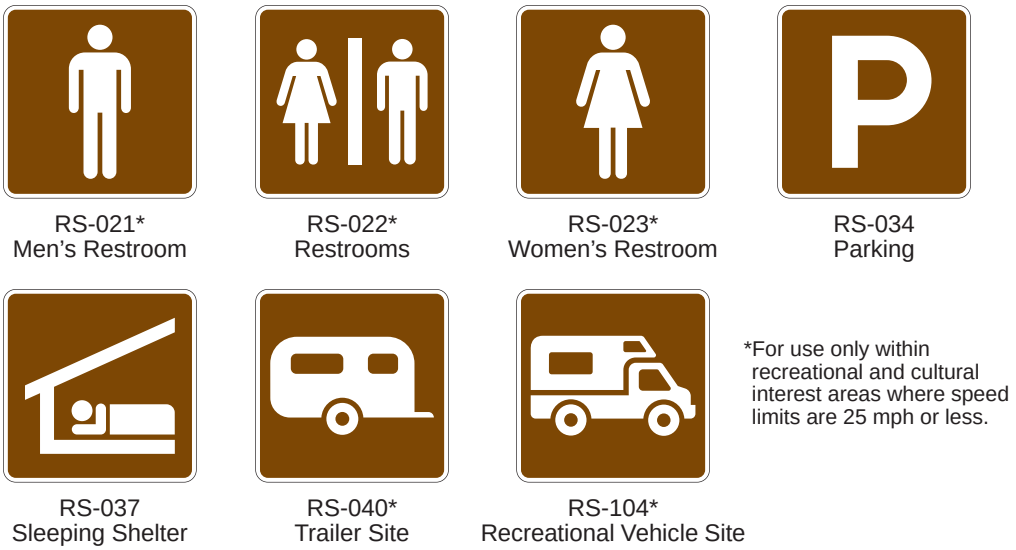

## Figure 2M-7. Recreational and Cultural Interest Area Symbol Signs for Services



RS-024*
First Aid



RS-026*
Post Office




RS-035*
Showers



RS-039
Picnic Shelter



RS-044
Picnic Site




RS-071
Tramway



RS-085*
Laundromat



RS-091*
Trash Dumpster



RS-150*
Electrical Hook-Up

*For use only within recreational and cultural interest areas where speed limits are 25 mph or less.

## Figure 2M-8. Recreational and Cultural Interest Area Symbol Signs for Land Recreation



RS-064
Horse Trail

RS-068
Hiking Trail

RS-076
Wildlife Viewing

RS-081*
Technical Rock Climbing

RS-082
Climbing

RS-084*
Spelunking/Caves

RS-095
All-Terrain Trail

RS-096
Baseball

RS-098*
Skateboarding

RS-116
Archery

RS-125*
In-Line Skating


RS-128
Golfing

RS-129
Tennis

*For use only within recreational and cultural interest areas where speed limits are 25 mph or less.

---

## *Figure 2M-8(CA). California Recreational and Cultural Interest Area Symbol Signs for Land Recreation*




G200-81aP(CA)

S12(CA)

## Figure 2M-9. Recreational and Cultural Interest Area Symbol Signs for Water Recreation



RS-053*
Marina

RS-054
Boat Ramp

RS-055
Motorboating

RS-058
Waterskiing

RS-060
Scuba Diving

RS-061
Swimming

RS-063
Fishing Area

RS-079
Canoeing

RS-106
Seal Viewing

RS-107
Whale Viewing

RS-117*
Hand Launch/
Small Boat Launch

RS-121
Jet Ski/Personal
Watercraft

RS-145
Beach

*For use only within recreational and cultural interest areas where speed limits are 25 mph or less.

## Figure 2M-10. Recreational and Cultural Interest Area Symbol Signs for Winter Recreation



RS-046
Cross Country Skiing

RS-049
Sledding

RS-077
Winter Recreational Area

RS-078
Snowshoeing

RS-105
Chair Lift/Ski Lift

RS-143
Dog Sledding

RS-144
Snow Tubing

---

## *Figure 2M-10(CA). California Recreational and Cultural Interest Area Symbol Signs for Winter Recreation*




SG30(CA)

SG31(CA)

SG32(CA)

SG33(CA)

SG34(CA)

SG35P(CA)

SG35-1P(CA)


## *Figure 2M-101(CA). Memorial or Dedication Signing*




G11-4A(CA)




G11-4B(CA)




G11-8(CA)




G11-9(CA)




G12-1(CA)




G12-2A(CA)




S35-1P(CA)




S35(CA)




S35-2P(CA)




S35-3P(CA)

## *Figure 2M-102(CA). Prohibited Recreational and Cultural Interest Area Symbol Signs and Educational Plaque*

### General




PS-002(CA)
PREP-002(CA)




PS-042(CA)
PREP-042(CA)




PS-140(CA)
PREP-140(CA)

### Land




R9-14
PREP-064(CA)




R9-3
R5-10c




PS-082(CA)
PREP-082(CA)




PS-096(CA)
PREP-096(CA)




PS-098(CA)
PREP-098(CA)




R9-13
PREP-125(CA)




PS-128(CA)
PREP-128(CA)

### Water




PS-061(CA)
PREP-061(CA)





PS-063(CA)
PREP-063(CA)

### Related Recreation Activities or Services




R5-6
PREP-R5-6(CA)




S22(CA)




S22-1(CA)

PS - Prohibited [Recreation Series] Symbol

PREP - Prohibited Recreational [Series] Educational Plaque

# Table 2M-1. Category Chart for Recreational and Cultural Interest Area Symbols

| General | |
|---|---|
| Bear Viewing Area | RS-012 |
| Bus Stop * | RS-031 |
| Campfires * ⊘ | RS-042 |
| Deer Viewing Area | RS-011 |
| Fire Extinguisher * | RS-090 |
| Lighthouse | RS-007 |
| Lookout Tower | RS-006 |
| Nature Study Area | RS-141 |
| Pick-Up Trucks * ⊘ | RS-140 |
| Recycling * | RS-200 |
| Sea Plane | RS-115 |
| Tunnel * | RS-005 |
| Viewing Area | RS-036 |

| Services | |
|---|---|
| Electrical Hook-Up * | RS-150 |
| First Aid * | RS-024 |
| Laundromat * | RS-085 |
| Picnic Shelter | RS-039 |
| Picnic Site | RS-044 |
| Post Office * | RS-026 |
| Showers * | RS-035 |
| Tramway | RS-071 |
| Trash Dumpster * | RS-091 |

| Water Recreation | |
|---|---|
| Beach | RS-145 |
| Boat Ramp | RS-054 |
| Canoeing | RS-079 |
| Fishing Area ⊘ | RS-063 |
| Hand Launch/Small Boat Launch * | RS-117 |
| Jet Ski/Personal Watercraft | RS-121 |
| Marina * | RS-053 |
| Motorboating | RS-055 |
| Scuba Diving | RS-060 |
| Seal Viewing | RS-106 |
| Swimming ⊘ | RS-061 |
| Waterskiing | RS-058 |
| Whale Viewing | RS-107 |

| Accommodations | |
|---|---|
| Men's Restroom * | RS-021 |
| Parking | RS-034 |
| Recreational Vehicle Site * | RS-104 |
| Restrooms * | RS-022 |
| Sleeping Shelter | RS-037 |
| Smoking * ** ⊘ | RS-002 |
| Trailer Site * | RS-040 |
| Women's Restroom * | RS-023 |

| Land Recreation | |
|---|---|
| All-Terrain Trail | RS-095 |
| Archery | RS-116 |
| Baseball ⊘ | RS-096 |
| Climbing ⊘ | RS-082 |
| Golfing ⊘ | RS-128 |
| Hiking Trail | RS-068 |
| Horse Trail ⊘ | RS-064 |
| In-Line Skating * ⊘ | RS-125 |
| Skateboarding * ⊘ | RS-098 |
| Spelunking/Caves * | RS-084 |
| Technical Rock Climbing * | RS-081 |
| Tennis | RS-129 |
| Wildlife Viewing | RS-076 |

| Winter Recreation | |
|---|---|
| Chair Lift/Ski Lift | RS-105 |
| Cross Country Skiing | RS-046 |
| Dog Sledding | RS-143 |
| Sledding | RS-049 |
| Snow Tubing | RS-144 |
| Snowshoeing | RS-078 |
| Winter Recreational Area | RS-077 |

*For use only within recreational and cultural interest areas where speed limits are 25 mph or less.
** Refer to FHWA's List of Known Errors for errors in sign. Refer to Section 1A.04 for more details.

⊘ Eligible for Prohibited Symbol sign

## Table 2M-1(CA). California Category Chart for Recreational and Cultural Interest Area Symbols

| General RS-Series Title | Sign Designation | PS-(CA) Series Title | Sign Designation | PREP-(CA) Series Legend | Sign Designation |
|---|---|---|---|---|---|
| Campfires ⊘ | RS-042 | No Campfires | PS-042(CA) | NO CAMPFIRES | PREP-042(CA) |
| Pick-Up Trucks ⊘ | RS-140 | No Pickups | PS-140(CA) | NO PICKUPS | PREP-140(CA) |

| Land RS-Series Title | Sign Designation | PS-(CA) Series Title | Sign Designation | PREP-(CA) Series Legend | Sign Designation |
|---|---|---|---|---|---|
| Baseball ⊘ | RS-096 | No Ball Playing | PS-096(CA) | NO BALL PLAYING | PREP-096(CA) |
| Climbing ⊘ | RS-082 | No Climbing | PS-082(CA) | NO CLIMBING | PREP-082(CA) |
| Golfing ⊘ | RS-128 | No Golfing | PS-128(CA) | NO GOLFING | PREP-128(CA) |
| Hiking Trail ⊘ | RS-068 | No Pedestrians | R9-3 | NO PEDESTRIANS | R5-10c |
| Horse Trail ⊘ | RS-064 | No Equestrians | R9-14 | NO EQUESTRIANS | PREP-064(CA) |
| In-Line Skating ⊘ | RS-125 | No Skaters | R9-13 | NO SKATERS | PREP-125(CA) |
| Skateboarding ⊘ | RS-098 | No Skateboarding * | PS-098(CA) | NO SKATEBOARDING | PREP-098(CA) |

| Water RS-Series Title | Sign Designation | PS-(CA) Series Title | Sign Designation | PREP-(CA) Series Legend | Sign Designation |
|---|---|---|---|---|---|
| Fishing Area ⊘ | RS-063 | No Fishing | PS-063(CA) | NO FISHING | PREP-063(CA) |
| Swimming ⊘ | RS-061 | No Swimming | PS-061(CA) | NO SWIMMING | PREP-061(CA) |

| Related Recreation Activities or Services | Sign Designation | Related Recreation Activities or Services | Sign Designation | PREP-(CA) Series Legend | Sign Designation |
|---|---|---|---|---|---|
| Bicycles Permitted ⊘ | D11-11 | No Bicycles | R5-6 | NO BICYCLES | PREP-R5-6(CA) |
| Camping ⊘ | D9-3 | | | NO LOITERING, CAMPING, VENDING OR PARKING OF VEHICLES 30 FEET OR LONGER | S22(CA) |
| | | | | VEHICLE INSPECTION ONLY, NO LOITERING OR CAMPING | S22-1(CA) |

⊘ Eligible for Prohibited Symbol Sign

PS- Prohibited [Recreational Series] Symbol
PREP- Prohibited Recreational [Series] Educational Plaque

## Table 2M-101(CA). California Recreational and Cultural Interest Area Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway |
|---|---|---|---|---|
| Memorial Bridge | G11-4A(CA) | 2M.10 | 44 x 18 | 44 x 18 |
| Memorial Bridge | G11-4B(CA) | 2M.10 | 44 x 24 | 44 x 24 |
| Memorial Bridge and Inventory Marker | G11-8(CA) | 2M.10 | 44 x 36 | 44 x 36 |
| Memorial Bridge and Inventory Marker | G11-9(CA) | 2M.10 | 44 x 42 | 44 x 42 |
| Memorial Highway | G12-1(CA) | 2M.10 | VAR x 18 | VAR x 24 |
| Memorial Highway | G12-2A(CA) | 2M.10 | VAR x 30 | VAR x 42 |
| Historical Landmark | G13-1A(CA) | 2M.101(CA) | 36 x 30 | 36 x 30 |
| Historical Landmark | G13-2A(CA) | 2M.101(CA) | 72 x 60 | 72 x 60 |
| Advance Historical Landmark | G14A(CA) | 2M.101(CA) | 36 x 30 | 36 x 30 |
| POINT OF HISTORICAL INTEREST | G15A(CA) | 2M.102(CA) | 15 x 9 | 36 x 30 |
| NEXT RIGHT/LEFT (plaque) | G58P(CA) | 2M.08 | 30 x 24 | 30 x 24 |
| National/State Park with Arrow | G72(CA) | 2M.09 | VAR x 18 | VAR x 30 |
| Historic District Supplemental Destination | G86-11(CA) | 2M.09 | VAR x 42 | VAR x 54 |
| WILDLIFE VIEWING (plaque) | G200-81aP(CA) | 2M.02 | 24 x 12 | 30 x 18 |
| EL CAMINO REAL | SG2(CA) | 2M.103(CA) | 30 x 28 | 48 x 40 |
| HISTORIC EL CAMINO REAL | SG2A(CA) | 2M.103(CA) | 42 x 15 | 42 x 15 |
| SNO-PARK X MILE | SG30(CA) | 2M.02 | 60 x 30 | 60 x 30 |
| SNO-PARK NEXT RIGHT | SG31(CA) | 2M.02 | 60 x 30 | 60 x 30 |
| SNO-PARK with Arrow | SG32(CA) | 2M.02 | 60 x 30 | 60 x 30 |
| SNO-PARK with Arrow | SG33(CA) | 2M.02 | VAR x 12 | VAR x 18 |
| SNO-PARK | SG34(CA) | 2M.02 | 96 x 24 | 120 x 30 |
| PERMIT REQUIRED (plaque) | SG35P(CA) | 2M.02 | 60 x 12 | 60 x 12 |
| PERMIT REQUIRED with Dates (plaque) | SG35-1P(CA) | 2M.02 | 60 x 18 | 60 x 18 |
| OHV TRAIL | S12(CA) | 2M.02 | 24 x 18 | 24 x 18 |
| Historic Route | S18(CA) | 2M.103(CA) | 12 x 18 | 24 x 36 |
| Historic Route 99 | S25(CA) | 2M.103(CA) | 12 x 18 | 24 x 36 |
| Historic Bridge | S29(CA) | 2M.104(CA) | VAR x 18 | VAR x 36 |
| Historic Bridge | S29-1(CA) | 2M.104(CA) | VAR x 24 | VAR x 48 |
| Advance Historic Bridge | S29-2(CA) | 2M.104(CA) | VAR x 24 | VAR x 48 |
| PLEASE DON'T DRINK AND DRIVE | S35(CA) | 2M.10 | 36 x 30 | 36 x 30 |
| IN MEMORY OF XXX - 1 PERSON (plaque) | S35-1P(CA) | 2M.10 | 36 x 12 | 36 x 12 |
| IN MEMORY OF XXX - 2 PERSONS (plaque) | S35-2P(CA) | 2M.10 | 36 x 15 | 36 x 15 |
| IN MEMORY OF XXX - 3 PERSONS (plaque) | S35-3P(CA) | 2M.10 | 36 x 18 | 36 x 18 |

# CHAPTER 2N. EMERGENCY MANAGEMENT SIGNS

## Section 2N.01 Emergency Management

*Guidance:*

01 *Contingency planning for an emergency evacuation should be considered by all State and local jurisdictions and should consider the use of all applicable roadways.*

02 *In the event of a disaster where highways that cannot be used will be closed, a successful contingency plan should account for the following elements: a controlled operation of certain designated highways, the establishment of traffic operations for the expediting of essential traffic, and the provision of emergency centers for civilian aid.*

## Section 2N.02 Design and Use of Emergency Management Signs

**Standard:**

01 **Emergency Management signs (see Figure 2N-1) shall be used to guide and control highway traffic during an emergency.**

*Guidance:*

02 *During an emergency, permanently-installed regulatory and warning signs that conflict with Emergency Management signs should be removed or covered until such time as the Emergency Management signs are no longer necessary.*

03 *Except for Evacuation Route signs, Emergency Management signs that are no longer necessitated by the emergency should be promptly removed and signs that normally provide regulation, warning, or guidance that were removed or covered during the emergency should be promptly displayed again.*

**Standard:**

04 **Advance planning for transportation operations emergencies shall be the responsibility of State and local authorities.**

Support:

05 The Federal Government provides guidance to the States as necessitated by changing circumstances.

**Standard:**

06 **Except as provided in Section 2A.07, the sizes for Emergency Management signs shall be as shown in Table 2N-1.**

Support:

07 Section 2A.07 contains information regarding the applicability of the various columns in Table 2N-1. Option:

08 Signs larger than those shown in Table 2N-1 may be used (see Section 2A.07).

*Guidance:*

09 *As conditions permit, the Emergency Management signs should be replaced or augmented by standard signs.*

10 *Except where specifically required elsewhere in this Chapter, the background of Emergency Management signs should be retroreflective.*

11 *Because Emergency Management signs might be needed in large numbers for temporary use during an emergency, consideration should be given to their fabrication from any light and economical material that can serve through the emergency period.*

Option:

12 Any Emergency Management sign that is used to mark an area that is contaminated by biological or chemical warfare agents or radioactive fallout may be accompanied by the standard symbol that is illustrated in the upper left corner of the EM4-1b and EM4-1c signs in Figure 2N-1.

## Section 2N.03 Evacuation Route Signs (EM1 Series)

**Standard:**

01 **An Advance Turn Arrow (M5 series) or Directional Arrow (M6 series) auxiliary plaque (see Figure 2D-6) shall be installed below the EM1-2 sign. The Advance Turn Arrow or Directional Arrow auxiliary plaque shall have a white arrow and border on a blue background when used with an EM1-2 sign.**

Option:

02 Where different evacuation conditions use different evacuation routes in the same area, the word HURRICANE, or a word that describes some other type of evacuation route, may be added above the EVACUATION ROUTE legend

within the blue circular symbol on the EM1-1a sign.

**Standard:**

03 **The EM1-1 series signs shall include a white directional arrow. The arrow designs on the EM1-1 series signs shall include a straight, vertical arrow pointing upward, a straight horizontal arrow pointing to the left or right, or a bent arrow pointing to the left or right for advance warning of a turn.**

*Guidance:*

04 *If used, the Evacuation Route sign, with the appropriate arrow, should be installed 150 to 300 feet in advance of, and at, any turn in an approved evacuation route. The sign should also be installed elsewhere for straight-ahead confirmation where needed.*

**Standard**

05 **If used in urban areas, the Evacuation Route sign shall be mounted at the right-hand side of the roadway, not less than 7 feet above the top of the curb, and at least 1 foot back from the face of the curb. If used in rural areas, the Evacuation Route sign shall be mounted at the right-hand side of the roadway, not less than 7 feet above the near edge of the pavement and not less than 6 feet or more than 10 feet to the right of the right-hand roadway edge.**

06 **Evacuation Route signs shall not be placed where they will conflict with other signs. Where a conflict in placement would occur between the Evacuation Route sign and a standard regulatory sign, the regulatory sign shall take precedence.**

Option:

07 In case of a conflict with guide or warning signs, the Evacuation Route sign may take precedence.

*Guidance:*

08 *Placement of Evacuation Route signs should be made under the supervision of the officials having jurisdiction over the placement of other traffic signs. Coordination with Emergency Management authorities and agreement between contiguous political entities should occur to assure continuity of routes.*

09 *Use of the specific Evacuation Route (EM1-1a and EM1-2) signs should be limited to areas where different evacuation conditions use different evacuation routes.*

Option:

10 Informational tsunami hazard zone signs may be placed along California roadways, including the state highway system, following the guidelines published by California Office of Emergency Services.

## Section 2N.04 AREA CLOSED Sign (EM2-1)

*Guidance:*

01 *The AREA CLOSED (EM2-1) sign (see Figure 2N-1) should be used to close a roadway in order to prohibit traffic from entering the area. It should be installed on the shoulder as near as practical to the right- hand edge of the roadway, or preferably, on a portable mounting or barricade partly or entirely in the roadway.*

02 *For best visibility, particularly at night, the sign height should not exceed 4 feet measured vertically from the pavement to the bottom of the sign. Unless adequate advance warning signs are used, it should not be placed to create a complete and unavoidable blocked route. Where feasible, the sign should be located at an intersection that provides a detour route.*

## Section 2N.05 TRAFFIC CONTROL POINT Sign (EM2-2)

*Guidance:*

01 *The TRAFFIC CONTROL POINT (EM2-2) sign (see Figure 2N-1) should be used to designate a location where an official traffic control point has been set up to impose such controls as are necessary to limit congestion, expedite emergency traffic, exclude unauthorized vehicles, or protect the public.*

02 *The sign should be installed in the same manner as the AREA CLOSED sign (see Section 2N.04), and at the point where traffic must stop to be checked.*

03 *A STOP (R1-1) sign (see Section 2B.04) should be used in conjunction with the TRAFFIC CONTROL POINT sign.*

04 *The TRAFFIC CONTROL POINT sign should be mounted directly below the STOP sign.*

## Section 2N.06 MAINTAIN TOP SAFE SPEED Sign (EM2-3)

Option:

01 The MAINTAIN TOP SAFE SPEED (EM2-3) sign (see Figure 2N-1) may be used on highways where conditions

are such that it is prudent to evacuate or traverse an area as quickly as possible.

02 Where an existing Speed Limit (R2-1) sign is in a suitable location, the MAINTAIN TOP SAFE SPEED sign may be mounted directly over the face of the speed limit sign that it supersedes.

Support:

03 Since any speed zoning would be impractical under such emergency conditions, no minimum speed limit can be prescribed by the MAINTAIN TOP SAFE SPEED sign in numerical terms. Where traffic is supervised by a traffic control point, official instructions will usually be given verbally, and the sign will serve as an occasional reminder of the urgent need for maintaining the proper speed.

*Guidance:*

04 *The sign should be installed as needed, in the same manner as other standard speed signs.*

**Standard:**

05 **If used in rural areas, the MAINTAIN TOP SAFE SPEED sign shall be mounted on the right- hand side of the road at a horizontal distance of not less than 6 feet or more than 10 feet from the roadway edge, and at a minimum height, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of 5 feet. If used in urban areas, the minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, shall be 7 feet, and the nearest edge of the sign shall be not less than 1 foot back from the face of the curb.**

## Section 2N.07 Permit Required Sign (EM2-4)

Support:

01 The intent of the Permit Required (EM2-4) sign (see Figure 2N-1) is to notify road users of the presence of the traffic control point so that those who do not have priority permits issued by designated authorities can take another route, or turn back, without making a needless trip and without adding to the screening load at the post. Local traffic, without permits, can proceed as far as the traffic control post.

**Standard:**

02 **If used, the Permit Required (EM2-4) sign shall be used at an intersection that is an entrance to a route on which a traffic control point is located.**

03 **If used, the EM2-4 sign shall be installed in a manner similar to that of the MAINTAIN TOP SAFE SPEED sign (see Section 2N.06).**

## Section 2N.08 Emergency Aid Center Signs (EM3-1 Series)

**Standard:**

01 **In the event of emergency, State and local authorities shall establish various centers for civilian relief, communication, medical service, and similar purposes. To guide the public to such centers a series of directional signs shall be used.**

02 **Emergency Aid Center (EM3-1 series) signs (see Figure 2N-1) shall display the designation of the center and an arrow indicating the direction to the center. They shall be installed as needed, at intersections and elsewhere, on the right-hand side of the roadway, in urban areas at a minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of 7 feet, and not less than 1 foot back from the face of the curb, and in rural areas at a minimum height, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of 5 feet, and at a horizontal distance of not less than 6 feet or more than 10 feet from the roadway edge.**

03 **Emergency Aid Center signs shall display one of the following legends, as appropriate, or others designating similar emergency facilities:**

- **A. MEDICAL CENTER (EM3-1),**
- **B. WELFARE CENTER (EM3-1a),**
- **C. REGISTRATION CENTER (EM3-1b), or**
- **D. DECONTAMINATION CENTER (EM3-1c).**

04 **The Emergency Aid Center sign shall be a horizontally-oriented rectangle. Except as provided in Paragraph 5 of this Section, the Emergency Aid Center signs shall have a black legend and border on a white background.**

Option:

05 When Emergency Aid Center signs are used in an incident situation, such as during the aftermath of a nuclear or biological attack, the background color may be fluorescent pink (see Chapter 6O).

## Section 2N.09 Shelter Directional Signs (EM4-1 Series)

**Standard:**

01 **Shelter Directional (EM4-1 series) signs (see Figure 2N-1) shall be used to direct the public to selected shelters that have been licensed and marked for emergency use.**

02 **The installation of Shelter Directional signs shall comply with established signing standards. Where used, the signs shall not be installed in competition with other necessary highway regulatory, guide, and warning signs.**

03 **The Shelter Directional sign shall be a horizontally-oriented rectangle. Except as provided in Paragraph 4 of this Section, the Shelter Directional signs shall have a black legend and border on a white background.**

Option:

04 When Shelter Directional signs are used in an incident situation, such as during the aftermath of a nuclear or biological attack, the background color may be fluorescent pink (see Chapter 6O).

05 The distance to the shelter may be omitted from the sign when appropriate.

06 Shelter Directional signs may display one of the following legends, or others designating similar emergency facilities:

A. EMERGENCY (EM4-1),
B. HURRICANE (EM4-1a),
C. FALLOUT (EM4-1b), or
D. CHEMICAL (EM4-1c).

07 If appropriate, the name of the facility may be used.

08 The Shelter Directional signs may be installed on the Interstate Highway System or any other major highway system when it has been determined that a need exists for such signs as part of a State or local shelter plan.


09 The Shelter Directional signs may be used to identify different routes to a shelter to provide for rapid movement of large numbers of persons.

*Guidance:*

10 *The Shelter Directional sign should be used sparingly and only in conjunction with approved plans of State and local authorities.*

11 *The Shelter Directional sign should not be posted more than 5 miles from a shelter.*

## Figure 2N-1. Emergency Management Signs

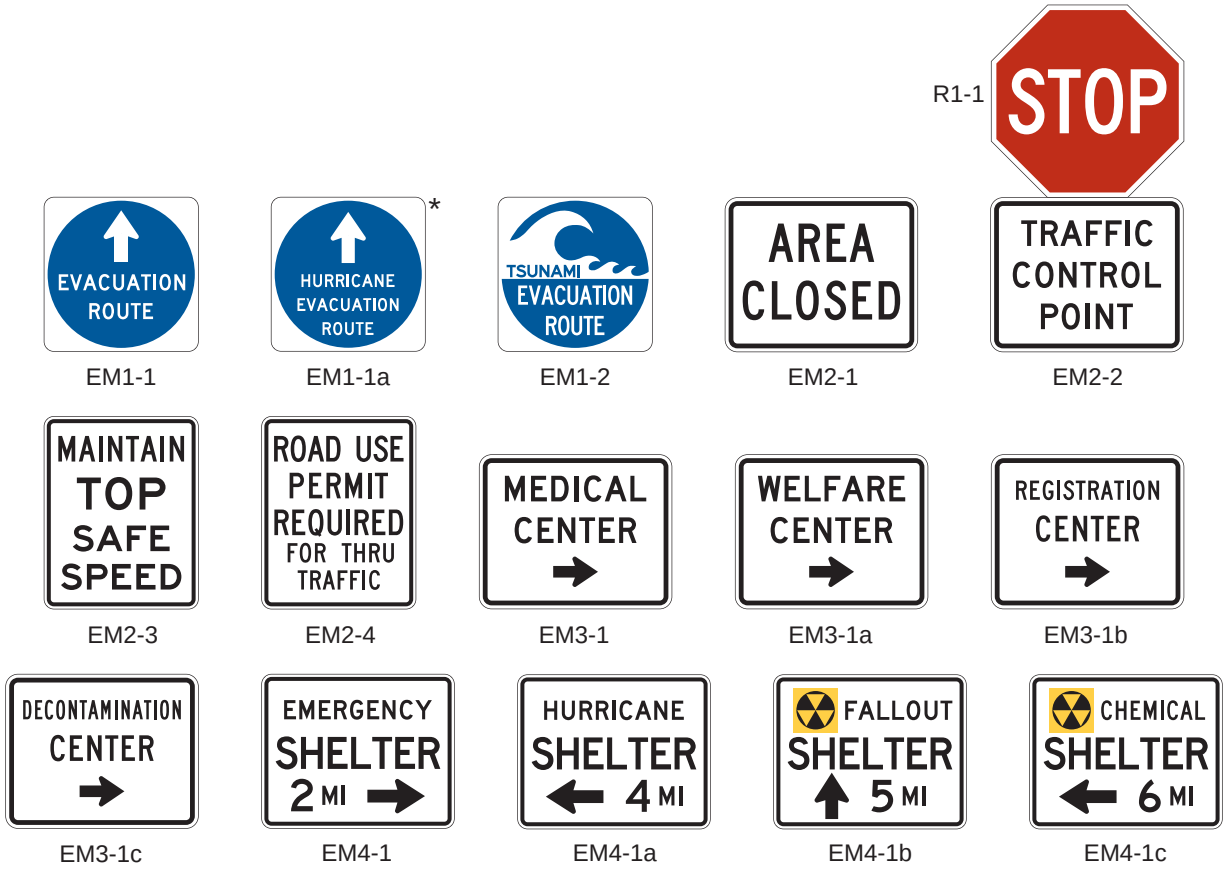


*HURRICANE is an example of one type of evacuation route. Legends for other types may also be used.

## Table 2N-1. Emergency Management Sign Sizes

| Sign or Plaque | Sign Designation | Section | Minimum Size |
|---|---|---|---|
| Evacuation Route | EM1-1, EM-1a, EM1-2 | 2N.03 | 24 x 24* |
| Area Closed | EM2-1 | 2N.04 | 30 x 24 |
| Traffic Control Point | EM2-2 | 2N.05 | 30 x 24 |
| Maintain Top Safe Speed | EM2-3 | 2N.06 | 24 x 30 |
| Permit Required | EM2-4 | 2N.07 | 24 x 30 |
| Emergency Aid Center | EM3-1, EM3-1a, EM3-1b, EM3-1c | 2N.08 | 30 x 24 |
| Shelter Directional | EM4-1, EM4-1a, EM4-1b, EM4-1c | 2N.09 | 30 x 24 |

* A minimum size of 18 x 18 may be used on low-volume roadways or roadways with speeds of 25 mph or less

Notes: 1. Larger signs may be used when appropriate. For EM1-1 and EM1-1a, a larger sign of 32 x 32 for single lane or multilane conventional roadways and 42 x 42 for expressways or freeways may be used.

2. Dimensions are shown as width x height, in inches

# PART 3
# MARKINGS

## CHAPTER 3A. GENERAL

### Section 3A.01 Standardization of Application

Support:

01 Markings are used to supplement other traffic control devices such as signs, signals, and other markings. In other instances, markings are used alone to effectively convey regulations, warnings, or guidance in ways not obtainable by the use of other devices.

02 Markings can take many forms, including road surface markings, curb markings, delineators, colored pavements, and channelizing devices.

**Standard:**

03 **Each standard marking shall be used only to convey the meaning prescribed for that marking in this Manual, including when used for applications not described in this Manual.**

04 **Except as provided in Chapter 3H, markings that must be visible at night shall be retroreflective unless the markings are adequately visible under street or highway lighting. All markings on Interstate highways shall be retroreflective.**

05 **Markings that are no longer applicable for roadway conditions or restrictions and that might cause confusion for the road user shall be removed or obliterated to be unidentifiable as a marking as soon as practicable.**

*Guidance:*

05a *Local authorities may apply lines, arrows, or other symbols to street or highway surfaces to guide visitors and tourists to local points of interest, provided Caltrans approves such markings (CVC § 21374).*

Option:

06 Until they can be removed or obliterated, markings that are no longer applicable for roadway conditions or restrictions may be temporarily masked with non-reflective, preformed tape that is approximately the same color as the pavement surface.

Support:

07 Obliteration of obsolete markings, using one of the known permanent removal methods, such as Ultra-High-Water blasting, shot blasting, or grinding, is the preferred action rather than temporary masking, particularly on faded asphalt concrete pavement. This results in the most visually distinct pavement markings and reduces the risk of driver confusion due to sun glare, especially on eastbound and westbound approaches.

08 Use of black tape for temporary "masking" is effective for new Asphalt Concrete pavement. However, for faded Asphalt Concrete pavement or Portland Cement Concrete pavements, black "masking" pavement markings could appear as a stripe in low light conditions and result in confusion to road users.

### Section 3A.02 Materials

*Guidance:*

01 *The materials used for markings should provide the specified color throughout their useful life.*

02 *Consideration should be given to selecting pavement marking materials that will minimize tripping or loss of traction for road users, including pedestrians, bicyclists, and motorcyclists.*

Option:

03 Marking systems that consist of clumps or droplets of material with visible open spaces of bare pavement between the material droplets, which can function in a manner that is similar to the marking systems that completely cover the pavement surface, may be used as pavement markings if they meet the other pavement marking requirements of the highway agency.

### Section 3A.03 Colors

**Standard:**

01 **Markings shall be yellow, white, red, blue, green, or purple. The colors for markings shall conform to the**

**standard highway colors.**

01a **The color of curb markings shall conform to CVC § 21458.**

01b **Lines, arrows, or other symbols on the street or highway surface to guide visitors and tourists shall be distinct in color from official traffic control devices (CVC § 21374).**

Option:

02 Black markings may be used in combination with the colors mentioned in Paragraph 1 of this Section to enhance the contrast with a light-colored pavement.

02a If the material used for centerline marking is paint, a 3-inch-wide black line may be placed between the 4-inch-wide yellow lines on streets and highways under local jurisdiction.

**Standard:**

02b **If the material used for centerline marking is paint, a 3-inch-wide black line shall be placed between the 4-inch-wide yellow lines on State highways.**

03 **When used, yellow markings for longitudinal lines shall delineate:**

- **A. The separation of traffic traveling in opposite directions,**
- **B. The left-hand edge of the roadways of divided highways and one-way streets or ramps, or**
- **C. The separation of two-way left-turn lanes and reversible lanes from other lanes.**

04 **When used, white markings for longitudinal lines shall delineate:**

- **A. The separation of traffic flows in the same direction,**
- **B. The right-hand edge of the roadway, or**
- **C. Both the right-hand edge and left-hand edge of a reversible roadway.**

05 **When used, red raised pavement markers or delineators shall delineate:**

- **A. Truck escape ramps, or**
- **B. One-way roadways, ramps, or travel lanes that shall not be entered or used in the direction from which the markers are visible.**

06 **When used, blue markings shall supplement white markings for parking spaces for persons with disabilities.**

07 **When used, purple markings shall be in accordance with the provisions of Chapter 3F to identify toll plaza approach lanes restricted to use only by vehicles with registered electronic toll collection accounts.**

08 **When pavement markings that simulate route signs are used (see Section 3B.22), the colors shall be the same as those that are used for the route signs (see Section 2D.11).**

Support:

09 Provisions regarding colored pavements are contained in Chapter 3H.

## Section 3A.04 Functions, Widths, and Patterns of Longitudinal Pavement Markings

**Standard:**

01 **The general functions of longitudinal lines shall be as follows:**

- **A. A double line indicates maximum or special restrictions.**
- **B. A solid line discourages or prohibits crossing (depending on the specific application).**
- **C. A broken line indicates a permissive condition.**
- **D. A dotted lane line provides warning of a downstream change in lane function.**
- **E. A dotted line used as a lane line or edge line extension guides vehicles through an intersection, a taper area, or an interchange ramp area.**

02 **The widths and patterns of longitudinal lines shall be as follows:**

- **A. Normal line—4 to 6 inches wide.**
- **B. Wide line—at least twice the width of a normal line.**
- **C. Double line—two parallel lines separated by a discernible space. The pavement surface shall be visible between the lines in the same way that it is visible outside the lines, except where contrast markings are used in combination with the double line (see Section 3A.03).**
- **D. Broken line—normal width line segments separated by gaps.**
- **E. Dotted line—noticeably shorter line segments separated by shorter gaps than used for a broken line. The width of a dotted line extension shall be at least the same as the width of the line it extends.**

02a **All longitudinal traffic lines for lane lines, edge lines, and centerlines on state highways shall be 6 inches wide.**

02b **All longitudinal traffic lines on local agency roadways shall be a minimum of 4 inches wide.**

Option:

02c Longitudinal traffic lines on local agency roadways may be 6 inches wide.

*Guidance:*

03 *To be recognized as a double line rather than two separate, disassociated single lines, the discernible space separating the parallel lines of a double line should not exceed two times the line width of a single line.*

Support:

04 The width of the line indicates the degree of emphasis.

05 Increasing edge line width from 4 inches to 6 inches has been shown to be a beneficial countermeasure to enhance safety at locations with a history of run-off-the-road crashes (see Section 3B.09). Wider normal lines with a 6-inch width instead of the minimum 4-inch width can be beneficial to both human drivers and driving automation systems (see Section 5B.02).

~~*Guidance:*~~

06 ~~*Broken lines should consist of 10-foot line segments and 30-foot gaps, or dimensions in a similar ratio of line segments to gaps as appropriate for traffic speeds and the need for delineation.*~~

07 ~~*A dotted line used as a lane line (see Section 3B.07) should consist of 3-foot line segments and 9-foot gaps. A dotted line for line extensions within an intersection, taper area, or interchange ramp area (see Section 3B.11) should consist of 2-foot line segments and 2-foot to 6-foot gaps.*~~

**Standard:**

07a **The widths and patterns of longitudinal lines shall conform to the details shown in Figures 3A-101(CA) through 3A-114(CA).**

Support:

08 Section 5B.02 contains information on pavement marking considerations for driving automation systems.

## Section 3A.05 Maintaining Minimum Pavement Marking Retroreflectivity

**Standard:**

01 **Except as provided in Paragraph 5 of this Section, a method designed to maintain retroreflectivity at or above 50 mcd/m$^2$/lx under dry conditions shall be used for longitudinal markings on roadways with speed limits of 35 mph or greater.**

*Guidance:*

02 *Except as provided in Paragraph 5 of this Section, a method designed to maintain retroreflectivity at or above 100 mcd/m$^2$/lx under dry conditions should be used for longitudinal markings on roadways with speed limits of 70 mph or greater.*

03 *The method used to maintain retroreflectivity should be one or more of those described in "Methods for Maintaining Pavement Marking Retroreflectivity" (FHWA-SA-22-028), 2022 Edition, FHWA or developed from an engineering study based on the values in Paragraphs 1 and 2 of this Section.*

Support:

04 Retroreflectivity levels for pavement markings are measured with an entrance angle of 88.76 degrees and an observation angle of 1.05 degrees. This geometry is also referred to as 30-meter geometry. The units of pavement marking retroreflectivity are reported in mcd/m$^2$/lx, which means millicandelas per square meter per lux.

Option:

05 The following markings may be excluded from the provisions established in Paragraphs 1 and 2 of this Section:

A. Markings where ambient illumination assures that the markings are adequately visible;
B. Markings on streets or highways that have an ADT of less than 6,000 vehicles per day; markings to alert possible wrong-way drivers, as shown in Figure 3A-102(CA) and Figure 3A-105(CA), Details 9A, 12A, and 25A;
C. Dotted extension lines that extend a longitudinal line through an intersection, major driveway, or interchange area (see Section 3B.11);
D. Curb markings;
E. Parking space markings; and
F. Shared-use path markings.

Support:

06 The provisions of this Section do not apply to non-longitudinal pavement markings including, but not limited to, the following:

A. Transverse markings;
B. Word, symbol, and arrow markings;
C. Crosswalk markings; and
D. Chevron, diagonal, and crosshatch markings.

07 Special circumstances will periodically cause pavement marking retroreflectivity to be below the minimum levels. These circumstances include, but are not limited to, the following:


A. Isolated locations of abnormal degradation;
B. Periods preceding imminent resurfacing or reconstruction;
C. Unanticipated events such as equipment breakdowns, material shortages, and contracting problems; and
D. Loss of retroreflectivity resulting from snow maintenance operations.

08 When such circumstances occur, compliance with Paragraphs 1 and 2 of this Section is still considered to be achieved if a reasonable course of action is taken to resume maintenance of minimum retroreflectivity in a timely manner according to the maintaining agency's method(s), policies, and procedures.

# *Figure 3A-101(CA). Centerlines - 2 Lane Highways*

## FOR SPEEDS 40 mph OR LESS


### *DETAIL 1*




**POLICY**

Centerline pattern for use on two-lane streets and highways (normally used on local streets and highways).


### *DETAIL 2*




Centerline pattern with pavement markers for use on two-lane streets and highways.


## FOR SPEEDS 45 mph OR MORE

### *DETAIL 5*




Centerline pattern for use on two-lane streets and highways (normally used on local streets and highways).


### *DETAIL 6*





Centerline pattern with pavement markers for use on two-lane streets and highways.

## CONTRAST STRIPING

### *OPTION 1*




### *OPTION 2*




**NOT TO SCALE**

**LEGEND**


- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- White or Yellow Normal Line
- Black Contrast Striping
- Two-Way Yellow Retroreflective Markers
- Two-Way Retroreflective Markers
- Direction of Travel

# *Figure 3A-102(CA). Lane Lines - Multilane Highways (Sheet 1 of 2)*

**FOR SPEEDS 40 mph OR LESS**


## POLICY

### *DETAIL 8*





Lane Line pattern for use on multilane streets and highways (normally used on local streets and highways).

### *DETAIL 9*




Lane Line pattern with pavement markers for use on multilane streets, and highways.

### *DETAIL 9A*




Lane line pattern with pavement markers for use on multilane streets, highways and freeway ramps.

**NOT TO SCALE**

## LEGEND


- 4 to 6 in. White (for local agencies)
  6 in. White (on State Highway System)
- Direction of Travel
- One-Way Clear Retroreflective Markers
- Red-Clear Retroreflective Markers

# *Figure 3A-102(CA). Lane Lines - Multilane Highways (Sheet 2 of 2)*

**FOR SPEEDS 45 mph OR MORE**


**POLICY**

***DETAIL 11***





Lane Line pattern for use on multilane streets and highways (normally used on local streets and highways).

***DETAIL 12***




Lane Line pattern with pavement markers for use on multilane conventional streets and highways, expressways and collector roads.

***DETAIL 12A***




Lane Line pattern with pavement markers for use on multilane conventional streets and highways, freeways, expressways, freeway ramps, and freeway to freeway connectors.

**NOT TO SCALE**

## LEGEND


- 4 to 6 in. White (for local agencies)
  6 in. White (on State Highway System)
- Direction of Travel
- One-Way Clear Retroreflective Markers
- Red-Clear Retroreflective Markers

# *Figure 3A-103(CA). No Passing Zones - One Direction*

**FOR SPEEDS 40 mph OR LESS**


**POLICY**

***DETAIL 15***




One direction no-passing pattern for use on two-lane streets and highways (normally used on local streets and highways). See Note 2.


***DETAIL 16***

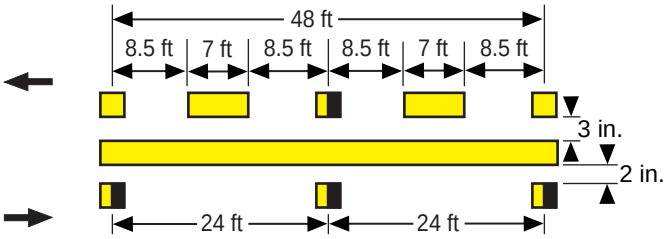


One direction no-passing pattern with pavement markers for use on two-lane streets and highways. See Notes 1 and 2.


**FOR SPEEDS 45 mph OR MORE**

***DETAIL 18***




One direction no-passing pattern for use on two-lane streets and highways (normally used on local streets and highways). See Note 2.

***DETAIL 19***

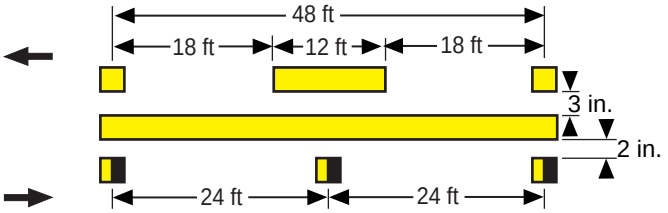


One direction no-passing pattern with pavement markers for use on two-lane streets and highways. See Notes 1 and 2.

**NOT TO SCALE**

**LEGEND**

- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Direction of Travel
- Two-Way Yellow Retroreflective Markers
- One-Way Yellow Retroreflective Markers

Notes:


1. Pavement markers shown off the solid line in Details 16 and 19 may be placed on the line.
2. If the material used for centerline marking is paint, a 3 in. black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

# *Figure 3A-104(CA). No Passing Zones - Two Direction*

### *DETAIL 21*




### *DETAIL 22*

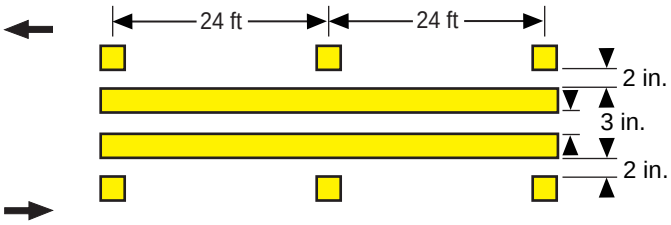


## POLICY

Two-direction no-passing pattern for use on two-lane streets and highways (normally used on local streets and highways). See Note 2.

Two-direction no-passing pattern with pavement markers for use on two-lane streets and highways. See Notes 1 and 2.

**CONTRAST STRIPING**

### *TYPICAL DOUBLE STRIPE CONTRAST DETAIL OPTION*



**NOT TO SCALE**

## LEGEND


- 4 to 6 in. Yellow (for local agencies) 6 in. Yellow (on State Highway System)
- Direction of Travel
- Two-Way Yellow Retroreflective Markers
- White or Yellow Normal Line
- Black Contrast Striping

Notes:

1. Pavement markers shown off the solid line in Detail 22 may be placed on the line.
2. If the material used for centerline marking is paint, a 3 in. black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

## *Figure 3A-105(CA). Left Edge Lines for Divided Highways*


### *DETAIL 24*




**POLICY**


Left Edge Line pattern for use on streets and highways (normally used on local streets and highways).

### *DETAIL 25*





Left Edge Line for use on State highways.

### *DETAIL 25A*




Left Edge Line for use on highways, freeways, freeway ramps and connectors.

### *DETAIL 26*




Alternate to Details 24 and 25 when there is adequate contrast between traveled way and shoulder.

### *DETAIL 27*




Alternate to Detail 25. A double solid yellow line may be used for more emphasis when motorists tend to use the shoulder for a through lane, or where encroachments onto the shoulder occasionally occur. See Note 1.

**NOT TO SCALE**


**LEGEND**

- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Direction of Travel
- One-Way Yellow Retroreflective Markers
- Red-Yellow Retroreflective Markers

Note: If the material used for centerline marking is paint, a 3 in black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

# *Figure 3A-106(CA). Right Edge Line and Right Edge Line Extension Through Intersections*


### *DETAIL 27B - Right Edge Line*




**POLICY**

Right Edge Line pattern for use on all State highways may be used on local streets and highways. It is generally dropped at the beginning of the intersection flares on conventional highways. See also Detail 27C.
On freeways, it may be flared in advance of the exit ramp as shown in Figure 3B-8(CA).

### *DETAIL 27C - Right Edge Line Extension Through Intersections*




Right Edge Line Extension Through Intersections pattern for use to extend the right edgeline through an intersection where climatic conditions, such as areas of heavy fog, may require additional guidance.

**CONTRAST STRIPING**

### *TYPICAL LANE LINE, EDGE LINE, OR CHANNELIZING LINE CONTRAST DETAIL OPTION*





**NOT TO SCALE**

**LEGEND**

- 4 to 6 in. White (for local agencies)
  6 in. White (on State Highway System)
- White or Yellow Normal or Wide line
- Black Contrast Striping
- Direction of Travel

# *Figure 3A-107(CA). Median Islands*


## *DETAIL 28*

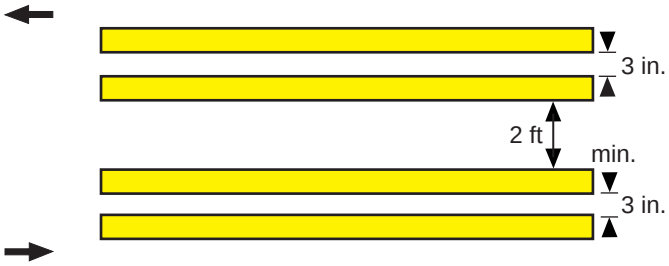


**POLICY**

Double Left Edge Line pattern for use on all-paved sections of streets and highways (normally used on local streets and highways). See Note 2.

## *DETAIL 29*

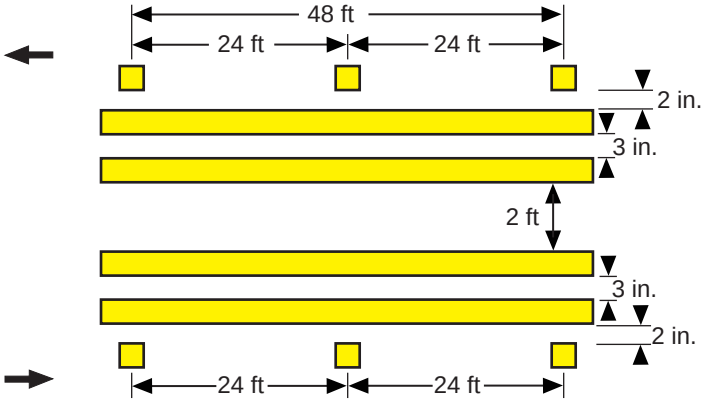


Double Left Edge Line pattern with pavement markers for use on all-paved sections of streets and highways. See Notes 1 and 2.

**NOT TO SCALE**

**LEGEND**


- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Two-Way Yellow Retroreflective Markers
- Direction of Travel

Notes:

1. Pavement markers shown off the solid line in Detail 29 may be placed on the line.
2. If the material used for centerline marking is paint, a 3 in black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.


## *Figure 3A-108(CA). Two-Way Left-Turn Lanes*

### *DETAIL 31*

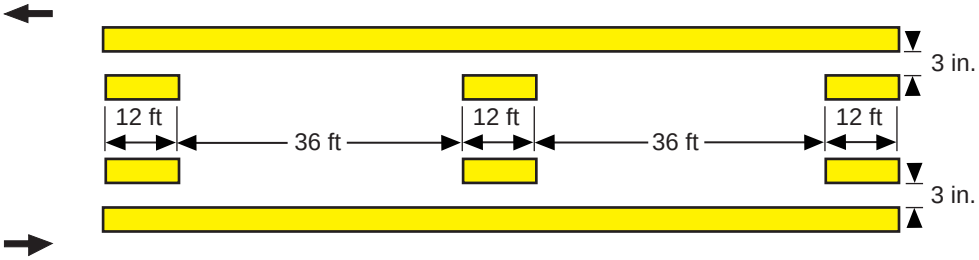


**POLICY** Two-way left-turn lane pattern for use on streets and highways (normally used on local streets and highways). See Note 2.

### *DETAIL 32*

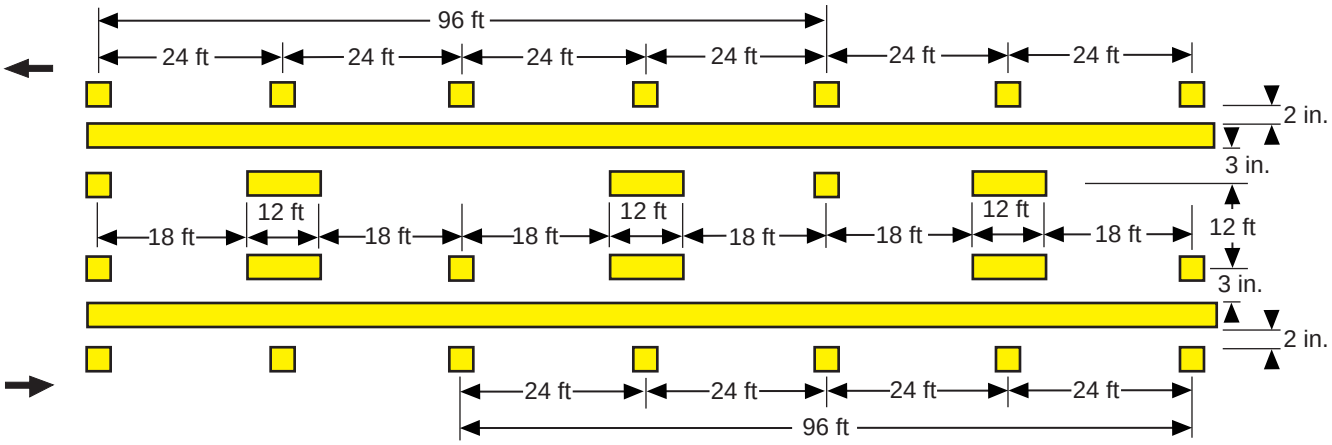


**POLICY** Two-way left-turn lane pattern for use on streets and highways. See Note 2.

**NOT TO SCALE**

**LEGEND**

4 to 6 in. Yellow (for local agencies)
6 in. Yellow (on State Highway System)


Two-Way Yellow Retroreflective Markers

Direction of Travel

Notes:

1. Pavement markers shown off the solid line in Detail 32 may be placed on the line.
2. If the material used for centerline marking is paint, a 3 in. black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

## *Figure 3A-109(CA). Intersection Markings*

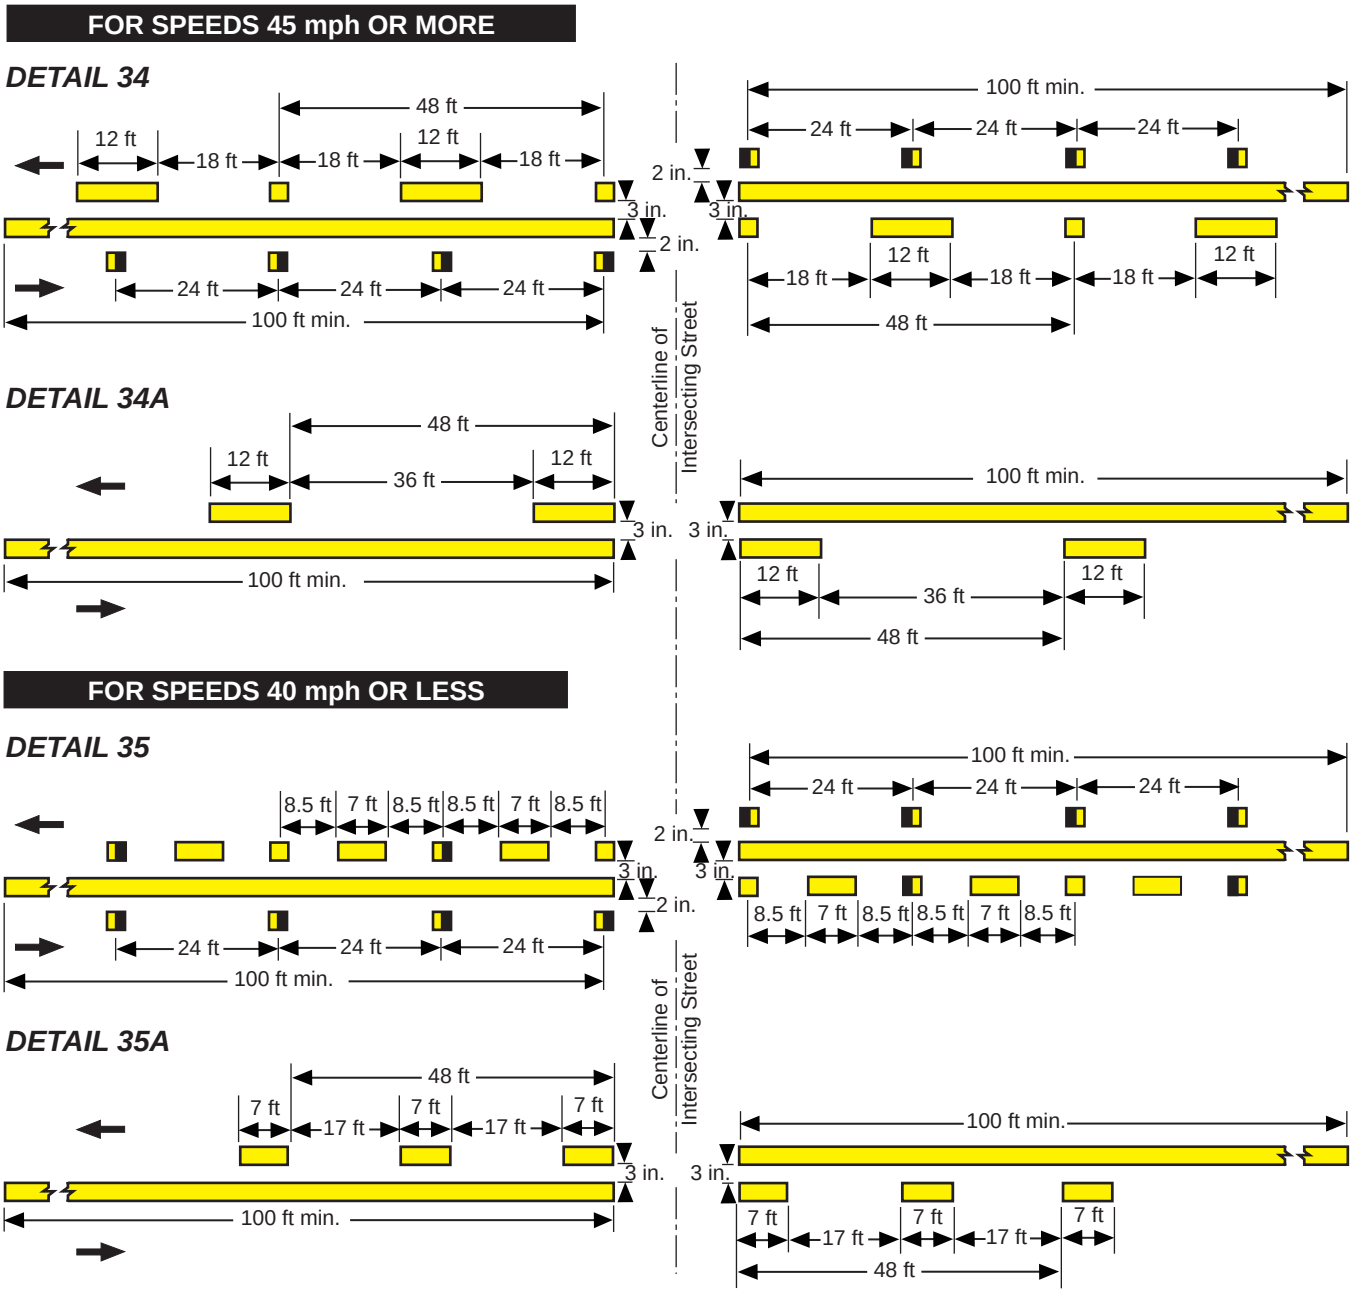


**NOT TO SCALE**

### LEGEND


- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Two-Way Yellow Retroreflective Markers
- One-Way Yellow Retroreflective Markers
- Direction of Travel

Notes:

1. Raised Pavement Markers are optional on non-state highways.
2. Raised Pavement Markers shown off the solid line may be placed on the line.
3. If the material used for centerline marking is paint, a 3 in. black line shall be placed between the yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

## *Figure 3A-110(CA). Freeway Exit and Entrance Ramp Channelizing Line (Sheet 1 of 2)*

### *DETAIL 36 - Exit Ramp Neutral Area (Gore) Channelizing Lines*

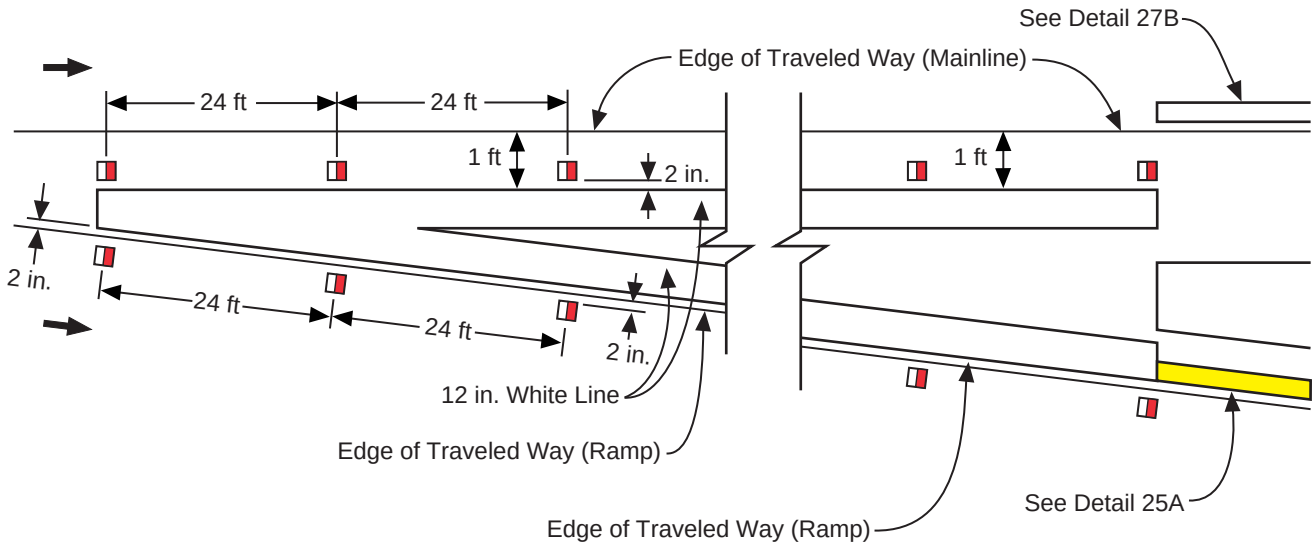


**NOT TO SCALE**


**LEGEND**

- 4 to 6 in. White (for local agencies)
  6 in. White (on State Highway System)
- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Red-Clear Retroreflective Markers
- Direction of Travel


Note: See Figure 3B-9(CA).

## *Figure 3A-110(CA). Freeway Exit and Entrance Ramp Channelizing Lines (Sheet 2 of 2)*

### *DETAIL 36A - Entrance Ramp Neutral Area (Merge) Channelizing Lines*

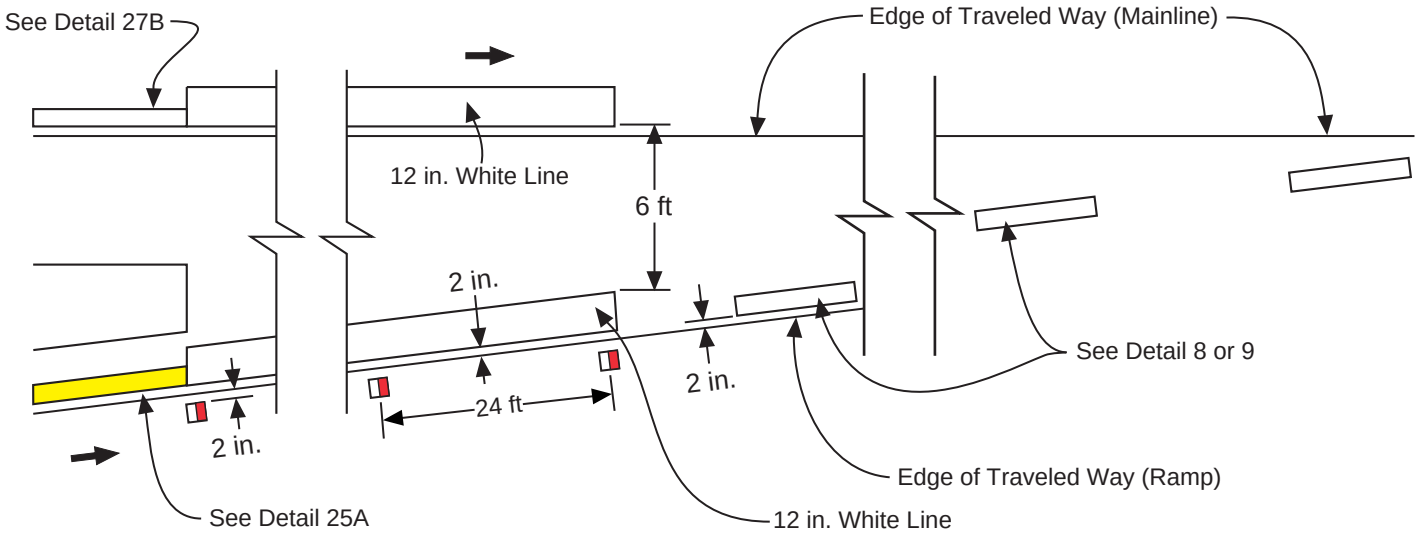


### *DETAIL 36B - Entrance Ramp Neutral Area (Acceleration Lane) Channelizing Lines*

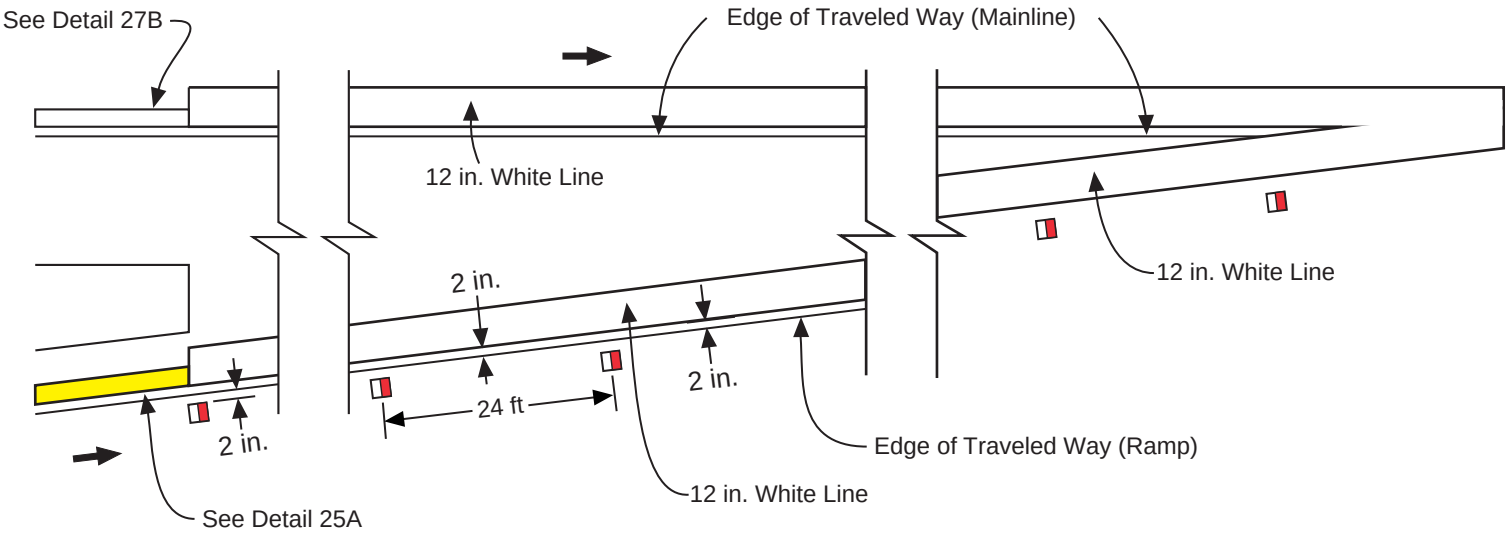


**NOT TO SCALE**

**LEGEND**


- 4 to 6 in. White (for local agencies)
  6 in. White (on State Highway System)
- 4 to 6 in. Yellow (for local agencies)
  6 in. Yellow (on State Highway System)
- Red-Clear Retroreflective Markers
- Direction of Travel

Notes:

1. For Detail 36A, see Figure 3B-10(CA) Sheet 1 of 2.
2. For Detail 36B, see Figure 3B-11(CA) Sheet 1 of 2.


## *Figure 3A-111(CA). Lane Drop Markings*

### *DETAIL 37 - Lane Drop Markings at Exit Ramps*

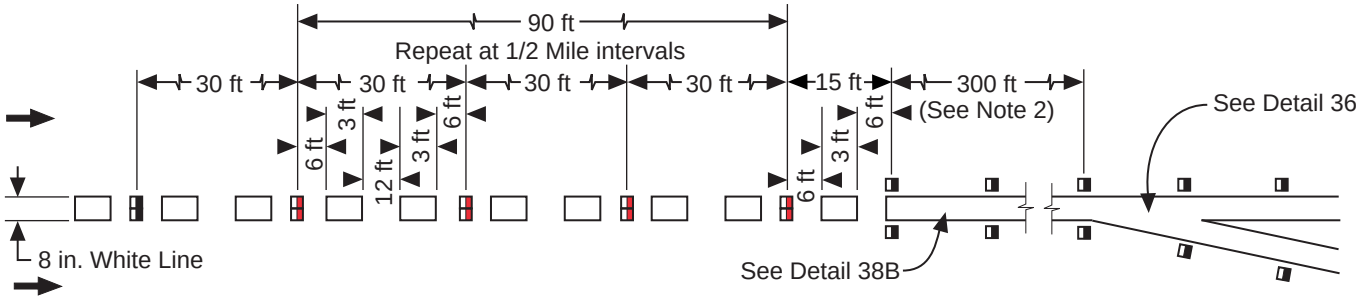



**POLICY** Marking pattern for use on mandatory lane drops at freeway exit ramps and freeway to freeway connectors.

### *DETAIL 37B - Lane Drop Markings at Conventional Highway Intersections*

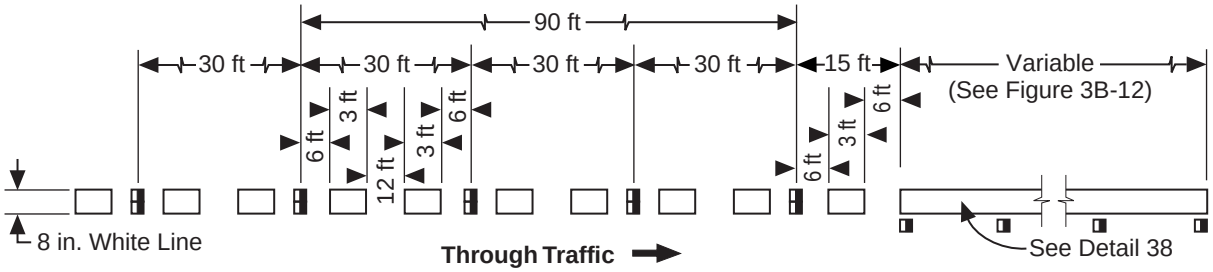


**POLICY** Marking pattern for use on mandatory turn lanes at intersections. Pavement markers shown are optional on local streets and highways.

### *DETAIL 37D - Lane Drop Line For Two-Lane Roundabouts*




**POLICY** For use on mandatory exiting lanes from two-lane roundabouts.

**NOT TO SCALE**

**LEGEND**

Direction of Travel

One-Way Clear Retroreflective Markers


Red-Clear Retroreflective Markers

Notes:

1. Pavement markers shown off the solid line in Detail 37 may be placed on the line.
2. The Solid Channelizing Line shown in Detail 37 may be omitted on short auxiliary lanes where weaving length is critical.

# Figure 3A-112(CA). Channelizing Line and Lane Line/Centerline Extensions

## DETAIL 38 - Channelizing Line




**POLICY**


Typical channelizing line for use on Left-Turn or Right-Turn lanes on State highways. Pavement Markers when used should be placed on the through traffic side only.

## DETAIL 38A - Channelizing Line





Typical channelizing line for use on Left-Turn or Right-Turn lanes on local streets and highways and freeway off-ramp terminals.

## DETAIL 38B - Channelizing Line at Exit Ramps




Typical channelizing line for use on Exit Ramps. Pavement Markers, as shown, may also be placed on the line.

## DETAIL 38D - Channelizing Line at Exit Ramps





Typical channelizing line for use on Exit Ramps. Pavement Markers, as shown, may also be placed on the line.


## DETAIL 39 - Bike Lane Line




## DETAIL 39A - Bike Lane Intersection Line

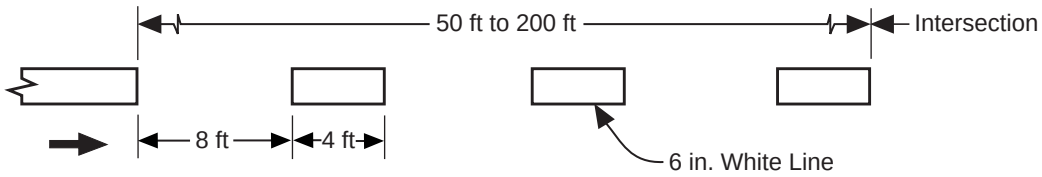



## DETAIL 40 - Lane Line Extension Through Intersections




The Lane Line Extension Through Intersections line is used to extend the lane line through an intersection that might otherwise be confusing to the motorist.


## DETAIL 41 - Centerline Extension Through Intersections




The Centerline Extension Through Intersections line is used to extend the centerline through an intersection that might otherwise be confusing to the motorist.


**NOT TO SCALE**

**LEGEND**



## *Figure 3A-113(CA). Examples of Preferential Lane Lines*


### *DETAIL 42 - Contiguous, Continuous Access*




**POLICY**


Refer to Figure 3E-3.C

### *DETAIL 44A - Contiguous, Access Prohibited*

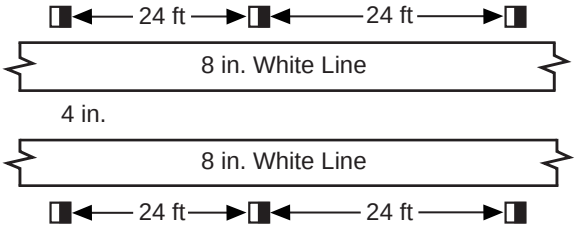



Refer to Figure 3E-3.A

### *DETAIL 44B - Buffer-Separated, Access Prohibited*

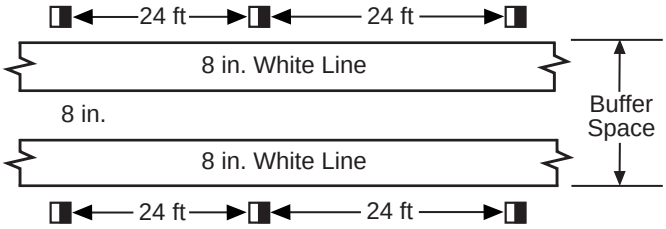


Refer to Figure 3E-2.A

### *DETAIL 45 - Buffer-Separated, Access Prohibited*

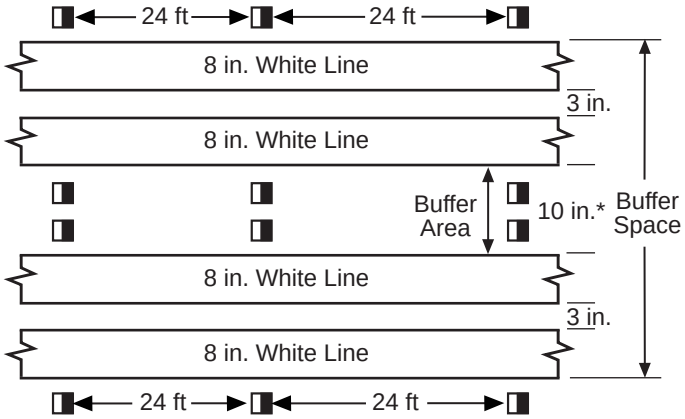


* If buffer area is wider than 4 feet, then chevron markings are required (Refer to Figure 3E-2.A and Section 3B-25).


Refer to Figure 3E-2.A

**NOT TO SCALE**

**LEGEND**


White Line  One-Way Clear Retroreflective Markers

## *Figure 3A-114(CA). Exit Ramp with Enhanced Pavement Markers for Wrong Way Details*





***Detail A***

**Limit Line (Stop Line) at Exit Ramp - Typical (See Note 1)**




***Detail B***

**Limit Line (With Recessed Markers) at Exit Ramp - Typical (See Note 1)**

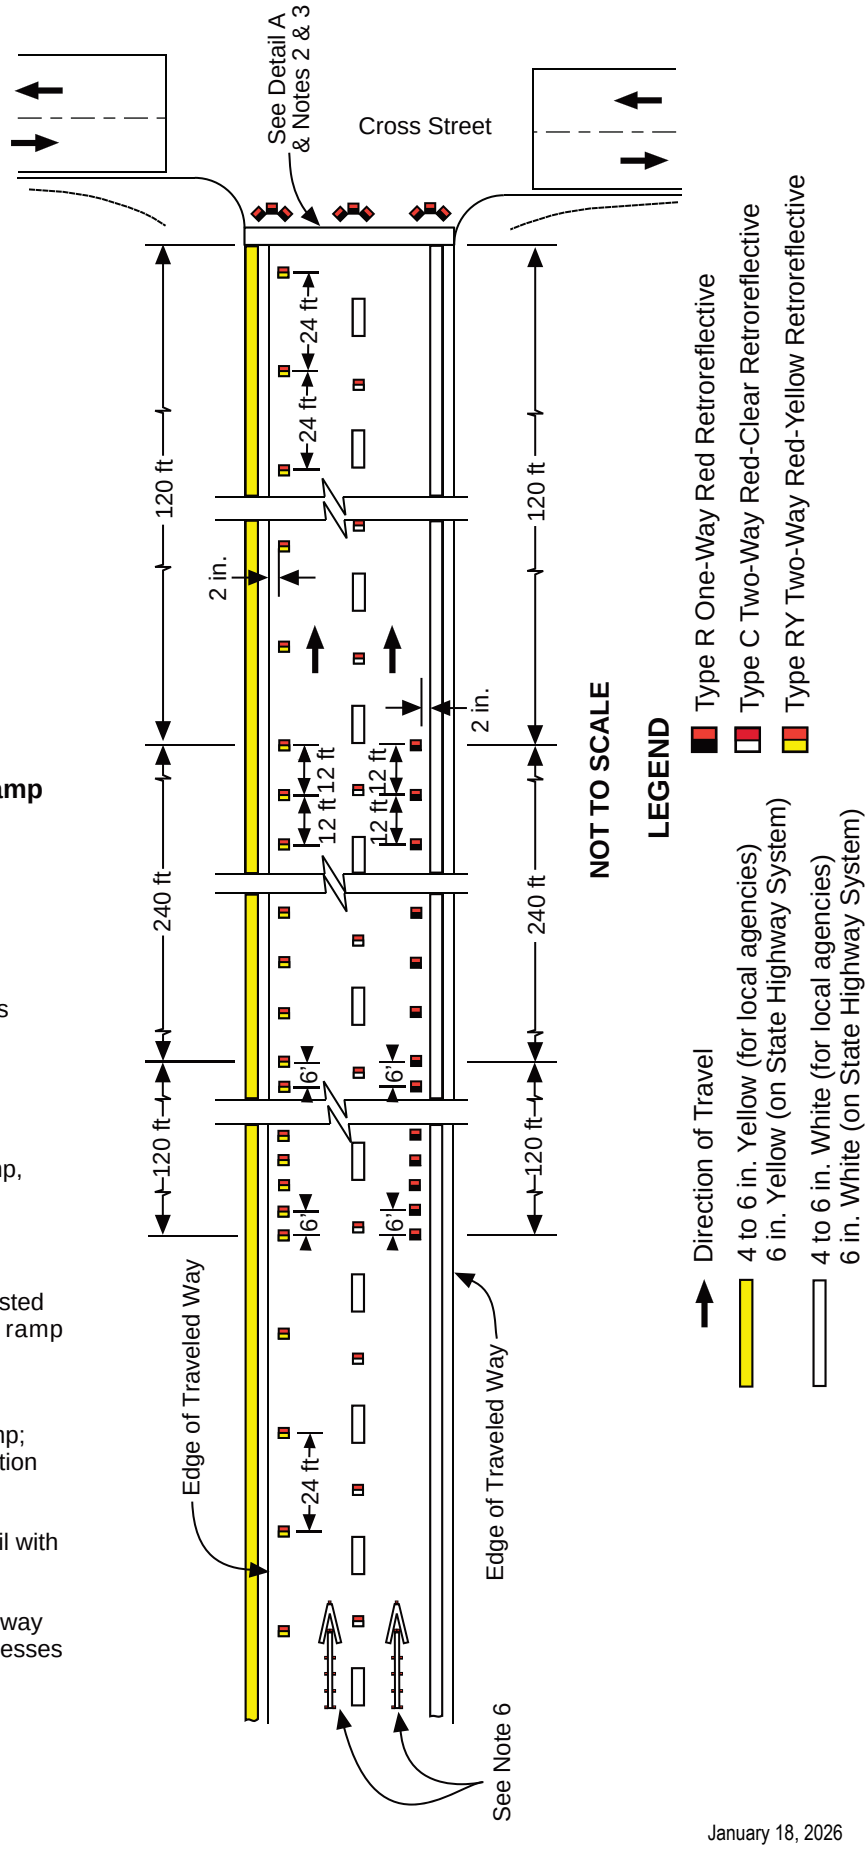


Notes:

1. May be a limit line or crosswalk.
2. Place Type R one-way red retroreflective markers on outermost limit line or crosswalk line with red facing the intersection.
3. If there is crosswalk at the end of the exit ramp, place raised Type R markers in front of the first line for wrong way vehicle that travels up the ramp, and recessed Type R markers in advance of the leading line in the direction of travel with the red reflective side facing the intersection.
4. The distances and marker spacings may be adjusted based on site specific conditions or exit ramp geometry, or loop detectors.
5. The layout shown is a typical detail of an exit ramp; refer to Figure 3B-21(CA) for exit ramp configuration and arrow placement and spacing.
6. Refer to Figure 3B-21(CA) for Type V arrow detail with Type R one-way red retroreflective markers.
7. When pavement markers are recessed, use two-way recesses with two-way markers and one-way recesses with one-way red markers. Configure one-way

# CHAPTER 3B. PAVEMENT AND CURB MARKINGS

## Section 3B.01 Yellow Center Line Pavement Markings

**Standard:**

01 **Center line pavement markings, when used, shall be the pavement markings used to delineate the separation of traffic lanes that have opposite directions of travel on a roadway and shall be yellow.**

Option:

02 Center line pavement markings may be placed at a location that is not the geometric center of the roadway.

03 On roadways without continuous center line pavement markings, short sections may be marked with center line pavement markings to control the position of traffic at specific locations, such as around curves, over hills, on approaches to grade crossings, at grade crossings, and at bridges.

**Standard:**

04 **The center line markings on two-lane, two-way roadways shall be one of the following as shown in Figure 3B-1:**

- **A. Two-direction passing zone markings consisting of a normal width broken yellow line where crossing the center line markings for passing with care is permitted for traffic traveling in either direction;**
- **B. One-direction no-passing zone markings consisting of a double yellow line, one of which is a normal width broken yellow line and the other is a normal width solid yellow line, where crossing the center line markings for passing with care is permitted for the traffic traveling adjacent to the broken line, but is prohibited for traffic traveling adjacent to the solid line; or**
- **C. Two-direction no-passing zone markings consisting of two normal width solid yellow lines where crossing the center line markings for passing is prohibited for traffic traveling in either direction.**

05 **A single solid yellow line shall not be used as a center line marking on a two-way roadway.**

06 **Except where a reversible lane (see Section 3B.04) or a two-way left-turn lane (see Section 3B.05) is present, the center line markings on undivided two-way roadways with four or more lanes for moving motor vehicle traffic always available shall be the two-direction no-passing zone markings consisting of normal width double solid yellow lines as shown in Figure 3B-2.**

*Guidance:*

07 *Section 3B.11 contains information for application of pavement markings through intersections or interchanges.*

08 *On two-way roadways with three through lanes for moving motor vehicle traffic, two lanes should be designated for traffic in one direction by using one-direction or two-direction no-passing zone markings as shown in Figure 3B-3.*

Support:

09 Refer to FHWA's List of Known Errors for error in labeling Paragraph 7. Refer to Section 1A.04 for more details.

## Section 3B.02 Warrants for Yellow Center Lines

**Standard:**

01 **Center line markings shall be placed on all paved undivided two-way urban arterials and collectors that have a traveled way of 20 feet or more in width and an ADT of 6,000 vehicles per day or greater. Center line markings shall also be placed on all paved undivided two-way streets or highways that have three or more lanes for moving motor vehicle traffic.**

*Guidance:*

02 *Center line markings should be placed on paved urban arterials and collectors that have a traveled way of 20 feet or more in width and an ADT of 4,000 vehicles per day or greater. Center line markings should also be placed on all rural arterials and collectors that have a traveled way of 18 feet or more in width and an ADT of 3,000 vehicles per day or greater. Center line markings should also be placed on other traveled ways where an engineering study indicates such a need.*

03 *Engineering judgment should be used in determining whether to place center line markings on traveled ways that are less than 16 feet wide because of the potential for traffic encroaching on the pavement edges, traffic being affected by parked vehicles, and traffic encroaching into the opposing traffic lane.*

Option:

04 Center line markings may be placed on other paved two-way traveled ways that are 16 feet or more in width.

05 If a traffic count is not available, the ADTs described in this Section may be estimates that are based on engineering judgment.

**Standard:**

06 **Centerline patterns shall be selected from those shown in Figures 3A-101(CA) and 3A-104(CA).**

07 **Raised retroreflective pavement markers shall be used to supplement the centerline markings on State highways. If used in snow areas, they shall be recessed.**

Option:

08 Raised retroreflective pavement markers may be used to supplement the centerline markings on highways and conventional roads.

Support:

09 On horizontal curves with radii less than 3280 feet and without street lighting, Detail 22 instead of Detail 21 can be helpful in improving the delineation for centerline markings, as it includes retroreflective raised pavement markers. Detail 22 can be applied in advance of the approach to the curve per Table 2C-3 and continued throughout the length of the curve.

10 Refer to CVC § 21460 for Double Lines.

11 Refer to CVC § 21460.5 for Two-Way Left-Turn Lanes.

**Standard:**

12 **A left edge line shall consist of a solid yellow line of 4 to 6 inches wide for local streets and roads and 6 inches wide on the State Highway System, yellow reflective pavement markers, yellow-red retroreflective markers, or a combination of line and markers as shown in Figure 3A-105(CA).**

Option:

13 Two normal solid yellow lines may be used as a left edge line on a divided roadway for more emphasis when motorists tend to use the shoulder for a through lane or where encroachments onto the shoulder occasionally occur.

Support:

14 Left edge line patterns for median islands are shown in Figure 3A-107(CA).

**Standard:**

15 **When a passing lane is provided, a two-direction no passing marking (refer to Figure 3A-104(CA)) shall be used when the Average Daily Traffic (ADT) exceeds 3,000. Refer to Figure 3B-104(CA).**

Option:

16 Passing in both directions may be provided by alternating the direction of the middle lane at about 1 mile intervals.

17 A one-direction no passing marking (refer to Figure 3A-103(CA)) with one or more YIELD TO UPHILL TRAFFIC (R55(CA)) signs may be used when the ADT is 3,000 or less.

## Section 3B.03 No-Passing Zone Pavement Markings

**Standard:**

01 **No-passing zones shall be marked by either the one-direction no-passing zone pavement markings or the two-direction no-passing zone pavement markings described in Section 3B.01 and shown in Figures 3B-1 and 3B-3.**

02 **No-passing zone markings shall be used on:**

- **A. Two-way roadways at lane-reduction transitions (see Section 3B.12),**
- **B. Approaches to obstructions that must be passed on the right (see Section 3B.13),**
- **C. Approaches to grade crossings (see Section 8C.02), and**
- **D. Approaches to crosswalks.**

03 **On two-way, two-lane or three-lane roadways where center line markings are installed, no- passing zones shall be established at vertical and horizontal curves and other locations where an engineering study indicates that passing must be prohibited because of inadequate sight distances or other special conditions.**

04 **On roadways with center line markings, no-passing zone markings shall be used at horizontal or vertical curves where the passing sight distance is less than the minimum shown in Table 3B-1 for the 85th-percentile speed or the speed limit.**

Support:

05 The passing sight distance on a vertical curve is the distance at which an object 3.5 feet above the pavement surface can be seen from a point 3.5 feet above the pavement (see Figure 3B-4). Similarly, the passing sight distance on a horizontal curve is the distance measured along the center line (or right-hand lane line of a three-lane roadway) between two points 3.5 feet above the pavement on a line tangent to the embankment or other obstruction that cuts off the view

on the inside of the curve (see Figure 3B-4).

06 The upstream end of a no-passing zone at point "a" in Figure 3B-4 is that point where the sight distance first becomes less than that specified in Table 3B-1. The downstream end of the no-passing zone at point "b" in Figure 3B-4 is that point at which the sight distance again becomes greater than the minimum specified.

~~*Guidance:*~~

07 ~~*Where the distance between successive no-passing zones is less than 400 feet, no-passing zone markings should connect the zones.*~~

**Standard:**

07a **If the gap between successive no-passing zones is less than the sight distance for the prevailing speed shown in Table 3B-1, or 400 feet, whichever is greater, the no-passing zone shall be continuous.**

Support:

08 No-passing zone signs (see Sections 2B.36, 2B.37, and 2C.53) are sometimes used to emphasize the existence and extent of a no-passing zone.

**Standard:**

09 **On three-lane roadways where the direction of travel in the center lane transitions from one direction to the other, a no-passing buffer zone, consisting of a flush median island (see Section 3J.03) at least 50 feet in length, shall be provided in the center lane as shown in Figure 3B-5. A lane-reduction transition (see Section 3B.12) shall be provided approaching each end of the buffer zone.**

Support:

10 Refer to CVC §§ 21750 through 21759 for overtaking and passing.

11 Refer to CVC § 21460 for Double Lines.

12 CVC § 21752 restricts passing (driving on the left side of a two-way roadway) when approaching within 100 feet of or when traversing any intersection or railroad grade crossing. CVC § 21752 also restricts passing (driving on the left side of a two-way roadway) when the view is obstructed upon approaching within 100 feet of any bridge, viaduct, or tunnel. The patterns and policy for intersection markings are shown in Figure 3A-109(CA).

**Standard:**

13 **No-passing zone patterns shall be selected from those shown in Figures 3A-103(CA) and 3A-104(CA).**

*Guidance:*

14 *The no-passing zone markings at intersections, when used, should be between 100 feet and 300 feet in length at the approach to an intersection and placed in a pattern as shown in Figure 3A-109(CA).*

## Section 3B.04 Yellow Pavement Markings for Reversible Lanes

**Standard:**

01 **If reversible lanes are used, the lane line pavement markings on each side of reversible lanes shall consist of a normal width broken double yellow line to delineate the edge of a lane in which the direction of travel is reversed from time to time, such that each of these markings serve as the center line markings of the roadway during some period (see Figure 3B-6).**

02 **Signs (see Section 2B.34), lane-use control signals (see Chapter 4T), or both shall be used to supplement reversible lane pavement markings.**

Support:

03 Section 3E.02 contains additional applications of pavement markings for counter-flow preferential lanes that also operate as reversible lanes.

## Section 3B.05 Pavement Markings for Two-Way Left-Turn Lanes

**Standard:**

01 **If a two-way left-turn lane that is never operated as a reversible lane is used, the lane line pavement markings on each side of the two-way left-turn lane shall consist of a normal width broken yellow line and a normal width solid yellow line to delineate the edges of a lane that can be used by traffic in either direction as part of a left-turn maneuver. These markings shall be placed with the broken line toward the two-way left-turn lane and the solid line toward the adjacent traffic lane as shown in Figure 3B-7.**

*Guidance:*

02 *White two-way left-turn lane-use arrows should be used at or just downstream from the beginning of a two-way left-*

*turn lane.*

Option:

03 Additional two-way left-turn lane-use arrow markings may be used at other locations along a two-way left-turn lane where engineering judgment determines that such additional markings are needed to emphasize the proper use of the lane.

**Standard:**

04 **A single-direction lane-use arrow shall not be used in a lane bordered on both sides by yellow two-way left-turn lane longitudinal markings.**

*Guidance:*

05 *Signs should be used in conjunction with the two-way left-turn markings (see Section 2B.32).*

06 *Two-way left-turn lane markings should not extend to intersections (see definition in Section 1C.02).*

Option:

07 Two-way left-turn lanes may be transitioned to mandatory left-turn lanes as shown in Figure 3B-7 or painted median islands where they approach an intersection.

Support:

08 Section 8A.06 contains guidance information for discontinuing a two-way left-turn lane in the immediate vicinity of a highway-rail or highway-LRT grade crossing.

**Standard:**

09 **On State highways, reversible lanes shall be separated by physical barriers or delineators.**

Support:

10 A two-way left-turn lane is a lane reserved in the center of a highway for exclusive use of left or U-turning vehicles. Refer to CVC § 21460.5. It is normally used where there are many points of access.

**Standard:**

11 **The two-way left-turn lane markings shall be selected from those shown in Figures 3B-7 and 3A-108(CA).**

Option:

12 Optional treatments at signalized, major, and minor intersections, as shown in Figure 3B-7(CA), may be used.

13 Two-way opposing pavement arrows may be used as shown in Figure 3B-7(CA). The arrows may be supplemented by a Two-Way Left Turn Lane (R3-9a or R3-9b) sign at new installations and problem locations.

*Guidance:*

14 *A gap in the markings should be made at all intersections.*

Support:

15 For left turn channelization, refer to Figure 3B-101(CA) and Caltrans' Highway Design Manual, Section 405.2. Refer to Section 1A.11 for information regarding this publication.

16 Channelized left-turn lanes in combination with continuous raised-curb medians are used instead of two-way left-turn lanes (TWLTL) if one or more of the following conditions exist:

A. Average daily traffic volumes exceed 20,000 vehicles per day
B. For remediation where there is a demonstrated crash problem,
C. Wherever a need is demonstrated through engineering study.

17 Refer to CVC § 21460.5 for Two-Way Left-Turn Lanes.

18 For details of two-way left-turn lanes, refer to Figure 3B-7(CA). For left turn channelization, refer to Figure 3B-101(CA) and Caltrans' Highway Design Manual, Section 405.2. Refer to Section 1A.05 for information regarding this publication.

## Section 3B.06 White Lane Line Pavement Markings

**Standard:**

01 **When used, lane line pavement markings delineating the separation of traffic lanes that have the same direction of travel shall be white.**

02 **Lane line markings shall be used on all freeways and Interstate highways.**

*Guidance:*

03 *Lane line markings should be used:*

*A. On all roadways that are intended to operate with two or more adjacent traffic lanes in the same direction of travel, except as otherwise required for reversible lanes.*
*B. At congested locations where the roadway will accommodate more traffic lanes with lane line markings than*

*without the markings.*

Support:

04 Examples of lane line markings are shown in Figures 3B-2, 3B-3, ~~and~~ 3B-7 through 3B-13, and 3B-7(CA) through 3B-10(CA).

**Standard:**

05 **Except as provided in Paragraph 1 of Section 3B.07, where crossing the lane line markings with care is not discouraged or prohibited, the lane line markings shall consist of a normal width broken white line.**

06 **Where crossing the lane line markings is discouraged, the lane line markings shall consist of a normal width solid white line.**

*Guidance:*

07 *A solid white lane line marking should be used on approaches to:*

*A. Intersections to separate a through lane from a mandatory turn lane.*
*B. Intersections to separate contiguous mandatory turn lanes from each other.*
*C. Toll collection points to separate toll lanes, payment methods, channelized movements, or obstructions.*

Option:

08 Solid white lane line markings may be used:

A. On approaches to intersections to separate contiguous through lanes.
B. To separate through traffic lanes from auxiliary lanes, such as an added uphill truck lane.
C. On approaches to crosswalks across multi-lane roadways.

09 Wide solid lane line markings may be used for greater emphasis.

10 A curved transition may be used where an edge line, channelizing line, or dotted extension line changes direction.

Support:

11 Examples of locations where a curved transition can have value include freeway exit and entrance ramps, and turn lanes.

**Standard:**

12 **Where crossing the lane line markings is prohibited, the lane line markings shall consist of a double solid white line (see Figure 3B-8).**

13 **Lane line patterns shall be selected from those shown in Figure 3A-102(CA). Detail 9 or 10 (40 mph or less) or Detail 12, 12A, or 13 (45 mph or more) shall be used on freeways, expressways, freeway ramps, freeway to freeway connectors and collector roads, except when used in snow areas, the raised pavement markers, if used, shall be recessed; otherwise, use Detail 8 or 11.**

14 **When a climbing lane is provided on an upgrade and truck lane control signs are used (refer to Section 2B.38), an 8-inch solid white line shall be used in place of the standard lane line stripe.**

## Section 3B.07 White Lane Line Markings for Non-Continuing Lanes

**Standard:**

01 **A normal width dotted white line marking shall be used as the lane line to separate a through lane that continues beyond the interchange or intersection from an adjacent deceleration or acceleration lane.**

02 **For exit ramps with a parallel deceleration lane, a normal width dotted white lane line extension shall be installed from the upstream end of the taper to the theoretical gore or to the upstream end of a solid white lane line, if used, that extends upstream from the theoretical gore as shown in Drawings A and C in Figure 3B-9.**

03 **For an exit ramp with a tapered deceleration lane, a normal width dotted white line extension shall be installed from the theoretical gore through the taper area such that it meets the edge line at the upstream end of the taper as shown in Drawing B in Figure 3B-9.**

04 **For entrance ramps with a parallel acceleration lane, a normal width dotted white lane line shall be installed from the theoretical gore or from the downstream end of a solid white lane line, if used, that extends downstream from the theoretical gore, to a point at least one-half the distance from the theoretical gore to the downstream end of the acceleration taper, as shown in Drawing A in Figure 3B-10 and 3B-10(CA) Sheet 2 of 2.**

Option:

05 For entrance ramps with a parallel acceleration lane, a normal width dotted white line extension may be installed from the downstream end of the dotted white lane line to the downstream end of the acceleration taper, as shown in Drawing A in Figure 3B-10 and 3B-10(CA) Sheet 2 of 2.

06 For entrance ramps with a tapered acceleration lane, a normal width dotted white line extension may be installed from the downstream end of the channelizing line adjacent to the through lane to the downstream end of the acceleration taper, as shown in Drawings B and C in Figure 3B-10 and 3B-10(CA) Sheet 1 of 2.

**Standard:**

06a **White chevron markings (refer to Section 3B.25) shall be placed in the neutral area of exit ramp gores.**

07 **A wide dotted white lane line shall be used:**

- **A. As a lane drop marking in advance of lane drops at exit ramps to distinguish a lane drop from a normal exit ramp (see Drawings A, B, and C in Figure 3B-11),**
- **B. In advance of freeway route splits with dedicated lanes (see Drawing D in Figure 3B-11),**
- **C. In advance of freeway route splits with an option lane (see Drawing E in Figure 3B-11),**
- **D. To separate a through lane that continues beyond an interchange from an adjacent continuous auxiliary lane between an entrance ramp and an exit ramp (see Drawing F in Figure 3B-11 and Figure 3B-11(CA) Sheet 1 of 2),**
- **E. As a lane drop marking in advance of lane drops at intersections to distinguish a lane drop from an intersection through lane (see Drawing A in Figure 3B-12), and**
- **F. To separate a through lane that continues beyond an intersection from an adjacent auxiliary lane between two intersections (see Drawing B in Figure 3B-12).**

*Guidance:*

08 *Lane drop markings used in advance of lane drops at freeway and expressway exit ramps should begin at least ½ mile in advance of the theoretical gore. If the dropped lane is an auxiliary lane 1/2 mile or less in length, the lane drop line should extend throughout the entire length.*

09 *On the approach to a multi-lane exit ramp having an optional exit lane that also carries through traffic, lane line markings should be used as illustrated in Drawing B in Figure 3B-11.*

10 *Lane drop markings used in advance of lane drops at intersections should begin a distance in advance of the intersection that is determined by engineering judgment as suitable to enable drivers who do not desire to make the mandatory turn to move out of the lane being dropped prior to reaching the queue of vehicles that are waiting to make the turn. The lane drop markings should begin no closer to the intersection than the most upstream regulatory or warning sign associated with the lane drop.*

11 *The dotted white lane lines that are used for lane drop markings and that are used as a lane line separating through lanes from auxiliary lanes should consist of line segments that are 3 feet in length separated by 9-foot gaps.*

**Standard:**

11a **The lane drop line pattern shall be as shown in Figure 3A-111(CA).**

Support:

11b Refer to Figures 3A-111(CA), 3B-9(CA), 3B-10(CA), 3B-14(CA) and 3B-104(CA) for further details of markings and signing.

Option:

11c A 8-inch wide single solid white line preceded by an 8-inch wide dotted white line may be placed in advance of an intersection where the outside lane is dropped at the intersection, and as a result, creates a mandatory turn lane.

**Standard:**

11d **If used, diagonal lines shall be the same color as the edge line.**

Support:

12 Sections 3B.21 and 3B.23 contain information regarding other markings that are associated with lane drops, such as ONLY word pavement markings and lane-use arrows.

13 Section 3B.12 contains information about the lane line markings that are to be used for transition areas where the number of through lanes is reduced at a location that is not at an interchange or intersection.

Option:

14 In the case of a lane drop at an exit ramp or intersection, a solid white line may replace a portion, but not all of the length, of the wide dotted white lane line.

**Standard:**

15 **Left-turn or right-turn lanes shall be separated from the through lanes by a single solid 8-inch-wide white line as shown in Figure 3A-112(CA) except as provided in paragraph 16.**

Option:

16 Left-turn or right-turn lanes may be separated from the through lanes by multiple solid 8-inch-wide white lines or two longitudinal

solid 8-inch-wide lines with diagonal lines used for crosshatch markings.

## Section 3B.08 Channelizing Lines

Support:

01 Channelizing lines are used to form neutral areas where traffic traveling in the same general direction is permitted on both sides including entrance and exit ramps, access and egress points to and from managed lanes, toll-plaza bypasses, and left-turn lanes separated from through lanes. Channelizing lines are also sometimes used to alter travel paths for speed management or other purposes.

02 Chapter 3J contains information for the application of channelizing lines used in conjunction with islands.

**Standard:**

03 **Except as provided in Section 3E.04 and Paragraph 6 of Section 3J.05, a channelizing line shall be a solid wide or double solid white line.**

Support:

04 Examples of channelizing line applications are shown in Figures 3B-9, 3B-10, 3B-10(CA), 3B-11, Drawing C in Figure 3B-15, Figures 3J-1 through 3J-5, and Drawing B in Figure 3J-6.

**Standard:**

05 **For all exit ramps and for entrance ramps with parallel acceleration lanes, channelizing lines shall be placed on both sides of the neutral area (see Figures 3B-9 and 3B-11, 3B-9(CA), 3B-10(CA) Sheet 2 of 2, and Drawing A in Figure 3B-10).**

06 **For entrance ramps with tapered acceleration lanes, channelizing lines shall be placed along both sides of the neutral area to a point at least one-half of the distance to the theoretical gore (see Drawing C in Figure 3B-10 and Figure 3B-10(CA) Sheet 1 of 2).**

07 **Channelizing lines shall be placed on both sides of the neutral area for bifurcations created from open-road tolling lanes that bypass a conventional toll plaza.**

08 **Where neutral areas are formed at access and egress points to and from a managed-lane facility, channelizing lines shall be placed on both sides of the neutral area (see Figures 2G-8, 2G-10, 2G-13, 2G-16, 2G-22, 2G-23, 2G-27, and 2G-28).**

Option:

09 For entrance ramps with tapered acceleration lanes, the channelizing lines may extend to the theoretical gore as shown in Drawing B in Figure 3B-10 and 3B-10(CA) Sheet 1 of 2.

**Standard:**

10 **Other pavement markings in the neutral area shall be white.**

Support:

11 Pavement markings within the neutral area include chevron markings (see Section 3B.25), retroreflective raised pavement markers (see Section 3B.16), and internally illuminated raised pavement markers (see Section 3B.16).

## Section 3B.09 Edge Line Pavement Markings

**Standard:**

01 **If used, edge line pavement markings shall delineate the right or left edges of a roadway.**

02 **Except as provided in Section 3E.04, right edge line pavement markings, if used, shall consist of a normal width solid white line to delineate the right-hand edge of the roadway.**

03 **If used on the roadways of divided highways or one-way streets, or on any ramp in the direction of travel, left edge line pavement markings shall consist of a normal width solid yellow line to delineate the left-hand edge of a roadway or to indicate driving or passing restrictions left of these markings, except as provided in Section 3E.04.**

Support:

04 Edge line markings provide visual references to guide road users during adverse weather and visibility conditions.

Option:

05 Wide solid edge line markings may be used for greater emphasis. Support:

06 Increasing edge line width from 4 inches to at least 6 inches can be a beneficial countermeasure on all facility types in both urban and rural areas.

*Guidance:*

07 *Edge line markings should not be continued through intersections, except for the following situations:*

*A. Dotted edge line extensions (see Section 3B.11), or*

*B. Through that part of an intersection with no intersection approach (such as the far side of a T- intersection).*

Support:

08 Section 3B.11 contains information on the use and application of edge lines through intersections, interchanges, and driveways.

**Standard:**

09 **A right edge line shall consist of a solid white line of 4 to 6 inches for local streets and roads, and 6 inches on the State Highway System.**

*Guidance:*

10 *The edge line should be placed 2 inches in from the edge of the traveled way, approximately 12 feet from the lane line or centerline on highway mainlines, ramps, and connectors. Refer to Figure 3A-106(CA).*

11 *Generally, the solid edge line should be dropped at the beginning of intersection flares.*

Option:

12 In heavy fog areas, or locations where additional guidance would be beneficial, a dotted 4-inch-wide white right-edge line may be continued across an intersection.

Support:

13 Edge line is not used at turnouts. Refer to Figure 3B-105(CA).

**Standard:**

14 **Exit and entrance ramps, including freeway connectors, shall be marked with a yellow edge line supplemented with yellow-red reflective pavement markers on the left and a white edge line on the right. Refer to Figure 3A-105(CA).**

15 **Exit ramps shall be further supplemented with enhanced reflective pavement marker spacings on the right and left edge lines. Enhanced blank-red pavement marker spacings shall be used at a closely spaced pattern on white right edge lines, and enhanced yellow-red reflective pavement marker spacing shall be used at a closely spaced pattern on yellow left edge lines. Refer to Figure 3A-114(CA)**

*Guidance:*

16 *If used, the enhanced spacing retroreflective pavement markers should be placed at a minimum of 120 feet from the ramp terminus. The spacing should be 12 feet, typical for 240 feet, and 6 feet, typical for an additional 120 feet. Refer to Figure 3A-114(CA).*

**Standard:**

17 **When the blank-red retroreflective pavement markers are placed along the white right Edge line, the side that is visible to traffic proceeding in the wrong direction shall be red, and the side visible to approaching traffic shall be blank.**

## Section 3B.10 Warrants for Use of Edge Lines

**Standard:**

01 **Edge line markings shall be placed on paved streets or highways with the following characteristics:**

**A. Freeways,**

**B. Expressways, and**

**C. Rural arterials with a traveled way of 20 feet or more in width and an ADT of 6,000 vehicles per day or greater.**

*Guidance:*

02 *Edge line markings should be placed on paved streets or highways with the following characteristics:*

*A. Rural arterials and collectors with a traveled way of 20 feet or more in width and an ADT of 3,000 vehicles per day or greater.*

*B. On other paved streets and highways where an engineering study indicates a need for edge line markings.*

03 *Edge line markings should not be placed where an engineering study or engineering judgment indicates that providing them is likely to decrease safety for all road users.*

Option:

04 Edge line markings may be placed on streets and highways with or without center line markings.

05 Edge line markings may be excluded, based on engineering judgment, for reasons such as if the traveled way edges are delineated by curbs, parking, or other markings.

06 If a bicycle lane is marked on the outside portion of the traveled way, the edge line that would mark the outside edge of the bicycle lane may be omitted.

07 Edge line markings may be used where edge delineation is desirable to minimize unnecessary driving on paved shoulders or on refuge areas that have lesser structural pavement strength than the adjacent roadway.

**Standard:**

08 **Edge lines shall be used on all State highways, except urban-type streets with curbs and parking provisions.**

Option:

09 The Two-Way Traffic (W6-3) sign may be used in conjunction with edge lines at locations where road users could perceive that they are on a one-way roadway when, in fact, they are on a two-lane, two-way highway. Refer to Section 2C.51 for the W6-3 sign.

## Section 3B.11 Application of Pavement Markings Through Intersections or Interchanges

**Standard:**

01 **Pavement markings extended into or continued through an intersection or interchange area shall be the same color as the line markings they extend (see Figure 3B-13).**

*Guidance:*

02 *Pavement markings extended into or continued through an intersection or interchange area should be at least the same width as the line markings they extend.*

03 *Where highway design or reduced visibility conditions make it desirable to provide control or to guide vehicles through an intersection or interchange, such as at offset, skewed, complex, or multi-leg intersections, on curved roadways, where multiple turn lanes are used, or where offset left-turn lanes might cause driver confusion, dotted lane line extension markings consisting of 2-foot line segments and 2-foot to 6- foot gaps should be used to extend longitudinal line markings through an intersection or interchange area.*

04 *Where greater restriction is preferred, solid lane lines or channelizing lines should be extended into or continued through intersections.*

**Standard:**

05 **Extensions of center lines through intersections shall be dotted lines.**

*Guidance:*

06 *Where a double line is extended through an intersection, a single line of equal width to one of the lines of the double line should be used.*

**Standard:**

07 **Solid lines shall not be used to extend edge lines into or through intersections except through that part of an intersection with no intersecting approach (such as at the far side of a T-intersection).**

*Guidance:*

08 *Edge line markings should be discontinued across intersecting approaches at intersections or interchanges.*

09 *Driveways that do not meet the definition of an intersection (see Section 1C.02) should have edge line markings maintained across the intersecting approach of the driveway.*

Option:

10 Dotted edge line extensions may be placed through intersections.

Support:

11 Section 3B.31 contains information about edge lines through diverging diamond interchanges with a transposed alignment crossroad.

12 Section 3D.03 provides information for edge lines through roundabouts.

13 Section 5B.02 contains information on edge line extensions for driving automation system considerations.

14 Section 8C.05 contains information about the extension of edge lines through grade crossing areas.

15 Section 9E.03 contains information for the extensions of bicycle lanes through intersections.

Support:

16 Refer to Figure 3A-112(CA), Detail 40 and 40A for lane line extensions.

## Section 3B.12 Lane-Reduction Transitions

Support:

01 A lane-reduction is where the number of through lanes is reduced at a location that is not at an interchange or intersection because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane.

02 Section 3B.07 contains information on pavement markings for lane drops and splits.

03 Section 2C.47 contains information for warning signing used for lane reductions.

**Standard:**

04 **Lane-reduction transitions (see Figure ~~3B-14~~ 3B-14(CA)) shall include the following elements:**

**A. A no-passing zone (see Section 3B.03) to prohibit passing in the direction of the convergence and through the transition area except where not applicable such as one-way streets, expressways, and freeways; and**

**B. An edge line (see Section 3B.09) in the direction of the convergence and through the transition area, except as provided in Paragraph 6 of this Section.**

*Guidance:*

05 *Except as provided in Paragraph 6 of this Section, the edge line marking should be installed from the location of the Lane Ends warning sign to beyond the beginning of the narrower roadway.*

Option:

06 On roadways with operating speeds less than 25 mph where curbs clearly define the roadway edge in the lane-reduction transition, or where a through lane becomes a parking lane, the edge line may be omitted as determined by engineering judgment.

*Guidance:*

07 *Lane-reduction transitions should include the following elements:*

*A. Delineators installed adjacent to the lane or lanes reduced for the full length of the transition and should be so placed and spaced (see Section 3G.04) to show the reduction except as provided in Paragraph 13 of this Section and except as provided in Paragraph 2 of Section 3G.03 for freeways and expressways,*

*B. Lane-reduction arrow markings (see Drawing F in Figure 3B-21) on the roadway with a speed limit of 45 mph or more, and*

*C. A termination of the broken white lane line at a point that is ¼ of the advance placement distance (see Section 2C.04) between the Lane Ends sign (see Section 2C.47) and the point where the transition taper begins.*

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 07, Item B text. Refer to Section 1A.04 for more details.

*Guidance:*

08 *For roadways having a speed limit of 45 mph or greater, the transition taper length for a lane- reduction transition should be computed by the formula L = WS, where L equals the taper length in feet, W equals the width of the offset distance in feet, and S equals the 85th-percentile speed or the speed limit in mph, whichever is higher. For roadways where the speed limit is less than 45 mph, the formula $L = WS^2/60$ should be used to compute the taper length.*

09 *The minimum lane reduction transition taper length should be 100 feet in urban areas and 200 feet in rural areas.*

10 *Where observed speeds exceed speed limits, longer tapers should be used.*

Option:

11 The minimum taper length may be less than 100 feet on roadways where the operating speed is less than 25 mph.

12 On new construction, where no speed limit has been established, the design speed may be used in the transition taper length formula.

13 On low-speed urban roadways where curbs clearly define the roadway edge in the lane-reduction transition, or where a through lane becomes a parking lane, delineators may be omitted as determined by engineering judgment.

14 Where a lane-reduction transition occurs on a roadway with a speed limit of less than 45 mph, lane- reduction arrow markings may be used.

15 Lane-reduction arrow markings may be used in long acceleration lanes based on engineering judgment.

16 A dotted white line may be used between the point where the broken white lane line is terminated to the point where the transition taper begins.

Support:

17 Typical lane reduction transitions (four lane to two lane) and transitions from two lanes to four lanes are shown in Figure 3B-14(CA).

## Section 3B.13 Approach Markings for Obstructions

**Standard:**

01 **Pavement markings shall be used to guide traffic away from fixed obstructions within a paved roadway. Approach markings for bridge supports, refuge islands, median islands, toll plaza islands, and raised channelization islands shall consist of a tapered line or lines extending from the center line or the lane line to a**

**point 1 to 2 feet to the right-hand side, or to both sides, of the approach end of the obstruction (see Figure 3B-15).**

*Guidance:*

02 *For roadways having a speed limit of 45 mph or greater, the taper length of the tapered line markings should be computed by the formula L = WS, where L equals the taper length in feet, W equals the width of the offset distance in feet, and S equals the 85th-percentile speed or the speed limit, whichever is higher. For roadways where the speed limit is less than 45 mph, the formula $L = WS^2/60$ should be used to compute the taper length.*

03 *The minimum taper length should be 100 feet in urban areas and 200 feet in rural areas.*

Option:

04 The minimum taper length may be less than 100 feet on roadways where the operating speed is less than 25 mph.

**Standard:**

05 **If traffic is required to pass only to the right of the obstruction, the markings shall consist of a two-direction no-passing zone marking at least twice the length of the diagonal portion as determined by the appropriate taper formula (see Drawing A in Figure 3B-15).**

Option:

06 If traffic is required to pass only to the right of the obstruction, yellow diagonal markings (see Section 3B.25) may be placed in the flush median islands (see Section 3J.03) between the no-passing zone markings as shown in Drawings A and B in Figure 3B-15.

**Standard:**

07 **If traffic can pass either to the right or left of the obstruction, the markings shall consist of two channelizing lines diverging from the lane line, one to each side of the obstruction. In advance of the point of divergence, a wide solid white line or normal width double solid white line shall be extended in place of the broken lane line for a distance equal to the length of the diverging lines (see Drawing C in Figure 3B-15).**

Option:

08 If traffic can pass either to the right or left of the obstruction, additional white chevron markings (see Section 3B.25) may be placed in the flush neutral area between the channelizing lines as shown in Drawing C in Figure 3B-15. Other markings, such as white delineators, white channelizing devices, white raised pavement markers, and white crosswalk markings may also be placed in the flush neutral area.

## Section 3B.14 Raised Pavement Markers – General

**Standard:**

01 **The color of raised pavement markers under both daylight and nighttime conditions shall conform to the color of the marking for which they serve as a positioning guide, or for which they supplement or substitute.**

Option:

02 The side of a raised pavement marker that is visible to traffic proceeding in the wrong direction may be red (see Section 3A.03).

03 Retroreflective or internally illuminated raised pavement markers may be used in the roadway immediately adjacent to curbed approach ends of raised medians and curbs of islands, or on top of such curbs (see Section 3J.06).

**Standard:**

04 **When used, internally illuminated raised pavement markers shall be steadily illuminated and shall not be flashed.**

Support:

05 Flashing raised pavement markers are considered to be In-Roadway Lights (see Chapter 4U).

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

*Guidance:*

06 *The spacing of raised pavement markers used to supplement or substitute for other types of longitudinal markings should correspond with the pattern of broken lines for which the markers supplement or substitute.*

**Standard:**

07 ~~**The value of N cited in Sections 3B.15 through 3B.17 for the spacing of raised pavement markers shall equal the length of one line segment plus one gap of the broken lines used on the highway.**~~

07a **The widths and patterns of raised pavement markers shall conform to the details shown in Figures 3A-101(CA) through 3A-114(CA). Refer to Section 3A.04.**

Option:

08 For additional emphasis, retroreflective raised pavement markers may be spaced closer than described in Sections 3B.15 through 3B.17, as determined by engineering judgment or engineering study.

Support:

09 Section 9A.03 contains information for the application of raised pavement markers to bicycle facilities.

Support:

10 Raised pavement markers are not normally placed where snowplows would damage the markers and require an unusual amount of replacement, unless recessed.

*Guidance:*

11 *When used in these areas, they should be recessed, as shown in Caltrans' Standard Plan A20-D. Refer to Section 1A.05 for information regarding this publication.*

**Advance Markers**

Option:

12 Advance Markers at exit ramps may be used to help motorists locate exit ramps in heavy fog areas.

Support:

13 The Advance Markers consist of a 3-2-1 countdown pattern of one-way clear reflective pavement markers. The pattern consists of three markers placed on the right shoulder 2100 feet in advance of the neutral area (gore), two markers at 1400 feet, and one marker at 700 feet. The markers are placed on a line perpendicular to the lane line at 1-foot spacing, beginning 2 inches off the edge of the traveled way.

## Section 3B.15 Raised Pavement Markers as Vehicle Positioning Guides with Other Longitudinal Markings

Option:

01 Retroreflective or internally illuminated raised pavement markers may be used as positioning guides with longitudinal line markings without necessarily conveying information to the road user about passing or lane-use restrictions. In such applications, markers may be positioned in line with or immediately adjacent to a single line marking, or positioned between the two lines of a double center line or double lane line marking.

~~*Guidance:*~~

02 ~~*Except as otherwise provided in Paragraphs 3 and 4 of this Section, the spacing for such applications should be 2N (see Section 3B.14).*~~

Option:

03 Where it is desired to alert the road user to changes in the travel path, such as on sharp curves or on transitions that reduce the number of lanes or that shift traffic laterally, the spacing ~~may be reduced to N or less~~ shown in Details 16, 17, 19, 20, 22 or 23 may be used.

04 ~~On freeways and expressways, the spacing may be increased to 3N for relatively straight and level roadway segments where engineering judgment indicates that such spacing will provide adequate delineation under wet night conditions.~~

**Standard:**

05 **The widths and patterns of raised pavement markers shall conform to the details shown in Figures 3A-101(CA) through 3A-114(CA). Refer to Section 3A.04.**

## Section 3B.16 Raised Pavement Markers Supplementing Other Markings

*Guidance:*

01 *The use of retroreflective or internally illuminated raised pavement markers for supplementing longitudinal line markings should comply with the following:*

- *A. Lateral Positioning*
  - *1. When supplementing double line markings, pairs of raised pavement markers placed laterally in line with or immediately outside of the two lines should be used.*
  - *2. When supplementing wide line markings, pairs of raised pavement markers placed laterally adjacent to each other should be used.*
- *B. Longitudinal Spacing*
  - *1. ~~When supplementing solid line markings, raised pavement markers at a spacing no greater than N (see~~*

~~*Section 3B.14) should be used, except that when supplementing channelizing lines or edge line markings, a spacing of no greater than N/2 should be used.*~~

2. ~~*When supplementing broken line markings, a spacing no greater than 3N should be used. However, when supplementing broken line markings identifying reversible lanes, a spacing of no greater than N should be used.*~~
3. *When supplementing dotted lane line markings, a spacing appropriate for the application should be used.*
4. *When supplementing longitudinal line extension markings through at-grade intersections, one raised pavement marker for each short line segment should be used.*
5. ~~*When supplementing line extensions through freeway interchanges, a spacing of no greater than N should be used.*~~

02 *Raised pavement markers should not supplement right-hand edge lines unless an engineering study or engineering judgment indicates the benefits of enhanced delineation of a curve or other location would outweigh possible impacts on bicyclists using the shoulder, and the spacing of raised pavement markers on the right-hand edge does not simulate a broken line during wet night conditions.*

02a *One-way blank-red retroreflective raised pavement markers should supplement wrong-way arrows, limit lines/stop lines, yield lines, or crosswalk markings used at freeway exit ramps*

Option:

03 Raised pavement markers also may be used to supplement other markings such as channelizing islands, gore areas, approaches to obstructions, or wrong-way arrows.

04 To improve the visibility of horizontal curves, center lines may be supplemented with retroreflective or internally illuminated raised pavement markers for the entire curved section as well as for a distance in advance of the curve that approximates 5 seconds of travel time.

**Standard:**

05 **The widths and patterns of raised pavement markers shall conform to the details shown in Figures 3A-101(CA) through 3A-114(CA). Refer to Section 3A.04.**

06 **When the one-way blank-red retroreflective raised pavement markers are placed along the type V arrow, limit lines, yield lines, or crosswalk markings, the side that is visible to traffic proceeding in the wrong direction shall be red and the side visible to approach traffic shall be blank.**

## Section 3B.17 Raised Pavement Markers Substituting for Pavement Markings

Option:

01 Retroreflective or internally illuminated raised pavement markers, or non-retroreflective raised pavement markers supplemented by retroreflective or internally illuminated markers, may be substituted for markings of other types.

*Guidance:*

02 *If used, the pattern of the raised pavement markers should simulate the pattern of the markings for which they substitute.*

**Standard:**

03 **Non-retroreflective raised pavement markers shall not be used alone, without supplemental retroreflective or internally illuminated markers, as a substitute for other types of pavement markings.**

Support:

04 Section 6J.02 contains information for flexible temporary pavement markers used during surface treatment paving operations.

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

**Standard:**

05 **If raised pavement markers are used to substitute for broken line markings, a group of three to five markers ~~equally spaced at a distance no greater than N/8 (see Section 3B.14)~~ shall be used. ~~If N is other than 40 feet, the markers shall be equally spaced over the line segment length (at ½ points for three markers, at ⅓ points for four markers, and at ¼ points for five markers).~~ At least one retroreflective or internally illuminated marker per group shall be used or a retroreflective or internally illuminated marker shall be installed midway in each gap between successive groups of non- retroreflective markers.**

06 ~~**When raised pavement markers substitute for solid line markings, the markers shall be equally spaced at no greater than N/4, with retroreflective or internally illuminated units at a spacing no greater than N/2.**~~

*Guidance:*

07 *Raised pavement markers should not substitute for right-hand edge line markings unless an engineering study or engineering judgment indicates the benefits of enhanced delineation of a curve or other location would outweigh possible impacts on bicyclists using the shoulder, and the spacing of raised pavement markers on the right-hand edge line does not simulate a broken line during wet night conditions.*

**Standard:**

08 ~~**When raised pavement markers substitute for dotted lines, they shall be spaced at no greater than N/4, with not less than one raised pavement marker per dotted line segment. At least one raised marker every N shall be retroreflective or internally illuminated.**~~

Option:

09 When substituting for wide lines, raised pavement markers may be placed laterally adjacent to each other to simulate the width of the line.

Support:

10 Section 5B.02 contains information on raised pavement marker considerations for driving automation systems.

## Section 3B.18 Curb Markings for Parking Regulations

*Guidance:*

01 *Except as provided in Paragraph 4 of this Section, since yellow and white curb markings are frequently used for curb delineation and visibility, parking regulations should be established through the installation of standard signs (see Sections 2B.53 and 2B.54).*

02 *Where curbs are marked to convey parking regulations in areas where curb markings are frequently obscured by snow and ice accumulation, signs should be used with the curb markings except as provided in Paragraph 4 of this Section.*

03 *Except as provided in Paragraph 4 of this Section, when curb markings are used without signs to convey parking regulations, a legible word marking regarding the regulation (such as "No Parking" or "No Standing") should be placed on the curb.*

Option:

04 Curb markings without word markings or signs may be used to convey a general prohibition by statute of parking within a specified distance of a STOP sign, YIELD sign, driveway, fire hydrant, or crosswalk.

05 Local highway agencies may prescribe special colors for curb markings to supplement standard signs for parking regulation.

Support:

06 Refer to Sections 2C.70 through 2C.73 for marking noses of raised medians and curbs of islands with object markers.

07 Refer to Section 2B.52 for Parking Regulations.

08 In California, curb markings are not used for delineating traffic. They are mainly used for parking regulations.

**Standard:**

09 **The color of curb markings shall conform to CVC § 21458 quoted below:**

**(a) Whenever local authorities enact local parking regulations and indicate them by the use of paint upon curbs, the following colors only shall be used, and the colors indicate as follows:**

**(1) Red indicates no stopping, standing, or parking, whether the vehicle is attended or unattended, except that a bus may stop in a red zone marked or signposted as a bus loading zone.**

**(2) Yellow indicates stopping only for the purpose of loading or unloading passengers or freight for the time as may be specified by local ordinance.**

**(3) White indicates stopping for either of the following purposes:**

**(A) Loading or unloading of passengers for the time as may be specified by local ordinance.**

**(B) Depositing mail in an adjacent mailbox.**

**(4) Green indicates time limit parking specified by local ordinance.**

**(5) Blue indicates parking limited exclusively to the vehicles of disabled persons and disabled veterans.**

**(b) Regulations adopted pursuant to subdivision (a) shall be effective on days and during hours or times as prescribed by local ordinances.**

10 **Parking regulations shall be covered by ordinance or order of the authority having jurisdiction over the street or highway.**

Option:

11 Curb markings may supplement standard signs.

12 Prohibitions or restrictions enacted by local authorities under CVC §§ Sections 22506, 22507, and 22500 may be indicated by marking curbs as prescribed by CVC § 21458.

**Policy on Parking Restrictions**

Support:

13 Loading Zones - Local authorities are authorized by Section 21112 of the CVC to license and regulate the location of stands on streets and highways for use of taxicabs and other public carriers for hire. Where such stands are located on State highways, and highway maintenance is not delegated to the local authority, the approval of Caltrans is required. The District Directors have been delegated the authority to approve local ordinances establishing such stands.

## Section 3B.19 Stop and Yield Lines

Option:

01 Stop lines may be used to indicate the point behind which vehicles are required to stop in compliance with a STOP (R1-1) sign, ~~a Stop Here for Pedestrians (R1-5b) sign, a Stop Here for School Crossing (R1-5c) sign, a Stop Here for Trail Crossing (R-5e) sign~~, or some other traffic control device that requires vehicles to stop, except YIELD signs that are not associated with passive grade crossings.

**Standard:**

02 **Stop lines shall consist of solid white lines extending across approach lanes to indicate the point at which the stop is intended or required to be made.**

03 **Except as provided in Section 8C.03, stop lines shall not be used at locations where drivers are required to yield in compliance with a YIELD (R1-2) sign, a Yield Here to Pedestrians (R1-5) sign, a Yield Here to School Crossings (R1-5a) sign, a Yield Here to Trail Crossings (R1-5d) sign, or at locations on uncontrolled approaches where drivers or bicyclists are required by State law to yield to pedestrians.**

*Guidance:*

04 *Stop lines should be used to indicate the point behind which vehicles are required to stop in compliance with a traffic control signal (see Section 4D.08).*

05 *Stop lines should be 12 to 24 inches wide.*

Option:

06 Stop lines may be omitted at ramp control signals.

Support:

07 Section 4J.02 contains information regarding the use and application of stop lines in conjunction with a pedestrian hybrid beacon.

**Standard:**

08 **If used, a yield line pavement marking shall not be installed without a Yield (R1-2) sign, a Yield Here to Pedestrians (R1-5) sign, a Yield Here to School Crossings (R1-5a) sign, a Yield Here to Trail Crossings (R1-5d) sign, or some other traffic control device that requires vehicles to yield (see Figure 3B-16).**

09 **Yield lines shall not be used at locations where drivers are required to stop in compliance with a STOP (R1-1) sign, ~~a Stop Here for Pedestrians (R1-5b) sign, a Stop Here for School Crossing (R1-5c) sign, a Stop Here for Trail Crossing (R1-5e) sign~~, a traffic control signal, or some other traffic control device.**

10 **Yield lines shall consist of a row of solid white isosceles triangles pointing toward approaching vehicles extending across approach lanes to indicate the point at which the yield is intended or required to be made.**

Option:

11 If a yield line marking is used on a bicycle facility, a Bicycles Yield to Pedestrians (R9-6) sign (see Section 9B-12) may be used.

*Guidance:*

12 *The individual triangles comprising the yield line should have a base of 12 to 24 inches wide and a height equal to 1.5 times the base. The space between the triangles should be 3 to 12 inches.*

13 *If used, stop and yield lines should be placed a minimum of 4 feet in advance of the nearest crosswalk line at controlled intersections, except for yield lines at roundabouts as provided for in Section 3D.04 and at midblock crosswalks. In the absence of a marked crosswalk, the stop line or yield line should be placed at the desired stopping or yielding point, but should not be placed more than 30 feet or less than 4 feet from the nearest edge of the intersecting*

*traveled way.*

**Standard:**

14 **If yield ~~(stop)~~ lines are used at a crosswalk that crosses an uncontrolled multi-lane approach, Yield Here to ~~(Stop Here for)~~ Pedestrians (R1-5 series) signs (see Section 2B.19) shall be used.**

*Guidance:*

15 *If yield ~~(stop)~~ lines are used at a crosswalk that crosses an uncontrolled multi-lane approach, the yield ~~(stop)~~ line should be placed 20 to 50 feet in advance of the nearest crosswalk line (see Drawing B in Figure 3B-16).*

16 *If yield ~~or stop~~ lines are used in advance of a crosswalk that crosses an uncontrolled multi-lane approach, parking should be prohibited in the area between the yield ~~or stop line~~ and the crosswalk.*

Support:

17 Section 9B.12 contains information for providing signing applicable to bicyclists also subject to a yielding requirement at a crosswalk that crosses an uncontrolled approach.

*Guidance:*

18 *Yield ~~(stop)~~ lines and Yield Here to ~~(Stop Here for)~~ Pedestrians signs should not be used in advance of crosswalks that cross an approach to or departure from a circular intersection.*

Support:

19 Section 8C.03 contains information regarding the use of stop lines and yield lines at grade crossings. Option:

20 Stop and yield lines may be staggered longitudinally on a lane-by-lane basis (see Drawing D in Figure 3B-13).

Support:

21 Staggered stop lines and staggered yield lines can improve the driver's view of pedestrians, provide better sight distance for turning vehicles, and increase the turning radius for left-turning vehicles.

22 As defined in CVC § 377, a "limit line" is a solid white line not less than 12 inch nor more than 24 inch wide, extending across a roadway or any portion thereof to indicate the point at which traffic is required to stop in compliance with legal requirements.

**Standard:**

23 **For all purposes, limit line(s) as defined per CVC § 377 shall mean stop line(s). See Paragraph 5.**

*Guidance:*

24 *If a sidewalk exists, the limit line should be placed in advance of an unmarked crosswalk area.*

Option:

25 A limit line may be placed in advance of a crosswalk where vehicles are required to stop, in compliance with a STOP (R1-1) sign, traffic control signal or some other traffic control device.

Support:

26 If a marked crosswalk is in place, it would normally function as a limit line.

27 Typical limit line markings are shown in Figure 3B-102(CA).

## Section 3B.20 Word, Symbol, and Arrow Pavement Markings – General

Support:

01 Word, symbol, and arrow markings on the pavement are used for the purpose of regulating, warning, or guiding traffic. These pavement markings can be helpful to road users in some locations by supplementing signs and providing additional emphasis for important regulatory, warning, or guidance messages, because the markings do not require diversion of the road user's attention from the roadway surface. Symbol messages are preferable to word messages. Examples of standard word and arrow pavement markings are shown in Figures 3B-17 and 3B-21, respectively.

01a Normally, pavement word and symbol markings supplement standard signing.

Option:

02 Word, symbol, and arrow pavement markings may be used as determined by engineering judgment to supplement signs and/or to provide additional emphasis for regulatory, warning, or guidance messages provided by other devices.

Support:

03 Section 8C.04 contains information for arrow pavement markings in the vicinity of grade crossings.

**Standard:**

04 **Word, symbol, and arrow markings shall be white, except as otherwise provided in this Section.**

05 **Pavement marking letters, numerals, symbols, and arrows shall be installed in accordance with the design details in the Pavement Markings chapter of the "Standard Highway Signs" publication (see Section 1A.05).**

Support:

05a Refer to Caltrans' Standard Plans for pavement marking letters, numerals, and symbols. Refer to Section 1A.05 for information regarding this publication

*Guidance:*

06 *Word, symbol, and/or arrow markings that are grouped together to formulate one interrelated message should not exceed three lines of information.*

07 *Except for the two opposing white arrows of a two-way left-turn lane marking (see Figure 3B-7) and the pavement word marking messages described in Items B and D of Paragraph 2 of Section 3B.26, the longitudinal space between word, symbol, and/or arrow markings that are used together to formulate one interrelated message should be at least four times the height of the characters for low-speed roads, but not more than ten times the height of the characters under any conditions.*

08 ~~*Except for the SCHOOL word marking*~~ *(see Section 7C.02), pavement word, symbol, and arrow markings should be no more than one lane in width.*

09 *Pavement word, symbol, and arrow markings should be proportionally scaled to fit within the width of the facility upon which they are applied.*

Option:

10 On narrow, low-speed shared-use paths, the pavement words, symbols, and arrows may be smaller than suggested, but to the relative scale.

11 On roadways where the operating speed is less than 25 mph, word, symbol, and arrow markings may be proportionally reduced by 25 percent.

## Section 3B.21 Word Pavement Markings

*Guidance:*

01 *Letters and numerals should be 6 feet or more in height, except as provided in Section 9E.01 for the BIKE LANE word pavement marking and in Section 9E.15 for a bicycle detector symbol and WAIT HERE FOR GREEN word pavement marking.*

02 *If a pavement marking word message consists of more than one line of information, it should read in the direction of travel. The first word of the message should be nearest to the road user.*

**Standard:**

03 **The word STOP shall not be placed on the pavement in advance of a stop line, unless every vehicle is required to stop at all times.**

*Guidance:*

03a *A STOP pavement legend should be placed on all but minor approaches to State highways not controlled by signals.*

Option:

03b Pavement markings with appropriate figures may be used to supplement speed limit signs. Refer to Section 2B.21.

*Guidance:*

04 *Where through lanes approaching an intersection become mandatory turn lanes, ONLY word pavement markings (see Figure 3B-17) should be used in addition to signs (see Sections 2B.27 and 2B.28) and the required lane-use arrow markings (see Section 3B.23).*

Option:

05 The ONLY word marking may be used to supplement the lane-use arrow markings in lanes that are designated for the exclusive use of a single movement such as turn bays.

06 The ONLY word marking may be used to supplement a preferential lane word or symbol marking (see Section 3E.03).

07 On roadways where the operating speed is less than 25 mph, word markings may be proportionally reduced by 25 percent.

**Standard:**

08 **The ONLY word marking shall not be used in a lane that is shared by more than one movement.**

Option:

09 Electric vehicle charging stations in off-street locations may be marked with a white, twelve-inch high EV CHARGING ONLY pavement legend (Refer to Figure 3B-106(CA)) to supplement Electric Vehicle Charging Station signs in sections 2B.52 and 2I.03.

**Standard:**

10 **Each electric vehicle charging station designated for Van Accessible, Standard Accessible, and Ambulatory electric vehicle charging stations shall be marked with a white, twelve-inch high EV CHARGING ONLY pavement legend (Refer to Figure 3B-106(CA) to supplement signs, per CBC, Chapter 11B, Section 812.9, and Figure 11B-812.9).**

Support:

11 The authority for local agencies to regulate accessible parking, including designated EV charging stations, is provided by CVC § 22511. The provisions apply to parking areas open to public travel, such as rest stops. Refer to Section 1B.01.

## Section 3B.22 Symbol Pavement Markings

Support:

01 Section 3E.03 contains information on the diamond-shaped symbol for high-occupancy vehicle (HOV) lanes.

02 Chapter 9E contains information on symbol markings that can be used for bicycle lanes.

Option:

03 Pavement markings simulating Interstate, U.S., State, and County route signs (see Figure 2D-4) with appropriate route numbers, but elongated for proper proportioning when viewed as a marking, may be used to guide road users to their destinations (see Figure 3B-18).

*Guidance:*

04 *If route sign markings are provided to guide road users, those route sign markings should be provided in option lanes if markings are provided in any lanes.*

05 *If two route sign markings are provided in an option lane, they should be placed in sequence and not divided around an optional lane arrow.*

Support:

06 Section 3A.03 provides information on route sign colors.

07 Section 9E.14 contains information on route markers for designated bicycle routes that can be used on shared-use paths.

~~*Guidance:*~~

08 ~~*The International Symbol of Accessibility parking space marking (see Figure 3B-19) should be placed in each parking space designated for use by persons with disabilities.*~~

**Standard:**

08a **The International Symbol of Accessibility (ISA) parking space marking shall be placed in each parking space within the highway right-of-way (refer to Figure 3B.19).**

*Guidance:*

08b *The ISA parking space marking (Figure 3B-19) should be placed in each parking space within the highway right-of-way designated for use by persons with disabilities.*

~~Option:~~

**Standard:**

09 **A blue background with a white border ~~may~~ shall supplement the wheelchair symbol as shown in Figure 3B-19.**

09a **If used, new construction of accessible parking spaces within the highway right-of-way and loading and unloading areas shall include pavement marking details shown on Figure 3B-19, or as shown on Caltrans' Standard Plan A90A. The loading and unloading area shall be marked by a border and hatched lines. The border shall be painted blue, and the hatched lines shall be painted a suitable contrasting color to the parking space (blue or white paint is preferred).**

09b **If used, new construction of accessible parking within the highway right-of-way shall include a blue painted curb, as shown on Caltrans' Standard Plan A90B. If parking within the highway right-of-way designated and designed for persons with disabilities includes a loading and unloading area, it shall be marked by a border and hatched lines. The border shall be painted blue, and the hatched lines shall be painted a suitable contrasting color to the parking space (blue or white paint is preferred).**

09c **Loading and unloading areas shall include the words "NO PARKING" within the blue border and shall be painted in white letters no less than 12 inches high (Refer to detail in Figure 3B-19). Refer to California Code of Regulations Title 24, Section 1129B.4.**

Support:

09d Provisions apply to parking areas open to public travel, such as rest stops. Refer to Section 1B.01.

10 A yield-ahead triangle symbol or YIELD AHEAD word pavement marking may be used on approaches to intersections where the approaching traffic will encounter a YIELD sign at the intersection.

**Standard:**

11 **The yield-ahead triangle symbol or YIELD AHEAD word pavement marking shall not be used unless a YIELD sign (see Section 2B.05) is in place at the intersection. The yield-ahead triangle symbol marking shall be as shown in Figure 3B-20.**

Option:

12 A pedestrian symbol pavement marking may be used on portions of facilities that are reserved exclusively for pedestrian use, such as where a shared-use path transitions to become separate facilities for different types of users.

## Section 3B.23 Lane-Use Arrows

Support:

01 Lane-use arrow markings (see Figure 3B-21) are used to indicate the mandatory or permissible movements in certain lanes (see Figure 3B-22) and in two-way left-turn lanes (see Figure 3B-7).

02 Section 8C.04 contains information about the placement of lane-use arrow markings in the vicinity of grade crossings.

*Guidance:*

03 *Lane-use arrow markings should be used in lanes and turn bays designated for the exclusive use of a turning movement, except where engineering judgment determines that physical conditions or other markings (such as a dotted extension of the lane line through the taper into the turn bay) clearly discourage unintentional use of a turn bay by through vehicles. Lane-use arrow markings should also be used in lanes from which movements are allowed that are contrary to the normal rules of the road (see Drawing B in Figure 3B-13).*

04 *When used in turn lanes, at least two arrows should be used, one at or near the upstream end of the full-width turn lane and one an appropriate distance upstream from the stop line or intersection (see Drawing A in Figure 3B-12).*

05 *Where opposing offset channelized left-turn lanes exist, lane-use arrow markings should be placed near the downstream terminus of the offset left-turn lanes to reduce wrong-way movements (see Figure 2B- 20).*

Option:

06 An additional arrow or arrows may be used in a turn lane. When arrows are used for a short turn lane, the second (downstream) arrow may be omitted based on engineering judgment.

Support:

07 An arrow at the downstream end of a turn lane can help to prevent wrong-way movements.

**Standard:**

08 **Where through lanes approaching an intersection become mandatory turn lanes, turn lane-use arrow markings (see Drawing A in Figure 3B-12 and Figure 3B-21) shall be used and shall be accompanied by standard signs (see Section 2B.28).**

**Arrows:**

**Standard:**

08a **Where a turning movement is mandatory, an arrow marking accompanied by a regulatory sign shall be used. However, when an additional clearly marked lane is provided for the approach to the turning movement, the sign is not required. Refer to CVC § 22101.**

Support:

08b Examples of entrance/exit ramp terminal signs and pavement markings are shown in Figure 3B-21(CA).

*Guidance:*

08c *The Type V arrows and warning signs, as shown in Figure 3B-103(CA), should be used at locations where road users could perceive that they are on a one-way roadway when, in fact, they are on a two-lane, two-way highway. The following are some typical situations:*

- *A. Construction sites where a two-lane highway is being converted to a freeway or an expressway.*
- *B. Two-lane, two-way highways where the ultimate freeway or expressway right-of-way has been purchased and grading for the full width has been completed.*
- *C. Two-lane, two-way highways following long sections of multi-lane freeway or expressway.*

**Exit Ramp Arrows:**

**Standard:**

08d **A minimum of two pavement arrows shall be placed on each freeway exit ramp lane.**

08e **A Type V arrow shall be the first arrow, on the ramp, in the direction of travel when exiting the freeway.**

08f **Where a mandatory movement is required, a Type I, II, III, IV, VII, or VIII arrow shall be placed with its point approximately 20 feet preceding the limit line, crosswalk, or "STOP" pavement legend. Where no mandatory movement is required, a Type V arrow shall be used at this location.**

08g **All other additional arrows, when used, shall be a minimum of 24 feet in length.**

08h **All arrows shall be placed in the center of the lane and spaced approximately 100 feet to 300 feet apart.**

*Guidance:*

08i *The actual position and spacing should be determined in the field to provide the optimum visibility for traffic that may attempt to enter the exit ramp in the wrong direction.*

Support:

08j Refer to Figure 3B-21(CA).

**Entrance Ramp Arrows:**

**Standard:**

08k **A minimum of one Type I arrow, not less than 18 feet in length, shall be positioned in the center of each freeway entrance ramp lane so that it is clearly in view of a right-way road user.**

*Guidance:*

08l *The distance between arrows, when more than one per lane is needed, should be 100 feet to 300 feet. The Type V arrow should not be used on entrance ramps.*

Support:

08m Refer to Figure 3B-21(CA).

08n Additional information on the signing of ramp terminals is shown in Section 2E.59.

**Turn Lane Arrows:**

**Standard:**

08o **One directional arrow, a minimum of 8 feet in length, shall be placed in the center of each turning lane near the point of entrance.**

Option:

08p High approach speeds may justify the use of a longer arrow. Two or more arrows may be placed in long turning lanes.

Support:

08q Refer to Figures 3B-7(CA) and 3B-101(CA).

08r Refer to Section 2B.48 and 2E.59 for Wrong-Way Traffic Control at Interchange Ramps.

*Guidance:*

09 *Where through lanes approaching an intersection become mandatory turn lanes, ONLY word markings (see Figure 3B-17) should be used in addition to signs (see Sections 2B.27 and 2B.28) and the required turn lane-use arrow markings. These signs and markings should be placed well in advance of the turn and should be repeated as necessary to provide the through motorist advance notification to vacate the lane prior to reaching a point where roadway geometrics or a queue of waiting vehicles forces the motorist to make an unintended turn.*

Option:

10 On freeways or expressways where a through lane becomes a mandatory exit lane, lane-use arrow markings may be used on the approach to the exit in the dropped lane and in an adjacent optional through-or-exit lane if one exists.

## Section 3B.24 Wrong-Way Arrows

*Guidance:*

01 *Where crossroad channelization or ramp geometrics do not make wrong-way movements difficult, the appropriate lane-use arrow should be placed in each lane of an exit ramp near the crossroad terminal where it will be clearly visible to a potential wrong-way road user (see Figure 2B-15).*

Option:

02 The wrong-way arrow markings shown in Drawing G in Figure 3B-21 may be placed near the downstream terminus of a ramp as shown in Figure 2B-15 and in Drawing A in Figure 2B-16, or at other locations where lane-use arrows are not appropriate, to indicate the correct direction of traffic flow and to discourage drivers from traveling in the wrong

direction.

## Section 3B.25 Chevron and Diagonal Markings

Support:

01 Chevron or diagonal markings are used to discourage travel on certain paved areas, such as shoulders, neutral areas, and flush median islands.

Support:

01a For chevron markings in exit gore areas, refer to Section 3B.11.

Option:

02 Chevron and diagonal markings may be used:

A. On approaches to obstructions in the roadway (see Sheet 2 of Figure 3B-15),
B. For channelized travel paths on approaches to intersections,
C. In buffer spaces between preferential lanes and general-purpose lanes (see Drawing A in Figure 3E- 2),
D. In the neutral area gores (see Figures 3B-9 through 3B-11),
E. In the neutral area of bifurcations created from open-road tolling lanes that bypass a conventional toll plaza,
F. In the neutral areas at access and egress points to and from a managed-lane facility (see Figures 2G-8, 2G-10, 2G-22, and 2G-23), and
G. In the neutral areas of islands.

03 Chevron markings may be supplemented with white retroreflective or internally illuminated raised pavement markers (see Section 3B.16) for enhanced nighttime visibility.

Support:

04 Section 5B.02 contains information on chevron markings for driving automation system considerations.

**Standard:**

05 **Chevron markings shall be white, with the point of each chevron facing toward approaching traffic, as shown in Figures 3B-9 through 3B-11, and Drawing C in Figure 3B-15.**

Option:

06 Diagonal markings for opposing directions of traffic may be used:

A. On approaches to obstructions in the roadway (see Drawings A and B in Figure 3B-15),
B. In flush median islands between double solid yellow center line markings (see Figure 3B-5), and
C. In buffer spaces between preferential lanes and general-purpose lanes (see Drawing D in Figure 3E- 4).

07 Diagonal markings may be used on paved shoulders or in no-parking zones, or other locations for special emphasis.

**Standard:**

08 **When diagonal markings are used between opposing directions of traffic or on the left shoulder of a one-way or divided roadway, they shall be yellow and slant away from traffic in the adjacent travel lanes, as shown in Figures 3B-2 and 3B-5, and Drawings A and B in Figure 3B-15.**

09 **When diagonal markings are used on the right shoulder or in no-parking zones (see Figure 3B- 23), they shall be white and slant away from traffic in the adjacent travel lane.**

*Guidance:*

10 *Except as provided in Paragraph 11 of this Section, chevrons and diagonal markings should be at least 12 inches wide for roadways having a speed limit of 45 mph or greater, and at least 8 inches wide for roadways having a speed limit of less than 45 mph. The longitudinal spacing of the chevrons or diagonal lines should be determined by engineering judgment considering factors such as speeds and desired visual impacts. The chevrons and diagonal lines should form an angle of approximately 30 to 45 degrees with the longitudinal lines that they intersect.*

Option:

11 Diagonal markings used in no-parking zones or on roadways with operating speeds of less than 25 mph may be 4 inches wide (see Figure 3B-23).

*Guidance:*

12 *Diagonal and chevron markings should be used, when in the opinion of an engineer, it is necessary to add emphasis or to discourage vehicular travel upon a paint-formed roadway feature such as an unusually wide shoulder area, a pedestrian refuge island, or a traffic divisional or channelization island.*

13 *Diagonal lines, when used, should be installed between an edge line and a traffic island, or between pairs of double yellow lines.*

14 *Chevron markings, when used, should be installed between channelizing lines for traffic flows in the same direction.*

Support:

15 The applicable channelizing lines for chevron markings are shown in Figure 3A-110(CA), Details 36, 36A, and 36B, and pairs of lines shown in Figure 3A-112(CA), Details 38 and 38A.

16 The diagonal lines or chevron markings are normally 12 inches wide.

**Standard:**

17 **Diagonal lines and chevrons shall be the same color as the line or lines to which they connect and shall point at a 45-degree forward angle.**

18 **Diagonal lines or chevrons, if used, shall be the same color as the edge line.**

Option:

19 The spacing between these lines may vary from 1 foot in a pedestrian crosswalk to 200 feet for vehicular traffic.

## Section 3B.26 Do Not Block Intersection Markings

Support:

00 Refer to CVC § 22526 for entering an intersection, a rail crossing, or a marked crosswalk.

Option:

01 Do Not Block Intersection markings may be used to mark the edges of an intersection area that is in close proximity to a signalized intersection, railroad crossing, or other nearby traffic control that might cause vehicles to stop within the intersection and impede other traffic entering the intersection. If authorized by law, Do Not Block Intersection markings with appropriate signs may also be used at other locations.

**Standard:**

02 **If used, Do Not Block Intersection markings (see Figure 3B-24) shall consist of one of the following alternatives:**

- **A. Wide solid white lines that outline the intersection area that vehicles must not block;**
- **B. Wide solid white lines that outline the intersection area that vehicles must not block and a white word message such as DO NOT BLOCK or KEEP CLEAR;**
- **C. Wide solid white lines that outline the intersection area that vehicles must not block and white cross-hatching within the intersection area; or**
- **D. A white word message, such as DO NOT BLOCK or KEEP CLEAR, within the intersection area that vehicles must not block.**

03 **Do Not Block Intersection markings shall be accompanied by one or more DO NOT BLOCK INTERSECTION (DRIVEWAY) (CROSSING) (R10-7) signs (see Section 2B.59), one or more DO NOT STOP ON TRACKS (R8-8) signs (see Section 8B.07), or one or more similar signs.**

## Section 3B.27 Parking Space Markings

**Standard:**

01 **On-street parking space markings shall be white.**

Support:

02 Examples of on-street parking space markings are shown in Figure 3B-23.

Option:

03 Blue lines may supplement white parking space markings of each parking space designated for use only by persons with disabilities (see Figure 3B-23).

Support:

04 Additional parking space markings for the purpose of designating spaces for use only by persons with disabilities are discussed in Section 3B.22 and illustrated in Figure 3B-19.

Support:

05 Refer to CVC §§ 22500 through 22522 for parking space markings.

06 Refer to Section 2B.45 for Parking Signs.

**Policy on Parking Restrictions**

Option:

07 Local authorities may, by ordinance, provide for the establishment of parking meter zones and cause streets and highways to be marked with white lines designating parking spaces. Refer to CVC § 22508.

Support:

08 No ordinance or resolution of local authorities shall apply to any state highway until the proposed ordinance or resolution has been presented to, and approved in writing by, the Department of Transportation. Refer to CVC § 21960(c).

09 The desirable dimensions of parking meter stalls are 8 feet by 24 feet with a minimum length of 20 feet.

*Guidance:*

10 *At signalized intersections, parking should be prohibited for a minimum of 30 feet on the near side and one stall length on the far side. Refer to Figure 3B-23(CA).*

**Standard:**

11 **Stopping, standing, or parking of a vehicle within 20 feet of the vehicle's approach side of any unmarked or marked crosswalk, or 15 feet of any crosswalk where a curb extension is present, is prohibited. Refer to CVC § 22500.**

## Section 3B.28 Speed Reduction Markings

Support:

01 Speed reduction markings (see Figure 3B-25) are transverse markings that are placed on the roadway within a lane (along both edges of the lane) in a pattern of progressively reduced spacing to give drivers the impression that their speed is increasing.

02 Speed reduction markings have been shown to enhance safety around curves and locations with a history of run-off-the-road crashes when applied in combination with horizontal alignment warning signs (see Section 2C.05).

Option:

03 Speed reduction markings may be placed in advance of an unexpectedly severe horizontal or vertical curve or other roadway feature where drivers need to decelerate prior to reaching the feature and where the desired reduction in speeds has not been achieved by the installation of warning signs and/or other traffic control devices.

*Guidance:*

04 *If used, speed reduction markings should be reserved for unexpected curves or other usages based on engineering judgment. Speed reduction markings should not be used on long tangent sections of roadway or in areas frequented mainly by local or familiar drivers, such as school zones. If used, speed reduction markings should supplement the appropriate warning signs and other traffic control devices and should not substitute for these devices.*

**Standard:**

05 **Speed reduction markings shall be a series of white transverse lines on both sides of the lane that are perpendicular to the center line, edge line, or lane line.**

*Guidance:*

06 *The longitudinal spacing between the markings should be progressively reduced from the upstream to the downstream end of the marked portion of the lane.*

07 *Speed reduction markings should not be greater than 12 inches in width, and should not extend more than 18 inches into the lane.*

**Standard:**

08 **Speed reduction markings shall be used only in lanes that have a longitudinal line (center line, edge line, or lane line) on both sides of the lane.**

## Section 3B.29 Speed Hump and Speed Table Markings

Support:

00 According to CVC § 440, speed humps or bumps are not official traffic control devices.

**Standard:**

01 **If speed hump markings are used, they shall be a series of white markings placed on a speed hump to identify its location. If markings are used for a speed hump that does not also function as a crosswalk or speed table, the markings shall comply with Option A, B, or C shown in Figure 3B-26. If markings are used for a speed hump that also functions as a crosswalk or speed table, the markings shall comply with Option A or B shown in Figure 3B-27.**

Option:

02 Where used, center line markings, lane line markings, and edge lines may be discontinued on the profile of the speed hump.

**Standard:**

03 **Where a speed hump or a speed table specifically incorporates a crossing movement for pedestrians, bicyclists, or equestrians, and functions as a raised crosswalk, crosswalk markings (see Chapter 3C) shall be provided.**

## Section 3B.30 Advance Speed Hump and Speed Table Markings

Option:

01 Advance speed hump markings (see Figure 3B-28) may be used in advance of speed humps or other engineered vertical roadway deflections such as dips where added visibility is desired or where such deflection is not expected.

02 Advance word pavement markings such as BUMP or HUMP (see Section 3B.20) may be used on the approach to a speed hump either alone or in conjunction with advance speed hump markings. Appropriate advance warning signs may be used in compliance with Section 2C.27.

02a. Raised retroreflective pavement markers may be used to supplement advance speed hump markings (Refer to Figure 3B-28).

Support:

02b Provisions for raised pavement markers supplementing other markings are contained in Section 3B.14 and 3B.16.

**Standard:**

03 **If advance speed hump or speed table markings are used, they shall be a series of eight white 12-inch transverse lines that become longer and are spaced closer together as the vehicle approaches the speed hump or other deflection. If advance markings are used, they shall comply with the detailed design shown in Figure 3B-28.**

*Guidance:*

04 *If used, advance speed hump markings should be installed in each approach lane.*

## Section 3B.31 Markings for a Diamond Interchange with a Transposed Alignment Crossroad

Support:

01 Markings used in a diverging diamond interchange with a transposed alignment crossroad can be advantageous for minimizing wrong-way movements. The potential for wrong-way movements is greatest at the crossover intersections where the alignment becomes transposed.

01a Diverging diamond interchanges, also known as double-crossover diamond interchanges, include directional crossovers on either side of the interchange that transpose the crossroad, which results in vehicles traveling on the left-hand side of the street or highway between the crossover intersections.

**Standard:**

02 **On the transposed alignment, each direction shall be considered a one-way roadway whereas the edge line convention shall be in accordance with Section 3B.09. Both yellow and white edge lines shall be used.**

03 **A lane-use arrow (see Section 3B.23) shall be used in each approach lane at the crossover intersection.**

Support:

04 Section 3C.11 contains information on crosswalks and pedestrian movements for diverging diamond interchanges with a transposed alignment crossroad.

**Standard:**

05 **Flush median islands (see Section 3J.03) shall not be used to divide the inverted flow of traffic.**

*Guidance:*

06 *Edge line and lane line extensions (see Section 3B.11) should be provided through the crossing points.*

Support:

07 Figure 3B-29 illustrates an example of pavement markings for a diverging diamond interchange with a transposed alignment crossroad.

## Section 3B.101(CA) Turnouts

*Guidance:*


01 *Paved turnouts should be marked with an 8-inch-wide single solid white line between the through lane and the turnout. The line should not extend through the entry and exit areas. Refer to Figure 3B-105(CA) and Caltrans' Highway Design Manual, Section 204.5 (4). Refer to Section 1A.05 for information regarding this publication.*

02 *The right edge line should be dropped throughout the length of the turnout.*


Option:

03 Turnout length may be increased 100 feet on downgrades over 3%.


## Figure 3B-1. Yellow Center Lines for Two-Lane, Two-Way Applications

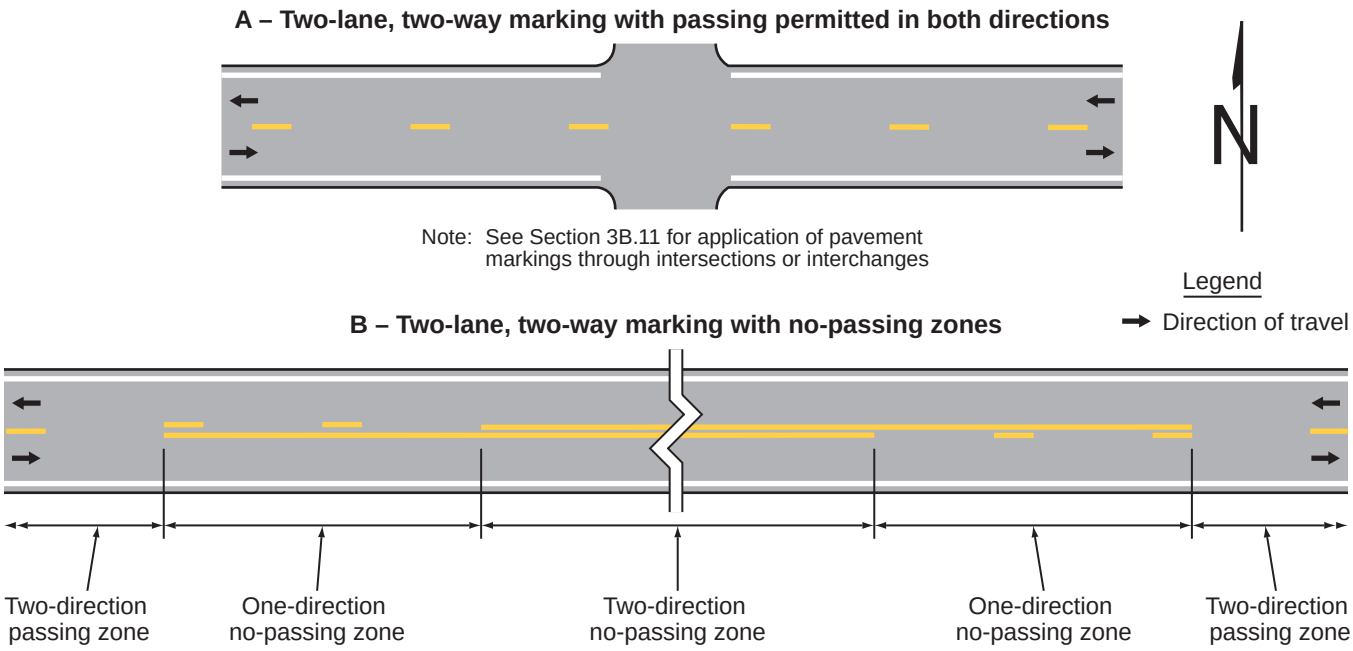

## Figure 3B-2. Yellow Center Lines for Four-or-More Lane, Two-Way Applications

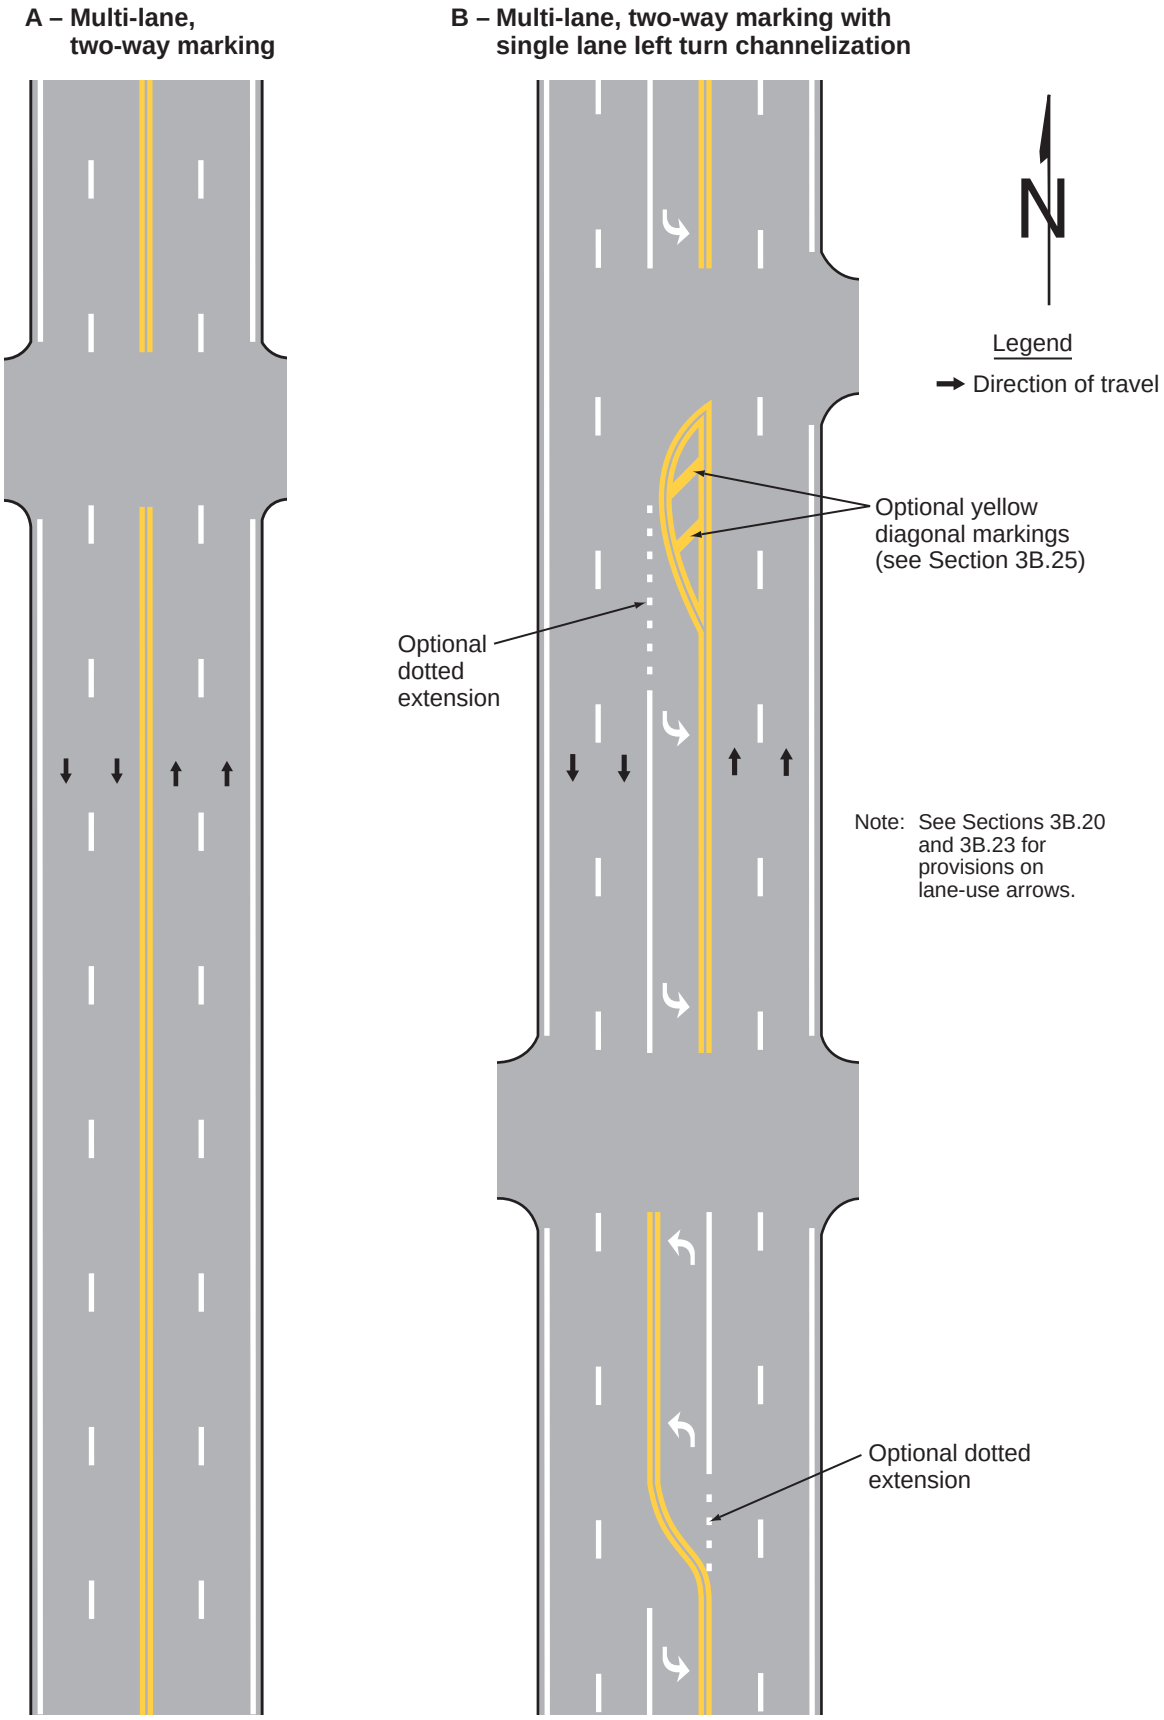


## Figure 3B-3. Yellow Center Lines for Three-Lane, Two-Way Applications

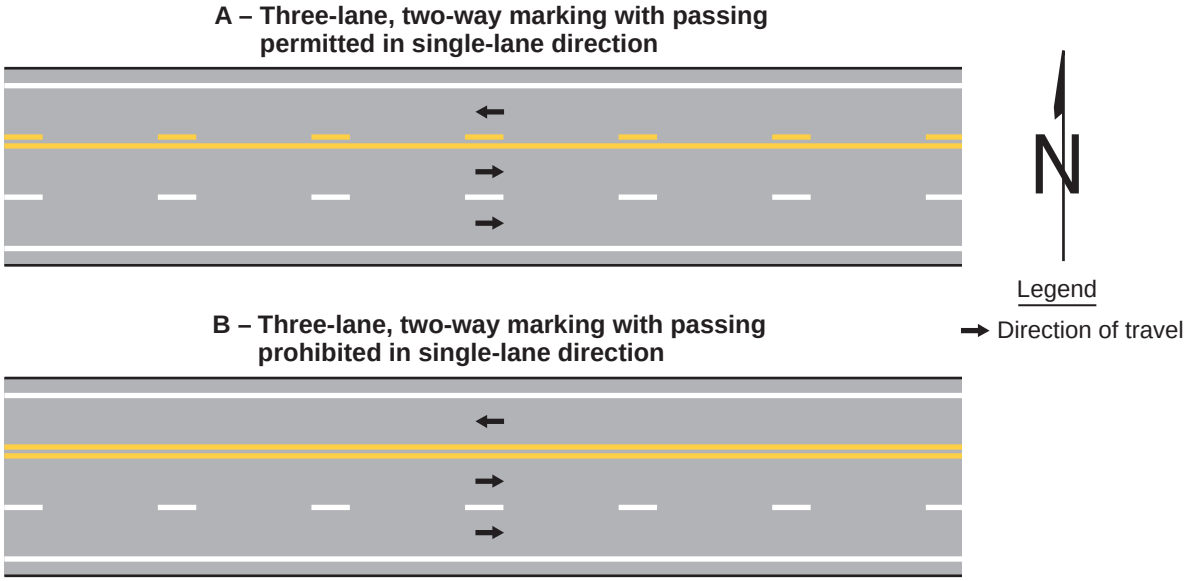

# Figure 3B-4. Method of Locating and Determining the Limits of No-Passing Zones at Curves

**A – No-passing zone at VERTICAL CURVE**

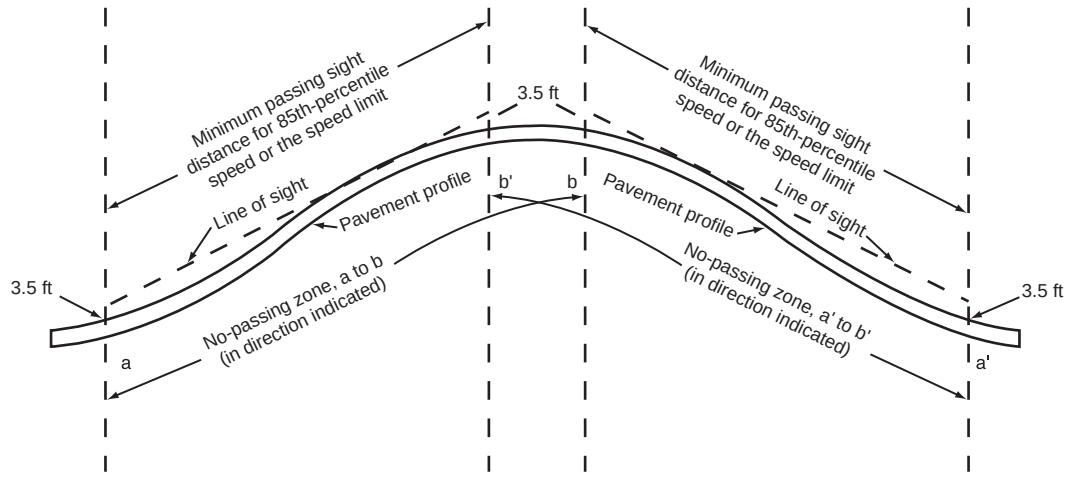


a, a' Begin no-passing zone
Sight distance becomes less than minimum measured between points 3.5 feet above pavement


b, b' End no-passing zone
Sight distance again exceeds minimum

**Profile View**

Legend
→ Direction of travel

Note: No-passing zones in opposite directions might or might not overlap, depending on alignment

**B – No-passing zone at HORIZONTAL CURVE**

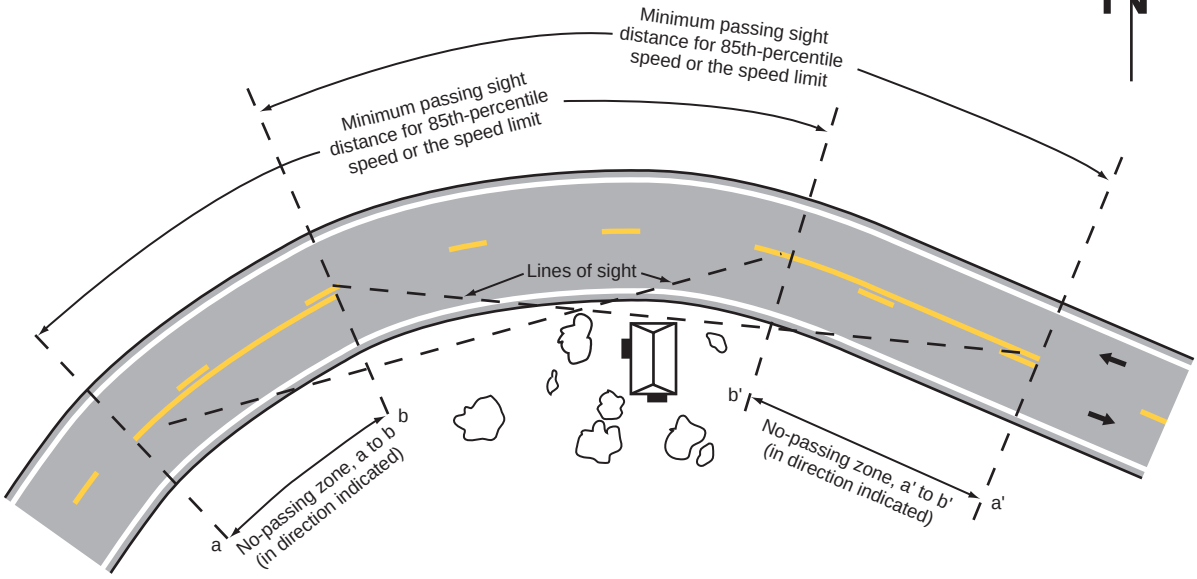



a, a' Begin no-passing zone
Sight distance becomes less than minimum measured between points 3.5 feet above pavement

b, b' End no-passing zone
Sight distance again exceeds minimum


**Plan View**

Note: No-passing zones in opposite directions might or might not overlap, depending on alignment


# Figure 3B-5. Application of Three-Lane, Two-Way Markings for Changing the Direction of the Center Lane

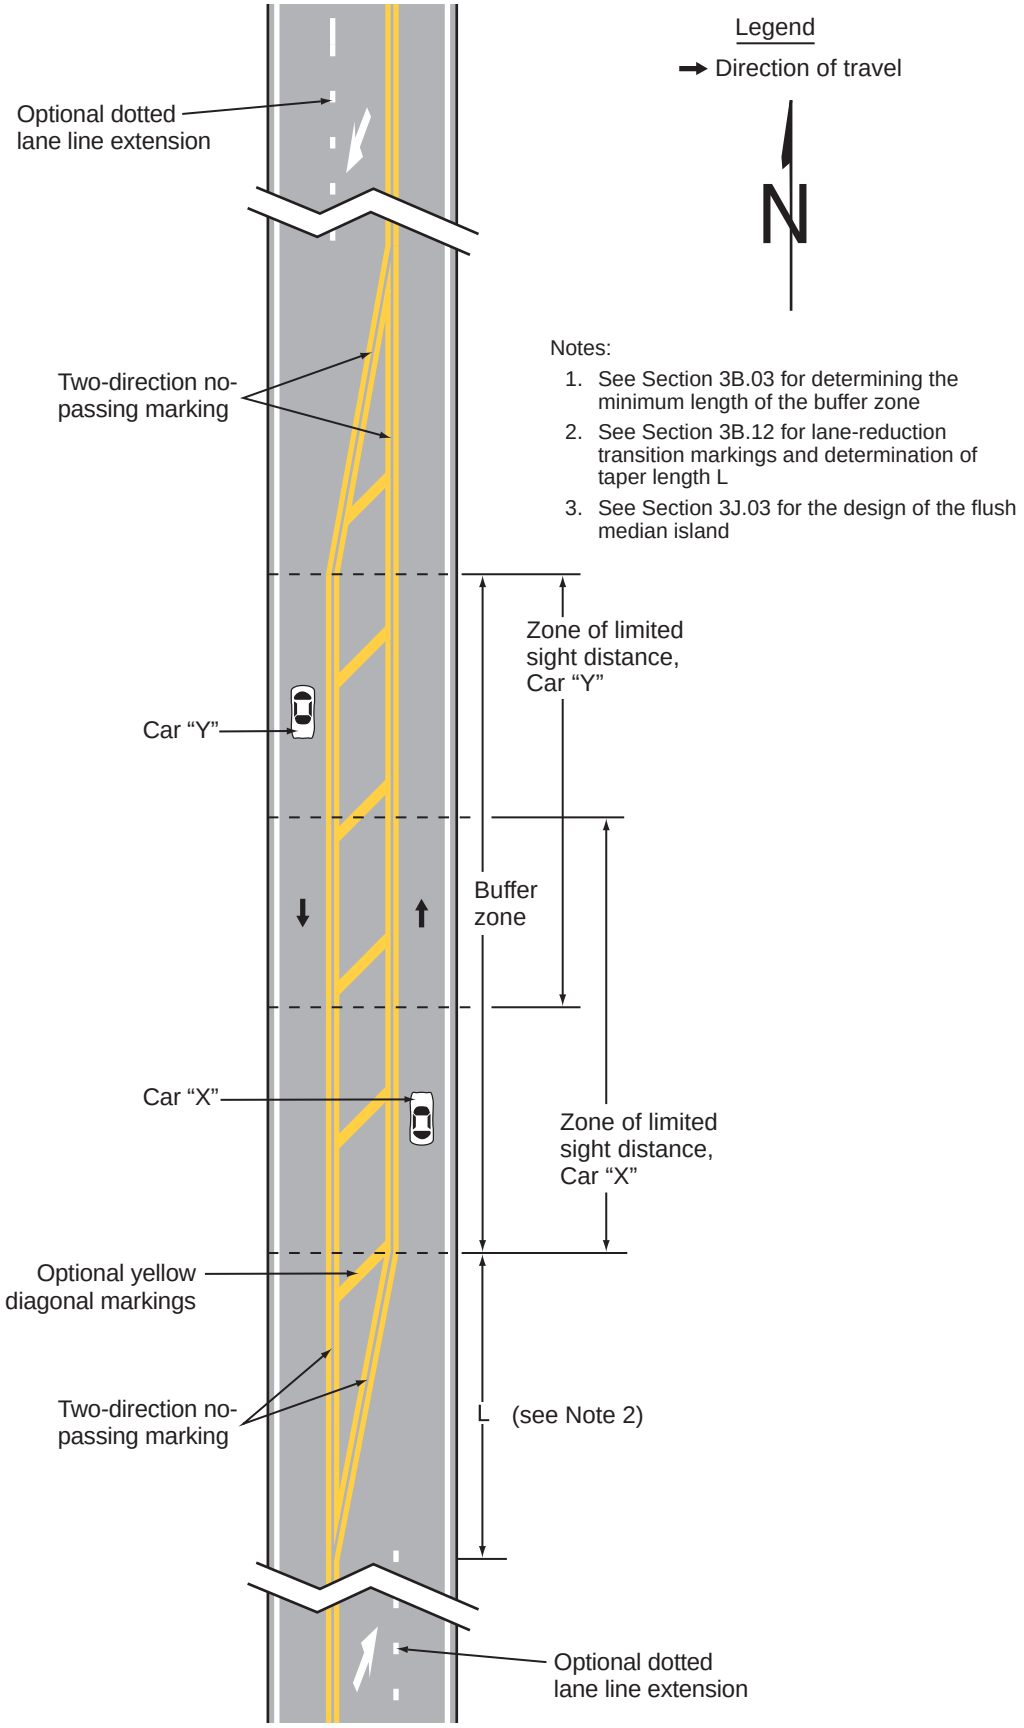


## Figure 3B-6. Example of Yellow Pavement Markings for Reversible Lanes

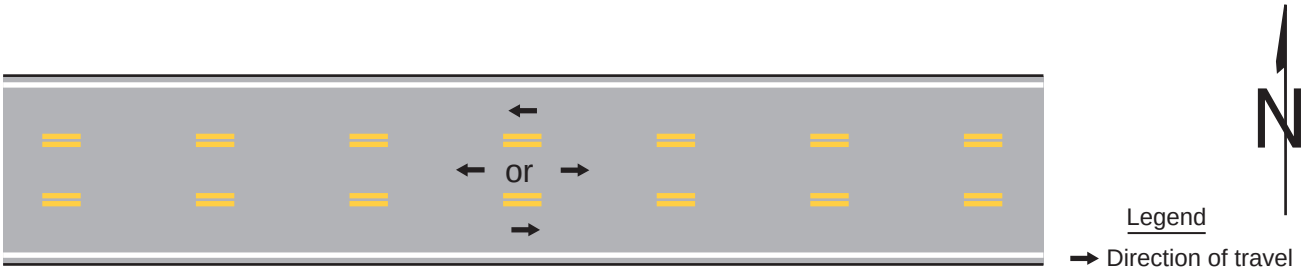

## Figure 3B-7. Examples of Two-Way Left-Turn Lane Marking Applications

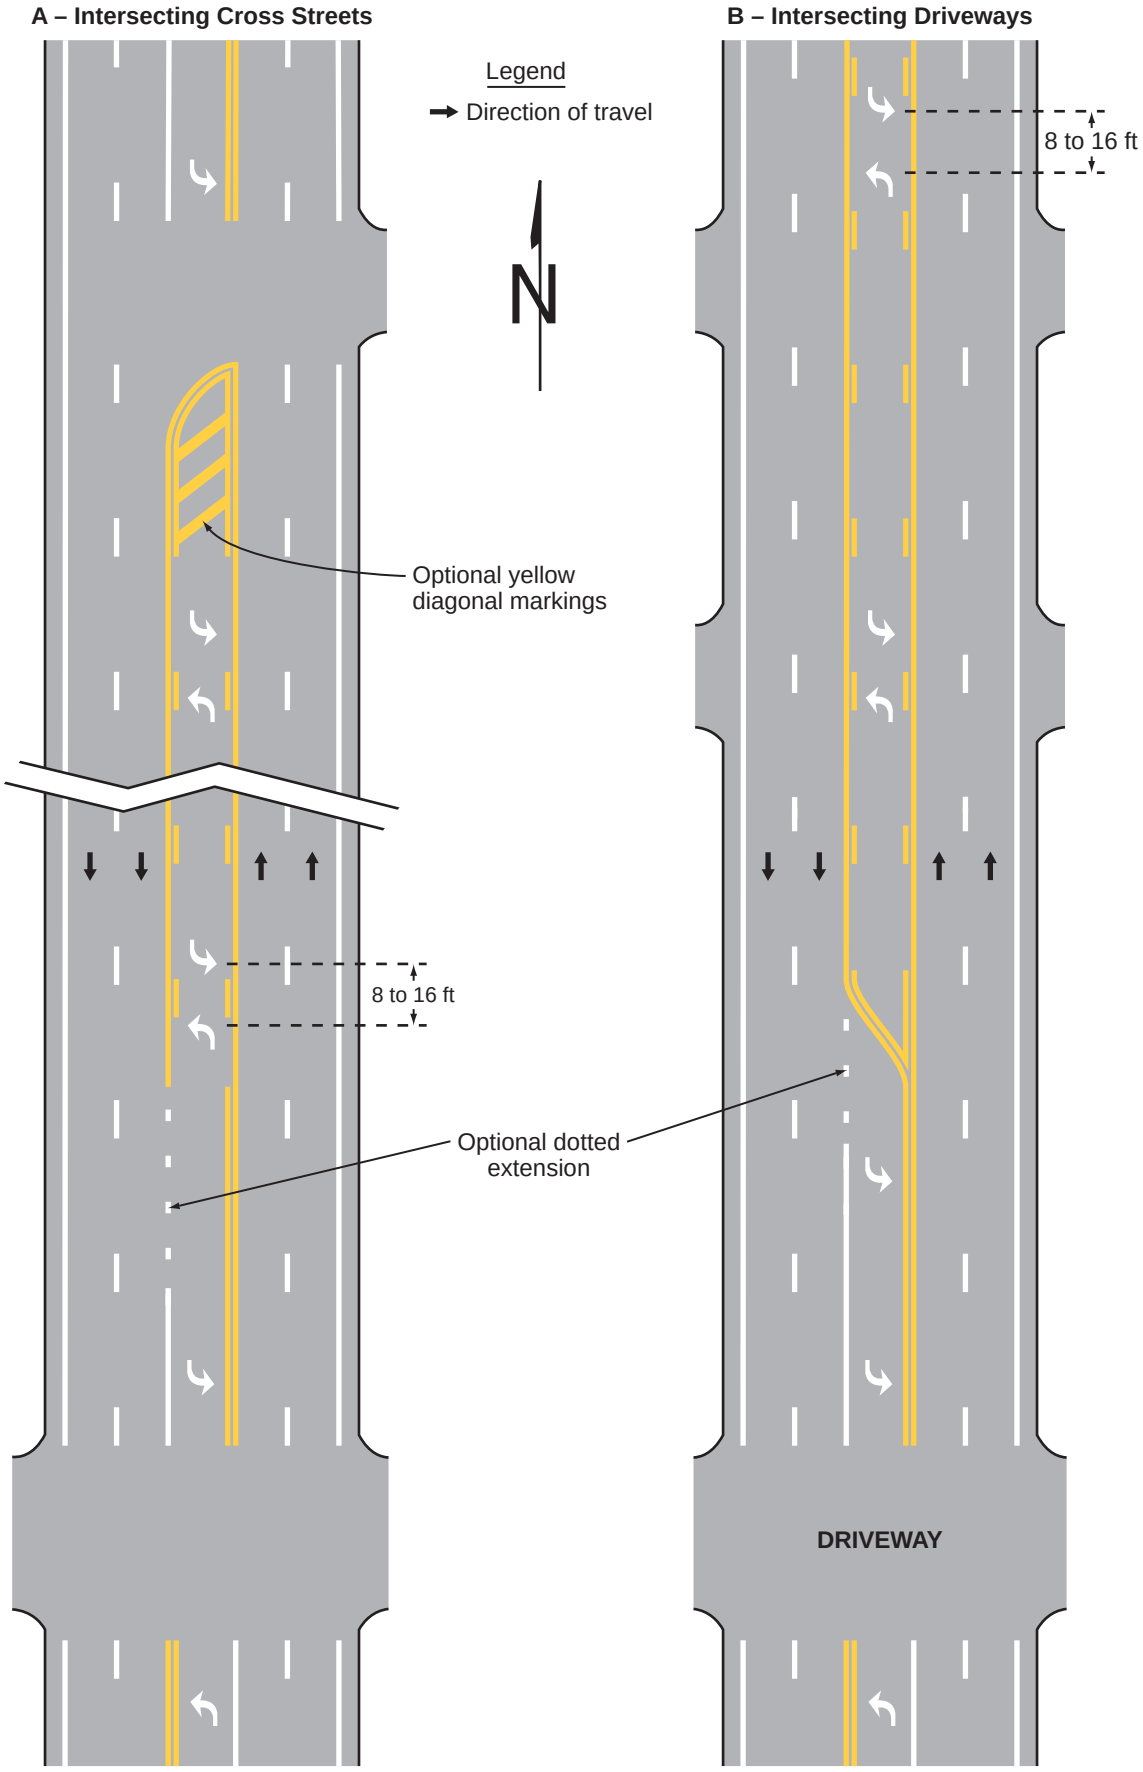


## *Figure 3B-7(CA). Example of Two-Way Left-Turn Lane Marking Applications*

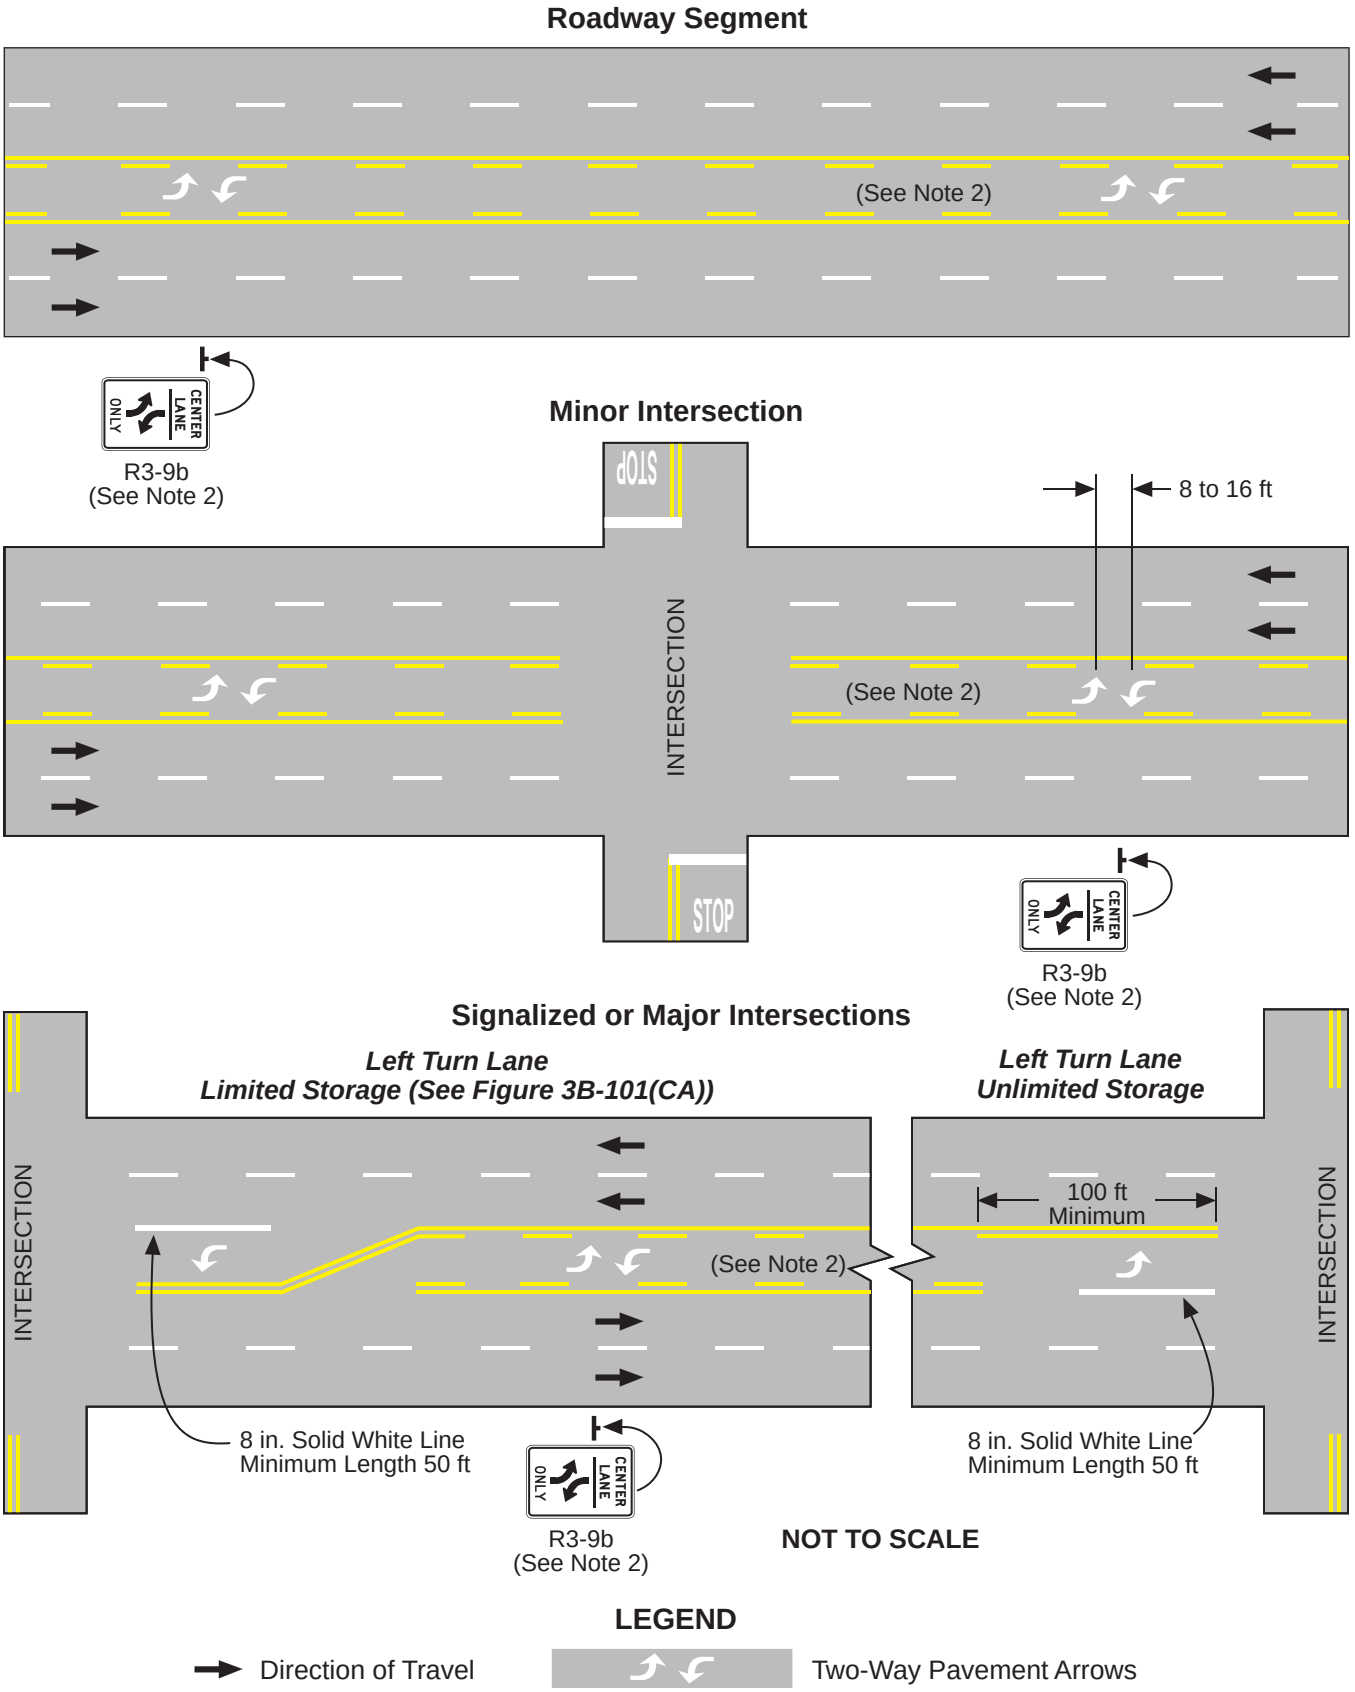



Notes:

1. See Figure 3A-108(CA) for Two-Way Left-Turn Lane line markings.
2. Two-Way Pavement Arrows, and the R3-9a (overhead) and R3-9b (post-mounted) signs are optional. See Section 2B.32.

## Figure 3B-8. Example of a Double Solid White Line Used to Prohibit Lane Changing

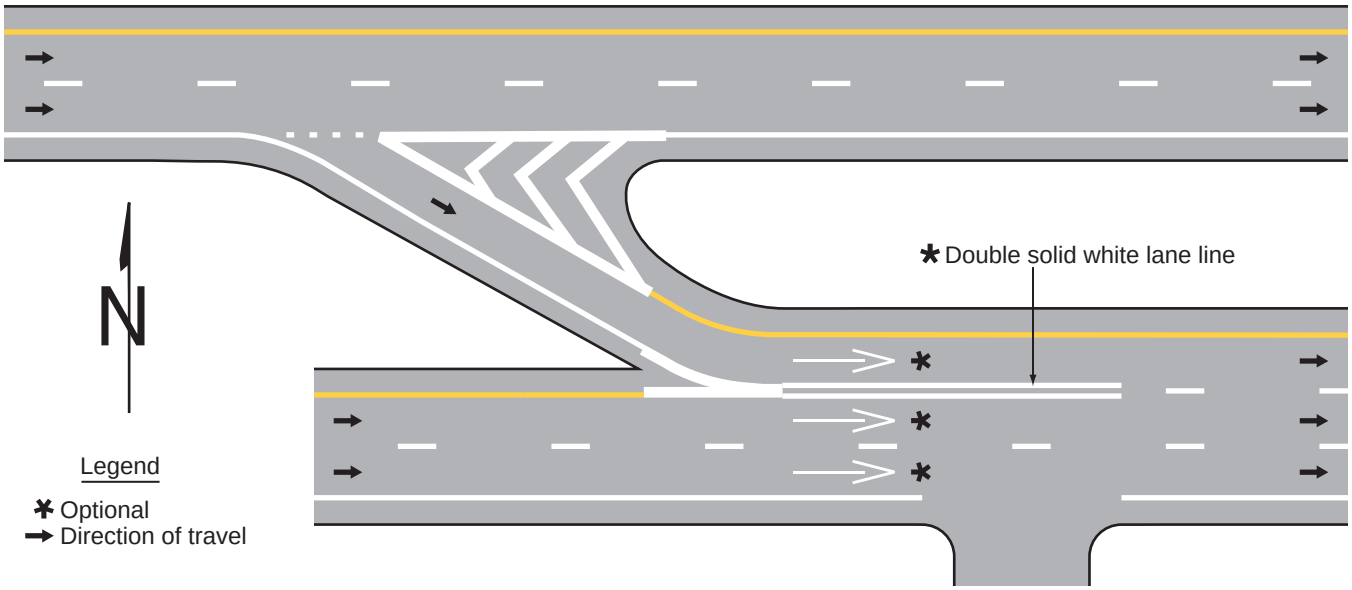


## Figure 3B-9. Examples of Dotted Line and Channelizing Line Applications for Exit Ramp Markings (Sheet 1 of 2)

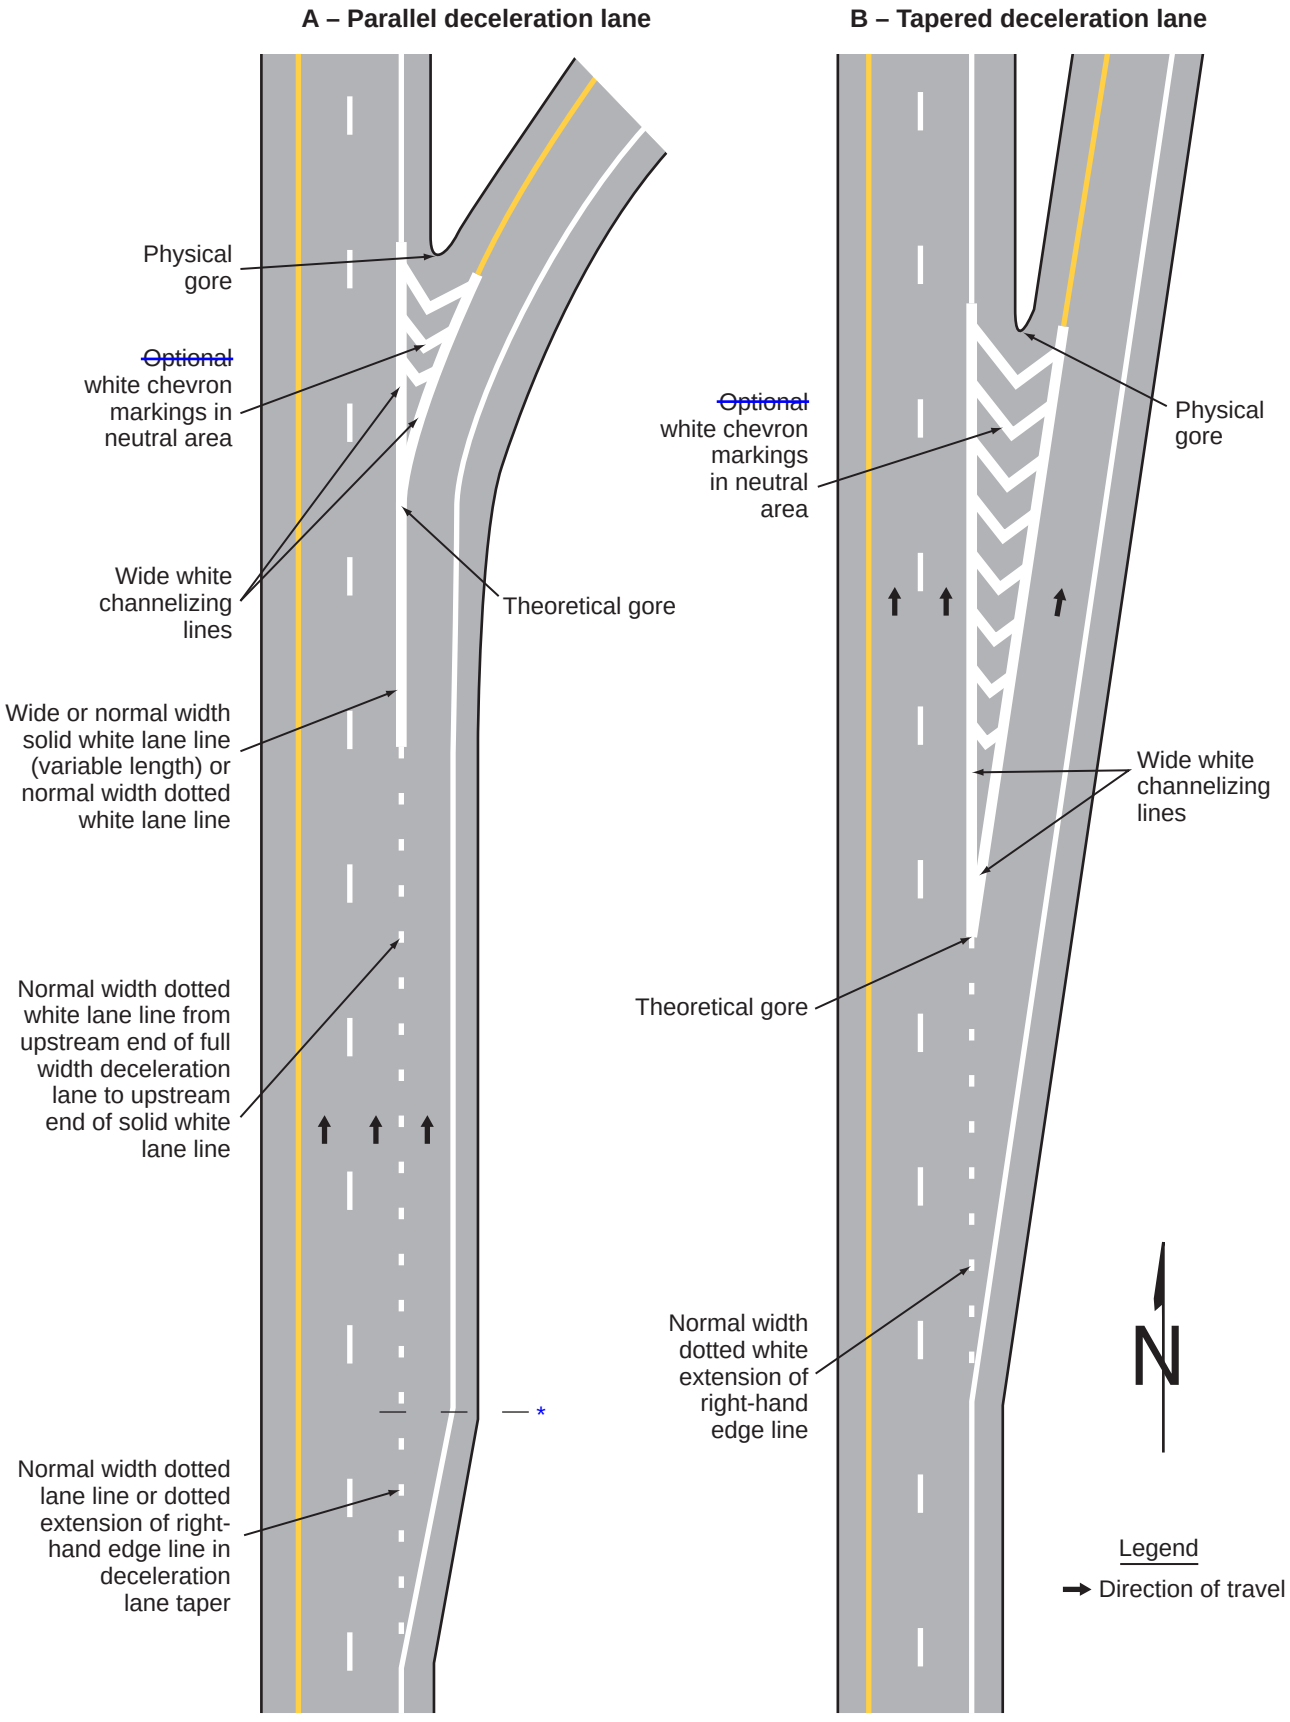


* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## Figure 3B-9. Examples of Dotted Line and Channelizing Line Applications for Exit Ramp Markings (Sheet 2 of 2)


**C – Parallel deceleration lane at a multi-lane exit ramp having an optional exit lane that also carries the through route**

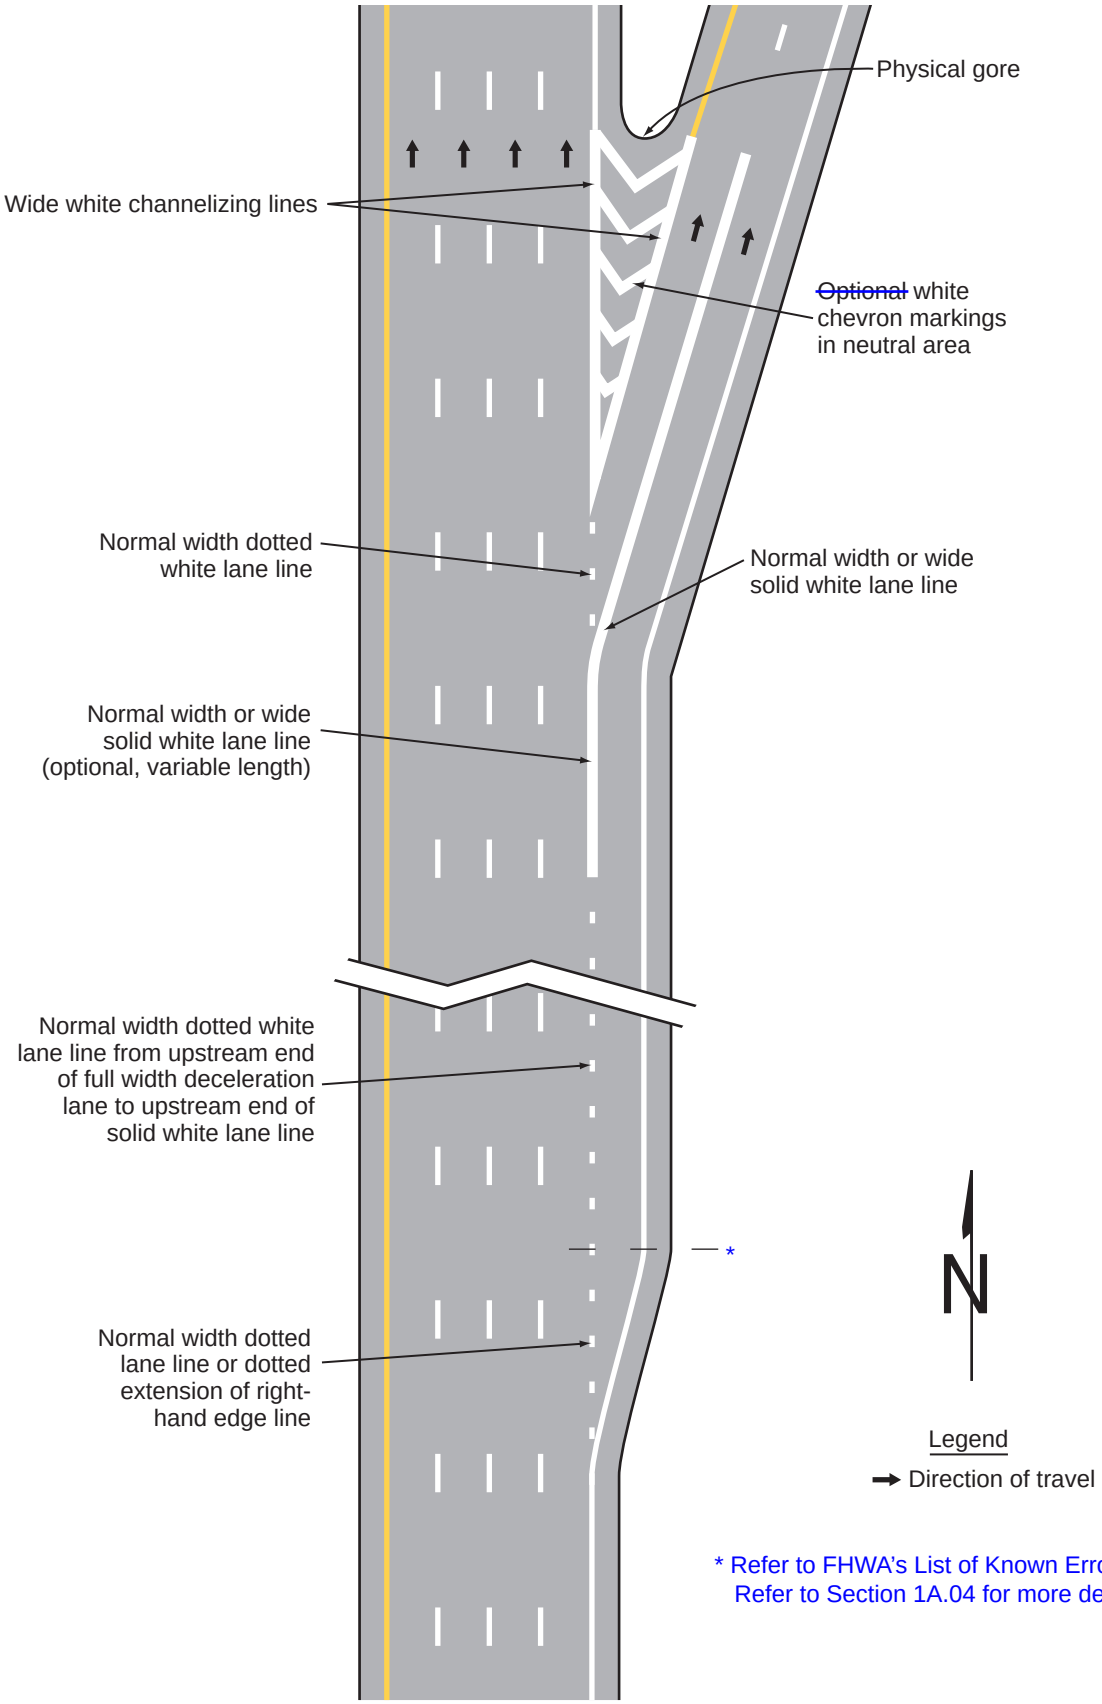


* Refer to FHWA's List of Known Errors for error. Refer to Section 1A.04 for more details.

## *Figure 3B-9(CA). Examples of Dotted Line, Chevron Markings, and Channelizing Line Applications for Exit Ramp Markings*

### Tapered Deceleration Lane

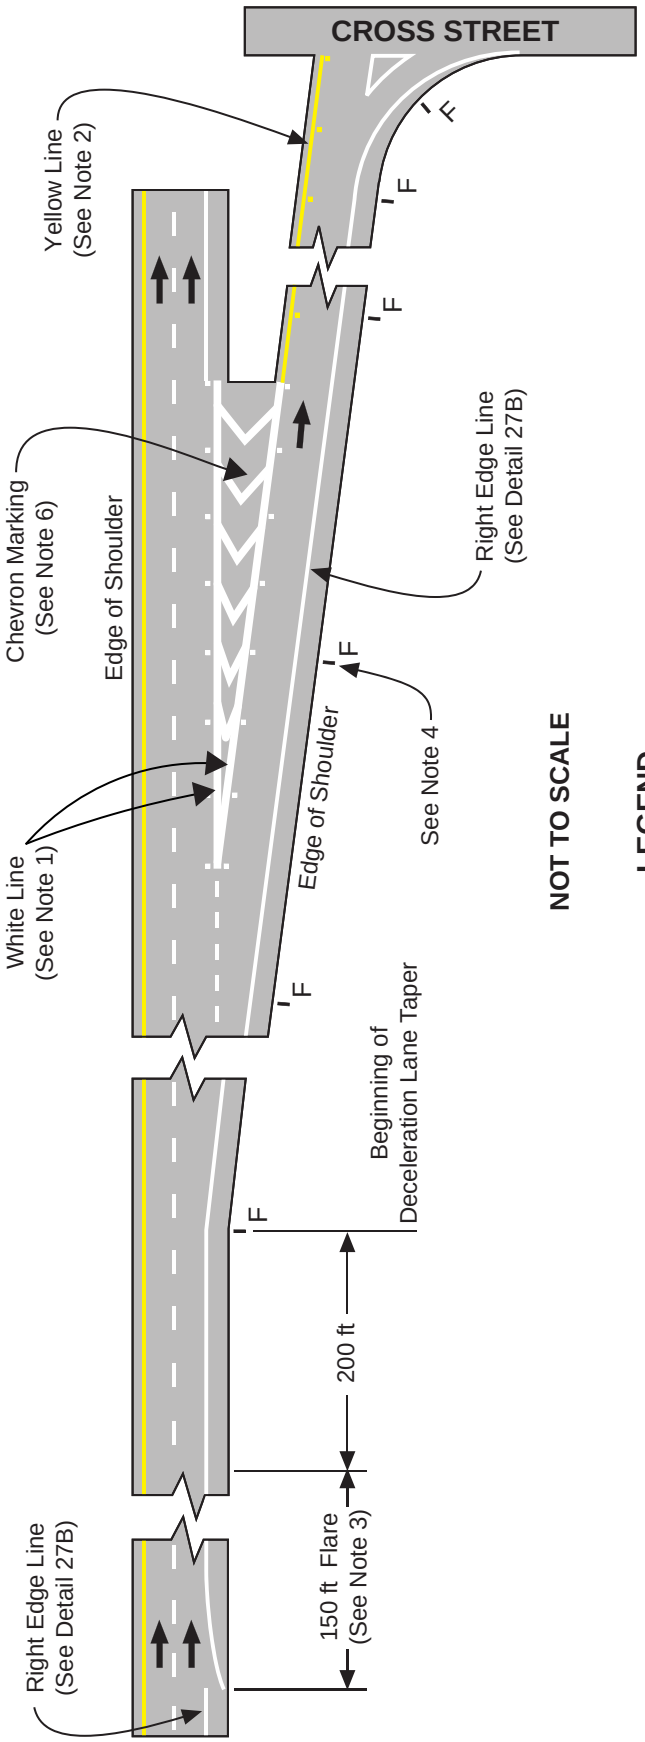


**NOT TO SCALE**


**LEGEND**

F Type F Delineator → Direction of Travel


Notes:

1. Place a Solid White Line and One-Way Clear Retroreflective Markers on 24 ft centers. See Detail 36 on Figure 3A-110(CA).
2. Place a Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers. See Detail 25A on Figure 3A-105(CA).
3. A flared Right Edge Line 150 ft in advance of an exit ramp, is recommended where climatic conditions, such as areas that experience heavy fog, may require additional guidance. In areas that normally do not experience these conditions, a continuous edge line may be used. See also Section 3B.14, Advance Markers - Exit Ramps.
4. Place delineators 2 ft to 6 ft outside edge of paved shoulder, approximately 200 ft apart with a minimum of 3 delineators per tangent. For additional details on delineator locations and spacing on curves, see Figures 3G-1 and 3G-102(CA).
5. See Figure 3A-114(CA) for Ramp Terminal Markings and Section 2B.48.
6. See Section 3B.25 Chevron and Diagonal Markings.


## Figure 3B-10. Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings (Sheet 1 of 2)

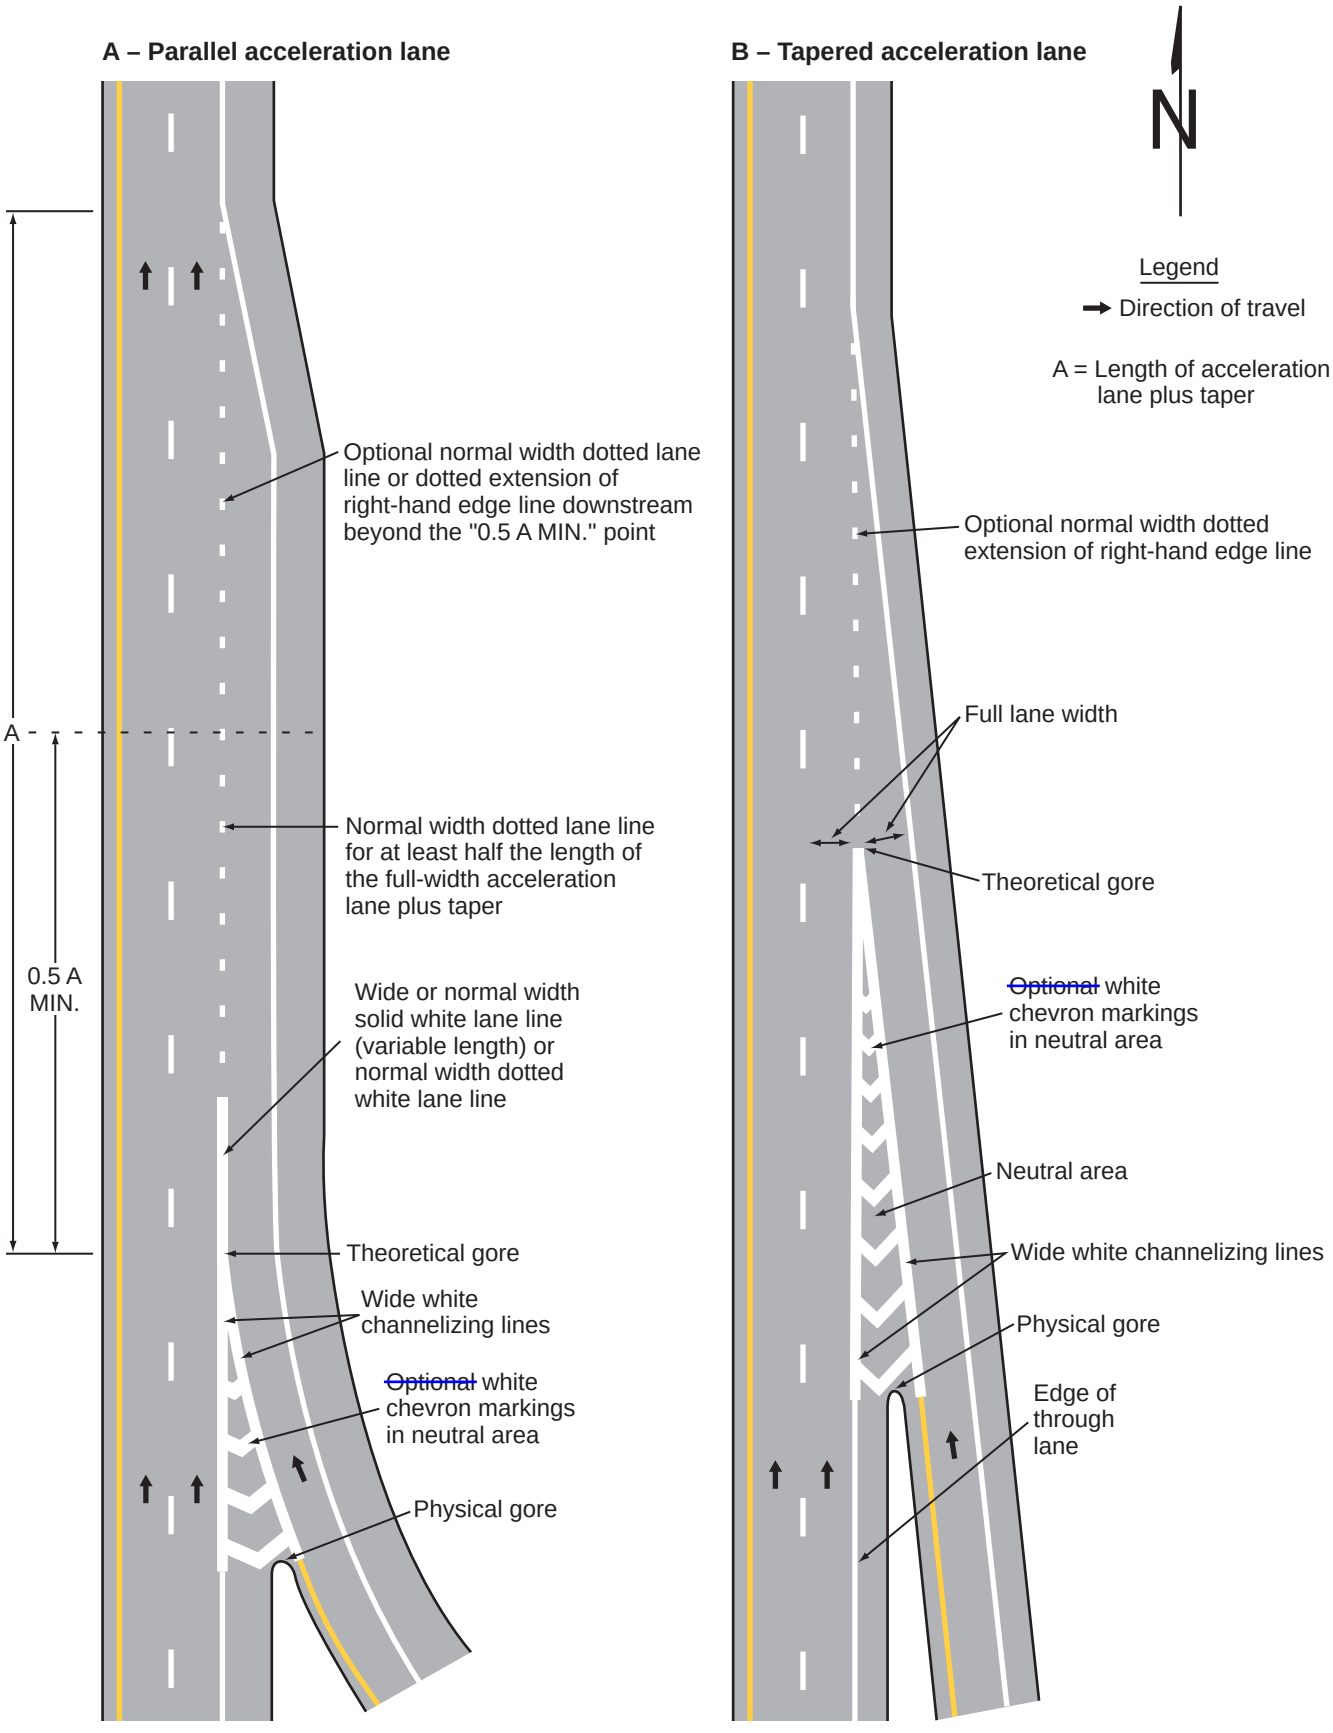

## Figure 3B-10. Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings (Sheet 2 of 2)

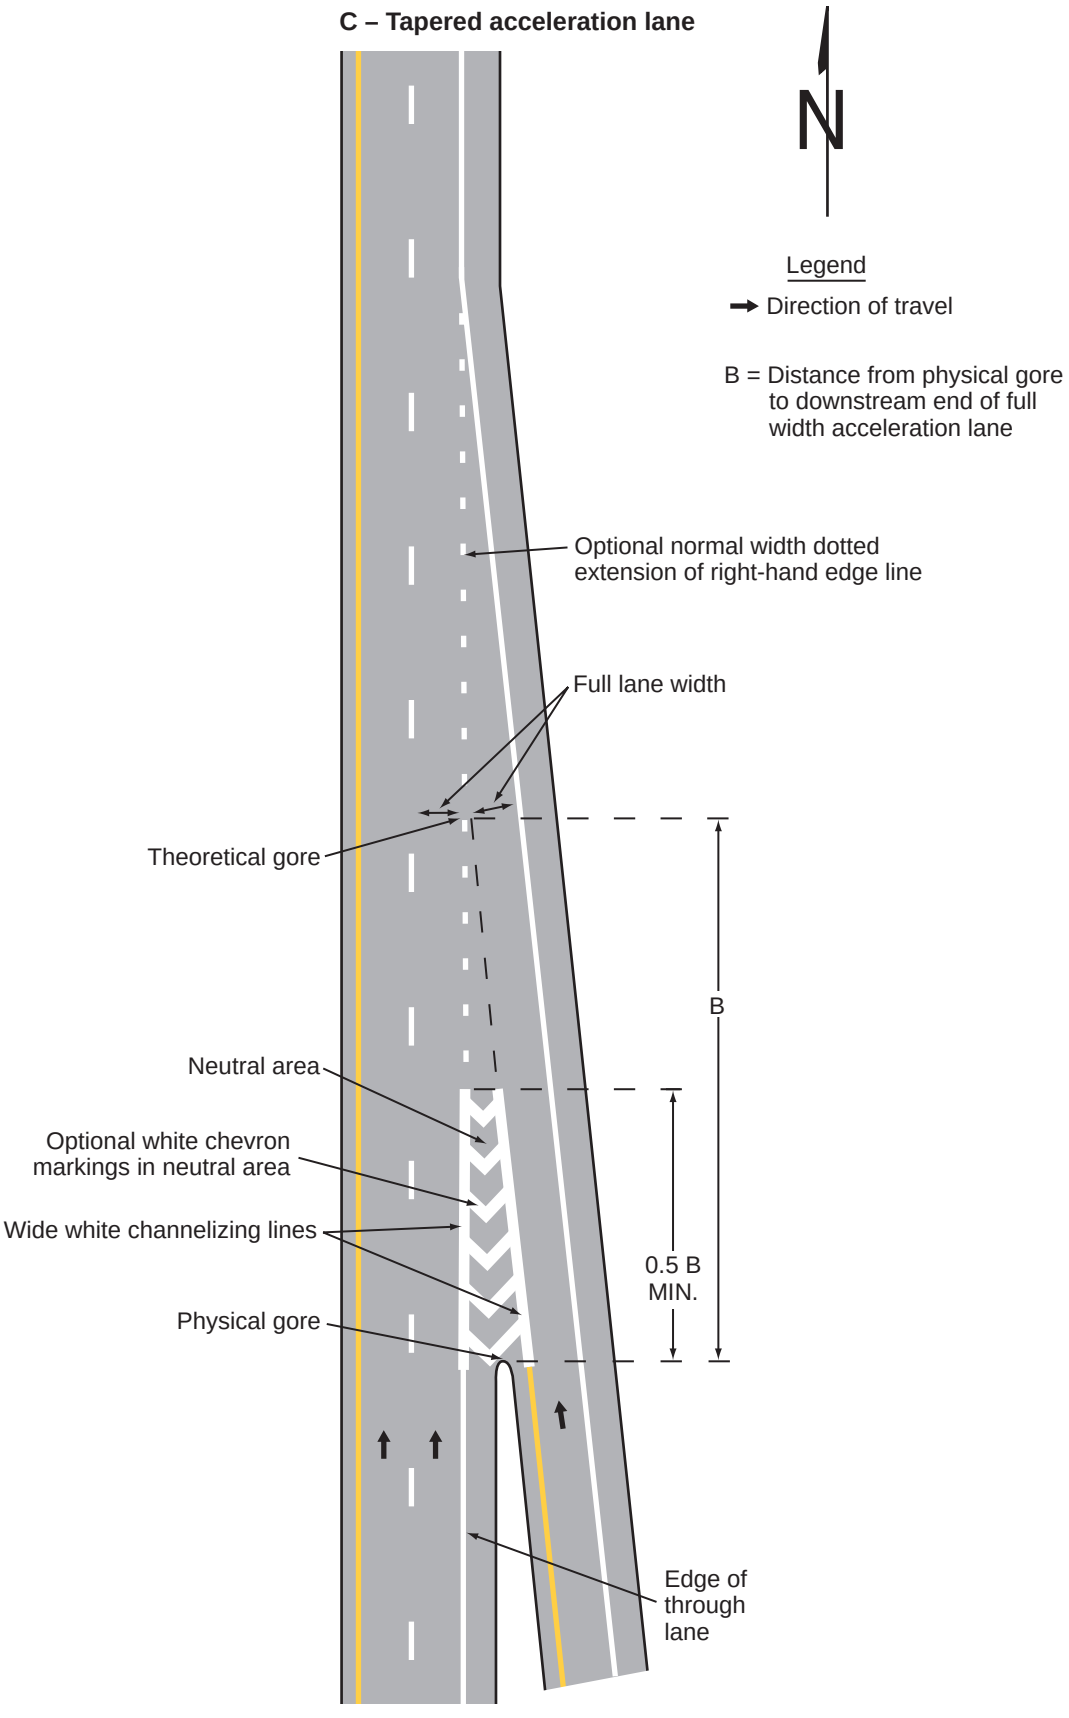


## *Figure 3B-10(CA). Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings (Sheet 1 of 2)*

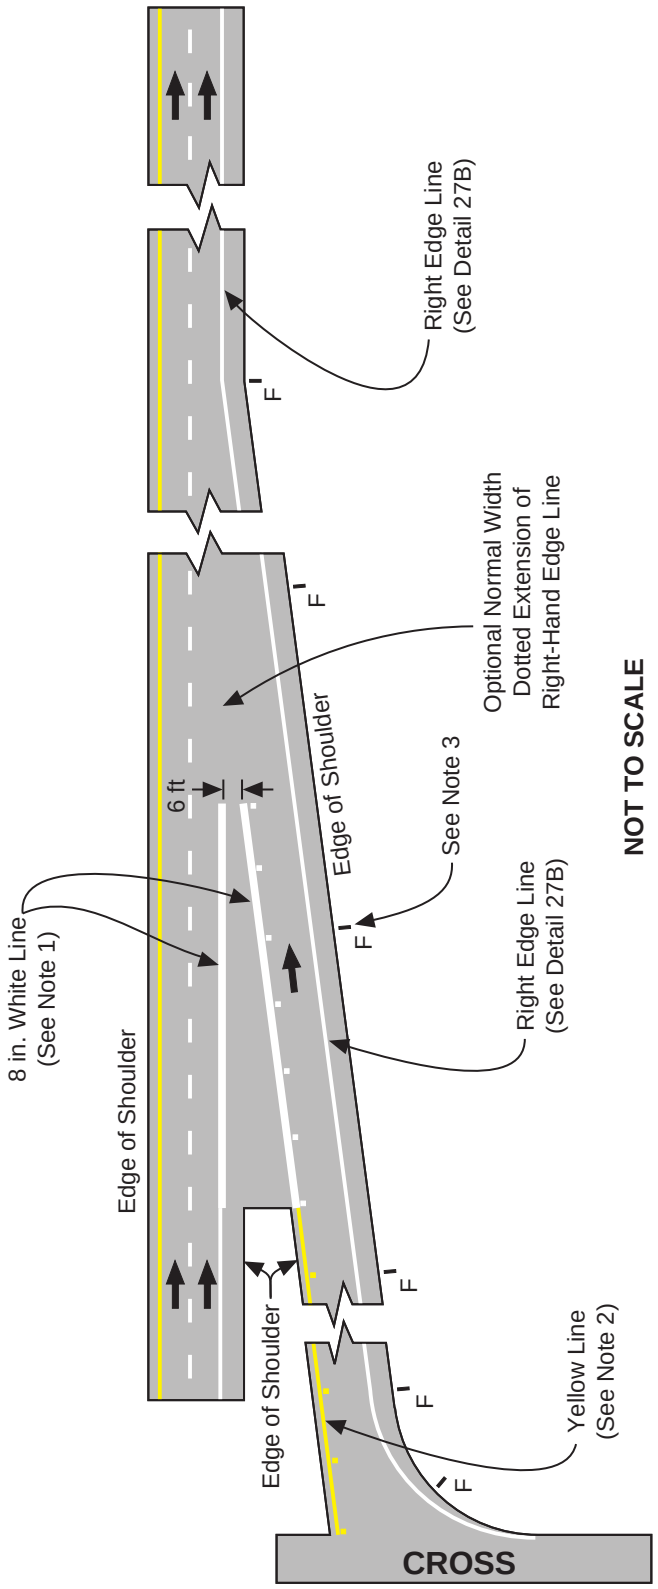


Notes:

1. Place an 8 in. Solid White Line and One-Way Clear Retroreflective Markers on 24 ft centers. See Detail 36A on Figure 3A-110(CA).
2. Place a Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers. See Detail 25A on Figure 3A-105(CA).
3. Place delineators 2 ft to 6 ft outside the edge of paved shoulder, approximately 200 ft apart with a minimum of 3 delineators per tangent. For additional details on delineator locations and spacing on curves, see Figures 3G-1 and 3G-102(CA).
4. When the entrance ramp lane becomes an added freeway lane, it shall be marked as a standard lane line. If the additional lane terminates at an exit ramp within 1/2 mi.

## *Figure 3B-10(CA). Examples of Dotted Line and Channelizing Line Applications for Entrance Ramp Markings (Sheet 2 of 2)*

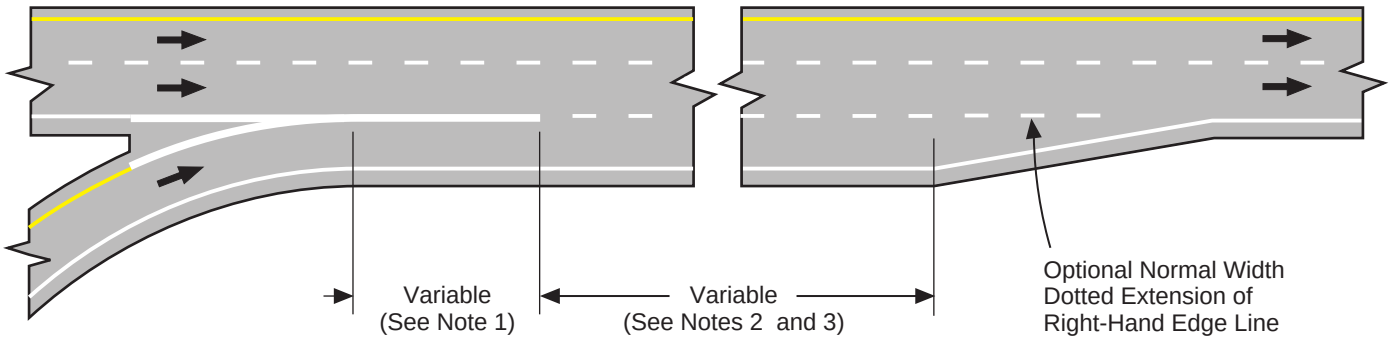


**PARALLEL ACCELERATION LANE**

**NOT TO SCALE**

**LEGEND**


→ Direction of Travel

Notes:

1. An 8 in. Solid White Channelizing Line should be continued for approximately one-tenth the length of the acceleration lane beyond the tangent point. See Detail 38A on Figure 3A-112(CA).
2. A Dashed White Lane Line (Detail 8 or 11) is normally used for the remaining length of the lane. However, in those locations where the lane may give the appearance of an added lane and to discourage its use by through traffic, an 8 in. Dashed White Channelizing Line (Detail 37) may be considered. See Figures 3A-102(CA) and 3A-111(CA).
3. See Figure 3B-14(CA) for transition area signing and marking details, when the acceleration lane is longer than 1 mi.


## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 1 of 6)

**A – Lane drop at a single lane exit ramp**

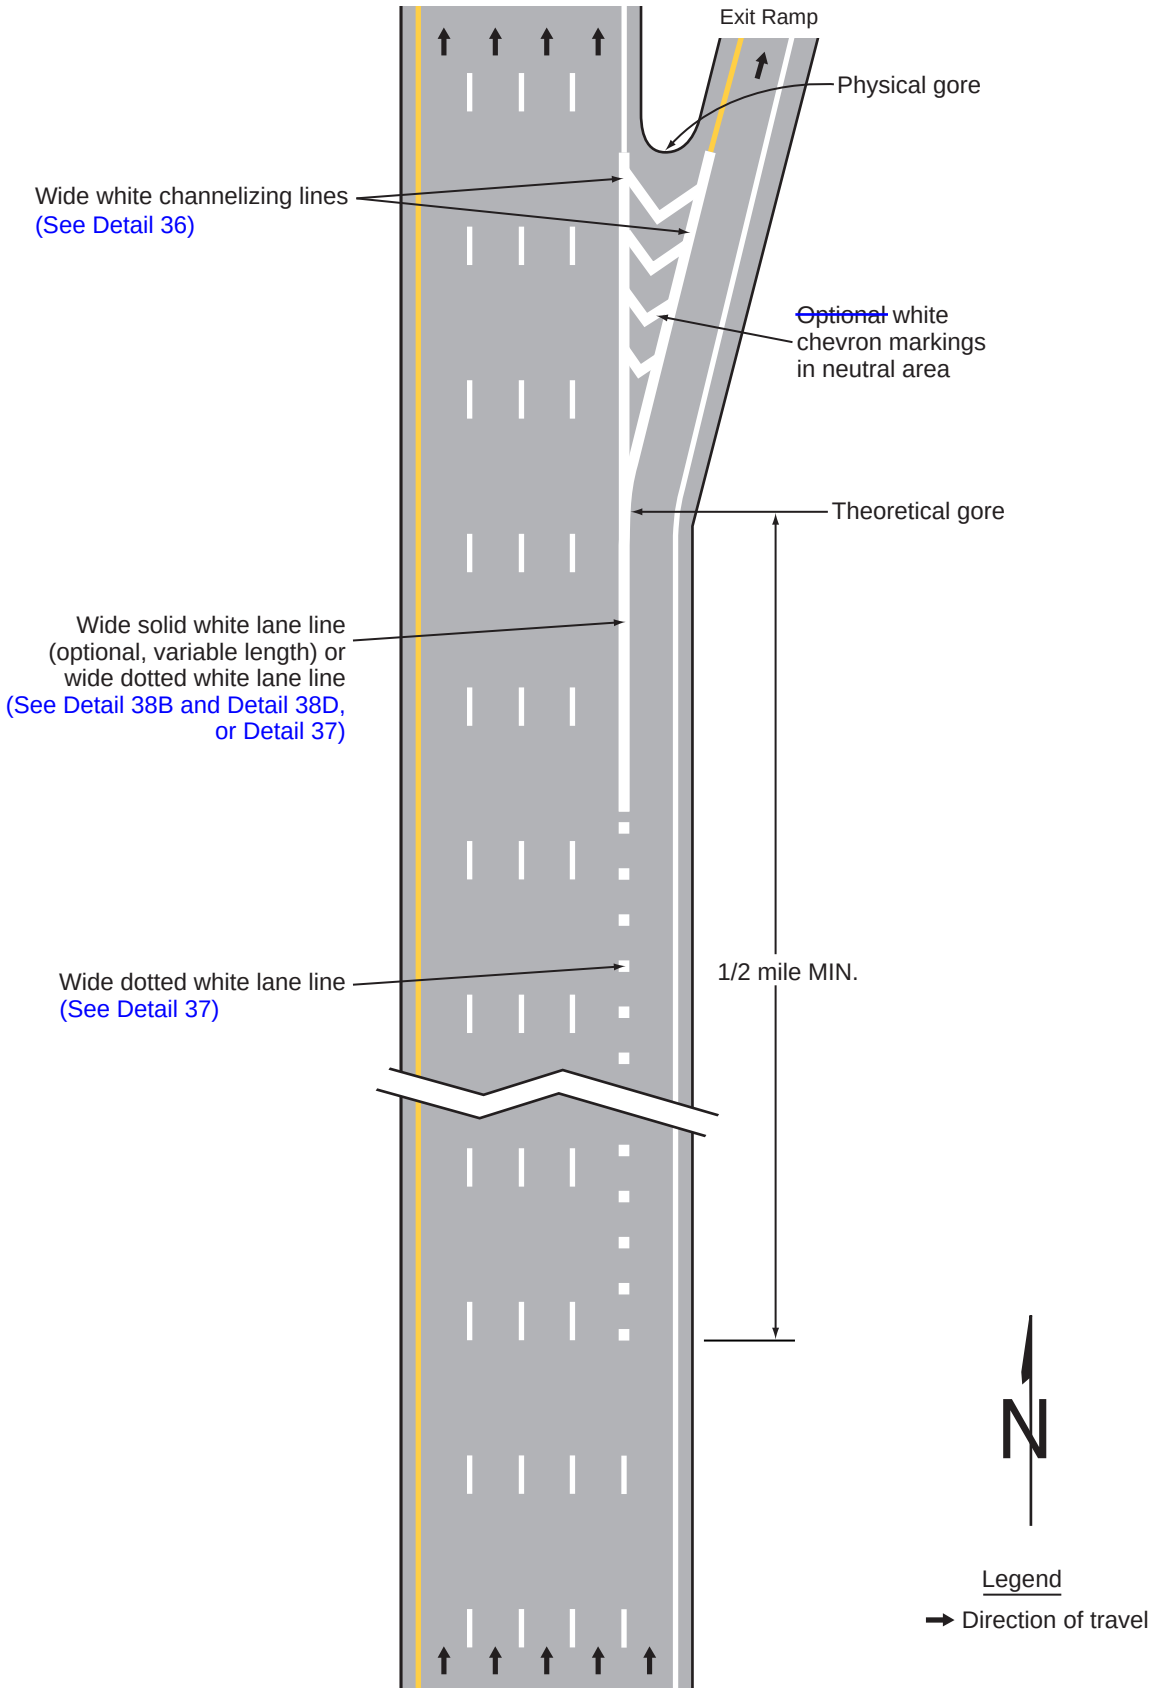


## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 2 of 6)

**B – Lane drop at a multi-lane exit ramp having an optional exit lane that also carries the through route**

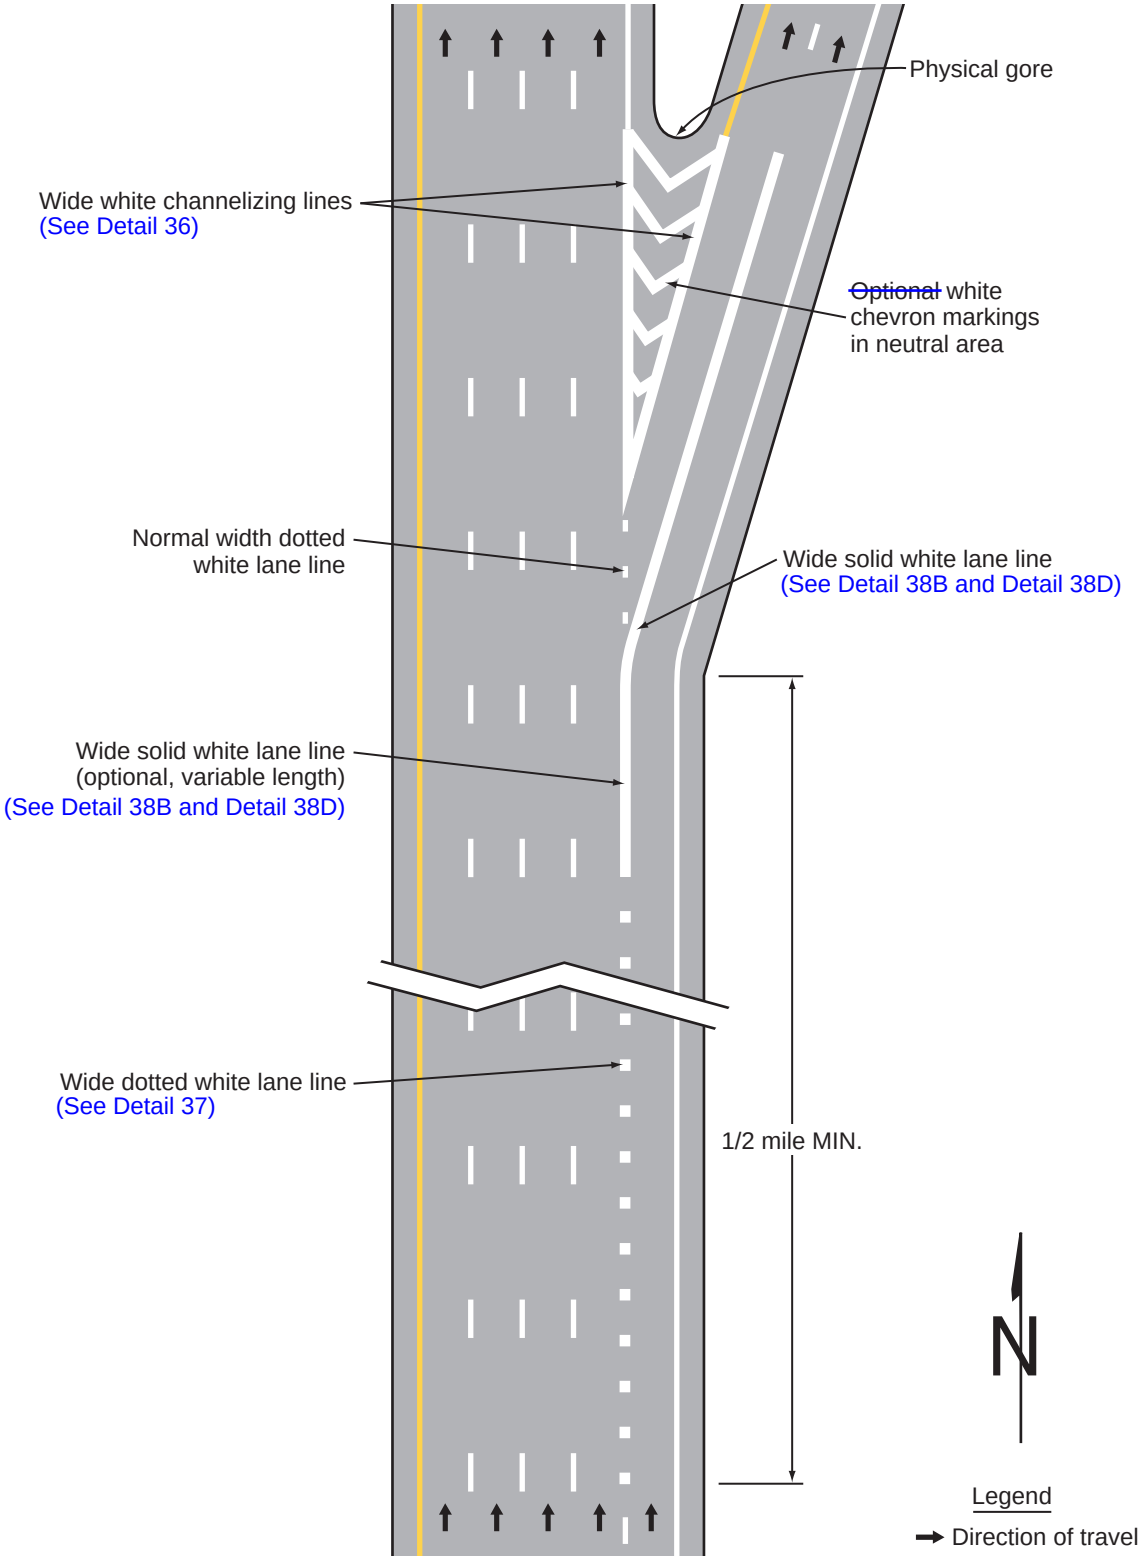


## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 3 of 6)

**C – Two-lane lane drop at an exit ramp**

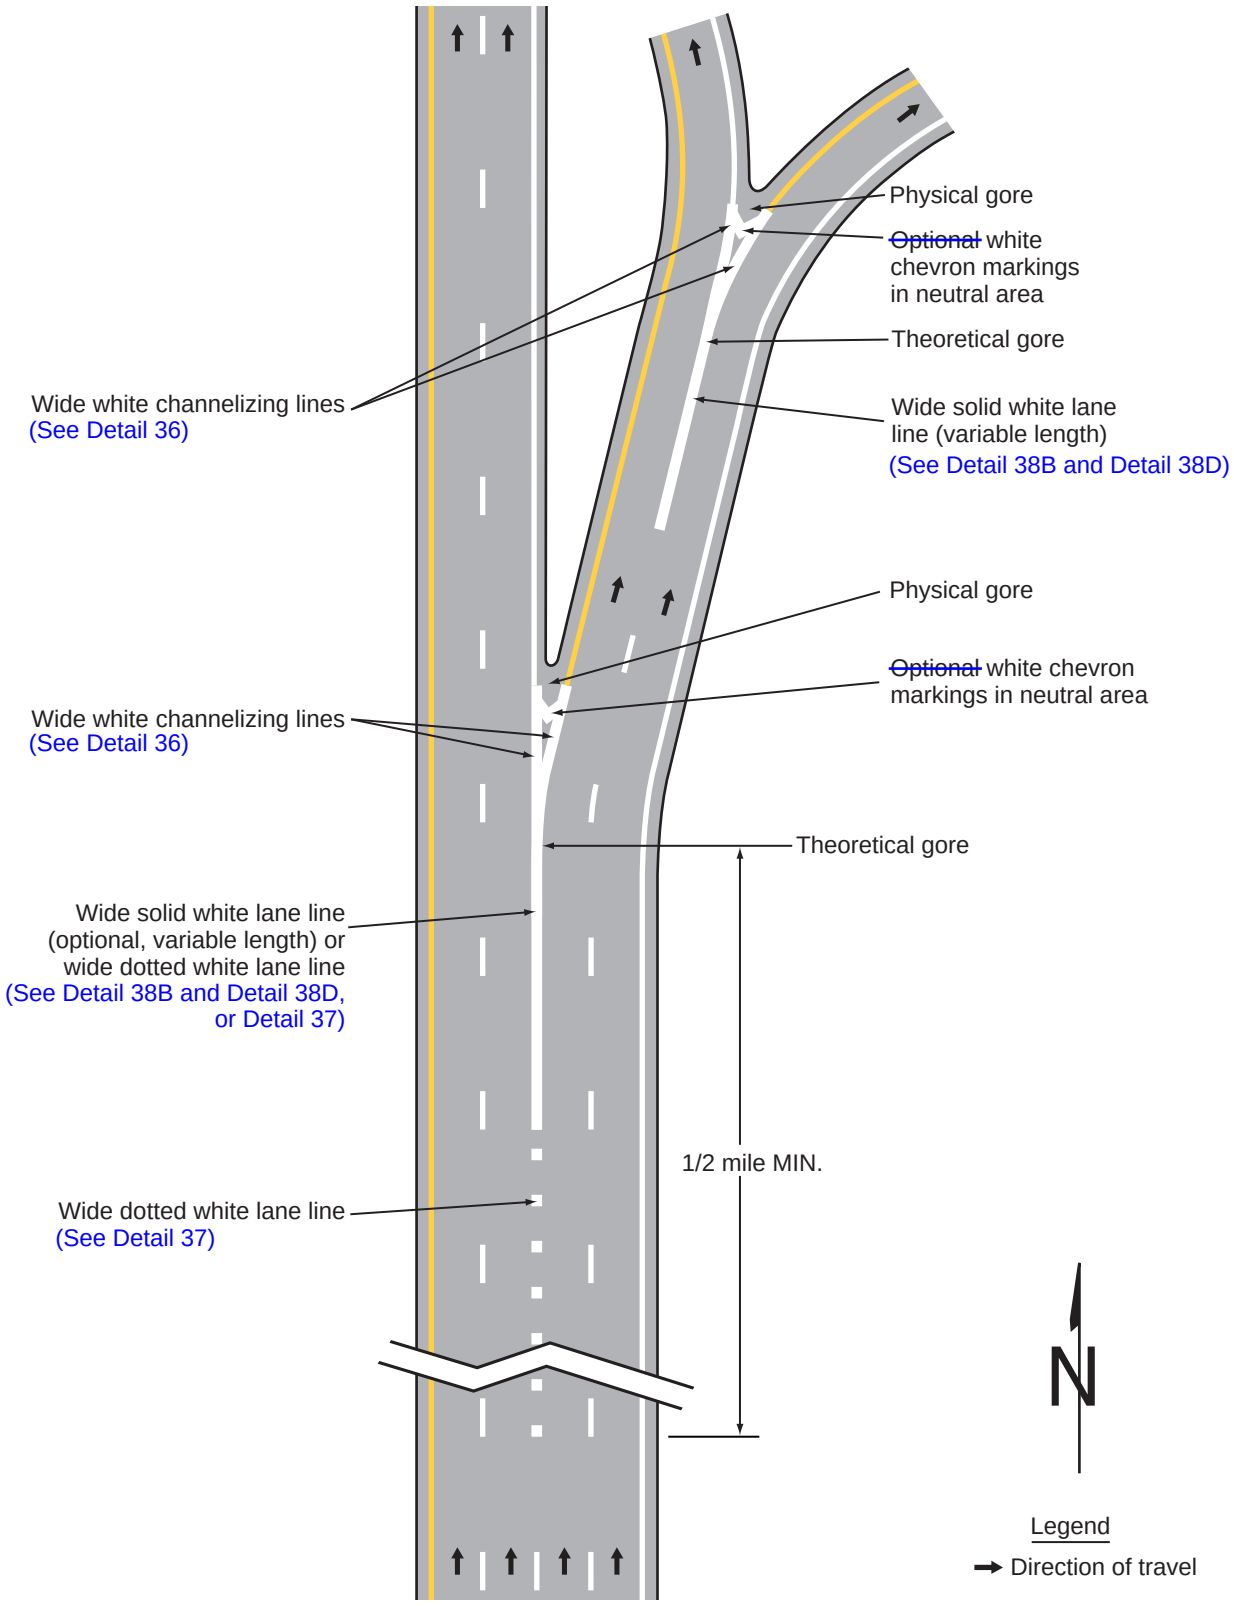


## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 4 of 6)

**D – Route split with dedicated lanes**

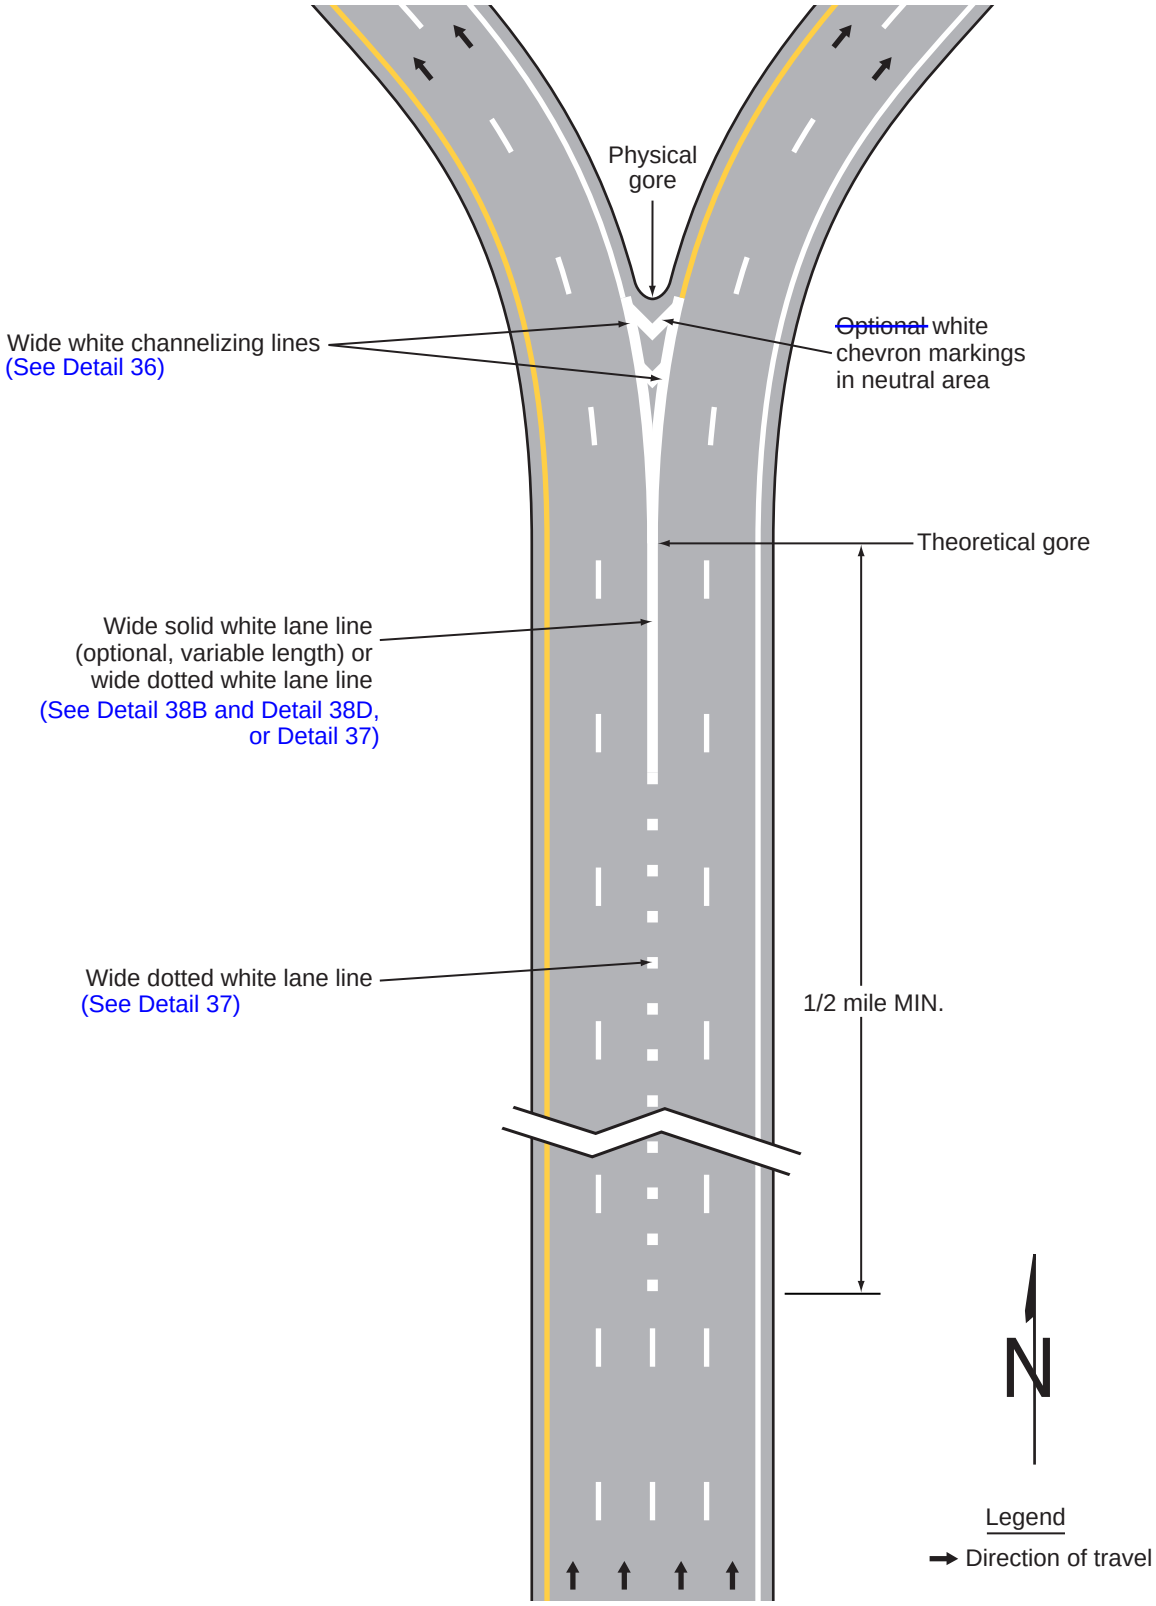


## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 5 of 6)

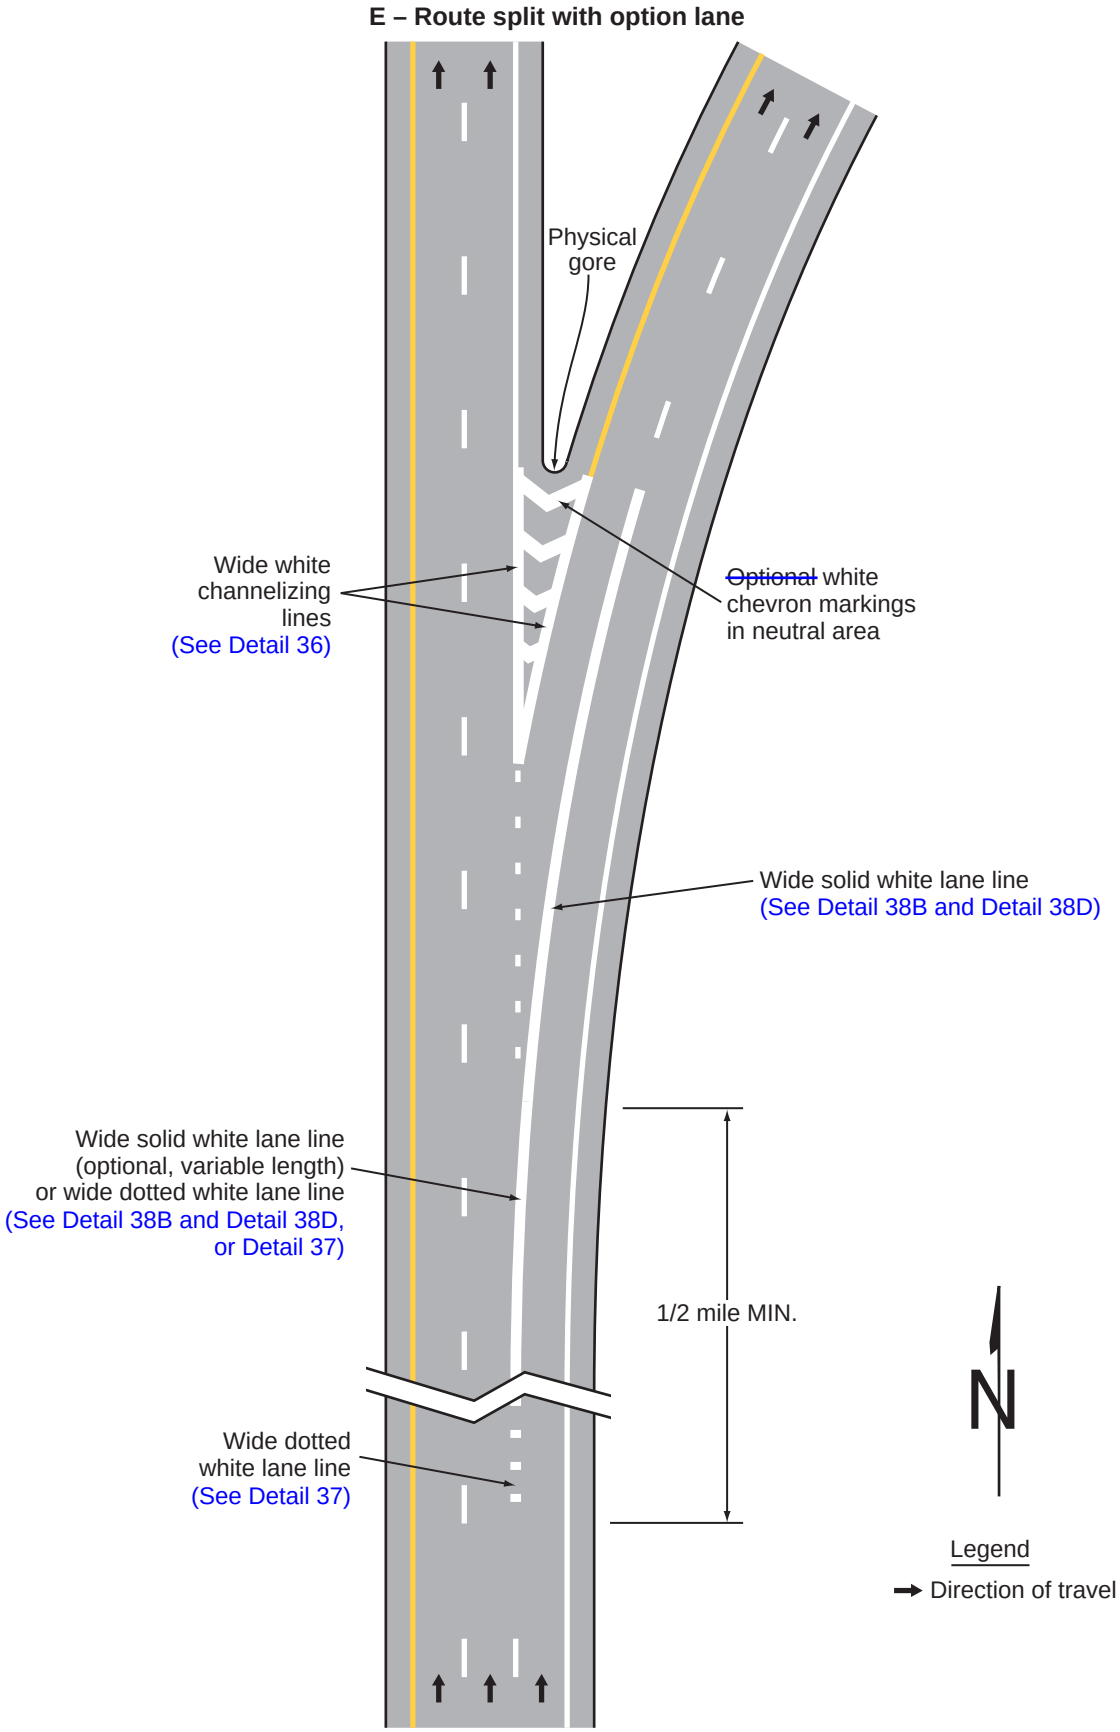

## Figure 3B-11. Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 6 of 6)


**F – Continuous auxiliary lane, such as at a cloverleaf interchange**

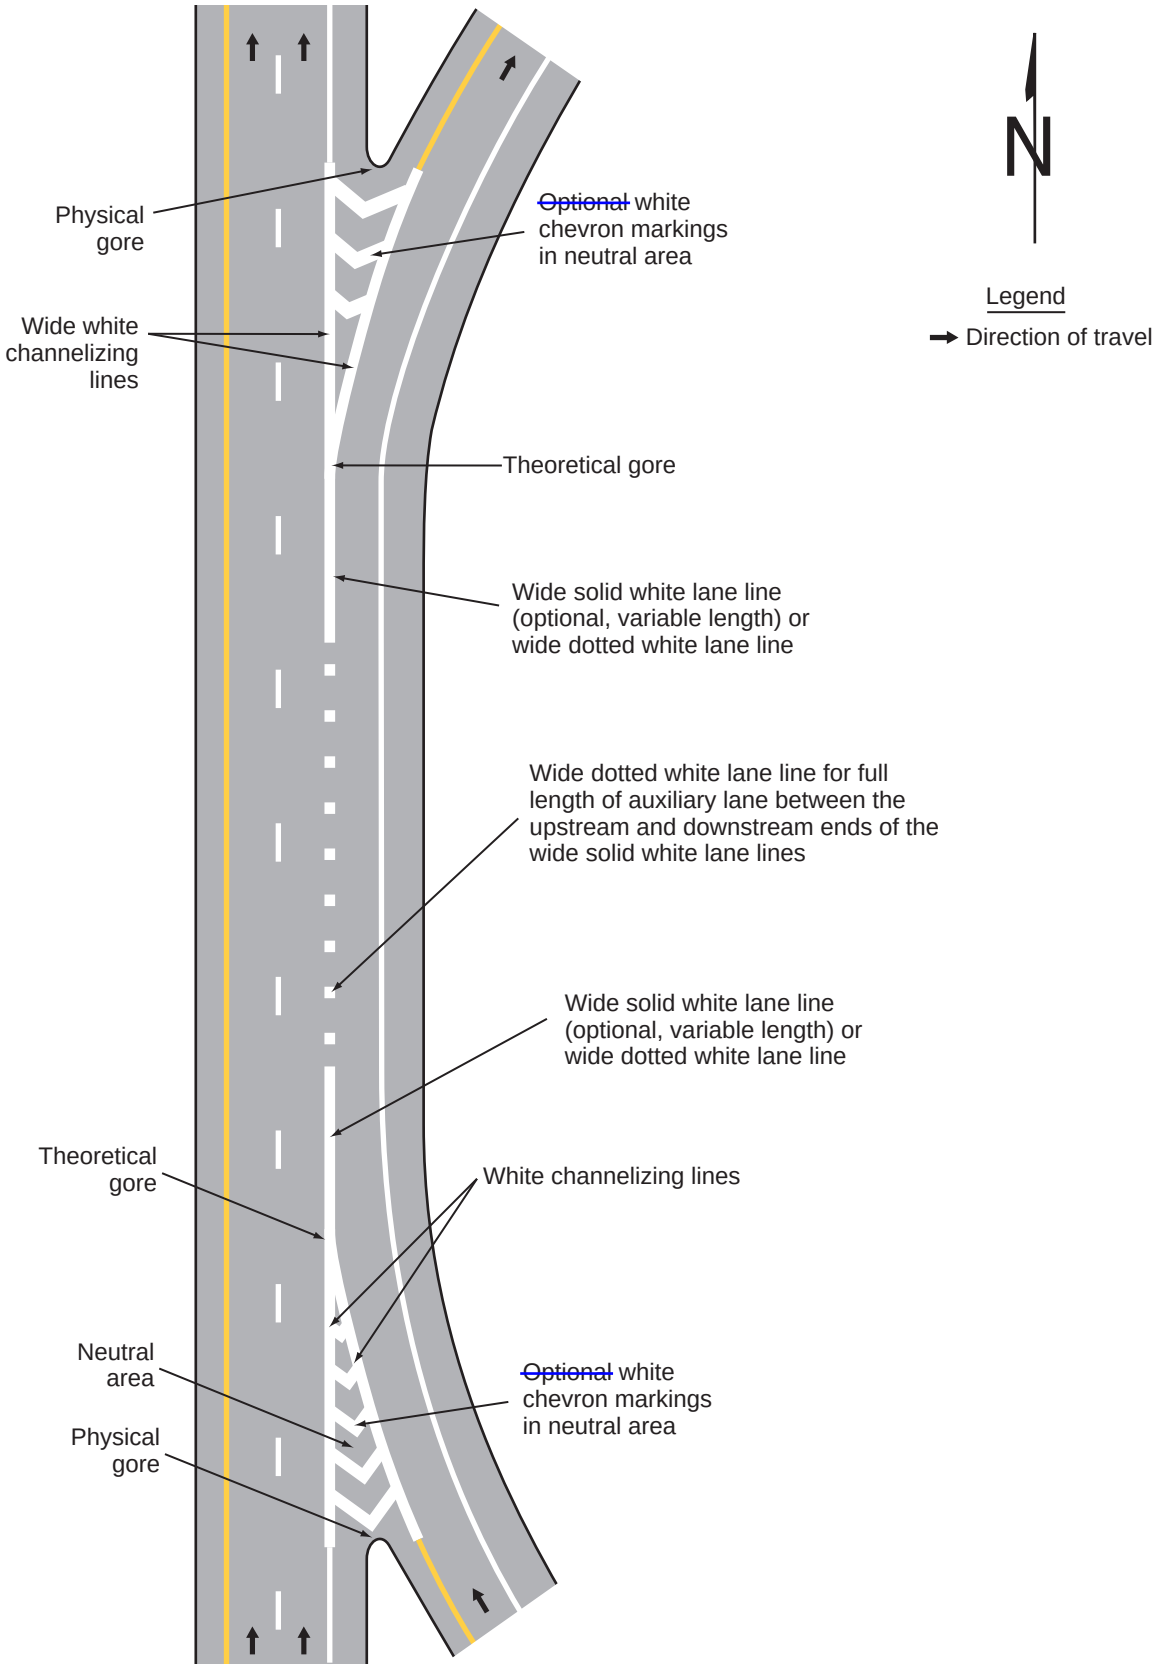


## *Figure 3B-11(CA). Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 1 of 2)*

### Auxiliary (Weaving) Lane, such as at Cloverleaf Interchange

#### A. AUXILIARY (WEAVING) LANE (600 FT TO 1/2 MI.)

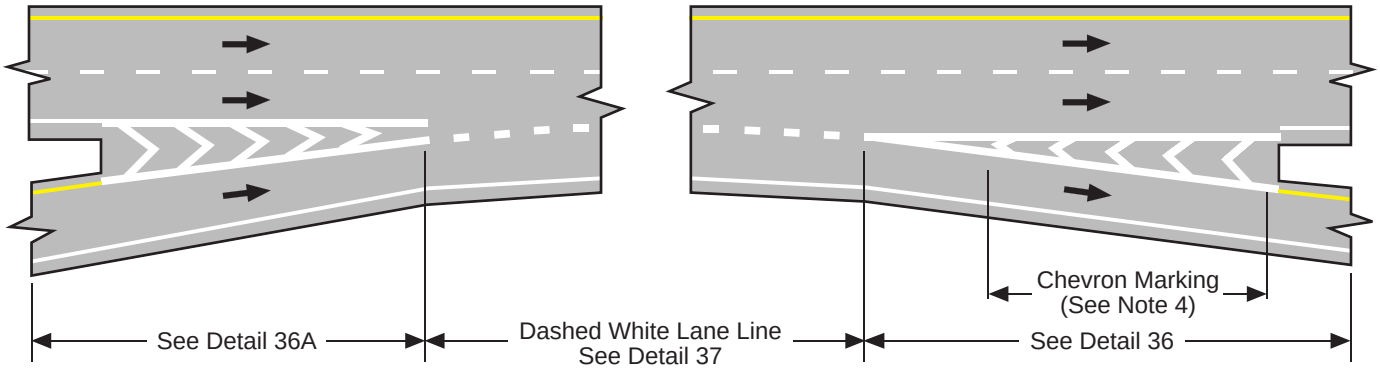


#### B. AUXILIARY (WEAVING) LANE (LONGER THAN 1/2 MI.)

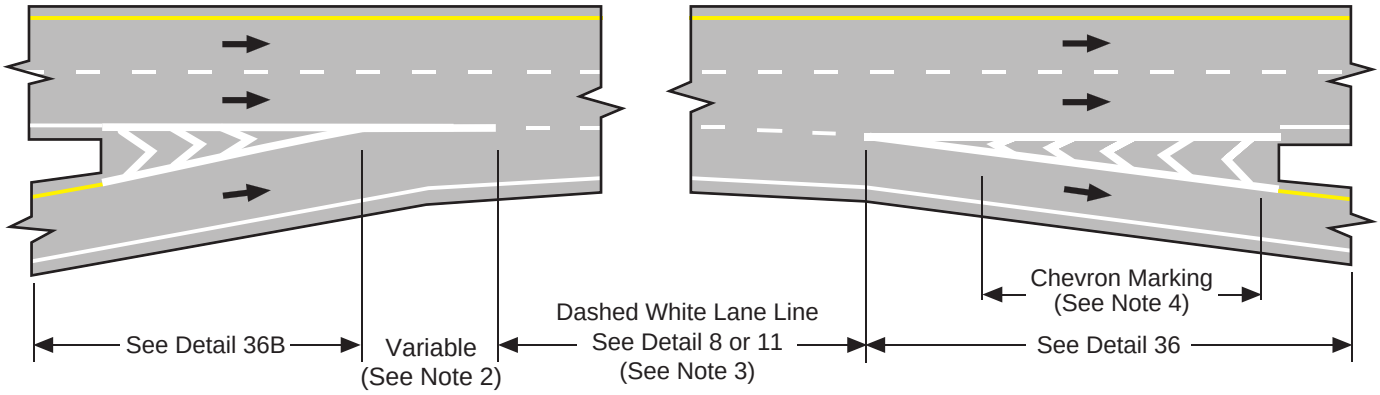


**NOT TO SCALE**

**LEGEND**

→ Direction of Travel

Notes:

1. Auxiliary (Weaving) Lanes less than 600 ft are normally marked as Exit Ramps (see Sheets 1 and 2) and Entrance Ramps (Refer to Figure 3B-10(CA)).


2. An 8 in. Solid White Channelizing Line should be continued for approximately one-tenth the length of the acceleration lane beyond the tangent point. See Detail 38A.

3. A Dashed White Lane Line (Detail 8 or 11) is normally used for the remaining length of the lane. However, in those locations where the lane may give the appearance of an added lane and to discourage its use by through traffic, an 8 in. Dashed White Channelizing Line (Detail 37) may be considered. See Details on Figures 3A-102(CA) and 3A-111(CA).


4. Refer to Section 3B.25 Chevron and Diagonal Markings.

## *Figure 3B-11(CA). Examples of Applications of Freeway and Expressway Lane-Drop Markings (Sheet 2 of 2)*


### CASE 1: Mainline Lane Drop to a One Lane Exit

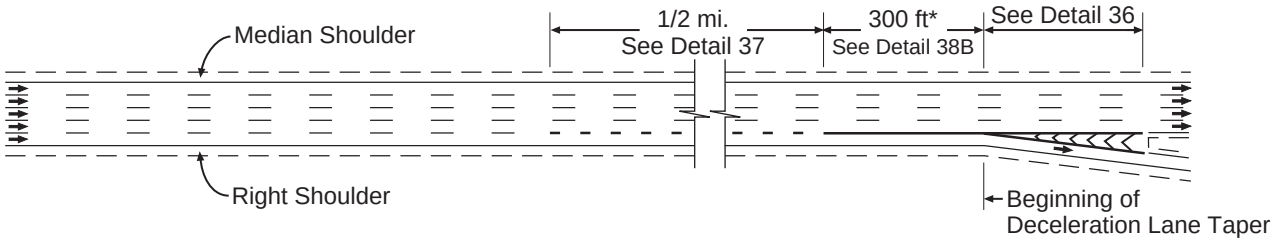


### CASE 2: Mainline Lane Drop to a Two Lane Exit (Optional Lane)

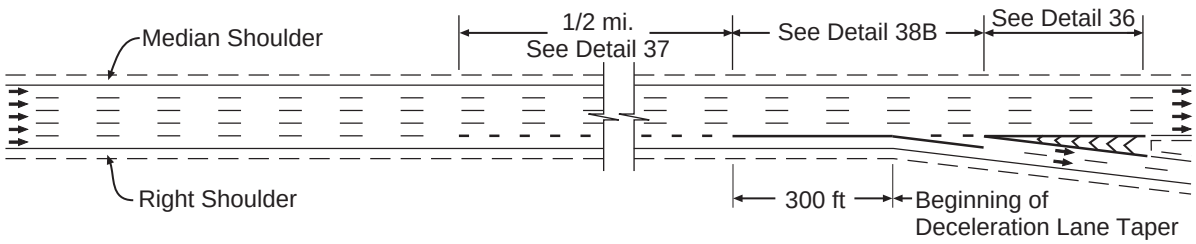


### CASE 3: Mainline Lane Drop to a Two Lane Exit

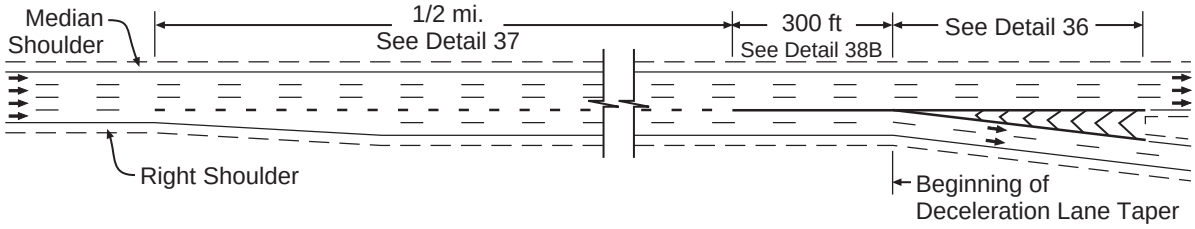


**NOT TO SCALE**


**LEGEND**

➡ Direction of Travel  - - - Lane Drop Pattern


Note: Refer to Part 2 for signs.

# Figure 3B-12. Examples of Applications of Conventional Road Lane-Drop Markings (Sheet 1 of 2)

**A – Lane drop at an intersection**

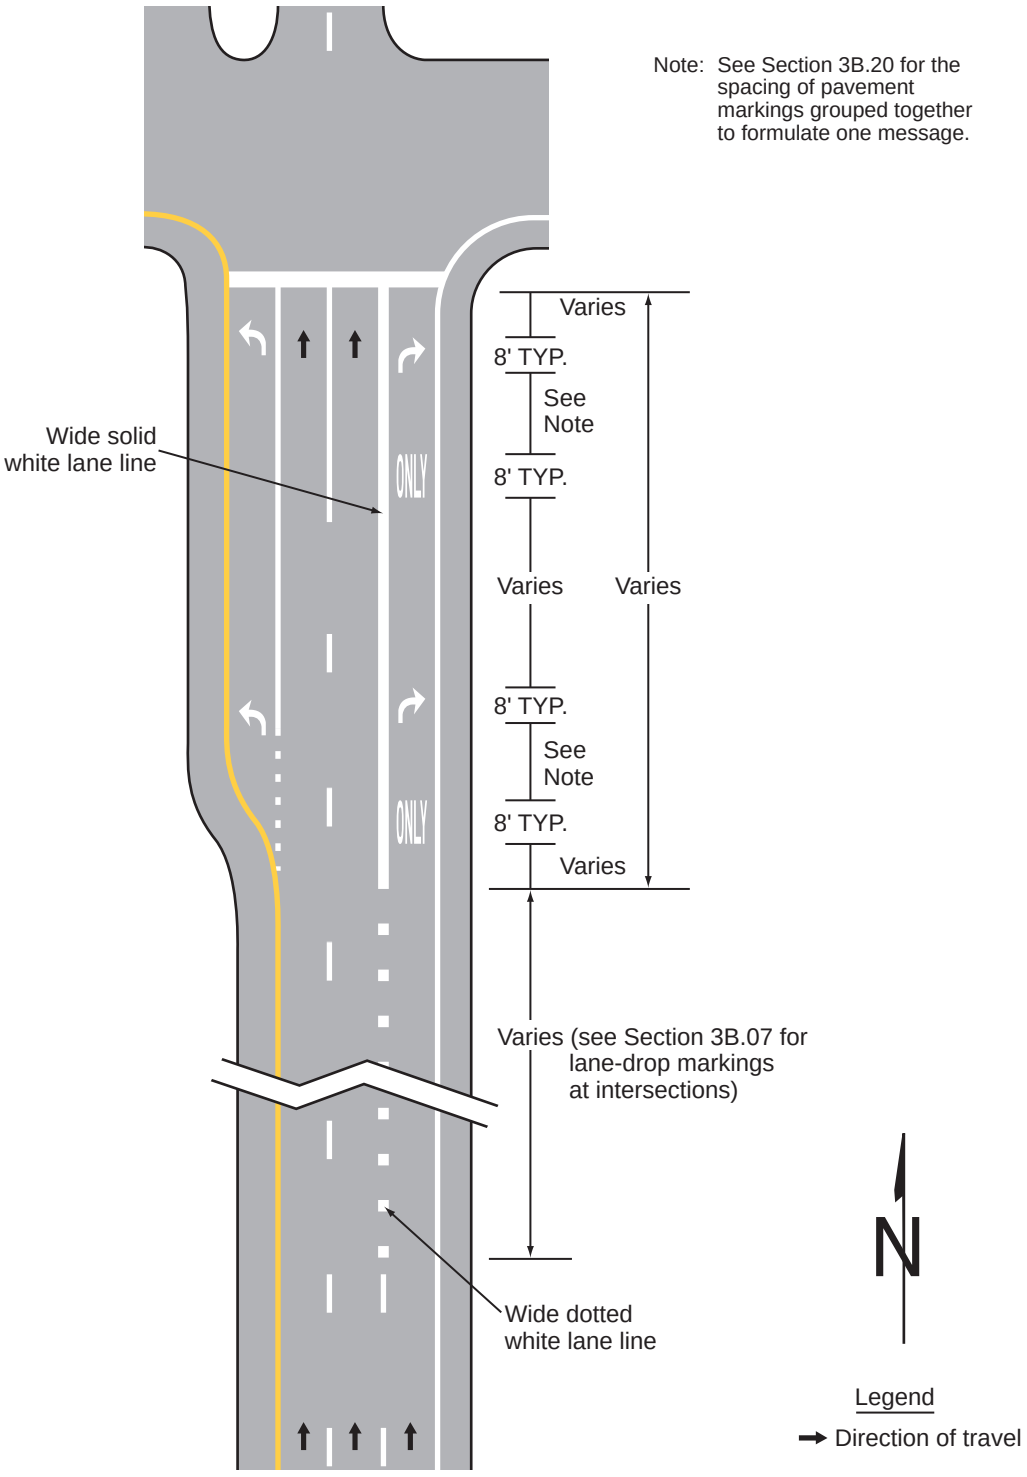


## Figure 3B-12. Examples of Applications of Conventional Road Lane-Drop Markings
(Sheet 2 of 2)

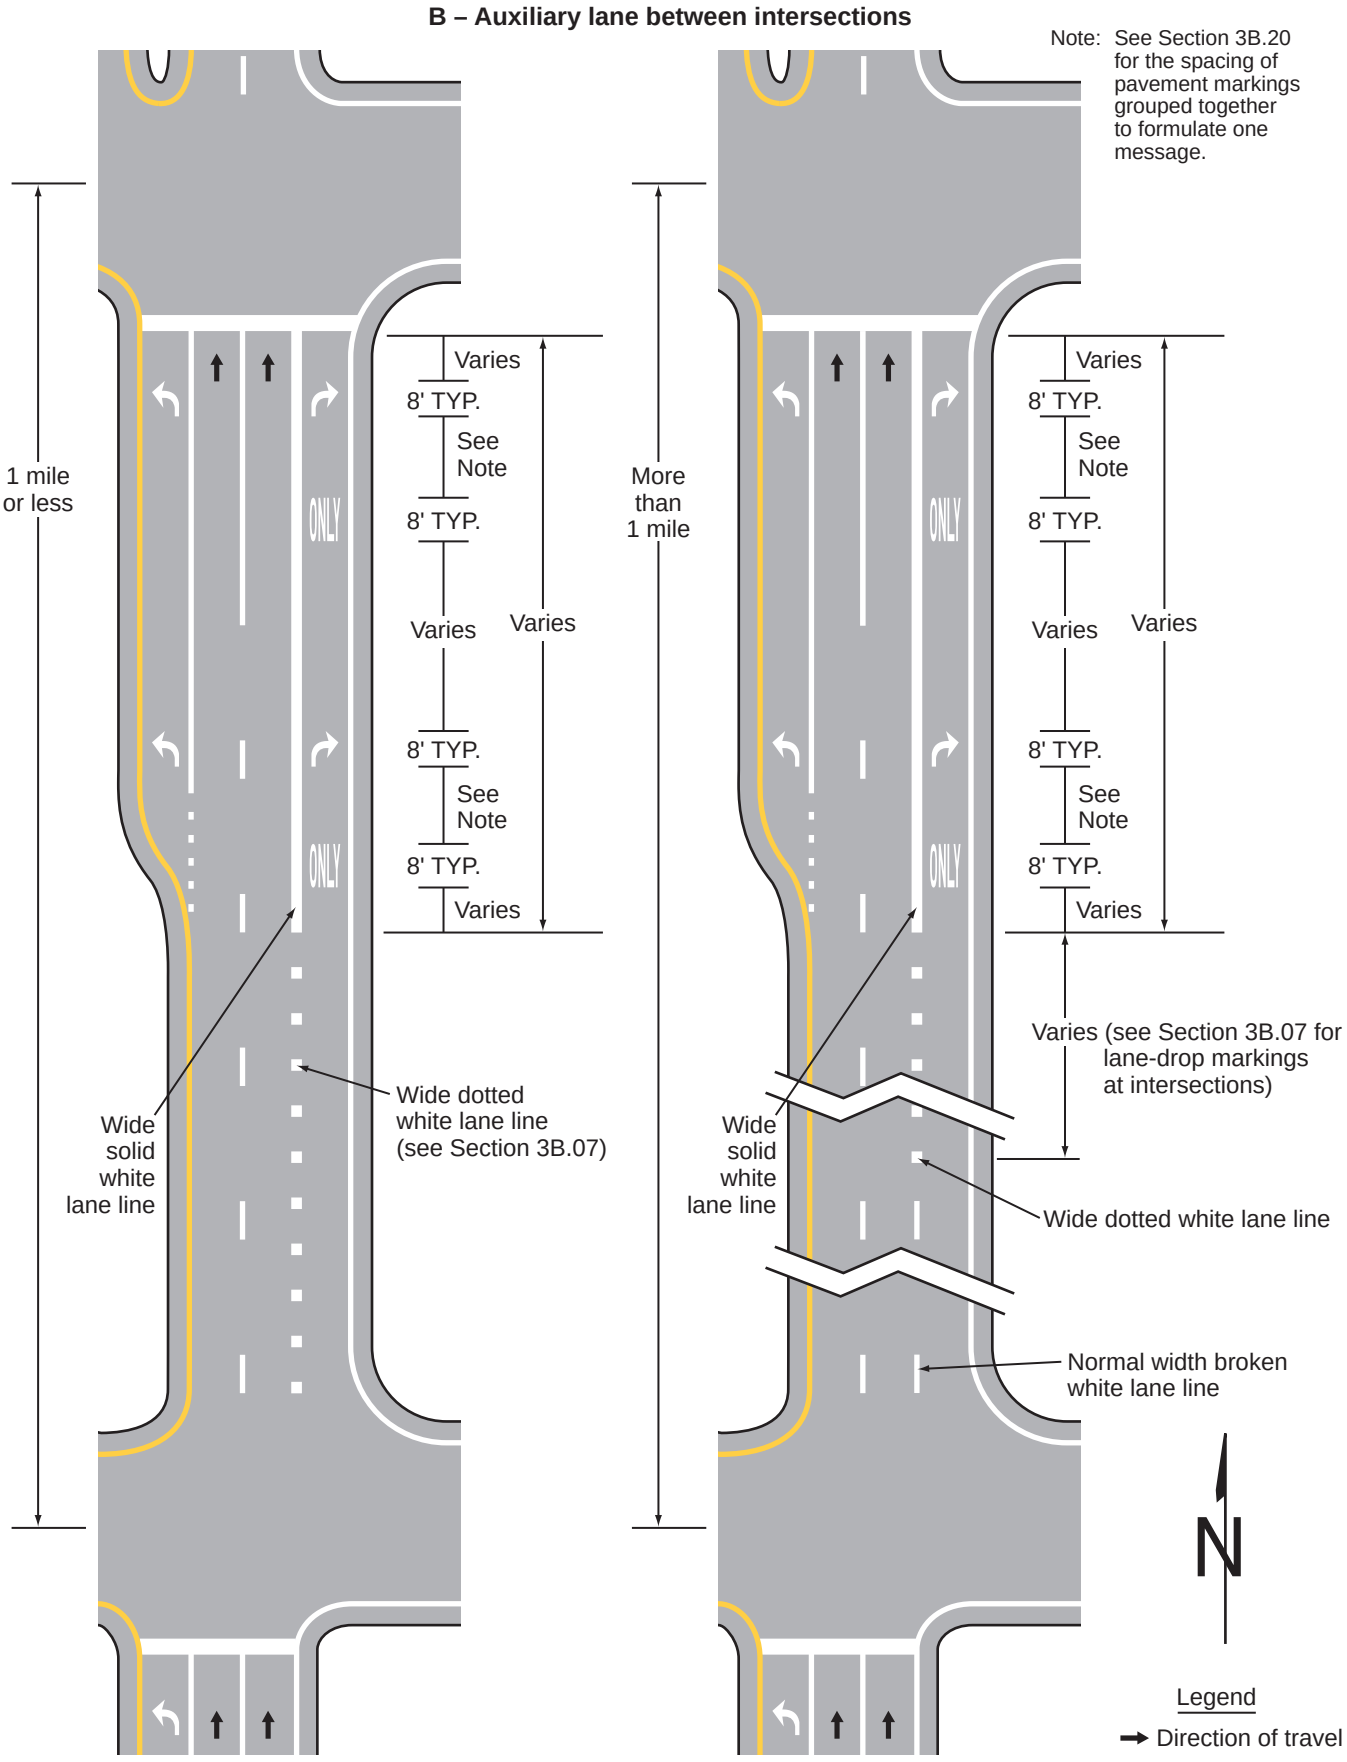


## Figure 3B-13. Examples of Line Extensions through Intersections (Sheet 1 of 2)

**A – Typical pavement markings with offset lane lines continued through the intersection**

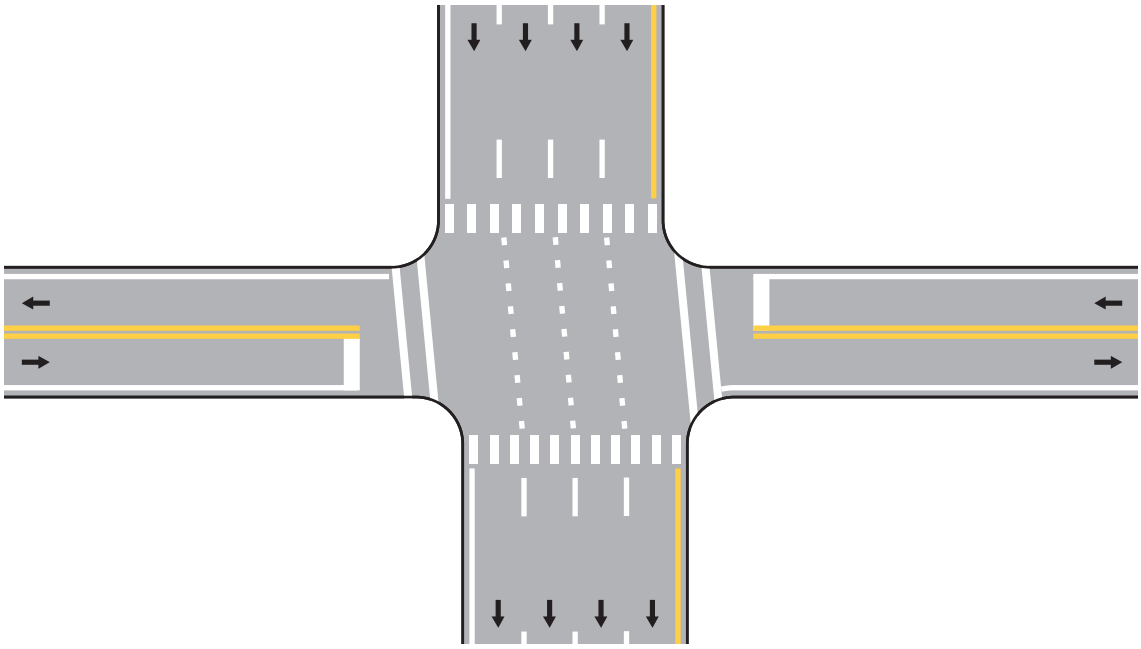


**B – Typical pavement markings with line extensions into intersection for double turns**

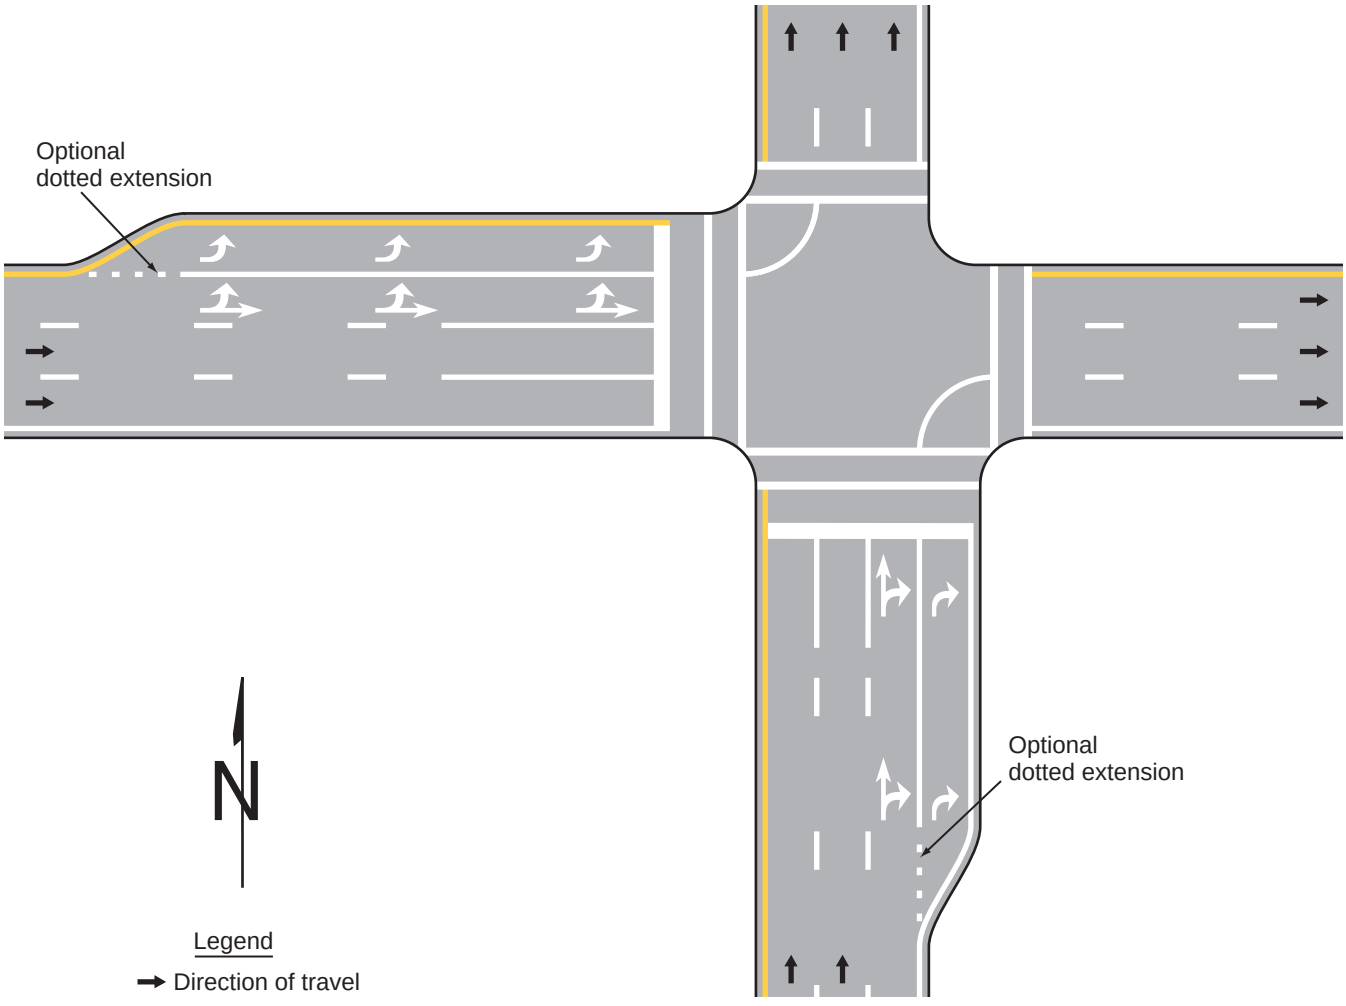


## Figure 3B-13. Examples of Line Extensions through Intersections (Sheet 2 of 2)


**C – Typical dotted line markings to extend lane line markings into the intersection**

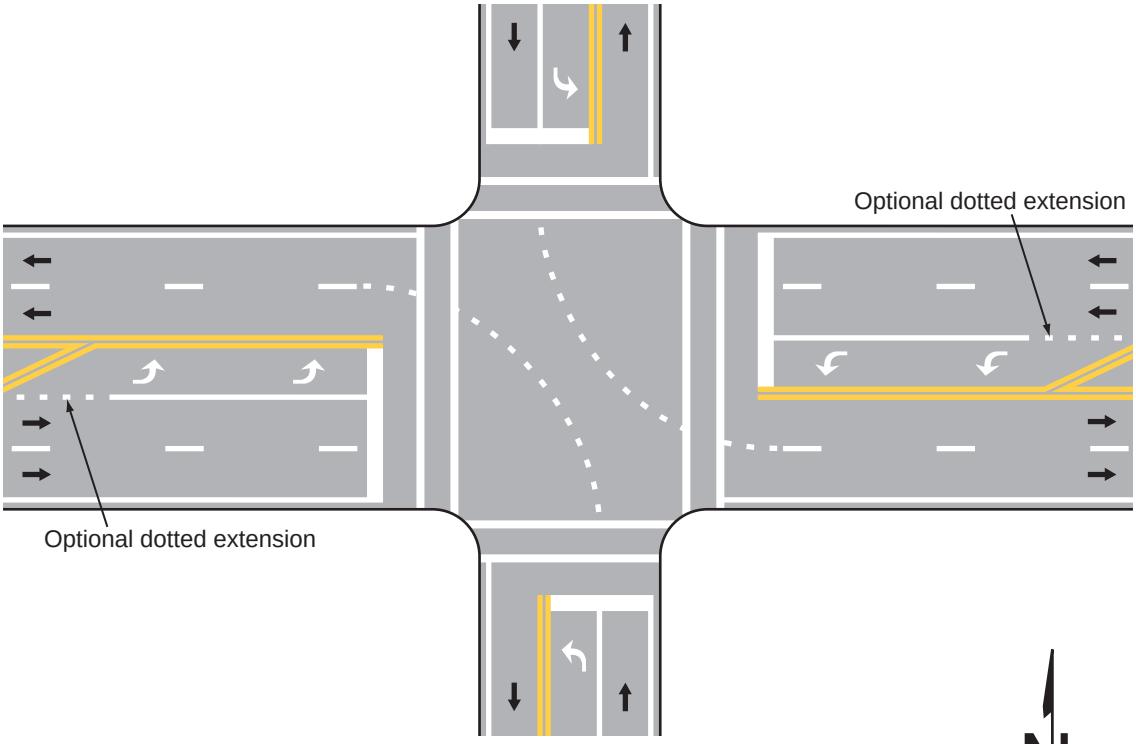


**D – Typical dotted line markings to extend center line and lane line markings into the intersection**

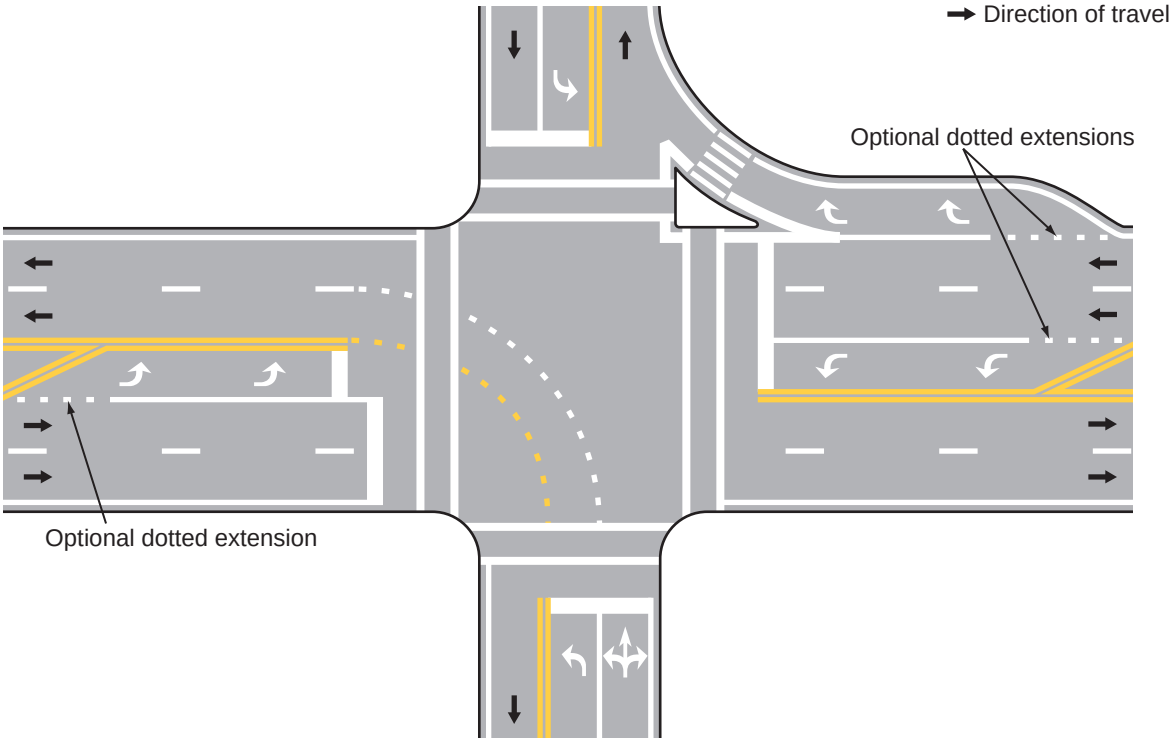


# Figure 3B-14. Examples of Applications of Lane-Reduction Transition Markings

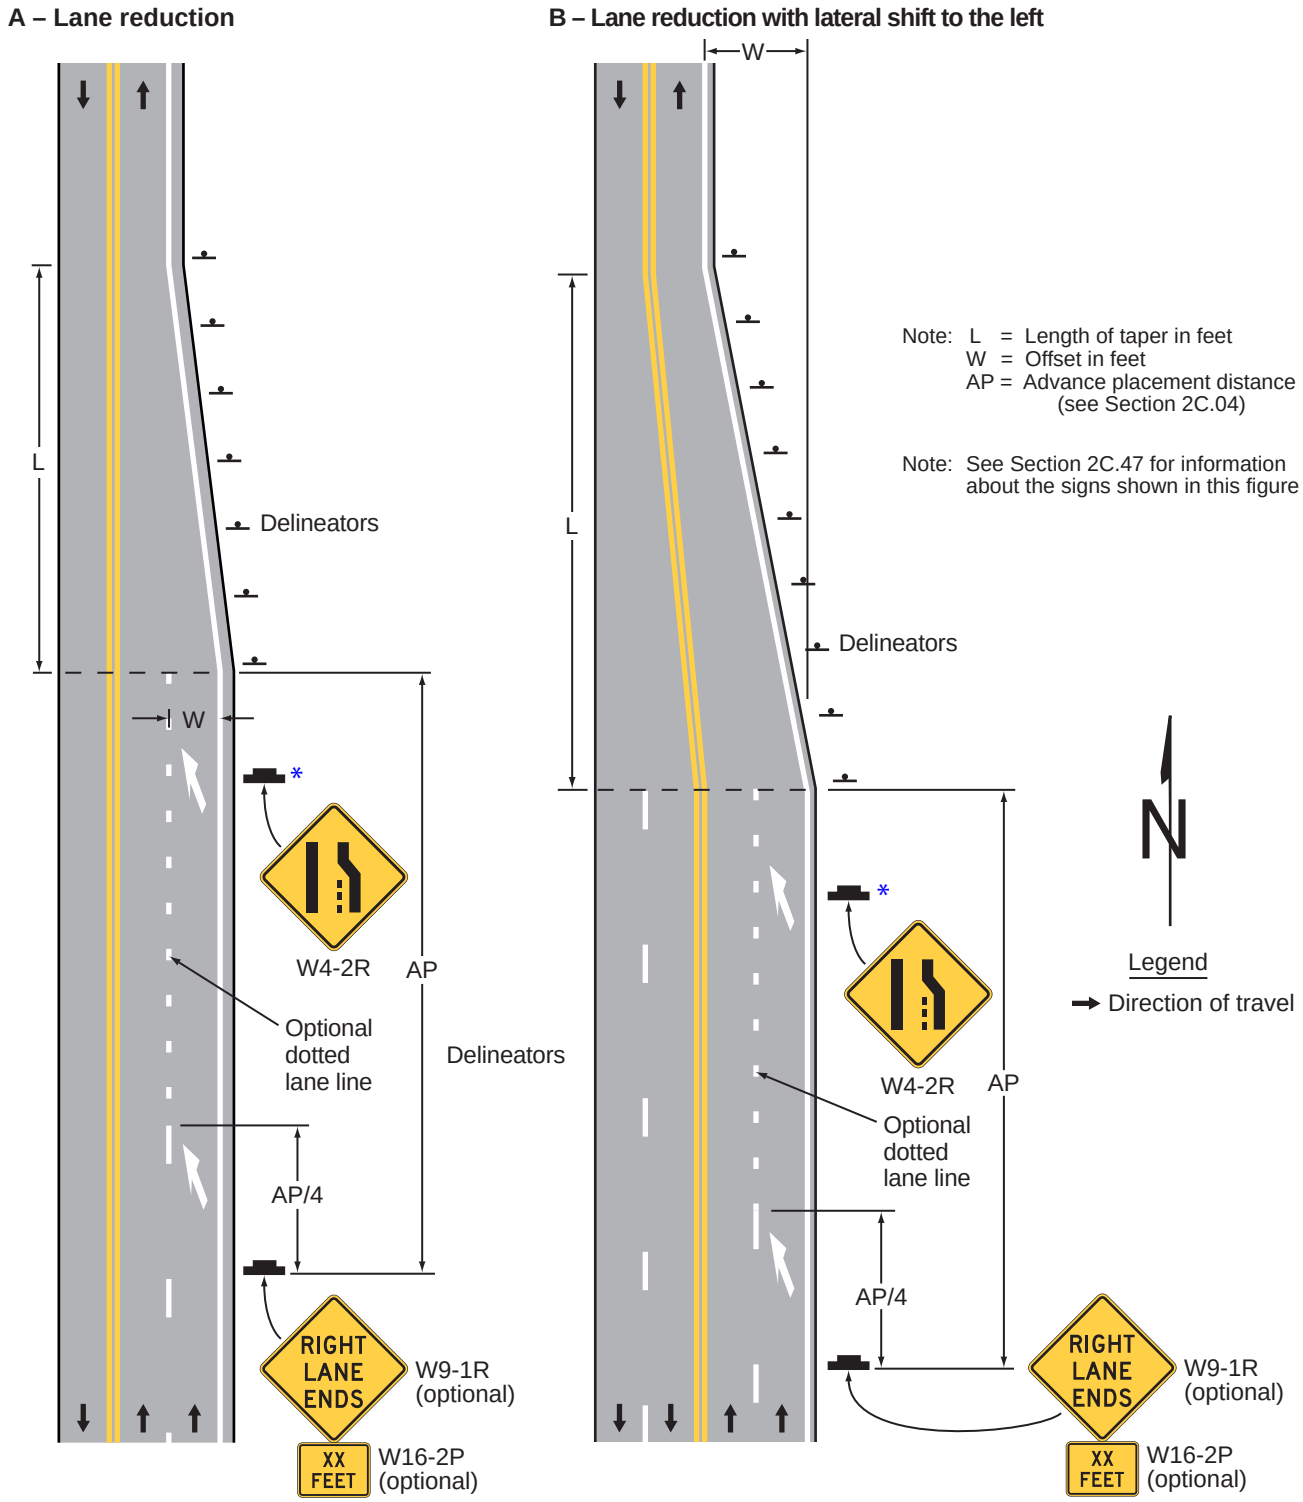


* Refer to FHWA's List of Known Errors for errors. Refer to Section 1A.04 for more details.


## *Figure 3B-14(CA). Examples of Applications of Lane-Reduction Transition Markings (Sheet 1 of 3)*

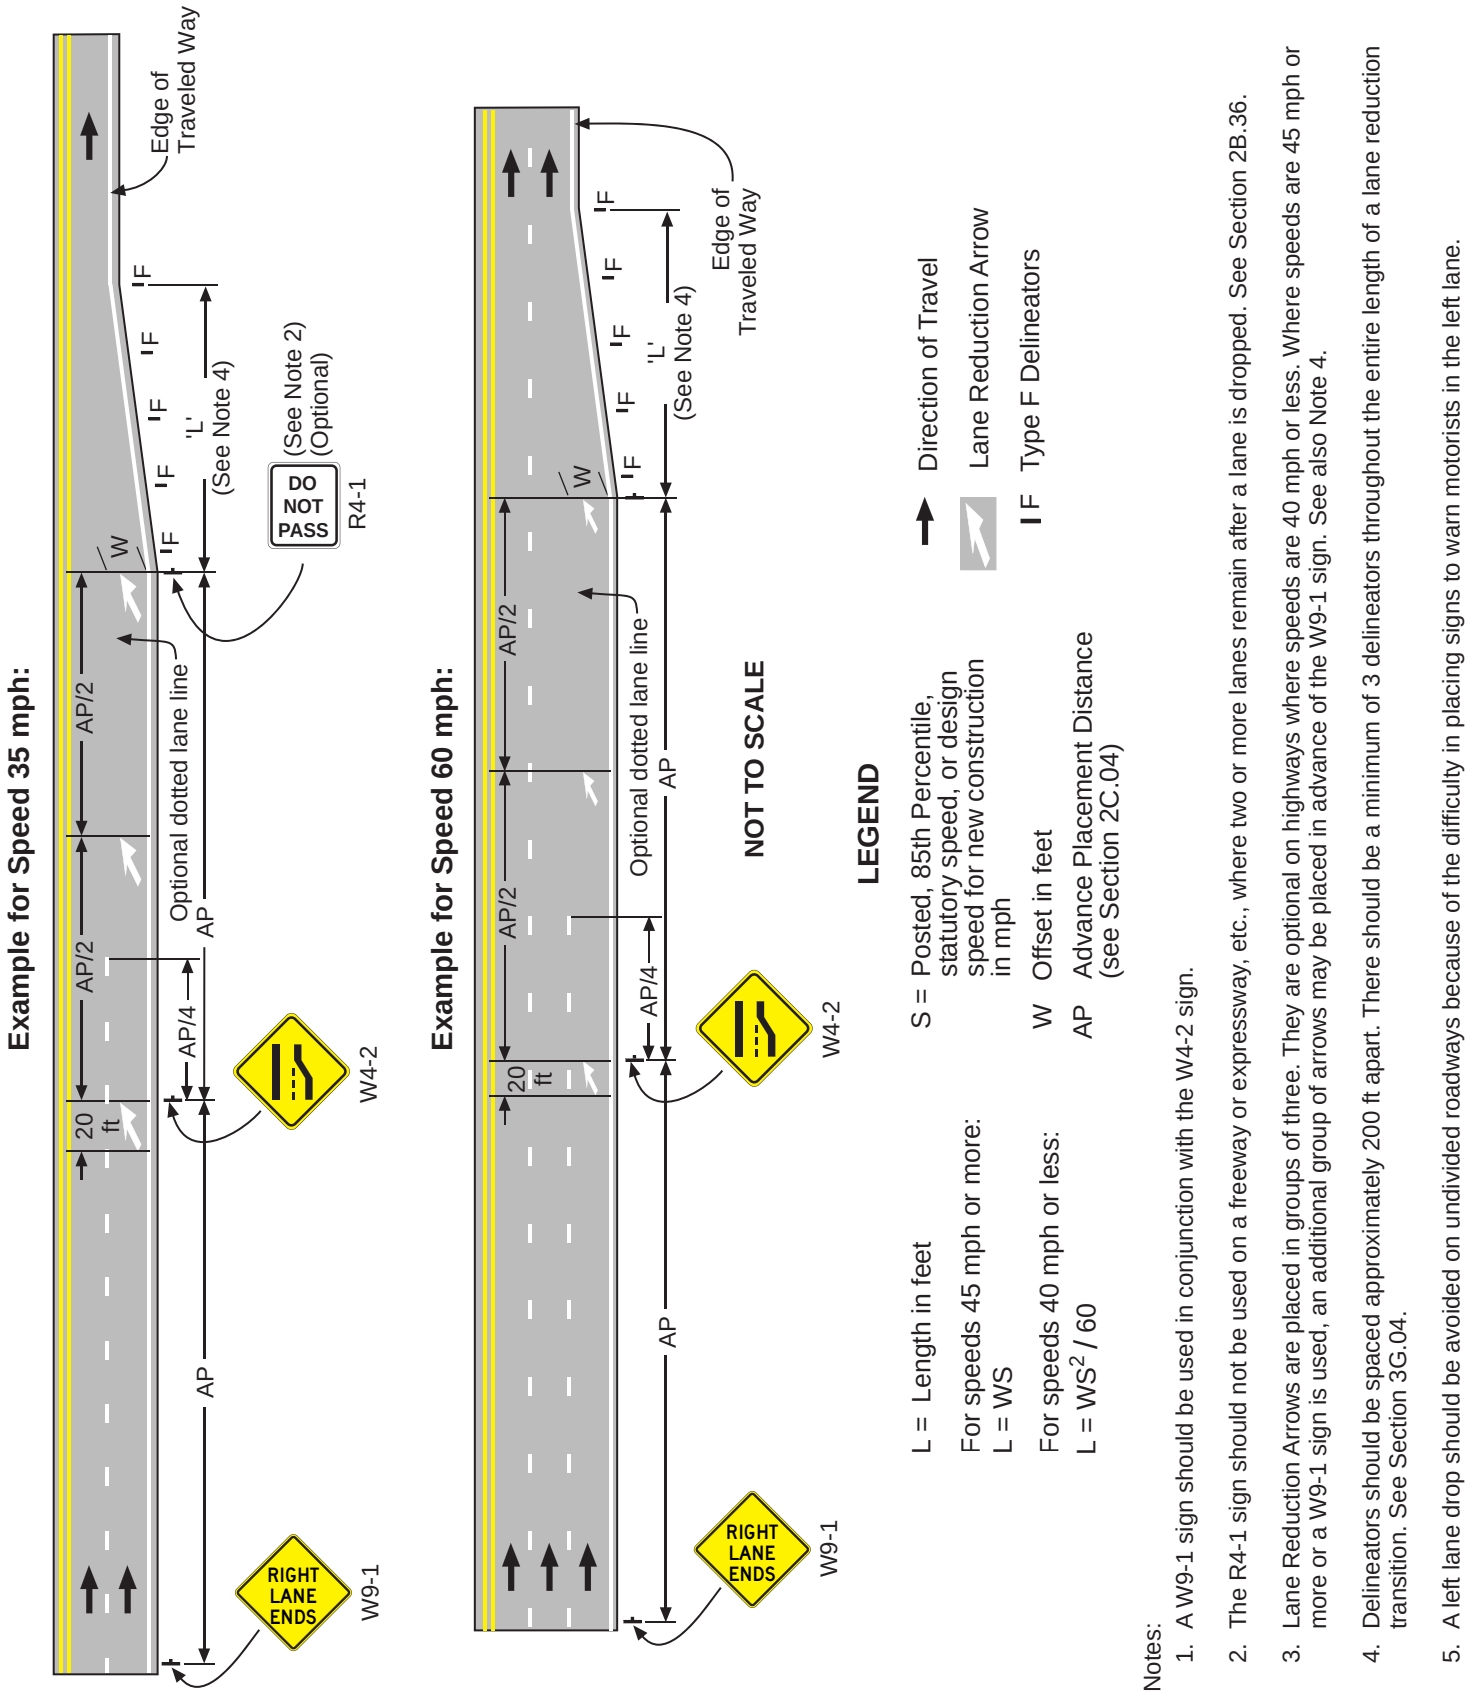


Notes:


1. A W9-1 sign should be used in conjunction with the W4-2 sign.
2. The R4-1 sign should not be used on a freeway or expressway, etc., where two or more lanes remain after a lane is dropped. See Section 2B.36.
3. Lane Reduction Arrows are placed in groups of three. They are optional on highways where speeds are 40 mph or less. Where speeds are 45 mph or more or a W9-1 sign is used, an additional group of arrows may be placed in advance of the W9-1 sign. See also Note 4.
4. Delineators should be spaced approximately 200 ft apart. There should be a minimum of 3 delineators throughout the entire length of a lane reduction transition. See Section 3G.04.
5. A left lane drop should be avoided on undivided roadways because of the difficulty in placing signs to warn motorists in the left lane.

## *Figure 3B-14(CA). Examples of Applications of Lane-Reduction Transition Markings (Sheet 2 of 3)*

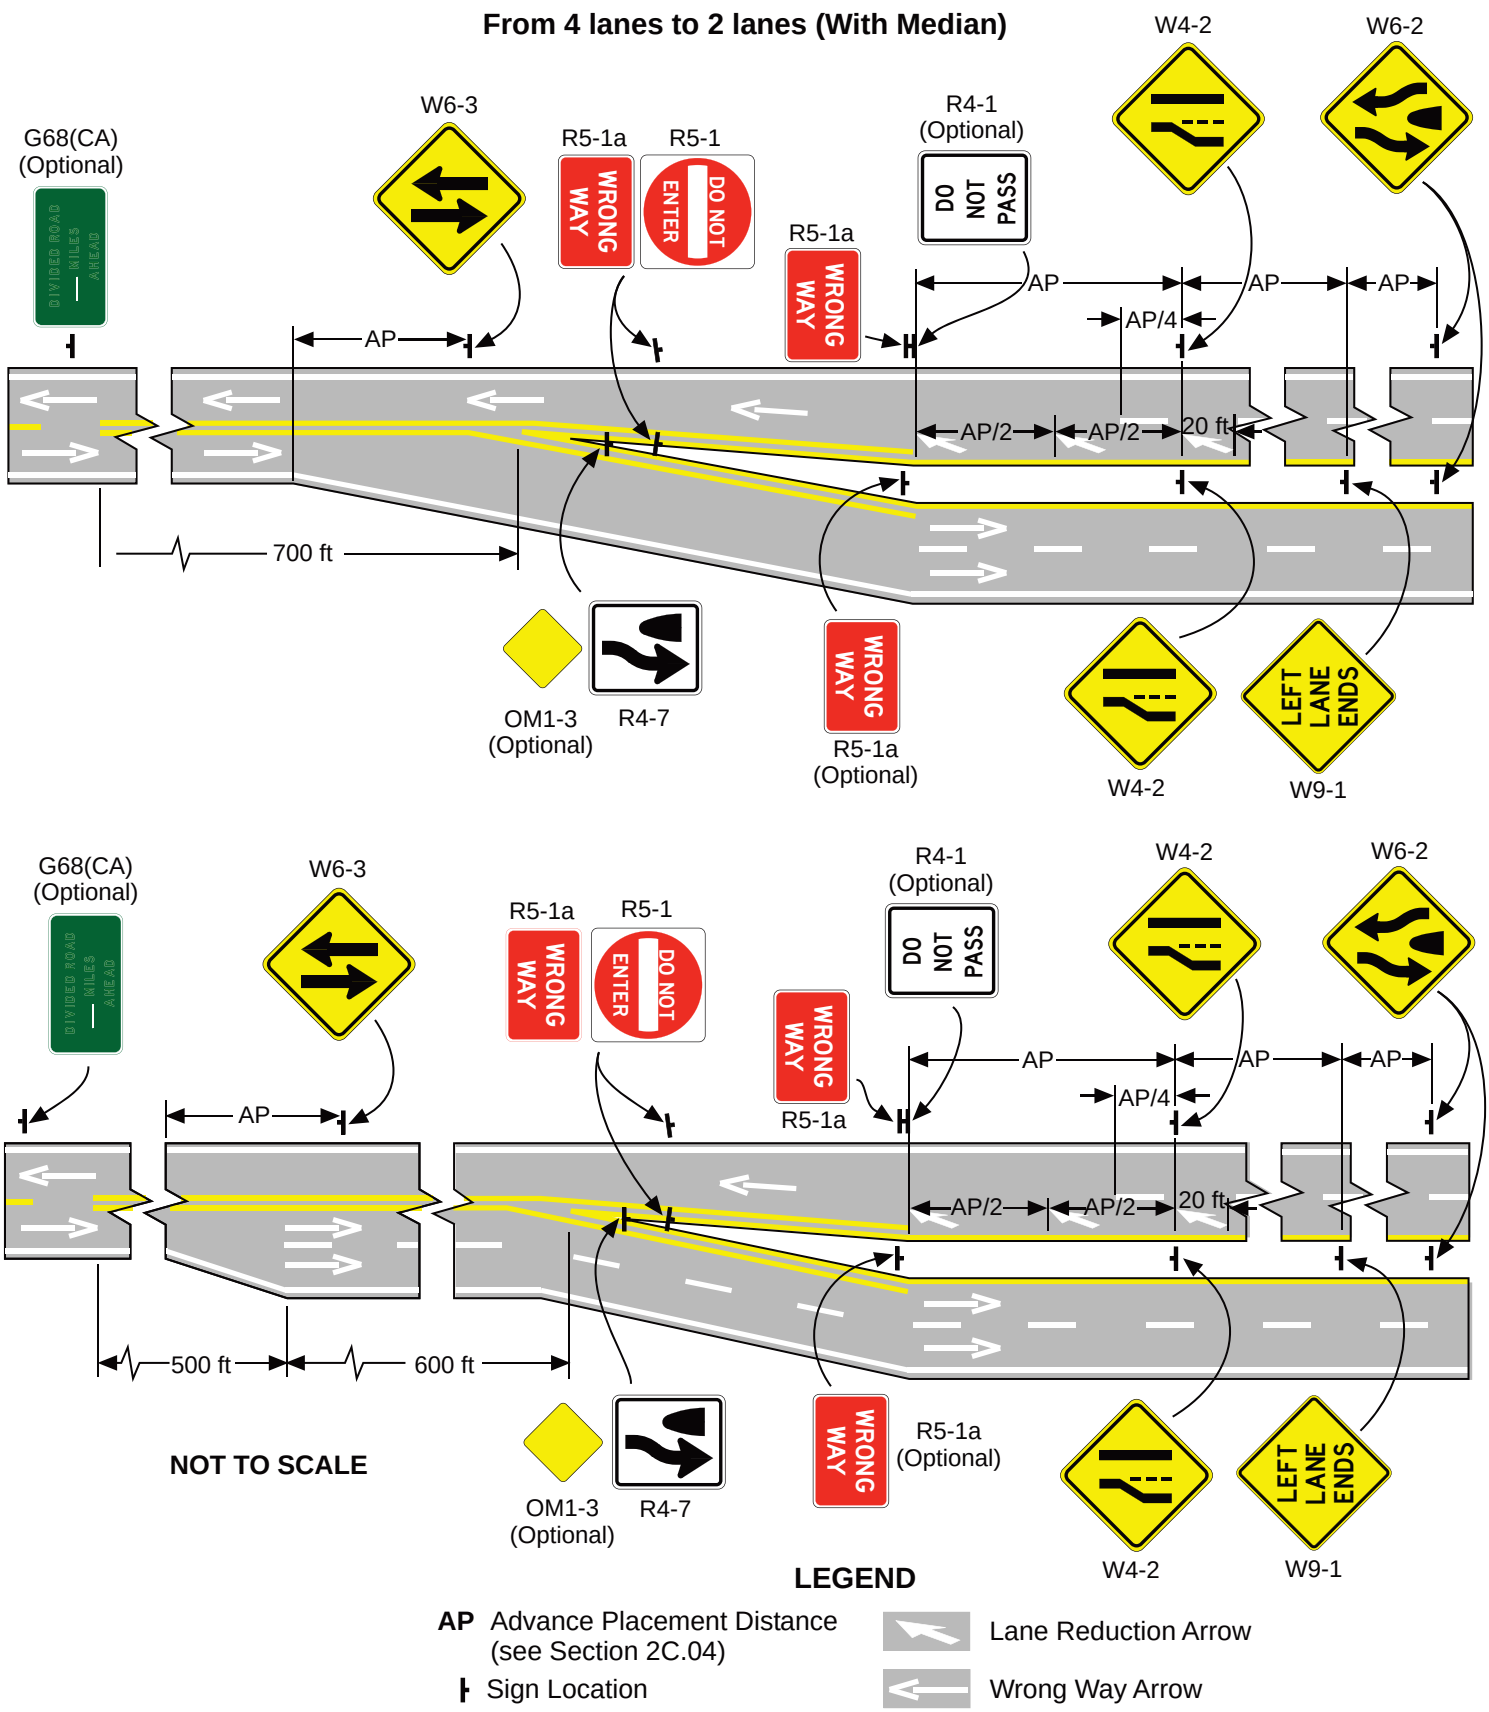


Note: The examples in this figure show a median and a merge right condition. When there is no median, Figure 3B-14(CA) (Sheet 1 of 3) should be used because of the difficulty in placing signs to warn the motorist in the left lane.

## *Figure 3B-14(CA). Examples of Applications of Lane-Reduction Transition Markings (Sheet 3 of 3)*

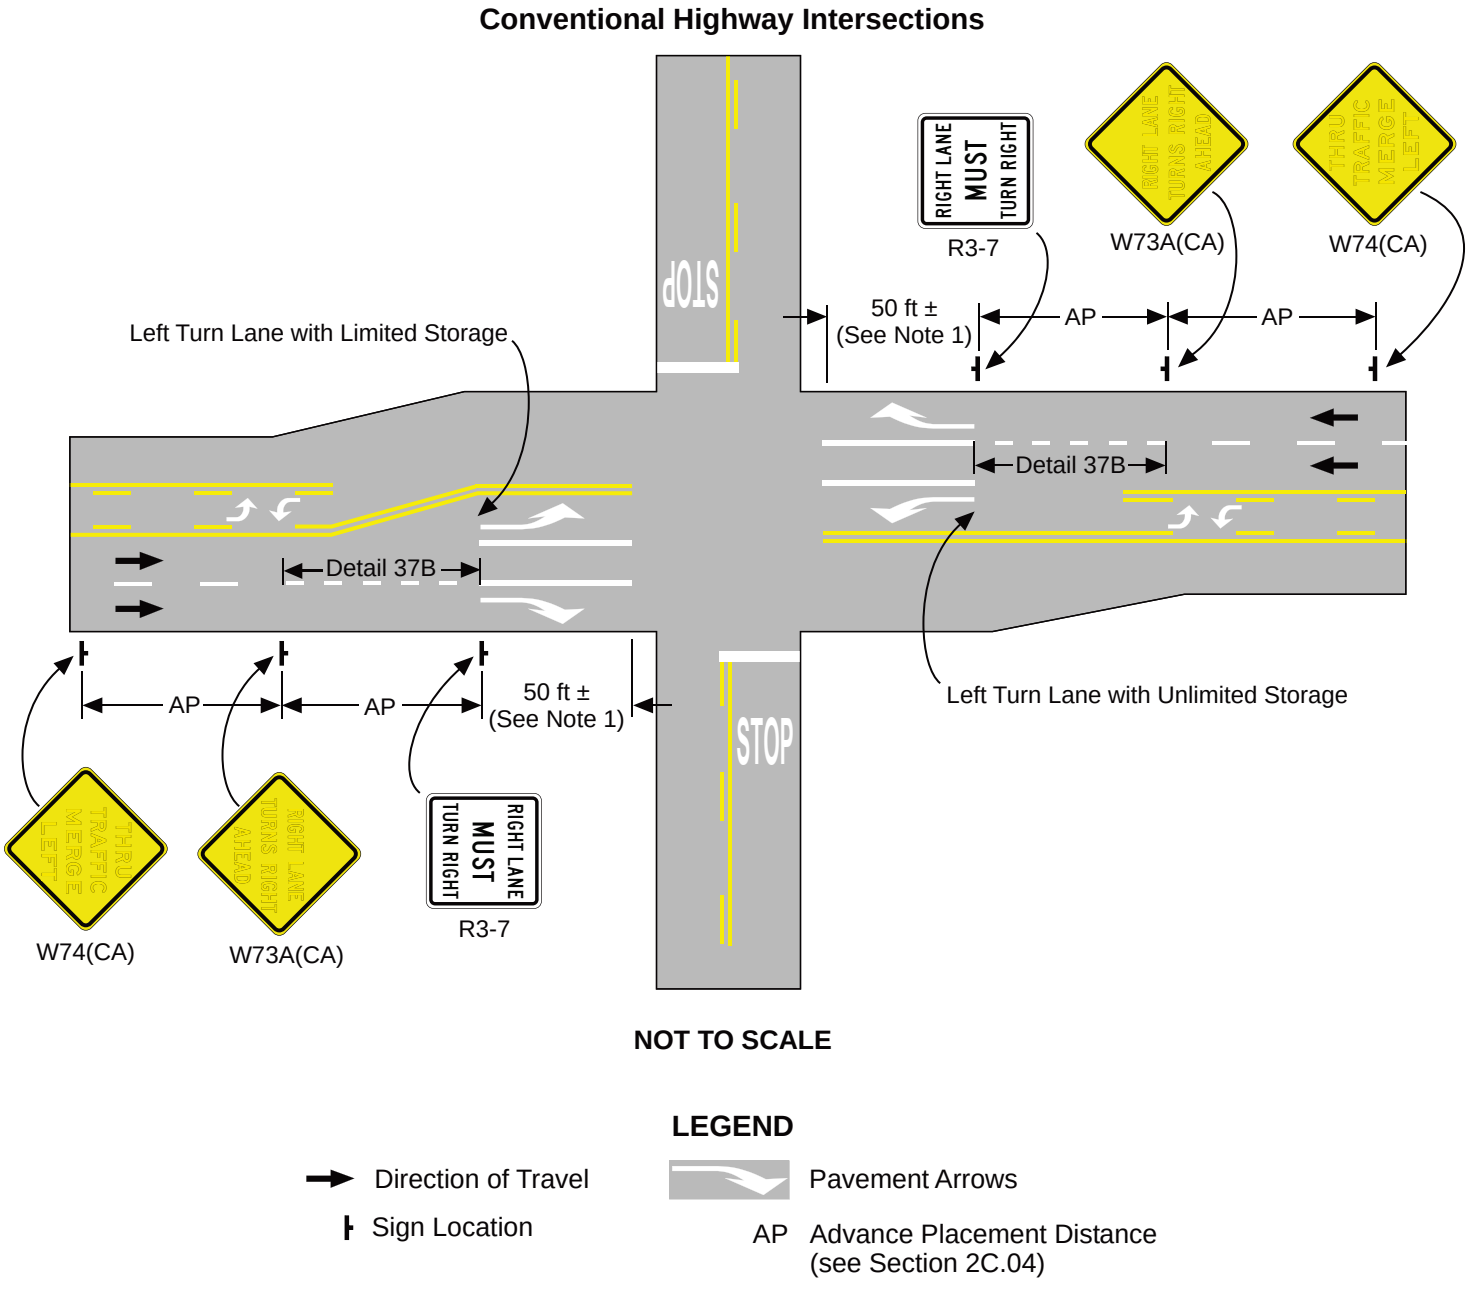


**NOT TO SCALE**


**LEGEND**

- Direction of Travel
- Sign Location
- Pavement Arrows
- AP Advance Placement Distance (see Section 2C.04)

Notes:


1. See Figure 3B-101(CA) for taper and storage lengths. See Detail 37B for lane drop markings. The minimum length of solid channelizing line is 50 ft.
2. The RIGHT LANE TURNS RIGHT AHEAD (W73A(CA)) sign should be placed in conjunction with the RIGHT LANE MUST TURN RIGHT (R3-7) sign and the appropriate lane line and markings. A THRU TRAFFIC MERGE LEFT (W74(CA)) sign may be placed in advance of the W73A(CA) sign. However, adequate sight distance or proximity to a freeway ramp, cross road, etc., may dictate the need and location of additional signs and the length of the turn lane.

## Figure 3B-15. Examples of Applications of Markings for Obstructions in the Roadway
(Sheet 1 of 2)

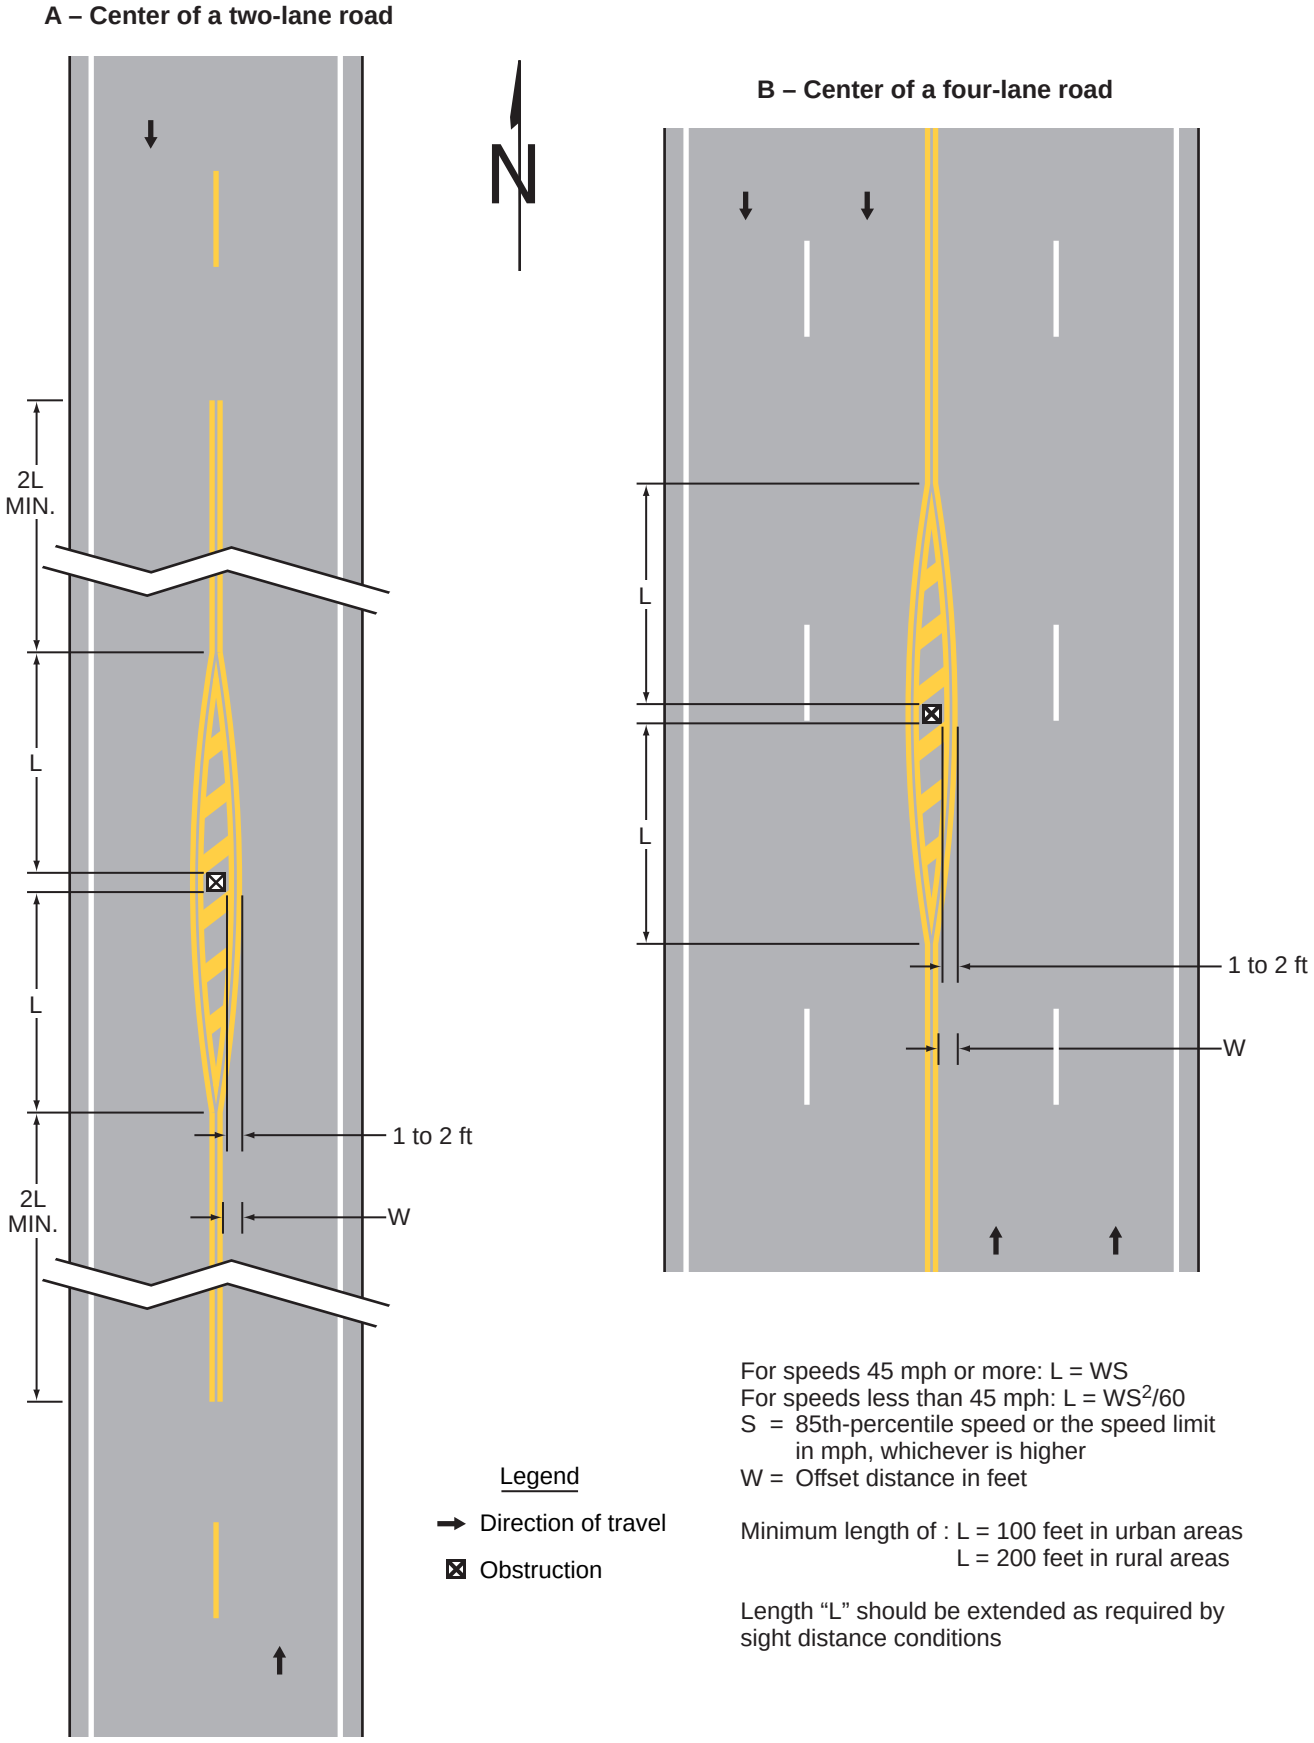

## Figure 3B-15. Examples of Applications of Markings for Obstructions in the Roadway
(Sheet 2 of 2)

**C – Traffic passing in the same direction on both sides of an obstruction**

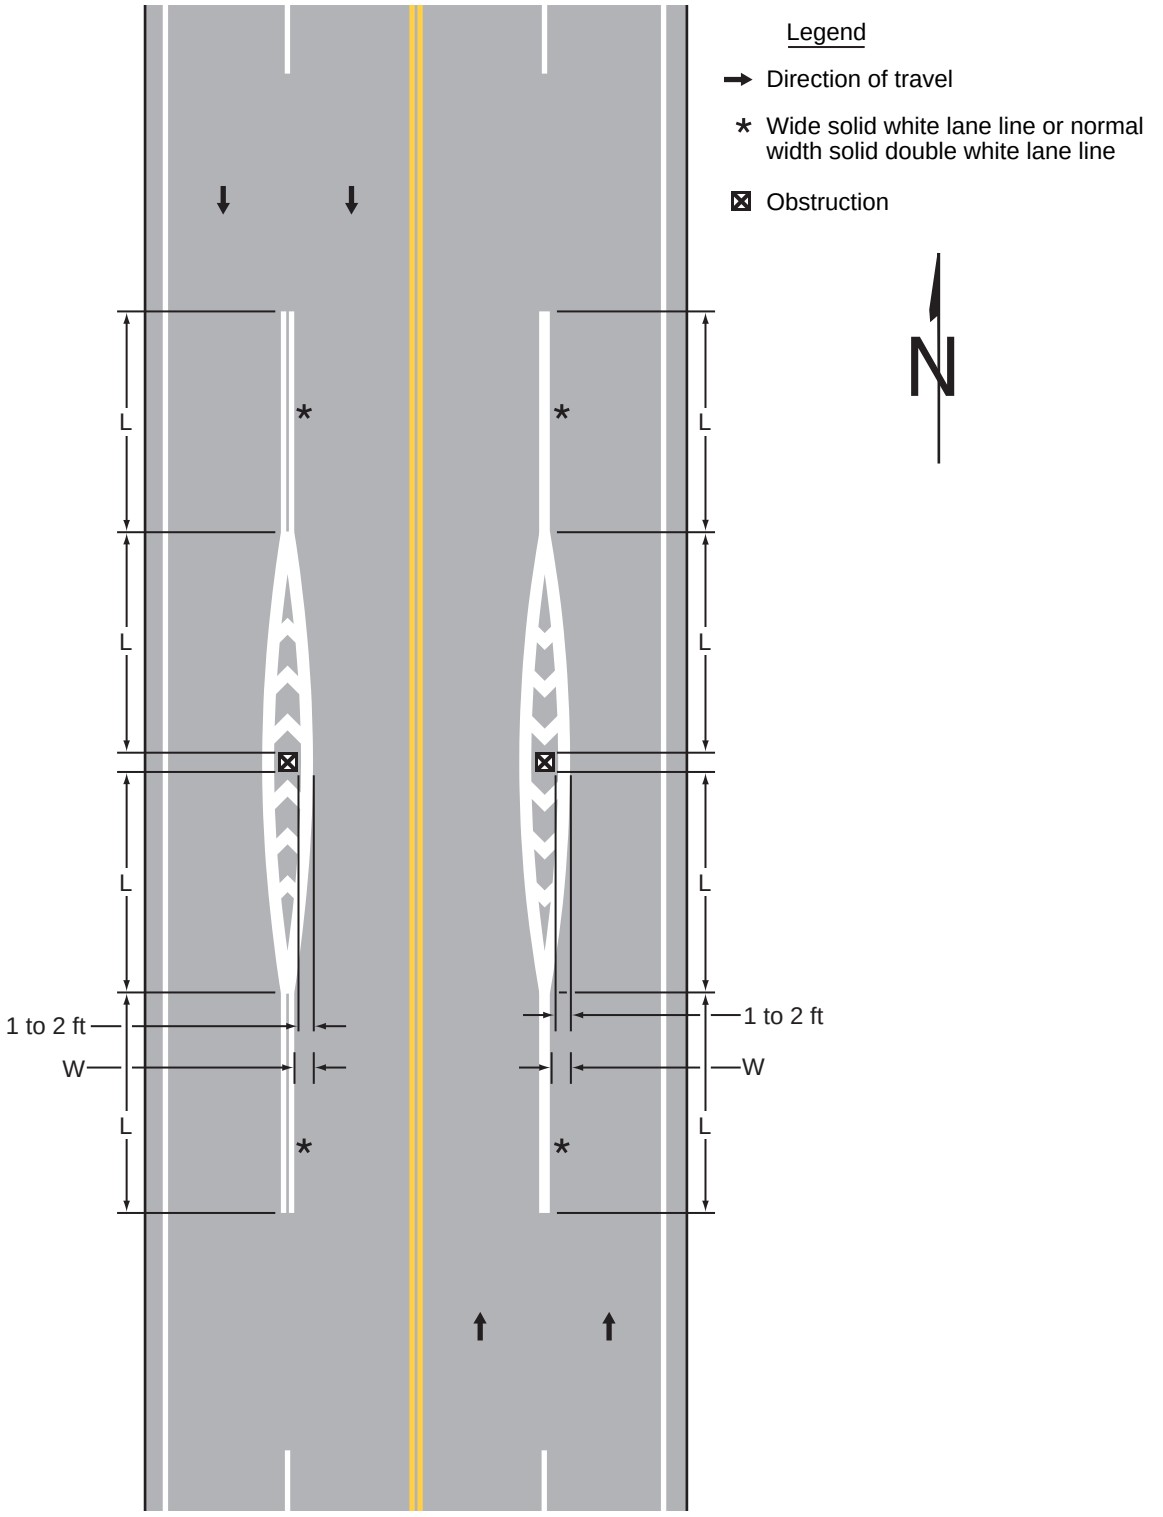



For speeds of 45 mph or more: L = WS
For speeds of less than 45 mph: L = $WS^2/60$
S = 85th-percentile speed or the speed limit in mph, whichever is higher
W = Offset distance in feet

Minimum length of: L = 100 feet in urban areas
L = 200 feet in rural areas

Length "L" should be extended as required by sight distance conditions

# Figure 3B-16. Examples of Yield Line Applications

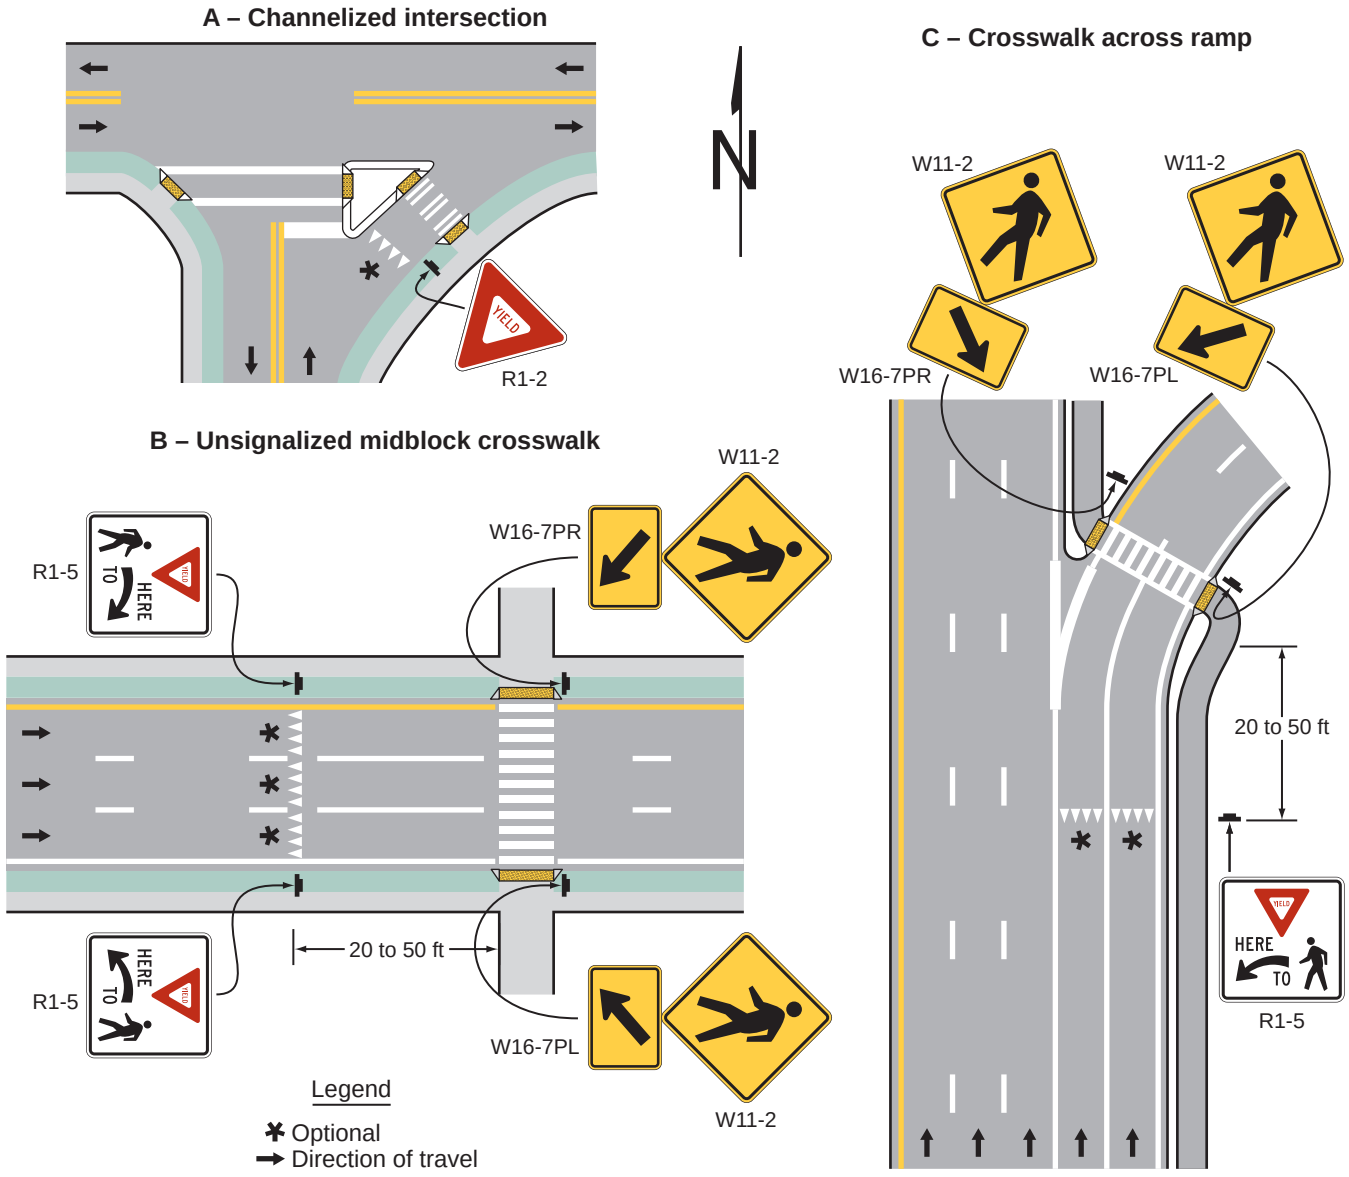

## Figure 3B-17. Example of Elongated Letters for Word Pavement Markings



## Figure 3B-18. Examples of Elongated Route Shields and Markers Applied as Pavement Markings

**A – Interstate Shield on dark or light pavement**




**B – U.S. Route Shield on dark pavement**




**C – U.S. Route Shield on light pavement**




~~**D – State Route Marker on dark pavement**~~




~~**E – State Route Marker on light pavement**~~




Note: See the "Standard Highway Signs" publication for sizes and details

---

## *Figure 3B-18(CA). Examples of California Elongated Route Shields and Markers Applied as Pavement Markings*

**D - State Route Shield on dark or light pavement**



## Figure 3B-19. International Symbol of Accessibility Parking Space Marking




Notes:

1. See the "Standard Highway Signs" publication for sizes and details
2. The blue-colored background with white border is optional

## *Figure 3B-19(CA). International Symbol of Accessibility Parking Space Marking and Related Markings (Sheet 1 of 2)*

**Loading and Unloading Area**
**Pavement Marking Legend**

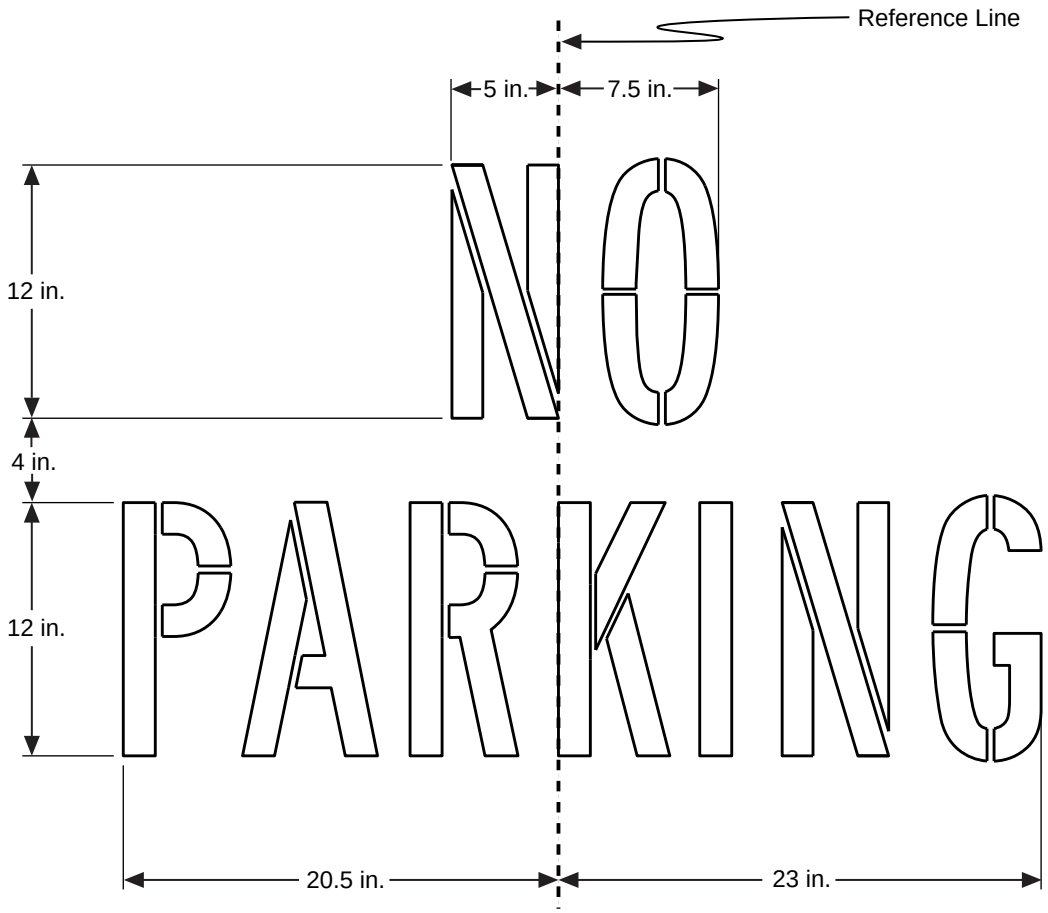



**NOT TO SCALE**

Notes:

1. The words "NO PARKING" shall be painted in the loading and unloading area in white letters no less than 12 in. high on a contrasting background and located so that it is visible to traffic enforcement officials. Use the FHWA Series Fonts as the official font for all pavement Legends. Adjust the spacing between individual letter pairs (kerning) and adjust the spacing across a whole word or block of text (tracking) to ensure proper visibility, legibility, and continuity of the stencil pieces during the field marking process.
2. Loading and unloading area border shall be marked in blue paint. The hatched lines shall be painted a suitable contrasting color to the parking space. Blue or white paint is preferred.


## *Figure 3B-19(CA). International Symbol of Accessibility Parking Space Marking and Related Markings (Sheet 2 of 2)*

### On-Street Parking (Conventional)

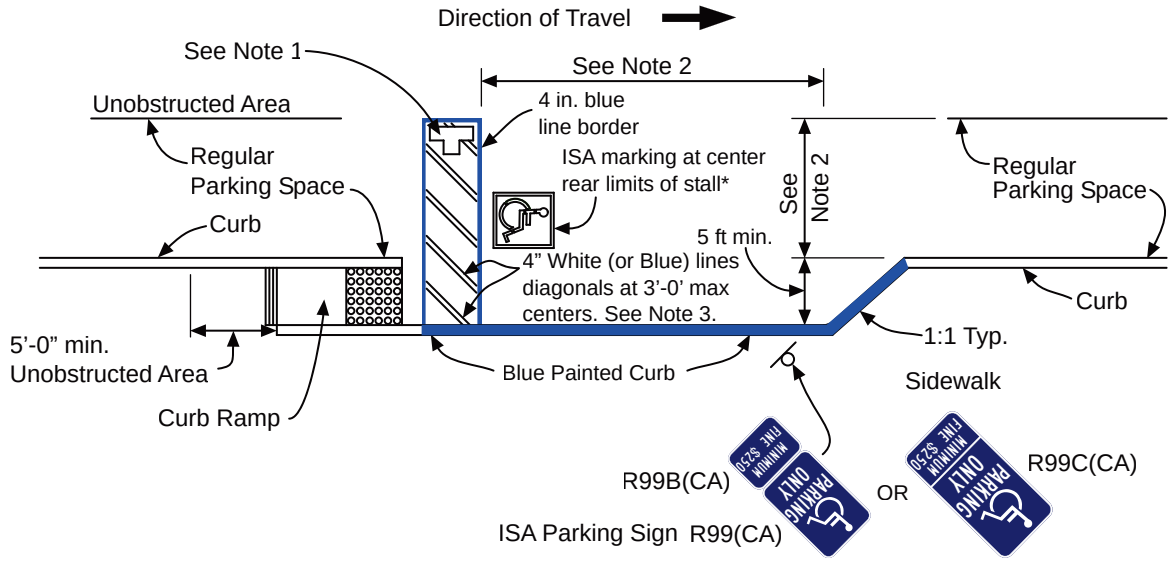


### On-Street Parking (Restricted Right of Way Width)

Should be located near curb ramp

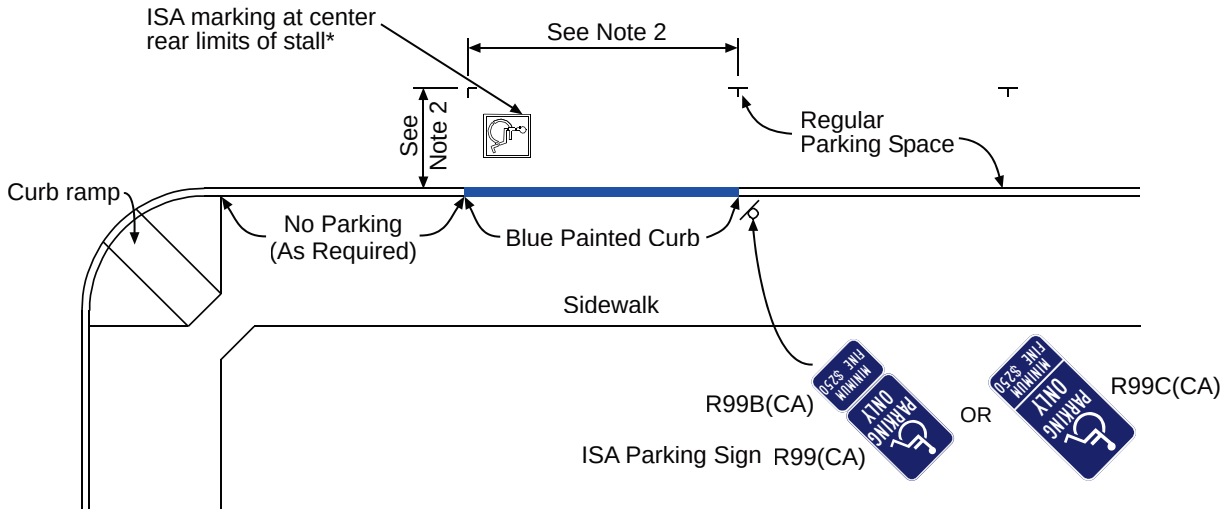



* ISA marking is optional for On-Street accessible parking

Notes:


1. The words "NO PARKING", shall be painted in white letters no less than 12 in. high on a contrasting background and located so that it is visible to traffic enforcement officials. See Standard Plan A24E for square unit area for painting the legend "NO PARKING".
2. Accessible on-street parking spaces shall not be smaller in length or width than that specified by the local jurisdiction for other parking spaces, but not less than 20 ft in length and not less than 8 ft in width.
3. The hatched lines shall be painted a suitable contrasting color to the parking space. Blue or white paint is preferred.
4. Actual dimensions and curb geometry may differ from that shown. See Standard Plan A90B for additional details.
5. Accessible on-street parking shall comply with CA MUTCD standards, applicable provisions of CVC 22500 through 22526, and California Building Code (CBC), Chapter 11.

# Figure 3B-20. Yield Ahead Triangle Symbols


**A – Speed limit of 45 mph or greater**

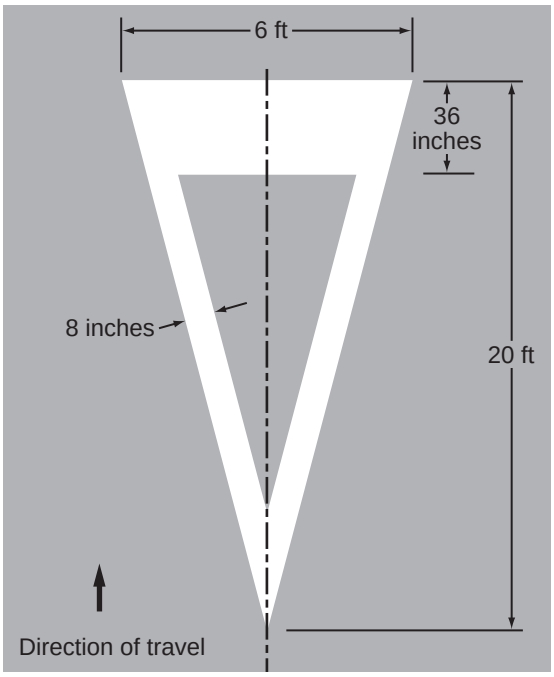


**B – Speed limit of less than 45 mph**

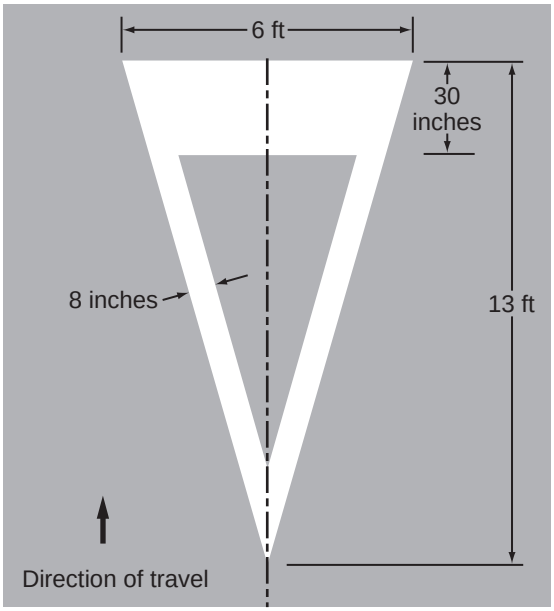

## Figure 3B-21. Examples of Standard Arrows for Pavement Markings

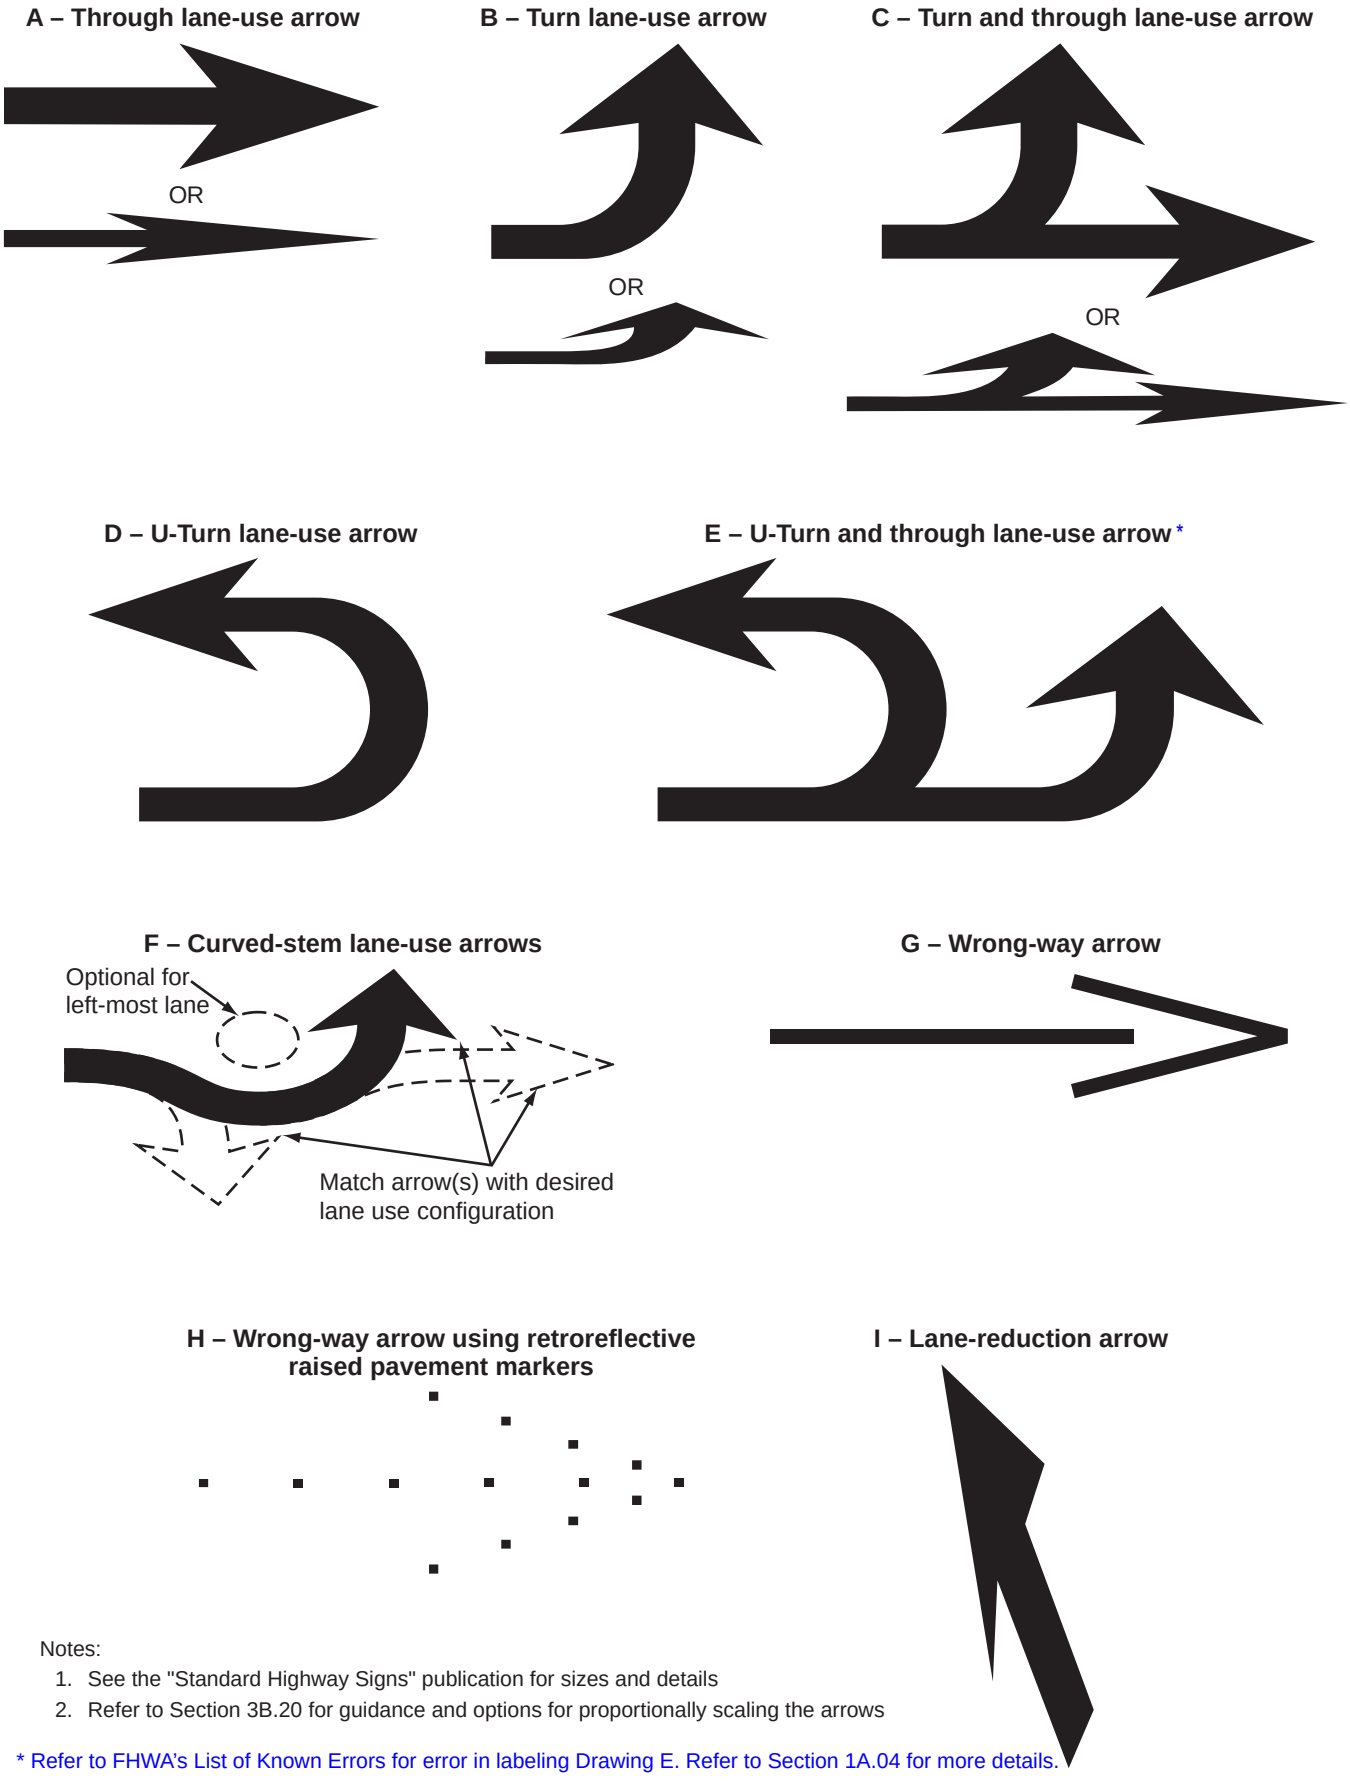



Notes:


1. See the "Standard Highway Signs" publication for sizes and details
2. Refer to Section 3B.20 for guidance and options for proportionally scaling the arrows

* Refer to FHWA's List of Known Errors for error in labeling Drawing E. Refer to Section 1A.04 for more details.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 1 of 9)*





**TYPE I (10 FT) ARROW**





**TYPE I (18 FT) ARROW**

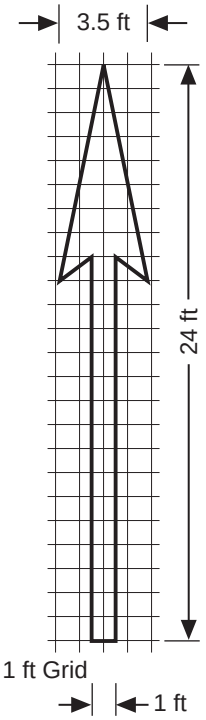



**TYPE I (24 FT) ARROW**

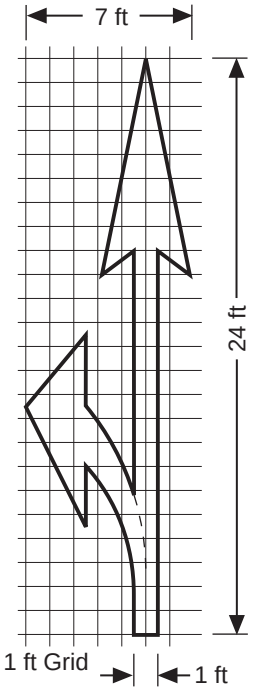



**TYPE II (L) ARROW**
(FOR TYPE II (R) ARROW, USE MIRROR IMAGE)

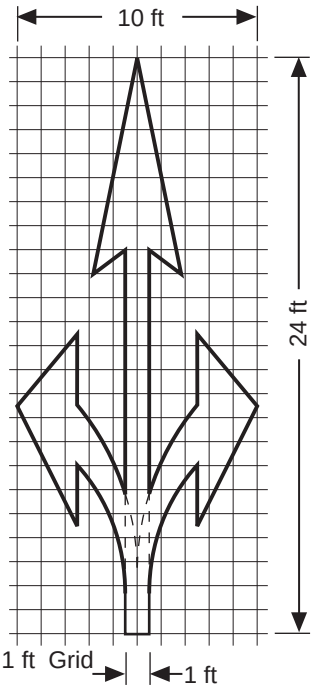



**TYPE II (B) ARROW**

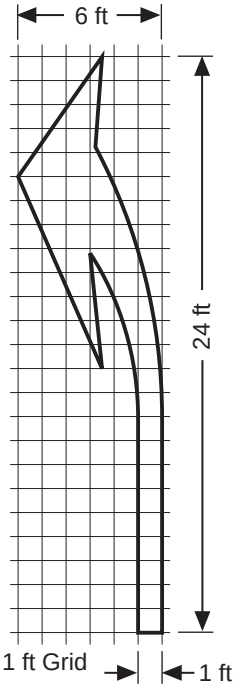


**TYPE III (L) ARROW**
(FOR TYPE III (R) ARROW, USE MIRROR IMAGE)

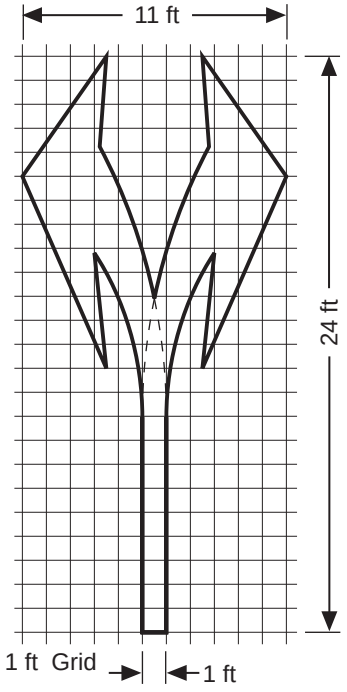


**TYPE III (B) ARROW**





**TYPE IV (L) ARROW**
(FOR TYPE IV (R) ARROW, USE MIRROR IMAGE)


**NOT TO SCALE**

Note: The design details for various arrows are also shown in Department of Transportation's Standard Plans.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 2 of 9)*

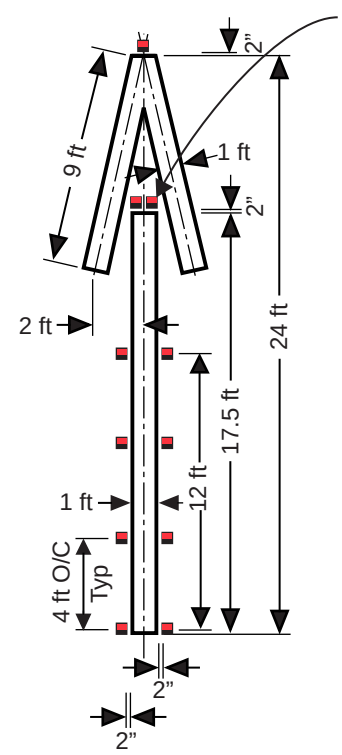



**TYPE V ARROW WITH PAVEMENT MARKERS**

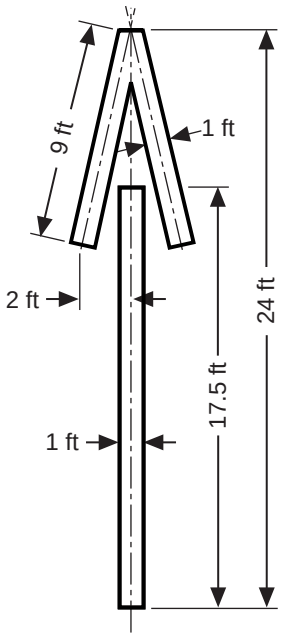



**TYPE V ARROW**

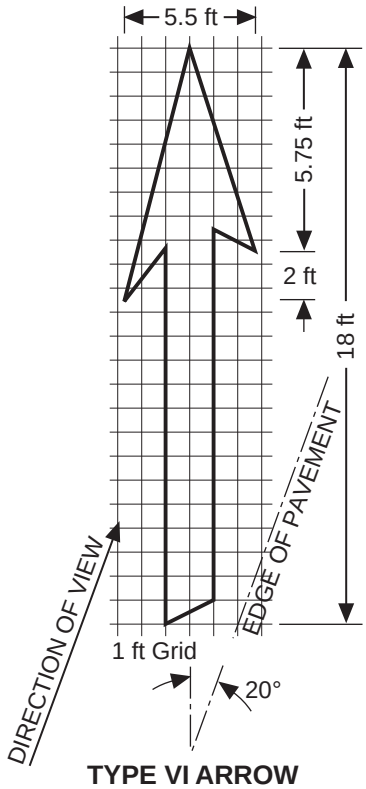



**TYPE VI ARROW**
**RIGHT LANE DROP ARROW**
(FOR LEFT LANE, USE MIRROR IMAGE)

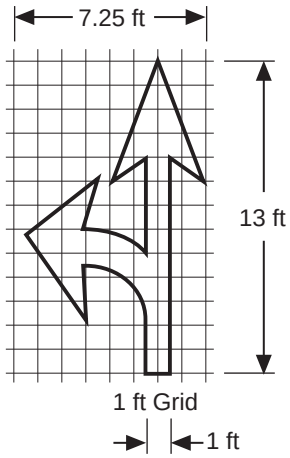


**TYPE VII (L) ARROW**
(FOR TYPE (R) ARROW, USE MIRROR IMAGE)

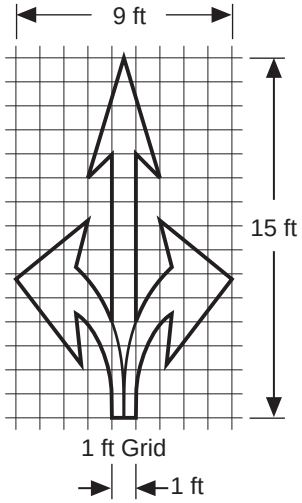


**TYPE VIII ARROW**

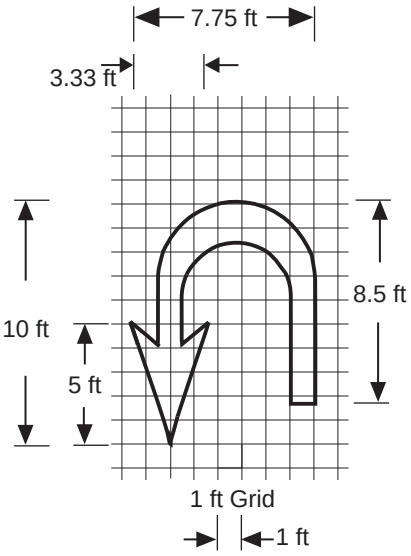


**TYPE XI ARROW**

**NOT TO SCALE**


Note: The design details for various arrows are also shown in Department of Transportation's Standard Plans.

**LEGEND**


One-Way Blank-Red Retroreflective Pavement Markers

## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 3 of 9)*

### A - Optional Lane Use Curved-stem (CS) Arrows

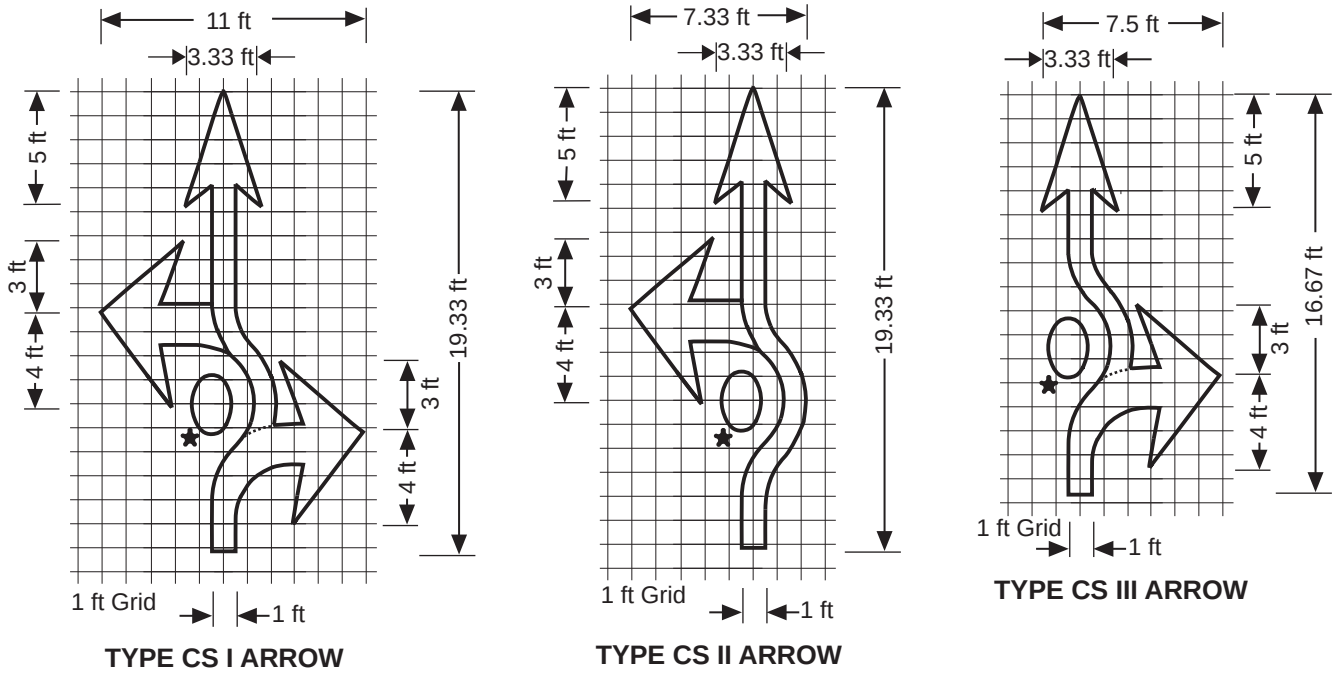


### B - Mandatory Lane Use Curved-stem (CS) Arrows

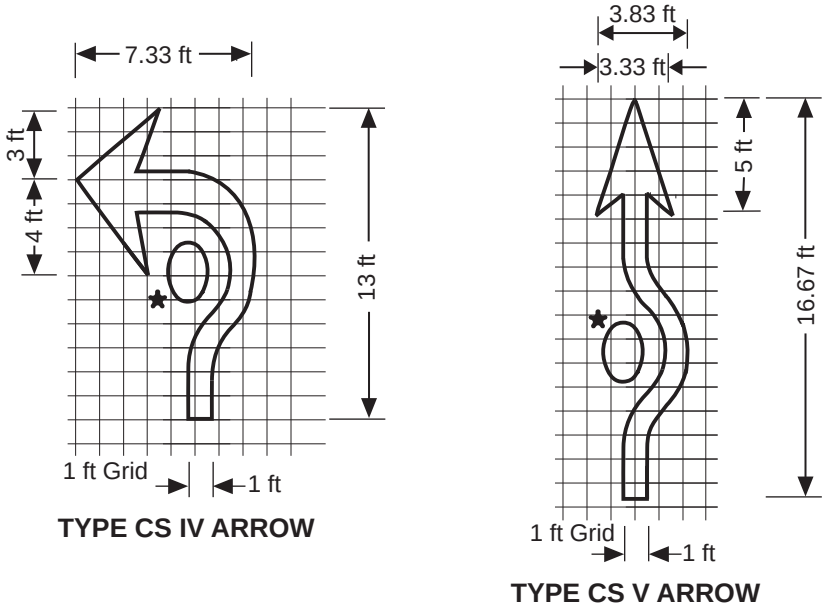



★ Ovals (symbolizing central island) with the arrows should only be used for left lane and single lane approaches to the roundabout

**NOT TO SCALE**

Note: The design details for various arrows are also shown in Department of Transportation's Standard Plans.

## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 4 of 9)*

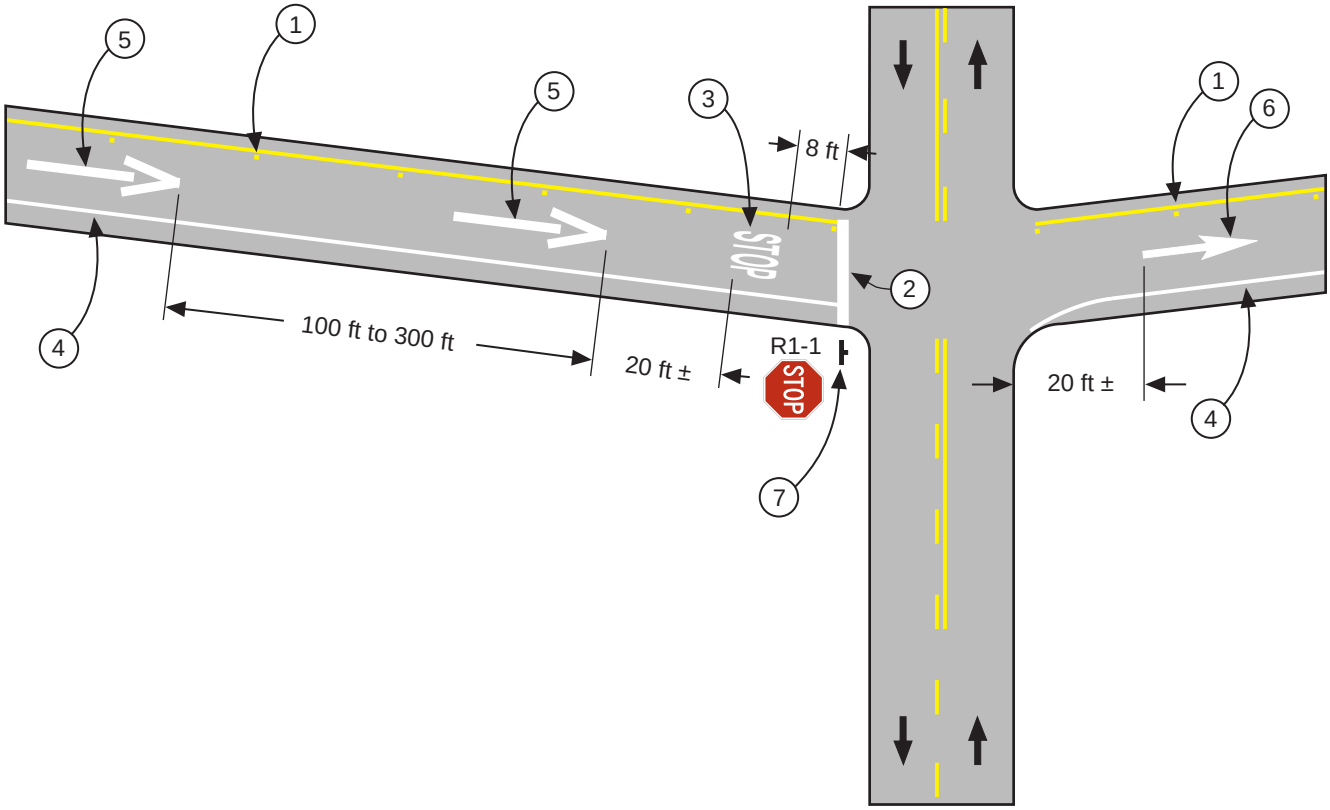


**NOT TO SCALE**


**LEGEND**

→ Direction of Travel

Notes:

1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. See also Note 7 and refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrows, in pairs, as shown. Refer to Section 3B.23.
6. Place Type I Arrow as shown. Refer to Section 3B.23.
7. A "YIELD" (R1-2) sign, Yield Line and "YIELD" pavement legend may be used in lieu of the "STOP" (R1-1) sign, Limit Line, and "STOP" pavement legend on low volume roads.

## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 5 of 9)*

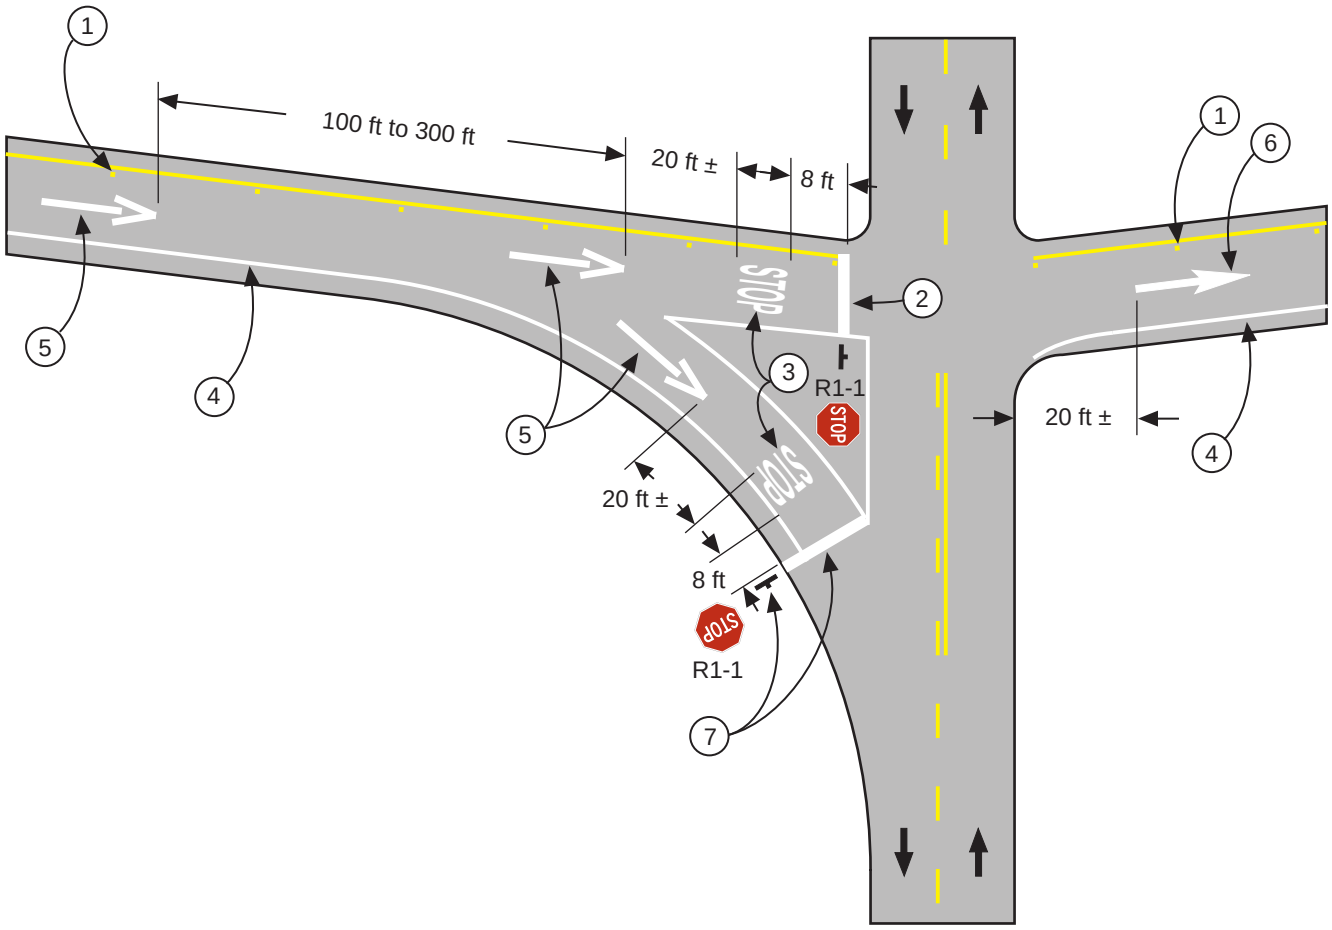


**NOT TO SCALE**


**LEGEND**

→ Direction of Travel

Notes:

1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. Refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrows, in pairs, as shown. See Section 3B.23.
6. Place Type I Arrow as shown. See Section 3B.23.
7. A "YIELD" (R1-2) sign, Yield Line and "YIELD" pavement legend may be used in lieu of the "STOP" (R1-1) sign, Limit Line and "STOP" pavement legend on low volume roads.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 6 of 9)*

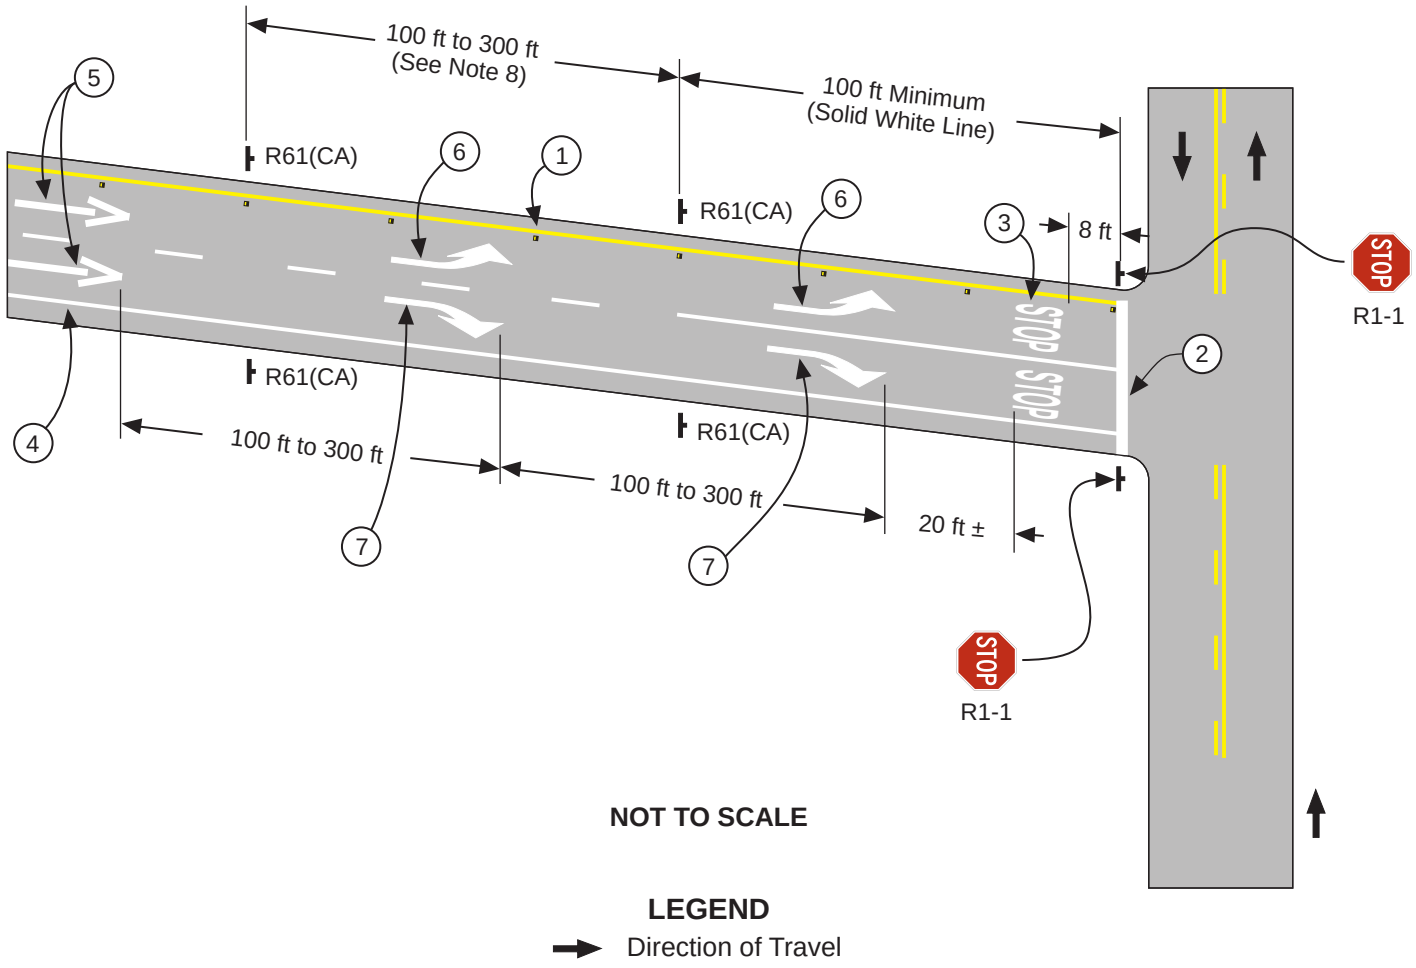


Notes:

1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. Refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrows as shown. Refer to Section 3B.23.
6. Place Type III (L) Arrows, in pairs, as shown when distance permits. Refer to Section 3B.23.
7. Place Type III (R) Arrows, in pairs, as shown when distance permits. Refer to Section 3B.23.
8. Intersection Lane Control (R61(CA) series) signs should be placed on both sides of the exit ramp, at the beginning of the Solid White Line. An additional set should also be placed in advance where distance permits, to alert the motorist of lane use controls ahead. Refer to Figure 2B-4(CA) for appropriate R61(CA) sign selection.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 7 of 9)*

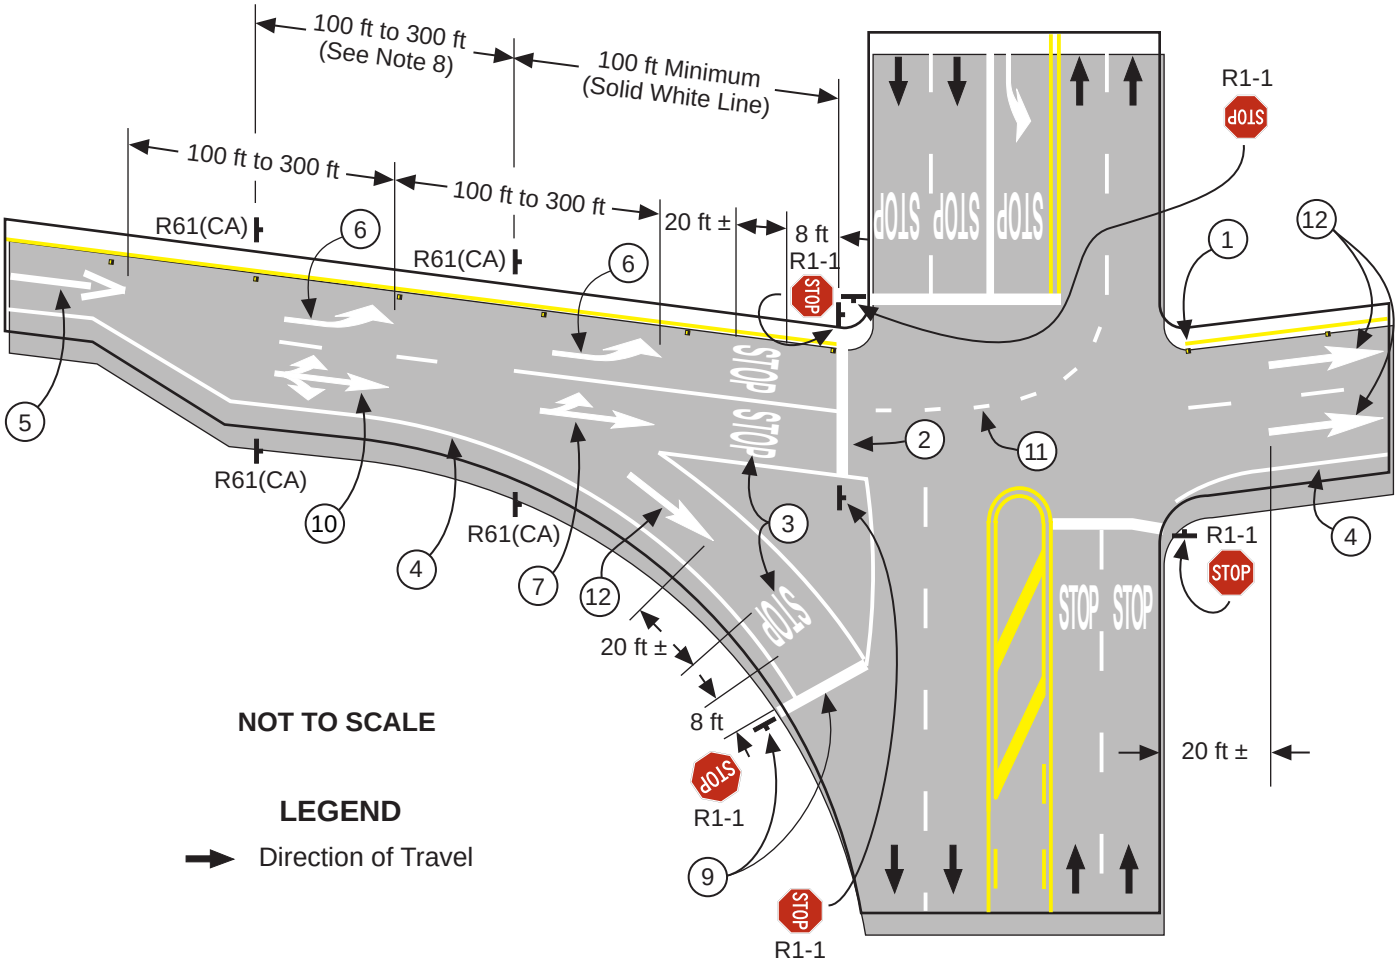


Notes:

1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. Refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrow as shown. Refer to Section 3B.23.
6. Place Type III (L) Arrows, in pairs, as shown where distance permits. Refer to Section 3B.23.
7. Place Type II (L) Arrow, as shown where distance permits. Refer to Section 3B.23.
8. Intersection Lane Control (R61(CA) series) signs should be placed on both sides of the exit ramp, at the beginning of the Solid White Line. An additional set should also be placed in advance where distance permits, to alert the motorist of lane use controls ahead. Refer to Figure 2B-4(CA) for appropriate R61(CA) sign selection.
9. A "YIELD" (R1-2) sign, Yield Line and "YIELD" pavement legend may be used in lieu of the "STOP" (R1-1) sign, Limit Line, and "STOP" pavement legend on low volume roads.
10. Place Type II (B) Arrow, as shown. Refer to Section 3B.23.
11. Lane Line Extensions through the intersection may be used, as shown. Refer to Detail 40 on Figure 3A-112(CA).
12. Place Type I (24 ft) Arrows as shown. Refer to Section 3B.23.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 8 of 9)*

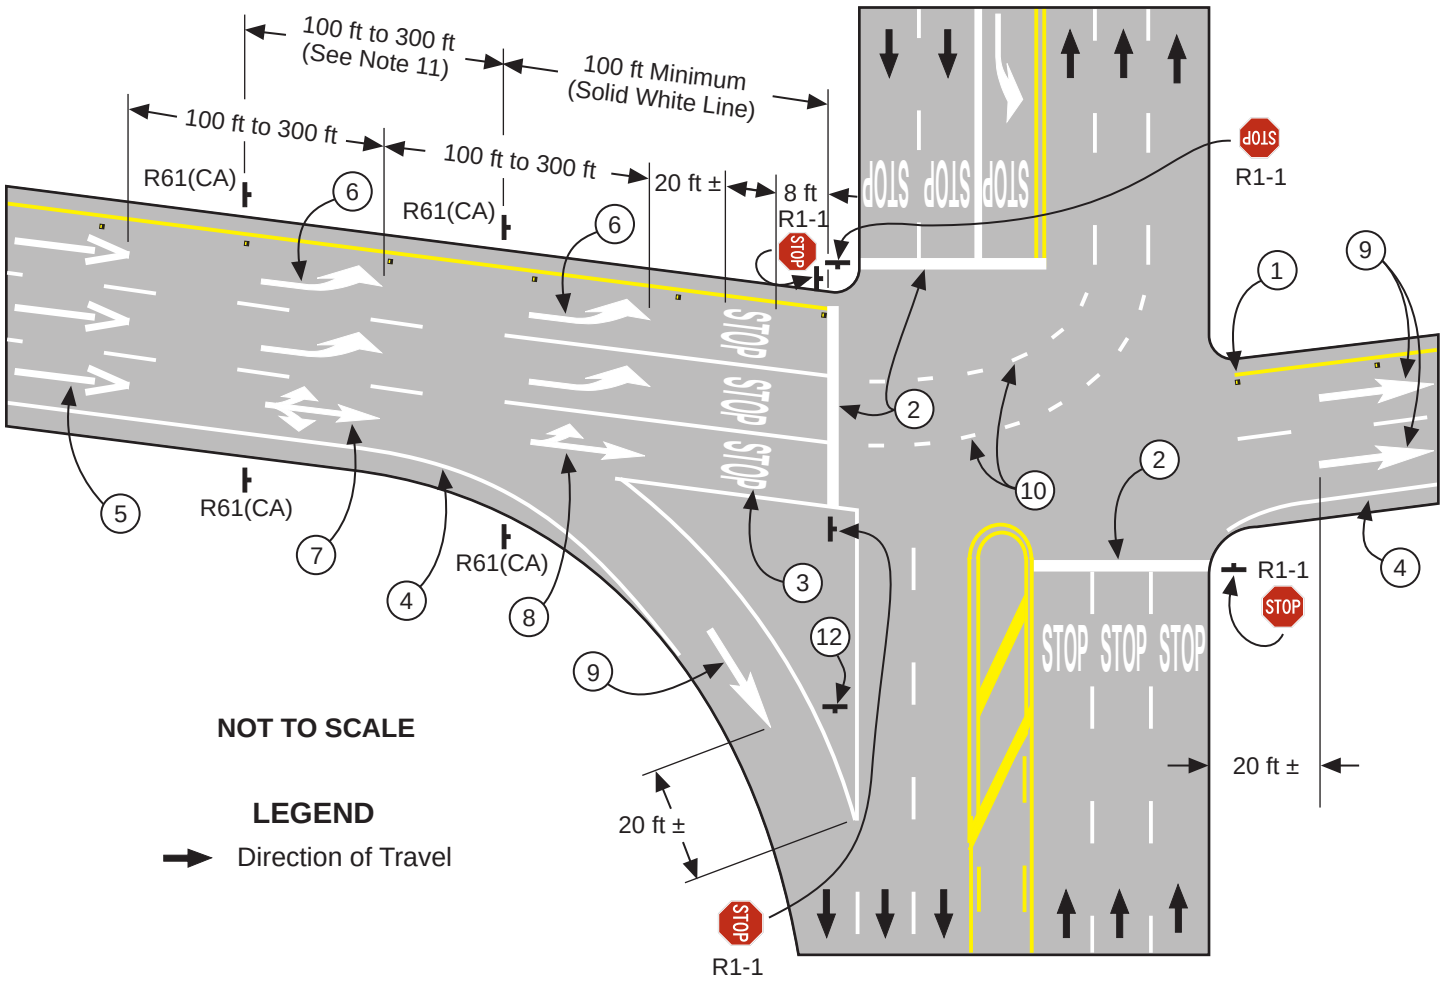


Notes:

1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. Refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrows as shown. Refer to Section 3B.23.
6. Place Type III (L) Arrows, in pairs, as shown where distance permits. Refer to Section 3B.23.
7. Place Type II (B) Arrow, as shown where distance permits. Refer to Section 3B.23.
8. Place Type II (L) Arrow, as shown. Refer to Section 3B.23.
9. Place Type I (24 ft) Arrow as shown. Refer to Section 3B.23.
10. Lane Line Extensions through the intersection may be used, as shown. Refer to Detail 40 on Figure 3A-112(CA).
11. Intersection Lane Control (R61(CA) series) signs should be placed on both sides of the exit ramp, at the beginning of the Solid White Line. An additional set should also be placed in advance where distance permits, to alert the motorist of lane use controls ahead. Refer to Figure 2B-4(CA) for appropriate R61(CA) sign selection.
12. The Added Lane Symbol (W4-3) sign should be used in lieu of the Merge Symbol (W4-1) sign, when an extra lane is provided of more than 1/2 mile in length.


## *Figure 3B-21(CA). Examples of Standard Arrows for Pavement Markings (Sheet 9 of 9)*

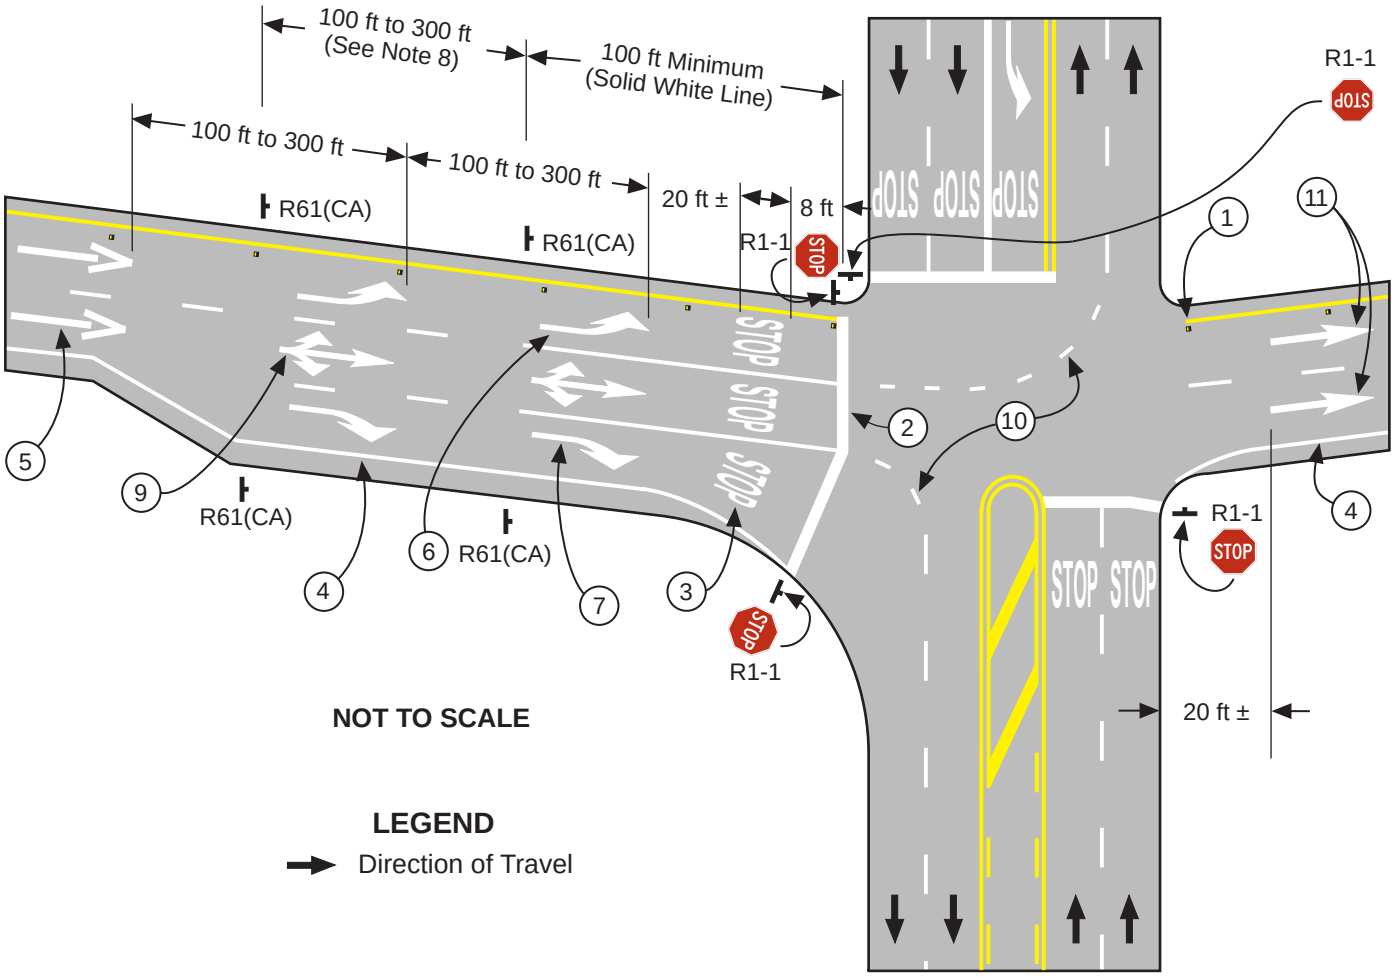


Notes:


1. Place Solid Yellow Left Edge Line and One-Way Yellow Retroreflective Pavement Markers on 24 ft centers as shown. Refer to Detail 25A on Figure 3A-105(CA).
2. Place Limit Line as shown. Refer to Section 3B.19.
3. Place "STOP" legend as shown. Refer to Section 3B.19.
4. Place Solid White Right Edge Line, flared end optional, as shown. Refer to Detail 27B on Figure 3A-106(CA).
5. Place Type V Arrows as shown. Refer to Section 3B.23.
6. Place Type III (L) Arrows, in pairs, as shown where distance permits. Refer to Section 3B.23.
7. Place Type III (R) Arrows, in pairs, as shown where distance permits. Refer to Section 3B.23.
8. Intersection Lane Control (R61(CA) series) signs should be placed on both sides of the exit ramp, at the beginning of the Solid White Line. An additional set should also be placed in advance where distance permits, to alert the motorist of lane use controls ahead. Refer to Figure 2B-4(CA) for appropriate R61(CA) sign selection.
9. Place Type II (B) Arrows, in pairs, as shown where distance permits. Refer to Section 3B.23.
10. Lane Line Extensions through the intersection may be used, as shown. Refer to Detail 40 on Figure 3A-112(CA).
11. Place Type I (24 ft) Arrows as shown. Refer to Section 3B.23.

## Figure 3B-22. Examples of Lane-Use Control Word and Arrow Pavement Markings

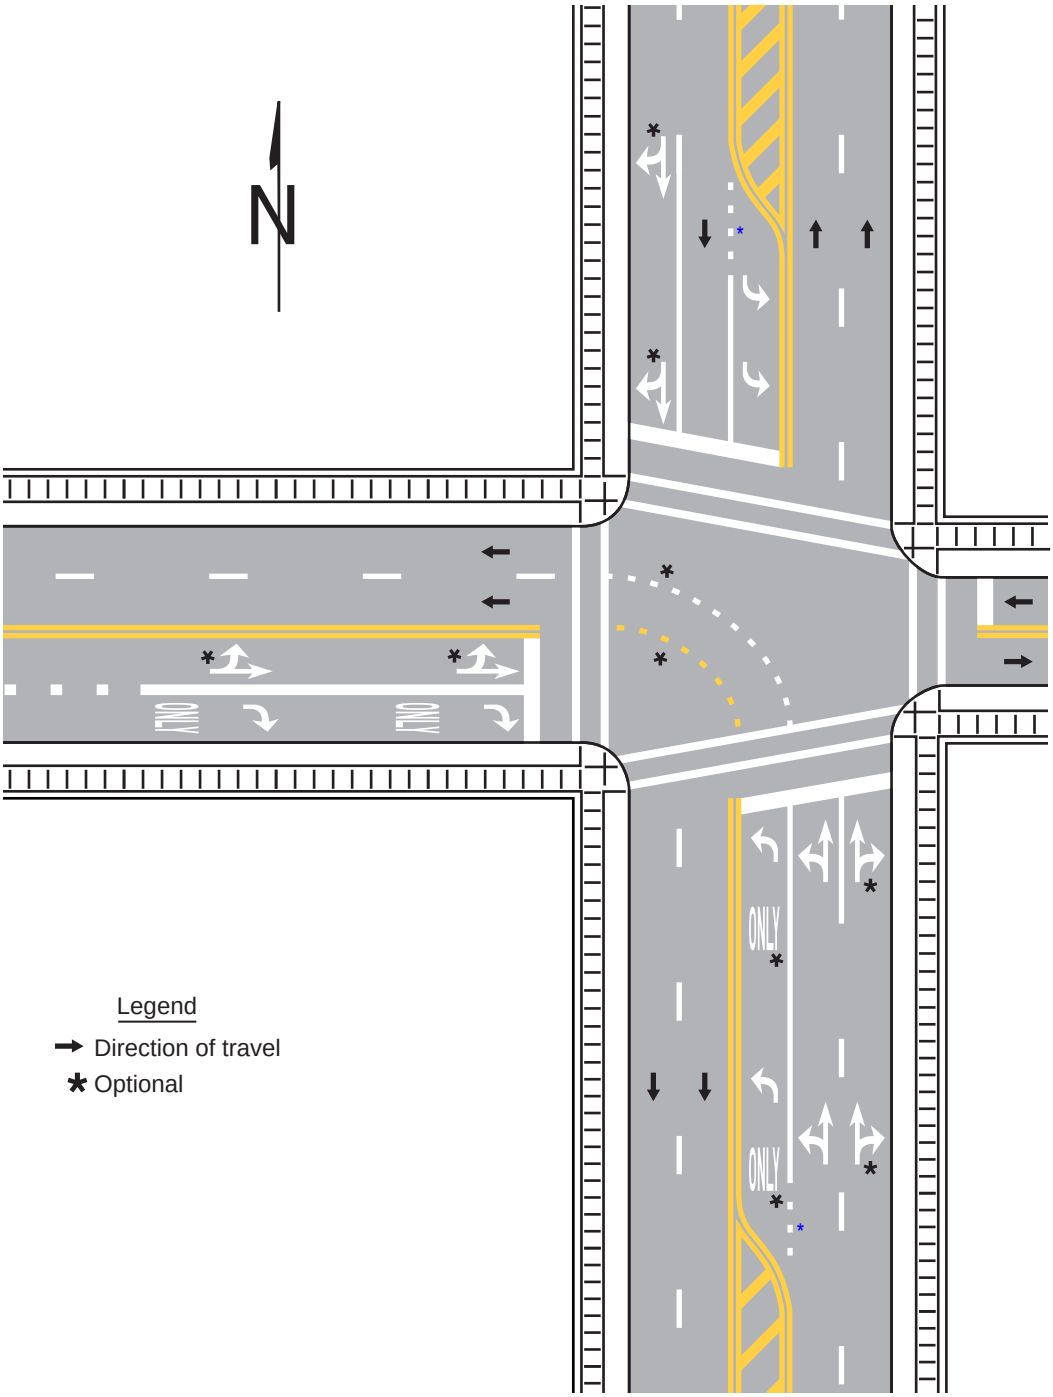



* Refer to FHWA's List of Known Errors for errors. Refer to Section 1A.04 for more details.

## Figure 3B-23. Examples of Parking Space Markings

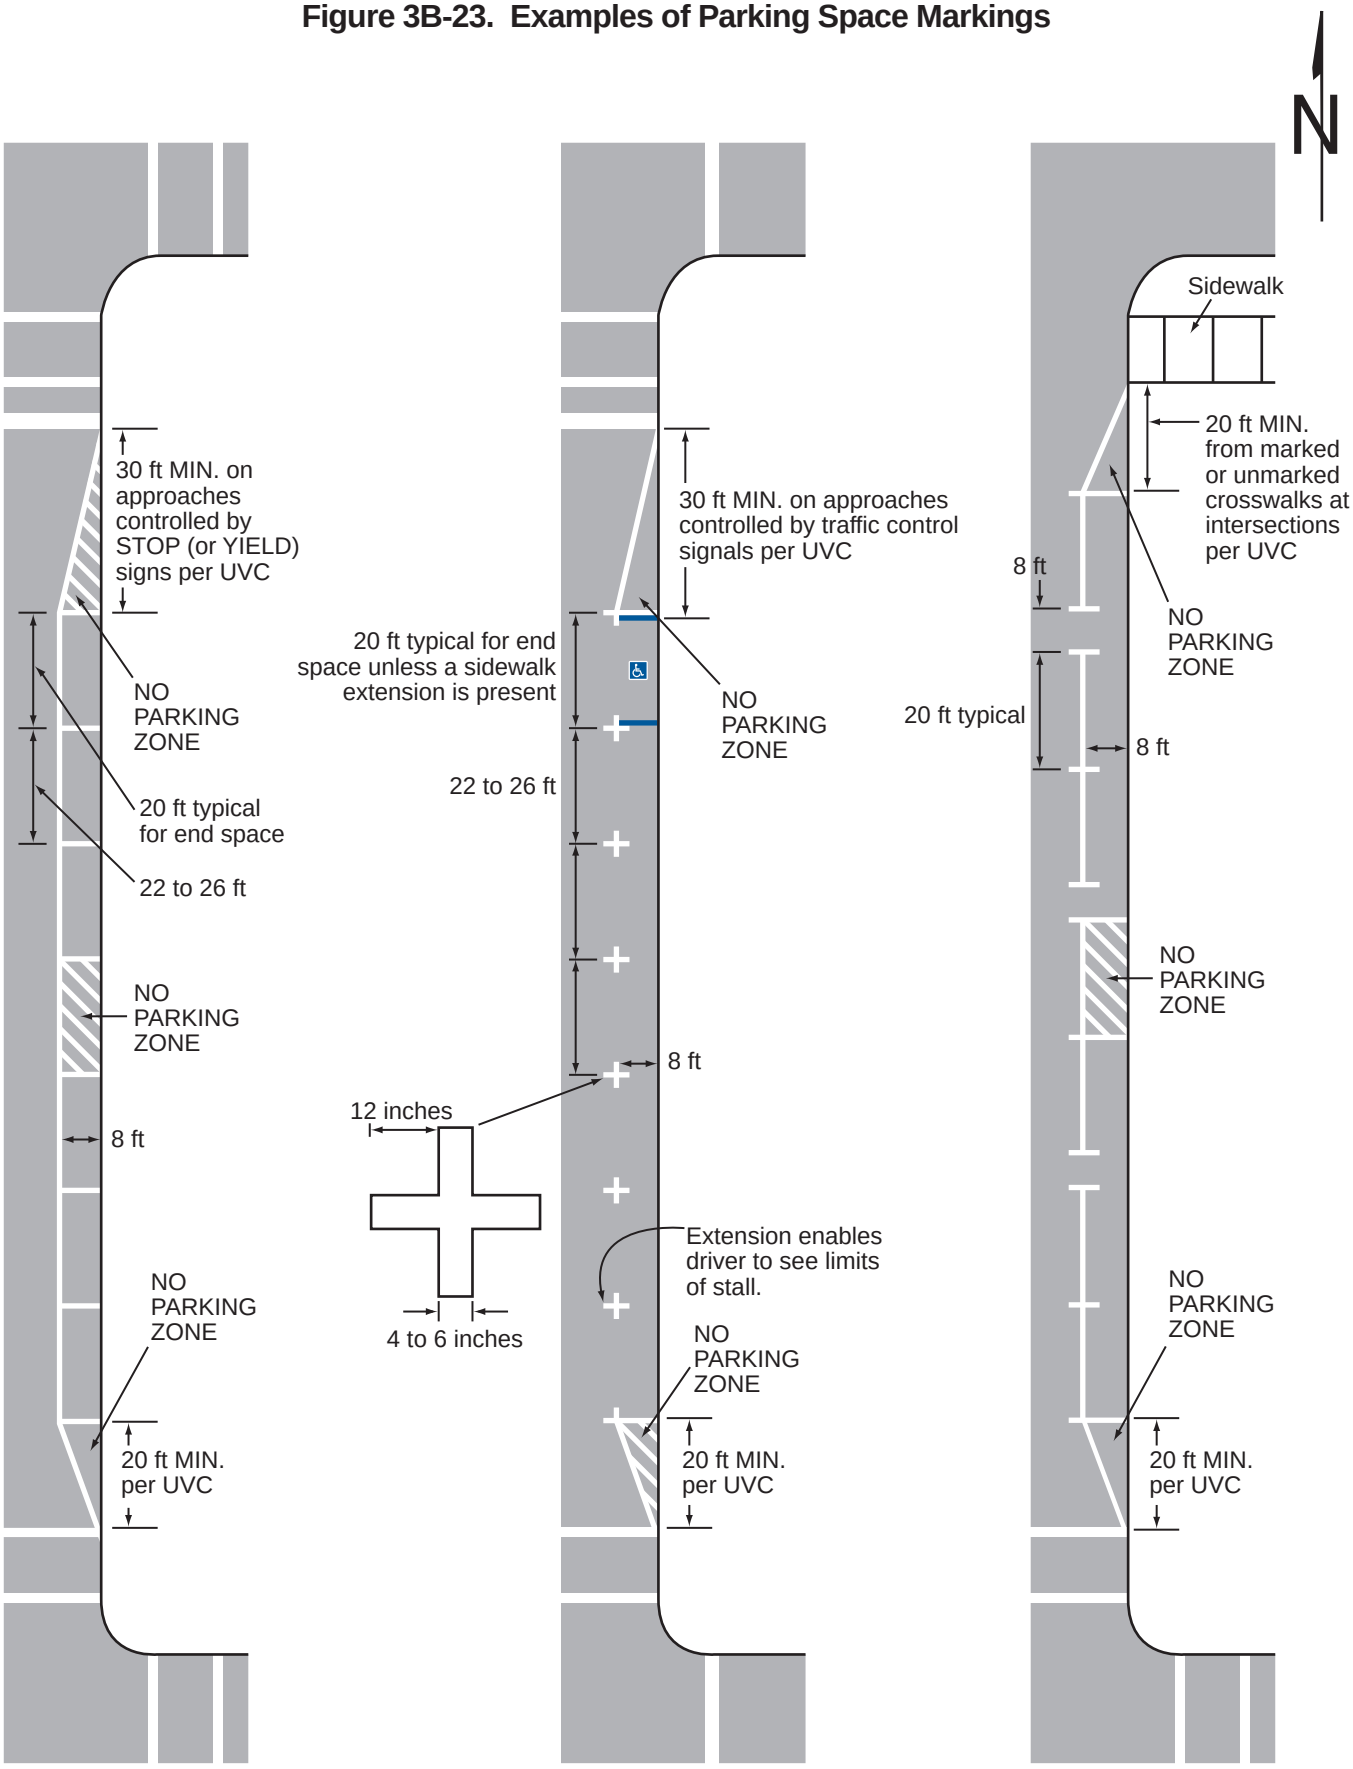


## Figure 3B-24. Do Not Block Intersection Markings

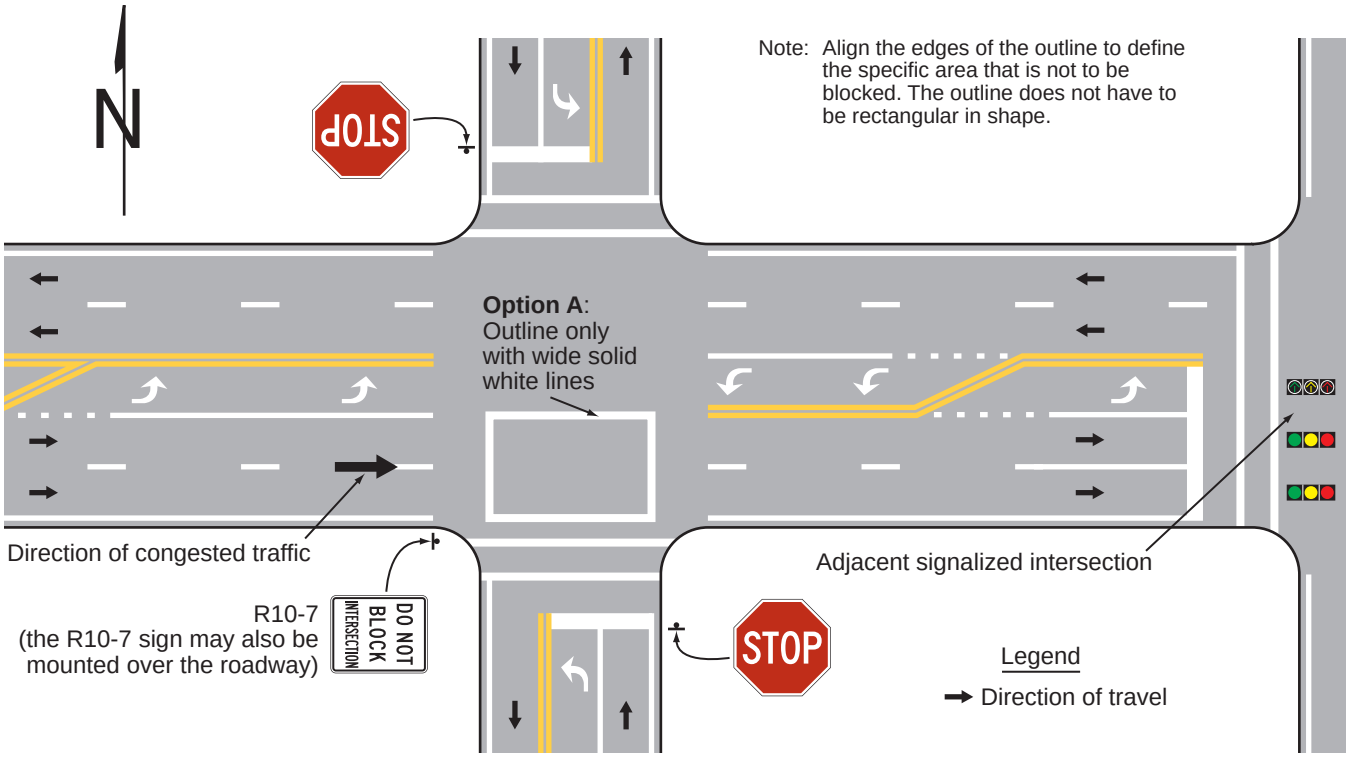


**Option B**:
Outline with "DO NOT BLOCK," "KEEP CLEAR," or similar text only message





**Option C**:
Outline with 4- to 6-inch solid white crosshatch lines





**Option D**:
"DO NOT BLOCK," "KEEP CLEAR," or similar text only message (no outline)




## Figure 3B-25. Example of the Application of Speed Reduction Markings

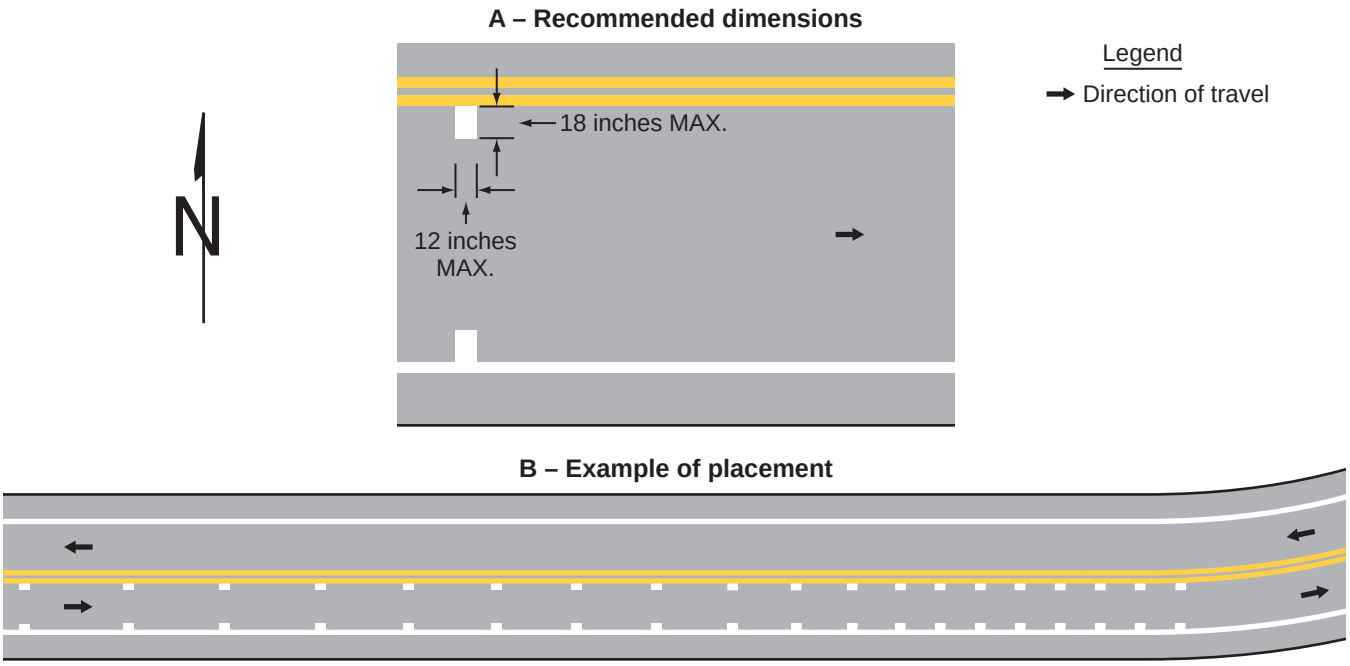

## Figure 3B-26. Pavement Markings for Speed Humps without Crosswalks

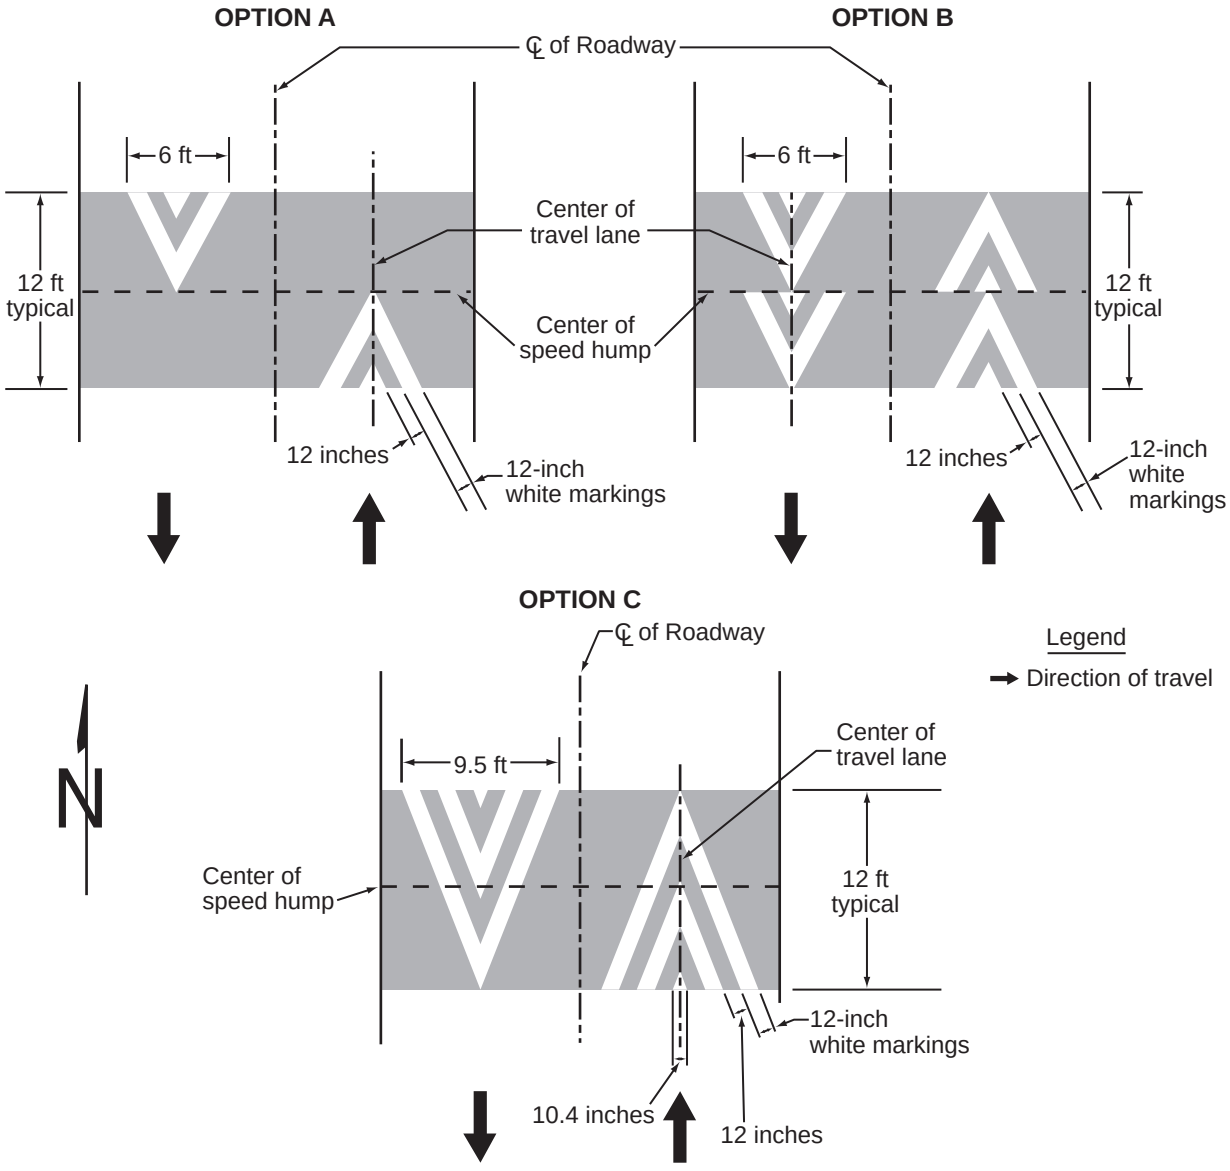


## Figure 3B-27. Pavement Markings for Speed Tables or Speed Humps with Crosswalks

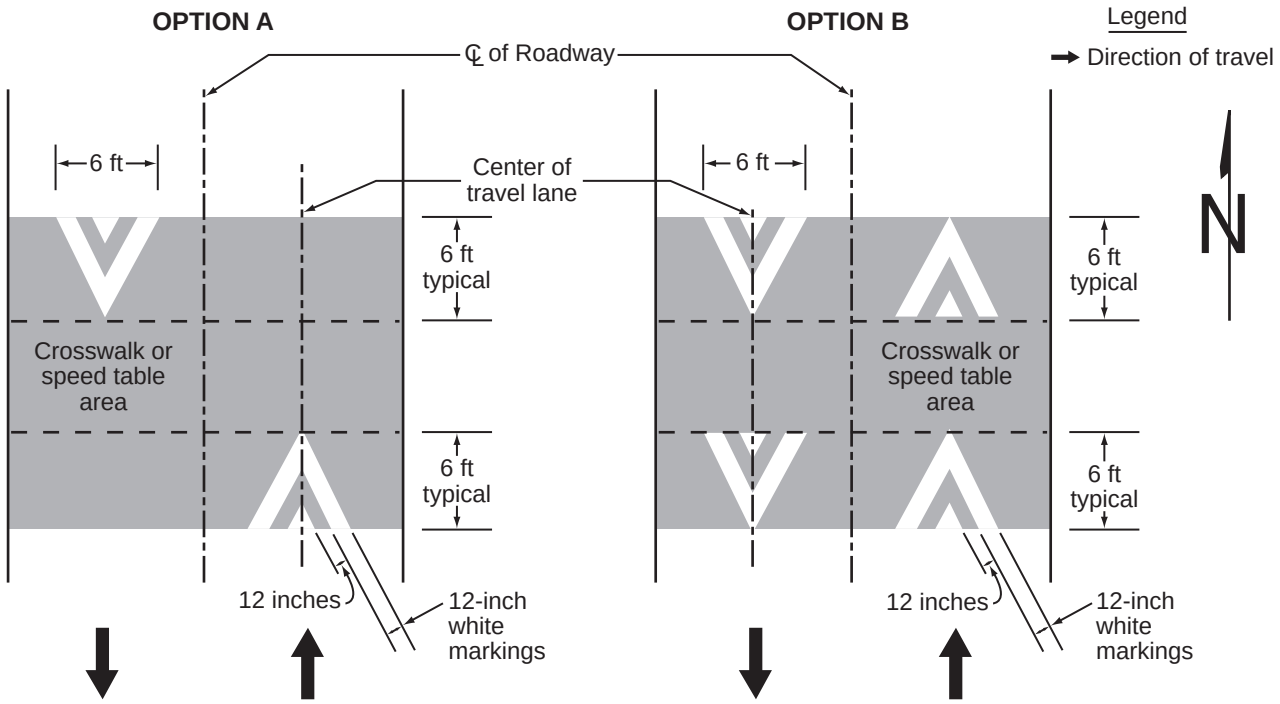


Note: Crosswalk lines are not shown


Scale = doesn't match anything. Kurt just tried to make look good while keeping road in proportion with lines.

## Figure 3B-28. Advance Warning Markings for Speed Humps or Speed Tables

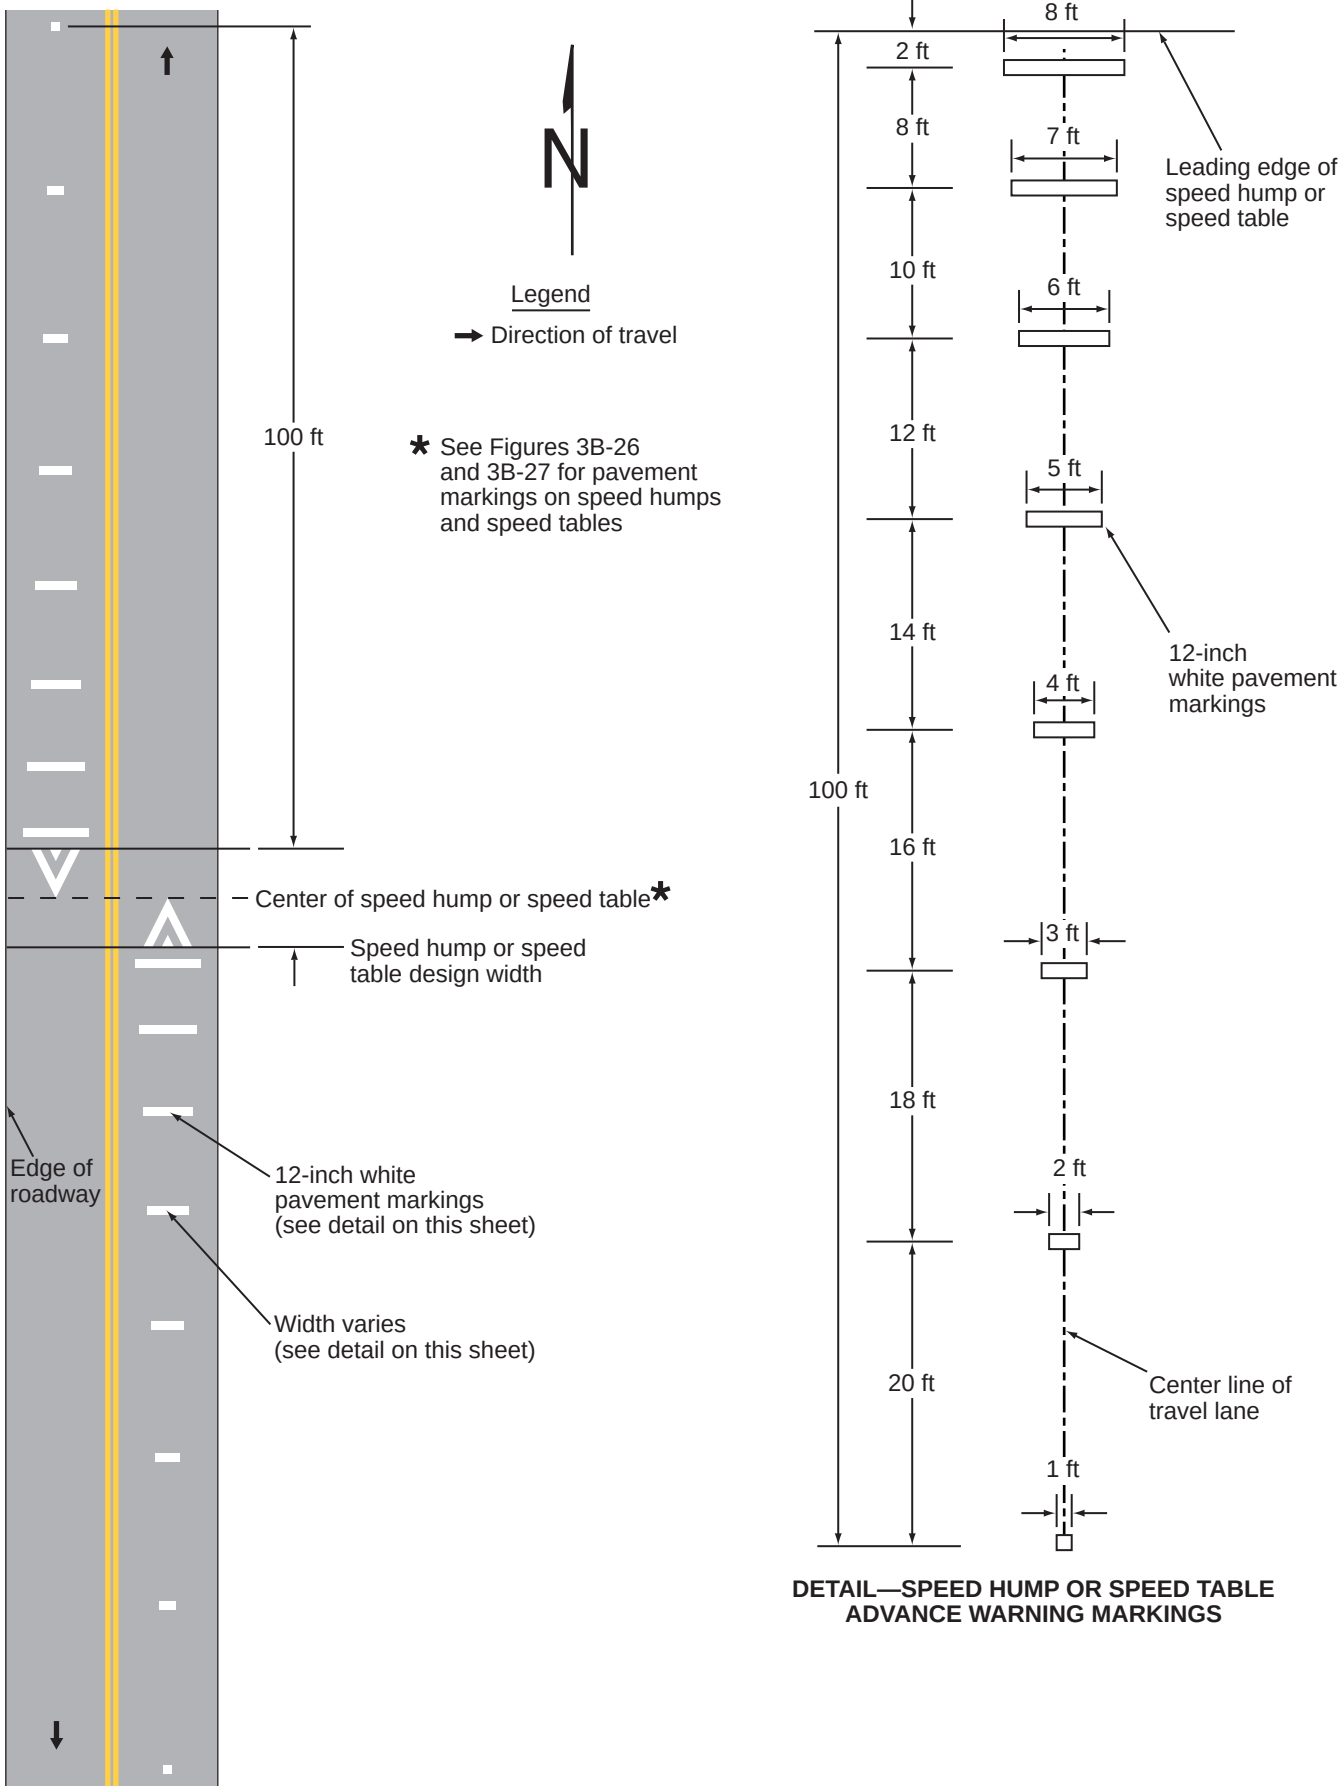



**DETAIL—SPEED HUMP OR SPEED TABLE ADVANCE WARNING MARKINGS**

## Figure 3B-29. Example of Pavement Markings for a Diamond Interchange with a Transposed Alignment Crossroad

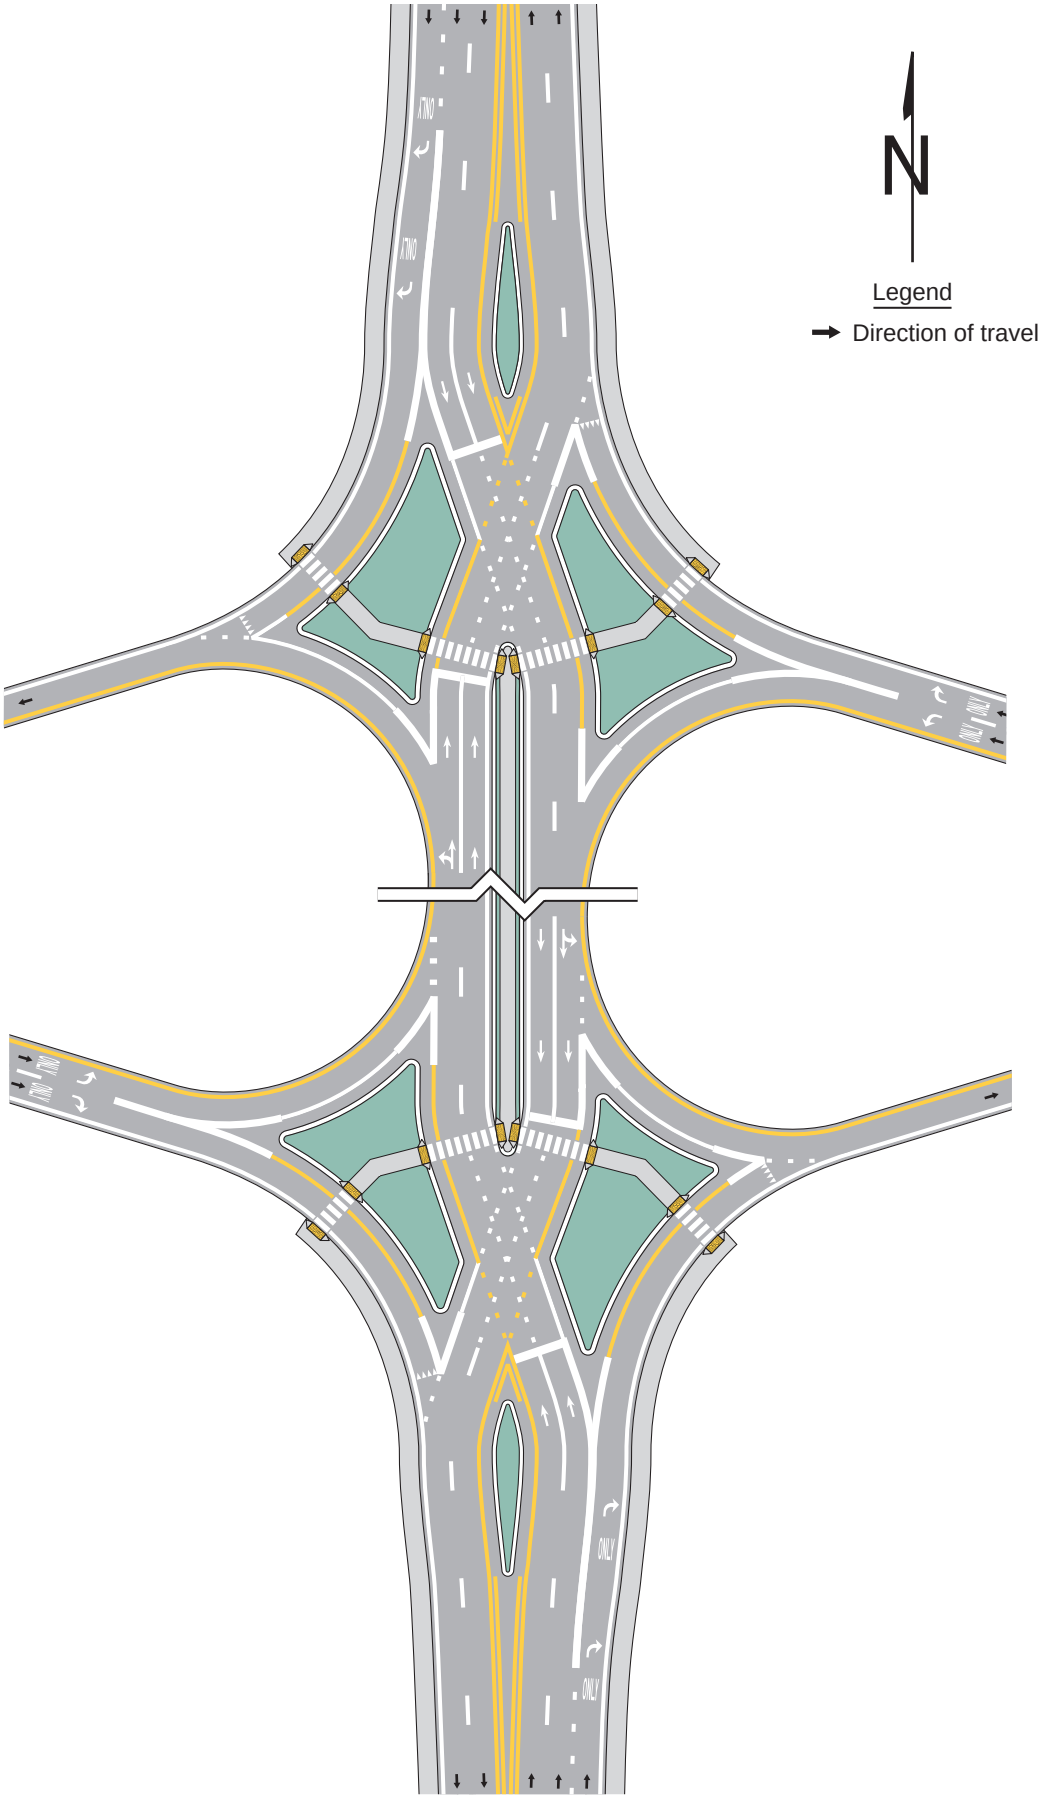


## *Figure 3B-101(CA). Examples of Left-Turn Channelization Markings*

### 4-Lane Roadway

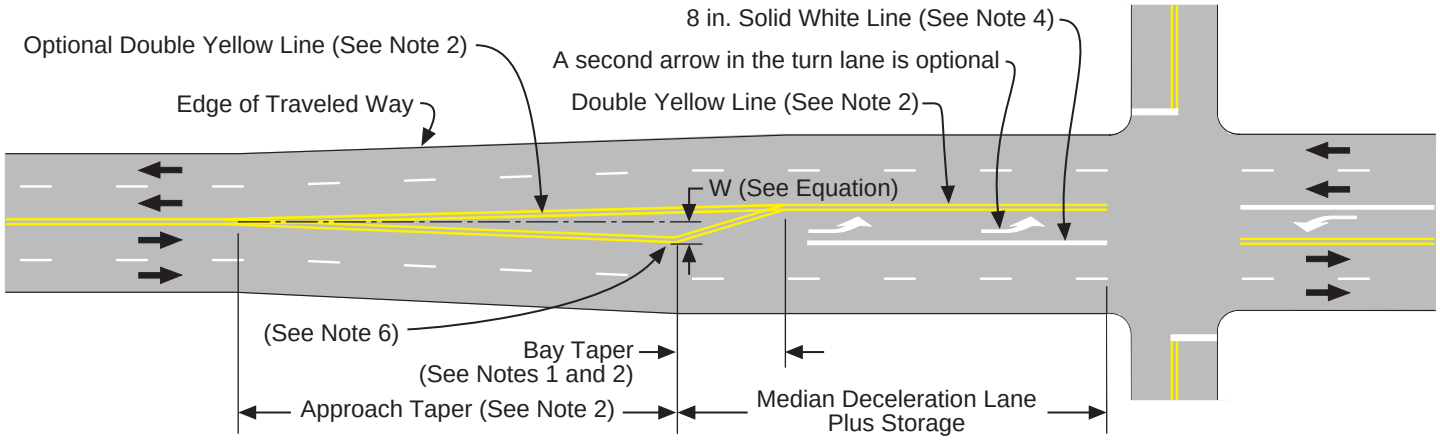


### 2-Lane Roadway

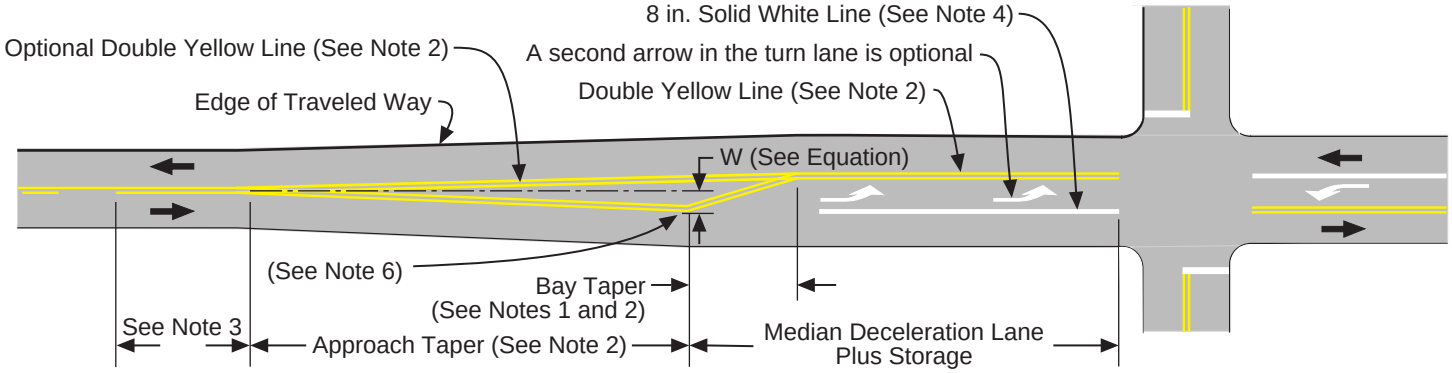


**NOT TO SCALE**

Approach Taper = $\frac{WS^2}{60}$ for speeds of 40 mph or less and

WS for speeds of 45 mph or more


Where S = Off Peak 85th Percentile Speed in mph

W = Width of Lateral Traffic Shift in feet

Notes:

1. Bay taper length = 60 ft or 90 ft for Business, Residential, and Urban Areas, and 120 ft for high speed Rural Areas.
2. Refer to Striping Details 21 through 23 or 28 through 30.
3. On two lane roads, use Striping Details 21 through 23 for one half (1/2) of the passing sight distance for the prevailing speed.
4. Refer to Striping Detail 38, use a minimum storage length of 50 ft.
5. Refer to Highway Design Manual, Section 405.2 for design details.
6. Based on engineering judgement, intersection of the Approach and Bay Tapers may be located within the width of the left-turn lane.

## *Figure 3B-102(CA). Examples of Intersection Markings*

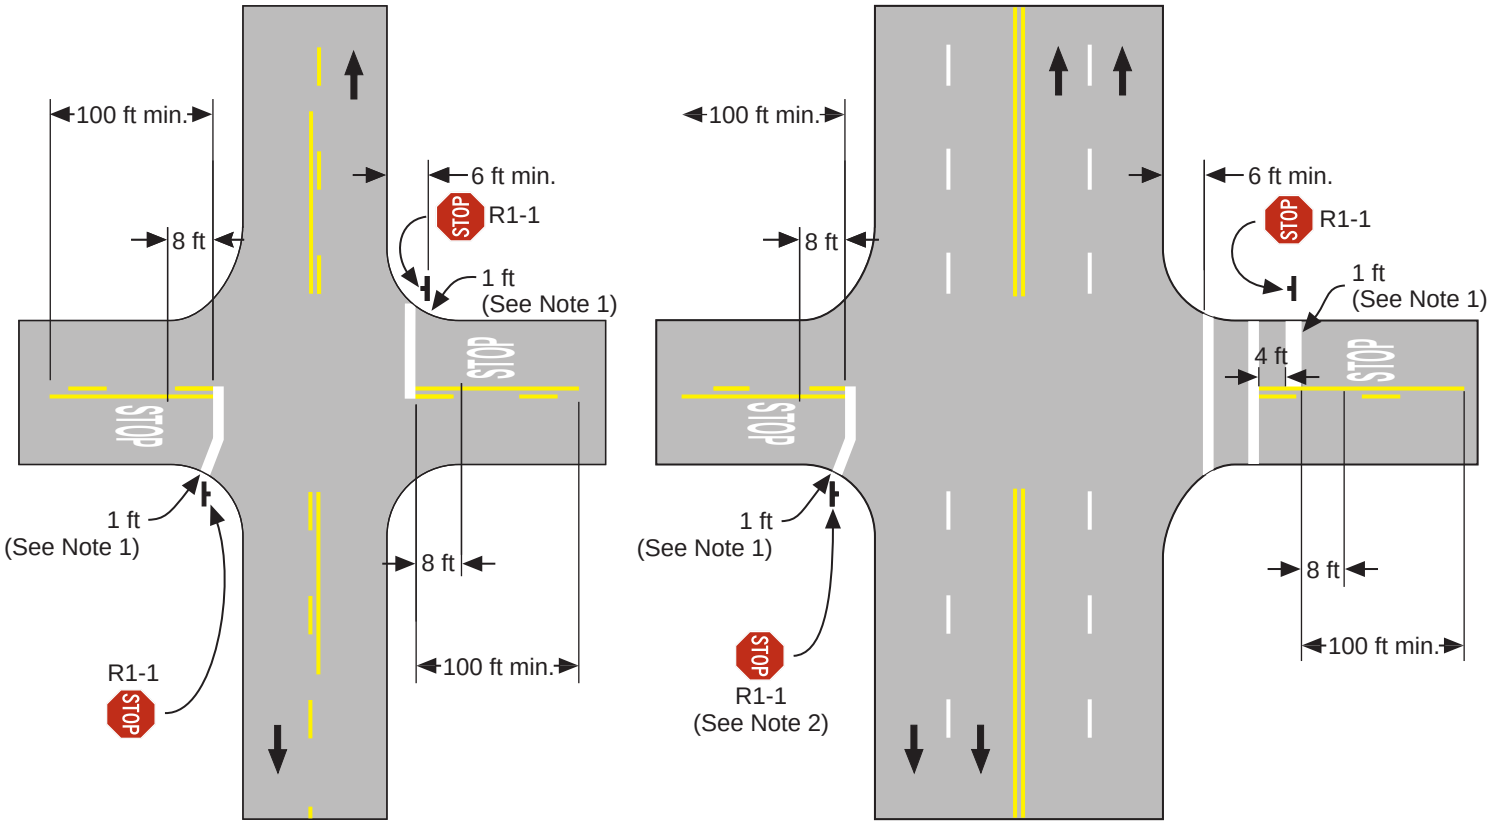


**NOT TO SCALE**

**LEGEND**


→ Direction of Travel

Notes:

1. The Limit Line is optional; refer to Section 3B.19. The Limit Line on wide side roads on long radius corners may be bent at a 45°± angle for traffic making a right turn.

2. When a Stop Ahead (W3-1) or STOP AHEAD (W3-1a) sign is used, a STOP AHEAD pavement marking may be placed to supplement the sign according to Section 3B.21.


## *Figure 3B-103(CA). Treatment for Divided Highway Illusion*

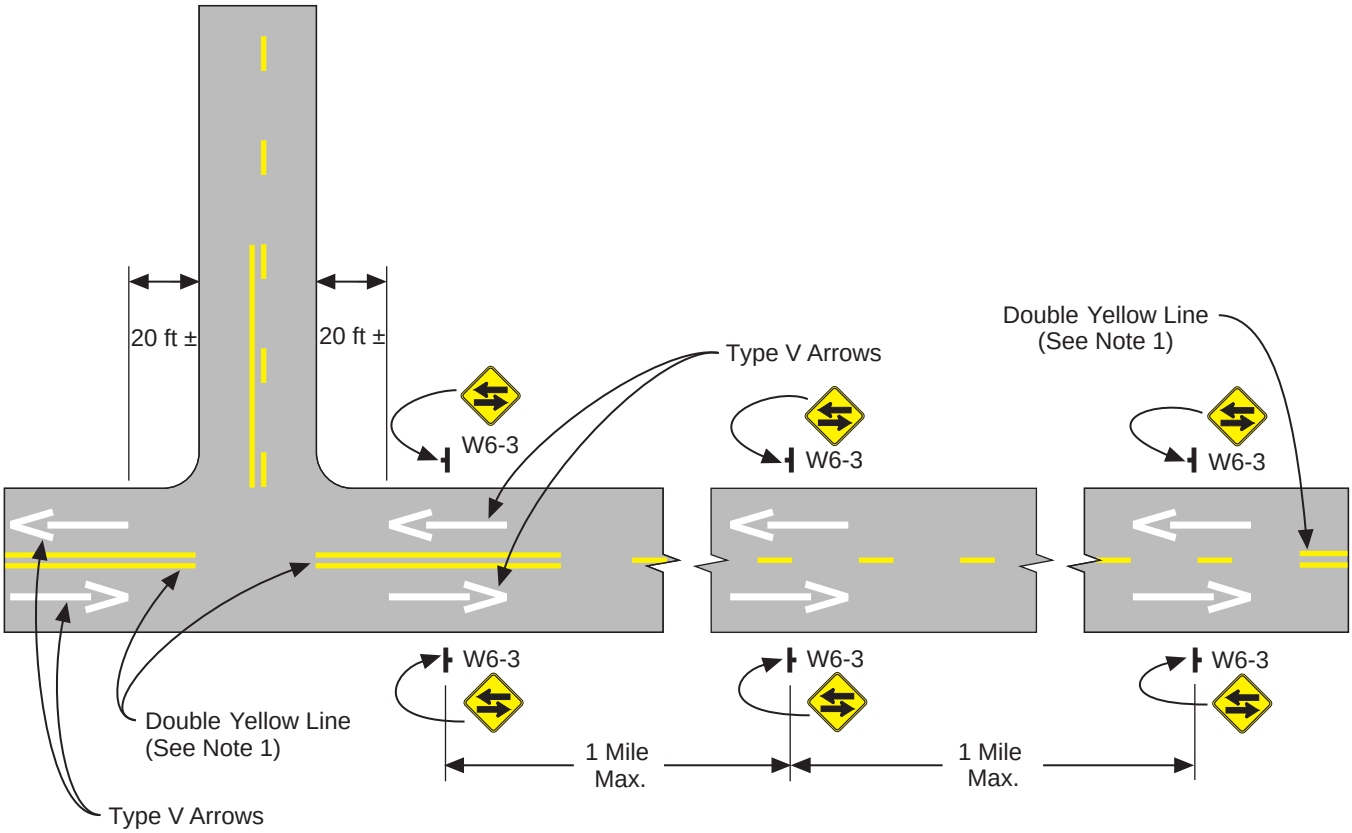


**NOT TO SCALE**

Note: Use a Double Yellow Line (Two Direction - No Passing) to discourage wrong way movements at critical locations, such as entering roads or approaches to transitions.

## *Figure 3B-104(CA). Passing Lanes*

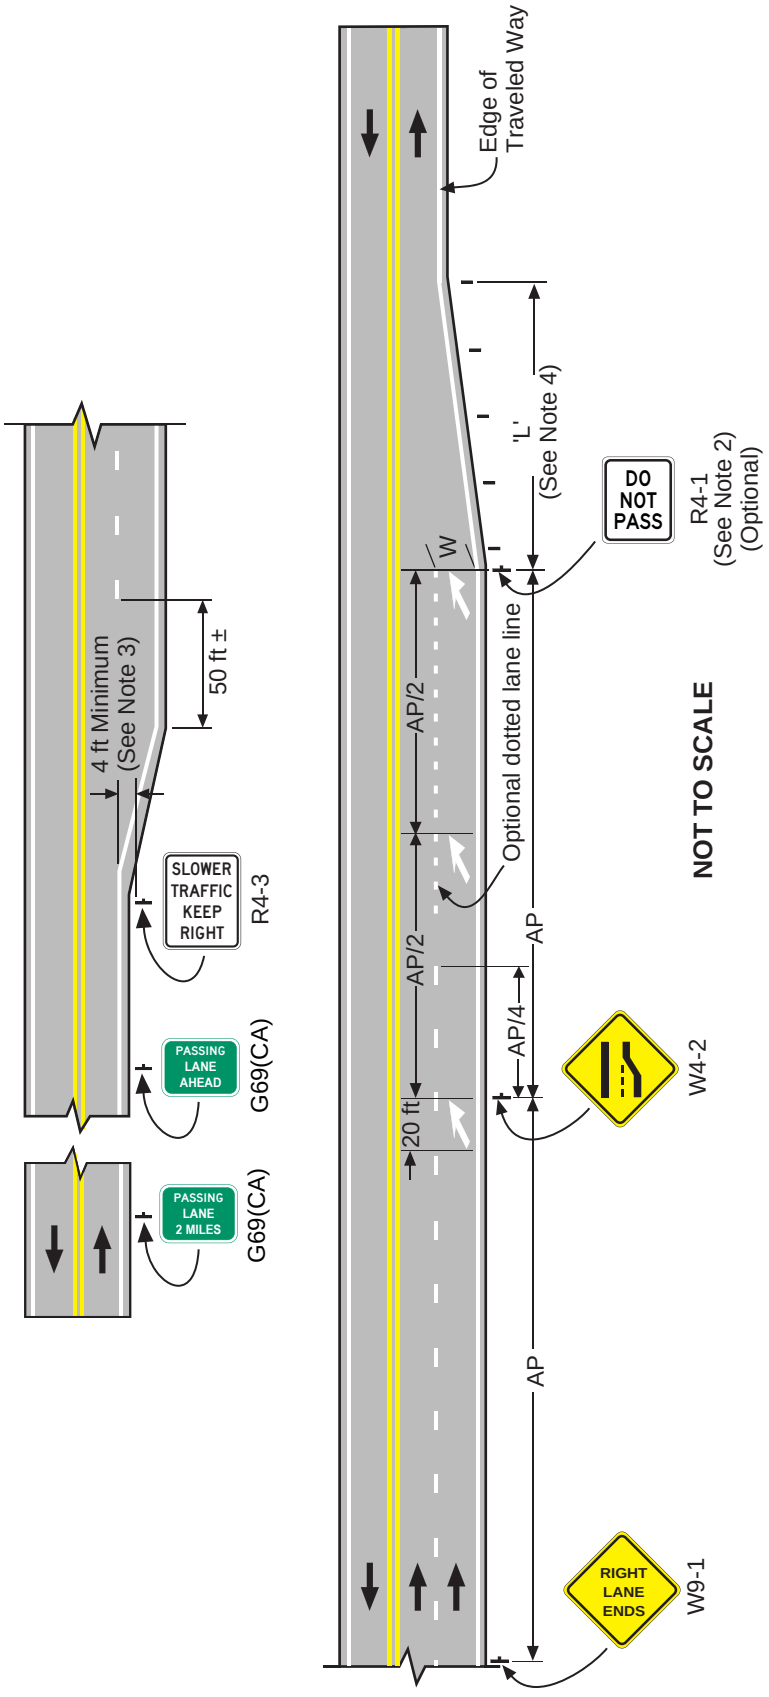



**LEGEND**

- L = Length in feet
- S = Posted, 85th Percentile, statutory speed, or design speed for new construction in mph
- For speeds 45 mph or more: L = WS
- For speeds 40 mph or less: L = $WS^2/60$
- W = Offset in feet
- AP = Advance Placement Distance (see Section 2C.04)
- Direction of Travel
- Lane Reduction Arrow
- Delineators (Type F)
- Sign Location

Notes:


1. For taper lengths, sign and delineator placement at different speeds, see Figure 3B-12(CA) (Sheet 1 of 3).
2. The R4-1 sign should not be used on a freeway or expressway, etc., where two or more lanes remain after a lane is dropped. See Section 2B.36.
3. To discourage vehicular travel off the traveled way, the Right Edge Line should be continued until there is at least 4 ft between the beginning of the edge line taper and the edge of the traveled way.
4. Delineators should be spaced approximately 200 ft apart. There should be a minimum of 3 delineators throughout the entire length of a lane reduction transition. See Section 3G.04.
5. Lane Reduction Arrows may be placed when a passing lane is 1 mi or more in length.

## *Figure 3B-105(CA). Examples of Signing and Marking Turnouts*

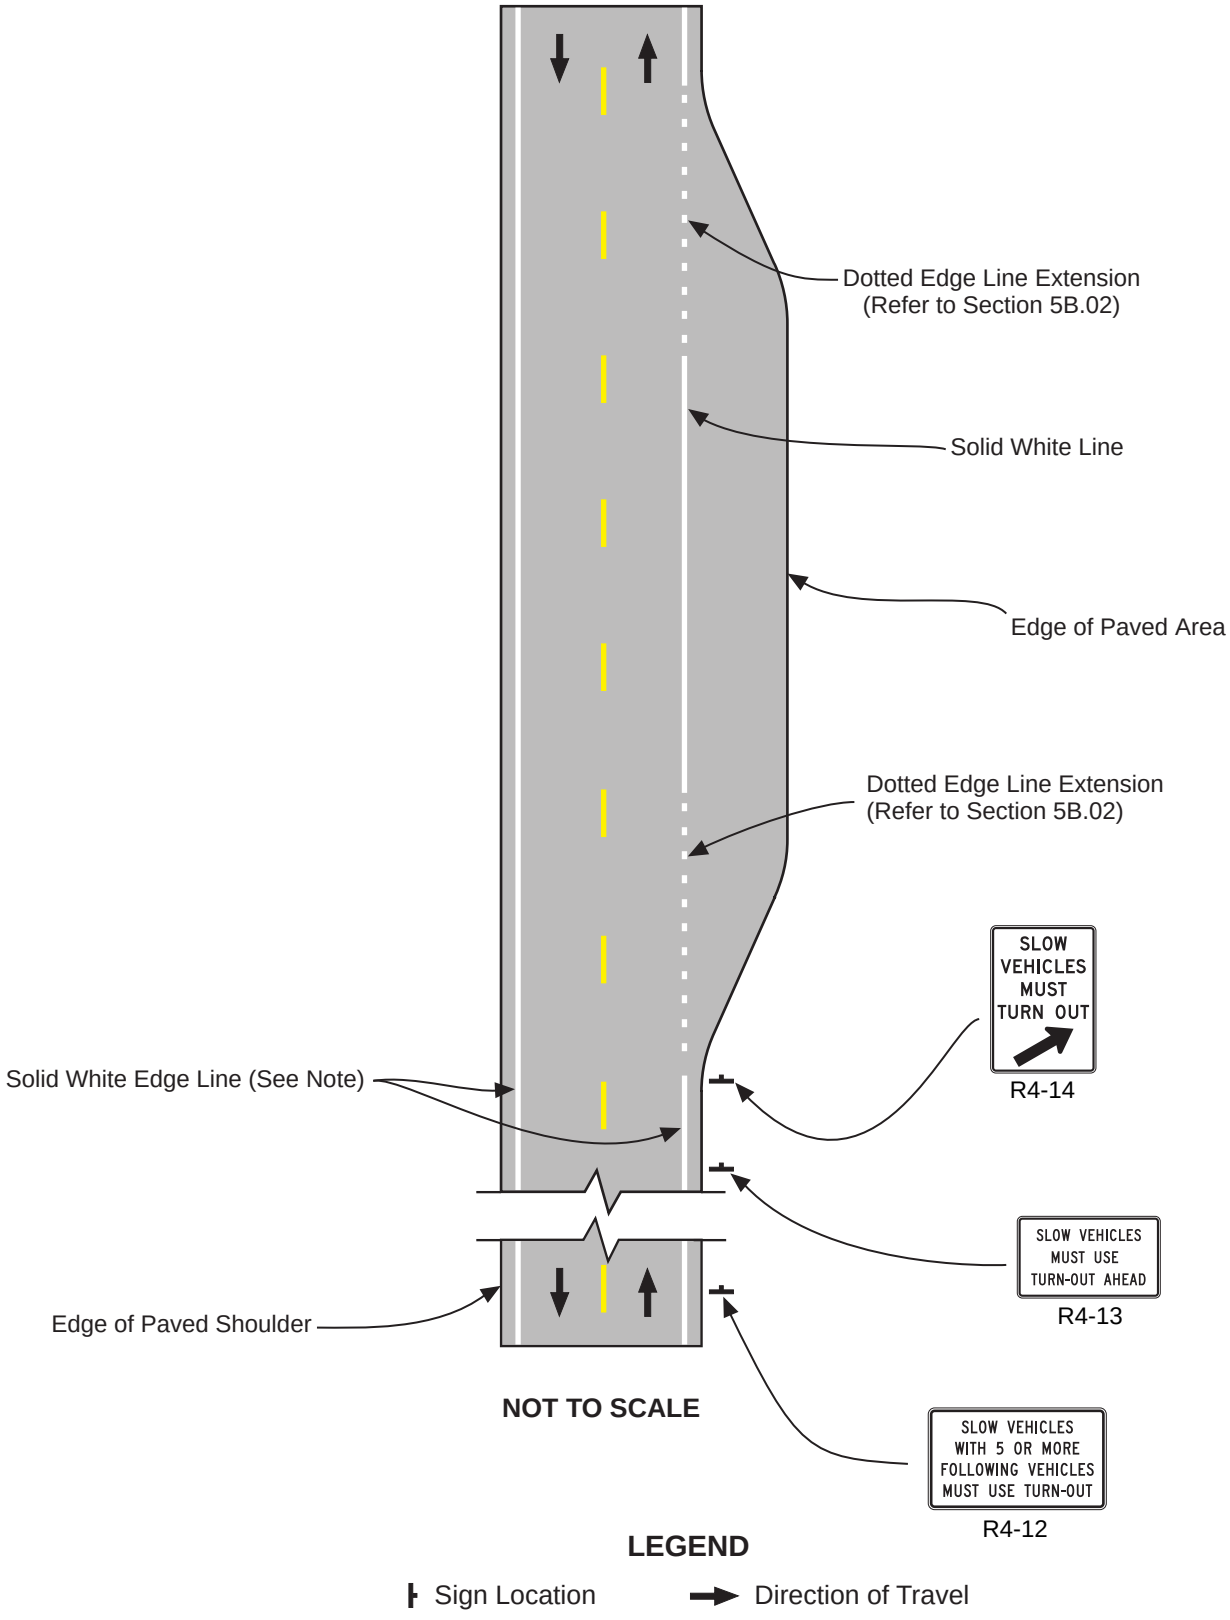


Note: Refer to Detail 27B on Figure 3A-106(CA).

## *Figure 3B-106(CA). Electric Vehicle Charging Station Pavement Legend Detail*

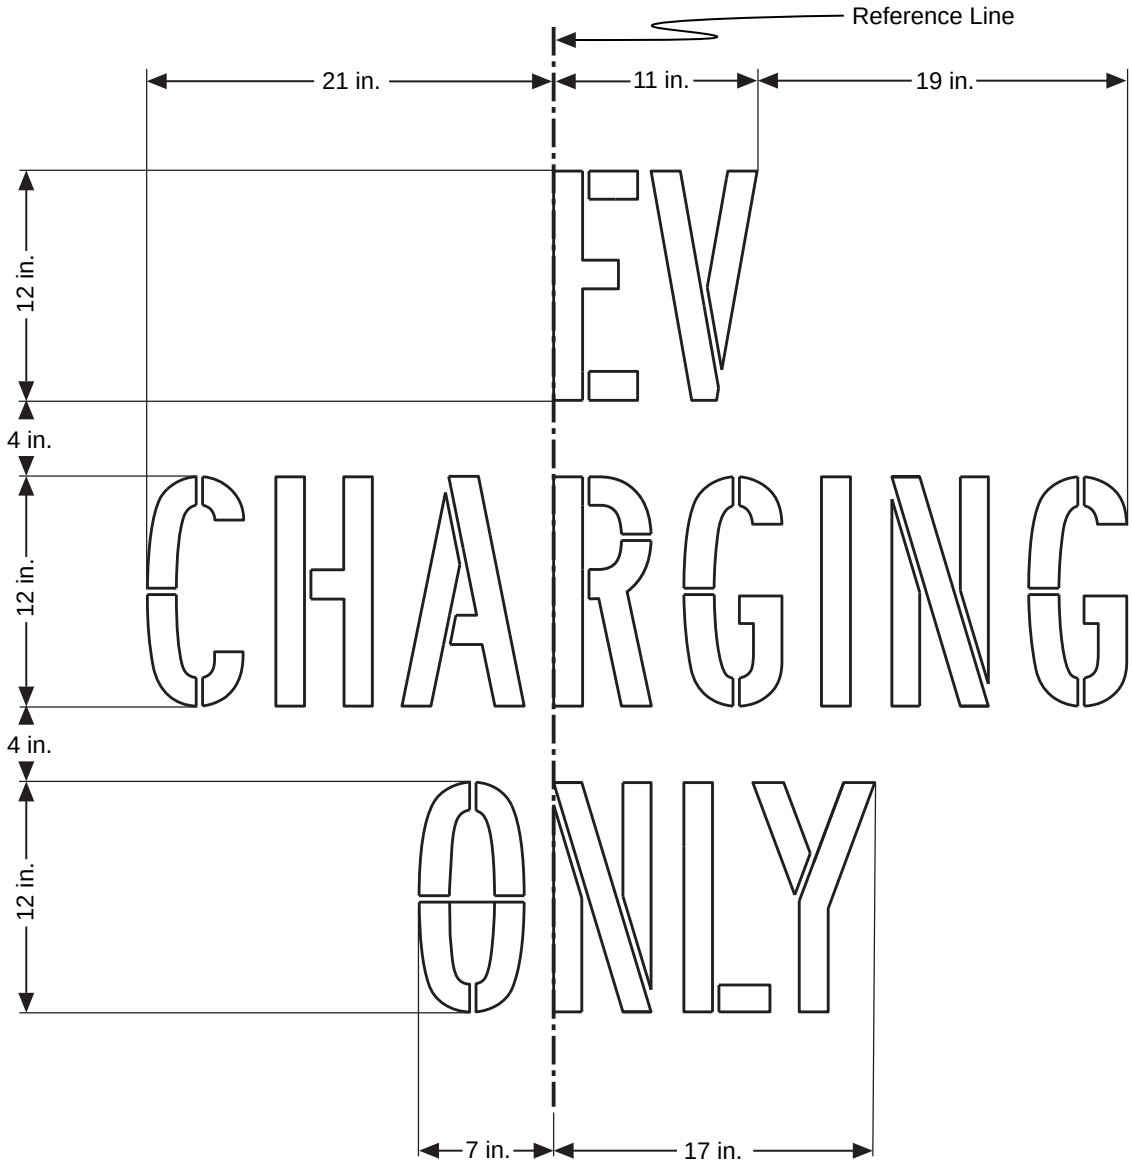


**NOT TO SCALE**

Note: Use the FHWA Series Fonts as the official font for all pavement Legends. Adjust the spacing between individual letter pairs (kerning) and adjust the spacing across a whole word or block of text (tracking) to ensure proper visibility, legibility, and continuity of the stencil pieces during the field marking process.

## Table 3B-1. Minimum Passing Sight Distances for No-Passing Zone Markings

| 85th-Percentile or Speed Limit | Minimum Passing Sight Distance |
|---|---|
| 25 mph | 450 feet |
| 30 mph | 500 feet |
| 35 mph | 550 feet |
| 40 mph | 600 feet |
| 45 mph | 700 feet |
| 50 mph | 800 feet |
| 55 mph | 900 feet |
| 60 mph | 1,000 feet |
| 65 mph | 1,100 feet |
| 70 mph | 1,200 feet |

# CHAPTER 3C. CROSSWALK MARKINGS

## Section 3C.01 General

Support:

01 Crosswalk markings provide guidance for pedestrians who are crossing roadways by defining and delineating paths on approaches to and within signalized intersections, and on approaches to other intersections where traffic stops.

02 In conjunction with signs and other measures, crosswalk markings help to alert road users of a designated pedestrian crossing point across roadways at locations that are not controlled by traffic control signals or STOP or YIELD signs.

03 At non-intersection locations, crosswalk markings legally establish the crosswalk.

04 Detectable warning surfaces mark boundaries between pedestrian and vehicular ways where there is no raised curb. Detectable warning surfaces are typically installed where curb ramps are constructed at the junction of sidewalks and the roadway or shoulder, for marked and unmarked crosswalks. Detectable warning surfaces contrast visually with adjacent walking surfaces, either light-on-dark, or dark-on-light. The U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990 contains specifications for the design of detectable warning surfaces.

## Section 3C.02 Application of Crosswalk Markings

*Guidance:*

01 *At locations controlled by traffic control signals, crosswalk markings should be installed.*

Option:

02 Crosswalk markings may be omitted if engineering judgment indicates they are not needed to direct pedestrians to the proper crossing path(s).

02a Pedestrian crosswalk markings may be placed at intersections, representing extensions of the sidewalk lines, or on any portion of the roadway distinctly indicated for pedestrian crossing. Refer to CVC § 275.

*Guidance:*

03 *On approaches controlled by STOP or YIELD signs, crosswalk markings should be installed where engineering judgment indicates they are needed to direct pedestrians to the proper crossing path(s).*

04 *At uncontrolled approaches, an engineering study should be performed before a marked crosswalk is installed. The following criteria should be considered:*

- *A. Total number of approach lanes,*
- *B. The presence of a median,*
- *C. The distance from adjacent signalized intersections or other controlled crossings,*
- *D. Projected pedestrian and bicyclist volumes,*
- *E. Pedestrian and bicyclist paths of travel,*
- *F. Pedestrian ages and abilities,*
- *G. Pedestrian and bicyclist delays,*
- *H. Location or frequency of public transit stops,*
- *I. Average daily traffic (ADT),*
- *J. Speed limit or the 85th-percentile speed,*
- *K. The horizontal and vertical geometry of the crossing location,*
- *L. The possible consolidation of multiple crossing points,*
- *M. The availability of street lighting, and*
- *N. Other appropriate factors.*

**Standard:**

05 **Crosswalk markings shall be provided at legally established crosswalks at non-intersection locations.**

*Guidance:*

06 *The installation of other traffic control devices and other measures designed to reduce traffic speeds, shorten crossing distances, enhance driver awareness of the crossing, and/or provide active warning of pedestrian presence, should be considered in addition to a new marked crosswalk and signs across an uncontrolled roadway where any of the following conditions exist:*

- *A. The roadway has four or more lanes of travel without a raised median or pedestrian refuge island and an ADT*

*of 12,000 vehicles per day or greater; or*

*B. The roadway has four or more lanes of travel with a raised median or pedestrian refuge island and an ADT of 15,000 vehicles per day or greater, or*

*C. The posted speed limit is 40 mph or greater, or*

*D. A crash study reveals that multiple-threat crashes are the predominant crash type on a multi-lane approach, or*

*E. When adequate visibility cannot be provided by parking prohibitions.*

06a *If a marked crosswalk exists across an uncontrolled roadway where the speed limit exceeds 40 mph and the roadway has four or more lanes of travel and an ADT of 12,000 vehicles per day or greater, advanced yield lines with associated Yield Here to Pedestrians (R1-5, R1-5a) signs should be placed 20 to 50 ft in advance of the crosswalk, adequate visibility should be provided by parking prohibitions, pedestrian crossing (W11-2) warning signs with diagonal downward pointing arrow (W16-7p) plaques should be installed at the crosswalk, and a high-visibility crosswalk marking pattern should be used (Refer to Figure 3C-101(CA)).*

Support:

07 Chapter 4J contains information on pedestrian hybrid beacons.

08 Chapter 4L contains information on rectangular rapid flashing beacons.

09 Section 4S.03 contains information regarding Warning Beacons to provide active warning of a pedestrian's presence.

10 Section 4U.02 contains information regarding In-Roadway Warning Lights at crosswalks.

11 Chapter 7C contains information on school crosswalks.

12 Chapter 7D contains information regarding school crossing supervision.

13 Section 9E.13 contains information on crosswalk markings for shared-use path crossings.

## Section 3C.03 Design of Crosswalk Markings

Support:

01 Section 3B.19 contains information regarding placement of stop line markings and yield line markings near crosswalk markings.

02 Crosswalk markings are classified as either transverse line or high-visibility. Transverse crosswalk markings consist of two transverse lines. High-visibility markings consist of longitudinal lines parallel to traffic flow with or without transverse lines. Figure 3C-1 presents crosswalk marking designs.

**Standard:**

03 **Crosswalk markings shall be white. When used, transverse lines shall not be less than ~~6~~ 12 inches or greater than 24 inches in width.**

Support:

04 The allowable upper limit approaching 24 inches for the width of the transverse lines is normally applied where no stop or yield line is used in advance of the crosswalk or when approach speeds exceed 35 miles per hour.

**Standard:**

05 **Except as provided in Paragraph 6 of this Section, the minimum width of a marked crosswalk shall be 6 feet.**

06 **At a non-intersection crosswalk where the posted speed limit is 40 mph or greater, the minimum width of the crosswalk shall be 8 feet.**

*Guidance:*

07 *High-visibility crosswalk markings (such as shown in Figure 3C-1) and warning signs (see Section 2C.55) should be installed for all crosswalks at non-intersection locations.*

08 *Added visibility should be provided by parking prohibitions on the approach to marked crosswalks at non-intersection locations.*

**Standard:**

09 **Where curb ramps are provided, crosswalk markings shall be located so that the curb ramps are within the extension of the crosswalk markings.**

*Guidance:*

10 *Transverse line crosswalk markings should extend across the full width of pavement or to the edge of the intersecting crosswalk to discourage diagonal walking between crosswalks.*

Support:

11 Provisions for aesthetic treatments for the interior portion of a legally-established crosswalk are contained in Section 3H.03.

**Standard:**

12 **If paving materials are used to function as the white transverse lines to establish a marked crosswalk, white additives shall be part of the mixture to produce a white surface. The white paving materials shall be retroreflective.**

13 **Crosswalk markings near schools shall be yellow as provided in CVC § 21368. Refer to Part 7.**

*Guidance:*

14 *In general, crosswalks should not be marked at intersections unless they are intended to channelize pedestrians. Emphasis is placed on the use of marked crosswalks as a channelization device.*

15 *The following factors may be considered in determining whether a marked crosswalk should be used:*

- *A. Vehicular approach speeds from both directions.*
- *B. Vehicular volume and density.*
- *C. Vehicular turning movements.*
- *D. Pedestrian volumes.*
- *E. Roadway width.*
- *F. Day and night visibility by both pedestrians and road users.*
- *G. Channelization is desirable to clarify pedestrian routes for sighted or sight impaired pedestrians.*
- *H. Discouragement of pedestrian use of undesirable routes.*
- *I. Consistency with markings at adjacent intersections or within the same intersection.*

Option:

16 Crosswalk markings may be established between intersections (mid-block) in accordance with CVC § 21106(a).

*Guidance:*

17 *Mid-block pedestrian crossings are generally unexpected by the motorist and should be discouraged unless, in the opinion of the engineer, there is strong justification in favor of such installation. Particular attention should be given to roadways with two or more traffic lanes in one direction as a pedestrian may be hidden from view by a vehicle yielding the right-of-way to a pedestrian.*

Option:

18 When diagonal or longitudinal lines are used to mark a crosswalk, the transverse crosswalk lines may be omitted.

**Standard:**

19 **However, when the factor that determined the need to mark a crosswalk is the clarification of pedestrian routes for sight-impaired pedestrians, the transverse crosswalk lines shall be marked.**

Option:

20 At controlled approaches, limit lines (stop lines) help to define pedestrian paths and are therefore a factor the engineer may consider in deciding whether or not to mark the crosswalk.

21 Where it is desirable to remove a marked crosswalk, the removal may be accomplished by repaving or surface treatment.

*Guidance:*

22 *A marked crosswalk should not be eliminated by allowing it to fade out or be worn away.*

Support:

23 The worn or faded crosswalk retains its prominent appearance to the pedestrian at the curb, but is less visible to the approaching road user.

**Standard:**

24 **Notification to the public shall be given at least 30 days prior to the scheduled removal of an existing marked crosswalk. The notice of proposed removal shall inform the public how to provide input related to the scheduled removal and shall be posted at the crosswalk identified for removal. Refer to CVC § 21950.5**

Option:

25 Signs may be installed at or adjacent to an intersection directing that pedestrians shall not cross in a crosswalk indicated at the intersection in accordance with CVC § 21106(b).

26 White PED XING pavement markings may be placed in each approach lane to a marked crosswalk, except at intersections controlled by traffic signals or STOP or YIELD signs.

## Section 3C.04 Transverse Line Crosswalks

*Guidance:*

01 *Transverse line crosswalk markings should be limited to locations controlled by traffic control signals or on approaches controlled by STOP or YIELD signs.*

Support:

02 Transverse line crosswalk marking design consists of two parallel transverse lines (see Figure 3C-1).

03 Transverse line crosswalk markings can provide benefits to crosswalk operations including:

A. Define where the channelization of pedestrians or other non-motorized users is necessary to facilitate crossing the roadway.
B. Alert motorists to the location of where pedestrians and other non-motorized users might be expected when crossing the roadway.
C. Emphasize a crosswalk at a controlled intersection.
D. Fulfill a legal need to mark the crosswalk.

## Section 3C.05 High-Visibility Crosswalks

Option:

01 High-visibility crosswalk markings may be used where additional conspicuity is desired for a crosswalk over transverse line crosswalk markings.

*Guidance:*

01a *This type of marking should be used at locations where substantial numbers of pedestrians cross without any other traffic control device, at locations where physical conditions are such that added visibility of the crosswalk is desired, or at places where a pedestrian crosswalk might not be expected.*

Support:

02 High-visibility crosswalk markings include the longitudinal bar, ladder, and bar pair designs (see Figure 3C-1).

03 High-visibility crosswalk markings can provide benefits to crosswalk operations including:

A. Providing greater detection distances for the approaching motorist.
B. Emphasizing a crosswalk where substantial numbers of pedestrians cross without any other traffic control device.
C. Emphasizing a crosswalk at an uncontrolled approach.
D. Emphasizing the location where a high number of conflicts between turning motorists and users of the crosswalk are expected.
E. Improving visibility of the crosswalk location for otherwise difficult to detect pedestrians or other non-motorized users of the crosswalk.
F. Emphasizing a school crossing.

**Standard:**

04 **The minimum number of individual longitudinal elements to establish a high-visibility crosswalk shall be three. For the bar pair crosswalk design (see Section 3C.08), a coupling set of two longitudinal bars shall be considered to be one individual longitudinal element.**

*Guidance:*

05 *The dimensions of the individual longitudinal element and the lateral spacing between subsequent individual longitudinal elements for a high-visibility crosswalk should be uniform when establishing the crosswalk.*

06 *The dimensions of the individual longitudinal element and the lateral spacing between subsequent individual longitudinal elements for a high-visibility crosswalk should be uniform when establishing separate crosswalks on multiple approaches to the same intersection and on both sides of a median refuge if one is present.*

07 *The individual longitudinal elements of a high-visibility crosswalk should be angled such that they are parallel to the travel path of approaching traffic.*

Option:

08 The lateral spacing between longitudinal elements may be staggered to avoid wheel paths, center lines, and lane lines.

## Section 3C.06 Longitudinal Bar Crosswalks

Support:

01 The longitudinal bar crosswalk marking design (see Figure 3C-1) provides for improved detection and recognition over the transverse line crosswalk for people with low vision and cognitive impairments.

**Standard:**

02 **The width of an individual longitudinal bar shall not be less than 12 inches or greater than 24 inches.**

03 **The lateral spacing between subsequent longitudinal bars shall not be less than 12 inches or greater than 60 inches. The lateral spacing of the longitudinal bars shall not exceed 2.5 times the width of a longitudinal bar.**

## Section 3C.07 Ladder Crosswalks

Support:

01 Ladder crosswalks (see Figure 3C-1) implement a pattern where interior longitudinal bars and transverse lines are used to define the limits of the crosswalk.

02 The ladder crosswalk marking design provides for improved detection and recognition over the transverse crosswalk for people with low vision and cognitive impairments.

03 Since the longitudinal component of the ladder crosswalk marking design is similar to the benefits provided by the longitudinal bar crosswalk design, the ladder crosswalk design is normally used to discourage or prohibit diagonal walking between crosswalks.

**Standard:**

04 **The transverse lines used to establish the limits of the ladder crosswalk shall not be less than 6 inches or greater than 24 inches in width.**

05 **The width of an individual interior longitudinal bar shall not be less than 12 inches or greater than 24 inches.**

06 **The lateral spacing between subsequent interior longitudinal bars shall not be less than 12 inches or greater than 60 inches. The lateral spacing of the interior longitudinal bars shall not exceed 2.5 times the width of an interior longitudinal bar.**

Option:

07 Where it might be necessary to alleviate a parallax phenomenon due to approaching roadway geometry that curves or to accommodate low approach angles of the approaching motorist, the interior longitudinal bars may be rotated up to 45 degrees to the transverse lines to remain parallel to approaching traffic.

## Section 3C.08 Bar Pair Crosswalks

Support:

01 Bar pair crosswalks (see Figure 3C-1) can provide the same benefits as other high-visibility crosswalk designs with the opportunity for less maintenance.

02 Bar pair crosswalks can be useful in locations that are susceptible to slip and fall incidents exacerbated by extreme or inclement weather, or in locations where high motorcycle or bicycle use is expected in order to maximize wheel traction with the road surface.

**Standard:**

03 **The width of an individual longitudinal bar that establishes one-half of the bar pair shall not be less than 8 inches or greater than 12 inches. The lateral spacing between successive individual longitudinal bars within the same bar pair shall be equal to the width of one longitudinal bar.**

04 **The lateral spacing between subsequent longitudinal bar pairs shall not be less than 24 inches or greater than 60 inches, or 2.5 times the width of the total width of a bar pair.**

05 **Longitudinal bar pair crosswalks shall not be installed with accompanying transverse lines.**

## Section 3C.09 Crosswalk Markings at Circular Intersections

**Standard:**

01 **Crosswalk markings shall not be provided to or from the central island of a roundabout.**

*Guidance:*

02 *If pedestrian facilities are provided, crosswalks should be marked across roundabout entrances and exits to indicate where pedestrians are intended to cross.*

03 *On an approach to a circular intersection controlled by a YIELD sign and at uncontrolled exits, crosswalks should be a minimum of 20 feet from the edge of the circulatory roadway.*

Support:

04 Chapter 3D provides figures that illustrate examples of crosswalk markings for roundabouts.

## Section 3C.10 Crosswalks for Exclusive Pedestrian Phases that Permit Diagonal Crossings

Option:

01 When an exclusive pedestrian phase that permits diagonal crossing of an intersection is provided at a traffic control signal, a marking as shown in Figure 3C-2 may be used for the crosswalk.

*Guidance:*

02 *The segments of the crosswalk marking that facilitate the diagonal crossing should not use high- visibility crosswalk markings.*

## Section 3C.11 Crosswalks at Diamond Interchanges with a Transposed Alignment Crossroad

Support:

01 Diverging diamond interchanges, also known as double-crossover diamond interchanges, include directional crossovers on either side of the interchange that transpose the crossroad which results in vehicles traveling on the left-hand side of the street or highway between the crossover intersections. The potential for altered travel paths for pedestrians and the associated, unique, operational aspects such as traffic approaching from unexpected directions and unfamiliar signal phasing schemes are important considerations.

*Guidance:*

02 *If pedestrian facilities are provided, pedestrian crossing movements of the crossroads at a diverging diamond interchange should be marked at the crossover intersections where motor vehicle traffic becomes transposed.*

03 *If pedestrian facilities are provided, crosswalks should be marked across ramp terminals at diverging diamond interchanges to indicate where pedestrians are intended to cross.*

04 *Crosswalks across diverging diamond interchange ramps with yield controlled vehicle movements should be located a minimum of 20 feet from the edge of an intersecting ramp.*

Support:

05 Section 3B.31 contains information on markings, such as edge lines, lane lines, and lane-use arrows, for diverging diamond interchanges.


06 Figure 3B-29 shows an example of pedestrian crossing locations at a diverging diamond interchange.

## Section 3C.12 Pedestrian Islands and Medians

Support:


01 Raised islands or raised medians of sufficient width that are placed in the center area of a street or highway can serve as a place of refuge for pedestrians who are attempting to cross at a midblock or intersection location. Center islands or medians allow pedestrians to find an adequate gap in one direction of traffic at a time, as the pedestrians are able to stop, if necessary, in the center island or median area and wait for an adequate gap in the other direction of traffic before crossing the second half of the street or highway. The U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990 contains specifications for the design of detectable warning surfaces and provides technical requirements that can be used to determine the minimum width for accessible refuge islands.

# Figure 3C-1. Crosswalk Markings

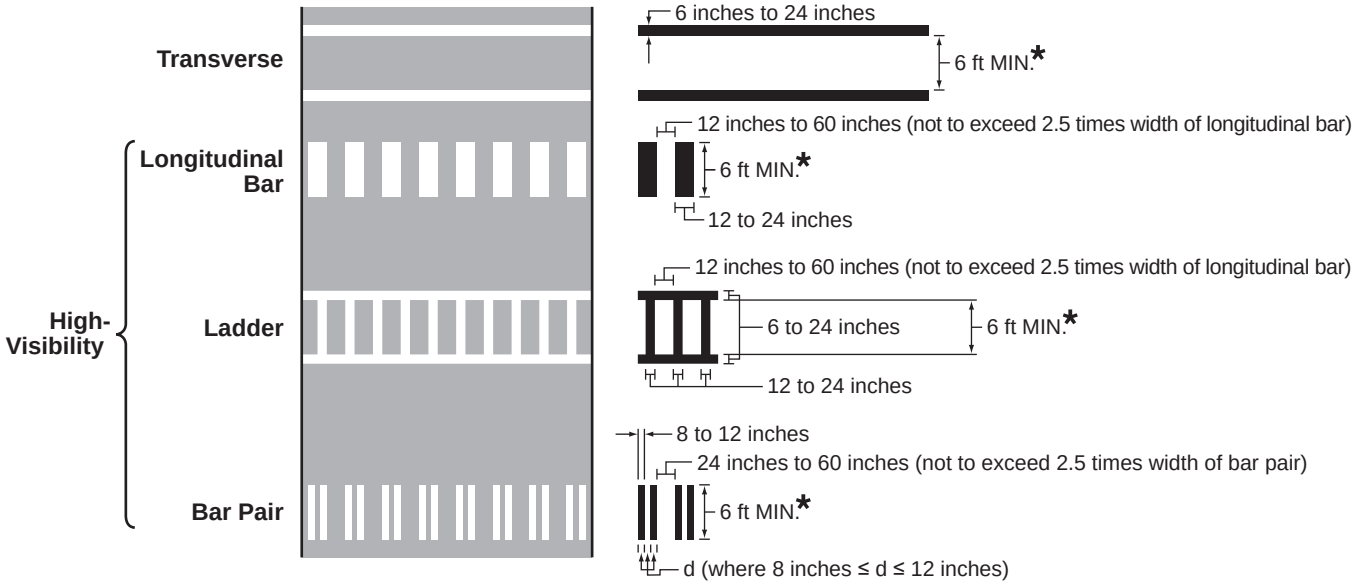



* Minimum crosswalk width shall be 8 feet where the posted speed limit is 40 mph or greater at a non-intersection crosswalk.

## Figure 3C-2. Example of Crosswalk Markings for an Exclusive Pedestrian Phase that Permits Diagonal Crossings

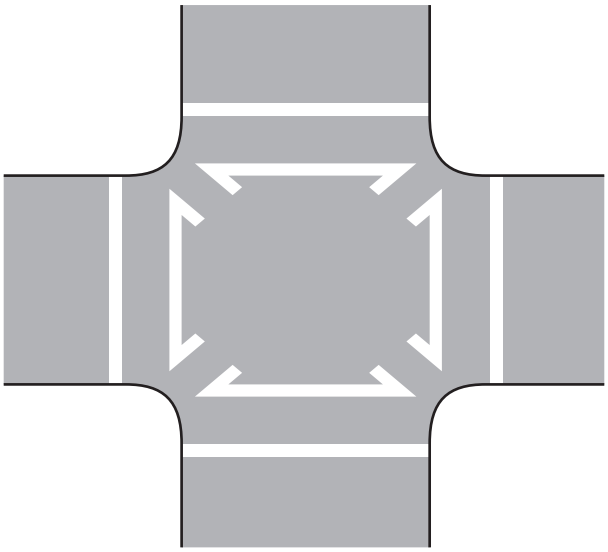

Note: High-visibility crosswalks can be used for the crosswalks around the perimeter of the intersection

## *Figure 3C-101(CA). Examples of Crosswalk Enhancements at Uncontrolled Multilane Approaches*

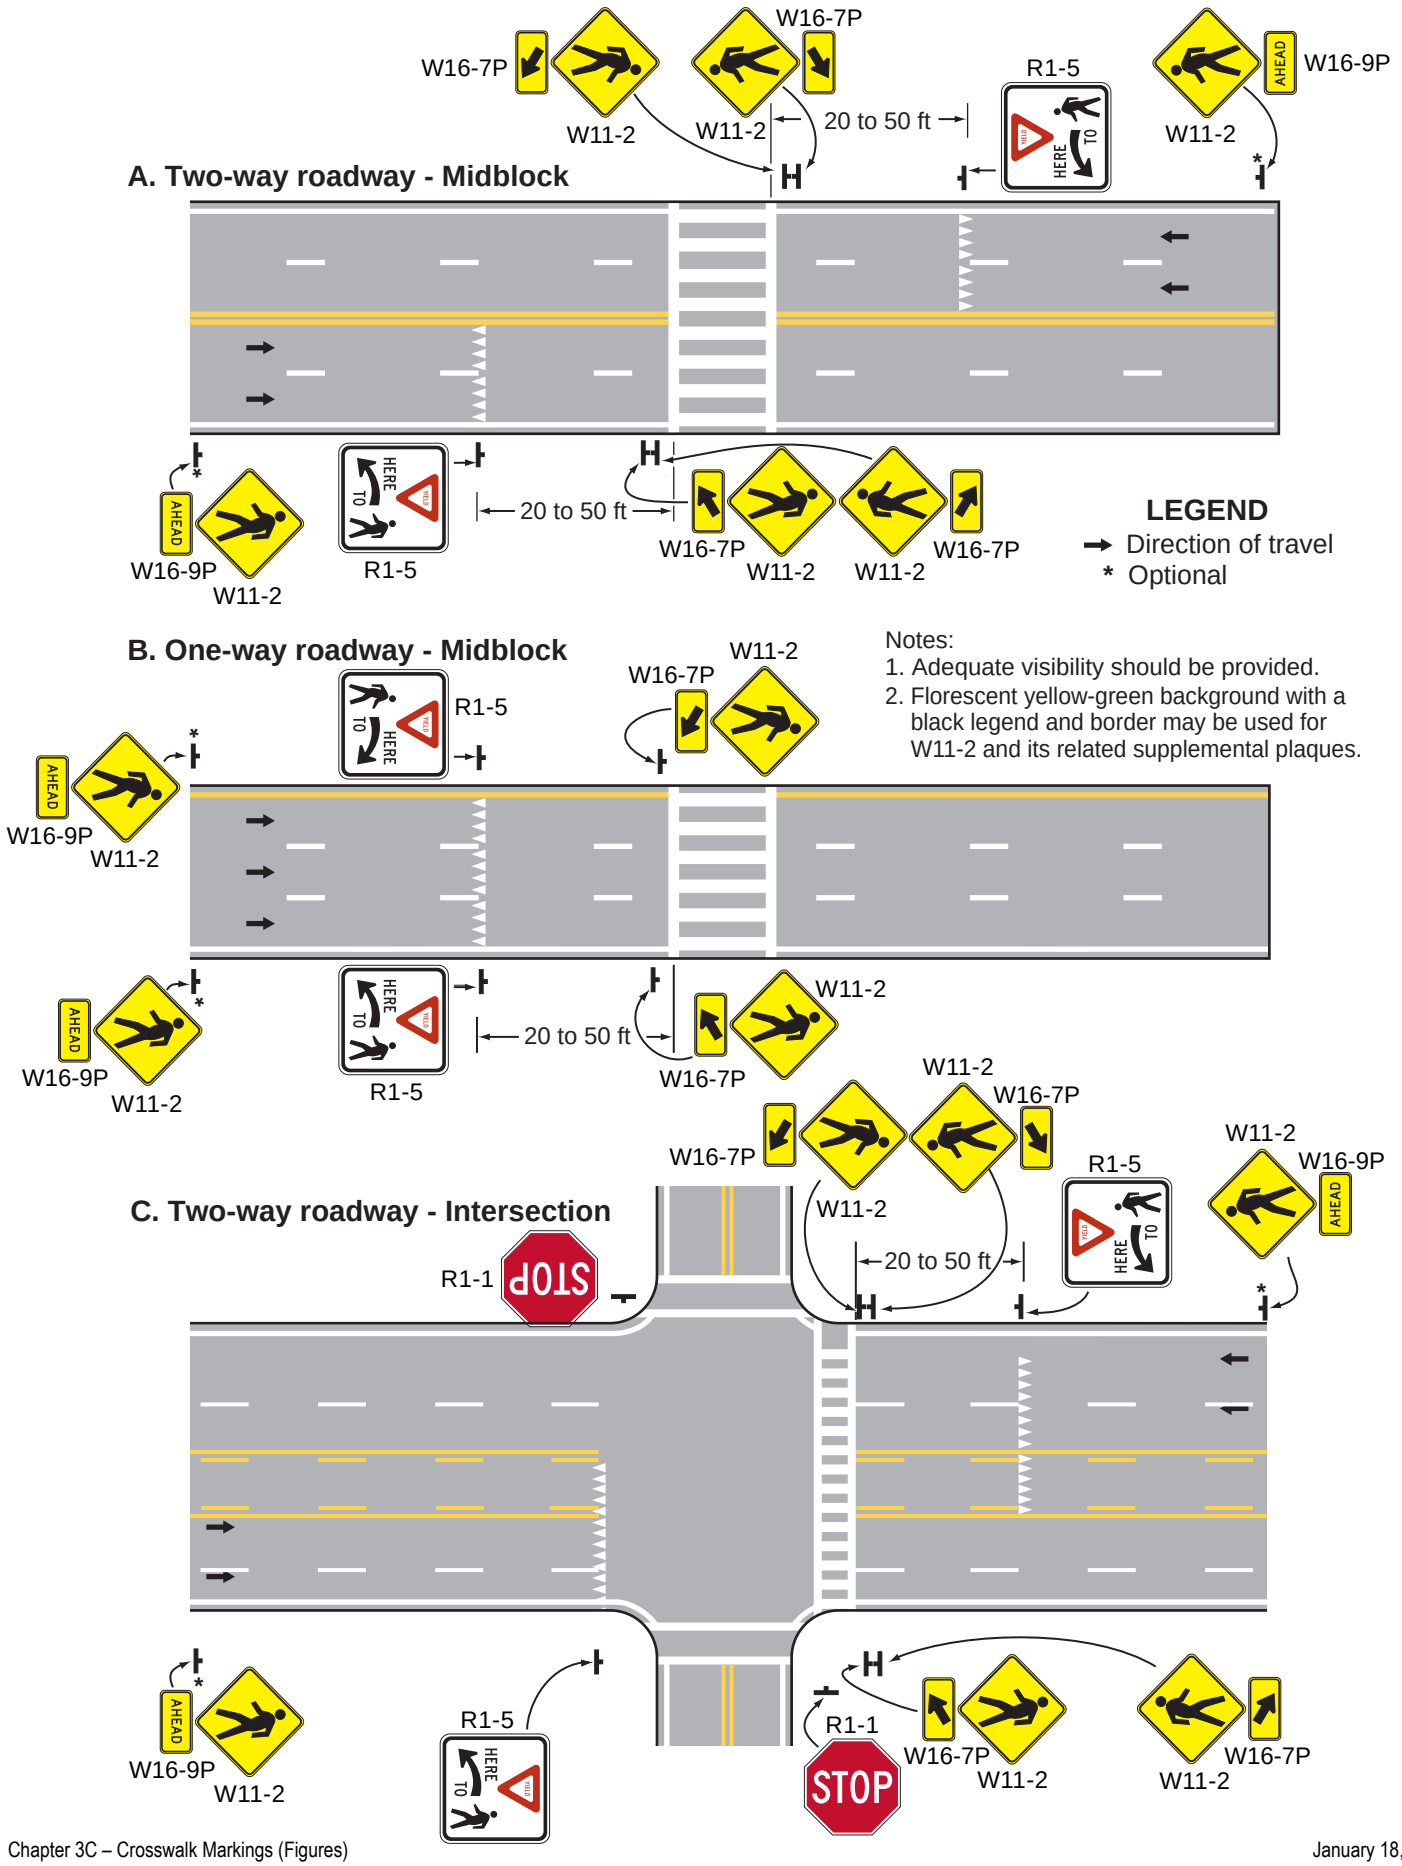

# CHAPTER 3D. CIRCULAR INTERSECTION MARKINGS

## Section 3D.01 General

*Guidance:*

01 *Pavement markings and signing for a circular intersection should be integrally designed to correspond to the geometric design and intended lane use of a circular intersection.*

02 *Markings on the approaches to a circular intersection and on the circulatory roadway should be compatible with each other to provide a consistent message to road users. The markings should supplement the signing, both conveying the optional and mandatory movements such that road users will know to choose the proper lane in the approach to the circular intersection and remain in that lane throughout departure from the circulatory roadway.*

Support:

03 Common circular intersection types include roundabouts, rotaries, and traffic circles (see definitions in Section 1C.02). Traffic circles and rotaries are often much larger than roundabouts. Modern roundabouts feature channelized, curved approaches that reduce vehicle speed. Traffic calming circles are smaller and are typically used on urban or suburban neighborhood streets.

04 Figure 3D-1 provides an example of the pavement markings for approach and circulatory roadways at a roundabout. Figure 3B-21(CA) shows the options that are available for lane-use pavement marking arrows on approaches to roundabouts. Figures 3D-2 through 3D-8 illustrate examples of markings for roundabouts of various geometric and lane-use configurations.

05 Actuated LED pedestrian warning signs (see Section 2A.12), traffic control signals, pedestrian hybrid beacons, and rectangular rapid flashing beacons (see Part 4) are sometimes used at roundabouts to facilitate the crossing of pedestrians or to meter traffic.

06 Section 8A.12 provides information about circular intersections that contain or are in close proximity to grade crossings.

07 Section 9E.05 contains information regarding bicycle lane markings at circular intersections.

08 Section 3C.09 contains information regarding crosswalks at circular intersections.

## Section 3D.02 White Lane Line Pavement Markings for Roundabouts

**Standard:**

01 **Multi-lane approaches to roundabouts shall have lane lines.**

02 **A through lane on a roadway that becomes a dropped lane (mandatory left-turn or right-turn lane) at a roundabout shall be marked with a dotted white lane line in accordance with Section 3B.07. Refer to Detail 37D as shown in Figure 3A-111(CA).**

*Guidance:*

03 *Multi-lane roundabouts should have lane line markings within the circulatory roadway to continuously channelize traffic in the circulatory roadway and through the departure movement.*

**Standard:**

04 **Continuous concentric lane lines shall not be used within the circulatory roadway of a roundabout.**

Option:

05 Channelizing lines (see Section 3B.08) and chevron and diagonal markings (see Section 3B.25) may be used on the approaches to and within the circulatory roadway of multi-lane roundabouts to separate traffic lanes, discourage lane changing, and/or compensate for off-tracking of larger trucks and vehicles.

Support:

06 Reducing the spacing between lines of a broken lane line allows better delineation of the lower-radius curves typically found in circular intersections.

## Section 3D.03 Edge Line Pavement Markings for Roundabout Circulatory Roadways

*Guidance:*

01 *A white edge line should be used on the outer (right-hand) edge of the circulatory roadway.*

02 *Where a white edge line is used for the circulatory roadway, it should be as follows (see Figure 3D- 1):*

*A. A solid line adjacent to the splitter island, and*

*B. A wide dotted line across the lane(s) entering the roundabout.*

**Standard:**

03 **Edge lines and edge line extensions shall not be placed across the exits from the circulatory roadway at roundabouts.**

Option:

04 A yellow edge line may be placed around the inner (left-hand) edge of the circulatory roadway (see Figure 3D-1) and may be used to channelize traffic (see Drawing B in Figure 3D-3).

## Section 3D.04 Yield Lines for Roundabouts

Support:

01 Section 2B.18 contains information regarding the TO ALL LANES (R1-2cP) plaque that can be used beneath the YIELD sign.

Option:

02 A yield line (see Section 3B.19) may be used to indicate the point behind which vehicles are required to yield at the entrance to a roundabout (see Figures 3D-1 and 3D-2).

## Section 3D.05 Word and Symbol Pavement Markings for Roundabouts

Option:

01 YIELD (word) (see Figure 3D-1) and YIELD AHEAD (symbol or word) pavement markings may be used on approaches to roundabouts.

02 Word and/or route shield pavement markings may be used on an approach to or within the circulatory roadway of a roundabout to provide route and/or destination guidance information to road users (see Figure 3D-8).

## Section 3D.06 Arrow Pavement Markings for Roundabouts

*Guidance:*

01 *Lane-use arrow pavement markings should not be used on single-lane approaches to circular intersections.*

02 *Lane-use arrows should be used on approaches to circular intersections with double left or double right turns.*

**Standard:**

03 **Lane-use arrow pavement markings shall not be provided between a crosswalk and a wide dotted line across the lane(s) entering the circular roadway.**

Option:

04 Where lane-use arrows are used on the approaches to a roundabout, they may be either normal or curved-stem (see Drawing F in Figure 3B-21 and Figure 3B-21(CA)).

05 An oval or circle may be used with the lane-use arrows to symbolize the central island (see Drawing F in Figure 3B-21).

*Guidance:*

06 *If lane-use arrows are used on the approaches to a roundabout, the style used should match the style of the lane-use arrows (normal or curved-stem) used on the regulatory lane-use signs on the approach.*

07 *If lane-use arrow pavement markings are used within the circulatory roadway of multi-lane roundabouts, normal lane-use arrows (see Section 3B.23 and Figure 3B-21) should be used.*

Support:


08 Details and sizes of the standard and curved-stem arrows that can be used for circular intersections are contained in the "Standard Highway Signs" publication (see Section 1A.05).

## Section 3D.07 Markings for Other Circular Intersections

Option:

01 The markings shown in this Chapter may be used at other circular intersections if engineering judgment indicates that their presence will benefit drivers, pedestrians, or other road users. Figure 2B-21 provides an example of markings at a mini-roundabout.

## Figure 3D-1. Example of Markings for Approach and Circulatory Roadways at a Roundabout

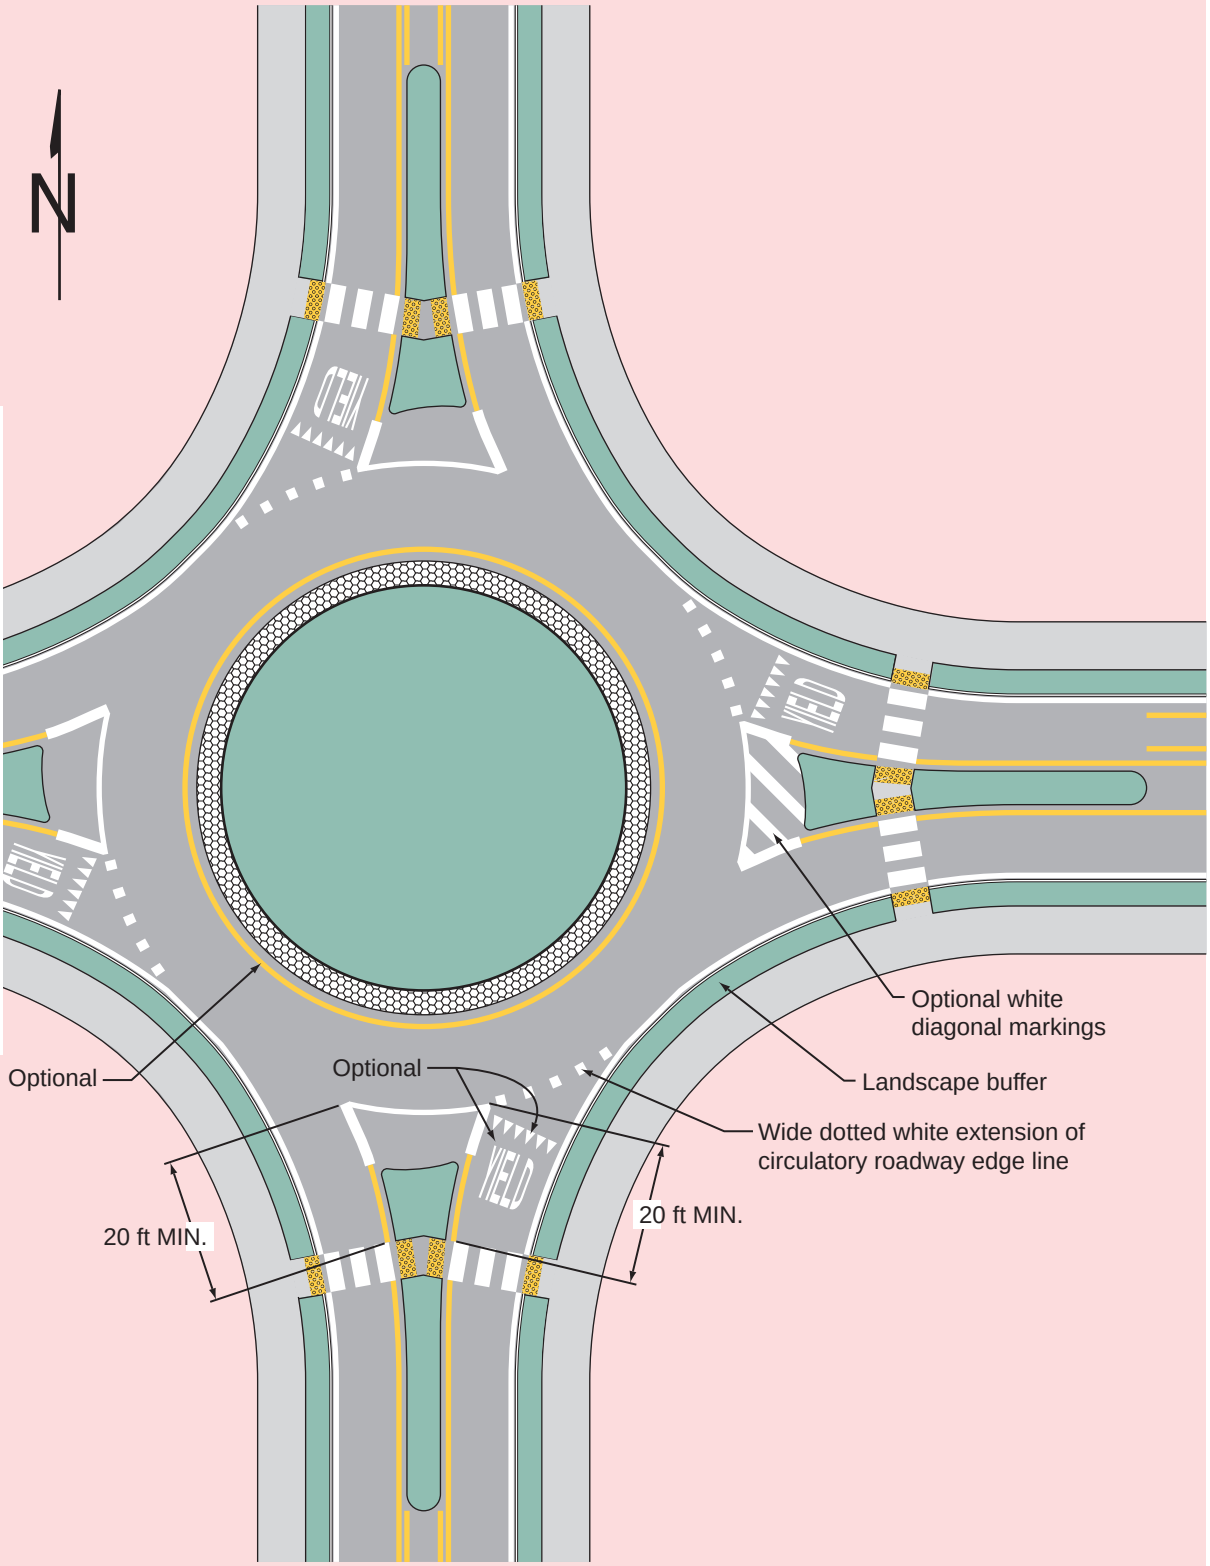

## Figure 3D-2. Example of Markings for a One-Lane Roundabout



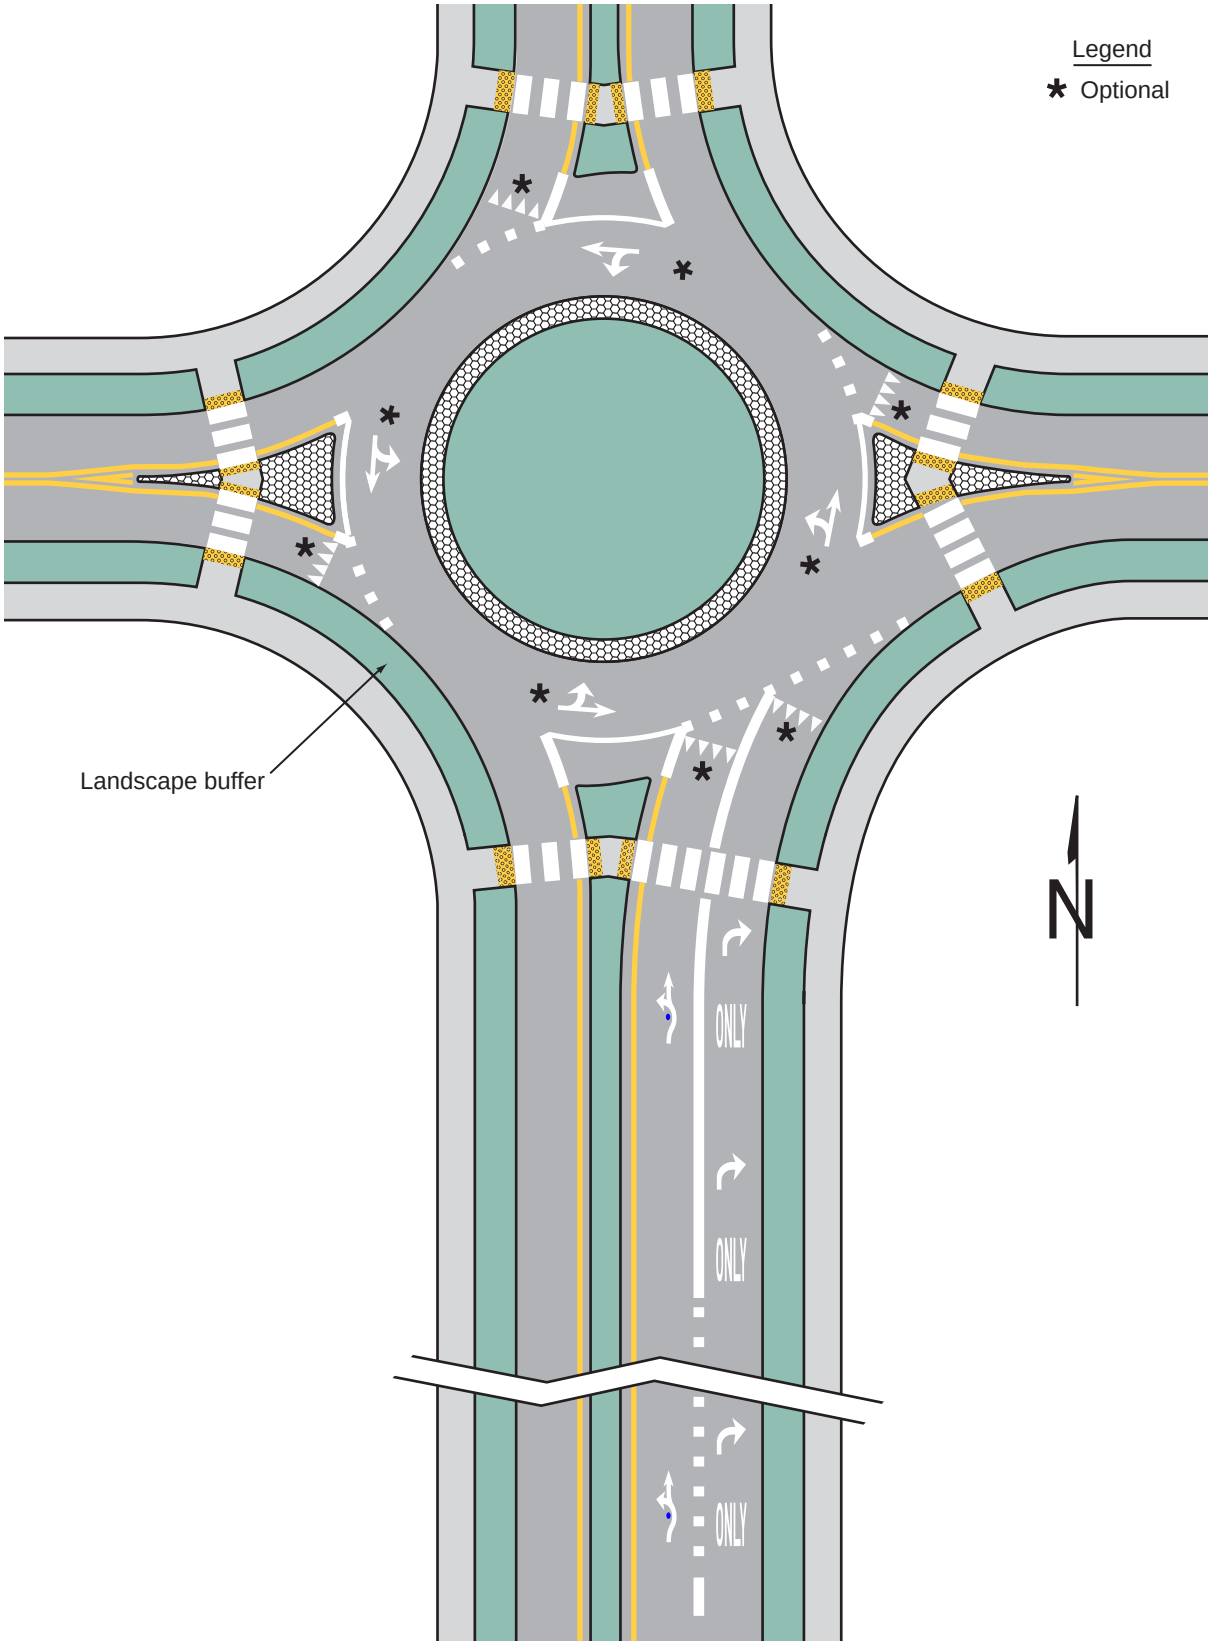


**Figure 3D-3. Example of Markings for a Two-Lane Roundabout with One-Lane and Two-Lane Approaches** (Sheet 1 of 2)

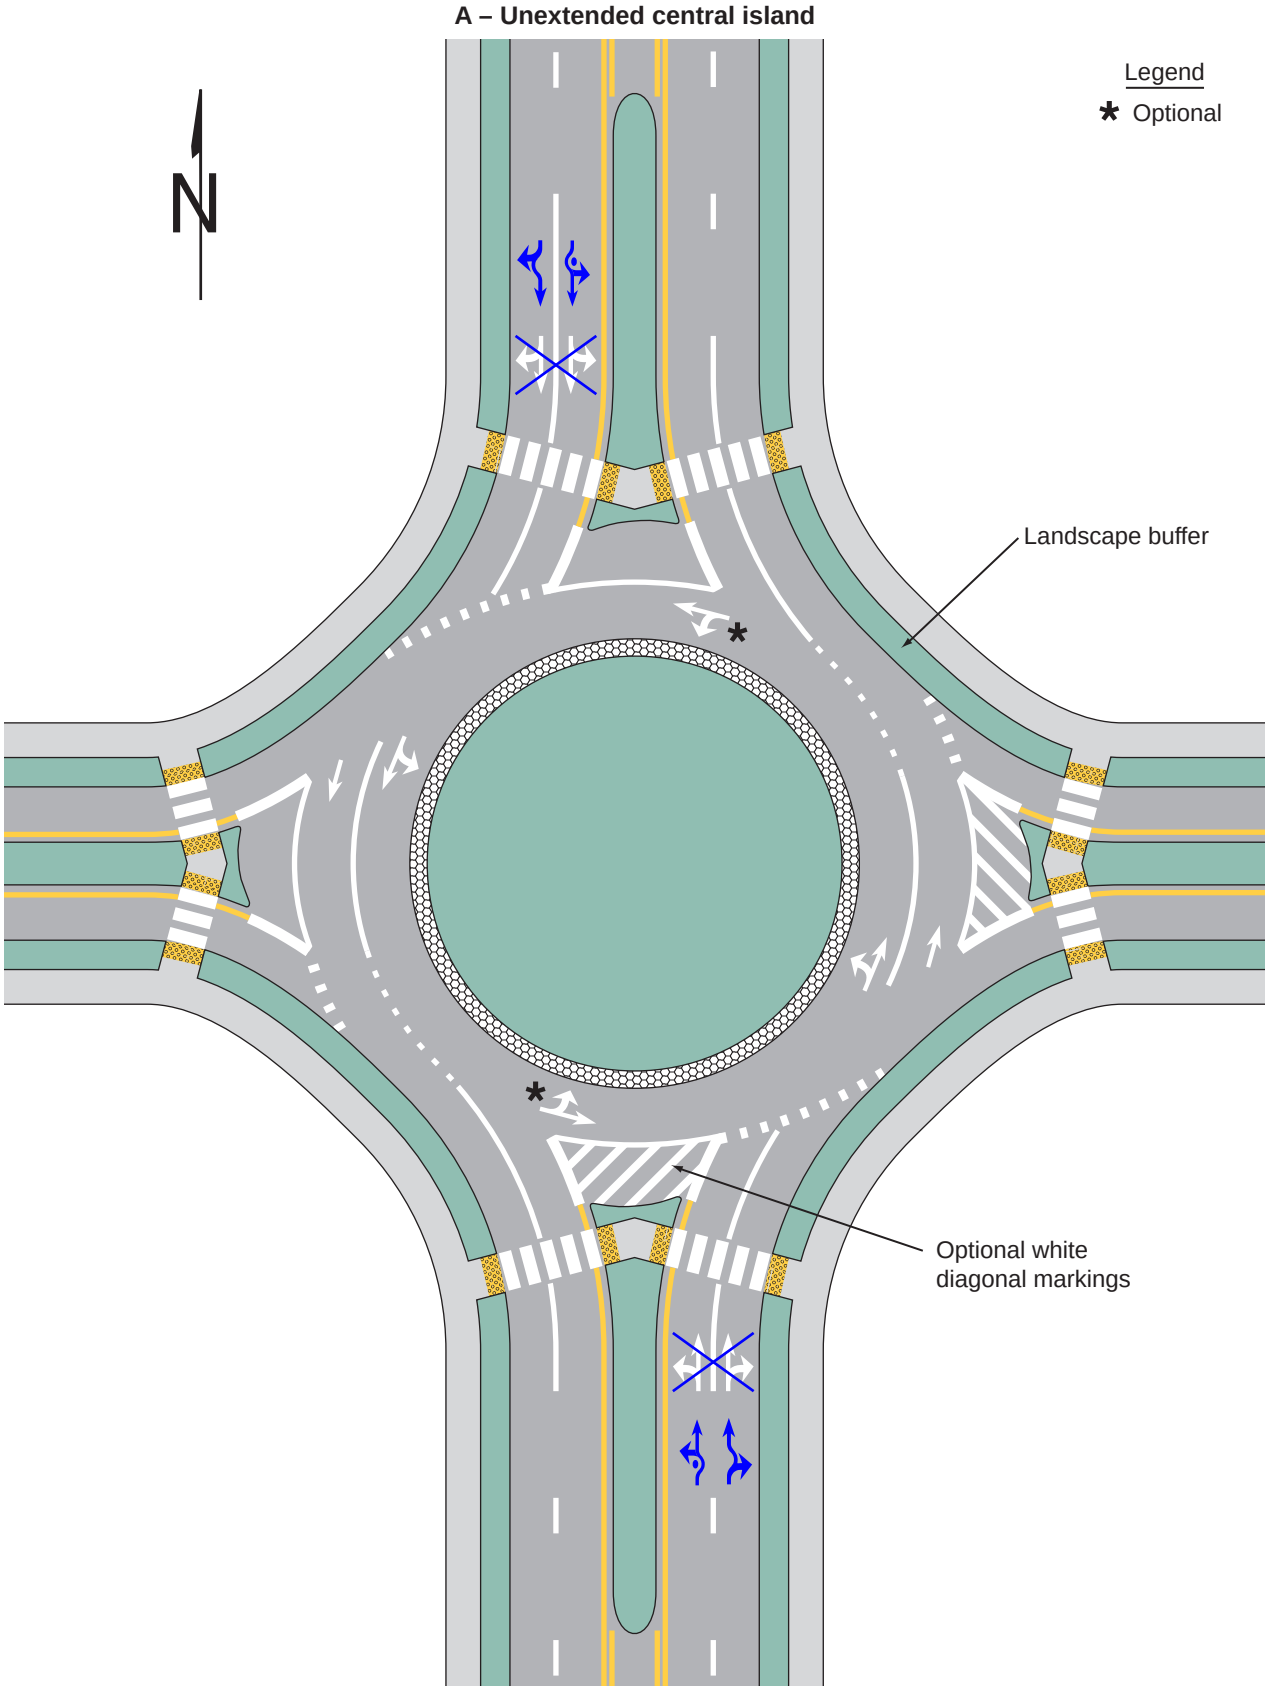


## Figure 3D-3. Example of Markings for a Two-Lane Roundabout with One-Lane and Two-Lane Approaches (Sheet 2 of 2)


**B – Central island extended by pavement markings**

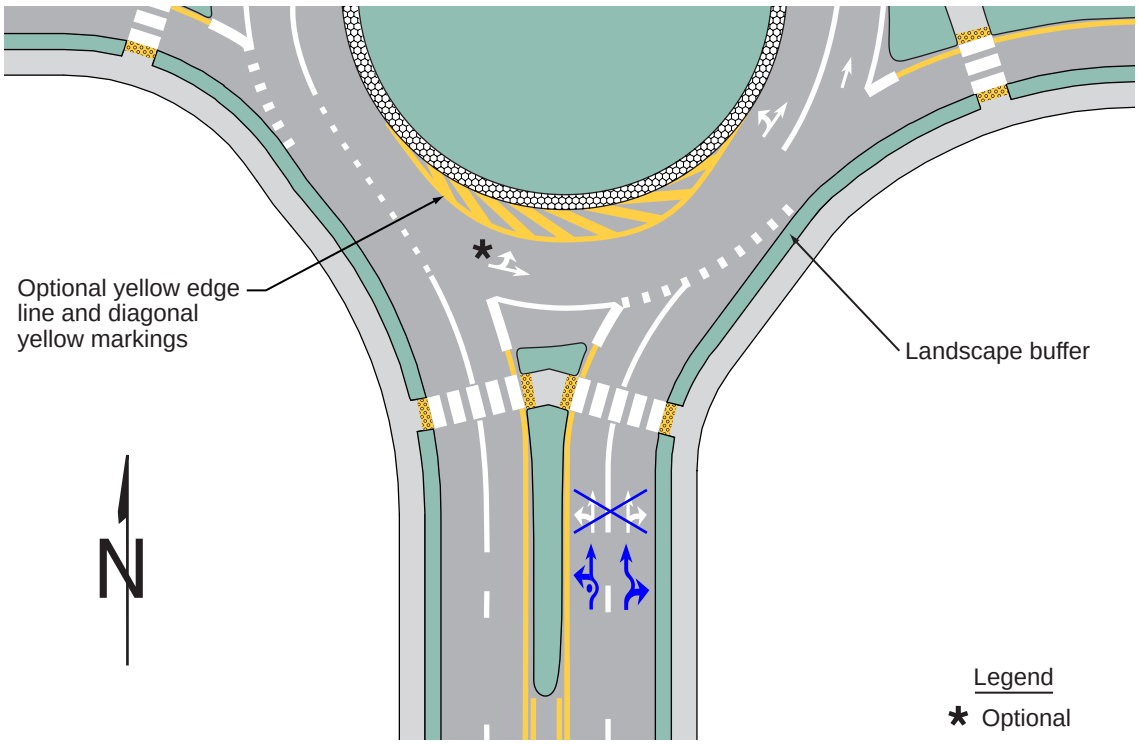



**C – Central island extended by a truck apron**

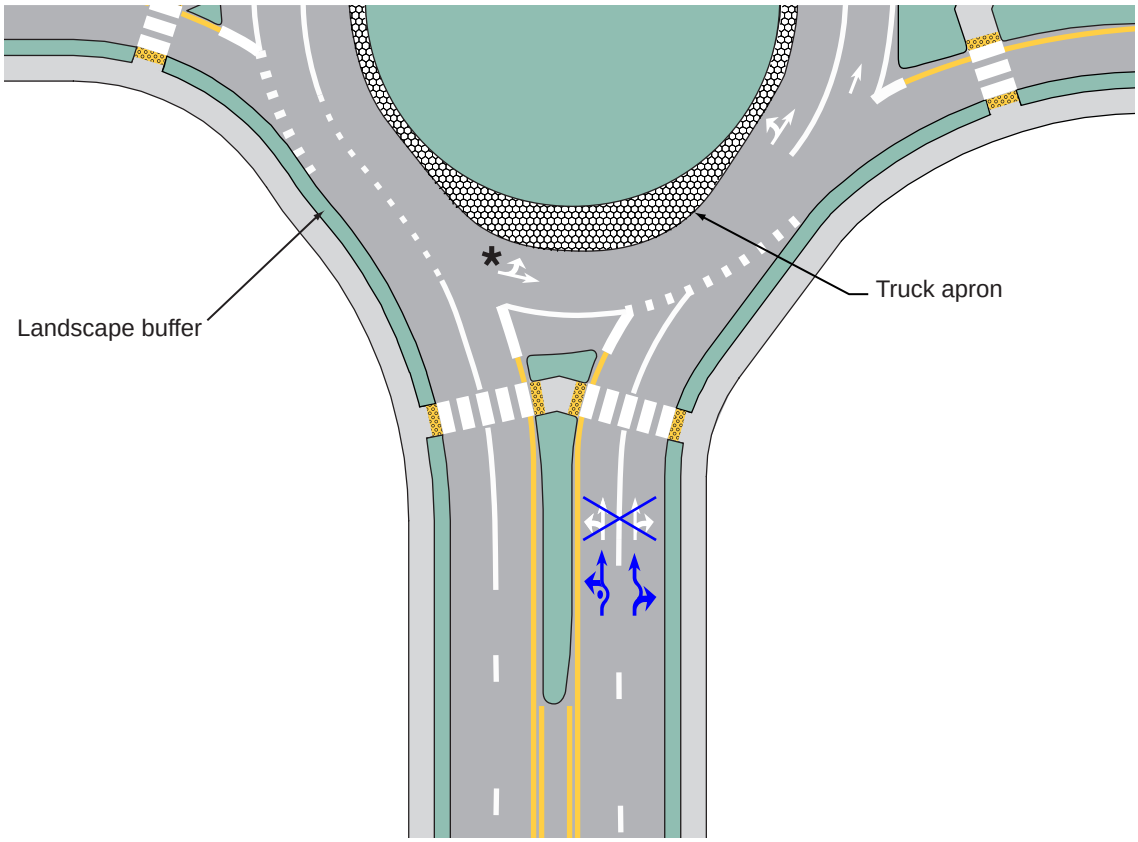


## Figure 3D-4. Example of Markings for a Two-Lane Roundabout with One-Lane Exits

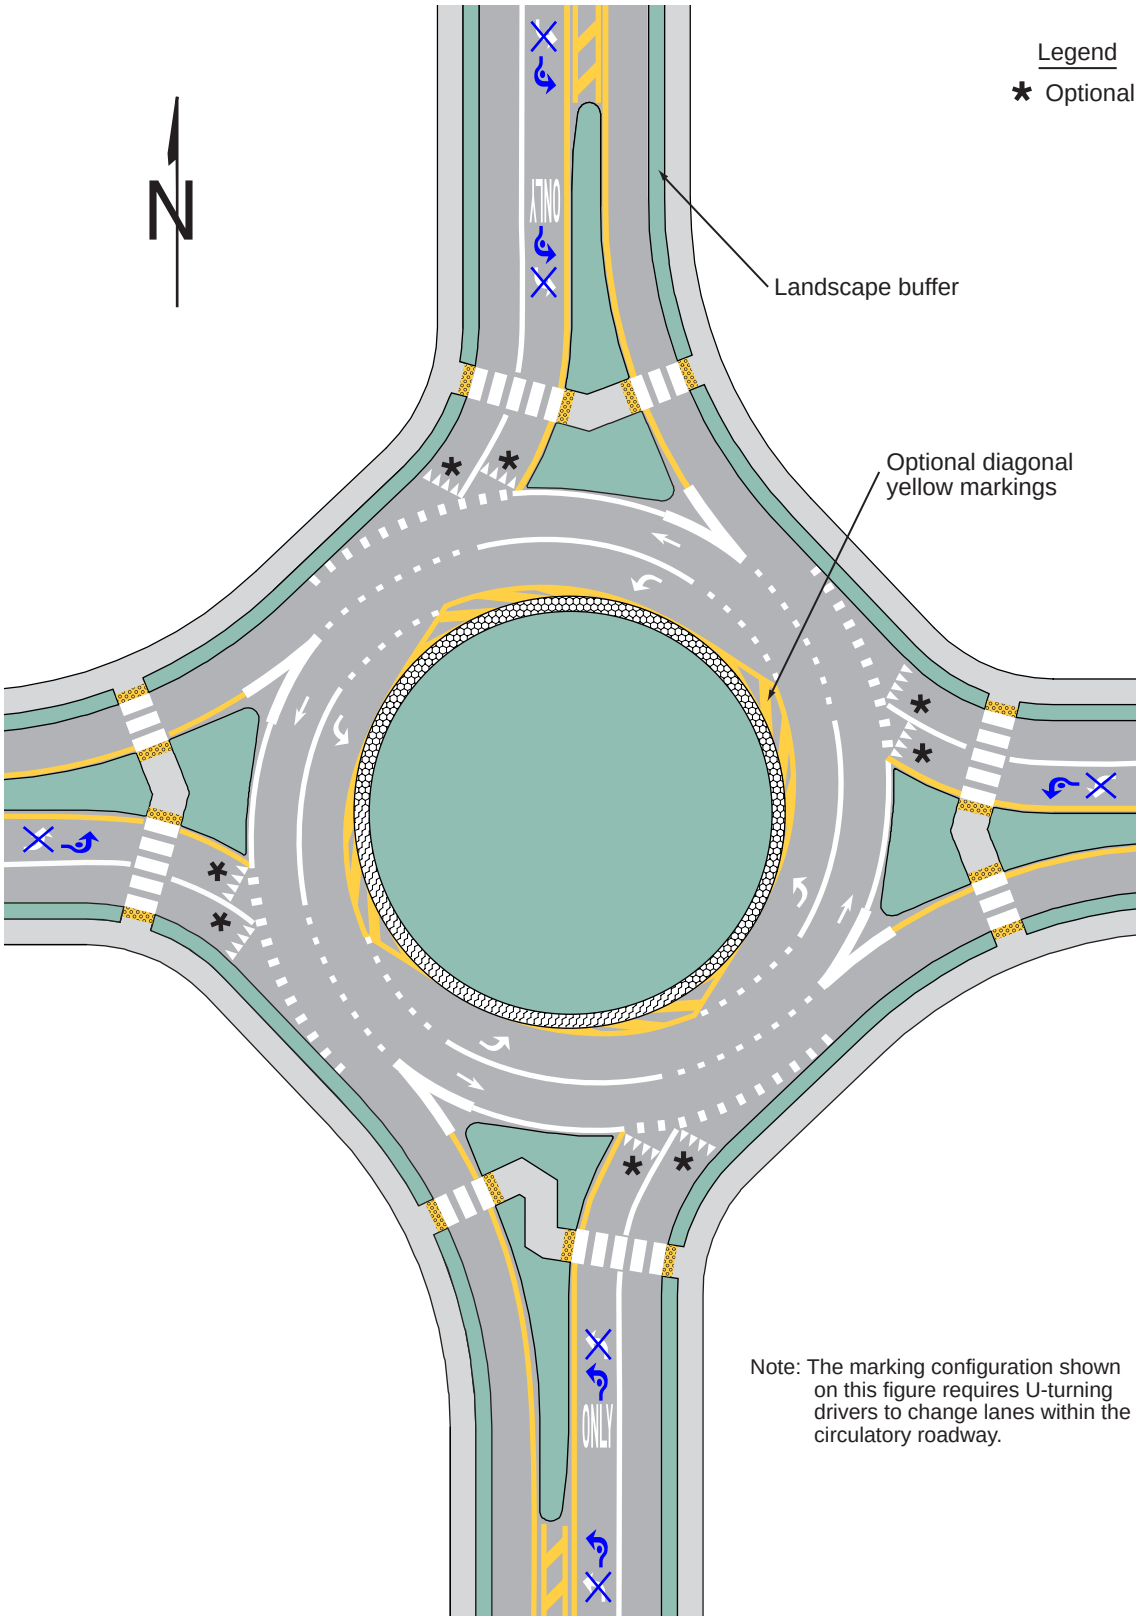


## Figure 3D-5. Example of Markings for a Two-Lane Roundabout with Two-Lane Exits

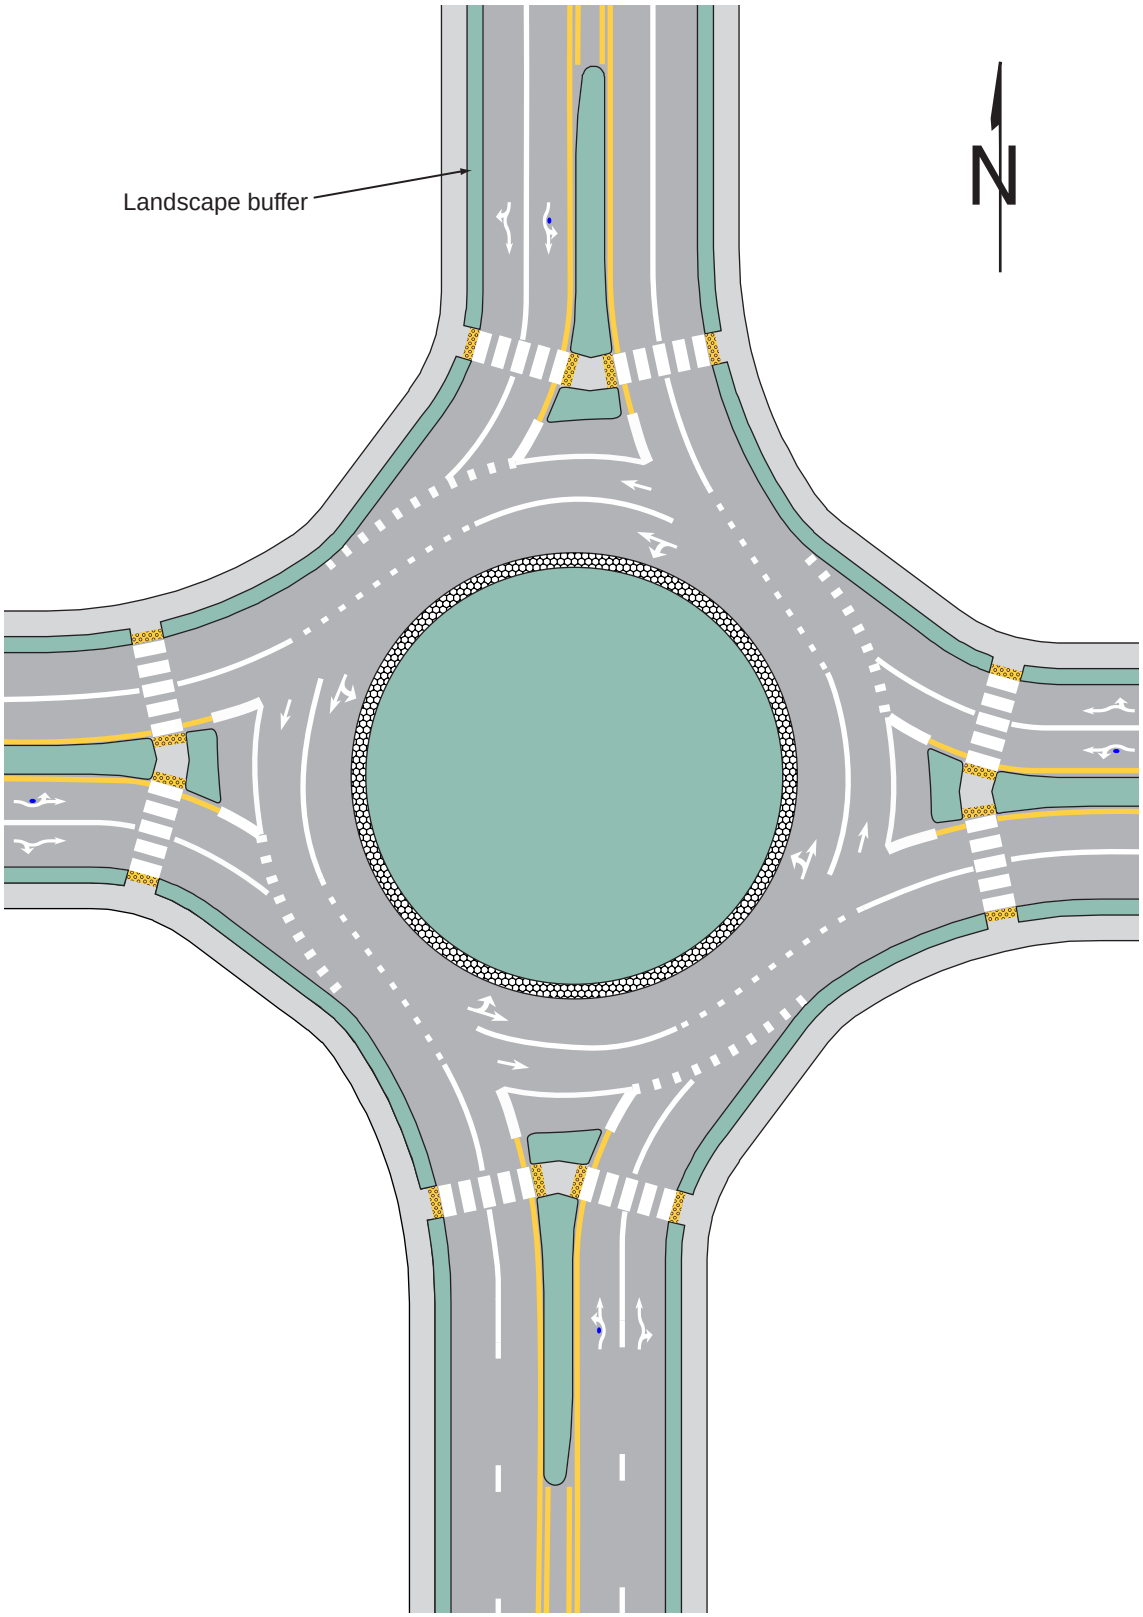


## Figure 3D-6. Example of Markings for a Two-Lane Roundabout with a Double Left Turn

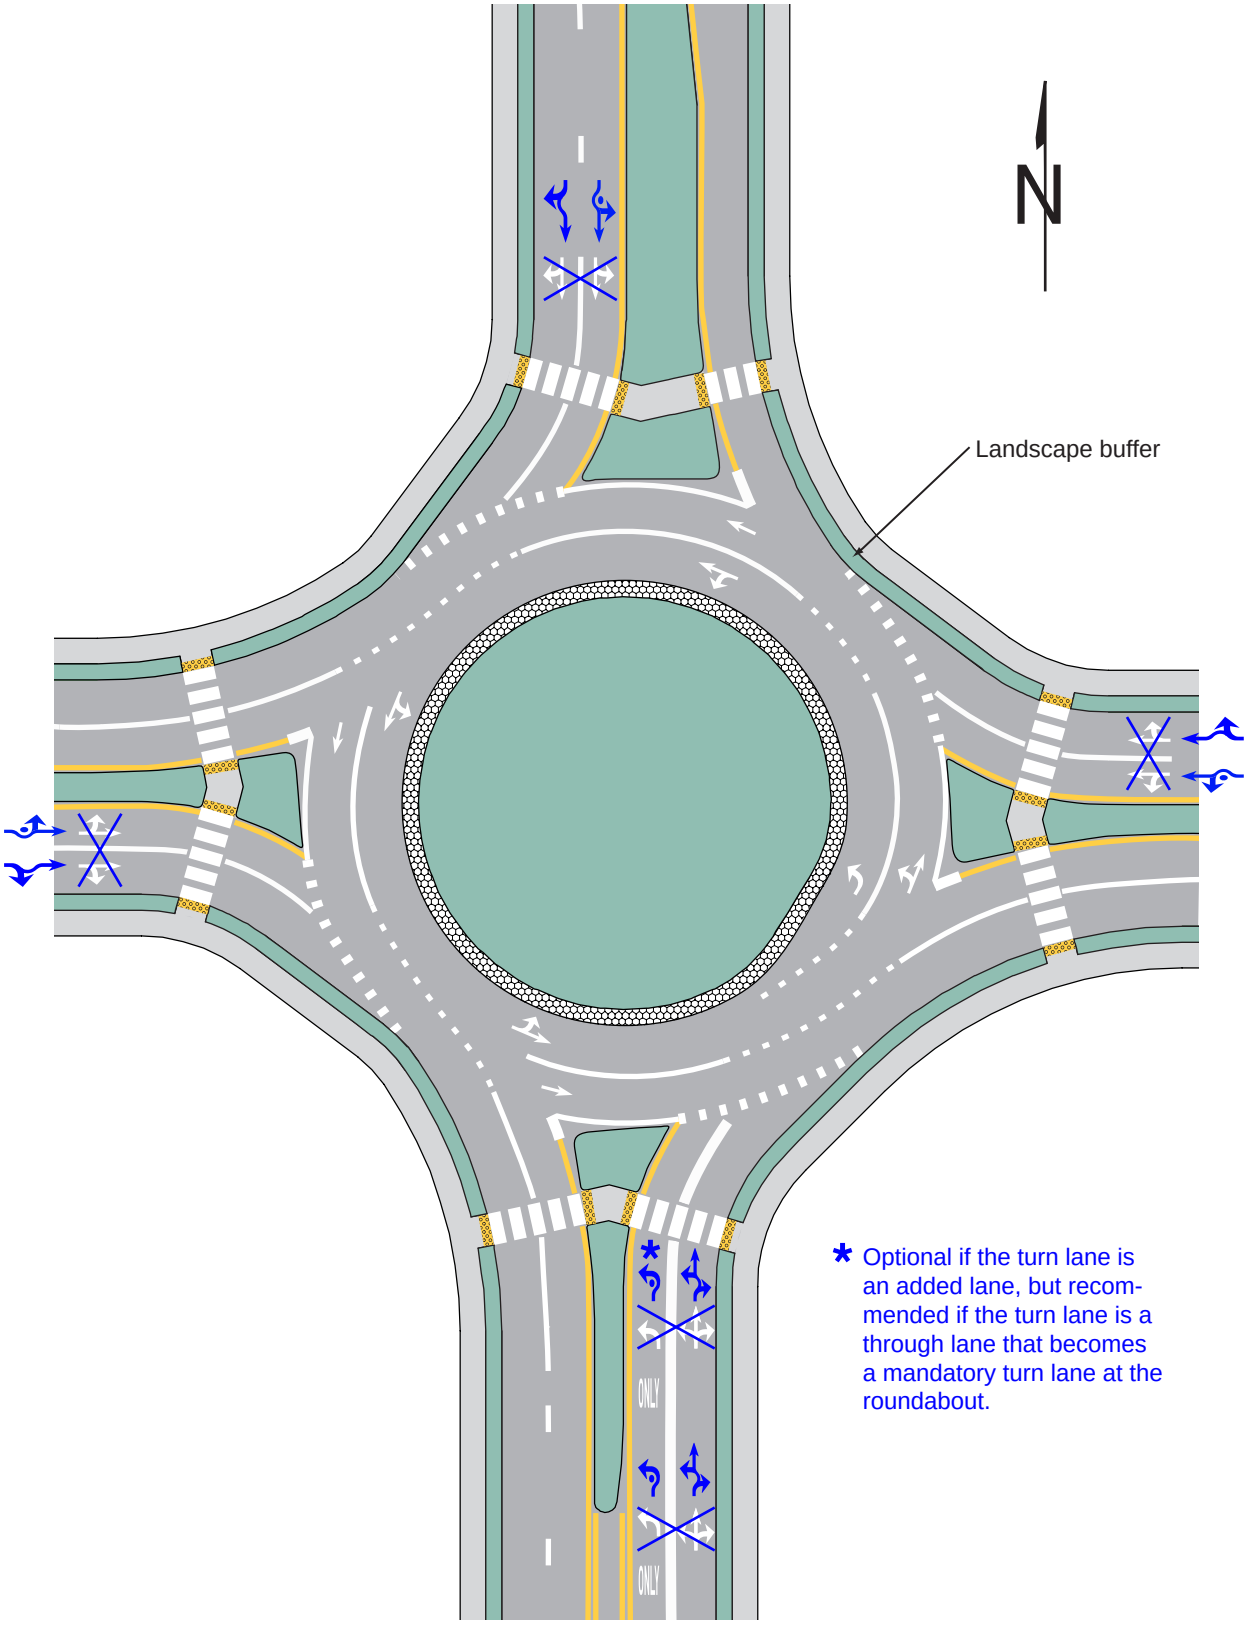

## Figure 3D-7. Example of Markings for a Two-Lane Roundabout with a Double Right Turn

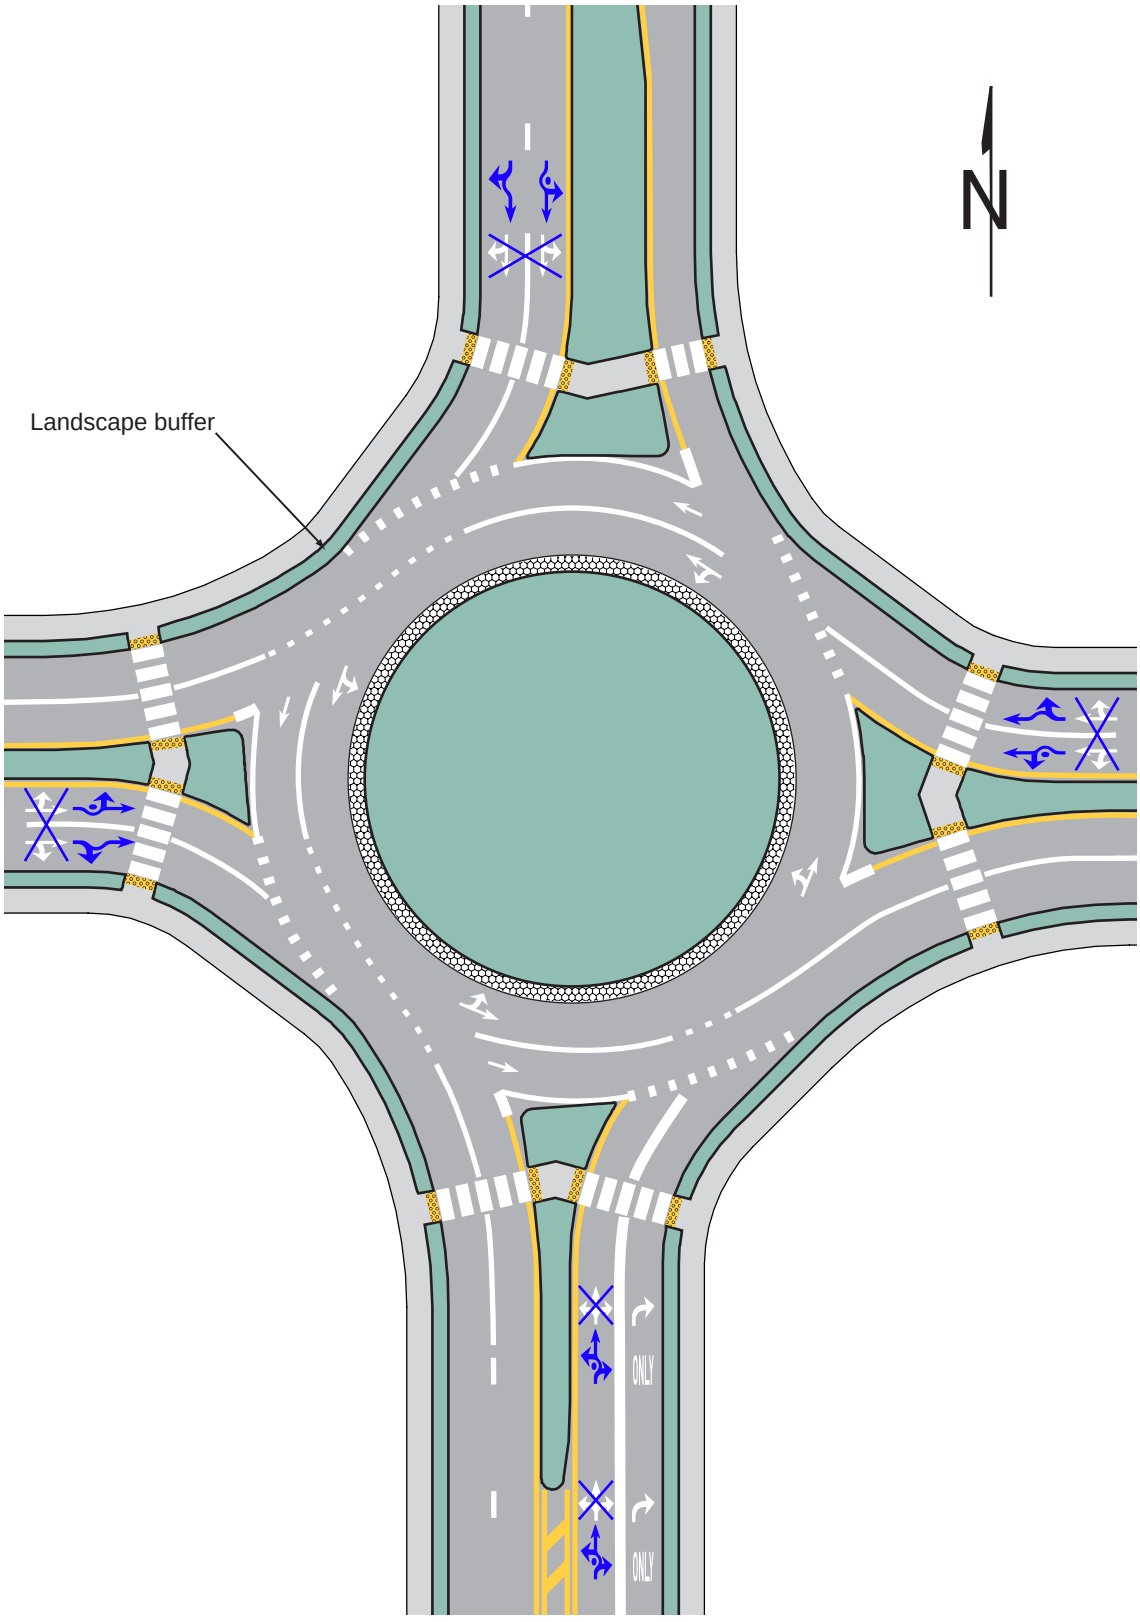

## Figure 3D-8. Example of Markings for a Diamond Interchange with Two Circular-Shaped Roundabout Ramp Terminals

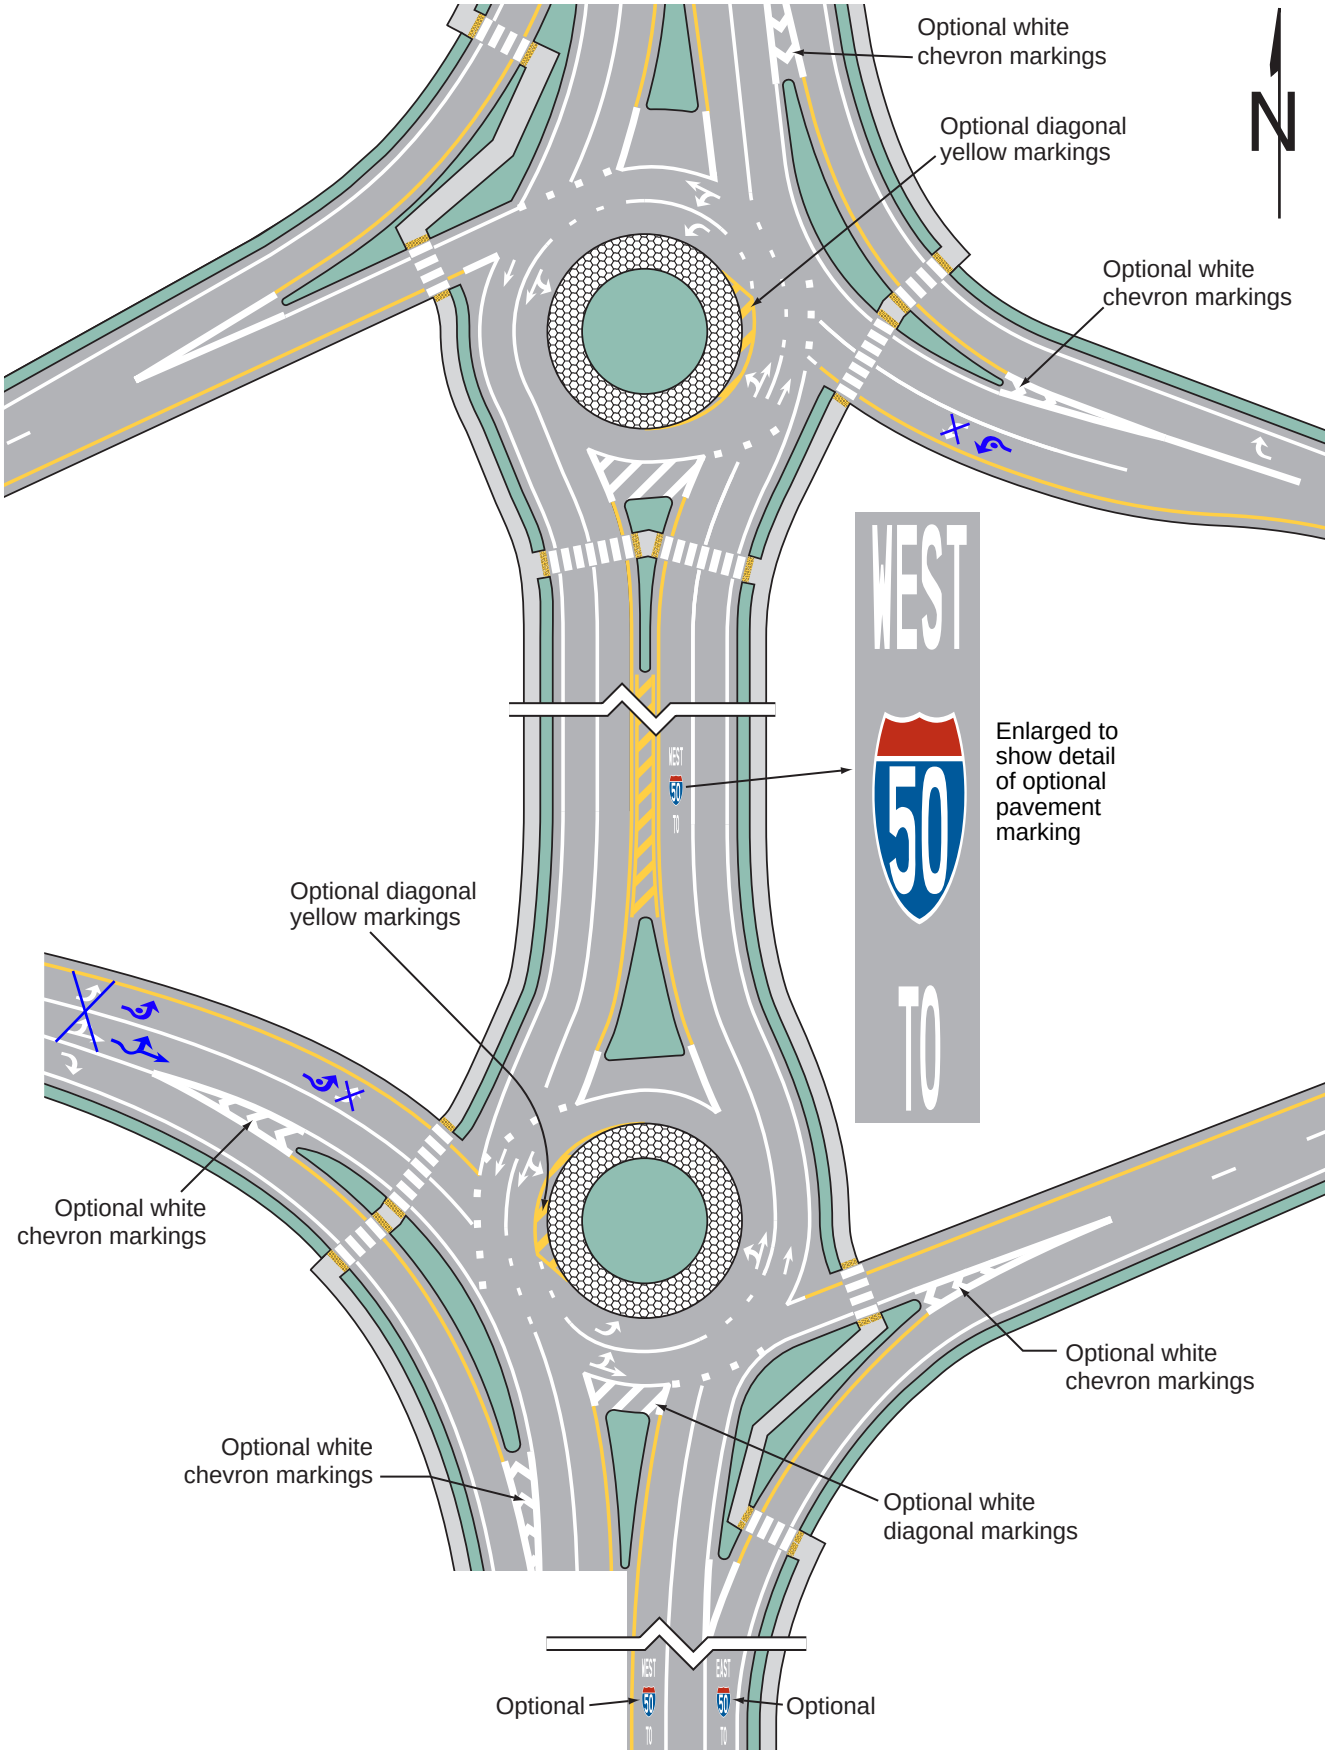

# CHAPTER 3E. PREFERENTIAL LANE MARKINGS FOR MOTOR VEHICLES

## Section 3E.01 General

Support:

01 Preferential lanes are established for one or more of a wide variety of special uses, including, but not limited to, high-occupancy vehicle (HOV) lanes, electronic toll collection (ETC) lanes, price-managed lanes, bus only lanes, taxi only lanes, and light rail transit only lanes.

02 This Chapter contains the pavement marking provisions for preferential lanes used by motor vehicles and light rail transit. Part 9 contains information for pavement markings for bicycle lanes.

03 Chapter 3H contains information for the use and application of colored pavement that can be used in preferential lanes to supplement the pavement markings described in this Chapter.

## Section 3E.02 Longitudinal Markings

Support:

01 Preferential lanes can take many forms depending on the level of usage and the design of the facility. They might be barrier-separated or buffer-separated from the adjacent general-purpose lanes, or they might be contiguous with the adjacent general-purpose lanes. Barrier-separated preferential lanes might be operated in a constant direction or be operated as reversible lanes. Some reversible preferential lanes on a divided highway might be operated counter-flow to the direction of traffic on the immediately adjacent general-purpose lanes. Section 1C.02 contains definitions of these terms.

02 Preferential lanes might be operated full-time (24 hours per day on all days), for extended periods of the day, part-time (restricted usage during specific hours on specified days), or on a variable basis (such as a strategy for a managed lane).

**Standard:**

03 **The left-hand and right-hand edge lines and lane lines used for preferential lanes that are adjacent to general-purpose lanes where traffic is flowing in the same direction shall be in accordance with Table 3E-1.**

04 **If there are two or more preferential lanes for traffic moving in the same direction, the lane lines between the preferential lanes shall be normal width broken white lines.**

05 **Preferential lanes for motor vehicles shall have appropriate regulatory signs in accordance with Sections 2G.03 through 2G.07.**

Support:

06 Figure 3E-1 illustrates pavement markings used for barrier-separated preferential lanes. Figure 3E-2 illustrates pavement markings used for buffer-separated preferential lanes. Figure 3E-3 illustrates pavement markings used for contiguous preferential lanes.

*Guidance:*

07 *Engineering judgment should determine the need for supplemental devices such as tubular markers, traffic cones, or other channelizing devices (see Chapter 3I).*

08 *Where preferential lanes and other travel lanes are separated by a buffer space wider than 4 feet and crossing the buffer space is prohibited, chevron markings (see Section 3B.25) should be placed in the buffer area (see Drawing A in Figure 3E-2).*

09 *The buffer space for a conventional road should be designed so that it is not misinterpreted as on- street parking, a bicycle lane, or any other type of lane.*

09a *Buffer spaces between 4 feet and 12 feet (refer to Figure 3A-113(CA), Detail 45) should be avoided, except when transitioning between narrow and wide buffer areas.*

Option:

10 If a full-time or part-time contiguous preferential lane is separated from the other travel lanes by a wide broken single white line (see Drawing C in Figure 3E-3), the spacing or skip pattern of the line may be reduced and the width of the line may be increased.

Support:

10a Refer to FHWA's List of Known Errors for error between Paragraphs 10 and 11. Refer to Section 1A.04 for more details.

**Standard:**

11 **At direct exits from a preferential lane, dotted white line markings shall be used to separate the tapered or parallel deceleration lane for the direct exit (including the taper) from the adjacent continuing preferential**

**through lane, to reduce the chance of unintended exit maneuvers.**

12 **Signs (see Section 2B.34), lane-use control signals (see Chapter 4T), or both shall be used to supplement the reversible lane markings on a divided highway where a part-time counter-flow preferential lane is present.**

13 **The longitudinal pavement markings used for preferential lanes that are adjacent to general- purpose lanes where traffic is flowing in the opposite direction (see Figure 3E-4) shall be in accordance with Table 3E-2.**

Support:

14 Figure 3E-4 illustrates pavement markings used for counter-flow preferential lanes on divided highways or on transitions to and from other divided highways such as bridges and crossovers.

Option:

15 Cones, tubular markers, or other channelizing devices (see Chapter 3I) may also be used in addition to longitudinal markings to separate the opposing lanes when a counter-flow preferential lane operation is in effect.

## Section 3E.03 Preferential Lane Word and Symbol Markings

Support:

01 Sections 3B.20 through 3B.22 contain information on general applications of word and symbol markings.

**Standard:**

02 **When a preferential lane is established, the preferential lane shall be marked with one or more of the following word or symbol markings for the preferential lane use specified:**

- **A. HOV lane—white lines formed in a diamond-shaped symbol or the word message HOV. The diamond shall be at least 2.5 feet wide and 12 feet in length. The lines shall be at least 6 inches in width. Refer to Figure 3E-101(CA).**
- **B. ETC Account-Only lane—except as provided in Paragraph 8 of this Section, a word marking or pictograph using the name of the ETC payment system required for use of the lane, such as E-Z PASS ONLY.**
- **C. Priced managed lane—the word marking EXPRESS or EXPRESS LANE(S) (see Section 2G.17).**
- **D. Bus only lane or bus stop—the word marking BUS ONLY or BUS STOP.**
- **E. Taxi only lane or taxi stand —the word marking TAXI ONLY or TAXI STAND.**
- **F. Light rail transit lane—the word marking LRT ONLY.**
- **G. Other type of preferential lane—a word marking appropriate to the restriction.**

*Guidance:*

03 *If multiple preferential lane uses are allowed in a single lane, the word or symbol marking for each preferential lane should be used.*

**Standard:**

04 **Pavement word or symbol markings for motorcycles and Inherently Low Emission Vehicles (ILEV) shall not be used to mark the preferential lane if motorcycles and ILEVs are allowed to use the preferential lane.**

Support:

05 Motorcycles and Inherently Low Emission Vehicles (ILEV) that are allowed to use a preferential lane are granted an exception such as through an established High-Occupancy Vehicle (HOV) regulation. Communicating that motorcycles and ILEVs are allowed to use the preferential lane is accomplished through regulatory signing (see Sections 2G.03 and 2G.04) that complements HOV signing.

**Standard:**

06 **Static or changeable message regulatory signs (see Sections 2G.03 through 2G.07) shall be used with preferential lane word or symbol markings.**

07 **All preferential lane word and symbol markings shall be white and shall be positioned laterally in the approximate center of the preferential lane.**

Option:

08 Preferential lane-use symbol or word markings may be omitted at toll plazas where physical conditions preclude the use of the markings.

09 Lane-use arrow markings may be placed on the curb lanes on approaches to intersections to signify non-preferential road users can use the lane for turning movements.

*Guidance:*

10 *All longitudinal pavement markings, as well as word and symbol pavement markings, associated with a preferential lane should end at approximately where the Preferential Lane Ends (R3-12a or R3-12c) sign (see Section 2G.07)*

*designating the downstream end of the preferential only lane restriction is installed.*

11 *The spacing of the markings should be based on engineering judgment that considers the operating speed, block lengths, distance from intersections, and other factors that affect clear communication to the road user.* A spacing of 180 feet should be used at the maximum interval for preferential lane markings on on-ramps.

12 *In addition to a regular spacing interval, the preferential lane marking should be placed at strategic locations such as major decision points, direct exit ramp departures from the preferential lane, and along access openings to and from adjacent general-purpose lanes. At decision points, the preferential lane marking should be placed on all applicable lanes and should be visible to approaching traffic for all available departures. At direct exits from preferential lanes where extra emphasis is needed, the use of word markings (such as "EXIT" or "EXIT ONLY") in the deceleration lane for the direct exit and/or on the direct exit ramp itself just beyond the exit gore should be considered.*

Option:

13 ~~A numeral indicating the vehicle occupancy requirements established for a high-occupancy vehicle lane may be included in sequence after the diamond symbol or HOV word message.~~

Support:

14 For State highways, refer to Caltrans' High Occupancy Vehicle (HOV) Guidelines and Ramp Meter Design Manual. Refer to Section 1A.05 for information regarding these publications.

## Section 3E.04 Markings for Part-Time Travel on a Shoulder

Support:

01 Shoulders are sometimes used to add capacity to a roadway in peak hour conditions to provide for transit or HOV priority or to provide higher throughput when open to all traffic.

02 A shoulder that has been opened to travel on a permanent, rather than a part-time basis is considered to be a travel lane and is signed and marked in accordance with other provisions of this Manual.

**Standard:**

03 **When part-time travel on a shoulder is open to all traffic, pavement word and symbol markings shall not be used in the shoulder.**

04 **When a shoulder is assigned part-time to a particular class or classes of vehicles, the shoulder shall be marked with one or more pavement word markings that identify the special use of the shoulder such as BUS ONLY, TRANSIT ONLY, HOV, or instead of the HOV pavement word marking, white lines formed in a diamond-shaped symbol (see Section 3E.03). A pavement word or symbol marking shall be provided in the shoulder immediately after exit and entry ramps (see Figure 3E-5) or immediately departing an intersection at the full-width shoulder (see Figure 3E-6). Appropriate regulatory signing (see Section 2G.03) shall be installed with the pavement word or symbol markings.**

05 **The channelizing line emanating from the entrance ramp shall be a wide dotted line through the intersecting alignment of the shoulder to the theoretical gore (see Drawings A and B in Figure 3E-5). At exit ramps, the channelizing line proceeding from the theoretical gore across the intersecting alignment of the shoulder shall be a wide dotted line (see Figure 3E-5).**

06 **If used, the extension of the channelizing line at entrance ramps proceeding from the theoretical gore across the opening of the on-ramp alignment shall be a wide dotted line (see Drawing C in Figure 3E-5) where it is demonstrated that traffic entering from an on-ramp stops or yields to traffic on the shoulder of the highway mainline.**

07 **An additional outside solid edge line shall be provided on the shoulder in accordance with Sections 3B.09 and 3B.10.**

*Guidance:*

08 *Changes in edge line pattern or direction should occur at appropriate regulatory signs.*

Option:


09 At locations where traffic is allowed to enter, exit, or merge with the shoulder, a dotted edge line may be used either in a continuous manner or angled to the pavement edge (see Figure 3E-6).

10 Red-colored pavement (see Section 3H.07) may be used on shoulders that allow only transit vehicles.


**Standard:**

11 **If used, red-colored pavement shall be discontinued on the shoulder through the influence area of the ramp (see Figure 3E-5).**


## Figure 3E-1. Markings for Barrier-Separated Preferential Lanes

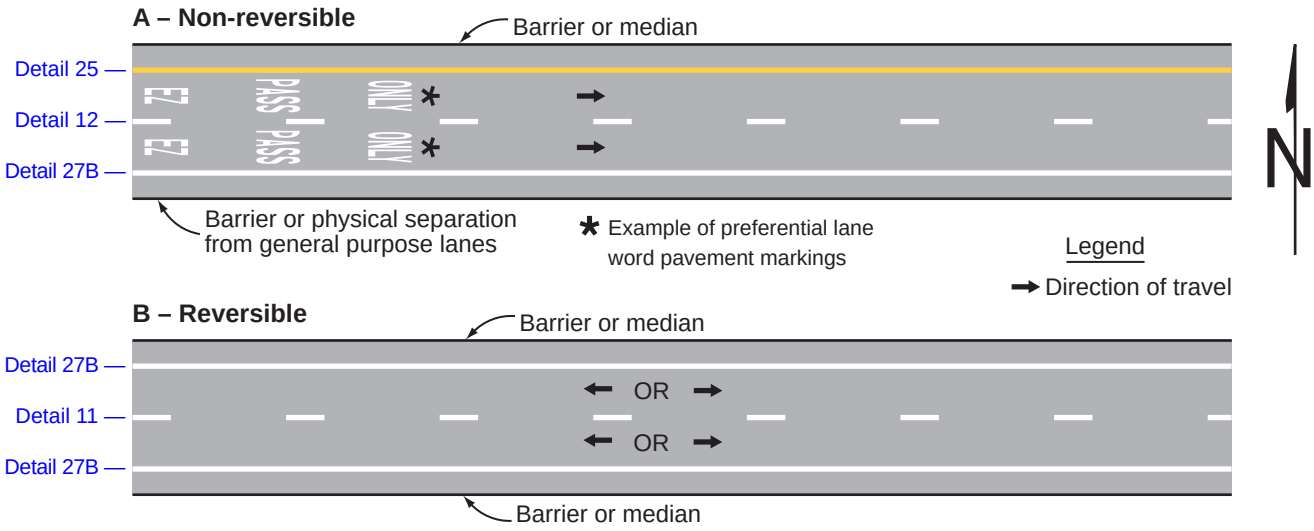


## Figure 3E-2. Markings for Buffer-Separated Preferential Lanes (Sheet 1 of 2)

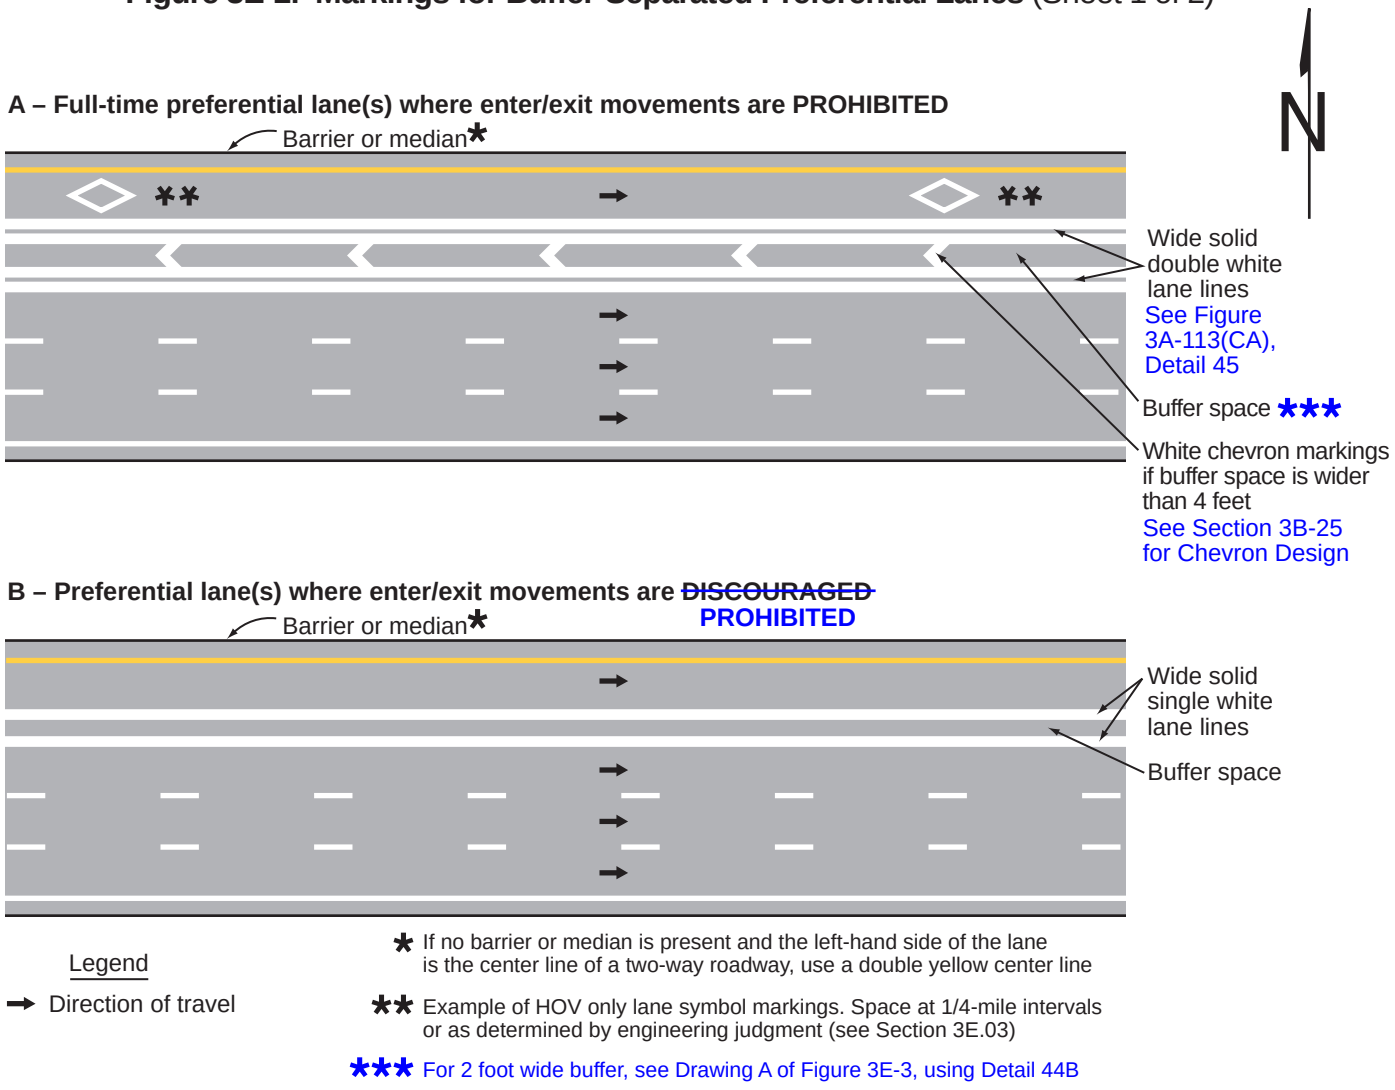

## Figure 3E-2. Markings for Buffer-Separated Preferential Lanes (Sheet 2 of 2)

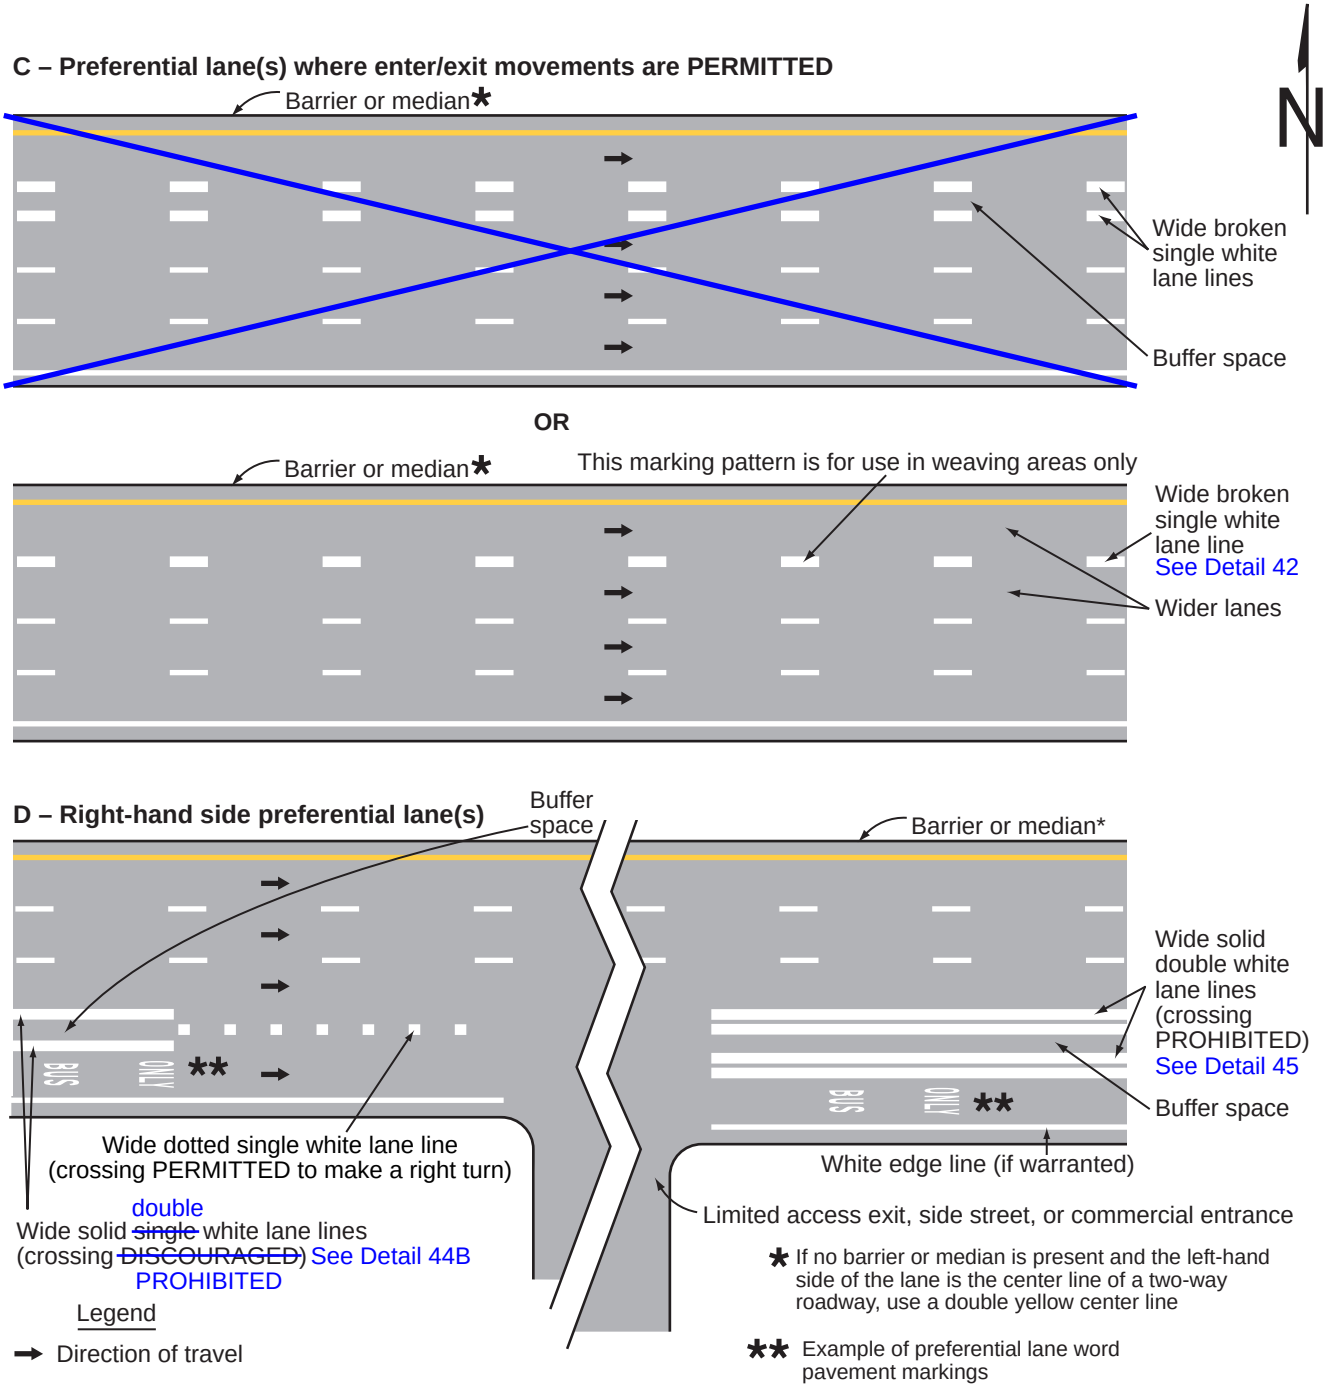

# Figure 3E-3. Markings for Contiguous Preferential Lanes

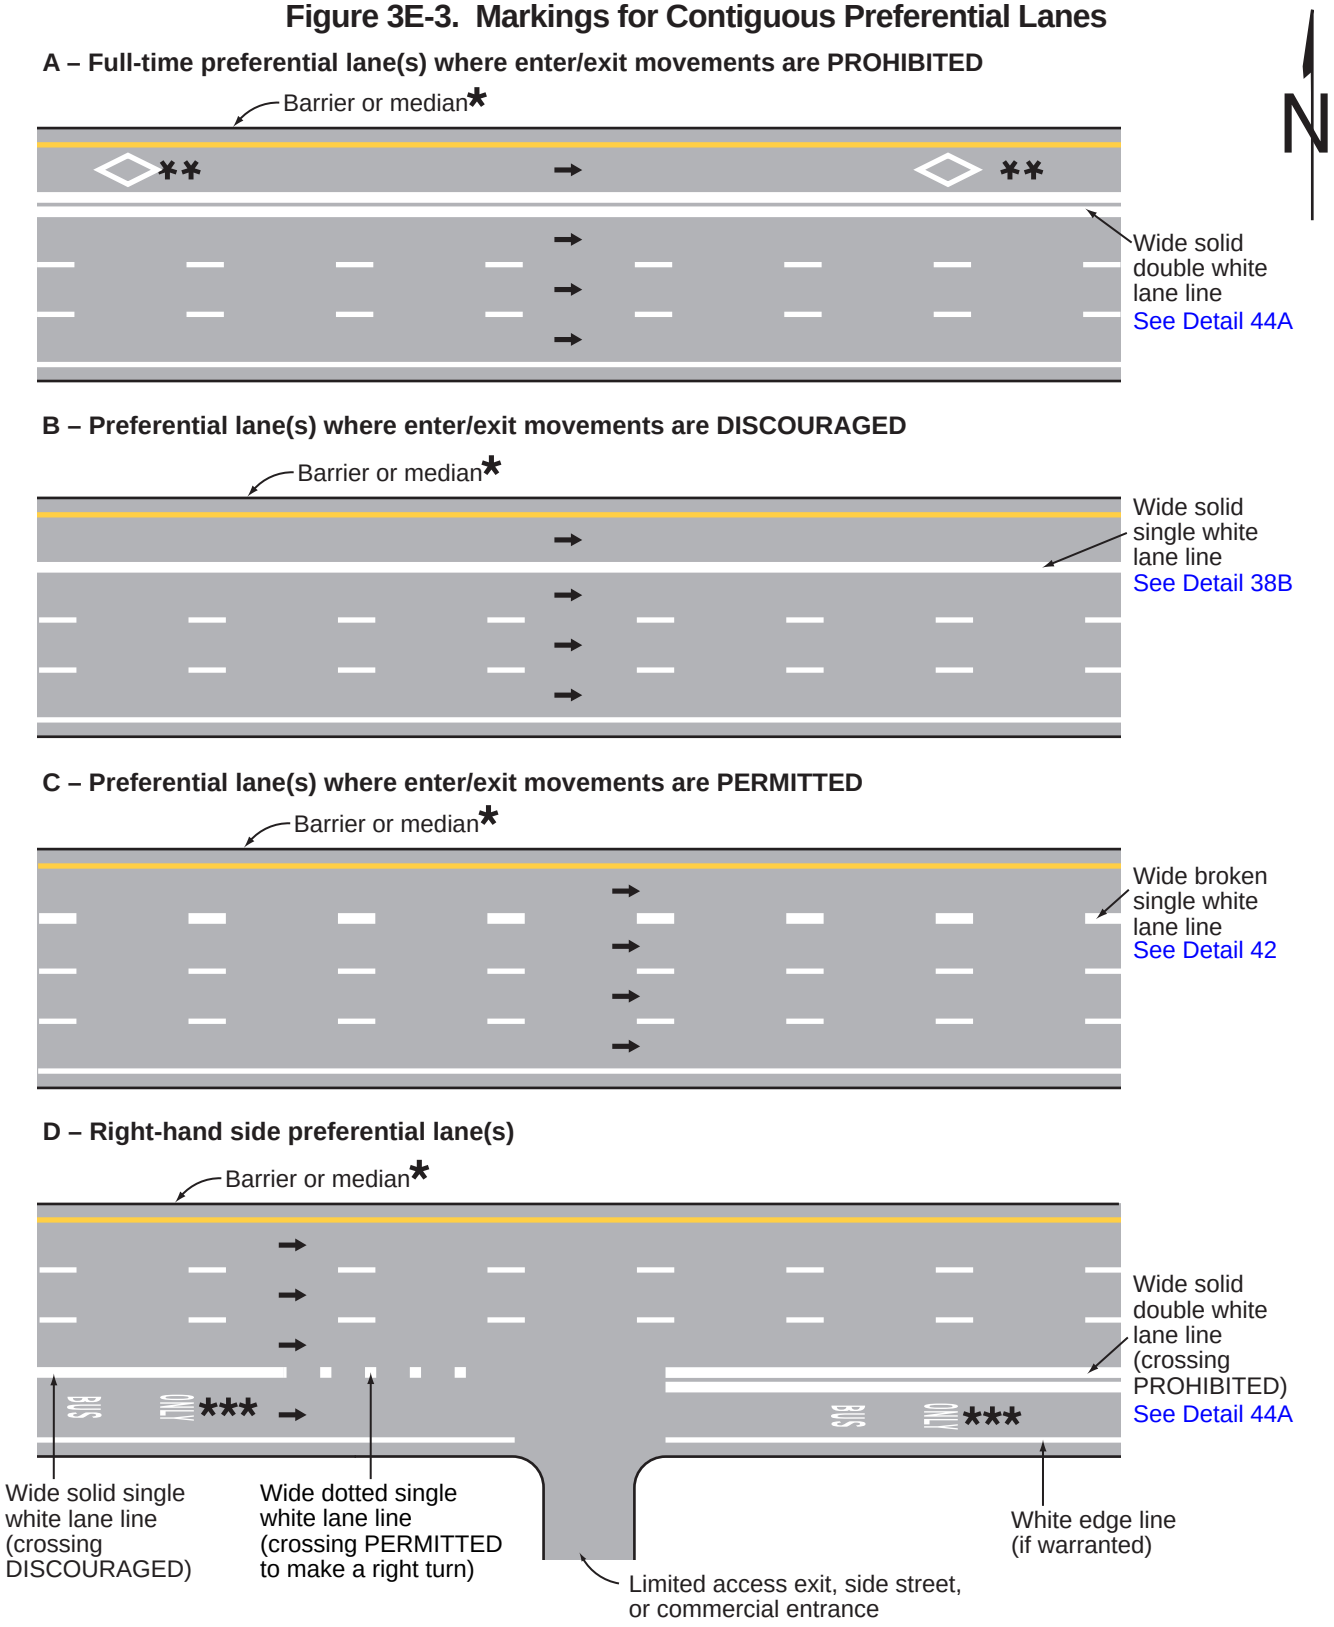


* If no barrier or median is present and the left-hand side of the lane is the center line of a two-way roadway, use a double yellow center line


** Example of HOV only lane symbol markings. Space at 1/4-mile intervals or as determined by engineering judgment (see Section 3E.03)

*** Example of preferential lane word pavement markings

Legend

→ Direction of travel

## Figure 3E-4. Markings for Contra*-Flow Preferential Lanes on Divided Highways

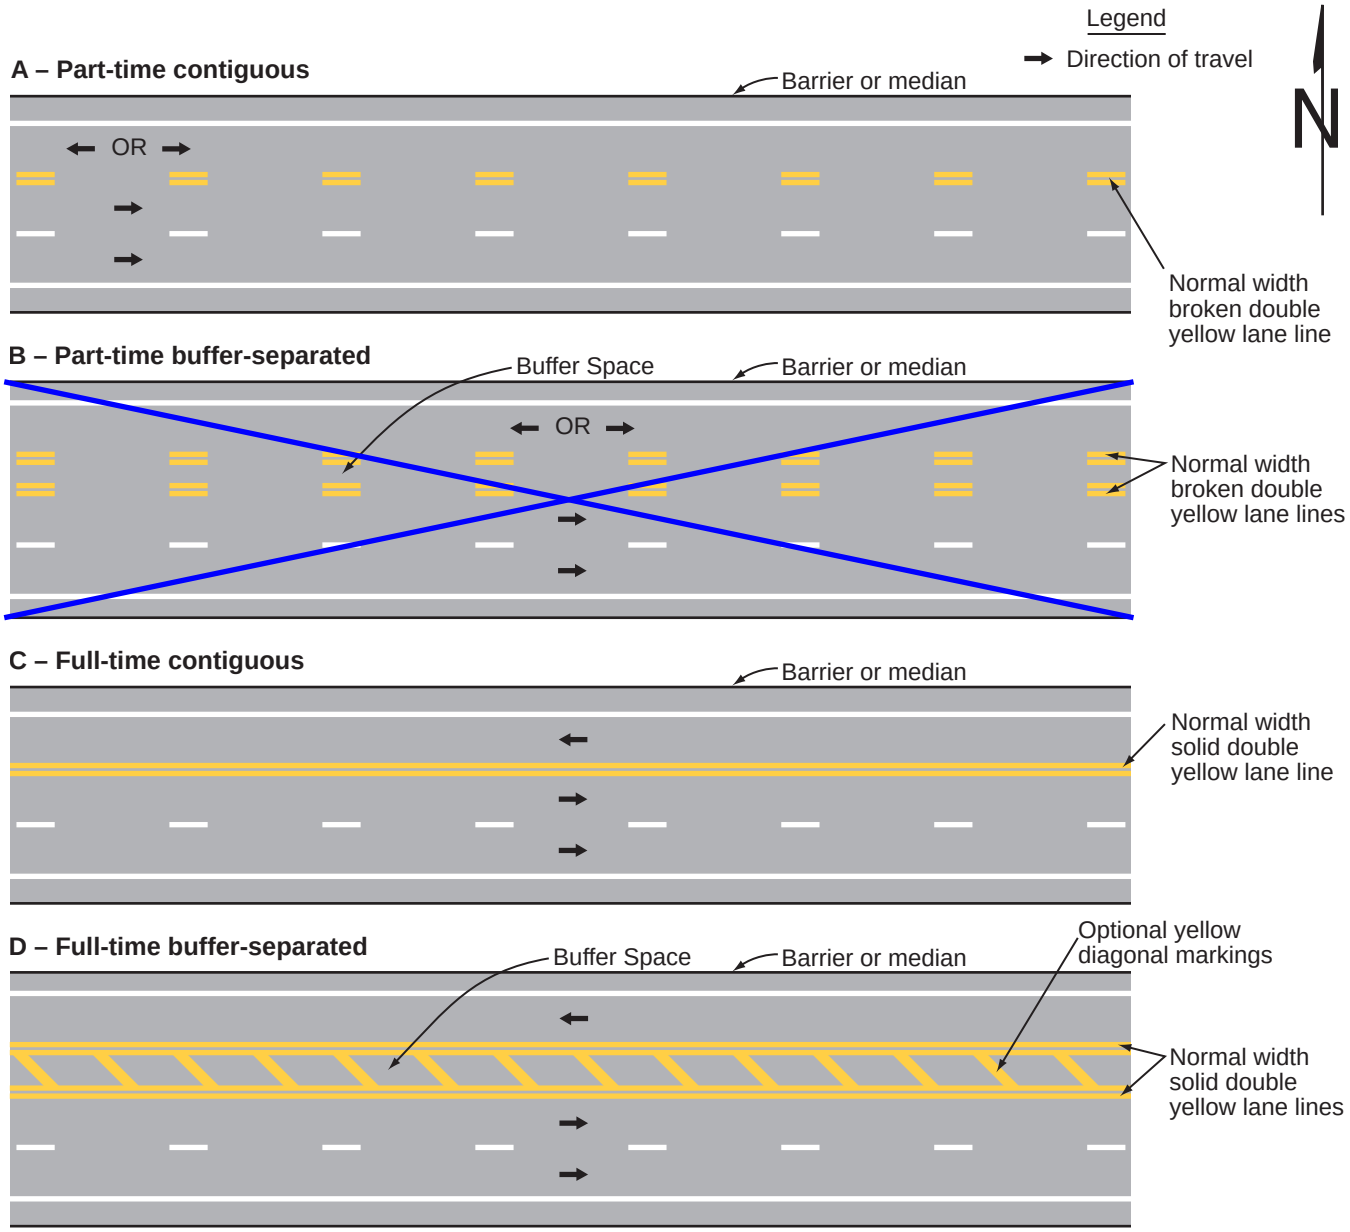



* Refer to FHWA's List of Known Errors for error in Figure title. Refer to Section 1A.04 for more details.

## Figure 3E-5. Markings for Part-Time Travel on Shoulder and Application of Pavement Word Markings (Sheet 1 of 3)

**A – Right-hand shoulder - transit use only**


**B – Right-hand shoulder - HOV allowed**

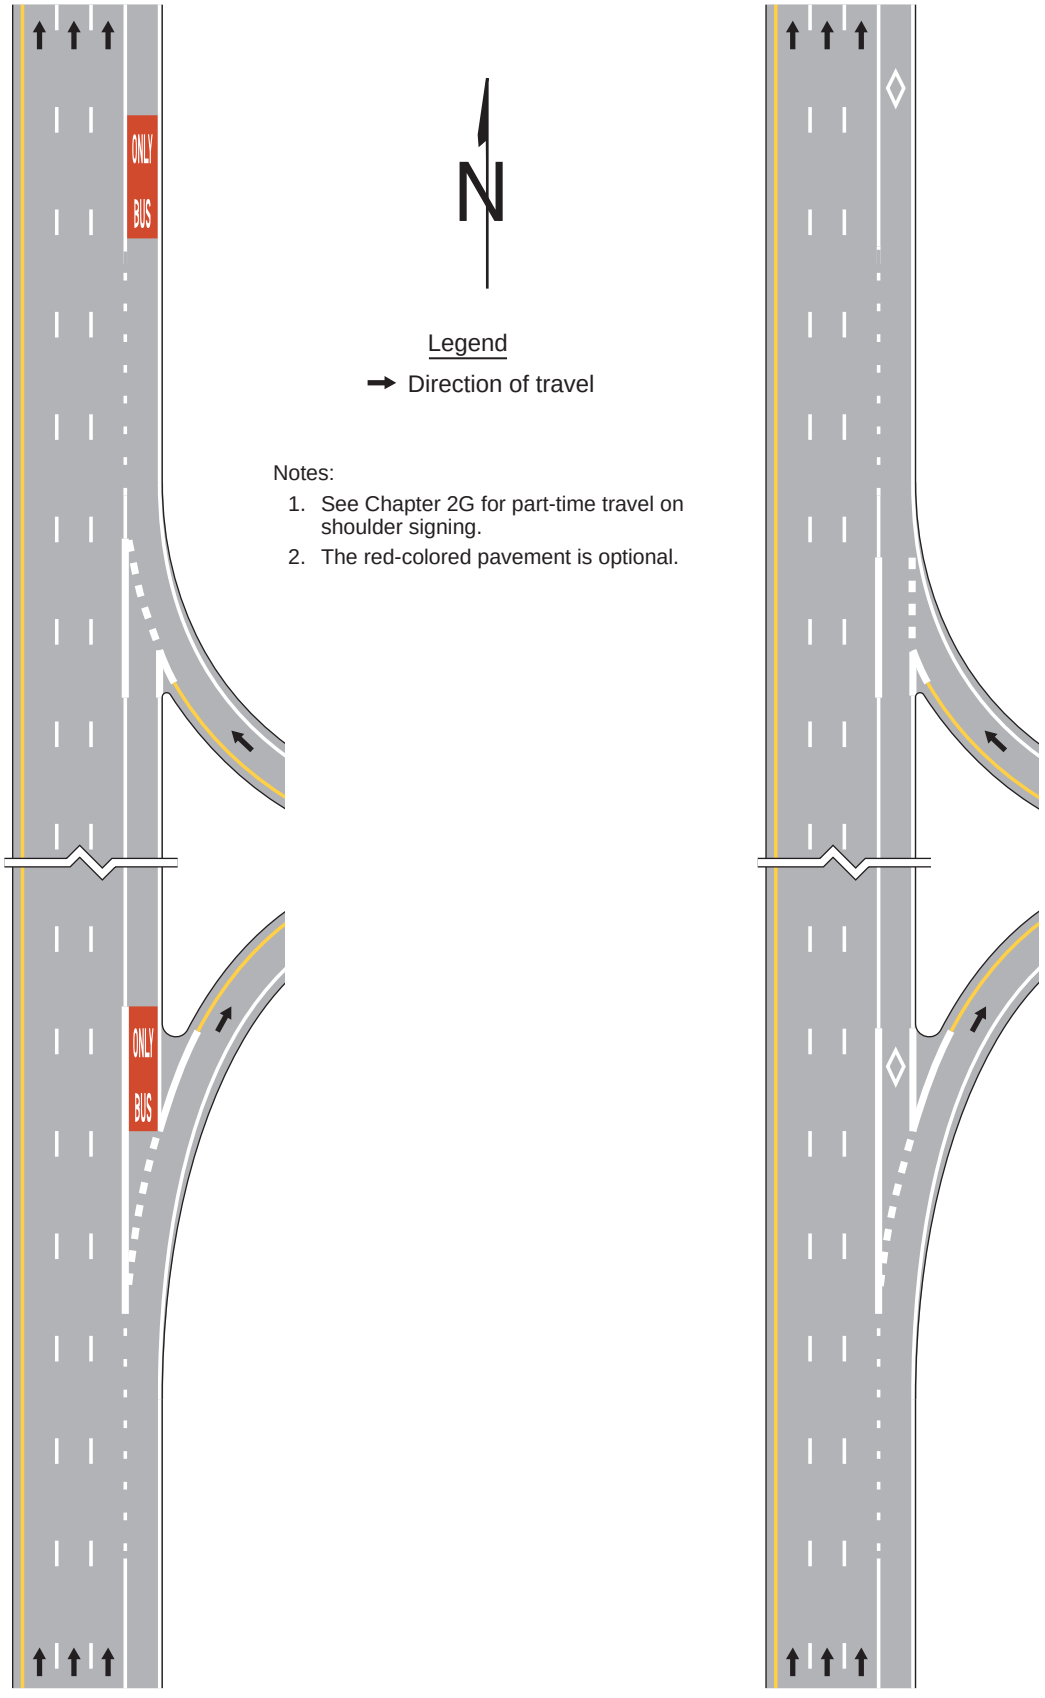


Notes:


1. See Chapter 2G for part-time travel on shoulder signing.
2. The red-colored pavement is optional.

## Figure 3E-5. Markings for Part-Time Travel on Shoulder and Application of Pavement Word Markings (Sheet 2 of 3)

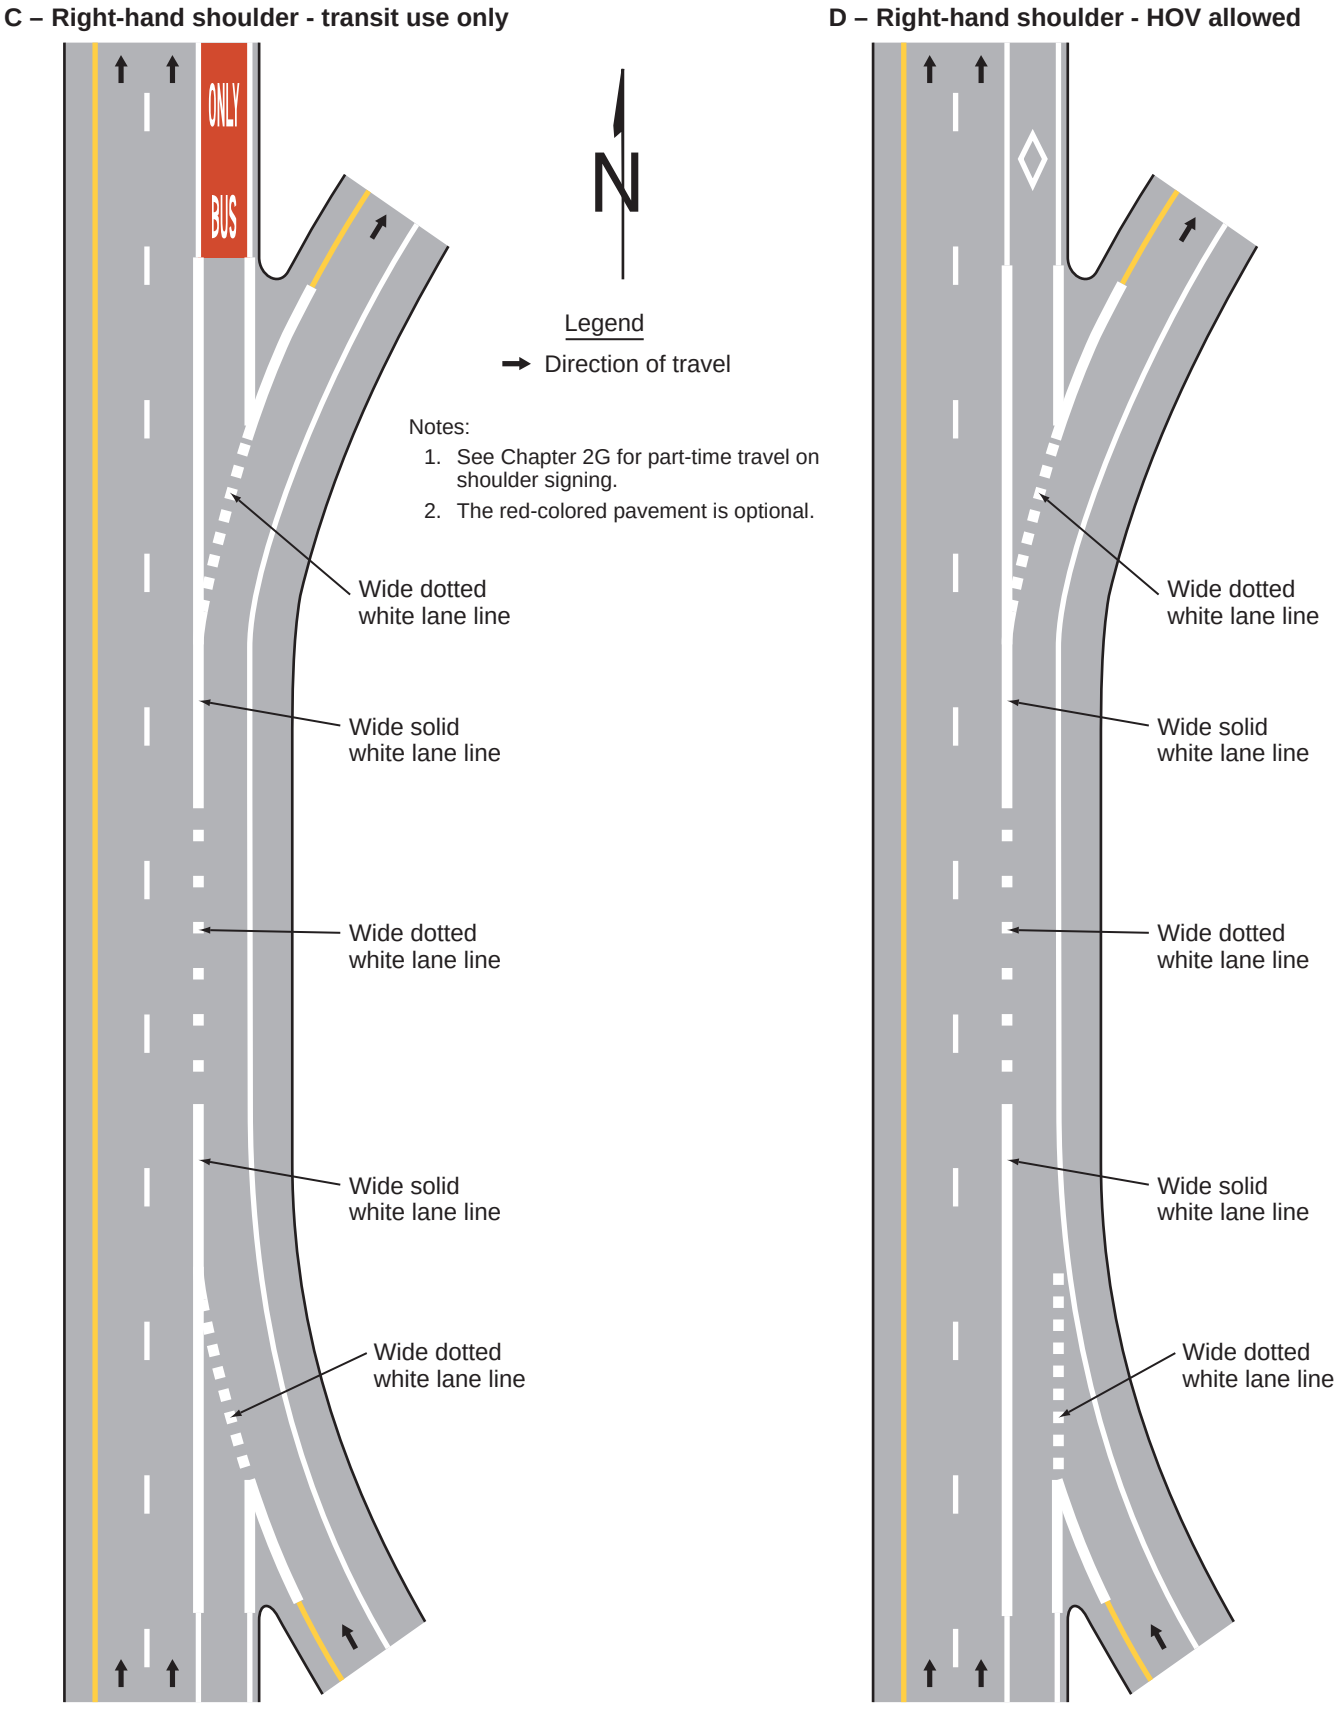


## Figure 3E-5. Markings for Part-Time Travel on Shoulder and Application of Pavement Word Markings (Sheet 3 of 3)

**E – Right-hand shoulder - transit use only**

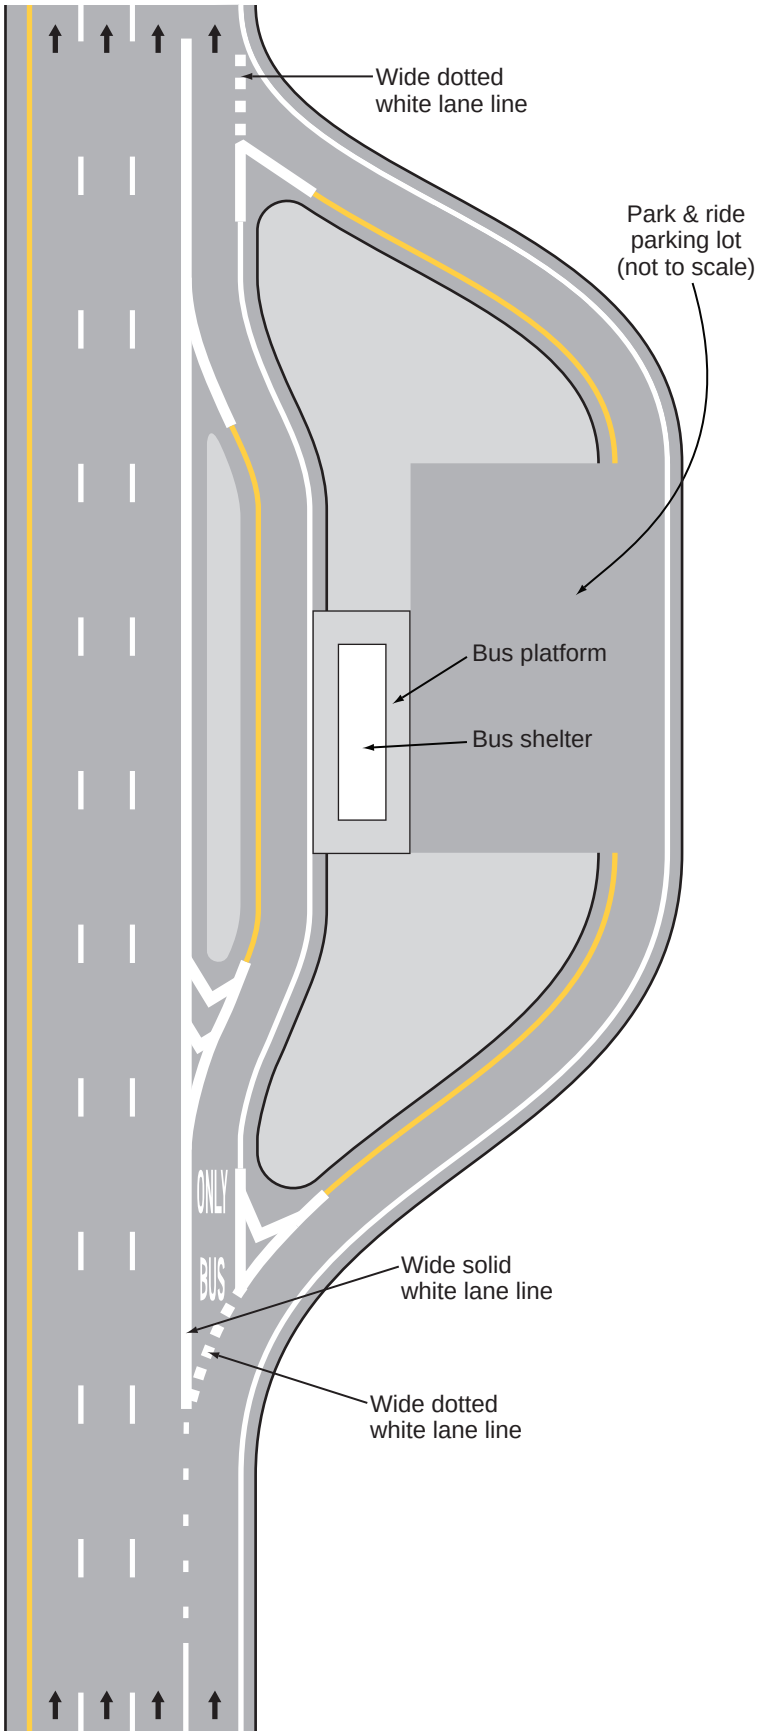


**F – Left-hand shoulder - HOV allowed**

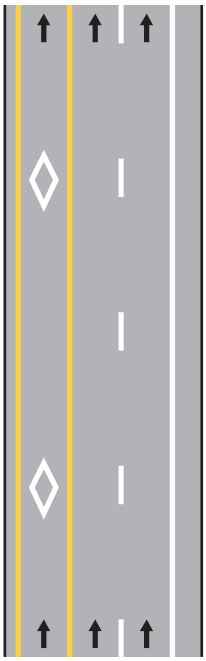





Legend


→ Direction of travel

Note: See Chapter 2G for part-time travel on shoulder signing.

## Figure 3E-6. Markings for Part-Time Travel on a Shoulder through an Intersection

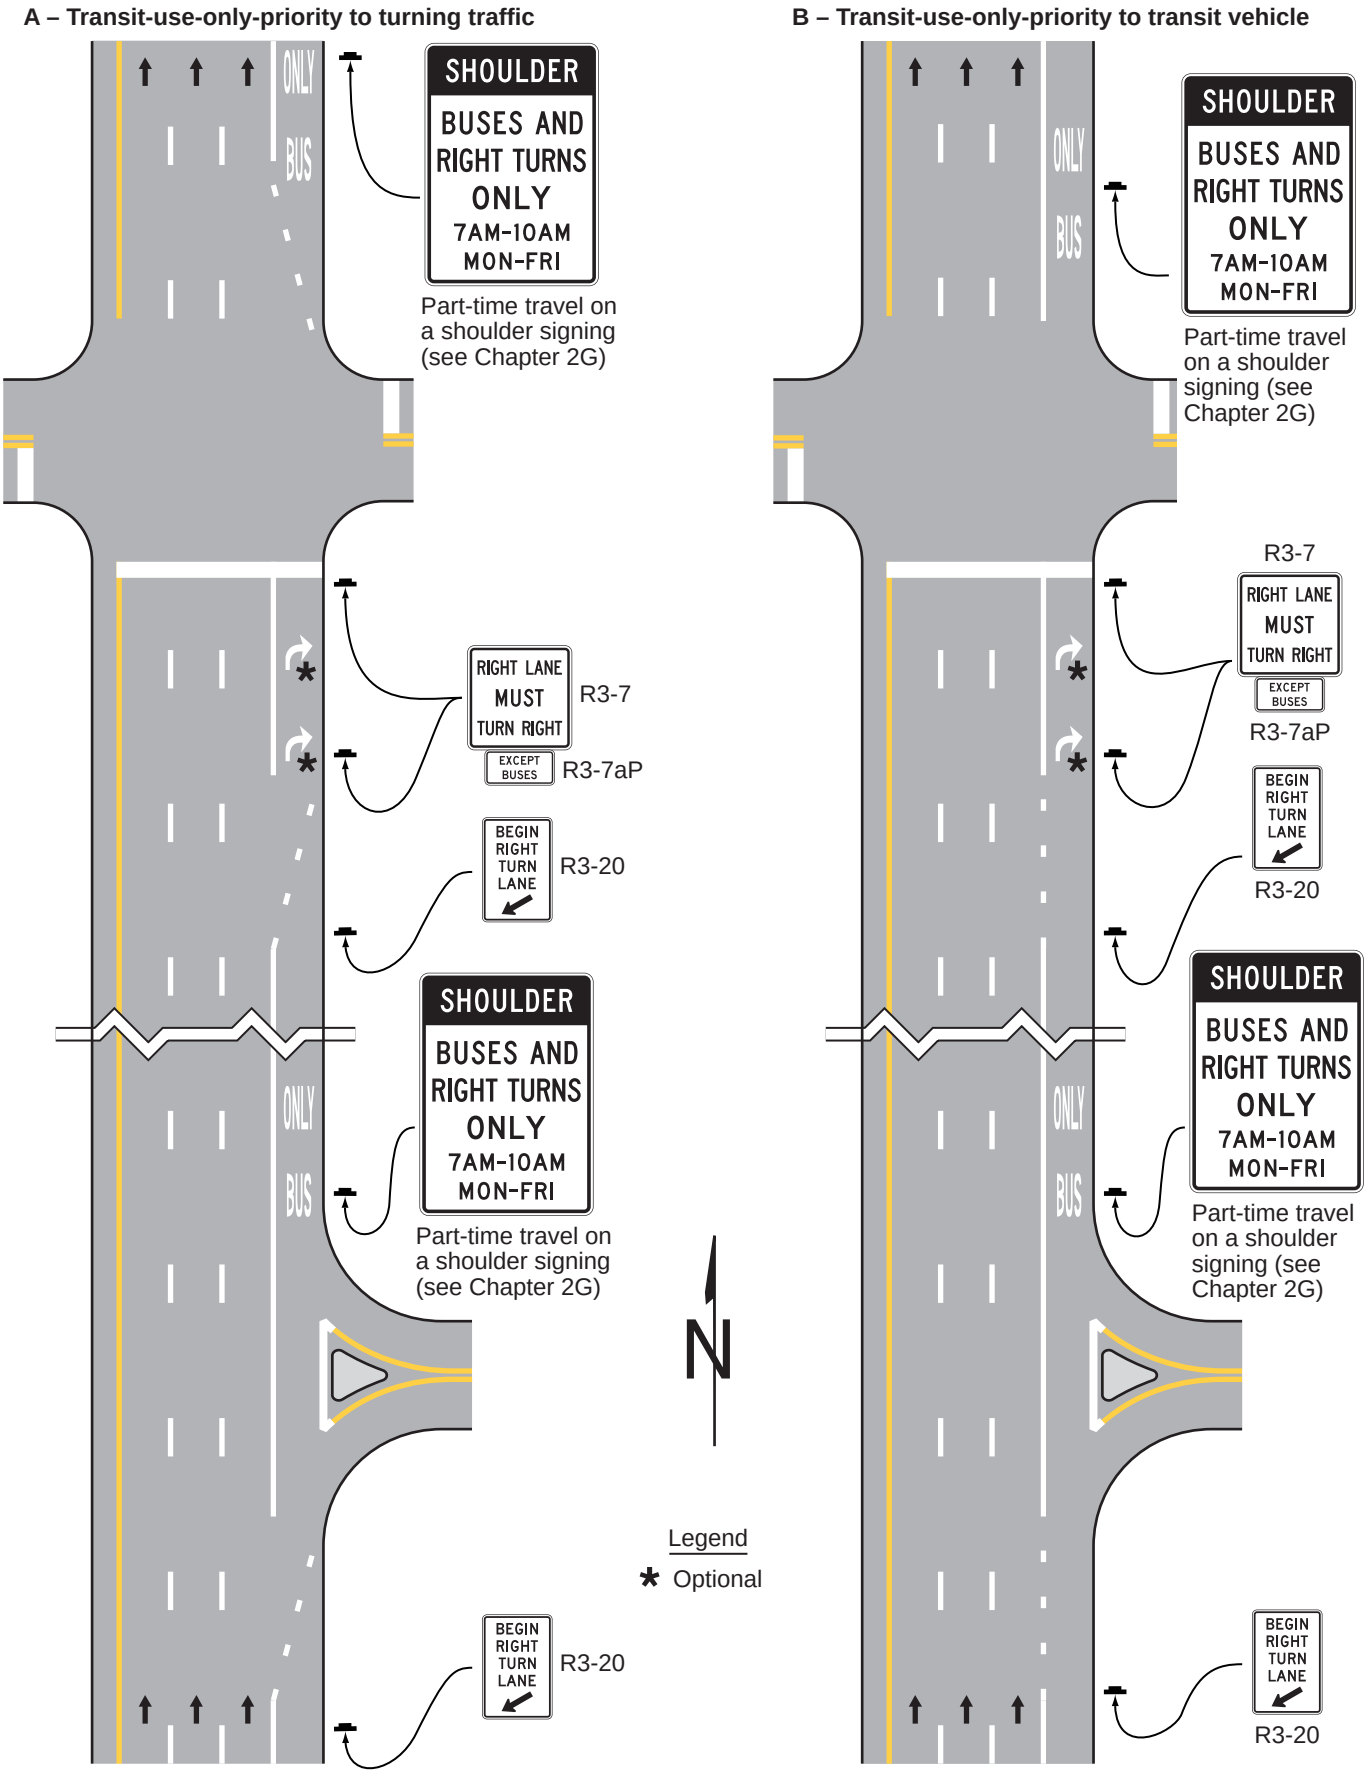

## *Figure 3E-101(CA). Diamond Symbol (HOV Lane)*

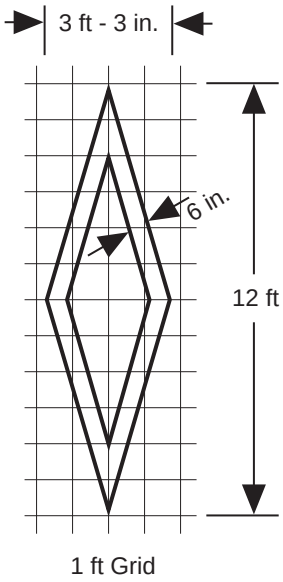


Note: The design detail for this symbol is also shown in the Department of Transportation's Standard Plans.

# Table 3E-1. Standard Edge Line and Lane Line Markings for Preferential Lanes

| Type of Preferential Lane | Left-Hand Line | Right-Hand Line |
|---|---|---|
| Barrier-Separated, Non-Reversible | A normal solid single yellow edge line | A normal solid single white edge line (see Drawing A in Figure 3E-1) |
| Barrier-Separated, Reversible | A normal solid single white edge line | A normal solid single white edge line (see Drawing B in Figure 3E-1) |
| Buffer-Separated, Left-Hand Side | A normal solid single yellow edge line | A wide solid double white line along both edges of the buffer space (two sets of wide solid double white lines) where crossing the buffer space is prohibited, and the buffer space is 4 feet or greater (see Drawing A in Figure 3E-3 and Detail 45 in Figure 3A-113(CA))<br>A wide solid single white line along both edges of the buffer space (a set of wide solid double white lines) where crossing the buffer space is ~~discouraged~~ prohibited, and the buffer space is 2 feet or greater (see Drawing B in Figure 3E and Detail 44B in Figure 3A-113(CA))<br>~~A wide broken single white line along both edges of the buffer space, or~~ a wide broken single white line within the buffer space (resulting in wider lanes), where crossing is permitted (see bottom half of Drawing C in Figure 3E-2 and Detail 42 in Figure 3A-113(CA)) |
| Buffer-Separated, Right-Hand Side | A wide solid double white line along both edges of the buffer space (two sets of wide solid double white lines) where crossing the buffer space is prohibited, and the buffer space is 4 feet or greater or a wide solid single white line along both edges of the buffer space (a set of wide solid double white lines) where crossing the buffer space is ~~discouraged~~ prohibited, and the buffer space is 2 feet or greater (see Drawing D in Figure 3E-2, Detail 45 in Figure 3A-113(CA), and Detail 44B in Figure 3A-113(CA))<br>~~A wide broken single white line along both edges of the buffer space, or~~ a wide broken single white line within the buffer space (resulting in wider lanes), where crossing is permitted (see Drawing D in Figure 3E-2 and Detail 42 in Figure 3A-113(CA))<br>A wide dotted single white line within the buffer space (resulting in wider lanes) where crossing is permitted for any vehicle to perform a right-turn maneuver (see Drawing D in Figure 3E-2 and Detail 37 in Figure 3A-111(CA)) | A normal solid single white edge line (if warranted) |
| Contiguous, Left-Hand Side | A normal solid single yellow edge line | A wide solid double white lane line where crossing is prohibited (see Drawing A in Figure 3E-3 and Detail 44A in Figure 3A-112(CA))<br>A wide solid single white lane line where crossing is discouraged (see Drawing B in Figure 3E-3 and Detail 38B in Figure 3A-113(CA))<br>A wide broken single white lane line where crossing is permitted (see Drawing C in Figure 3E-3 and Detail 42 in Figure 3A-113(CA)) |
| Contiguous, Right-Hand Side | A wide solid double white lane line where crossing is prohibited (see Drawing D in Figure 3E-3 and Detail 44A in Figure 3A-113(CA))<br>A wide solid single white lane line where crossing is discouraged (see Drawing D in Figure 3E-3 and Detail 38B in Figure 3A-112(CA)).<br>A wide broken single white lane line where crossing is permitted (see Drawing D in Figure 3E-3 and Detail 42 in Figure 3A-113(CA))<br>A wide dotted single white lane line where crossing is permitted for any vehicle to perform a right-turn maneuver (see Drawing D in Figure 3E-3 and Detail 37 in Figure 3A-111(CA)) | A normal solid single white lane line (if warranted) |

Notes: 1. If there are two or more preferential lanes, the lane lines between the preferential lanes shall be normal broken white lines.
2. The standard lane markings listed in this table are provided in a tabular format for reference.

## Table 3E-2. Standard Center Line and Edge Line Markings for Counter-Flow Preferential Lanes on Divided Highways

| Type of Preferential Lane | Center Line on Left-Hand Side | Edge Line on Left-Hand Side |
|---|---|---|
| Part-Time Contiguous | A normal width broken double yellow line | A normal solid single white line (if warranted) |
| ~~Part-Time Buffer-Separated~~ | ~~A normal width broken double yellow line along both edges of the buffer space~~ | ~~A normal solid single white line (if warranted)~~ |
| Full-Time Contiguous | A normal width solid double yellow line | A normal solid single white line (if warranted) |
| Full-Time Buffer-Separated | A normal width solid double yellow line along both edges of the buffer space | A normal solid single white line (if warranted) |

# CHAPTER 3F. MARKINGS FOR TOLL PLAZAS

## Section 3F.01 General

Support:

01 At toll plazas, pavement markings help road users identify the proper lane(s) to use for the type of toll payment they plan to use, to channelize movements into the various lanes, and to delineate obstructions in the roadway.

02 Section 3H.08 contains information on the use and application of purple-colored pavement at toll plazas for vehicles with registered electronic toll collection (ETC) accounts.

## Section 3F.02 Longitudinal Markings

*Guidance:*

01 *Solid white lane line markings should be used to separate toll lanes, payment methods, or to channelize movements at toll plazas.*

02 *Solid white lane line markings should begin at the upstream end of the full-width toll lane and be continued to the toll plaza.*

Option:

03 For a toll plaza approach lane that is restricted to use only by vehicles with registered ETC accounts, the solid white lane line or edge line on the right-hand side of the ETC Account-Only lane and the solid white lane line or solid yellow edge line on the left-hand side of the ETC Account-Only lane may be supplemented with purple solid longitudinal markings placed contiguous to the inside edges of the lines defining the lane.

**Standard:**

04 **If the purple solid longitudinal markings described in Paragraph 3 of this Section are used, the purple markings shall be at least 3 inches wide.**

*Guidance:*

05 *If the purple solid longitudinal markings described in Paragraph 3 of this Section are used, the purple markings should not be wider than the line they supplement.*

**Standard:**

06 **Toll booths and the islands on which they are located are considered to be obstructions in the roadway and they shall be provided with markings that comply with the provisions of Section 3B.13 and Chapter 3J.**

Option:

07 Longitudinal pavement markings may be omitted alongside toll booth islands between the approach markings and any departure markings.

## Section 3F.03 Pavement Word and Symbol Markings

Support:

01 Section 3E.03 contains information on the use of pavement word and symbol markings for ETC Account-Only lanes not specific to toll plazas.

**Standard:**

02 **Except as provided in Paragraph 4 of this Section, when a lane on the approach to a toll plaza is restricted to use only by vehicles with registered ETC accounts, the ETC Account-Only lane word markings or pictograph described in Section 3E.03 shall be used (see Drawing A in Figure 3H-6).**

03 **When one or more open-road tolling (ORT) lanes that are restricted to use only by vehicles with registered ETC accounts bypass a mainline toll plaza on a separate alignment, pavement word markings or pictographs shall be used on the approach to the point where the ORT lanes diverge from the lanes destined for the mainline toll plaza (see Drawings B and C in Figure 3H-6).**

Option:

04 Preferential lane-use markings may be omitted at toll plazas where physical conditions preclude the use of the markings.

*Guidance:*

05 *If an ORT lane that is immediately adjacent to a mainline toll plaza is not separated from adjacent cash payment toll plaza lanes by a curb or barrier, then channelizing devices (see Section 3I.01), and/or longitudinal pavement*

*markings that discourage or prohibit lane changing should be used to separate the ORT lane from the adjacent cash payment lane. This separation should begin on the approach to the mainline toll plaza at approximately the point where the vehicle speeds in the adjacent cash lanes drop below 30 mph during off-peak periods and should extend downstream beyond the toll plaza approximately to the point where the vehicles departing the toll plaza in the adjacent cash lanes have accelerated to 30 mph.*

# CHAPTER 3G. DELINEATORS

## Section 3G.01 General

Support:

01 Delineators are particularly beneficial at locations where the alignment might be confusing or unexpected, such as at lane-reduction transitions and curves. Delineators are effective guidance devices at night and during adverse weather. An important advantage of delineators in certain locations is that they remain visible when the roadway is wet or covered by snow.

02 Delineators are considered guidance devices to help road users navigate the roadway alignment, rather than warning devices.

Option:

03 Delineators may be used on long continuous sections of highway or through short stretches where there are changes in horizontal alignment.

## Section 3G.02 Design

**Standard:**

01 **Delineators shall consist of retroreflective devices that are capable of clearly retroreflecting light under normal atmospheric conditions from a distance of 1,000 feet when illuminated by the high beams of standard automobile lights. They shall be mounted on crashworthy (see definition in Section 1C.02) supports.**

02 **Retroreflective elements for delineators shall have a minimum vertical and horizontal dimension of 3 inches, or a minimum diameter dimension of 3 inches when circular.**

Support:

03 Within a series of delineators along a roadway, delineators for a given direction of travel at a specific location are referred to as single delineators if they have one retroreflective element for that direction, double delineators if they have two identical retroreflective elements for that direction mounted together, or vertically-elongated delineators if they have a single retroreflective element with an elongated vertical dimension to approximate the vertical dimension of two separate single delineators.

Option:

04 A vertically-elongated delineator of appropriate size may be used in place of a double delineator.

Support:

05 There are two classes of delineator posts and several types of retroreflectorization as shown in Figure 3G-101(CA).

## Section 3G.03 Application

**Standard:**

01 **The color of delineators shall comply with the color of edge lines stipulated in Sections 3A.03 and 3B.09.**

02 **A series of single delineators shall be provided on the right-hand side of freeways and expressways and on at least one side of interchange ramps, except when either Condition A or Condition B is met, as follows:**

- **A. On tangent sections of freeways and expressways when both of the following conditions are met:**
  - **1. Raised pavement markers are used continuously on lane lines throughout all curves and on all tangents to supplement pavement markings, and**
  - **2. Roadside delineators are used to lead into all curves, or**
- **B. On sections of roadways where continuous lighting is in operation between interchanges.**

Option:

03 Delineators may be provided on other classes of roads.

04 A series of single delineators may be provided on the left-hand side of roadways.

05 Chevron Alignment (W1-8) signs may be used instead of or in addition to standard delineators, as provided in Section 2C.08.

**Standard:**

06 **Delineators on the left-hand side of a two-way roadway shall be white (see Figure 3G-1).**

*Guidance:*

07 *A series of single delineators should be provided on the outside of curves on interchange ramps.*

08 *Where median crossovers are provided for official or emergency use on divided highways and where these crossovers are to be marked with pavement markings, a double yellow delineator should be placed on the left-hand side of the through roadway on the far side of the crossover for each roadway.*

09 *Double or vertically-elongated delineators should be installed at approximately 100-foot intervals along acceleration and deceleration lanes.*

10 *A series of delineators should be used wherever guardrail or other longitudinal barriers are present along a roadway or ramp.*

Option:

11 Red delineators may be used on the reverse side of any delineator where it would be viewed by a road user traveling in the wrong direction on that particular ramp or roadway.

*Guidance:*

12 *Except as provided in Paragraph 13 of Section 3B.12, delineators of the appropriate color should be used to indicate a lane-reduction transition where either an outside or inside lane merges into an adjacent lane.*

13 *When used for lane-reduction transitions, the delineators should be installed adjacent to the lane or lanes reduced for the full length of the transition and should be so placed and spaced to show the reduction (see Section 3B.12 and Figure ~~3B-14~~ 3B-14(CA)).*

14 *On a highway with continuous delineation on either or both sides, delineators should be carried through transitions.*

**Standard:**

15 **When used on a truck escape ramp, delineators shall be red.**

*Guidance:*

16 *Red delineators should be placed on both sides of truck escape ramps.*

Option:

17 Where delineation is required within a paved area, surface mounted channelizers may be used. Refer to Section 3I.01.

Support:

18 Examples of the use of delineators are shown in Figure 3G-101(CA). Color exceptions are shown in Figure 3G-103(CA) and 3G-104(CA).

19 Following are typical delineators and their uses:

A. Type E - White Retroreflector (2 Sided). For use on the left or right of 2-lane 2-way streets and highways when it is desirable to have a reflector on the front and one on the back of the delineator facing the opposite direction of traffic.
B. Type F - White Retroreflector (1 Sided). For use on the right of freeways and expressways. They may also be used on 2-lane 2-way streets and highways when the Type E is not needed.
C. Type G - Yellow Retroreflector (1 Sided). For use on the left of divided highways and 2-lane highway intersections as shown in Figure 3G-102(CA).
D. Type J - Red Retroreflector (1 Sided). For placement on both sides of Truck Escape Ramps as shown in Figure 3G-103(CA).

20 As shown in Figure 3G-102(CA) and Figure 3G-104(CA), Type K(CA), Type P(CA), and Type R(CA) Object Markers are used along with delineators. Refer to Figure 2C-17(CA) for object marker details.

21 Bikeway separator posts are a type of delineator used as vertical elements to define Class IV bikeways. Refer to the FHWA "Separated Bike Lane Planning and Design Guide" for information on the design of bikeway separator posts. Refer to Sections 9E.07 and 9E.17.

## Section 3G.04 Placement and Spacing

*Guidance:*

01 *Except as provided in Paragraph 2 of this Section, delineators should be mounted at a height, measured vertically from the bottom of the lowest retroreflective device to the elevation of the near edge of the roadway, of approximately 4 feet.*

Option:

02 When mounted on the face of or on top of guardrails or other longitudinal barriers, delineators may be mounted at a lower elevation than the normal delineator height recommended in Paragraph 1 of this Section.

*Guidance:*

03 *Delineators should be placed 2 to ~~8~~ 6 feet outside the outer edge of the shoulder, or if appropriate, in line with the roadside barrier that is 8 feet or less outside the outer edge of the shoulder.*

04 *Delineators should be placed at a constant distance from the edge of the roadway, except that where an obstruction intrudes into the space between the pavement edge and the extension of the line of the delineators, the delineators should be transitioned to be in line with or inside the innermost edge of the obstruction. If the obstruction is a guardrail or other longitudinal barrier, the delineators should be transitioned to be just behind, directly above (in line with), or on the innermost edge of the guardrail or longitudinal barrier.*

05 *Delineators should not present a vertical or horizontal clearance obstacle for pedestrians.*

06 *Delineators should be spaced 200 to 530 feet apart on mainline tangent sections. Delineators should be spaced 100 to 200 feet apart on ramp tangent sections.*

Option:

07 On a highway with continuous delineation on either or both sides, the spacing between a series of delineators may be closer.

08 When uniform spacing is interrupted by such features as driveways and intersections, delineators which would ordinarily be located within the features may be relocated in either direction for a distance not exceeding ¼ of the uniform spacing. Delineators still falling within such features may be eliminated.

09 Delineators may be transitioned in advance of a lane transition or obstruction as a guide for oncoming traffic.

*Guidance:*

10 *The spacing of delineators should be adjusted on approaches to and throughout horizontal curves so that several delineators are always simultaneously visible to the road user. The approximate spacing shown in Table 3G-1 should be used.*

11 *The spacing between red delineators that are placed on both sides of a truck escape ramp should not exceed 50 feet for a distance that is sufficient to identify the ramp entrance. The spacing between red delineators that are placed beyond the ramp entrance should be such that adequate guidance is provided based on the length and design of the escape ramp.*

Option:

12 When needed for special conditions, delineators of the appropriate color may be mounted in a closely- spaced manner on the face of or on top of guardrails or other longitudinal barriers to form a continuous or nearly-continuous "ribbon" of delineation.

Support:

13 Examples of delineator installations are shown in Figure 3G-1.

*Guidance:*

14 *If used on the State Highway System, delineators should be placed as follows:*

- *A. On the outsides of highway curves of 3000 feet radius or less (including medians in divided highways), freeway exit and entrance ramps and connectors. Exception to this is where a median barrier is delineated as shown in the Median Barrier Delineation Detail in Figure 3G-105(CA). Delineator spacing on curves is shown in Figure 3G-1 and Table 3G-1.*
- *B. On the right of tangent sections of freeway entrance and exit ramps, collector roads, freeway connectors and lane reduction transition sections at 200 feet spacing.*
- *C. On embankments higher than 10 feet and with side slopes steeper than 4:1. The spacing of tangent sections is approximately 525 feet. For spacing on curves, refer to Figure 3G-1 and Table 3G-1.*
- *D. On approaches to narrow bridges as shown in Figure 3G-104(CA).*
- *E. On tangent sections of rural State highways where there are no reflective pavement markers, such as in snow areas. Delineator spacing is approximately 525 feet.*
- *F. On all new guardrail or bridge rail installations, or when maintenance is required on existing guardrail or bridge rail, within 12 feet of the edge of traveled way and curves of 3000 feet radius or less. The spacing on tangent sections is approximately 525 feet. For spacing on curves, refer to Figure 3G-1 and Table 3G-1.*

Option:

15 Delineators may also be placed as follows:

- A. At intersections, road approaches, and median openings, as shown in Figure 3G-102(CA).
- B. On sections of highway with non-standard shoulder width.

16 If the exit gore at an interchange is not illuminated or is partially illuminated, delineators may be placed as shown in Figure 3G-102(CA) per the following details:

A. Type F - White Retroreflectors (1 Sided) on the right side, beginning at a distance > 5S from the theoretical gore point at 100 feet spacing.
B. Type G - Yellow Retroreflectors (1 Sided) on the left side of the exit at 10 feet spacing and then shifting to 100 feet spacing.
C. Type F - White Retroreflectors (1 Sided) on the right side of the mainline, downstream of the exit at 10 feet spacing.

Support:

17 Refer to Table 3G-1 for formula to calculate value of S.

## Section 3G.101(CA) Emergency Passageway Marker

Support:

01 Except for emergency passageways in median barriers, median openings are not allowed on freeways.

*Guidance:*

02 *Where freeway median passageways are provided for emergency vehicles, delineation for the crossover should be as follows:*

*A. At a point, 1/5 mile in advance of the crossover, one Class 1 Delineator, with a yellow post and two 3 x 12 inch white retroreflectors stacked vertically (24 inch of white retroreflectance), should be placed on the left side of the through roadway facing approaching traffic.*
*B. At a point, 1/10 mile in advance of the crossover, one Class 1 Delineator, with a yellow post and two 3 x 12 inch yellow retroreflectors stacked vertically, should be placed on the left side as in A.*
*C. At the far side of the crossover, one Class 1 Delineator, with a yellow post and one 3 x 12 inch white retroreflector over one 3 x 12 inch yellow retroreflector stacked vertically, should be placed on the left side as in A.*

## Section 3G.102(CA) Narrow Bridge Signing and Marking

Support:

01 The placement of warning signs, object markers, delineators, and edge lines at narrow bridges is dependent upon the width of the bridge and approach roadway.

**Standard:**

02 **Narrow bridge signing and marking shall conform to the details shown in Figure 3G-104(CA).**

## Section 3G.103(CA) Median Barrier Delineation


*Guidance:*

01 *Median barriers should be delineated when the clearance between the barrier and the edge of traveled way is less than 8 feet.*

02 *In general, when delineated, it should be with an approved median barrier marker, the same color as the left edge line. They should be placed on top of the barrier at 48 foot centers.*

03 *Markers placed on the sides of barriers, near the splash zone, should be avoided because of the tendency to collect dirt which reduces their effectiveness. Refer to Figure 3G-105(CA).*

# Figure 3G-1. Examples of Delineator Placement

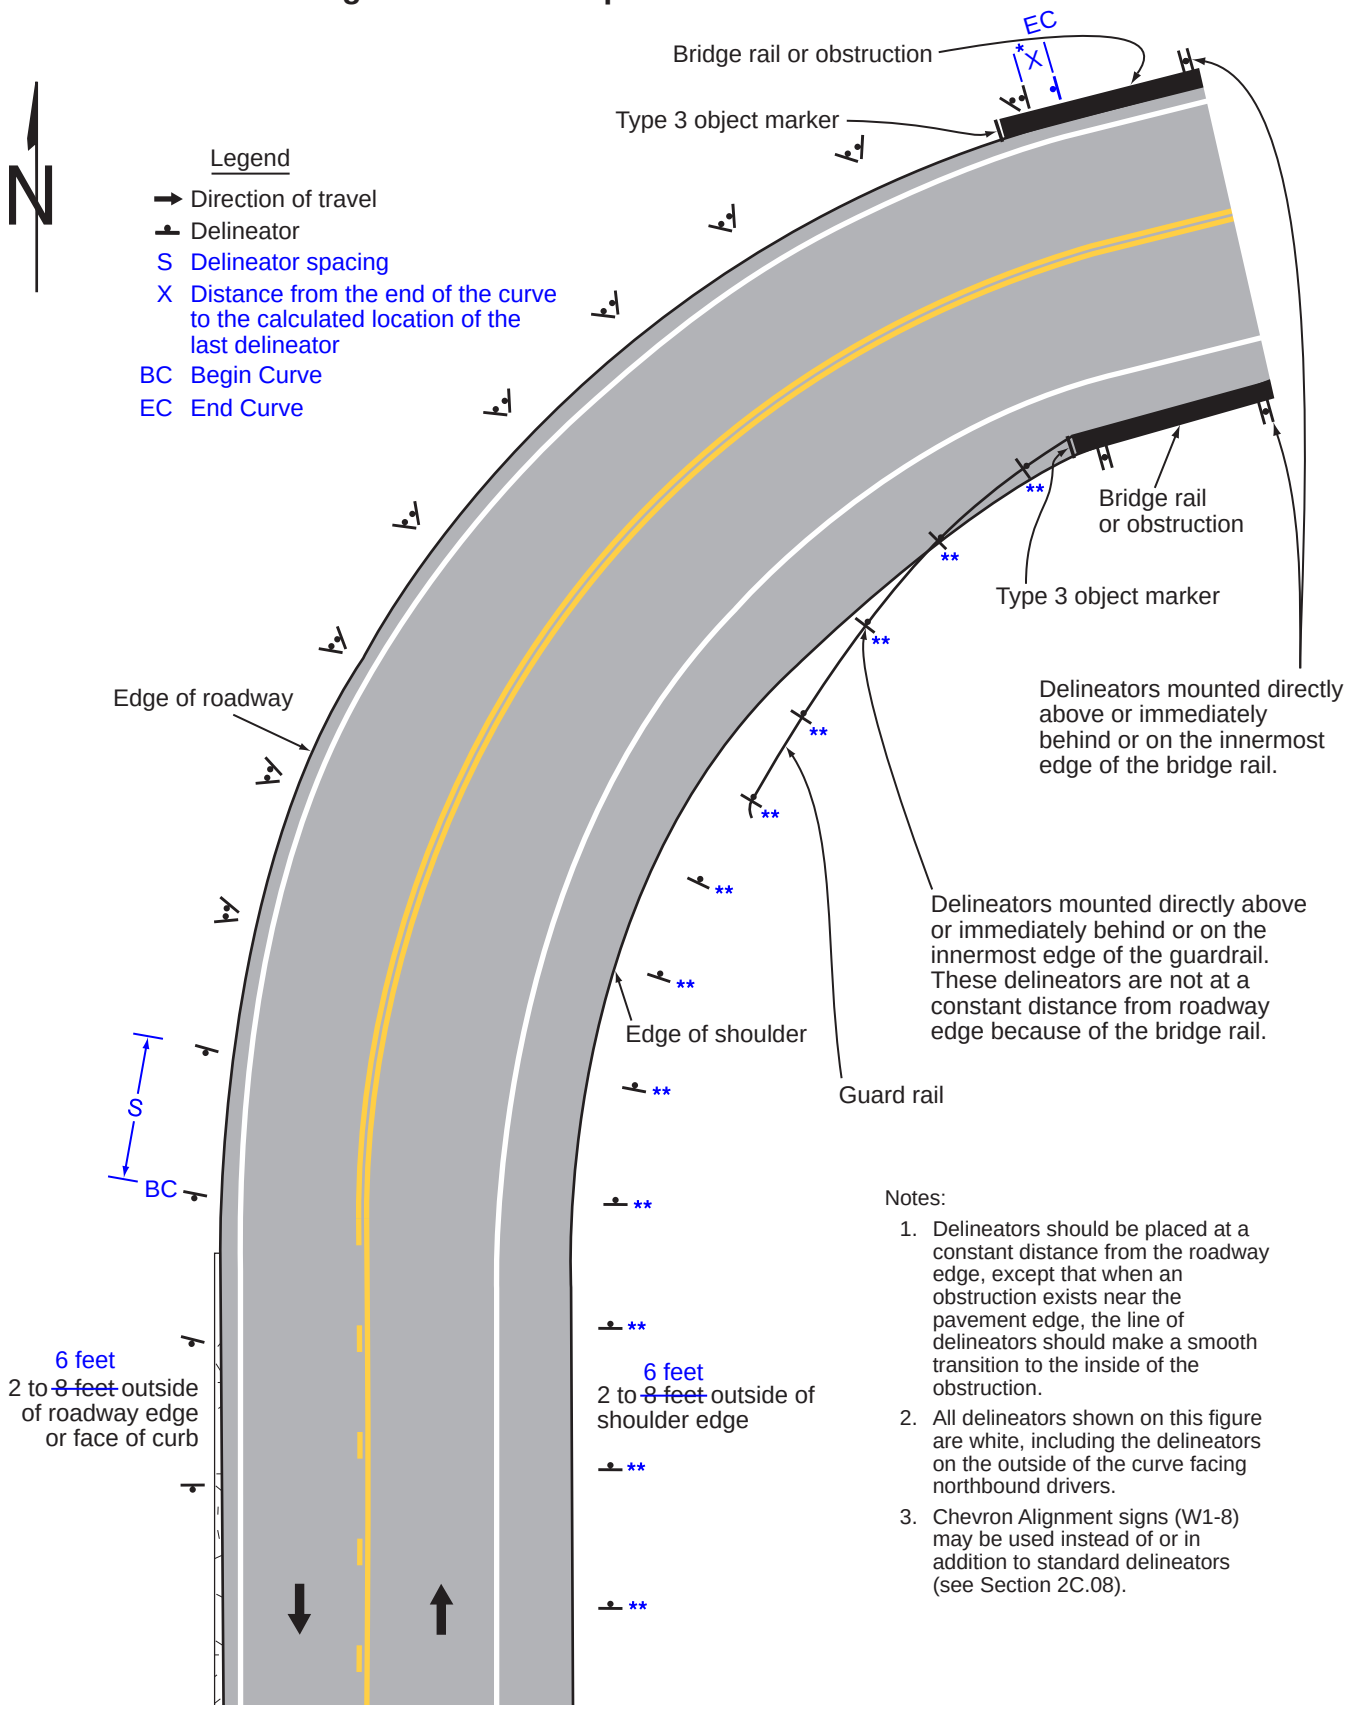



Notes:

1. Delineators should be placed at a constant distance from the roadway edge, except that when an obstruction exists near the pavement edge, the line of delineators should make a smooth transition to the inside of the obstruction.
2. All delineators shown on this figure are white, including the delineators on the outside of the curve facing northbound drivers.
3. Chevron Alignment signs (W1-8) may be used instead of or in addition to standard delineators (see Section 2C.08).


* Prorate distance "X" among all spacing so the delineator falls at the end of the curve.

** See Section 3G.03 Paragraph 10 for use of delineators when guardrail or other longitudinal barriers are present along a roadway.


## *Figure 3G-101(CA). Examples of Delineators*

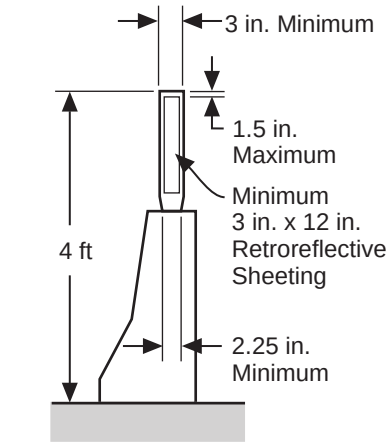



**CONCRETE BARRIER DELINEATOR (FLEXIBLE POST)**

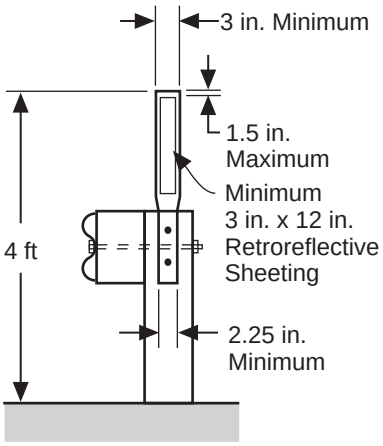


**GUARDRAIL DELINEATOR (FLEXIBLE POST)**

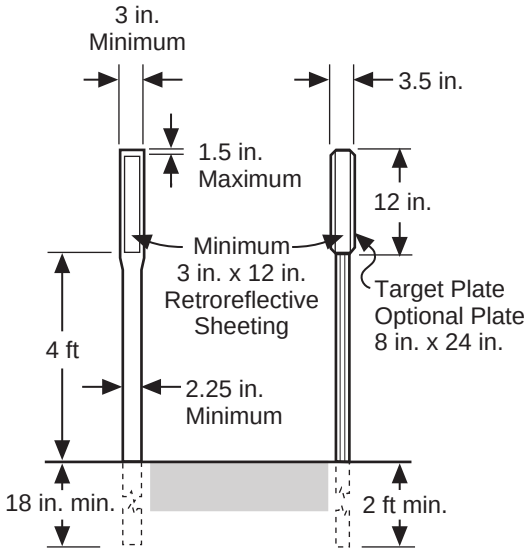


**CLASS 1 FLEXIBLE POST** **CLASS 2 METAL POST**

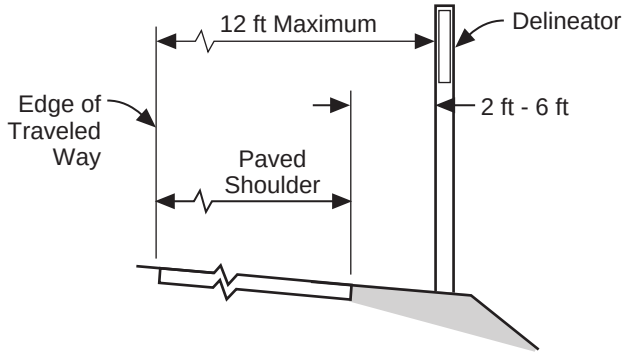


**TYPICAL DELINEATOR PLACEMENT**

**TYPES OF DELINEATORS**

| TYPE | RETROREFLECTOR COLOR | |
|---|---|---|
| | FRONT | BACK* |
| E | WHITE | WHITE |
| F | WHITE | NONE |
| G | YELLOW | NONE |
| J | RED | NONE |

* Back Retroreflector:

Class 1 Delineator - 3 in. ± square of retroreflective sheeting.


Class 2 Delineator - 3 in. ± acrylic cube-corner retroreflective element.

**NOT TO SCALE**

Notes:

1. Class 1 (Flexible Post) Delineators are standard on State highways, except for certain locations, e.g., snow or protected areas behind guardrail, etc. Refer to Section 3G.03 for post color.
2. Class 1 (Flexible Post) Delineators used in construction or maintenance zones shall be orange with white retroreflective sheeting. However, if the delineators are to remain in place as a permanent roadway feature after the construction or maintenance period, refer to Section 3G.03 for post color and retroreflective sheeting color.
3. The Type of Retroreflective Element and Class of Post is designated as E-1, F-2, etc.


## *Figure 3G-102(CA). Examples of Delineator Placement When Used at Intersections, Islands, Ramps, and Connectors (Sheet 1 of 2)*

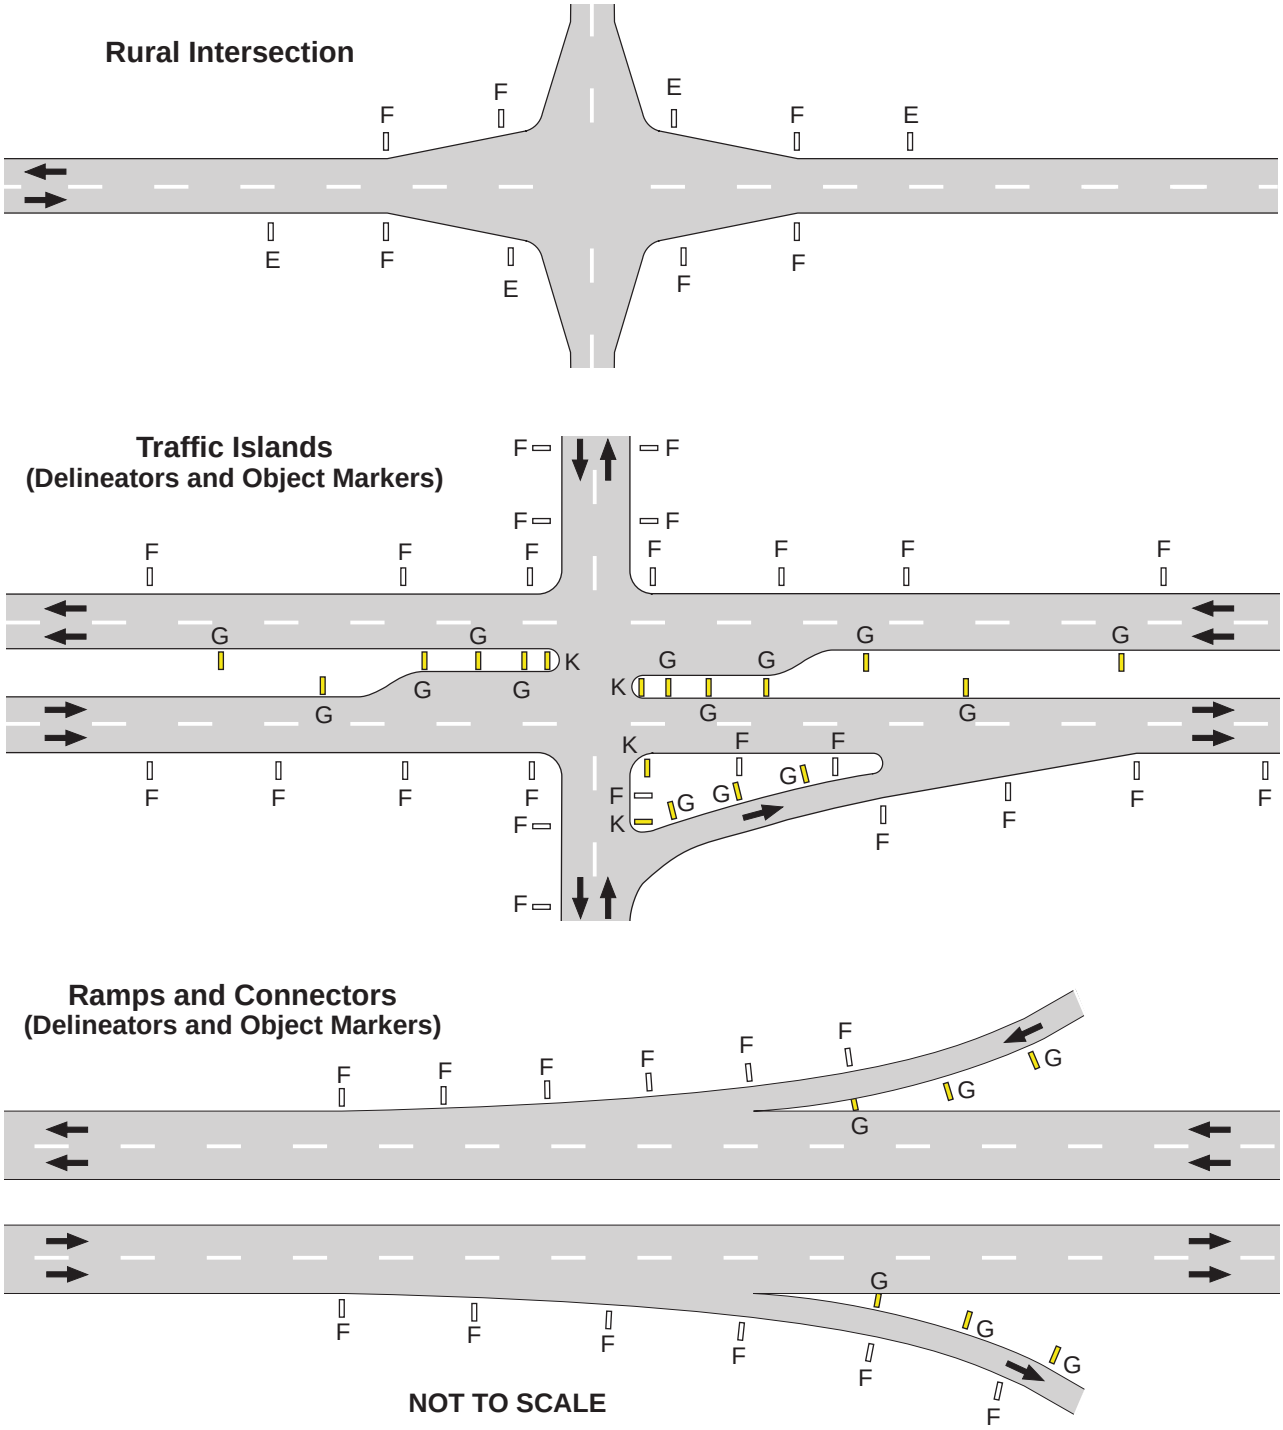


Notes:

1. For typical Delineators, see Figure 3G-101(CA).
2. For Delineator spacing on curves, see Figure 3G-1.
3. For typical Object Markers, see Figure 2C-17 and 2C-17(CA).


## *Figure 3G-102(CA). Examples of Delineator Placement When Used at Intersections, Islands, Ramps, and Connectors (Sheet 2 of 2)*

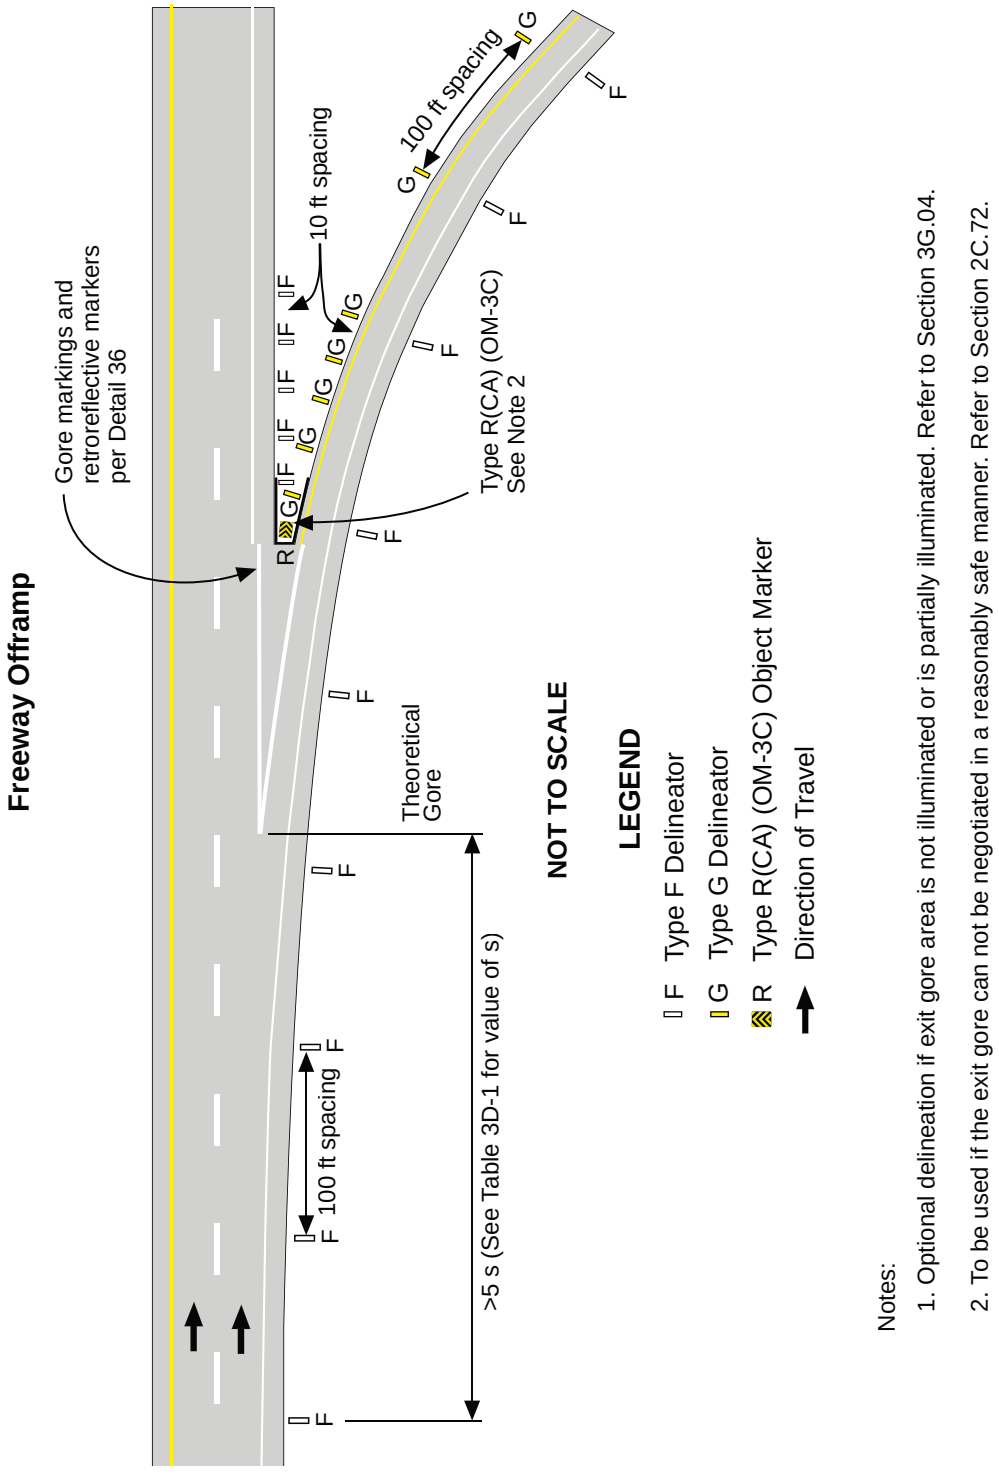


Notes:

1. Optional delineation if exit gore area is not illuminated or is partially illuminated. Refer to Section 3G.04.
2. To be used if the exit gore can not be negotiated in a reasonably safe manner. Refer to Section 2C.72.

## *Figure 3G-103(CA). Examples of Runaway Truck Ramp Signs and Markings*

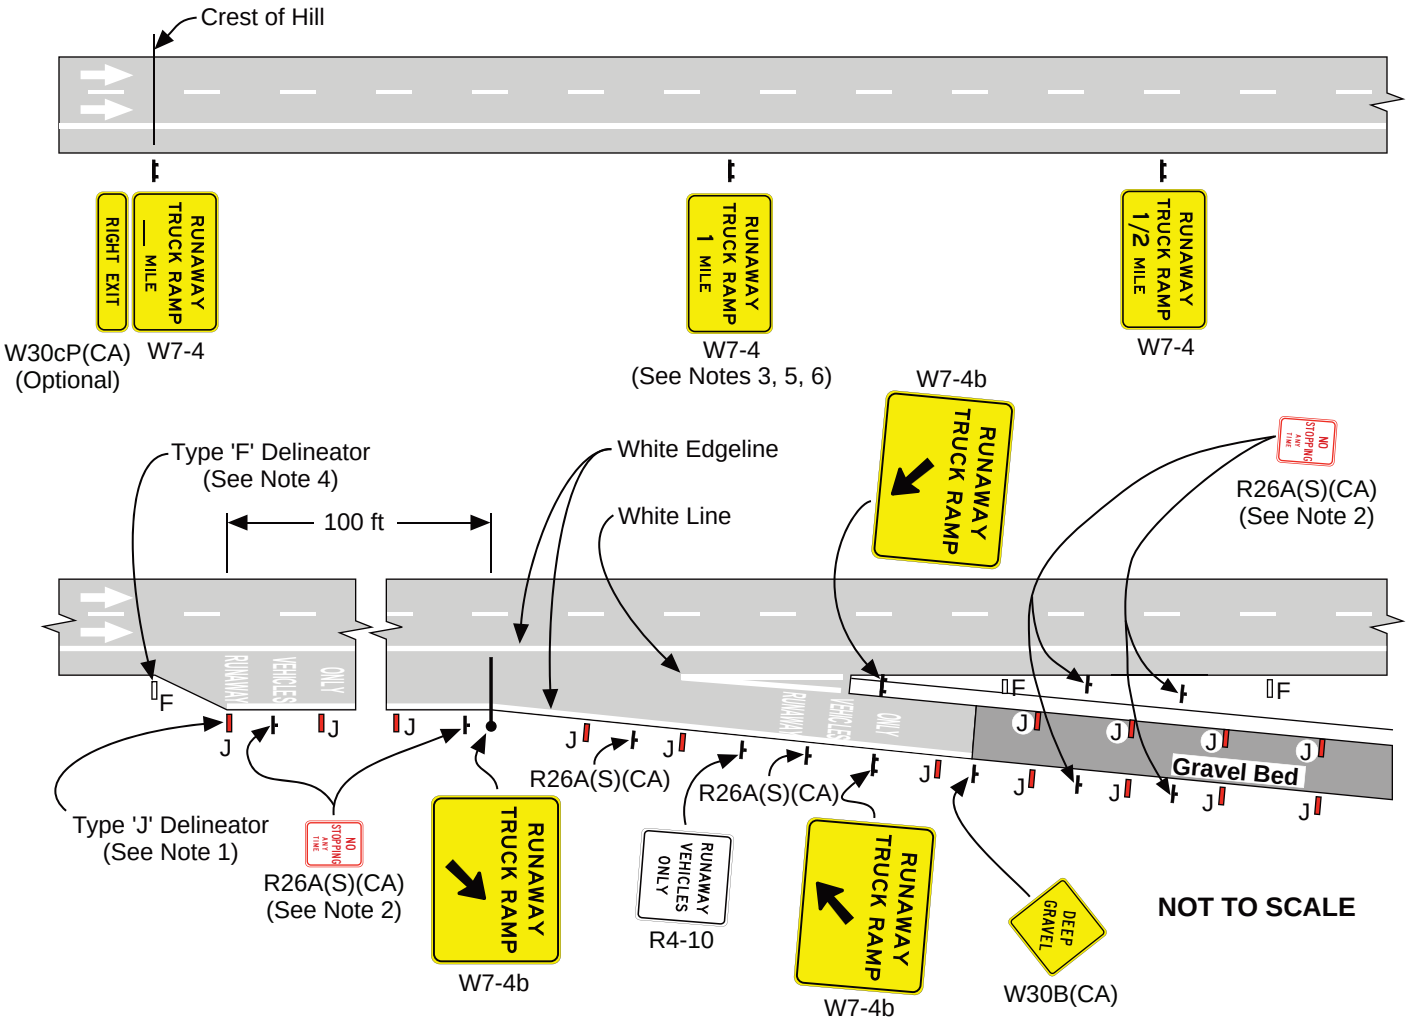


**LEGEND**

F Type F Delineator


J Type J Delineator

→ Direction of Travel

Notes:

1. Place Type 'J' Delineators at 50 ft centers. Refer to Figure 3G-101(CA).
2. Place NO STOPPING ANY TIME, R26A(S)(CA) signs at 250 ft centers.
3. Additional RUNAWAY TRUCK RAMP 1 MILE and RUNAWAY TRUCK RAMP 1/2 MILE, W7-4 signs may also be placed in the median on a one-way roadway.
4. Place three Type 'F' Delineators at 500 ft centers, preceding and following the Runaway Truck Ramp. Refer to Figure 3G-101(CA).
5. Additional advance RUNAWAY TRUCK RAMP (2 MILES, 3 MILES, etc.) W7-4 signs may be added as necessary.
6. Overhead signs may be substituted for ground mounted signs.
7. Refer to Figure 3A-101(CA) through Figure 3A-114(CA) for widths and patterns of longitudinal lines.

## *Figure 3G-104(CA). Narrow Bridge Signs and Markings (One-Way and Two-Way Roadways)*

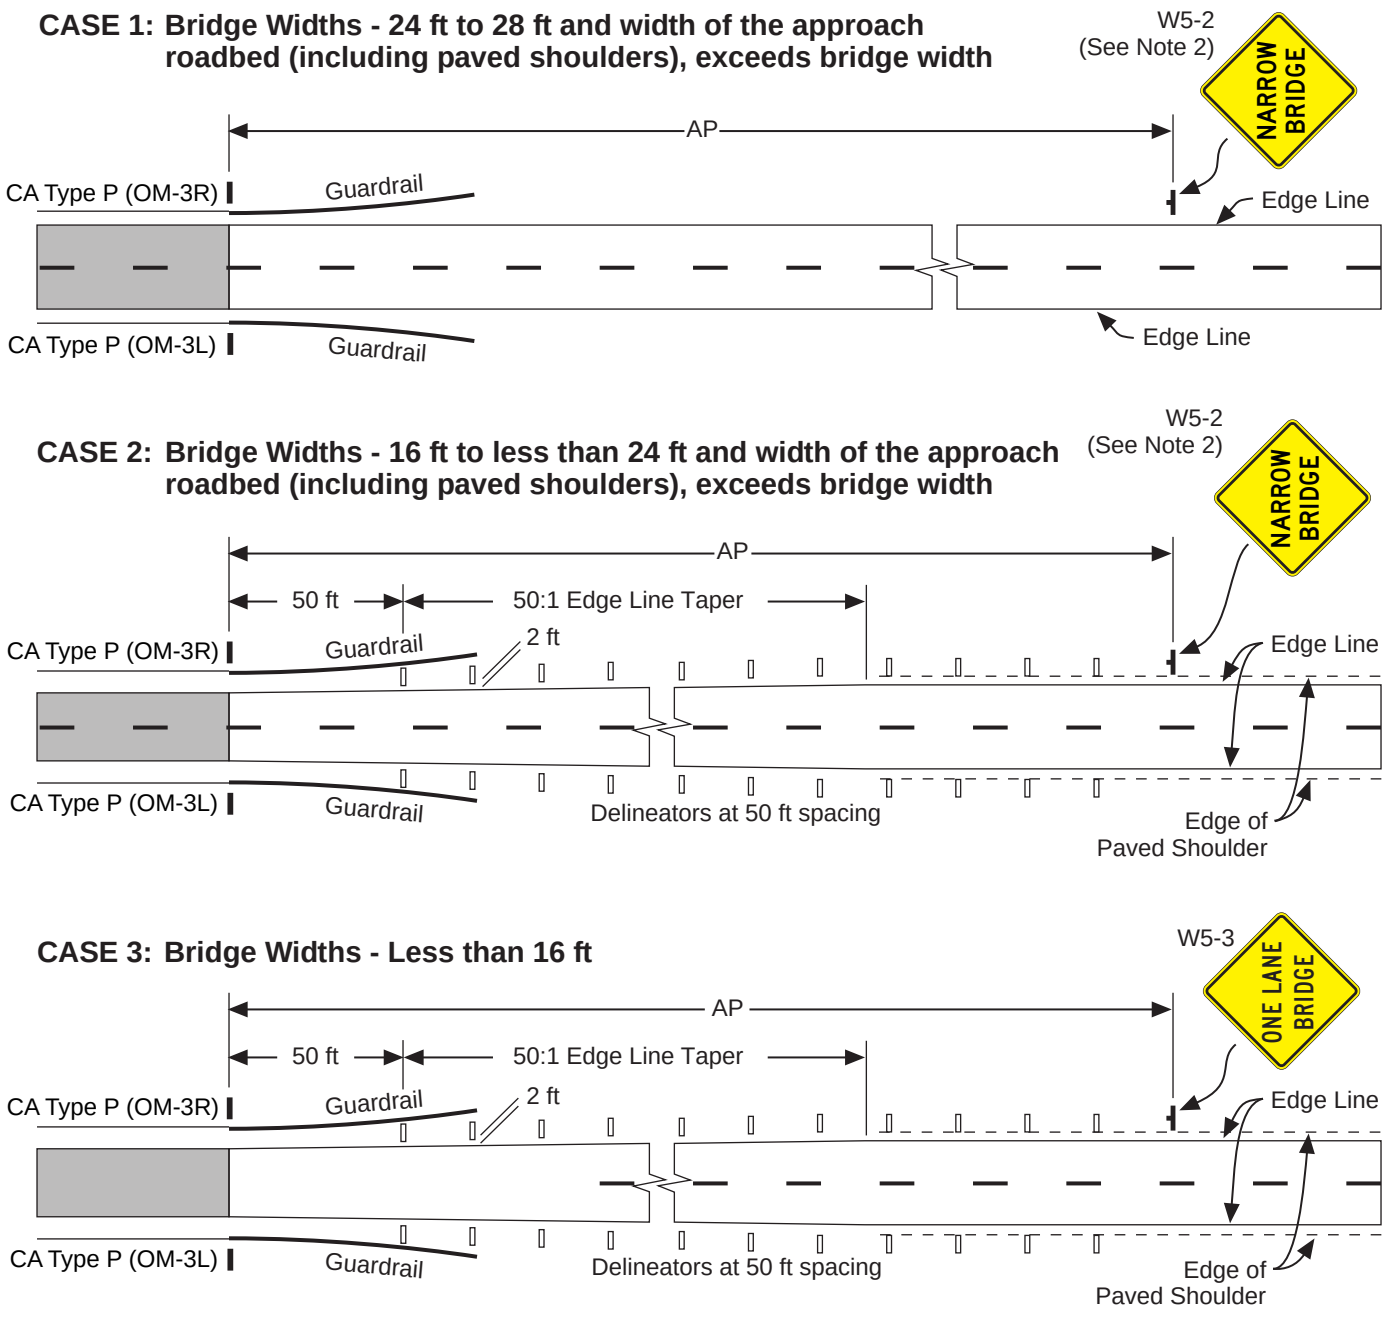


**NOT TO SCALE**


### LEGEND

| | |
|---|---|
| ▌ | CA Type P Object Marker. Refer to Figure 2C-17(CA). |
| AP | Advance Placement Distance. Refer to Section 2C.04. |
| ▯ | Delineators (Type "F" for One-Way Roadways and Type "E" for Two-Way Roadways). Refer to Figure 3G-101(CA). |

Notes:

1. The Edge Line shall be continued across all bridges on State highways.
2. The NARROW BRIDGE (W5-2) sign should be erected on the right and in the median on a one-way roadway.
3. Delineators shall be continued across the bridge in Cases 2 and 3.

## *Figure 3G-105(CA). Examples of Median Barrier Delineation*

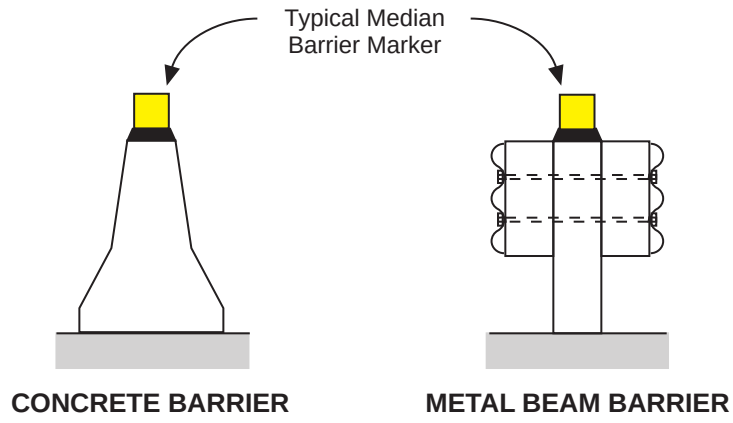


**NOT TO SCALE**

Note: Median Barrier Marker should be the same color as the left edge line.

# Table 3G-1. Approximate Spacing for Delineators on Horizontal Curves

| Radius (R) of Curve | Approximate Spacing (S) on Curve |
|---|---|
| 50 feet | 20 feet |
| 115 feet | 25 feet |
| 180 feet | 35 feet |
| 250 feet | 40 feet |
| 300 feet | ~~50 feet~~ 40 feet |
| 400 feet | ~~55 feet~~ 40 feet |
| 500 feet | ~~65 feet~~ 40 feet |
| 600 feet | ~~70 feet~~ 40 feet |
| 700 feet | 75 feet |
| 800 feet | 80 feet |
| 900 feet | 85 feet |
| 1,000 feet | 90 feet |

Notes:
1. Spacing for specific radii may be interpolated from table.
2. The minimum spacing should be 20 feet.
3. The spacing on curves should not exceed 300 feet.
4. In advance of or beyond a curve, and proceeding away from the end of the curve, the spacing of the first delineator is 2S, the second 3S, and the third 6S, but not to exceed 300 feet.
5. S refers to the delineator spacing for specific radii computed from the formula $S=3\sqrt{R-50}$.
6. The distances for S shown in the table above were rounded to the nearest 5 feet.

# CHAPTER 3H. COLORED PAVEMENT

## Section 3H.01 Standardization of Application

Support:

01 Colored pavements consist of differently-colored road paving materials, such as colored asphalt or concrete. Other surface treatments can be applied to the surface of a road, island, or area outside the traveled way to simulate a colored pavement.

02 If non-retroreflective colored pavement is used as a purely aesthetic surface treatment (see Section 3H.03) within the provisions of this Chapter and are not intended to communicate regulations, warnings, guidance, or other information to road users, the colored pavement is not considered to be a traffic control device, even if it is located between the lines of a crosswalk.

**Standard:**

03 **If colored pavement is used within the traveled way, on flush or raised islands, or on shoulders to communicate regulations, warnings, guidance, or other information to road users, or if retroreflectivity is used, the colored pavement shall be considered a traffic control device and shall be limited to the colors and applications specified in this Chapter.**

04 **Except as provided in Paragraph 5 of Section 3H.07, colored pavement shall only be used if the corresponding regulations, warnings, or guidance are applicable at all times.**

*Guidance:*

05 *Colored pavements used as traffic control devices should only be used where the color pavement contrasts significantly with adjoining paved areas.*

Support:

06 The chromaticity coordinates that define the ranges of acceptable colors for traffic control devices are found in the Appendix to Subpart F of 23 CFR 655.

**Standard:**

07 **If used, colored pavement shall only be used to supplement other markings as provided in this Manual.**

Support:

08 Longitudinal pavement markings, crosswalks, pavement marking symbols, and elongated route markers are not considered colored pavements.

## Section 3H.02 Materials

Option:

01 Colored pavements may be either retroreflective or non-retroreflective, in accordance with the provisions of this Chapter for specific applications.

*Guidance:*

02 *If surface treatments are applied to the surface of a road, island, or other area outside the traveled way to simulate a colored pavement, pavement marking materials should be selected that will minimize loss of traction for road users (see Paragraph 2 of Section 3A.02).*

Support:

03 Providing for retroreflectivity, such as incorporating glass beads, can affect the skid resistance of pavement markings.

04 Installation of colored pavement to one lane or an area or portion of a multi-lane traveled way can create differentials in skid resistance values between the areas of colored pavement and non-colored pavement that might be unexpected by the road user.

## Section 3H.03 Aesthetic Surface Treatments

Support:

01 Aesthetic surface treatments are sometimes used between the transverse lines within a crosswalk, in islands, in medians, in shoulders, within sidewalk extensions designated by pavement markings, or in other areas outside of the traveled way.

02 Common examples of materials used as aesthetic surface treatments include brick, paving bricks, paving stones, or

other materials designed to simulate such paving. Some examples of geometries for aesthetic surface treatments include honeycomb, lattice, mesh, grid, and regular polygon patterns.

03 Surfaces with individual units laid out of plane and those that are heavily-textured, rough, or chamfered, could increase rolling resistance and subject pedestrians who use wheelchairs to the effects of vibration; it is desirable to minimize surface discontinuities.

04 Common examples of colors for aesthetic surface treatments incorporated into the material or geometry are brick red, rust, brown, burgundy, clay, tan, or similar earth-tone equivalents (see Figure 3H-1).

**Standard:**

05 **Aesthetic surface treatments shall not interfere with traffic control devices.**

06 **Aesthetic surface treatments shall not be of a surface that can confuse pedestrians with vision disabilities that rely on tactile treatments or cues for navigation.**

07 **Colors used for aesthetic surface treatments shall be outside the chromaticity coordinates that define the ranges of acceptable colors for traffic control devices.**

08 **Patterns that constitute a purely aesthetic surface treatment shall be devoid of advertising and shall not contain elements of retroreflectivity.**

09 **Patterns that constitute a purely aesthetic surface treatment for the interior area of a crosswalk shall not be designed to encourage road users to remain in the crosswalk, engage or interact with the pattern, or otherwise inhibit users from crossing the street in a safe and efficient manner.**

*Guidance:*

10 *Aesthetic surface treatments should not use colors or patterns that degrade the contrast of markings used to delineate an area, or that might be mistaken by road users as a traffic control application.*

11 *To provide contrast, a gap of at least one-half the width of the white transverse line used to establish the crosswalk, but not less than 6 inches, should be used between the white crosswalk lines and the aesthetic surface treatment, such as unmarked pavement or a black contrast line (see Section 3A.03).*

12 *To provide contrast, a gap of at least the width of the longitudinal line used to establish the area should be used between the longitudinal line and the aesthetic surface treatment, such as unmarked pavement or a black contrast line (see Section 3A.03). If the longitudinal line is a double line, the gap should be at least the width of one of the lines that makes up the double line.*

13 *Aesthetic surface treatments should not contain pictographs, illustrations, or symbols.*

Support:

14 Refer to FHWA's List of Known Errors for error in Paragraph 13 text. Refer to Section 1A.04 for more details.

## Section 3H.04 Yellow-Colored Pavement

Support:

01 Yellow-colored pavement is used to enhance the conspicuity of areas separating traffic traveling in opposite directions of travel and the left-hand edge of the roadway.

**Standard:**

02 **If used, yellow-colored pavement shall be limited to:**

- **A. Flush or raised median islands separating traffic flows in opposite directions,**
- **B. Left-hand shoulders of divided highways, and**
- **C. Left-hand shoulders of one-way streets or ramps.**

03 **Yellow-colored pavement shall not be incorporated into elements of the roadway that function as reversible lanes or two-way left-turn lanes.**

04 **Yellow-colored pavement shall not be used on channelizing islands where traffic travels in the same general direction on both sides.**

Option:

05 Yellow-colored pavement may be installed for the entire length of the roadway, island, or shoulder, or for only a portion or portions of the roadway, island, or shoulder.

Support:

06 An example of an application of yellow-colored pavement is shown in Figure 3H-2.

## Section 3H.05 White-Colored Pavement

Support:

01 White-colored pavement is used to enhance the conspicuity of areas separating traffic traveling in the same direction of travel and the right-hand edge of the roadway.

**Standard:**

02 **If used, white-colored pavement shall be limited to:**

- **A. Flush or raised channelizing islands where traffic passes on both sides in the same general direction,**
- **B. Right-hand shoulders,**
- **C. Exit gore areas, and**
- **D. Entrance gore areas.**

*Guidance:*

03 *When used on right-hand shoulders, white-colored pavement should be limited to areas not intended for use by motor vehicle traffic except those shoulders designated for emergency use.*

Option:

04 White-colored pavement may be installed for the entire length of the roadway, island, or shoulder, or for only a portion or portions of the roadway, island, or shoulder.

05 White-colored pavement may be used instead of chevron markings (see Sections 3B.13 and 3B.25) in neutral areas.

Support:

06 An example of an application of white-colored pavement is shown in Figure 3H-3.

## Section 3H.06 Green-Colored Pavement for Bicycle Facilities

Support:

01 Green-colored pavement is used to enhance the conspicuity of locations where bicyclists are expected to operate, and areas where bicyclists and other traffic might have potentially conflicting, weaving, or crossing movements. Green-colored pavement is also used to enhance the conspicuity of word, symbol, and/or arrow pavement markings when these markings are used in certain bicycle facilities.

**Standard:**

02 **If used, green-colored pavement shall be limited to:**

- **A. Bicycle lanes (see Sections 9E.01, 9E.06, 9E.07, and 9E.08),**
- **B. Extensions of bicycle lanes through intersections (see Section 9E.03),**
- **C. Extensions of bicycle lanes through areas where motor vehicles enter a mandatory turn lane in which motor vehicles must weave across bicyclists in bicycle lanes (see Section 9E.02),**
- **D. Two-stage bicycle turn boxes (see Section 9E.11),**
- **E. Bicycle Boxes (see Section 9E.12), and**
- **F. As a background for bicycle detector symbols (see Section 9E.15).**

03 **Green-colored pavement shall not be:**

- **A. Incorporated into electric-vehicle parking stations or parking stalls,**
- **B. Incorporated into crosswalks (see Chapter 3C),**
- **C. Used as a background for shared-lane markings (see Section 9E.09), or**
- **D. Used instead of the required markings for bicycle facilities (see Chapter 9E).**

04 **If used, the pattern of the green-colored pavement supplementing dotted extension lines shall match the pattern of the dotted lines, thus filling in only the areas that are directly between a pair of dotted line segments. If used, the pattern of the green-colored pavement supplementing a dotted longitudinal line, which defines a bicycle lane (see Paragraph 11 of Section 9E.02), shall match the pattern of the dotted line, thus filling in only the areas that are directly between a line segment and the curb, or, in the absence of a curb, the edge of the roadway.**

*Guidance:*

05 *If green-colored pavement is used within separated bicycle lanes on an independent alignment, it should be used only at the entrances to those facilities from roadways open to public travel or at conflict, weaving, or crossing locations.*

06 *If green-colored pavement is used within shared-use paths, it should be used only where pedestrian and bicyclist movements are separated and for only a portion (or portions) of the path designated for bicyclist use.*

Option:

07 Green-colored pavement may be installed for the entire length of a bicycle lane or bicycle lane extension or for only

a portion (or portions) of the bicycle lane or bicycle lane extension.

08 Green-colored pavement may be installed for the entire length of a physically-separated bikeway within the roadway or for only a portion (or portions) of the physically-separated bikeway within the roadway.

*Guidance:*

09 *Appropriate regulatory (see Chapter 9B) or guide signing (see Chapter 9D) should be installed to provide related information to the presence of the colored pavement.*

Support:

10 Examples of applications of green-colored pavement are shown in Figure 3H-4.

## Section 3H.07 Red-Colored Pavement for Public Transit Systems

Support:

01 Red-colored pavement is used to enhance the conspicuity of locations, station stops, or travel lanes in the roadway exclusively reserved for vehicles of public transit systems or multi-modal facilities where public transit is the primary mode. These public transit vehicles include buses, streetcars, trolleys, light-rail trains, and rapid transit fleets.

Option:

02 Red-colored pavement may be used where engineering judgment determines that one or more of the following conditions are expected to result from its application:

A. Increased travel speeds will be expected by the public transport vehicle after an exclusive lane or facility is provided,
B. Reduced overall service time through the corridor will be expected by the public transport vehicle,
C. Decreased rates of illegal parking or occupation of the transit or multi-mode lane or facility will be expected.

**Standard:**

03 **If used, red-colored pavement shall be applied only in lanes, areas, or locations where general- purpose traffic is not allowed to use, queue, wait, idle, or otherwise occupy the lane, area, or location where red-colored pavement is used.**

04 **Red-colored pavement shall be installed for the full width of the lane.**

Option:

05 Red-colored pavement may be used for full-time or part-time operations.

06 Red-colored pavement may be installed for the entire length of a restricted lane or for only a portion (or portions) of the restricted lane.

07 Red-colored pavement may be installed in a broken pattern where entrance into the transit lane is permitted by general traffic, for example where general traffic is allowed in a transit lane in advance of a turn.

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 7 text. Refer to Section 1A.04 for more details.

**Standard:**

08 **Regulatory signs (see Sections 2B.02 and 2G.03) shall be used to establish the allowable use of the lane, area, or location. Regulatory signs shall also be used when it is determined that other vehicles will be allowed to enter the lane to turn or bypass queues.**

*Guidance:*

09 *If red-colored pavement is used on public transit facilities separated from the roadway or on facilities on an independent alignment, it should be used only at the entrances to those facilities from roadways open to public travel.*

Support:

10 Examples of applications of red-colored pavement are shown in Figure 3H-5.

## Section 3H.08 Purple-Colored Pavement for Electronic Toll Collection (ETC) Account-Only Preferential Lanes

**Standard:**

01 **Purple-colored pavement shall be limited to:**

**A. Lanes on the approach to a toll plaza where the lane is restricted to use only with a registered ETC account; and**
**B. Lanes or approaches to an open-road tolling (ORT) collection facility that bypasses the physical**

**toll plaza, where the ORT facility is restricted for use only by vehicles with registered ETC accounts.**

02 **Purple-colored pavement shall not be used in an approach lane that also facilitates additional payment methods downstream.**

03 **If used approaching a physical toll plaza, purple-colored pavement shall be flanked by white solid longitudinal lines that establish the toll lane.**

04 **If used on an ORT collection facility that bypasses the physical toll plaza, purple-colored pavement shall be flanked by appropriate edge lines, and if applicable in multi-lane bypasses, appropriate longitudinal solid or broken white lane lines.**


Option:

05 Purple-colored pavement may be installed for the entire length of a toll lane or ORT collection facility or for only a portion (or portions) of the toll lane or ORT collection facility.


Support:

06 Figure 3H-6 illustrates examples of purple-colored pavement for use at toll plazas.


## Figure 3H-1. Aesthetic Treatments for Transverse Crosswalks

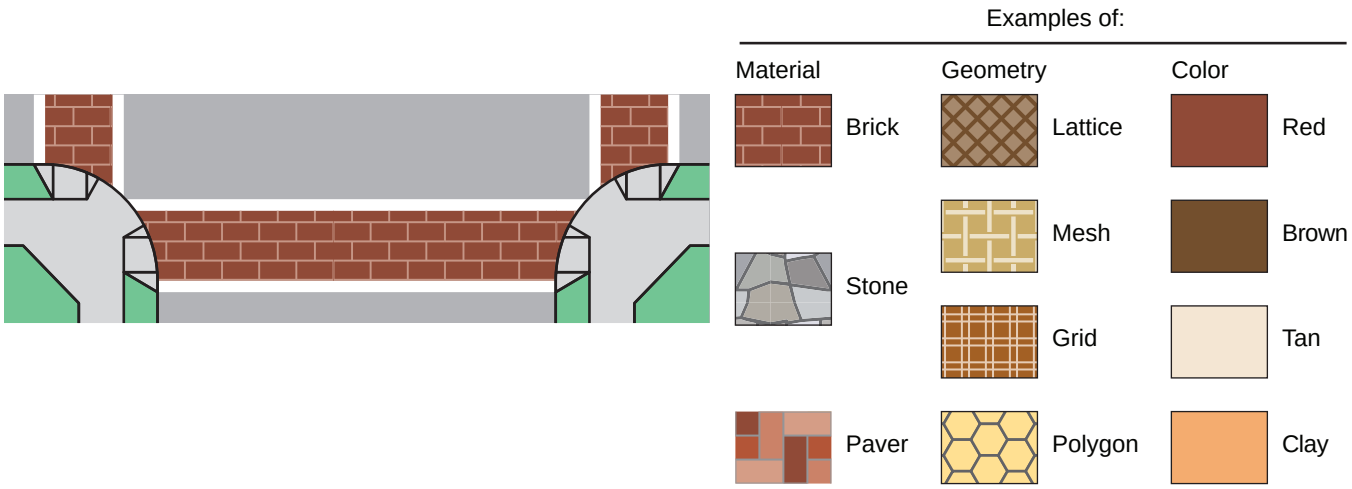

## Figure 3H-2. Examples of Yellow-Colored Pavement Applications

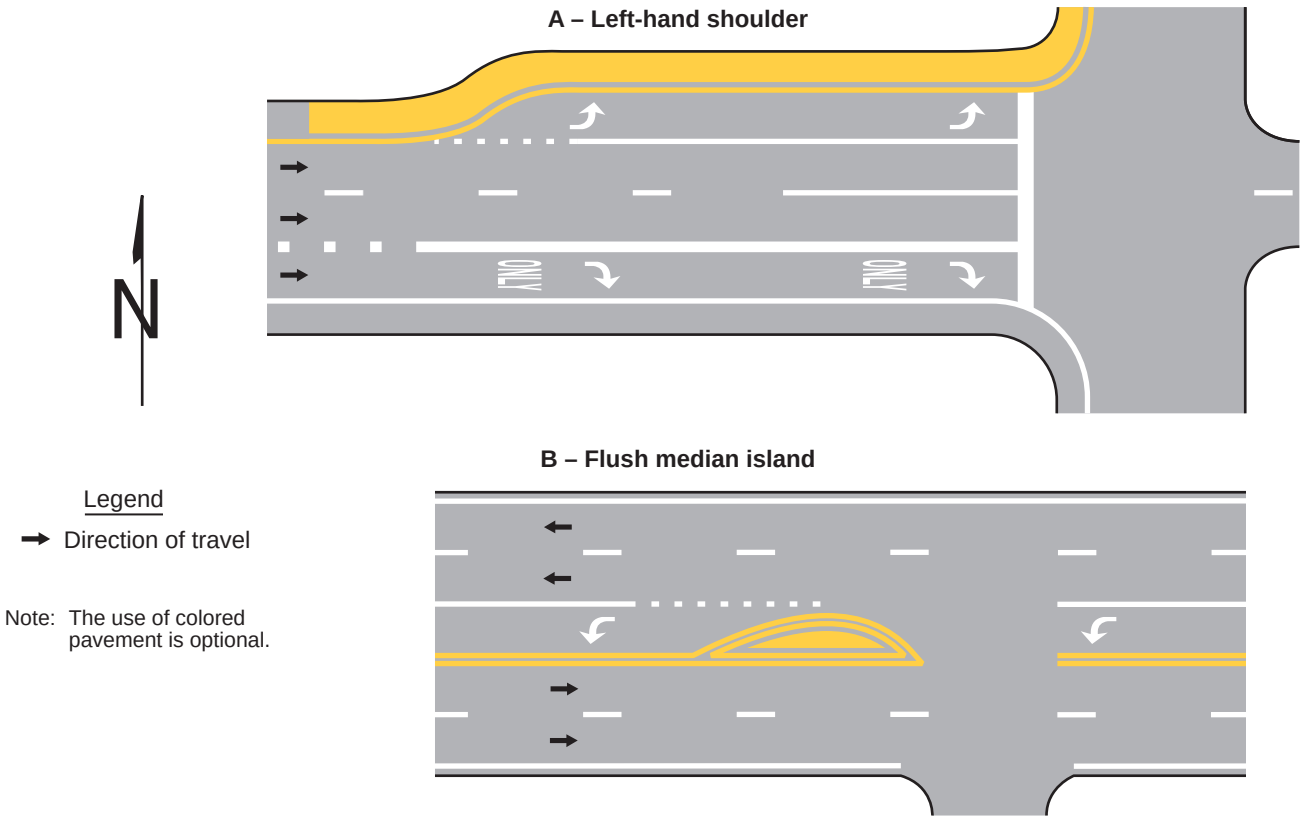

## Figure 3H-3. Examples of White-Colored Pavement Applications

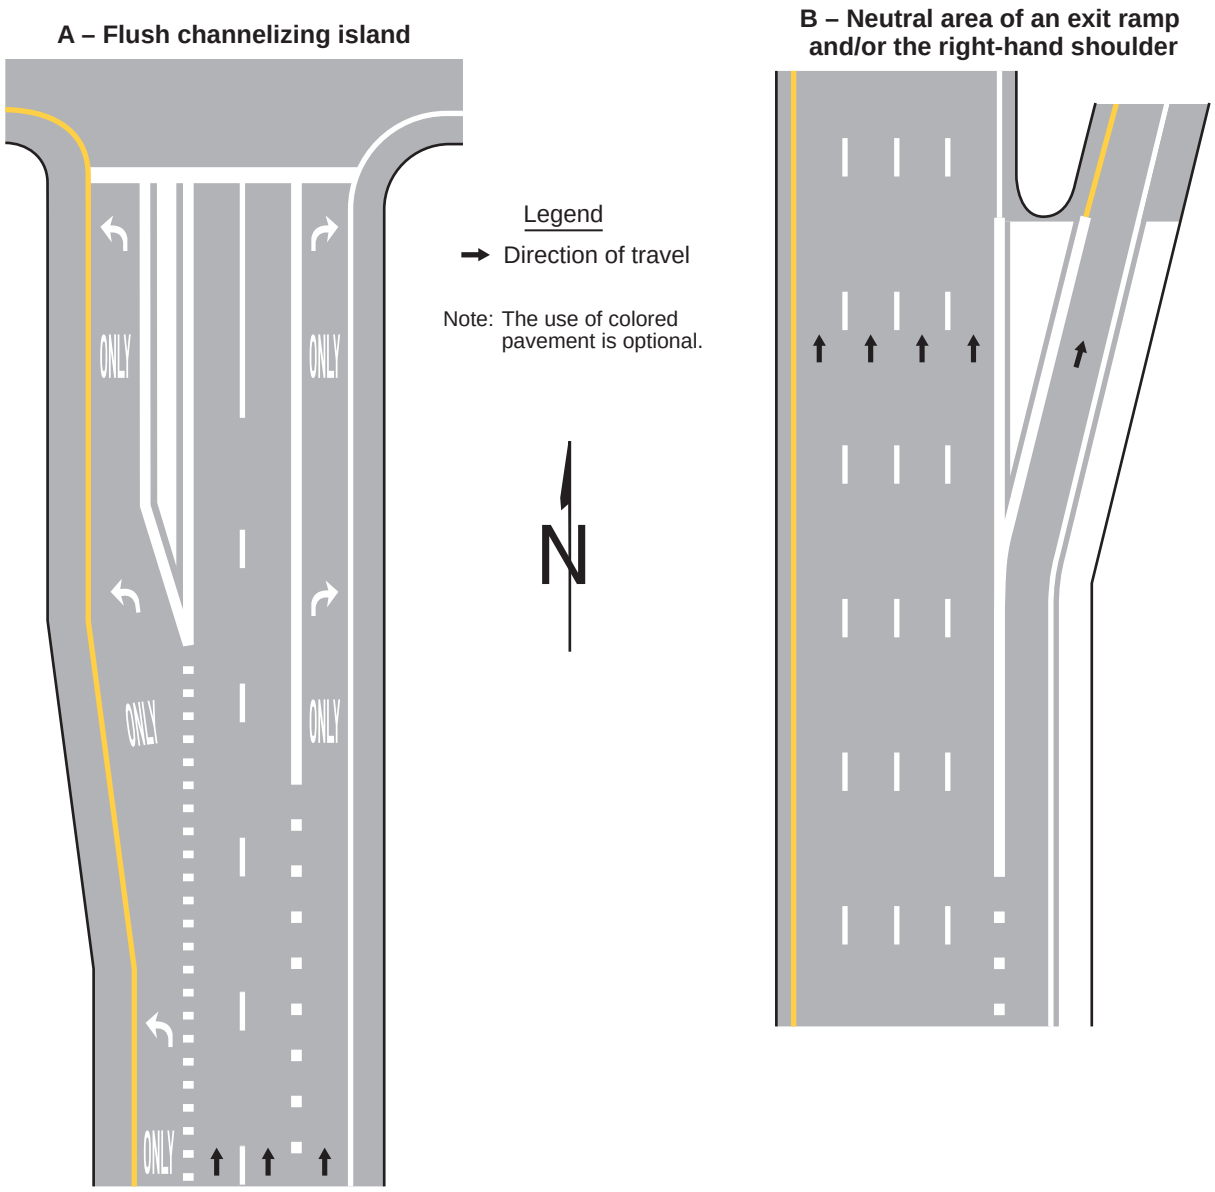

# Figure 3H-4. Examples of Green-Colored Pavement Applications


**A – Applied to the entire corridor**




**B – Limited to the bicycle symbol and arrow**



**C – Applied approaching and departing an intersection**

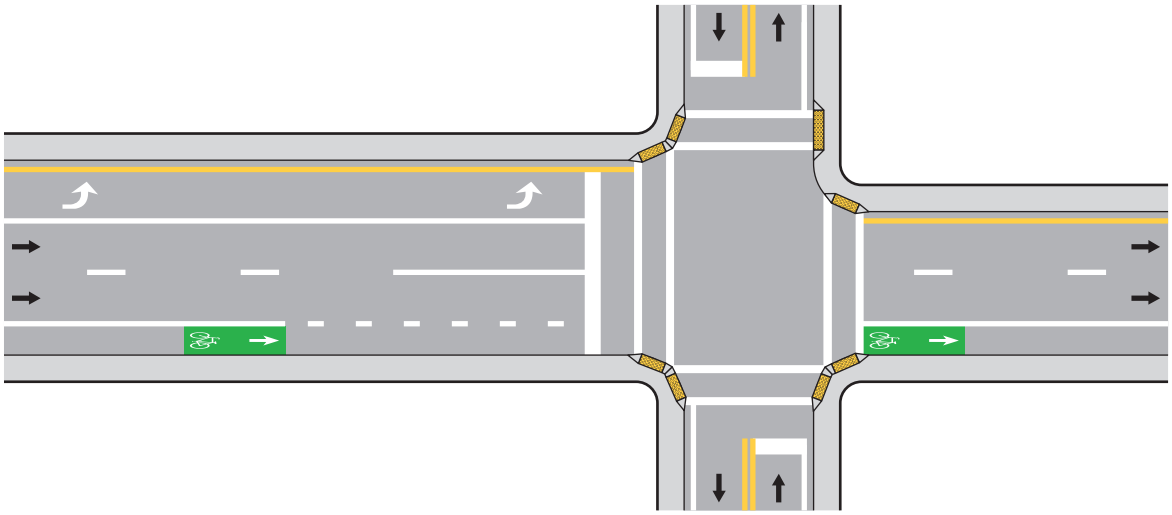

**D – Applied supplementing the dotted line approaching intersections and/or the dotted extensions of bicycle lanes through intersections**

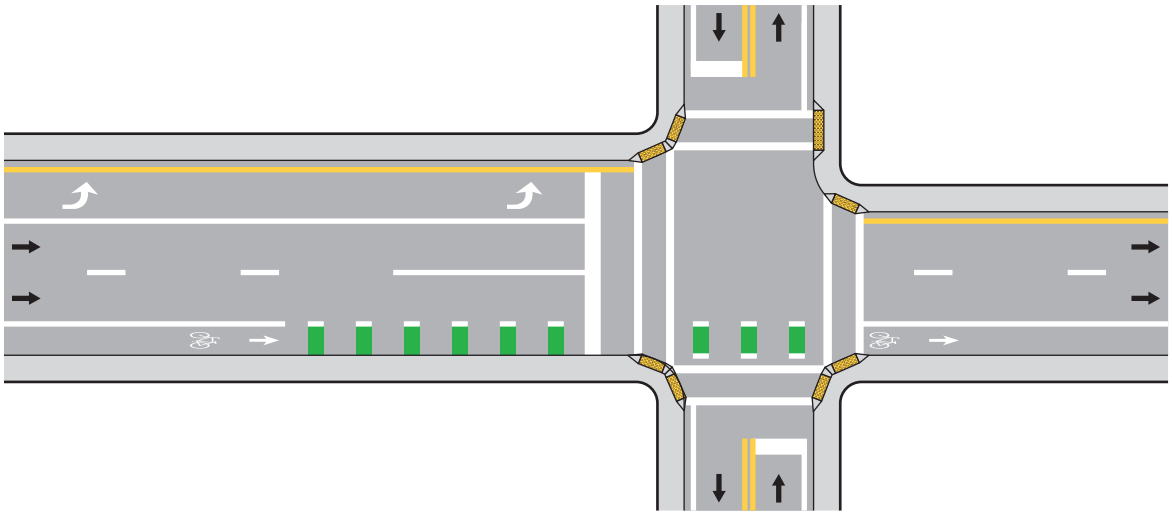


Notes:

1. The use of colored pavement is optional.
2. See Chapter 9E for bicycle facility markings.

Legend

→ Direction of travel

# Figure 3H-5. Examples of Red-Colored Pavement Applications

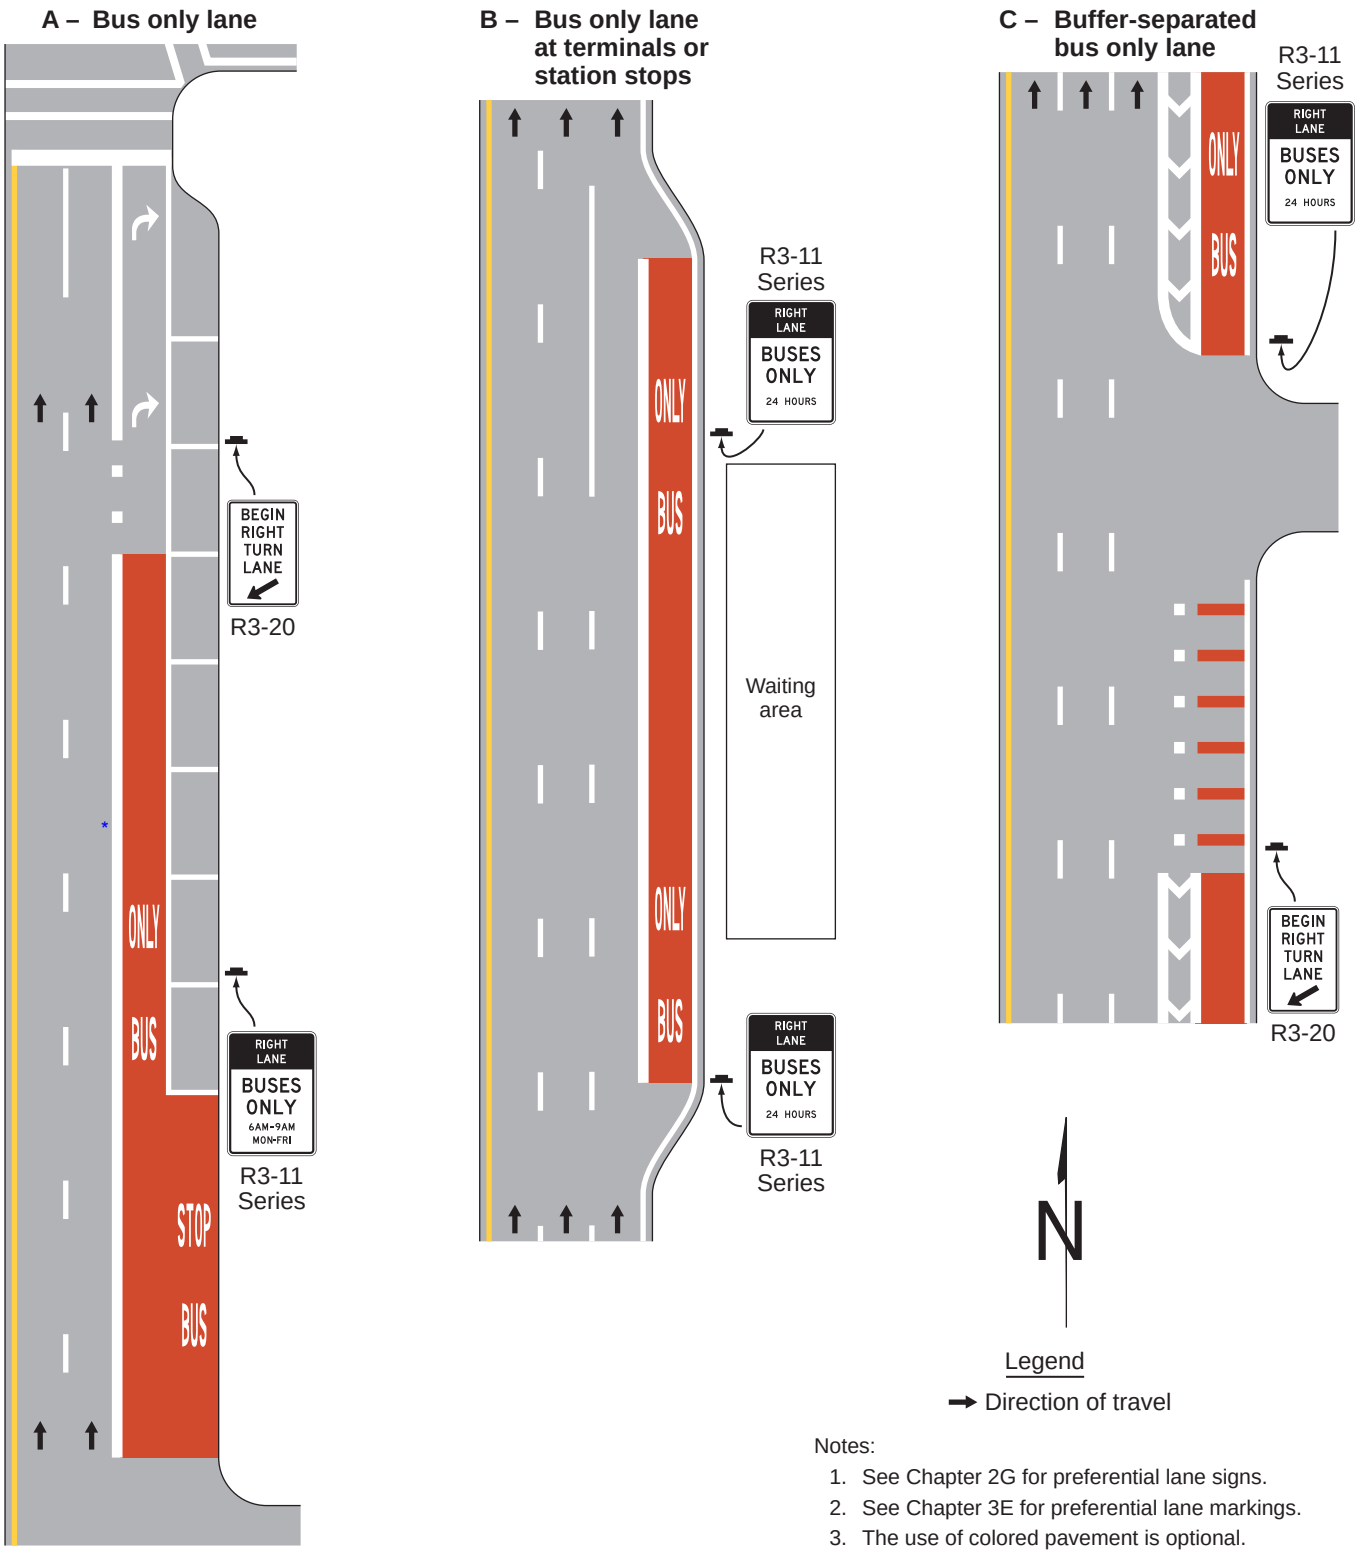



Notes:

1. See Chapter 2G for preferential lane signs.
2. See Chapter 3E for preferential lane markings.
3. The use of colored pavement is optional.

* Refer to FHWA's List of Known Errors for error in Drawing A. Refer to Section 1A.04 for more details.

## Figure 3H-6. Examples of Purple-Colored Pavement Applications (Sheet 1 of 2)

**A – Electronic toll collection only toll plaza lane**

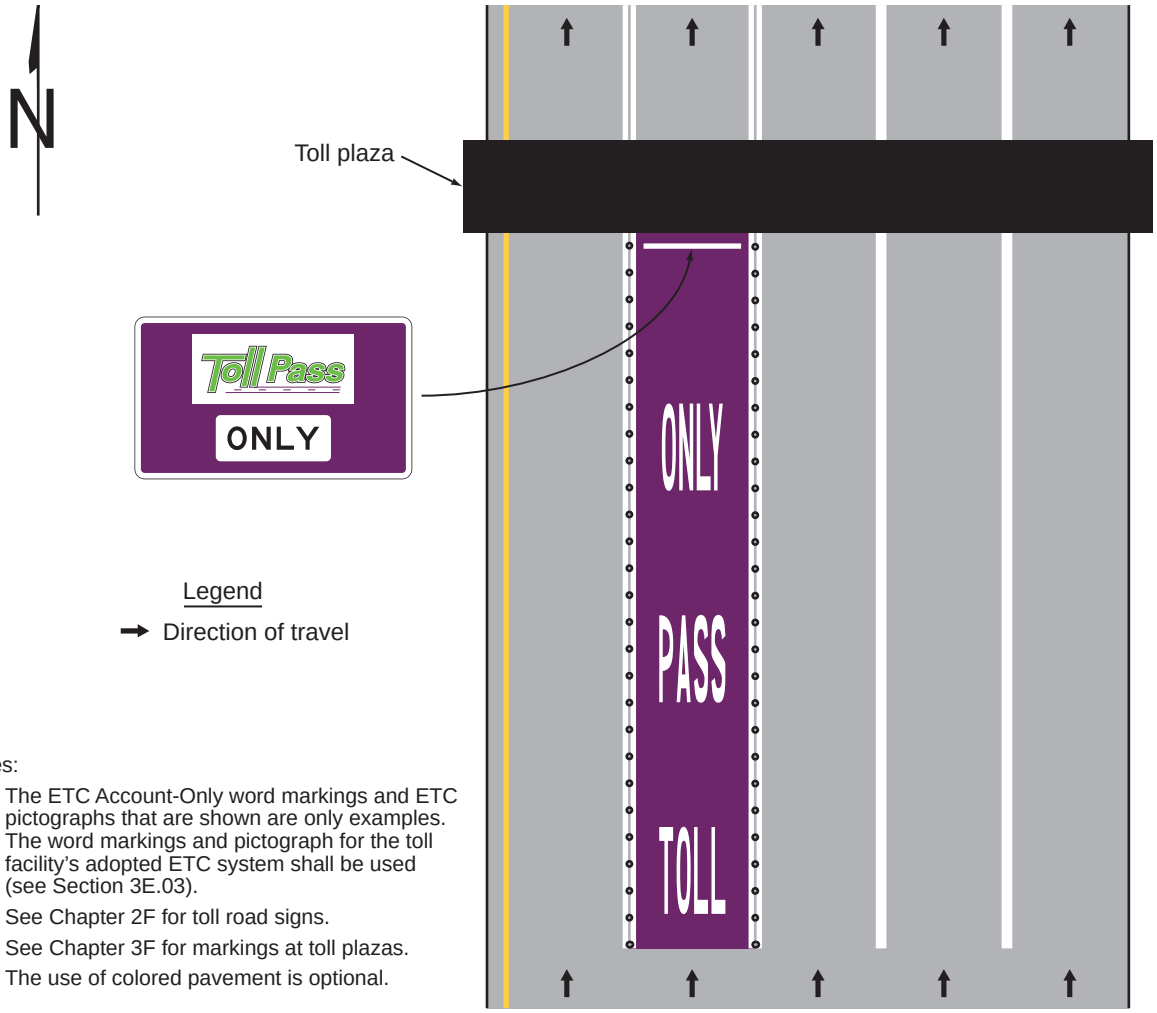



Notes:


1. The ETC Account-Only word markings and ETC pictographs that are shown are only examples. The word markings and pictograph for the toll facility's adopted ETC system shall be used (see Section 3E.03).
2. See Chapter 2F for toll road signs.
3. See Chapter 3F for markings at toll plazas.
4. The use of colored pavement is optional.

## Figure 3H-6. Examples of Purple-Colored Pavement Applications (Sheet 2 of 2)

**B – Open-road electronic toll collection bypass with upstream option lane**

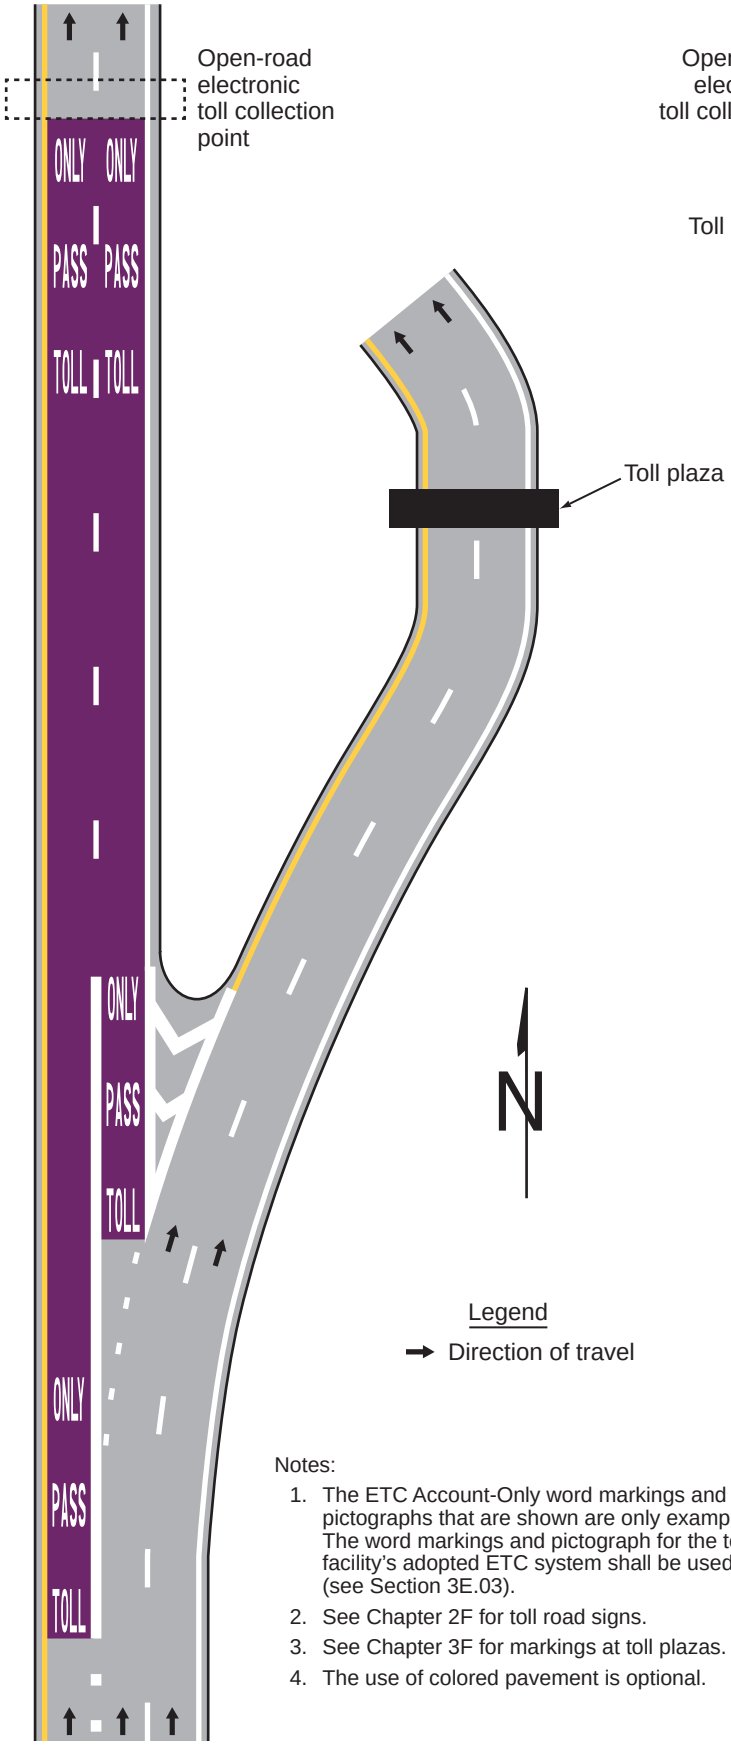


**C – Open-road electronic toll collection bypass with dedicated approach lanes**

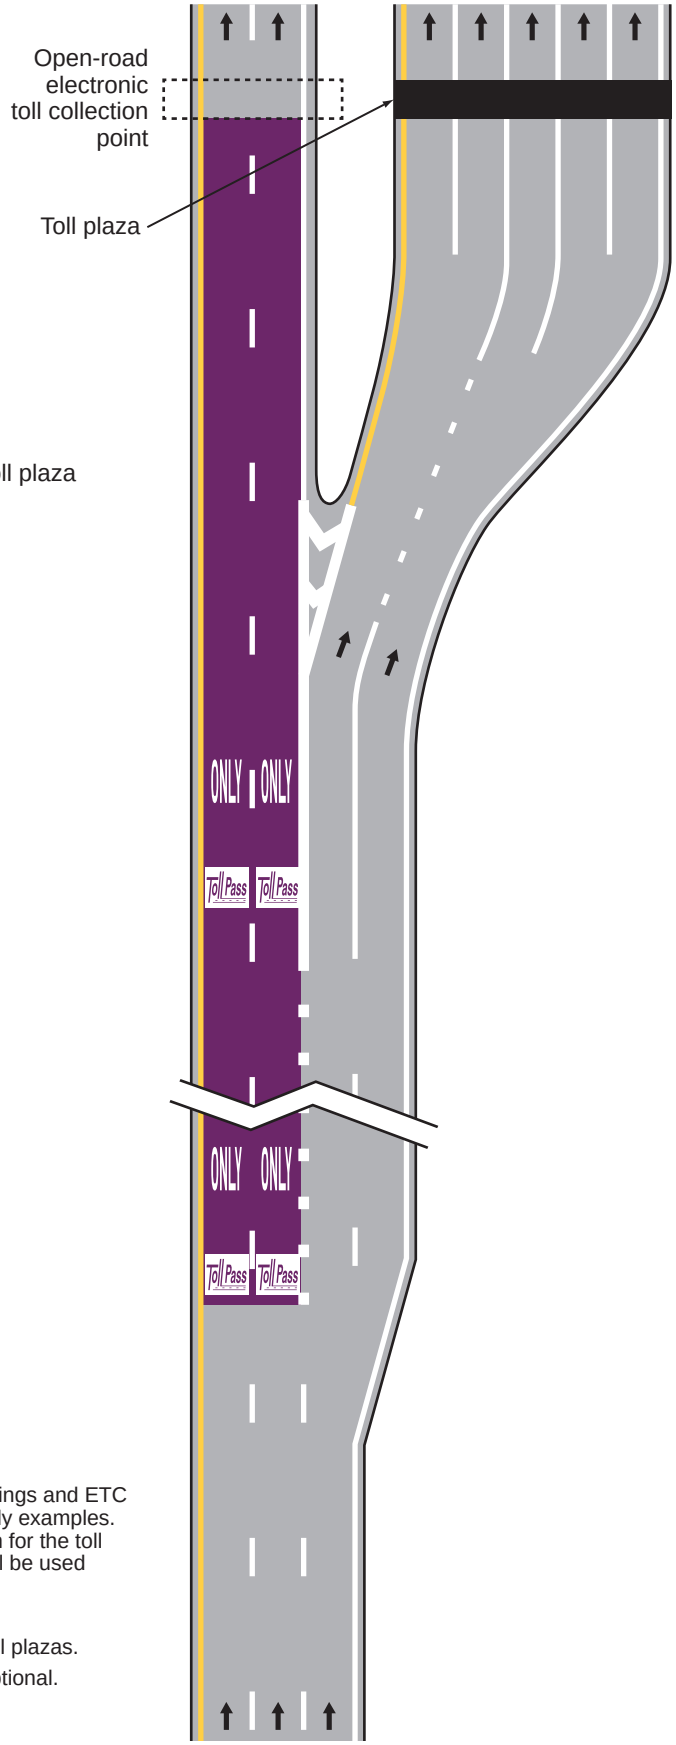


Legend

→ Direction of travel

Notes:

1. The ETC Account-Only word markings and ETC pictographs that are shown are only examples. The word markings and pictograph for the toll facility's adopted ETC system shall be used (see Section 3E.03).
2. See Chapter 2F for toll road signs.
3. See Chapter 3F for markings at toll plazas.
4. The use of colored pavement is optional.

# CHAPTER 3I. CHANNELIZING DEVICES USED FOR EMPHASIS OF PAVEMENT MARKING PATTERNS

## Section 3I.01 Channelizing Devices

Option:

01 Channelizing devices (see Sections 6K.01 through 6K.07 and Figure 6K-1) such as cones, tubular markers, vertical panels, lane separators, drums, and barricades may be used for general traffic control purposes such as adding emphasis to reversible lane delineation, channelizing lines, islands, pedestrian facilities, or bicycle facilities. Channelizing devices may also be used along a center line to preclude turns or along lane lines to preclude lane changing, as determined by engineering judgment.

Support:

01a In California, cones and drums are used for temporary traffic control, not as permanent channelizing devices.

02 Although they are not considered to be traffic control devices, raised islands (see Chapter 3J) are also sometimes used to channelize traffic.

**Standard:**

03 **Except for color, the design of channelizing devices, including, but not limited to, retroreflectivity, minimum dimensions, and mounting height, shall comply with the provisions of Chapter 6K.**

04 **Except as provided in Paragraph 5 of this Section, the color of channelizing devices used outside of temporary traffic control zones shall be the same color as the pavement marking that they supplement, or for which they are substituted, in accordance with Section 3A.03.**

Option:

05 The color of channelizing devices used to emphasize pavement marking patterns outside of temporary traffic control zones may be orange provided that the application of the orange-colored channelizing device is not permanent.

Support:

06 Emergency incidents and planned special events are the most common temporary traffic control zones that would justify orange channelizing devices to emphasize standard pavement marking colors. These events do not necessitate police officers or other authorized personnel to obtain and deploy channelizing devices that match the color of the existing pavement marking.

**Standard:**

07 **For nighttime use, channelizing devices shall be retroreflective (as described in Part 6) or internally illuminated. On channelizing devices used outside of temporary traffic control zones, retroreflective sheeting or bands shall be white if the devices separate traffic flows in the same direction and shall be yellow if the devices separate traffic flows in the opposite direction or are placed along the left-hand edge line of a one-way roadway or ramp.**

Support:

08 Channelizers are flexible retroreflective devices for installation within the roadway to discourage road users from crossing a line or area of the roadway. Unlike delineators, which indicate the roadway alignment, channelizers are intended to provide additional guidance and/or restriction to traffic by supplementing pavement markings and delineation.

Option:

09 Channelizers may be used for additional emphasis to discourage median crossings at traffic islands and at lane separations.

**Standard:**

10 **The design of a channelizer shall be as shown in Figure 3I-101(CA).**

11 **The retroreflective unit used on channelizers shall be a minimum of 3 x 12 inches. The 3 x 24 inch minimum retroreflective unit shall be visible at 1000 feet at night under illumination of legal high beam headlights, by persons with vision of or corrected to 20/20.**

12 **The post shall be flexible with a 2 ¼ inch minimum width, except that the portion containing the retroreflective unit shall be a minimum width of 3 inches. The post shall be a minimum height of 36 inches above the pavement.**

13 **Channelizer posts used for temporary traffic control shall be orange with white reflectors. Refer to Section 6H.101(CA).**

Option:

14 At locations where speeds are 40 mph or less a minimum post height of 28 inch may be used.

Support:

15 Since channelizers require closer spacing, their post size requirements differ from those of delineators.

16 There are two basic types of channelizers: one attaches to the pavement and the other attaches to an anchoring device imbedded in the pavement. Both the base and anchor systems are designed to permit replacement of the channelizer post. Refer to Figure 3I-101(CA).

*Guidance:*

17 *Channelizers should be placed a minimum of 2 feet from the traffic line, away from traffic, to allow for future maintenance of the line.*

Option:

18 Space limitations may dictate exceptions to this criterion. At certain locations, placement directly on the traffic line may be required.

Support:

19 Spacing of the channelizers depends on the type of facility where they are to be used, the speed and volume of traffic, and the alignment to be channelized. Spacing which results in a visual fence/barrier effect is a key factor in channelizer installation.

*Guidance:*

20 *The maximum post spacing should be 100 feet on carpool lanes where channelizers are used primarily to delineate the separation between the carpool lane and the main facility.*

21 *In locations where a relatively high number of violations occur, the post spacing should be 25 feet.*

Option:

22 Where barrier violations are relatively minimal, a post spacing of 50 feet may be adequate. However, spacing in excess of 50 feet is of negligible value as a deterrent to intentional barrier violations.

23 Post spacing closer than 25 feet may be considered on lower speed roads, urban streets and at specific locations such as traffic islands.

## Section 3I.02 Tubular Markers

**Standard:**

01 **Tubular markers for permanent installations shall be a minimum of 28 inches in height and shall be a minimum of 2 inches wide facing road users.**

*Guidance:*

02 *Tubular markers should be affixed to the pavement or other surface either directly or by means of an attachment system that is affixed to the pavement or other surface. Tubular markers should normally be spaced no greater than N as cited in Section 3B.14.*

Option:

03 Other spacing may be used based on engineering judgment. Support:

04 Tubular markers are sometimes used to provide additional emphasis or improve lane discipline in advance of an unsignalized crosswalk (see Figure 3I-1).


*Guidance:*

05 *When tubular markers are used to supplement a R1-6 series sign (see Section 2B.20) that is either on the center line, lane line, or median island, they should not be used on the same pavement marking line where the R1-6 series sign is installed.*

Support:

06 Section 6K.04 contains information for temporary installations of tubular markers.


## Figure 3I-1. Examples of Tubular Markers Supplementing Pavement Markings in Advance of an Unsignalized Crosswalk (Sheet 1 of 2)

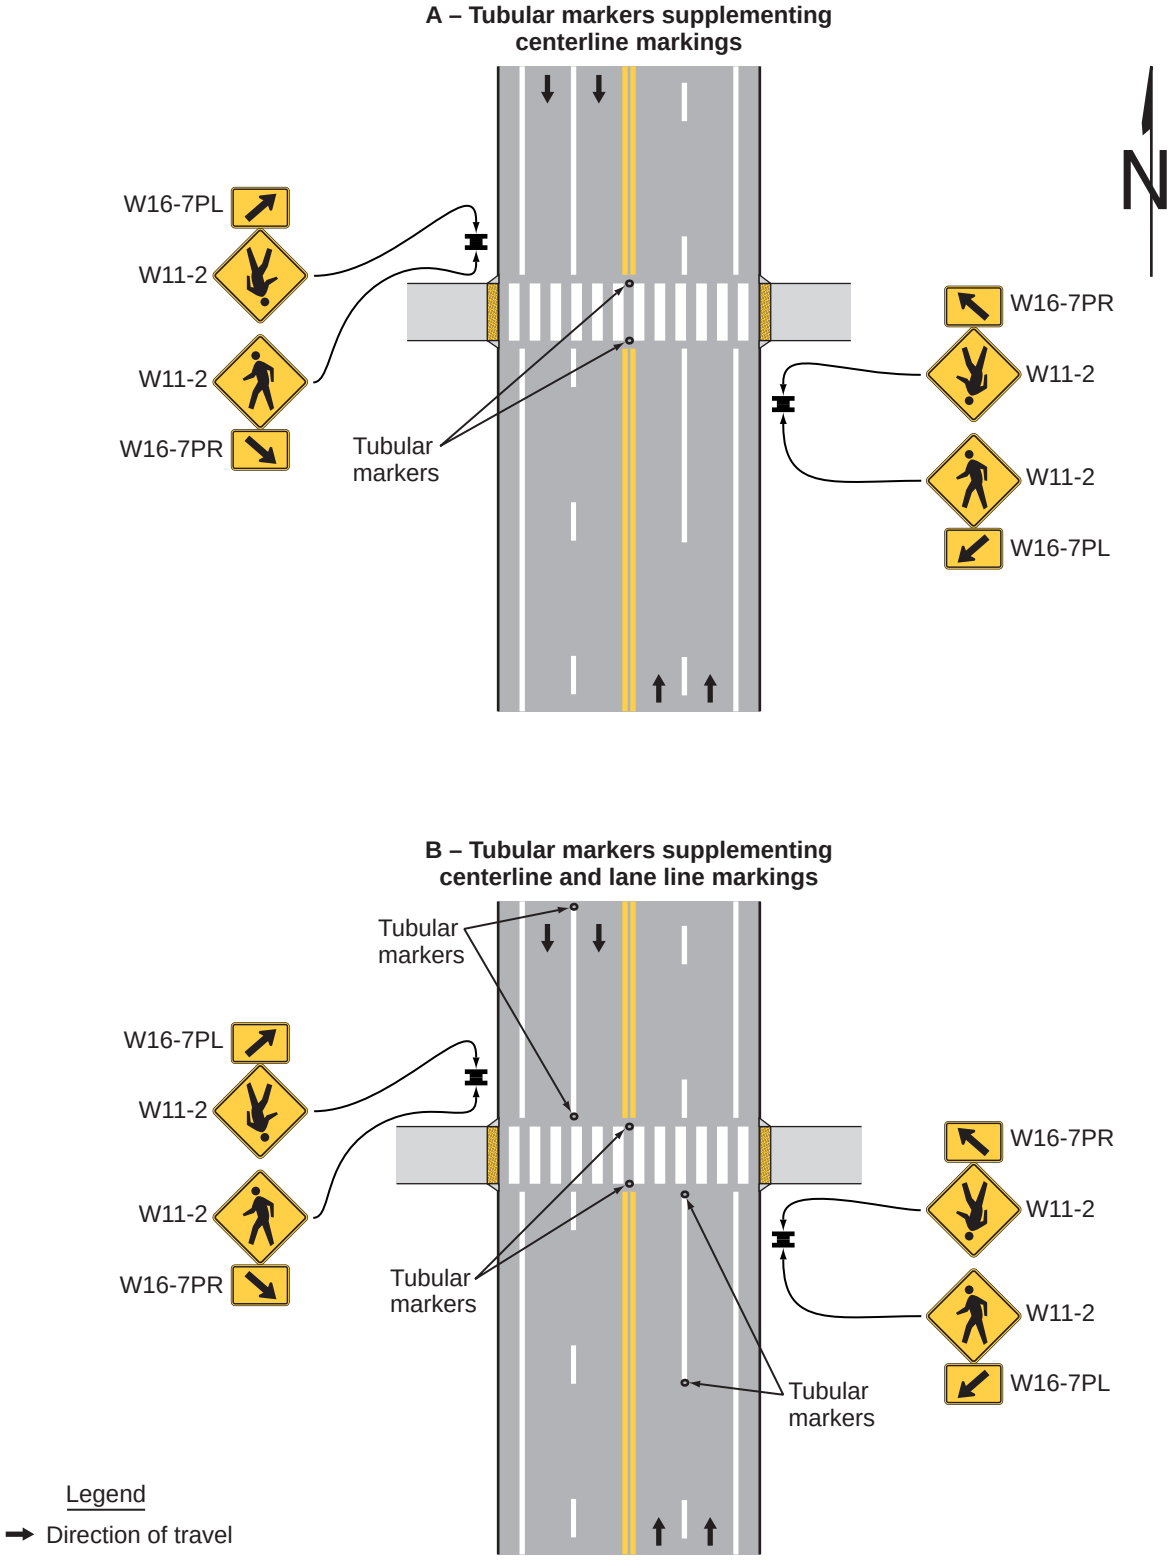



Note: Fluorescent yellow-green background with a black legend and border may be used for W11-2 and its related supplemental plaques.

## Figure 3I-1. Examples of Tubular Markers Supplementing Pavement Markings in Advance of an Unsignalized Crosswalk (Sheet 2 of 2)

**C – Tubular markers supplementing lane lines with in-street pedestrian crossing sign on centerline**

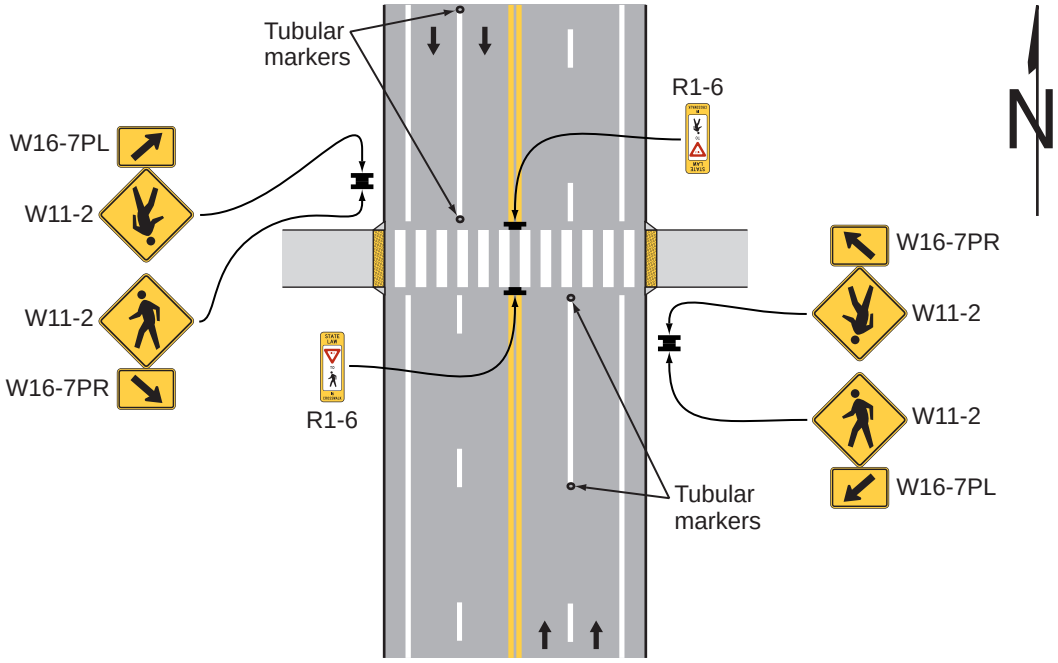



**D – Tubular markers supplementing edge and lane lines; in-street pedestrian sign crossing on centerline**

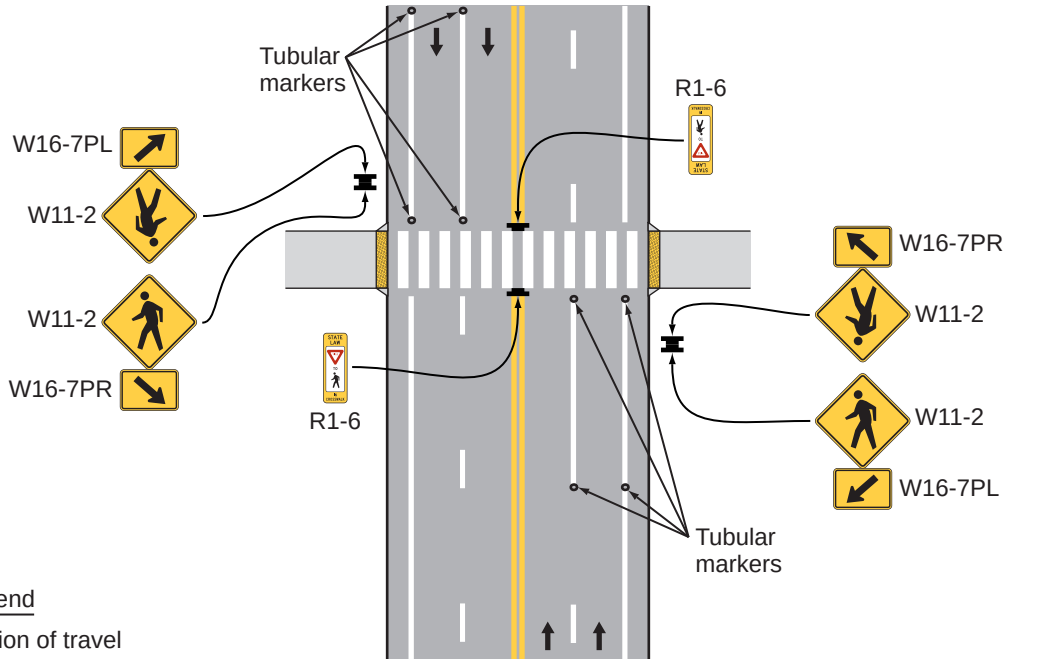


Note: Fluorescent yellow-green background with a black legend and border may be used for W11-2 and its related supplemental plaques.

## *Figure 3I-101(CA). Example of Channelizers*

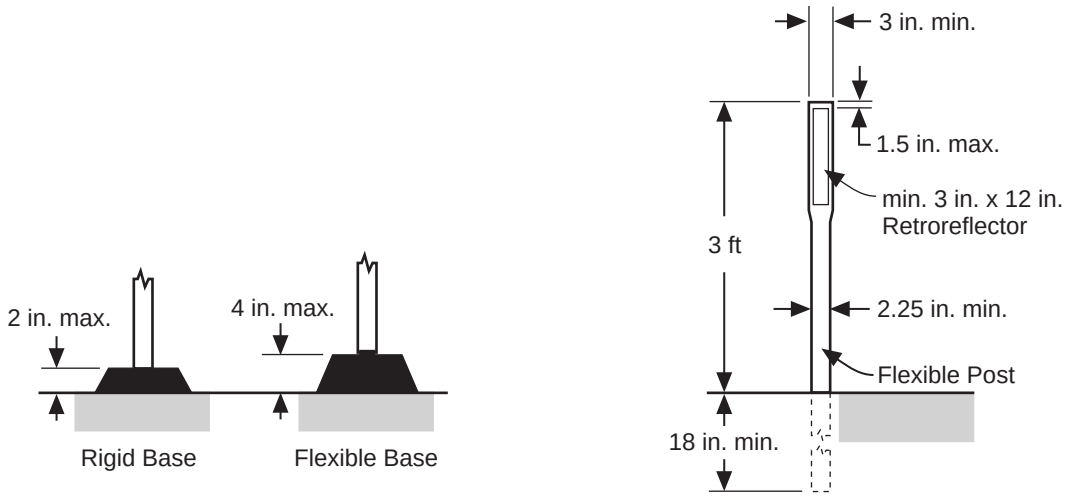


**NOT TO SCALE**

# CHAPTER 3J. MARKING AND DELINEATION OF ISLANDS AND SIDEWALK EXTENSIONS

## Section 3J.01 General

Support:

01 This Chapter addresses the marking and delineation of islands (see definition in Section 1C.02) and sidewalk extensions designated by pavement markings. Definitions, types, sizes, and other criteria for the design of islands are set forth in "A Policy on Geometric Design of Highways and Streets," 2018 Edition, AASHTO.

02 Section 3C.12 contains information on pedestrian islands and medians.

03 Sections 3H.04 and 3H.05 contain information on colored pavement that can be used within islands.

Option:

04 An island may be designated by curbs, pavement edges, pavement markings, channelizing devices, or other devices.

Support:

05 Raised channelization with sloping (mountable) curbed medians are used instead of channelization accomplished through the use of pavement markings (flush), for the following operating conditions:

A. Left- and right-turn lane treatments at intersections on all roadways with operating speeds of less than 40 mph.
B. Right-turn treatments on roadways with operating speeds equal to or greater than 40 mph.

06 On State highways, criteria for the design of islands are set forth in Caltrans' Highway Design Manual. Refer to Section 1A.05 for information regarding this publication.

## Section 3J.02 Approach-End Treatment

Support:

01 An approach-end treatment to an island consists of longitudinal pavement markings and/or channelizing devices upstream of the island followed by a divergence of those pavement markings and/or channelizing devices concluding with a transition to other pavement markings that demarcate or outline the island (see Figure 3J-1).

02 Section 3B.13 contains information on pavement markings that function as approach-end treatments for obstructions.

*Guidance:*

03 *The ends of islands first approached by traffic should be marked with an approach-end treatment, curb markings (see Section 3J.04), or both to guide vehicles into desired paths of travel along the island edge.*

04 *When raised bars or buttons that project more than 1 inch above the pavement surface are used to create a rumble section in the neutral area, the raised bars or buttons should be marked with white or yellow retroreflective materials, as determined by the direction or directions of travel they separate.*

## Section 3J.03 Islands Designated by Pavement Markings

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, islands formed by pavement markings only shall be established using channelizing lines, and shall be white when separating traffic flows in the same general direction or yellow when separating opposing directions of traffic.**

02 **If a continuous flush median island separating travel in opposite directions is used, two sets of double solid yellow lines shall be used to form the island (see Figure 3B-5). Other markings in the median island area, such as diagonal lines (see Section 3B.25), shall also be yellow, except crosswalk markings which shall be white (see Chapter 3C).**

03 **If used, chevron or diagonal markings (see Section 3B.25) within the island shall be the same color as the channelizing line.**

Option:

04 Both chevron and diagonal markings of the same color may be used within the same island based on engineering judgment.

05 The area within the flush island delineated by pavement markings may use colored pavement in accordance with the provisions of Chapter 3H.

Support:

06 Figure 3J-2 illustrates examples of islands designated by pavement markings.

## Section 3J.04 Curb Markings for Raised Islands

**Standard:**

01 **Where curbs are marked for delineation or visibility purposes, the colors shall comply with the general principles of markings (see Section 3A.03).**

*Guidance:*

02 *Retroreflective solid yellow curb markings should be placed on the approach ends of raised medians and curbs of islands that are located in the line of traffic flow where the curb serves to channel traffic to the right of the obstruction (see Figure 3J-3).*

03 *Retroreflective solid white curb markings should be used when traffic is permitted to pass on either side of the island (see Figure 3J-3).*

04 *The retroreflective area should be of sufficient length to denote the general alignment of the edge of the island along which vehicles travel, including the approach end, when viewed from the approach to the island.*

Option:

05 Where the curbs of the islands become parallel to the direction of traffic flow or where the island is illuminated or marked with delineators, curb markings may be discontinued based on engineering judgment or study.

06 Curb markings at openings in a continuous median island may be omitted based on engineering judgment or study.

## Section 3J.05 Pavement Markings for Raised Islands

Support:

01 Pavement markings for raised islands include the approach-end treatment (see Section 3J.02), channelizing lines, edge lines, and chevron or diagonal markings.

Option:

02 Solid yellow edge lines (see Sections 3B.09 and 3B.10) may be used adjacent to raised islands separating travel in opposite directions (see Drawing A in Figure 3J-3).

**Standard:**

03 **Except as provided in Paragraphs 4 and 6 of this Section, raised islands separating traffic flows in the same general direction shall be outlined with white channelizing lines (see Drawing A in Figure 3J-4).**

Option:

04 Pavement markings for smaller raised islands may be omitted based on engineering judgment.

*Guidance:*

05 *Smaller raised islands without marked channelizing lines, edge lines, or chevron or diagonal markings should use curb markings (see Section 3J.04).*

06 *Where traffic passes on the right of a raised island separating traffic flows in the same general direction, a yellow edge line should be used adjacent to raised islands of discernible size or length instead of continuing the white channelizing line from the approach-end treatment (see Drawing B in Figure 3J-4).*

Support:

07 Yellow edge lines adjacent to raised islands that separate traffic flows in the same general direction can be advantageous as a countermeasure for wrong-way entry or travel if the yellow edge line is of discernible length.

Option:

08 Chevron markings may be used in neutral areas formed by diverging channelizing lines at raised islands separating traffic flows in the same general direction.

09 Diagonal markings of an appropriate color may be used in buffer areas between the channelizing line and the raised island (see Figure 3J-5).

**Standard:**

10 **Double solid 4 inch wide yellow lines shall be used to delineate the edge of a median island where the median is an all-paved, at-grade section of the highway. The island formed by double yellow lines shall be at least 2 foot in width, as shown in Figure 3A-107(CA).**

11 **When used, other markings in the median island area shall be yellow.**

Support:

12 This treatment is not intended for freeways or other highways with a positive barrier in the median. Single solid yellow left edge line and markers as shown in Figure 3A-105(CA) are standard.

13 The use of channelizing lines are shown in Figure 3A-112(CA) and no-passing markings are shown in Figures 3A-104(CA) and 3B-15.

## Section 3J.06 Island Delineation

**Standard:**

01 **Delineators installed on islands shall be the same colors as the related channelizing or edge lines except that, when only facing wrong-way traffic, they shall be red (see Section 3G.03).**

02 **Each roadway through an intersection shall be considered separately in positioning delineators to assure maximum effectiveness.**

Option:

03 Retroreflective or internally illuminated raised pavement markers of the appropriate color may be placed on the pavement in front of the curb and/or on the top of curbed approach ends of raised medians and curbs of islands, as a supplement to or as a substitute for retroreflective curb markings.

## Section 3J.07 Sidewalk Extensions Designated by Pavement Markings

Support:

01 Sidewalk extensions reclaim a portion of the roadway, sometimes including a portion of parking lanes, shoulders, and/or the traveled way, and repurpose that area for non-vehicular uses. They extend the sidewalk or other pedestrian space, shorten pedestrian crossing distances, alter the roadway geometry for speed management or channelizing, or serve other purposes.

02 Sidewalk extensions, sometimes referred to as curb extensions, neckdowns, or bulb-outs, typically are created by physical infrastructure including concrete or asphalt to form a physical narrowing of the roadway with the finished surface at the same level as the adjoining sidewalk.

03 Sidewalk extensions can also be designated by pavement markings for temporary or semi-permanent applications in which the finished surface is at the same level as the vehicular travel pavement. Where an adjoining curb and raised sidewalk are present, this type of application results in a multi-level sidewalk due to the difference in elevation between the adjoining pedestrian surfaces.

04 Sidewalk extensions designated by pavement markings differ from other paved areas designated by pavement markings that are intended to be traversable by a vehicle for authorized or emergency purposes.

**Standard:**

05 **Sidewalk extensions designated by pavement markings shall be established using double solid lines connecting to the outside physical curb or, in the absence of a curb, to the edge of the roadway. The color of the double solid line shall comply with the provisions of Section 3A.03.**

Support:

06 The paved area between the double solid line forming the sidewalk extension designated by pavement markings and the sidewalk or other roadside area is not part of the roadway. Sidewalk extensions designated by pavement markings formed by double solid lines are distinct from areas such as shoulders or gore areas where travel is discouraged by the presence of a single line, or flush medians where travel is prohibited by a double solid line. Sidewalk extensions designated by pavement markings with double solid lines designate areas outside the roadway where vehicle traversal is prohibited.

07 Areas formed by a single wide line are sometimes used to alter the roadway geometry for speed management or channelizing, or to serve other purposes, where pedestrians are not expected (see Drawing B in Figure 3J-6). These areas are not considered a sidewalk extension, and provisions to delineate areas where vehicle traversal is discouraged include channelizing lines (see Section 3B.08), edge lines (see Section 3B.09), and diagonal markings (see Section 3B.25).

*Guidance:*

08 *Channelizing devices such as tubular markers (see Chapter 3I) should be used to provide conspicuity for, and to prevent vehicles from traversing, the area of the sidewalk extension designated by pavement markings. They should be located adjacent to the double solid line outside the traveled way.*

Support:

09 When selecting other methods of physical separation, the visual contrast from adjoining pavement and maximum separation distances are considerations so they are visible to pedestrians having limited vision and detectable by

pedestrians who travel with a long cane.

10 Sight lines and the visibility of road users within the sidewalk extension area are considerations when selecting methods of physical separation.

11 The swept path of turning design or other prevailing vehicle types is a consideration, especially if a larger vehicle is expected to traverse a portion of the sidewalk extension while turning where pedestrians might be present.

**Standard:**

12 **Crosswalk markings shall not be extended through sidewalk extensions designated by pavement markings.**

Support:

13 Accessibility provisions at sidewalk extensions designated by pavement markings are outside the scope of this Manual. State and local organizations providing support services to pedestrians with vision disabilities can provide advice to the traffic engineer on site-specific accessibility decisions. In addition, orientation and mobility specialists or similar staff can provide advice to inform such decisions. The U.S. Access Board (www.access-board.gov) provides technical assistance for making pedestrian facilities accessible to persons with disabilities.

*Guidance:*

14 *Traffic control devices that are critical to the specific conditions at the sidewalk extension, such as STOP or YIELD signs or Pedestrian Crossing signs, should be located within the sidewalk extension designated by pavement markings. Their lateral offset (see Section 2A.16) should be measured from the center of the double solid line designating a sidewalk extension rather than from the physical curb line behind the sidewalk extension area so that the signs are more visible to approaching traffic and not occluded by any physical features placed within the sidewalk extension area.*

Support:

15 The location of accessible pedestrian signals (see Section 4K.02) is a consideration when providing a sidewalk extension designated by pavement markings.

16 Aesthetic surface treatments (see Chapter 3H) are sometimes used in sidewalk extensions designated by pavement markings to emphasize that the area is outside of the traveled way.


**Standard:**

17 **In accordance with the provisions of Section 3H.03, aesthetic surface treatments, if used within a sidewalk extension designated by pavement markings, shall be non-retroreflective.**


Support:

18 Figure 3J-6 illustrates an example of a sidewalk extension designated by pavement markings and an example of channelizing.


## Figure 3J-1. Example of Markings for an Approach-End Treatment to an Island

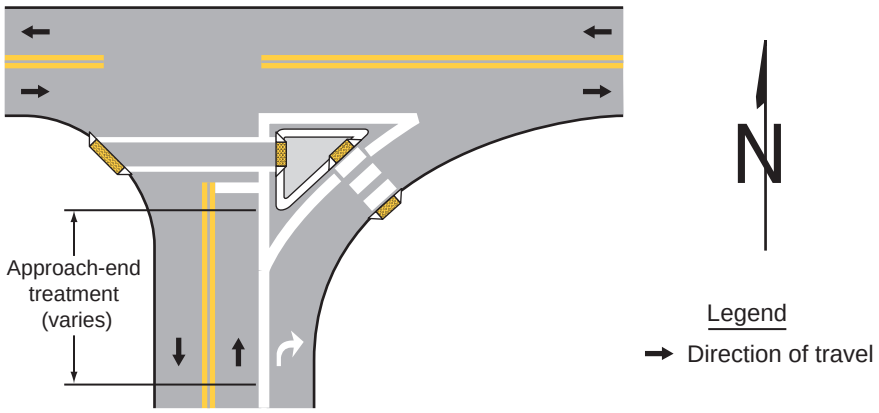

## Figure 3J-2. Examples of Islands Designated by Pavement Markings

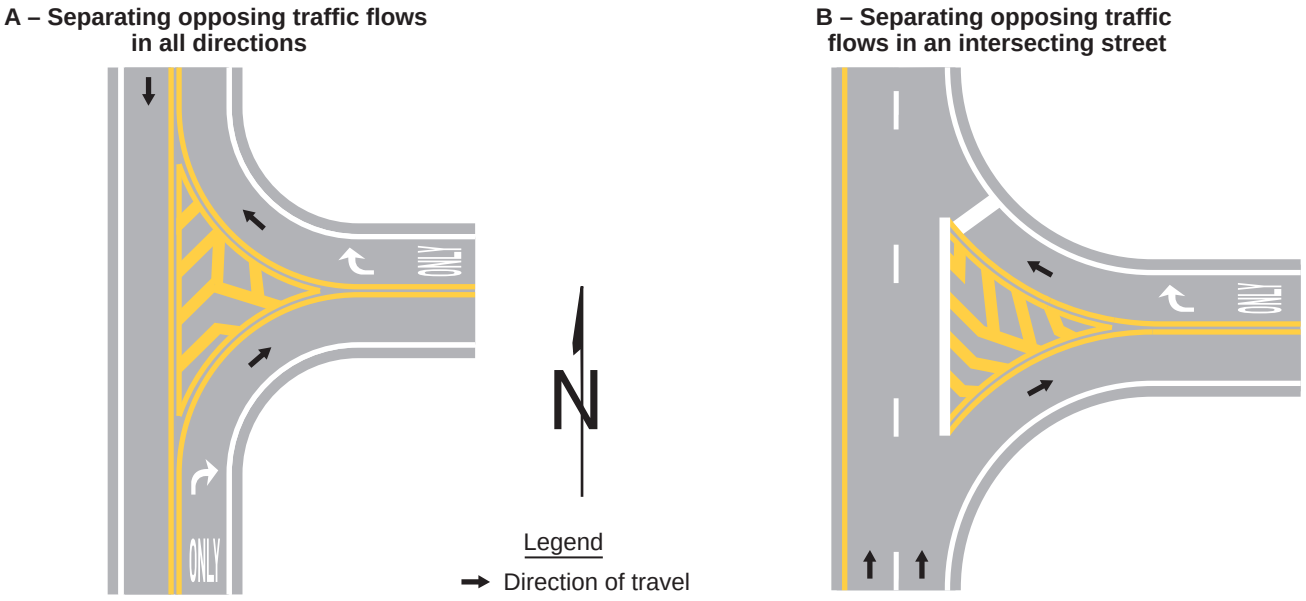


## Figure 3J-3. Examples of Curb Markings for Raised Islands

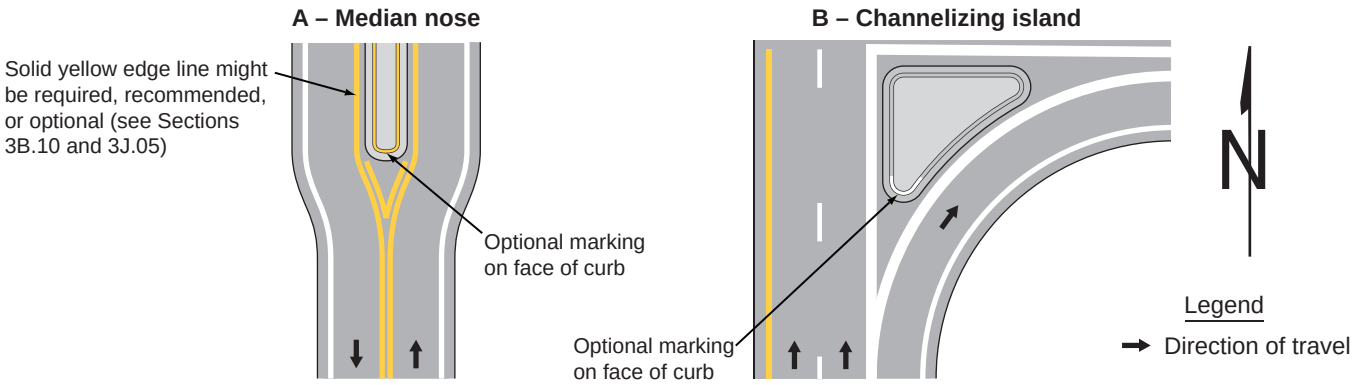


## Figure 3J-4. Examples of Pavement Markings for Raised Islands (Sheet 1 of 2)

**A – White channelizing lines applied to a raised island separating traffic flow in the same general direction**

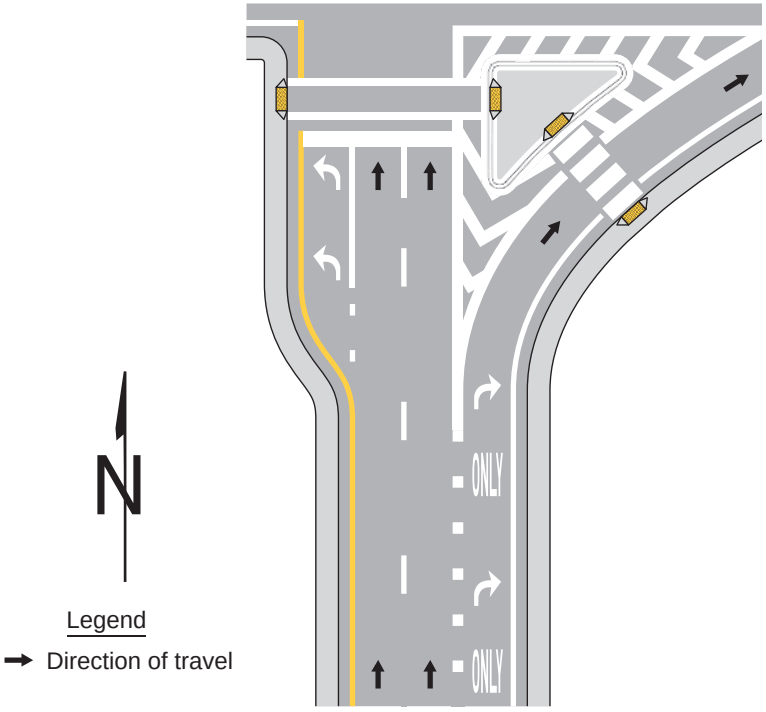


## Figure 3J-4. Examples of Pavement Markings for Raised Islands (Sheet 2 of 2)


**B – Yellow edge line applied to raised island separating traffic flows in the same general direction**

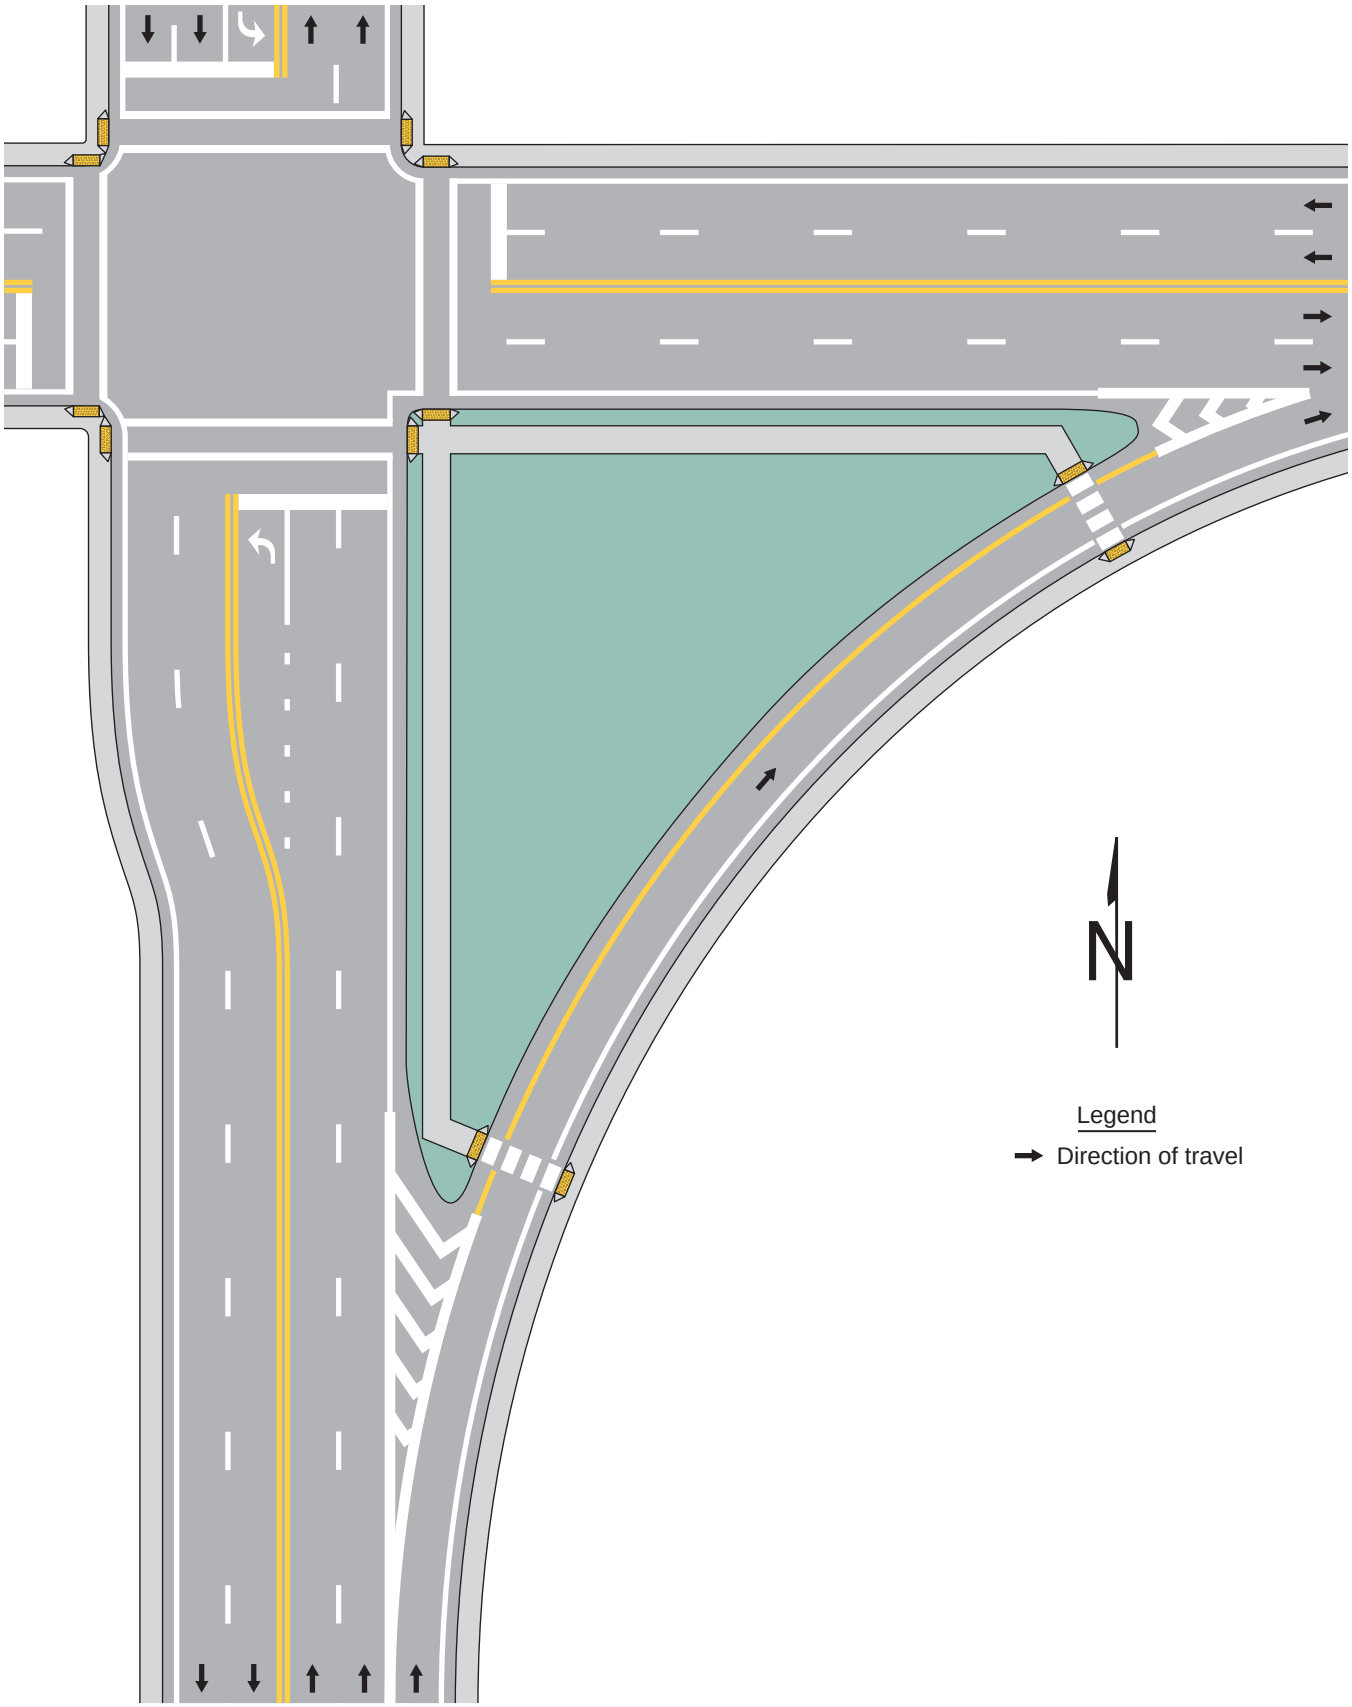

## Figure 3J-5. Example of Optional Chevron and Diagonal Pavement Markings at a Raised Island

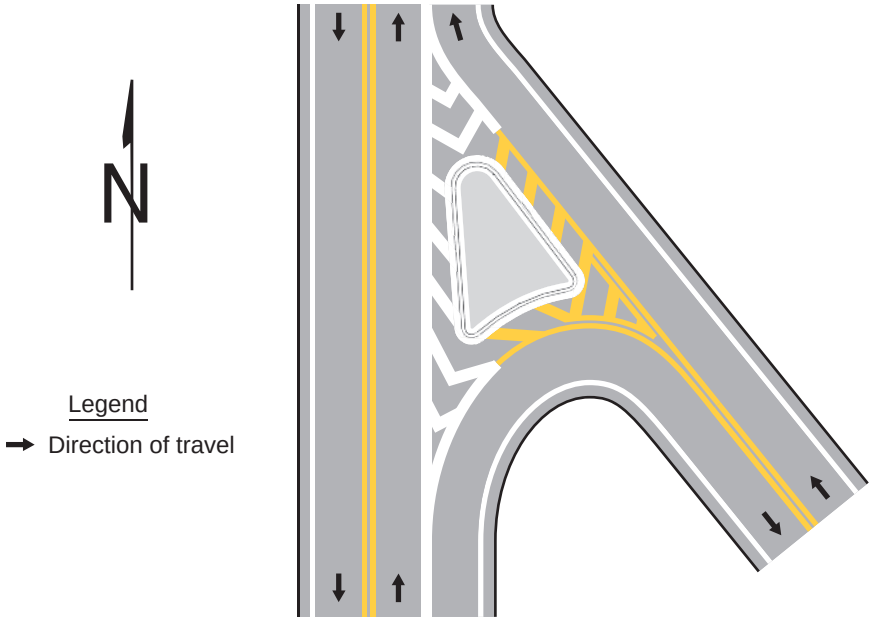

# Figure 3J-6. Examples of Sidewalk Extensions Designated by Pavement Markings and Channelization

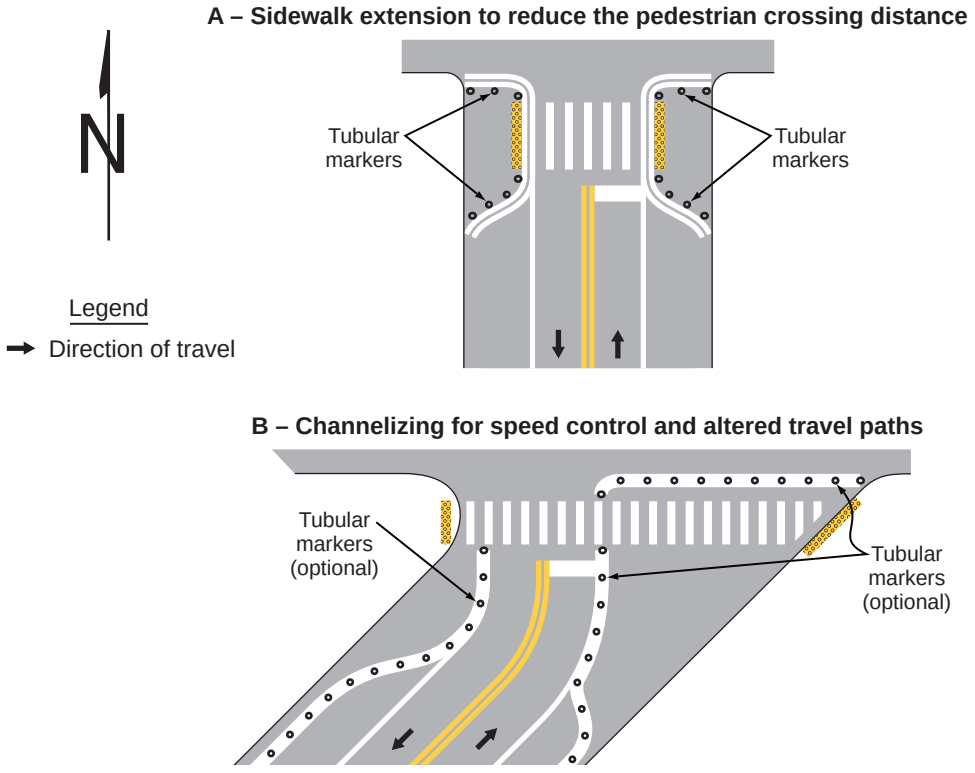

# CHAPTER 3K. RUMBLE STRIP MARKINGS

## Section 3K.01 Longitudinal Rumble Strip Markings

Support:

01 Longitudinal rumble strips consist of a series of rough-textured or slightly raised or depressed road surfaces intended to alert inattentive drivers through vibration and sound that their vehicle has left the travel lane. Shoulder rumble strips are typically installed along the shoulder near the travel lane. On divided highways, rumble strips are sometimes installed on the median side (left-hand side) shoulder as well as on the outside (right-hand side) shoulder. On two-way roadways, rumble strips are sometimes installed along the center line.

02 This Manual contains no provisions regarding the design and placement of longitudinal rumble strips. The provisions in this Manual address the use of markings in combination with a longitudinal rumble strip. Figure 3K-1 illustrates markings used with or near longitudinal rumble strips.

03 Section 6M.06 contains information related to longitudinal rumble strips.

Option:

04 An edge line or center line may be located over a longitudinal rumble strip to create a rumble stripe.

**Standard:**

05 **The color of an edge line or center line associated with a longitudinal rumble stripe shall be in accordance with Section 3A.03.**

06 **An edge line shall not be used in addition to a rumble stripe that is located along a shoulder.**

## Section 3K.02 Transverse Rumble Strip Markings

Support:

01 Transverse rumble strips consist of intermittent narrow, transverse areas of rough-textured or slightly raised or depressed road surface that extend across the travel lanes to alert drivers to unusual vehicular traffic conditions. Through noise and vibration, they attract the attention of road users to features such as unexpected changes in alignment and conditions requiring a reduction in speed or a stop.

02 This Manual contains no provisions regarding the design and placement of transverse rumble strips that approximate the color of the pavement. The provisions in this Manual address the use of markings in combination with a transverse rumble strip.

03 Section 6M.06 contains information related to transverse rumble strips.


**Standard:**

04 **Except as otherwise provided in Section 6M.06 for TTC zones, if the color of a transverse rumble strip used within a travel lane is not the color of the pavement, the color of the transverse rumble strip shall be either black or white.**

*Guidance:*

05 *White transverse rumble strip markings used in a travel lane should not be placed in locations where they could be confused with other transverse markings such as stop lines or crosswalks.*

## Figure 3K-1. Examples of Longitudinal Rumble Strip Markings

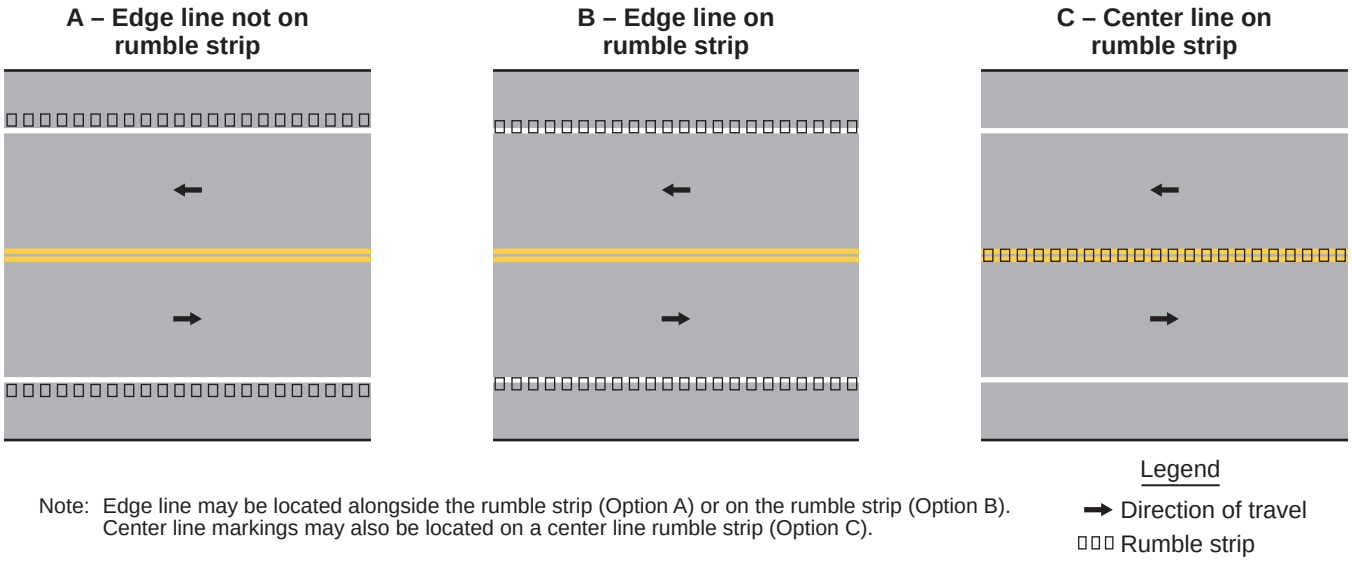


Note: Edge line may be located alongside the rumble strip (Option A) or on the rumble strip (Option B). Center line markings may also be located on a center line rumble strip (Option C).

*THIS PAGE INTENTIONALLY LEFT BLANK*

# PART 4
# HIGHWAY TRAFFIC SIGNALS

## CHAPTER 4A. GENERAL

### Section 4A.01 Types

Support:

01 The following types and uses of highway traffic signals are discussed in Part 4: traffic control signals; bicycle signal faces; pedestrian signal heads; hybrid beacons; rectangular rapid flashing beacons; emergency-vehicle traffic control signals; traffic control signals for one-lane, two-way facilities; traffic control signals for freeway entrance ramps; movable bridge traffic signals; toll plaza traffic signals; flashing beacons; lane-use control signals; and in- roadway warning lights.

### Section 4A.02 Meanings of Signal Indications

Support:

01 The "Uniform Vehicle Code" (see Section 1A.06) is the primary source for the standards for the meanings of vehicular signal indications to both vehicle operators and pedestrians as provided in Sections 4A.03 and 4A.04, the standards for the meanings of separate bicycle signal face indications as provided in Section 4A.05, and the standards for the meanings of separate pedestrian signal head indications as provided in Section 4A.06.

02 The physical area that is defined as being "within the intersection" is dependent upon the conditions that are described in the definition of an intersection in Section 1C.02.

### Section 4A.03 Meanings of Steady Vehicular Signal Indications

**Standard:**

01 **The following meanings shall be given to steady highway traffic signal indications for vehicles and pedestrians:**

**A. Steady green signal indications shall have the following meanings:**

**1. Vehicular traffic facing a CIRCULAR GREEN signal indication is permitted to proceed straight through or turn right or left or make a U-turn movement except as such movement is modified by lane-use signs, turn prohibition signs, lane markings, roadway design, separate turn signal indications, or other traffic control devices.**

**Such vehicular traffic, including vehicles turning right or left or making a U-turn movement, shall yield the right-of-way to:**

**(a) Pedestrians lawfully within an associated crosswalk, and**

**(b) Other vehicles lawfully within the intersection.**

**In addition, vehicular traffic turning left or making a U-turn movement to the left shall yield the right-of-way to other vehicles approaching from the opposite direction so closely as to constitute an immediate hazard during the time when such turning vehicle is moving across or within the intersection.**

**2. Vehicular traffic facing a GREEN ARROW signal indication, displayed alone or in combination with another signal indication, is permitted to cautiously enter the intersection only to make the movement indicated by such arrow, or such other movement as is permitted by other signal indications displayed at the same time.**

**Such vehicular traffic, including vehicles turning right or left or making a U-turn movement, shall yield the right-of-way to:**

**(a) Pedestrians lawfully within an associated crosswalk, and**

**(b) Other vehicles lawfully within the intersection.**

**3. Pedestrians facing a CIRCULAR GREEN signal indication, unless otherwise directed by a pedestrian signal indication or other traffic control device, are permitted to proceed across the roadway within any marked or unmarked associated crosswalk. The pedestrian shall yield the right-of-way to vehicles lawfully within the intersection or so close as to create an immediate hazard at the time that the green signal indication is first displayed.**

4. **Pedestrians facing a GREEN ARROW signal indication, unless otherwise directed by a pedestrian signal indication or other traffic control device, shall not cross the roadway.**

**B. Steady yellow signal indications shall have the following meanings:**

1. **Vehicular traffic facing a steady CIRCULAR YELLOW signal indication is thereby warned that the related green movement or the related flashing arrow movement is being terminated or that a steady red signal indication will be displayed immediately thereafter when vehicular traffic shall not enter the intersection. The rules set forth concerning vehicular operation under the movement(s) being terminated shall continue to apply while the steady CIRCULAR YELLOW signal indication is displayed.**
2. **Vehicular traffic facing a steady YELLOW ARROW signal indication is thereby warned that the related GREEN ARROW movement or the related flashing arrow movement is being terminated. The rules set forth concerning vehicular operation under the movement(s) being terminated shall continue to apply while the steady YELLOW ARROW signal indication is displayed.**
3. **Pedestrians facing a steady CIRCULAR YELLOW or YELLOW ARROW signal indication, unless otherwise directed by a pedestrian signal indication or other traffic control device shall not start to cross the roadway.**

**C. Steady red signal indications shall have the following meanings:**

1. **Vehicular traffic facing a steady CIRCULAR RED signal indication, unless entering the intersection to make another movement permitted by another signal indication, shall stop at a clearly marked stop line; but if there is no stop line, traffic shall stop before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, then before entering the intersection; and shall remain stopped until a signal indication to proceed is displayed, or as provided below.**

   **Except when a traffic control device is in place prohibiting a turn on red ~~or a steady RED ARROW~~ signal indication is displayed, vehicular traffic facing a steady CIRCULAR RED signal indication is permitted to enter the intersection to turn right, or to turn left from a one-way street into a one-way street, after stopping. The right to proceed with the turn shall be subject to the rules applicable after making a stop at a STOP sign.** Refer to CVC § 21453.
2. **Vehicular traffic facing a steady RED ARROW signal indication shall not enter the intersection to make the movement indicated by the arrow and, unless entering the intersection to make another movement permitted by another signal indication, shall stop at a clearly marked stop line; but if there is no stop line, before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, then before entering the intersection; and shall remain stopped until a signal indication or other traffic control device permitting the movement indicated by such RED ARROW is displayed.**

   **~~When a traffic control device is in place permitting a turn on a steady RED ARROW signal indication, vehicular traffic facing a steady RED ARROW signal indication is permitted to enter the intersection to make the movement indicated by the arrow signal indication, after stopping. The right to proceed with the turn shall be limited to the direction indicated by the arrow and shall be subject to the rules applicable after making a stop at a STOP sign.~~** Conflicts with CVC § 21453(c).
3. **Unless otherwise directed by a pedestrian signal indication or other traffic control device, pedestrians facing a steady CIRCULAR RED or steady RED ARROW signal indication shall not enter the roadway.**

## Section 4A.04 Meanings of Flashing Vehicular Signal Indications

**Standard:**

01 **The following meanings shall be given to flashing highway traffic signal indications for vehicles and pedestrians:**

**A. A flashing green signal indication has no meaning and shall not be used.**

**B. Flashing yellow signal indications shall have the following meanings:**

1. **Vehicular traffic, on an approach to an intersection, facing a flashing CIRCULAR YELLOW signal indication is permitted to cautiously enter the intersection to proceed straight through or turn right or left or make a U-turn except as such movement is modified by laneuse signs, turn prohibition signs, lane markings, roadway design, separate turn signal indications, or other traffic control devices.**

   **Such vehicular traffic, including vehicles turning right or left or making a U-turn, shall yield the**

**right-of-way to:**

**(a) Pedestrians lawfully within an associated crosswalk, and**

**(b) Other vehicles lawfully within the intersection.**

**In addition, vehicular traffic turning left or making a U-turn to the left shall yield the right- of-way to other vehicles approaching from the opposite direction so closely as to constitute an immediate hazard during the time when such turning vehicle is moving across or within the intersection.**

2. **Vehicular traffic, on an approach to an intersection, facing a flashing YELLOW ARROW signal indication, displayed alone or in combination with another signal indication, is permitted to cautiously enter the intersection only to make the movement indicated by such arrow, or other such movement as is permitted by other signal indications displayed at the same time.**

   **Such vehicular traffic, including vehicles turning right or left or making a U-turn, shall yield the right-of-way to:**

   **(a) Pedestrians lawfully within an associated crosswalk, and**

   **(b) Other vehicles lawfully within the intersection.**

   **In addition, vehicular traffic turning left or making a U-turn to the left shall yield the right- of-way to other vehicles approaching from the opposite direction so closely as to constitute an immediate hazard during the time when such turning vehicle is moving across or within the intersection.**

3. **Pedestrians facing any flashing yellow signal indication at an intersection, unless otherwise directed by a pedestrian signal indication or other traffic control device, are permitted to proceed across the roadway within any marked or unmarked associated crosswalk. Pedestrians shall yield the right-of-way to vehicles lawfully within the intersection at the time that the flashing yellow signal indication is first displayed.**

4. **When a flashing CIRCULAR YELLOW signal indication(s) is displayed as a beacon (see Chapter 4S) to supplement another traffic control device, road users are notified that there is a need to pay extra attention to the message contained thereon or that the regulatory or warning requirements of the other traffic control device, which might not be applicable at all times, are currently applicable.**

C. **Flashing red signal indications shall have the following meanings:**

1. **Vehicular traffic, on an approach to an intersection, facing a flashing CIRCULAR RED signal indication shall stop at a clearly marked stop line; but if there is no stop line, before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, at the point nearest the intersecting roadway where the driver has a view of approaching traffic on the intersecting roadway before entering the intersection. The right to proceed shall be subject to the rules applicable after making a stop at a STOP sign.**

2. **Vehicular traffic, on an approach to an intersection, facing a flashing RED ARROW signal indication if intending to turn in the direction indicated by the arrow shall stop at a clearly marked stop line; but if there is no stop line, before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, at the point nearest the intersecting roadway where the driver has a view of approaching traffic on the intersecting roadway before entering the intersection. The right to proceed with the turn shall be limited to the direction indicated by the arrow and shall be subject to the rules applicable after making a stop at a STOP sign.**

3. **Pedestrians facing any flashing red signal indication at an intersection, unless otherwise directed by a pedestrian signal indication or other traffic control device, are permitted to proceed across the roadway within any marked or unmarked associated crosswalk. Pedestrians shall yield the right-of-way to vehicles lawfully within the intersection at the time that the flashing red signal indication is first displayed.**

4. **When a flashing CIRCULAR RED signal indication(s) is displayed as a beacon (see Chapter 4S) to supplement another traffic control device, road users** shall stop at a clearly marked limit line, but if none, before entering the crosswalk on the near side of the intersection, or if none, then at the point nearest the intersecting roadway where the driver has a view of approaching traffic on the intersecting roadway before entering it, and the driver may proceed subject to the rules applicable after making a stop at a stop sign ~~are notified that there is a need to pay extra attention to the message contained thereon or that the regulatory requirements of the other traffic control device, which might not be applicable at all times, are currently applicable~~**. Use of this signal indication shall be limited to supplementing STOP (R1-1),**

~~**DO NOT ENTER (R5-1), or WRONG WAY (R5-1a) signs,**~~ **and to applications where compliance with the supplemented traffic control device requires a stop at a designated point. Refer to CVC § 21457(a).**

## Section 4A.05 Meanings of Bicycle Symbol Signal Indications

**Standard:**

01 **The following meanings shall be given to bicycle symbol signal indications for bicyclists:**

**A. Bicyclists facing a steady GREEN BICYCLE signal indication are permitted to enter the intersection only to make the movement indicated by the lane-use arrow(s) displayed on the Bicycle Signal sign (see Section 9B.22) that is located immediately adjacent to the signal face, Bicyclists proceeding into the intersection during the display of the steady GREEN BICYCLE signal indication shall yield the right-of-way to:**

1. **Pedestrians lawfully within an associated crosswalk, and**
2. **Other vehicles lawfully within the intersection.**

**B. Bicyclists facing a steady YELLOW BICYCLE signal indication are thereby warned that the related green movement is being terminated and that a steady RED BICYCLE signal indication will be displayed immediately thereafter when bicyclists shall not enter the intersection. The rules set forth concerning bicycle operation under the movement being terminated shall continue to apply while the steady YELLOW BICYCLE signal indication is displayed.**

**C. Bicyclists facing a steady RED BICYCLE signal indication shall not enter the intersection to make the movement indicated by the lane-use arrow(s) displayed on the Bicycle Signal sign (see Section 9B.22) that is located immediately adjacent to the signal face and, unless entering the intersection to make another movement permitted by another bicycle symbol signal indication, shall stop at a clearly marked stop line; but if there is no stop line, before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, then before entering the intersection; and shall remain stopped until a GREEN BICYCLE signal indication permitting the movement indicated by such RED BICYCLE signal indication is displayed.**

**Except when a traffic control device is in place prohibiting a turn on red, bicyclists facing a steady RED BICYCLE signal indication are permitted to enter the intersection to turn right if there are no approach lanes for motor vehicle traffic to their right. The right to proceed with the turn shall be subject to the rules applicable after making a stop at a STOP sign.**

**D. A flashing GREEN BICYCLE signal indication has no meaning and shall not be used.**

**E. A flashing YELLOW BICYCLE signal indication has no meaning and shall not be used.**

Support:

Refer to National MUTCD website, Frequently Asked Questions (FAQs) on Part 4 – Highway Traffic Signals, for exceptions to Item E:

**Standard:**

**F. Bicyclists facing a flashing RED BICYCLE signal indication shall stop at a clearly marked stop line; but if there is no stop line, before entering the crosswalk on the near side of the intersection; or if there is no crosswalk, at the point nearest the intersecting roadway where the bicyclist has a view of approaching traffic on the intersecting roadway before entering the intersection. The right to proceed in the direction indicated by the lane-use arrow(s) displayed on the Bicycle Signal sign (see Section 9B.22) that is located immediately adjacent to the signal face shall be subject to the rules applicable after making a stop at a STOP sign.**

## Section 4A.06 Meanings of Pedestrian Signal Indications

**Standard:**

01 **Pedestrian signal indications shall have the following meanings:**

**A. A flashing WALKING PERSON (symbolizing WALK) signal indication has no meaning and shall not be used.**

**B. Pedestrians facing a steady WALKING PERSON (symbolizing WALK) signal indication shall be permitted to start to cross the roadway in the direction of the signal indication, possibly in conflict with turning vehicles. Pedestrians shall yield the right-of-way to vehicles lawfully within the intersection at the**

**time that the WALKING PERSON (symbolizing WALK) signal indication is first shown.**

**C. Pedestrians facing a flashing UPRAISED HAND (symbolizing DONT WALK) signal indication shall not start to cross the roadway in the direction of the signal indication. Any pedestrian who has already started to cross the roadway on a steady WALKING PERSON (symbolizing WALK) signal indication shall continue to proceed to the far side of the traveled way of the street or highway, unless otherwise directed by a traffic control device to proceed only to the median of a divided highway or only to some other island or pedestrian refuge area (see Section 3C.12). Refer to CVC § 21456(a)(2).**

**D. Pedestrians facing a steady UPRAISED HAND (symbolizing DONT WALK) signal indication shall not enter the roadway in the direction of the signal indication.**

02 **In reference to CVC § 21456(a), if a pedestrian control signal showing the words "WALK" or "WAIT" or "DON'T WALK" or other approved symbol is in place, the signal shall indicate as follows:**

**(1) A "WALK" or approved "Walking Person" symbol means a pedestrian facing the signal may proceed across the roadway in the direction of the signal, but shall yield the right-of-way to vehicles lawfully within the intersection at the time that signal is first shown. Except as otherwise directed by a bicycle control signal described in § 21456.3, the operator of a bicycle facing a pedestrian control signal displaying a "WALK" or approved "Walking Person" symbol may proceed across the roadway in the direction of the signal, but shall yield the right-of-way to any vehicles or pedestrians lawfully within the intersection.**

**(2) A flashing "DON'T WALK" or "WAIT" or approved "Upraised Hand" symbol with a "countdown" signal indicating the time remaining for a pedestrian to cross the roadway means a pedestrian facing the signal may start to cross the roadway in the direction of the signal, but must complete the crossing prior to the display of the steady "DON'T WALK" or "WAIT" or approved "Upraised Hand" symbol when the "countdown" ends.**

**(3) A steady "DON'T WALK" or "WAIT" or approved "Upraised Hand" symbol or a flashing "DON'T WALK" or "WAIT" or approved "Upraised Hand" without a "countdown" signal indicating the time remaining for a pedestrian to cross the roadway means a pedestrian facing the signal shall not start to cross the roadway in the direction of the signal, but any pedestrian who started the crossing during the display of the "WALK" or approved "Walking Person" symbol and who has partially completed crossing shall proceed to a sidewalk or safety zone or otherwise leave the roadway while the steady "WAIT" or "DON'T WALK" or approved "Upraised Hand" symbol is showing.**

## Section 4A.07 Lateral Offset of Signal Supports and Cabinets

*Guidance:*

01 *The following items should be considered when placing signal supports and cabinets:*

*A. Reference should be made to the "Roadside Design Guide," 4th Edition, 2011, AASHTO, and to the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.*

*B. Signal supports should be placed as far as practicable from the edge of the traveled way without adversely affecting the visibility of the signal indications.*

*C. Where supports cannot be located based on the recommended AASHTO clearances, consideration should be given to the use of appropriate safety devices.*

*D. No part of a concrete foundation for a signal support should extend more than 4 inches above the ground level at any point. This limitation does not apply to the concrete foundation for a rigid support.*

*E. In order to minimize hindrance to the passage of persons with physical disabilities, a signal support or controller cabinet should not obstruct the sidewalk, or access from the sidewalk to the crosswalk.*

*F. Controller cabinets should be located as far as practicable from the edge of the roadway.*

*G. On medians, the minimum clearances provided in Items A through E for signal supports should be obtained, if practicable.*

Support:

02 Refer to Figures 4F-102(CA) through 4F-108(CA) for typical signal layouts for various intersections.

## Section 4A.08 Use of Signs at Signalized Locations

Support:

01 Traffic signal signs are sometimes used at highway traffic signal locations to instruct or guide pedestrians, bicyclists, or motorists. Among the signs typically used at or on the approaches to signalized locations are movement prohibition signs (see Section 2B.26), lane-control signs (see Sections 2B.27 through 2B.29), pedestrian crossing signs

(see Section 2B.57), pedestrian and bicycle actuation signs (see Section 2B.58), traffic signal signs (see Sections 2B.59 and 2C.44), No Turn on Red signs (see Section 2B.60), Signal Ahead warning signs (see Section 2C.35), Street Name signs (see Section 2D.45), and Advance Street Name signs (see Section 2D.46).

*Guidance:*

02 *Regulatory, warning, and guide signs should be used at highway traffic signal locations as provided in Part 2 and as specifically provided elsewhere in Part 4.*

Support:

03 Section 2B.27 contains information regarding the use of overhead lane-control signs on signalized approaches where lane drops, multiple-lane turns involving combined through-and-turn lanes, or other lane-use regulations that would be unexpected by unfamiliar road users are present.

*Guidance:*

04 *If used, illuminated traffic signal signs should be designed and mounted in such a manner as to avoid glare and reflections that seriously detract from the signal indications. Highway traffic signal faces should be given dominant position and brightness to maximize their priority in the overall display.*

**Standard:**

05 **The minimum vertical clearance and horizontal offset of the total assembly of traffic signal signs (see Section 2B.59) shall comply with the provisions of Sections 4D.09 and 4D.10.**

06 **Because the potential for conflicting commands could create driver confusion, YIELD or STOP signs shall not be used in conjunction with any highway traffic signal operation~~, except in either of the following cases:~~**

**~~A. If the signal indication for an approach is a flashing red at all times, or~~**

**~~B. If a minor street or driveway is located within or adjacent to an area controlled by a traffic control signal, but does not require separate traffic signal control because an extremely low potential for conflict exists.~~**

07 **STOP signs shall not be erected at any entrance to an intersection controlled by traffic signals. Refer to CVC § 21355(a).**

Option:

08 YIELD or STOP signs may be used at a channelized turn lane if it is separated from the adjacent travel lanes moving in same direction by an island and the channelized turn lane is not controlled by a traffic control signal.

## Section 4A.09 Use of Pavement Markings at Signalized Locations

Support:

01 Pavement markings that clearly communicate the operational plan of an intersection to road users play an important role in the effective operation of highway traffic signals. By designating the number of lanes, the use of each lane, the length of additional lanes on the approach to an intersection, crosswalks, and the proper stopping points, the engineer can design the signal phasing and timing to best match the goals of the operational plan.

*Guidance:*

02 *Pavement markings should be used at highway traffic signal locations as provided in Part 3. If the road surface will not retain pavement markings, signs should be installed to provide the needed road user information.*

## Section 4A.10 Responsibility for Operation and Maintenance

*Guidance:*

01 *Prior to installing any highway traffic signal, the responsibility for the maintenance of the signal and all of the appurtenances, hardware, software, and the timing plan(s) should be clearly established by the responsible agency.*

02 *To this end the agency should:*

*A. Keep every controller assembly in effective operation in accordance with its predetermined timing schedule, check the operation of the controller assembly frequently enough to verify that it is operating in accordance with the predetermined timing schedule, and establish a policy to maintain a record of all timing changes and that only authorized persons are permitted to make timing changes;*

*B. Clean the optical system of the signal sections and replace the light sources as frequently as experience proves necessary;*

*C. Clean and service equipment and other appurtenances (i.e. cameras and preemption devices) as frequently as experience proves necessary;*

*D. Provide for alternate operation of the traffic control signal during a period of failure, using flashing mode or manual control, or manual traffic direction by proper authorities as might be required by traffic volumes or*

*congestion, or by erecting other traffic control devices;*

E. *Have properly-skilled maintenance personnel available without undue delay for all signal malfunctions and signal indication failures;*
F. *Provide spare equipment to minimize the interruption of highway traffic signal operation as a result of equipment failure;*
G. *Provide for the availability of properly-skilled maintenance personnel for the repair of all components; and*
H. *Maintain the appearance of the signal displays and equipment.*

Support:

03 Caltrans is responsible for the operation of all State highway traffic signals, regardless of whether the signal is maintained by the State or by others.

# CHAPTER 4B. TRAFFIC CONTROL SIGNALS — GENERAL

## Section 4B.01 General

Support:

01 Words such as pedestrians and bicyclists are used redundantly in selected Sections of Part 4 to encourage sensitivity to these elements of "traffic."

02 Standards for traffic control signals are important because traffic control signals need to attract the attention of a variety of road users, including those who are older, those with vision disabilities, as well as those who are fatigued or distracted, or who are not expecting to encounter a signal at a particular location.

## Section 4B.02 Advantages and Disadvantages of Traffic Control Signals

Support:

01 When properly used, traffic control signals are valuable devices for safety and the control of vehicular and vulnerable road user traffic. They control the various traffic movements by alternating between directing them to stop and permitting them to proceed and thereby profoundly influence traffic flow. This accomplishes the need to safely separate road users in time in order to prevent crashes.

02 Traffic control signals that are properly designed, located, operated, and maintained will have one or more of the following advantages:

A. They reduce the frequency and severity of certain types of crashes, especially right-angle collisions and those involving vulnerable road users.
B. They provide for the orderly movement of traffic.
C. They increase the traffic-handling capacity of the intersection if:
    1. Proper physical layouts and control measures are used, and
    2. The signal operational parameters are reviewed and updated (if needed) on a regular basis (as engineering judgment determines that significant traffic flow and/or land use changes have occurred) to maximize the ability of the traffic control signal to satisfy current traffic demands.
D. They are coordinated to provide for continuous or nearly-continuous movement of traffic at a definite speed along a given route under favorable conditions.
E. They are used to interrupt heavy traffic at intervals to permit other traffic, vehicular or pedestrian, to cross.

03 Traffic control signals are often considered a panacea for all traffic problems at intersections. This belief has led to traffic control signals being installed at many locations where they are not needed, adversely affecting the safety and efficiency of motor vehicle, bicycle, and pedestrian traffic.

04 Traffic control signals, even when justified by traffic and roadway conditions, can be ill-designed, ineffectively placed, improperly operated, or poorly maintained. Improper or unjustified traffic control signals can result in one or more of the following disadvantages:

A. Excessive delay,
B. Excessive disobedience of the signal indications,
C. Increased use of less-adequate routes as road users attempt to avoid the traffic control signals, and
D. Significant increases in the frequency of collisions (especially rear-end collisions).

## Section 4B.03 Alternatives to Traffic Control Signals

*Guidance:*

01 *Since road user delay and the frequency of some types of crashes are sometimes higher under traffic signal control than under STOP sign control, consideration should be given to providing alternatives to traffic control signals even if one or more of the signal warrants (see Chapter 4C) has been satisfied.*

Option:

02 These alternatives may include, but are not limited to, the following:

A. Installing signs along the major street to warn road users approaching the intersection;
B. Installing a roundabout to reduce fatal and serious injury crashes and vehicular conflicts that result in fatal and serious injury crashes (see Section 8A.12 if the location is in close proximity to a grade crossing);
C. Installing a pedestrian hybrid beacon (see Chapter 4J), rectangular rapid flashing beacons (see Chapter 4L), pedestrian-actuated Warning Beacons (see Chapter 4S), or In-Roadway Warning Lights (see Chapter 4U) if

pedestrian safety is the major concern;

D. Relocating the stop line(s) and making other changes to improve the sight distance at the intersection;
E. Installing measures designed to reduce speeds on the approaches;
F. Installing a flashing beacon at the intersection to supplement STOP sign control;
G. Installing flashing beacons on warning signs in advance of a stop-controlled intersection on the major- street and/or minor-street approaches;
H. Adding one or more lanes on a minor-street approach to reduce the number of vehicles per lane on the approach;
I. Revising the geometrics at the intersection to channelize vehicular movements and reduce the time required for a vehicle to complete a movement, which could also assist pedestrians;
J. Revising the geometrics at the intersection to add pedestrian median refuge islands and/or curb extensions;
K. Installing roadway lighting if a disproportionate number of crashes occur at night;
L. Restricting one or more turning movements, perhaps on a time-of-day basis, if alternate routes are available;
M. If the warrant is satisfied, installing multi-way stop control;
N. Employing other alternatives, depending on conditions at the intersection.

## Section 4B.04 Basis of Installation of Traffic Control Signals

Support:

01 A careful analysis of traffic operations, pedestrian and bicyclist needs, and other factors at a large number of signalized and unsignalized locations, coupled with engineering judgment, has provided a series of signal warrants, described in Chapter 4C, that define the minimum conditions under which installing traffic control signals might be justified.

*Guidance:*

02 *The design (including the phasing, operation, and timing) of new traffic control signals should be based on an engineering study of roadway, traffic, and other conditions.*

## Section 4B.05 Basis of Removal of Traffic Control Signals

*Guidance:*

01 *Engineering judgment should be applied in the review of operating traffic control signals to determine whether the type of installation and the timing program meet the current requirements of all forms of traffic.*

02 *If changes in traffic patterns eliminate the need for a traffic control signal, consideration should be given to removing it and replacing it with appropriate alternative traffic control devices, if any are needed.*

03 *If the engineering study indicates that the traffic control signal is no longer justified, and a decision is made to remove the signal, the removal should be accomplished using the following steps:*

*A. Determine the appropriate traffic control to be used after the removal of the signal.*
*B. Remove any sight-distance restrictions as necessary.*
*C. Inform the public of the removal study.*
*D. Flash or cover the signal heads for a minimum of 90 days, and install the appropriate STOP sign control or other traffic control devices.*
*E. Remove the signal if the engineering data collected during the removal study period confirms that the signal is no longer needed.*

Option:

04 Because Items C, D, and E in Paragraph 3 of this Section are not relevant when a temporary traffic control signal (see Section 4D.11) is removed, a temporary traffic control signal may be removed immediately after Items A and B are completed.

05 Instead of total removal of a traffic control signal, the poles, controller cabinet, and cables may remain in place after removal of the signal heads for continued analysis.

**Standard:**

06 **Once a traffic signal at an intersection or pedestrian crossing has been energized, it shall not be turned off unless arrangements have been made for temporary control by traffic officers, temporary stop signs or an approved temporary signal.**

## Section 4B.101(CA) Modifications of Existing Signals

Support:

01 Where existing signals are to be modified, construction plans need to include a separate plan of the existing system as well as a plan showing the modifications.

Option:

02 It may also be necessary to include a tabulation on the plan showing such appurtenances as backplates and special signal faces that may be difficult to discern on a complicated plan.

*Guidance:*

03 *The design of any signal modification project should include adequate consideration for keeping the existing signals in operation while the modification work is being done.*

# CHAPTER 4C. TRAFFIC CONTROL SIGNAL NEEDS STUDIES

## Section 4C.01 Studies and Factors for Justifying Traffic Control Signals

**Standard:**

01 **Except for a temporary traffic control signal (see Section 4D.11) installed in a temporary traffic control zone, before a traffic control signal is installed at a particular location, an engineering study of traffic conditions, pedestrian characteristics, and physical characteristics of the location shall be performed to determine whether installation of a traffic control signal is justified at that location.**

01a **On State highways, the engineering study to evaluate proposed traffic control and design geometrics for intersections and other access improvements shall use Intersection Safety and Operational Assessment Process (ISOAP) and Information Guide. Intersection geometry and traffic control shall be determined through a performance-based analysis that considers all users and supports the principles of the Safe System Approach.**

Option:

01b On local streets and highways, the engineering study to evaluate proposed traffic control and design geometrics for intersections and other access improvements may use Intersection Safety and Operational Assessment Process (ISOAP) and Information Guide. Intersection geometry and traffic control may be determined through a performance-based analysis that considers all users and supports the principles of the Safe System Approach.

Support:

01c Refer to Caltrans' website (https://dot.ca.gov/programs/traffic-operations/isoap) for more information on the ISOAP memo, guide, forms, related NCHRP publications, and other references and resources for the evaluation of proposed traffic control and design geometrics for intersections and other access improvements.

**Standard:**

02 **The investigation of the need for a traffic control signal shall include an analysis of factors related to the existing operation and safety at the study location and the potential to improve these conditions, and the applicable factors contained in the following traffic signal warrants:**

**Warrant 1, Eight-Hour Vehicular Volume**
**Warrant 2, Four-Hour Vehicular Volume**
**Warrant 3, Peak Hour**
**Warrant 4, Pedestrian Volume**
**Warrant 5, School Crossing**
**Warrant 6, Coordinated Signal System**
**Warrant 7, Crash Experience**
**Warrant 8, Roadway Network**
**Warrant 9, Intersection Near a Grade Crossing**

03 **The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.**

Support:

04 Sections 8D.08 and 8D.14 contain information regarding the use of traffic control signals instead of gates and/or flashing-light signals at grade crossings.

*Guidance:*

05 *When considering the installation of a traffic control signal, alternatives to traffic control signals, including those listed in Section 4B.03, should also be considered.*

06 *A traffic control signal should not be installed unless one or more of the factors described in this Chapter are met.*

07 *A traffic control signal should not be installed unless an engineering study indicates that installing a traffic control signal will improve the overall safety and/or operation of the intersection.*

08 *The study should consider the effects of the right-turning vehicles from the minor-street approaches. Engineering judgment should be used to determine what, if any, portion of the right-turning traffic is subtracted from the minor-street traffic count when evaluating the count against the signal warrants listed in Paragraph 2 of this Section.*

09 *Engineering judgment should also be used in applying various traffic signal warrants to cases where major-street approaches consist of one lane plus one left-turn or right-turn lane. The site-specific traffic characteristics should dictate whether a major-street approach is considered as one lane or two lanes. For example, for a major-street approach with one lane for through and right-turning traffic plus a left-turn lane, if engineering judgment indicates that*

*it should be considered a one-lane approach because the traffic using the left-turn lane is minor, the total traffic volume approaching the intersection should be applied against the signal warrants as a one-lane approach. The major-street approach should be considered two lanes if approximately half of the traffic on the approach turns left and the left-turn lane is of sufficient length to accommodate all left-turning vehicles.*

10 *Similar engineering judgment and rationale should be applied to a minor-street approach with one through/left-turn lane plus a right-turn lane. In this case, the degree of conflict of minor-street right-turning traffic with traffic on the major street should be considered. Thus, right-turning traffic should not be included in the minor-street volume if the movement enters the major street with minimal conflict. The minor-street approach should be evaluated as a one-lane approach with only the traffic volume in the through/left-turn lane considered.*

11 *If a minor-street approach has one combined through/right-turn lane plus a left-turn lane, the approach should either be analyzed as a two-lane approach based on the sum of the traffic volumes using both lanes or as a one-lane approach based on only the traffic volume in the approach lane with the higher volume.*

12 *At a location that is under development or construction or at a location where it is not possible to obtain a traffic count that would represent future traffic conditions, hourly volumes should be estimated as part of an engineering study for comparison with traffic signal warrants. Except for locations where the engineering study uses the satisfaction of Warrant 8 to justify a signal, a traffic control signal installed under projected conditions should have an engineering study done within 1 year of putting the signal into steady (stop-and-go) operation to determine if the signal is justified. If not justified, the signal should be taken out of steady (stop-and-go) operation or removed.*

Option:

13 For signal warrant analysis, a location with a wide median may be analyzed as one intersection or as two intersections (see Section 2A.23) based on engineering judgment. Refer to CVC § 21361(a) for designation as a single intersection, for locations on the state highway system.

14 At an intersection with a high volume of left-turning traffic from the major street, the signal warrant analysis may be performed in a manner that considers the higher ~~of the major-street left-turn volumes as the "minor-street" volume and the corresponding single direction of opposing traffic on the major street as the "major-street"~~ volume of the major-street left-turn volumes plus the higher volume minor-street approach as the "minor street" volume and both approaches of the major street minus the higher of the major-street left-turn volume as "major street" volume.

15 For signal warrants requiring conditions to be present for a certain number of hours in order to be satisfied, any four consecutive 15-minute periods may be considered as 1 hour if the separate 1-hour periods used in the warrant analysis do not overlap each other and both the major-street volume and the minor-street volume are for the same specific 1-hour periods.

16 For signal warrant analysis, bicyclists may be counted as either vehicles or pedestrians.

Support:

17 When performing a signal warrant analysis, bicyclists riding in the street with other vehicular traffic are usually counted as vehicles and bicyclists who are clearly using pedestrian facilities are usually counted as pedestrians.

Option:

18 Engineering study data may include the following:

A. The number of vehicles entering the intersection in each hour from each approach during 12 hours of an average day. It is desirable that the hours selected contain the greatest percentage of the 24-hour traffic volume.
B. Vehicular volumes for each traffic movement from each approach, classified by vehicle type (heavy trucks, passenger cars and light trucks, public-transit vehicles, and, in some locations, bicycles), during each 15-minute period of the 2 hours in the morning and 2 hours in the afternoon during which the total traffic entering the intersection is the greatest.
C. Pedestrian volume counts on each crosswalk during the same periods as the vehicular counts in Item B and during the hours of highest pedestrian volume. Where young, elderly, and/or persons with physical or vision disabilities need special consideration, the pedestrians and their crossing times may be classified by general observation.
D. Information about nearby facilities and activity centers that serve the young, elderly, and/or persons with disabilities, including requests from persons with disabilities for accessible crossing improvements at the location under study. These persons might not be adequately reflected in the pedestrian volume count if the absence of a signal restrains their mobility.

E. The posted or statutory speed limit or the 85th-percentile speed on the uncontrolled approaches to the location.
F. A condition diagram showing details of the physical layout, including such features as intersection geometrics, channelization, grades, sight-distance restrictions, transit stops and routes, parking conditions, pavement markings, roadway lighting, driveways, nearby railroad crossings, distance to the nearest traffic control signals, utility poles and fixtures, and adjacent land use.
G. A collision diagram showing crash experience by type, location, direction of movement, severity, weather, time of day, date, and day of week for at least 1 year.

19 The following data, which are desirable for a more precise understanding of the operation of the intersection, may be obtained during the periods described in Item B of Paragraph 18 of this Section:

A. Vehicle-hours of stopped-time delay determined separately for each approach.
B. The number and distribution of acceptable gaps in vehicular traffic on the major street for entrance from the minor street.
C. The posted or statutory speed limit or the 85th-percentile speed on controlled approaches at a point near to the intersection but unaffected by the control.
D. Pedestrian delay time for at least two 30-minute peak pedestrian delay periods of an average weekday or like periods of a Saturday or Sunday.
E. Queue length on stop-controlled approaches.

**Standard:**

19a **Delay, congestion, approach conditions, driver confusion, future land use or other evidence of the need for right of way assignment beyond that which could be provided by stop sign shall be documented.**

Support:

19b Figure 4C–101(CA) and Figure 4C-103(CA) are examples of warrant sheets.

*Guidance:*

19c *Figure 4C-103(CA) should be used only for new intersections or other locations where it is not reasonable to count actual traffic volumes.*

Support:

20 The safe and efficient movement of all road users is the primary consideration in the engineering study to determine whether to install a traffic control signal or to install some other type of control or roadway configuration. Installation of a traffic control signal does not necessarily result in improved safety in every case. In some cases, the installation of a traffic control signal at an inappropriate location could adversely impact safety for one or more types of road users. The purpose of the engineering study is to evaluate all of the factors that are relevant to a specific location. The satisfaction of a warrant (or warrants) is one of the relevant factors in the engineering study, but it is not intended to be the only factor or even the overriding consideration. Agencies can install a traffic control signal at a location where no warrants are met, but only after conducting an engineering study that documents the rationale for deciding that the installation of a traffic control signal is the best solution for improving the overall safety and/or operation at the location.

## Section 4C.02 Warrant 1, Eight-Hour Vehicular Volume

Support:

01 The Minimum Vehicular Volume, Condition A (see Table 4C-1), is intended for application at locations where a large volume of intersecting traffic is the principal reason to consider installing a traffic control signal.

02 The Interruption of Continuous Traffic, Condition B (see Table 4C-1), is intended for application at locations where Condition A is not satisfied and where the traffic volume on a major street is so heavy that traffic on a minor intersecting street suffers excessive delay or conflict in entering or crossing the major street.

03 It is intended that Warrant 1 be treated as a single warrant. If Condition A is satisfied, then Warrant 1 is satisfied and analyses of Condition B and the combination of Conditions A and B are not needed. Similarly, if Condition B is satisfied, then Warrant 1 is satisfied and an analysis of the combination of Conditions A and B is not needed.

*Guidance:*

04 *The need for a traffic control signal should be considered if an engineering study finds that one of the following conditions exist for each of any 8 hours of an average day:*

*A. The vehicles per hour given in both of the 100 percent columns of Condition A in Table 4C-1 exist on the major street and the more critical minor-street approach, respectively, to the intersection; or*
*B. The vehicles per hour given in both of the 100 percent columns of Condition B in Table 4C-1 exist on the major*

*street and the more critical minor-street approach, respectively, to the intersection.*

**Standard:**

05 **These major-street and minor-street volumes shall be for the same 8 hours for each condition; however, the 8 hours that are selected for the Condition A analysis shall not be required to be the same 8 hours that are selected for the Condition B analysis.**

Support:

06 On the minor street, the more critical volume is not required to be on the same approach during each of these 8 hours. The more critical minor-street volume is the one that meets the warranting criteria for that approach, and in the case of a one-lane minor-street approach that is opposite from a multi-lane minor-street approach might not have the higher volume.

Option:

07 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 40 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000, the traffic volumes in the 70 percent columns in Table 4C-1 may be used in place of the 100 percent columns.

*Guidance:*

08 *The combination of Conditions A and B is intended for application at locations where Condition A is not satisfied and Condition B is not satisfied and should be applied only after an adequate trial of other alternatives that could cause less delay and inconvenience to traffic has failed to solve the traffic problems.*

09 *The need for a traffic control signal should be considered if an engineering study finds that both of the following conditions exist for each of any 8 hours of an average day:*

*A. The vehicles per hour given in both of the 80 percent columns of Condition A in Table 4C-1 exist on the major street and the more critical minor-street approach, respectively, to the intersection; and*

*B. The vehicles per hour given in both of the 80 percent columns of Condition B in Table 4C-1 exist on the major street and the more critical minor-street approach, respectively, to the intersection.*

**Standard:**

10 **These major-street and minor-street volumes shall be for the same 8 hours for each condition; however, the 8 hours satisfied in Condition A shall not be required to be the same 8 hours satisfied in Condition B.**

Support:

11 On the minor street, the more critical volume is not required to be on the same approach during each of the 8 hours. The more critical minor-street volume is the one that meets the warranting criteria for that approach, and in the case of a one-lane minor-street approach that is opposite from a multi-lane minor-street approach might not have the higher volume.

Option:

12 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 40 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000, the traffic volumes in the 56 percent columns in Table 4C-1 may be used in place of the 80 percent columns.

## Section 4C.03 Warrant 2, Four-Hour Vehicular Volume

Support:

01 The Four-Hour Vehicular Volume signal warrant conditions are intended to be applied where the volume of intersecting traffic is the principal reason to consider installing a traffic control signal.

*Guidance:*

02 *The need for a traffic control signal should be considered if an engineering study finds that, for each of any 4 hours of an average day, the plotted points representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the more critical minor-street approach (one direction only) all fall above the applicable curve in Figure 4C-1 for the existing combination of approach lanes.*

Support:

03 On the minor street, the more critical volume is not required to be on the same approach during each of these 4 hours. The more critical minor-street volume is the one that meets the warranting criteria for that approach, and in the case of a one-lane minor-street approach that is opposite from a multi-lane minor-street approach might not have the higher volume.

Option:

04 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 40 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000, Figure 4C-2 may be used in place of Figure 4C-1.

## Section 4C.04 Warrant 3, Peak Hour

Support:

01 The Peak Hour signal warrant is intended for use at a location where traffic conditions are such that for a minimum of 1 hour of an average day, the minor-street traffic suffers undue delay when entering or crossing the major street.

*Guidance:*

02 *This signal warrant should be applied only in unusual cases, such as office complexes, manufacturing plants, industrial complexes, or high-occupancy vehicle facilities that attract or discharge large numbers of vehicles over a short time.*

03 *The need for a traffic control signal should be considered if an engineering study finds that the criteria in either of the following two categories are met:*

- *A. If all three of the following conditions exist for the same 1 hour (any four consecutive 15-minute periods) of an average day:*
  - *1. The total stopped-time delay experienced by the traffic on one minor-street approach (one direction only) controlled by a STOP sign equals or exceeds: 4 vehicle-hours for a one-lane approach or 5 vehicle-hours for a two-lane approach, and*
  - *2. The volume on the same minor-street approach (one direction only) equals or exceeds 100 vehicles per hour for one moving lane of traffic or 150 vehicles per hour for two moving lanes, and*
  - *3. The total entering volume serviced during the hour equals or exceeds 650 vehicles per hour for intersections with three approaches or 800 vehicles per hour for intersections with four or more approaches.*
- *B. The plotted point representing the vehicles per hour on the major street (total of both approaches) and the corresponding vehicles per hour on the more critical minor-street approach (one direction only) for 1 hour (any four consecutive 15-minute periods) of an average day falls above the applicable curve in Figure 4C-3 for the existing combination of approach lanes.*

Option:

04 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 40 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000, Figure 4C-4 may be used in place of Figure 4C-3 to evaluate the criteria in Item B of Paragraph 3 in this Section.

05 If this warrant is the only warrant met and a traffic control signal is justified by an engineering study, the traffic control signal may be operated in the flashing mode during the hours that the volume criteria of this warrant are not met.

*Guidance:*

06 *If this warrant is the only warrant met and a traffic control signal is justified by an engineering study, the traffic control signal should be traffic-actuated.*

## Section 4C.05 Warrant 4, Pedestrian Volume

Support:

01 The Pedestrian Volume signal warrant is intended for application where the traffic volume on a major street is so heavy that pedestrians experience excessive delay in crossing the major street.

*Guidance:*

02 *The need for a traffic control signal at an intersection or midblock crossing should be considered if an engineering study finds that one of the following criteria is met:*

- *A. For each of any 4 hours of an average day, the plotted points representing the vehicles per hour on the major street (total of both approaches) and the corresponding pedestrians per hour crossing the major street (total of all crossings) all fall above the curve in Figure 4C-5; or*
- *B. For 1 hour (any four consecutive 15-minute periods) of an average day, the plotted point representing the vehicles per hour on the major street (total of both approaches) and the corresponding pedestrians per hour crossing the major street (total of all crossings) falls above the curve in Figure 4C-6.*

Option:

03 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 35 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000, Figure 4C-7 may be used in place of Figure 4C-5 to evaluate Item A in Paragraph 2 of this Section, and Figure 4C-8 may be used in place of Figure 4C-6 to evaluate Item B in Paragraph 2 of this Section.

04 Where there is a divided street having a median of sufficient width for pedestrians to wait, the criteria in Items A and B of Paragraph 2 of this Section may be applied separately to each direction of vehicular traffic.

*Guidance:*

05 *The Pedestrian Volume signal warrant should not be applied at locations where the distance to the nearest traffic control signal or STOP sign controlling the street that pedestrians desire to cross is less than 300 feet, unless the proposed traffic control signal will not restrict the progressive movement of traffic.*

**Standard:**

06 **If this warrant is met and a traffic control signal is justified by an engineering study, the traffic control signal shall be equipped with pedestrian signal heads complying with the provisions set forth in Chapter 4I.**

*Guidance:*

07 *If this warrant is met and a traffic control signal is justified by an engineering study, then:*

*A. If it is installed at an intersection or major driveway location, the traffic control signal should also control the minor-street or driveway traffic, should be traffic-actuated, and should include pedestrian detection.*

*B. If it is installed at a non-intersection crossing, the traffic control signal should be installed at least 100 feet from side streets or driveways that are controlled by STOP or YIELD signs, and should be pedestrian-actuated. If the traffic control signal is installed at a non-intersection crossing, at least one of the signal faces should be over the traveled way for each approach, parking and other sight obstructions should be prohibited for at least 100 feet in advance of and at least 20 feet beyond the crosswalk or site accommodations should be made through curb extensions or other techniques to provide adequate sight distance, and the installation should include suitable standard signs and pavement markings.*

*C. Furthermore, if it is installed within a signal system, the traffic control signal should be coordinated.*

Option:

08 The criterion for the pedestrian volume crossing the major street may be reduced as much as 50 percent if the 15th-percentile crossing speed of pedestrians is less than 3.5 feet per second (see Figures 4C-5 through 4C-8).

09 A traffic control signal may not be needed at the study location if adjacent coordinated traffic control signals consistently provide gaps of adequate length for pedestrians to cross the street.

## Section 4C.06 Warrant 5, School Crossing

Support:

01 The School Crossing signal warrant is intended for application where the fact that schoolchildren cross the major street is the principal reason to consider installing a traffic control signal. For the purposes of this warrant, the word "schoolchildren" includes elementary through high school students.

*Guidance:*

02 *The need for a traffic control signal should be considered when an engineering study of the frequency and adequacy of gaps in the vehicular traffic stream as related to the number and size of groups of schoolchildren at an established school crossing across the major street shows that the number of adequate gaps in the traffic stream during the period when the schoolchildren are using the crossing is less than the number of minutes in the same period and there are a minimum of 20 schoolchildren during the highest crossing hour.*

03 *Before a decision is made to install a traffic control signal, consideration should be given to the implementation of other remedial measures, such as warning signs and flashers, school speed zones, school crossing guards, or a grade-separated crossing.*

04 *The School Crossing signal warrant should not be applied at locations where the distance to the nearest traffic control signal along the major street is less than 300 feet, unless the proposed traffic control signal will not restrict the progressive movement of traffic.*

**Standard:**

05 **If this warrant is met and a traffic control signal is justified by an engineering study, the traffic control signal shall be equipped with pedestrian signal heads complying with the provisions set forth in Chapter 4I.**

*Guidance:*

06 *If this warrant is met and a traffic control signal is justified by an engineering study, then:*

*A. If it is installed at an intersection or major driveway location, the traffic control signal should also control the minor-street or driveway traffic, should be traffic-actuated, and should include pedestrian detection.*

*B. If it is installed at a non-intersection crossing, the traffic control signal should be installed at least 100 feet from side streets or driveways that are controlled by STOP or YIELD signs, and should be pedestrian-actuated. If the traffic control signal is installed at a non-intersection crossing, at least one of the signal faces should be over the traveled way for each approach, parking and other sight obstructions should be prohibited for at least 100 feet in advance of and at least 20 feet beyond the crosswalk or site accommodations should be made through curb extensions or other techniques to provide adequate sight distance, and the installation should include suitable standard signs and pavement markings.*

*C. Furthermore, if it is installed within a signal system, the traffic control signal should be coordinated.*

**Standard:**

07 **Criterion for school crossing traffic signals shall be as follows:**

**A. The signal shall be designed for full-time operation.**

**B. Pedestrian signal faces shall be installed at all marked crosswalks at signalized intersections along the "Suggested Route to School."**

**C. If an intersection is signalized under this guideline for school pedestrians, the entire intersection shall be signalized.**

*Guidance:*

*D. School area traffic signals should be traffic actuated type with push buttons or other detectors for pedestrians.*

Option:

08 Non-intersection school pedestrian crosswalk locations may be signalized when justified.

## Section 4C.07 Warrant 6, Coordinated Signal System

Support:

01 Progressive movement in a coordinated signal system sometimes necessitates installing traffic control signals at intersections where they would not otherwise be needed in order to maintain proper platooning of vehicles.

*Guidance:*

02 *The need for a traffic control signal should be considered if an engineering study finds that one of the following criteria is met:*

*A. On a one-way street or a street that has traffic predominantly in one direction, the adjacent traffic control signals are so far apart that they do not provide the necessary degree of vehicular platooning.*

*B. On a two-way street, adjacent traffic control signals do not provide the necessary degree of platooning and the proposed and adjacent traffic control signals will collectively provide a progressive operation.*

03 *The Coordinated Signal System signal warrant should not be applied where the resultant spacing of traffic control signals would be less than 1,000 feet.*

## Section 4C.08 Warrant 7, Crash Experience

Support:

01 The Crash Experience signal warrant conditions are intended for application where the severity and frequency of crashes are the principal reasons to consider installing a traffic control signal.

*Guidance:*

02 *The need for a traffic control signal should be considered if an engineering study finds that all of the following criteria are met:*

*A. Adequate trial of alternatives with satisfactory observance and enforcement has failed to reduce the crash frequency; and*

*B. At least one of the following conditions applies to the reported crash history (where each reported crash considered is related to the intersection and apparently exceeds the applicable requirements for a reportable crash):*

*1. The number of reported angle crashes and pedestrian crashes within a 1-year period equals or exceeds the*

*threshold number in Table 4C-2 for total angle crashes and pedestrian crashes (all severities); or*

2. *The number of reported fatal-and-injury angle crashes and pedestrian crashes within a 1-year period equals or exceeds the threshold number in Table 4C-2 for total fatal-and-injury angle crashes and pedestrian crashes; or*
3. *The number of reported angle crashes and pedestrian crashes within a 3-year period equals or exceeds the threshold number in Table 4C-3 for total angle crashes and pedestrian crashes (all severities); or*
4. *The number of reported fatal-and-injury angle crashes and pedestrian crashes within a 3-year period equals or exceeds the threshold number in Table 4C-3 for total fatal-and-injury angle crashes and pedestrian crashes; and*

C. *For each of any 8 hours of an average day, the vehicles per hour (vph) given in both of the 80 percent columns of Condition A in Table 4C-1 (see Section 4C.02), or the vph in both of the 80 percent columns of Condition B in Table 4C-1 exists on the major street and the more critical minor-street approach, respectively, to the intersection, or the volume of pedestrian traffic is not less than 80 percent of the requirements specified in the Pedestrian Volume warrant (see Section 4C.05).*

**Standard:**

03 **These major-street and minor-street volumes shall be for the same 8 hours.**

Support:

04 On the minor street, the more critical volume is not required to be on the same approach during each of these 8 hours. The more critical minor-street volume is the one that meets the warranting criteria for that approach, and in the case of a one-lane minor-street approach that is opposite from a multi-lane minor-street approach might not have the higher volume.

Option:

05 If the posted or statutory speed limit or the 85th-percentile speed on the major street exceeds 40 mph, or if the intersection lies within the built-up area of an isolated community having a population of less than 10,000:

A. The traffic volumes in the 56 percent columns in Table 4C-1 may be used in place of the 80 percent columns.
B. Tables 4C-4 and 4C-5 may be used in place of Tables 4C-2 and 4C-3, respectively. Option:

06 Agencies may calibrate Highway Safety Manual (HSM) (AASHTO, 2010) safety performance functions (SPFs) to their own crash data or develop their own SPFs to produce agency specific average crash frequency values. When documented as part of the engineering study, these agency specific crash frequency values may be used instead of the values shown in Tables 4C-2 through 4C-5 when applying the Crash Experience signal warrant.

Support:

07 The values in Tables 4C-2 through 4C-5 for Minimum Number of Reported Crashes that correspond to the Crash Experience signal warrant were derived using the safety performance functions (SPFs) in the Highway Safety Manual (HSM) (AASHTO, 2010) for stop-controlled and signalized intersections with characteristics that are considered typical. The values in Tables 4C-2 through 4C-5 are representative of average crash frequency for the given intersection condition. The values correspond to the threshold at which the signalized intersection safety performance outperforms the stop-controlled intersection, for otherwise identical conditions and equivalent traffic.

## Section 4C.09 Warrant 8, Roadway Network

Support:

01 Installing a traffic control signal at some intersections might be justified to encourage concentration and organization of traffic flow on a roadway network.

*Guidance:*

02 *The need for a traffic control signal should be considered if an engineering study finds that the common intersection of two or more major routes meets one or both of the following criteria:*

*A. The intersection has a total existing, or immediately projected, entering volume of at least 1,000 vehicles per hour during the peak hour of a typical weekday and has 5-year projected traffic volumes, based on an engineering study, that meet one or more of Warrants 1, 2, and 3 during an average weekday; or*
*B. The intersection has a total existing or immediately projected entering volume of at least 1,000 vehicles per hour for each of any 5 hours of a non-normal business day (Saturday or Sunday).*

03 *A major route as used in this signal warrant should have at least one of the following characteristics:*

*A. It is part of the street or highway system that serves as the principal roadway network for through traffic flow;*

*B. It includes rural or suburban highways outside, entering, or traversing a city; or*
*C. It appears as a major route on an official plan, such as a major street plan in an urban area traffic and transportation study.*

## Section 4C.10 Warrant 9, Intersection Near a Grade Crossing

Support:

01 The Intersection Near a Grade Crossing signal warrant is intended for use at a location where none of the conditions described in the other eight traffic signal warrants are met, but the proximity of a grade crossing on an approach controlled by a STOP or YIELD sign at a highway-highway intersection is the principal reason to consider installing a traffic control signal.

*Guidance:*

02 *This signal warrant should be applied only after adequate consideration has been given to other alternatives or after a trial of an alternative has failed to alleviate the safety concerns associated with the grade crossing. Among the alternatives that should be considered or tried are:*

*A. Providing additional pavement that would enable vehicles to clear the track or that would provide space for an evasive maneuver, or*
*B. Reassigning the stop controls at the highway-highway intersection to make the approach across the track a non-stopping approach.*

03 *The need for a traffic control signal should be considered if an engineering study finds that both of the following criteria are met:*

*A. A grade crossing exists on an approach controlled by a STOP or YIELD sign at a highway-highway intersection and the center of the track nearest to the intersection is within 140 feet of the stop line or yield line on the approach; and*
*B. During the highest traffic volume hour during which rail traffic uses the crossing, the plotted point representing the vehicles per hour on the major street (total of both approaches) of the highway- highway intersection and the corresponding vehicles per hour on the minor-street approach that crosses the track (one direction only, approaching the intersection) falls above the applicable curve in Figure 4C-9 or 4C-10 for the existing combination of approach lanes over the track and the distance D, which is the clear storage distance as defined in Section 1C.02.*

04 *The following considerations apply when plotting the traffic volume data on Figure 4C-9 or 4C-10:*

*A. Figure 4C-9 should be used if there is only one lane approaching the highway-highway intersection at the track crossing location and Figure 4C-10 should be used if there are two or more lanes approaching the highway-highway intersection at the track crossing location.*
*B. After determining the actual distance D, the curve for the distance D that is nearest to the actual distance D should be used. For example, if the actual distance D is 95 feet, the plotted point should be compared to the curve for D=90 feet.*
*C. If the rail traffic arrival times are unknown, the highest traffic volume hour of the day should be used.*

Option:

05 The traffic volume on the minor-street approach to the highway-highway intersection may be multiplied by up to three adjustment factors as provided in Paragraphs 6 through 8 of this Section.

06 Because the curves are based on an average of four occurrences of rail traffic per day, the vehicles per hour on the minor-street approach may be multiplied by the adjustment factor shown in Table 4C-6 for the appropriate number of occurrences of rail traffic per day.

07 Because the curves are based on typical vehicle occupancy, if at least 2% of the vehicles crossing the track are buses carrying at least 20 people, the vehicles per hour on the minor-street approach may be multiplied by the adjustment factor shown in Table 4C-7 for the appropriate percentage of high-occupancy buses.

08 Because the curves are based on tractor-trailer trucks comprising 10% of the vehicles crossing the track, the vehicles per hour on the minor-street approach may be multiplied by the adjustment factor shown in Table 4C-8 for the appropriate distance and percentage of tractor-trailer trucks.

**Standard:**

09 **If this warrant is met and a traffic control signal at the highway-highway intersection is justified by an engineering study, then:**

**A. The traffic control signal shall have actuation on the minor street,**

**B. Preemption control shall be provided in accordance with Sections 4F.19 and 8D.09, and**

**C. The grade crossing shall have flashing-light signals (see Section 8D.02).**

*Guidance:*

10 *If this warrant is met and a traffic control signal at the highway-highway intersection is justified by an engineering study, the grade crossing should have automatic gates (see Section 8D.03).*


## Figure 4C-1. Warrant 2, Four-Hour Vehicular Volume




*Note: 115 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 80 vph applies as the lower threshold volume for a minor-street approach with one lane


## Figure 4C-2. Warrant 2, Four-Hour Vehicular Volume (70% Factor)

**(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 40 MPH ON MAJOR STREET)**

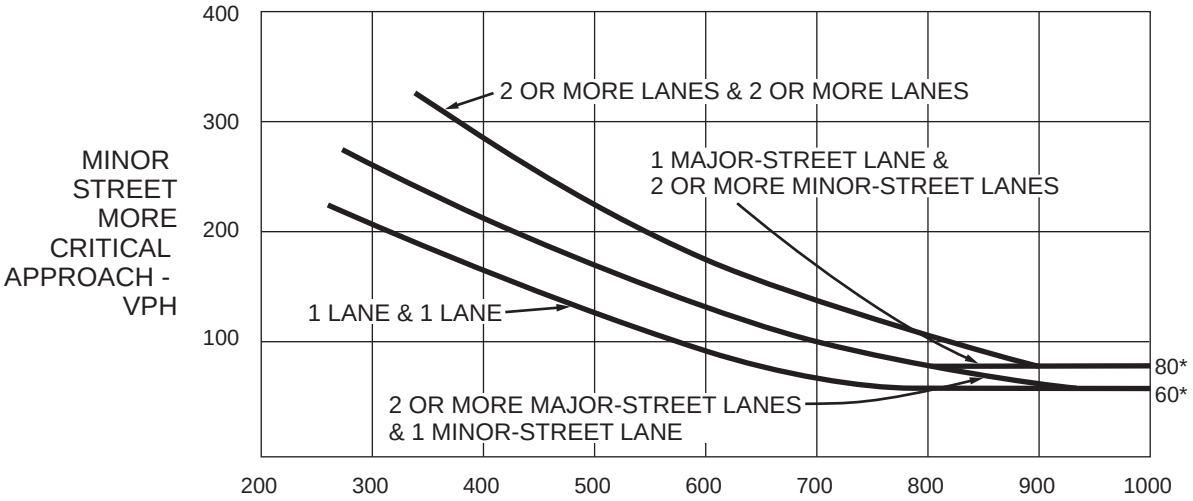


*Note: 80 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 60 vph applies as the lower threshold volume for a minor-street approach with one lane


## Figure 4C-3. Warrant 3, Peak Hour

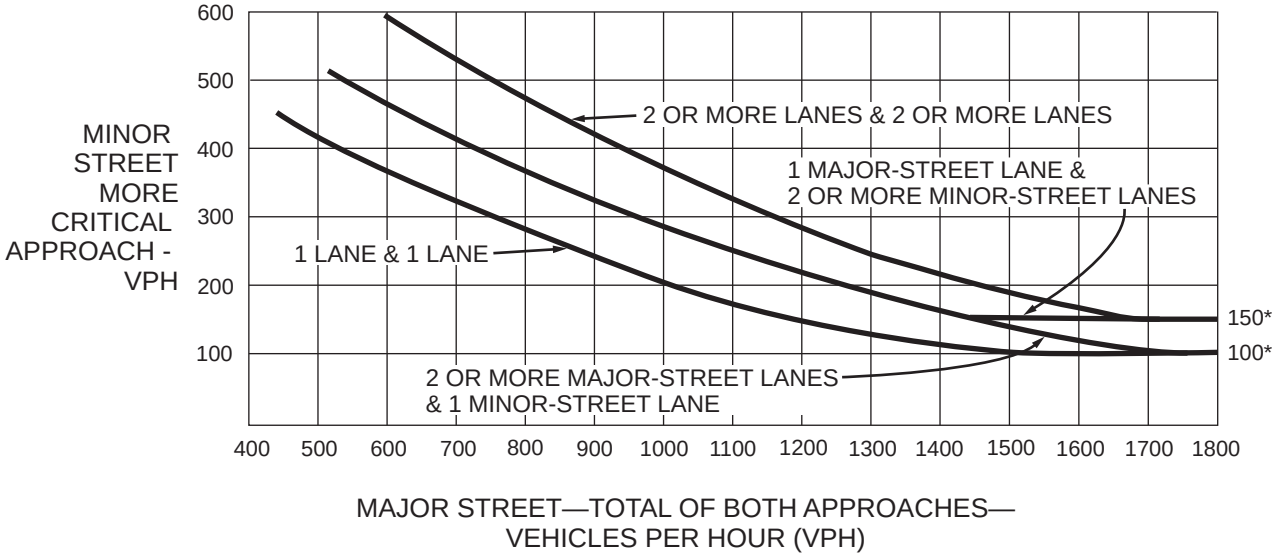


*Note: 150 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 100 vph applies as the lower threshold volume for a minor-street approach with one lane


# Figure 4C-4. Warrant 3, Peak Hour (70% Factor)

**(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 40 MPH ON MAJOR STREET)**

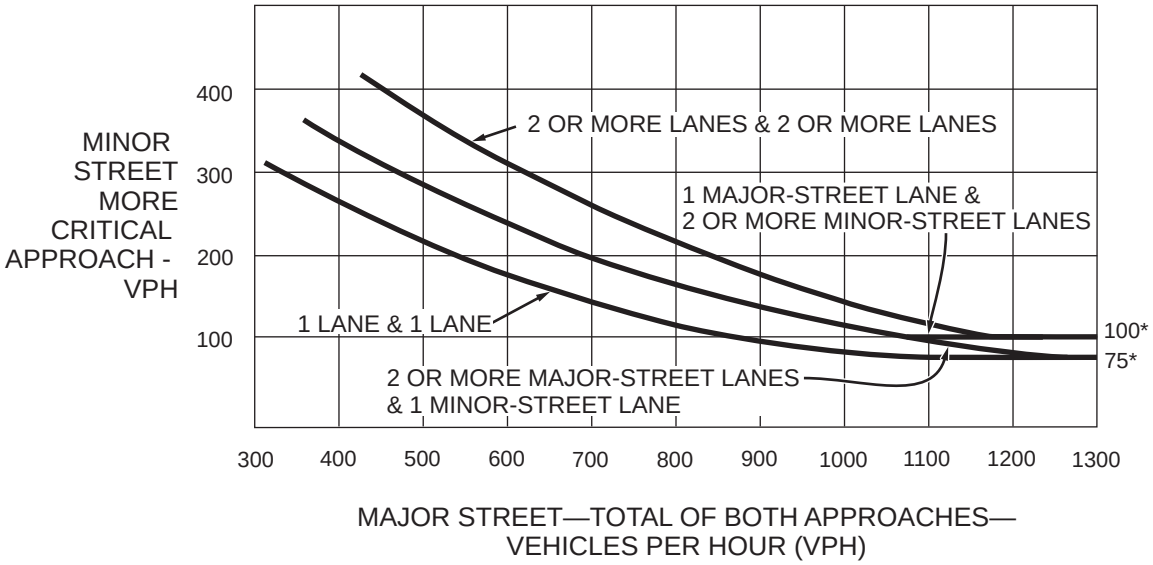


*Note: 100 vph applies as the lower threshold volume for a minor-street approach with two or more lanes and 75 vph applies as the lower threshold volume for a minor-street approach with one lane


## Figure 4C-5. Warrant 4, Pedestrian Four-Hour Volume

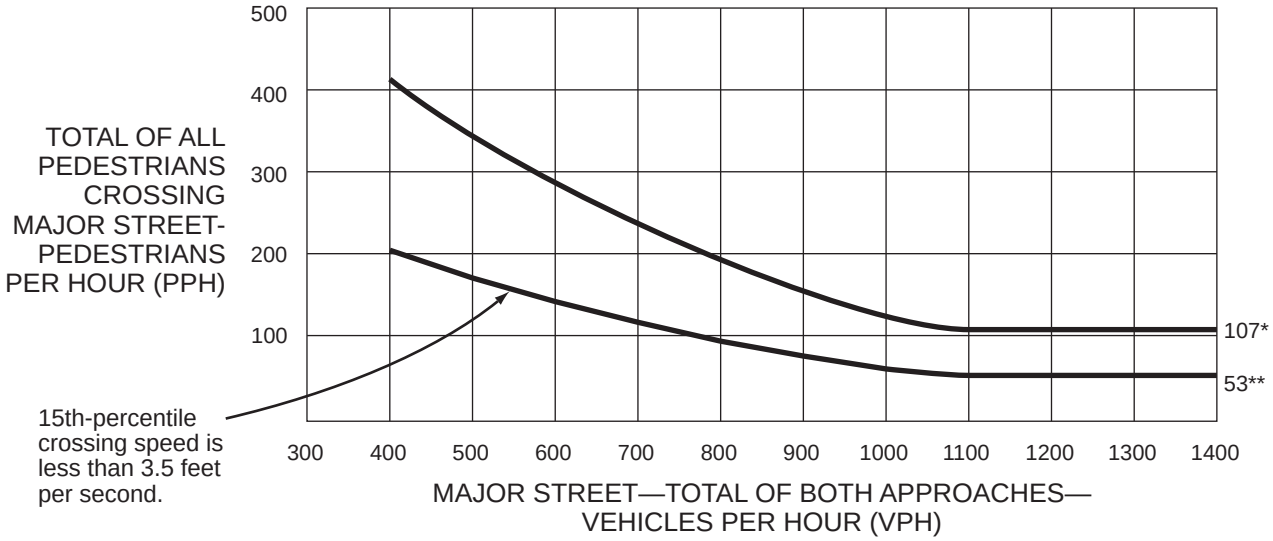


* 107 pph applies as the lower threshold volume

** 53 pph applies as the lower threshold volume if the 15th-percentile crossing speed is less than 3.5 feet per second

## Figure 4C-6. Warrant 4, Pedestrian Peak Hour

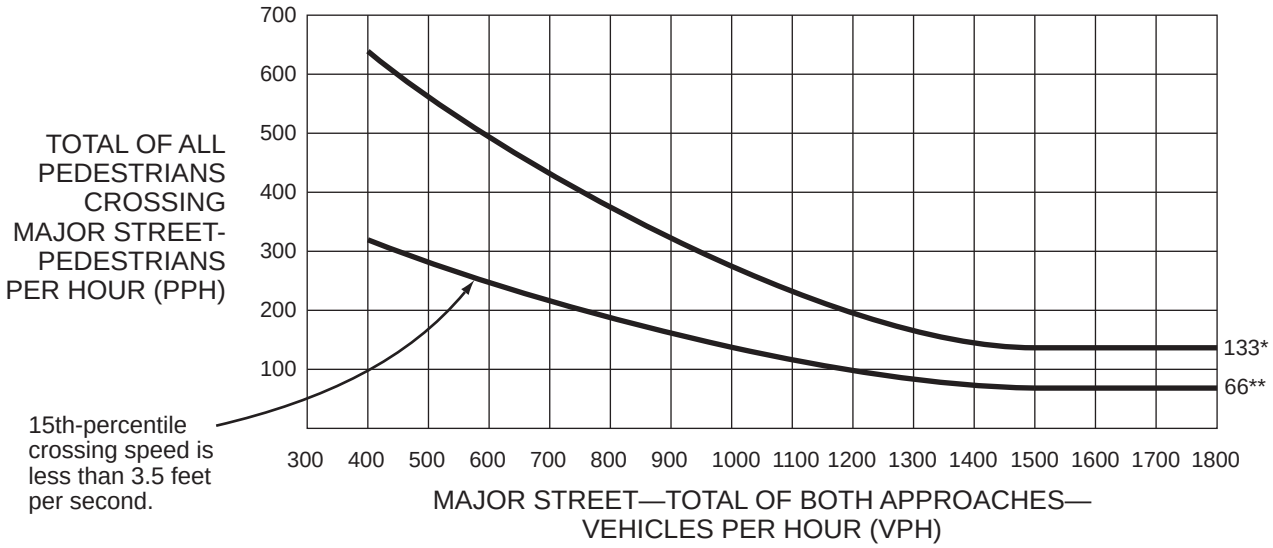



* 133 pph applies as the lower threshold volume

** 66 pph applies as the lower threshold volume if the 15th-percentile crossing speed is less than 3.5 feet per second

# Figure 4C-7. Warrant 4, Pedestrian Four-Hour Volume (70% Factor)

**(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 40*** MPH ON MAJOR STREET)**

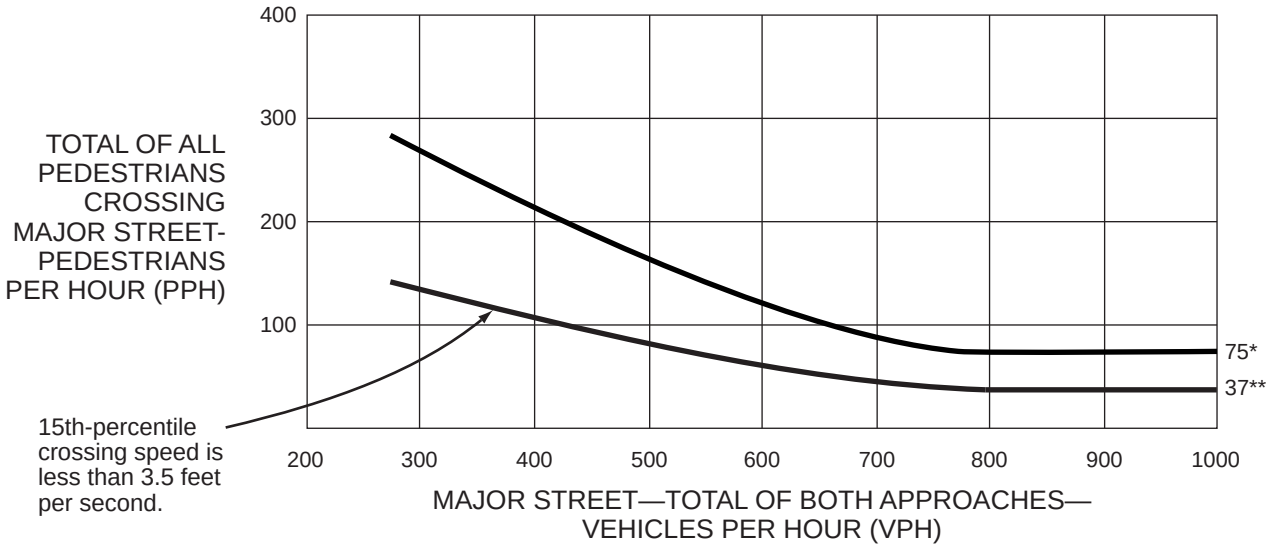



* 75 pph applies as the lower threshold volume

** 37 pph applies as the lower threshold volume if the 15th-percentile crossing speed is less than 3.5 feet per second

*** Refer to FHWA's List of Known Errors for error in the parenthesis below the figure title. Refer to Section 1A.04 for more details.

# Figure 4C-8. Warrant 4, Pedestrian Peak Hour (70% Factor)

**(COMMUNITY LESS THAN 10,000 POPULATION OR ABOVE 40*** MPH ON MAJOR STREET)**

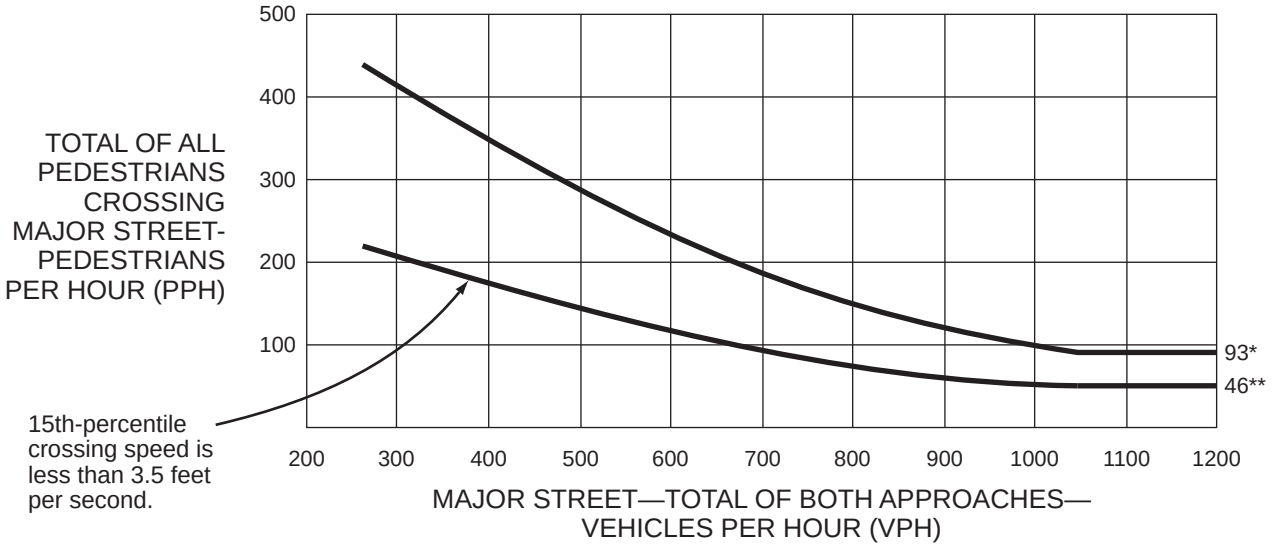



* 93 pph applies as the lower threshold volume

** 46 pph applies as the lower threshold volume if the 15th-percentile crossing speed is less than 3.5 feet per second

*** Refer to FHWA's List of Known Errors for error in the parenthesis below the figure title. Refer to Section 1A.04 for more details.


## Figure 4C-9. Warrant 9, Intersection Near a Grade Crossing (One Approach Lane at the Track Crossing)

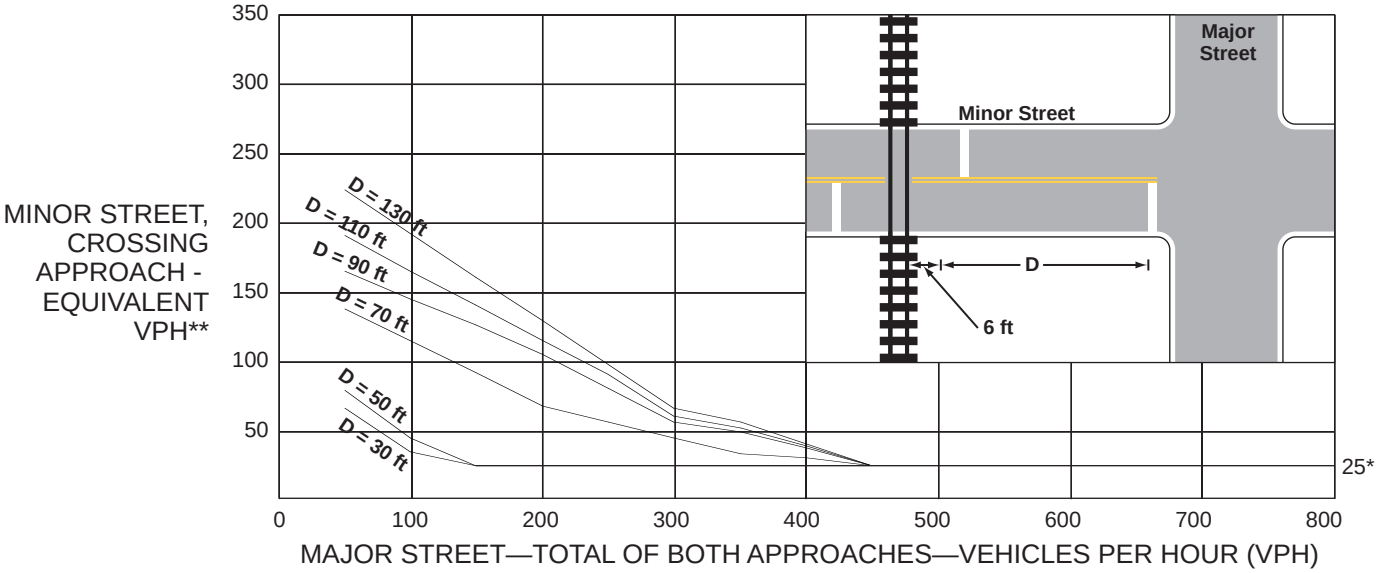


* 25 vph applies as the lower threshold volume

** VPH after applying the adjustment factors in Tables 4C-6, 4C-7, and/or 4C-8, if appropriate

## Figure 4C-10. Warrant 9, Intersection Near a Grade Crossing (Two or More Approach Lanes at the Track Crossing)

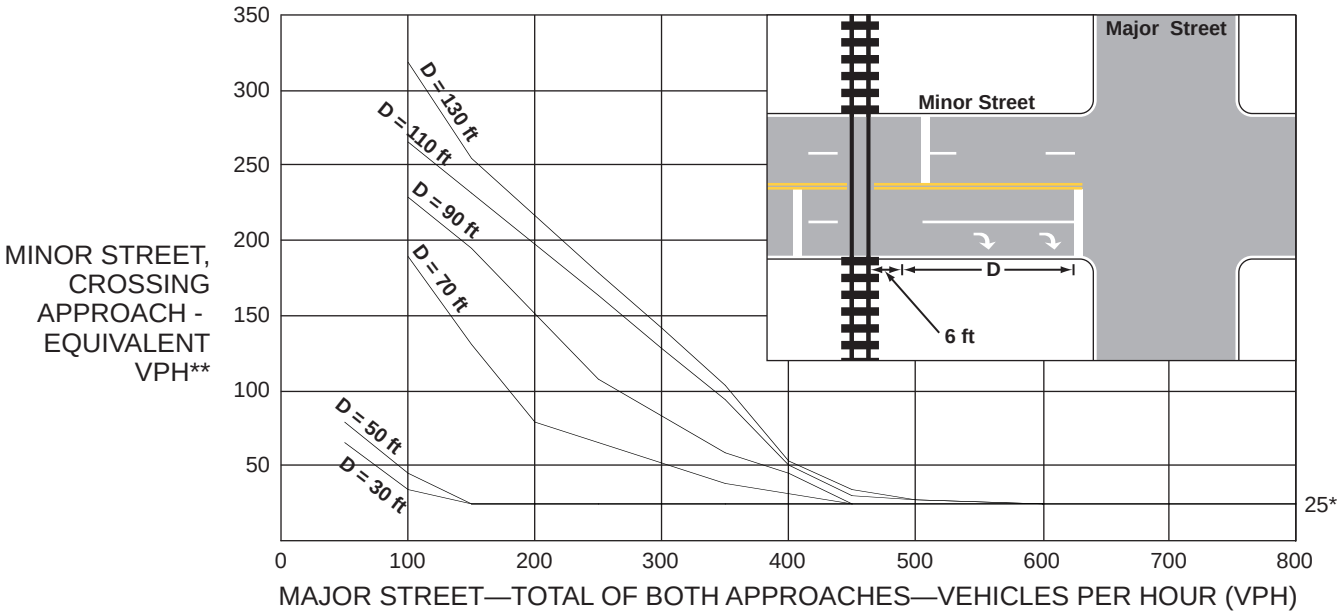


* 25 vph applies as the lower threshold volume

** VPH after applying the adjustment factors in Tables 4C-6, 4C-7, and/or 4C-8, if appropriate

## *Figure 4C-101(CA). Traffic Signal Warrants Worksheet (Sheet 1 of 5)*

COUNT DATE _____

DIST _____ CO _____ RTE _____ PM _____

CALC _____ DATE _____

CHK _____ DATE _____

Major St: _____ Critical Approach Speed _____ mph

Minor St: _____ Critical Approach Speed _____ mph

Speed limit or critical speed on major street traffic > 40 mph..... ☐
or
In built up area of isolated community of < 10,000 population..... ☐ **RURAL (R)**

☐ **URBAN (U)**

---

**WARRANT 1 - Eight Hour Vehicular Volume** **SATISFIED YES ☐ NO ☐**
**(Condition A or Condition B or combination of A and B must be satisfied)**

**Condition A - Minimum Vehicle Volume** **100% SATISFIED YES ☐ NO ☐**
**80% SATISFIED YES ☐ NO ☐**

| | MINIMUM REQUIREMENTS (80% SHOWN IN BRACKETS) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | U | R | U | R | | | | | | | Hour |
| APPROACH LANES | 1 | | 2 or More | | | | | | | | |
| Both Approaches Major Street | 500 (400) | 350 (280) | 600 (480) | 420 (336) | | | | | | | |
| Highest Approach Minor Street | 150 (120) | 105 (84) | 200 (160) | 140 (112) | | | | | | | |

**Condition B - Interruption of Continuous Traffic** **100% SATISFIED YES ☐ NO ☐**
**80% SATISFIED YES ☐ NO ☐**

| | MINIMUM REQUIREMENTS (80% SHOWN IN BRACKETS) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | U | R | U | R | | | | | | | Hour |
| APPROACH LANES | 1 | | 2 or More | | | | | | | | |
| Both Approaches Major Street | 750 (600) | 525 (420) | 900 (720) | 630 (504) | | | | | | | |
| Highest Approach Minor Street | 75 (60) | 53 (42) | 100 (80) | 70 (56) | | | | | | | |

**Combination of Conditions A & B** **SATISFIED YES ☐ NO ☐**

| REQUIREMENT | CONDITION | ✓ | FULFILLED |
|---|---|---|---|
| TWO CONDITIONS SATISFIED 80% | A. MINIMUM VEHICULAR VOLUME | | Yes ☐ No ☐ |
| | AND,<br>B. INTERRUPTION OF CONTINUOUS TRAFFIC | | |
| AND, AN ADEQUATE TRIAL OF OTHER ALTERNATIVES THAT COULD CAUSE LESS DELAY AND INCONVENIENCE TO TRAFFIC HAS FAILED TO SOLVE THE TRAFFIC PROBLEMS | | | Yes ☐ No ☐ |

Major-street and minor-street volumes shall be for the same 8 hours for each condition; however, the 8 hours satisfied in Condition A shall not be required to be the same 8 hours satisfied in Condition B.

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.

## *Figure 4C-101(CA). Traffic Signal Warrants Worksheet (Sheet 2 of 5)*

### WARRANT 2 - Four Hour Vehicular Volume

**SATISFIED* YES ☐ NO ☐**

Record hourly vehicular volumes for any four hours of an average day.

| APPROACH LANES | One | 2 or More | Hour | | | |
|---|---|---|---|---|---|---|
| Both Approaches - Major Street | | | | | | |
| Higher Approach - Minor Street | | | | | | |

| | |
|---|---|
| *All plotted points fall above the applicable curve in Figure 4C-1. (URBAN AREAS) | Yes ☐ No ☐ |
| OR, All plotted points fall above the applicable curve in Figure 4C-2. (RURAL AREAS) | Yes ☐ No ☐ |

### WARRANT 3 - Peak Hour
### (Part A or Part B must be satisfied)

**SATISFIED YES ☐ NO ☐**

**PART A**

**SATISFIED YES ☐ NO ☐**

**(All parts 1, 2, and 3 below must be satisfied for the same one hour, for any four consecutive 15-minute periods)**

| | |
|---|---|
| 1. The total delay experienced by traffic on one minor street approach (one direction only) controlled by a STOP sign equals or exceeds four vehicle-hours for a one-lane approach, or five vehicle-hours for a two-lane approach; AND | Yes ☐ No ☐ |
| 2. The volume on the same minor street approach (one direction only) equals or exceeds 100 vph for one moving lane of traffic or 150 vph for two moving lanes; AND | Yes ☐ No ☐ |
| 3. The total entering volume serviced during the hour equals or exceeds 800 vph for intersections with four or more approaches or 650 vph for intersections with three approaches. | Yes ☐ No ☐ |

**PART B**

**SATISFIED YES ☐ NO ☐**

| APPROACH LANES | One | 2 or More | Hour |
|---|---|---|---|
| Both Approaches - Major Street | | | |
| Higher Approach - Minor Street | | | |

| | |
|---|---|
| The plotted point falls above the applicable curve in Figure 4C-3. (URBAN AREAS) | Yes ☐ No ☐ |
| OR, The plotted point falls above the applicable curve in Figure 4C-4. (RURAL AREAS) | Yes ☐ No ☐ |

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.

## *Figure 4C-101 (CA). Traffic Signal Warrants Worksheet (Sheet 3 of 5)*

### WARRANT 4 - Pedestrian Volume (Parts 1 and 2 Must Be Satisfied)

**SATISFIED YES ☐ NO ☐**

**Part 1 (Parts A or B must be satisfied)**

A.

| Hours – – –> | | | | |
|---|---|---|---|---|
| Vehicles per hour for any 4 hours | | | | |
| Pedestrians per hour for any 4 hours | | | | |

**Figure 4C-5 or Figure 4C-6**
**SATISFIED YES ☐ NO ☐**

B.

| Hours – – –> | | | | |
|---|---|---|---|---|
| Vehicles per hour for any 1 hour | | | | |
| Pedestrians per hour for any 1 hour | | | | |

**Figure 4C-7 or Figure 4C-8**
**SATISFIED YES ☐ NO ☐**

**Part 2** **SATISFIED YES ☐ NO ☐**

| | |
|---|---|
| AND, The distance to the nearest traffic signal along the major street is greater than 300 ft | Yes ☐ No ☐ |
| OR, The proposed traffic signal will not restrict progressive traffic flow along the major street. | Yes ☐ No ☐ |

---

### WARRANT 5 - School Crossing (Parts A and B Must Be Satisfied)

**SATISFIED YES ☐ NO ☐**

**Part A**
**Gap/Minutes and # of Children**

**SATISFIED YES ☐ NO ☐**

| Gaps vs Minutes | Hour |
|---|---|
| Minutes Children Using Crossing | |
| Number of Adequate Gaps | |
| School Age Pedestrians Crossing Street / hr | |

Gaps < Minutes YES ☐ NO ☐
AND Children > 20/hr YES ☐ NO ☐

| | |
|---|---|
| AND, Consideration has been given to less restrictive remedial measures. | Yes ☐ No ☐ |

**Part B** **SATISFIED YES ☐ NO ☐**

| | |
|---|---|
| The distance to the nearest traffic signal along the major street is greater than 300 ft | Yes ☐ No ☐ |
| OR, The proposed signal will not restrict the progressive movement of traffic. | Yes ☐ No ☐ |

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.

## *Figure 4C-101(CA). Traffic Signal Warrants Worksheet (Sheet 4 of 5)*

### WARRANT 6 - Coordinated Signal System (All Parts Must Be Satisfied)

SATISFIED YES ☐ NO ☐

| MINIMUM REQUIREMENTS | DISTANCE TO NEAREST SIGNAL | |
|---|---|---|
| ≥ 1000 ft | N ft, S ft, E ft, W ft | Yes ☐ No ☐ |
| On a one-way street or a street that has traffic predominantly in one direction, the adjacent traffic control signals are so far apart that they do not provide the necessary degree of vehicular platooning. | | Yes ☐ No ☐ |
| OR, On a two-way street, adjacent traffic control signals do not provide the necessary degree of platooning and the proposed and adjacent traffic control signals will collectively provide a progressive operation. | | |

### WARRANT 7 - Crash Experience Warrant (All Parts Must Be Satisfied)

SATISFIED YES ☐ NO ☐

| | | | |
|---|---|---|---|
| Adequate trial of alternatives with satisfactory observance and enforcement has failed to reduce the crash frequency. | | | Yes ☐ No ☐ |
| REQUIREMENTS | Number of crashes reported within a 12 month period susceptible to correction by a traffic signal, and involving injury or damage exceeding the requirements for a reportable crash. | | Yes ☐ No ☐ |
| 5 OR MORE | | | |
| REQUIREMENTS | CONDITIONS | ✓ | Yes ☐ No ☐ |
| ONE CONDITION SATISFIED **MINIMUM REPORTED CRASHES** | Table 4C-2, Angle crashes and pedestrian crashes | | |
| | OR, Table 4C-2, Fatal-and-injury angle crashes and pedestrian crashes | | |
| | OR, Table 4C-3, Angle crashes and pedestrian crashes | | |
| | OR, Table 4C-3, Fatal-and-injury angle crashes and pedestrian crashes | | |
| ONE CONDITION SATISFIED 80% | Warrant 1, Condition A - Minimum Vehicular Volume | | Yes ☐ No ☐ |
| | OR, Warrant 1, Condition B - Interruption of Continuous Traffic | | |
| | OR, Warrant 4, Pedestrian Volume Condition Ped Vol ≥ 80% of Figure 4C-5 through Figure 4C-8 | | |

### WARRANT 8 - Roadway Network (All Parts Must Be Satisfied)

SATISFIED YES ☐ NO ☐

| MINIMUM VOLUME REQUIREMENTS | ENTERING VOLUMES - ALL APPROACHES | ✓ | FULFILLED |
|---|---|---|---|
| 1000 Veh/Hr | During Typical Weekday Peak Hour _____ Veh/Hr and has 5-year projected traffic volumes that meet one or more of Warrants 1, 2, and 3 during an average weekday. | | Yes ☐ No ☐ |
| | OR During Each of Any 5 Hrs. of a Sat. or Sun _____ Veh/Hr | | |

| CHARACTERISTICS OF MAJOR ROUTES | MAJOR ROUTE A | MAJOR ROUTE B | |
|---|---|---|---|
| Hwy. System Serving as Principal Network for Through Traffic | | | |
| Rural or Suburban Highway Outside Of, Entering, or Traversing a City | | | |
| Appears as Major Route on an Official Plan | | | |
| Any Major Route Characteristics Met, Both Streets | | | Yes ☐ No ☐ |

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.

## *Figure 4C-101 (CA). Traffic Signal Warrants Worksheet (Sheet 5 of 5)*

**WARRANT 9 - Intersection Near a Grade Crossing** **SATISFIED YES ☐ NO ☐**
**(Both Parts A and B Must Be Satisfied)**

| | |
|---|---|
| **PART A**<br><br>A grade crossing exists on an approach controlled by a STOP or YIELD sign and the center of the track nearest to the intersection is within 140 feet of the stop line or yield line on the approach. Track Center Line to Limit Line _____ ft | Yes ☐ No ☐ |
| **PART B**<br><br>**There is one minor street approach lane at the track crossing -** During the highest traffic volume hour during which rail traffic uses the crossing, the plotted point falls above the applicable curve in Figure 4C-9.<br><br>Major Street - Total of both approaches: _____ VPH<br>Minor Street - Crosses the track (one direction only, approaching the intersection):<br>_____ VPH X AF (Use Tables 4C-2, 3, & 4 below to calculate AF) = _____ VPH | Yes ☐ No ☐ |
| **OR, There are two or more minor street approach lanes at the track crossing -**<br>During the highest traffic volume hour during which rail traffic uses the crossing, the plotted point falls above the applicable curve in Figure 4C-10.<br><br>Major Street - Total of both approaches : _____ VPH<br>Minor Street - Crosses the track (one direction only, approaching the intersection):<br>_____ VPH X AF (Use Tables 4C-2, 3, & 4 below to calcualte AF) = _____ VPH | |

The minor street approach volume may be multiplied by up to three following adjustment factors (AF) as described in Section 4C.10.


1- Number of Rail Traffic per Day_____ Adjustment factor from table 4C-2____

2- Percentage of High-Occupancy Buses on Minor Street Approach_____ Adjustment factor from table 4C-3____

3- Percentage of Tractor-Trailer Trucks on Minor Street Approach_____ Adjustment factor from table 4C-4____

NOTE: If no data is availale or known, then use AF = 1 (no adjustment)

## *Figure 4C-102 (CA). Traffic Count Worksheet*

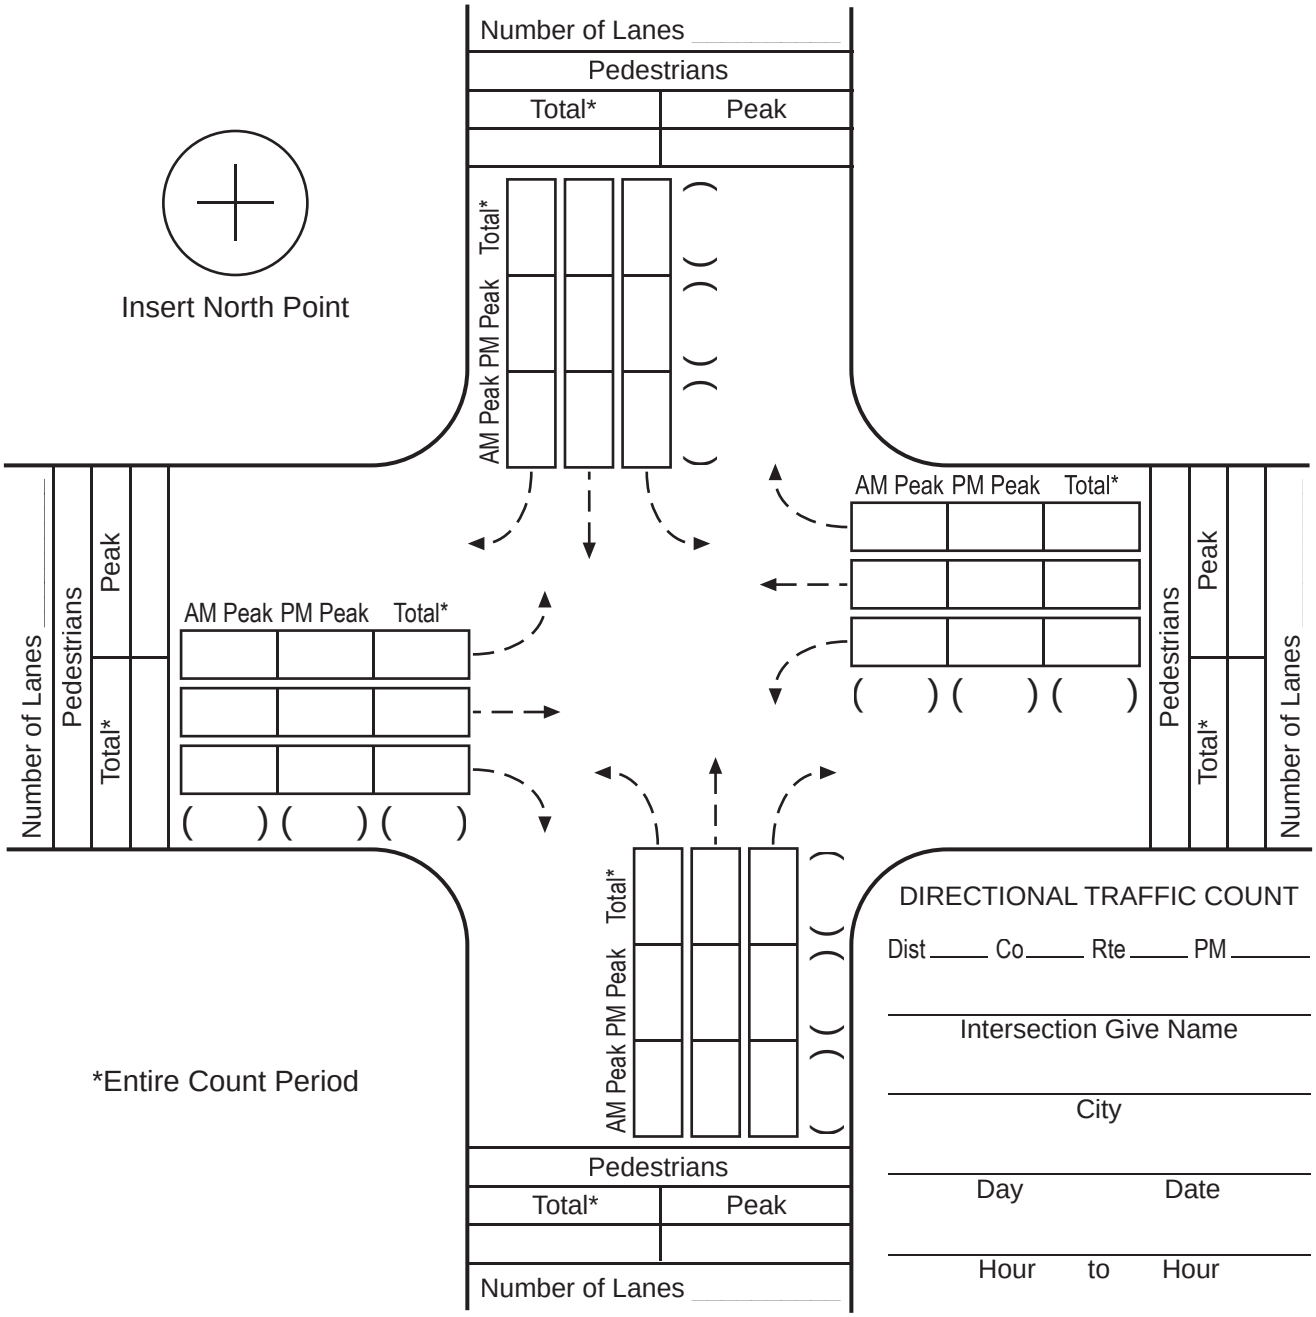

## *Figure 4C-103 (CA). Traffic Signal Warrants Worksheet (Average Traffic Estimate Form)*

COUNT DATE _____

_____ _____ _____ _____
DIST CO RTE PM

CALC _____ DATE _____
CHK _____ DATE _____

Major St: _____ Critical Approach Speed _____ mph
Minor St: _____ Critical Approach Speed _____ mph

Speed limit or critical speed on major street traffic > 40 mph..... ☐
or
In built up area of isolated community of < 10,000 population..... ☐
} **RURAL (R)**

☐ **URBAN (U)**

### (Based on Estimated Average Daily Traffic - See Note)

URBAN..... RURAL.....

**CONDITION A - Minimum Vehicular Volume**

Satisfied _____ Not Satisfied _____

Number of lanes for moving traffic on each approach

| Major Street | Minor Street |
|---|---|
| 1..... | 1..... |
| 2 or More..... | 1..... |
| 2 or More..... | 2 or More..... |
| 1..... | 2 or More..... |

Minimum Requirements EADT

| Vehicles Per Day on Major Street (Total of Both Approaches) | | Vehicles Per Day on Higher-Volume Minor Street Approach (One Direction Only) | |
|---|---|---|---|
| Urban | Rural | Urban | Rural |
| 8,000 | 5,600 | 2,400 | 1,680 |
| 9,600 | 6,720 | 2,400 | 1,680 |
| 9,600 | 6,720 | 3,200 | 2,240 |
| 8,000 | 5,600 | 3,200 | 2,240 |

**CONDITION B - Interruption of Continuous Traffic**

Satisfied _____ Not Satisfied _____

Number of lanes for moving traffic on each approach

| Major Street | Minor Street |
|---|---|
| 1..... | 1..... |
| 2 or More..... | 1..... |
| 2 or More..... | 2 or More..... |
| 1..... | 2 or More..... |

| Vehicles Per Day on Major Street (Total of Both Approaches) | | Vehicles Per Day on Higher-Volume Minor Street Approach (One Direction Only) | |
|---|---|---|---|
| Urban | Rural | Urban | Rural |
| 12,000 | 8,400 | 1,200 | 850 |
| 14,400 | 10,080 | 1,200 | 850 |
| 14,400 | 10,080 | 1,600 | 1,120 |
| 12,000 | 8,400 | 1,600 | 1,120 |

**Combination of CONDITIONS A + B**

Satisfied _____ Not Satisfied _____

No one condition satisfied, but following conditions fulfilled 80% or more..... _____ A _____ B

| Vehicles Per Day on Major Street (Total of Both Approaches) | Vehicles Per Day on Higher-Volume Minor Street Approach (One Direction Only) |
|---|---|
| 2 CONDITIONS 80% | 2 CONDITIONS 80% |

**Note: To be used only for NEW INTERSECTIONS or other locations where it is not reasonable to count actual traffic volumes.**

The satisfaction of a traffic signal warrant or warrants shall not in itself require the installation of a traffic control signal.

# Table 4C-1. Warrant 1, Eight-Hour Vehicular Volume

**Condition A—Minimum Vehicular Volume**

| Number of lanes for moving traffic on each approach | | Vehicles per hour on major street (total of both approaches) | | | | Vehicles per hour on more critical minor-street approach (one direction only) | | | |
|---|---|---|---|---|---|---|---|---|---|
| Major Street | Minor Street | 100%[a] | 80%[b] | 70%[c] | 56%[d] | 100%[a] | 80%[b] | 70%[c] | 56%[d] |
| 1 | 1 | 500 | 400 | 350 | 280 | 150 | 120 | 105 | 84 |
| 2 or more | 1 | 600 | 480 | 420 | 336 | 150 | 120 | 105 | 84 |
| 2 or more | 2 or more | 600 | 480 | 420 | 336 | 200 | 160 | 140 | 112 |
| 1 | 2 or more | 500 | 400 | 350 | 280 | 200 | 160 | 140 | 112 |

*

| Number of lanes for moving traffic on each approach | | Vehicles per hour on major street (total of both approaches) | | | | Vehicles per hour on more critical minor-street approach (one direction only) | | | |
|---|---|---|---|---|---|---|---|---|---|
| Major Street | Minor Street | 100%[a] | 80%[b] | 70%[c] | 56%[d] | 100%[a] | 80%[b] | 70%[c] | 56%[d] |
| 1 | 1 | 750 | 600 | 525 | 420 | 75 | 60 | 53 | 42 |
| 2 or more | 1 | 900 | 720 | 630 | 504 | 75 | 60 | 53 | 42 |
| 2 or more | 2 or more | 900 | 720 | 630 | 504 | 100 | 80 | 70 | 56 |
| 1 | 2 or more | 750 | 600 | 525 | 420 | 100 | 80 | 70 | 56 |

[a] Basic minimum hourly volume
[b] Used for combination of Conditions A and B after adequate trial of other remedial measures
[c] May be used when the major-street speed exceeds 40 mph or in an isolated community with a population of less than 10,000
[d] May be used for combination of Conditions A and B after adequate trial of other remedial measures when the major-street speed exceeds 40 mph or in an isolated community with a population of less than 10,000

* Refer to FHWA's List of Known Errors for error above the second sub-table. Refer to Section 1A.04 for more details.

# Table 4C-2. Minimum Number of Reported Crashes in a One-Year Period

| Number of through lanes on each approach | | Total of angle and pedestrian crashes (all severities)[a] | | Total of fatal-and-injury angle and pedestrian crashes[a] | |
|---|---|---|---|---|---|
| Major Street | Minor Street | Four Legs | Three Legs | Four Legs | Three Legs |
| 1 | 1 | 5 | 4 | 3 | 3 |
| 2 or more | 1 | 5 | 4 | 3 | 3 |
| 2 or more | 2 or more | 5 | 4 | 3 | 3 |
| 1 | 2 or more | 5 | 4 | 3 | 3 |

[a] Angle crashes include all crashes that occur at an angle and involve one or more vehicles on the major street and one or more vehicles on the minor street

## Table 4C-3. Minimum Number of Reported Crashes in a Three-Year Period

| Number of through lanes on each approach | | Total of angle and pedestrian crashes (all severities)[a] | | Total of fatal-and-injury angle and pedestrian crashes[a] | |
|---|---|---|---|---|---|
| Major Street | Minor Street | Four Legs | Three Legs | Four Legs | Three Legs |
| 1 | 1 | 6 | 5 | 4 | 4 |
| 2 or more | 1 | 6 | 5 | 4 | 4 |
| 2 or more | 2 or more | 6 | 5 | 4 | 4 |
| 1 | 2 or more | 6 | 5 | 4 | 4 |

[a] Angle crashes include all crashes that occur at an angle and involve one or more vehicles on the major street and one or more vehicles on the minor street

## Table 4C-4. Minimum Number of Reported Crashes in a One-Year Period

| Community less than 10,000 population or above 40 mph on major street | | | | | |
|---|---|---|---|---|---|
| Number of through lanes on each approach | | Total of angle and pedestrian crashes (all severities)[a] | | Total of fatal-and-injury angle and pedestrian crashes[a] | |
| Major Street | Minor Street | Four Legs | Three Legs | Four Legs | Three Legs |
| 1 | 1 | 4 | 3 | 3 | 3 |
| 2 or more | 1 | 10 | 9 | 6 | 6 |
| 2 or more | 2 or more | 10 | 9 | 6 | 6 |
| 1 | 2 or more | 4 | 3 | 3 | 3 |

[a] Angle crashes include all crashes that occur at an angle and involve one or more vehicles on the major street and one or more vehicles on the minor street

## Table 4C-5. Minimum Number of Reported Crashes in a Three-Year Period

| Community less than 10,000 population or above 40 mph on major street | | | | | |
|---|---|---|---|---|---|
| Number of through lanes on each approach | | Total of angle and pedestrian crashes (all severities)[a] | | Total of fatal-and-injury angle and pedestrian crashes[a] | |
| Major Street | Minor Street | Four Legs | Three Legs | Four Legs | Three Legs |
| 1 | 1 | 6 | 5 | 4 | 4 |
| 2 or more | 1 | 16 | 13 | 9 | 9 |
| 2 or more | 2 or more | 16 | 13 | 9 | 9 |
| 1 | 2 or more | 6 | 5 | 4 | 4 |

[a] Angle crashes include all crashes that occur at an angle and involve one or more vehicles on the major street and one or more vehicles on the minor street

## Table 4C-6. Warrant 9, Adjustment Factor for Daily Frequency of Rail Traffic

| Rail traffic per day | Adjustment factor |
|---|---|
| 1 | 0.67 |
| 2 | 0.91 |
| 3 to 5 | 1.00 |
| 6 to 8 | 1.18 |
| 9 to 11 | 1.25 |
| 12 or more | 1.33 |

## Table 4C-7. Warrant 9, Adjustment Factor for Percentage of High-Occupancy Buses

| % of high-occupancy buses* on minor-street approach | Adjustment factor |
|---|---|
| 0% | 1.00 |
| 2% | 1.09 |
| 4% | 1.19 |
| 6% or more | 1.32 |

* A high-occupancy bus is defined as a bus occupied by at least 20 people.

## Table 4C-8. Warrant 9, Adjustment Factor for Percentage of Tractor-Trailer Trucks

| % of tractor-trailer trucks on minor-street approach | Adjustment factor | |
|---|---|---|
| | D less than 70 feet | D of 70 feet or more |
| 0% to 2.5% | 0.50 | 0.50 |
| 2.6% to 7.5% | 0.75 | 0.75 |
| 7.6% to 12.5% | 1.00 | 1.00 |
| 12.6% to 17.5% | 2.30 | 1.15 |
| 17.6% to 22.5% | 2.70 | 1.35 |
| 22.6% to 27.5% | 3.28 | 1.64 |
| More than 27.5% | 4.18 | 2.09 |

# CHAPTER 4D. DESIGN FEATURES OF TRAFFIC CONTROL SIGNALS

## Section 4D.01 General

Support:

01 The features of traffic control signals of interest to road users are the location, design, and meaning of the signal indications. Uniformity in the design features that affect the traffic to be controlled, as set forth in this Manual, is especially important for the safety and efficiency of operations.

02 Traffic control signals can be operated in pretimed, semi-actuated, or full-actuated modes. For isolated (non-interconnected) signalized locations on rural high-speed highways, full-actuated mode with advance vehicle detection on the high-speed approaches is typically used. These features are designed to reduce the frequency with which the onset of the yellow change interval is displayed when high-speed approaching vehicles are in the "dilemma zone" such that the drivers of these high-speed vehicles find it difficult to decide whether to stop or proceed.

**Standard:**

03 **The design and operation of traffic control signals shall take into consideration the needs of all modes of traffic including access and safety.**

04 **When a traffic control signal is not in operation, such as before it is placed in service, during seasonal shutdowns, or when it is not desirable to operate the traffic control signal, the signal faces shall be covered, turned, or taken down to clearly indicate that the traffic control signal is not in operation.**

*Guidance*:

05 *If a cover is placed over a traffic control signal face that is not in operation and that has a yellow retroreflective strip along the perimeter of its signal backplate (see Paragraph 21 in Section 4D.06), the entire signal face, including the backplate, should be covered. If a traffic control signal face that is not in operation and that has a yellow retroreflective strip along the perimeter of its signal backplate is turned, the turned signal face should be oriented such that the yellow backplate border will not reflect light back to road users on any of the approaches to the intersection.*

Support:

06 Seasonal shutdown is a condition in which a permanent traffic control signal is turned off or otherwise made non-operational during a particular season when its operation is not justified. This might be applied in a community where tourist traffic during most of the year justifies the permanent signalization, but a seasonal shutdown of the signal during an annual period of lower tourist traffic would reduce delays; or where a major traffic generator, such as a large factory, justifies the permanent signalization, but the large factory is shut down for an annual factory vacation for a few weeks in the summer.

**Standard:**

07 **A traffic control signal shall control traffic only at the intersection or midblock location where the signal faces are placed.**

*Guidance:*

08 *Midblock crosswalks should not be signalized if they are located within 300 feet from the nearest traffic control signal, unless supported by an engineering study or engineering judgment that indicates safe and efficient operation of the closely-spaced traffic control signals can be achieved.*

09 *Midblock crosswalks should not be signalized if they are located within 100 feet from side streets or driveways that are controlled by STOP signs or YIELD signs, unless supported by an engineering study or engineering judgment that considers restricting turning movements from the side street or driveway to eliminate conflicts with pedestrian and bicyclist movements.*

10 *Engineering judgment should be used to determine the proper phasing and timing for a traffic control signal. Since traffic flows and patterns change, phasing and timing should be reevaluated regularly and updated if needed.*

11 *Traffic control signals within ½ mile of one another along a major route or in a network of intersecting major routes should be coordinated, preferably with interconnected controller units. Where traffic control signals that are within ½ mile of one another along a major route have a jurisdictional boundary or a boundary between different signal systems between them, coordination across the boundary should be considered.*

Support:

12 Signal coordination need not be maintained between control sections that operate on different cycle lengths.

13 Sections 4F.19, 4Q.03, and 8D.09 contain information about coordination of traffic control signals with grade crossing signals and movable bridge signals.

## Section 4D.02 Provisions for Pedestrians

Support:

01 Chapter 4I contains additional information regarding pedestrian control features, Chapter 4J contains additional information regarding pedestrian hybrid beacons, and Chapter 4K contains additional information regarding accessible pedestrian signals and detectors.

**Standard:**

02 **Pedestrian signal heads shall be used in conjunction with vehicular traffic control signals under any of the following conditions, unless the pedestrian crossing is prohibited:**

- **A. If the basis for traffic signal installation was justified by an engineering study and meeting either Warrant 4, Pedestrian Volume or Warrant 5, School Crossing (see Chapter 4C);**
- **B. If an exclusive pedestrian signal phase or a leading pedestrian interval (LPI) is provided with all conflicting vehicular movements being stopped;**
- **C. At an established signalized school crossing; or**
- **D. Where there are existing pedestrian accommodations and engineering judgment determines that multi-phase signal indications (such as split-phase timing) would tend to confuse or cause conflicts with pedestrians using a crosswalk guided only by vehicular signal indications.**

*Guidance:*

03 *Pedestrian signal heads should be installed for each marked crosswalk at a location controlled by a traffic control signal.*

04 *Where pedestrian movements regularly occur, pedestrians should be provided with sufficient time to cross the roadway by adjusting the traffic control signal operation and timing to provide sufficient crossing time every cycle or by providing pedestrian detectors.*

05 *Where certain pedestrian movements are prohibited at a traffic control signal location, a No Pedestrian Crossing (R9-3) sign (see Section 2B.57) should be used if it is impracticable to provide a barrier or other physical feature to physically discourage the pedestrian movements.*

Support:

06 Accessible pedestrian signals (see Chapter 4K) that provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) enhance safety and accessibility at signalized crossings for pedestrians with vision disabilities.

Option

07 Pedestrian signal heads may be used under other conditions based on engineering judgment.

## Section 4D.03 Provisions for Bicyclists

**Standard:**

01 **At installations where visibility-limited signal faces are used, signal faces shall be adjusted so bicyclists for whom the indications are intended can see the signal indications. If the visibility-limited signal faces cannot be aimed to serve the bicyclist, then separate signal faces (see Chapter 4H) shall be provided for the bicyclist.**

02 **On bikeways, signal timing and actuation shall be reviewed and adjusted to consider the needs of bicyclists.**

Option:

03 Where it is desired to provide separate signal indications to control bicyclist movements at a traffic control signal, bicycle signal faces may be used (see Chapter 4H).

Support:

04 Sections 9B.02, 9B.11, 9B.20, 9B.22, 9E.02, 9E.06, 9E.07, 9E.08, 9E.11, 9E.12, and 9E.15 contain additional provisions regarding bicyclist movements and actuation at traffic control signals.

05 The Guide for the Development of Bicycle Facilities (2024), published by the American Association of State Highway and Transportation Officials (AASHTO), and the Urban Bikeway Design Guide (2025), published by the National Association of City Transportation Officials (NACTO), provide guidance on the recommended practices regarding additional provisions of traffic signals for the bicyclists.

## Section 4D.04 Provisions for Transit Vehicles

Option:

01 Where it is desired to provide separate signal indications to control transit vehicles at a traffic control signal, LRT

signal indications may be used at intersections where special signal phases are used for transit vehicles (see Section 8D.15).

## Section 4D.05 Number of Signal Faces on an Approach

**Standard:**

01 **The signal faces for each approach to an intersection or a midblock location shall be provided as follows:**

- **A. If a signalized motor vehicle through movement exists on an approach, a minimum of two primary signal faces shall be provided for the through movement. ~~Except for single lane approaches,~~ if a signalized motor vehicle through movement does not exist on an approach, a minimum of two primary signal faces shall be provided for the signalized motor vehicle turning movement that is considered to be the major movement from the approach (also see Section 4F.16). Single lane approaches shall have two signal faces per movement.**
- **B. See Sections 4F.02 through 4F.08 for left-turn (and U-turn to the left) signal faces.**
- **C. See Sections 4F.09 through 4F.15 for right-turn (and U-turn to the right) signal faces.**

Option:

02 Where a movement (or a certain lane or lanes) at the intersection never conflicts with any other signalized vehicular or pedestrian movement, a continuously-displayed single-section GREEN ARROW signal indication may be used to inform road users that the movement is free-flow and does not need to stop.

Support:

03 In some circumstances where the through movement never conflicts with any other signalized vehicular or pedestrian movement at the intersection, such as at T-intersections with appropriate geometrics and/or pavement markings and signing, an engineering study might determine that the through movement (or certain lanes of the through movement) can be free-flow and not signalized.

*Guidance:*

04 *If two or more left-turn lanes are provided for a separately-controlled left-turn movement, or if a left- turn movement represents the major movement from an approach, two or more primary left-turn signal faces should be provided.*

05 *If two or more right-turn lanes are provided for a separately-controlled right-turn movement, or if a right-turn movement represents the major movement from an approach, two or more primary right-turn signal faces should be provided.*

Support:

06 Locating primary signal faces overhead on the far side of the intersection has been shown to ~~provide safer~~ improve operation by reducing intersection entries late in the yellow interval and by reducing red signal violations, as compared to post-mounting signal faces at the roadside or locating signal faces overhead within the intersection on a diagonally-oriented mast arm or span wire. On approaches with two or more lanes for the through movement, one signal face per through lane, centered over each through lane, has also been shown to ~~provide safer operation~~ be effective in reducing excessive red signal violations.

*Guidance:*

07 *If the posted or statutory speed limit or the 85th-percentile speed on an approach to a signalized location is 45 mph or higher, signal faces should be provided as follows for ~~all~~ new or reconstructed signal installations where there is a documented pattern of excessive red signal violations (see Figure 4D-1):*

- *A. The minimum number and location of primary (non-supplemental) signal faces for through traffic should be provided in accordance with Table 4D-1.*
- *B. If the number of overhead primary signal faces for through traffic is equal to the number of through lanes on an approach, one overhead signal face should be located approximately over the center of each through lane.*
- *C. Except for shared left-turn and right-turn signal faces, any primary signal face required by Sections 4F.02 through 4F.16 for a mandatory turn lane should be located overhead approximately over the center of each mandatory turn lane.*
- *D. All primary signal faces should be located on the far side of the intersection.*
- *E. In addition to the primary signal faces, one or more supplemental pole-mounted or overhead signal faces should be considered to provide added visibility for approaching traffic that is traveling behind large vehicles.*
- *F. All signal faces should have backplates.*

08 *This layout of signal faces should also be considered for any major urban or suburban arterial street with four or more lanes and for other approaches with speeds of less than 45 mph.*

## Section 4D.06 Visibility, Aiming, and Shielding of Signal Faces

*Guidance:*

01 *The visibility of signal indications to approaching traffic should be the highest priority for signal face placement and aiming.*

02 *Road users approaching a signalized intersection or other signalized area, such as a midblock crosswalk, should be given a clear and unmistakable indication of whether they are being directed to stop or permitted to proceed.*

03 *The geometry of each intersection to be signalized, including vertical grades, horizontal curves, and obstructions as well as the lateral and vertical angles of sight toward a signal face, as determined by typical driver-eye position, should be considered in determining the vertical, longitudinal, and lateral position of the signal face.*

04 *At signalized midblock crosswalks, at least one of the signal faces should be over the traveled way for each approach.*

05 *The two primary signal faces required as a minimum for each approach should be continuously visible to traffic approaching the traffic control signal, from a point at least the minimum sight distance provided in Table 4D-2 in advance of and measured to the stop line. This range of continuous visibility should be provided unless precluded by a physical obstruction or unless another signalized location is within this range.*

06 *If approaching traffic does not have a continuous view of at least two signal faces for at least the minimum sight distance shown in Table 4D-2, a sign (see Section 2C.35) should be installed to warn approaching traffic of the traffic control signal.*

Option:

07 If a sign is installed to warn approaching road users of the traffic control signal, the sign may be supplemented by a Warning Beacon (see Section 4S.03).

08 A Warning Beacon used in this manner may be interconnected with the traffic signal controller assembly in such a manner as to flash yellow during the period when road users passing this beacon at the legal speed for the roadway might encounter a red signal indication (or a queue resulting from the display of the red signal indication) upon arrival at the signalized location.

09 If the sight distance to the signal faces for an approach is limited by horizontal or vertical alignment, supplemental signal faces aimed at a point on the approach at which the signal indications first become visible may be used.

*Guidance:*

10 *Supplemental signal faces should be used if engineering judgment has shown that they are needed to achieve intersection visibility both in advance and immediately before the signalized location.*

11 *If supplemental signal faces are used, they should be located to provide optimum visibility for the movement to be controlled.*

12 *In cases where irregular street design necessitates placing signal faces for different street approaches with a comparatively small angle between their respective signal indications, each signal indication should, to the extent practical, be visibility-limited by signal visors, signal louvers, or other means so that an approaching road user's view of the signal indication(s) controlling movements on other approaches is minimized.*

**Standard:**

13 **Signal visors exceeding 12 inches in length shall not be used on free-swinging signal faces.**

*Guidance:*

14 *Signal visors should be used on signal faces to aid in directing the signal indication specifically to approaching traffic, as well as to reduce "sun phantom," which can result when external light enters the lens.*

15 *The use of signal visors, or the use of signal faces or devices that direct the light without a reduction in intensity, should be considered as an alternative to signal louvers because of the reduction in light output caused by signal louvers.*

Option:

16 Special signal faces, such as visibility-limited signal faces, may be used such that the road user does not see signal indications intended for other approaches before seeing the signal indications for their own approach, especially if simultaneous viewing of both signal indications could cause the road user to be misdirected.

*Guidance:*

17 *If the posted or statutory speed limit or the 85th-percentile speed on an approach to a signalized location is 45 mph*

*or higher, signal backplates should be used on all of the signal faces that face the approach. Signal backplates should also be considered for use on signal faces on approaches with posted or statutory speed limits or 85th-percentile speeds of less than 45 mph where sun glare, bright sky, and/or complex or confusing backgrounds indicate a need for enhanced signal face target value.*

Support:

18 The use of backplates enhances the contrast between the traffic signal indications and their surroundings for both day and night conditions, which is also helpful to older drivers.

**Standard:**

19 **If backplates are used, ancillary legends of any kind that identify the purpose or operation of the signal face shall not be placed on the backplate.**

20 **The inside of signal visors (hoods), the entire surface of louvers and fins, and the front surface of backplates shall have a dull black finish to minimize light reflection and to increase contrast between the signal indication and its background.**

Option:

21 A yellow retroreflective strip with a minimum width of 1 inch and a maximum width of 3 inches may be placed along the perimeter of the face of a signal backplate to project a rectangular appearance at night.

## Section 4D.07 Lateral Positioning of Signal Faces

**Standard:**

01 **At least one and preferably both of the minimum of two primary signal faces required for the through movement (or the major turning movement if there is no through movement) on the approach shall be located between two lines intersecting with the center of the approach at a point 10 feet behind the stop line, one making an angle of approximately 20 degrees to the right of the center of the approach extended, and the other making an angle of approximately 20 degrees to the left of the center of the approach extended. The signal face that satisfies this requirement shall simultaneously satisfy the longitudinal placement requirement described in Section 4D.08 (see Figure 4D-2).**

02 **If both of the minimum of two primary signal faces required for the through movement (or the major turning movement if there is no through movement) on the approach are post-mounted, they shall both be on the far side of the intersection, one on the right and one on the left of the approach lane(s).**

03 **The required signal faces for through traffic on an approach shall be located not less than 8 feet apart measured horizontally perpendicular to the approach between the centers of the signal faces.**

04 **If more than one separate turn signal face is provided for a turning movement and if one or both of the separate turn signal faces are located over the roadway, the signal faces shall be located not less than 8 feet apart measured horizontally perpendicular to the approach between the centers of the signal faces.**

*Guidance:*

05 *If horizontally-arranged or clustered signal faces are used, the minimum 8-foot horizontal separation between the two signal faces should be measured from the center of the right-most signal indication in the signal face on the left to the center of the left-most signal indication in the signal face on the right.*

06 *Except as provided in Paragraph 7 of this Section, for signal faces located over the roadway, separate turn signal faces should be located at least 8 feet from the nearest traffic signal face for a different movement on the same approach measured horizontally perpendicular to the approach between the centers of the signal faces.*

Option:

07 For modifications to existing traffic signals, the minimum horizontal separation between a separate turn signal face and the nearest traffic signal face for a different movement may be reduced to 3 feet.

*Guidance:*

08 *If a signal face controls a specific lane or lanes of an approach, its position should make it readily visible to road users making that movement.*

Support:

09 Section 4D.05 contains additional provisions regarding lateral positioning of signal faces for approaches having a posted or statutory speed limit or an 85th-percentile speed of 45 mph or higher.

*Guidance:*

10 *If a mandatory left-turn, right-turn, or U-turn lane is present on an approach and if a primary separate turn signal*

*face controlling that lane is mounted over the roadway, the primary separate turn signal face should not be positioned any farther to the right than the extension of the right-hand edge of the mandatory turn lane or any farther to the left than the extension of the left-hand edge of the mandatory turn lane.*

Support:

11 Supplemental turn signal faces mounted over the roadway are not subject to the positioning recommendations in Paragraph 10 of this Section.

*Guidance:*

12 *For new or reconstructed signal installations, on an approach with a mandatory turn lane(s) for a permissive left-turn (or U-turn to the left) movement, signal faces that display a CIRCULAR GREEN signal indication should not be post-mounted on the far-side median or mounted overhead above the mandatory turn lane(s) or the extension of the lane(s).*

**Standard:**

13 **If supplemental ~~post-mounted~~ signal faces are used, the following limitations shall apply:**

- **A. Left-turn arrows and U-turn arrows to the left shall not be used in near right signal faces that are located to the right of the through and/or right-turn lanes.**
- **B. Right-turn arrows and U-turn arrows to the right shall not be used in far left signal faces that are located to the left of the through and/or left-turn lanes. A far-side median-mounted signal face shall be considered a far left signal face for this application.**

## Section 4D.08 Longitudinal Positioning of Signal Faces

**Standard:**

01 **Except where the width of an intersecting roadway or other conditions make it physically impractical, the signal faces for each approach to an intersection or a midblock location shall be provided as follows:**

- **A. A signal face installed to satisfy the requirements for primary left-turn signal faces (see Sections 4F.02 through 4F.08) and primary right-turn signal faces (see Sections 4F.09 through 4F.15), and at least one and preferably both of the minimum of two primary signal faces required for the through movement (or the major turning movement if there is no through movement) on the approach shall be located:**
  1. **No less than 40 feet beyond the stop line, and**
  2. **No more than 180 feet beyond the stop line unless a supplemental near-side signal face is provided.**
- **B. The primary signal faces that are used to satisfy the requirements of Item A shall simultaneously satisfy the lateral placement requirement described in Section 4D.07 (see Figure 4D-2).**

*Guidance:*

02 *Where the nearest signal face is located between 150 and 180 feet beyond the stop line, engineering judgment of the conditions, including the worst-case visibility conditions, should be used to determine if the provision of a supplemental near-side signal face would be beneficial.*

03 *Supplemental near-side signal faces should be located as near as practicable to the stop line.*

Support:

04 Section 4D.05 contains additional provisions regarding longitudinal positioning of signal faces for approaches having a posted or 85th-percentile speed of 45 mph or higher.

## Section 4D.09 Mounting Height of Signal Faces

**Standard:**

01 **The bottom of the signal housing and any related attachments to a vehicular signal face located over any portion of a highway that can be used by motor vehicles shall be at least 15 feet above the pavement.**

*Guidance:*

01a *The bottom of the signal housing and any related attachments to a vehicular signal face located over a roadway should be at least 17 feet. Refer to Caltrans' Standard Plans publication. See Section 1A.05 for information regarding this publication.*

**Standard:**

02 **The bottom of the signal housing (including brackets) of a vehicular signal face that is vertically arranged or horizontally arranged and not located over a roadway:**

- **A. Shall be a minimum of 8 feet above the sidewalk or, if there is no sidewalk, above the pavement grade at the center of the roadway.**

**B. Shall be a minimum of 4.5 feet above the median island grade of a center median island if located on the near side of the intersection.**

*Guidance:*

03 *The top of the signal housing of a vehicular signal face located over any portion of a highway that can be used by motor vehicles should not be more than 25.6 feet above the pavement.*

04 *For viewing distances between 40 and 53 feet from the stop line, the maximum mounting height to the top of the signal housing of a vehicular signal face located over any portion of a highway that can be used by motor vehicles should be as shown in Figure 4D-3 .*

05 *The bottom of the signal housing (including brackets) of a vehicular signal face that is vertically arranged and not located over a roadway or shoulder (refer to Figures 4E-2, 4F-3, 4F-4, 4F-6, 4F-10, 4F-11, 4F-13, and 4F-15):*

*A. Should be a maximum of 19 feet above the sidewalk or, if there is no sidewalk, above the pavement grade at the center of the roadway.*

*B. Should be a maximum of 19 feet above the median island grade of a center median island if located on the near side of the intersection.*

06 *The bottom of the signal housing (including brackets) of a vehicular signal face that is horizontally arranged and not located over a roadway or shoulder (refer to Figures 4E-2, 4F-3, 4F-4, 4F-6, 4F-10, 4F-11, 4F-13, and 4F-15):*

*A. Should be a maximum of 22 feet above the sidewalk or, if there is no sidewalk, above the pavement grade at the center of the roadway.*

*B. Should be a maximum of 22 feet above the median island grade of a center median island if located on the near side of the intersection.*

## Section 4D.10 Lateral Offset (Clearance) of Signal Faces

*Guidance:*

01 *Signal faces mounted at the side of a roadway at less than 15 feet from the bottom of the housing and any related attachments should have a horizontal offset of not less than 2 feet from the face of a vertical curb, or if there is no curb, not less than 2 feet from the edge of a shoulder.*

## Section 4D.11 Temporary and Portable Traffic Control Signals

Support:

01 A temporary traffic control signal is generally installed using methods that minimize the costs of installation, relocation, and/or removal. Typical temporary traffic control signals are for specific purposes, such as for one-lane, two-way facilities in temporary traffic control zones (see Chapter 4O), for a haul-road intersection, or for access to a site that will have a permanent access point developed at another location in the near future. Portable traffic signals are temporary traffic signals.

02 Because a portable traffic control signals is considered to be a type of temporary traffic control signal, the provisions for temporary traffic control signals are also applicable to portable traffic control signals.

02a Refer to Section 6P.01 and Typical Application 14 Haul Road Crossing (Figure 6P-14(CA) and related Notes) when using a temporary traffic control signal at haul road crossings.

**Standard:**

03 **Advance signing shall be used when employing a temporary traffic control signal.**

04 **A temporary traffic control signal shall:**

**A. Meet the physical display and operational requirements of a conventional traffic control signal;**

**B. Be removed when no longer needed; and**

**C. Except as provided in Paragraph 5 of this Section, be placed in the flashing mode during periods when it is not desirable to operate the signal in the steady mode, or the signal heads shall be covered, turned, or taken down to indicate that the signal is not in operation.**

Option:

05 If the temporary traffic control signal is capable of being operated in a semi-actuated mode, such that green signal indications are continually shown to major-street traffic except when responding to a minor-street approach vehicle call, it may be operated in a semi-actuated mode instead of being placed in a flashing mode.

*Guidance:*

06 *A temporary traffic control signal should be used only if engineering judgment indicates that installing the signal*

*will improve the overall safety and/or operation of the location.*

07 *The use of temporary traffic control signals by a work crew on a regular basis in their work area should be subject to the approval of the jurisdiction having authority over the roadway.*

08 *A temporary traffic control signal should not operate longer than 30 days unless associated with a longer-term temporary traffic control zone project.*

09 *Section 6L.01 contains information about the use of temporary traffic control signals in temporary traffic control zones.*

Support:

10 Refer to FHWA's List of Known Errors for error in labeling Paragraph 9. Refer to Section 1A.04 for more details.

Option:

11 One-way traffic control signals may utilize semi- or fully-traffic-actuated controller units, or may be manually controlled.

## Section 4D.101(CA) Permissive Left-Turn Phasing

*Guidance:*

01 *When a protected-permissive or permissive-protected left-turn phasing operation is used for a signal system, no information sign is necessary.*

**Standard:**

02 **If a sign is used, it shall be a LEFT TURN YIELD ON GREEN (Green Ball symbol) (R10-12) sign.**

Option:

03 Public agencies having jurisdiction may use an Activated Blank-Out message sign on local roads in place of the R10-12 sign on their local roads that are not part of an intersection with a State highway.

**Standard:**

04 **The Activated Blank-Out sign shall say LEFT TURN YIELD in at least 6 inch high letters. The light source shall be designed and constructed so that when illuminated, the message shall be white and remain dark when not in use. The message shall be illuminated only when the green permissive ball is lighted.**

05 **The following apply to permissive left-turn phasing:**

1. **This operation shall not be initiated where the left turn collision warrant is satisfied.**
2. **Both directions of through traffic shall be terminated simultaneously except where opposing left turns or opposing U-turns are prohibited.**

*Guidance:*

3. *Signal faces should not be placed in a median facing a left turn lane.*
   - *The signal face is provided with some type of visibility control so that the indications are not visible to traffic in the left turn storage lane; or*
   - *A LEFT TURN YIELD ON GREEN (symbolic circular green) (R10-12) sign is installed below the said signal face.*

Support:

4. Signs are not required for this operation unless U-turns are to be prohibited.

## Section 4D.102(CA) Review of Traffic Signal Operations

*Guidance:*

01 *All traffic signals should be periodically reviewed for proper operation. The traffic signal operation should be observed during morning and evening peak traffic periods and during off-peak periods. If an operating deficiency is observed, the reason for the deficiency should be determined. If there is a malfunction, Maintenance unit should be notified, and after corrective work is done, further surveillance should be conducted to be sure no deficiency remains. If a need for a design change is observed, an analysis should be made to determine what improvement might be necessary to improve the design.*

02 *Improvements to consider are:*

1. *Timing of:*
   a. *Maximums or Force Offs*
   b. *Gap Interval*
   c. *Offsets*
   d. *Cycle Length*
2. *Time-of-Day or Traffic Responsive Settings*
3. *Signal Phasing or Phase Sequence*

4. *Type of Operation*
5. *Coordination of Signals*
6. *Signs, Striping and/or Pavement Markings*
7. *Roadway Improvements*

**Standard:**


03 **Timing and phasing of traffic signals and any subsequent changes in timing shall be approved by the public agency having jurisdiction. Timing records shall be kept by the agency responsible for the maintenance and/or operation and be readily available to the maintenance and traffic operations staffs and other agencies, where appropriate.**

Support:

04 Aids for timing are shown in Tables 4D-102(CA) and 4D-103(CA).

# Figure 4D-1. Recommended Vehicular Signal Faces for Approaches with Posted, Statutory, or 85th-Percentile Speed of 45 mph or Higher

(Where there are Excessive Red Signal Violations)

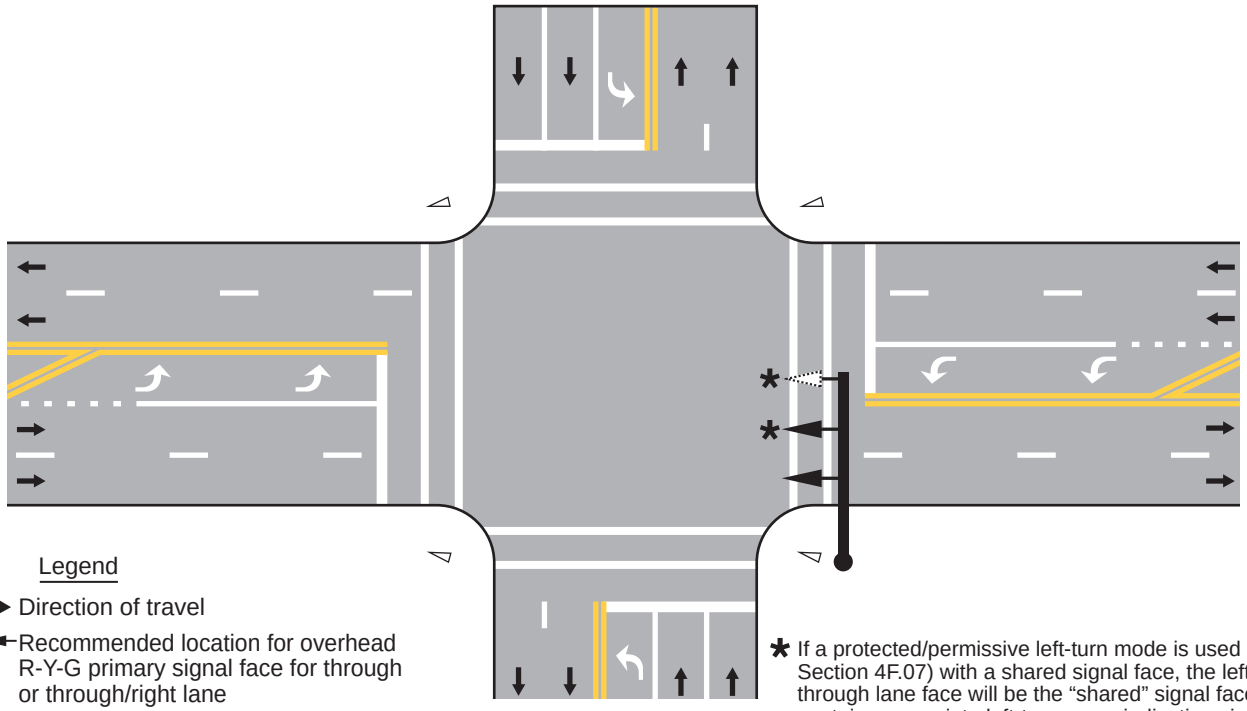

Legend


- Direction of travel
- Recommended location for overhead R-Y-G primary signal face for through or through/right lane
- Overhead primary left-turn signal face as determined by selected mode of left-turn operation
- Possible location for a supplemental R-Y-G signal face

* If a protected/permissive left-turn mode is used (see Section 4F.07) with a shared signal face, the left-most through lane face will be the "shared" signal face, will contain appropriate left-turn arrow indications in addition to circular R-Y-G, and typicallywill be located over the projection of the lane line between the left-turn and through lanes.

Notes:

1. Signal faces for only one direction and only one possible set of geometrics (number of lanes, etc.) are illustrated. If there are fewer or more than two through lanes on the approach, see Table 4D-1.
2. Any primary left-turn and/or right-turn signal faces, as determined by Sections 4F.02 through 4F.15, should be overhead for each mandatory turn lane.
3. One or more pole-mounted or overhead supplemental faces should be considered, based on the geometrics of the approach, to maximize visibility for approaching traffic.
4. All signal faces should have backplates.


## Figure 4D-2. Lateral and Longitudinal Location of Primary Signal Faces

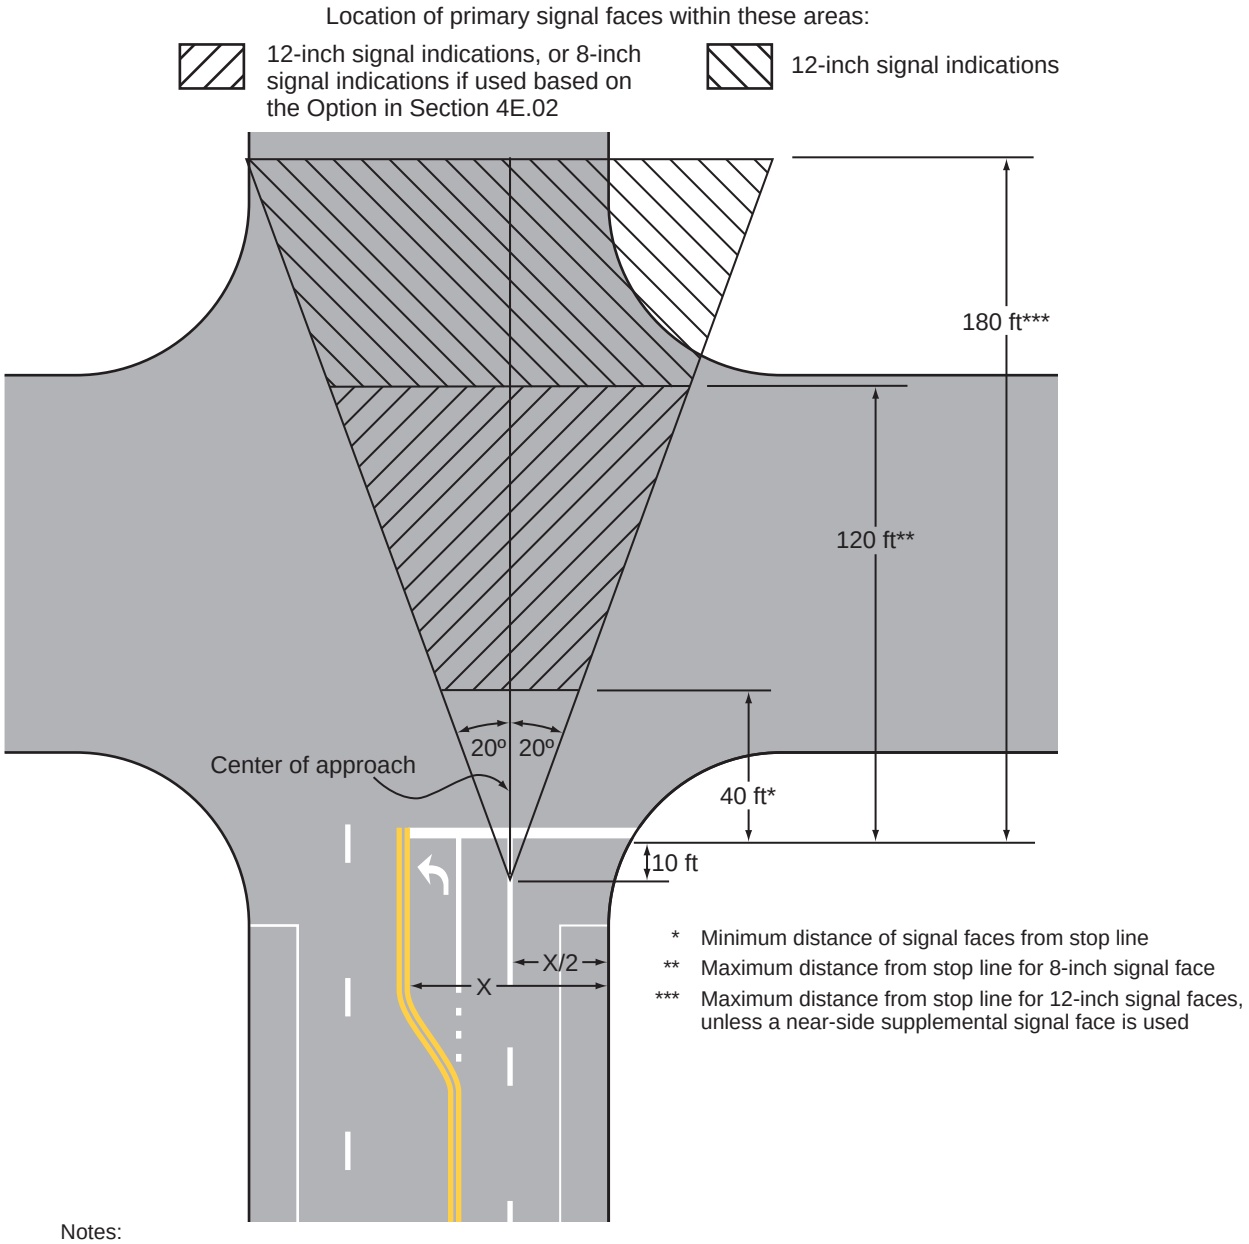


Notes:

1. See Section 4D.05 for approaches with posted, statutory, or 85th-percentile speeds of 45 mph or higher
2. See Section 4D.07 regarding location of signal faces that display a CIRCULAR GREEN signal indication for a permissive left-turn movement on approaches with a mandatory left-turn lane or lanes

## Figure 4D-3. Maximum Mounting Height of Signal Faces that Are Located between 40 Feet and 53 Feet from the Stop Line

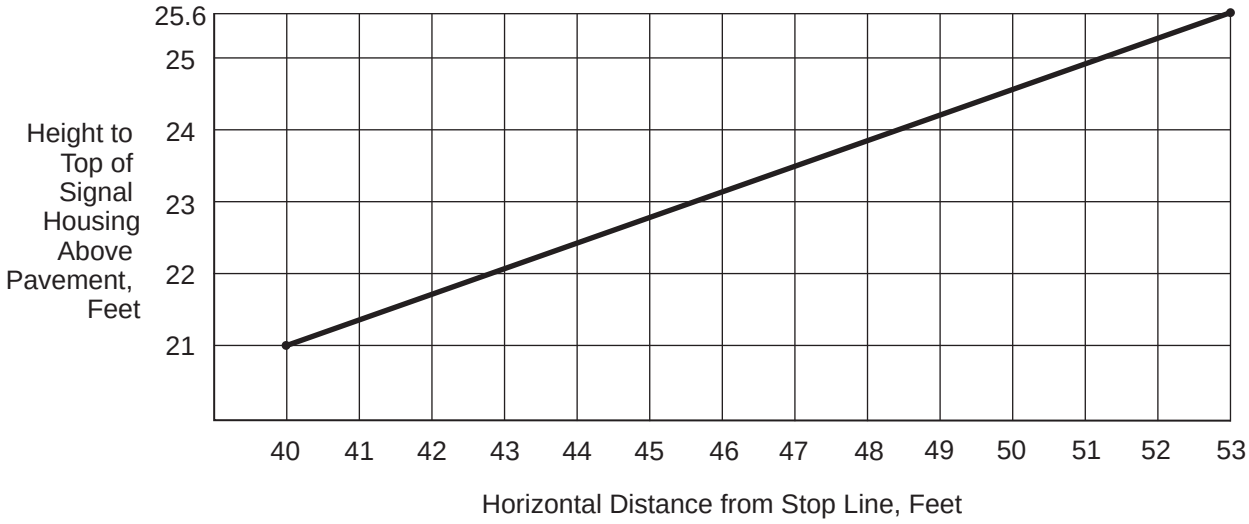

## Table 4D-1. Recommended Minimum Number of Primary Signal Faces for Through Traffic on Approaches with Posted, Statutory, or 85th-Percentile Speed of 45 mph or Higher

| Number of Through Lanes on the Approach | Total Number of Primary Through Signal Faces for the Approach* | Minimum Number of Overhead-Mounted Primary Through Signal Faces for the Approach |
|---|---|---|
| 1 | 2 | 1 |
| 2 | 2 | 1 |
| 3 | 3 | 2** |
| 4 or more | 4 or more | 3** |

Notes:

* A minimum of two through signal faces is always required (see Section 4D.05). These recommended numbers of through signal faces may be exceeded. Also, see cone of vision requirements otherwise indicated in Section 4D.07.

** If practical, all of the recommended number of primary through signal faces should be located overhead.

## Table 4D-2. Minimum Sight Distance for Signal Visibility

| 85th-Percentile Speed | Minimum Sight Distance |
|---|---|
| 20 mph | 175 feet |
| 25 mph | 215 feet |
| 30 mph | 270 feet |
| 35 mph | 325 feet |
| 40 mph | 390 feet |
| 45 mph | 460 feet |
| 50 mph | 540 feet |
| 55 mph | 625 feet |
| 60 mph | 715 feet |

Note: Distance in this table are derived from stopping sight distance plus an assumed queue length for shorter cycle lengths (60 to 75 seconds).

## Table 4D-101(CA). Minimum Yellow Change Interval Timing

| |
|---|
| Yellow Time = $\frac{\text{Detector Setback Distance}}{\text{Speed}}$ |
| T = $\frac{D}{V}$ = The minimum yellow change interval (sec) |
| V = Speed (ft/sec) |
| d = Deceleration Rate (10 ft/sec$^2$) |
| $t_R$ = Reaction Time (1 sec) |
| Reaction Distance = $Vt_R$ |
| Deceleration Distance = $\frac{1}{2}dt^2$ or $\frac{1}{2}$Vt or $\frac{V^2}{2d}$ |
| D = Detector Setback = Deceleration Distance + Reaction Distance = $\frac{V}{2d}+Vt_R$ |
| T = $\frac{\frac{V^2}{2d}+Vt_R}{V}$ |
| T = $\frac{V}{2d} + t_R$ |

### a – For Speed determined by 85th Percentile

| SPEED (Determined by 85th Percentile Speed)* | MINIMUM YELLOW INTERVAL |
|---|---|
| mph | Seconds |
| 25 or less | 3.0 |
| 30 | 3.2 |
| 35 | 3.6 |
| 40 | 3.9 |
| 45 | 4.3 |
| 50 | 4.7 |
| 55 | 5.0 |
| 60 | 5.4 |
| 65 | 5.8 |

*See Section 4F.17 Standard under paragraph 13c

### b – For Posted or Prima Facie Speed

| POSTED SPEED OR UNPOSTED PRIMA FACIE SPEED | MINIMUM YELLOW INTERVAL* |
|---|---|
| mph | Seconds |
| 15 | 3.0 |
| 20 | 3.2 |
| 25 | 3.6 |
| 30 | 3.7 |
| 35 | 4.1 |
| 40 | 4.4 |
| 45 | 4.8 |
| 50 | 5.2 |
| 55 | 5.5 |
| 60 or higher | 5.9 |

*Speed values for Table 4D-101.b(CA) are inclusive of the 7 mph added for speeds equal to 30 mph or higher and 10 mph for speeds equal to or lower than 25 mph for determining the minimum values of the yellow intervals.

## Table 4D-102(CA). Traffic Signal Timing Analysis Chart

| Number of Cars | Min. Time in Seconds Req. for Cars | Length of Stopped Queue Feet | Length of Moving Queue Feet (30 mph) | Moving Queue Time (Bond Width in Seconds) | NUMBER OF VEHICLES PER HOUR LANE AT INDICATED CYCLE LENGTH | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | 50 Sec. | 60 Sec. | 70 Sec. | 80 Sec. | 90 Sec. | 100 Sec. | 120 Sec. | 150 Sec. | 180 Sec. | 240 Sec. |
| 1 | 4 | 25 | 0 | 2 | 70 | 60 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 |
| 2 | 7 | 50 | 88 | 4 | 145 | 120 | 100 | 90 | 80 | 70 | 60 | 50 | 40 | 30 |
| 3 | 9 | 75 | 176 | 6 | 215 | 180 | 150 | 135 | 120 | 110 | 90 | 70 | 60 | 45 |
| 4 | 11 | 100 | 264 | 8 | 290 | 240 | 205 | 180 | 160 | 145 | 120 | 95 | 80 | 60 |
| 5 | 13 | 125 | 352 | 10 | 360 | 360 | 255 | 225 | 200 | 180 | 150 | 120 | 100 | 175 |
| 6 | 15 | 150 | 440 | 12 | 430 | 420 | 310 | 270 | 240 | 215 | 180 | 145 | 120 | 90 |
| 7 | 17 | 175 | 528 | 14 | 505 | 480 | 360 | 315 | 280 | 250 | 210 | 170 | 140 | 105 |
| 8 | 19 | 200 | 616 | 16 | 575 | 540 | 410 | 360 | 320 | 290 | 240 | 190 | 160 | 120 |
| 9 | 21 | 225 | 704 | 18 | 650 | 600 | 460 | 405 | 360 | 320 | 270 | 215 | 180 | 135 |
| 10 | 23 | 250 | 792 | 20 | 720 | 660 | 510 | 450 | 400 | 360 | 300 | 240 | 200 | 150 |
| 11 | 25 | 275 | 880 | 22 | 790 | 720 | 560 | 495 | 440 | 400 | 330 | 265 | 220 | 165 |
| 12 | 27 | 300 | 968 | 24 | 865 | 780 | 610 | 540 | 480 | 430 | 360 | 290 | 240 | 180 |
| 13 | 29 | 325 | 1056 | 26 | 935 | 840 | 665 | 585 | 520 | 470 | 390 | 315 | 260 | 195 |
| 14 | 31 | 350 | 1144 | 28 | 1020 | 900 | 715 | 630 | 560 | 500 | 420 | 340 | 280 | 210 |
| 15 | 33 | 375 | 1232 | 30 | 1080 | 960 | 765 | 675 | 600 | 540 | 450 | 365 | 300 | 225 |
| 16 | 35 | 400 | 1320 | 32 | 1150 | 1020 | 815 | 720 | 640 | 580 | 480 | 385 | 320 | 240 |
| 17 | 37 | 425 | 1408 | 34 | 1225 | 1080 | 865 | 765 | 680 | 610 | 510 | 410 | 340 | 255 |
| 18 | 39 | 450 | 1496 | 36 | 1295 | 1140 | 920 | 810 | 720 | 650 | 540 | 430 | 360 | 270 |
| 19 | 41 | 475 | 1584 | 38 | | 1200 | 970 | 855 | 760 | 680 | 570 | 455 | 380 | 285 |
| 20 | 43 | 500 | 1672 | 40 | | 1260 | 1020 | 900 | 800 | 720 | 600 | 480 | 400 | 300 |
| 21 | 45 | 525 | 1760 | 42 | | 1320 | 1070 | 945 | 840 | 760 | 630 | 505 | 420 | 315 |
| 22 | 47 | 550 | 1848 | 44 | | 1380 | 1120 | 990 | 880 | 790 | 660 | 530 | 440 | 330 |
| 23 | 49 | 575 | 1936 | 46 | | 1140 | 1175 | 1035 | 920 | 830 | 690 | 550 | 460 | 345 |
| 24 | 51 | 600 | 2024 | 48 | | | 1225 | 1080 | 960 | 860 | 720 | 575 | 480 | 360 |
| 25 | 53 | 625 | 2112 | 50 | | | 1275 | 1125 | 1000 | 900 | 750 | 600 | 500 | 375 |
| 26 | 55 | 650 | 2200 | 52 | | | 1325 | 1170 | 1040 | 930 | 780 | 625 | 520 | 390 |
| 27 | 57 | 675 | 2288 | 54 | | | 1375 | 1215 | 1080 | 960 | 810 | 650 | 540 | 405 |
| 28 | 59 | 700 | 2376 | 56 | | | 1430 | 1260 | 1120 | 990 | 840 | 670 | 560 | 420 |
| 29 | 61 | 725 | 2464 | 58 | | | | 1305 | 1160 | 1020 | 870 | 700 | 580 | 435 |

## Table 4D-103(CA). Signal Operations - Vehicular Speed

| SECONDS | | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| mph | Ft/s | DISTANCE TRAVELED IN FEET | | | | | | | | | | |
| 1 | 1.46 | 14.6 | 21.9 | 29.3 | 36.6 | 44.0 | 51.3 | 58.6 | 66.0 | 73.3 | 80.6 | 88.0 |
| 2 | 2.93 | 29.3 | 44.0 | 58.6 | 73.3 | 88.0 | 102.6 | 117.3 | 132.0 | 146.6 | 161.3 | 176.0 |
| 3 | 4.40 | 44.0 | 66.0 | 88.0 | 110.0 | 132.0 | 154.0 | 176.0 | 198.0 | 220.0 | 242.0 | 264.0 |
| 4 | 5.86 | 58.6 | 88.0 | 117.3 | 146.6 | 176.0 | 205.3 | 234.6 | 264.0 | 293.3 | 322.6 | 352.0 |
| 5 | 7.30 | 73.0 | 110.0 | 147.0 | 183.0 | 220.0 | 257.0 | 293.0 | 330.0 | 367.0 | 403.0 | 440.0 |
| 10 | 14.60 | 146.0 | 220.0 | 293.0 | 366.0 | 440.0 | 513.0 | 587.0 | 660.0 | 733.0 | 807.0 | 880.0 |
| 15 | 22.00 | 220.0 | 330.0 | 440.0 | 550.0 | 660.0 | 770.0 | 880.0 | 990.0 | 1,100.0 | 1,210.0 | 1,320.0 |
| 20 | 29.30 | 293.0 | 440.0 | 587.0 | 733.0 | 880.0 | 1,027.0 | 1,173.0 | 1,320.0 | 1,467.0 | 1,613.0 | 1,760.0 |
| 25 | 36.70 | 367.0 | 550.0 | 733.0 | 917.0 | 1,100.0 | 1,283.0 | 1,467.0 | 1,650.0 | 1,833.0 | 2,017.0 | 2,200.0 |
| 30 | 44.00 | 440.0 | 660.0 | 880.0 | 1,100.0 | 1,320.0 | 1,540.0 | 1,760.0 | 1,980.0 | 2,200.0 | 2,420.0 | 2,640.0 |
| 35 | 51.30 | 513.0 | 770.0 | 1,027.0 | 1,283.0 | 1,540.0 | 1,797.0 | 2,053.0 | 2,310.0 | 2,567.0 | 2,823.0 | 3,080.0 |
| 40 | 58.70 | 587.0 | 880.0 | 1,173.0 | 1,467.0 | 1,760.0 | 2,053.0 | 2,347.0 | 2,640.0 | 2,933.0 | 3,227.0 | 3,520.0 |
| 45 | 66.00 | 660.0 | 990.0 | 1,320.0 | 1,650.0 | 1,980.0 | 2,310.0 | 2,640.0 | 2,970.0 | 3,300.0 | 3,630.0 | 3,960.0 |
| 50 | 73.30 | 733.0 | 1,100.0 | 1,467.0 | 1,833.0 | 2,200.0 | 2,567.0 | 2,933.0 | 3,300.0 | 3,667.0 | 4,033.0 | 4,400.0 |
| 55 | 80.70 | 807.0 | 1,210.0 | 1,613.0 | 2,017.0 | 2,420.0 | 2,823.0 | 3,227.0 | 3,630.0 | 4,033.0 | 4,437.0 | 4,840.0 |
| 60 | 88.00 | 880.0 | 1,320.0 | 1,760.0 | 2,200.0 | 2,640.0 | 3,080.0 | 3,520.0 | 3,960.0 | 4,400.0 | 4,840.0 | 5,280.0 |
| 65 | 95.30 | 953.0 | 1,430.0 | 1,907.0 | 2,383.0 | 2,860.0 | 3,337.0 | 3,813.0 | 4,290.0 | 4,767.0 | 5,243.0 | 5,720.0 |
| 70 | 102.70 | 1,027.0 | 1,540.0 | 2,053.0 | 2,567.0 | 3,080.0 | 3,593.0 | 4,107.0 | 4,620.0 | 5,133.0 | 5,647.0 | 6,160.0 |
| 75 | 110.00 | 1,100.0 | 1,650.0 | 2,200.0 | 2,750.0 | 3,300.0 | 3,850.0 | 4,400.0 | 4,950.0 | 5,500.0 | 6,050.0 | 6,600.0 |
| 80 | 117.30 | 1,173.0 | 1,760.0 | 2,347.0 | 2,933.0 | 3,520.0 | 4,107.0 | 4,693.0 | 5,280.0 | 5,867.0 | 6,453.0 | 7,040.0 |
| 85 | 124.70 | 1,247.0 | 1,870.0 | 2,493.0 | 3,117.0 | 3,740.0 | 4,363.0 | 4,987.0 | 5,610.0 | 6,233.0 | 6,858.0 | 7,480.0 |
| 90 | 132.00 | 1,320.0 | 1,980.0 | 2,640.0 | 3,300.0 | 3,960.0 | 4,620.0 | 5,280.0 | 5,940.0 | 6,600.0 | 7,260.0 | 7,920.0 |
| 95 | 139.30 | 1,393.0 | 2,090.0 | 2,787.0 | 3,483.0 | 4,180.0 | 4,877.0 | 5,573.0 | 6,270.0 | 6,967.0 | 7,663.0 | 8,360.0 |
| 100 | 146.70 | 1,467.0 | 2,200.0 | 2,933.0 | 3,667.0 | 4,400.0 | 5,133.0 | 5,867.0 | 6,600.0 | 7,333.0 | 8,067.0 | 8,800.0 |
| 105 | 154.00 | 1,540.0 | 2,310.0 | 3,080.0 | 3,850.0 | 4,620.0 | 5,390.0 | 6,160.0 | 6,930.0 | 7,700.0 | 8,470.0 | 9,240.0 |
| 110 | 161.30 | 1,613.0 | 2,420.0 | 3,227.0 | 4,033.0 | 4,840.0 | 5,647.0 | 6,453.0 | 7,260.0 | 8,067.0 | 8,873.0 | 9,680.0 |
| 115 | 168.60 | 1,686.0 | 2,530.0 | 3,373.0 | 4,217.0 | 5,060.0 | 5,903.0 | 6,747.0 | 7,590.0 | 8,434.0 | 9,277.0 | 10,120.0 |
| 120 | 176.00 | 1,760.0 | 2,640.0 | 3,520.0 | 4,400.0 | 5,280.0 | 6,160.0 | 7,040.0 | 7,920.0 | 8,800.0 | 9,680.0 | 10,560.0 |

# CHAPTER 4E. TRAFFIC CONTROL SIGNAL INDICATIONS

## Section 4E.01 Signal Indications – Design, Illumination, Color, and Shape

**Standard:**

01 **The illuminated part of each signal indication shall be circular or arrow, except those used for bicycle symbol signal indications, pedestrian signal heads, light rail transit signal indications, and lane-use control signals.**

02 **Letters or numbers (including those associated with countdown displays) shall not be displayed as part of a vehicular signal indication.**

03 **Strobes shall not be used within or adjacent to any signal indication.**

04 **Except for the flashing vehicular and pedestrian signal indications and the distinctive indications for emergency-vehicle preemption (see Section 4F.19) that are expressly allowed by the provisions of this Part, flashing displays shall not be used within or adjacent to any signal indications.**

05 **Each circular signal indication shall emit a single color: red, yellow, or green.**

06 **Except as provided in Paragraph 7 of this Section, each arrow signal indication shall emit a single color: red, yellow, or green.**

Option:

07 A bimodal signal section that is capable of alternating between the display of a GREEN ARROW signal indication and the display of a YELLOW ARROW signal indication, both pointing in the same direction, may be used provided that both colors are never displayed simultaneously.

**Standard:**

08 **The arrow, which shall show only one direction, shall be the only illuminated part of an arrow signal indication.**

09 **Arrows shall be pointed:**

- **A. Vertically upward to indicate a straight-through movement,**
- **B. Horizontally in the direction of the turn to indicate a turn at approximately or greater than a right angle,**
- **C. Upward with a slope at an angle approximately equal to that of the turn if the angle of the turn is substantially less than a right angle, or**
- **D. In a manner that directs the driver through the turn if a U-turn arrow is used (see Figure 4E-1).**

10 **Except as provided in Paragraph 11 of this Section, the requirements of Chapters 1 and 2 of the publication entitled "Equipment and Materials Standards of the Institute of Transportation Engineers" that pertain to the aspects of the signal head design that affect the display of the signal indications shall be met for signal optical units that use incandescent lamps within optical assemblies that include lenses. Except as provided in Paragraph 11 of this Section, the requirements of the Institute of Transportation Engineers' publications entitled "Vehicle Traffic Control Signal Heads: Light Emitting Diode (LED) Circular Signal Supplement," 2005, ITE, and "Vehicle Traffic Control Signal Heads: Light Emitting Diode (LED) Vehicle Arrow Traffic Signal Supplement," 2008, ITE, that pertain to the aspects of the signal head design that affect the display of the signal indications shall be met for light-emitting diode (LED) traffic signal modules.**

*Guidance:*

11 *The intensity and distribution of light from each illuminated signal lens or LED signal module should comply with the publications specified in Paragraph 10 of this Section, as appropriate.*

Support:

12 References to signal lenses in this section are not intended to limit signal optical units to incandescent lamps within optical assemblies that include lenses. Research has resulted in signal optical units that are not lenses, such as, but not limited to, light-emitting diode (LED) traffic signal modules. Some units are practical for all signal indications, and some are practical for specific types such as visibility-limited signal indications.

*Guidance:*

13 *If a signal indication is so bright that it causes excessive glare during nighttime conditions, some form of automatic dimming should be used to reduce the brilliance of the signal indication.*

## Section 4E.02 Size of Vehicular Signal Indications

**Standard:**

01 **There shall be three nominal diameter sizes for vehicular signal indications: 4 inches, 8 inches, and 12 inches.**

02 **Four-inch signal indications shall only be used for bicycle signal faces per Section 4H.07.**

03 **Twelve-inch signal indications shall be used for all arrow signal indications.**

04 **Except as provided in Paragraph 5 of this Section, 12-inch signal indications shall be used for all circular signal indications in all new signal faces.**

Option:

05 Eight-inch circular signal indications may be used in new signal faces only for:

A. The green or flashing yellow signal indications in an emergency-vehicle traffic control signal (see Section 4M.02);
B. The circular indications in signal faces controlling the approach to the downstream location where two adjacent signalized locations are close to each other and it is impractical because of factors such as high approach speeds, horizontal or vertical curves, or other geometric factors to install visibility- limited signal faces for the downstream approach;
C. The circular indications in a signal face that is located less than 120 feet from the stop line on a roadway with a posted or statutory speed limit or operating speed of 30 mph or less;
D. The circular indications in a supplemental near-side signal face;
E. The circular indications in a supplemental signal face installed for the sole purpose of controlling pedestrian movements rather than vehicular movements; and
F. The circular indications in a flashing beacon (see Chapter 4S).

06 Different sizes of signal indications may be used in the same signal face or signal head, provided that the signal face or signal head complies with the requirements contained in Paragraphs 3 through 5 of this Section.

## Section 4E.03 Positions of Signal Indications Within a Signal Face – General

Support:

01 Standardization of the number and arrangements of signal sections in vehicular traffic control signal faces enables road users who are color vision deficient to identify the illuminated color by its position relative to other signal sections.

**Standard:**

02 **Unless otherwise provided in this Manual for a particular application, each signal face at a signalized location shall have three, four, or five signal sections. Unless otherwise provided in this Manual for a particular application, if a vertical signal face includes a cluster (see Section 4E.04), the signal face shall have at least three vertical positions.**

03 **A single-section signal face shall be permitted at a traffic control signal if it consists of a continuously-displayed GREEN ARROW signal indication that is being used to indicate a continuous movement.**

04 **The signal sections in a signal face shall be arranged in a vertical or horizontal straight line, except as otherwise provided in Section 4E.04.**

05 **The arrangement of adjacent signal sections in a signal face shall follow the relative positions listed in Sections 4E.04 or 4E.05, as applicable.**

06 **If a signal section that displays a CIRCULAR YELLOW signal indication is used, it shall be located between the signal section that displays the red signal indication and all other signal sections.**

07 **If a U-turn arrow signal section is used in a signal face for a U-turn to the left, its position in the signal face shall be the same as stated in Sections 4E.04 and 4E.05 for a left-turn arrow signal section of the same color. If a U-turn arrow signal section is used in a signal face for a U-turn to the right, its position in the signal face shall be the same as stated in Sections 4E.04 and 4E.05 for a right-turn arrow signal section of the same color.**

08 **A U-turn arrow signal indication pointing to the left shall not be used in a signal face that also contains a left-turn arrow signal indication. A U-turn arrow signal indication pointing to the right shall not be used in a signal face that also contains a right-turn arrow signal indication.**

Option:

09 Within a signal face, two identical CIRCULAR RED or RED ARROW signal indications may be displayed immediately horizontally adjacent or immediately vertically adjacent to each other in a vertical signal face (see Drawing A in Figure 4E-2) or immediately horizontally adjacent to each other in a horizontal signal face (see Drawing B in Figure 4E-2) for emphasis.

10 Horizontally-arranged and vertically-arranged signal faces may be used on the same approach provided they are separated to meet the lateral separation spacing required in Section 4D.07.

Support:

11 Figure 4E-2 illustrates some of the typical arrangements of signal sections in signal faces that do not control separate turning movements. Figures 4F-1 through 4F-7 illustrate the typical arrangements of signal sections in left-turn signal faces. Figures 4F-8 through 4F-14 illustrate the typical arrangements of signal sections in right-turn signal faces.

**Standard:**

12 **There shall be at least two signal faces for each movement on each signal-controlled approach.**

*Guidance:*

13 *Supplemental signal faces should be considered if any of the following conditions exist:*

A. *The area is rural.*
B. *The area is urban and the signal is the first one on a particular highway.*
C. *The roadway is striped for two or more approach lanes.*
D. *Where visibility of the signal is affected by alignment* or obstructions.

Support:

14 On an undivided roadway, the signal faces for each through approach of an intersection are usually placed at the far right and far left corners.

Option:

15 The signal faces for two or more approaches may be combined on a single standard.

Support:

16 It is generally desirable to locate the signal faces on separate standards at curb returns. This practice will tend to maximize the visibility of the signal faces for the controlled approach while minimizing the visibility of the signal faces intended for the cross-street approach.

*Guidance:*

17 *Separate standards should be considered whenever the curb return radius is greater than 10 feet.*

18 *The preferred locations for new installations of signal faces for fully-protected left turn movements at a typical intersection are on a mast arm of sufficient length to place one signal face as nearly as practical in line with the left turn lane and to place the second face on a standard at the far left corner.*

Option:

19 Unusual roadway geometrics, wide medians, wide roadways, more than one left turn lane in the same direction or other factors may require the left turn signal face(s) to be mounted on standard(s) located in a median to satisfy visibility requirements.

20 A signal face, containing a circular green indication, may be located in a far median only when:

A. The signal phasing provides a protected left turn movement; or
B. The signal face is provided with some type of visibility control so that the indications are not visible to traffic in the left turn storage lane; or
C. It is not facing a left turn storage lane; or
D. LEFT TURN YIELD ON GREEN (symbolic circular green) (R10-12) sign is installed below the said signal face.

21 A signal face containing a circular green indication may be located in the near median where there is a left turn storage lane and there is no associated left turn phase.

22 Supplemental signal faces may be placed at a near side location or suspended from a mast arm.

## Section 4E.04 Positions of Signal Indications Within a Vertical Signal Face

**Standard:**

01 **In each vertically-arranged signal face, all signal sections that display red signal indications shall be located above all signal sections that display yellow and green signal indications.**

02 **In vertically-arranged signal faces, each signal section that displays a YELLOW ARROW signal indication shall be located above the signal section that displays the GREEN ARROW signal indication to which it applies.**

03 **The relative positions of signal sections in a vertically-arranged signal face, from top to bottom, shall be as follows:**

**CIRCULAR RED**
**Steady and/or flashing left-turn RED ARROW**
**Steady and/or flashing right-turn RED ARROW**
**CIRCULAR YELLOW**
**CIRCULAR GREEN**

**Straight-through GREEN ARROW**
**Steady left-turn YELLOW ARROW**
**Flashing left-turn YELLOW ARROW**
**Left-turn GREEN ARROW**
**Steady right-turn YELLOW ARROW**
**Flashing right-turn YELLOW ARROW**
**Right-turn GREEN ARROW**

04 **If a bimodal signal section (see Section 4E.01) is used in a vertically-arranged signal face, the bimodal signal section shall occupy the same position relative to the other sections as the signal section that displays the GREEN ARROW signal indication in a vertically-arranged signal face would occupy.**

Option:

05 In a vertically-arranged signal face, signal sections that display signal indications of the same color may be arranged horizontally adjacent to each other at right angles to the basic straight line arrangement to form a clustered signal face (see Figures 4E-2, 4F-4, 4F-6, 4F-10, 4F-11, 4F-13, and 4F-15).

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

**Standard:**

06 **Such clusters shall be limited to the following:**

- **A. Two identical signal sections,**
- **B. Two or three different signal sections that display signal indications of the same color, or**
- **C. For only the specific case described in Section 4F.16 (see Drawing B in Figure 4F-15), two signal sections, one of which displays a GREEN ARROW signal indication and the other of which displays a flashing YELLOW ARROW signal indication.**

07 **Except as otherwise provided in Sections 4F.04, 4F.08, 4F.11, and 4F.15 for a three-section separate turn signal face with a bimodal signal section that displays a flashing YELLOW ARROW signal indication, the signal section that displays a flashing yellow signal indication during steady mode operation:**

- **A. Shall not be placed in the same vertical position as the signal section that displays a steady yellow signal indication, and**
- **B. Shall be placed below the signal section that displays a steady yellow signal indication.**

Support:

08 Sections 4J.02 and 4N.02 contain exceptions to the provisions of this Section that are applicable to hybrid beacons.

## Section 4E.05 Positions of Signal Indications Within a Horizontal Signal Face

**Standard:**

01 **In each horizontally-arranged signal face, all signal sections that display red signal indications shall be located to the left of all signal sections that display yellow and green signal indications.**

02 **In horizontally-arranged signal faces, each signal section that displays a YELLOW ARROW signal indication shall be located to the left of the signal section that displays the GREEN ARROW signal indication to which it applies.**

03 **The relative positions of signal sections in a horizontally-arranged signal face, from left to right, shall be as follows:**

**CIRCULAR RED**
**Steady and/or flashing left-turn RED ARROW**
**Steady and/or flashing right-turn RED ARROW**
**CIRCULAR YELLOW**
**Steady left-turn YELLOW ARROW**
**Flashing left-turn YELLOW ARROW**
**Left-turn GREEN ARROW CIRCULAR GREEN**
**Straight-through GREEN ARROW**
**Steady right-turn YELLOW ARROW**
**Flashing right-turn YELLOW ARROW**
**Right-turn GREEN ARROW**

04 **If a bimodal signal section (see Section 4E.01) is used in a horizontally-arranged signal face, the signal section that displays the dual left-turn arrow signal indication shall be located immediately to the right of the signal section that displays the CIRCULAR YELLOW signal indication, the signal section that displays the straight-through GREEN ARROW signal indication shall be located immediately to the right of the signal section that displays the CIRCULAR GREEN signal indication, and the signal section that displays the dual right-turn arrow signal indication shall be located to the right of all other signal sections.**


05 **Except as otherwise provided in Sections 4F.04, 4F.08, 4F.11, and 4F.15 for a three-section separate turn signal face with a flashing YELLOW ARROW signal indication, the signal section that displays a flashing yellow signal indication during steady mode operation:**

- **A. Shall not be placed in the same horizontal position as the signal section that displays a steady yellow signal indication, and**
- **B. Shall be placed to the right of the signal section that displays a steady yellow signal indication.**

## Figure 4E-1. Typical Arrangements of U-Turn Signal Faces



## Figure 4E-2. Typical Arrangements of Signal Sections in Signal Faces That Do Not Control Turning Movements

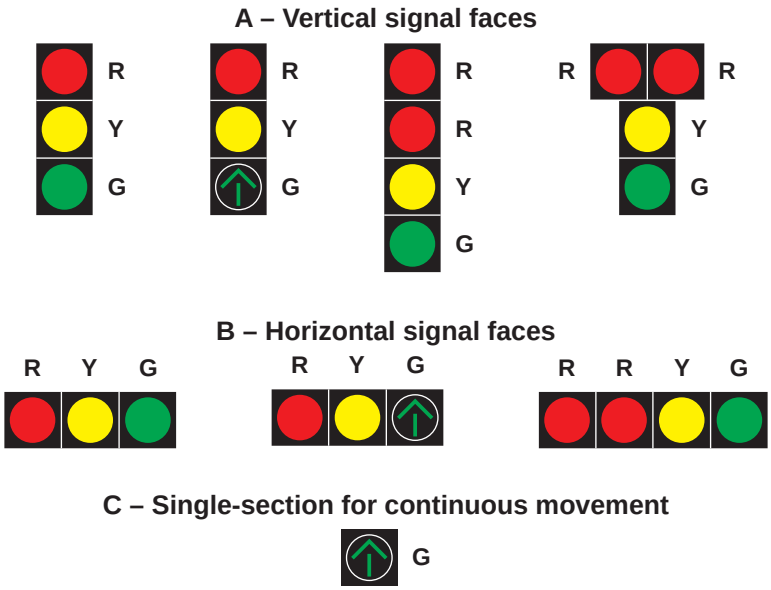

# CHAPTER 4F. STEADY (STOP-AND-GO) OPERATION OF TRAFFIC CONTROL SIGNALS

## Section 4F.01 Application of Steady and Flashing Signal Indications during Steady (Stop-and- Go) Operation

**Standard:**

01 **When a traffic control signal is being operated in a steady (stop-and-go) mode, at least one indication in each signal face shall be displayed at any given time.**

02 **A signal face(s) that controls a particular vehicular movement during any interval of a cycle shall control that same movement during all intervals of the cycle.**

03 **Steady and flashing signal indications shall be applied as follows:**

**A. A steady CIRCULAR RED signal indication:**

1. **Shall be displayed when it is intended to prohibit traffic, except pedestrians directed by a pedestrian signal head, from entering the intersection or other controlled area. Turning after stopping is permitted as stated in Item C.1 in Paragraph 1 of Section 4A.03.**
2. **Shall be displayed with the appropriate GREEN ARROW signal indications when it is intended to permit traffic to make a specified turn or turns, and to prohibit traffic from proceeding straight ahead through the intersection or other controlled area, except in protected only mode operation (see Sections 4F.06 and 4F.13), or in protected/permissive mode operation with separate turn signal faces (see Sections 4F.08 and 4F.15).**

**B. A steady CIRCULAR YELLOW signal indication:**

1. **Shall be displayed following a CIRCULAR GREEN or straight-through GREEN ARROW signal indication in the same signal face.**
2. **Shall not be displayed in conjunction with the change from the CIRCULAR RED signal indication to the CIRCULAR GREEN signal indication.**
3. **Shall be followed by a CIRCULAR RED signal indication except that, when entering preemption operation, the return to the previous CIRCULAR GREEN signal indication shall be permitted following a steady CIRCULAR YELLOW signal indication (see Section 4F.19).**
4. **Shall not be displayed to an approach from which drivers are turning left permissively using a shared signal face or making a U-turn to the left permissively using a shared signal face unless one of the following conditions exists:**
   - **(a) A steady CIRCULAR YELLOW signal indication is also simultaneously being displayed to the opposing approach;**
   - **~~(b) An engineering study has determined that, because of unique intersection conditions, the condition described in Item (a) cannot reasonably be implemented without causing significant operational or safety problems and that the volume of impacted left-turning or U-turning traffic is relatively low, and those left-turning or U-turning drivers are advised that a steady CIRCULAR YELLOW signal indication is not simultaneously being displayed to the opposing traffic if this operation occurs continuously by the installation of a W25-1 sign (see Section 2C.44) with the legend ONCOMING TRAFFIC HAS EXTENDED GREEN; or~~ W25-1 sign shall not be used in California**
   - **~~(c) Drivers are advised of the operation if it occurs only occasionally, such as during a preemption sequence, by the installation of a W25-2 sign (see Section 2C.44) with the legend ONCOMING TRAFFIC MAY HAVE EXTENDED GREEN.~~ W25-2 sign shall not be used in California**

**C. A steady CIRCULAR GREEN signal indication shall be displayed only when it is intended to permit traffic to proceed in any direction that is lawful and practical.**

**D. A steady RED ARROW signal indication shall be displayed when it is intended to prohibit traffic, except pedestrians directed by a pedestrian signal head, from entering the intersection or other controlled area to make the indicated turn. ~~Except as described in Item C.2 in Paragraph 1 of Section 4A.03~~, turning on a steady RED ARROW signal indication shall not be permitted.**

**E. A flashing RED ARROW signal indication shall be displayed as part of a steady (stop-and-go) mode of operation only when it is intended to permit traffic, after coming to a full stop, to cautiously enter the intersection to make a turn in the direction indicated by the arrow after yielding to pedestrians, if any,**

**and/or to opposing traffic, if any.**

**F. A steady YELLOW ARROW signal indication:**

1. **Shall be displayed in the same direction as a GREEN ARROW signal indication following a GREEN ARROW signal indication in the same signal face, unless:**
   - **(a) The GREEN ARROW signal indication and a CIRCULAR GREEN (or straight- through GREEN ARROW) signal indication terminate simultaneously in the same signal face, or**
   - **(b) The green arrow is a straight-through GREEN ARROW (see Item B.1 in this Paragraph).**
2. **Shall be displayed in the same direction as a flashing YELLOW ARROW signal indication or flashing RED ARROW signal indication following a flashing YELLOW ARROW signal indication or flashing RED ARROW signal indication in the same signal face, when the flashing arrow indication is displayed as part of a steady mode operation, if the signal face will subsequently display a steady red signal indication.**
3. **Shall not be displayed in conjunction with the change from a steady RED ARROW, flashing RED ARROW, or flashing YELLOW ARROW signal indication to a GREEN ARROW signal indication, except when entering preemption operation as provided in Item F.5(a) of this Paragraph.**
4. **Shall not be displayed when any conflicting vehicular movement has a green or yellow signal indication ~~(except for the situation regarding U-turns to the left provided in Paragraph 4 of this Section)~~ or any conflicting pedestrian movement has a WALKING PERSON (symbolizing WALK) or flashing UPRAISED HAND (symbolizing DONT WALK) signal indication, except that a steady left-turn (or U-turn to the left) YELLOW ARROW signal indication used to terminate a flashing left-turn (or U-turn to the left) YELLOW ARROW or a flashing left-turn (or U-turn to the left) RED ARROW signal indication in a signal face controlling a permissive left-turn (or U-turn to the left) movement as described in Sections 4F.04 and 4F.08 shall be permitted to be displayed when a CIRCULAR YELLOW signal indication is displayed for the opposing through movement. Vehicles departing in the same direction shall not be considered in conflict if, for each turn lane with moving traffic, there is a separate departure lane, and pavement markings or raised channelization clearly indicate which departure lane to use.**
5. **Shall not be displayed to terminate a flashing arrow signal indication on an approach from which drivers are turning left permissively or making a U-turn to the left permissively unless one of the following conditions exists:**
   - **(a) A steady CIRCULAR YELLOW or CIRCULAR RED signal indication is also simultaneously being displayed to the opposing approach;**
   - **~~(b) An engineering study has determined that, because of unique intersection conditions, the condition described in Item (a) cannot reasonably be implemented without causing significant operational or safety problems and that the volume of impacted left-turning or U-turning traffic is relatively low, and those left-turning or U-turning drivers are advised that a steady CIRCULAR YELLOW signal indication is not simultaneously being displayed to the opposing traffic if this operation occurs continuously by the installation of a W25-1 sign (see Section 2C.44) with the legend ONCOMING TRAFFIC HAS EXTENDED GREEN; or~~ W25-1 sign shall not be used in California**
   - **~~(c) Drivers are advised of the operation if it occurs only occasionally, such as during a preemption sequence, by the installation of a W25-2 sign (see Section 2C.44) with the legend ONCOMING TRAFFIC MAY HAVE EXTENDED GREEN.~~ W25-2 sign shall not be used in California.**
6. **Shall be terminated by a RED ARROW signal indication for the same direction or a CIRCULAR RED signal indication except:**
   - **(a) When entering preemption operation, the display of a GREEN ARROW signal indication or a flashing arrow signal indication shall be permitted following a steady YELLOW ARROW signal indication.**
   - **(b) When the movement controlled by the arrow is to continue on a permissive mode basis during an immediately following signal phase, the display of a CIRCULAR GREEN signal indication or flashing YELLOW ARROW signal indication shall be permitted following a steady YELLOW ARROW signal indication. To provide a red clearance interval, it shall be permitted to display a**

**steady left-turn RED ARROW signal indication immediately following the steady left-turn YELLOW ARROW signal indication.**

**G. A flashing YELLOW ARROW signal indication shall be displayed as part of a steady (stop- and-go) mode of operation only when it is intended to permit traffic to cautiously enter the intersection to make a turn in the direction indicated by the arrow after yielding to pedestrians, if any, and/or to opposing traffic, if any.**

**H. A steady GREEN ARROW signal indication:**

1. **Shall be displayed only to allow vehicular movements, in the direction indicated, that are not in conflict with other vehicles moving on a green or yellow signal indication (except for the situation regarding U-turns provided in Paragraph 4 of this Section and straight- through GREEN ARROWs provided in Paragraph 5 of this Section), even if the other vehicles are required to yield the right-of-way to the traffic moving on the GREEN ARROW signal indication, and are not in conflict with pedestrians crossing in compliance with a WALKING PERSON (symbolizing WALK) or flashing UPRAISED HAND (symbolizing DONT WALK) signal indication. Vehicles departing in the same direction shall not be considered in conflict if, for each turn lane with moving traffic, there is a separate departure lane, and pavement markings or raised channelization clearly indicate which departure lane to use.**
2. **Shall be displayed on a signal face that controls a left-turn movement when said movement is not in conflict with other vehicles moving on a green or yellow signal indication (except for the situation regarding U-turns provided in Paragraph ~~4~~ 4a of this Section) and is not in conflict with pedestrians crossing in compliance with a WALKING PERSON (symbolizing WALK) or flashing UPRAISED HAND (symbolizing DONT WALK) signal indication. Vehicles departing in the same direction shall not be considered in conflict if, for each turn lane with moving traffic, there is a separate departure lane, and pavement markings or raised channelization clearly indicate which departure lane to use.**
3. **Shall not be required on the stem of a T-intersection or for turns from a one-way street.**

~~Option:~~

04 ~~If U-turns are permitted from the approach and a right-turn GREEN ARROW signal indication is simultaneously being displayed to road users making a right turn from the conflicting approach to the left, road users making a U-turn may be advised of the operation by the installation of a U-TURN YIELD TO RIGHT TURN (R10-16) sign (see Section 2B.59).~~

**Standard:**

04a **When a RIGHT TURN ARROW controls the Right Turn movement, a conflicting U-turn approach shall be prohibited.**

Option:

05 A steady straight-through GREEN ARROW signal indication may be used instead of a CIRCULAR GREEN signal indication in a signal face to discourage wrong-way turns under the following conditions, even if opposed by a simultaneous permissive left-turn movement:

A. On an approach intersecting a one-way street;
B. On an approach intersecting an interchange exit ramp;
C. On an approach with unique geometric design that prohibits turns; or
D. On an approach with pre-signals and the adjacent lanes are controlled separately (see Sections 8D.11 and 8D.12).

06 If not otherwise prohibited, steady red, yellow, and green turn arrow signal indications may be used instead of steady circular red, yellow, and green signal indications in a signal face on an approach where all traffic is required to turn or where the straight-through movement is not physically possible.

Support:

07 Section 4F.16 contains information regarding the signalization of approaches that have a combined left-turn/right-turn lane and no through movement.

08 Section 4D.07 contains information regarding limitations on left-turn arrows, right-turn arrows, and U-turn arrows in supplemental signal faces.

**Standard:**

09 **A straight-through RED ARROW signal indication or a straight-through YELLOW ARROW signal indication shall not be displayed on any signal face, either alone or in combination with any other signal indication.**

10 **The following combinations of signal indications shall not be simultaneously displayed on any one signal face:**
- **A. CIRCULAR YELLOW with CIRCULAR RED,**
- **B. CIRCULAR GREEN with CIRCULAR RED, or**
- **C. Straight-through GREEN ARROW with CIRCULAR RED.**

11 **Except as provided in Paragraph 13 of this Section, the above combinations shall not be simultaneously displayed on an approach as a result of the combination of displays from multiple signal faces unless the display is created by a signal face(s) devoted exclusively to the control of a right-turn movement and:**
- **A. The signal face(s) controlling the right-turn movement is visibility limited from the adjacent through movement or positioned to minimize potential confusion to approaching road users, or**
- **B. A RIGHT TURN SIGNAL (R10-10) sign (see Sections 4F.09, 4F.11, 4F.13, and 4F.15) is mounted adjacent to the signal face(s) controlling the right-turn movement.**

12 **Except as provided in Paragraph 13 of this Section, the following combinations of signal indications shall not be simultaneously displayed on any one signal face or as a result of the combination of displays from multiple signal faces on an approach:**
- **A. CIRCULAR GREEN with CIRCULAR YELLOW,**
- **B. Straight-through GREEN ARROW with CIRCULAR YELLOW,**
- **C. GREEN ARROW with YELLOW ARROW pointing in the same direction,**
- **D. YELLOW ARROW with RED ARROW pointing in the same direction, or**
- **E. GREEN ARROW with RED ARROW pointing in the same direction.**

13 **If a separate signal face is provided at a pre-signal (see Section 8D.11) or at a queue cutter signal (see Section 8D.12) for a left-turn and/or right-turn lane that extends from the downstream signalized intersection back to and across a grade crossing, the following combinations of signal indications shall be permitted to be simultaneously displayed as a result of the combination of displays from multiple signal faces at the pre-signal or queue cutter signal:**
- **A. Straight-through GREEN ARROW with CIRCULAR RED,**
- **B. Straight-through GREEN ARROW with CIRCULAR YELLOW, and**
- **C. CIRCULAR YELLOW with CIRCULAR RED.**

14 **Except as otherwise provided in Sections 4F.08, 4F.15, 4J.03, and 4N.03, the same signal section shall not be used to display both a flashing yellow and a steady yellow indication during steady mode operation. Except as otherwise provided in Sections 4F.04, 4F.08, 4F.11, and 4F.13, the same signal section shall not be used to display both a flashing red and a steady red indication during steady mode operation.**

*Guidance:*

15 *No movement that creates an unexpected crossing of pathways of moving vehicles or pedestrians should be allowed during any green or yellow interval, except when all three of the following conditions are met:*
- *A. The movement involves only slight conflict, and*
- *B. Serious traffic delays are substantially reduced by permitting the conflicting movement, and*
- *C. Drivers and pedestrians subjected to the unexpected conflict are effectively warned thereof by a sign.*

## Section 4F.02 Signal Indications for Left-Turn Movements – General

Support:

01 In Sections 4F.03 through 4F.08, provisions applicable to left-turn movements and left-turn lanes are also applicable to signal indications for U-turns to the left that are provided at locations where left turns are prohibited or not geometrically possible.

02 Left-turning traffic is controlled by one of four modes as follows:
- A. Permissive Only Mode—turns made on a CIRCULAR GREEN signal indication, a flashing left-turn YELLOW ARROW signal indication, or a flashing left-turn RED ARROW signal indication after yielding to pedestrians, if any, and/or opposing traffic, if any.
- B. Protected Only Mode—turns made only when a left-turn GREEN ARROW signal indication is displayed.
- C. Protected/Permissive Mode—both modes can occur on an approach during the same cycle.
- D. Variable Left-Turn Mode—the operating mode changes among the protected only mode and/or the protected/permissive mode and/or the permissive only mode during different periods of the day or as traffic conditions change.

Option:

03 In areas having a high percentage of older drivers, special consideration may be given to the use of protected only mode left-turn phasing, when appropriate.

**Standard:**

04 **During a permissive left-turn movement, the signal faces for through traffic on the opposing approach shall simultaneously display green or steady yellow signal indications. If pedestrians crossing the lane or lanes used by the permissive left-turn movement to depart the intersection are controlled by pedestrian signal heads, the signal indications displayed by those pedestrian signal heads shall not be limited to any particular display during the permissive left-turn movement.**

05 **During a protected left-turn movement, the signal faces for through traffic on the opposing approach shall simultaneously display steady CIRCULAR RED signal indications. During a protected left-turn movement, a GREEN ARROW or a YELLOW ARROW signal indication shall not simultaneously be displayed to right-turning traffic on the opposing approach, except where a separate departure lane is available for each left-turn and right-turn lane with moving traffic and pavement markings or raised channelization clearly indicate which departure lane to use (see Item H.1 in Paragraph 3 in Section 4F.01). If pedestrians crossing the lane or lanes used by the protected left-turn movement to depart the intersection are controlled by pedestrian signal heads, the pedestrian signal heads shall display a steady UPRAISED HAND (symbolizing DONT WALK) signal indication during the protected left-turn movement.**

06 **If a combined left-turn/through lane exists on an approach, a left-turn GREEN ARROW or left- turn YELLOW ARROW signal indication or a flashing left-turn RED ARROW signal indication shall not be displayed to the approach simultaneously with a CIRCULAR RED signal indication for the through movement, and a left-turn RED ARROW signal indication shall not be displayed to the approach simultaneously with a CIRCULAR GREEN or CIRCULAR YELLOW signal indication for the through movement.**

07 **A yellow change interval for the left-turn movement shall not be displayed when the status of the left-turn operation is changing from permissive to protected within any given signal sequence.**

08 **If the operating mode changes among the protected only mode and/or the protected/permissive mode and/or the permissive only mode during different periods of the day or as traffic conditions change, the requirements in Sections 4F.03 through 4F.08 that are appropriate to that mode of operation shall be met, subject to the following:**

- **A. The CIRCULAR GREEN and CIRCULAR YELLOW signal indications shall not be displayed when operating in the protected only mode.**
- **B. The left-turn GREEN ARROW and left-turn YELLOW ARROW signal indications shall not be displayed when operating in the permissive only mode.**

Option:

09 When variable left-turn mode phasing is used for an approach that has a combined left-turn/straight- through lane and a flashing yellow arrow is used as the permissive turn display, a five-section shared left-turn signal face containing both circular and arrow indications may be used in combination with one or more separate left-turn signal faces for the mandatory left-turn lane(s), if any are present, on the same approach.

The steady left-turn YELLOW ARROW signal indication and the flashing left-turn YELLOW ARROW signal indication may be displayed in the same section of the five-section shared left-turn signal face.

10 Additional static signs or changeable message signs may be used to meet the requirements for the variable left-turn mode or to inform drivers that left-turn green arrows will not be available during certain times of the day.

Support:

11 Sections 4F.03 through 4F.08 describe the use of the following two types of signal faces for controlling left-turn movements:

- A. Shared signal face – This type of signal face controls both the left-turn movement and the adjacent movement (usually the through movement) and can serve as one of the two required primary signal faces for the adjacent movement. A shared signal face always displays the same color of circular indication that is displayed by the signal face or faces for the adjacent movement. If a shared signal face that provides protected/permissive mode left turns is mounted overhead for an approach that includes a mandatory left-turn lane, it is usually positioned over or slightly to the right of the extension of the lane line separating the left-turn lane from the adjacent lane. If a shared signal face that provides protected/permissive mode left turns is mounted overhead for an approach

that does not include a mandatory left-turn lane, it is usually positioned over the center of the combined left-turn/straight-through lane.

B. Separate left-turn signal face – This type of signal face controls only the left-turn movement and cannot serve as one of the two required primary signal faces for the adjacent movement (usually the through movement) because it displays signal indications that are applicable only to the left-turn movement. This type of signal face is used only for an approach that has a mandatory left-turn lane(s). If a separate left-turn signal face is mounted overhead at the intersection, it is positioned over the extension of the mandatory left-turn lane. In a separate left-turn signal face, a flashing left-turn YELLOW ARROW signal indication or a flashing left-turn RED ARROW signal indication is used to control permissive left-turn movements.

12 Section 4D.07 contains provisions regarding the lateral positioning of signal faces that control left- turn movements.

13 It is not necessary that the same mode of left-turn operation or same type of left-turn signal face be used on every approach to a signalized location. Selecting different modes and types of left-turn signal faces for the various approaches to the same signalized location is acceptable.

Option:

14 A signal face that is shared by left-turning and right-turning traffic may be provided for a combined left-turn/right-turn lane on an approach that has no through traffic (see Section 4F.16).

## Section 4F.03 Signal Indications for Permissive Only Mode Left-Turn Movements in a Shared Signal Face

**Standard:**

01 **If a shared signal face is provided for a permissive only mode left turn, it shall meet the following requirements (see Figure 4F-1):**

**A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, and CIRCULAR GREEN. Only one of the three indications shall be displayed at any given time.**

**B. During the permissive left-turn movement, a CIRCULAR GREEN signal indication shall be displayed.**

**C. A permissive only shared signal face, regardless of where it is positioned and regardless of how many adjacent through signal faces are provided, shall always simultaneously display the same color of circular indication that the adjacent through signal face or faces display.**

**D. If the permissive only mode is not the only left-turn mode used for the approach, the signal face shall be the same shared signal face that is used for the protected/permissive mode (see Section 4F.07) except that the left-turn GREEN ARROW and left-turn YELLOW ARROW signal indications shall not be displayed when operating in the permissive only mode.**

## Section 4F.04 Signal Indications for Permissive Only Mode Left-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate left-turn signal face shall not be used for an approach that does not include a mandatory left-turn lane.**

02 **If a separate left-turn signal face is being operated in a permissive only left-turn mode, a CIRCULAR GREEN signal indication shall not be used in that face.**

03 **If a separate left-turn signal face is being operated in a permissive only left-turn mode and a flashing left-turn YELLOW ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-2):**

**A. It shall be capable of displaying the following signal indications: steady left-turn RED ARROW, steady left-turn YELLOW ARROW, and flashing left-turn YELLOW ARROW. Only one of the three indications shall be displayed at any given time.**

**B. During the permissive left-turn movement, a flashing left-turn YELLOW ARROW signal indication shall be displayed.**

**C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the flashing left-turn YELLOW ARROW signal indication.**

**D. It shall be permitted to display a flashing left-turn YELLOW ARROW signal indication for a permissive left-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR**

**RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement.**

**E. During steady mode (stop-and-go) operation, the signal section that displays the steady left-turn YELLOW ARROW signal indication during change intervals shall not be used to display the flashing left-turn YELLOW ARROW signal indication for permissive left turns unless a bimodal signal section capable of alternating between the display of a steady YELLOW ARROW and a flashing YELLOW ARROW signal indication is used to operate variable left- turn mode phasing.**

**F. During flashing mode operation (see Section 4G.01), the display of a flashing left-turn YELLOW ARROW signal indication shall be only from the signal section that displays a steady left-turn YELLOW ARROW signal indication during steady mode (stop-and-go) operation.**

**G. If the permissive only mode is not the only left-turn mode used for the approach, the signal face shall be the same separate left-turn signal face with a flashing YELLOW ARROW signal indication that is used for the protected/permissive mode (see Section 4F.08) except that the left- turn GREEN ARROW signal indication shall not be displayed when operating in the permissive only mode.**

Option:

04 A separate left-turn signal face with a flashing left-turn RED ARROW signal indication during the permissive left-turn movement may be used for unusual geometric conditions, such as wide medians with offset left-turn lanes, but only when an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive left turn.

**Standard:**

05 **If a separate left-turn signal face is being operated in a permissive only left-turn mode and a flashing left-turn RED ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-3):**

**A. It shall be capable of displaying the following signal indications: steady or flashing left-turn RED ARROW, steady left-turn YELLOW ARROW, and left-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time. The GREEN ARROW indication is required in order to provide a three-section signal face, but shall not be displayed during the permissive only mode.**

**B. During the permissive left-turn movement, a flashing left-turn RED ARROW signal indication shall be displayed, thus indicating that each and every vehicle must successively come to a full stop before making a permissive left turn.**

**C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the flashing left-turn RED ARROW signal indication.**

**D. It shall be permitted to display a flashing left-turn RED ARROW signal indication for a permissive left-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement.**

**E. A supplementary sign shall not be required. ~~If used, it shall be a LEFT TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27) sign (see Section 2B.59).~~**

Option:

06 The requirements of Item A in Paragraph 5 of this Section may be met by a vertically-arranged signal face with a horizontal cluster of two left-turn RED ARROW signal indications, the left-most of which displays a steady indication and the right-most of which displays a flashing indication (see Figure 4F-3).

## Section 4F.05 Signal Indications for Protected Only Mode Left-Turn Movements in a Shared Signal Face

**Standard:**

01 **A shared signal face shall not be used for protected only mode left turns unless the CIRCULAR GREEN and left-turn GREEN ARROW signal indications always begin and terminate together. If a shared signal face is provided for a protected only mode left turn, it shall meet the following requirements (see Figure 4F-4):**

**A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, CIRCULAR GREEN, and left-turn GREEN ARROW. Only one of the three colors shall be displayed at any given time.**

**B. During the protected left-turn movement, the shared signal face shall simultaneously display both a CIRCULAR GREEN signal indication and a left-turn GREEN ARROW signal indication.**

**C. The shared signal face shall always simultaneously display the same color of circular indication that the adjacent through signal face or faces display.**

**D. If the protected only mode is not the only left-turn mode used for the approach, the signal face shall be the same shared signal face that is used for the protected/permissive mode (see Section 4F.07).**

Option:

02 A straight-through GREEN ARROW signal indication may be used instead of the CIRCULAR GREEN signal indication in Items A and B in Paragraph 1 of this Section on an approach where a straight- through GREEN ARROW signal indication is also used instead of a CIRCULAR GREEN signal indication in the other signal face(s) for through traffic.

## Section 4F.06 Signal Indications for Protected Only Mode Left-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate left-turn signal face shall not be used for an approach that does not include a mandatory left-turn lane.**

02 **If a separate left-turn signal face is provided for a protected only mode left turn, it shall meet the following requirements (see Figure 4F-5):**

**A. It shall be capable of displaying, the following signal indications: steady left-turn RED ARROW, steady left-turn YELLOW ARROW, and left-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time.**

**B. During the protected left-turn movement, a left-turn GREEN ARROW signal indication shall be displayed.**

**C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the left- turn GREEN ARROW signal indication.**

**D. If the protected only mode is not the only left-turn mode used for the approach, the signal face shall be the same separate left-turn signal face that is used for the protected/permissive mode (see Section 4F.08 and Figures 4F-3 and 4F-7) except that the flashing left-turn YELLOW ARROW or flashing left-turn RED ARROW signal indication shall not be displayed when operating in the protected only mode.**

*Guidance:*

03 *Since separate signal phases for protected left turns will reduce the green time available for other phases, alternate means of handling left turn conflicts should be considered first.*

Support:

04 The most likely possibilities are:

1. Prohibition of left turns. This can be done only if there are convenient alternate means of making the movement. Typical alternate means are:
   a. A series of right and/or left turns around a block to permit getting to the desired destination; or
   b. Making the left turn at an adjacent unsignalized intersection during gaps in the opposing through traffic.
2. Geometric changes to eliminate the left turn. An effective change would be a complete separation or a complete or partial "clover leaf" at grade. Any of these, while eliminating left turns, requires additional cost and right of way.
3. Provide protected-permissive or permissive-protected left turn operation. The protected left turn interval may be prohibited during certain periods of the day to allow only permissive intervals for left turn movement in order to increase the green time available for other phases. Refer to Section 4F.07 for the requirements of protected-permissive or permissive-protected left turn operation.

*Guidance:*

05 *Protected left turn phases should be considered where such alternatives couldn't be utilized, and one or more of the following conditions exist:*

1. *Collisions - Five or more left turn collisions for a particular left turn movement during a recent 12-month period.*
2. *Delay - Left-turn delay of one or more vehicles, which were waiting at the beginning of the green interval and are still remaining in the left turn lane after at least 80% of the total number of cycles for one hour.*
3. *Volume - At new intersections where only estimated volumes are available, the following criteria may be used. For pre-timed signal or a background-cycle-controlled actuated signal, a left turn volume of more than two vehicles per approach per cycle*

*for a peak hour; or for a traffic-actuated signal, 50 or more left turning vehicles per hour in one direction with the product of the turning and conflicting through traffic during the peak hour of 100,000 or more.*

4. *Miscellaneous. Other factors that might be considered include but are not limited to: impaired sight distance due to horizontal or vertical curvature, or where there are a large percentage of buses and trucks.*

## Section 4F.07 Signal Indications for Protected/Permissive Mode Left-Turn Movements in a Shared Signal Face

**Standard:**

01 **If a shared signal face is provided for a protected/permissive mode left turn, it shall meet the following requirements (see Figure 4F-6):**

- **A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, CIRCULAR GREEN, steady left-turn YELLOW ARROW, and left-turn GREEN ARROW. Only one of the three circular indications shall be displayed at any given time. Only one of the two arrow indications shall be displayed at any given time. If the left-turn GREEN ARROW signal indication and the CIRCULAR GREEN signal indication(s) for the adjacent through movement are always terminated together, the steady left-turn YELLOW ARROW signal indication shall not be required.**
- **B. During the protected left-turn movement, the shared signal face shall simultaneously display a left-turn GREEN ARROW signal indication and a circular signal indication that is the same color as the signal indication for the adjacent through lane on the same approach as the protected left turn.**
- **C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the left- turn GREEN ARROW signal indication, unless the left-turn GREEN ARROW signal indication and the CIRCULAR GREEN signal indication(s) for the adjacent through movement are being terminated together. When the left-turn GREEN ARROW and CIRCULAR GREEN signal indications are being terminated together, the required display following the left-turn GREEN ARROW signal indication shall be either the display of a CIRCULAR YELLOW signal indication alone or the simultaneous display of the CIRCULAR YELLOW and left-turn YELLOW ARROW signal indications.**
- **D. During the permissive left-turn movement, the shared signal face shall display only a CIRCULAR GREEN signal indication.**
- **E. A protected/permissive shared signal face, regardless of where it is positioned and regardless of how many adjacent through signal faces are provided, shall always simultaneously display the same color of circular indication that the adjacent through signal face or faces display.**
- **F. A supplementary sign shall not be required. If used, it shall be a LEFT TURN YIELD ON GREEN (symbolic circular green) (R10-12) sign (see Section 2B.59).**

## Section 4F.08 Signal Indications for Protected/Permissive Mode Left-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate left-turn signal face shall not be used for an approach that does not include a mandatory left-turn lane.**

02 **If a separate left-turn signal face is being operated in a protected/permissive left-turn mode, a CIRCULAR GREEN signal indication shall not be used in that face.**

03 **If a separate left-turn signal face is being operated in a protected/permissive left-turn mode and a flashing left-turn YELLOW ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-7):**

- **A. It shall be capable of displaying the following signal indications: steady left-turn RED ARROW, steady left-turn YELLOW ARROW, flashing left-turn YELLOW ARROW, and left-turn GREEN ARROW. Only one of the four indications shall be displayed at any given time.**
- **B. During the protected left-turn movement, a left-turn GREEN ARROW signal indication shall be displayed.**
- **C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the left- turn GREEN ARROW signal indication. It shall be permitted to display a steady left-turn RED ARROW**

**signal indication immediately following the steady left-turn YELLOW ARROW signal indication to provide a red clearance interval.**

**D. During the permissive left-turn movement, a flashing left-turn YELLOW ARROW signal indication shall be displayed.**

**E. A steady left-turn YELLOW ARROW signal indication shall be displayed following the flashing left-turn YELLOW ARROW signal indication if the permissive left-turn movement is being terminated and the separate left-turn signal face will subsequently display a steady left-turn RED ARROW indication.**

**F. It shall be permitted to display a flashing left-turn YELLOW ARROW signal indication for a permissive left-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement.**

**G. When a permissive left-turn movement is changing to a protected left-turn movement, a left- turn GREEN ARROW signal indication shall be displayed immediately upon the termination of the flashing left-turn YELLOW ARROW signal indication. A steady left-turn YELLOW ARROW signal indication shall not be displayed between the display of the flashing left-turn YELLOW ARROW signal indication and the display of the steady left-turn GREEN ARROW signal indication.**

**H. The display shall be either:**

**1. A four-section signal face with the steady left-turn YELLOW ARROW signal indication being displayed in a different section than the flashing left-turn YELLOW ARROW signal indication, or**

**2. A three-section signal face with the steady left-turn YELLOW ARROW signal indication and the flashing left-turn YELLOW ARROW signal indication being displayed in the same bimodal signal section.**

**I. During steady mode (stop-and-go) operation where a four-section signal face is used, the signal section that displays the steady left-turn YELLOW ARROW signal indication during change intervals shall not be used to display the flashing left-turn YELLOW ARROW signal indication for permissive left turns.**

**J. During flashing mode operation (see Chapter 4G) where a four-section signal face is used, the display of a flashing left-turn YELLOW ARROW signal indication shall be only from the signal section that displays a steady left-turn YELLOW ARROW signal indication during steady mode (stop-and-go) operation.**

Option:

04 A bimodal signal section (capable of displaying a GREEN ARROW for the protected left-turn movement and a flashing YELLOW ARROW for the permissive left-turn movement) along with a steady left- turn YELLOW ARROW signal indication and a steady left-turn RED ARROW signal indication may be used for a separate left-turn signal face and may be considered to be a four-section signal face that is compliant with Item H.1 of Paragraph 3 of this Section.

05 A separate left-turn signal face with a flashing left-turn RED ARROW signal indication during the permissive left-turn movement may be used for unusual geometric conditions, such as wide medians with offset left-turn lanes, but only when an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive left turn.

**Standard:**

06 **If a separate left-turn signal face is being operated in a protected/permissive left-turn mode and a flashing left-turn RED ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-3):**

**A. It shall be capable of displaying the following signal indications: steady or flashing left-turn RED ARROW, steady left-turn YELLOW ARROW, and left-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time.**

**B. During the protected left-turn movement, a left-turn GREEN ARROW signal indication shall be displayed.**

**C. A steady left-turn YELLOW ARROW signal indication shall be displayed following the left- turn GREEN ARROW signal indication.**

**D. During the permissive left-turn movement, a flashing left-turn RED ARROW signal indication shall be displayed.**

**E. A steady left-turn YELLOW ARROW signal indication shall be displayed following the flashing left-turn RED ARROW signal indication if the permissive left-turn movement is being terminated and the separate left-turn signal face will subsequently display a steady left-turn RED ARROW indication.**

**F. When a permissive left-turn movement is changing to a protected left-turn movement, a left- turn GREEN ARROW signal indication shall be displayed immediately upon the termination of the flashing left-turn RED ARROW signal indication. A steady left-turn YELLOW ARROW signal indication shall not be displayed between the display of the flashing left-turn RED ARROW signal indication and the display of the steady left-turn GREEN ARROW signal indication.**

**G. It shall be permitted to display a flashing left-turn RED ARROW signal indication for a permissive left-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement.**

**H. A supplementary sign shall not be required. ~~If used, it shall be a LEFT TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27) sign (see Section 2B.59).~~**

Option:

07 The requirements of Item A in Paragraph 6 of this Section may be met by a vertically-arranged signal face with a horizontal cluster of two left-turn RED ARROW signal indications, the left-most of which displays a steady indication and the right-most of which displays a flashing indication (see Figure 4F-3).

## Section 4F.09 Signal Indications for Right-Turn Movements – General

Support:

01 In Sections 4F.10 through 4F.15, provisions applicable to right-turn movements and right-turn lanes are also applicable to signal indications for U-turns to the right that are provided at locations where right turns are prohibited or not geometrically possible.

02 Right-turning traffic is controlled by one of four modes as follows:

A. Permissive Only Mode—turns made on a CIRCULAR GREEN signal indication, a flashing right-turn YELLOW ARROW signal indication, or a flashing right-turn RED ARROW signal indication after yielding to pedestrians, if any.
B. Protected Only Mode—turns made only when a right-turn GREEN ARROW signal indication is displayed.
C. Protected/Permissive Mode—both modes occur on an approach during the same cycle.
D. Variable Right-Turn Mode—the operating mode changes among the protected only mode and/or the protected/permissive mode and/or the permissive only mode during different periods of the day or as traffic conditions change.

**Standard:**

03 **During a permissive right-turn movement, the signal faces, if any, that exclusively control U- turn traffic that conflicts with the permissive right-turn movement (see Item H.1 in Paragraph 3 in Section 4F.01) shall simultaneously display steady U-turn RED ARROW signal indications. If pedestrians crossing the lane or lanes used by the permissive right-turn movement to depart the intersection are controlled by pedestrian signal heads, the signal indications displayed by those pedestrian signal heads shall not be limited to any particular display during the permissive right-turn movement.**

04 **During a protected right-turn movement, a GREEN ARROW or a YELLOW ARROW signal indication shall not simultaneously be displayed to left-turning traffic on the opposing approach, except where a separate departure lane is available for each left-turn and right-turn lane with moving traffic and pavement markings or raised channelization clearly indicate which departure lane to use (see Item H.1 in Paragraph 3 in Section 4F.01). Signal faces, if any, that exclusively control U-turn traffic that conflicts with the protected right-turn movement shall simultaneously display steady RED ARROW signal indications. If pedestrians crossing the lane or lanes used by the protected right-turn movement to depart the intersection are controlled by pedestrian signal heads, the pedestrian signal heads shall display a steady UPRAISED HAND (symbolizing DONT WALK) signal indication during the protected right-turn movement.**

05 **If a combined right-turn/through lane exists on an approach, a right-turn GREEN ARROW or right-turn YELLOW ARROW signal indication or a flashing right-turn RED ARROW signal indication shall not be displayed to the approach simultaneously with a CIRCULAR RED signal indication for the through movement, and a right-turn RED ARROW signal indication shall not be displayed to the approach simultaneously with a CIRCULAR GREEN or CIRCULAR YELLOW signal indication for the through movement.**

06 **If the operating mode changes among the protected only mode and/or the protected/permissive mode and/or**

**the permissive only mode during different periods of the day or as traffic conditions change, the requirements in Sections 4F.10 through 4F.15 that are appropriate to that mode of operation shall be met, subject to the following:**

**A. The CIRCULAR GREEN and CIRCULAR YELLOW signal indications shall not be displayed when operating in the protected only mode.**

**B. The right-turn GREEN ARROW and right-turn YELLOW ARROW signal indications shall not be displayed when operating in the permissive only mode.**

Option:

07 When variable right-turn mode phasing is used for an approach that has a combined right- turn/straight-through lane and a flashing yellow arrow is used as the permissive turn display, a five-section shared right-turn signal face containing both circular and arrow indications may be used in combination with one or more separate right-turn signal faces for the mandatory right-turn lane(s), if any are present, on the same approach. The steady right-turn YELLOW ARROW signal indication and the flashing right-turn YELLOW ARROW signal indication may be displayed in the same section of the five-section shared right- turn signal face.

08 Additional static signs or changeable message signs may be used to meet the requirements for the variable right-turn mode or to inform drivers that right-turn green arrows will not be available during certain times of the day.

Support:

09 Sections 4F.10 through 4F.15 describe the use of the following two types of signal faces for controlling right-turn movements:

A. Shared signal face – This type of signal face controls both the right-turn movement and the adjacent movement (usually the through movement) and can serve as one of the two required primary signal faces for the adjacent movement. A shared signal face always displays the same color of circular indication that is displayed by the signal face or faces for the adjacent movement.

B. Separate right-turn signal face – This type of signal face controls only the right-turn movement and cannot serve as one of the two required primary signal faces for the adjacent movement (usually the through movement) because it displays signal indications that are applicable only to the right-turn movement. If a separate right-turn signal face is mounted overhead at the intersection, it is positioned over the extension of the mandatory right-turn lane. In a separate right-turn signal face, a flashing right-turn YELLOW ARROW signal indication or a flashing right-turn RED ARROW signal indication is used to control permissive right-turn movements.

10 Section 4D.07 contains provisions regarding the lateral positioning of signal faces that control right- turn movements.

11 It is not necessary that the same mode of right-turn operation or same type of right-turn signal face be used on every approach to a signalized location. Selecting different modes and types of right-turn signal faces for the various approaches to the same signalized location is acceptable.

Option:

12 A signal face that is shared by left-turning and right-turning traffic may be provided for a combined left-turn/right-turn lane on an approach that has no through traffic (see Section 4F.16).

*Guidance:*

13 *A right-turn green arrow should be considered for use only when there is an exclusive right-turn lane or it is the only movement that traffic is permitted to make or when the right-turn volume exceeds 200 vehicles per hour.*

## Section 4F.10 Signal Indications for Permissive Only Mode Right-Turn Movements in a Shared Signal Face

**Standard:**

01 **If a shared signal face is provided for a permissive only mode right turn, it shall meet the following requirements (see Figure 4F-8):**

**A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, and CIRCULAR GREEN. Only one of the three indications shall be displayed at any given time.**

**B. During the permissive right-turn movement, a CIRCULAR GREEN signal indication shall be displayed.**

**C. A permissive only shared signal face, regardless of where it is positioned and regardless of how many adjacent through signal faces are provided, shall always simultaneously display the same color of circular indication that the adjacent through signal face or faces display.**

**D. If the permissive only mode is not the only right-turn mode used for the approach, the signal face shall be the same shared signal face that is used for the protected/permissive mode (see Section 4F.14) except that the right-turn GREEN ARROW and right-turn YELLOW ARROW signal indications shall not be displayed when operating in the permissive only mode.**

## Section 4F.11 Signal Indications for Permissive Only Mode Right-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate right-turn signal face shall not be used for an approach that does not include a mandatory right-turn lane.**

02 **If a separate right-turn signal face is being operated in a permissive only right-turn mode, a CIRCULAR GREEN signal indication shall not be used in that face.**

03 **If a separate right-turn signal face is being operated in a permissive only right-turn mode and a flashing right-turn YELLOW ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-9):**

- **A. It shall be capable of displaying one of the following sets of signal indications:**
  1. **Steady right-turn RED ARROW, steady right-turn YELLOW ARROW, and flashing right- turn YELLOW ARROW. Only one of the three indications shall be displayed at any given time.**
  2. **Steady CIRCULAR RED, steady right-turn YELLOW ARROW, and flashing right-turn YELLOW ARROW. Only one of the three indications shall be displayed at any given time. If the CIRCULAR RED signal indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a CIRCULAR RED signal indication, a RIGHT TURN SIGNAL (R10-10R) sign (see Section 2B.59) shall be used unless the CIRCULAR RED signal indication in the separate right-turn signal face is shielded, hooded, louvered, positioned, or designed such that it is not readily visible to drivers in the through lane(s).**
- **B. During the permissive right-turn movement, a flashing right-turn YELLOW ARROW signal indication shall be displayed.**
- **C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the flashing right-turn YELLOW ARROW signal indication.**
- **D. When the separate right-turn signal face is provided ~~providing a message to stop and remain stopped~~, a steady right-turn RED ARROW signal indication shall be displayed if it is intended that right turns on red not be permitted ~~(except when a traffic control device is in place permitting a turn on a steady RED ARROW signal indication)~~ or a steady CIRCULAR RED signal indication shall be displayed if it is intended that right turns on red be permitted. Refer to CVC § 21453.**
- **E. It shall be permitted to display a flashing right-turn YELLOW ARROW signal indication for a permissive right-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications.**
- **F. During steady mode (stop-and-go) operation, the signal section that displays the steady right- turn YELLOW ARROW signal indication during change intervals shall not be used to display the flashing right-turn YELLOW ARROW signal indication for permissive right turns unless a bimodal signal section capable of alternating between the display of a steady YELLOW ARROW and a flashing YELLOW ARROW signal indication is used during variable right-turn mode operation.**
- **G. During flashing mode operation (see Chapter 4G), the display of a flashing right-turn YELLOW ARROW signal indication shall be only from the signal section that displays a steady right-turn YELLOW ARROW signal indication during steady mode (stop-and-go) operation.**
- **H. If the permissive only mode is not the only right-turn mode used for the approach, the signal face shall be the same separate right-turn signal face with a flashing YELLOW ARROW signal indication that is used for the protected/permissive mode (see Section 4F.15) except that the right-turn GREEN ARROW signal indication shall not be displayed when operating in the permissive only mode.**

Option:

04 When an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive right turn, a separate right-turn signal face with a flashing right-turn RED ARROW signal

indication during the permissive right-turn movement may be used.

**Standard:**

05 **If a separate right-turn signal face is being operated in a permissive only right-turn mode and a flashing right-turn RED ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-10):**

- **A. It shall be capable of displaying one of the following sets of signal indications:**
  1. **Steady or flashing right-turn RED ARROW, steady right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time. The GREEN ARROW indication is required in order to provide a three-section signal face, but shall not be displayed during the permissive only mode.**
  2. **Steady CIRCULAR RED on the left and steady right-turn RED ARROW on the right of the top position, steady right-turn YELLOW ARROW in the middle position, and right-turn GREEN ARROW in the bottom position. Only one of the four indications shall be displayed at any given time. The GREEN ARROW indication is required in order to provide three vertical positions, but shall not be displayed during the permissive only mode. If the CIRCULAR RED signal indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a CIRCULAR RED signal indication, a RIGHT TURN SIGNAL (R10-10R) sign (see Section 2B.59) shall be used unless the CIRCULAR RED signal indication in the separate right-turn signal face is shielded, hooded, louvered, positioned, or designed such that it is not readily visible to drivers in the through lane(s).**
- **B. During the permissive right-turn movement, a flashing right-turn RED ARROW signal indication shall be displayed, thus indicating that each and every vehicle must successively come to a full stop before making a permissive right turn.**
- **C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the flashing right-turn RED ARROW signal indication.**
- **D. When the separate right-turn signal face is provided ~~providing a message to stop and remain stopped~~, a steady right-turn RED ARROW signal indication shall be displayed if it is intended that right turns on red not be permitted ~~(except when a traffic control device is in place permitting a turn on a steady RED ARROW signal indication)~~ or a steady CIRCULAR RED signal indication shall be displayed if it is intended that right turns on red be permitted. Refer to CVC § 21453.**
- **E. The display of a flashing right-turn RED ARROW signal indication for a permissive right-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement shall be permitted.**
- **F. A supplementary sign shall not be required. ~~If used, it shall be a RIGHT TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27) sign (see Section 2B.59).~~**

Option:

06 The requirements of Item A.1 in Paragraph 5 of this Section may be met by a vertically-arranged signal face with a horizontal cluster of two right-turn RED ARROW signal indications, the left-most of which displays a steady indication and the right-most of which displays a flashing indication (see Figure 4F-10).

## Section 4F.12 Signal Indications for Protected Only Mode Right-Turn Movements in a Shared Signal Face

**Standard:**

01 **A shared signal face shall not be used for protected only mode right turns unless the CIRCULAR GREEN and right-turn GREEN ARROW signal indications always begin and terminate together. If a shared signal face is provided for a protected only right turn, it shall meet the following requirements (see Figure 4F-11):**

- **A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, CIRCULAR GREEN, and right-turn GREEN ARROW. Only one of the three colors shall be displayed at any given time.**
- **B. During the protected right-turn movement, the shared signal face shall simultaneously display both a CIRCULAR GREEN signal indication and a right-turn GREEN ARROW signal indication.**
- **C. The shared signal face shall always simultaneously display the same color of circular indication that the**

**adjacent through signal face or faces display.**

**D. If the protected only mode is not the only right-turn mode used for the approach, the signal face shall be the same shared signal face that is used for the protected/permissive mode (see Section 4F.15).**

Option:

02 A straight-through GREEN ARROW signal indication may be used instead of the CIRCULAR GREEN signal indication in Items A and B in Paragraph 1 of this Section on an approach where a straight- through GREEN ARROW signal indication is also used instead of a CIRCULAR GREEN signal indication in the other signal face(s) for through traffic.

## Section 4F.13 Signal Indications for Protected Only Mode Right-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate right-turn signal face shall not be used for an approach that does not include a mandatory right-turn lane.**

02 **If a separate right-turn signal face is provided for a protected only mode right turn, it shall meet the following requirements (see Figure 4F-12):**

**A. It shall be capable of displaying one of the following sets of signal indications:**

**1. Steady right-turn RED ARROW, steady right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time.**

**2. Steady CIRCULAR RED, steady right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of three indications shall be displayed at any given time. If the CIRCULAR RED signal indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a CIRCULAR RED signal indication, a RIGHT TURN SIGNAL (R10-10R) sign (see Section 2B.59) shall be used unless the CIRCULAR RED signal indication is shielded, hooded, louvered, positioned, or designed such that it is not readily visible to drivers in the through lane(s).**

**B. During the protected right-turn movement, a right-turn GREEN ARROW signal indication shall be displayed.**

**C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the right- turn GREEN ARROW signal indication.**

**D. When the separate signal face is provided ~~providing a message to stop and remain stopped~~, a steady right-turn RED ARROW signal indication shall be displayed if it is intended that right turns on red not be permitted ~~(except when a traffic control device is in place permitting a turn on a steady RED ARROW signal indication)~~ or a steady CIRCULAR RED signal indication shall be displayed if it is intended that right turns on red be permitted. Refer to CVC § 21453.**

**E. If the protected only mode is not the only right-turn mode used for the approach, the signal face shall be the same separate right-turn signal face that is used for the protected/permissive mode (see Section 4F.15) except that a flashing right-turn YELLOW ARROW or flashing right-turn RED ARROW signal indication shall not be displayed when operating in the protected only mode.**

## Section 4F.14 Signal Indications for Protected/Permissive Mode Right-Turn Movements in a Shared Signal Face

**Standard:**

01 **If a shared signal face is provided for a protected/permissive mode right turn, it shall meet the following requirements (see Figure 4F-13):**

**A. It shall be capable of displaying the following signal indications: steady CIRCULAR RED, steady CIRCULAR YELLOW, CIRCULAR GREEN, steady right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the three circular indications shall be displayed at any given time. Only one of the two arrow indications shall be displayed at any given time. If the right-turn GREEN ARROW signal indication and the CIRCULAR GREEN signal indication(s) for the adjacent through movement are always terminated together, the steady right-turn YELLOW ARROW signal indication shall not be required.**

**B. During the protected right-turn movement, the shared signal face shall simultaneously display a right-**

**turn GREEN ARROW signal indication and a circular signal indication that is the same color as the signal indication for the adjacent through lane on the same approach as the protected right turn.**

**C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the right- turn GREEN ARROW signal indication, unless the right-turn GREEN ARROW signal indication and the CIRCULAR GREEN signal indication(s) for the adjacent through movement are being terminated together. When the right-turn GREEN ARROW and CIRCULAR GREEN signal indications are being terminated together, the required display following the right-turn GREEN ARROW signal indication shall be either the display of a CIRCULAR YELLOW signal indication alone or the simultaneous display of the CIRCULAR YELLOW and right-turn YELLOW ARROW signal indications.**

**D. During the permissive right-turn movement, the shared signal face shall display only a CIRCULAR GREEN signal indication.**

**E. A protected/permissive shared signal face, regardless of where it is positioned and regardless of how many adjacent through signal faces are provided, shall always simultaneously display the same color of circular indication that the adjacent through signal face or faces display.**

## Section 4F.15 Signal Indications for Protected/Permissive Mode Right-Turn Movements in a Separate Signal Face

**Standard:**

01 **A separate right-turn signal face shall not be used for an approach that does not include a mandatory right-turn lane.**

02 **If a separate right-turn signal face is being operated in a protected/permissive right-turn mode, a CIRCULAR GREEN signal indication shall not be used in that face.**

03 **If a separate right-turn signal face is being operated in a protected/permissive right-turn mode and a flashing right-turn YELLOW ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-14):**

**A. It shall be capable of displaying one of the following sets of signal indications:**

**1. Steady right-turn RED ARROW, steady right-turn YELLOW ARROW, flashing right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the four indications shall be displayed at any given time.**

**2. Steady CIRCULAR RED, steady right-turn YELLOW ARROW, flashing right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the four indications shall be displayed at any given time. If the CIRCULAR RED signal indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a CIRCULAR RED signal indication, a RIGHT TURN SIGNAL (R10-10R) sign (see Section 2B.59) shall be used unless the CIRCULAR RED signal indication in the separate right-turn signal face is shielded, hooded, louvered, positioned, or designed such that it is not readily visible to drivers in the through lane(s).**

**B. During the protected right-turn movement, a right-turn GREEN ARROW signal indication shall be displayed.**

**C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the right- turn GREEN ARROW signal indication. It shall be permitted to display a steady right-turn RED ARROW signal indication immediately following the steady right-turn YELLOW ARROW signal indication to provide a red clearance interval.**

**D. During the permissive right-turn movement, a flashing right-turn YELLOW ARROW signal indication shall be displayed.**

**E. A steady right-turn YELLOW ARROW signal indication shall be displayed following the flashing right-turn YELLOW ARROW signal indication if the permissive right-turn movement is being terminated and the separate right-turn signal face will subsequently display a steady red indication.**

**F. When a permissive right-turn movement is changing to a protected right-turn movement:**

**1. If a permissive left-turn movement from the opposing approach is being terminated simultaneously with the termination of the permissive right-turn movement, a steady right- turn YELLOW ARROW signal indication shall be displayed following the flashing right- turn YELLOW ARROW signal indication. To provide a red clearance interval, it shall be permitted to display a steady right-turn**

**RED ARROW signal indication immediately following the steady right-turn YELLOW ARROW signal indication.**

2. **If a permissive left-turn movement from the opposing approach that is being terminated simultaneously with the termination of the permissive right-turn movement is not present, a right-turn GREEN ARROW signal indication shall be displayed immediately upon the termination of the flashing right-turn YELLOW ARROW signal indication. In this situation, a steady right-turn YELLOW ARROW signal indication shall not be displayed between the display of the flashing right-turn YELLOW ARROW signal indication and the display of the steady right-turn GREEN ARROW signal indication.**

**G. When the separate right-turn signal face is provided ~~providing a message to stop and remain stopped~~, a steady right-turn RED ARROW signal indication shall be displayed if it is intended that right turns on red not be permitted ~~(except when a traffic control device is in place permitting a turn on a steady RED ARROW signal indication)~~ or a steady CIRCULAR RED signal indication shall be displayed if it is intended that right turns on red be permitted. Refer to CVC § 21453.**

**H. It shall be permitted to display a flashing right-turn YELLOW ARROW signal indication for a permissive right-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications.**

**I. The display shall be either:**

1. **A four-section signal face with the steady right-turn YELLOW ARROW signal indication being displayed in a different section than the flashing right-turn YELLOW ARROW signal indication, or**
2. **A three-section signal face with the steady right-turn YELLOW ARROW signal indication and the flashing right-turn YELLOW ARROW signal indication being displayed in the same bimodal signal section.**

**J. During steady mode (stop-and-go) operation where a four-section signal face is used, the signal section that displays the steady right-turn YELLOW ARROW signal indication during change intervals shall not be used to display the flashing right-turn YELLOW ARROW signal indication for permissive right turns.**

**K. During flashing mode operation (see Chapter 4G) where a four-section signal face is used, the display of a flashing right-turn YELLOW ARROW signal indication shall be only from the signal section that displays a steady right-turn YELLOW ARROW signal indication during steady mode (stop-and-go) operation.**

Option:

04 A bimodal signal section (capable of displaying a GREEN ARROW for the protected right-turn movement and a flashing YELLOW ARROW for the permissive right-turn movement) along with a steady right-turn YELLOW ARROW signal indication and a steady right-turn RED ARROW signal indication may be used for a separate right-turn signal face and may be considered to be a four-section signal face that is compliant with Item I.1 of Paragraph 3 of this Section.

05 When an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive right turn, a separate signal face that has a flashing right-turn RED ARROW signal indication during the permissive right-turn movement may be used.

**Standard:**

06 **If a separate right-turn signal face is being operated in a protected/permissive right-turn mode and a flashing right-turn RED ARROW signal indication is provided, it shall meet the following requirements (see Figure 4F-10):**

**A. It shall be capable of displaying one of the following sets of signal indications:**

1. **Steady or flashing right-turn RED ARROW, steady right-turn YELLOW ARROW, and right-turn GREEN ARROW. Only one of the three indications shall be displayed at any given time.**
2. **Steady CIRCULAR RED on the left and steady or flashing right-turn RED ARROW on the right of the top position, steady right-turn YELLOW ARROW in the middle position, and right-turn GREEN ARROW in the bottom position. Only one of the four indications shall be displayed at any given time. If the CIRCULAR RED signal indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a CIRCULAR RED signal indication, a RIGHT**

**TURN SIGNAL (R10-10R) sign (see Section 2B.59) shall be used unless the CIRCULAR RED signal indication in the separate right-turn signal face is shielded, hooded, louvered, positioned, or designed such that it is not readily visible to drivers in the through lane(s).**

**B. During the protected right-turn movement, a right-turn GREEN ARROW signal indication shall be displayed.**

**C. A steady right-turn YELLOW ARROW signal indication shall be displayed following the right- turn GREEN ARROW signal indication.**

**D. During the permissive right-turn movement, the separate right-turn signal face shall display a flashing right-turn RED ARROW signal indication.**

**E. A steady right-turn YELLOW ARROW signal indication shall be displayed following the flashing right-turn RED ARROW signal indication if the permissive right-turn movement is being terminated and the separate right-turn signal face will subsequently display a steady red indication.**

**F. When a permissive right-turn movement is changing to a protected right-turn movement, a right-turn GREEN ARROW signal indication shall be displayed immediately upon the termination of the flashing right-turn RED ARROW signal indication. A steady right-turn YELLOW ARROW signal indication shall not be displayed between the display of the flashing right-turn RED ARROW signal indication and the display of the steady right-turn GREEN ARROW signal indication.**

**G. When the separate right-turn signal face is provided ~~providing a message to stop and remain stopped~~, a steady right-turn RED ARROW signal indication shall be displayed if it is intended that right turns on red not be permitted ~~(except when a traffic control device is in place permitting a turn on a steady RED ARROW signal indication)~~ or a steady CIRCULAR RED signal indication shall be displayed if it is intended that right turns on red be permitted. Refer to CVC § 21453.**

**H. It shall be permitted to display a flashing right-turn RED ARROW signal indication for a permissive right-turn movement while the signal faces for the adjacent through movement display steady CIRCULAR RED signal indications and the opposing left-turn signal faces display left-turn GREEN ARROW signal indications for a protected left-turn movement.**

**I. A supplementary sign shall not be required. ~~If used, it shall be a RIGHT TURN YIELD ON FLASHING RED ARROW AFTER STOP (R10-27) sign (see Section 2B.59).~~**

Option:

07 The requirements of Item A.1 in Paragraph 6 of this Section may be met by a vertically-arranged signal face with a horizontal cluster of two right-turn RED ARROW signal indications, the left-most of which displays a steady indication and the right-most of which displays a flashing indication (see Figure 4F-10).

## Section 4F.16 Signal Indications for Approaches with No Through Movement

Support:

01 The provisions of this section apply only to approaches where no through movement exists, such as the stem of a T-intersection or where the opposite approach is a one-way roadway in the opposing direction.

**Standard:**

02 **Except for single-lane approaches, a minimum of two primary signal faces shall be provided for the signalized turning movement that is considered to be the major movement from the approach (see Section 4D.05).**

Option:

03 The required two primary signal faces and any supplemental primary signal faces may continuously display a steady CIRCULAR RED signal indication while steady or flashing YELLOW and steady GREEN ARROW signal indications are displayed during times when the traffic control signal is being operated in the steady (stop-and-go) mode. The continuous display of steady CIRCULAR RED is intended to reinforce that there is no through movement for safety-critical locations.

**Standard:**

04 **CIRCULAR GREEN and CIRCULAR YELLOW signal indications shall not be displayed to an approach with no through movement if:**

**A. The posted or statutory speed limit on the approach is 35 mph or higher,**

**B. The one-way roadway that opposes the approach is an exit ramp from a freeway or expressway, or**

**C. The one-way roadway that opposes the approach has a posted or statutory speed limit of 35 mph or**

**higher.**

Support:

05 A lane from which left-turn and right-turn movements can both be made is sometimes provided on an approach that has no through movement, either as the only approach lane or as one of several approach lanes.

Option:

06 If all of the lanes on the approach are designated as mandatory turn lanes and no lane is designated as a combined left-turn/right-turn lane, the left-turn and right-turn movements may start and terminate independently, and the left-turn and right-turn movements each may be operated in one or more of the modes of operation as described in Sections 4F.02 through 4F.15.

**Standard:**

07 **When a combined left-turn/right-turn lane exists on an approach, the left-turn and right-turn movements shall start and terminate simultaneously and the red signal indication used in each of the signal faces on the approach shall be a CIRCULAR RED.**

Support:

08 This requirement for the use of CIRCULAR RED signal indications in signal faces for approaches having a combined lane for left-turn and right-turn movements is a specific exception to other provisions in this Chapter that would otherwise require the use of RED ARROW signal indications.

**Standard:**

09 **The signal faces provided for an approach with a combined left-turn/right-turn lane and no through movement shall be one of the following:**

- **A. Except as provided in Paragraph 6 of Section 4F.01 and Paragraph 4 of this Section, two or more signal faces, each capable of displaying CIRCULAR RED, CIRCULAR YELLOW, and CIRCULAR GREEN signal indications, shall be provided for the approach. This display shall be permissible regardless of the number of mandatory left-turn and/or right-turn lanes that exist on the approach in addition to the combined left-turn/right-turn lane and regardless of whether or not there are pedestrian or opposing vehicular movements that conflict with the left- turn or right-turn movements. However, if there is an opposing approach and the signal phasing protects the left-turn movement on the approach with the combined left-turn/right-turn lane from conflicts with the opposing vehicular movements and any signalized pedestrian movements, a left-turn GREEN ARROW signal indication shall also be included in the left-most signal face and shall be displayed simultaneously with the CIRCULAR GREEN signal indication.**
- **B. If the approach has one or more mandatory turn lanes in addition to the combined left- turn/right-turn lane and there is no conflict with a signalized vehicular or pedestrian movement, and GREEN ARROW signal indications are used in place of CIRCULAR GREEN signal indications on the approach, the signal faces for the approach shall be:**
  1. **A signal face(s) capable of displaying CIRCULAR RED, YELLOW ARROW, and GREEN ARROW signal indications for the mandatory turn lane(s), with the arrows pointing in the direction of the turn, and**
  2. **A shared left-turn/right-turn signal face capable of displaying CIRCULAR RED, left-turn YELLOW ARROW, left-turn GREEN ARROW, right-turn YELLOW ARROW, and right- turn GREEN ARROW signal indications, in an arrangement of signal sections that complies with the provisions of Section 4E.04 or 4E.05.**
- **C. If the approach has one or more mandatory turn lanes in addition to the combined left- turn/right-turn lane and there is a conflict with a signalized vehicular or pedestrian movement, and flashing YELLOW ARROW signal indications are used in place of CIRCULAR GREEN signal indications on the approach, the signal faces for the approach shall be as described in Items B.1 and B.2 of this Paragraph, except that flashing YELLOW ARROW signal indications shall be used in place of the GREEN ARROW signal indications for the turning movement(s) that conflicts with the signalized vehicular or pedestrian movement.**

Support:

10 Figure 4F-15 illustrates application of these Standards on approaches that have only a combined left- turn/right-turn lane, and on approaches that have one or more mandatory turn lanes in addition to the combined left-turn/right-turn

lane.

Option:

11 If the lane-use regulations on an approach are variable such that at certain times all of the lanes on the approach are designated as mandatory turn lanes and no lane is designated as a combined left-turn/right-turn lane:

A. During the times that no lane is designated as a combined left-turn/right-turn lane, the left-turn and right-turn movements may start and terminate independently, and the left-turn and right-turn movements may be operated in one or more of the modes of operation as described in Sections 4F.02 through 4F.15; and
B. If a protected/permissive mode is used, the operation of the shared left-turn/right-turn signal face provided in Paragraph 9 may be modified to display the steady left-turn (right-turn) YELLOW ARROW signal indication and the flashing left-turn (right-turn) YELLOW ARROW signal indication in the same section in order to not exceed the maximum of five sections per signal face provided in Section 4E.03.

## Section 4F.17 Yellow Change and Red Clearance Intervals

Support:

01 The exclusive function of the yellow change interval is to warn traffic approaching a signalized location that their permission to proceed is being terminated after which they will be directed to stop, or in the case of a protected/permissive turning movement that their protected movement is being terminated after which they will need to perform their turn in a permissive manner.

**Standard:**

02 **A steady yellow signal indication shall be displayed following every CIRCULAR GREEN or GREEN ARROW signal indication and following every flashing YELLOW ARROW or flashing RED ARROW signal indication displayed as a part of a steady mode operation. This requirement shall not apply when a CIRCULAR GREEN, a flashing YELLOW ARROW, or a flashing RED ARROW signal indication is followed immediately by a GREEN ARROW signal indication.**

03 **The duration of the yellow change interval shall be determined using engineering practices.**

Support:

04 Section 4F.01 contains provisions regarding the display of steady CIRCULAR YELLOW signal indications to approaches from which drivers are allowed to make permissive left turns.

*Guidance:*

05 *When indicated by the application of engineering practices, the yellow change interval should be followed by a red clearance interval to provide additional time before conflicting traffic movements, including pedestrians, are released.*

**Standard:**

06 **When used, the duration of the red clearance interval shall be determined using engineering practices.**

07 **The durations of yellow change intervals and red clearance intervals shall be consistent with the determined values within the technical capabilities of the controller unit.**

08 **The duration of a yellow change interval shall not vary on a cycle-by-cycle basis within the same signal timing plan.**

09 **Except as provided in Paragraph 10 of this Section, the duration of a red clearance interval shall not be decreased or omitted on a cycle-by-cycle basis within the same signal timing plan.**

Option:

10 The duration of a red clearance interval may be extended from its predetermined value for a given cycle based upon the detection of a vehicle that is predicted to violate the red signal indication.

11 When an actuated signal sequence includes a signal phase for permissive/protected (lagging) left-turn movements in both directions, the red clearance interval may be shown during those cycles when the lagging left-turn signal phase is skipped and may be omitted during those cycles when the lagging left-turn signal phase is shown.

12 The duration of a yellow change interval or a red clearance interval may be different in different signal timing plans for the same controller unit.

Support:

12a When used, red clearance intervals normally range from 0.1 to 2.0 seconds.

*Guidance:*

13 *A yellow change interval should have a minimum duration of 3 seconds, and a maximum duration of 6 seconds. The longer intervals should be reserved for use on approaches with higher speeds. Except when clearing a one-lane, two-*

*way facility (see Section 4O.02) or when clearing an exceptionally wide intersection, a red clearance interval should have a duration not exceeding 6 seconds.*

13a *Practitioners should exercise engineering judgment for determination of the minimum yellow change interval. Judgment should be based on numerous factors including, but not limited to, field observation of traffic behavior, intersection geometrics, downhill grade, perception-reaction time of drivers in the area, and actually driving the protected left-turn or protected right-turn movements to assess the need for longer yellow change intervals. Particular attention should be paid where setting minimum yellow change interval timing when exclusive turn lane exceeds 150 feet in length excluding the transition. Refer to Table 4D-101(CA).*

Support:

13b The purpose of the yellow signal indication is to warn traffic approaching a traffic signal that the related green movement is ending or that a steady red indication will be exhibited immediately thereafter and traffic will be required to stop when the red signal is exhibited.

**Standard:**

13c **The minimum yellow change interval for through traffic movement shall be determined by using the 85th percentile speed of free-flow traffic rounded up to the next 5 mph increment. Where the posted or prima facie speed limit is higher than the rounded value, use the posted or prima facie speed limit for determination of the minimum yellow change interval for the through traffic movement. Refer to Table 4D-101(CA) sub-heading "a".**

13d **If the 85th percentile speed data is not available, the minimum yellow change interval for through traffic movements shall be determined by adding 7 miles per hour to the posted or prima facie speed limits of 30 mph or higher, and by adding 10 miles per hour to the posted or prima facie speed limits of 25 mph or less. Refer to Table 4D-101(CA) sub-heading "b".**

Option:

13e The minimum yellow change interval for the through movement and the protected left-turn or protected right-turn may be increased based on appropriate engineering judgment.

**Standard:**

14 **Except for Warning Beacons mounted on advance warning signs on the approach to a signalized location (see Section 2C.35), signal displays that are intended to provide a "pre-yellow warning" interval, such as flashing green signal indications, vehicular countdown displays, or other similar displays, shall not be used at a signalized location.**

Support:

15 The use of signal displays (other than Warning Beacons mounted on advance warning signs) that convey a "pre-yellow warning" have been found by research to increase the frequency of crashes.

## Section 4F.18 Preemption and Priority Control of Traffic Control Signals – General

Option:

01 Traffic control signals may be designed and operated to respond to certain classes of approaching vehicles by altering the normal signal timing and phasing plan(s) during the approach and passage of those vehicles. The alternative plan(s) may be as simple as extending a currently displayed green interval or as complex as replacing the entire set of signal phases and timing.

Support:

02 Some types or classes of vehicles supersede others when a traffic control signal responds to more than one type or class. In general, a vehicle that is more difficult to control supersedes a vehicle that is easier to control.

Option:

03 Preemption or priority control of traffic control signals may also be a means of indicating to specified classes of vehicles at certain non-intersection locations, such as on approaches to one-lane bridges and tunnels, movable bridges, highway maintenance and construction activities, metered freeway entrance ramps, and transit operations, that they are permitted to proceed.

*Guidance:*

04 *When a traffic control signal that is returning to a steady mode from a dark mode (typically upon restoration from a power failure) receives a preemption or priority request, care should be exercised to minimize the possibility of vehicles or pedestrians being misdirected into a conflict with the vehicle making the request.*

Option:

05 During the change from a dark mode to a steady mode under a preemption or priority request, the display of signal indications that could misdirect road users may be prevented by one or more of the following methods:

A. Having the traffic control signal remain in the dark mode,
B. Having the traffic control signal remain in the flashing mode,
C. Altering the flashing mode,
D. Executing the normal start-up routine before responding, or
E. Responding directly to initial or dwell period.

*Guidance:*

06 *Traffic control signals operating under preemption control or under priority control should be operated in a manner designed to keep traffic moving.*

07 *Traffic control signals that are designed to respond under preemption or priority control to more than one type or class of vehicle should be designed to respond in the relative order of importance or difficulty in stopping the type or class of vehicle. The order of priority should be: train, boat, heavy vehicle (fire vehicle, emergency medical service), light vehicle (law enforcement), light rail ~~transit~~ vehicles, rubber-tired ~~transit~~ vehicles.*

Option:

08 If engineering judgment indicates that light rail transit signal indications would reduce road user confusion that might otherwise occur if standard traffic signal indications were used to control these movements, light rail transit signal indications complying with Section 8D.15 and as illustrated in Figure 8D-3 may be used for preemption or priority control of the following exclusive movements at signalized intersections:

A. Public transit buses in "queue jumper" lanes, and
B. Public transit buses in semi-exclusive or mixed-use alignments.

## Section 4F.19 Preemption Control of Traffic Control Signals

Support:

01 Preemption control (see definition in Section 1C.02) is typically given to trains, boats, emergency vehicles, and light rail transit.

02 Examples of preemption control include the following:

A. The prompt displaying of green signal indications at signalized locations ahead of fire vehicles, law enforcement vehicles, ambulances, and other official emergency vehicles;
B. A special sequence of signal phases and timing to expedite and/or provide additional clearance time for vehicles to clear the tracks prior to the arrival of rail traffic; and
C. A special sequence of signal phases to display a steady red indication to prohibit ~~turning~~ all movements toward the tracks during the approach or passage of rail traffic.

**Standard:**

03 **During the transition into preemption control, the yellow change interval, and any red clearance interval that follows, shall not be shortened or omitted.**

Option:

04 During the transition into preemption control:

A. Any pedestrian walk interval and/or pedestrian change interval may be shortened or omitted.
B. The red clearance interval, if any, may be omitted so that the return to the previous green signal indication follows a steady yellow signal indication in the same signal face.

Support:

04a Section 8D.09 contains additional information regarding the pedestrian change interval for railroad preemption.

**Standard:**

05 **During preemption control and during the transition out of preemption control:**

**A. Any yellow change interval, and any red clearance interval that follows, shall not be shortened or omitted.**
**B. A signal indication sequence from a steady yellow signal indication to a green signal indication shall not be permitted.**

Option:

06 A distinctive indication may be provided at the intersection to inform law enforcement personnel who are escorting traffic (such as a parade or funeral procession) that the traffic control signal has changed to a red indication not because of normal cycling, but because it has been preempted by rail traffic approaching an adjacent grade crossing or by boat traffic approaching an adjacent movable bridge.

07 A distinctive indication may be provided at the intersection to show that an emergency vehicle has been given

control of the traffic control signal (see Section 11-106 of the "Uniform Vehicle Code"). In order to assist in the understanding of the control of the traffic control signal, a common distinctive indication may be used where drivers from different agencies travel through the same intersection when responding to emergencies.

*Guidance:*

08 *~~Except for traffic control signals interconnected with light rail transit systems~~, traffic control signals with railroad preemption or coordinated with flashing-light signal systems should be provided with a back-up power supply.*

09 *If a traffic control signal or hybrid beacon is installed near or within a grade crossing or if a grade crossing with active traffic control devices is within or near a signalized highway intersection, Chapter 8D should be consulted.*

Support:

10 Section 8D.09 contains additional information regarding preemption for grade crossings. Section 8D.10 contains information regarding prohibiting movements toward the grade crossing during preemption. Sections 8D.11 and 8D.12 contain additional information regarding pre-signals and queue cutter signals, respectively, for grade crossings.

**Emergency Vehicle Preemption**

11 Authorized emergency vehicles may preempt traffic signals. The purpose of such preemption is to provide the right of way to the emergency vehicle as soon as practical. The preemption may be controlled by one of the following means:

1. By direct wire, modulated light or radio from a remote location such as a fire house; or
2. By modulated light or radio from an emergency vehicle, or
3. By network communication

*Guidance:*

12 *Emergency vehicle equipment should be capable of encoding IDs.*

13 *Emergency vehicle preemption should provide the following sequence of operation:*

1. *A yellow change interval and any required red clearance interval for any signal phase that is green or yellow when preemption is initiated and which will be red during the preemption interval.*

**Standard:**

14 **The length of the yellow change and red clearance intervals shall not be altered by preemption. Phases, which are in the green interval when preemption is initiated, and which will be green during the preemption period shall remain green. Any pedestrian walk interval in effect when preemption is initiated shall be immediately terminated. The normal pedestrian clearance interval may be shortened or omitted.**

2. **An all-red intersection preemption display shall not be used.**
3. **The traffic signal shall return to normal operation upon termination of the demand for preemption or the termination of the assured green interval.**

15 **In the event of a demand for an emergency vehicle preemption during the time that the intersection is operating on railroad preemption, the railroad preemption sequence shall continue unaffected until completion. In the event of a demand for railroad preemption during emergency vehicle preemption operation, railroad preemption shall immediately assume control of the intersection.**

16 **When control of emergency vehicle preemption is by means of a radio or modulated light source, the following shall apply:**

1. **The transmitter shall be permanently mounted on the emergency vehicle or building and shall operate at a range sufficient to permit a normal yellow change interval and any required clearance intervals to take place prior to the arrival of the emergency vehicle. The normal pedestrian clearance interval may be abbreviated.**
2. **The preemption system may provide an indication (such as a special signal) to the driver of an emergency vehicle that preemption of the traffic signal has been effected. If a special signal light is used, the color shall not be red, yellow, or green.**
3. **The system shall be designed to prevent simultaneous preemption by two or more emergency vehicles on separate approaches to the intersection.**

17 **When performed by a local agency, the installation of emergency vehicle preemption equipment on state highways shall be covered by an Encroachment Permit issued by the Caltrans District Director.**

18 **The permit shall state the applicable requirements from those listed above and the following:**

1. **It should be understood that the permit for the installation might be revoked or changed as deemed advisable or necessary by Caltrans.**

2. **The programming of the preemption equipment shall be as approved in advance by Caltrans and shall not be changed without written permission. The Permittee shall make any changes in programming, requested by Caltrans.**
3. **The Permittee shall assume all liability for the claims, which arise due to or because of the permit.**

Support:

19 Normally emergency vehicle preemption equipment is installed, operated, and maintained at no cost to the State. An exception is where the equipment is installed for use by vehicles of another State agency.

**Standard:**

20 **The State shall maintain the preemption equipment at the traffic signal when the signal is maintained by the State. The costs of such maintenance shall be at 100% local agency expense.**

## Section 4F.20 Priority Control of Traffic Control Signals

Support:

01 Priority control (see definition in Section 1C.02) is typically given to certain non-emergency vehicles such as light-rail transit vehicles operating in a mixed-use alignment and buses.

02 Examples of priority control include the following:

A. The displaying of early or extended green signal indications at an intersection to assist public transit vehicles improve operations, and
B. Special phasing to assist public transit vehicles in entering the travel stream ahead of other waiting traffic.

**Standard:**

03 **During priority control and during the transition into or out of priority control:**

**A. The shortening or omission of any yellow change interval, and of any red clearance interval that follows, shall not be permitted.**
**B. The shortening of any pedestrian walk interval below that time described in Section 4I.06 shall not be permitted.**
**C. The omission of a pedestrian walk interval and its associated change interval shall not be permitted unless the associated vehicular phase is also omitted or the pedestrian phase is exclusive.**
**D. The shortening or omission of any pedestrian change interval shall not be permitted.**
**E. A signal indication sequence from a steady yellow signal indication to a green signal indication shall not be permitted.**

### Bus/Transit Vehicle Priority

Support:


04 The requirements for bus/transit vehicle priority insofar as installation, encroachment permit, maintenance and funding are the same as stated above for emergency vehicle preemption on state highways.

*Guidance:*


05 *The operational requirements for bus/transit vehicle priority should be similar to those above for emergency vehicle preemption. Refer to CVC § 25352.*

06 *Normally, bus/transit priority should not occur more than once every other signal cycle.*


## Figure 4F-1. Typical Position and Arrangements of Shared Signal Faces for Permissive Only Mode Left Turns

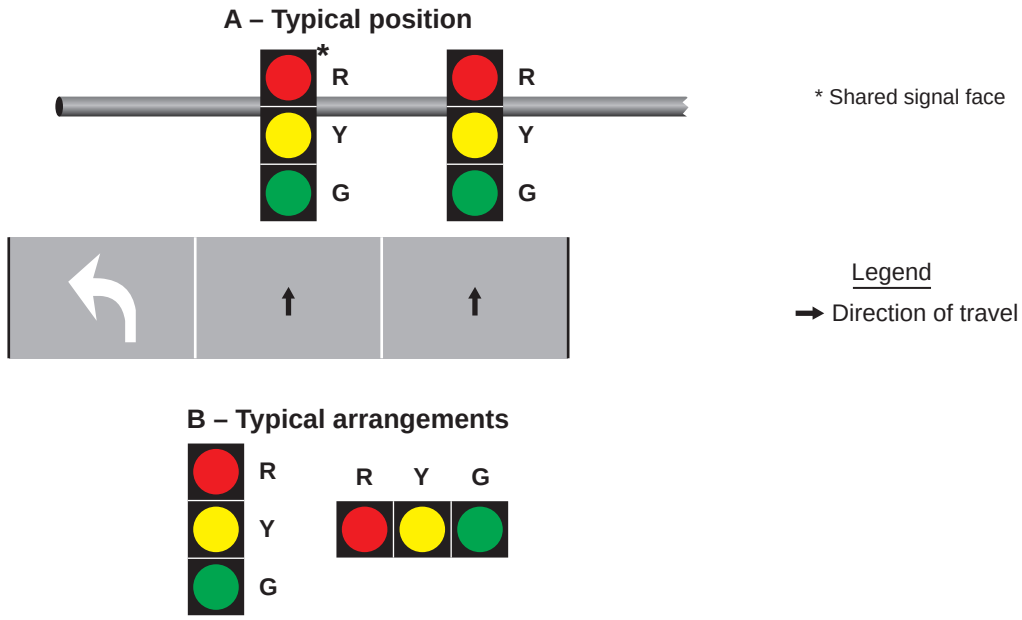

## Figure 4F-2. Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Permissive Only Mode Left Turns

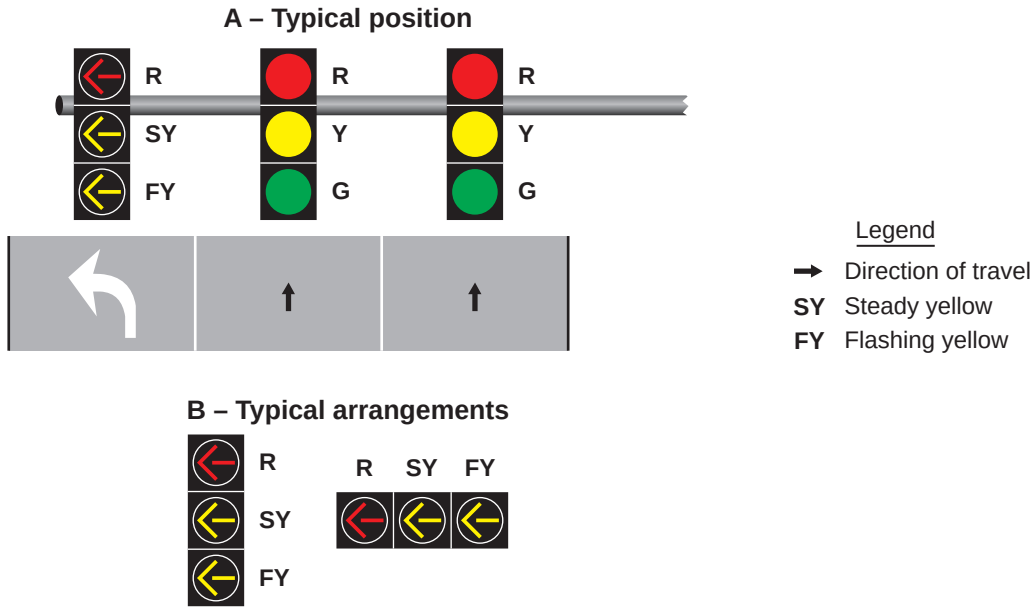

# Figure 4F-3. Typical Position and Arrangements of Separate Signal Faces with Flashing Red Arrow for Permissive Only Mode and Protected/Permissive Mode Left Turns

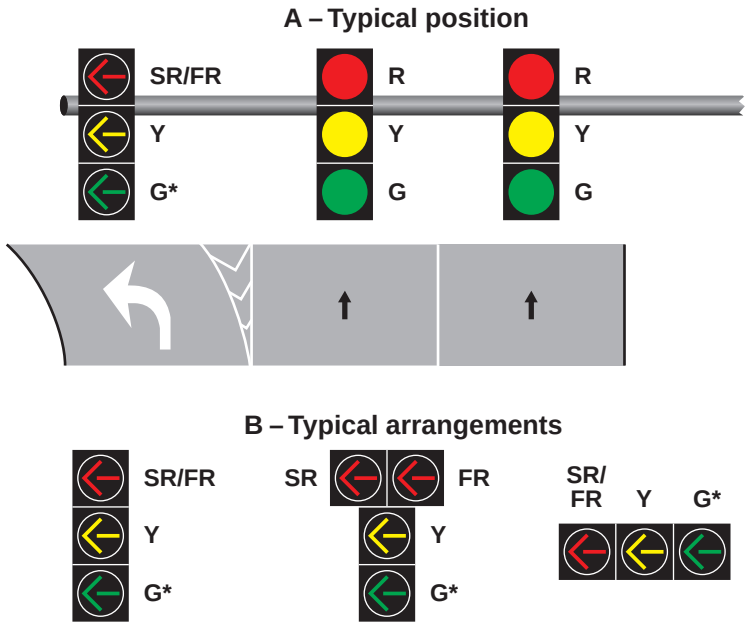



Legend

→ Direction of travel
**SR** Steady red
**FR** Flashing red
**SR/FR** Steady red and flashing red

Note: A flashing red arrow controlling a left-turn movement may be used only when an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive turn


*Shall not be displayed when operated in the permissive only mode

# Figure 4F-4. Typical Positions and Arrangements of Shared Signal Faces for Protected Only Mode Left Turns

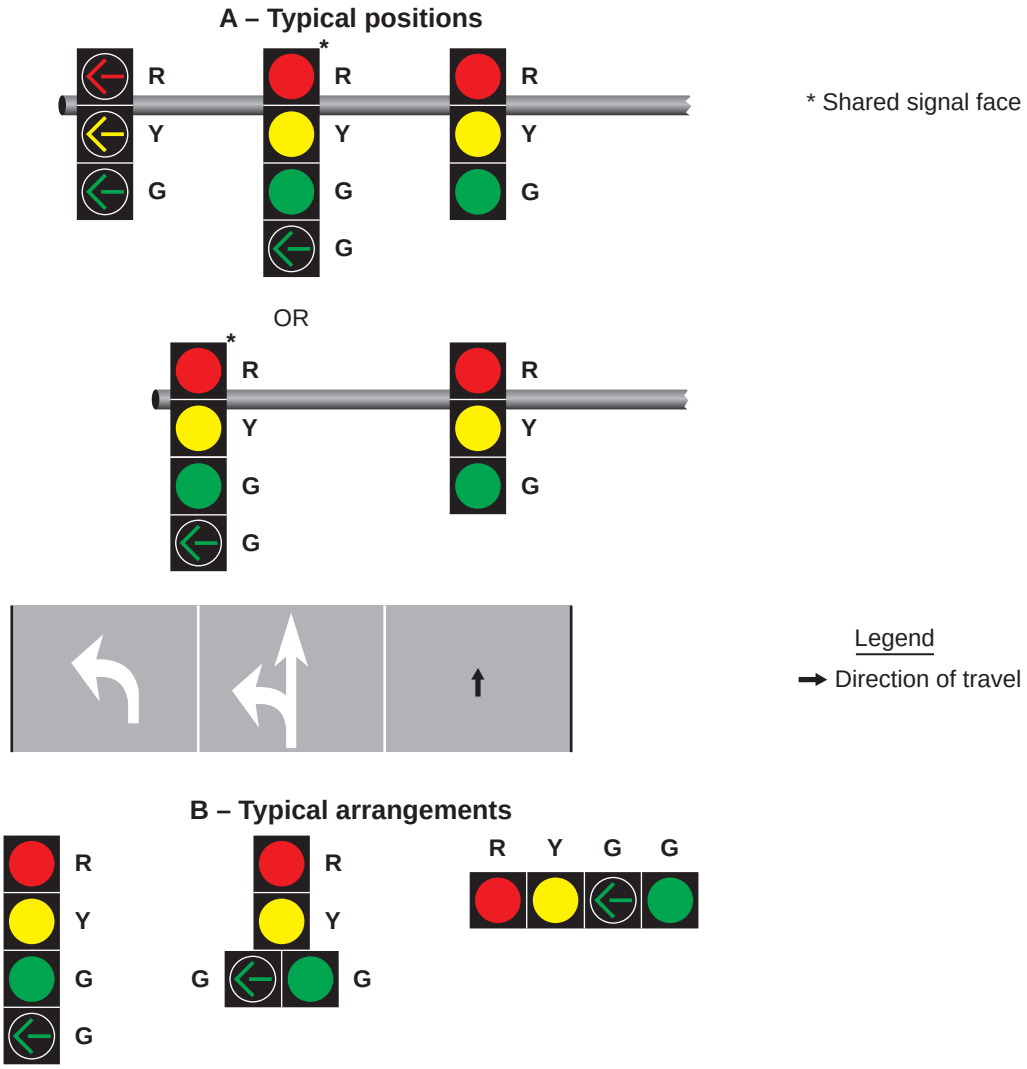



Note: Shared signal faces shall only be used for a protected-only mode left turn if the circular green and green left-turn arrow indications always begin and terminate together


## Figure 4F-5. Typical Position and Arrangements of Separate Signal Faces for Protected Only Mode Left Turns

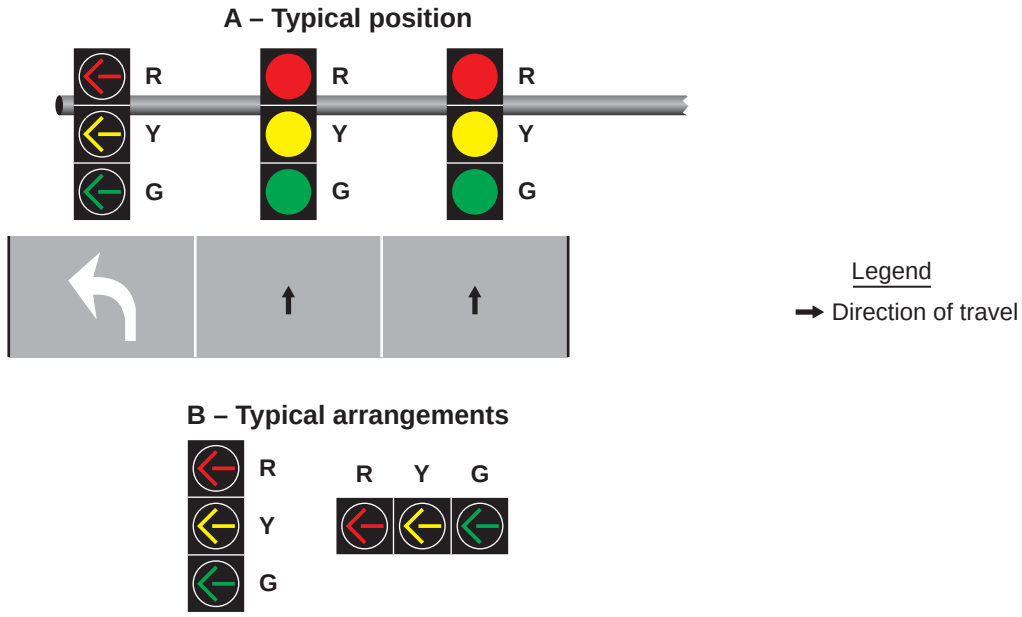


# Figure 4F-6. Typical Position and Arrangements of Shared Signal Faces for Protected/Permissive Mode Left Turns

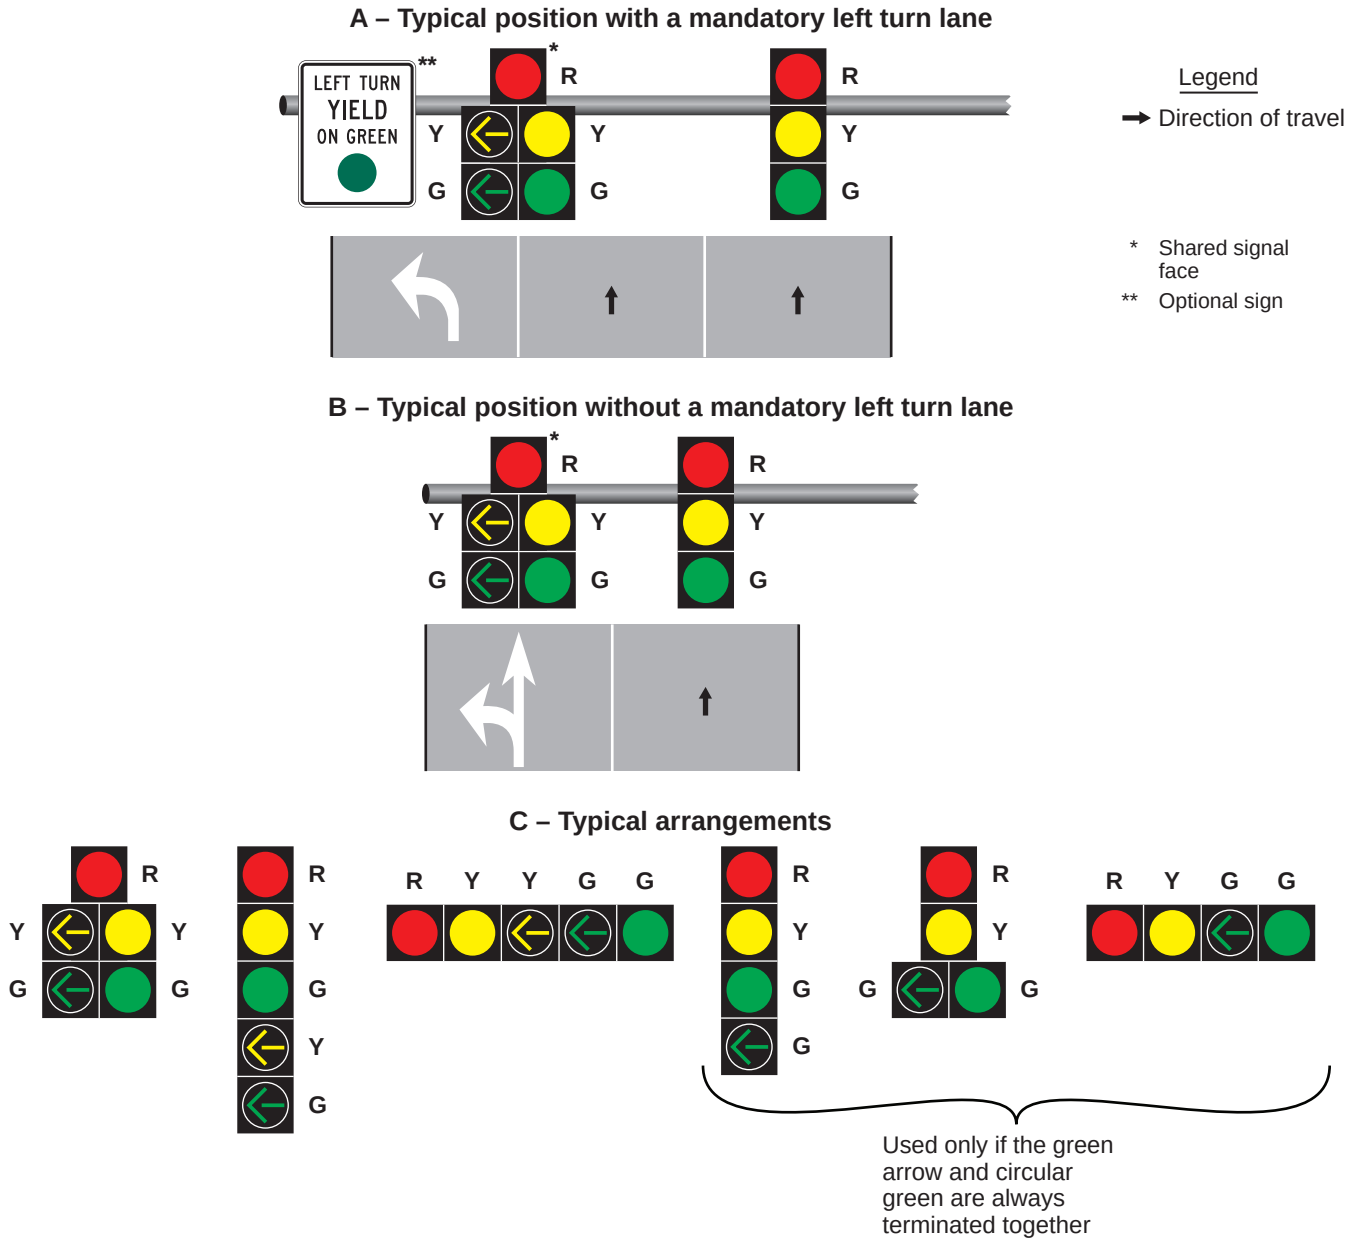


# Figure 4F-7. Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Protected/Permissive Mode and Variable Mode Left Turns

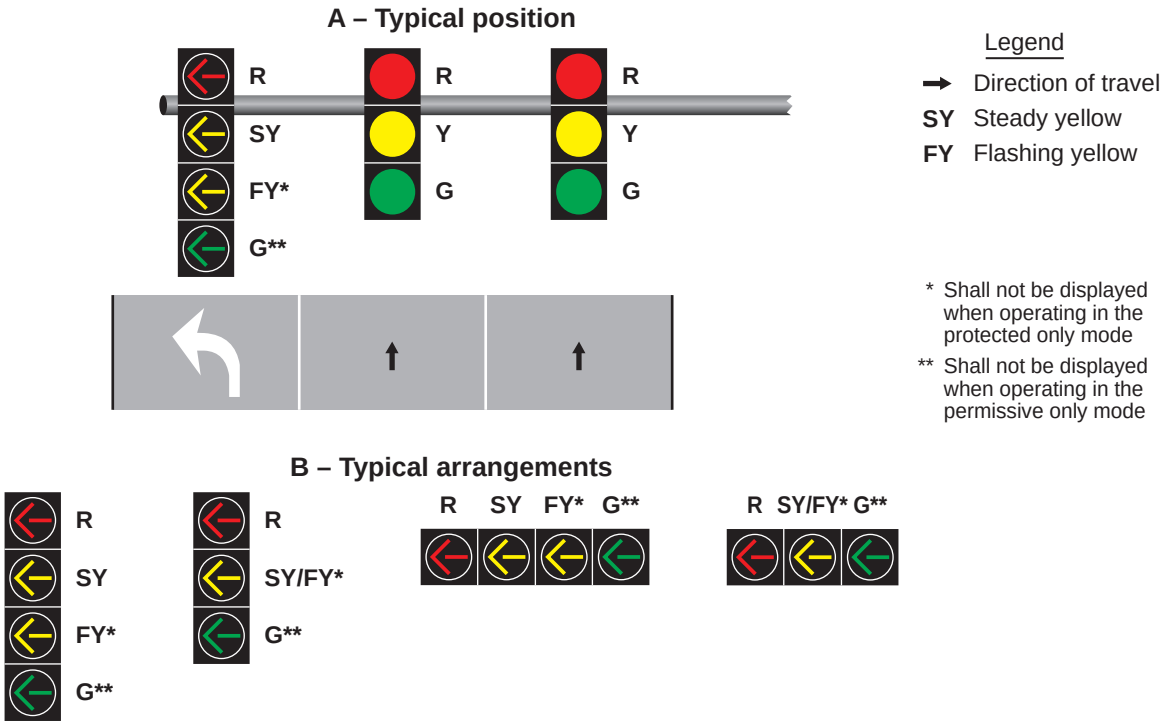


# Figure 4F-8. Typical Positions and Arrangements of Shared Signal Faces for Permissive Only Mode Right Turns

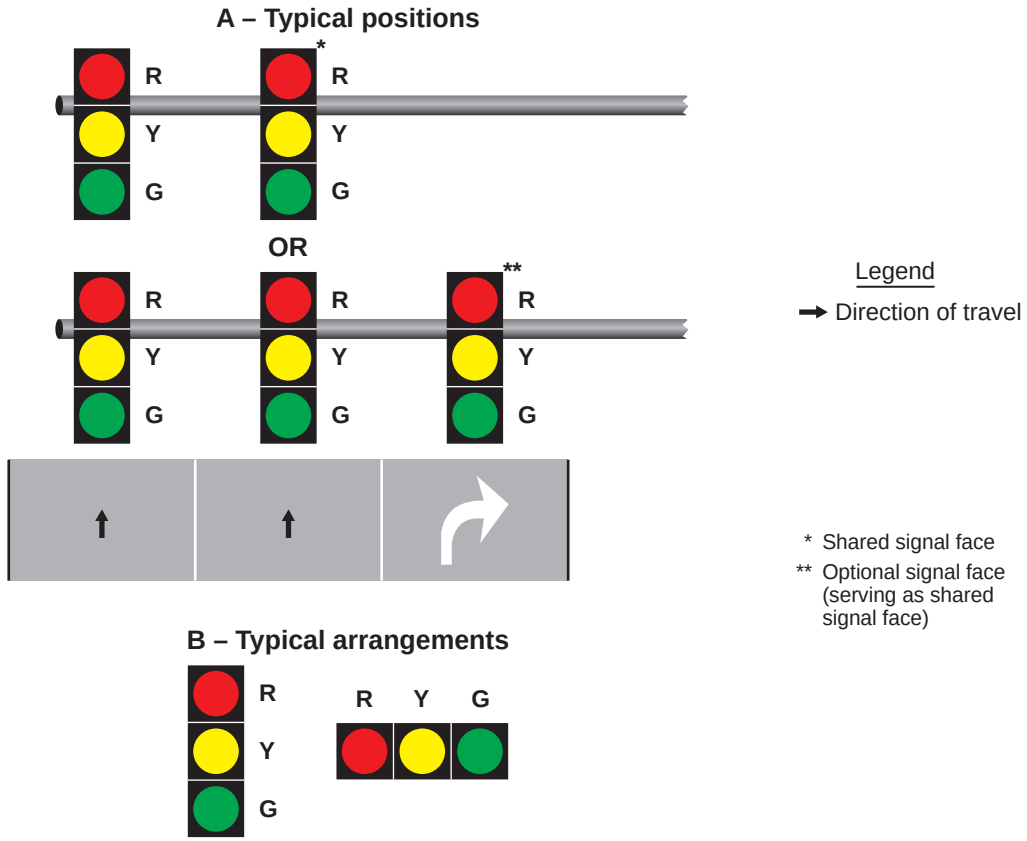

# Figure 4F-9. Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Permissive Only Mode Right Turns

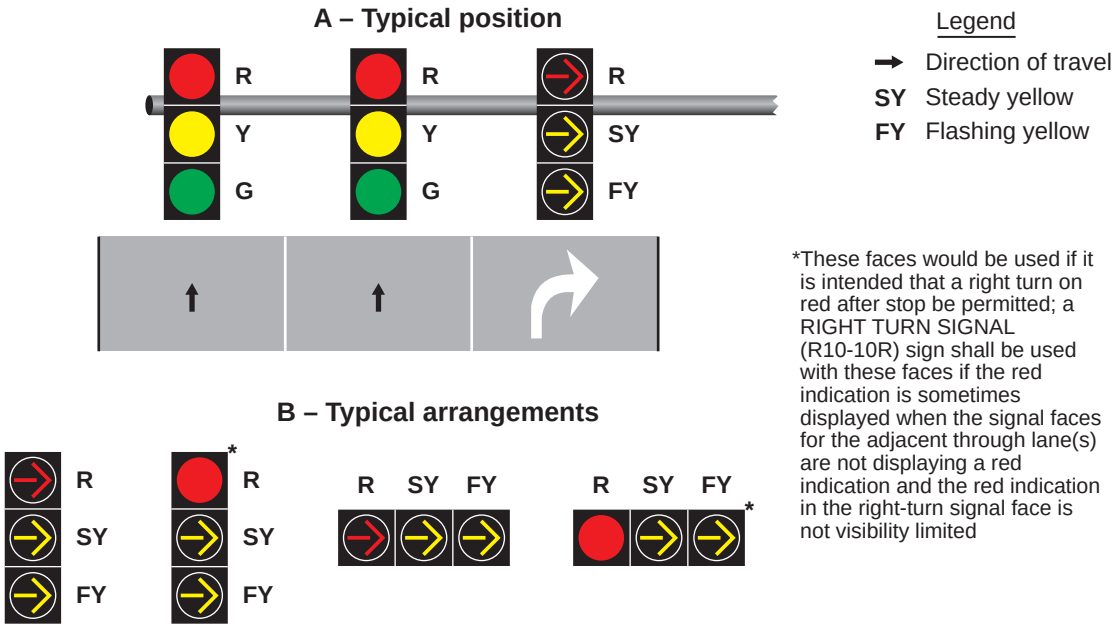


# Figure 4F-10. Typical Position and Arrangements of Separate Signal Faces with Flashing Red Arrow for Permissive Only Mode and Protected/Permissive Mode Right Turns

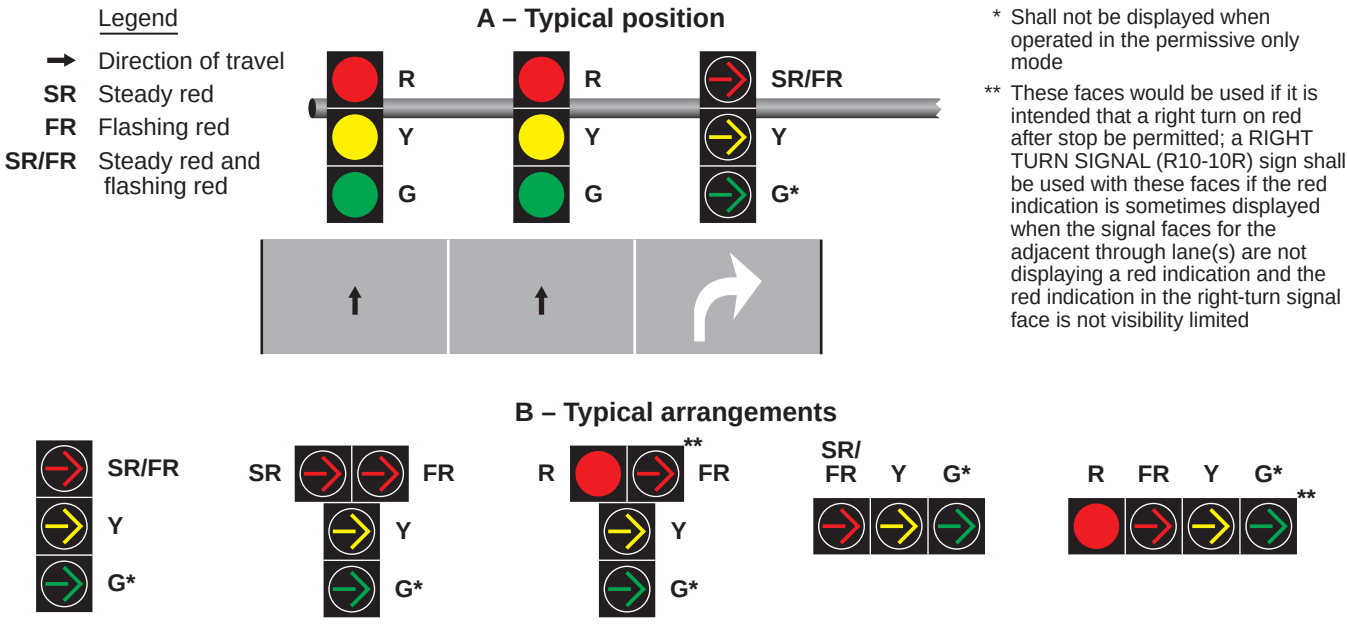



Note: A flashing red arrow controlling a right-turn movement may be used only when an engineering study determines that each and every vehicle must successively come to a full stop before making a permissive turn

# Figure 4F-11. Typical Positions and Arrangements of Shared Signal Faces for Protected Only Mode Right Turns

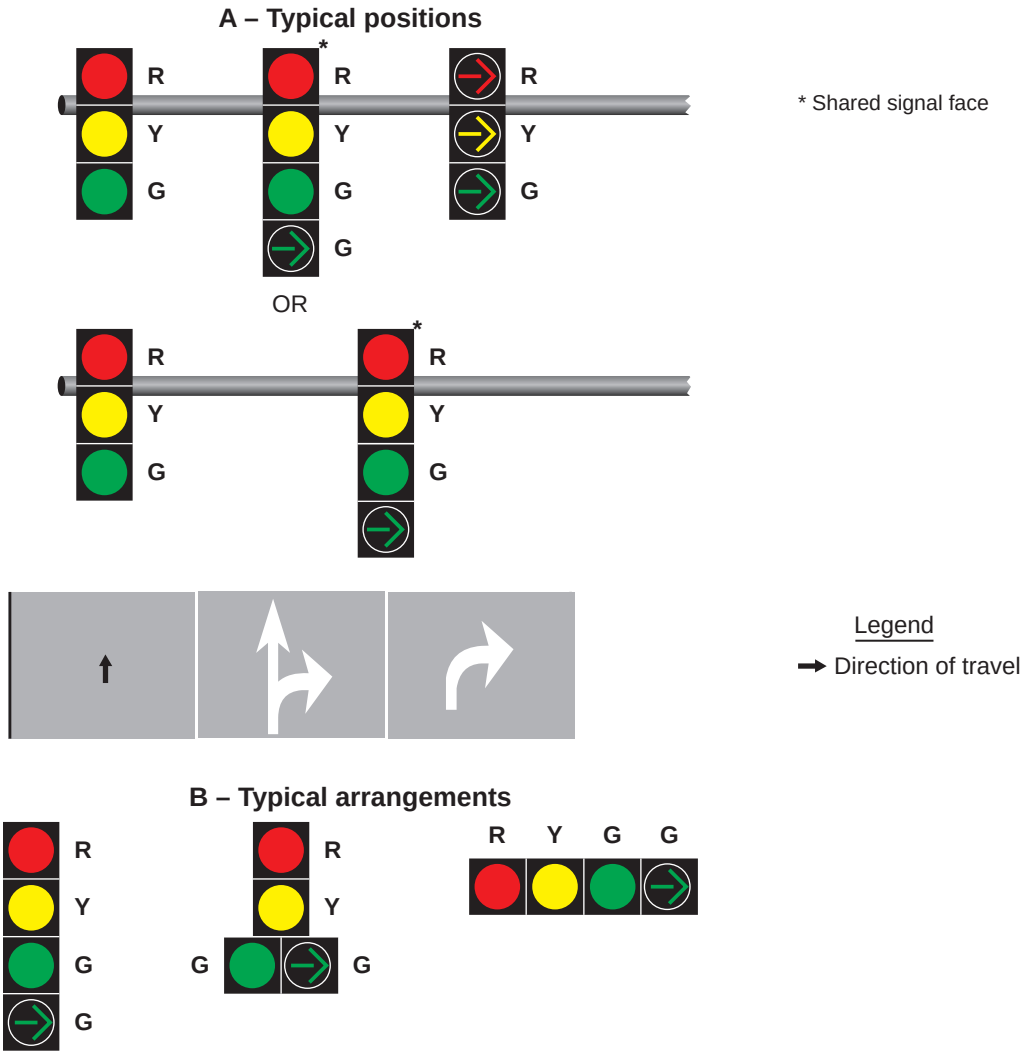



Note: Shared signal faces shall only be used for a protected-only mode right turn if the circular green and green right-turn arrow indications always begin and terminate together


# Figure 4F-12. Typical Position and Arrangements of Separate Signal Faces for Protected Only Mode Right Turns

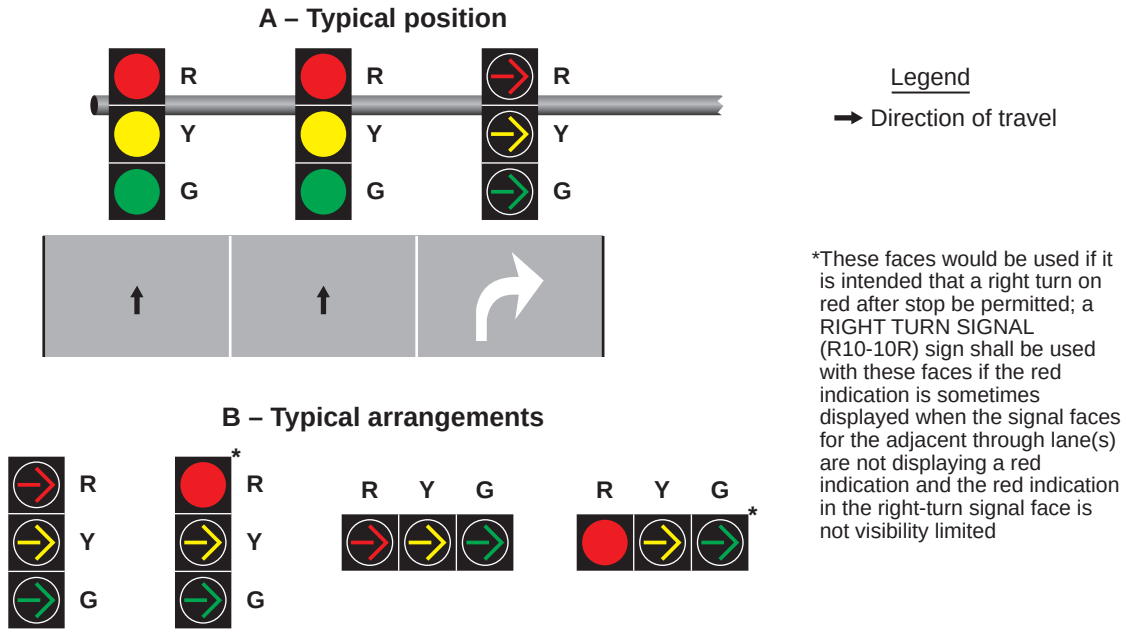

# Figure 4F-13. Typical Positions and Arrangements of Shared Signal Faces for Protected/Permissive Mode Right Turns

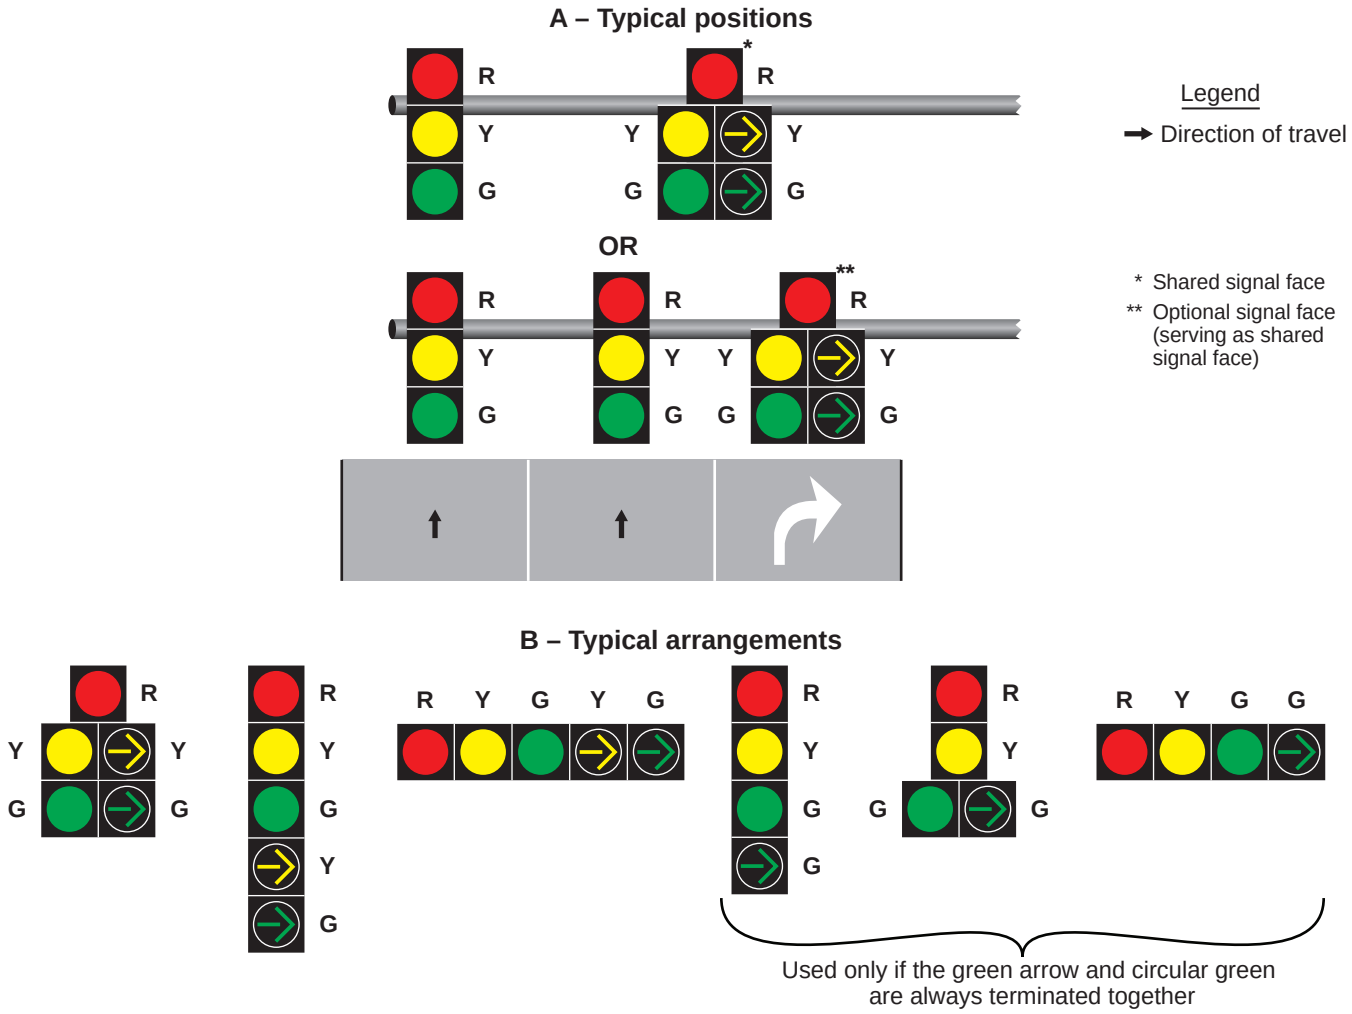

# Figure 4F-14. Typical Position and Arrangements of Separate Signal Faces with Flashing Yellow Arrow for Protected/Permissive Mode and Variable Mode Right Turns

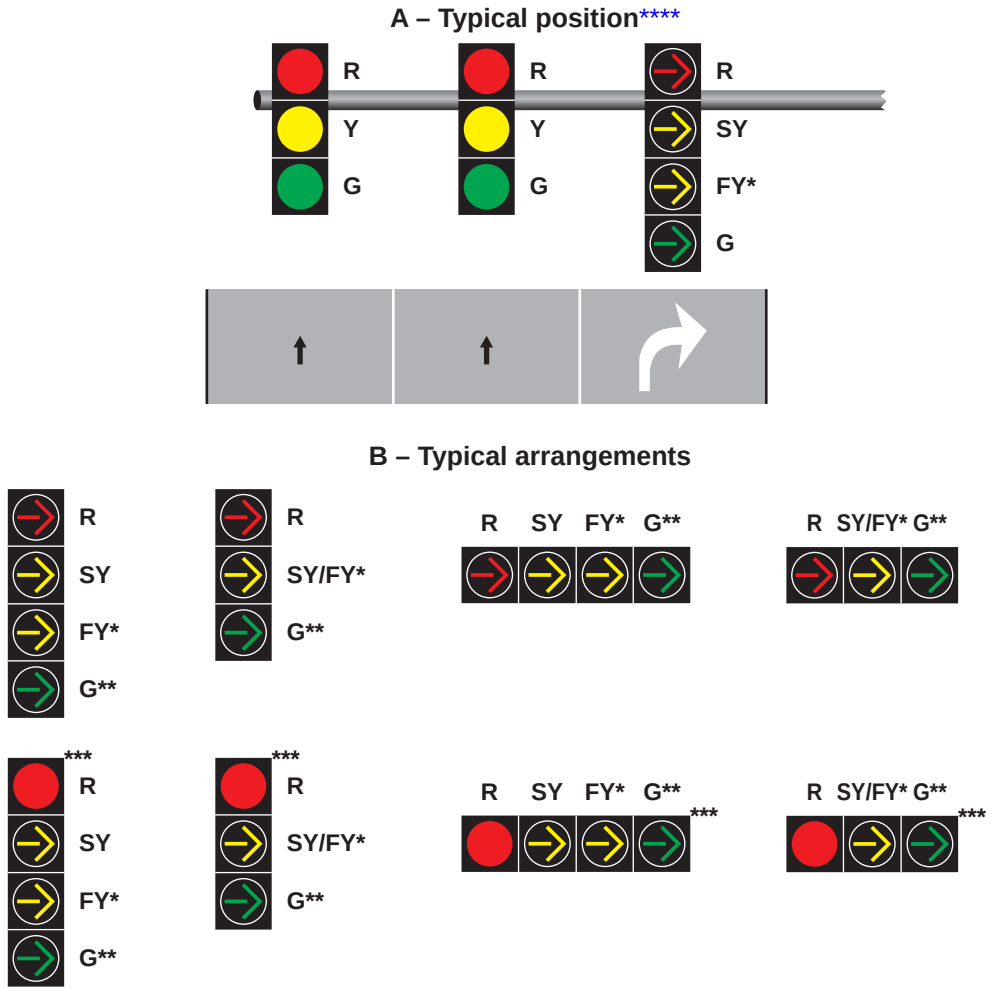


Legend

➡ Direction of travel
**SY** Steady yellow
**FY** Flashing yellow


* Shall not be displayed when operating in the protected only mode

** Shall not be displayed when operating in the permissive only mode

*** These faces would be used if it is intended that a right turn on red after stop be permitted; a RIGHT TURN SIGNAL (R10-10R) sign shall be used with these faces if the red indication is sometimes displayed when the signal faces for the adjacent through lane(s) are not displaying a red indication and the red indication in the right-turn signal face is not visibility limited

**** Refer to FHWA's List of Known Errors for error in:
"A - Typical position".
Refer to Section 1A.04 for more details

## Figure 4F-15. Signal Indications for Approaches with a Combined Left-Turn/Right-Turn Lane and No Through Movement (Sheet 1 of 3)

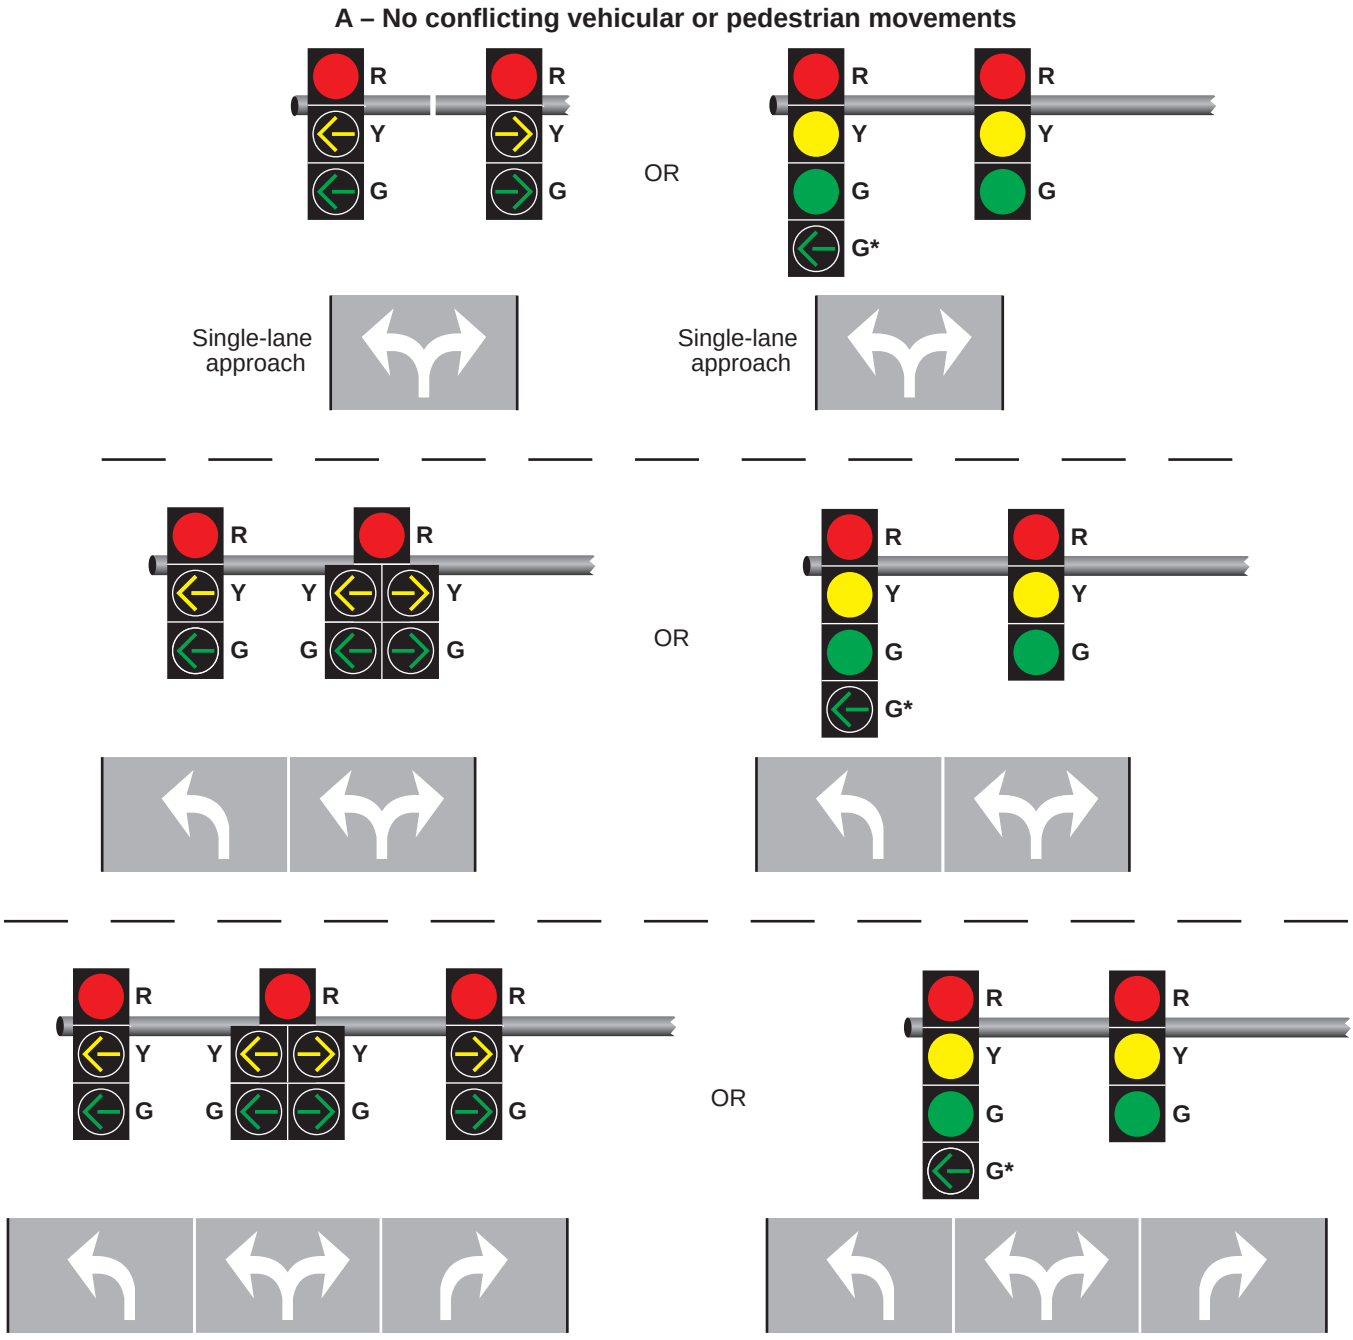



Notes:

1. Horizontally-aligned signal faces may also be used.
2. Shared signal faces may also be 5 sections in a vertical straight line instead of a cluster.

*Left-turn GREEN ARROW section shall be included if there is an opposing one-way approach and the signal phasing eliminates conflicts.

## Figure 4F-15. Signal Indications for Approaches with a Combined Left-Turn/Right-Turn Lane and No Through Movement (Sheet 2 of 3)

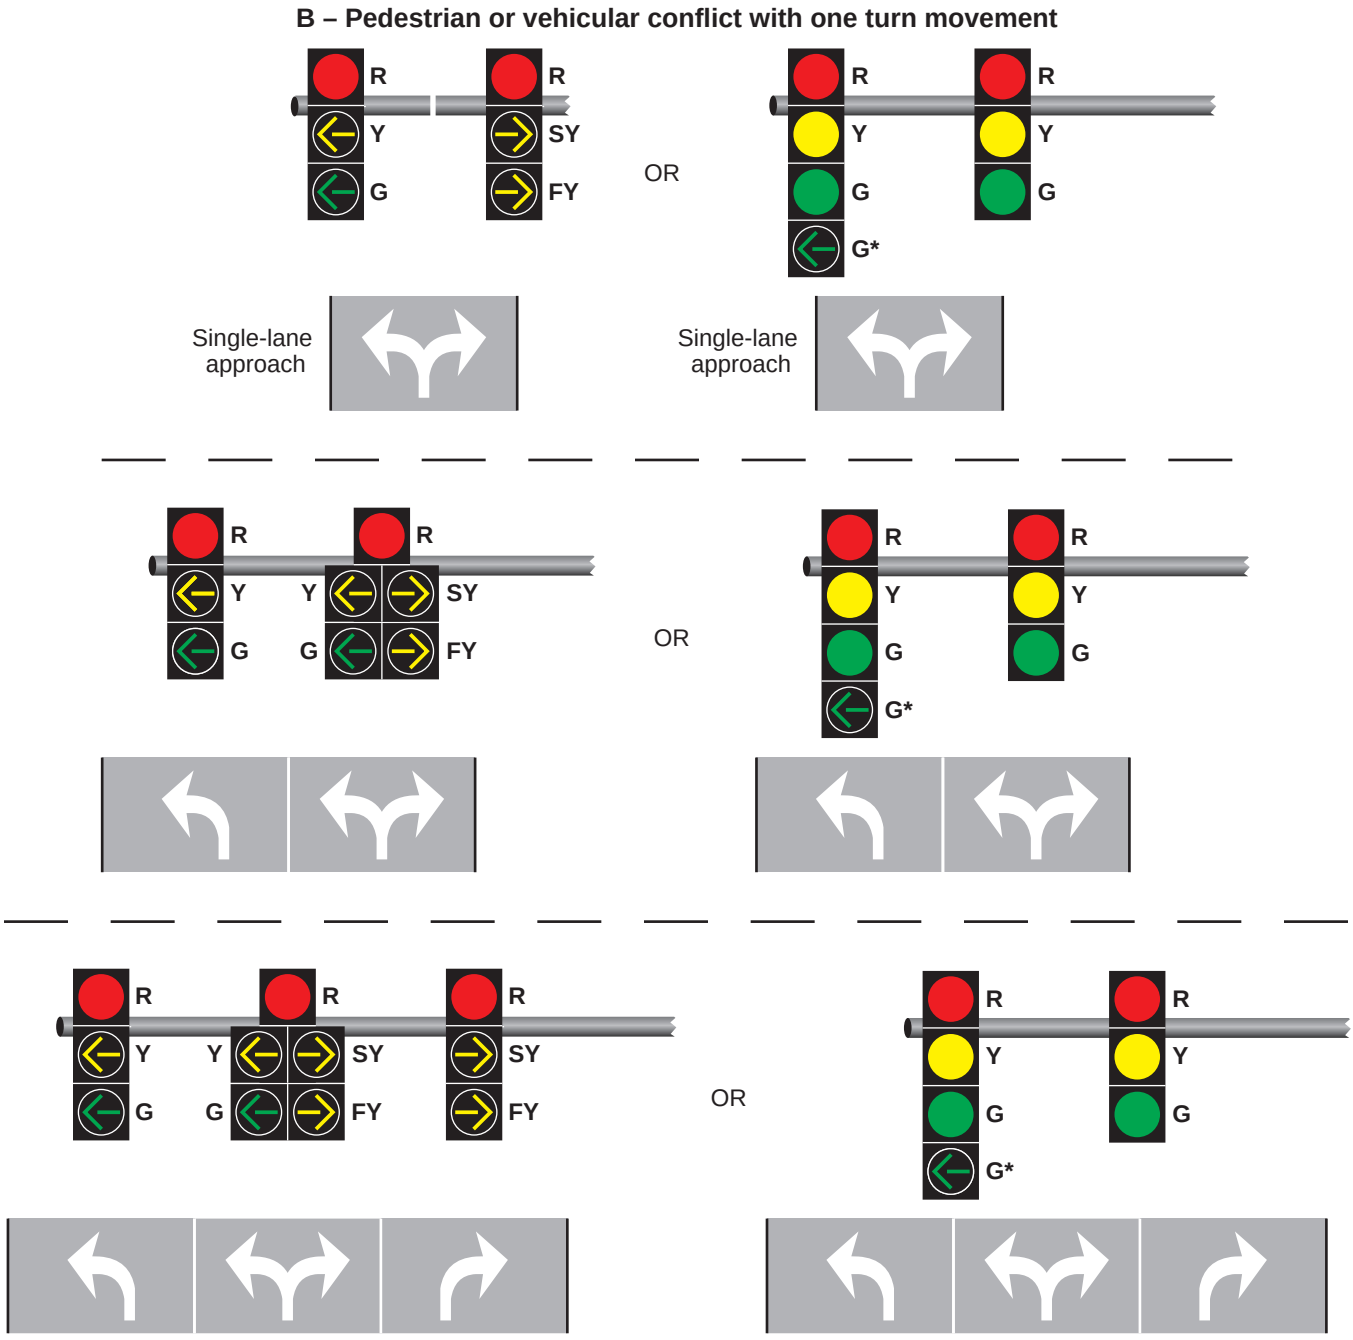



Notes:

1. A conflict with the right-turn movement is illustrated.
2. Horizontally-aligned signal faces may also be used.
3. Shared signal faces may also be 5 sections in a vertical straight line instead of a cluster.

*Left-turn GREEN ARROW section shall be included if there is an opposing one-way approach and the signal phasing eliminates conflicts.

## Figure 4F-15. Signal Indications for Approaches with a Combined Left-Turn/Right-Turn Lane and No Through Movement (Sheet 3 of 3)

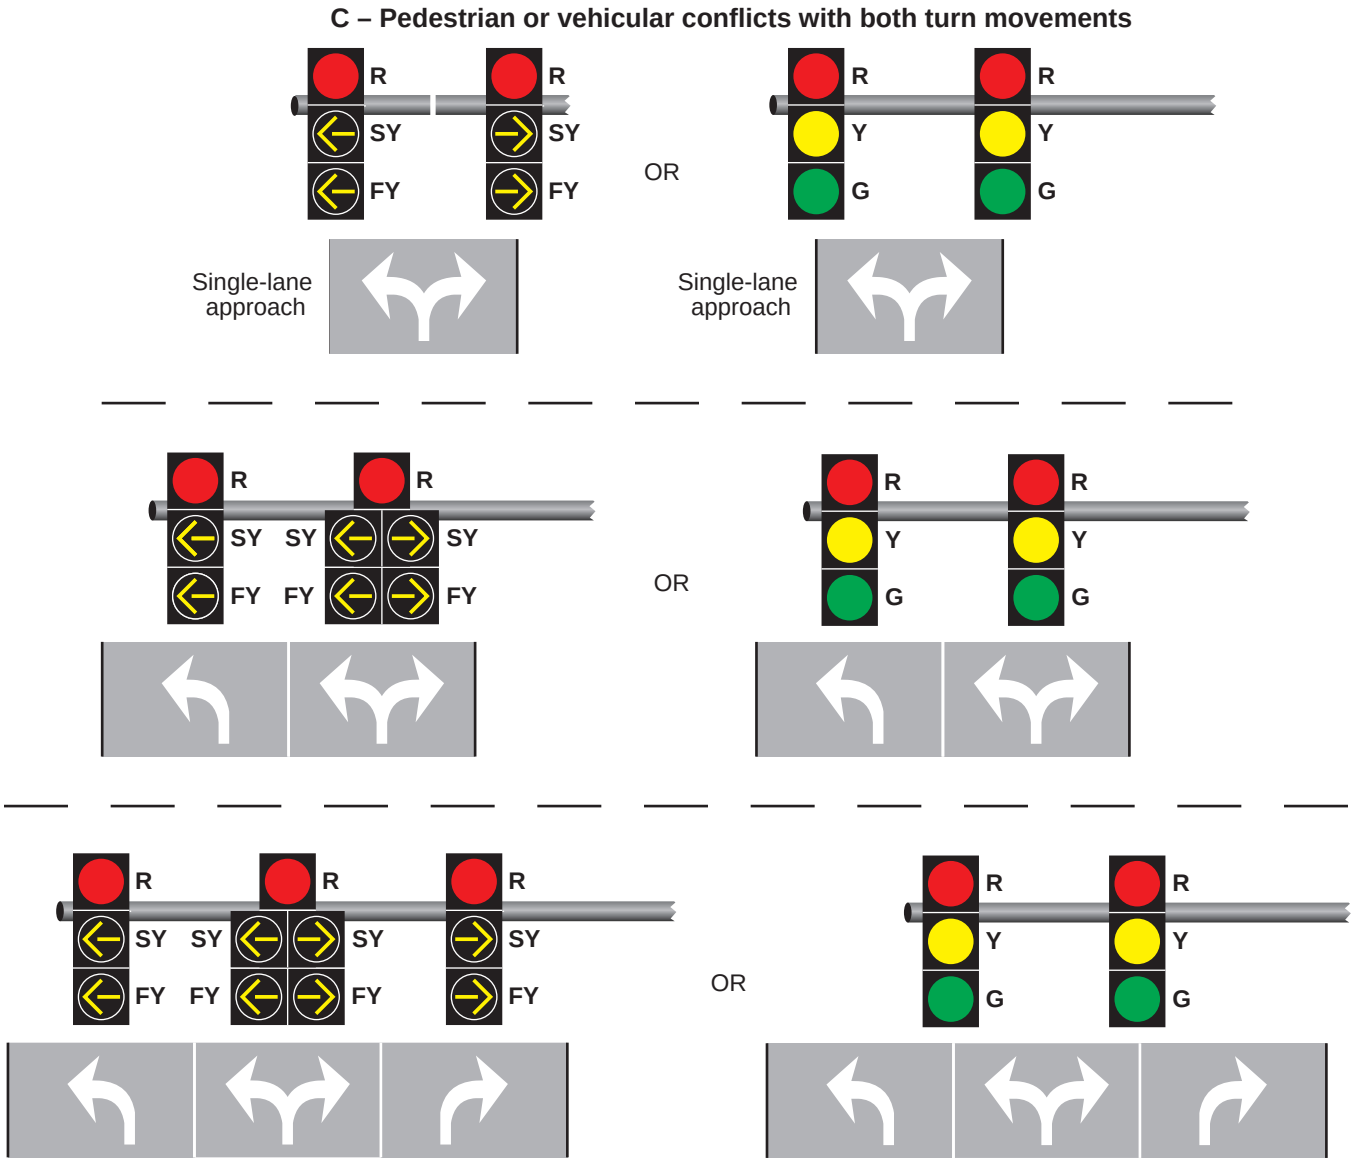


Notes:

1. Horizontally-aligned signal faces may also be used.
2. Shared signal faces may also be 5 sections in a vertical straight line instead of a cluster.

# CHAPTER 4G. FLASHING OPERATION OF TRAFFIC CONTROL SIGNALS

## Section 4G.01 Flashing Operation of Traffic Control Signals – General

**Standard:**

01 **The light source of a flashing signal indication shall be flashed continuously at a rate of not less than 50 or more than 60 times per minute.**

02 **The displayed period of each flash shall be a minimum of ½ and a maximum of ⅔ of the total flash cycle.**

03 **Flashing signal indications shall comply with the requirements of other Sections of this Manual regarding visibility limiting or positioning of conflicting signal indications, except that flashing yellow signal indications for through traffic shall not be required to be visibility limited or positioned to minimize visual conflict for road users in separately-controlled turn lanes.**

04 **Each traffic control signal shall be provided with an independent flasher mechanism that operates in compliance with this Chapter.**

05 **A manual switch shall be provided to initiate the flashing mode. A conflict monitor (malfunction management unit) circuit and, if appropriate, an automatic means shall also be provided to initiate the flashing mode.**

06 **The flashing operation shall not be terminated by removing or turning off the controller unit or the conflict monitor (malfunction management unit) or both.**

Option:

07 Based on engineering study or engineering judgment, traffic control signals may be operated in the flashing mode on a scheduled basis during one or more periods of the day rather than operated continuously in the steady (stop-and-go) mode.

Support:

08 Sections 4I.06 and 4K.04 contain information regarding the operation of pedestrian signal heads and accessible pedestrian signal detector push button locator tones, respectively, during flashing operation.

## Section 4G.02 Flashing Operation – Transition Into Flashing Mode

Option:

01 The transition from steady (stop-and-go) mode to flashing mode, if initiated by a conflict monitor (malfunction management unit) or by a manual switch, may be made at any time.

**Standard:**

02 **Programmed changes from steady (stop-and-go) mode to flashing mode shall be made under either of the following circumstances:**

- **A. At the end of the common major-street red interval (such as just prior to the start of the green in both directions on the major street), or**
- **B. Directly from a CIRCULAR GREEN signal indication to a flashing CIRCULAR YELLOW signal indication, or from a GREEN ARROW signal indication to a flashing YELLOW ARROW signal indication, or from a flashing YELLOW ARROW signal indication (see Sections 4F.02, 4F.04, 4F.08, 4F.09, 4F.11, and 4F.15) to a flashing YELLOW ARROW signal indication (in a different signal section if the signal face displays the steady YELLOW ARROW signal indication in a different section than the flashing YELLOW ARROW signal indication).**

03 **During programmed changes into flashing mode, no green signal indication or flashing yellow signal indication shall be terminated and immediately followed by a steady red or flashing red signal indication without first displaying the steady yellow signal indication.**

## Section 4G.03 Flashing Operation – Signal Indications During Flashing Mode

*Guidance:*

01 *When a traffic control signal is operated in the flashing mode, a flashing yellow signal indication should be used for the major street and a flashing red signal indication should be used for the other approaches unless flashing red signal indications are used on all approaches.*

**Standard:**

02 **When a traffic control signal is operated in the flashing mode, all of the green signal indications at the signalized location shall be dark (non-illuminated) and shall not be displayed in either a steady or flashing**

**manner, except for single-section GREEN ARROW signal indications as provided in Paragraph 6 of this Section.**

03 **Flashing yellow signal indications shall be used on more than one approach to a signalized location only if those approaches do not conflict with each other.**

04 **Except as provided in Paragraph 5 of this Section, when a traffic control signal is operated in the flashing mode, one and only one signal indication in every signal face at the signalized location shall be flashed.**

Option:

05 If a signal face has two identical CIRCULAR RED or RED ARROW signal indications (see Section 4E.04), both of those identical signal indications may be flashed simultaneously.

**Standard:**

06 **No steady indications, other than a single-section signal face consisting of a continuously- displayed GREEN ARROW signal indication that is used alone to indicate a continuous movement in the steady (stop-and-go) mode, shall be displayed at the signalized location during the flashing mode. A single-section GREEN ARROW signal indication shall remain continuously displayed when the traffic control signal is operated in the flashing mode.**

07 **If a signal face includes both circular and arrow signal indications of the color that is to be flashed, only the circular signal indication shall be flashed.**

08 **All signal faces that are flashed on an approach shall flash the same color, either yellow or red, except that separate turn signal faces (see Sections 4F.04, 4F.06, 4F.08, 4F.11, 4F.13, and 4F.15) shall be permitted to flash a RED ARROW signal indication when the adjacent through movement signal indications are flashed yellow. Shared signal faces (see Sections 4F.03, 4F.05, 4F.07, 4F.10, 4F.12, and 4F.14) for turn movements shall not be permitted to flash a CIRCULAR RED signal indication when the adjacent through movement signal indications are flashed yellow.**

09 **The appropriate RED ARROW or YELLOW ARROW signal indication shall be flashed when a signal face consists entirely of arrow indications. A signal face that consists entirely of arrow indications and that provides a protected only turn movement during the steady (stop-and-go) mode or that provides a flashing YELLOW ARROW or flashing RED ARROW signal indication for a permissive turn movement during the steady (stop-and-go) mode shall be permitted to flash the YELLOW ARROW signal indication during the flashing mode if the adjacent through movement signal indications are flashed yellow and if it is intended that a permissive turn movement not requiring a full stop by each turning vehicle be provided during the flashing mode.**

## Section 4G.04 Flashing Operation – Transition Out of Flashing Mode

**Standard:**

01 **All changes from flashing mode to steady (stop-and-go) mode shall be made under one of the following procedures:**

- **A. Yellow-red flashing mode: Changes from flashing mode to steady (stop-and-go) mode shall be made at the beginning of the major-street green interval (when a green signal indication is displayed to through traffic in both directions on the major street), or if there is no common major-street green interval, at the beginning of the green interval for the major traffic movement on the major street.**
- **B. Red-red flashing mode: Changes from flashing mode to steady (stop-and-go) mode shall be made by changing the flashing red indications to steady red indications followed by appropriate green indications to begin the steady mode cycle. These green indications shall be the beginning of the major-street green interval (when a green signal indication is displayed to through traffic in both directions on the major street) or if there is no common major-street green interval, at the beginning of the green interval for the major traffic movement on the major street.**

*Guidance:*

02 *The steady red clearance interval provided during the change from red-red flashing mode to steady (stop-and-go) mode should have a minimum duration of 6 seconds.*

03 *When changing from the yellow-red flashing mode to steady (stop-and-go) mode at a location where there is a common major-street green interval, the flashing red signal indications for the minor street should immediately change to steady red signal indications, and the flashing yellow signal indications for the through movements on the major street should change to green signal indications in both directions (after the minor-street signal indications have been steady red for a short time, if desired), or the flashing yellow signal indications for the through movements on the major*

*street should change to steady yellow signal indications followed by a steady red clearance interval before changing to green signal indications in both directions.*

04 *When changing from the yellow-red flashing mode to steady (stop-and-go) mode at a location where there is no common major-street green interval, the flashing red signal indications for the minor street should immediately change to steady red signal indications, and the flashing yellow signal indications for the through movements on the major street should change to steady yellow signal indications followed by a steady red clearance interval before changing to green signal indications for the major traffic movement on the major street.*

**Standard:**

05 **During programmed changes out of flashing mode, no flashing yellow signal indication shall be terminated and immediately followed by a steady red or flashing red signal indication without first displaying a steady yellow signal indication.**

Option:

06 Because special midblock signals that rest in flashing circular yellow in the position normally occupied by the green signal indication do not have a green signal indication in the signal face, these signals may go directly from flashing circular yellow (in the position normally occupied by the green signal indication) to steady yellow without going first to a green signal indication.

# CHAPTER 4H. BICYCLE SIGNALS

## Section 4H.01 Use of Bicycle Signal Faces

Option:

01 A bicycle signal face may be used to provide separate control of a bicyclist movement for various situations, including the following:

A. To provide a protected bicycle signal phase or a leading or lagging bicycle interval;
B. To continue a through bicycle lane on the right-hand side of a mandatory right-turn lane (or on the left-hand side of a mandatory left-turn lane) that would otherwise be in non-compliance with Paragraph 1 of Section 9E.02 or Paragraph 7 of Section 9E.06;
C. To provide a bicycle interval for a counter-flow bicycle facility; or
D. To provide for unusual or unexpected arrangements of the bicyclist movement through complex intersections, conflict areas, or signal control.

02 A bicycle signal face may be used at a mid-block traffic control signal where there are no motor vehicle movements parallel to the bicycle crossing**.**

Support:

03 Chapter 4C contains information on warrants for the installation of a new traffic control signal.

*Guidance:*

04 *The decision as to whether to incorporate a bicycle signal face(s) into a new traffic control signal design should be made during the engineering study performed in accordance with Paragraph 1 of Section 4C.01.*

05 *Engineering judgment should be exercised in determining whether or not it would be advantageous or beneficial to install a bicycle signal face(s) at an existing traffic control signal.*

Support:

06 Retrofitting existing circular traffic signals that are operated as bicycle signal faces with bicycle symbol signal faces is analogous to retrofitting existing traffic signals with pedestrian signals where such a determination is not required through an engineering study.

07 For the purpose of warrant analyses, provisions for classifying bicycles are provided in Paragraph 16 of Section 4C.01 and Paragraph 2 of Section 9F.01.

**Standard:**

08 **If used, a bicycle signal face shall only be used to control bicyclist movements from a designated bicycle lane or from a separate facility, such as a shared-use path.**

09 **If used, a bicycle signal face shall only be used to control bicyclist movements where bicyclists moving on a GREEN BICYCLE or YELLOW BICYCLE signal indication are not in conflict with any simultaneous motor vehicle movement at the signalized location, including right (or left) turns on red.**

*Guidance:*

10 *If used where motor vehicle traffic can make the same movements as bicyclists, a bicycle signal face should only be used if the bicyclist movement controlled by the bicycle signal face is sometimes allowed to proceed or sometimes required to stop at times when motor vehicle traffic, making the same movement and controlled by other vehicular signal faces, is required to stop or allowed to proceed, respectively.*

## Section 4H.02 Prohibited Uses of Bicycle Signal Faces

**Standard:**

01 **Bicycle signal faces shall not be used to control conflicting bicyclist movements from perpendicular or nearly perpendicular directions.**

Support:

01a As clarified by FHWA's MUTCD Team, the purpose of this prohibition is intended to eliminate the "bike scramble" used in some jurisdictions that operate similar to a pedestrian scramble phase where all movements go at the same time from all directions. Since bicycles can be traveling much faster than pedestrians, the intent is to require separate phases to separate conflicting bicycle movements from perpendicular or near perpendicular directions.

**Standard:**

02 **Bicycle signal faces shall not be used for controlling any bicyclist movement that is sharing an approach lane with motor vehicle traffic.**

03 **Bicycle signal faces shall not be used in any manner with respect to the design and operation of a hybrid beacon.**

## Section 4H.03 Bicycle Signal Signs

Support:

01 The primary purposes of the Bicycle Signal (R10-40, R10-40a, R10-41, R10-41a, R10-41b) sign (see Section 9B.22) are to inform road users that the signal indications in the bicycle signal face are intended only for bicyclists, and to inform bicyclists which specific bicyclist movements are controlled by the bicycle signal face.

**Standard:**

02 **Except as provided in Paragraph 3 of this Section, a Bicycle Signal (R10-40, R10-40a, R10-41, R10-41a, or R10-41b) sign shall be installed immediately adjacent to (including above or below) every bicycle signal face. The Bicycle Signal sign shall have a minimum size of 24 inches x 36 inches if it is placed next to an overhead-mounted bicycle signal face and shall have a minimum size of 12 inches x 21 inches if it is placed next to a post-mounted bicycle signal face.**

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

Option:

03 The Bicycle Signal sign may be omitted adjacent to a supplemental near-side bicycle signal face containing 4-inch indications.

## Section 4H.04 Application of Bicycle Symbol Signal Indications during Steady (Stop-and-Go) Operation

**Standard:**

01 **Steady bicycle symbol signal indications shall be applied as follows:**

- **A. A steady RED BICYCLE signal indication shall be displayed when it is intended to prohibit bicyclists in a designated bicycle lane or from a separate facility such as a shared-use path from entering the intersection or other controlled area. Turning after stopping shall be permitted as stated in Item C in Paragraph 1 of Section 4A.05.**
- **B. A steady YELLOW BICYCLE signal indication shall be displayed following a GREEN BICYCLE signal indication in the same bicycle signal face. A YELLOW BICYCLE signal indication shall not be displayed in conjunction with the change from the RED BICYCLE signal indication to a GREEN BICYCLE signal indication. The YELLOW BICYCLE signal indication shall be followed by a RED BICYCLE signal indication.**
- **C. A steady GREEN BICYCLE signal indication shall be displayed only when it is intended to permit bicyclists in a designated bicycle lane or from a separate facility such as a shared-use path to enter the intersection as discussed in Section 4A.05.**

## Section 4H.05 Application of Bicycle Symbol Signal Indications during Flashing Operation

**Standard:**

01 **The mode of operation of the bicycle signal faces at a traffic control signal shall be the same as the mode of operation of the other traffic signal faces at the same signalized location. Bicycle signal faces shall operate in the steady (stop-and-go) mode when the other traffic signal faces are operating in the steady (stop-and-go) mode. Bicycle signal faces shall operate in the flashing mode when the other signal faces are operating in the flashing mode. Bicycle signal faces shall not be placed in a dark mode when other vehicular traffic signal faces are operating in the flashing mode.**

*Guidance:*

02 *When a traffic control signal is operated in the flashing mode, bicycle signal faces should display a flashing RED BICYCLE signal indication if the other vehicular signal faces on the same approach are displaying flashing red signal indications or if there are no other vehicular signal faces on the same approach.*

03 *When a traffic control signal is operated in the flashing mode, bicycle signal faces should display a flashing YELLOW BICYCLE signal indication if the other vehicular signal faces for the through lanes on the same approach are displaying flashing yellow signal indications unless it is determined by engineering judgment that a flashing RED BICYCLE signal indication would provide a safer operation.*

Support:

04 Refer to National MUTCD website, Frequently Asked Questions (FAQs) on Part 4 – Highway Traffic Signals, for use of flashing yellow Bicycle Symbol Signal Indication. Refer to Section 1A.04 for more details.

## Section 4H.06 Layout of Bicycle Signal Faces

**Standard:**

01 **Bicycle signal faces shall consist of all bicycle symbol signal indications (see Figure 4H-1). Circular or arrow signal indications shall not be used in a bicycle signal face.**

Option:

02 Bicycle signal faces may be oriented vertically or horizontally.

**Standard:**

03 **The layouts and arrangements of the bicycle signal face shall be in accordance with the following provisions:**

- **A. Only the bicycle symbol shown on Page 6-7 in the 2004 Standard Highway Signs publication (see Section 1A.05) shall be used for bicycle symbol signal indications and shall be proportioned to fit within the signal lens. The bicycle symbol shall only be positioned horizontally and shall face to the left.**
- **B. The RED BICYCLE, YELLOW BICYCLE, and GREEN BICYCLE signal indications shall be in the same relative position to each other as specified for the CIRCULAR RED, CIRCULAR YELLOW, and CIRCULAR GREEN signal indications, respectively, in Sections 4E.04 and 4E.05.**
- **C. As a specific exception to Paragraph 5 of Section 4E.04, two YELLOW BICYCLE signal indications or two GREEN BICYCLE signal indications shall not be arranged horizontally adjacent to each other at right angles to the basic straight line arrangement to form a clustered signal face.**

Option:

04 Backplates (see Paragraphs 18 and 19 in Section 4D.06) may be used with bicycle signal faces.

05 If a bicycle signal face having 4-inch signal indications is used, the accompanying visors may be omitted.

## Section 4H.07 Size of Bicycle Symbol Signal Indications

**Standard:**

01 **There shall be three nominal diameter sizes for bicycle signal indications: 4 inches, 8 inches, and 12 inches.**

02 **All signal indications in a bicycle signal face shall be of the same size.**

03 **Four-inch signal indications shall not be used for any bicycle signal face other than a supplemental, post-mounted, near-side bicycle signal face.**

## Section 4H.08 Placement of Bicycle Signal Faces

**Standard:**

01 **The provisions of Sections 4D.05 through 4D.08 shall apply to the placement of the bicycle signal faces except as follows:**

- **A. As a specific exception to Item A in Paragraph 1 of Section 4D.05, a minimum of one primary bicycle signal face shall be provided to control traffic for the bicyclist movement, even if a bicyclist through movement exists.**
- **B. The primary bicycle signal face shall have either 8-inch or 12-inch signal indications, even if it is located at the near side of the signal-controlled location.**
- **C. When the primary bicycle signal face is located more than 120 feet beyond the stop line, a supplemental near-side bicycle signal face shall be provided.**

*Guidance:*

02 *When the primary bicycle signal face is located more than 80 feet and up to 120 feet beyond the stop line, a supplemental near-side bicycle signal face should be provided.*

03 *A bicycle signal face should be separated horizontally or vertically from the nearest vehicular traffic signal face for the same approach by at least 3 feet measured either horizontally perpendicular to the approach between the centers of the signal faces or vertically from the center of the lowest signal indication of the top signal face to the center of the highest signal indication of the bottom signal face. If horizontally- arranged or clustered signal faces are used, the minimum 3-foot horizontal separation between the two signal faces should be measured from the center of the right-most signal indication in the signal face on the left to the center of the left-most signal indication in the signal face on*

*the right.*

04 *Bicycle signal faces should be placed such that visibility is maximized for bicyclists and minimized for adjacent or conflicting vehicle movements not controlled by the bicycle signal face. Consideration should be given to using visibility-limited bicycle signal faces in situations where drivers not controlled by the bicycle signal face might be confused by viewing the bicycle signal indications, such as when the bicyclist movement controlled by the bicycle signal face is sometimes allowed to proceed or sometimes required to stop at times when motor vehicle traffic, making the same movement and controlled by other vehicular signal faces, is required to stop or allowed to proceed, respectively.*

## Section 4H.09 Mounting Height of Bicycle Signal Faces

**Standard:**

01 **The provisions of Section 4D.09 shall apply to the mounting height of bicycle signal faces except as follows:**

**A. The bottom of the signal housing (including brackets) of a bicycle signal face that is not located over a roadway or shoulder shall be a minimum of 7 feet above the sidewalk or ground, and**

**B. If 4-inch signal indications are used in a supplemental, post-mounted, near-side bicycle signal face, the bottom of the signal housing (including brackets) shall be a minimum of 4 feet and a maximum of 8 feet above the sidewalk or ground. Bicycle signal faces with 4-inch signal indications installed above a pedestrian sidewalk or pathway shall not project more than 4 inches into the pedestrian facility.**

## Section 4H.10 Intensity and Light Distribution of Bicycle Signal Faces

*Guidance:*

01 *Except for the 4-inch nominal size of the lens diameter, the intensity and distribution of light from each illuminated bicycle signal face should be similar to that recommended for vehicular traffic signal faces in accordance with Paragraph 11 of Section 4E.01 to the extent practical.*

## Section 4H.11 Yellow Change and Red Clearance Intervals for Bicycle Signal Faces

**Standard:**

01 **The provisions of Section 4F.17 shall apply to the duration of the yellow change and the red clearance intervals of a bicycle signal phase.**

*Guidance:*

02 *The minimum duration of the yellow change interval of a bicycle signal phase should be 3 seconds.*

Support:

03 The function of the yellow change interval is to warn bicyclists approaching a signalized location that their permission to proceed is being terminated after which they will be directed to stop. Providing clearance time for a bicyclist to travel through the intersection or conflict area is the purpose of the red clearance interval rather than the yellow change interval.

## Section 4H.12 Bicycle Push Buttons

Option:

01 Bicycle push buttons may be used for bicycle detection. Support:

02 The location of bicycle push buttons intended only for use by bicyclists and not pedestrians are determined by engineering judgment considering a reasonable reach without requiring most bicyclists to dismount.

**Standard:**

03 **Where used, push buttons intended to be used by both pedestrians and bicyclists shall be located and operated to meet all accessibility requirements (see Section 4I.05).**

04 **Bicycle push buttons shall be accompanied by an appropriate regulatory sign (R10-4, R10-24, or R10-26) explaining the purpose and operation of the push button (see Sections 2B.58 and 9B.20).**

## Section 4H.101(CA) Optional Use of Bicycle Signal Faces

Support:

01 A bicycle signal (refer to Figure 4H-1) is an electrically powered traffic control device that uses bicycle signal faces and directs bicyclists to take specific actions. Use of bicycle signal faces is analogous to using pedestrian signal heads where implementation is based on engineering judgment. Refer to CVC §§ 21450 and 21456.3.

Option:

02 Existing signalized locations may be retrofitted with additional signal heads that include bicycle signal faces if the engineer determines that it would be advantageous or beneficial to have the signalized location implement bicycle signal faces.

**Standard:**

03 **If used, bicycle signal faces shall only be used at signalized locations. Signal phasing shall be such that while bicycles are moving on a green or yellow bicycle indication, they are not in conflict with any simultaneous motor vehicle movements at the signalized location, including right (or left) turns on red.**

*Guidance:*

04 *Before existing signalized intersections are retrofitted with bicycle signal faces, alternative means of handling conflicts between bicycles and motor vehicles should be considered.*

05 *Two alternatives that should be considered are:*

*A. Striping to direct a bicyclist to a lane adjacent to a traffic lane such as a bike lane to left of a right-turn-only lane.*

*B. Redesigning the intersection to direct a bicyclist from an off-street path to a bicycle lane at a point removed from the signalized intersection.*

## Section 4H.102(CA) Limit Line Bicycle Detection Zone

**Standard:**

01 **All new limit line bicycle detection zone installations and modifications to the existing limit line bicycle detection zone installations on a public or private road or driveway intersecting a public road (refer to Section 1B.01 for applicability and Section 1C.02 for definitions and meanings) shall either provide a Limit Line Bicycle Detection Zone in which the Reference Bicycle-Rider for each traffic movement from each approach is detected or be placed on permanent recall or fixed time operation. Refer to CVC § 21450.5.**

02 **All new and modified bike path approaches to a signalized intersection shall be equipped with either a Limit Line Bicycle Detection Zone or a bicyclist pushbutton, or else the phase serving the bike path shall be placed on permanent recall or fixed time operation. A bicyclist pushbutton, if used, shall be located on the right side of the bike path and where it can be reached from the bike path.**

03 **At new signalized intersections or when the advance detection is being replaced at existing signalized intersections, phases with advance detection only shall be placed on permanent recall.**

Support:

04 The requirement to detect the Reference Bicycle-Rider in the Limit Line Bicycle Detection Zone is technology-neutral.

Option:

05 The limit line bicycle detection zone in a bike lane may be narrower than 6 feet. Refer to Figure 4H-101(CA).

06 A Bicycle Detector Symbol may be used. Refer to Sections 9B.20 and 9E.15.

07 A bicyclist pushbutton may be used to supplement the required limit line bicycle detection zone.

Support:

08 Refer to Chapter 9B for bicycle regulatory signs and Chapter 9E for bicycle facility markings.

*Guidance:*

09 *If more than 50% of the limit line detectors need to be replaced at a signalized intersection, then the entire intersection should be upgraded so that every lane has a Limit Line Bicycle Detection Zone.*

10 *The Reference Bicycle-Rider or the equivalent should be used to confirm bicycle detection under the following situations:*

*A. A new detection system has been installed; or*

*B. The detection configuration has been modified.*

Support:

11 CVC § 21202(a) requires bicyclists traveling "at a speed less than the normal speed of traffic" to ride "as close as practicable to the right-hand curb or edge of the roadway" with exceptions, including when the bicyclist is "approaching a place where a right turn is authorized." This exception was intended to provide the bicyclist the flexibility to avoid having to ride against the right hand curb or edge of the road where a potential conflict would be created with a right turning road user.

12 A Limit Line Bicycle Detection Zone provides for the detection of both bicycles and vehicles, including motorcycles.

*Guidance:*

13 *Where a Limit Line Bicycle Detection Zone that detects the Reference Bicycle-Rider has been provided, minimum bicycle timing should be provided as follows:*

14 *For all phases, the sum of the minimum green, plus the yellow change interval, plus any red clearance interval should be*

*sufficient to allow a bicyclist riding a bicycle 6 feet long to clear the last conflicting lane at a speed of 14.7 feet/sec plus an additional effective start-up time of 6 seconds, according the formula*

*Gmin + Y + Rclear ≥ 6 sec + (W+6 feet)/14.7 feet/sec,*

*Where:*

*Gmin = Length of minimum green interval (sec)*
*Y = Length of yellow interval (sec)*
*Rclear = Length of red clearance interval (sec)*
*W = Distance from limit line to far side of last conflicting lane (feet)*

Support:

15 Bicyclist crossing times are shown in Table 4H-101(CA). The speed of 14.7 feet/sec represents the final crossing speed and the effective start-up time of 6 seconds represents the time lost in reacting to the green light and then accelerating to full speed.

Option:


16 A limit line bicycle detection system that can discriminate between bicyclists and vehicles may be used to extend the length of the minimum green.

17 Supplemental Reference Bicycle-Rider detection zones, new technology, or various signal controller settings may be utilized to adjust the time (Gmin + Y + Rclear ) and/or travel distance (W) that bicyclists are exposed to conflicting vehicular traffic.

# Figure 4H-1. Typical Arrangements of Bicycle Signal Faces




## *Figure 4H-101(CA). Bicycle Detection Systems (Sheet 1 of 3)*

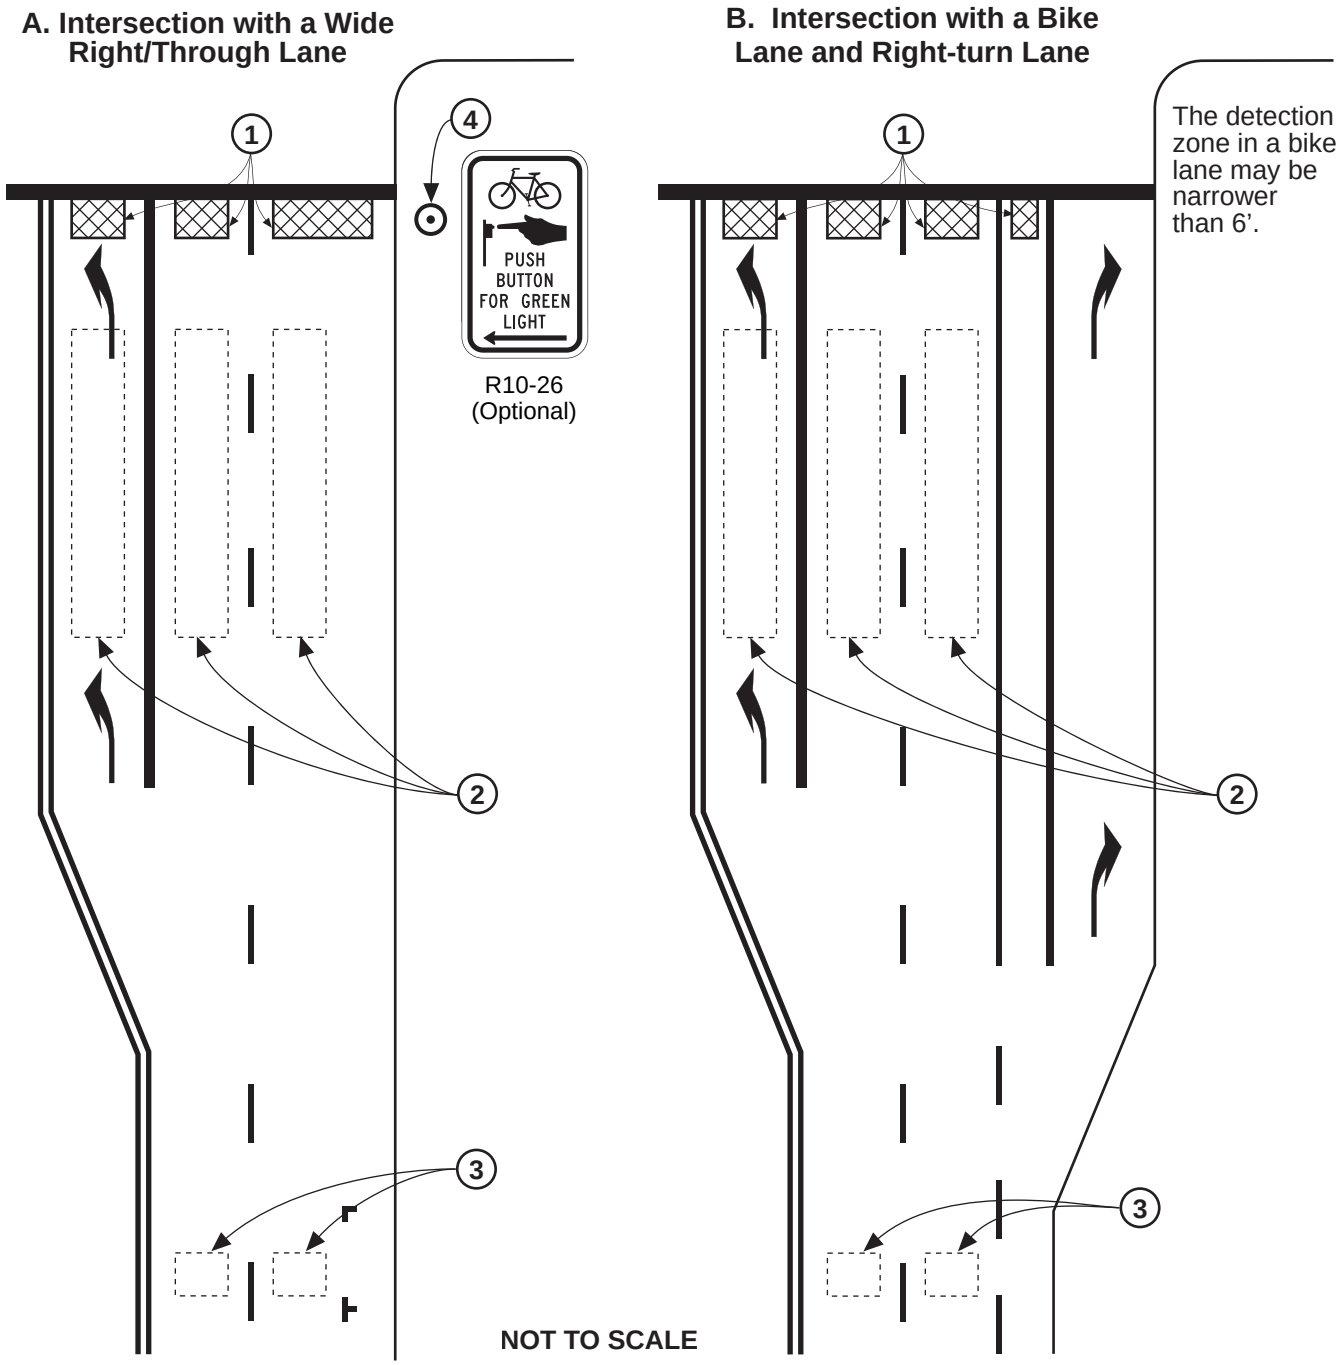


NOTES:

1. Typical technology-neutral limit line detection locations. See Section 4H.102(CA).
2. Typical presence detection locations.
3. Typical advance detection locations.
4. A bicyclist pushbutton may be used to activate a traffic signal to supplement the required limit line detection. A pushbutton should be located so it is convenient to use by bicyclists. See Chapter 9B for bicycle regulatory signs.


## *Figure 4H-101(CA). Bicycle Detection Systems (Sheet 2 of 3)*

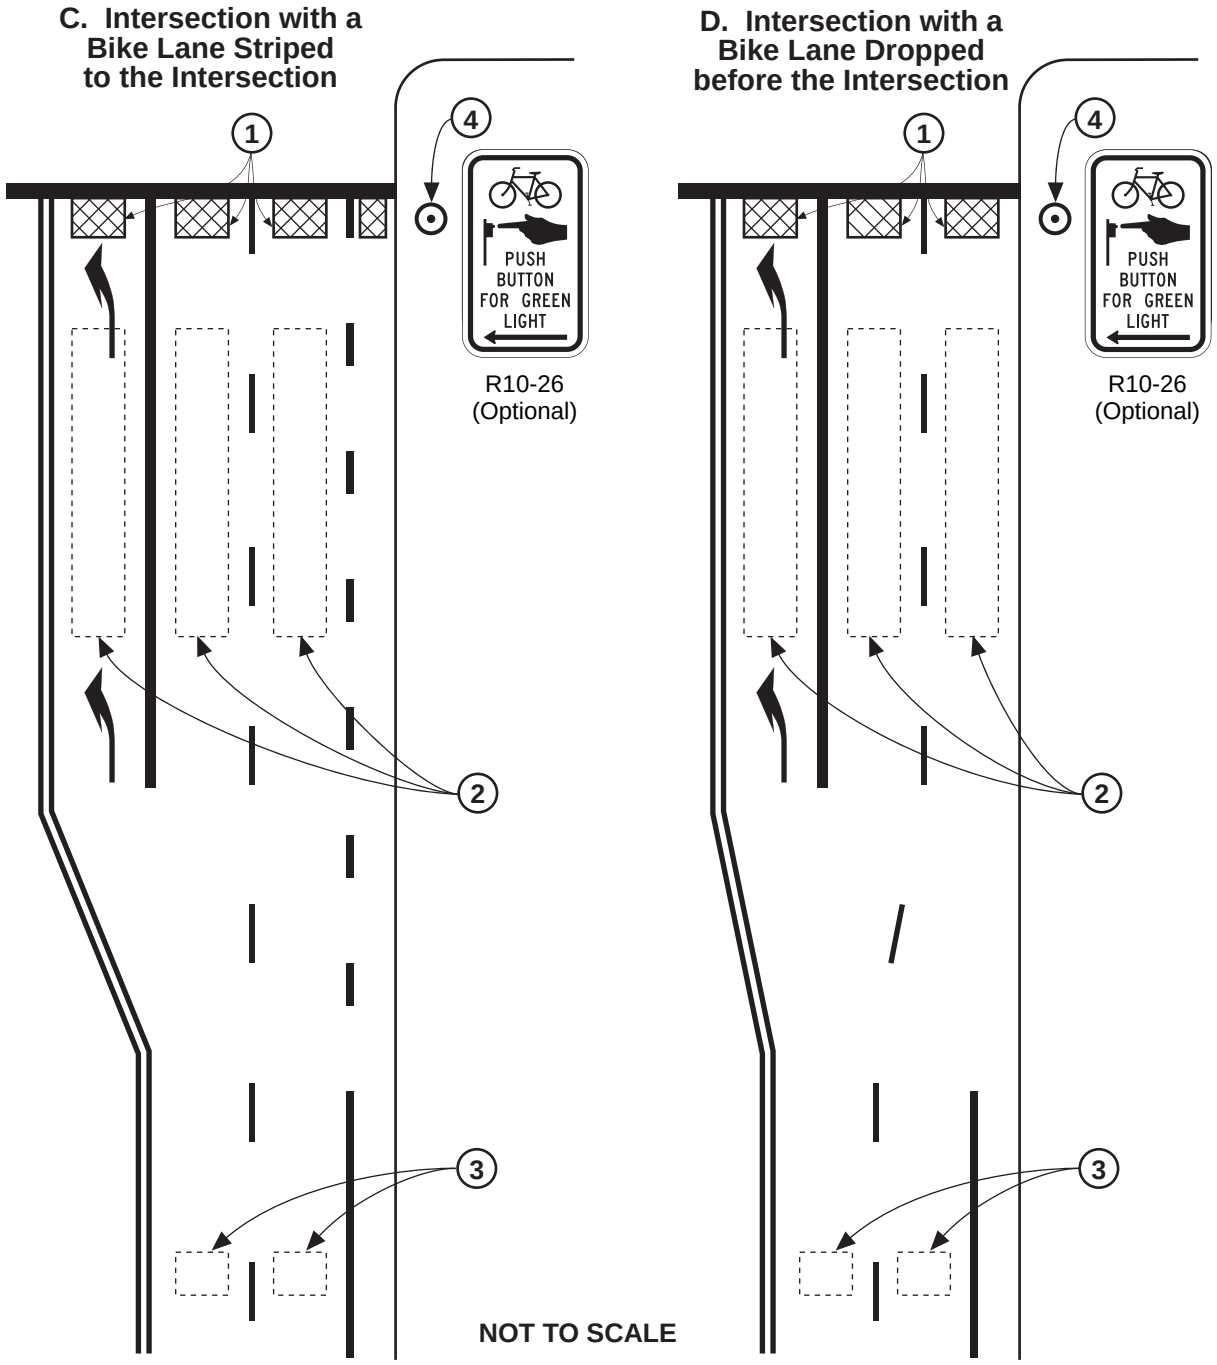


NOTES:

1. Typical technology-neutral limit line detection locations. See Section 4H.102(CA).
2. Typical presence detection locations.
3. Typical advance detection locations.
4. A bicyclist pushbutton may be used to activate a traffic signal to supplement the required limit line detection. A pushbutton should be located so it is convenient to use by bicyclists. See Chapter 9B for bicycle regulatory signs.

## *Figure 4H-101(CA). Bicycle Detection Systems (Sheet 3 of 3)*

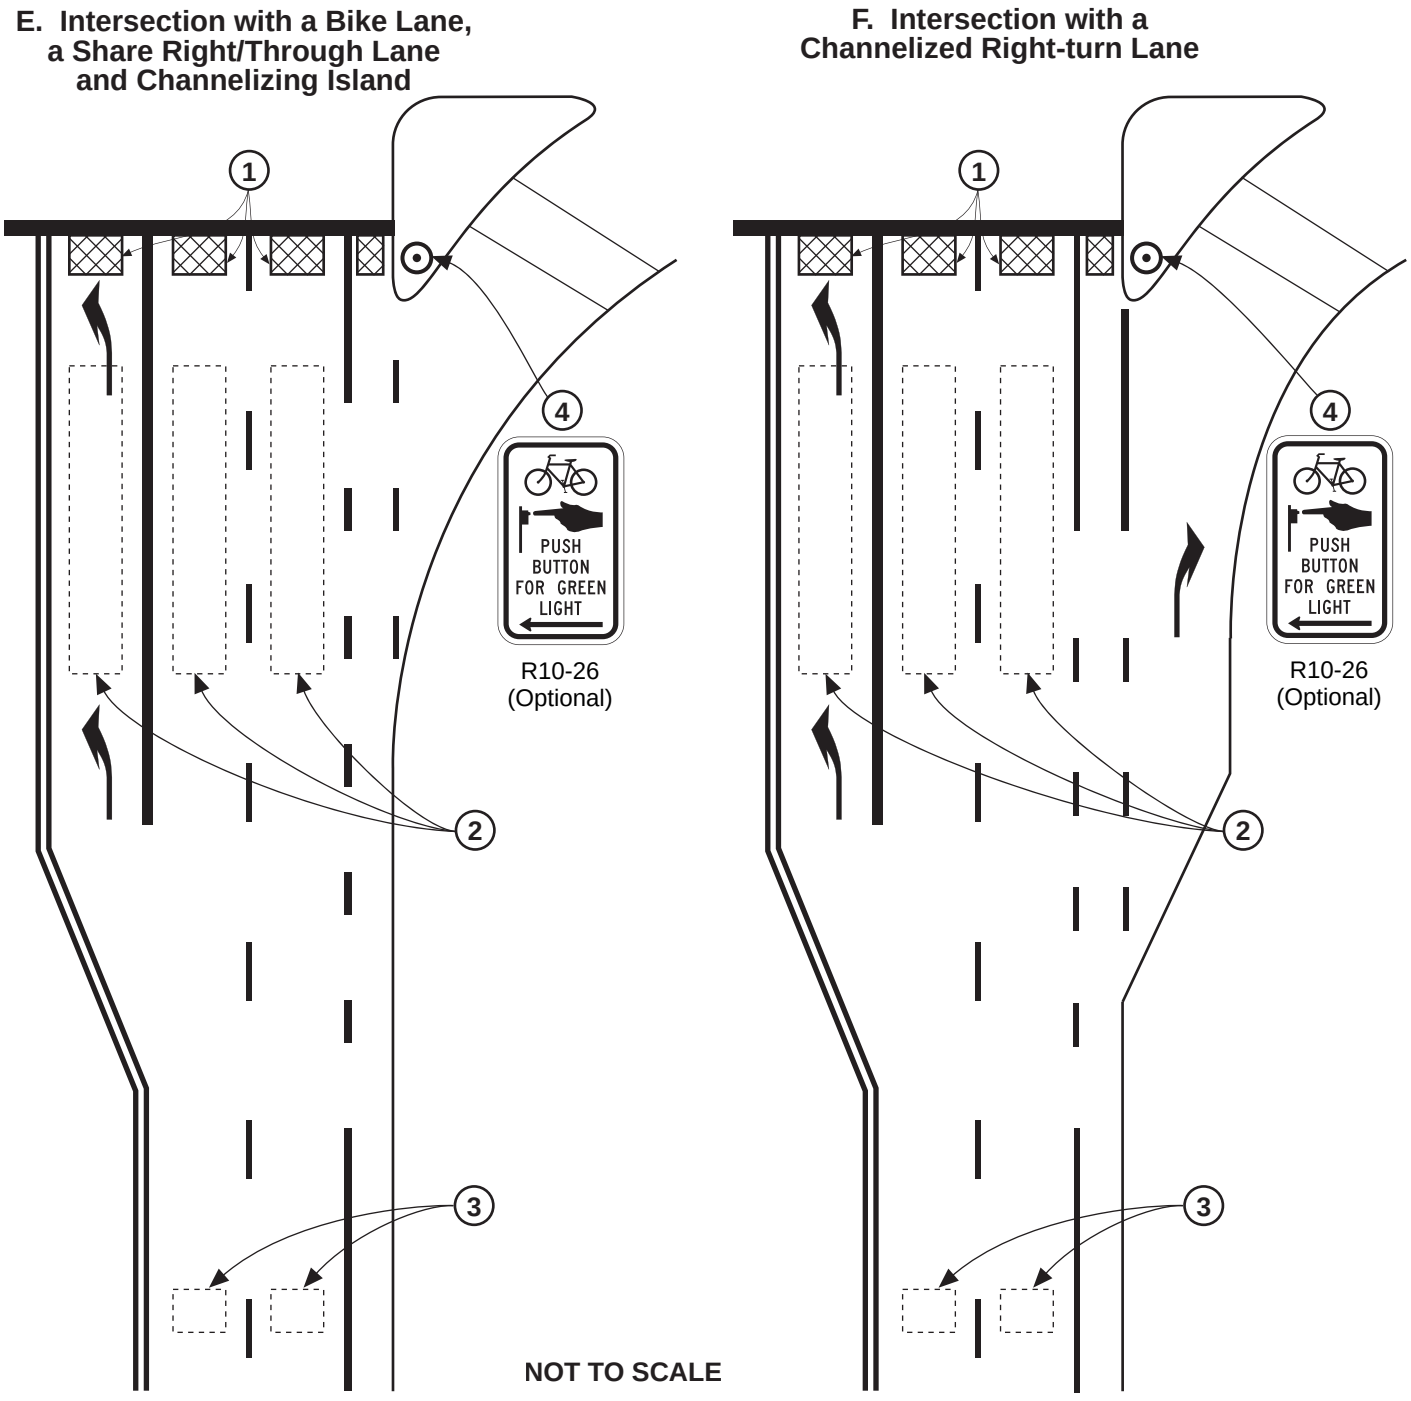


NOTES:

1. Typical technology-neutral limit line detection locations. See Section 4H.102(CA).
2. Typical presence detection locations.
3. Typical advance detection locations.
4. A bicyclist pushbutton may be used to activate a traffic signal to supplement the required limit line detection. A pushbutton should be located so it is convenient to use by bicyclists. See Chapter 9B for bicycle regulatory signs.

## Table 4H-101(CA). Signal Operations - Minimum Bicycle Timing

| $G_{min}$ + Y + $R_{clear}$ ≥ 6 Sec + (w+6 ft)/14.7 ft/Sec, Where | |
|---|---|
| $G_{min}$ = Length of minimum green interval (sec) | |
| Y = Length of yellow interval (sec) | |
| $R_{clear}$ = Length of red clearance interval (sec) | |
| W = distance from limit line to far side of last conflicting lane (ft) | |
| **Distance from limit line to far side of last conflicting lane** | **Minimum phase length (minimum green plus yellow plus red clearance)** |
| **Feet** | **Seconds** |
| 40 | 9.1 |
| 50 | 9.8 |
| 60 | 10.5 |
| 70 | 11.2 |
| 80 | 11.9 |
| 90 | 12.5 |
| 100 | 13.2 |
| 110 | 13.9 |
| 120 | 14.6 |
| 130 | 15.3 |
| 140 | 15.9 |
| 150 | 16.6 |
| 160 | 17.3 |
| 170 | 18.0 |
| 180 | 18.7 |

# CHAPTER 4I. PEDESTRIAN CONTROL FEATURES

## Section 4I.01 Pedestrian Signal Heads

Support:

01 Pedestrian signal heads provide special types of traffic signal indications exclusively intended for controlling pedestrians. These signal indications consist of the illuminated symbols of a WALKING PERSON (symbolizing WALK) and an UPRAISED HAND (symbolizing DONT WALK).

02 Section 4D.02 contains information on when to use pedestrian signal heads.

03 Accessible pedestrians signals (see Chapter 4K) where pedestrian signal heads are used provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to cross the street.

04 Chapter 4J contains information regarding the use of pedestrian hybrid beacons and Chapter 4U contains information regarding the use of In-Roadway Warning Lights at unsignalized marked crosswalks.

## Section 4I.02 Size, Design, and Illumination of Pedestrian Signal Head Indications

**Standard:**

01 **All new pedestrian signal head indications shall be displayed within a rectangular background and shall consist of symbolized messages (see Figure 4I-1), except that existing pedestrian signal head indications with lettered or outline style symbol messages shall be permitted to be retained for the remainder of their useful service life. The symbol designs that are set forth in the "Standard Highway Signs" publication (see Section 1A.05) shall be used. Each pedestrian signal head indication shall be independently displayed and emit a single color.**

02 **If a two-section pedestrian signal head is used, the UPRAISED HAND (symbolizing DONT WALK) signal section shall be mounted directly above the WALKING PERSON (symbolizing WALK) signal section. If a one-section pedestrian signal head is used, the symbols shall be either overlaid upon each other or arranged side-by-side with the UPRAISED HAND symbol to the left of the WALKING PERSON symbol, and a light source that can display each symbol independently shall be used.**

03 **The WALKING PERSON (symbolizing WALK) signal indication shall be white, with all except the symbol obscured by an opaque material for signal optical units that use incandescent lamps within optical assemblies that include lenses. The UPRAISED HAND (symbolizing DONT WALK) signal indication shall be Portland orange, with all except the symbol obscured by an opaque material for signal optical units that use incandescent lamps within optical assemblies that include lenses.**

04 **Except as provided in Paragraph 5 of this Section, the requirements of Chapter 3 of the publication entitled "Equipment and Materials Standards of the Institute of Transportation Engineers," 2008, ITE, that pertain to the aspects of the pedestrian signal head design that affect the display of the signal indications shall be met for signal optical units that use incandescent lamps within optical assemblies that include lenses. Except as provided in Paragraph 5 of this Section, the requirements of the publication entitled "Pedestrian Traffic Control Signal Indicators – Light Emitting Diode (LED) Signal Modules," 2011, ITE, that pertain to the aspects of the signal head design that affect the display of the signal indications shall be met for light-emitting diode (LED) pedestrian signal head modules.**

*Guidance:*

05 *The intensity and distribution of light from each illuminated pedestrian signal lens or LED pedestrian signal head module should comply with the publications specified in Paragraph 4 of this Section, as appropriate.*

06 *When not illuminated, the WALKING PERSON (symbolizing WALK) and UPRAISED HAND (symbolizing DONT WALK) symbols should not be visible to pedestrians at the far end of the crosswalk that the pedestrian signal head indications control.*

**Standard:**

07 **For pedestrian signal head indications, the symbols shall be at least 6 inches high.**

08 **The light source of a flashing UPRAISED HAND (symbolizing DONT WALK) signal indication shall be flashed continuously at a rate of not less than 50 or more than 60 times per minute. The displayed period of each flash shall be a minimum of ½ and a maximum of ⅔ of the total flash cycle.**

*Guidance:*

09 *Pedestrian signal head indications should be conspicuous and recognizable to pedestrians at all distances from the beginning of the controlled crosswalk to a point 10 feet from the end of the controlled crosswalk during both day and night.*

10 *For crosswalks where the pedestrian enters the crosswalk more than 100 feet from the pedestrian signal head indications, the symbols should be at least 9 inches high.*

11 *If the pedestrian signal indication is so bright that it causes excessive glare in nighttime conditions, some form of automatic dimming should be used to reduce the brilliance of the signal indication.*

Option:

12 An animated eyes symbol may be added to a pedestrian signal head in order to prompt pedestrians to look for vehicles in the intersection during the time that the WALKING PERSON (symbolizing WALK) signal indication is displayed.

**Standard:**

13 **If used, the animated eyes symbol shall consist of an outline of a pair of white steadily illuminated eyes with white eyeballs that scan from side to side at a rate of approximately once per second. The animated eyes symbol shall be at least 12 inches wide with each eye having a width of at least 5 inches and a height of at least 2.5 inches. The animated eyes symbol shall be illuminated at the start of the walk interval and shall terminate at the end of the walk interval.**

## Section 4I.03 Location and Height of Pedestrian Signal Heads

**Standard:**

01 **Pedestrian signal heads shall be mounted with the bottom of the signal housing including brackets not less than 7 feet or more than 10 feet above sidewalk level, and shall be positioned and adjusted to provide maximum visibility at the beginning of the controlled sidewalk.**

*Guidance:*

02 *If pedestrian signal heads are mounted on the same support as vehicular signal heads, there should be a physical separation between them.*

## Section 4I.04 Countdown Pedestrian Signals

**Standard:**

01 **All pedestrian signal heads used at crosswalks where the pedestrian change interval is more than 7 seconds shall include a pedestrian change interval countdown display in order to inform pedestrians of the number of seconds remaining in the pedestrian change interval.**

Option:

02 Pedestrian signal heads used at crosswalks where the pedestrian change interval is 7 seconds or less may include a pedestrian change interval countdown display in order to inform pedestrians of the number of seconds remaining in the pedestrian change interval.

**Standard:**

03 **Where countdown pedestrian signals are used, the countdown shall always be displayed simultaneously with the flashing UPRAISED HAND (symbolizing DONT WALK) signal indication displayed for that crosswalk.**

04 **Countdown pedestrian signals shall consist of Portland orange numbers that are at least 6 inches in height on a black opaque background. The countdown pedestrian signal shall be located immediately adjacent to the associated UPRAISED HAND (symbolizing DONT WALK) pedestrian signal head indication (see Figure 4I-1).**

05 **The display of the number of remaining seconds shall begin only at the beginning of the pedestrian change interval (flashing UPRAISED HAND). After the countdown displays zero, the display shall remain dark until the beginning of the next countdown.**

06 **The countdown pedestrian signal shall display the number of seconds remaining until the termination of the pedestrian change interval (flashing UPRAISED HAND). Countdown displays shall not be used during the walk interval. Countdown displays shall not be used during the red clearance interval of a concurrent vehicular phase. that is ending simultaneously with or after the end of the pedestrian phase.**

*Guidance:*

07 *If used with a pedestrian signal head that does not have a concurrent vehicular phase, the pedestrian change*

*interval (flashing UPRAISED HAND) should be set to be approximately 4 seconds less than the required pedestrian clearance time (see Section 4I.06) and an additional clearance interval (during which a steady UPRAISED HAND is displayed) should be provided prior to the start of the conflicting vehicular phase.*

08 *For crosswalks where the pedestrian enters the crosswalk more than 100 feet from the countdown pedestrian signal display, the numbers should be at least 9 inches in height.*

09 *Because some technology includes the countdown pedestrian signal logic in a separate timing device that is independent of the timing in the traffic signal controller, care should be exercised by the engineer when timing changes are made to pedestrian change intervals.*

10 *If the pedestrian change interval is interrupted or shortened as a part of a transition into a preemption sequence (see Section 4F.19), the countdown pedestrian signal display should be discontinued and go dark immediately upon activation of the preemption transition.*

Support:

11 Refer to Section 9E.12 for countdown pedestrian signals, when used with bicycle boxes.

## Section 4I.05 Pedestrian Detectors

Option:

01 Pedestrian detectors may be push buttons or passive detection devices.

Support:

02 Passive detection devices register the presence of a pedestrian in a position indicative of a desire to cross, without requiring the pedestrian to push a button. Some passive detection devices are capable of tracking the progress of a pedestrian as the pedestrian crosses the roadway for the purpose of extending or shortening the duration of certain pedestrian timing intervals.

03 The provisions in this Section place pedestrian push buttons within easy reach of pedestrians who are intending to cross each crosswalk and make it obvious which push button is associated with each crosswalk. These provisions also position push button poles in optimal locations for installation of accessible pedestrian signals (see Chapter 4K). Information regarding reach ranges can be found in the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.

*Guidance:*

04 *If pedestrian push buttons are used, they should be capable of easy activation requiring no more than 5 pounds of force, should not require tight grasping, pinching, or twisting of the wrist, and should be conveniently located near each end of the crosswalks. Except as provided in Paragraphs 5 and 6 of this Section, pedestrian push buttons should be located to meet all of the following criteria (see Figure 4I-2):*

- *A. Unobstructed and accessible within one or more of the reach ranges specified in Section 308, and from a clear ground space as specified in Section 305, of the 2010 ADA Standards for Accessible Design;*
- *B. To provide a wheelchair accessible route from the push button to the ramp;*
- *C. On the side of the curb ramp which is farthest from the center of the intersection;*
- *D. Not greater than 10 feet from the edge of the associated curb ramp which is farther from the center of the intersection;*
- *E. Not greater than 5 feet from the outside edge of the marked crosswalk farthest from the center of the intersection;*
- *F. Not farther from the crosswalk than the stop line is, if present;*
- *G. Between 1.5 and 6 feet from the face of the curb or from the outside edge of the shoulder (or if no shoulder exists, from the edge of the pavement);*
- *H. With the face of the push button parallel to the crosswalk to be used;*
- *I. At a mounting height of approximately 3.5 feet, but no more than 4 feet, above the sidewalk;*
- *J. Allowing a minimum 4-foot continuous clear width for a pedestrian access route; and*
- *K. Outside the flared side of the curb ramp, if present.*

05 *Where there are physical constraints that make it impracticable to place the pedestrian push button adjacent to a level all-weather surface, the surface should be as level as feasible.*

06 *Where there are physical constraints that make it impracticable to place the pedestrian push button between 1.5 and 6 feet from the face of the curb or from the outside edge of the shoulder (or if no shoulder exists, from the edge of the pavement), it should not be farther than 10 feet from the face of the curb or from the outside edge of the shoulder (or if*

*no shoulder exists, from the edge of the pavement).*

07 *Except as provided in Paragraph 8 of this Section, where two pedestrian push buttons are provided on the same corner of a signalized location, the push buttons should be separated by a distance of at least 10 feet.*

Option:

08 Where there are physical constraints on a particular corner that make it impracticable to provide the 10-foot separation between the two pedestrian push buttons the push buttons may be placed closer together or on the same pole.

Support:

09 Figure 4I-3 shows typical pedestrian push button locations for a variety of situations.

**Standard:**

10 **If a pedestrian push button is provided, a sign (see Section 2B.58) shall also be installed ~~adjacent to~~ immediately above the pedestrian push button detector explaining the purpose and use.**

Option:

11 At certain locations, a supplemental sign in a more visible location may be used to call attention to the pedestrian push button.

**Standard:**

12 **The positioning of pedestrian push buttons and the legends on the pedestrian push button signs shall indicate which crosswalk signal is actuated by each pedestrian push button.**

13 **If the pedestrian clearance time is sufficient only to cross from the curb or shoulder to a median of sufficient width for pedestrians to wait and the signals are pedestrian actuated, an additional pedestrian detector shall be provided in the median.**

*Guidance:*

14 *The use of additional pedestrian detectors on islands or medians where a pedestrian might become stranded should be considered.*

15 *If used, special purpose push buttons (to be operated only by authorized persons) should include a housing capable of being locked to prevent access by the general public and do not need an instructional sign.*

**Standard:**

16 **If used, a pilot light or other means of indication installed with a pedestrian push button shall not be illuminated until actuation. Once it is actuated, the pilot light shall remain illuminated until the pedestrian's green or WALKING PERSON (symbolizing WALK) signal indication is displayed.**

Option:

17 At signalized locations with a demonstrated need and subject to equipment capabilities, pedestrians with special needs may be provided with additional crossing time by means of an extended push button press.

**Standard:**

18 **If additional crossing time is provided by means of an extended push button press, a PUSH BUTTON FOR 2 SECONDS FOR EXTRA CROSSING TIME (R10-32P) plaque (see Figure 2B-27) shall be installed adjacent to the pedestrian push button detector.**

## Section 4I.06 Pedestrian Intervals and Signal Phases

**Standard:**

01 **At intersections equipped with pedestrian signal heads, the pedestrian signal indications shall be displayed except when the vehicular traffic control signal is being operated in the flashing mode. At those times, the pedestrian signal indications shall not be displayed.**

02 **Except as provided in Paragraph 3 of Section 4J.03, when the pedestrian signal heads associated with a crosswalk are displaying either a steady WALKING PERSON (symbolizing WALK) or a flashing UPRAISED HAND (symbolizing DONT WALK) signal indication, a steady red signal indication shall be shown to any conflicting vehicular movement that is approaching the intersection or midblock location perpendicular or nearly perpendicular to the crosswalk.**

03 **When pedestrian signal heads are used, a WALKING PERSON (symbolizing WALK) signal indication shall be displayed only when pedestrians are permitted to leave the curb or shoulder.**

04 **A pedestrian change interval consisting of a flashing UPRAISED HAND (symbolizing DONT WALK) signal indication shall begin immediately following the WALKING PERSON (symbolizing WALK) signal indication except as provided in Section 4F.19. Following the pedestrian change interval, a buffer interval consisting of a**

**steady UPRAISED HAND (symbolizing DONT WALK) signal indication shall be displayed for at least 2 seconds prior to the release of any conflicting vehicular movement. The sum of the time of the pedestrian change interval and the buffer interval shall not be less than the calculated pedestrian clearance time (see Paragraphs 7 through 16 of this Section). The buffer interval shall not begin later than the beginning of the red clearance interval, if used.**

Option:

05 During the yellow change interval, the UPRAISED HAND (symbolizing DON'T WALK) signal indication may be displayed as either a flashing indication, a steady indication, or a flashing indication for an initial portion of the yellow change interval and a steady indication for the remainder of the interval.

Support:

06 Figure 4I-4 illustrates the pedestrian intervals and their possible relationships with associated vehicular signal phase intervals.

*Guidance:*

07 *Except as provided in Paragraph 8 of this Section, the pedestrian clearance time should be sufficient to allow a pedestrian crossing in the crosswalk who left the curb or edge of pavement at the end of the WALKING PERSON (symbolizing WALK) signal indication to travel at a walking speed of 3.5 feet per second to at least the far side of the traveled way or to a median of sufficient width for pedestrians to wait.*

Option:

08 A walking speed of up to 4 feet per second may be used to evaluate the sufficiency of the pedestrian clearance time at locations where an extended push button press function has been installed to provide slower pedestrians an opportunity to request and receive a longer pedestrian clearance time. Passive pedestrian detection may also be used to automatically adjust the pedestrian clearance time based on the pedestrian's actual walking speed or actual clearance of the crosswalk.

09 The additional time provided by an extended push button press to satisfy pedestrian clearance time needs may be added to either the walk interval or the pedestrian change interval.

*Guidance:*

10 *Where pedestrians who walk slower than 3.5 feet per second, or pedestrians who use wheelchairs, routinely use the crosswalk, a walking speed of less than 3.5 feet per second should be considered in determining the pedestrian clearance time.*

10a *Where older or disabled pedestrians routinely use the crosswalk, a walking speed of 2.8 feet per second should be considered in determining the pedestrian clearance time.*

11 *Except as provided in Paragraph 12 of this Section, the walk interval should be at least 7 seconds in length so that pedestrians will have adequate opportunity to leave the curb or shoulder before the pedestrian clearance time begins.*

Option:

12 If pedestrian volumes and characteristics do not require a 7-second walk interval, walk intervals as short as 4 seconds may be used.

Support:

13 The walk interval is intended for pedestrians to start their crossing. The pedestrian clearance time is intended to allow pedestrians who started crossing during the walk interval to complete their crossing. Longer walk intervals are often used when the duration of the vehicular green phase associated with the pedestrian crossing is long enough to allow it.

*Guidance:*

14 *The total of the walk interval and pedestrian clearance time should be sufficient to allow a pedestrian crossing in the crosswalk who left the pedestrian detector (or, if no pedestrian detector is present, a location 6 feet behind the face of the curb or 6 feet behind the edge of the pavement) at the beginning of the WALKING PERSON (symbolizing WALK) signal indication to travel at a walking speed of 3 feet per second to the far side of the traveled way being crossed or to the median if a two-stage pedestrian crossing sequence is used. Any additional time that is required to satisfy the conditions of this paragraph should be added to the walk interval.*

Option:

15 On a street with a median of sufficient width for pedestrians to wait, a pedestrian clearance time that allows the pedestrian to cross only from the curb or shoulder to the median may be provided.

**Standard:**

16 **Where the pedestrian clearance time is sufficient only for crossing from the curb or shoulder to a median of sufficient width for pedestrians to wait, median-mounted pedestrian signals, with pedestrian detectors (see Sections 4I.05 and 4K.01) if actuated operation is used, shall be provided and signing such as the R10-3d sign (see Section 2B.58) shall be provided to notify pedestrians to cross only to the median to await the next WALKING PERSON (symbolizing WALK) signal indication.**

Support:

17 Accessible pedestrian signals (see Chapter 4K) where median-mounted pedestrian signals and detectors are used provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to resume crossing the street after crossing to the median.

Option:

18 During the transition into preemption, the walk interval and the pedestrian change interval may be shortened or omitted as described in Section 4F.19.

19 At intersections with high pedestrian volumes and high conflicting turning vehicle volumes, a brief leading pedestrian interval, during which an advance WALKING PERSON (symbolizing WALK) indication is displayed for the crosswalk while red indications continue to be displayed to parallel through and/or turning traffic, may be used to reduce conflicts between pedestrians and turning vehicles.

Support:

20 Accessible pedestrian signals (see Chapter 4K) where leading pedestrian intervals are used provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to cross the street in the absence of the audible cues normally provided when the onset of the vehicular and pedestrian movements coincide.

21 If a leading pedestrian interval is used without accessible features, pedestrians with vision disabilities might begin crossing at the onset of the vehicular movement when vehicle operators are not expecting them to begin crossing.

*Guidance:*

22 *If a leading pedestrian interval is used, it should be at least 3 seconds in duration and should be timed to allow pedestrians to cross at least one lane of traffic or, in the case of a large corner radius, to travel far enough for pedestrians to establish their position ahead of the turning traffic before the turning traffic is released.*


23 *If a leading pedestrian interval is used, consideration should be given to prohibiting turns across the crosswalk during the leading pedestrian interval.*

24 *At locations where a leading pedestrian interval is used, the minimum time for the WALKING PERSON (symbolizing WALK) indication should be the time provided for the leading pedestrian interval plus 7 seconds.*


Support:

25 At intersections with pedestrian volumes that are so high that drivers have difficulty finding an opportunity to turn across the crosswalk, the duration of the green interval for a parallel concurrent vehicular movement is sometimes intentionally set to extend beyond the pedestrian clearance time to provide turning drivers additional green time to make their turns while the pedestrian signal head is displaying a steady UPRAISED HAND (symbolizing DONT WALK) signal indication after pedestrians have had time to complete their crossings.

## Figure 4I-1. Typical Pedestrian Signal Indications

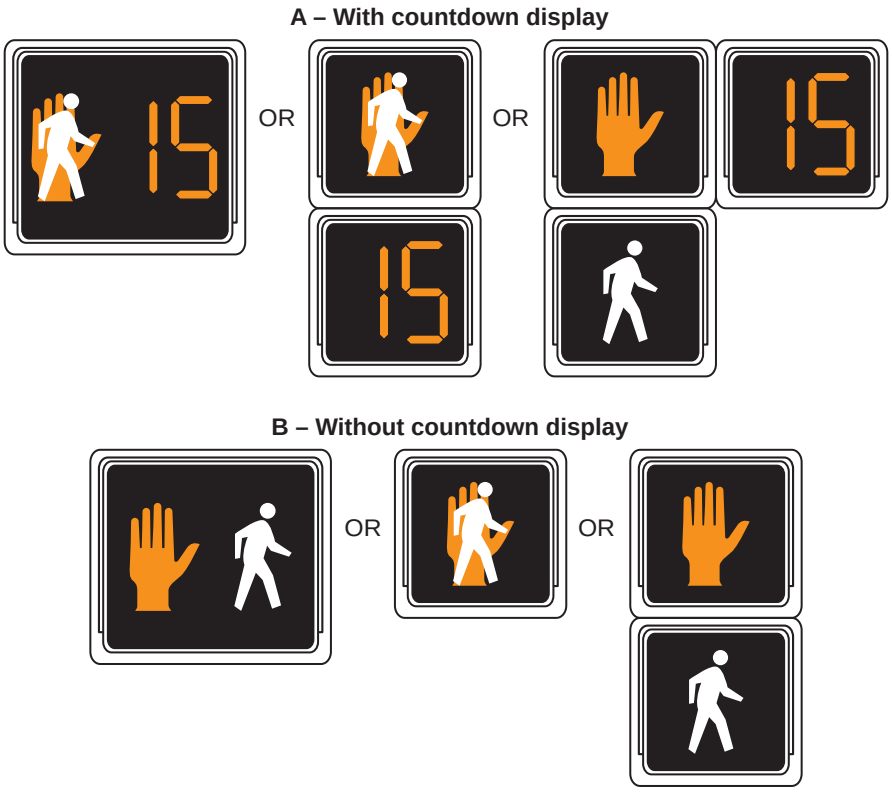



## Figure 4I-2. Preferred Push Button Location Area

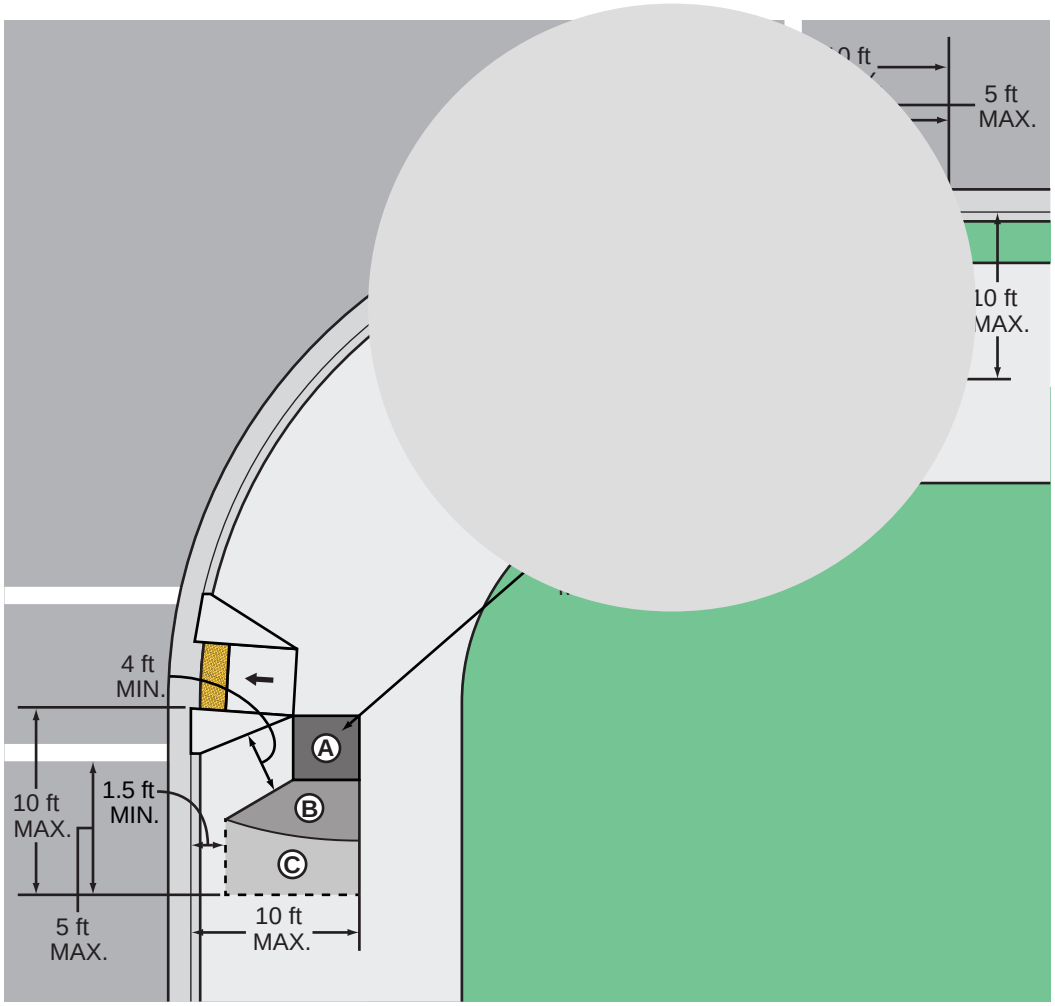


Notes:


1. The push button detector should be located 5 feet or less from the outside edge of the marked crosswalk farthest from the intersection.
2. The push button detector should be located no farther from the crosswalk than the stop line, if one is present.
3. A 4-foot minimum unobstructed pedestrian access route should be maintained.
4. The maximum (MAX.) and minimum (MIN.) dimensions shown in this figure are recommendations.
5. Two pedestrian push buttons on the same corner should be separated by at least 10 feet. The 10-foot dimension shown in this figure is in reference to the placement of the push buttons within their respective areas.
6. Figure 4I-3 shows typical push button locations.
7. This figure is not drawn to scale.
8. Refer to California Building Code (CBC) Section 11B-101 et seq, Code of Federal Regulation (28 CFR 35.151; and the 2004 ADAAG at 36 CFR part 1191, appendices B and D), Americans with Disabilities Act (ADA) for placement of pedestrian pushbuttons.



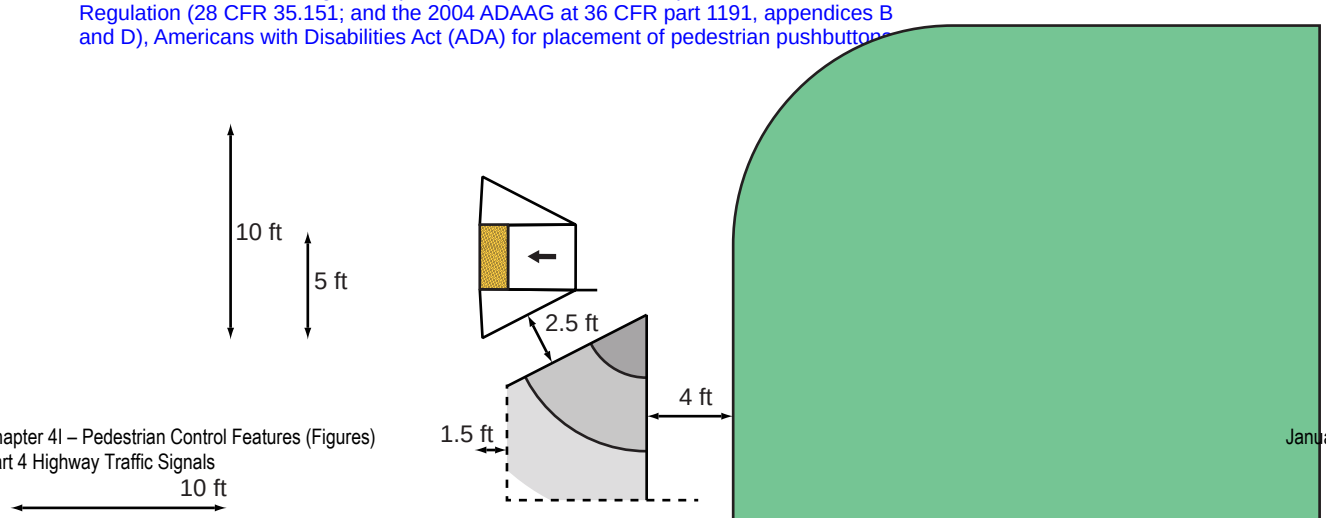



# Figure 4I-3. Typical Push Button Locations


**A – Perpendicular curb ramps with crosswalks close together**

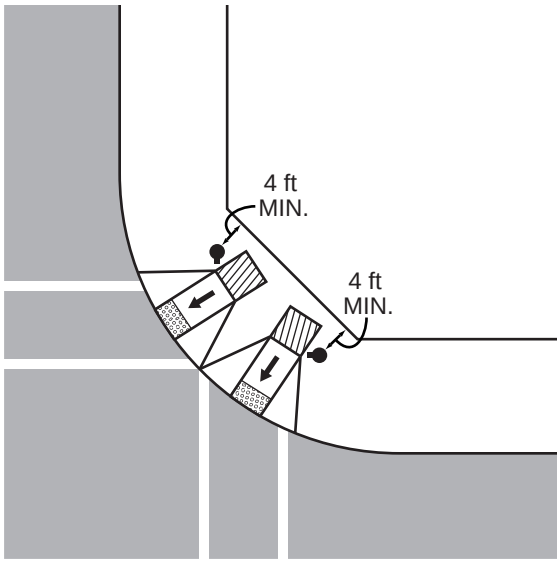



**B – Parallel curb ramps**

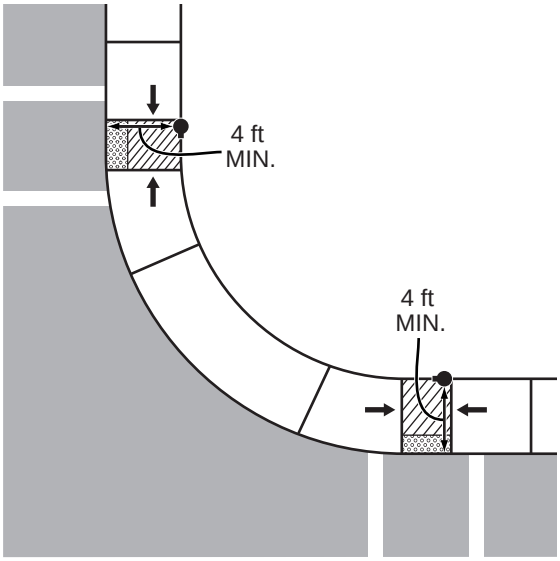


**C – Perpendicular curb ramps with shared landing area**

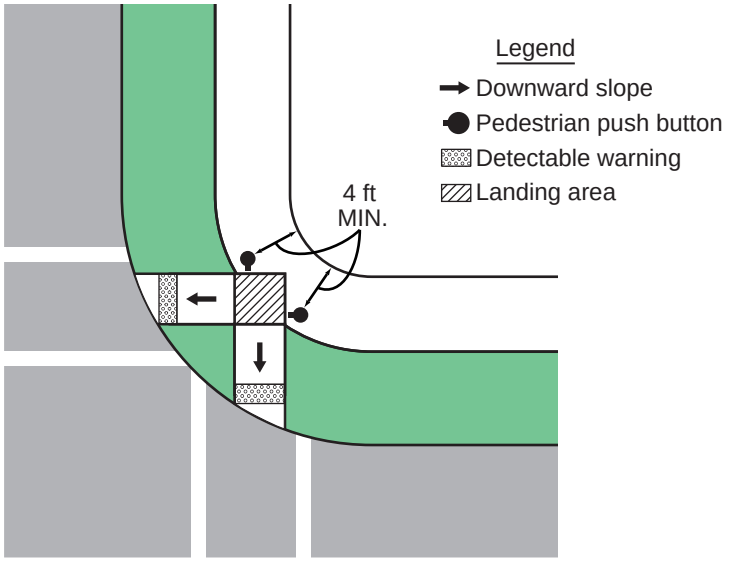



**D – Perpendicular curb ramps with continuous surface between ramps**

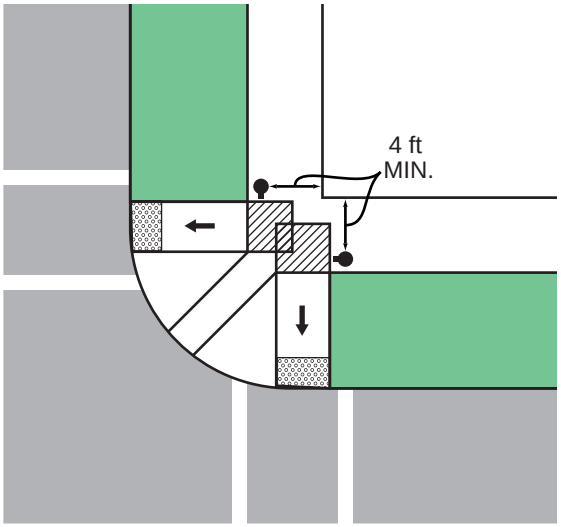


Notes:

1. This figure is not drawn to scale.
2. These drawings are intended to describe the typical locations for pedestrian push button installations. They are not intended to be a guide for the design of curb ramps.
3. Refer to California Building Code (CBC) Section 11B-101 et seq, Code of Federal Regulation (28 CFR 35.151; and the 2004 ADAAG at 36 CFR part 1191, appendices B and D), Americans with Disabilities Act (ADA) for placement of pedestrian pushbuttons.

## Figure 4I-4. Pedestrian Intervals

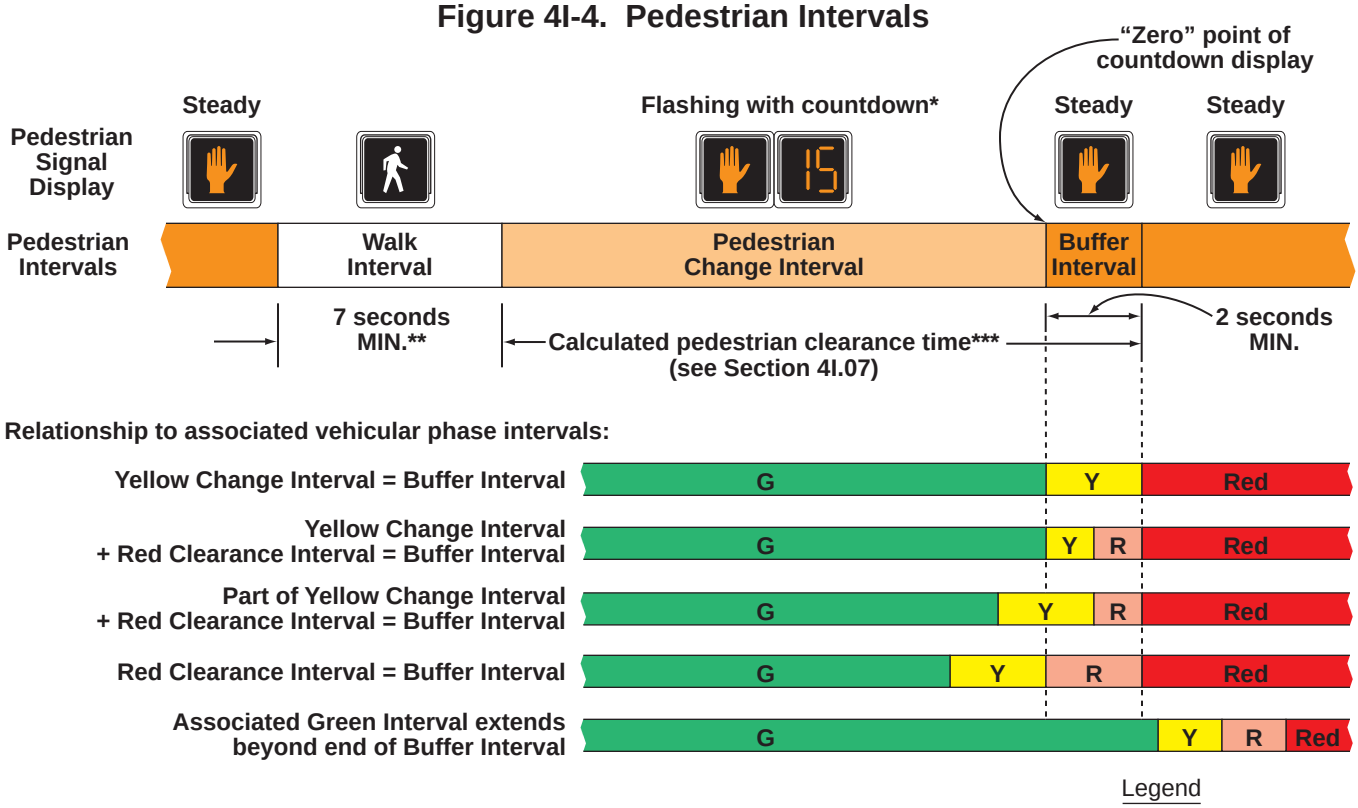


* The countdown display is optional for Pedestrian Change Intervals of 7 seconds or less.

** The Walk Interval may be reduced under some conditions (see Section 4I.07)****.

*** The Buffer Interval, which shall always be provided and displayed, may be used to help satisfy the calculated pedestrian clearance time, or may begin after the calculated pedestrian clearance time has ended.

**** Refer to FHWA's List of Known Errors for error in the note. Refer to Section 1A.04 for more details

Legend

**G** = Green Interval
**Y** = Yellow Change Interval (of at least 3 seconds)
**R** = Red Clearance Interval
**Red** = Red because conflicting traffic has been released

# CHAPTER 4J. PEDESTRIAN HYBRID BEACONS

## Section 4J.01 Application of Pedestrian Hybrid Beacons

Support:

01 A pedestrian hybrid beacon is a special type of hybrid beacon used to warn and control traffic at an unsignalized location to assist pedestrians in crossing a street or highway at a marked crosswalk.

01a A conventional traffic control signal operation with a standard signal face displaying green, yellow and red (steady and/or flashing red) indications, at a mid-block crosswalk is an alternative to the pedestrian hybrid beacon.

Option:

02 A pedestrian hybrid beacon may be considered for installation to facilitate pedestrian crossings at a location that does not meet traffic signal warrants (see Chapter 4C), or at a location that meets traffic signal warrants under Sections 4C.05 and/or 4C.06 but a decision is made to not install a traffic control signal.

**Standard:**

03 **If used, pedestrian hybrid beacons shall be used in conjunction with signs and pavement markings (see Section 4J.02) to warn and control traffic at locations where pedestrians enter or cross a street or highway. A pedestrian hybrid beacon shall only be installed at a marked crosswalk.**

*Guidance:*

04 *If one of the signal warrants of Chapter 4C is met and a traffic control signal is justified by an engineering study, and if a decision is made to install a traffic control signal, it should be installed based upon the provisions of Chapters 4D through 4I and 4K.*

05 *If a traffic control signal is not justified under the signal warrants of Chapter 4C and if gaps in traffic are not adequate to permit pedestrians to cross, or if the speed for vehicles approaching on the major street is too high to permit pedestrians to cross, or if pedestrian delay is excessive, the need for a pedestrian hybrid beacon should be considered on the basis of an engineering study that considers major-street volumes, speeds, widths, and gaps in conjunction with pedestrian volumes, walking speeds, and delay.*

06 *For a major street where the posted or statutory speed limit or the 85th-percentile speed is 35 mph or less, the need for a pedestrian hybrid beacon should be considered if the engineering study finds that the plotted point representing the vehicles per hour on the major street (total of both approaches) and the corresponding total of all pedestrians crossing the major street for 1 hour (any four consecutive 15-minute periods) of an average day falls above the applicable curve in Figure 4J-1 for the length of the crosswalk.*

07 *For a major street where the posted or statutory speed limit or the 85th-percentile speed exceeds 35 mph, the need for a pedestrian hybrid beacon should be considered if the engineering study finds that the plotted point representing the vehicles per hour on the major street (total of both approaches) and the corresponding total of all pedestrians crossing the major street for 1 hour (any four consecutive 15-minute periods) of an average day falls above the applicable curve in Figure 4J-2 for the length of the crosswalk.*

08 *For crosswalks that have lengths other than the four that are specifically shown in Figures 4J-1 and 4J-2, the values should be interpolated between the curves.*

Option:

09 The criteria for the pedestrian volume crossing the major street shown in Figures 4J-1 and 4J-2 may be reduced as much as 50 percent if the 15th-percentile crossing speed of pedestrians is less than 3.5 feet per second.

10 Where there is a divided street having a median of sufficient width for pedestrians to wait, the criteria for the major-street traffic volume shown in Figures 4J-1 and 4J-2 may be applied separately to each direction of vehicular traffic.

## Section 4J.02 Design of Pedestrian Hybrid Beacons

**Standard:**

01 **Except as otherwise provided in this Section, a pedestrian hybrid beacon shall meet the provisions of Chapters 4D through 4G, 4I, and 4J.**

02 **A pedestrian hybrid beacon face shall consist of three signal sections, with a CIRCULAR YELLOW signal indication centered below two horizontally-aligned CIRCULAR RED signal indications (see Figure 4J-3).**

03 **When an engineering study finds that installation of a pedestrian hybrid beacon is justified, then:**

**A. At least two pedestrian hybrid beacon faces shall be installed for each approach of the major street;**

**B. A stop line shall be installed for each approach to the crosswalk;**

**C. A pedestrian signal head complying with the provisions set forth in Chapter 4I shall be installed at each end of the marked crosswalk;**

**D. The pedestrian hybrid beacon shall be pedestrian actuated; and**

**E. If the pedestrian hybrid beacon is installed at or immediately adjacent to an intersection with a minor street, a STOP sign shall be installed for each minor-street approach.**

*Guidance:*

04 *When an engineering study finds that installation of a pedestrian hybrid beacon is justified, then:*

*A. Parking and other sight obstructions should be prohibited for at least 100 feet in advance of and at least 20 feet beyond the marked crosswalk, or site accommodations should be made through curb extensions or other techniques to provide adequate sight distance; and*

*B. If installed within a signal system, the pedestrian hybrid beacon should be coordinated.*

05 *On approaches having posted or statutory speed limits or 85th-percentile speeds in excess of 35 mph and on approaches having traffic or operating conditions that would tend to obscure visibility of roadside hybrid beacon face locations, both of the minimum of two pedestrian hybrid beacon faces should be installed over the roadway.*

06 *On multi-lane approaches having posted or statutory speed limits or 85th-percentile speeds of 35 mph or less, either a pedestrian hybrid beacon face should be installed on each side of the approach (if a median of sufficient width exists) or at least one of the pedestrian hybrid beacon faces should be installed over the roadway.*

07 *A pedestrian hybrid beacon should comply with the signal face location provisions described in Sections 4D.05 through 4D.10.*

Option:

08 A CROSSWALK—STOP ON RED (symbolic circular red) (R10-23) or a STOP ON STEADY RED—YIELD ON FLASHING RED AFTER STOP (R10-23a) sign (see Section 2B.59) may be installed facing each major street approach.

Support:

08a Refer to FHWA's List of Known Errors for error in Paragraph 8 text. Refer to Section 1A.04 for more details.

Option:

09 A W11-2 (Pedestrian), S1-1 (School), or W11-15 (Trail) crossing warning sign with an AHEAD (W16-9P) supplemental plaque may be placed in advance of a pedestrian hybrid beacon. A Warning Beacon may be installed to supplement the W11-2, S1-1, or W11-15 sign.

10 Backplates (see Section 4D.06) may be used with pedestrian hybrid beacons.

Support:

11 Accessible pedestrian signals (see Chapter 4K) where a pedestrian hybrid beacon is used provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to cross the street.

*Guidance:*

12 *If a Warning Beacon supplements a W11-2 sign in advance of a pedestrian hybrid beacon, it should be programmed to flash only when the pedestrian hybrid beacon is not in the dark mode.*

**Standard:**

13 **If a Warning Beacon is installed to supplement the W11-2 sign, the design and location of the Warning Beacon shall comply with the provisions of Sections 4S.01 and 4S.03.**

14 **Bicycle signal faces (see Chapter 4H) shall not be used at a pedestrian hybrid beacon.**

## Section 4J.03 Operation of Pedestrian Hybrid Beacons

**Standard:**

01 **Pedestrian hybrid beacon indications shall be dark (not illuminated) during periods between actuations.**

02 **Following an actuation by a pedestrian, a pedestrian hybrid beacon face shall display a flashing CIRCULAR YELLOW signal indication, followed by a steady CIRCULAR YELLOW signal indication, followed by both steady CIRCULAR RED signal indications during the pedestrian walk interval, followed by alternating flashing CIRCULAR RED signal indications during the pedestrian change interval (see Figure 4J-3). Upon termination of the pedestrian change interval, the pedestrian hybrid beacon faces shall revert to a dark (not illuminated) condition.**

03 **Except as provided in Paragraph 4 of this Section, the pedestrian signal heads shall continue to display a**

**steady UPRAISED HAND (symbolizing DONT WALK) signal indication when the pedestrian hybrid beacon faces are either dark or displaying flashing or steady CIRCULAR YELLOW signal indications. The pedestrian signal heads shall display a WALKING PERSON (symbolizing WALK) signal indication when the pedestrian hybrid beacon faces are displaying steady CIRCULAR RED signal indications. The pedestrian signal heads shall display a flashing UPRAISED HAND (symbolizing DONT WALK) signal indication when the pedestrian hybrid beacon faces are displaying alternating flashing CIRCULAR RED signal indications. Upon termination of the pedestrian change interval, the pedestrian signal heads shall revert to a steady UPRAISED HAND (symbolizing DONT WALK) signal indication.**

Option:

04 Where the pedestrian hybrid beacon is installed adjacent to a roundabout to facilitate crossings by pedestrians with vision disabilities and an engineering study determines that pedestrians without vision disabilities can be allowed to cross the roadway without actuating the pedestrian hybrid beacon, the pedestrian signal heads may be dark (not illuminated) when the pedestrian hybrid beacon faces are dark.

*Guidance:*

05 *The duration of the flashing yellow interval should be determined by engineering judgment.*

06 *The duration of the flashing yellow interval should not vary on a cycle-by-cycle basis.*

07 *If the pedestrian hybrid beacon is coordinated as a part of a signal system, it should remain in the dark condition after a pedestrian actuation has been received until the point in the background cycle when the predetermined duration of the flashing yellow interval needs to be initiated in order to achieve the appropriate coordinated offset.*

Option:

08 If a minimum dark time between activations of the pedestrian hybrid beacon has been set on the controller, the pedestrian hybrid beacon may remain in the dark condition after a pedestrian actuation has been received until the minimum dark time has been provided.

Support:

09 The minimum dark time is a preprogrammed time set in the controller that provides time between the pedestrian actuation and beginning of the flashing yellow interval. At locations in coordinated signal systems, the dark time can be variable based on when the pedestrian actuation occurs in the coordinated signal timing sequence.

**Standard:**

10 **The duration of the steady yellow change interval shall be determined using engineering practices in accordance with the provisions in Section 4F.17.**

*Guidance:*

11 *A steady yellow change interval should have a minimum duration of 3 seconds and a maximum duration of 6 seconds (see Section 4F.17). The longer intervals should be reserved for use on approaches with higher speeds.*

Option:

12 A steady red clearance interval may be used after the steady yellow change interval.

13 The alternating flashing CIRCULAR RED signal indications may continue to flash for a short period after the pedestrian change interval has terminated to provide a buffer interval for pedestrians.


*Guidance:*

14 *A pedestrian hybrid beacon that is located 200 feet or less from an active grade crossing should be preempted in accordance with the applicable provisions in Sections 4F.19 and 8D.09.*

**Standard:**


15 **If a pedestrian hybrid beacon is placed into a flashing mode by a conflict monitor (malfunction management unit) or by a manual switch, the pedestrian hybrid beacon faces shall display flashing CIRCULAR YELLOW signal indications to each approach of the major street and the pedestrian signal heads shall revert to a dark (not illuminated) condition.**

## Figure 4J-1. Guidelines for the Installation of Pedestrian Hybrid Beacons on Low-Speed Roadways

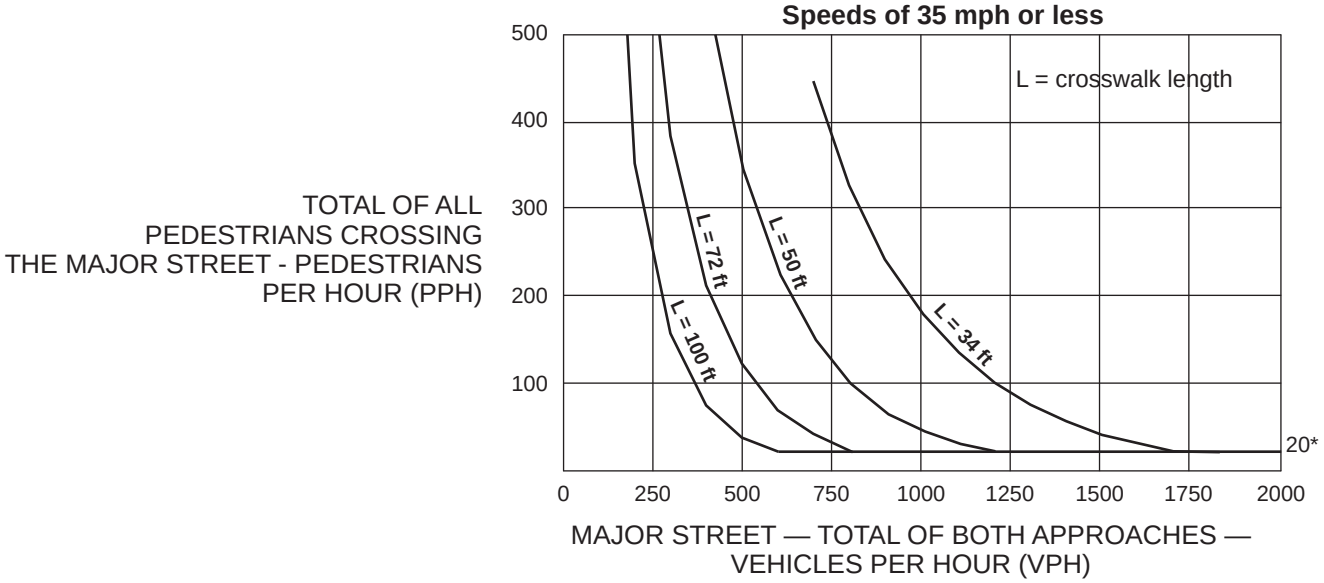



* Note: 20 pph applies as the lower threshold volume

## Figure 4J-2. Guidelines for the Installation of Pedestrian Hybrid Beacons on High-Speed Roadways

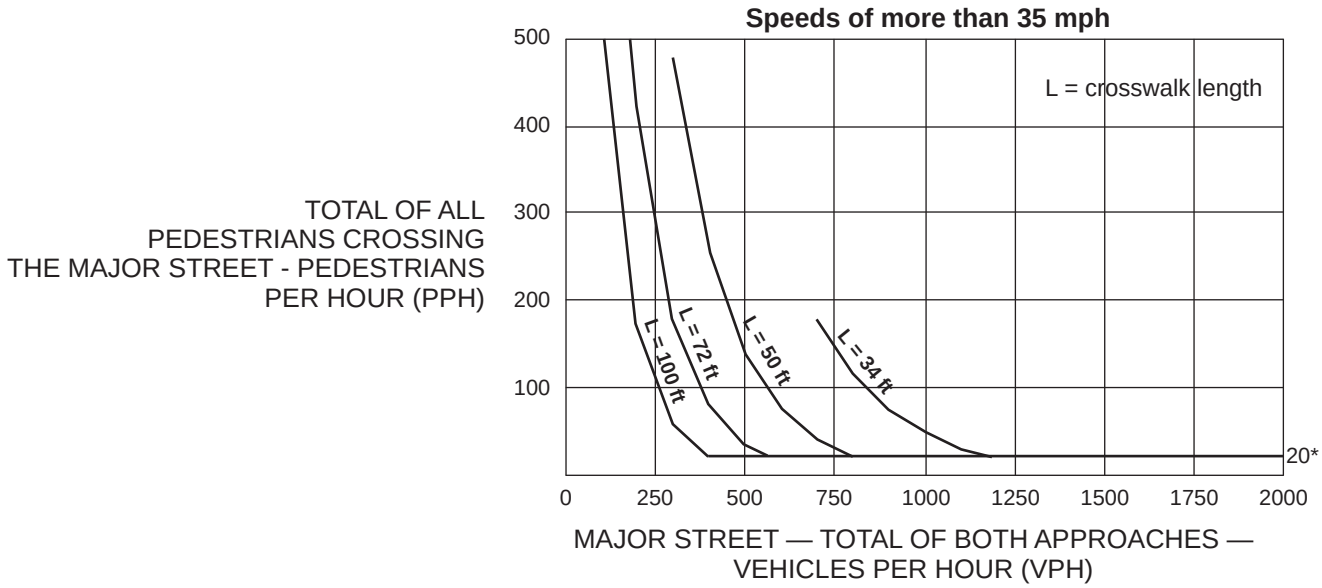


* Note: 20 pph applies as the lower threshold volume

## Figure 4J-3. Sequence for a Pedestrian Hybrid Beacon

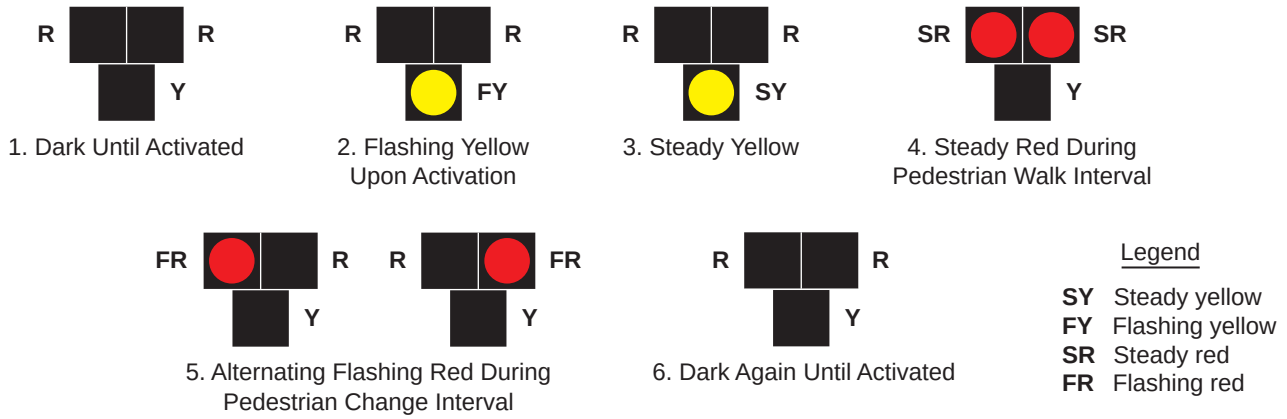


Note: An optional steady red clearance interval may be added after Interval 3, and an optional short buffer interval (alternating flashing red while the pedestrian signal heads are displaying a steady UPRAISED HAND) may be added after Interval 5.

# CHAPTER 4K. ACCESSIBLE PEDESTRIAN SIGNALS AND DETECTORS

## Section 4K.01 General

Support:

01 Accessible pedestrian signals and detectors provide information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces). The decision of when to use accessible pedestrian signals is subject to requirements of the Americans with Disabilities Act and Section 504 of the Rehabilitation Act of 1973.

02 The primary technique that pedestrians with vision disabilities use to cross streets at signalized locations is to initiate their crossing when they hear the traffic in front of them stop and the traffic alongside them begin to move, which often corresponds to the onset of the green interval. The existing environment is often not sufficient to provide the information that pedestrians with vision disabilities need to cross a roadway at a signalized location.

03 The following factors are relevant in determining whether a particular signalized location presents difficulties for pedestrians with vision disabilities to cross the roadway:

A. Potential demand for accessible pedestrian signals;
B. A request for accessible pedestrian signals;
C. Traffic volumes during times when pedestrians might be present, including periods of low traffic volumes or high turn-on-red volumes;
D. The complexity of the traffic signal phasing (such as split phases, protected turn phases, leading pedestrian intervals, and exclusive pedestrian phases); and
E. The complexity of the intersection geometry.

04 The factors that make crossing at a signalized location difficult for pedestrians with vision disabilities include: increasingly quiet vehicles, turns on red (which mask the beginning of the through phase), continuous turning movements, complex signal operations, circular intersections, and wide streets. In addition, low traffic volumes might make it difficult for pedestrians with vision disabilities to discern signal phase changes.

05 State and local organizations providing support services to pedestrians with vision and/or hearing disabilities can provide advice to the traffic engineer on site-specific accessibility decisions. In addition, orientation and mobility specialists or similar staff can provide advice to inform such decisions. The U.S. Access Board (www.access-board.gov) provides technical assistance for making pedestrian signal information accessible to persons with vision disabilities.

**Standard:**

06 **When used, accessible pedestrian signals shall be used in combination with pedestrian signal timing.**

07 **The information provided by an accessible pedestrian signal shall indicate which pedestrian crossing is served by each device.**

08 **Under steady (stop-and-go) operation, accessible pedestrian signals shall not be limited in operation by the time of day or day of week.**

Option:

09 Accessible pedestrian signal detectors may be push buttons or passive detection devices.

10 At locations with pretimed traffic control signals or non-actuated approaches, pedestrian push buttons may be used to activate the accessible pedestrian signals.

Support:

11 Accessible pedestrian signals are typically integrated into the pedestrian detector (push button), so the audible tones and/or messages come from the push button housing. They have a push button locator tone and a vibrotactile arrow, and can include audible beaconing and other special features.

Option:

12 The name of the street to be crossed may also be provided in accessible format, such as Braille or raised characters. Tactile maps of crosswalks may also be provided.

Support:

13 Specifications regarding Braille or raised characters can be found in the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.

**Standard:**

14 **At accessible pedestrian signal locations where pressing the pedestrian push button is necessary to activate the walk interval, pressing the pedestrian push button shall activate both the walk interval and the accessible pedestrian signals.**

Support:

15 Refer to California Building Code (CBC) § 11B-101 et seq, Code of Federal Regulation (28 CFR 35.151; and the 2004 ADAAG at 36 CFR part 1191, appendices B and D) and Americans with Disabilities Act (ADA) for non-passive accessible pedestrian signal detectors.

**Standard:**

16 **The tone of the walk signal shall not be similar to the push button locator tones.**

Option:

17 New signalized intersections and planned upgrades to signalized intersections that are equipped with pedestrian crosswalks as well as the following characteristics may be considered for accessible pedestrian signals when the need and viability are confirmed by an engineering study:

A. Intersections near blind centers and senior centers
B. Transit terminals
C. T-type intersections
D. Wide intersections
E. Intersections with unusual geometry
F. Skewed intersections
G. Mid-block crosswalks
H. Intersections with exclusive phasing
I. Intersections with leading pedestrian intervals
J. Intersections with frequent side street calls, and;
K. Intersections with high turning volumes
L. Pedestrian hybrid beacons
M. Rectangular Rapid Flashing Beacons

18 The installation of Accessible Pedestrian Signals may be considered when an engineering study and evaluation have been conducted and the following minimum conditions have been met:

A. The proposed intersection crosswalk must be signalized.
B. The audible devices should be retrofittable to the existing traffic signal hardware.
C. The signalized intersection should be equipped with pedestrian push buttons.
D. The selected crosswalk must be suitable for the installation of audible signals, in terms of surrounding land use and traffic patterns.
E. There must be a demonstrated need for the audible signals in the form of a request from an individual or group that would use the audible signal.
F. The individual or group requesting the device should agree to train the visually impaired users of the audible signals.

## Section 4K.02 Location

Support:

01 Accessible pedestrian signals that are located as close as possible to pedestrians waiting to cross the street provide the clearest and least ambiguous indication of which pedestrian crossing is served by a device.

*Guidance:*

02 *Push buttons for accessible pedestrian signals should be located in accordance with the provisions of Section 4I.05 and should be located as close as possible to the crosswalk line furthest from the center of the intersection and as close as possible to the curb ramp.*

**Standard:**

03 **Except for the situation regarding simultaneous walk indications for all crosswalks, if two accessible pedestrian push buttons are placed less than 10 feet apart or on the same pole (see Paragraphs 7 and 8 in Section 4I.05), each accessible pedestrian push button shall be provided with the following features:**

**A. A push button locator tone,**
**B. A vibrotactile walk indication,**
**C. A speech walk message for the WALKING PERSON (symbolizing WALK) indication (see Section 4K.03), and**
**D. A speech push button information message (see Section 4K.05).**

04 **If the pedestrian clearance time is sufficient only to cross from the curb or edge of pavement to a median of**

**sufficient width for pedestrians to wait and accessible pedestrian signal detectors are used, an additional accessible pedestrian signal detector shall be provided in the median.**

## Section 4K.03 Walk Indications

Support:

01 Technology that provides different sounds for each non-concurrent signal phase has frequently been found to provide ambiguous information. Research indicates that a rapid percussive tone for each crossing coming from accessible pedestrian signal devices on separated poles located close to each crosswalk provides unambiguous information to pedestrians with vision disabilities. Vibrotactile indications provide information to pedestrians who are blind and deaf and are also used by pedestrians who are blind or who have low vision to confirm the walk signal in noisy situations.

**Standard:**

02 **Accessible pedestrian signals shall have both audible and vibrotactile walk indications.**

03 **Vibrotactile walk indications shall be provided by a vibrotactile arrow that is located on the push button (see Paragraph 1 in Section 4K.04). The vibrotactile arrow shall vibrate during the walk interval.**

04 **Accessible pedestrian signals shall have an audible walk indication during the walk interval only.**

05 **The audible walk indication shall be audible at the beginning of the associated crosswalk. The accessible walk indication shall have the same duration as the pedestrian walk signal except when the pedestrian signal rests in walk.**

*Guidance:*

06 *If the pedestrian signal rests in walk, the accessible walk indication should be limited to the first 7 seconds of the walk interval. The accessible walk indication should be recalled by a button press during the walk interval provided that the crossing time remaining is longer than the pedestrian change interval.*

**Standard:**

07 **Where two accessible pedestrian signals on one corner, or in a median, that are associated with different phases are placed less than 10 feet apart, the audible walk indication shall be a speech walk message (see Paragraph 3 in Section 4K.02). In all other cases, including at midblock crossings, on corners where only one accessible pedestrian signal is present, in a median, and on corners where two accessible pedestrian signals are separated by a distance of at least 10 feet, the audible walk indication shall be a percussive tone.**

08 **Audible tone walk indications shall repeat at eight to ten ticks per second. Audible tones used as walk indications shall consist of multiple frequencies with a dominant component at 880 Hz.**

*Guidance:*

09 *The volume of audible walk indications and push button locator tones (see Section 4K.04) should be set to be a maximum of 5 dBA louder than ambient sound, except when audible beaconing is provided in response to an extended push button press.*

**Standard:**

10 **Automatic volume adjustment up to a maximum volume of 100 dBA in response to ambient traffic sound level shall be provided.**

*Guidance:*

11 *The sound level of audible walk indications and push button locator tones should be adjusted to be low enough to avoid misleading pedestrians with vision disabilities when the following conditions exist:*

*A. Where there is an island that allows unsignalized right turns across a crosswalk between the island and the sidewalk.*

*B. Where multi-leg approaches or complex signal phasing require more than two pedestrian phases, such that it might be unclear which crosswalk is served by each audible tone.*

*C. At intersections where a diagonal pedestrian crossing is allowed, or where one street receives a WALKING PERSON (symbolizing WALK) signal indication simultaneously with another street.*

Option:

12 An alert tone, which is a very brief burst of high-frequency sound at the beginning of the audible walk indication that rapidly decays to the frequency of the walk tone, may be used to alert pedestrians to the beginning of the walk interval.

Support:

13 An alert tone can be particularly useful if the walk tone is not easily audible in some traffic conditions.

14 Speech walk messages communicate to pedestrians which street has the walk interval. To be a useful system, the words and their meaning need to be correctly understood by all users in the context of the street environment where they are used. Because of this, tones are the preferred means of providing audible walk indications except where two accessible pedestrian signals on one corner are not separated by a distance of at least 10 feet.

15 If speech walk messages are used, pedestrians have to know the names of the streets that they are crossing in order for the speech walk messages to be unambiguous. In getting directions to travel to a new location, pedestrians with vision disabilities do not always get the name of each street to be crossed. Therefore, it is desirable to give users of accessible pedestrian signals the name of the street controlled by the push button. This can be done by means of a speech push button information message (see Section 4K.05) during the flashing or steady UPRAISED HAND intervals, or by raised print and Braille labels on the push button housing.

16 By combining the information from the push button message or Braille label, the vibrotactile arrow aligned in the direction of travel on the relevant crosswalk, and the speech walk message, pedestrians with vision disabilities are able to correctly respond to speech walk messages even if there are two push buttons on the same pole.

**Standard:**

17 **If speech walk messages are used to communicate the walk interval, they shall provide a clear message that the walk interval is in effect, as well as to which crossing it applies.**

*Guidance:*

18 *Speech walk messages that are used at intersections having pedestrian phasing that is concurrent with vehicular phasing should be patterned after the model: "Broadway. Walk sign is on to cross Broadway."*

19 *Speech walk messages that are used at intersections having exclusive pedestrian phasing should be patterned after the model: "Walk sign is on for all crossings."*

20 *Speech walk messages should not contain any additional information, except they should include designations such as "Street" or "Avenue" where this information is necessary to avoid ambiguity at a particular location.*

21 *Speech walk messages should not state or imply a command to the pedestrian, such as "Cross Broadway now." Speech walk messages should not tell pedestrians that it is "safe to cross," because it is always the pedestrian's responsibility to check actual traffic conditions.*

**Standard:**

22 **A speech walk message is not required at times when the walk interval is not timing, but, if provided:**

**A. It shall begin with the term "wait."**

**B. It need not be repeated for the entire time that the walk interval is not timing.**

23 **If a pilot light (see Section 4I.05) is used at an accessible pedestrian signal location, each actuation shall be accompanied by the speech message "wait."**

Option:

24 Accessible pedestrian signals that provide speech walk messages may provide similar messages in languages other than English, if needed.

**Standard:**

25 **If used, speech walk messages in a language other than English shall be stated first in English, and then repeated in the second language, alternating back and forth while the walk interval is timing.**

## Section 4K.04 Vibrotactile Arrows and Locator Tones

**Standard:**

01 **To enable pedestrians with vision disabilities to distinguish and locate the appropriate push button at an accessible pedestrian signal location, and to help them align with the crosswalk, each push button shall clearly indicate by means of a vibrotactile arrow which crosswalk signal is actuated by the push button. Vibrotactile arrows shall be located on the button of the push button assembly, shall have high visual contrast (light on dark or dark on light), and shall be aligned parallel to the direction of travel on the associated crosswalk.**

02 **A locator tone shall be incorporated into the accessible pedestrian signal equipment to help pedestrians with vision disabilities locate the vibrotactile arrow, and the associated push button if a push button is provided.**

Support:

03 A push button locator tone is a repeating sound that informs approaching pedestrians that a push button to actuate

pedestrian timing or receive additional information exists, and that enables pedestrians with vision disabilities to locate the push button.

**Standard:**

04 **Push button locator tones shall have a duration of 0.15 seconds or less, and except as provided in Paragraph 5 of this Section, push button locator tones shall repeat at 1-second intervals at all times that the audible walk indication is not active, including during the pedestrian change interval and during the time that the pedestrian signal is resting in walk (see Paragraph 6 in Section 4K.03).**

Option:

05 The push button locator tone may default to a deactivated mode during periods when the steady UPRAISED HAND (symbolizing DON'T WALK) signal indication is being displayed for the associated crosswalk if a passive pedestrian detection system is implemented that activates the locator tone at all times (other than when the audible walk indication is active) that a pedestrian is present within a 12-foot radius from the push button location. Where pedestrian facilities (such as sidewalks) are present, the passive detection requirement may be reduced such that it only applies to pedestrians who are on the pedestrian facilities within the 12-foot radius from the push button location.

**Standard:**

06 **Push button locator tones shall be deactivated when the traffic control signal or pedestrian hybrid beacon is operating in a flashing mode. This requirement shall not apply to traffic control signals or pedestrian hybrid beacons that are activated from a flashing or dark mode to a steady (stop- and-go) mode by pedestrian actuations.**

07 **Push button locator tones shall be intensity responsive to ambient sound.**

*Guidance:*

08 *Push button locator tones should be audible 6 to 12 feet from the push button, or to the building line, whichever is less.*

Support:

09 Section 4K.03 contains additional provisions regarding the volume and sound level of push button locator tones.

## Section 4K.05 Extended Push Button Press Features

Option:

01 Pedestrians may be provided with additional features such as increased crossing time, audible beaconing, or a speech push button information message as a result of an extended push button press.

**Standard:**

02 **If an extended push button press (see Paragraph 18 in Section 4I.05) is used to provide any additional feature(s), a push button press of less than one second shall actuate only the pedestrian timing and any associated accessible walk indication, and a push button press of one second or more shall actuate the pedestrian timing, any associated accessible walk indication, and any additional feature(s).**

03 **If additional crossing time is provided by means of an extended push button press, a PUSH BUTTON FOR 2 SECONDS FOR EXTRA CROSSING TIME (R10-32P) plaque (see Section 4I.05) shall be installed adjacent to the pedestrian push button detector.**

Support:

04 Audible beaconing is the use of an audible signal in such a way that pedestrians with vision disabilities can home in on the signal that is located on the far end of the crosswalk as they cross the street.

05 Not all crosswalks at an intersection need audible beaconing. Audible beaconing is not appropriate at locations with channelized turns or split phasing, because of the possibility of confusion.

*Guidance:*

06 *Audible beaconing should be considered following an engineering study at:*

- *A. Crosswalks longer than 70 feet, unless those crosswalks are divided by a median that has another accessible pedestrian signal with a locator tone;*
- *B. Crosswalks that are skewed;*
- *C. Intersections with irregular geometry, such as more than four legs;*
- *D. Crosswalks where audible beaconing is requested by a person with vision disabilities; or*
- *E. Other locations where a study indicates audible beaconing would be beneficial.*

07 *If audible beaconing is used, it should be initiated by an extended push button press.*

**Standard:**

08 **If audible beaconing is used, the volume of the push button locator tone during the pedestrian change interval of the called pedestrian phase shall be increased up to a maximum of 100 dBA, and shall come from a loudspeaker that is mounted at the far end of the crosswalk at a height of 7 to 10 feet above the pavement.**

*Guidance:*

09 *The audible beaconing loudspeaker mounted at the far end of the crosswalk should be within the width of the crosswalk.*

Support:

10 When the locator tone is active during the pedestrian change interval at a traffic control signal or pedestrian hybrid beacon where audible beaconing is used, the locator tone from the audible beaconing loudspeaker is at an elevated volume, while the locator tone from the accessible pedestrian signal is at its normal, quiet setting.

Option:

11 The sound level of the accessible pedestrian signal walk indication and subsequent push button locator tone may be increased by an extended push button press.

12 Speech push button information messages may provide intersection identification, as well as information about unusual intersection signalization and geometry, such as notification regarding exclusive pedestrian phasing, leading pedestrian intervals, split phasing, diagonal crosswalks, and medians or islands.

**Standard:**

13 **If speech push button information messages are made available by actuating the accessible pedestrian signal detector, they shall only be actuated when the walk interval is not timing. They shall begin with the term "Wait," followed by intersection identification information modeled after: "Wait to cross Broadway at Grand." If information on intersection signalization or geometry is also given, it shall follow the intersection identification information.**

*Guidance:*

14 *Speech push button information messages should not be used to provide landmark information or to inform pedestrians with vision disabilities about detours or temporary traffic control situations.*

Support:

15 Additional information on the structure and wording of speech push button information messages is included in the Institute of Transportation Engineers' "Electronic Toolbox for Making Intersections More Accessible for Pedestrians Who Are Blind or Visually Impaired."

# CHAPTER 4L. RECTANGULAR RAPID FLASHING BEACONS

## Section 4L.01 Application of Rectangular Rapid Flashing Beacons

Option:

01 A pedestrian-activated and/or bicyclist-activated rectangular rapid flashing beacon (RRFB) may be used to provide supplemental emphasis to pedestrian, school, and trail warning signs at marked crosswalks across uncontrolled approaches.

**Standard:**

02 **An RRFB shall only be installed to function as a Warning Beacon (see Section 4S.03). Except as otherwise provided in this Chapter, all other provisions of the MUTCD applicable to Warning Beacons shall apply to RRFBs.**

03 **An RRFB shall only be used to supplement a post-mounted W11-2 (Pedestrian), S1-1 (School), or W11-15 (Trail) crossing warning sign with a diagonal downward arrow (W16-7P) plaque, or an overhead-mounted W11-2, S1-1, or W11-15 crossing warning sign, located at or immediately adjacent to a marked crosswalk.**

04 **Except for crosswalks across the approach to or egress from a roundabout, or crosswalks across free-flow turn lanes separated by a channelizing island, an RRFB shall not be used for crosswalks across approaches controlled by YIELD signs, STOP signs, traffic control signals, or pedestrian hybrid beacons.**

Option:

05 An additional RRFB may be installed on that approach in advance of the crosswalk, as a Warning Beacon to supplement a W11-2 (Pedestrian), S1-1 (School), or W11-15 (Trail) crossing warning sign with an AHEAD (W16-9P) or distance (W16-2P or W16-2aP) plaque.

**Standard:**

06 **If an additional RRFB is installed on the approach in advance of the crosswalk, it shall be supplemental to and not a replacement for the RRFB at the crosswalk itself.**

## Section 4L.02 Design of Rectangular Rapid Flashing Beacons

**Standard:**

01 **Each RRFB unit shall consist of two rapidly-flashed rectangular-shaped yellow indications, each with an LED-array based pulsing light source. The size of each RRFB indication shall be at least 5 inches wide by at least 2 inches high.**

02 **The two RRFB indications for each RRFB unit shall be aligned horizontally, with the longer dimension horizontal and with a minimum space between the two indications of at least 7 inches, measured from nearest edge of one indication to the nearest edge of the other indication. The outside edges of the RRFB indications, including any housings, shall not project beyond the outside edges of the W11-2, S1-1, or W11-15 sign that it supplements.**

03 **An RRFB unit shall not be installed independent of the crossing warning signs for the approach that the RRFB faces. If the RRFB unit is supplementing a post-mounted sign, the RRFB unit shall be installed on the same support as the associated W11-2, S1-1, or W11-15 crossing warning sign and plaque. If the RRFB unit is supplementing an overhead-mounted sign, the RRFB unit shall be mounted directly above the top of sign or below the bottom of the sign.**

Option:

04 As a specific exception to Paragraph 6 of Section 4S.01, the RRFB unit associated with a post- mounted sign and plaque may be located between and immediately adjacent to the bottom of the crossing warning sign and the top of the supplemental downward diagonal arrow plaque (or, in the case of a supplemental advance sign, the AHEAD or distance plaque) or within 12 inches above the crossing warning sign, rather than the recommended minimum of 12 inches above or below the sign assembly.

05 Signal visors and backplates, with or without a yellow retroreflective strip, may be used with RRFB units based on provisions in Section 4D.06.

**Standard:**

06 **For any approach on which RRFBs are used to supplement post-mounted signs, at least two W11-2, S1-1, or W11-15 crossing warning signs (each with an RRFB unit and a W16-7P plaque) shall be installed at the crosswalk, one on the right-hand side of the roadway and one on the left-hand side of the roadway.**

*Guidance:*

07 *On a divided highway, the left-hand side RRFB assembly should be installed on the median, if practicable, rather than on the far left side of the highway.*

**Standard:**

08 **For any approach on which RRFBs are used to supplement an overhead-mounted sign, at least one W11-2, S1-1, or W11-15 crossing warning sign (without a W16-7P plaque) located approximately over the center of the lanes of the approach (or where optimum visibility can be achieved) shall be installed at the crosswalk.**

**Standard:**

09 **If used at intersections, the design of the RRFBs shall conform to the requirements for post- mounted or overhead placement described in Paragraph 3 of this Section.**

Option:

10 RRFBs may be installed at intersections with more than one crosswalk on the same uncontrolled approach (see Figure 4L-1).

11 If used at intersections with two crosswalks on an uncontrolled approach, post-mounted RRFBs may be installed to face only one direction of travel at the first crosswalk that traffic encounters (see Figure 4L-1).

**Standard:**

12 **The light intensity of the yellow indications during daytime conditions shall meet the minimum specifications for Class 1 yellow peak luminous intensity in the publication "Directional Flashing Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles J595," 2005, Society of Automotive Engineers (SAE).**

Option:

13 If the RRFB indications are so bright that they cause excessive glare during nighttime conditions, an automatic signal dimming device may be used to reduce the brilliance of the RRFB indications during nighttime conditions.

Support:

13a Refer to Section 1D.04 for light brilliance and CVC §§ 21466.5 and 21467.

**Standard:**

14 **If pedestrian push button detectors (rather than passive detection) are used to actuate the RRFB indications, a PUSH BUTTON TO TURN ON WARNING LIGHTS/AWAIT GAP IN TRAFFIC (R10-25) sign (see Section 2B.58) shall be installed explaining the purpose and use of the pedestrian push button detector.**

Support:

14a Refer to FHWA's List of Known Errors for error in Paragraph 14 text. Refer to Section 1A.04 for more details.

Support:

15 Section 4I.05 contains further information about pedestrian push button detector location criteria.

16 Section 4H.12 contains information about bicyclist push buttons.

*Guidance:*

16a *Where a RRFB is located 200 feet or less from a grade crossing, an engineering study should be made to evaluate the placement and determine if queuing could impact the grade crossing.*

17 *An audible information device should be used with RRFBs to assist pedestrians with vision disabilities.*

Option:

18 A small light directed at and visible to pedestrians in the crosswalk may be installed integral to the RRFB or pedestrian push button detector to give confirmation that the RRFB is in operation.

## Section 4L.03 Operation of Rectangular Rapid Flashing Beacons

**Standard:**

01 **The RRFB shall be normally dark, shall initiate operation only upon pedestrian actuation, and shall cease operation at a predetermined time after the pedestrian actuation or, with passive detection, after the pedestrian clears the crosswalk.**

02 **All RRFB units associated with a given crosswalk (including those with an advance crossing sign, if used) shall, when activated, simultaneously commence operation of their rapid flashing indications and shall cease operation simultaneously.**

*Guidance:*

03 *The minimum duration of a predetermined period of operation of the RRFBs following each actuation should be based on the procedures for the timing of pedestrian clearance times for pedestrian signals (see Section 4I.06).*

Support:

04 One consideration for lengthening the duration of the predetermined period of operation of the RRFBs is adding the perception/reaction time for pedestrians to confirm that a vehicle will yield or stop.

**Standard:**

05 **The predetermined flash period shall be immediately initiated each and every time that a pedestrian is detected either through passive detection or as a result of a pedestrian pressing a push button detector, including when pedestrians are detected while the RRFBs are already flashing and when pedestrians are detected immediately after the RRFBs have ceased flashing.**

06 **When activated, the two yellow indications in each RRFB unit shall flash in a rapidly flashing sequence. As a specific exception to the requirements for the flash rate of beacons provided in Paragraph 3 of Section 4S.01, RRFBs shall use a much faster flash rate and shall provide 75 flashing sequences per minute.**

07 **Except as provided in Paragraph 8 of this Section, during each 800-millisecond flashing sequence, the left and right RRFB indications shall operate using the following sequence:**

**A. The RRFB indication on the left-hand side shall be illuminated for approximately 50 milliseconds.**
**B. Both RRFB indications shall be dark for approximately 50 milliseconds.**
**C. The RRFB indication on the right-hand side shall be illuminated for approximately 50 milliseconds.**
**D. Both RRFB indications shall be dark for approximately 50 milliseconds.**
**E. The RRFB indication on the left-hand side shall be illuminated for approximately 50 milliseconds.**
**F. Both RRFB indications shall be dark for approximately 50 milliseconds.**
**G. The RRFB indication on the right-hand side shall be illuminated for approximately 50 milliseconds.**
**H. Both RRFB indications shall be dark for approximately 50 milliseconds.**
**I. Both RRFB indications shall be illuminated for approximately 50 milliseconds.**
**J. Both RRFB indications shall be dark for approximately 50 milliseconds.**
**K. Both RRFB indications shall be illuminated for approximately 50 milliseconds.**
**L. Both RRFB indications shall be dark for approximately 250 milliseconds**.


08 **The flash rate of each individual RRFB indication, as applied over the full flashing sequence, shall not be more than 5 flashes per second, to avoid frequencies that might cause seizures.**

09 **If an audible information device is used in conjunction with an RRFB, the audible information device shall not use vibrotactile indications or percussive indications.**

*Guidance:*

10 *If an audible information device is used in conjunction with an RRFB, the audible message should be a speech message that says, "Warning lights are flashing." The audible message should be spoken twice.*


## Figure 4L-1. Example of RRFBs at Uncontrolled, Marked Crosswalks at an Intersection

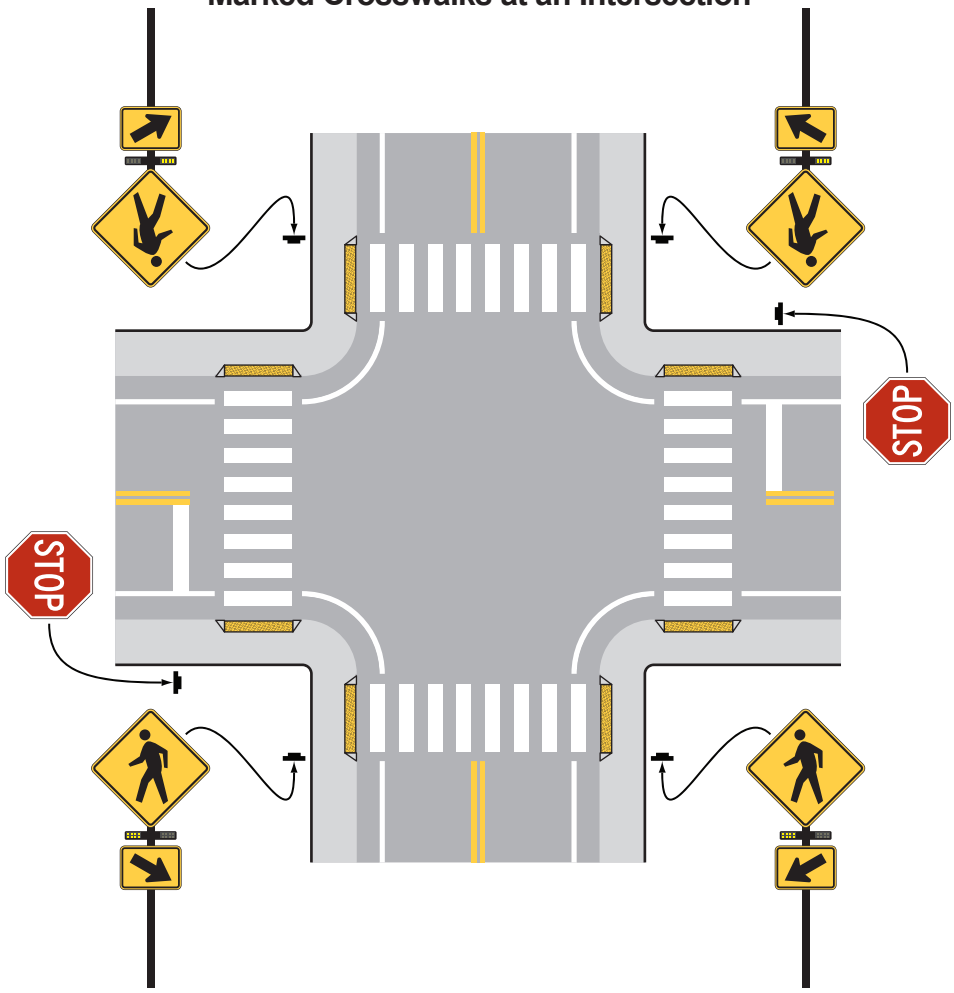


Notes:

1. When activated, the RRFBs on both approaches shall simultaneously commence operation of their rapid flashing indications and shall cease operation simultaneously.
2. If placed overhead, follow the requirements of Paragraph 8 of Section 4L.02, except that the signs may be placed approximately over the center of the intersection.

## *Figure 4L-1(CA). Example of RRFBs at Uncontrolled, Marked Crosswalks at an Intersection*

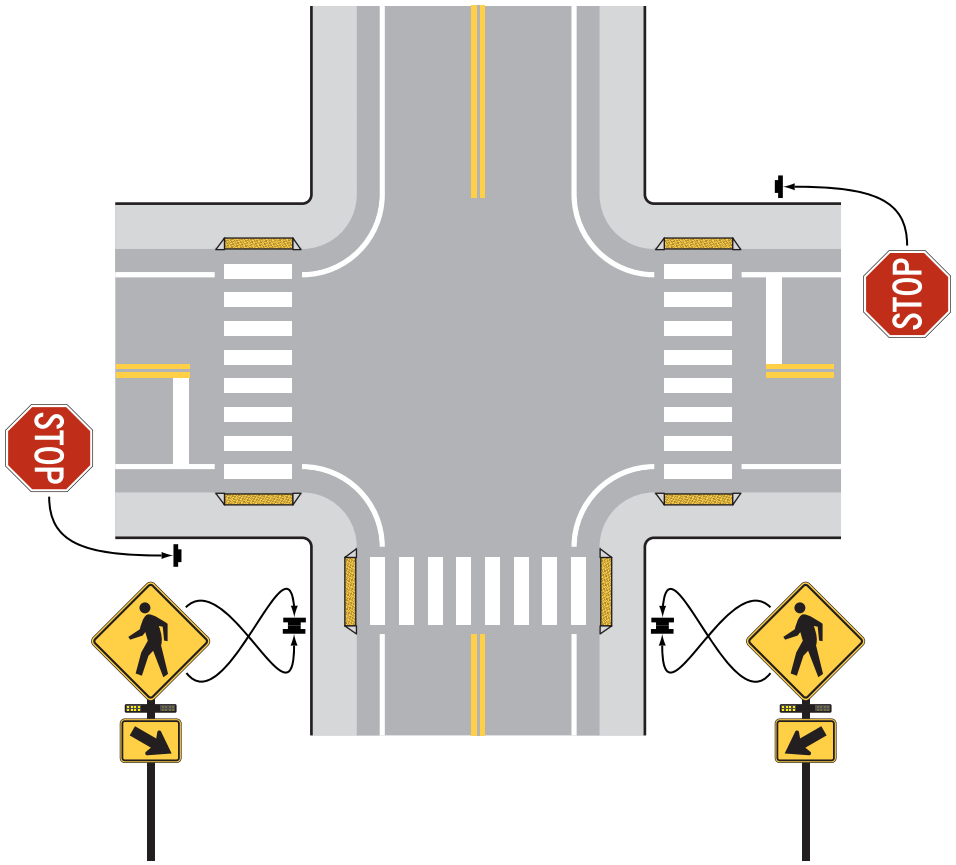


NOTES:

1. When activated, the RRFBs on both approaches shall simultaneously commence operation of their rapid flashing indications and shall cease operation simultaneously.
2. If placed overhead, follow the requirements of paragraph 8 of Section 4L.02, except that the signs may be placed approximately over the center of the intersection.

# CHAPTER 4M. TRAFFIC CONTROL SIGNALS FOR EMERGENCY-VEHICLE ACCESS

## Section 4M.01 Application of Emergency-Vehicle Traffic Control Signals

Support:

01 An emergency-vehicle traffic control signal is a special traffic control signal that directs all conflicting traffic to stop in order to permit the driver of an authorized emergency vehicle to proceed into the roadway or intersection.

Option:

02 An emergency-vehicle traffic control signal may be installed at a location that does not meet other traffic signal warrants such as at an intersection or other location to permit direct access from a building housing the emergency vehicle.

03 An emergency-vehicle hybrid beacon may be installed instead of an emergency-vehicle traffic control signal under the conditions described in Section 4N.01.

*Guidance:*

04 *If a traffic control signal is not justified under the signal warrants of Chapter 4C and if gaps in traffic are not adequate to permit the timely entrance of emergency vehicles, or the stopping sight distance for vehicles approaching on the major street is insufficient for emergency vehicles, installing an emergency- vehicle traffic control signal should be considered. If one of the signal warrants of Chapter 4C is met and a traffic control signal is justified by an engineering study, and if a decision is made to install a traffic control signal, it should be installed based upon the provisions of Chapters 4D through 4I and 4K.*

05 *The sight distance determination should be based on the location of the visibility obstruction for the critical approach lane for each street or drive and the posted or statutory speed limit or 85th-percentile speed on the major street, whichever is higher.*

## Section 4M.02 Design of Emergency-Vehicle Traffic Control Signals

**Standard:**

01 **Except as otherwise provided in this Section, an emergency-vehicle traffic control signal shall meet the requirements of this Manual.**

02 **An Emergency Vehicle (W11-8) sign (see Section 2C.54) with an EMERGENCY SIGNAL AHEAD (W11-12P) supplemental plaque shall be placed in advance of all emergency-vehicle traffic control signals. If a Warning Beacon is installed to supplement the W11-8 sign, the design and location of the beacon shall comply with the Standards of Sections 4S.01 and 4S.03.**

*Guidance:*

03 *At least one of the two required signal faces for each approach on the major street should be located over the roadway.*

04 *The following size signal indications should be used for emergency-vehicle traffic control signals: 12- inch diameter for steady red and steady yellow circular signal indications and any arrow indications, and 8- inch diameter for green or flashing yellow circular signal indications.*

**Standard:**

05 **An EMERGENCY SIGNAL (R10-13) sign (see Section 2B.59) shall be installed facing each major-street approach.**

06 **If an overhead signal face is provided, the EMERGENCY SIGNAL sign shall be mounted adjacent to the overhead signal face.**

Option:

07 An approach that only serves emergency vehicles may be provided with only one signal face consisting of one or more signal sections.

08 Besides using an 8-inch diameter signal indication, other appropriate means to reduce the flashing yellow light output may be used.

## Section 4M.03 Operation of Emergency-Vehicle Traffic Control Signals

**Standard:**

01 **Green signal indications for emergency vehicles at signalized locations operating in the steady (stop-and-go) mode shall be obtained as provided in Section 4F.19.**

02 **As a minimum, the signal indications, sequence, and manner of operation of an emergency- vehicle traffic control signal installed at a midblock location shall be as follows:**

**A. The signal indication, between emergency-vehicle actuations, shall be either green or flashing yellow. If the flashing yellow signal indication is used instead of the green signal indication, it shall be displayed in the normal position of the green signal indication, while the steady red and steady yellow signal indications shall be displayed in their normal positions.**

**B. When an emergency-vehicle actuation occurs, a steady yellow change interval followed by a steady red interval shall be displayed to traffic on the major street.**

**C. A yellow change interval is not required following the green interval for the emergency-vehicle driveway.**

*Guidance:*

03 *Emergency-vehicle traffic control signals located at intersections should either be operated in the flashing mode (see Sections 4G.01 and 4G.03) between emergency-vehicle actuations or be full-actuated or semi-actuated to accommodate normal vehicular and pedestrian traffic on the streets.*

04 *Warning Beacons, if used with an emergency-vehicle traffic control signal, should be flashed only:*

*A. For an appropriate time in advance of and during the steady yellow change interval for the major street, and*

*B. During the steady red interval for the major street.*

05 *The duration of the steady red interval for traffic on the major street should be determined by on-site test-run time studies, but should not exceed 1.5 times the time required for the emergency vehicle to clear the path of conflicting vehicles.*

Option:

06 An emergency-vehicle traffic control signal sequence may be initiated manually from a local control point such as a fire station or law enforcement headquarters or from an emergency vehicle equipped for remote operation of the signal.

# CHAPTER 4N. HYBRID BEACONS FOR EMERGENCY-VEHICLE ACCESS

## Section 4N.01 Application of Emergency-Vehicle Hybrid Beacons

**Standard:**

01 **Emergency-vehicle hybrid beacons shall be used only in conjunction with signs to warn and control traffic at an unsignalized location where emergency vehicles enter or cross a street or highway. Emergency-vehicle hybrid beacons shall be actuated only by authorized emergency or maintenance personnel.**

*Guidance:*

02 *Emergency-vehicle hybrid beacons should only be used when all of the following criteria are satisfied:*

*A. The conditions justifying an emergency-vehicle traffic control signal (see Section 4M.01) are met;*

*B. An engineering study, considering the road width, approach speeds, and other pertinent factors, determines that emergency-vehicle hybrid beacons can be designed and located in compliance with the requirements contained in this Chapter and in Section 4S.01, such that they effectively warn and control traffic at the location; and*

*C. The location is not at or within 100 feet from an intersection or driveway where the side road or driveway is controlled by a STOP or YIELD sign.*

## Section 4N.02 Design of Emergency-Vehicle Hybrid Beacons

**Standard:**

01 **Except as otherwise provided in this Section, an emergency-vehicle hybrid beacon shall meet the requirements of this Manual.**

02 **An emergency-vehicle hybrid beacon face shall consist of three signal sections, with a CIRCULAR YELLOW signal indication centered below two horizontally aligned CIRCULAR RED signal indications (see Figure 4N-1).**

03 **At least two emergency-vehicle hybrid beacon faces shall be installed for each approach of the major street.**

*Guidance:*

04 *On approaches having posted or statutory speed limits or 85th-percentile speeds in excess of 40 mph, and on approaches having traffic or operating conditions that would tend to obscure visibility of roadside beacon faces, both of the minimum of two emergency-vehicle hybrid beacon faces should be installed over the roadway.*

05 *On multi-lane approaches having posted or statutory speed limits or 85th-percentile speeds of 40 mph or less, either an emergency-vehicle hybrid beacon face should be installed on each side of the approach (if a median of sufficient width exists) or at least one of the emergency-vehicle hybrid beacon faces should be installed over the roadway.*

06 *An emergency-vehicle hybrid beacon should comply with the signal face location provisions described in Sections 4D.05 through 4D.10.*

**Standard:**

07 **Stop lines and EMERGENCY SIGNAL—STOP ON FLASHING RED (R10-14 or R10-14a) signs (see Section 2B.59) shall be used with emergency-vehicle hybrid beacons for each approach of the major street.**

Option:

08 If needed for extra emphasis, a STOP HERE ON FLASHING RED (R10-14b) sign (see Section 2B.59) may be installed with an emergency-vehicle hybrid beacon.

09 Emergency-vehicle hybrid beacons may be equipped with a light or other display visible to the operator of the egressing emergency vehicle to provide confirmation that the beacons are operating.

10 Emergency-vehicle hybrid beacons may be supplemented with an advance warning sign, which may also be supplemented with a Warning Beacon (see Section 4S.03).

*Guidance:*

11 *If a Warning Beacon is used to supplement the advance warning sign, it should be programmed to flash only when the emergency-vehicle hybrid beacon is not in the dark mode.*

## Section 4N.03 Operation of Emergency-Vehicle Hybrid Beacons

**Standard:**

01 **Emergency-vehicle hybrid beacons shall be placed in a dark mode (no indications displayed) during periods between actuations.**

02 **Upon actuation by authorized emergency personnel, the emergency-vehicle hybrid beacon faces shall each display a flashing yellow signal indication, followed by a steady yellow change interval, prior to displaying two**

**CIRCULAR RED signal indications in an alternating flashing array for a duration of time adequate for egress of the emergency vehicles (see Figure 4N-1). The alternating flashing red signal indications shall only be displayed when it is required that drivers on the major street stop and then proceed subject to the rules applicable after making a stop at a STOP sign. Upon termination of the flashing red signal indications, the emergency-vehicle hybrid beacons shall revert to a dark mode (no indications displayed) condition.**

*Guidance:*

03 *The duration of the flashing yellow interval should be determined by engineering judgment.*

**Standard:**

04 **The duration of the steady yellow change interval shall be determined using engineering practices in accordance with the provisions in Section 4F.17.**

*Guidance:*

05 *A yellow change interval should have a minimum duration of 3 seconds and a maximum duration of 6 seconds (see Section 4F.17). The longer intervals should be reserved for use on approaches with higher speeds.*

Option:

06 A steady red clearance interval may be used after the steady yellow change interval.

*Guidance*

07 *An emergency-vehicle hybrid beacon that is located 200 feet or less from an active grade crossing should be preempted in accordance with the applicable provisions in Sections 4F.19 and 8D.09.*

**Standard:**

08 **If an emergency-vehicle hybrid beacon is placed into a flashing mode by a conflict monitor (malfunction management unit) or by a manual switch, the emergency-vehicle hybrid beacon faces shall display flashing yellow signal indications to each approach of the major street.**

## Figure 4N-1. Sequence for an Emergency-Vehicle Hybrid Beacon




1. Dark until activated




2. Flashing yellow upon activation




3. Steady yellow







4. Alternating flashing red during egress of the emergency vehicle(s)




5. Dark again until activated

Legend

**SY** Steady yellow
**FY** Flashing yellow
**FR** Flashing red

Note: An optional steady red clearance interval may be used after Interval 3 and before Interval 4.

# CHAPTER 4O. TRAFFIC CONTROL SIGNALS FOR ONE-LANE, TWO-WAY FACILITIES

## Section 4O.01 Application of Traffic Control Signals for One-Lane, Two-Way Facilities

Support:

01 A traffic control signal at a narrow bridge, tunnel, or roadway section that is not of sufficient width for two opposing vehicles to pass is a special signal that alternates which direction of travel is permitted to proceed.

02 Temporary traffic control signals (see Sections 4D.11 and 6L.01) are the most frequent application of traffic control signals for one-lane, two-way facilities.

*Guidance:*

03 *Sight distance across or through the one-lane, two-way facility should be considered as well as the approach speed and sight distance approaching the facility when determining whether traffic control signals should be installed.*

Option:

04 At a narrow bridge, tunnel, or roadway section where a traffic control signal is not justified under the conditions of Chapter 4C, a traffic control signal may be used if gaps in opposing traffic do not permit the flow of traffic through the one-lane section of roadway.

## Section 4O.02 Design of Traffic Control Signals for One-Lane, Two-Way Facilities

**Standard:**

01 **The provisions of Chapters 4D through 4G shall apply to traffic control signals for one-lane, two-way facilities, except that:**

- **A. The durations of the red clearance intervals shall be adequate to clear the one-lane section of conflicting vehicles; and**
- **B. Adequate means, such as interconnection, shall be provided to prevent conflicting signal indications, such as green and green, at opposite ends of the section.**

## Section 4O.03 Operation of Traffic Control Signals for One-Lane, Two-Way Facilities

*Guidance:*

01 *Traffic control signals at one-lane, two-way facilities should operate in a manner consistent with traffic requirements.*

02 *Adequate time should be provided to allow traffic to clear the narrow facility before opposing traffic is allowed to move. Engineering judgment should be used to determine the proper timing for the signal.*

**Standard:**

03 **When in the flashing mode, the signal indications shall flash red.**

# CHAPTER 4P. TRAFFIC CONTROL SIGNALS FOR FREEWAY ENTRANCE RAMPS

## Section 4P.01 Application of Freeway Entrance Ramp Control Signals

Support:

01 Ramp control signals are traffic control signals that control the flow of traffic entering the freeway facility. This is often referred to as "ramp metering."

02 Freeway entrance ramp control signals are sometimes used if controlling traffic entering the freeway could reduce the total expected delay to traffic in the freeway corridor, including freeway ramps and local streets.

*Guidance:*

03 *The installation of ramp control signals should be preceded by an engineering study of the physical and traffic conditions on the highway facilities likely to be affected. The study should include the ramps and ramp connections and the surface streets that would be affected by the ramp control, as well as the freeway section concerned.*

Support:

04 Information on conditions that might justify freeway entrance ramp control signals, factors to be evaluated in traffic engineering studies for ramp control signals, design of ramp control signals, and operation of ramp control signals can be found in the FHWA's "Ramp Management and Control Handbook."

## Section 4P.02 Design of Freeway Entrance Ramp Control Signals

**Standard:**

01 **Ramp control signals shall meet all of the standard design specifications for traffic control signals, except as otherwise provided in this Section.**

02 **The signal face for freeway entrance ramp control signals shall be ~~either a two-section signal face containing red and green signal indications or~~ a three-section signal face containing red, yellow, and green signal indications.**

Option:

03 Ramp control signals may be placed in the dark mode (no indications displayed) when not in use.

04 Ramp control signals may be used to control some, but not all, lanes on a ramp, such as when non- metered HOV ~~bypass~~ preferential lanes are provided on a ramp.

**Standard:**

05 **If only one controlled lane is present on an entrance ramp, or if more than one controlled lane is present on an entrance ramp ~~and the ramp control signals are operated such that green signal indications are always displayed simultaneously to all of the controlled lanes on the ramp~~, then a minimum of two signal faces per ramp shall face entering traffic. The minimum number of upper signal faces per ramp shall not be less than the total number of lanes at the limit line for viewing by approaching motorists. For side-mounted signals, the same number of lower signal faces shall also be provided for viewing by stopped motorists at the limit line.**

~~06 If two controlled lanes are present on an entrance ramp and the ramp control signals are operated such that green signal indications are not always displayed simultaneously to both of the controlled lanes on the ramp, then one signal face shall be provided over the approximate center of each separately-controlled lane.~~

~~07 If three or more controlled lanes are present on an entrance ramp and the ramp control signals are operated such that green signal indications are not always displayed simultaneously to all of the controlled lanes on the ramp, then one signal face shall be provided over the approximate center of each separately-controlled lane.~~

07a **If multiple lanes are present on an entrance ramp and the ramp control faces are operated such that green signal indications are not always displayed simultaneously to all of the lanes on the ramp, then the following shall apply:**

- **A. If roadside mounted signal faces are installed, a minimum of two signal faces shall be provided for each of the lanes, with both mounted at the side of the roadway on a single pole (refer to Paragraphs 9 and 10 below). Roadside mounted signal faces only apply to configurations with 2 separately controlled lanes.**
- **B. If overhead mounted signals faces are installed, one signal face shall be provided over the approximate center of each separately-controlled lane.**

*Guidance:*

08 *Additional side-mounted signal faces should be considered for ramps with ~~three or more separately-controlled lanes.~~ overhead mounted signal faces.*

Option:

09 For entrance ramps with only one controlled lane, the two required signal faces may both be mounted at the side of

the roadway on a single pole (as a specific exception to the normal 8-foot minimum lateral separation of signal faces required by Section 4D.07), with the lower signal face installed at a minimum mounting height of 4.5 feet.

**Standard:**

10 **For entrance ramps with two or more controlled lanes, if two signal faces are installed for the right- hand lane or for the left-hand lane, the two signal faces for that lane ~~may~~ shall both be mounted at the closest side of the roadway on a single pole (as a specific exception to the normal 8-foot minimum lateral separation of signal faces required by Section 4D.07), with the lower signal face installed at a minimum mounting height of 4.5 feet.**

*Guidance:*

11 *Ramp control signals should be located and designed to minimize their viewing by mainline freeway traffic.*

12 *Regulatory signs with legends appropriate to the control, such as XX VEHICLE(S) PER GREEN (R89(CA) or XX VEHICLE(S) PER GREEN EACH LANE (R10-29) (see Section 2B.61), should be installed.*

13 *When ramp control signals are installed on a freeway-to-freeway ramp, special consideration should be given to assuring adequate visibility of the ramp control signals, and multiple advance warning signs with flashing Warning Beacons should be installed to warn road users of the metered operation.*

Support:

14 Refer to Section 2G.102(CA) for regulatory signs for HOV lanes at metered ramps.

## Section 4P.03 Operation of Freeway Entrance Ramp Control Signals

*Guidance:*

01 *Operational strategies for ramp control signals, such as periods of operation, metering rates and algorithms, and queue management, should be determined by the operating agency prior to the installation and activation of the ramp control signals and should be closely monitored and adjusted as needed thereafter.*

02 *When the ramp control signals are in operation ~~operated only during certain periods of the day~~, a RAMP METER AHEAD (W3-7) sign, RAMP METERED WHEN FLASHING (W3-8) sign (see Section 2C.37) or an overhead Activated Blank-Out "METER ON" (W88-2(CA), W88-3(CA)) message sign, or an Activated Blank-Out "PREPARE TO STOP" (W89(CA)) message sign should be installed in advance of the ramp control signal near the entrance to the ramp, or on the arterial on the approach to the ramp, to alert road users to the presence and operation of ramp meters (Refer to Figure 2C-8 and Figure 2C-8(CA)).*

**Standard:**

03 **The RAMP METERED WHEN FLASHING sign shall be supplemented with a Warning Beacon (see Section 4S.03) that flashes when the ramp control signal is in operation (controlling the flow of traffic entering the freeway). Flashing light-emitting diode (LED) units shall not be used within the legend or border of the sign.**

# CHAPTER 4Q. TRAFFIC CONTROL FOR MOVABLE BRIDGES

## Section 4Q.01 Application of Traffic Control for Movable Bridges

Support:

01 Traffic signals for movable bridges are a special type of highway traffic signal installed at movable bridges to notify road users to stop because of a road closure rather than alternately controlling the flow of conflicting traffic movements. The signals are operated in coordination with the opening and closing of the movable bridge, and with the operation of movable bridge warning and resistance gates, or other devices and features used to warn, control, and stop traffic.

02 Movable bridge warning gates installed at movable bridges decrease the likelihood of vehicles and pedestrians passing the stop line and entering an area where potential hazards exist because of bridge operations.

03 A movable bridge resistance gate is sometimes used at movable bridges and located downstream of the movable bridge warning gate. A movable bridge resistance gate provides a physical deterrent to road users when placed in the appropriate position. The movable bridge resistance gates are considered a design feature and not a traffic control device; requirements for them are contained in AASHTO's "Standard Specifications for Movable Highway Bridges."

**Standard:**

04 **Traffic control at movable bridges shall include both signals and gates, except in the following cases:**

- **A. Neither is required if other traffic control devices or measures considered appropriate are used under either of the following conditions:**
  - **1. On low-volume roads (roads of less than 400 vehicles average daily traffic), or**
  - **2. At manually-operated bridges if electric power is not available.**
- **B. Only signals are required in urban areas if intersecting streets or driveways make gates ineffective.**
- **C. Only movable bridge warning gates are required if a traffic control signal that is controlled as part of the bridge operations exists within 500 feet of the movable bridge resistance gates and no intervening traffic entrances exist.**

## Section 4Q.02 Design and Location of Movable Bridge Signals and Gates

**Standard:**

01 **The signal faces and mountings of movable bridge signals shall comply with the provisions of Chapters 4D through 4G except as provided in this Section.**

02 **Signal faces with 12-inch diameter signal indications shall be used for all new movable bridge signals.**

Option:

03 Existing signal faces with 8-inch diameter lenses may be retained for the remainder of their useful service life.

**Standard:**

04 **Since movable bridge operations cover a variable range of time periods between openings, the signal faces shall be one of the following types:**

- **A. Three-section signal faces with red, yellow, and green signal indications; or**
- **B. Two one-section signal faces with red signal indications in a vertical array separated by a STOP HERE ON RED (R10-6) sign (see Section 2B.59).**

05 **Regardless of which signal type is selected, at least two signal faces shall be provided for each approach to the movable span and a stop line (see Section 3B.19) shall be installed to indicate the point behind which vehicles are required to stop.**

*Guidance:*

06 *If movable bridge operation is frequent, the use of three-section signal faces should be considered.*

07 *Insofar as practicable, the height and lateral placement of signal faces should comply with the requirements for other traffic control signals in accordance with Chapter 4D. They should be located no more than 50 feet in advance of the movable bridge warning gate.*

Option:

08 Movable bridge signals may be supplemented with audible warning devices to provide additional warning to drivers and pedestrians.

*Guidance:*

09 *A DRAW BRIDGE (W3-6) sign (see Section 2C.36) should be used in advance of movable bridge signals and gates to give warning to road users, except in urban conditions where such signing would not be practical.*

**Standard:**

10 **If physical conditions prevent a road user from having a continuous view of at least two signal indications for the distance specified in Table 4D-2, an auxiliary device (either a supplemental signal face or the DRAW BRIDGE (W3-6) sign to which has been added a Warning Beacon that is interconnected with the movable bridge controller unit) shall be provided in advance of movable bridge signals and gates.**

Option:

11 The DRAW BRIDGE (W3-6) sign may be supplemented by a Warning Beacon (see Section 4S.03). Support:

12 If two sets of gates (both a warning and a resistance gate) are used for a single direction, highway traffic signals are not required to accompany the resistance gate nearest the span opening.

**Standard:**

13 **Movable bridge warning gates, if used, shall be at least standard railroad size, striped with 16- inch alternate vertical, fully-reflectorized red and white stripes. Flashing red lights in accordance with the Standards for those on railroad gates (see Section 8D.03) shall be included on the gate arm and they shall only be operated if the gate is closed or in the process of being opened or closed.**

*Guidance:*

14 *In the horizontal position, the top of the gate should be approximately 4 feet above the pavement.*

15 *Movable bridge warning gates should be of lightweight construction. In its normal upright position, the gate arm should provide adequate lateral clearance.*

Option:

16 The movable bridge resistance gates may be delineated, if practical, in a manner similar to the movable bridge warning gate.

*Guidance:*

17 *Movable bridge warning gates, if used, should extend at least across the full width of the approach lanes if movable bridge resistance gates are used. On divided highways in which the roadways are separated by a barrier median, movable bridge warning gates, if used, should extend across all roadway lanes approaching the span openings.*

18 *If movable bridge resistance gates are not used on undivided highways, movable bridge warning gates, if used, should extend across the full width of the roadway.*

Option:

19 A single full-width gate or two half-width gates may be used. Support:

20 The locations of movable bridge signals and gates are determined by the location of the movable bridge resistance gate (if used) rather than by the location of the movable spans. The movable bridge resistance gates for high-speed highways are preferably located 50 feet or more from the span opening except for bascule and lift bridges, where they are often attached to, or are a part of, the structure.

*Guidance:*

21 *Except where physical conditions make it impracticable, movable bridge warning gates should be located 100 feet or more from the movable bridge resistance gates or, if movable bridge resistance gates are not used, 100 feet or more from the movable span.*

22 *On bridges or causeways that cross a long reach of water and that might be hit by large marine vessels, within the limits of practicality, traffic should not be halted on a section of the bridge or causeway that is subject to impact.*

23 *In cases where it is impractical to halt traffic on a span that is not subject to impact, traffic should be halted at least one span from the opening. If traffic is halted by signals and gates more than 330 feet from the movable bridge warning gates (or from the span opening if movable bridge warning gates are not used), a second set of gates should be installed approximately 100 feet from the gate or span opening.*

24 *If the movable bridge is close to a grade crossing and traffic might possibly be stopped on the crossing as a result of the bridge opening, a traffic control device should notify the road users to not stop on the railroad tracks.*

## Section 4Q.03 Operation of Movable Bridge Signals and Gates

**Standard:**

01 **Traffic control devices at movable bridges shall be coordinated with the movable spans, so that the signals, gates, and movable spans are controlled by the bridge tender through an interlocked control.**

02 **If the three-section type of signal face is used, the green signal indication shall be displayed at all times between bridge openings, except that if the bridge is not expected to open during continuous periods in excess of**

**5 hours, a flashing yellow signal indication shall be permitted to be used. The signal shall display a steady red signal indication when traffic is required to stop. The duration of the yellow change interval between the display of the green and steady red signal indications, or flashing yellow and steady red signal indications, shall be determined using engineering practices (see Section 4F.17).**

03 **If the vertical array of red signal indications is the type of signal face selected, the red signal indications shall flash alternately only when traffic is required to stop.**

*Guidance:*

04 *Traffic control signals on adjacent streets and highways should be interconnected with the movable bridge control if indicated by engineering judgment. When such interconnection is provided, the traffic control signals at adjacent intersections should be preempted by the operation of the movable bridge in the manner described in Section 4F.19.*

# CHAPTER 4R. HIGHWAY TRAFFIC SIGNALS AT TOLL PLAZAS

## Section 4R.01 Traffic Signals at Toll Plazas

**Standard:**

01 **Traffic control signals or devices that closely resemble traffic control signals that use red or green circular indications shall not be used at toll plazas to indicate the open or closed status of the toll plaza lanes.**

*Guidance:*

02 *Traffic control signals or devices that closely resemble traffic control signals that use red or green circular indications should not be used for new or reconstructed installations at toll plazas to indicate the success or failure of electronic toll payments or to alternately direct drivers making cash toll payments to stop and then proceed.*

## Section 4R.02 Lane-Use Control Signals at or Near Toll Plazas

**Standard:**

01 **Lane-use control signals used at toll plazas shall comply with the provisions of Chapter 4T except as otherwise provided in this Section.**

02 **At toll plazas with multiple lanes where one or more lanes is sometimes closed to traffic, a lane- use control signal shall be installed above the center of each toll plaza lane to indicate the open or closed status of the controlled lane.**

Option:

03 The bottom of the signal housing of a lane-use control signal above a toll plaza lane having a canopy may be mounted lower than 15 feet above the pavement, but not lower than the vertical clearance of the canopy structure.

04 Lane-use control signals may also be used to indicate the open or closed status of an Open-Road ETC lane as a supplement to other devices used for the temporary closure of a lane (see Part 6).

## Section 4R.03 Warning Beacons at Toll Plazas

**Standard:**

01 **Warning Beacons used at toll plazas shall comply with the provisions of Chapter 4S except as otherwise provided in this Section.**

*Guidance:*

02 *Warning Beacons, if used with a toll plaza canopy sign (see Section 2F.16) to assist drivers of such vehicles in locating the dedicated ETC Account-Only lane(s), should be installed in a manner such that the beacons are distinctly separate from the lane-use control signals (see Section 4T.01) for the toll plaza lane.*

Option:

03 Warning Beacons that are mounted on toll plaza islands, behind impact attenuators in front of toll plaza islands, and/or on toll booth pylons (ramparts) to identify them as objects in the roadway may be mounted at a height that is appropriate for viewing in a toll plaza context, even if that height is lower than the normal minimum of 8 feet above the pavement.

# CHAPTER 4S. FLASHING BEACONS

## Section 4S.01 General Design and Operation of Flashing Beacons

Support:

01 A flashing beacon is a highway traffic signal with one or more signal sections that operates in a flashing mode. It can provide traffic control when used as an Intersection Control Beacon (see Section 4S.02) or it can provide warning when used in other applications (see Sections 4S.03, 4S.04, and 4S.05).

**Standard:**

02 **Flashing beacon units, their mountings, signal visors, and backplates shall comply with the provisions of Chapters 4D and 4E, except as otherwise provided in this Chapter.**

03 **Beacons shall be flashed at a rate of not less than 50 or more than 60 times per minute. The illuminated period of each flash shall be a minimum of ½ and a maximum of ⅔ of the total cycle.**

04 **A beacon shall not be included within the border of a sign except for Interchange Exit Direction signs with advisory speed panels (see Section 2E.25).**

05 **There shall be two nominal diameter sizes for flashing beacon signal indications: 8 inches and 12 inches.**

*Guidance:*

06 *If used to supplement a warning or regulatory sign, the edge of the beacon signal housing should normally be located no closer than 12 inches outside of the nearest edge of the sign or from the nearest edge of any of the signs and plaques in a sign assembly.*

Option:

07 An automatic dimming device may be used to reduce the brilliance of flashing yellow signal indications during night operation.

08 Backplates (see Section 4D.06) may be used with flashing beacons.

Support:

09 Typical uses include:

A. Obstructions in or immediately adjacent to the roadway.
B. Supplemental to advance warning signs.
C. At mid-block crosswalks.
D. At intersections where a warning is appropriate.

Option:

10 Only warning, regulatory or construction signs may be supplemented by flashing beacons.

## Section 4S.02 Intersection Control Beacon

**Standard:**

01 **An Intersection Control Beacon shall consist of one or more signal faces directed toward each approach to an intersection. Each signal face shall consist of one or more signal sections of a standard traffic signal face, with flashing CIRCULAR YELLOW or CIRCULAR RED signal indications in each signal face. They shall be installed and used only at an intersection to control two or more directions of travel.**

02 **Application of Intersection Control Beacon signal indications shall be limited to the following:**

**A. Yellow on one route (normally the major street) and red for the remaining approaches that are controlled by STOP signs, or**
**B. Red for all approaches (if all of the intersection approaches are controlled by STOP signs).**

03 **Flashing yellow signal indications shall not face conflicting vehicular approaches.**

04 **A STOP sign (see Section 2B.04) shall be used on approaches to which a flashing red signal indication is displayed on an Intersection Control Beacon.**

05 **If two horizontally-aligned red signal indications are used on an approach for an Intersection Control Beacon, they shall be flashed simultaneously to avoid being confused with grade crossing flashing-light signals. If two vertically-aligned red signal indications that have a physical separation between them are used on an approach for an Intersection Control Beacon, they shall be flashed alternately.**

06 **Twelve-inch signal indications shall be used for Intersection Control Beacons facing approaches where:**

**A. Road users view both Intersection Control Beacon and lane-use control signal indications simultaneously;**

**or**

**B. The nearest Intersection Control Beacon signal face is more than 120 feet beyond the stop line, unless a supplemental near-side Intersection Control Beacon signal face is provided.**

*Guidance:*

07 *Twelve-inch signal indications should be used for Intersection Control Beacons facing approaches where:*

*A. The posted or statutory speed limit or the 85th-percentile approach speed is higher than 40 mph, or*

*B. Where only post-mounted flashing beacon signal faces are used.*

08 *An Intersection Control Beacon should not be mounted on a pedestal in the roadway unless the pedestal is within the confines of a traffic or pedestrian island.*

Option:

09 Supplemental signal indications may be used on one or more approaches in order to provide adequate visibility to approaching road users.

10 Intersection Control Beacons may be used at intersections where traffic or physical conditions do not justify conventional traffic control signals but crash rates indicate the possibility of a special need.

11 An Intersection Control Beacon is generally located over the center of an intersection; however, it may be used at other suitable locations.

Support:

12 The cost of installing an Intersection Control Beacon and intersection lighting is shared with the local agency in the same manner as a traffic signal.

Option:

13 On undivided highways or on highways where the median is less than 8 feet wide, the installation may consist of a single standard located off of the right shoulder or Type 9 cantilever flashing beacon installation as described for use on divided highways, or it may be a Type 15-FBS flashing beacon installation.

## Section 4S.03 Warning Beacon

Support:

01 Typical applications of Warning Beacons include the following:

A. As supplemental emphasis to signs or object markers on or in front of obstructions that are in or immediately adjacent to the roadway;

B. As supplemental emphasis to warning signs;

C. As emphasis for midblock crosswalks;

D. As supplemental emphasis to regulatory signs, except STOP, DO NOT ENTER, WRONG WAY, and SPEED LIMIT signs; and

E. In conjunction with a regulatory or warning sign that includes the phrase WHEN FLASHING in its legend or on a supplemental plaque to indicate that the regulation is in effect or that the condition is present only at certain times. Section 2A.12 prohibits the use flashing light-emitting diode (LED) units within the legend or border of the sign in conjunction with the phrase WHEN FLASHING in its legend or on a supplemental plaque.

**Standard:**

02 **A Warning Beacon shall consist of one or more signal sections of a standard traffic signal face with a flashing CIRCULAR YELLOW signal indication in each signal section.**

03 **A Warning Beacon shall be used only to supplement an appropriate warning or regulatory sign or marker.**

04 **Warning Beacons, if used at intersections, shall not face conflicting vehicular approaches.**

*Guidance:*

05 *The condition or regulation justifying Warning Beacons should largely govern their location with respect to the roadway.*

06 *If an obstruction is in or adjacent to the roadway, illumination of the lower portion or the beginning of the obstruction or illumination of the sign on or in front of the obstruction, in addition to the beacon, should be considered.*

07 *Warning Beacons should be operated only during those periods or times when the condition or regulation exists.*

Option:

08 If Warning Beacons have more than one signal section, they may be flashed either alternately or simultaneously.

09 A Warning Beacon interconnected with a traffic signal controller assembly may be used with a BE PREPARED TO STOP (W3-4) sign and a WHEN FLASHING (W16-13P) plaque (see Section 2C.35).

10 Warning Beacons that are actuated by pedestrians, bicyclists, or other road users may be used as appropriate to provide additional warning to vehicles approaching a crossing or other location.

*Guidance:*

11 *An audible information device should be used with pedestrian-actuated Warning Beacons to assist pedestrians with vision disabilities.*

**Standard:**

12 **If an audible information device is used in conjunction with a pedestrian-actuated Warning Beacon at a pedestrian crossing, the audible information device shall not use vibrotactile indications or percussive indications.**

*Guidance:*

13 *If an audible information device is used in conjunction with a pedestrian-actuated Warning Beacon at a pedestrian crossing, the audible message should be a speech message that says, "Warning lights are flashing." The audible message should be spoken twice.*

14 *Where a warning beacon is located 200 feet or less from a grade crossing, an engineering study should be made to evaluate the placement and determine if queuing could impact the grade crossing.*

## Section 4S.04 Speed Limit Sign Beacon

**Standard:**

01 **A Speed Limit Sign Beacon shall be used only to supplement a Speed Limit sign.**

02 **A Speed Limit Sign Beacon shall consist of one or more signal sections of a standard traffic control signal face, with a flashing CIRCULAR YELLOW signal indication in each signal section. If two or more signal indications are used, they shall be alternately flashed.**

Option:

03 A Speed Limit Sign Beacon may be used with a fixed or variable Speed Limit sign. If applicable, a flashing Speed Limit Sign Beacon (with an appropriate accompanying sign) may be used to indicate that the displayed speed limit is in effect.

## Section 4S.05 Stop Beacon

**Standard:**

01 **A Stop Beacon shall be used only to supplement a STOP sign, a DO NOT ENTER sign, or a WRONG WAY sign.**

02 **A Stop Beacon shall consist of one or more signal sections of a standard traffic signal face with a flashing CIRCULAR RED signal indication in each signal section. If two horizontally-aligned signal indications are used for a Stop Beacon, they shall be flashed simultaneously to avoid being confused with grade crossing flashing-light signals. If two vertically-aligned signal indications are used for a Stop Beacon, they shall be flashed alternately.**

*Guidance:*

03 *The edge of the signal housing of a Stop Beacon should be not less than 12 inches or more than 24 inches from the nearest edge of the STOP sign, DO NOT ENTER sign, or WRONG WAY sign that it supplements.*

Support:

04 A Stop Sign Flashing Beacon consists of one or two signal sections with a flashing circular red indication in each section.

## Section 4S.101(CA) Flashing Beacons at School Crosswalks

Option:

01 Flashing yellow beacons may be installed to supplement standard school signing and markings for the purpose of providing advanced warning during specified times of operation when justified.

02 Flashing beacons at school crosswalks may be installed on State highways in accordance with CVC §§ 21372 and 21373.

Support:

03 A flashing yellow beacon can be considered under the following conditions:

A. The uncontrolled school crossing is on the "Suggested Route to School"; and
B. At least 40 school pedestrians use the crossing during each of any two hours (not necessarily consecutive) of a normal school day; and

C. The crossing is at least 600 feet from the nearest alternate crossing controlled by traffic signals, stop signs or crossing guards; and
D. The vehicular volume through the crossing exceeds 200 vehicles per hour in urban areas or 140 vehicles per hour in rural areas during the same hour the students are going to and from school during normal school hours; and
E. The critical approach speeds exceeds 35 mph or the approach visibility is less than the stopping sight distance.

04 If school authorities are to operate flashing yellow beacon, an inter-agency agreement needs to be executed to assure designations of a responsible adult to operate the beacon controls and to provide accessibility for necessary equipment maintenance.

05 Figure 4S-101(CA) shows the worksheet for flashing beacon at school crossings.

## Section 4S.102(CA) Flashing Beacons for Fire Stations

Option:

01 Flashing beacons at fire station driveways or at intersections immediately adjacent to a fire station may be installed.

**Standard:**

02 **The flashing beacon shall be used only to supplement an appropriate warning or regulatory sign. The flashing beacon shall be actuated from an non-illuminated condition by a switch at the fire station.**

## Section 4S.103(CA) Flashing Beacons at Bus Stops on Freeway Interchanges

Option:

01 At locations of approved bus stops within interchange areas, a flashing beacon may be provided near the top of a lighting standard to provide a flag stop.

**Standard:**

02 **The following design and operational requirements shall be met:**

**A. A push button shall be provided on the lighting standard with a sign explaining the purpose and operation. The sign shall state that if no bus has arrived within 15 minutes (or other time) after the button has been actuated it will be necessary to actuate it again.**
**B. The flashing beacon shall consist of a 8-inch, signal section with an uncolored or white lens mounted on the lighting standard in such a position that an approaching bus driver can see it on the freeway.**
**C. The operation of the control shall be such that the flashing beacon will operate for 15 minutes after the button has been actuated and then go out.**

## *Figure 4S-101(CA). Flashing Beacon at School Crossings Worksheet*

COUNT DATE _____

DIST _____ CO _____ RTE _____ PM _____

CALC _____ DATE _____

CHK _____ DATE _____

Major St: _____ Critical Approach Speed _____ mph

Minor St: _____ Critical Approach Speed _____ mph

Speed limit or critical speed on major street traffic > 40 mph..... ☐
or
In built up area of isolated community of < 10,000 population..... ☐ **RURAL (R)**

☐ **URBAN (U)**

---

**Flashing Yellow Beacon at School Crossings (All Parts Must Be Satisfied)** **SATISFIED YES ☐ NO ☐**

**Part A**

| | MINIMUM REQUIREMENTS | | | | |
|---|---|---|---|---|---|
| | | U | R | | |
| Vehicle Volume | Each of 2 Hours | 200 | 140 | | |
| School Age Pedestrians Crossing Street | Each of 2 Hours | 40 | 40 | | |

SATISFIED YES ☐ NO ☐

**AND**

**Part B**

Critical Approach Speed Exceeds 35 mph SATISFIED YES ☐ NO ☐

**AND**

**Part C**

Is Nearest Controlled Crossing More Than 600 ft away? SATISFIED YES ☐ NO ☐

# CHAPTER 4T. LANE-USE CONTROL SIGNALS

## Section 4T.01 Application of Lane-Use Control Signals

Support:

01 Lane-use control signals are special overhead signals that permit or prohibit the use of specific lanes of a street or highway or that indicate the impending prohibition of their use. Lane-use control signals are distinguished by placement of special signal faces over a certain lane or lanes of the roadway, over a shoulder where driving is permitted at certain times, and by their distinctive shapes and symbols. Supplementary signs are sometimes used to explain their meaning and intent.

02 Lane-use control signals are most commonly used for reversible lane control, but are also used in certain non-reversible lane applications and for toll plaza lanes (see Section 4R.02).

*Guidance:*

03 *An engineering study should be conducted to determine whether a reversible lane operation can be controlled satisfactorily by static signs (see Section 2B.34) or whether lane-use control signals are necessary. Lane-use control signals should be used to control reversible-lane operations if any of the following conditions are present:*

- *A. More than one lane is reversed in direction;*
- *B. Two-way or one-way left turns are allowed during peak-period reversible operations, but those turns are from a different lane than used during off-peak periods;*
- *C. Other unusual or complex operations are included in the reversible lane pattern;*
- *D. Demonstrated crash experience occurring with reversible lane operation controlled by static signs that can be corrected by using lane-use control signals at the times of transition between peak and off-peak patterns; and/or*
- *E. An engineering study indicates that the safety and efficiency of the traffic operations of a reversible- lane system would be improved by lane-use control signals.*

**Standard:**

04 **Pavement markings (see Section 3B.04) shall be used in conjunction with reversible-lane control signals.**

Option:

05 Lane-use control signals may also be used if there is no intent or need to reverse lanes, but there is a need to indicate the open or closed status of one or more lanes, such as:

- A. On a freeway, if it is desired to close certain lanes at certain hours to facilitate the merging of traffic from a ramp or other freeway;
- B. On a freeway, near its terminus, to indicate a lane that ends;
- C. On a freeway or long bridge, to indicate that a lane may be temporarily blocked by a crash, breakdown, construction or maintenance activities, or similar temporary conditions; and
- D. On a conventional road or driveway, at access or egress points to or from a facility, such as a parking garage, where one or more lanes of the access or egress are opened or closed at various times.

06 A USE LANE(S) WITH GREEN ARROW (R10-8) sign (see Section 2B.59) may be used in conjunction with lane-use control signals.

## Section 4T.02 Meaning of Lane-Use Control Signal Indications

**Standard:**

01 **The meanings of lane-use control signal indications (see Figure 4T-1) shall be as follows:**

- **A. A steady DOWNWARD GREEN ARROW signal indication shall mean that the lane which the arrow signal indication is located over is open to vehicle travel in that direction.**
- **B. A steady YELLOW X signal indication shall mean that the lane which the Yellow X signal indication is located over is about to be closed to vehicle traffic in that direction and shall be followed by a steady RED X signal indication (either within the same signal face or in a downstream signal face).**
- **C. A steady RED X signal indication shall mean that the lane which the Red X signal indication is located over is closed to vehicle traffic in the direction viewed by the road user.**
- **D. A steady WHITE TWO-WAY LEFT-TURN ARROW signal indication shall mean that the lane which the turning arrows indication is located over is open to traffic making a left turn from either direction of travel, but not for through travel.**
- **E. A steady WHITE ONE-WAY LEFT-TURN ARROW signal indication shall mean that the lane which the**

**turning arrow indication is located over is open to traffic making a left turn in that direction (without opposing turns in the same lane), but not for through travel.**

## Section 4T.03 Design of Lane-Use Control Signals

**Standard:**

01 **All lane-use control signal indications shall be in units with rectangular signal faces and shall have opaque backgrounds. Except as provided in Paragraph 13 of this Section, the nominal minimum height and width of each DOWNWARD GREEN ARROW, YELLOW X, and RED X signal face shall be 18 inches for typical applications. Except as provided in Paragraph 13 of this Section, the WHITE TWO-WAY LEFT-TURN ARROW and WHITE ONE-WAY LEFT-TURN ARROW signal faces shall have a nominal minimum height and width of 30 inches.**

02 **Each lane to be reversed or closed shall have signal faces with at least a DOWNWARD GREEN ARROW and a RED X symbol.**

03 **Each reversible lane that also operates as a two-way or one-way left-turn lane during certain periods shall have signal faces that also include the applicable WHITE TWO-WAY LEFT-TURN ARROW or WHITE ONE-WAY LEFT-TURN ARROW symbol.**

04 **Each non-reversible lane immediately adjacent to a reversible lane shall have signal indications that display a DOWNWARD GREEN ARROW to traffic traveling in the permitted direction and a RED X to traffic traveling in the opposite direction.**

05 **If in separate signal sections, the relative positions, from left to right, of the signal indications shall be RED X, YELLOW X, DOWNWARD GREEN ARROW, WHITE TWO-WAY LEFT-TURN ARROW, WHITE ONE-WAY LEFT-TURN ARROW.**

*Guidance:*

06 *The color of lane-use control signal indications should be clearly visible for at least 2,300 feet at all times under normal atmospheric conditions, unless otherwise physically obstructed.*

07 *Lane-use control signal faces should be located approximately over the center of the controlled lane.*

08 *If the area to be controlled is more than 2,300 feet in length, or if the vertical or horizontal alignment is curved, intermediate lane-use control signal faces should be located over each controlled lane at frequent intervals. This location should be such that road users will at all times be able to see at least one signal indication and preferably two along the roadway, and will have a definite indication of the lanes specifically reserved for their use.*

09 *All lane-use control signal faces should be located in a straight line across the roadway approximately at right angles to the roadway alignment.*

10 *On roadways having intersections controlled by traffic control signals, the lane-use control signal face should be located sufficiently far in advance of or beyond such traffic control signals to prevent them from being misconstrued as traffic control signals.*

**Standard:**

11 **Except as provided in Paragraph 12 of this Section, the bottom of the signal housing of any lane- use control signal face shall be a minimum of 15 feet and a maximum of 19 feet above the pavement grade.**

Option:

12 The bottom of a lane-use control signal housing may be lower than 15 feet above the pavement if it is mounted on a canopy or other structure over the pavement, but not lower than the vertical clearance of the structure.

13 Except for lane-use control signals at toll plazas (see Section 4R.02) , lane-use control signal faces with nominal height and width of 12 inches for the DOWNWARD GREEN ARROW, YELLOW X, and RED X signal faces, and lane-use control signal faces with nominal height and width of 18 inches for the WHITE TWO-WAY LEFT-TURN ARROW and WHITE ONE-WAY LEFT-TURN ARROW signal faces may be used in areas with minimal visual clutter and with speeds of less than 40 mph.

14 Other sizes of lane-use control signal faces larger than 18 inches with proportional dimensions and with message recognition distances appropriate to signal spacing may be used for the DOWNWARD GREEN ARROW, YELLOW X, and RED X signal faces.

15 Non-reversible lanes not immediately adjacent to a reversible lane on any street so controlled may also be provided with signal indications that display a DOWNWARD GREEN ARROW to traffic traveling in the permitted direction and a RED X to traffic traveling in the opposite direction.

16 The signal indications provided for each lane may be in separate signal sections or may be superimposed in the same signal section.

## Section 4T.04 Operation of Lane-Use Control Signals

**Standard:**

01 **All lane-use control signals shall be coordinated so that all the signal indications along the controlled section of roadway are operated uniformly and consistently. The lane-use control signal system shall be designed to reliably guard against showing any prohibited combination of signal indications to any traffic at any point in the controlled lanes.**

02 **For reversible lane control signals, the following combination of signal indications shall not be simultaneously displayed over the same lane to both directions of travel:**

- **A. DOWNWARD GREEN ARROW in both directions,**
- **B. YELLOW X in both directions,**
- **C. WHITE ONE-WAY LEFT-TURN ARROW in both directions,**
- **D. DOWNWARD GREEN ARROW in one direction and YELLOW X in the other direction,**
- **E. WHITE TWO-WAY LEFT-TURN ARROW or WHITE ONE-WAY LEFT-TURN ARROW in one direction and DOWNWARD GREEN ARROW in the other direction,**
- **F. WHITE TWO-WAY LEFT-TURN ARROW in one direction and WHITE ONE-WAY LEFT-TURN ARROW in the other direction, and**
- **G. WHITE ONE-WAY LEFT-TURN ARROW in one direction and YELLOW X in the other direction.**

03 **A moving condition in one direction shall be terminated either by the immediate display of a RED X signal indication or by a YELLOW X signal indication followed by a RED X signal indication.**

04 **In either case, the duration of the RED X signal indication shall be an appropriate duration to allow traffic time to vacate the lane before any moving condition is allowed in the opposing direction.**

05 **Whenever a DOWNWARD GREEN ARROW signal indication is changed to a WHITE TWO- WAY LEFT-TURN ARROW signal indication, the RED X signal indication shall continue to be displayed to the opposite direction of travel for an appropriate duration to allow traffic time to vacate the lane being converted to a two-way left-turn lane.**

06 **If an automatic control system is used, a manual control to override the automatic control shall be provided.**

*Guidance:*

07 *The type of control provided for reversible lane operation should be such as to permit either automatic or manual operation of the lane-use control signals.*

**Standard:**

08 **If used, lane-use control signals shall be operated continuously, except that lane-use control signals that are used only for special events or other infrequent occurrences and lane-use control signals on non-reversible freeway lanes are permitted to be darkened when not in operation. The change from normal operation to non-operation shall occur only when the lane-use control signals display signal indications that are appropriate for the lane use that applies when the signals are not operated. The lane-use control signals shall display signal indications that are appropriate for the existing lane use when changed from non-operation to normal operations. Also, traffic control devices shall clearly indicate the proper lane use when the lane-use control signals are not in operation.**

Support:

09 Section 2B.34 contains additional information concerning considerations involving left-turn prohibitions in conjunction with reversible lane operations. Section 2G.24 contains additional information concerning lane-use control signals used for part-time travel on a shoulder. Section 2G.25 contains additional information concerning lane-use control signals used for active lane management on freeways and expressways.

## Figure 4T-1. Lane-Use Control Signal Indications



Downward Green Arrow | Yellow X | Red X | White Two-Way Left-Turn Arrows | White One-Way Left-Turn Arrow

# CHAPTER 4U. IN-ROADWAY WARNING LIGHTS

## Section 4U.01 Application of In-Roadway Warning Lights

Support:

01 In-Roadway Warning Lights are special types of highway traffic signals installed in the roadway surface to warn road users that they are approaching a condition on or adjacent to the roadway that might not be readily apparent and might require the road users to reduce their speed and/or come to a stop. This includes situations warning of marked school crosswalks, marked midblock crosswalks, marked crosswalks on uncontrolled approaches, marked crosswalks in advance of roundabouts as described in Chapter 3D, and other roadway situations involving pedestrian crossings.

**Standard:**

02 **In-Roadway Warning Lights shall not be used for any application that is not described in this Chapter.**

03 **When used, In-Roadway Warning Lights shall be flashed and shall not be steadily illuminated.**

Support:

04 Steadily illuminated lights installed in the roadway surface are considered to be internally illuminated raised pavement markers (see Section 3B.14).

Option:

05 In-Roadway Warning Lights may be flashed in a manner that includes a continuous flash of varying intensity and time duration that is repeated to provide a flickering effect (see Section 4U.02).

*Guidance:*

06 *If used, In-Roadway Warning Lights should not exceed a height of ¾ inch above the roadway surface.*

## Section 4U.02 In-Roadway Warning Lights at Crosswalks

Option:

01 In-Roadway Warning Lights may be installed at certain marked crosswalks, based on an engineering study or engineering judgment, to provide additional warning to road users.

**Standard:**

02 **If used, In-Roadway Warning Lights at crosswalks shall be installed only at marked crosswalks with applicable warning signs. They shall not be used at crosswalks controlled by YIELD signs, STOP signs, traffic control signals, or pedestrian hybrid beacons.**

**If In-Roadway Warning Lights are used at a crosswalk, the following requirements shall apply:**

- **A. Except as provided in Paragraphs 7 and 8 of this Section, they shall be installed along both sides of the crosswalk and shall span its entire length.**
- **B. They shall initiate operation based on pedestrian actuation and shall cease operation at a predetermined time after the pedestrian actuation or, with passive detection, after the pedestrian clears the crosswalk.**
- **C. They shall display a flashing yellow light when actuated. The flash rate shall be at least 50, but not more than 60, flash periods per minute. If they are flashed in a manner that includes a continuous flash of varying intensity and time duration that is repeated to provide a flickering effect, the flickers or pulses shall not repeat at a rate that is between 5 and 30 per second to avoid frequencies that might cause seizures.**
- **D. They shall be installed in the area between the outside edge of the crosswalk line and 10 feet from the outside edge of the crosswalk.**
- **E. They shall face away from the crosswalk if unidirectional, or shall face away from and across the crosswalk if bidirectional.**

Support:

02a Refer to FHWA's List of Known Errors for error in paragraph numbering in this section. Refer to Section 1A.04 for more details.

**Standard:**

03 **If used on one-lane, one-way roadways, a minimum of two In-Roadway Warning Lights shall be installed on the approach side of the crosswalk. If used on two-lane roadways, a minimum of three In-Roadway Warning Lights shall be installed along both sides of the crosswalk. If used on roadways with more than two lanes, a minimum of one In-Roadway Warning Light per lane shall be installed along both sides of the crosswalk.**

*Guidance:*

04 *If used, In-Roadway Warning Lights should be installed in the center of each travel lane, at the center line of the roadway, at each edge of the roadway or parking lanes, or at other suitable locations away from the normal tire track paths.*

05 *The location of the In-Roadway Warning Lights within the lanes should be based on engineering judgment.*

Option:

06 On one-way streets, In-Roadway Warning Lights may be omitted on the departure side of the crosswalk.

07 Based on engineering judgment, the In-Roadway Warning Lights on the departure side of the crosswalk on the left-hand side of a median may be omitted.

08 Unidirectional In-Roadway Warning Lights installed at crosswalk locations may have an optional, additional yellow light indication in each unit that is visible to pedestrians in the crosswalk to indicate to pedestrians in the crosswalk that the In-Roadway Warning Lights are in fact flashing as they cross the street. These yellow lights may flash with and at the same flash rate as the light module in which each is installed.

*Guidance:*

09 *If used, the period of operation of the In-Roadway Warning Lights following each actuation should be sufficient to allow a pedestrian crossing in the crosswalk to leave the curb or shoulder and travel at a walking speed of 3.5 feet per second to at least the far side of the traveled way or to a median of sufficient width for pedestrians to wait. Where pedestrians who walk slower than 3.5 feet per second, or pedestrians who use wheelchairs, routinely use the crosswalk, a walking speed of less than 3.5 feet per second should be considered in determining the period of operation.*

10 *An audible information device should be used with In-Roadway Warning Lights to provide assistance for pedestrians with vision disabilities.*

**Standard:**

11 **If pedestrian push buttons (rather than passive detection) are used to actuate the In-Roadway Warning Lights, a PUSH BUTTON TO TURN ON WARNING LIGHTS/WAIT FOR GAP IN TRAFFIC (R10-25) sign (see Section 2B.58) shall be installed explaining the purpose and use of the pedestrian push button detector.**

Support:

11a Refer to FHWA's List of Known Errors for error in Paragraph 11 text. Refer to Section 1A.04 for more details.

**Standard:**

12 **Where the period of operation is sufficient only for crossing from a curb or shoulder to a median of sufficient width for pedestrians to wait, median-mounted pedestrian actuators shall be provided.**

13 **If an audible information device is used in conjunction with In-Roadway Warning Lights, the audible information device shall not use vibrotactile indications or percussive indications.**

*Guidance:*

14 *If an audible information device is used in conjunction with In-Roadway Warning Lights, the audible message during the time that the lights are flashing should be a speech message that says, "Warning lights are flashing." The audible message should be spoken twice.*

**Standard:**

15 **The following shall be considered when evaluating the need for In-Roadway Warning Lights:**

- **A. Whether the crossing is controlled or uncontrolled.**
- **B. An engineering traffic study to determine if In-Roadway Warning Lights are compatible with the safety and operation of nearby intersections, which may or may not be, controlled by traffic signals or STOP/YIELD signs.**
- **C. Standard traffic signs for crossings and crosswalk pavement markings are provided.**
- **D. At least 40 pedestrians regularly use the crossing during each of any two hours (not necessarily consecutive) during a 24-hour period.**
- **E. The vehicular volume through the crossing exceeds 200 vehicles per hour in urban areas or 140 vehicles per hour in rural areas during peak-hour pedestrian usage.**
- **F. The critical approach speed (85th percentile) is 45 mph or less.**
- **G. In-Roadway Warning Lights are visible to drivers at the minimum stopping sight distance for the posted speed limit.**
- **H. Public education on In-Roadway Warning Lights is conducted for new installations.**

Option:


16 Overhead or roadside Flashing Yellow Beacons may be installed in conjunction with In-Roadway Warning Lights. In-Roadway Warning Lights may be installed independently, but are not necessarily intended to be a substitute for standard flashing beacons. Engineering judgment should be exercised.

*Guidance:*

17 *Typical applications of In-Roadway Warning Lights are shown in Figure 4U-101(CA).*

18 *Where In-Roadway Warning Lights are located 200 feet or less from a grade crossing, an engineering study should be made to evaluate the placement and determine if queuing could impact the grade crossing.*

## *Figure 4U-101(CA). Typical Layout for In-Roadway Warning Lights (IRWLs)*

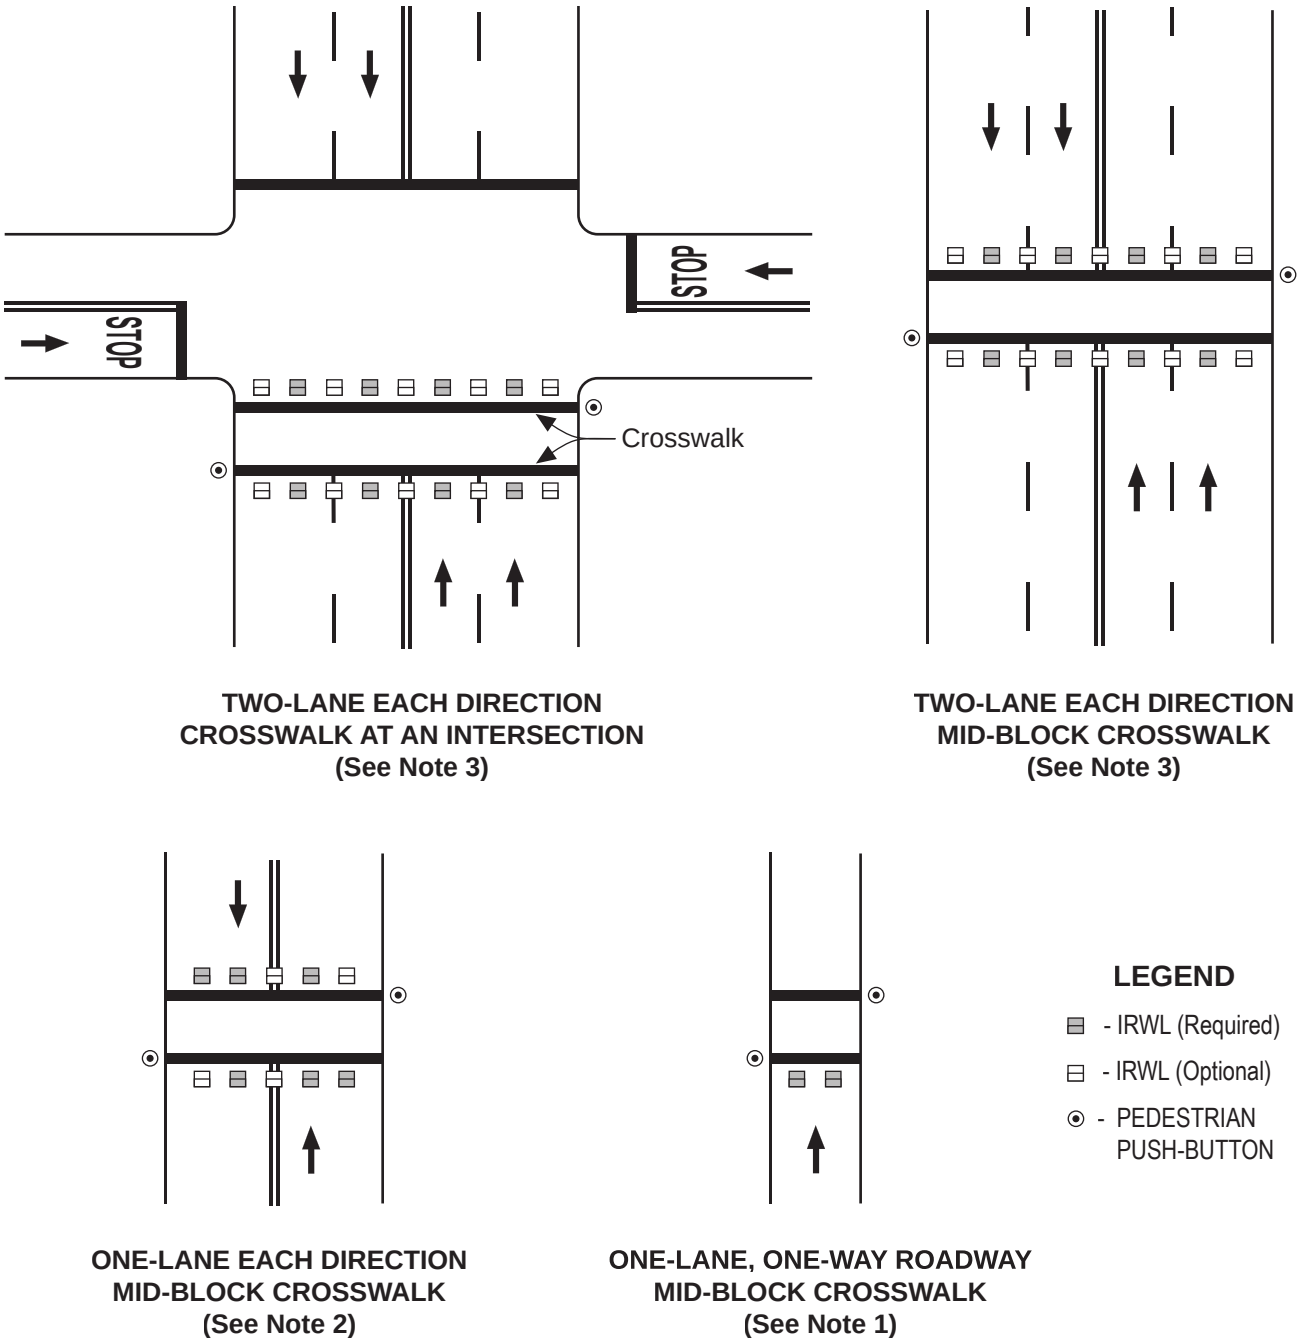


NOTES:

1. One-Lane, One-Way Roadways, a minimum of two IRWLs shall be installed on the approach side ot the crosswalk.
2. One-Lane each direction, a minimum of three IRWLs shall be installed along both sides of the crosswalk.
3. Two-Lanes each direction, a minimum of one IRWLs per lane, shall be installed along both sides of the crosswalk.
4. IRWLs should be located off the tire tracks.

# PART 5
# TRAFFIC CONTROL DEVICE CONSIDERATIONS FOR AUTOMATED VEHICLES

## CHAPTER 5A. GENERAL

### Section 5A.01 Scope and Purpose

Support:

01 The scope of the provisions in this Part are intended for consideration of traffic control devices that are specifically being designed to accommodate automated vehicles capable of performing partial or full real-time operational functions in general traffic on a sustained basis. This Part does not require agencies to use these provisions in their accommodation of automated vehicles on their roadways. Rather, the purpose of these provisions is to provide agencies with general considerations and guidance for traffic control devices that can be more helpful in the accommodation of such vehicles, while at the same time being more beneficial to road users.

02 It is important for early implementers of automated vehicles to understand the ramifications of traffic control devices in a mixed fleet environment and to consider the needs of both human and machine-led road users. Partial automation technologies are already commercially available in the vehicle fleet and are operating under current infrastructure conditions. The overall effectiveness of the automation is impacted by the uniformity and consistent application of the highway infrastructure, including traffic control devices.

03 This Chapter provides an overview of foundational driving automation system (see definition in Section 5A.03) technology terminology, key principles, considerations for traffic control device selection, and topics for agencies to consider. The MUTCD does not address standardization of digital infrastructure, geometric road design, traffic control device maintenance levels, minimum pavement conditions, or other items that might be important for safe and effective operation of driving automation system technologies.

### Section 5A.02 Overview of Automated Vehicles and Connected Vehicles

Support:

01 Driving automation system technology automates some or all aspects of the driving tasks to assist or replace the human driver and can include driver assistance technology generally known as advanced driver assistance systems (ADAS). Automated vehicles (AVs) are vehicles in which at least one element of vehicle control (such as steering, speed control, or braking) occurs without direct human driver input. AVs function by gathering information from a suite of sensors that can include, but are not limited to:

A. Cameras,
B. Radar,
C. Light detection and ranging (LiDAR),
D. Ultrasonic, and
E. Infrared.

02 AVs can combine sensor data with other inputs including detailed map data and information from other connected vehicles or infrastructure. AVs might be able to detect and classify objects in their surroundings and might predict how they are likely to behave.

03 Connected vehicle technology enables cars, buses, trucks, trains, roads, and roadside infrastructure, as well as other devices such as cellular telephones, to communicate with one another. Connected vehicle technology enabling vehicles to communicate with each other is known as vehicle-to-vehicle (V2V). Connected vehicle technology enabling vehicles to communicate with infrastructure is known as vehicle-to-infrastructure (V2I). Connected vehicle technology enables equipped vehicles on the road to be aware of the location and status of other nearby equipped vehicles or devices. Road users could receive notifications and alerts of dangerous situations, such as a vehicle that is about to run a red traffic signal as it nears an intersection, or an oncoming car, that is out of sight beyond a curve swerving into the opposing lane to avoid an object on the road.

## Section 5A.03 Definitions and Terms

Support:

01 The definitions and terms shown in Items A through G below, which are found in the Society of Automotive Engineers standard SAE J3016 and other sources, are used extensively in automated vehicle technology. Their definitions, which are summarized below for reference and for use with the provisions of this Manual, are as follows:

A. Advanced Driver Assistance Systems (ADAS) – Electronic systems that aid a vehicle driver with one or more driving tasks while driving. They are intended to increase the safe operation of a vehicle and include applications such as automatic braking, lane keeping assistance, adaptive cruise control, and others.
B. Automated Driving System (ADS) – The hardware and software that are collectively capable of performing the entire Dynamic Driving Task (DDT) on a sustained basis, regardless of whether it is limited to a specific Operational Design Domain (ODD); this term is used specifically to describe a Level 3, 4, or 5 driving automation system.
C. Automation Levels – The levels of automation that are described in Table 5A-1.
D. Cooperative Automation – Technology that enables communication with other vehicles and the infrastructure to coordinate automated vehicle operation.
E. Driving Automation System – The hardware and software that are collectively capable of performing part or all of the DDT on a sustained basis; this term is used generically to describe any system capable of Levels 1 through 5 driving automation.
F. Dynamic Driving Task (DDT) – All of the real-time operational and tactical functions required to operate a vehicle in on-road traffic, excluding the strategic functions such as trip scheduling and selection of destinations and waypoints.
G. Operational Design Domain (ODD) – Operating conditions under which a given driving automation system or feature thereof is specifically designed to function, including, but not limited to, environmental, geographical, and time-of-day restrictions, and/or the requisite presence or absence of certain traffic or roadway characteristics.

## Section 5A.04 Traffic Control Device Design and Use Considerations

Support:

01 The interaction of traffic control devices with driving automation systems can create many challenges for agencies in determining traffic control device selection and application. The lack of tolerance of driving automation systems for non-uniformity in traffic control device design and application is a limiting factor of current driving automation system sophistication. This is because driving automation systems have a limited ability to interpolate across gaps in traffic control device cues to the vehicle in the following types of situations:

A. The driving automation system technology's ability to adapt to existing traffic control device design and typical quality, such as the refresh rates of electronic changeable message sign displays or the overall quality of a device that has been in service on the roadway for many years;
B. The color perception of signs;
C. The electronically perceptible conspicuity and contrast of markings in different environments and lighting conditions;
D. The driving automation system camera technology and device photometric characteristics in interpreting various types of traffic signals
E. The ability to discern and comprehend temporary traffic control devices and their varying applications, such as active electronic display devices or flaggers; and
F. The ability to decipher traffic control at highway-rail or highway-LRT grade crossings, especially at passive grade crossings.

02 These and other challenges might limit the functionality of driving automation systems, thus making them less effective or functional, with potential implications for safety and traffic operations. The uniform design and consistent application of standardized traffic control devices supports the functionality of driving automation system technology in many situations. Similarly, good traffic control device maintenance practices and programs will help improve the potential for driving automation systems to operate properly in many roadway environments.

*Guidance:*

03 *Agencies should adopt traffic control device maintenance policies and or practices with consideration to both the human driver and driving automation system technology needs (see Sections 1D.10, 2A.19, 3A.05 and 4A.10).*

04 *Engineering judgment (see Section 1D.03) used to determine traffic control device selection and placement should consider uniformity in application and location needed to support both the human driver and driving automation system technology.*

Support:

05 A systematic approach to traffic control device selection, application, and maintenance taking into consideration certain fundamental principles, will help agencies considering the inclusion of Avs on their roadways. Generally, improvements to traffic control device uniformity and improved maintenance policies and practices that keep traffic control devices in good working order with high levels of conspicuity that are beneficial to the human driver will be beneficial to AVs as well.

*Guidance:*

06 *Agencies should apply the following fundamental principles and considerations as they evaluate traffic control devices and other maintenance practices to support driving automation system technologies during maintenance and infrastructure improvements:*

- *A. Applying uniform and consistent traffic control devices on each type of roadway, and applying a similar approach to traffic control at similar locations in similar situations.*
- *B. Establishing maintenance policies that incorporate effective practices to identify and then fix or replace in a timely manner any traffic control device that is reaching the end of its useful life, or that is damaged or otherwise no longer serviceable.*
- *C. Making sure, based on engineering judgment, that temporary or emergency traffic control, to the extent practicable, is planned in advance using devices that comply with the provisions of this Manual and that follow policies designed to provide uniformity throughout the site and across jurisdictions.*
- *D. Removing extraneous devices that are no longer necessary or that provide limited benefit to vehicle operation or navigation.*

## Table 5A-1. Automation Levels

| Automation Level | Description | Automation Category | Automation Type |
|---|---|---|---|
| **Level 0** | The full-time performance by the human driver of all aspects of the Dynamic Driving Task, even when enhanced by warning or momentary intervention systems. | **None*** | **None** |
| **Level 1** | The driving mode specific execution by a sustained driver assistance system of either steering or acceleration/deceleration using information about the driving environment and with the expectation that the human driver performs all remaining aspects of the Dynamic Driving Task. | **Advanced Driver Assistance Systems (ADAS)** | **Driving Automation System** |
| **Level 2** | The driving mode specific execution by one or more sustained driver assistance systems of both steering and acceleration/deceleration using information about the driving environment and with the expectation that the human driver performs all remaining aspects of the Dynamic Driving Task. | | |
| **Level 3** | The driving mode specific sustained performance by an ADS of all aspects of the Dynamic Driving Task within a given ODD with the expectation that the human driver will respond appropriately to a request to intervene. | **Automated Driving System (ADS)** | |
| **Level 4** | The driving mode specific sustained performance by an ADS of all aspects of the Dynamic Driving Task, even if a human driver does not respond appropriately to a request to intervene. | | |
| **Level 5** | The full-time sustained performance by an ADS of all aspects of the Dynamic Driving Task under all roadway and environmental conditions that can be managed by a human driver. | | |

*NOTE: Level 0 might include some ADAS features, but they are considered to be warning or momentary intervention systems at this level.

# CHAPTER 5B. PROVISIONS FOR TRAFFIC CONTROL DEVICES

## Section 5B.01 Signs

Support:

01 Driving automation systems use sensors, algorithms, and processing to locate, read, and comprehend traffic signs and assist the human driver or AV in appropriately making vehicle operational decisions. Location, condition, uniformity, design characteristics, and consistent application all affect the ability of driving automation systems to perform these functions.

**Standard:**

02 **When scanning graphics (see Section 2A.04) of any type are used on a sign for support of driving automation systems, the scanning graphics shall not be visible to the human eye and the sign shall have no apparent loss of resolution or recognition for the road user.**

*Guidance:*

*03 Agencies seeking to better accommodate driving automation systems to support AVs, while also potentially benefitting human drivers, should consider:*

- *A. Clearly associating the sign location and application with the displayed message to the specific lane or road to which it applies, such as in the case of parallel roads or lanes with different speed limits or restrictions.*
- *B. The practice of sign and information spreading (see Section 2A.20) to limit the amount of information displayed in one location or on one sign to minimize sign clutter.*
- *C. Signs with designs t~~hat are~~ otherwise not provided for in this Manual or the "Standard Highway Signs" publication(see Section 1A.05) are designed based on the standardized sign design practices and features as provided for in this Manual for the type of sign, the location, and the characteristics of the roadway on which it is used.*
- D. *The refresh rate of LEDs in the illuminated portion of electronic-display signs to provide for greater consistency in driving automation system detection.*

## Section 5B.02 Markings

Support:

01 Driving automation systems use sensors, algorithms, and processing to locate, read, and comprehend pavement markings. Location, condition, uniformity, design characteristics, and consistent application all have some effect on the ability of driving automation systems to perform this function. Certain pavement marking applications and practices have been shown through research to better support driving automation system technology, while also benefitting, or at least not detracting from, the performance of the human operator.

*Guidance:*

*02 Agencies seeking to better accommodate driving automation system to support AVs, while also potentially benefitting human drivers, should consider:*

- *A. Normal width longitudinal lines of at least 6 inches in width (see Section 3A.04).*
- *B. Edge lines of at least 6 inches in width (see Sections 3A.04 and 3B.09).*
- *C. Dotted edge line extensions along all entrance and exit ramps, all auxiliary lanes, and all tapers where a deceleration or auxiliary lane is added (see Section 3B.11).*
- *D. Chevron markings in the neutral areas of exit gores to distinguish them from travel lanes (see Section 3B.25).*
- *E. Raised pavement markers only as a supplement to, rather than as a substitute for, pavement markings (see Sections 3B.16 and 3B.17).*
- *F. Uniform contrast markings on light-colored pavements to create greater contrast (see Section 3A.03).*
- *G. Broken lines with uniform marking and gap length (see Section 3A.04).*

## Section 5B.03 Highway Traffic Signals

*Guidance:*

*01 Agencies seeking to better accommodate driving automation systems to support AVs, while also potentially benefitting human drivers, should consider:*

A. *Consistent signal face placement along corridors with respect to overhead mounting versus post mounting on the side of the roadway (see Sections 4D.05 thru 4D.10).*
B. *Consistent number of signal faces for approach lanes and the selection of signal indications and signal clusters along a corridor to promote uniform displays for identical or similar situations (see Sections 4D.05 and 4D.06).*
C. *The refresh rate of LED traffic signals to provide for greater consistency in driving automation system detection.*
D. *Providing signal faces with backplates (see Section 4D.06) having retroreflective borders to enhance signal face conspicuity and detection by driving automation system sensors.*
E. *Using FLASHING YELLOW ARROW signal indications for permissive turns.*

Support:

02 Signal faces that display a CIRCULAR GREEN indication and that are located over or directly in line with a mandatory turn lane can be less effective for driving automation systems to recognize as a traffic signal face controlling permissive turning movements.

03 Achieving uniformity along a corridor is desirable for driving automation systems, but can be challenging. Multiple options are available for traffic signal displays to allow design variations based on specific intersection variables such as available overhead clearance, utility conflicts, signal support design constraints, and other factors. V2I capabilities can complement driving automation system recognition of traffic signals to provide redundancy, and to improve reliability and accuracy.

## Section 5B.04 Temporary Traffic Control

*Guidance:*

*01 Agencies seeking to better accommodate driving automation systems to support, while also potentially benefitting human drivers, in and through temporary traffic control (TTC) zones should consider:*

*A. Consistent type, spacing, and mounting height of signs (see Sections 6B.04 and 6F.02).*
*B. Use of the END ROAD WORK (G20-2) sign to establish the end of the TTC zone (see Section 6H.36).*
*C. Wider retroreflective material on, or reduced spacing of, channelizing devices to better accommodate driving automation system sensors in nighttime and adverse weather conditions (see Chapter 6K).*
*D. Continuous markings at the beginning of TTC zones and in lane transitions.*
*E. Temporary raised pavement markers only as a supplement to, rather than as a substitute for, pavement markings (see Section 6J.03).*
*F. Removal or obliteration of pavement markings that are no longer applicable as soon as practicable, for long-term stationary operations in the temporary traveled way (see Section 6J.01).*

Support:

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

02 Pavement markings ~~that are~~ not fully removed and pavement scarring are of particular concern as there can be misinterpretation by driving automation systems that can result in erroneous vehicle positioning in TTC zones.

03 V2I communications can complement driving automation systems recognition in TTC zones by communicating the presence of a TTC zone to vehicles.

04 Section 6J.01 describes the use of pavement markings in TTC zones and the removal or obliteration of existing pavement markings.

05 Section 6J.02 describes the use of temporary pavement markings in TTC zones.

## Section 5B.05 Traffic Control for Highway-Rail and Highway-Light Rail Transit Grade Crossings

*Guidance:*

*01 Agencies seeking to better accommodate driving automation systems to support AVs, while also potentially benefitting human drivers, at grade crossings should consider:*

*A. Consistent placement of signs and markings for passive and active grade crossings along a corridor to promote uniformity and to improve the ability of driving automation system technology to recognize grade crossings.*
*B. Removal of signs and pavement markings associated with grade crossings that are out of service (see Section 8A.09).*

Support:

02 V2I communications can complement driving automation system recognition of grade crossings to improve reliability and accuracy, and to relay information on the arrival or presence of a train or LRT vehicle at a grade crossing.

## Section 5B.06 Traffic Control for Bicycle Facilities

*Guidance:*

*01 Agencies seeking to better accommodate driving automation systems to support AVs, while also potentially benefitting human road users, should consider:*

*A. Use of an END (R3-9dP) plaque with a BIKE LANE (R3-17) sign to indicate the end of a bicycle lane that is merging with other traffic (see Sections 2B.33 and 9B.04).*

*B. Use of Bicycle Lane Ends (W9-5) and Bicycle Merging (W9-5a) warning signs in advance of the end of a bicycle lane and where a merging maneuver might occur (see Section 9C.07).*

Support:

02 Bicycle facilities that are physically separated from motor vehicle traffic using vertical objects or vertical separation can facilitate detection from driving automation system sensors (see Section 9E.07).

*THIS PAGE INTENTIONALLY LEFT BLANK*

# PART 6
# TEMPORARY TRAFFIC CONTROL

## CHAPTER 6A. GENERAL

### Section 6A.01 General

Support:

01 Whenever the acronym "TTC" is used in Part 6, it refers to "temporary traffic control."

**Standard:**

02 **The needs and control of all road users (motorists, bicyclists, and pedestrians within the highway, or on a site roadway open to public travel (see definition in Section 1C.02), including persons with disabilities) through a TTC zone shall be an essential part of highway construction, utility work, maintenance operations, and the management of traffic incidents.**

Support:

03 When the normal function of the roadway, or a site roadway open to public travel (see definition in Section 1C.02), is suspended, TTC planning provides for continuity of the movement of motor vehicle, bicycle, and pedestrian traffic (including accessible passage); transit operations; and access (and accessibility) to property and utilities.

04 The primary function of TTC is to facilitate movement of road users through or around TTC zones while protecting road users, workers, responders to traffic incidents, and equipment.

05 Of equal importance to the public traveling through the TTC zone is the safety of workers performing the many varied tasks within the work space. TTC zones present constantly changing conditions that are unexpected by the road user. This creates an even higher degree of vulnerability for the workers and incident management responders on or near the roadway (see Section 6C.04). At the same time, the TTC zone provides for the efficient completion of whatever activity interrupted the normal use of the roadway.

06 Consideration for road user safety, worker and responder safety, and the efficiency of road user flow is an integral element of every TTC zone, from planning through completion. A concurrent objective of the TTC is the efficient construction and maintenance of the highway and the efficient resolution of traffic incidents.

07 No one set of TTC devices can satisfy all conditions for a given project or incident. At the same time, defining details that would be adequate to cover all applications is impractical. Instead, Part 6 displays typical applications that depict common applications of TTC devices. The TTC selected for each situation depends on the type of highway, road user conditions, the duration of operation, physical constraints, and the nearness of the work space or incident management activity to road users.

08 The TTC needs on low-volume and special purpose roads will sometimes be minimal, especially for shorter-term durations and for lower-speed roads. The use of maintenance vehicle warning flashers, a limited number of signs, or a single flagger could be adequate for these situations.

09 Improved road user performance might be realized through a well-prepared public relations effort that covers the nature of the work, the time and duration of its execution, the anticipated effects upon road users, and possible alternate routes and modes of travel. Such programs have been found to result in a significant reduction in the number of road users traveling through the TTC zone, which reduces the possible number of conflicts.

10 Operational improvements might be realized by using intelligent transportation systems (ITS) in work zones. The use in work zones of ITS technology, such as portable camera systems, highway advisory radio, variable speed limits, ramp metering, traveler information, merge guidance, warning systems for vehicles exiting the work space, and queue detection information, is aimed at increasing safety for both workers and road users and helping to ensure a more efficient traffic flow. The use in work zones of ITS technologies has been found to be effective in providing traffic monitoring and management, data collection, and traveler information.

**Standard:**

11 **TTC plans and devices shall be the responsibility of the public body or official or the owners of site roadways open to public travel having jurisdiction for guiding road users.**

*Guidance:*

12 *There should be adequate statutory authority for the implementation and enforcement of needed road user*

*regulations, parking controls, speed zoning, and the management of traffic incidents. Such statutes should provide sufficient flexibility in the application of TTC to meet the needs of changing conditions in the TTC zone.*

Support:

13 The provisions of Part 6 apply to both rural and urban areas. A rural highway is normally characterized by lower volumes, higher speeds, fewer turning conflicts, and less conflict with pedestrians or other vulnerable road users. An urban street is typically characterized by relatively low speeds, wide ranges of road user volumes, narrower roadway lanes, frequent intersections and driveways, significant vulnerable road user activity, and more businesses and houses.

14 The determination as to whether a particular facility at a particular time of day can be considered to be a high-volume roadway or can be considered to be a low-volume roadway is made by the public agency or official having jurisdiction.

15 Special plans preparation and coordination with transit, other highway agencies, law enforcement and other emergency units, utilities, schools, trucking associations, and railroad companies might be needed to reduce unexpected and unusual road user operation situations.

16 Per the provisions of the Construction Safety Orders in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 4, Article 11, §§ 1598 and 1599), this Part of the California MUTCD is incorporated by reference as part of those regulations.

17 It is the responsibility of the Contractor or Organization performing work on, or adjacent to, a highway to install and maintain such devices which are necessary to provide passage for the traveling public (including pedestrians and bicyclists) through the work, as well as for the safeguard of workers.

**Standard:**

18 **Before work begins, traffic control plans, when developed for handling traffic through a construction or maintenance project, shall be approved by the Engineer or the Engineer's designee of the public agency or authority having jurisdiction over the roadway.**

Option:

19 When typical applications from Chapter 6P are to be used the Engineer or the Engineer's designee of the public agency or authority having jurisdiction over the highway may approve their use before the work begins to ensure the appropriate plans are used.

Support:

20 The following references from the California Vehicle Code (CVC) relate to TTC:

- § 165 – Authorized Emergency Vehicle.
- § 291 – Department of Transportation.
- § 385 – Local Authorities.
- § 21351.3 – Use of Metric System Designations.
- § 21363 – Detour Signs.
- § 21367 – Traffic Control: Highway Construction.
- § 21466.5 – Light Impairing Driver's Vision.
- § 22362 – Speed Limit Where Persons are at Work.

## Section 6A.02 Fundamental Principles of Temporary Traffic Control

*Guidance:*

01 *Road user and worker safety and accessibility in TTC zones should be an integral and high-priority element of every project from planning through design and construction. Similarly, maintenance and utility work should be planned and conducted with the safety and accessibility of all motorists, bicyclists, pedestrians (including those with disabilities), and workers being considered at all times. If the TTC zone includes a grade crossing, early coordination with the railroad company or light rail transit agency should take place.*

02 *The following are the seven fundamental principles of TTC:*

*A. General plans or guidelines should be developed to provide safety for motorists, bicyclists, pedestrians, workers, enforcement/emergency officials, and equipment, with the following factors being considered:*

*1. The basic safety principles governing the design of permanent roadways and roadsides should also govern the design of TTC zones. The goal should be to route road users through such zones using roadway geometrics, roadside features, and TTC devices as nearly as possible comparable to those for normal highway situations.*

2. *A TTC plan, in detail appropriate to the complexity of the work project or incident, should be prepared and understood by all responsible parties before the site is occupied.*

**Standard:**

**Any changes in the TTC plan ~~*should*~~ shall be approved by ~~*an official who is knowledgeable (for example, trained and/or certified) in proper TTC practices.*~~ the Engineer or the Engineer's designee of the public agency or authority having jurisdiction over the highway. Refer to California Board for Professional Engineers, Land Surveyors, and Geologists' Professional Engineers (PE) Act included in Business and Professions Code §§ 6700 to 6799.**

*Guidance:*

B. *Road user movement should be inhibited as little as practical, based on the following considerations:*
   1. *TTC at work and incident sites should be designed on the assumption that drivers will only reduce their speeds if they clearly perceive a need to do so (see Section 6B.01).*
   2. *Frequent and abrupt changes in geometrics such as lane narrowing, dropped lanes, or main roadway transitions that require rapid maneuvers, should be avoided.*
   3. *Work should be scheduled in a manner that minimizes the need for lane closures or alternate routes, while still getting the work completed quickly and the lanes or roadway open to traffic as soon as possible.*
   4. *Attempts should be made to reduce the volume of traffic using the roadway or freeway to match the restricted capacity conditions. Road users should be encouraged to use alternative routes. When the roadway capacity is reduced because of lane closures, the demand could exceed the available capacity, which might result in either a lengthy stopped or slow moving queue of vehicles that might extend past the normal location of the signs shown in the typical advance warning area. An assessment of the expected queue length, which should be a part of the TTC plan design process, might result in adjustments to the sign spacing and number of signs as well as the use of more conspicuous devices to increase the distance and conspicuity of the advance warning area. For high-volume roadways and freeways, the closure of selected entrance ramps or other access points and the use of signed diversion routes should be evaluated.*
   5. *Bicyclists and pedestrians, including those with disabilities, should be provided with access and passage through the TTC zone.*
   6. *If work operations permit, lane closures on high-volume streets and highways should be scheduled during off-peak hours. Night work should be considered if the work can be accomplished with a series of short-term operations.*
   7. *Early coordination with officials having jurisdiction over the affected cross streets and providing emergency services should occur if significant impacts to roadway operations are anticipated.*

C. *Motorists, bicyclists, and pedestrians should be guided in a clear and positive manner while approaching and traversing TTC zones and incident sites. The following principles should be applied:*
   1. *Adequate warning, delineation, and channelization should be provided to assist in guiding road users in advance of and through the TTC zone or incident site by using proper pavement marking, signing, or other devices that are effective under varying conditions. Information should be provided in usable formats for pedestrians with vision disabilities.*
   2. *TTC devices inconsistent with intended travel paths through TTC zones should be removed or covered. However, in intermediate-term stationary, short-term, and mobile operations, where visible permanent devices are inconsistent with intended travel paths, devices that highlight or emphasize the appropriate path should be used. Traffic control devices should provide information in usable formats for pedestrians with vision disabilities.*
   3. *Flagging procedures, when used, should provide positive guidance to road users traversing the TTC zone.*

D. *To provide acceptable levels of operations, routine day and night inspections of TTC elements should be performed as follows:*
   1. *Individuals who are knowledgeable (for example, trained and/or certified) in the principles of proper TTC should be assigned responsibility for safety in TTC zones. The most important duty of these individuals is to check that TTC devices on the project are consistent with the TTC plan and are effective for motorists, bicyclists, pedestrians, and workers.*
   2. *As the work progresses, temporary traffic controls and/or working conditions should be modified, as needed, to facilitate road user movement and provide worker safety. The individual responsible for TTC*

*should have the authority to halt work until applicable or remedial safety measures are taken.*

3. *TTC zones should be carefully monitored under varying conditions of road user volumes, light, and weather to check that applicable TTC devices are effective, clearly visible, clean, and in compliance with the TTC plan.*
4. *When warranted, an engineering study should be made (in cooperation with law enforcement officials) of reported crashes occurring within the TTC zone. Crash records in TTC zones should be monitored to identify the need for changes in the TTC zone.*

E. *Attention should be given to the maintenance of roadside safety during the life of the TTC zone by applying the following principles:*
1. *To accommodate run-off-the-road incidents, disabled vehicles, or emergency situations, unencumbered roadside recovery areas or clear zones should be provided where practical.*
2. *Channelization of road users should be accomplished by the use of pavement markings, signing, and crashworthy, detectable channelizing devices.*
3. *Work equipment, workers' private vehicles, materials, and debris should be stored in such a manner to reduce the probability of being impacted by run-off-the-road vehicles.*

F. *Each person whose actions affect TTC zone safety, from the upper-level management through the field workers, should receive training appropriate to the job decisions each individual is required to make. Only those individuals who are trained in proper TTC practices and have a basic understanding of the principles (established by applicable standards and guidelines, including those of this Manual) should supervise the selection, placement, and maintenance of TTC devices used for TTC zones and for incident management.*

G. *Good public relations should be maintained by applying the following principles:*
1. *The needs of all road users should be assessed such that appropriate advance notice is given and clearly defined alternative paths are provided.*
2. *The cooperation of the various news media should be sought in publicizing the existence of and reasons for TTC zones because news releases can assist in keeping the road users well informed.*
3. *The needs of abutting property owners, residents, and businesses should be assessed and appropriate accommodations made.*
4. *The needs of emergency service providers (law enforcement, fire, and medical) should be assessed and appropriate coordination and accommodations made.*
5. *The needs of railroads and transit should be assessed and appropriate coordination and accommodations made.*
6. *The needs of operators of commercial vehicles such as buses and large trucks should be assessed and appropriate accommodations made.*
7. *Early coordination should occur with school officials to discuss potential impacts on picking up and dropping off schoolchildren, on school bus routing, and on safe routes to school patterns.*

Option:

8. Public Information - Improved road user performance may be realized through a well-prepared and complete public relations effort that covers the nature of the work, the time and duration of its execution, its anticipated effects on traffic, and possible alternate routes and modes of travel. Such programs can encourage the use of alternate routes, thus allowing consideration of temporary lane closures for additional buffer space.

## Section 6A.03 TTC Devices

*Guidance:*

01 *The design and application of TTC devices used in TTC zones should consider the needs of all road users (motorists, bicyclists, and pedestrians), including those with disabilities.*

**Standard:**

02 **Traffic control devices shall be defined as all signs, signals, markings, channelizing devices, or other devices that use colors, shapes, symbols, words, sounds, or tactile information for the primary purpose of communicating a regulatory, warning, or guidance message to road users on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel.**

03 **All traffic control devices used for construction, maintenance, utility, or incident management operations on a street, highway, pedestrian facility, bikeway, pathway, or site roadway open to public travel shall comply with**

**the applicable provisions of this Manual.**

04 **All TTC devices shall be removed as soon as practical when they are no longer needed. When work is suspended for short periods of time, TTC devices that are no longer appropriate shall be removed or covered.**

05 **On public roadways, covers for TTC signs shall be of sufficient size and density to completely block out the message so that it is not visible either during the day or at night. Covers shall be fastened securely to prevent movement caused by wind action. Refer to Caltrans' Standard Specifications Section 12-3.11. Refer to Section 1A.05 for information regarding this publication.**

Support:

06 Refer to Caltrans' Highway Design Manual Section 110.7 for Traffic Control Plans. Refer to Caltrans' Transportation Management Plan Guidelines for Temporary Traffic Control Zone Transportation Management Plan. Refer to Section 1A.05 for information regarding these publications.

## Section 6A.04 Crashworthiness of TTC Devices

Support:

01 Various Sections of the MUTCD require certain traffic control devices, their supports, and/or related appurtenances to be crashworthy (see definition in Section 1C.02). Such MUTCD crashworthiness provisions apply to all streets, highways, and site roadways open to public travel.

## Section 6A.05 Night Work

Support:

01 Conducting highway construction and maintenance activities during night hours could provide an advantage when traditional daytime traffic control strategies cannot achieve an acceptable balance between worker and public safety, traffic and community impact, and constructability. The two basic advantages of working at night are reduced traffic congestion and less involvement with business activities. However, the two basic conditions that must normally be met for night work to offer any advantage are reduced traffic volumes and easy set up and removal of the traffic control patterns on a nightly basis.

02 Shifting work activities to night hours, when traffic volumes are lower and normal business is less active, might offer an advantage in some cases, as long as the necessary work can be completed and the worksite restored to essentially normal operating conditions to carry the higher traffic volume during non- construction hours.

03 Although working at night might offer advantages, it also includes safety issues. Reduced visibility inherent in night work impacts the performance of both drivers and workers. Because traffic volumes are lower and congestion is minimized, speeds are often higher at night necessitating greater visibility at a time when visibility is reduced. Finally, the incidence of impaired (alcohol or drugs), fatigued, or drowsy drivers might be higher at night.

04 Working at night also involves other factors, including construction productivity and quality, social impacts, economics, and environmental issues. A decision to perform construction or maintenance activities at night normally involves some consideration of the advantages to be gained compared to the safety and other issues that might be impacted.

05 Section 6N.18 contains specific provisions on TTC for work during nighttime hours.

# CHAPTER 6B. TEMPORARY TRAFFIC CONTROL ELEMENTS

## Section 6B.01 Temporary Traffic Control Plans

Support:

01 Each TTC zone is different. Many variables, such as location of work, highway type, geometrics, vertical and horizontal alignment, intersections, interchanges, road user volumes, road user mix (motorists, bicyclists, and pedestrians), road vehicle mix (buses, trucks, and cars), and road user speeds affect the needs of each zone. The goal of TTC in work zones is safety with minimum disruption to road users. The key factor in promoting TTC zone safety is proper judgment.

02 A TTC plan describes TTC measures to be used for facilitating road users through a work zone or an incident area. TTC plans play a vital role in facilitating road user flow when a work zone, incident, or other event temporarily disrupts normal road user flow. Important auxiliary provisions that cannot conveniently be specified on project plans can easily be incorporated into Special Provisions within the TTC plan.

03 TTC plans range in scope from being very detailed to simply referencing typical drawings contained in this Manual, standard approved highway agency drawings and manuals, or specific drawings contained in the contract documents. The degree of detail in the TTC plan depends entirely on the nature and complexity of the situation.

04 During TTC activities, commercial vehicles might need to follow a different route from passenger vehicles because of bridge, weight, clearance, or geometric restrictions. Also, vehicles carrying hazardous materials might need to follow a different route from other vehicles. The Hazardous Materials and National Network signs are included in Sections 2B.67 and 2B.68, respectively.

*Guidance:*

*05 A TTC plan should be developed for planned activities that will affect road users. A TTC plan should be developed for unplanned and emergency situations where practicable.*

*06 The TTC plan should start in the planning phase and continue through the design, construction, and restoration phases. The TTC plans and devices should follow the principles set forth in Part 6. The management of traffic incidents should follow the principles set forth in Chapter 6O.*

*07 TTC plans should be prepared by persons knowledgeable (for example, trained and/or certified) about the fundamental principles of TTC and work activities to be performed. The design, selection, and placement of TTC devices for a TTC plan should be based on engineering judgment.*

*08 Coordination should be made between adjacent or overlapping projects to check that duplicate signing is not used and to check compatibility of traffic control between adjacent or overlapping projects.*

*09 Traffic control planning should be completed for all highway construction, utility work, maintenance operations, and incident management including minor maintenance and utility projects prior to occupying the TTC zone. Planning for all road users should be included in the process.*

*10 For any planned special event that will have an impact on the traffic on any street or highway, a TTC plan should be developed in conjunction with and be approved by the agency or agencies that have jurisdiction over the affected roadways.*

*11 Provisions for effective continuity of accessible circulation paths for pedestrians should be incorporated into the TTC plan.*

Option:

12 Provisions may be incorporated into the project bid documents that enable contractors to develop an alternate TTC plan.

13 Modifications of TTC plans may be necessary because of changed conditions or a determination of better methods of safely and efficiently handling road users.

~~*Guidance:*~~

**Standard:**

14 **This alternate or modified plan ~~should~~ shall have the approval of the Engineer or the Engineer's designee of the public agency or authority having jurisdiction over the highway ~~responsible highway agency or owner of site roadways open to public travel~~ prior to implementation.**

*Guidance:*

*15 Provisions for effective continuity of transit service should be incorporated into the TTC planning process because*

*often public transit buses cannot efficiently be detoured in the same manner as other vehicles (particularly for short-term maintenance projects). Where applicable, the TTC plan should provide for features such as accessible temporary bus stops, pull-outs, and satisfactory waiting areas for transit patrons, including persons with disabilities (see Section 8A.13 for additional light rail transit issues to consider for TTC).*

16 *Provisions for effective continuity of railroad service and acceptable access to abutting property owners and businesses should also be incorporated into the TTC planning process.*

## Reduced Speed Limits in TTC Zones

17 *Reduced speed zoning (lowering the regulatory speed limit) should be avoided as much as practical because drivers will reduce their speeds only if they clearly perceive a need to do so.*

18 *If reduced speed limits are used, they should be used only in the specific portion of the TTC zone where conditions or restrictive features are present. However, frequent changes in the speed limit should be avoided. A TTC plan should be designed so that vehicles can travel through the TTC zone with a speed limit reduction of no more than 10 mph.*

19 *A reduction of more than 10 mph in the speed limit should be used only when required by restrictive features in the TTC zone. Where restrictive features justify a speed reduction of more than 10 mph, additional driver notification should be provided. The speed limit should be stepped down in advance of the location requiring the lowest speed, and additional TTC warning devices should be used.*

**Standard:**

19a **The justification for the reduced regulatory speed limit shall be documented in writing. Refer to CVC §§ 21367 and 22362.**

Support:

20 Research has demonstrated that large reductions in the speed limit, such as a 30 mph reduction, increase speed variance and the potential for crashes. Smaller reductions in the speed limit of up to 10 mph cause smaller changes in speed variance and lessen the potential for increased crashes. A reduction in the regulatory speed limit of only up to 10 mph from the normal speed limit has been shown to be more effective.

20a See Section 2B.21 for Regulatory Speed Limit signs and Speed Zones.

20b See Section 6G.08 for WORK ZONE (G20-5aP) plaque and END WORK ZONE SPEED LIMIT (R2-12) sign.

20c CVC § 22362 gives the agency having jurisdiction over a highway the authority to regulate the speed of traffic to provide protection for workers when at work on the roadway or within the right-of-way so close thereto as to be endangered by passing traffic by placing appropriate signs indicating the limits of the restricted construction zone and the applicable speed limit at required locations.

20d Under CVC § 21367, traffic may be regulated by warning signs, lights, appropriate control devices, or by a person or persons controlling and directing the flow of traffic, gives the agency having jurisdiction over a highway the authority to regulate the speed of traffic whenever the traffic would endanger the safety of workers or the work would interfere with or endanger the movement of traffic through the area.

*Guidance:*

20e *The need for a long-term reduced speed limit within a TTC zone should be a decision made during the project development process. The need for a short-term reduced speed limit within a TTC zone, such as a maintenance activity, should be determined in advance of planned maintenance activities.*

Option:

20f If lowering speed limits for a short-term, such as a maintenance activity, signs lowering the speed limit by 10 mph or less may be placed in work zones that are not protected by a positive barrier and involve workers on foot or on equipment.

*Guidance:*

20g *Reducing speed limits in TTC zones should be avoided if traffic speeds can be reduced by other means. Speed restrictions should be imposed on the public only when necessary for worker or public safety.*

**Standard:**

20h **Where traffic obstructions exist only during the hours of construction, the speed zone signs shall be covered during non-working hours.**

Support:

20i CVC § 22362 applies to "When Workers are Present" condition and signs need to be covered or removed when no work is in progress. As per CVC § 21367, agency can "...regulate the movement of traffic...whenever the traffic would endanger the safety of workers or the work would interfere with or endanger the movement of traffic through the area." If obstructions would be present throughout the project duration the signs would not need to be covered or removed. This would also apply to situations where the

construction work changes the highway configuration, curvature or elevation, making it necessary to post reduced speed limits.

Option:

20j The Advisory Speed (W13-1P) plaque may be used in combination with various warning type signs to decrease speed at a particular location. See Section 6H.32

*Guidance:*

20k *To preserve the effectiveness of the W13-1P plaque, it should not be used unless the condition to which it applies is immediate and will be experienced by all motorists.*

20l *Construction zone speed limits should be reduced in sequential stages and where overall reduction of 15 mph or more is required. The first stage of the sequence should be a reduction of 10 mph and the final stage reduction should be 10 mph or 5 mph, as necessary.*

**Standard:**

20m **The reduced speed limit shall not be less than 25 mph. Refer to CVC § 22362.**

20n **Speed limit signs for reduced speed limits shall be posted only in areas where the traveling public is affected by TTC operations.**

20o **Signs shall be used only during working hours and removed, or covered during non-working hours unless the movement of traffic through the TTC zone is affected during non-working hours as well. Refer to CVC § 21367.**

20p **Signs shall be removed immediately following completion of the construction or change in the conditions for which they were installed. When the construction is completed or the speed restriction is no longer necessary, the formal speed zone orders shall be revoked.**

Support:

21 Chapter 6P contains typical applications (TAs) of TTC zones that are organized according to duration, location, type of work, and highway type. Table 6P-1 is an index of these typical applications. These typical applications include the use of various TTC methods, but do not include a layout for every conceivable work situation.

22 Decisions regarding the selection of the most appropriate typical application to use as a guide for a specific TTC zone require an understanding of each situation. Although there are many ways of categorizing TTC zone applications, the typical applications illustrated in Chapter 6P are characterized by work duration, work location, work type, and highway type.

*Guidance:*

23 Typical applications should be altered, when necessary, to fit the conditions of a particular TTC zone.

Option:

24 Other devices may be added to supplement the devices shown in the typical applications. The sign spacings and taper lengths may be increased to provide additional time or space for driver response.

25 Devices labeled as optional in the typical applications may be deleted.

Support:

26 Formulating specific plans for TTC at traffic incidents is difficult because of the variety of situations that can arise.

27 Well-designed TTC plans for planned special events will likely be developed from a combination of treatments from several of the typical applications.

## Section 6B.02 Temporary Traffic Control Zones

Support:

01 A TTC zone is an area of a highway where road user conditions are changed because of a work zone, an incident zone, or a planned special event through the use of TTC devices, uniformed law enforcement officers, or other authorized personnel.

02 A work zone is an area of a highway with construction, maintenance, or utility work activities. A work zone is typically marked by signs, channelizing devices, barriers, pavement markings, and/or work vehicles. It extends from the first warning sign or high-intensity rotating, flashing, oscillating, or strobe lights on a vehicle to the END ROAD WORK sign or the last TTC device.

03 An incident zone is an area of a highway where temporary traffic controls are imposed by authorized officials in response to a traffic incident (see Section 6O.01). It extends from the first warning device (such as a sign, light, or cone) to the last TTC device or to a point where road users return to the original lane alignment and are clear of the incident.

04 A planned special event often creates the need to establish altered traffic patterns to handle the increased traffic volumes generated by the event. The size of the TTC zone associated with a planned special event can be small, such as

closing a street for a festival, or can extend throughout a municipality for larger events. The duration of the TTC zone is determined by the duration of the planned special event.

## Section 6B.03 Components of Temporary Traffic Control Zones

Support:

01 A TTC zone is often divided into four areas as needed, based on engineering judgment: the advance warning area, the transition area, the activity area, and the termination area. Figure 6B-1 illustrates the four areas typically included in a TTC zone. These four areas are described in Sections 6B.04 through 6B.07.

## Section 6B.04 Advance Warning Area

Support:

01 The advance warning area is the section of highway where road users are informed about the upcoming transition and activity areas or incident area.

Option:

02 The advance warning area may vary from a single sign or high-intensity rotating, flashing, oscillating, or strobe lights on a vehicle to a series of signs in advance of the TTC zone activity area.

*Guidance:*

03 *Typical distances for placement of advance warning signs on freeways and expressways should be longer because drivers are conditioned to uninterrupted flow. Therefore, the advance warning sign placement should extend on these facilities as far as ½ mile or more.*

04 *On urban streets, the effective placement of the nearest warning sign to the TTC zone, in feet, should range from 4 to 8 times the speed limit in mph, with the high end of the range being used when speeds are relatively high. When two or more advance warning signs are used on higher-speed streets, such as major arterials, the advance warning area should extend a greater distance (see Table 6B-1).*

Option:

05 When a single advance warning sign is used (in cases such as low-speed residential streets), the advance warning area may be as short as 100 feet.

*Guidance:*

06 *Since rural highways are normally characterized by higher speeds, the effective placement of the first warning sign in feet should be substantially longer—from 8 to 12 times the speed limit in mph. Since two or more advance warning signs are normally used for these conditions, the advance warning area should extend 1,500 feet or more for open highway conditions (see Table 6B-1).*

07 *The distances contained in Table 6B-1 are approximate, are intended for guidance purposes only, and should be applied with engineering judgment. These distances should be adjusted for field conditions, if necessary, by increasing or decreasing the recommended distances.*

Support:

08 The need to provide additional reaction time for a condition is one example of justification for increasing the sign spacing. Conversely, decreasing the sign spacing might be justified in order to place a sign immediately downstream of an intersection or major driveway such that traffic turning onto the roadway in the direction of the TTC zone will be warned of the upcoming condition.

Option:

09 Advance warning may be eliminated when the activity area is ~~sufficiently removed from the road users' path~~ behind a barrier, more than 2 feet behind the curb, or 15 feet or more from the edge of the traveled way so that it does not interfere with the normal flow.

## Section 6B.05 Transition Area

Support:

01 The transition area is that section of highway where road users are redirected out of their normal path. Transition areas usually involve strategic use of tapers, which because of their importance are discussed separately in detail.

**Standard:**

02 **Except for mobile operations, when redirection of the road users' normal path is required, road users shall be directed from the normal path to a new path with appropriate channelizing devices, traffic control devices,**

**and/or TTC methods.**

Option:

03 Because it is impracticable in mobile operations to redirect the road users' normal path with stationary channelization, more dominant vehicle-mounted traffic control devices, such as arrow boards, portable changeable message signs, and high-intensity rotating, flashing, oscillating, or strobe lights, may be used instead of channelizing devices to establish a transition area.

## Section 6B.06 Activity Area

Support:

01 The activity area is the section of the highway where the work activity takes place. It is comprised of the work space, the traffic space, and the buffer space.

02 The work space is that portion of the highway closed to road users and set aside for workers, equipment, and material, and a shadow vehicle if one is used upstream. Work spaces are usually delineated for road users by channelizing devices or, to exclude vehicles and pedestrians, by temporary barriers.

Option:

03 The work space may be stationary or may move as work progresses.

*Guidance:*

*04 Since there might be several work spaces (some even separated by several miles) within the project limits, each work space should be adequately signed to inform road users and reduce confusion.*

Support:

05 The traffic space is the portion of the highway in which road users are routed through the activity area.

06 The buffer space is a lateral and/or longitudinal area that separates road user flow from the work space or an unsafe area, and might provide some recovery space for an errant vehicle.

*Guidance:*

*07 Neither work activity nor storage of equipment, vehicles, or material should occur within a buffer space.*

Option:

08 Buffer spaces may be positioned either longitudinally or laterally with respect to the direction of road user flow. The activity area may contain one or more lateral or longitudinal buffer spaces.

09 A longitudinal buffer space may be placed in advance of a work space.

*Guidance:*

10 *The longitudinal buffer space ~~may~~ should also be used to separate opposing road user flows that use portions of the same traffic lane, as shown in Figure 6B-2.*

Option:

11 If a longitudinal buffer space is used, the values shown in Table 6B-2 and Table 6B-2(CA) may be used to determine the length of the longitudinal buffer space.

Support:

12 Typically, the buffer space is formed as a traffic island and defined by channelizing devices.

13 When a shadow vehicle, arrow board, or changeable message sign is placed in a closed lane in advance of a work space, only the area upstream of the vehicle, arrow board, or changeable message sign constitutes the buffer space.

Option:

14 The lateral buffer space may be used to separate the traffic space from the work space, as shown in Figures 6B-1 and 6B-2, or such areas as excavations or pavement-edge drop-offs. A lateral buffer space also may be used between two travel lanes, especially those carrying opposing flows.

*Guidance:*

15 *The width of a lateral buffer space should be determined by engineering judgment.*

Option:

16 When work occurs on a high-volume, highly-congested facility, a vehicle storage or staging space may be provided for incident response and emergency vehicles (for example, tow trucks and fire apparatus) so that these vehicles can respond quickly to road user incidents.

## Section 6B.07 Termination Area

Support:

01 The termination area is the section of the highway where road users are returned to their normal driving path. The termination area extends from the downstream end of the work area to the last TTC device such as END ROAD WORK signs, if posted.

Option:

02 An END ROAD WORK sign, a Speed Limit sign, or other signs may be used to inform road users that they can resume normal operations.

03 A longitudinal buffer space may be used between the work space and the beginning of the downstream taper.

## Section 6B.08 Tapers

Option:

01 Tapers may be used in both the transition and termination areas. Whenever tapers are to be used in close proximity to an interchange ramp, crossroads, curves, or other influencing factors, the length of the tapers may be adjusted.

Support:

02 Tapers are created by using a series of channelizing devices and/or pavement markings to move traffic out of or into the normal path. Types of tapers are shown in Figure 6B-2.

03 Longer tapers are not necessarily better than shorter tapers (particularly in urban areas with characteristics such as short block lengths or driveways) because extended tapers tend to encourage sluggish operation and to encourage drivers to delay lane changes unnecessarily. The test concerning adequate lengths of tapers involves observation of driver performance after TTC plans are put into effect.

*Guidance:*

04 *The appropriate taper length (L) should be determined using the criteria shown in Tables 6B-3, 6B-3(CA) and 6B-4.*

Support:

05 A merging taper requires the longest distance because drivers are required to merge into common road space.

*Guidance:*

06 *A merging taper should be long enough to enable merging drivers to have adequate advance warning and sufficient length to adjust their speeds and merge into an adjacent lane before the downstream end of the transition.*

Support:

07 A shifting taper is used when a lateral shift is needed. When more space is available, a longer than minimum taper distance can be beneficial. Changes in alignment can also be accomplished by using horizontal curves designed for normal highway speeds.

*Guidance:*

08 *A shifting taper should have a length of approximately ½ L (see Tables 6B-3, 6B-3(CA) and 6B-4).*

Support:

09 A shoulder taper might be beneficial on a high-speed roadway where shoulders are part of the activity area and are closed, or when improved shoulders might be mistaken as a driving lane. In these instances, the same type, but abbreviated, closure procedures used on a normal portion of the roadway can be used.

*Guidance:*

10 *If used, shoulder tapers should have a length of approximately ⅓ L (see Tables 6B-3, 6B-3(CA) and 6B-4). If a shoulder is used as a travel lane, either through practice or during a TTC activity, a normal merging or shifting taper should be used.*

Support:

11 A downstream taper might be useful in termination areas to provide a visual cue to the driver that access is available back into the original lane or path that was closed.

*Guidance:*

12 *If used, a downstream taper should have a minimum length of 50 feet and a maximum length of 100 feet with devices placed at a spacing of approximately 20 feet.*

Support:

13 The one-lane, two-way taper is used in advance of an activity area that occupies part of a two-way roadway in such a manner that a portion of the road is used alternately by traffic in each direction.

*Guidance:*

14 *A taper having a minimum length of 50 feet and a maximum length of 100 feet with channelizing devices at approximately 20-foot spacing should be used to guide traffic into the one-lane section, and a downstream taper should be used to guide traffic back into their original lane.*

Support:

15 An example of a one-lane, two-way traffic taper is shown in Figure 6B-3.

*Guidance:*

16 *On State highways, Caltrans' Standard Plans for Traffic Control Systems (Standard Plans T9 through T27) should be used. See Section 1A.05 for information regarding this publication.*

## Section 6B.09 Detours and Diversions

Support:

01 A detour is a temporary rerouting of road users onto an existing highway in order to avoid a TTC zone.

*Guidance:*

02 *Detours should be clearly signed over their entire length so that road users can easily use existing highways to return to the original highway.*

Support:

03 A diversion is a temporary rerouting of road users onto a temporary highway or alignment placed around the work area.


**Standard:**

04 **The detour route shall be evaluated for height, weight, and size restrictions. Appropriate signs shall be posted along the route to advise road users of any restrictions. Refer to CVC § 21363 for detour signs.**


Option:

05 Advance signs or changeable message signs (CMS) may be necessary to give trucks an opportunity to turn around and retrace their path or select another route.


## Figure 6B-1. Component Parts of a Temporary Traffic Control Zone

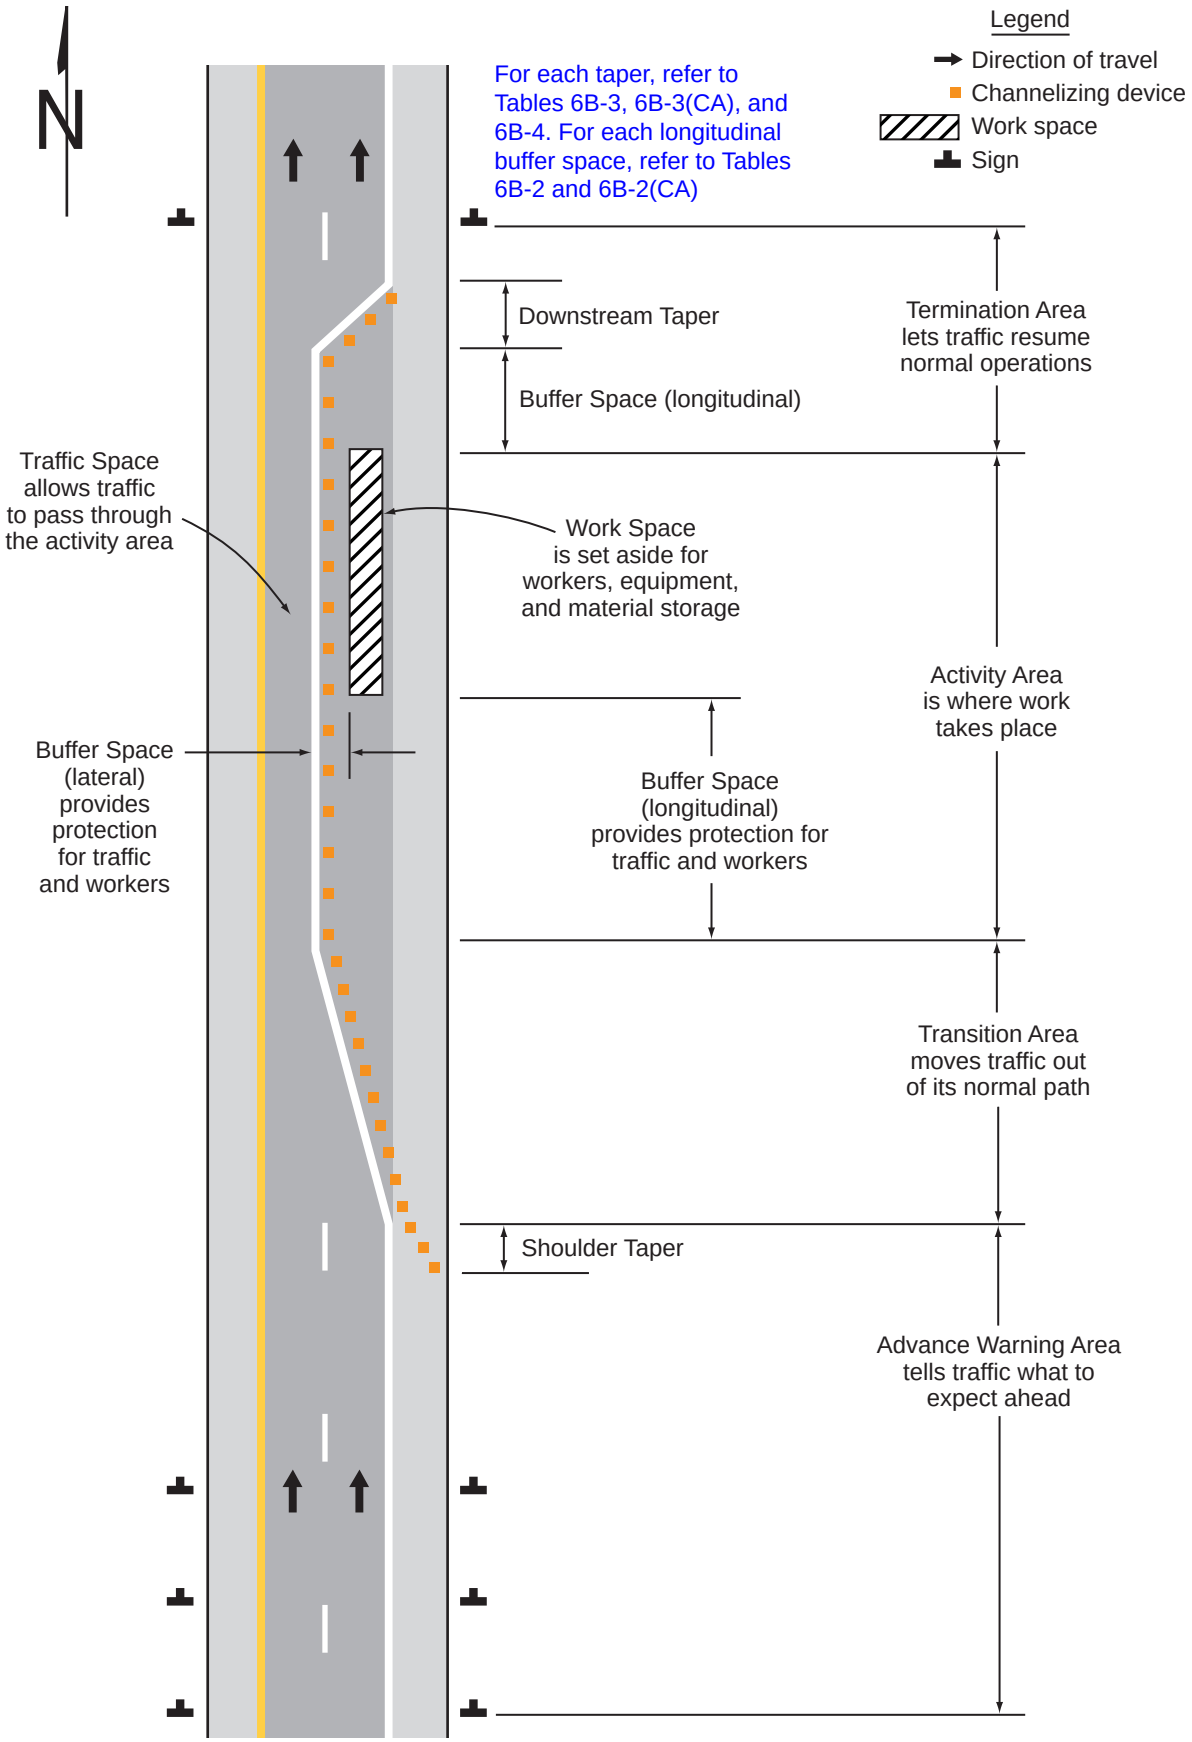

# Figure 6B-2. Types of Tapers and Buffer Spaces

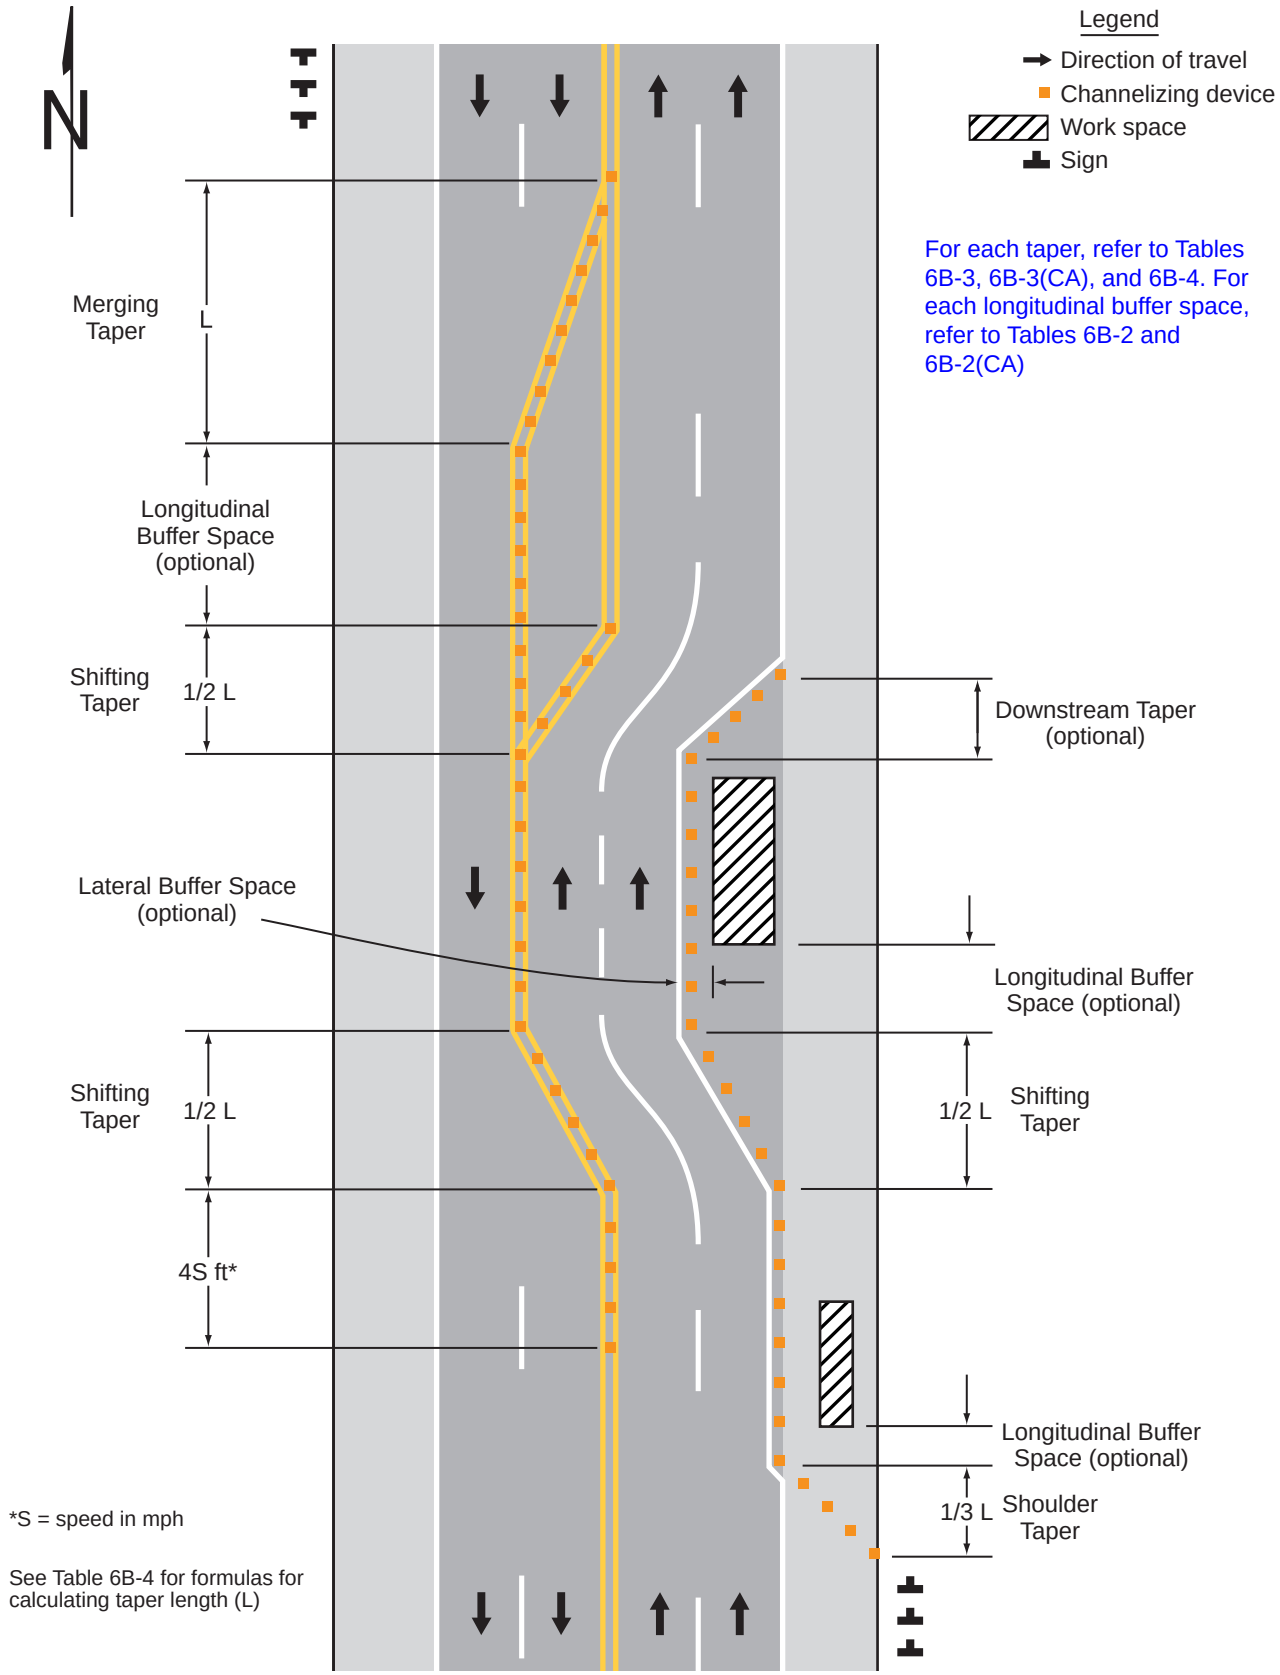

## Figure 6B-3. Example of a One-Lane, Two-Way Traffic Taper

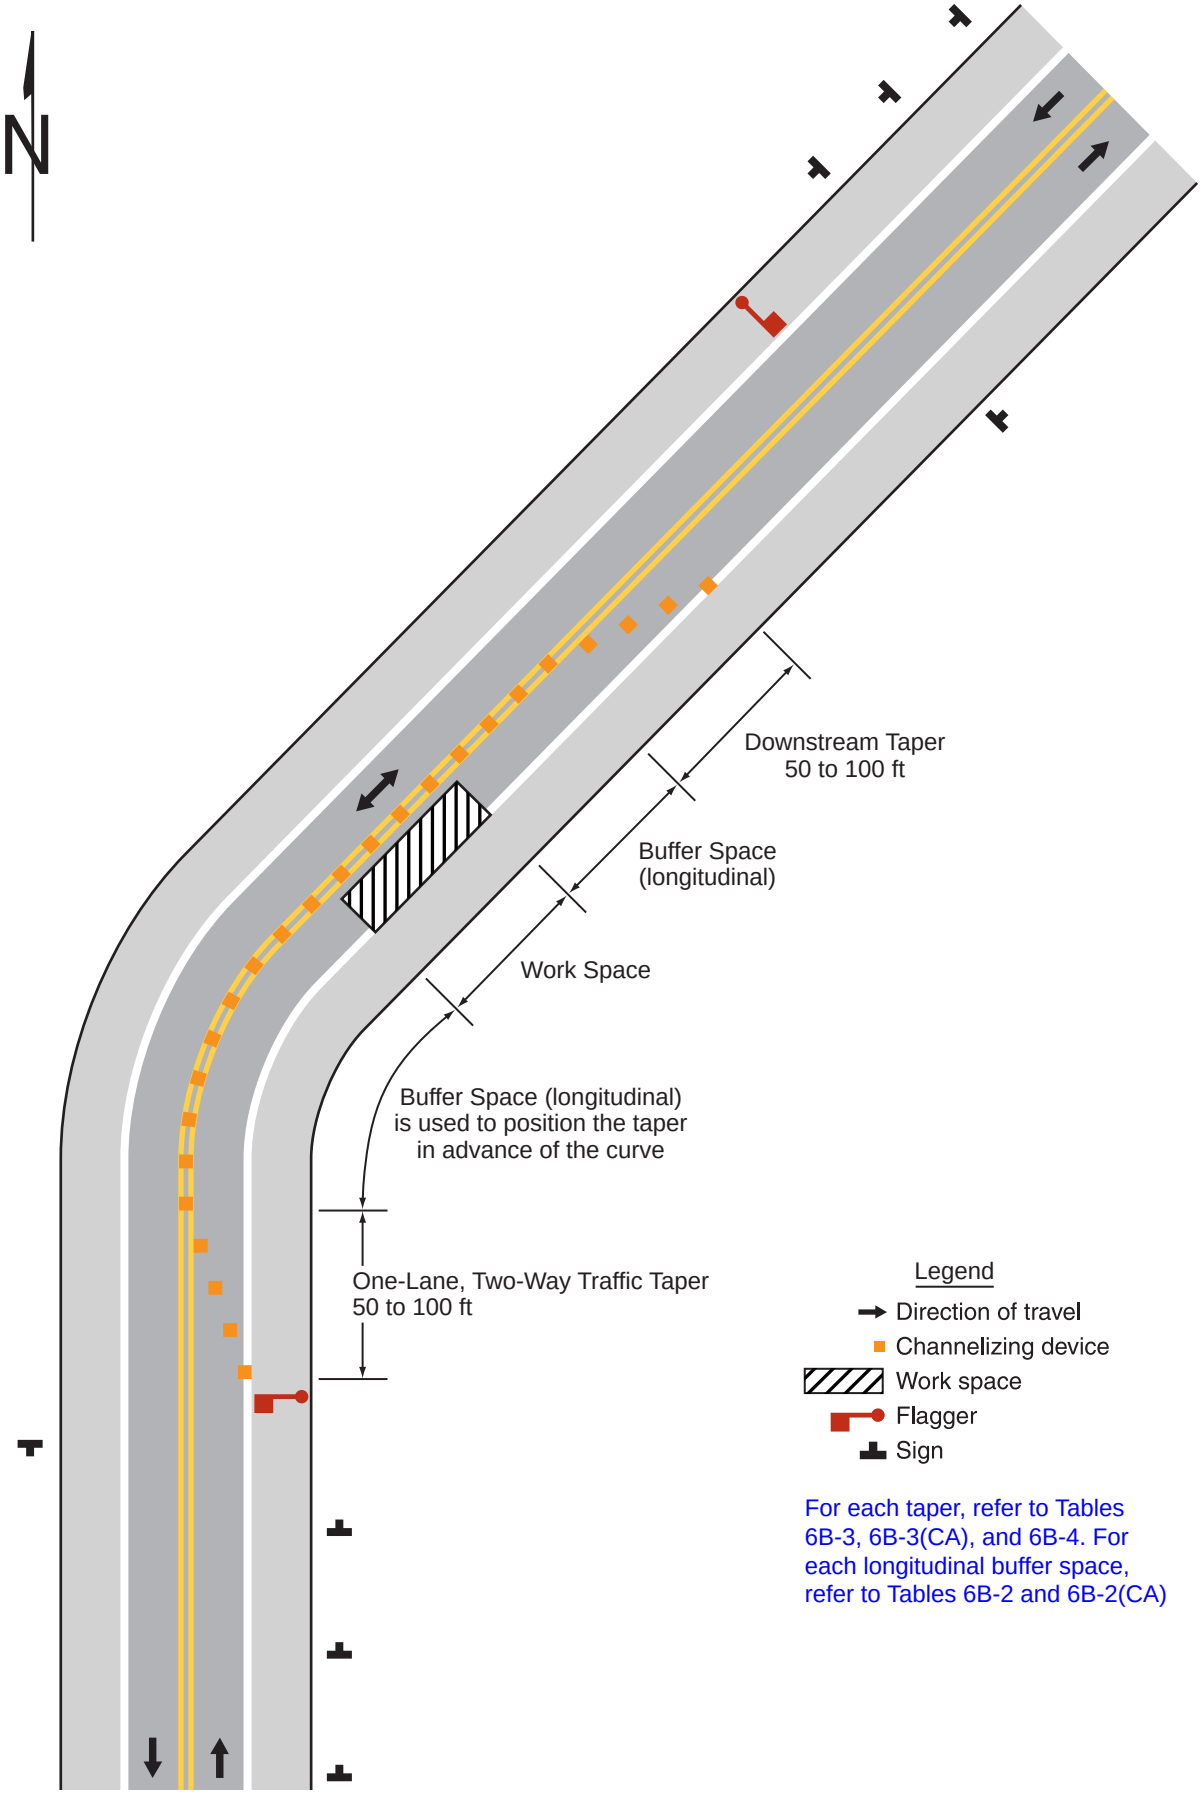

## Table 6B-1. Recommended Advance Warning Sign ~~Minimum~~ Spacing

| Road Type | Distance between Signs** | | |
|---|---|---|---|
| | A | B | C |
| Urban ~~(low speed)~~* 25 mph or less*** | 100 feet | 100 feet | 100 feet |
| Urban – 30 mph*** | 150 feet | 150 feet | 150 feet |
| Urban – 35 mph*** | 200 feet | 200 feet | 200 feet |
| Urban – 40 mph*** | 250 feet | 250 feet | 250 feet |
| Urban – 45 mph*** | 300 feet | 300 feet | 300 feet |
| Urban ~~(high speed)~~* 50 mph or more*** | 350 feet | 350 feet | 350 feet |
| Rural | 500 feet | 500 feet | 500 feet |
| Expressway / Freeway | 1,000 feet | 1,500 feet | 2,640 feet |

* ~~Speed category to be determined by the highway agency or owner of site roadways open to public travel.~~

** The column headings A, B, and C are the dimensions shown in Figures 6P-1 through 6P-54**** The A dimension is the distance from the transition or point of restriction to the first sign. The B dimension is the distance between the first and second signs. The C dimension is the distance between the second and third signs. (The "first sign" is the sign in a three-sign series that is closest to the TTC zone. The "third sign" is the sign that is furthest upstream from the TTC zone.)

*** Posted speed limit, off-peak 85th – percentile speed prior to work starting, or other anticipated operating speed in mph.

**** Refer to FHWA's List of Known Errors for error in **. Refer to Section 1A.04 for more details.

## Table 6B-2. Stopping Sight Distance as a Function of Speed on Level Roads (Used as suggested longitudinal buffer space length or location for flagger station)

| Speed* | Distance |
|---|---|
| 20 mph | 115 feet |
| 25 mph | 155 feet |
| 30 mph | 200 feet |
| 35 mph | 250 feet |
| 40 mph | 305 feet |
| 45 mph | 360 feet |
| 50 mph | 425 feet |
| 55 mph | 495 feet |
| 60 mph | 570 feet |
| 65 mph | 645 feet |
| 70 mph | 730 feet |
| 75 mph | 820 feet |

* Posted speed, off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph.

## Table 6B-2(CA). Stopping Sight Distance as a Function of Speed on Downgrades (Used as suggested longitudinal buffer space length or location for flagger station)

| Speed (mph) | % Downgrade (Buffer Space) | | |
|---|---|---|---|
| | -3% (feet) | -6% (feet) | -9% (feet) |
| 20 | 116 | 120 | 126 |
| 25 | 158 | 165 | 173 |
| 30 | 205 | 215 | 227 |
| 35 | 257 | 271 | 287 |
| 40 | 315 | 333 | 354 |
| 45 | 378 | 400 | 427 |
| 50 | 446 | 474 | 507 |
| 55 | 520 | 553 | 593 |
| 60 | 598 | 638 | 686 |
| 65 | 682 | 728 | 785 |
| 70 | 771 | 825 | 891 |
| 75 | 866 | 927 | 1003 |

*Exhibit 3-2. A Policy on Geometric Design on Highways and Streets, AASHTO, 2001, p.115

## Table 6B-3. Taper Length Criteria for Temporary Traffic Control Zones

| Type of Taper | Taper Length |
|---|---|
| Merging Taper | at least L |
| Shifting Taper | at least 0.5 L |
| Shoulder Taper | at least 0.33 L |
| One-Lane, Two-Way Traffic Taper | 50 feet minimum, 100 feet maximum |
| Downstream Taper | 50 feet minimum, 100 feet maximum |

Note: Use Table 6B-4 to calculate L

---

## Table 6B-3(CA). Taper Length Criteria for Temporary Traffic Control Zones (for 12 feet Offset Width)

| Speed S (mph) | Minimum Taper Length** For Width of Offset 12 feet (W) | | | |
|---|---|---|---|---|
| | Merging L (feet) | Shifting L/2 (feet) | Shoulder L/3 (feet) | Down Stream (feet)*** |
| 20 | 80 | 40 | 27 | 50 |
| 25 | 125 | 63 | 42 | 50 |
| 30 | 180 | 90 | 60 | 50 |
| 35 | 245 | 123 | 82 | 50 |
| 40 | 320 | 160 | 107 | 50 |
| 45 | 540 | 270 | 180 | 50 |
| 50 | 600 | 300 | 200 | 50 |
| 55 | 660 | 330 | 220 | 50 |
| 60 | 720 | 360 | 240 | 50 |
| 65 | 780 | 390 | 260 | 50 |
| 70 | 840 | 420 | 280 | 50 |
| 75 | 900 | 450 | 300 | 50 |

* - Posted speed limit, off-peak 85th -percentile speed prior to work starting, or the anticipated operating speed in mph

** - For other offsets use the following merging taper length formula for L:
For speeds of 40 mph or less, L=WS2/60
For speeds of 45 mph or more, L=WS
Where: L = taper length in feet
W = width of offset in feet
S = posted speed limit, off-peak 85th -percentile speed prior to work starting, or the anticipated operating speed in mph.

***-Maximum downstream taper in length is 100 feet. Refer to Section 6B.08.

## Table 6B-4. Formulas for Determining Taper Length

| Speed (S) | Taper Length (L) in feet |
|---|---|
| 40 mph or less | $L = \frac{WS^2}{60}$ |
| 45 mph or more | L = WS |

Where: L = taper length in feet
W = width of offset in feet
S = posted speed limit, or off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph

# CHAPTER 6C. PEDESTRIAN AND WORKER SAFETY

## Section 6C.01 Pedestrian and Worker Safety – General

**Standard:**

01 **The various TTC provisions for pedestrian and worker safety set forth in Part 6 shall be applied by ~~knowledgeable~~ qualified (for example, trained and/or certified) persons after appropriate evaluation and engineering judgment.**

## Section 6C.02 Pedestrian Considerations

Support:

01 A wide range of pedestrians might be affected by TTC zones, including the young, elderly, and people with disabilities such as hearing, vision, or mobility. Pedestrians need a clearly delineated and usable travel path. Considerations for pedestrians with disabilities are addressed in Section 6C.03.

*Guidance:*

02 *Prior to closing a sidewalk or other pedestrian facility, the maintaining agency should advise users of the future closure.*

**Standard:**

03 **If the TTC zone affects the movement of pedestrians, adequate pedestrian access and walkways shall be provided.**

Option:

04 If establishing or maintaining an alternate pedestrian route is not feasible during the project, an alternate means of providing for pedestrians may be used, such as adding free bus service around the project or assigning someone the responsibility to assist pedestrians with disabilities through the project limits.

05 If an existing pedestrian route is impacted by a short duration or a short-term stationary work zone that is attended with project personnel, establishing an alternate pedestrian route may not be necessary if the work can be stopped and pedestrians can navigate the work zone. Pedestrians may be delayed for a short period of time for project personnel to move equipment and material to facilitate passage. Work zone personnel may also provide assistance to pedestrians as necessary.

Support:

06 Pedestrians are reluctant to retrace their steps to a prior intersection for a crossing or to add distance or out-of-the-way travel to a destination.

*Guidance:*

07 *The following three items should be considered when planning for pedestrians in TTC zones:*

*A. Pedestrians should not be led into conflicts with vehicles, equipment, and operations.*

*B. Pedestrians should not be led into conflicts with vehicles moving through or around the worksite.*

*C. Pedestrians should be provided with a convenient and accessible path that replicates as nearly as practical the most desirable characteristics of the existing sidewalk(s) or footpath(s).*

08 *A pedestrian route should not be severed and/or moved for non-construction activities such as parking for vehicles and equipment.*

09 *TTC zones should be designed to minimize conflicts between vehicular and pedestrian movements. Consideration should be made to separate pedestrian movements from both worksite activity and vehicular traffic. Unless an acceptable route that does not involve crossing the roadway can be provided, pedestrians should be appropriately directed with advance signing that encourages them to cross to the opposite side of the roadway. In urban and suburban areas with high vehicular traffic volumes, these signs should be placed at intersections (rather than midblock locations) so that pedestrians are not confronted with midblock worksites that will induce them to attempt skirting the worksite or making a midblock crossing.*

Support:

10 Figures 6P-28 and 6P-29 show typical TTC device usage and techniques for pedestrian movement through work zones.

*Guidance:*

11 *To accommodate the needs of pedestrians, including those with disabilities, the following considerations should be*

*addressed when temporary pedestrian pathways in TTC zones are designed or modified:*

A. *Provisions for continuity of accessible paths for pedestrians should be incorporated into the TTC plan.*
B. *Access to transit stops should be maintained.*
C. *A smooth, continuous hard surface should be provided throughout the entire length of the temporary pedestrian facility. There should be no curbs or abrupt changes in grade or terrain that could cause tripping or be a barrier to pedestrians with disabilities. The geometry and alignment of the facility should meet the applicable requirements of the "U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990."*
D. *The width of the existing pedestrian facility should be provided for the temporary facility if practical. Traffic control devices and other construction materials and features should not intrude into the usable width of the sidewalk, temporary pathway, or other pedestrian facility. When it is not possible to maintain a minimum width of 60 inches throughout the entire length of the pedestrian pathway, a 60 x 60-inch passing space should be provided at least every 200 feet to allow individuals in wheelchairs to pass.*
E. *Blocked routes, alternate crossings, and sign and signal information should be communicated to pedestrians with vision disabilities by providing devices such as audible information devices or barriers and channelizing devices that are detectable to the pedestrians traveling with the aid of a long cane or who have vision disabilities.*
F. *When channelization is used to delineate a pedestrian pathway, a continuous detectable edging should be provided throughout the length of the facility such that pedestrians using a long cane can follow it. These detectable edgings should comply with the provisions of Section 6M.04.*
G. *Signs and other devices mounted lower than 7 feet above the temporary pedestrian pathway should not project more than 4 inches into accessible pedestrian facilities.*

Support:

12 Where pedestrians in TTC zones are routed on temporary pedestrian pathways, providing information in non-visual formats (such as accessible pedestrian signals with audible tones and/or speech messages, and vibrotactile surfaces) aids pedestrians with vision disabilities so they can navigate the temporary pathway. Section 6C.03 contains additional information on accessibility considerations in TTC zones. Section 4K.01 contains information on accessible pedestrian signals.

Option:

13 Whenever it is feasible, the worksite may be closed off from pedestrian intrusion if doing so is determined to be preferable to channelizing pedestrians along the site with TTC devices.

*Guidance:*

14 *Fencing should not create sight distance restrictions for road users. Fences should not be constructed of materials that would be hazardous if impacted by vehicles. Wooden railing, fencing, and similar systems placed immediately adjacent to motor vehicle traffic should not be used as substitutes for crashworthy temporary traffic barriers.*

15 *Ballast for TTC devices should be kept to the minimum amount needed and should be mounted low to prevent penetration of the vehicle windshield.*

16 *Movement by work vehicles and equipment across designated pedestrian paths should be minimized and, when necessary, should be controlled by flaggers or other TTC. Staging or stopping of work vehicles or equipment along the side of pedestrian paths should be avoided, since it encourages movement of workers, equipment, and materials across the pedestrian path.*

17 *Access to the work space by workers and equipment across pedestrian walkways should be minimized because the access often creates unacceptable changes in grade, and rough or muddy terrain, and pedestrians will tend to avoid these areas by attempting non-intersection crossings where no curb ramps are available.*

Option:

18 A canopied walkway may be used to protect pedestrians from falling debris, and to provide a covered passage for pedestrians.

*Guidance:*

19 *Covered walkways should be sturdily constructed and adequately lighted for nighttime use.*

20 *When pedestrian and vehicle paths are rerouted to a closer proximity to each other, consideration should be given to separating them by a temporary traffic barrier.*

21 *If a temporary traffic barrier is used to shield pedestrians, it should be designed to accommodate site conditions.*

Support:

22 Depending on the possible vehicular speed and angle of impact, temporary traffic barriers might deflect upon impact by an errant vehicle. Guidance for locating and designing temporary traffic barriers can be found in Chapter 9 of the "Roadside Design Guide," 4th Edition, 2011, AASHTO.

**Standard:**

23 **Normal vertical curbing shall not be used as a substitute for temporary traffic barriers when temporary traffic barriers are needed.**

Option:

24 Temporary traffic barriers or longitudinal channelizing devices may be used to discourage pedestrians from unauthorized movements into the work space. They may also be used to inhibit conflicts with vehicular traffic by minimizing the possibility of midblock crossings.

Support:

25 A major concern for pedestrians is building construction encroaching onto the contiguous sidewalks, which forces pedestrians off the curb into direct conflict with moving vehicles.

*Guidance:*

26 *If a significant potential exists for vehicle incursions into the pedestrian path, pedestrians should be rerouted or temporary traffic barriers should be installed.*

Support:

27 TTC devices, temporary traffic barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.

*Guidance:*

28 *Tape, rope, or plastic chain strung between devices should not be used as a control for pedestrian movements because they are not detectable and are therefore not accessible to and usable by individuals with disabilities.*

29 *In general, pedestrian routes should be preserved in urban and commercial suburban areas. Alternative routing should be discouraged.*

30 *The highway agency in charge of the TTC zone should regularly inspect the activity area so that effective pedestrian TTC is maintained.*

Support:

31 Other laws and requirements are unique to California and need to be followed when providing pedestrian access through or around TTC zones.

32 Additional information on this topic can be found in publication titled "Pedestrian Considerations for California Temporary Traffic Control Zones on Caltrans' following web link:
https://dot.ca.gov/-/media/dot-media/programs/safety-programs/documents/ped-bike/pedbrochure-a11y.pdf

33 See Memorandum for more details on Caltrans' following web link:
https://dot.ca.gov/-/media/dot-media/programs/safety-programs/documents/ca-mutcd/rev8/temp-ped-access-route-07142017-a11y.pdf

## Section 6C.03 Accessibility Considerations

Support:

01 Additional information on the design and construction of accessible temporary facilities is found in the "Guidelines for Accessible Pedestrian Signals (NCHRP Web-Only Document 117B)," 2008 Edition (TRB) and the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.

02 Where pedestrians are detoured to a temporary traffic control signal, an accessible pedestrian signal (see Chapter 4K) provides information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to cross the street along the alternate route.

*Guidance:*

03 *Adequate provisions should be made for pedestrians with disabilities. The extent of needs for such provisions should be determined through engineering judgment or by the individual responsible for each TTC zone situation.*

**Standard:**

04 **When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian**

**facility. A barrier that is detectable by a person with a vision disability traveling with the aid of a long cane shall be placed across the full width of the closed pedestrian facility.**

Support:

05 Maintaining a detectable, channelized pedestrian route is much more useful to pedestrians with vision disabilities than closing a walkway and providing audible directions to an alternate route involving additional crossings and a return to the original route. Braille is not useful in conveying such information because it is difficult to find. Audible instructions might be provided, but the extra distance and additional street crossings might add complexity to a trip.

*Guidance:*

06 *Because printed signs and surface delineation are not usable by pedestrians with vision disabilities, blocked routes, alternate crossings, and sign and signal information should be communicated to pedestrians with vision disabilities by providing audible information devices, tactile and/or vibrating surface devices, and barriers and channelizing devices that are detectable to pedestrians traveling with the aid of a long cane or who have vision disabilities.*

Support:

07 The most desirable way to provide information to pedestrians with vision disabilities that is equivalent to visual signing for notification of sidewalk closures is a speech message provided by an audible information device. Devices that provide speech messages in response to passive pedestrian actuation are the most desirable. Other devices that continuously emit a message, or that emit a message in response to use of a pushbutton, are also acceptable. Audible information devices might not be needed if detectable channelizing devices make an alternate route of travel evident to pedestrians with vision disabilities.

*Guidance:*

08 *If a pushbutton is used to provide equivalent TTC information to pedestrians with vision disabilities, the pushbutton should be equipped with a locator tone to notify pedestrians with vision disabilities that a special accommodation is available, and to help them locate the pushbutton.*

## Section 6C.04 Worker Safety Considerations

Support:

01 Equally as important as the safety of road users traveling through the TTC zone is the safety of workers. TTC zones present temporary and constantly changing conditions that are unexpected by road users. This creates an even higher degree of vulnerability for workers on or near the roadway.

02 Maintaining TTC zones with road user flow inhibited as little as possible, and using TTC devices that get the road users' attention and provide positive direction are of particular importance. Likewise, equipment and vehicles moving within the activity area create a risk to workers on foot. When possible, the separation of moving equipment and construction vehicles from workers on foot provides the operators of these vehicles with a greater separation clearance and improved sight lines to minimize exposure to the hazards of moving vehicles and equipment.

*Guidance:*

03 *The following are the key elements of worker safety and TTC management that should be considered to improve worker safety:*

- *A. Training—all workers should be trained on how to work next to motor vehicle traffic in ways that minimize their vulnerability. Workers having specific TTC responsibilities should be trained in TTC techniques, device usage, and placement.*
- *B. Temporary Traffic Barriers—temporary traffic barriers should be placed along the work space depending on factors such as lateral clearance of workers from adjacent traffic, speed of traffic, duration and type of operations, time of day, and volume of traffic.*
- *C. Speed Management—reducing the speed of vehicular traffic, mainly through regulatory speed zoning, funneling, lane reduction, and/or the use of speed safety cameras, uniformed law enforcement officers or flaggers should be considered. The use of regulatory speed zone signing tends to be more effective when law enforcement is present. Refer to Section 6B.01.*
- *D. Activity Area—operations entering and departing the work space, and within the work space, should be planned to minimize backing maneuvers by construction vehicles and equipment to minimize the risk of run-over and back-over crashes.*
- *E. Worker Safety Planning—a trained person designated by the employer should conduct a basic hazard assessment for the worksite and job classifications required in the activity area. This safety professional should*

*determine whether engineering, administrative, or personal protection measures should be implemented. This plan should be in accordance with the Occupational Safety and Health Act of 1970, as amended, "General Duty Clause" Section 5(a)(1) - Public Law 91-596, 84 Stat. 1590, December 29, 1970, as amended, and with the requirement to assess worker risk exposures for each job site and job classification, as per 29 CFR 1926.20 (b)(2) of "Occupational Safety and Health Administration Regulations, General Safety and Health Provisions."*

Option:

04 The following are additional elements of TTC management that may be considered to improve worker safety:

A. Shadow Vehicle—in the case of mobile and constantly moving operations, such as pothole patching and striping operations, a shadow vehicle, equipped with appropriate lights and warning signs, may be used to protect the workers from impacts by errant vehicles. The shadow vehicle may be equipped with a rear-mounted impact attenuator.
B. Road Closure—if alternate routes are available to handle road users, the road may be closed temporarily to facilitate project completion and thus further reduce worker vulnerability.
C. Law Enforcement Use—in highly vulnerable work situations, particularly those of relatively short- duration, law enforcement units may be stationed to heighten the awareness of passing vehicular traffic and to improve safety through the TTC zone.
D. Lighting—for nighttime work, the TTC zone and approaches may be lighted.

*Guidance:*

*Care should be taken to ensure that the lighting used for nighttime work does not cause blinding. Refer to CVC § 21466.5 for light impairing driver's vision.*

Option:

E. Special Devices—these include rumble strips, changeable message signs, hazard identification beacons, flags, and warning lights. Intrusion warning devices may be used to alert workers to the approach of errant vehicles.

Support:

05 Judicious use of the special devices described in Item E in Paragraph 4 of this Section might be helpful for certain difficult TTC situations, but misuse or overuse of special devices or techniques might lessen their effectiveness.

## Section 6C.05 High-Visibility Safety Apparel

**Standard:**

01 **For daytime and nighttime activity, all workers, including emergency responders, within the right-of-way who are within the TTC zone shall wear high-visibility safety apparel that meets the Performance Class 2 or 3 requirements of the ANSI/ISEA 107–2015 publication entitled "American National Standard for High-Visibility Safety Apparel and Headwear," or equivalent revisions, except as provided in Paragraph 4 of this Section. A person designated by the employer to be responsible for worker safety shall make the selection of the appropriate class of garment.**

Support:

01a Refer to Construction Safety Order in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 4, Article 11, §§ 1598 and 1599). Refer to Section 1A.05 for information regarding this publication.

**Standard:**

02 **The apparel background (outer) material color shall be fluorescent orange-red, fluorescent yellow-green, or a combination of the two as defined in the ANSI standard. The retroreflective material shall be orange, yellow, white, silver, yellow-green, or a fluorescent version of these colors.**

03 **When uniformed law enforcement personnel are used to direct traffic, to investigate crashes, or to handle lane closures, obstructed roadways, and disasters, high-visibility safety apparel as described in this Section shall be worn by the law enforcement personnel.**

Option:

04 Emergency and incident responders and law enforcement personnel within the TTC zone may wear high-visibility safety apparel that meets the performance requirements of the ANSI/ISEA 207-2006 publication entitled "American National Standard for High-Visibility Public Safety Vests," or equivalent revisions, and labeled as ANSI 207-2006, in lieu of ANSI/ISEA 107-2015 apparel.

**Standard:**

05 **Except as provided in Paragraph 6 of this Section, firefighters or other emergency responders working within**

**the right-of-way shall wear high-visibility safety apparel as described in this Section.**

Option:

06 Firefighters or other emergency responders working within the right-of-way and engaged in emergency operations that directly expose them to flame, fire, heat, and/or hazardous materials may wear retroreflective turn-out gear that is specified and regulated by other organizations, such as the National Fire Protection Association.

*Guidance:*

07 *For flagger wear during nighttime activity, high-visibility safety apparel that meets the Performance Class 3 requirements of the ANSI/ISEA 107–2015 publication entitled "American National Standard for High-Visibility Apparel and Headwear," or equivalent revision, and labeled as meeting the ANSI 107-2015 standard performance for Class 3 risk exposure should be worn.*

## Section 6C.101(CA) Bicycle Considerations

Support:

01 There are several considerations in planning for bicyclists in TTC zones on highways and streets:

A. A travel route that replicates the most desirable characteristics of a wide paved shoulder or bikeway through or around the TTC zone is desirable for bicyclists.

B. If the TTC zone interrupts the continuity of an existing bikeway system, signs directing bicyclists through or around the zone and back to the bikeway is desirable.

C. Unless a separate bike path through or around the TTC zone is provided, adequate roadway lane width to allow bicyclists and motor vehicles to travel side by side through or around the TTC zone is desirable.

*Guidance:*

*D. When the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, warning signs should be used to advise motorists of the presence of bicyclists in the travel way lanes. Refer to Section 6N.04 for more details.*

**Standard:**

**E. Bicyclists shall not be led into direct conflicts with opposing mainline traffic, work site vehicles, or equipment moving through or around the TTC zone, except during flagging operation.**

Support:

02 Figures 6P-15, 6P-19(CA), 6P-30, 6P-32, 6P-47, 6P-48, 6P-49, 6P-50, 6P-51, 6P-51(CA) and 6P-101(CA) show typical TTC device usage and techniques for bicycle movement through TTC zones.

# CHAPTER 6D. FLAGGER CONTROL

## Section 6D.01 Qualifications for Flaggers

*Guidance:*

01 Because flaggers are responsible for public safety and make the greatest number of contacts with the public of all highway workers, they should be trained in proper traffic control practices and public contact techniques. Flaggers should be able to satisfactorily demonstrate the following abilities:

A. Ability to receive and communicate specific instructions clearly, firmly, and courteously;
B. Ability to move and maneuver quickly in order to avoid danger from errant vehicles;
C. Ability to control signaling devices (such as paddles and flags) in order to provide clear and positive guidance to drivers approaching a TTC zone in frequently changing situations;
D. Ability to understand and apply proper traffic control practices, sometimes in stressful or emergency situations; and
E. Ability to recognize dangerous traffic situations and warn workers in sufficient time to avoid injury.

**Standard:**

02 **Flaggers shall be trained in the proper fundamentals of flagging moving traffic before being assigned as flaggers. Signaling directions used by flaggers shall conform to the details shown in Figure 6D-1. The training and instructions shall be based on this Manual and work site conditions and also include the following:**

**(1) flagger equipment which must be used,**
**(2) layout of the work zone and flagging station,**
**(3) methods to signal traffic to stop, proceed or slow down,**
**(4) methods of one-way traffic control,**
**(5) trainee demonstration of proper flagging methodology and operations,**
**(6) emergency vehicles traveling through the work zone,**
**(7) handling emergency situations,**
**(8) methods of dealing with hostile drivers,**
**(9) flagging procedures when a single flagger is used (when applicable),**

03 **Documentation of the training shall be maintained as required by Injury Illness and Prevention Program of the General Industry Safety Order in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 7, § 3203).**

04 **Flaggers shall be trained by persons with the qualifications and experience necessary to effectively instruct the employee in the proper fundamentals of flagging moving traffic.**

Support:

05 Refer to Construction Safety Order in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 4, Article 11, § 1599 - Flaggers) for flagger training. Refer to Section 1A.05 for information regarding this publication.

06 Refer to Caltrans' Flagging Instruction Handbook for additional information regarding Chapter 6D topics. Refer to Section 1A.05 for information regarding this publication.

## Section 6D.02 STOP/SLOW Paddle for Hand-Signaling

*Guidance:*

01 *The STOP/SLOW paddle (R1-1/W20-8) (see Figure 6D-1 and Table 6G-1) should be the primary and preferred hand-signaling device because the STOP/SLOW paddle gives road users more positive guidance than red flags. Except as noted in Paragraph 3 below.*

**Standard:**

02 **The STOP/SLOW paddle (R1-1 and W20-8) shall have an octagonal shape on a rigid handle. When used at night, the STOP/SLOW paddle shall be retroreflectorized.**

02a **The sign retroreflectivity shall be maintained at or above the minimum levels in Table 2A-5.**

Option

03 A STOP/STOP or a SLOW/SLOW paddle may be used in certain situations (see Section 6D.05), provided the device meets the size and shape requirements for the STOP/SLOW paddle.

*Guidance:*

04 *The STOP/SLOW paddle should be fabricated from light semi-rigid material. The bottom of the STOP/SLOW sign*

*portion of the paddle should be a minimum of 6 feet above the pavement when mounted on a rigid staff.*

Support:

05 The optimum method of displaying a STOP or SLOW message is to place the STOP/SLOW paddle on a rigid staff that is tall enough that when the end of the staff is resting on the ground, the message is high enough to be seen by approaching or stopped traffic.

Option:

05a The 24 x 24 inch size of the STOP/SLOW paddle may be used where greater emphasis is needed and speeds are 30 mph or more.

06 The STOP/SLOW paddle may be modified to improve conspicuity by incorporating ~~either white or~~ red flashing lights on the STOP face, and ~~either white or~~ yellow flashing lights on the SLOW face. The flashing lights may be arranged in any of the following patterns:

A. Two ~~white or~~ red lights, one centered vertically above and one centered vertically below the STOP legend; and/or two ~~white or~~ yellow lights, one centered vertically above and one centered vertically below the SLOW legend;
B. Two ~~white or~~ red lights, one centered horizontally on each side of the STOP legend; and/or two ~~white or~~ yellow lights, one centered horizontally on each side of the SLOW legend;
C. One ~~white or~~ red light centered below the STOP legend; and/or one white or yellow light centered below the SLOW legend;
D. A series of eight or more small ~~white or~~ red lights no larger than ¼ inch in diameter along the outer edge of the paddle, arranged in an octagonal pattern at the eight corners of the border of the STOP face; and/or a series of eight or more small ~~white or~~ yellow lights no larger than ¼ inch in diameter along the outer edge of the paddle, arranged in a diamond pattern along the border of the SLOW face; or
~~E. A series of white lights forming the shapes of the letters in the legend.~~

**Standard:**

07 **If flashing lights are used on the STOP face of the paddle, their colors shall be ~~all white or~~ all red. If flashing lights are used on the SLOW face of the paddle, their colors shall be ~~all white or~~ all yellow.**

08 **If more than eight flashing lights are used, the lights shall be arranged such that they clearly convey the octagonal shape of the STOP face of the paddle and/or the diamond shape of the SLOW face of the paddle.**

09 **If flashing lights are used on the STOP/SLOW paddle, the flash rate shall be at least 50, but not more than 60, flashes per minute.**

## Section 6D.03 Flag for Hand-Signaling

~~*Guidance:*~~

**Standard:**

01 **Use of flags ~~should~~ shall be limited to emergency situations.**

~~**Standard:**~~

02 **Flags, when used (for emergency situations only), shall be red or fluorescent orange-red in color, shall be a minimum of 24 inches square, and shall be securely fastened to a staff that is approximately 36 inches in length.**

*Guidance:*

03 *The free edge of a flag should be weighted so the flag will hang vertically, even in heavy winds.*

**Standard:**

04 **When used at nighttime (for emergency situations only), flags shall be retroreflectorized.**

## Section 6D.04 Flashlight for Hand-Signaling

Option:

01 When flagging in an emergency situation at night in a non-illuminated flagger station, a flagger may use a traffic baton made of a flashlight with a red glow cone to supplement the STOP/SLOW paddle or flag.

**Standard:**

02 **When a flashlight is used for flagging in an emergency situation at night in a non-illuminated flagger station, the flagger shall hold the flashlight in the left hand, shall hold the paddle or flag in the right hand as shown in Figure 6D-1, and shall use the flashlight in the following manner to control approaching road users:**

**A. To inform road users to stop, the flagger shall hold the flashlight with the left arm extended and pointed**

**down toward the ground, and then shall slowly wave the flashlight in front of the body in a slow arc from left to right such that the arc reaches no farther than 45 degrees from vertical.**

**B. To inform road users to proceed, the flagger shall point the flashlight at the vehicle's bumper, slowly aim the flashlight toward the open lane, then hold the flashlight in that position. The flagger shall not wave the flashlight.**

**C. To alert or slow traffic, the flagger shall point the flashlight toward oncoming traffic and quickly wave the flashlight in a Figure eight motion.**

## Section 6D.05 Flagger Procedures

Support:

01 The use of paddles and flags by flaggers is illustrated in Figure 6D-1.

**Standard:**

02 **Flaggers shall use a STOP/SLOW paddle, a flag (for emergency situations only), or an Automated Flagger Assistance Device (AFAD) (see Sections 6L.02 through 6L.04) to control road users approaching a TTC zone. The use of hand movements alone without a paddle, flag, or AFAD to control road users shall be prohibited when controlling traffic in a one-lane two-way operation except when the control is provided by emergency responders at incident scenes as described in Section 6O.01 or provided by uniformed law enforcement officers.**

03 **The following methods of signaling with a paddle shall be used:**

**A. To stop road users, the flagger shall face road users and aim the STOP paddle face toward road users in a stationary position with the arm extended horizontally away from the body. The free arm shall be held with the palm of the hand above shoulder level toward approaching traffic.**

**B. To direct stopped road users to proceed, the flagger shall face road users with the SLOW paddle face aimed toward road users in a stationary position with the arm extended horizontally away from the body. The flagger shall motion with the free hand for road users to proceed.**

**C. To alert or slow traffic, the flagger shall face road users with the SLOW paddle face aimed toward road users in a stationary position with the arm extended horizontally away from the body.**

Option:

04 To further alert or slow traffic, the flagger holding the SLOW paddle face toward road users may motion up and down with the free hand, palm down.

Standard:

05 **The following methods of signaling with a flag (for emergency situations only) shall be used:**

**A. To stop road users, the flagger shall face road users and extend the flag staff horizontally across the road users' lane in a stationary position so that the full area of the flag is visibly hanging below the staff. The free arm shall be held with the palm of the hand above shoulder level toward approaching traffic.**

**B. To direct stopped road users to proceed, the flagger shall face road users with the flag and arm lowered from the view of the road users, and shall motion with the free hand for road users to proceed. Flags shall not be used to signal road users to proceed.**

**C. To alert or slow traffic, the flagger shall face road users and slowly wave the flag in a sweeping motion of the extended arm from shoulder level to straight down without raising the arm above a horizontal position. The flagger shall keep the free hand down.**

*Guidance:*

06 *The flagger should stand either on the shoulder adjacent to the road user being controlled or in the closed lane prior to stopping road users. A flagger should only stand in the lane being used by moving road users after road users have stopped. The flagger should be clearly visible to the first approaching road user at all times. The flagger also should be visible to other road users. The flagger should be stationed sufficiently in advance of the workers to warn them (for example, with audible warning devices such as horns or whistles) of approaching danger by out-of-control vehicles. The flagger should stand alone, away from other workers, work vehicles, or equipment.*

Option:

07 In certain conditions, it may be more appropriate for a flagger to use a STOP/STOP or a SLOW/SLOW paddle to convey the appropriate message to approaching road users and avoid confusing those that are approaching the operation from the opposing direction.

## Section 6D.06 Flagger Stations

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, flagger stations shall be located such that approaching road users will have sufficient distance to stop at an intended stopping point.**

Option:

02 If sufficient stopping sight distance is not achievable, the location of the flagger station may be modified based on engineering judgment.

03 The distances shown in Table 6B-2, which provides information regarding the stopping sight distance as a function of speed, may be used for the location of a flagger station. These distances may be increased for downgrades (Refer to Table 6B-2(CA)) and other conditions that affect stopping distance.

*Guidance:*

04 *Flagger stations should be located such that an errant vehicle has additional space to stop without entering the work space. The flagger should identify an escape route that can be used to avoid being struck by an errant vehicle.*


**Standard:**

05 **Except in emergency situations, flagger stations shall be preceded by an advance warning sign or signs. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.**

Support:

06 Refer to Construction Safety Orders in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 4, Article 3, § 1523 – Illumination and § 1599 - Flaggers). Refer to Section 1A.05 for information regarding this publication.

# Figure 6D-1. Use of Hand-Signaling Devices by Flaggers

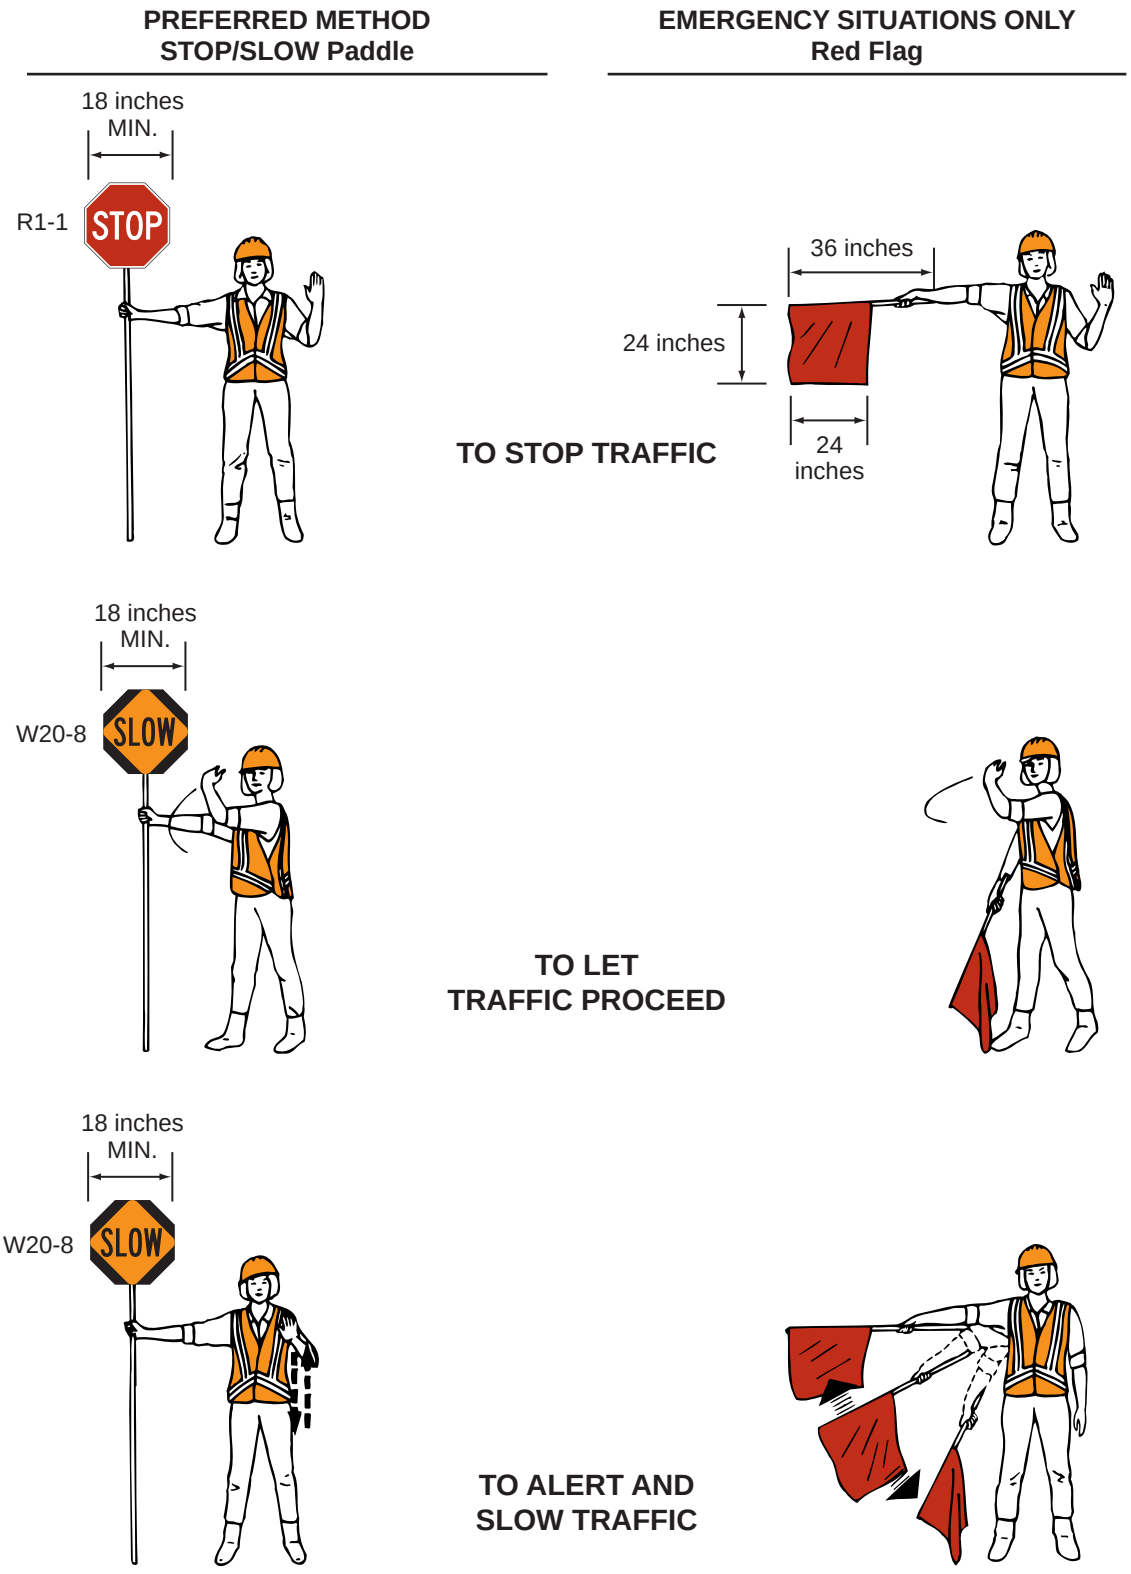

# CHAPTER 6E. ONE-LANE, TWO-WAY TRAFFIC CONTROL

## Section 6E.01 One-Lane, Two-Way Traffic Control – General

**Standard:**

01 **Except as provided in Paragraph 4 of this Section, when traffic in both directions must use a single lane for a limited distance, movements from each end shall be coordinated.**

*Guidance:*

02 *Provisions should be made for alternate one-way movement through the constricted section via methods such as flagger control, ~~a flag transfer~~, a pilot car, traffic control signals, or stop or yield control.*

03 *Control points at each end should be chosen to permit easy passing of opposing lanes of vehicles.*

Option:

04 If the work space on a low-volume street or road is short and road users from both directions are able to see the traffic approaching from the opposite direction through and beyond the worksite, the movement of traffic through a one-lane, two-way constriction may be self-regulating.

## Section 6E.02 Flagger Method

*Guidance:*

01 *Except as provided in Paragraph 2 of this Section, traffic should be controlled by a flagger at each end of a constricted section of roadway. One of the flaggers should be designated as the coordinator. To provide coordination of the control of the traffic, the flaggers should be able to communicate with each other orally, electronically, or with manual signals. These manual signals should not be mistaken for flagging signals.*

Option:

02 When a one-lane, two-way TTC zone is short enough to allow a flagger to see from one end of the zone to the other, traffic may be controlled by either a single flagger or by a flagger at each end of the section.

*Guidance:*

03 *When a single flagger is used, the flagger should be stationed on the shoulder opposite the constriction or work space, or in a position where good visibility and traffic control can be maintained at all times. When good visibility and traffic control cannot be maintained by one flagger station, traffic should be controlled by a flagger at each end of the section.*

## Section 6E.03 Flag Transfer Method

~~Support:~~

01 ~~The driver of the last vehicle proceeding into the one-lane section is given a red flag (or other token) and instructed to deliver it to the flagger at the other end. The opposite flagger, upon receipt of the flag, then knows that traffic can be permitted to move in the other direction. A variation of this method is to replace the use of a flag with an official pilot car that follows the last road user vehicle proceeding through the section.~~

~~*Guidance:*~~

02 ~~*The flag transfer method should be employed only where the one-way traffic is confined to a relatively short length of a road, usually no more than 1 mile in length.*~~

**Standard:**

03 **This section is deleted for application and shall not be used in California.**

## Section 6E.04 Pilot Car Method

Option:

01 A pilot car may be used to guide a queue of vehicles through the TTC zone or detour.

*Guidance:*

02 *The pilot car should have the name of the contractor or contracting authority prominently displayed.*

**Standard:**

03 **The PILOT CAR FOLLOW ME (G20-4) sign or PILOT CAR DO NOT PASS (R115(CA)) sign (see Figure 6H-1 and Figure 6G-1(CA)) shall be mounted on the top or on the rear of the pilot vehicle (see Section 6H.37).**

04 **The pilot car operation shall be coordinated with flagging operations or other methods of control at each end**

**of the one lane section of the work zone.**

05 **If an Automated Flagger Assistance Device (AFAD) (see Section 6L.02) is used in pilot car operations, the AFAD shall be operated by a flagger positioned near and within the line of sight of the AFAD. The AFAD shall not be left unattended at any time that the AFAD is being used.**

*Guidance:*

06 *If temporary traffic control signals are used in pilot car operations and long wait times will be encountered by road users, consideration should be given to using signs to notify drivers of the wait time and/or pilot car operation, based on engineering judgment.*

Option:

07 Two or more pilot cars may be used to guide two-way traffic through a particularly complex detour or TTC zone.

*Guidance:*

08 *The TRAFFIC CONTROL – WAIT AND FOLLOW PILOT CAR (C37(CA)) sign (Refer to Figures 6G-1(CA) and 6H-1(CA)) should be used at intersecting approaches to a work zone when pilot cars are controlling reversible lane traffic. Where vehicular traffic cannot effectively self-regulate, one or two flaggers should be placed at the intersection instead of C37(CA) sign.*

## Section 6E.05 Temporary Traffic Control Signal Method

Option:

01 Traffic control signals may be used to control vehicular traffic movements in one-lane, two-way TTC zones (see Figure 6P-12 and Chapter 4O).

## Section 6E.06 Stop or Yield Control Method

Option:

01 STOP or YIELD signs may be used to control traffic on low-volume roads at a one-lane, two-way TTC zone when drivers are able to see the other end of the one-lane, two-way operation and have sufficient visibility of approaching vehicles.

*Guidance:*

02 *If the STOP or YIELD sign is installed for only one direction, then the STOP or YIELD sign should face road users who are driving on the side of the roadway that is closed for the work activity area.*

**Standard:**

03 **The approach to the side that is not closed shall be visible (for a distance equal to the safe passing sight distance for that approach) to the driver who must yield or stop.**

Support:

04 Refer to Section 3B.03 and Figure 6P-11.

# CHAPTER 6F. TEMPORARY TRAFFIC CONTROL ZONE SIGNS – GENERAL

## Section 6F.01 General Characteristics of TTC Zone Signs

Support:

01 TTC zone signs convey both general and specific messages by means of words, symbols, and/or arrows and have the same three categories as all road user signs: regulatory, warning, and guide.

Option:

02 Where the color orange is required, the fluorescent orange color may also be used.

Support:

03 The fluorescent version of orange provides higher conspicuity than standard orange, especially during twilight.

Option:

04 Standard orange flags, flashing beacons, and/or flashing warning lights may be used in conjunction with signs.

**Standard:**

05 **When standard orange flags, flashing beacons, and/or flashing warning lights are used in conjunction with a sign, they shall not block the sign face.**

06 **Except as provided in Section 2A.07, the sizes for TTC signs and plaques shall be as shown in Tables 6G-1, 6G-1(CA), 6H-1, 6H-1(CA), ~~and~~ 6I-1, and 6I-1(CA). The sizes in the minimum column shall only be used on low-volume rural roads, local streets, or roadways where the operating speed is 30 mph or less.**

Option:

07 The dimensions of signs and plaques shown in Tables 6G-1, 6G-1(CA), 6H-1, 6H-1(CA), ~~and~~ 6I-1 and 6I-1(CA) may be increased wherever necessary for greater legibility or emphasis.

*Guidance:*

08 *Deviations from standard sizes as prescribed in this Manual should be in 6-inch increments.*

Support:

09 Sign design details are contained in the "Standard Highway Signs" publication (see Section 1A.05).

10 Section 2A.04 contains additional information regarding the design of signs, including an Option allowing the development of special word message signs if a standard word message or symbol sign is not available to convey the necessary regulatory, warning, or guidance information.

**Standard:**

11 **All signs used at night shall be either retroreflective or illuminated to show the same shape and similar color both day and night.**

12 **The requirement for sign illumination shall not be considered to be satisfied by street, highway, or strobe lighting.**

12a **TTC zone signs used at night shall maintain retroreflectivity at or above the minimum levels in Table 2A-5.**

Option:

13 Sign illumination may be either internal or external.

14 Signs may be made of rigid or flexible material.

Support:

15 Sign design details are contained in FHWA's "Standard Highway Signs and Markings" book and Caltrans' California Sign Specifications. Refer to Section 1A.05 for information regarding these publications.

## Section 6F.02 Sign Placement

*Guidance:*

01 *Signs should be located on the right-hand side of the roadway unless otherwise provided in this Manual.*

Option:

02 Where special emphasis is needed, signs may be placed on both the left-hand and right-hand sides of the roadway. Signs mounted on portable supports may be placed within the roadway itself. Signs may also be mounted on or above barricades.

Support:

03 The provisions of this Section regarding mounting height apply unless otherwise provided for a particular sign elsewhere in this Manual.

**Standard:**

04 **The minimum height, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement, of signs installed at the side of the road in rural areas shall be 5 feet (see Figure 6F-1).**

05 **The minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of signs installed at the side of the road in business, commercial, or residential areas where parking or pedestrian movements are likely to occur, or where the view of the sign might be obstructed, shall be 7 feet (see Figure 6F-1).**

06 **The minimum height, measured vertically from the bottom of the sign to the sidewalk, of signs installed above sidewalks shall be 7 feet.**

07 **The bottom of a sign mounted on a barricade, or other portable support, shall be at least 1 foot above the traveled way.**

Option:

08 The height to the bottom of a secondary sign mounted below another sign may be 1 foot less than the height provided in Paragraphs 4 through 6 of this Section.

*Guidance:*

09 *Neither portable nor permanent sign supports should be located on sidewalks, bicycle facilities, or areas designated for pedestrians or bicyclists. Sign supports should be located so as to accommodate bicyclists in areas designated for their use. A minimum lateral width of 4 feet should be maintained for pedestrian pathways.*

**Standard:**

10 **Signs shall be mounted and placed in accordance with Section 307 of the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.**

*Guidance:*

11 *Except as provided in Paragraph 12 of this Section (refer to Figures 6G-1, 6G-1(CA), 6H-1, 6H-1(CA), 6I-1 and 6I-1(CA)), signs mounted on portable sign supports that do not meet the minimum mounting heights provided in Part 2 should not be used for a duration of more than 3 days.*

Option:

12 The R9-8 through R9-11a series, R11 series, W1-6 through W1-8 series, M4-10, E5-1, or other similar type signs (see Figures 6G-1, 6G-1(CA), 6H-1, 6H-1(CA), ~~and~~ 6I-1, and 6I-1(CA)), may be used on portable sign supports that do not meet the minimum mounting heights provided in Part 2 for longer than 3 days.

Support:

13 Methods of mounting signs other than on posts are illustrated in Figure 6F-2.

*Guidance:*

14 *Signs mounted on Type 3 Barricades should not cover more than 50 percent of the top two rails or 33 percent of the total area of the three rails.*

**Standard:**

15 **Signs and sign supports used together shall be crashworthy (see Section 6A.04). Where large signs having an area exceeding 50 square feet are installed on multiple breakaway posts, the clearance from the ground to the bottom of the sign shall be at least 7 feet.**

Option:

16 For mobile operations, a sign may be mounted on a work vehicle, a shadow vehicle, or a trailer stationed in advance of the TTC zone or moving along with it.

17 Refer to Section 2A.18 for mounting of small plastic signs on channelizers (CA), cones or portable delineators.

## Section 6F.03 Sign Maintenance

*Guidance:*


01 *Signs should be properly maintained for cleanliness, visibility, retroreflectivity, and correct positioning.*

02 *Signs that have lost significant legibility should be promptly replaced.*


Support:

03 Section 2A.21 contains information regarding the retroreflectivity of signs, including the signs that are used in TTC zones.


# Figure 6F-1. Height and Lateral Location of Signs—Typical Installations

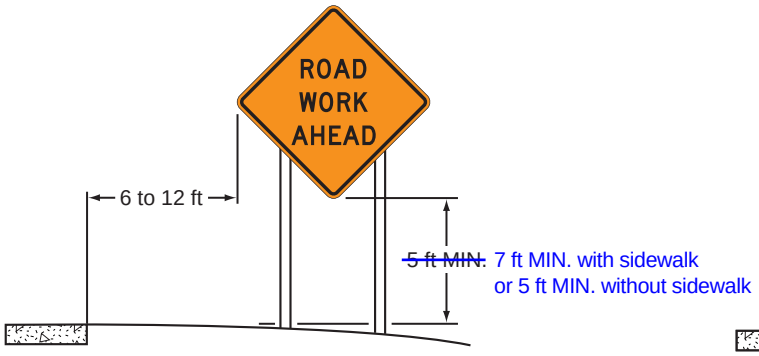



**A – Rural area**

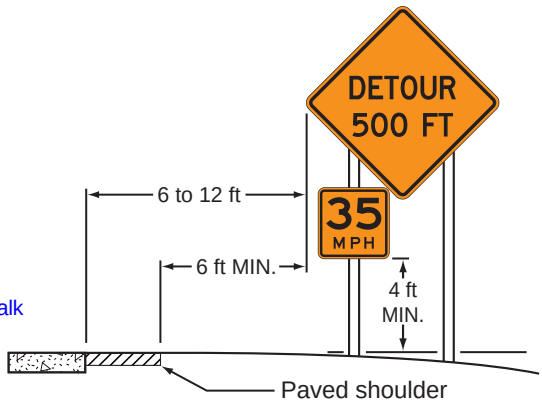


**B – Rural area with advisory speed plaque**

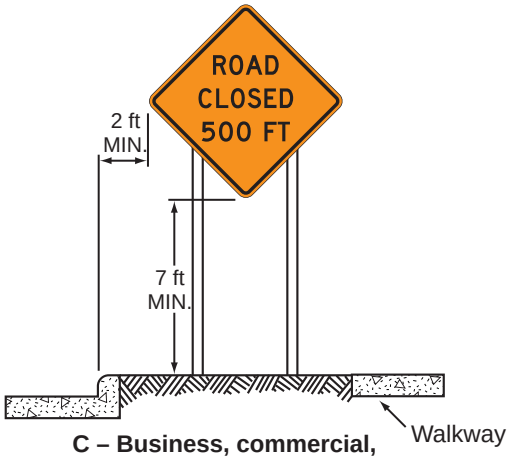



**C – Business, commercial, or residential area**

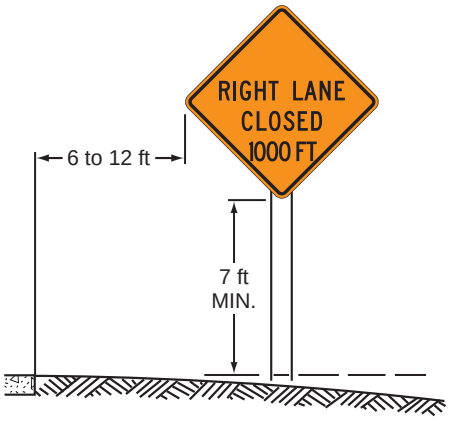




**D – Business, commercial, or residential area (without curb)**

# Figure 6F-2. Methods of Mounting Signs Other Than on Posts

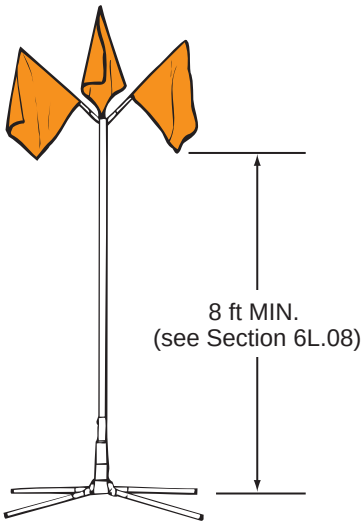




High-Level Warning Device
(Flag Tree)

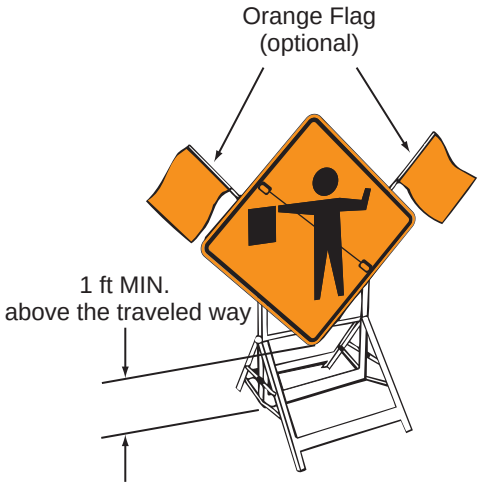

PORTABLE AND TEMPORARY MOUNTINGS

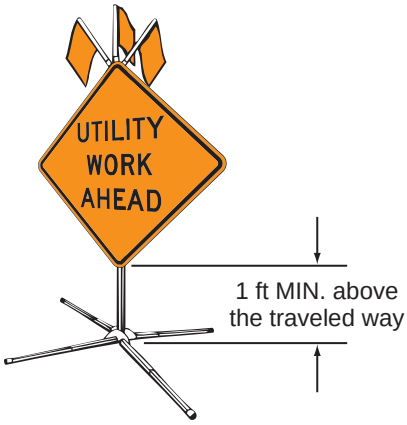


BARRICADES
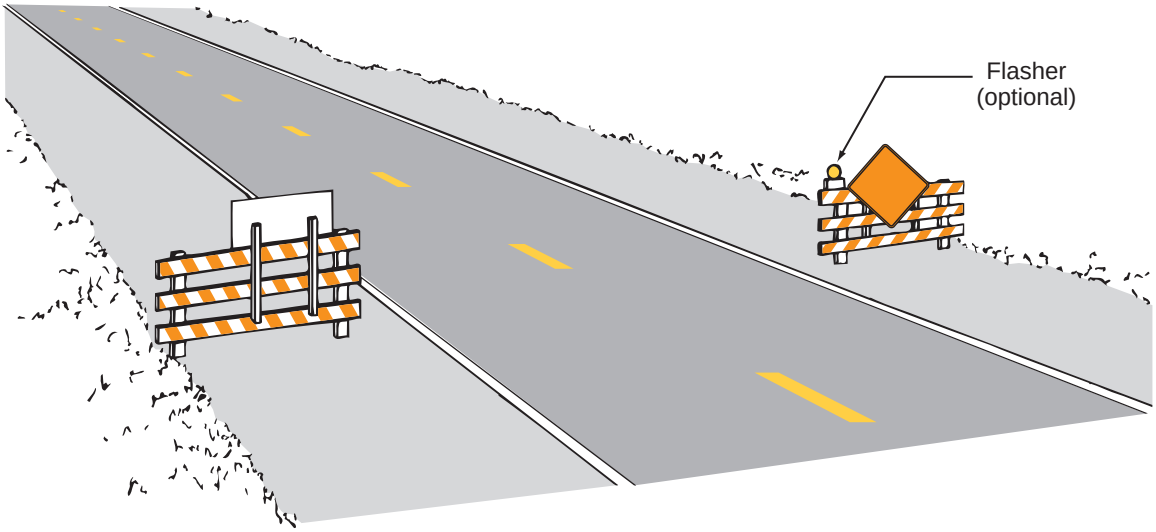
# CHAPTER 6G. TTC ZONE REGULATORY SIGNS

## Section 6G.01 Regulatory Sign Authority

Support:

01 Regulatory signs such as those shown in Figure 6G-1 inform road users of traffic laws or regulations and indicate the applicability of legal requirements that would not otherwise be apparent.

**Standard:**

02 **Regulatory signs shall be authorized by the public agency or official having jurisdiction and shall conform with Chapter 2B.**

Support:

03 Some of the California regulatory signs used in TTC zones are shown in Figure 6G-1(CA) and Table 6G-1(CA).

## Section 6G.02 Regulatory Sign Design and Size

**Standard:**

01 **TTC regulatory signs shall comply with the Standards for regulatory signs presented in Part 2 and in the FHWA's "Standard Highway Signs" publication (see Section 1A.05).**

02 **The sizes for TTC regulatory signs shall be as shown in Table 6G-1.**

## Section 6G.03 Regulatory Sign Applications

**Standard:**

01 **If a TTC zone requires regulatory measures different from those existing, the existing permanent regulatory devices shall be removed or covered and superseded by the appropriate temporary regulatory signs. This change shall be made in compliance with applicable ordinances or statutes of the jurisdiction.**

## Section 6G.04 Road Closed Signs (R11-2 Series)

*Guidance:*

01 *The ROAD CLOSED (R11-2) sign (see Figure 6G-1) should be used when the roadway is closed to all road users except contractors' equipment or officially authorized vehicles. The R11-2 sign should be accompanied by appropriate warning and detour signing.*

Option:

02 STREET CLOSED (R11-2a), BRIDGE OUT (R11-2b), or PATH CLOSED (R11-2c) signs may be substituted for Road Closed signs where applicable.

*Guidance:*

03 *Road Closed signs should be installed at or near the center of the roadway on or above a Type 3 Barricade that closes the roadway (see Section 6K.07).*

**Standard:**

04 **Road Closed signs shall not be used where road user flow is maintained through the TTC zone with a reduced number of lanes on the existing roadway or where the actual closure is some distance beyond the sign.**

## Section 6G.05 Local Traffic Only Signs (R11-3 Series and R11-4)

*Guidance:*

01 *The Local Traffic Only signs (see Figure 6G-1) should be used where road user flow detours to avoid a closure some distance beyond the sign, but where local road users can use the roadway to the point of closure. These signs should be accompanied by appropriate warning and detour signing.*

Support:

01a Refer to FHWA's List of Known Errors for errors in Paragraph 1. Refer to Section 1A.04 for more details.

02 *In rural applications, the Local Traffic Only sign should have the legend ROAD CLOSED XX MILES AHEAD, LOCAL TRAFFIC ONLY (R11-3).*

Option:

03 In urban areas, a ROAD (STREET) CLOSED TO THRU TRAFFIC (R11-4) sign or the legend ROAD CLOSED, LOCAL TRAFFIC ONLY may be used.

04 In urban areas, a word message that includes the name of an intersecting street name or well-known destination may be substituted for the words XX MILES AHEAD on the R11-3 sign where applicable.

05 A STREET CLOSED (R11-3a) or BRIDGE OUT (R11-3b) sign may be substituted for a R11-3 sign, where applicable.

06 The words BRIDGE OUT, BRIDGE CLOSED, or STREET CLOSED may be substituted for the words ROAD CLOSED on the R11-4 sign where applicable.

07 The word RAMP may be substituted for ROAD or STREET where applicable.

## Section 6G.06 Weight Limit Signs (R12-1, R12-2, and R12-5)

**Standard:**

01 **A Weight Limit sign (see Figure 6G-1), which shows the gross weight ~~or axle weight~~ that is permitted on the roadway or bridge, shall be consistent with State or local regulations and shall not be installed without the approval of the authority having jurisdiction over the highway.**

02 **When weight restrictions are imposed because of the activity in a TTC zone, a marked detour shall be provided for vehicles weighing more than the posted limit.**

## Section 6G.07 STAY IN LANE Signs (R4-9 and R4-9a)

Option:

01 A STAY IN LANE (R4-9) sign (see Figure 6G-1) may be used where a multi-lane shift has been incorporated as part of the TTC on a highway to direct road users around road work that occupies part of the roadway on a multi-lane highway.

*Guidance:*

02 *A STAY IN LANE TO MERGE POINT (R4-9a) sign (see Figure 6G-1) should be used during late merge operations (see Section 6N.19) to direct traffic to use all available lanes until the merge point is reached.*

## Section 6G.08 Work Zone and Higher Fines Signs and Plaques

Option:

01 A WORK ZONE (G20-5aP) plaque (see Figure 6G-1) may be mounted above a Speed Limit sign to emphasize that a reduced speed limit is in effect within a TTC zone. An END WORK ZONE SPEED LIMIT (R2-12) sign (see Figure 6G-1) may be installed at the downstream end of the reduced speed limit zone.

*Guidance:*

02 *A BEGIN ~~HIGHER~~ DOUBLE FINES ZONE (R2-10) sign (see Figure 6G-1) should be installed at or near the beginning of a TTC zone where increased fines are imposed for traffic violations, and an END ~~HIGHER~~ DOUBLE FINES ZONE (R2-11) sign (see Figure 6G-1) should be installed at or near the downstream end of the TTC zone.*

Option:

03 Alternate legends such as BEGIN (or END) DOUBLE FINES ZONE may also be used for the R2-10 and R2-11 signs.

04 A ~~FINES HIGHER~~, FINES DOUBLE, ~~or $XX FINE~~ plaque (see Section 2B.25 and Figure 6G-1) may be mounted below the Speed Limit sign if increased fines are imposed for traffic violations within the TTC zone.

05 Individual signs and plaques for work zone speed limits and higher fines may be combined into a single sign or may be displayed as an assembly of signs and plaques.

06 The TRAFFIC FINES DOUBLED IN CONSTRUCTION ZONES (C40(CA)) and TRAFFIC FINES DOUBLED IN WORK ZONES (C40A(CA)) (see Figure 6G-1(CA)) signs may be placed approximately 500 feet in advance of the first required TTC sign(s). The placement of the C40(CA) and C40A(CA) signs is at the discretion of the responsible person(s) in charge of the work zone.

Support:

07 Refer to CVC § 42009 for fines for offenses committed in highway construction or maintenance area. In California, as per CVC only doubling of the fines is allowed, not higher fines of other denominations.

*Guidance:*

08 *The C40A(CA) sign is intended to be manufactured as a fabric sign and should be used on a short term (daily) basis only. Longer term situations should use the C40(CA) sign.*

Support:

09 CVC § 22362 applies to "When Workers are Present" condition and signs need to be covered or removed when no work is in progress. However, per CVC 21367, agency can "...regulate the movement of traffic...whenever the traffic would endanger the safety of workers or the work would interfere with or endanger the movement of traffic through the area." If obstructions would be present throughout the project duration the signs would not need to be covered or removed. This would also apply to situations where the construction work changes the highway configuration, curvature or elevation, making it necessary to post reduced speed limits.

Option:

10 The Speed Limit (R2-1) sign with a WORK ZONE (G20-5aP) plaque mounted above it may be used for the protection of workers during working hours to reduce speed limit within a TTC zone.

**Standard:**

11 **The R2-1 sign with G20-5aP plaque mounted above it shall only be used in conjunction with appropriate advance warning signs.**

12 **The R2-1 signs with G20-5aP plaques mounted above them shall be removed or covered promptly when no longer applicable.**

Support:

13 The R2-1 sign with G20-5aP mounted above it is authorized for use by CVC § 22362. This section provides authority to post a speed limit of not less than 25 mph at locations where employees of any contractor, or of the agency in charge of the job, are engaged in work upon the roadway.

14 Posting unrealistically low speed limits will result in loss of sign credibility and a high violation rate.

*Guidance:*

15 *Before using a R2-1 sign with G20-5aP plaque mounted above it, work zone conditions should be analyzed to determine what maximum speed limit would be appropriate for that particular location.*

16 *The R2-1 sign with G20-5aP plaque mounted above it should be placed within 400 feet of the zone where workers are on the roadway or so nearly adjacent as to be endangered by traffic.*

Option:

17 The R2-1 sign with G20-5aP plaque mounted above it may be provided by the agency having jurisdiction over the street or road.

*Guidance:*

18 *The R2-1 sign with G20-5aP plaque mounted above it should be posted a maximum distance of 400 feet in advance of where, and when workers are present; and the Speed Reduction (W3-5) sign or Speed Zone Ahead (R2-4(CA)) sign informs road users of the reduced speed limit TTC zone.*

19 *As the TTC zone activities change, signs should be moved as appropriate.*

## Section 6G.09 PEDESTRIAN CROSSWALK Sign (R9-8)

Option:

01 The PEDESTRIAN CROSSWALK (R9-8) sign (see Figure 6G-1) may be used to indicate where a temporary crosswalk has been established.

**Standard:**

02 **If a temporary crosswalk is established, it shall be accessible to pedestrians with disabilities in accordance with Section 6C.03.**

## Section 6G.10 SIDEWALK CLOSED Signs (R9-9, R9-10, R9-11, and R9-11a)

*Guidance:*

01 *SIDEWALK CLOSED signs (see Figure 6G-1) should be used where pedestrian flow is restricted. Bicyclist/Pedestrian Detour (M4-9a) signs or Pedestrian Detour (M4-9b) signs should be used where pedestrian flow is rerouted (see Section 6I.02).*

02 *The SIDEWALK CLOSED (R9-9) sign should be installed at the beginning of the closed sidewalk, at the intersections preceding the closed sidewalk, and elsewhere along the closed sidewalk as needed.*

03 *The SIDEWALK CLOSED, (ARROW) USE OTHER SIDE (R9-10) sign should be installed at the beginning of the restricted sidewalk when a parallel sidewalk exists on the other side of the roadway.*

04 *The SIDEWALK CLOSED AHEAD, (ARROW) CROSS HERE (R9-11) sign should be used to indicate to pedestrians that sidewalks beyond the sign are closed and to direct them to open crosswalks, sidewalks, or other travel paths.*

05 *The SIDEWALK CLOSED, (ARROW) CROSS HERE (R9-11a) sign should be installed just beyond the point to which pedestrians are being redirected.*

Support:

06 These signs are typically mounted on a detectable barricade to encourage compliance and to communicate with pedestrians that the sidewalk is closed. Printed signs are not useful to many pedestrians with vision disabilities. A barrier or barricade detectable by a person with a vision disability is sufficient to indicate that a sidewalk is closed. If the barrier is continuous with detectable channelizing devices for an alternate route, accessible signing might not be necessary.

## Section 6G.11 TURN OFF 2-WAY RADIO AND CELL PHONE Sign (R22-2)

**Standard:**

01 **The TURN OFF 2-WAY RADIO AND CELL PHONE (R22-2) sign (see Figure 6G-1) shall be used to require road users to turn off mobile radio transmitters and cellular telephones where blasting operations occur.**

Support:

02 Section 6H.25 contains information about the full sequence of signs for blasting zones and the specific requirements for location of this regulatory sign.

## Section 6G.12 Other Regulatory Signs

Option:

01 Regulatory word message signs other than those classified and specified in this Manual and the "Standard Highways Signs" publication (see Section 1A.05) may be developed and used based on engineering judgment to aid the enforcement of other laws or regulations in TTC zones.

*Guidance:*

02 *Special regulatory signs should comply with the general requirements of color, shape, and alphabet size and series. The sign message should be brief, legible, and clear.*

## Section 6G.101(CA) RAMP CLOSED (C2(CA)) and RAMP CLOSED, USE RAMP AT __ (SC7(CA)) Signs

**Standard:**

01 **The RAMP CLOSED (C2(CA)) sign (refer to Figure 6G-1(CA)) shall be installed at the entrance of an on-ramp or off-ramp that is closed to all road users.**

Option:

02 The RAMP CLOSED, USE RAMP AT __ (SC7(CA)) sign may be used in lieu of the RAMP CLOSED (C2(CA)) sign.

*Guidance:*

03 *The RAMP CLOSED AHEAD (C19(CA)) sign (refer to Figure 6H-1(CA)) should be used in advance of the point where an on-ramp or off-ramp is closed to all road users.*

Option:

04 The USE NEXT EXIT (C38(CA)) sign may be used with the RAMP CLOSED (C2(CA)) sign on freeways if the next exit provides access to destinations from the closed ramp.

*Guidance:*

05 *The Day – Specific hours (SC6-3P(CA)) plaque should be installed below the RAMP CLOSED (C2(CA)) sign to notify motorists when a freeway or expressway on-ramp or off-ramp is temporarily closed for no more than one day.*

06 *The Multiple Days – Specific Hours (SC6-4P(CA)) plaque should be installed below the RAMP CLOSED (C2(CA)) sign to notify motorists when a freeway or expressway on-ramp or off-ramp is temporarily closed for multiple consecutive days.*

07 *The RAMP CLOSED assembly should be removed when the ramp is reopened to traffic.*

**Standard:**

08 **The SC6-3P(CA) and SC6-4P(CA) plaques (refer to Figure 6I-1(CA)) shall display the correct day of the week, month, calendar date, and times during which the ramp is closed.**

Option:

09 For extended ramp closures, a PCMS may be used in advance of the ramp to supplement the RAMP CLOSED assembly for the duration of the closure.

Option:

10 The RAMP CLOSED, USE RAMP AT ___ (SC7(CA)) sign may be used in lieu of the combination of the RAMP CLOSED (C2(CA)) sign and USE NEXT EXIT (C38(CA)) sign as shown on Caltrans' Standard Plan T-14 to inform motorists of a closed entrance or exit ramp and to provide an alternate route. See Section 1A.05 for information regarding this publication.

*Guidance:*

11 *The ___ EXIT – RAMP CLOSED (SC8(CA)) sign should be used to inform motorists of a closed exit ramp.*

**Standard:**

12 **If used, the SC8(CA) sign shall be placed on the right shoulder, upstream of the preceding exit ramp.**

*Guidance:*

13 *The EXIT with Arrow (SC18(CA)) sign should be used to inform motorists of the direction to follow for a freeway exit within a work zone.*

## Section 6G.102(CA) MOVE OVER OR SLOW WHEN AMBER LIGHTS FLASHING Sign (R111(CA))

01 On Freeways, lane and/or shoulder closures, incident management, and for short duration work, MOVE OVER OR SLOW WHEN AMBER LIGHTS FLASHING (R111(CA)) sign (refer to Figure 6G-1(CA)) may be temporarily displayed on the back of a work vehicle to warn and regulate road users to move over and/or slow when passing work vehicles displaying a flashing amber warning light within or adjacent to the highway.

## Section 6G.103(CA) Moving Lane Closure Signs (W23-1 and SC10(CA), SC11(CA), SC13(CA), SC15(CA))

**Standard:**

01 **On State highways, the following signs (see Figures 6H-1 and 6G-1(CA)) shall be used as shown in Caltrans' Standard Plans T15, T16 and T17 for moving lane closures. See Section 1A.05 for information regarding this publication.**

- **A. LANE CLOSED AHEAD or ROAD WORK AHEAD (SC10(CA)).**
- **B. LANE CLOSED (SC11(CA)).**
- **C. SLOW TRAFFIC AHEAD (W23-1).**
- **D. DO NOT PASS (SC13(CA)).**
- **E. CAUTION (SC15(CA)).**

02 **The Moving Lane Closure signs shall have a black legend on either a white or an orange background.**

03 **If used, the SC10(CA) sign and a Type II arrow board shall be mounted on the designated sign vehicle.**

04 **The SC11(CA) sign and a Type II arrow board shall be mounted on the designated sign vehicle.**

05 **If used, the W23-1 sign shall be mounted on the rear of the designated sign vehicle.**

06 **The SC13(CA) sign shall be mounted on the rear and/or the front of the designated sign vehicle.**

07 **If used, the SC15(CA) sign shall be mounted on the front of the designated sign vehicle.**

## Figure 6G-1. Regulatory Signs and Plaques in Temporary Traffic Control Zones (Sheet 1 of 2)




R1-1 R1-2 R1-2aP R1-7 R1-7a R1-8 G20-5aP R2-1

R2-6P R2-6aP R2-6bP R2-10 R2-10 R2-11 R2-11 R2-12

R3-1 R3-2 R3-3 R3-4 R3-5 R3-6


R3-7 R3-8 R3-18 R3-27 R4-1 R4-2

R4-7 R4-7c R4-9 R4-9a R5-1 R5-1a

R6-1 R6-2 R8-3

Note: See Chapter 2B for information on the application of these signs.

## Figure 6G-1. Regulatory Signs and Plaques in Temporary Traffic Control Zones (Sheet 2 of 2)

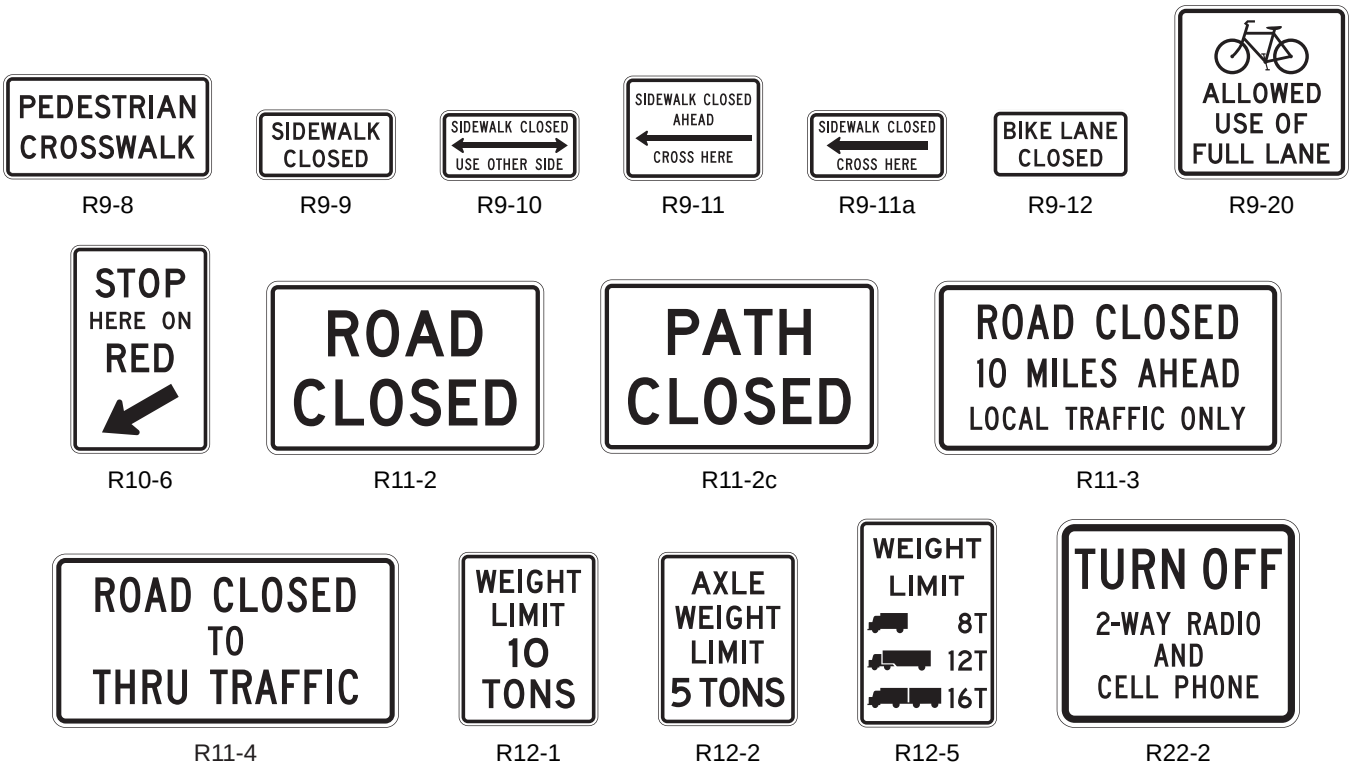


Note: See Chapter 2B for information on the application of these signs.


## *Figure 6G-101(CA). California Regulatory Signs and Plaques in Temporary Traffic Control Zones*




C2(CA)




C37(CA)




C40(CA)




R111(CA)




R115(CA)




SC7(CA)




SC10(CA)




SC11(CA)




SC13(CA)




SC15(CA)

## Table 6G-1. Temporary Traffic Control Zone Regulatory Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway | Minimum |
|---|---|---|---|---|---|
| Stop | R1-1 | 6G.02 | 30 x 30* | — | — |
| Stop (on Stop/Slow Paddle) | R1-1 | 6D.02 | 18 x 18 | — | — |
| Yield | R1-2 | 6G.02 | 36 x 36 x 36* | — | 30 x 30 x 30 |
| To Oncoming Traffic (plaque) | R1-2aP | 6G.02 | 36 x 30 | 48 x 36 | 24 x 18 |
| Wait on Stop | R1-7 | 6L.03 | 24 x 30 | 24 x 30 | — |
| Wait on Stop - Go on Slow | R1-7a | 6G.03 ** | 30 x 36 | 30 x 36 | — |
| Go on Slow | R1-8 | 6L.03 | 24 x 30 | 24 x 30 | — |
| Speed Limit | R2-1 | 6G.08 | 24 x 30* | 36 x 48 | — |
| ~~Fines Higher (plaque)~~ | ~~R2-6P~~ | ~~6G.08~~ | ~~24 x 18~~ | ~~36 x 24~~ | ~~—~~ |
| Fines Double (plaque) | R2-6aP | 6G.08 | 24 x 18 | 36 x 24 | — |
| $XX Fine (plaque) | R2-6bP | 6G.08 | 24 x 18 | 36 x 24 | — |
| Begin Double ~~Higher~~ Fines Zone | R2-10 | 6G.08 | 24 x 30 | 36 x 48 | — |
| End Double ~~Higher~~ Fines Zone | R2-11 | 6G.08 | 24 x 30 | 36 x 48 | — |
| End Work Zone Speed Limit | R2-12 | 6G.08 | 24 x 36 | 36 x 54 | — |
| Movement Prohibition | R3-1,2,3,4 | 6G.02 | 24 x 24* | 36 x 36 | — |
| Mandatory Movement Lane Control - Turn Only | R3-5 | 6G.02 | 30 x 36 | — | — |
| Optional Movement Lane Control - Thru and Turn | R3-6 | 6G.02 | 30 x 36 | — | — |
| Right (Left) Lane Must Turn Right (Left) | R3-7 | 6G.02 | 30 x 30* | — | — |
| Advance Intersection Lane Control (2 lanes) | R3-8 | 6G.02 | 30 x 30 | — | — |
| Movement Prohibition - No U or Left Turn | R3-18 | 6G.02 | 24 x 24* | 36 x 36 | — |
| Movement Prohibition - No Straight Through | R3-27 | 6G.02 | 24 x 24* | 36 x 36 | — |
| Do Not Pass | R4-1 | 6G.02 | 24 x 30 | 36 x 48 | — |
| Pass With Care | R4-2 | 6G.02 | 24 x 30 | 36 x 48 | — |
| Keep Right | R4-7 | 6G.02 | 24 x 30 | 36 x 48 | — |
| Narrow Keep Right | R4-7c | 6G.02 | 18 x 30 | — | — |
| Stay in Lane | R4-9 | 6G.07 | 24 x 30 | 36 x 48 | — |
| Stay In Lane To Merge Point | R4-9a | 6G.07 | 36 x 48 | 36 x 48 | — |
| Do Not Enter | R5-1 | 6G.02 | 30 x 30* | 36 x 36 | — |
| Wrong Way | R5-1a | 6G.02 | 36 x 24* | 42 x 30 | — |
| One Way | R6-1 | 6G.02 | 36 x 12* | 48 x 18 | — |
| One Way | R6-2 | 6G.02 | 24 x 30* | 36 x 48 | — |
| ~~No Parking (symbol)~~ | ~~R8-3~~ | ~~6G.02~~ | ~~24 x 24*~~ | ~~36 x 36~~ | ~~—~~ |
| Pedestrian Crosswalk | R9-8 | 6G.09 | 36 x 18 | — | — |
| Sidewalk Closed | R9-9 | 6G.10 | 24 x 12 | — | — |
| Sidewalk Closed, Use Other Side | R9-10 | 6G.10 | 24 x 12 | — | — |
| Sidewalk Closed Ahead, Cross Here | R9-11 | 6G.10 | 24 x 18 | — | — |
| Sidewalk Closed, Cross Here | R9-11a | 6G.10 | 24 x 12 | — | — |
| Bike Lane Closed | R9-12 | 6P.01 | 24 x 12 | — | — |
| Stop Here on Red | R10-6 | 6L.04 | 24 x 36 | — | — |
| Road Closed | R11-2, 2a, 2b, 2c | 6G.04 | 48 x 30 | — | — |
| Road Closed - Local Traffic Only | R11-3, 3a, 3b, 4 | 6G.05 | 60 x 30 | — | — |
| Weight Limit | R12-1, 2 | 6G.06 | 24 x 30 | 36 x 48 | — |
| Weight Limit | R12-5 | 6G.06 | 24 x 36 | 36 x 48 | — |
| Turn Off 2-Way Radio and Cell Phone | R22-2 | 6G.11 | 42 x 36 | 42 x 36 | — |
| Work Zone (plaque) | G20-5aP | 6G.08 | 24 x 18 | 30 x 24 | — |

(Also see C2(CA) Sign Size)

* See Table 2B-1 for minimum size required for signs facing traffic on multi-lane conventional roads

** Refer to FHWA's List of Known Errors for error in the Section reference for the R1-7a sign. Refer to Section 1A.04 for more details.

Notes:

1. Larger signs may be used wherever necessary for greater legibility or emphasis
2. Dimensions are shown in inches and are shown as width x height

## Table 6G-1(CA). California Temporary Traffic Control Zone Regulatory Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road (Minimum) | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|
| RAMP CLOSED | C2(CA) | 6G.101(CA) | 48 x 30 | 48 x 30 | 48 x 30 | — |
| TRAFFIC CONTROL-WAIT AND FOLLOW PILOT CAR | C37(CA) | 6E.04 | 36 x 42 | 36 x 42 | — | — |
| TRAFFIC FINES DOUBLE IN CONSTRUCTION ZONES | C40(CA) | 6G.08 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| MOVE OVER OR SLOW WHEN AMBER LIGHTS FLASHING | R111(CA) | 6G.102(CA) | 54 x 18 | 54 x 18 | 54 x 18 | --- |
| PILOT CAR DO NOT PASS | R115(CA) | 6E.04 | 36 x 18 | 36 x 18 | — | — |
| RAMP CLOSED, USE RAMP AT___ | SC7(CA) | 6G.101(CA) | 84 x 42 | 84 x 42 | 84 x 42 | — |
| LANE CLOSED AHEAD or ROAD WORK AHEAD | SC10(CA) | 6G.103(CA) | 48 x 30 | 66 x 36 | 66 x 36 | — |
| LANE CLOSED | SC11(CA) | 6G.103(CA) | 42 x 30 | 54 x 42 | 54 x 42 | — |
| DO NOT PASS | SC13(CA) | 6G.103(CA) | 42 x 30 | 54 x 42 | 54 x 42 | — |
| CAUTION | SC15(CA) | 6G.103(CA) | 42 x 18 | 54 x 24 | 54 x 24 | — |
| DOUBLE FINE ZONE | SR54(CA) | 2B.25 | 30 x 30 | 42 x 42 | 42x 42 | — |

# CHAPTER 6H. TTC ZONE WARNING SIGNS

## Section 6H.01 Warning Sign Function, Design, and Application

Support:

01 TTC zone warning signs (see Figure 6H-1) notify road users of specific situations or conditions on or adjacent to a roadway that might not otherwise be apparent.

**Standard:**

02 **TTC warning signs shall comply with the Standards for warning signs presented in Part 2 and in the FHWA's "Standard Highway Signs" publication (see Section 1A.05).**

03 **The sizes for TTC warning signs shall be as shown in Table 6H-1.**

04 **Except as provided in Paragraph 5 of this Section, TTC warning signs shall be diamond-shaped with a black legend and border on an orange (or fluorescent orange) background, except for the Grade Crossing Advance Warning (W10-1) sign, which shall have a black legend and border on a yellow (or fluorescent yellow) background.**

Option:

05 Warning signs that are required or recommended in Parts 2 or 7 to have a fluorescent yellow-green background may have that color background in TTC zones.

06 Existing warning signs with a yellow background that are still applicable may remain in place.

07 Warning signs used for TTC incident management situations may have a black legend and border on a fluorescent pink background.

08 Mounting or space considerations may justify a change from the standard diamond shape to a rectangular shape.

09 In emergencies, available warning signs having yellow backgrounds may be used if signs with orange or fluorescent pink backgrounds are not at hand.

*Guidance:*

10 *Where roadway or road user conditions require greater emphasis, larger than standard size warning signs should be used, with the symbol or legend enlarged approximately in proportion to the outside dimensions.*

11 *Where any part of the roadway is obstructed or closed by work activities or incidents, advance warning signs should be installed to alert road users well in advance of these obstructions or restrictions.*

12 *Where road users include pedestrians, the provision of supplemental audible information or detectable barriers or barricades should be provided for people with vision disabilities.*

Support:

13 Detectable barriers or barricades communicate very clearly to pedestrians who have vision disabilities that they can no longer proceed in the direction that they are traveling.

Option:

14 Advance warning signs may be used singly or in combination.

15 Where distances are not displayed on warning signs as part of the message, a supplemental plaque with the distance legend may be mounted immediately below the sign on the same support.

16 The NO SHOULDER (W8-23) sign (see Figure 6H-1) may be used where no earth, gravel or paved shoulders are available for vehicles to pull off the roadway.

Support:

17 Some of the California warning signs used in TTC zones are shown in Figure 6H-1(CA) and Table 6H-1(CA).

## Section 6H.02 Position of Advance Warning Signs

*Guidance:*

01 *Where highway conditions permit, warning signs should be placed in advance of the transition and activity areas at varying distances depending on roadway type, condition, and posted speed. Table 6B-1 contains information regarding the spacing of advance warning signs. Where a series of two or more advance warning signs is used, the closest sign to the transition and activity areas should be placed approximately 100 feet for low-speed urban streets to 1,000 feet or more for freeways and expressways.*

02 *Where multiple advance warning signs are needed on the approach to a transition and activity area, the ROAD WORK AHEAD (W20-1) sign should be the first advance warning sign encountered by road users.*

Support:

03 Various conditions, such as limited sight distance or obstructions that might require a driver to reduce speed or stop, might require additional advance warning signs.

Option:

04 As an alternative to a specific distance on advance warning signs, the word AHEAD may be used. Support:

05 At TTC zones on lightly-traveled roads, all of the advance warning signs prescribed for major construction might not be needed.

Option:

06 Utility work, maintenance, or minor construction can occur within the TTC zone limits of a major construction project, and additional warning signs may be needed.

*Guidance:*

07 *Utility, maintenance, and minor construction signing and TTC should be coordinated with appropriate authorities so that road users are not confused or misled by the additional TTC devices.*

## Section 6H.03 ROAD (STREET) WORK Sign (W20-1)

*Guidance:*

01 *The ROAD (STREET) WORK (W20-1) sign (see Figure 6H-1), which serves as a general warning of obstructions or restrictions, should be located in advance of the work space or any detour, on the road where the work is taking place.*

02 *Where traffic can enter a TTC zone from a crossroad or a major (high-volume) driveway, an advance warning sign should be used on the crossroad or major driveway.*

Option:

03 The legend STREET may be substituted for ROAD and the distance legend may be either XX FEET, XX MILES, or AHEAD.

04 The RAMP WORK AHEAD (C23(CA)) sign (see Figure 6H-1(CA)) may be substituted for the W20-1 sign where applicable.

05 The ROAD (STREET) WORK Informational plaque (C23B(CA)) (refer to Figure 6H-1(CA)) may be used with the ROAD (STREET) WORK (W20-1) sign.

**Standard:**

06 **The message displayed on the ROAD (STREET) WORK Informational plaque (C23B(CA)) shall be worded in terms common to motorists, as shown in examples below. The height and width of the plate will vary according to the lettering size and message. The width of the plate shall not exceed the overall width of the W20-1 sign.**

Support:

07 Following are some example messages:

A. BRIDGE REPLACEMENT
B. BRIDGE WIDENING
C. BRIDGE REPAIR
D. CURVE IMPROVEMENT
E. HIGHWAY REALIGNMENT
F. HIGHWAY WIDENING
G. HIGHWAY WIDENING AND PAVING
H. HIGHWAY REHABILITATION
I. STORM REPAIR
J. PAVING
K. SIGNING IMPROVEMENT
L. PAVEMENT MAINTENANCE
M. SAFETY IMPROVEMENT

*Guidance:*

08 *The SPECIAL EVENT AHEAD (SC5(CA)) sign (refer to Figure 6H-1(CA)) should be used in lieu of the ROAD (STREET) WORK (W20-1) sign for special events, such as bike races, movie filming, etc., where the event is on the travel way or close enough or of such a nature as to have a potential effect on motorists, bicyclists and pedestrians.*

## Section 6H.04 DETOUR Sign (W20-2)

~~*Guidance:*~~

**Standard:**

01 **The DETOUR (W20-2) sign (see Figure 6H-1) ~~should~~ shall be used in advance of a road user detour over a different roadway or route. Refer to CVC § 21363 for detour signs.**

Option:

01 The distance legend may be either XX FEET, XX MILES, or AHEAD.

## Section 6H.05 ROAD (STREET) CLOSED Sign (W20-3)

*Guidance:*

01 *The ROAD (STREET) CLOSED (W20-3) sign (see Figure 6H-1) should be used in advance of the point where a highway is closed to all road users, or to all but local road users.*

Option:

02 The legend STREET may be substituted for ROAD and the distance legend may be either XX FEET, XX MILES, or AHEAD.

## Section 6H.06 ONE LANE ROAD Sign (W20-4)

**Standard:**

01 **The ONE LANE ROAD (W20-4) sign (see Figure 6H-1) shall be used only in advance of that point where motor vehicle traffic in both directions must use a common single lane (see Section 6E.01).**

Option:

02 The distance legend may be either XX FEET, XX MILES, or AHEAD.

## Section 6H.07 Lane(s) Closed Signs (W20-5, W20-5a, and W9-3)

**Standard:**

01 **The Lane(s) Closed sign (see Figure 6H-1) shall be used in advance of that point where one or more through lanes of a multi-lane roadway are closed.**

02 **For a single lane closure, the Lane Closed (W20-5) sign (see Figure 6H-1) shall use the legend RIGHT (LEFT) LANE CLOSED. Where two or more adjacent lanes are closed, the W20-5a sign (see Figure 6H-1) shall use the legend XX RIGHT (LEFT) LANES CLOSED.**

Option:

02a The Lane Closed or LANE(S) CLOSED (W20-5, W20-5a or C20(CA)) sign by itself, or in combination with LEFT (C20A(CA)) sign overlay and/or Numeral (C20B(CA)) sign overlay may be used. (Refer to Figures 6H-1, 6H-1(CA) and 6I-1(CA)).

02b The LANE CLOSED (C30(CA)) sign (refer to Figure 6H-1(CA)) may be used within a closed lane of a multilane highway as follow-up information to the appropriate advance warning signs. The C30(CA) sign may be repeated at intervals, throughout long lane closures, as a reminder to motorists.

03 The distance legend may be either XX FEET, XX MILES, or AHEAD.

*Guidance:*

04 *The Interior Lane Shift (W9-3) sign (see Figure 6H-1) should be used in advance of that point where work occupies an interior lane(s) and approaching motor vehicle traffic is directed to the right or left of the work zone in the lane(s) by using a shifting taper to route traffic around the closed interior lane(s).*

Support:

05 For moving lane closures on State highways, see Caltrans' Standard Plan T-16. Refer to Section 1A.05 for information regarding this publication.

06 Do not use the CENTER LANE CLOSED AHEAD (W9-3) sign (refer to Figure 6H-1) for moving lane closures on State highways.

## Section 6H.08 Lane Ends Signs (W4-2 and W9-2a)

~~Option:~~

*Guidance:*

01 *The Lane Ends (W4-2) sign (see Figure 6H-1) ~~may~~ should be used to warn drivers of the reduction in the number of lanes for moving motor vehicle traffic in the direction of travel on a multi-lane roadway.*

~~*Guidance:*~~

02 *The MERGE HERE TAKE TURNS (W9-2a) sign (see Figure 6H-1) should be used to identify the merge point at which vehicles from alternate lanes take turns merging during Late Merge applications (see Section 6N.19).*

## Section 6H.09 ON RAMP Plaque (W13-4P)

~~*Guidance:*~~

01 ~~*When work is being done on a ramp, but the ramp remains open, the ON RAMP (W13-4P) plaque (see Figure 6H-1) should be used to supplement the advance ROAD WORK sign.*~~

**Standard:**

02 **The ON RAMP (W13-4) plaque shall not be used in California due to the potential for conflict if it is used when the work is being done on an off ramp.**

## Section 6H.10 RAMP NARROWS Sign (W5-4)

*Guidance:*

01 *The RAMP NARROWS (W5-4) sign (see Figure 6H-1) should be used in advance of the point where work on a ramp reduces the normal width of the ramp along a part or all of the ramp.*

Option:

02 The ROAD NARROWS (W5-1) sign (refer to Figure 6H-1) or NARROW LANE(S) (C12(CA)) sign (refer to Figure 6H-1(CA)), as appropriate, may be used instead of the RAMP NARROWS (W5-4) sign (refer to Figure 6H-1). Refer to Sections 2C.17 and 6H.102(CA).

## Section 6H.11 SLOW TRAFFIC AHEAD Sign (W23-1)

Option:

01 The SLOW TRAFFIC AHEAD (W23-1) sign (see Figure 6H-1) may be used on a shadow vehicle, usually mounted on the rear of the most upstream shadow vehicle, along with other appropriate signs for mobile operations to warn of slow moving work vehicles. A ROAD (STREET) WORK (W20-1) sign may also be used with the SLOW TRAFFIC AHEAD sign.

## Section 6H.12 EXIT OPEN and EXIT CLOSED Signs (E5-2 and E5-2a)

Option:

01 An EXIT OPEN (E5-2) or EXIT CLOSED (E5-2a) sign (see Figure 6H-1) may be used to supplement other warning signs where work is being conducted in the vicinity of an exit ramp and where the exit maneuver for vehicular traffic using the ramp is different from the normal condition.

Support:

02 Refer to FHWA's List of Known Errors for error in Paragraph 1. Refer to Section 1A.04 for more details.

## Section 6H.13 EXIT ONLY Sign (E5-3)

Option:

01 An EXIT ONLY (E5-3) sign (see Figure 6H-1) may be used to supplement other warning signs where work is being conducted in the vicinity of an exit ramp and where the exit maneuver for vehicular traffic using the ramp is different from the normal condition.

## Section 6H.14 NEW TRAFFIC PATTERN AHEAD Sign (W23-2)

Option:

01 A NEW TRAFFIC PATTERN AHEAD (W23-2) sign (see Figure 6H-1) may be used on the approach to an intersection or along a section of roadway to provide advance warning of a change in traffic patterns, such as revised lane usage, roadway geometry, or signal phasing.

*Guidance:*

02 *To retain its effectiveness, the W23-2 sign should be displayed for up to 2 weeks, and then it should be covered or removed until it is needed again.*

## Section 6H.15 Flagger Signs (W20-7 and W20-7a)

*Guidance:*

01 *The Flagger (W20-7) sign (see Figure 6H-1) should be used in advance of any point where a flagger is stationed to control road users.*

Option:

02 A distance legend may be displayed on a supplemental plaque below the Flagger sign. The sign may be used with appropriate legends or in conjunction with other warning signs, such as the BE PREPARED TO STOP (W3-4) sign (see Figure 6H-1).

03 The FLAGGER (W20-7a) word message sign with a distance legend may be substituted for the Flagger (W20-7) sign.

## Section 6H.16 Two-Way Traffic Sign (W6-3)

*Guidance:*

01 *When one roadway of a normally-divided highway is closed, with two-way vehicular traffic maintained on the other roadway, the Two-Way Traffic (W6-3) sign (see Figure 6H-1) should be used at the beginning of the two-way vehicular traffic section and at intervals to remind road users of opposing vehicular traffic.*

02 *The Two-Way Traffic (W6-3) sign should also be used at locations where motorists could perceive that they are on a one-way roadway when, in fact, they are on a two lane, two-way highway.*

Support:

03 Following are some typical situations:

A. Construction sites where a two-lane highway is being converted to a freeway or an expressway.
B. Two-lane, two-way highways where ultimate freeway or expressway right-of-way has been purchased and grading for the full width has been completed.
C. Two-lane, two-way highways following long sections of multi-lane freeway or expressway.
D. Lane-shift as shown in Figure 6P-102(CA).

## Section 6H.17 Narrow Two-Way Traffic Sign (W6-4)

**Standard:**

01 **The Narrow Two-Way Traffic (W6-4) sign (see Figure 6H-1) shall be an upright, retroreflective orange-colored sign placed on a flexible support and sized at least 12 inches wide by 18 inches high.**

Support:

02 The Narrow Two-Way Traffic (W6-4) sign is intended for mounting only on a flexible support in a series along the center line to separate opposing vehicular traffic on a two-lane, two-way operation.

**Standard:**

03 **Narrow Two-Way Traffic signs shall not be placed within pedestrian crossings.**

## Section 6H.18 Workers Signs (W21-1 and W21-1a)

Option:

01 A Workers (W21-1) sign (see Figure 6H-1) may be used to alert road users of workers in or near the roadway.

*Guidance:*

02 *In the absence of other warning devices, a Workers sign should be used when workers are in the roadway.*

Option:

03 The WORKERS (W21-1a) word message sign may be used as an alternate to the Workers (W21-1) symbol sign.

## Section 6H.19 FRESH OIL (TAR) Sign (W21-2)

*Guidance:*

01 *The FRESH OIL (TAR) (W21-2) sign (see Figure 6H-1) should be used to warn road users of the surface treatment.*

## Section 6H.20 ROAD MACHINERY AHEAD Sign (W21-3)

Option:

01 The ROAD MACHINERY AHEAD (W21-3) sign (see Figure 6H-1) may be used to warn of machinery operating in or adjacent to the roadway.

## Section 6H.21 Motorized Traffic Signs (W8-6 and W11-10)

Option:

01 Motorized Traffic (W8-6 and W11-10 or C44(CA)) signs (refer to Figure 6H-1 and Figure 6H-1(CA)) may be used to alert road users to locations where unexpected travel on the roadway or entries into or departures from the roadway by construction vehicles might occur. The TRUCK CROSSING (W8-6) or TRUCKS ENTERING EXITING (C44(CA)) word message sign may be used as an alternate to the Truck (W11-10) symbol sign (see Figure 6H-1) where there is an established construction vehicle crossing, entrance, or exit of the roadway.

Support:

02 These locations might be relatively confined or might occur randomly over a segment of roadway.

## Section 6H.22 Shoulder Work Signs (W21-5, W21-5a, and W21-5b)

Support:

01 Shoulder Work signs (see Figure 6H-1 and Figure 6H-1(CA)) warn of maintenance, reconstruction, or utility operations on the highway shoulder where the roadway is unobstructed.

**Standard:**

02 **The Shoulder Work sign shall have the legend SHOULDER WORK (W21-5), RIGHT (LEFT) SHOULDER CLOSED (W21-5a), or RIGHT (LEFT) SHOULDER CLOSED XX FT or AHEAD (W21- 5b), or SHOULDER WORK AHEAD (C24(CA)), or SHOULDER CLOSED (C30A(CA)).**

Option:

03 The Shoulder Work sign may be used in advance of the point on a non-limited access highway where there is shoulder work. It may be used singly or in combination with a ROAD WORK NEXT XX MILES or ROAD WORK AHEAD sign.

*Guidance:*

04 *On freeways and expressways, the RIGHT (LEFT) SHOULDER CLOSED XX FT or AHEAD (W21- 5b) sign followed by RIGHT (LEFT) SHOULDER CLOSED (W21-5a) sign should be used in advance of the point where the shoulder work occurs and should be preceded by a ROAD WORK AHEAD sign.*

Option:

05 The SHOULDER WORK AHEAD (C24(CA)) sign may be used in advance of the point where shoulder work or utility operations involve the shoulder but the roadway is unobstructed.

06 The SHOULDER CLOSED (C30A(CA)) sign may be used within a shoulder area that has been closed due to work near the traveled way. The C30A(CA) sign is supplemental to appropriate advance warning signs.

## Section 6H.23 SURVEY CREW Sign (W21-6)

*Guidance:*

01 *The SURVEY CREW (W21-6) sign (see Figure 6H-1) should be used to warn of surveying crews working in or adjacent to the roadway.*

## Section 6H.24 UTILITY WORK Sign (W21-7)

Option:

01 The UTILITY WORK (W21-7) sign (see Figure 6H-1) may be used as an alternate to the ROAD (STREET) WORK (W20-1) sign for utility operations on or adjacent to a highway.

Support:

02 Typical examples of where the UTILITY WORK sign is used appear in Figures 6P-4, 6P-6, 6P-10, 6P-15, 6P-18, 6P-21, 6P-22, 6P-26, and 6P-33.

Option:

03 The distance legend may be either XX FEET, XX MILES, or AHEAD.

## Section 6H.25 Signs for Blasting Areas

Support:

01 Radio-Frequency (RF) energy can cause the premature firing of electric detonators (blasting caps) used in TTC zones.

**Standard:**

02 **Road users shall be warned where blasting operations occur. A sequence of signs shall be prominently displayed to warn all road users of blasting operations and to direct operators of mobile radio equipment, including cellular telephones, to turn off transmitters in a blasting area. These signs shall be covered or removed when there are no explosives in the area or the area is otherwise secured.**

03 **The BLASTING ZONE AHEAD (W22-1) sign (see Figure 6H-1) shall be used in advance of any TTC zone where explosives are being used. The TURN OFF 2-WAY RADIO AND CELL PHONE (R22-2) and END BLASTING ZONE (W22-3) signs shall be used in sequence with this sign.**

04 **The TURN OFF 2-WAY RADIO AND CELL PHONE (R22-2) sign (see Section 6G.11 and Figure 6G-1) shall follow the BLASTING ZONE AHEAD (W22-1) sign and shall be placed at least 1,000 feet before the beginning of the blasting zone.**

05 **The END BLASTING ZONE (W22-3) sign (see Figure 6H-1) shall be placed a minimum of 1,000 feet past the blasting zone.**

Option:

06 The END BLASTING ZONE sign may be placed either with or preceding the END ROAD WORK sign.

## Section 6H.26 Shoulder Signs and Plaque (W8-4, W8-9, W8-17, and W8-17P)

Option:

01 The SOFT SHOULDER (W8-4) sign (see Figure 6H-1) may be used to warn of a soft shoulder condition.

02 The LOW SHOULDER (W8-9) sign (see Figure 6H-1) may be used to warn of a shoulder condition where there is an elevation difference of 3 inches or less between the shoulder and the travel lane.

*Guidance:*

03 *The Shoulder Drop Off (W8-17) sign (see Figure 6H-1) should be used when an unprotected shoulder drop-off, adjacent to the travel lane, exceeds 3 inches in depth for a continuous length along the roadway, based on engineering judgment.*

Option:

04 A SHOULDER DROP-OFF (W8-17P) supplemental plaque (see Figure 6H-1) may be mounted below the W8-17 sign.

05 The black on orange background LOW SHOULDER (W8-9) sign (refer to Figure 6H-1) may be used on State highways to warn of a shoulder condition where there is an elevation difference of less than 3 inches between the shoulder and the travel lane.

## Section 6H.27 UNEVEN LANES Sign (W8-11)

*Guidance:*

01 *The UNEVEN LANES (W8-11) sign (see Figure 6H-1) should be used during operations that create a difference in elevation between adjacent lanes that are open to travel.*

02 *The UNEVEN PAVEMENT (C46(CA)) sign (refer to Figure 6H-1(CA)) should be used during operations that create a difference in elevation in the pavement that is not along a lane line.*

Support:

03 Uneven pavement conditions include elevation difference adjacent to lanes but not at the lane line; between a vehicle lane and a bicycle lane or an unmarked shoulder; and a step in any direction in the pavement. A step is defined as a ridge in the pavement, such as that which might exist between the pavement and a concrete gutter or manhole cover; or that might exist between two pavement blankets when the top level does not extend to the edge of the roadway.

Option:

04 In situations where there is a need to warn bicyclists or other road users of the uneven pavement condition the UNEVEN PAVEMENT (C46P(CA)) plaque (refer to Figure 6H-1(CA)) may be used.

**Standard:**

05 **A C46P(CA) plaque shall not be used alone. If a C46P(CA) plaque is used, it shall be mounted below either a Vehicular Traffic Warning sign (refer to Section 2C.54) or a Non-Vehicular Warning sign (refer to Section 2C.55). The background color of the C46P(CA) plaque shall match the background color of the warning sign with which it is displayed.**

Option:

06 When warning is intended to be directed primarily to motorcyclists, use of the UNEVEN LANES (W8-11) sign or UNEVEN PAVEMENT (C46(CA)) sign with motorcycle plaque (W8-15aP) (refer to Figure 6H-1 and Figure 6H-1(CA)) may be considered.

Support:

07 Refer to Table 6H-101(CA) for pavement surface tolerances for each road user group.

## Section 6H.28 STEEL PLATE AHEAD Sign (W8-24)

Option:

01 A STEEL PLATE AHEAD (W8-24) sign (see Figure 6H-1) may be used to warn road users that the presence of a temporary steel plate(s) might make the road surface uneven and might create slippery conditions during wet weather.

## Section 6H.29 NO CENTER LINE Sign (W8-12)

*Guidance:*

01 *The NO CENTER LINE (W8-12) sign (see Figure 6H-1) should be used when the work obliterates the center line pavement markings and when temporary pavement centerline markings are not provided. This sign should be placed at the beginning of the TTC zone and repeated at 2-mile intervals in long TTC zones.*

Support:

02 Section 6J.02 contains information regarding temporary markings.

**Standard:**

03 **The NO CENTER LINE (W8-12) sign shall not be used on State highways. Whenever construction or maintenance work causes obliteration of center stripe, temporary or permanent center stripe shall be in place prior to opening the State highway to public traffic.**

## Section 6H.30 Reverse Curve Signs (W1-4 Series)

*Guidance:*

01 *In order to give road users advance notice of a lane shift, a Reverse Curve (W1-4, W1-4b, or W1-4c) sign (see Figure 6H-1) should be used when a lane (or lanes) is being shifted to the left or right. If the design speed of the curves is 30 mph or less, a Reverse Turn (W1-3) sign should be used.*

**Standard:**

02 **If a Reverse Curve (or Turn) sign is used, the direction of the reverse curve (or turn) shall be appropriately illustrated. Except as provided in Paragraph 3 of this Section, the number of lanes illustrated on the sign shall be the same as the number of through lanes available to road users.**

Option:

03 Where two or more lanes are being shifted, a W1-4 (or W1-3) sign with an ALL LANES (W24-1cP) plaque (see Figure 6H-1) may be used instead of a sign that illustrates the number of lanes.

04 Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.

## Section 6H.31 Double Reverse Curve Signs (W24-1 Series)

Option:

01 The Double Reverse Curve (W24-1, W24-1a, or W24-1b) sign (see Figure 6H-1) may be used where the tangent distance between two reverse curves is less than 600 feet, thus making it difficult for a second Reverse Curve (W1-4 series) sign to be placed between the curves. If the design speed of the curves is 30 mph or less, Double Reverse Turn signs may be used.

**Standard:**

02 **If a Double Reverse Curve (or Turn) sign is used, the direction of the double reverse curve (or turn) shall be appropriately illustrated. Except as provided in Paragraph 3 of this Section, the number of lanes illustrated on the sign shall be the same as the number of through lanes available to road users.**

Option:

03 Where two or more lanes are being shifted, a W24-1 (or Double Reverse Turn sign showing one lane) sign with an ALL LANES (W24-1cP) plaque (see Figure 6H-1) may be used instead of a sign that illustrates the number of lanes.

04 Where more than three lanes are being shifted, the Double Reverse Curve (or Turn) sign may be rectangular.

## Section 6H.32 Advisory Speed Plaque (W13-1P)

Option:

01 In combination with a warning sign, an Advisory Speed (W13-1P) plaque (see Figure 6H-1) may be used to indicate a recommended speed through the TTC zone.

**Standard:**

02 **The Advisory Speed plaque shall not be used in conjunction with any sign other than a warning sign, nor shall it be used alone. When used with orange TTC zone signs, this plaque shall have a black legend and border on an orange background. The plaque shall be at least 24 x 24 inches in size when used with a sign that is 36 x 36 inches or larger. Except in emergencies, an Advisory Speed plaque shall not be mounted until the recommended speed is determined by the highway agency.**

Support:

02a Refer to FHWA's List of Known Errors for error in Paragraph 2. Refer to Section 1A.04 for more details.

03 Warning signs with advisory speed plaques (see Section 2C.59) inform drivers of the recommended operating speed based on temporary conditions within a TTC zone. Examples include narrow lanes, temporary diversion (reverse curves), lane shifts, sight distance restrictions, rough road surface, bumps, low/no shoulder, workers on foot, work vehicles or equipment close to the open travel lane, or other conditions that indicate the need for reduced speed.

04 AASHTO and ITE design documents contain established engineering practices for the determination of the recommended advisory speeds for horizontal curves or locations with limited sight distance.

## Section 6H.33 Supplementary Distance Plaque (W7-3aP)

Option:

01 In combination with a warning sign, a Supplementary Distance (W7-3aP) plaque (see Figure 6H-1) with the legend NEXT XX MILES may be used to indicate the length of highway over which a work activity is being conducted, or over which a condition exists in the TTC zone.

02 In long TTC zones, Supplementary Distance plaques with the legend NEXT XX MILES may be placed in combination with warning signs at regular intervals within the zone to indicate the remaining length of highway over which the TTC work activity or condition exists.

**Standard:**

03 **The Supplementary Distance plaque with the legend NEXT XX MILES shall not be used in conjunction with any sign other than a warning sign, nor shall it be used alone. When used with orange TTC zone signs, this plaque shall have a black legend and border on an orange background. The plaque shall be at least 30 x 24 inches in size when used with a sign that is 36 x 36 inches or larger.**

*Guidance:*

04 *When used in TTC zones, the Supplementary Distance plaque with the legend NEXT XX MILES should be placed below the initial warning sign designating that, within the approaching zone, a temporary work activity or condition exists.*

## Section 6H.34 Motorcycle Plaque (W8-15P)

Support:

00 Refer to FHWA's List of Known Errors for error in Section title. Refer to Section 1A.04 for more details.

Option:

01 A Motorcycle (W8-15P) plaque (see Figure 6H-1) may be mounted below a LOOSE GRAVEL (W8- 7) sign, an UNEVEN LANES (W8-11) sign, an UNEVEN PAVEMENT (C46(CA)) sign (see Figure 6H-1(CA)), a GROOVED PAVEMENT (W8-15) sign, a METAL BRIDGE DECK (W8-16) sign, or a STEEL PLATE AHEAD (W8-24) sign if the warning is intended to be directed primarily to motorcyclists.

Support:

02 Refer to FHWA's List of Known Errors for error in Paragraph 1. Refer to Section 1A.04 for more details.

## Section 6H.35 ROAD WORK NEXT XX MILES Sign (G20-1)

*Guidance:*

01 *The ROAD WORK NEXT XX MILES (G20-1) sign (see Figure 6H-1) should be installed in advance of TTC zones that are more than 2 miles in length.*

Option:

02 The ROAD WORK NEXT XX MILES sign may be mounted on a Type 3 Barricade. The sign may also be used for TTC zones of shorter length.

**Standard:**

03 **The distance displayed on the ROAD WORK NEXT XX MILES sign shall be stated to the nearest whole mile.**

## Section 6H.36 END ROAD WORK Sign (G20-2)

*Guidance:*

01 *When used, the END ROAD WORK (G20-2) sign (see Figure 6H-1) should be placed near the downstream end of the termination area, as determined by engineering judgment.*

Option:

02 The END ROAD WORK sign may be installed on the back of a warning sign facing the opposite direction of road users or on the back of a Type 3 Barricade.

03 The END ROAD WORK (G20-2) sign may be omitted if the end of the work zone is obvious to motorists or falls within a larger project's limits.

Support:

04 Conditions could be such that posting of END ROAD WORK (G20-2) signs is not helpful. For example, they can be omitted if other TTC zones begin within 1 mile of the end of the workspace in rural areas, or about 0.25 miles within urban areas. For normal daytime maintenance operations, the G20-2 sign is optional.

## Section 6H.37 PILOT CAR FOLLOW ME Sign (G20-4)

**Standard:**

01 **The PILOT CAR FOLLOW ME (G20-4) sign (see Figure 6H-1) shall be mounted in a conspicuous position on the top or on the rear of a vehicle used for guiding one-way vehicular traffic through or around a TTC zone (see Section 6E.04).**

## Section 6H.38 Other Warning Signs

Option:

01 Advance warning signs may be used by themselves or with other advance warning signs.

02 Besides the warning signs specifically related to TTC zones, several other warning signs in Part 2 may apply in TTC zones.

03 Word message warning signs other than those classified and specified in this Manual and the "Standard Highway Signs" publication (see Section 1A.05) may be developed and used based on engineering judgment to warn of special conditions in TTC zones.

**Standard:**

04 **Except as provided in Sections 6F.01 and 6H.01, other warning signs that are used in TTC zones shall have black legends and borders on an orange background.**

*Guidance:*

05 *Other warning signs should comply with the general requirements of color, shape, and alphabet size and series. The sign message should be brief, legible, and clear.*

## Section 6H.101(CA) LOOSE GRAVEL Sign (W8-7)

*Guidance:*

01 *The LOOSE GRAVEL (W8-7) sign (refer to Figure 6H-1) should be used on chip seal jobs or other areas to warn motorists that there is loose gravel on the roadway.*

**Standard:**

02 **When used, the W8-7 sign shall be placed at the beginning of work and at maximum 2000 feet intervals.**

Option:

03 When warning is intended to be directed primarily to motorcyclists, use of the W8-7 sign with motorcycle plaque (W8-15aP) may be considered.

04 The Advisory Speed (W13-1P) plaque (refer to Figure 6H-1) may be used in combination with the W8-7 sign to indicate the need

to decrease speed at a particular location. Refer to Section 6B.01.

*Guidance:*

05 *The advisory speed should be reasonable or prudent, considering weather, visibility, traffic, surface condition and width of the roadway.*

**Standard:**

06 **On highways with speed limits of 40 mph or higher for seal coat projects, the W13-1P (35 mph or lower) plaque shall be used to supplement the W8-7 sign during placement and/or brooming of screenings.**

## Section 6H.102(CA) NARROW LANE(S) Sign (C12(CA))

Option:

01 The NARROW LANE(S) (C12(CA)) sign (refer to Figure 6H-1(CA)) may be used, when appropriate, to warn the approaching motorist of a narrow lane condition.

*Guidance:*

02 *When used, the C12(CA) sign should be used in conjunction with an Advisory Speed (W13-1P) plaque (refer to Figure 6H-1). Refer to Section 6B.01.*

## Section 6H.103(CA) OPEN TRENCH Sign (C27(CA))

**Standard:**

01 **The OPEN TRENCH (C27(CA)) sign (see Figure 6H-1(CA)) shall be used in advance of open trenches in/or adjacent to roadway.**

02 **The edge of the traveled way shall be defined by edge line delineation consisting of appropriate markers or striping. Edge line delineation shall be white when located on the right of traffic and yellow when located on the left of traffic.**

*Guidance:*

03 *Trenches in excess of 0.15 feet in depth but not exceeding 0.25 feet in depth that are less than 8 feet from the edge of traveled way should be identified by LOW SHOULDER (W8-9) signs (refer to Figure 6H-1) set in the trench adjacent to the edge of pavement at intervals not to exceed every 2,000 feet.*

Option:

04 Portable delineators may be placed at intervals not to exceed 100 feet in lieu of edge line delineation.

**Standard:**

05 **Trenches in excess of 0.25 feet but less than 2.5 feet in depth that are less than 8 feet from the edge of traveled way shall be identified by alternating C27(CA) and NO SHOULDER (W8-23) signs (refer to Figure 6H-1 and Figure 6H-1(CA)) set in the trench at intervals not to exceed 2,000 feet.**

*Guidance:*

06 *Channelizers (CA) or portable delineators should be placed 2 feet to 6 feet outside of the edge line at 100 feet intervals for the conditions described above.*

07 *Trenches in excess of 0.25 feet in depth but not exceeding 2.5 feet in depth that are 8 feet to 15 feet from the edge of traveled way should be identified by C27(CA) signs set in the trench at intervals not to exceed every 2,000 feet. Portable delineators should be placed at 200 feet intervals within 2 feet from the edge of the trench and at 100 feet intervals for edge conditions exceeding 0.5 feet in depth.*

08 *Trenches in excess of 0.5 feet in depth but not exceeding 2.5 feet in depth that are more than 15 feet from the edge of traveled way at locations where a recovery area was available prior to construction should be identified by placing delineators at 200 feet intervals within 2 feet from the edge of the trench and by placing C27(CA) signs in the trench at intervals not to exceed 2,000 feet.*

**Standard:**

09 **Signing for trenches in excess of 2.5 feet in depth shall be based upon engineering judgment or studies (as noted in Section 1D.03) to ensure proper visibility of barricades and signing.**

Support:

10 Refer to Tables 6K-101(CA) and 6B-1.

## Section 6H.104(CA) Object Markers

**Standard:**

01 **When used in work zones, the OM1-3 object markers (refer to Figure 6H-101(CA)) shall have an orange or fluorescent orange retroreflective background.**

02 **When used in work zones, the Type OM3-L, OM3-R and OM3-C object marker (refer to Figure 6H-101(CA)) shall have alternating retroreflective orange and white stripes.**

Support:

03 Figure 6H-101(CA) shows examples of object markers in TTC zones.

04 Refer to Chapter 2C for more details.

## Section 6H.105(CA) Slow For The Cone Zone (SC19(CA) and SC20(CA)) Signs

Option:

01 The Slow For The Cone Zone (SC19(CA)) and SLOW FOR THE CONE ZONE (SC20(CA)) signs (refer to Figures 6H-1(CA), 6P-32, 6P-33, and 6P-36 may be used to remind motorists to slow down when entering a temporary traffic control (TTC) zone to improve worker and road user safety.

02 If used, SC19(CA) and/or SC20(CA) signs may be used within the advance warning area, transition area, or activity area of a TTC zone.

03 A pictograph may be used on the SC19(CA) sign to identify a governmental jurisdiction, an area of jurisdiction, a governmental agency, a military base or branch of service, a governmental-approved university or college, or a governmental-approved institution.

**Standard:**

04 **If a pictograph is used on the SC19(CA) sign, the maximum dimension (height or width) of a pictograph shall not exceed two times the letter height of the largest legend used on the sign.**

## Section 6H.106(CA) FRESH CONCRETE Sign (C43(CA))

Option:

01 The FRESH CONCRETE (C43(CA)) sign (refer to Figure 6H-1(CA)) may be used to warn road users of the surface treatment.

**Standard:**

02 **When used, the FRESH CONCRETE (C43(CA)) sign shall be placed at the beginning of the pavement work area.**

*Guidance:*

03 *The FRESH CONCRETE (C43(CA)) sign should remain in place during the entire curing period.*

## Section 6H.107(CA) CAUTION FREQUENT STOPPING AND BACKING STAY BACK 100 FEET Sign (SC21(CA))

Option:


01 For mobile operations, CAUTION FREQUENT STOPPING AND BACKING STAY BACK 100 FEET (SC21(CA)) sign (refer to Figure 6H-1(CA)) may be mounted on a work vehicle to warn road users and workers of the frequent stopping and backing maneuvers made by the vehicle.

## Figure 6H-1. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 1 of 4)




Note: See Chapter 2C for information on the application of these signs.

## Figure 6H-1. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 2 of 4)

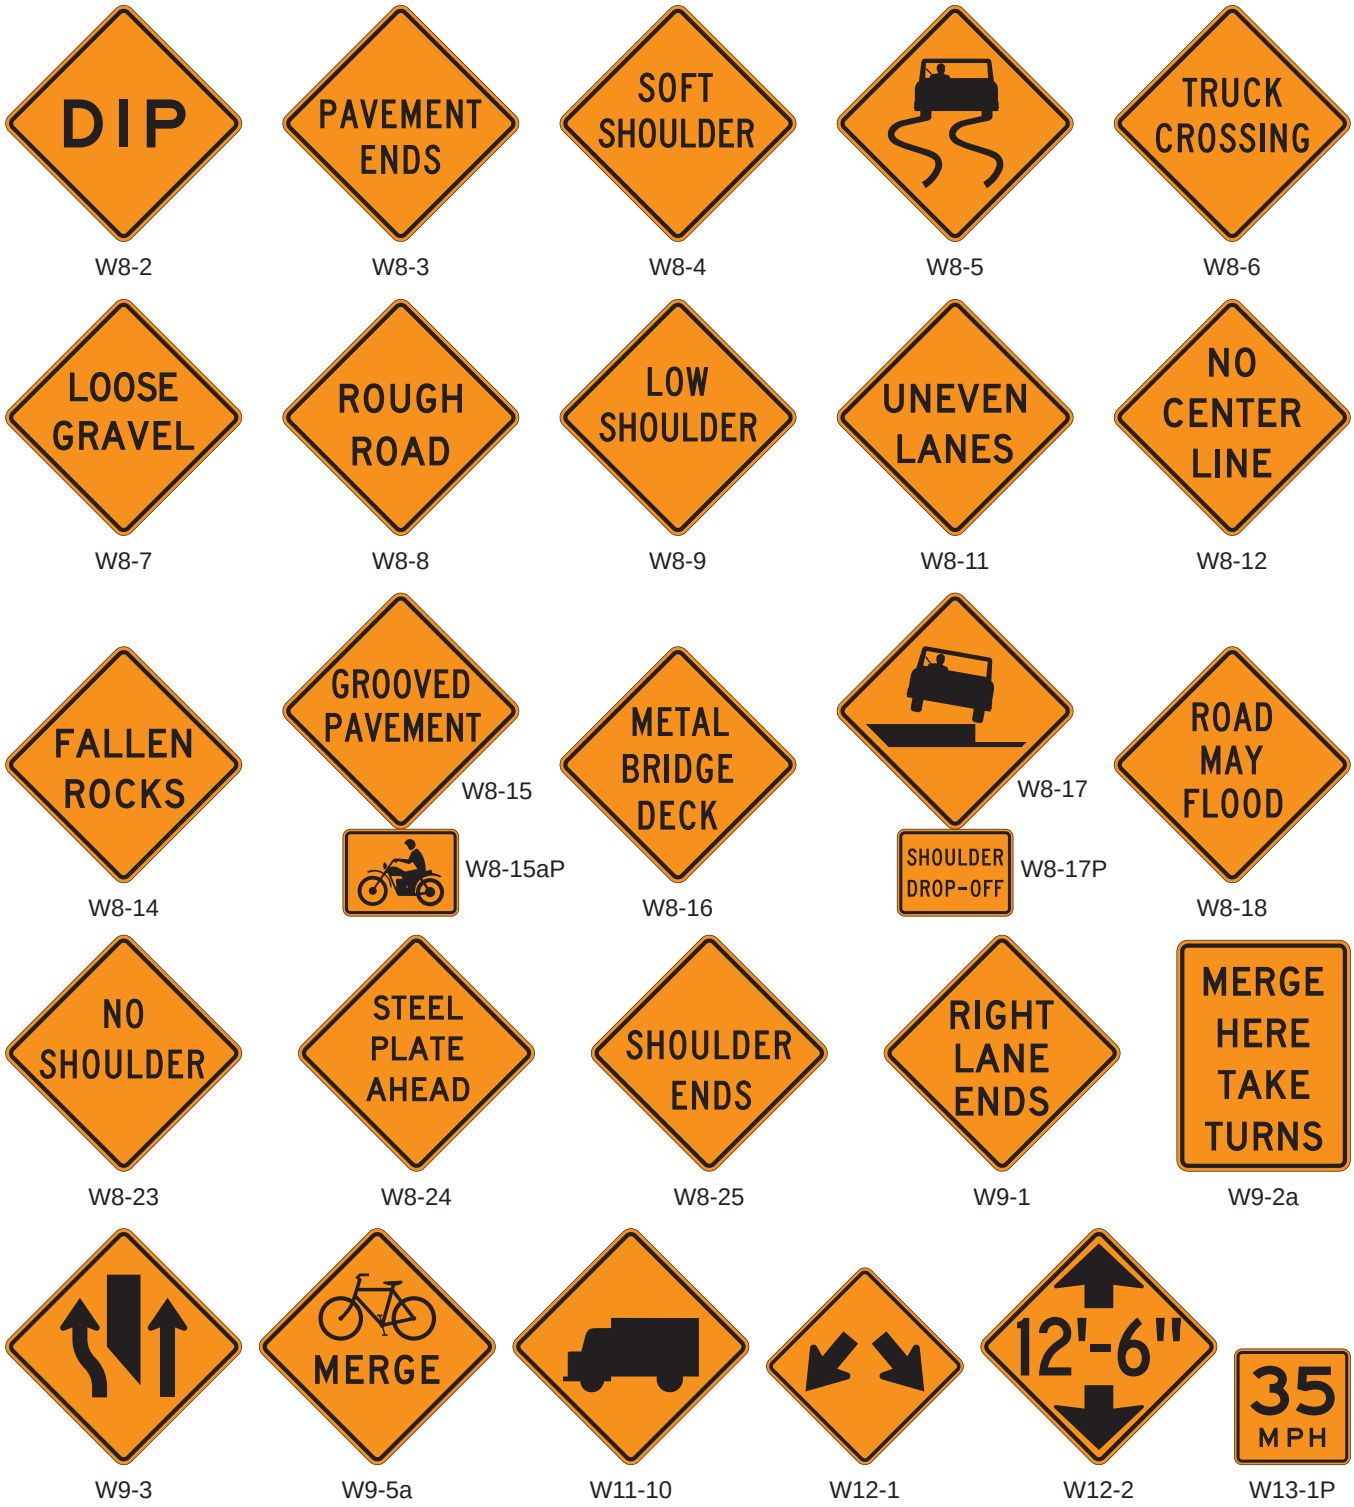


Note: See Chapter 2C for information on the application of these signs.


## Figure 6H-1. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 3 of 4)




Note: See Chapter 2C for information on the application of these signs.

* An optional STREET WORK word message sign is shown in the "Standard Highway Signs" publication.
** An optional STREET CLOSED word message sign is shown in the "Standard Highway Signs" publication.
*** An optional FLAGGER (W20-7a) word message sign is shown in the "Standard Highway Signs" publication.
**** An optional FRESH TAR word message sign is shown in the "Standard Highway Signs" publication.

## Figure 6H-1. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 4 of 4)

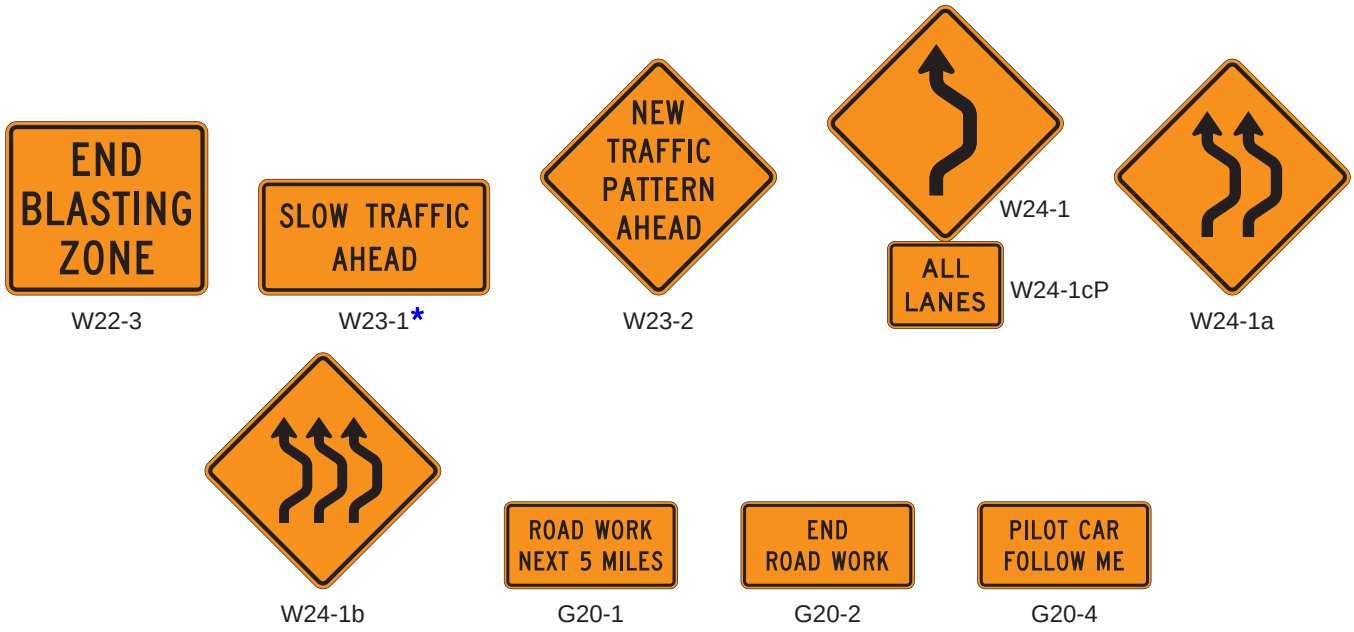


Note: See Chapter 2C for information on the application of these signs.

* See Section 6H.104(CA)

## *Figure 6H-1(CA). California Warning Signs and Plaques in Temporary Traffic Control Zones*



C12(CA)



C19(CA)



C20(CA)



C23(CA)



C23B(CA)



C24(CA)



C27(CA)



C30(CA)



C30A(CA)



C31A(CA)



C37(CA)



C40A(CA)



C43(CA)



C44(CA)



C45(CA)



C46(CA)



C46P(CA)



SC5(CA)



SC19(CA)



SC20(CA)




SC21(CA)

## *Figure 6H-101(CA). Examples of Object Markers in Temporary Traffic Control Zones*

**Object Marker (OM1-3)**



**Object Marker (OM3-L&R)**



(Left) (Right)

**Object Marker (OM3-C)**



## Table 6H-1. Temporary Traffic Control Zone Warning Sign and Plaque Sizes (Sheet 1 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway | Minimum | |
|---|---|---|---|---|---|---|
| Turn and Curve Signs | W1-1,2,3,4 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Reverse Curve (2 or more lanes) | W1-4b,4c | 6H.30 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Large Arrow (1-direction) | W1-6 | 6H.01 | 48 x 24 | 60 x 30 | — | |
| Chevron Alignment | W1-8 | 6H.01 | 18 x 24 | 30 x 36 | — | |
| Stop Ahead | W3-1 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Yield Ahead | W3-2 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Signal Ahead | W3-3 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Be Prepared to Stop | W3-4 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Reduced Speed Limit Ahead | W3-5 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| XX MPH Speed Zone Ahead | W3-5a | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Merging Traffic | W4-1,5 | 6H.01 | 36 x 36 | 48 x 48 | 36 x 36 | |
| Lane Ends | W4-2 | 6H.08 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Added Lane | W4-3,6 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| No Merge Area (plaque) | W4-5aP | 6H.01 | 18 x 24 | 24 x 30 | — | |
| Road Narrows | W5-1 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Narrow Bridge | W5-2 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| One Lane Bridge | W5-3 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Ramp Narrows | W5-4 | 6H.10 | 36 x 36 | 48 x 48 | 30 x 30 | (Also see W5-1 or C12(CA) Signs) |
| Divided Highway | W6-1 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Divided Highway Ends | W6-2 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Two-Way Traffic | W6-3 | 6H.16 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Narrow Two-Way Traffic | W6-4 | 6H.17 | 12 x 18 | 12 x 18 | — | |
| Hill | W7-1 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Next XX Miles (plaque) | W7-3aP | 6H.33 | 24 x 18 | 36 x 30 | — | |
| Bump | W8-1 | 6H.01 | 36 x 36 | 48 x 48 | 24 x 24 | |
| Dip | W8-2 | 6H.01 | 36 x 36 | 48 x 48 | 24 x 24 | |
| Pavement Ends | W8-3 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Soft Shoulder | W8-4 | 6H.26 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Slippery When Wet | W8-5 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Truck Crossing | W8-6 | 6H.21 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Loose Gravel | W8-7 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Rough Road | W8-8 | 6H.01 | 36 x 36 | 48 x 48 | 24 x 24 | |
| Low Shoulder | W8-9 | 6H.26 | 36 x 36 | 48 x 48 | 24 x 24 | |
| Uneven Lanes | W8-11 | 6H.27 | 36 x 36 | 48 x 48 | 30 x 30 | |
| No Center Line | W8-12 | 6H.29 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Fallen Rocks | W8-14 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Grooved Pavement | W8-15 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Motorcycle (plaque) | W8-15aP | 6H.34 | 24 x 18 | 30 x 24 | — | |
| Metal Bridge Deck | W8-16 | 6H.34 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Shoulder Drop Off (symbol) | W8-17 | 6H.26 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Shoulder Drop-Off (plaque) | W8-17P | 6H.26 | 24 x 18 | 30 x 24 | — | |
| Road May Flood | W8-18 | 6H.01 | 36 x 36 | 48 x 48 | 24 x 24 | |
| No Shoulder | W8-23 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Steel Plate Ahead | W8-24 | 6H.28 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Shoulder Ends | W8-25 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Lane Ends | W9-1,~~2~~ | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Merge Here Take Turns | W9-2a | 6N.19 | 36 x 48 | 36 x 48 | — | |
| Interior Lane Shift Ahead | W9-3 | 6H.07 | 36 x 36 | 48 x 48 | 30 x 30 | |

## Table 6H-1. Temporary Traffic Control Zone Warning Sign and Plaque Sizes (Sheet 2 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway | Minimum | |
|---|---|---|---|---|---|---|
| Bicycles Merging | W9-5a | 6P.01 | 30 x 30 | — | 18 x 18 | |
| Grade Crossing Advance Warning | W10-1 | 6H.01 | 36 dia. | 48 Dia. | — | |
| Truck | W11-10 | 6H.21 | 36 x 36 | 48 x 48 | 24 x 24 | |
| Double Arrow | W12-1 | 6H.01 | 30 x 30 | 36 x 36 | — | |
| Low Clearance | W12-2 | 6H.01 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Advisory Speed (plaque) | W13-1P | 6H.32 | 18 x 18 | 24 x 24 | 18 x 18 | |
| ~~On Ramp (plaque)~~ | ~~W13-4P~~ | ~~6H.09~~ | ~~36 x 36~~ | ~~36 x 36~~ | — | (See C23(CA) for RAMP WORK AHEAD Sign) |
| No Passing Zone (pennant) | W14-3 | 6H.01 | 48 x 48 x 36 | 64 x 64 x 48 | 40 x 40 x 30 | |
| XX Feet (2-line plaque) | W16-2P | 6H.01 | 24 x 18 | 30 x 24 | — | |
| Road Work (with distance) | W20-1 | 6H.03 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Path Work (with distance) | W20-1b | 6P.01 | 36 x 36 | — | 30 x 30 | |
| Detour (with distance) | W20-2 | 6H.04 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Bike Detour (with distance) | W20-2a | 6P.01 | 36 x 36 | — | 30 x 30 | |
| ** Bike Diversion (with distance) | W20-2b | 6P.01 | 36 x 36 | — | 30 x 30 | |
| Road Closed (with distance) | W20-3 | 6H.05 | 36 x 36 | 48 x 48 | 30 x 30 | See C19(CA) for RAMP CLOSED Sign) |
| Path Closed (with distance) | W20-3a | 6P.01 | 36 x 36 | — | 30 x 30 | |
| One Lane Road (with distance) | W20-4 | 6H.06 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Lane(s) Closed (with distance) | W20-5,5a | 6H.07 | 36 x 36 | 48 x 48 | 30 x 30 | (Also see C20(CA) Sign Size) |
| Bike Lane Closed (with distance) | W20-5b | 6P.01 | 36 x 36 | — | 30 x 30 | |
| Flagger (symbol) | W20-7 | 6H.15 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Flagger | W20-7a | 6H.15 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Slow (on Stop/Slow Paddle) | W20-8 | 6D.02 | 18 x 18 | — | — | |
| Workers | W21-1,1a | 6H.18 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Fresh Oil | W21-2 | 6H.19 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Road Machinery Ahead | W21-3 | 6H.20 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Slow Moving Vehicle | W21-4 | 6N.05 | 36 x 18 | — | — | |
| Shoulder Work | W21-5 | 6H.22 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Shoulder Closed | W21-5a | 6H.22 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Shoulder Closed (with distance) | W21-5b | 6H.22 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Survey Crew | W21-6 | 6H.23 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Utility Work (with distance) | W21-7 | 6H.24 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Mowing Ahead | W21-8 | 6N.05 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Blasting Zone Ahead | W22-1 | 6H.25 | 36 x 36 | 48 x 48 | 30 x 30 | |
| End Blasting Zone | W22-3 | 6H.25 | 42 x 36 | 42 x 36 | 36 x 30 | |
| Slow Traffic Ahead | W23-1 | 6H.11 | 54 x 30 ~~48 x 24~~ | 72 x 42 ~~48 x 24~~ | 48 x 24 ~~—~~ | |
| New Traffic Pattern Ahead | W23-2 | 6H.14 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Double Reverse Curve (1 lane) | W24-1 | 6H.31 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Double Reverse Curve (2 lanes) | W24-1a | 6H.31 | 36 x 36 | 48 x 48 | 30 x 30 | |
| Double Reverse Curve (3 lanes) | W24-1b | 6H.31 | 36 x 36 | 48 x 48 | 30 x 30 | |
| All Lanes (plaque) | W24-1cP | 6H.31 | 24 x 18 | 30 x 24 | — | |
| Road Work (Construction) Next XX Miles | G20-1 | 6H.35 | 60 x 36 ~~36 x 18~~ | 90 x 48 ~~48 x 24~~ | 36 x 18 ~~—~~ | |
| End Road Work | G20-2 | 6H.36 | 36 x 18 | 48 x 24 | — | |
| Pilot Car Follow Me | G20-4 | 6H.37 | 36 x 18 | — | — | |

* See Table 2C-1 for minimum size required for signs facing traffic on multi-lane conventional roads

** Refer to FHWA's List of Known Errors for error in row with the W20-2b sign. Refer to Section 1A.04 for more details.

Notes:
1. Larger signs may be used wherever necessary for greater legibility or emphasis
2. Dimensions are shown in inches and are shown as width x height

## Table 6H-1(CA). California Temporary Traffic Control Zone Warning Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road (Minimum) | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|
| NARROW LANE(S) | C12(CA) | 6H.10, 6H.102(CA) | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| RAMP CLOSED AHEAD | C19(CA) | 6G.101 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| RIGHT LANE CLOSED AHEAD | C20(CA) | 6H.07 | 36 x 36 | 48 x 48 | 48 x 48 | 72 x 72 |
| RAMP WORK AHEAD | C23(CA) | 6H.03 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| ROAD (STREET) WORK Informational plaque | C23B(CA) | 6H.03 | Var x 18 | Var x 24 | Var x 24 | --- |
| SHOULDER WORK AHEAD | C24(CA) | 6H.22 | 30 x 30 | 48 x 48 | 48 x 48 | --- |
| OPEN TRENCH | C27(CA) | 6H.103(CA) | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| LANE CLOSED | C30(CA) | 6H.07 | 30 x 30 | 48 x 48 | 48 x 48 | --- |
| SHOULDER CLOSED | C30A(CA) | 6H.22 | 30 x 30 | 48 x 48 | 48 x 48 | --- |
| TRAFFIC CONTROL - WAIT AND FOLLOW PILOT CAR | C37(CA) | 6E.04 | 36 x 42 | 36 x 42 | --- | --- |
| TRAFFIC FINES DOUBLED IN WORK ZONES | C40A(CA) | 6G.08 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| FRESH CONCRETE | C43(CA) | 6H.106(CA) | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| TRUCKS ENTERING EXITING | C44(CA) | 6H.21 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| RUMBLE STRIPS | C45(CA) | 6M.06 | 36 x 36 | 48 x 48 | --- | --- |
| UNEVEN PAVEMENT | C46(CA) | 6H.27 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| UNEVEN PAVEMENT plaque | C46P(CA) | 6H.27 | 30 x 18 | 36 x 24 | 36 x 24 | --- |
| SPECIAL EVENT AHEAD | SC5(CA) | 6H.03 | 36 x 36 | 48 x 48 | 48 x 48 | --- |
| Slow For The Cone Zone | SC19(CA) | 6H.105(CA) | 54 x 36 | 54 x 36 | 54 x 36 | 114 x 78 |
| SLOW FOR THE CONE ZONE | SC20(CA) | 6H.105(CA) | 42 x 36 | 54 x 48 | 54 x 48 | — |
| CAUTION FREQUENT STOPPING AND BACKING STAY BACK 100 FEET | SC21(CA) | 6H.107(CA) | 30 x 42 | 30 x 42 | 30 x 42 | --- |
| FLOODED | W55(CA) | 6O.101(CA) | 30 x 30 | 36 x 36 | 36 x 36 | --- |
| FLOODING AHEAD TURN AROUND DON'T DROWN | W86(CA) | 6O.101(CA) | 30 x 24 | --- | --- | --- |
| EMERGENCY SCENE AHEAD | W90(CA) | 6O.102(CA) | 36 X 36 | 48 X 48 | 48 X 48 | --- |

## Table 6H-101(CA). Pavement Surface Tolerances*

| Direction of Travel | Steps** | |
|---|---|---|
| | Bicycles / Motorcycles | 4 Wheeled Motor Vehicles |
| Parallel to travel | No more than 3/8" high | No more than 2" high |
| Perpendicular to travel | No more than 3/4" high | No more than 2" high |

Notes:
* Criteria for displaying warning signs. If a step of more than 3" high exists in the pavement, do not open that portion of roadway to traffic.
** Step - A ridge in the pavement, such as that which might exist between the pavement and a concrete gutter or manhole cover; or that might exist between two pavement blankets when the top level does not extend to the edge of the roadway.

# CHAPTER 6I. TTC ZONE GUIDE SIGNS

## Section 6I.01 Guide Signs – General

Support:

01 Guide signs along highways provide road users with information to help them along their way through the TTC zone. The design of guide signs is presented in Part 2.

*Guidance:*

02 *The following guide signs should be used in TTC zones as needed:*

*A. Standard route markings where temporary route changes are necessary,*

*B. Directional signs and street name signs, and*

*C. Special guide signs relating to the condition or work being done.*

**Standard:**

03 **If additional temporary guide signs are used in TTC zones, they shall have a black legend and border on an orange background.**

Option:

04 Guide signs used in TTC incident management situations may have a black legend and border on a fluorescent pink background.

05 When temporary directional signs and temporary street name signs are used in conjunction with detour routing, these signs may have a black legend and border on an orange background.

06 When permanent directional signs or permanent street name signs are used in conjunction with detour signing, they may have a white legend on a green background (see Sections 2D.35 and 2D.45).

**Standard:**

07 **The sizes for TTC guide signs shall be as shown in Table 6I-1.**

Support:

08 Refer to FHWA's List of Known Errors for error in labeling Paragraph 7. Refer to Section 1A.04 for more details.

09 Some of the California guide signs used in TTC zones are shown in Figure 6I-1(CA) and Table 6I-1(CA).

## Section 6I.02 Detour Signs and Plaques (M4-8P, M4-8a, M4-8bP, M4-9, M4-9a, M4-9b, M4-9c, and M4-10)

**Standard:**

01 **Each detour shall be adequately marked with standard temporary route signs and destination signs.**

Support:

01a Refer to CVC § 21363 for detour signs.

Option:

02 Detour signs in TTC incident management situations may have a black legend and border on a fluorescent pink background.

03 The Detour Arrow (M4-10) sign (see Figure 6I-1) may be used where a detour route has been established.

04 The DETOUR (M4-8P) plaque (see Figure 6I-1) may be mounted at the top of a route sign assembly to mark a temporary route that detours from a highway, bypasses a section closed by a TTC zone, and rejoins the highway beyond the TTC zone.

*Guidance:*

05 *The Detour Arrow (M4-10) sign should normally be mounted just below the ROAD CLOSED (R11-2, R11-3a, or R11-4) sign. The Detour Arrow sign should include a horizontal arrow pointed to the right or left as required.*

06 *The DETOUR (M4-9) sign (see Figure 6I-1) should be used for unnumbered highways, for emergency situations, for periods of short durations, or where, over relatively short distances, road users are guided along the detour and back to the desired highway without route signs.*

07 *A Street Name sign should be placed above, or the street name should be incorporated into, a DETOUR (M4-9) sign to indicate the name of the street being detoured.*

Option:

08 The END DETOUR (M4-8a) sign or the END (M4-8bP) plaque (see Figure 6I-1) may be used to indicate that the

detour has ended.

*Guidance:*

09 *When the END DETOUR sign is used on a numbered highway, the sign should be mounted above a route sign after the downstream end of the detour.*

10 *The Pedestrian/Bicyclist Detour (M4-9a) sign (see Figure 6I-1) should be used where a pedestrian/bicyclist detour route has been established because of the closing of a pedestrian/bicycle facility to through traffic.*

**Standard:**

11 **If used, the Pedestrian/Bicyclist Detour sign shall have an arrow pointing in the appropriate direction.**

Option:

12 The arrow on a Pedestrian/Bicyclist Detour sign may be on the sign face or on a supplemental plaque.

13 The Pedestrian Detour (M4-9b) sign or Bicyclist Detour (M4-9c) sign (see Figure 6I-1) may be used where a pedestrian or a bicyclist detour route (not both) has been established because of the closing of the pedestrian or bicycle facility to through traffic.

*Guidance:*

14 *The DETOUR (M4-8) sign should be placed on tangent sections at intervals not to exceed 0.25 miles and at major intersections.*

Option:

15 In urban areas, the M4-8 signs may be placed at every intersection.

*Guidance:*

16 *The DETOUR with Arrow (SC3(CA)) sign (see Figure 6I-1(CA)) should be used for unnumbered highways, for emergency situations, for periods of short duration, or where, over relatively short distances, road users are guided along the detour and back to the desired highway without route markers.*

17 *The (FWY) DETOUR with Arrow (SC9(CA)) sign (see Figure 6I-1(CA)) should be used to inform motorists of the direction to follow for a detour. The words FWY DETOUR may be substituted for DETOUR, where applicable.*

## Section 6I.03 EXIT CLOSED Panel

*Guidance:*

01 *When an exit ramp is closed, an EXIT CLOSED sign panel with a black legend and border on an orange background should be placed diagonally across the interchange/intersection guide signs.*

## Section 6I.101(CA) Construction Project Funding Identification Signs

Option:

01 For use on projects with estimated contract costs of $1,000,000 or more and 60 working days or more, or 70 working days minimum when Saturdays or holidays are counted as working days, the Construction Funding Identification signs may be used to identify funding sources for a highway project. Formats of the sign series are flexible to include federal, state and/or local agency funding sources. See Figure 6I-101(CA).

**Standard:**

02 **If used, header panel shall include type of project and anticipated year of completion, according to established contract completion schedule, limited to one line each with a minimum letter size based on sign panel size and the "Standard Highway Signs and Markings" book (refer to Section 1A.11), designed to fit within fluorescent orange portion for Building California (C48B(CA)), Federal-Aid Highway Funds - Building CA (C50(CA) Series), and Local Funds Only (C51(CA)) signs, or shall include legend "Your Tax Dollars AT WORK" for Clean California (C49(CA) Series) signs. Installation shall be placed in advance of temporary traffic control zone signs and limited to one sign installed in each direction on up to two approaches.**

*Guidance:*

03 *Information on the sign should include type of project, such as Highway Construction, Highway Repair, Highway Improvement, Bridge Construction, Bridge Repair, or Roadside Work for C48B(CA) and C51(CA) signs.*

### Building California (C48B(CA)) Sign

Option:

04 The C48B(CA) sign may be used on projects funded by State Highway Funds (Building California Funds), formerly known as Senate Bill 1. Format of this sign is flexible to include up to four funding agency pictographs. See Figure 6I-101(CA).

### Clean California (C49A(CA) or C49D(CA)) Signs

Option:

05 The C49(CA) Series signs may be used on projects funded by State General Funds (Clean California Funds), projects to beautify and revitalize public spaces across the State. Format of these signs is flexible to include up to four funding agency pictographs. See Figure 6I-101(CA).

### Federal-Aid Highway Funds - Building CA (C50C(CA) or C50D(CA)) Signs

Option:

06 The C50(CA) Series signs may be used to identify funding source for a project using Federal-Aid Highway Program funds. Format of these signs is flexible to include up to three funding agency pictographs. See Figure 6I-101(CA).

**Standard:**

07 **The project description used on the C50(CA) Series signs shall be limited to the following project categories:**

1. **New Pavement**
2. **New Carpool Lane**
3. **Bridge Maintenance**
4. **Bridge Restoration**
5. **New Biking/Walking Paths**
6. **Broadband installation**
7. **Improved Drainage System**

*Guidance:*


08 *If the project scope does not fit any of the project categories, an alternated project category should be considered, such as Highway Construction, Highway Repair, Highway Improvement, Bridge Construction, or Roadside Work.*

### Local Funds Only (C51(CA)) Sign

Option:

09 The C51(CA) sign may be used on projects funded by local funds only (city, county, or other funding agencies). Format of this sign is flexible to include up to four funding agency pictographs. See Figure 6I-101(CA).

## Figure 6I-1. Exit Open and Closed and Detour Signs and Plaques

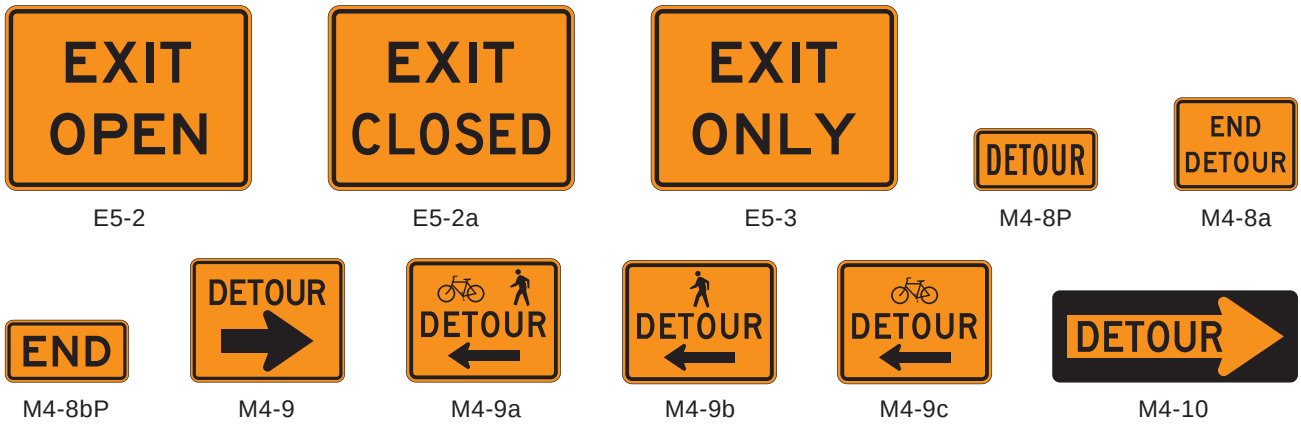

## *Figure 6I-1(CA). California Guide Signs and Plaques in Temporary Traffic Control Zones*




C20A(CA)




C20B(CA)




C38(CA)




SC3(CA)




SC6-3P(CA)




SC6-4P(CA)




SC8(CA)




SC9(CA)




SC18(CA)

## *Figure 6I-101(CA). California Guide Signs and Plaques in Temporary Traffic Control Zones*




C48B(CA)




C49A(CA)




C49D(CA)




C50C(CA)




C50D(CA)




C51(CA)

## Table 6I-1. Temporary Traffic Control Zone Guide Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | Freeway or Expressway | Minimum |
|---|---|---|---|---|---|
| Exit Open | E5-2 | 6H.12 | 48 x 36 | 48 x 36 | — |
| Exit Closed | E5-2a | 6H.12 | 48 x 36 | 48 x 36 | — |
| Exit Only | E5-3 | 6H.13 | 48 x 36 | 48 x 36 | — |
| Detour | M4-8P | 6I.02 | 24 x 12 | 30 x 15 | — |
| End Detour | M4-8a | 6I.02 | 24 x 18 | 24 x 18 | — |
| End (plaque) | M4-8bP | 6I.02 | 24 x 12 | 24 x 12 | — |
| Detour | M4-9 | 6I.02 | 30 x 24 | 48 x 36 | — |
| Bike/Pedestrian Detour | M4-9a | 6I.02 | 30 x 24 | — | — |
| Pedestrian Detour | M4-9b | 6I.02 | 30 x 24 | — | — |
| Bike Detour (with arrow) | M4-9c | 6I.02 | 30 x 24 | — | — |
| Detour | M4-10 | 6I.02 | 48 x 18 | — | — |

Notes:
1. Larger signs may be used wherever necessary for greater legibility or emphasis
2. Dimensions are shown in inches and are show as width x height

## Table 6I-1(CA). California Temporary Traffic Control Zone Guide Sign and Plaque Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road (Minimum) | Expressway | Freeway | Oversized |
|---|---|---|---|---|---|---|
| LEFT (sign overlay) | C20A(CA) | 6H.07 | 16 x 7 | 19 x 8 | 19 x 8 | 33 x 10 |
| Numeral (sign overlay) | C20B(CA) | 6H.07 | 6 x 8 | 8 x 10 | 8 x 10 | 10 x 12 |
| USE NEXT EXIT | C38(CA) | 6G.101(CA) | --- | 48 x 36 | 48 x 36 | — |
| DETOUR with Arrow | SC3(CA) | 6I.02 | 36 x 12 | 48 x 18 | 48 x 18 | --- |
| Day – Specific Hours (plaque) | SC6-3P(CA) | 6G.101(CA) | 36 x 18 | 48 x 24 | 48 x 24 | --- |
| Multiple Days – Specific Hours (plaque) | SC6-4P(CA) | 6G.101(CA) | 36 x 30 | 48 x 42 | 48 x 42 | --- |
| ____EXIT RAMP CLOSED | SC8(CA) | 6G.101(CA) | --- | 84 x 42 | 84 x 42 | --- |
| (FWY) DETOUR with Arrow | SC9(CA) | 6I.02 | 36 x 36 | 48 x 48 | 48 x 48 | — |
| EXIT with Arrow | SC18(CA) | 6G.101(CA) | --- | 48 x 48 | 48 x 48 | — |
| Building California Sign | C48B(CA) | 6I.101(CA) | 48 x 30 | 132 x 78 | 132 x 78 | — |
| Clean California Signs | C49A(CA) & C49D(CA) | 6I.101(CA) | 48 x 30 | 132 x 78 | 132 x 78 | — |
| Federal-Aid Highway Funds-Building CA Signs | C50C(CA) & C50D(CA) | 6I.101(CA) | 48 x 30 | 132 x 78 | 132 x 78 | — |
| Local Funds Only Sign | C51(CA) | 6I.101(CA) | 48 x 30 | 132 x 78 | 132 x 78 | — |

# CHAPTER 6J. TTC ZONE PAVEMENT MARKINGS

## Section 6J.01 Pavement Markings in TTC Zones

Support:

01 Pavement markings are installed or existing markings are maintained or enhanced in TTC zones to provide road users with a clearly defined path for travel through the TTC zone in day, night, and twilight periods under both wet and dry pavement conditions.

*Guidance:*

02 *The work should be planned and staged to provide for the placement and removal of the pavement markings in a way that minimizes the disruption to traffic flow approaching and through the TTC zone during the placement and removal process.*

**Standard:**

03 **Existing pavement markings shall be maintained in all long-term stationary (see Section 6N.01) TTC zones in accordance with Chapters 3A and 3B, except as otherwise provided for temporary pavement markings in Section 6J.02. Pavement markings shall match the alignment of the markings in place at both ends of the TTC zone. Pavement markings shall be placed along the entire length of any paved detour or temporary roadway prior to the detour or roadway being opened to road users.**

*Guidance:*

04 *For long-term stationary operations, pavement markings in the temporary traveled way that are no longer applicable should be removed or obliterated as soon as practical. Pavement marking obliteration should remove the non-applicable pavement marking material, and the obliteration method should minimize pavement scarring.*

**Standard:**

05 **Painting over existing pavement markings with black paint or spraying with asphalt shall not be accepted as a substitute for removal or obliteration.**

Option:

06 Removable, non-reflective, preformed tape that is approximately the same color as the pavement surface may be used where markings need to be covered temporarily.

*Guidance:*

07 *Centerlines and lane lines should be placed, replaced, or delineated where appropriate before the roadway is opened to traffic.*

**Standard:**

08 **On State highways, whenever construction or maintenance work causes obliteration of center stripe, temporary or permanent center stripe shall be in place prior to opening the State highway to public traffic.**

## Section 6J.02 Temporary Markings

Support:

01 Temporary markings are those pavement markings or devices that are placed within TTC zones to provide road users with a clearly defined path of travel through the TTC zone when the permanent markings are either removed or obliterated during the work activities. Temporary markings are typically needed during the reconstruction of a road while it is open to traffic, such as overlays or surface treatments or where lanes are temporarily shifted on pavement that is to remain in place.

*Guidance:*

02 *Unless justified based on engineering judgment, temporary pavement markings should not remain in place for more than 14 days after the application of the pavement surface treatment or the construction of the final pavement surface on new roadways or over existing pavements.*

03 *The temporary use of edge lines, channelizing lines, lane-reduction transitions, gore markings, and other longitudinal markings, and the various non-longitudinal markings (such as stop lines, railroad crossings, crosswalks, words, symbols, or arrows) should be in accordance with the State's or highway agency's policy.*

**Standard:**

04 **Warning signs, channelizing devices, and delineation shall be used to indicate required road user paths in TTC zones where it is not possible to provide a clear path by pavement markings.**

05 **Except as otherwise provided in this Section, all temporary pavement markings for no-passing zones shall**

**comply with the requirements of Chapters 3A and 3B. All temporary broken line pavement markings shall use the same cycle length as permanent markings and shall have line segments that are at least 2 feet long.**

*Guidance:*

06 *All pavement markings and devices used to delineate road user paths should be reviewed during daytime and nighttime periods.*

Option:

07 Half-cycle lengths with a minimum of 2-foot stripes may be used on roadways with severe curvature (see Section 3A.04) for broken line center lines in passing zones and for lane lines.

08 For temporary situations of 14 days or less, for a two- or three-lane road, no-passing zones may be identified by using DO NOT PASS (R4-1), PASS WITH CARE (R4-2), and NO PASSING ZONE (W14-3) signs (see Sections 2B.36, 2B.37, and 2C.53) rather than pavement markings. Also, DO NOT PASS, PASS WITH CARE, and NO PASSING ZONE signs may be used instead of pavement markings on roads with low volumes for longer periods in accordance with the State's or highway agency's policy.

*Guidance:*

09 *If used, the DO NOT PASS, PASS WITH CARE, and NO PASSING ZONE signs should be placed in accordance with Sections 2B.36, 2B.37, and 2C.53.*

10 *If used, the NO CENTER LINE sign should be placed in accordance with Section 6H.29.*

**Standard:**

11 **Temporary lane lines and/or centerlines shall consist of retroreflectorized lines approximately 24 inches long, 4 inches wide, spaced approximately 24 feet apart.**

Option:

12 Day/night raised retroreflectorized pavement markers, approved by Caltrans, may be used in lieu of 24-inch lines. See Section 6J.03 for spacing requirements.

*Guidance:*

13 *Right edge lines should not be simulated with dashed lines or raised pavement markers because they could confuse motorists.*

Option:

14 Portable delineators, permanent type delineators, etc., may be used where it is considered desirable to enhance the edge of traveled way due to curvilinear alignment, narrowing pavement, etc.

**Standard:**

15 **Locations on two-lane conventional highways where no-passing zone centerline delineation has been obliterated shall be posted with a sign package consisting of a ROAD (STREET) WORK (W20-1) sign and WORK ZONE (G20-5aP) plaque in combination with a DO NOT PASS (R4-1) sign.**

*Guidance:*

16 *The R4-1 sign should be posted at approximate 2000 feet intervals throughout the extended no-pass zone. A PASS WITH CARE (R4-2) sign should also be placed at the end of the zone.*

## Section 6J.03 Temporary Raised Pavement Markers

Option:

01 Retroreflective or internally illuminated raised pavement markers, or non-retroreflective raised pavement markers supplemented by retroreflective or internally illuminated markers, may be substituted for markings of other types in TTC zones.

**Standard:**

02 **If used, the color and pattern of the raised pavement markers shall simulate the color and pattern of the markings for which they substitute.**

03 **If temporary raised pavement markers are used to substitute for broken line segments, a group of at least three retroreflective markers equally spaced at no greater than 5 feet shall be installed every 40 feet.**

04 **If temporary raised pavement markers are used to substitute for solid lines, the markers shall be equally spaced at no greater than 10 feet, with retroreflective or internally illuminated units at a spacing no greater than 20 feet.**

~~Option:~~

**Standard:**

05 **Temporary raised pavement markers may be used to substitute for broken line segments by using at least two retroreflective markers placed at each end of a segment of 2 to 5 feet in length, using the same cycle length as permanent markings.**

*Guidance:*

06 *Raised pavement markers should be considered for use along surfaced detours or temporary roadways, and other changed or new travel-lane alignments.*

Option:

07 Retroreflective or internally illuminated raised pavement markers, or non-retroreflective raised pavement markers supplemented by retroreflective or internally illuminated markers, may also be used in TTC zones to supplement markings as prescribed in Chapters 3A and 3B.

## Section 6J.04 Delineators

Option:

01 Delineators may be used in TTC zones to indicate the alignment of the roadway and to outline the required vehicle path through the TTC zone.

**Standard:**

02 **When used, delineators shall combine with or supplement other TTC devices. They shall be mounted on crashworthy supports and shall be in accordance with Chapter 3G.**

*Guidance:*

03 *Spacing along roadway curves should be as set forth in Section 3G.04 and should be such that several delineators are visible to an approaching driver.*

**Standard:**

04 **The delineators shall be placed 2 feet to 6 feet outside the outer edge of the shoulder. Retroreflection of delineators shall be 3 x 12 inch minimum size.**

# CHAPTER 6K. TTC ZONE CHANNELIZING DEVICES

## Section 6K.01 Channelizing Devices – General

**Standard:**

01 **Designs of various channelizing devices shall be as shown in Figure 6K-1 and 6K-101(CA). All channelizing devices shall be crashworthy (see definition in Section 1C.02).**

Support:

02 The function of channelizing devices is to warn road users of conditions created by work activities in or near the roadway and to guide road users. Channelizing devices include cones, tubular markers, channelizers (CA), portable delineators, vertical panels, drums, barricades, and longitudinal channelizing devices.

03 Channelizing devices provide for smooth and gradual vehicular traffic flow from one lane to another, onto a bypass or detour, or into a narrower traveled way. They are also used to channelize traffic away from the work space, pavement drop-offs, pedestrian or shared-use paths, bicycle facilities, or opposing directions of vehicular traffic.

*Guidance:*

04 *The spacing between cones, tubular markers, vertical panels, drums, and barricades should not exceed a distance in feet equal to 1 times the speed limit in mph when used for taper channelization, and should not exceed a distance in feet equal to 2 times the speed limit in mph when used for tangent channelization.*

05 *When channelizing devices have the potential of leading vehicular traffic out of the intended vehicular traffic space as shown in Figure 6P-39, the channelizing devices should be extended a distance in feet of 2 times the speed limit in mph beyond the downstream end of the transition area.*

05a *The spacing of channelizing devices should not exceed the maximum distances shown in Table 6K-101(CA).*

Option:

06 A gap not exceeding 2 inches between the bottom rail and the ground surface may be used to facilitate drainage.

07 Warning lights (see Section 6L.07) may be added to channelizing devices in areas with frequent fog, snow, or severe roadway curvature, or where visual distractions are present.

08 A series of sequential flashing warning lights may be placed on channelizing devices that form a merging taper in order to increase driver detection and recognition of the merging taper.

Support:

09 The flashing rates and patterns for warning lights used on channelizing devices are specified in Section 6L.07.

**Standard:**

10 **The retroreflective material used on channelizing devices shall display a similar color day or night.**

11 **Except as provided in Paragraph 12 of this Section, information identifying the owner or manufacturer of the channelizing device shall not be displayed on any portion of the device that can be seen by road users approaching the device.**

Option:

12 The name and telephone number of the highway agency, contractor, or supplier may be displayed on the non-retroreflective surface of all types of channelizing devices.

**Standard:**

13 **The area containing the name and telephone number shall be non-retroreflective and not over 2 inches in height.**

*Guidance:*

14 *Particular attention should be given to maintaining the channelizing devices to keep them clean, visible, and properly positioned at all times.*

**Standard:**

15 **Channelizing devices that are no longer serviceable (see definition in Section 1C.02) shall be replaced.**

## Section 6K.02 Pedestrian Channelizing Devices

Support:

01 Pedestrian channelizing devices indicate a suitable path of pedestrian travel around or through the work zone.

*Guidance:*

02 *Pedestrian channelizing devices should be provided when work activities impact sidewalks or other pedestrian*

*facilities or when the design of the temporary pedestrian facility does not otherwise include accessibility features consistent with the features in the existing pedestrian facility.*

03 *The pedestrian channelizing devices should be used both to close sidewalks and to delineate an alternate route.*

Support:

04 An example of a pedestrian channelizing device is depicted in Figure 6K-2.

**Standard:**

05 **Pedestrian channelizing devices shall be crashworthy (see definition in Section 1C.02) when exposed to vehicular traffic.**

06 **Devices used to channelize pedestrians shall be detectable to users of long canes and visible to pedestrians with vision disabilities.**

07 **When used as a sidewalk closure, the device shall cover the entire width of the sidewalk.**

08 **Pedestrian channelizing devices shall have continuous detection plates and hand-trailing edges. The bottom of the detection plate shall be no higher than 2 inches above the walkway. The top edge of the detection plate shall be at least 8 inches above the walkway. The top of the hand-trailing edge shall be no lower than 32 inches and no higher than 38 inches above the walkway. The top surface of the hand-trailing edge shall be smooth to optimize hand trailing. Both the detection plate and the hand-trailing edge shall share a common vertical plane.**

*Guidance:*

09 *When pedestrian channelizing devices are combined in a series, the gap between devices should not exceed 1 inch.*

Support:

10 The hand-trailing edge is the upper rail on a pedestrian channelizing device, as shown in Figure 6K-2. It is provided to allow pedestrians with vision disabilities to follow the pedestrian channelizing device with their hand. The hand-trailing edge is not a weight-bearing railing.

*Guidance:*

11 *There should be at least a 2-inch gap between the hand-trailing edge and its support.*

**Standard:**

12 **When visible to vehicular traffic the detection plate and the hand-trailing edge of the pedestrian channelizing device shall have retroreflective sheeting complying with Paragraph 10 of Section 6K.01.**

*Guidance:*

13 *When not visible to vehicular traffic, the pedestrian channelizing device should have a contrasting pattern in alternating light and dark colors to provide visual contrast on the upper surface consisting of a minimum of 6 inches of sheeting or other contrasting materials.*

Option:

14 Non-retroreflective materials may be used on the pedestrian side of the pedestrian channelizing device.

15 The sheeting on the pedestrian side of the pedestrian channelizing device may have stripes that are oriented either vertically or at a 45-degree angle.

Support:

16 The contrast of the light and dark stripes on the barricade sheeting assists pedestrians with vision disabilities in following the designated detour.

17 Section 6M.04 also contains information regarding detectable edging for pedestrian channelization. Option:

18 A continuous wall may be used as a pedestrian channelizing device.

*Guidance:*

19 *When used, a continuous wall should have a lower edge no more than 2 inches above the walkway, should extend a minimum of 32 inches above the walkway, should have a common vertical face, and should have alternating, contrasting sheeting positioned 32 inches above the walkway.*

Option:

20 The continuous wall may extend to any height above the 32-inch minimum.

## Section 6K.03 Cones

**Standard:**

01 **Cones (see Figure 6K-1) shall be predominantly orange and shall be made of a material that can be struck without causing damage to the impacting vehicle. For daytime and low-speed roadways, cones shall be not less than 18 inches in height. When cones are used on freeways and other high-speed highways or at night on all**

**highways, or when more conspicuous guidance is needed, cones shall be a minimum of 28 inches in height.**

02 **For nighttime use, cones shall be retroreflectorized or equipped with lighting devices for maximum visibility. Retroreflectorization of cones that are 28 to 36 inches in height shall be provided by a 6-inch wide white band located 3 to 4 inches from the top of the cone and an additional 4-inch wide white band located approximately 2 inches below the 6-inch band.**

Option:

02a For cones that are 28 to 36 inches in height, and additional 4-inch orange retroreflective band may be added approximately 2 inches below the 4-inch white retroreflective band.

03 **Retroreflectorization of cones that are more than 36 inches in height shall be provided by horizontal, circumferential, alternating orange and white retroreflective stripes that are 4 to 6 inches wide. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any non-retroreflective spaces between the retroreflective stripes shall not exceed 3 inches in width.**

Option:

03a Additional white colored retroreflectorization may be added to the top and/or bottom sides of the base of cones (not part of the conical shape) to enhance visibility.

Support:

03b The 36-inch and 42-inch high cones provide additional conspicuity in visually complex environments and for older road users.

04 Traffic cones may be used to channelize road users, divide opposing vehicular traffic lanes, divide lanes when two or more lanes are kept open in the same direction, and delineate short-duration maintenance and utility work.

*Guidance:*

05 *Steps should be taken to minimize the possibility of cones being blown over or displaced by wind or moving vehicular traffic.*

Option:

06 Cones may be doubled up to increase their weight.

Support:

07 Some cones are constructed with bases that can be filled with ballast. Others have specially weighted bases, or weight such as sandbag rings, that can be dropped over the cones and onto the base to provide added stability.

*Guidance:*

08 *Ballast should be kept to the minimum amount needed.*

**Standard:**

09 **On State highways, the retroreflectorized bands shall be visible at 1000 feet at night under illumination of legal high beam headlights, by persons with vision of or corrected to 20/20.**

*Guidance:*

10 *On local roads, the retroreflectorized bands should be visible at 1000 feet at night under illumination of legal high beam headlights, by persons with vision of or corrected to 20/20.*

Support:

11 Refer to Caltrans' Standard Specifications Section 12-3.01B for visibility criteria cited. See Section 1A.05 for information regarding this publication.

## Section 6K.04 Tubular Markers

Support:

00a Tubular markers are used to guide and channelize traffic for temporary traffic control. Tubular markers generally have the same circular cross-section throughout their length. Tubular markers may be affixed to the ground or may be portable. There are three types of tubular markers and they are defined as following:

00b The term "tubular marker" is used for a tubular marker that is affixed to the pavement and is cylindrical from top to bottom

00c The term "channelizer (CA)" is a special type of tubular marker that is affixed to the pavement and has a cylindrical lower portion and a flattened upper portion. This term "channelizer (CA)" is not to be confused with the term "channelizing device(s)" in Section 6K.01. Although it is similar to the channelizer for permanent use, as discussed in Section 3I.01 and shown in Figure 3I-101(CA), there are differences. The channelizer (CA) is used for temporary traffic control.

00d The term "portable delineator" is used to describe a tubular marker that is not affixed to the pavement but stabilized by using a weighted base or weights, and is cylindrical from top to bottom. This term "portable delineator" is not to be confused with the term "delineator " in Section 6J.04.

**Standard:**

00e **The retroreflectorized bands for tubular markers, channelizers (CA), and portable delineators shall be visible at 1000 feet during night under illumination of legal high beam headlights, by persons with vision of or corrected to 20/20.**

Support:

00f Refer to Caltrans' Standard Specifications Section 12-3.01B) for visibility criteria cited. See Section 1A.05 for information regarding this publication.

## Tubular Marker

**Standard:**

01 **Tubular markers (see Figure 6K-1) shall be predominantly orange for TTC zone applications and shall be not less than 18 inches high and 2 inches wide facing road users. They shall be made of a material that can be struck without causing damage to the impacting vehicle.**

02 **Tubular markers shall be a minimum of 28 inches in height when they are used on freeways and other high-speed highways, on all highways during nighttime, or whenever more conspicuous guidance is needed.**

03 **For nighttime use, tubular markers shall be retroreflectorized. Retroreflectorization of tubular markers that have a height of less than 42 inches shall be provided by two 3-inch wide white bands placed a maximum of 2 inches from the top with a maximum of 6 inches between the bands. Retroreflectorization of tubular markers that have a height of 42 inches or more shall be provided by four 4-inch to 6-inch wide alternating orange and white stripes with the top stripe being orange.**

Support:

03a The 42-inch high tubular markers provide additional conspicuity in visually complex environments and for older road users.

*Guidance:*

04 *Tubular markers have less visible area than other devices and should be used only where space restrictions do not allow for the use of other more visible devices.*

05 *Tubular markers should be stabilized by affixing them to the pavement, ~~by using weighted bases, or by using weights such as sandbag rings that can be dropped over the tubular markers and onto the base to provide added stability. Ballast should be kept to the minimum amount needed.~~*

Option:

06 Tubular markers may be used effectively to divide opposing lanes of road users, divide vehicular traffic lanes when two or more lanes of moving vehicular traffic are kept open in the same direction, and to delineate the edge of a pavement drop off where space limitations do not allow the use of larger devices.

**Standard:**

07 **A tubular marker shall be attached to the pavement to display the minimum 2-inch width to the approaching road users.**

## Portable Delineator

**Standard:**

08 **The design of a portable delineator shall be as shown in Figure 6K-101(CA).**

09 **Portable delineators shall be a minimum of 36 inches in height. The vertical portion of portable delineators shall be fluorescent orange or predominantly orange. The posts shall be not less than 3 inches in width or diameter. Retroreflectorization of portable delineators that have a height of less than 42 inches shall be provided by two 3-inch wide white bands placed a maximum of 2 inches from the top with a maximum of 6 inches between the bands. Retroreflectorization of portable delineators that have a height of 42 inches or more shall be provided by four 4-inch to 6-inch wide alternating orange and white stripes with the top stripe being orange.**

Option:

10 Additional white colored retroreflectorization may be added to the top and/or bottom sides of the portable delineator base to enhance visibility.

Support:

11 The 42-inch or higher portable delineators provide additional conspicuity in visually complex environments and for older road users.

*Guidance:*

12 *Portable delineators have less visible area than other devices and should be used only where space restrictions do not allow for the use of other more visible devices.*

13 *Portable delineators should be stabilized by using weighted bases, or weights such as sandbag rings that can be dropped over*

*the portable delineators and onto the base to provide added stability. Ballast should be kept to the minimum amount needed.*

Option:

14 Portable delineators may be used effectively to divide opposing lanes of road users, divide vehicular traffic lanes when two or more lanes of moving vehicular traffic are kept open in the same direction, and to delineate the edge of a pavement drop off where space limitations do not allow the use of larger devices.

**Channelizer(CA)**

**Standard:**

15 **When a channelizer (CA) is used, it shall be attached to the pavement in a manner such that the retroreflectorized bands facing road users meet the minimum visibility requirements.**

16 **The design of a channelizer (CA) shall be as shown in Figure 6K-101(CA). The height shall be 36 inch minimum where speeds are above 40 mph. The height shall be 28 inch minimum where speeds are 40 mph or less. The width of the post shall be 2 ¼ inch minimum and the color predominantly orange. Channelizers (CA) shall be affixed with retroreflective white sheeting, 3 by 12 inches in size.**

Support:

17 Channelizers (CA) are implanted in the ground or affixed to the pavement, and are not susceptible to displacement, and are capable of normally withstanding numerous vehicular impacts.

18 Channelizers (CA) are generally used in series to create a visual fence/barrier, to provide additional guidance and/or restriction to traffic.

Option:

19 Channelizers (CA) may be used in lieu of cones, portable delineators, or drums, to channelize traffic or divide opposing lanes of traffic.

## Section 6K.05 Vertical Panels

**Standard:**

01 **Vertical panels (see Figure 6K-1) shall have retroreflective striped material that is 8 to 12 inches in width and at least 24 inches in height. They shall have alternating diagonal orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction vehicular traffic is to pass.**

02 **Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.**

*Guidance:*

02a *Vertical panels should be a minimum of 12 inch in width.*

Option:

03 Where the height of the retroreflective material on the vertical panel is less than 36 inches, a stripe width of 4 inches may be used.

04 Where space is limited, vertical panels may be used to channelize vehicular traffic, divide opposing lanes, or replace barricades.

## Section 6K.06 Drums

**Standard:**

01 **Drums (see Figure 6K-1) used for road user warning or channelization shall be constructed of lightweight, deformable materials. They shall be a minimum of 36 inches in height and have at least an 18-inch minimum width regardless of orientation. Metal drums shall not be used. The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4 to 6 inches wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any non-retroreflectorized spaces between the horizontal orange and white stripes shall not exceed 3 inches wide. Drums shall have closed tops that will not allow collection of construction debris or other debris.**

Support:

02 Drums are highly visible, have good target value, give the appearance of being formidable obstacles and, therefore, command the respect of road users. They are portable enough to be shifted from place to place within a TTC zone in order to accommodate changing conditions, but are generally used in situations where they will remain in place for a prolonged period of time.

Option:

03 Although drums are most commonly used to channelize or delineate road user flow, they may also be used alone or in groups to mark specific locations.

*Guidance:*

04 *Drums should not be weighted with sand, water, or any material to the extent that would make them hazardous to road users or workers when struck. Drums used in regions susceptible to freezing should have drain holes in the bottom so that water will not accumulate and freeze causing a hazard if struck by a road user.*

**Standard:**

05 **Ballast shall not be placed on the top of a drum.**

06 **On State highways, the retroreflectorized bands shall be maintained at or above minimum levels in Table 2A-5.**

*Guidance:*

07 *On local roads, the retroreflectorized bands should be maintained at or above minimum levels in Table 2A-5.*

Support:

08 Refer to Caltrans' Standard Specifications Section 12-3.01B for visibility criteria cited. Refer to Section 1A.05 for information regarding this publication.

## Section 6K.07 Type 1, 2, or 3 Barricades

Support:

01 A barricade is a portable or fixed device having from one to three rails with appropriate markings and is used to control road users by closing, restricting, or delineating all or a portion of the right-of-way.

02 As shown in Figure 6K-1, barricades are classified as Type 1, Type 2, or Type 3.

**Standard:**

03 **Stripes on barricade rails shall be alternating orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction road users are to pass. Except as provided in Paragraph 4 of this Section, the stripes shall be 6 inches wide.**

Option:

04 When rail lengths are less than 36 inches, 4-inch wide stripes may be used.

**Standard:**

05 **The minimum length for Type 1 and Type 2 Barricades shall be 24 inches, and the minimum length for Type 3 Barricades shall be 48 inches. Each barricade rail shall be 8 to 12 inches wide. Barricades used on freeways, expressways, and other high-speed roadways shall have a minimum of 270 square inches of retroreflective area facing road users.**

Support:

05a The Type I and Type II Barricades, 36 inches in length with each rail 12-inch wide, provide additional conspicuity in visually complex environments and for older road users.

**Standard:**

05b **On State highways, the retroreflectorized bands shall be maintained at or above minimum levels in Table 2A-5.**

*Guidance:*

05c *On local roads, the retroreflectorized bands should be maintained at or above minimum levels in Table 2A-5.*

Support:

05d Refer to Caltrans' Standard Specifications Section 12-3.01B for visibility criteria cited. See Section 1A.05 for information regarding this publication.

*Guidance:*

06 *Where barricades extend entirely across a roadway, the stripes should slope downward in the direction toward which road users must turn.*

07 *Where both right and left turns are provided, the barricade stripes should slope downward in both directions from the center of the barricade or barricades.*

08 *Where no turns are intended, the stripes should be positioned to slope downward toward the center of the barricade or barricades.*

09 *Barricade rails should be supported in a manner that will allow them to be seen by the road user, and in a manner that provides a stable support that is not easily blown over or displaced.*

10 *The width of the existing pedestrian facility should be provided for the temporary facility if practical. Traffic control*

*devices and other construction materials and features should not intrude into the usable width of the sidewalk, temporary pathway, or other pedestrian facility. When it is not possible to maintain a minimum width of 60 inches throughout the entire length of the pedestrian pathway, a 60 x 60-inch passing space should be provided at least every 200 feet to allow individuals in wheelchairs to pass.*

11 *Barricade rail supports should not project into pedestrian circulation routes more than 4 inches from the support between 27 and 80 inches from the surface as described in Section 307 of the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.*

Option:

12 For Type 1 Barricades, the support may include other unstriped horizontal rails necessary to provide stability.

*Guidance:*

13 *On high-speed expressways or in other situations where barricades might be susceptible to overturning in the wind, ballasting should be used.*

Option:

14 Sandbags may be placed on the lower parts of the frame or the stays of barricades to provide the required ballast.

Support:

15 Type 1 or Type 2 Barricades are intended for use in situations where road user flow is maintained through the TTC zone.

Option:

16 Barricades may be used alone or in groups to mark a specific condition or they may be used in a series for channelizing road users.

17 Type 1 Barricades may be used on conventional roads or urban streets.

*Guidance:*

18 *Type 2 or Type 3 Barricades should be used on freeways and expressways or other high-speed roadways. Type 3 Barricades should be used to close or partially close a road.*

Option:

19 Type 3 Barricades used at a road closure may be placed completely across a roadway or from curb to curb.

*Guidance:*

20 *Where provision is made for access of authorized equipment and vehicles, the responsibility for Type 3 Barricades should be assigned to a person who will provide proper closure at the end of each work day.*

Support:

21 When a highway is legally closed but access must still be allowed for local road users, barricades usually are not extended completely across the roadway.

**Standard:**

22 **A sign shall be installed with the appropriate legend concerning permissible use by local road users (see Section 6G.05).**

*Guidance:*

23 *Adequate visibility of the barricades from both directions should be provided.*

Option:

24 Signs may be installed on barricades (see Section 6F.02).

25 Barricades may be used as sign supports if the barricades have been successfully crash tested as one unit with a construction area sign attached.

## Section 6K.08 Direction Indicator Barricades

**Standard:**

01 **The Direction Indicator Barricade (see Figure 6K-1) shall consist of a One-Direction Large Arrow (W1-6) sign mounted above a diagonal striped, horizontally-aligned, retroreflective rail.**

02 **The One-Direction Large Arrow (W1-6) sign shall have a black legend and border on an orange background. The stripes on the bottom rail shall be alternating orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction road users are to pass. The stripes shall be 4 inches wide. The One-Direction Large Arrow (W1-6) sign shall be 24 x 12 inches. The bottom rail shall have a length of 24 inches and a height of 8 inches.**

Option:

03 The Direction Indicator Barricade may be used in tapers, transitions, and other areas where specific directional guidance to drivers is necessary.

*Guidance:*

04 *If used, Direction Indicator Barricades should be used in a series to direct the driver through the transition and into the intended travel lane.*

## Section 6K.09 Temporary Traffic Barriers as Channelizing Devices

Support:

01 Temporary traffic barriers (see Section 6M.02) are not TTC devices in themselves; however, when placed in a position identical to a line of channelizing devices and marked and/or equipped with appropriate channelization features to provide guidance and warning both day and night, they serve as TTC devices.

**Standard:**

02 **Temporary traffic barriers serving as TTC devices shall comply with requirements for such devices as set forth throughout Part 6.**

03 **Temporary traffic barriers (see Section 6M.02) shall not be used solely to channelize road users, but also to protect the work space. If used to channelize vehicular traffic, the temporary traffic barrier shall be supplemented with delineation, pavement markings, or channelizing devices for improved daytime and nighttime visibility.**

*Guidance:*

04 *Temporary traffic barriers should not be used for a merging taper except in low-speed urban areas.*

05 *When it is necessary to use a temporary traffic barrier for a merging taper in low-speed urban areas or for a constricted/restricted TTC zone, the taper length should be designed to optimize road user operations considering the available geometric conditions.*

**Standard:**

06 **When it is necessary to use a temporary traffic barrier for a merging taper in low-speed urban areas or for a constricted/restricted TTC zone, the taper shall be delineated using channelizing devices, and/or an edge line, and/or delineators on the barrier.**

*Guidance:*

07 *When used for channelization, temporary traffic barriers should be of a light color for increased visibility.*

Option:

08 Side reflectors or top mounted reflectors (facing the road user) may be used on temporary traffic barriers.

*Guidance:*

09 *If used, the spacing of these reflectors should not exceed a distance in feet equal to 1.0 times the speed limit in mph through the TTC zone.*

## Section 6K.10 Longitudinal Channelizing Devices

Support:

01 Longitudinal channelizing devices are lightweight, deformable devices that are highly visible, have good target value, and can be connected together.

**Standard:**

02 **If used singly as Type 1, 2, or 3 barricades, longitudinal channelizing devices shall comply with the general size, color, stripe pattern, retroreflectivity, and placement characteristics established for the devices described in this Chapter.**

*Guidance:*

03 *If used to channelize vehicular traffic at night, longitudinal channelizing devices should be supplemented with retroreflective material or delineation for improved nighttime visibility.*

Option:

04 Longitudinal channelizing devices may be used instead of a line of cones, drums, or barricades.

05 Longitudinal channelizing devices may be hollow and filled with water as a ballast.

06 Longitudinal channelizing devices may be used for pedestrian traffic control.

**Standard:**

07 **If used for pedestrian traffic control, longitudinal channelizing devices shall be interlocked to delineate or channelize flow. The interlocking devices shall not have gaps that allow pedestrians to stray from the channelizing path.**

*Guidance:*

08 *Longitudinal channelizing devices have not met the crashworthy requirements for temporary traffic barriers and should not be used to shield obstacles or provide positive protection for pedestrians or workers.*

## Section 6K.11 Temporary Lane Separators

Option:

01 Temporary lane separators may be used to channelize road users, to divide opposing vehicular traffic lanes, and to divide lanes when two or more lanes are open in the same direction.

**Standard:**

02 **Temporary lane separators shall consist of a longitudinal base component with a maximum height of 4 inches and a maximum width of 1 foot. The longitudinal base shall have sloping sides in order to facilitate crossover by emergency vehicles. One or more types of channelizing devices, such as tubular markers, vertical panels, or a Narrow Two-Way Traffic (W6-4) sign (see Section 6H.17) mounted on flexible supports, shall be affixed to the longitudinal base.**

03 **Channelizing devices affixed to the longitudinal base of a temporary lane separator shall be retroreflectorized to provide nighttime visibility.**

*Guidance:*

04 *A temporary lane separator should be stabilized by affixing it to the pavement in a manner suitable to its design, while allowing the unit to be intentionally moved from place to place within the TTC zone in order to accommodate changing conditions.*

05 *Temporary Lane Separators should not be used to shield obstacles or provide positive protection for pedestrians or workers because these devices have not met the crashworthy requirements for temporary traffic barriers.*

**Standard:**

06 **At pedestrian crossing locations, temporary lane separators shall have an opening or be shortened to provide a pathway that is at least 60 inches wide for crossing pedestrians.**

## Section 6K.12 Other Channelizing Devices


Option:

01 Channelizing devices other than those described in this Chapter may be used in special situations based on an engineering study.


*Guidance:*

02 *Other channelizing devices should comply with the general size, color, stripe pattern, retroreflection, and placement characteristics established for the devices described in this Chapter.*


# Figure 6K-1. Examples of Channelizing Devices

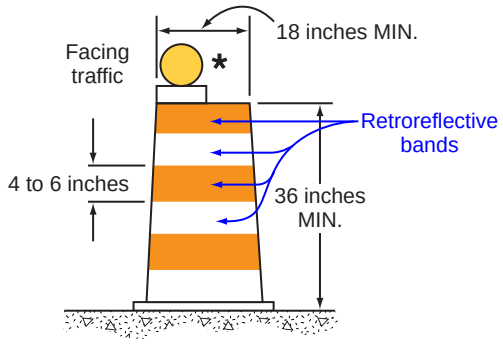



**DRUM**

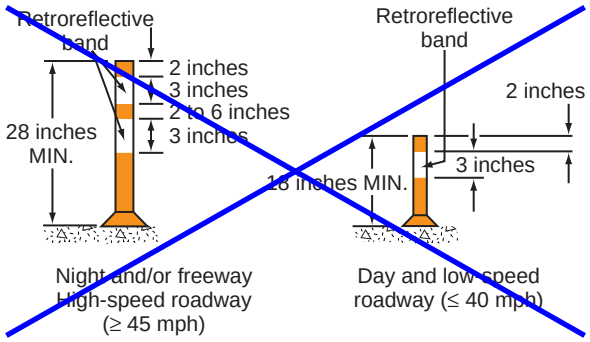



**TUBULAR MARKERS**
(See Figure 6K-101(CA))

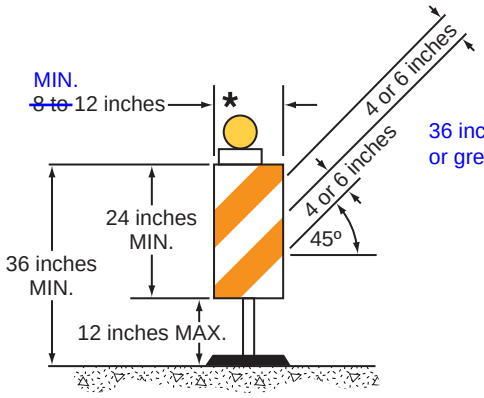



**VERTICAL PANEL**

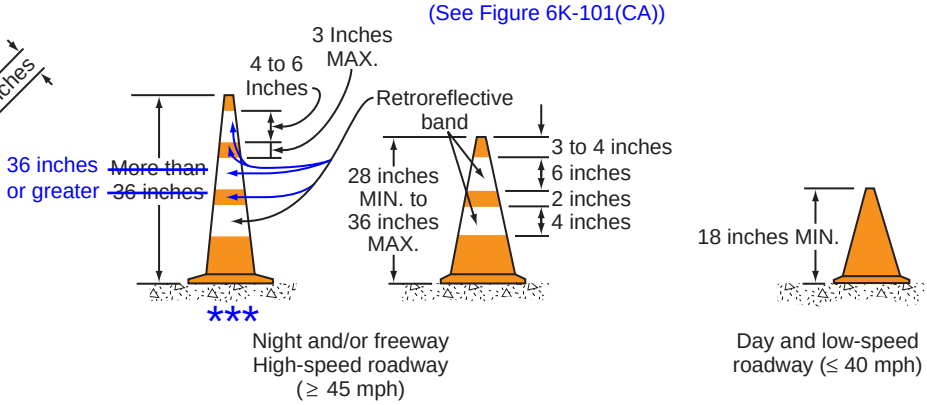



**CONES**

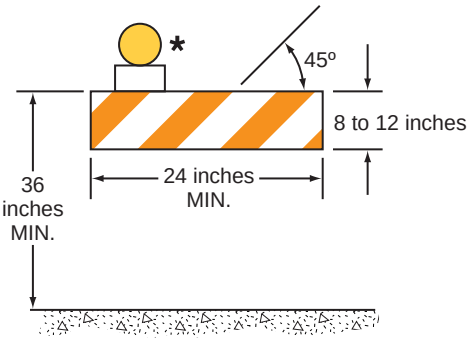



**TYPE 1 BARRICADE ****

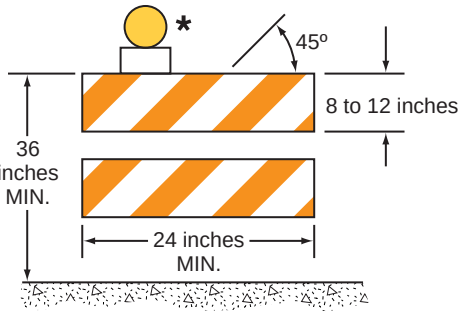


**TYPE 2 BARRICADE ****

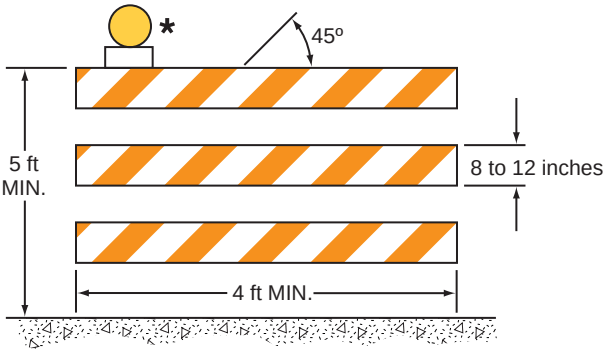


**TYPE 3 BARRICADE ****

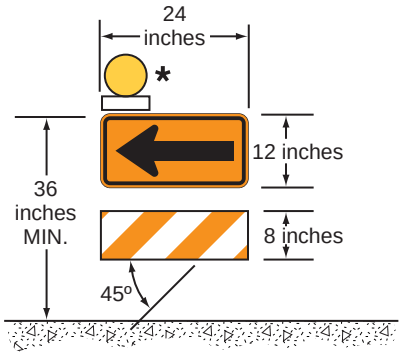



**DIRECTION INDICATOR BARRICADE ****

* Warning lights (optional)

** Rail stripe widths shall be 6 inches, except that 4-inch wide stripes may be used if rail lengths are less than 36 inches. The sides of barricades facing traffic shall have retroreflective rail faces.

*** Refer to FHWA's List of Known Errors for error in "More than 36 inches" tall cone. Refer to Section 1A.04 for more details.


# Figure 6K-2. Pedestrian Channelizing Device

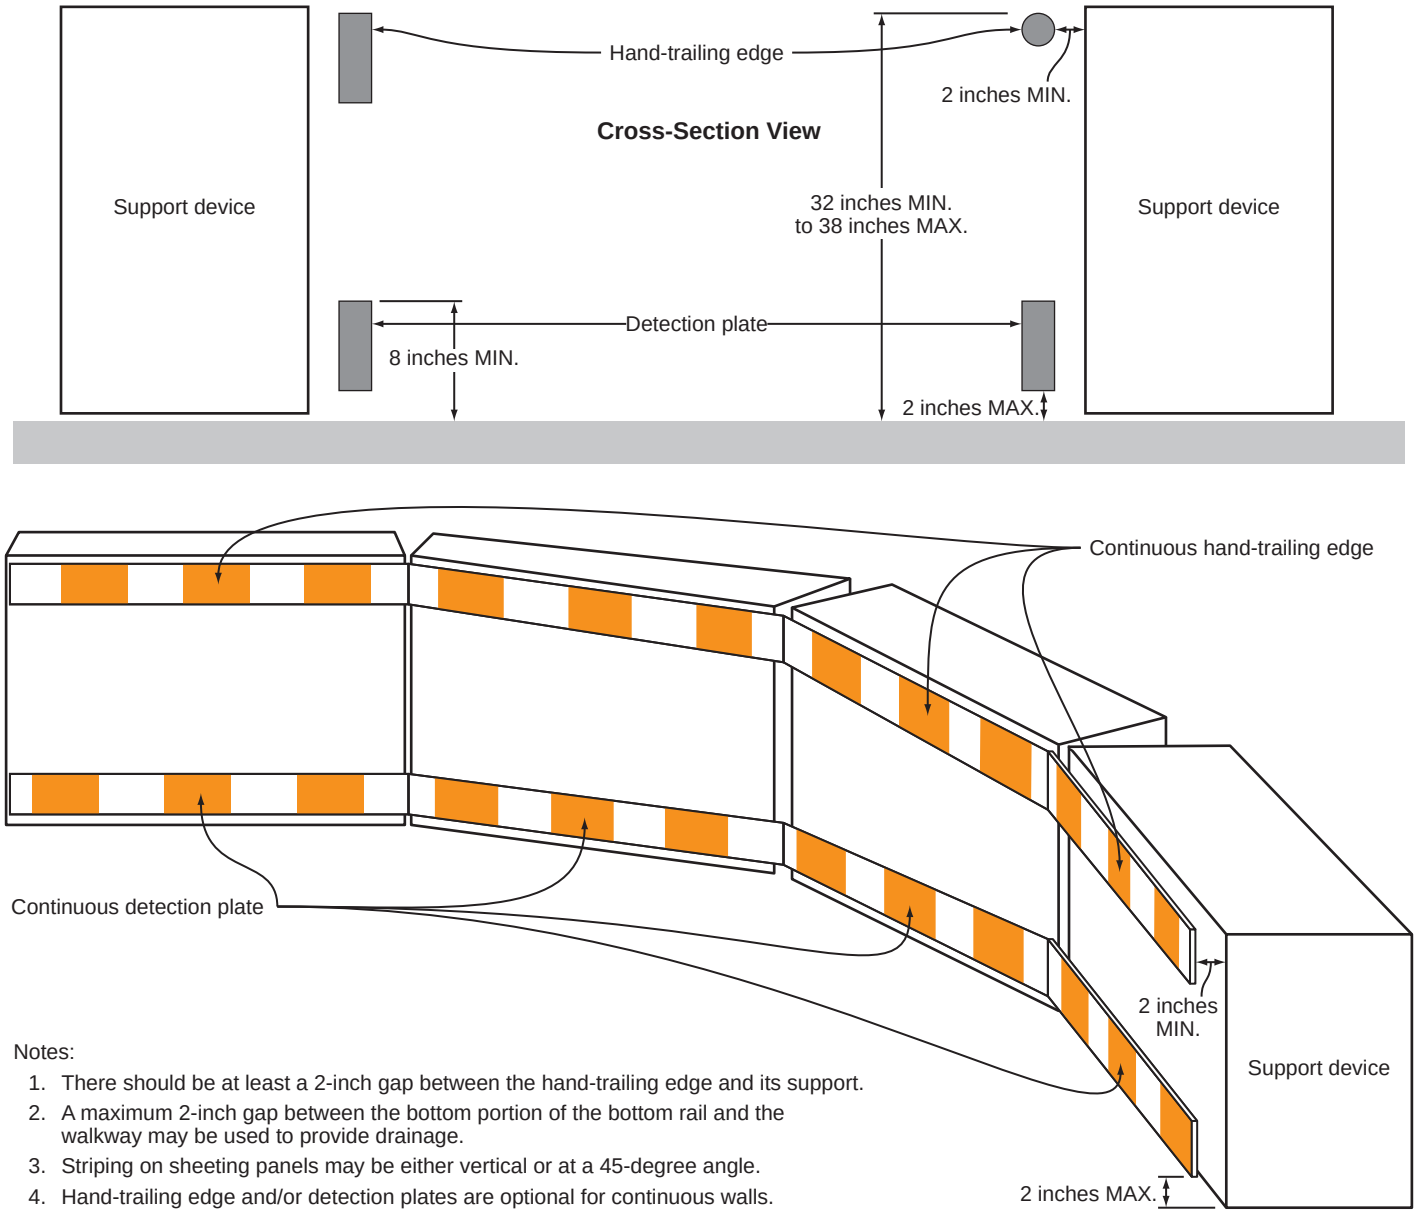



Notes:

1. There should be at least a 2-inch gap between the hand-trailing edge and its support.
2. A maximum 2-inch gap between the bottom portion of the bottom rail and the walkway may be used to provide drainage.
3. Striping on sheeting panels may be either vertical or at a 45-degree angle.
4. Hand-trailing edge and/or detection plates are optional for continuous walls.


## *Figure 6K-101(CA). Tubular Markers*

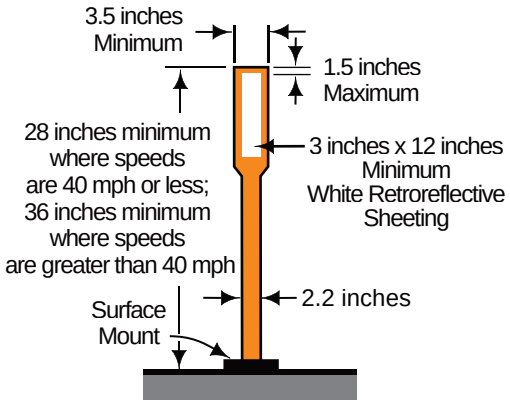


**CHANNELIZER(CA)**
(Tubular marker with flattened top and affixed to pavement)

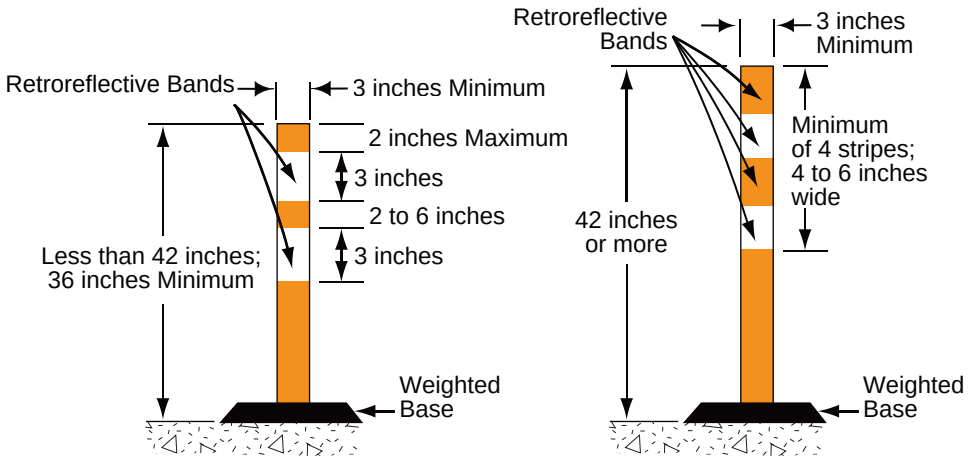


**PORTABLE DELINEATOR**
(Tubular marker with weighted base, not affixed to pavement)

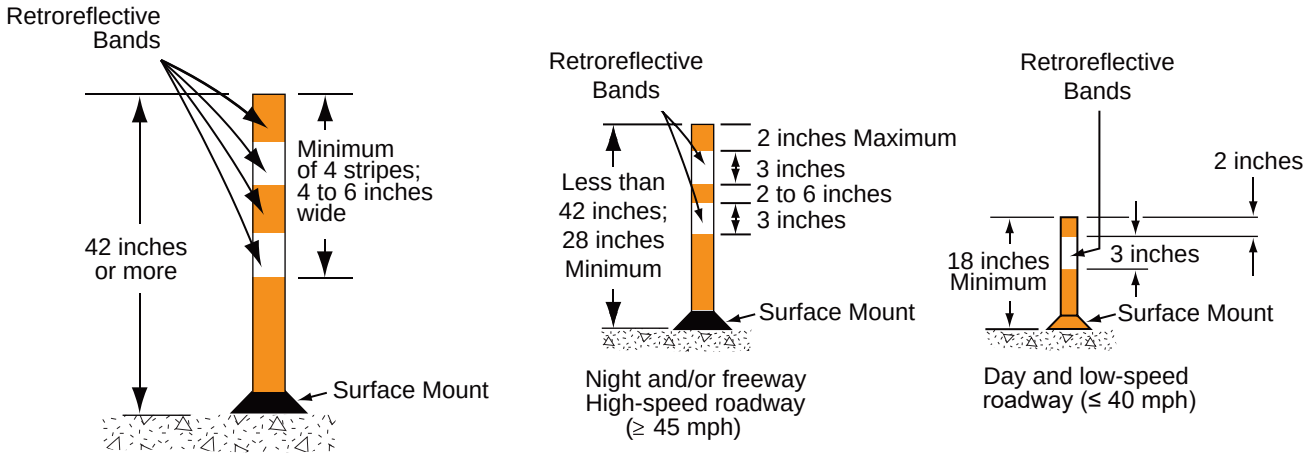


**TUBULAR MARKER**
(Affixed to pavement)

## Table 6K-101(CA). Maximum Spacing of Channelizing Devices

| Speed (mph) | Maximum Channelizing Devices Spacing | | |
|---|---|---|---|
| | Taper* (feet) | Tangent (feet) | Conflict** (feet) |
| 20 | 20 | 40 | 10 |
| 25 | 25 | 50 | 12 |
| 30 | 30 | 60 | 15 |
| 35 | 35 | 70 | 17 |
| 40 | 40 | 80 | 20 |
| 45 | 45 | 90 | 22 |
| 50 | 50 | 100 | 25 |
| 55 | 50 | 100 | 25 |
| 60 | 50 | 100 | 25 |
| 65 | 50 | 100 | 25 |
| 70 | 50 | 100 | 25 |
| 75 | 50 | 100 | 25 |

* Maximum channelizing device spacing for all speeds on one-lane/two-way tapers is 20 feet. Maximum channelizing device spacing for all speeds on downstream tapers is 20 feet. All other tapers are as shown.

** Use on intermediate and short-term projects for taper and tangent sections where there are no pavement markings or where there is a conflict between existing pavement markings and channelizing devices.

# CHAPTER 6L. OTHER TTC ZONE TRAFFIC CONTROL DEVICES

## Section 6L.01 Temporary Traffic Control Signals

**Standard:**

01 **Temporary traffic control signals (see Section 4D.11) used to control road user movements through TTC zones and in other TTC situations shall comply with the applicable provisions of Part 4 and for State highways, Caltrans' Standard Plans and/or Special Provisions. See Section 1A.05 for information regarding this publication.**

Support:

02 Temporary traffic control signals are typically used in TTC zones such as temporary haul road crossings; temporary one-way operations along a one-lane, two-way highway; temporary one-way operations on bridges, reversible lanes, and intersections.

**Standard:**

03 **A temporary traffic control signal that is used to control traffic through a one-lane, two-way section of roadway shall comply with the provisions of Section 4O.02.**

*Guidance:*

04 *When temporary traffic control signals are used, conflict monitors typical of traditional traffic control signal operations should be used.*

Support:

05 Where pedestrians are detoured to a temporary traffic control signal, an accessible pedestrian signal (see Chapter 4K) provides information in non-visual formats (such as audible tones and/or speech messages, and vibrating surfaces) so that a pedestrian with vision disabilities can know when to cross the street along the alternate route.

Option:

06 Temporary traffic control signals may be portable or temporarily mounted on fixed supports.

*Guidance:*

07 *Temporary traffic control signals should only be used in situations where temporary traffic control signals are preferable to other means of traffic control, such as changing the work staging or work zone size to eliminate one-way vehicular traffic movements, using flaggers to control one-way or crossing movements, using STOP or YIELD signs, and using warning devices alone.*

Support:

08 Factors related to the design and application of temporary traffic control signals include the following:

A. Safety and road user needs;
B. Work staging and operations;
C. The feasibility of using other TTC strategies (for example, flaggers, providing space for two lanes, or detouring road users, including bicyclists and pedestrians);
D. Sight distance restrictions;
E. Human factors considerations (for example, lack of driver familiarity with temporary traffic control signals);
F. Road-user volumes including roadway and intersection capacity;
G. Affected side streets and driveways;
H. Vehicle speeds;
I. The placement of other TTC devices;
J. Parking;
K. Turning restrictions;
L. Pedestrians;
M. The nature of adjacent land uses (such as residential or commercial);
N. Legal authority;
O. Signal phasing and timing requirements;
P. Full-time or part-time operation;
Q. Actuated, fixed-time, or manual operation;
R. Power failures or other emergencies;
S. Inspection and maintenance needs;

T. Need for detailed placement, timing, and operation records; and
U. Operation by contractors or by others.

09 Although temporary traffic control signals can be mounted on trailers or lightweight portable supports, fixed supports offer superior resistance to displacement or damage by severe weather, vehicle impact, and vandalism.

*Guidance:*

10 *Other TTC devices should be used to supplement temporary traffic control signals, including warning and regulatory signs, pavement markings, and channelizing devices.*

11 *Temporary traffic control signals not in use should be covered or removed.*

12 *If a temporary traffic control signal is located within ½ mile of an adjacent traffic control signal, consideration should be given to interconnected operation.*

**Standard:**

13 **Temporary traffic control signals shall not be located within 200 feet of a grade crossing unless the temporary traffic control signal is provided with preemption in accordance with Sections 4F.18, 4F.19, and 8D.09, or unless a uniformed officer or flagger is provided at the crossing to prevent vehicles from stopping within the crossing.**

## Section 6L.02 Automated Flagger Assistance Devices – General

Support:

01 Automated Flagger Assistance Devices (AFADs) enable a flagger(s) to be positioned out of the lane of traffic and are used to control road users through TTC zones. These devices are designed to be remotely operated either by a single flagger at one end of the TTC zone or at a central location, or by separate flaggers near each device's location.

02 There are two types of AFADs:

A. An AFAD (see Section 6L.03) that uses a remotely controlled STOP/SLOW sign on either a trailer or a movable cart system to alternately control right-of-way.
B. An AFAD (see Section 6L.04) that uses remotely controlled red and yellow lenses and a gate arm to alternately control right-of-way.

03 AFADs might be appropriate for short-term and intermediate-term activities (see Section 6N.01). Typical applications include TTC activities such as, but not limited to:

A. Bridge maintenance,
B. Haul road crossings, and
C. Pavement patching.

**Standard:**

04 **AFADs shall only be used in situations where there is only one lane of approaching traffic in the direction to be controlled.**

05 **When used at night, the AFAD location shall be illuminated in accordance with Section 6D.06.**

*Guidance:*

06 *AFADs should not be used for long-term stationary work (see Section 6N.01).*

**Standard:**

07 **Because AFADs are not traffic control signals, they shall not be used as a substitute for or a replacement for a continuously operating temporary traffic control signal as described in Section 6L.01.**

08 **AFADs shall meet the crashworthy (see definition in Section 1C.02) performance criteria contained in Section 6A.04.**

*Guidance:*

09 *If used, AFADs should be located in advance of one-lane, two-way tapers and downstream from the point where approaching traffic is to stop in response to the device.*

**Standard:**

10 **If used, AFADs shall be placed so that all of the signs and other items controlling traffic movement are readily visible to the driver of the initial approaching vehicle with advance warning signs alerting other approaching traffic to be prepared to stop.**

11 **If used, an AFAD shall be operated only by a flagger (see Section 6D.01) who has been trained on the operation of the AFAD. The flagger(s) operating the AFAD(s) shall not leave the AFAD(s) unattended at any time while the AFAD(s) is being used.**

12 **The use of AFADs shall conform to one of the following methods:**

**A. An AFAD at each end of the TTC zone (Method 1), or**

**B. An AFAD at one end of the TTC zone and a flagger at the opposite end (Method 2).**

13 **Except as provided in Paragraph 14 of this Section, two flaggers shall be used when using either Method 1 or Method 2.**

Option:

14 A single flagger may simultaneously operate two AFADs (Method 1) or may operate a single AFAD on one end of the TTC zone while being the flagger at the opposite end of the TTC zone (Method 2) if both of the following conditions are present:

A. The flagger has an unobstructed view of the AFAD(s), and

B. The flagger has an unobstructed view of approaching traffic in both directions.

*Guidance:*

15 *When an AFAD is used, the advance warning signing should include a ROAD WORK AHEAD (W20- 1) sign, a ONE LANE ROAD (W20-4) sign, and a BE PREPARED TO STOP (W3-4) sign.*

**Standard:**

16 **When the AFAD is not in use, the signs associated with the AFAD, both at the AFAD location and in advance, shall be removed or covered.**

*Guidance:*

17 *A State or local agency that elects to use AFADs should adopt a policy, based on engineering judgment, governing AFAD applications. The policy should also consider more detailed and/or more restrictive requirements for AFAD use, such as the following:*

*A. Conditions applicable for the use of Method 1 and Method 2 AFAD operation,*
*B. Volume criteria,*
*C. Maximum distance between AFADs,*
*D. Conflicting lenses/indications monitoring requirements,*
*E. Fail-safe procedures,*
*F. Additional signing and pavement markings,*
*G. Application consistency,*
*H. Larger signs or lenses to increase visibility, and*
*I. Use of backplates.*

## Section 6L.03 STOP/SLOW Automated Flagger Assistance Devices

**Standard:**

01 **A STOP/SLOW Automated Flagger Assistance Device (AFAD) shall include a STOP/SLOW sign that alternately displays the STOP (R1-1) face and the SLOW (W20-8) face of a STOP/SLOW paddle (see Figure 6L-1).**

02 **The AFAD's STOP/SLOW sign shall have an octagonal shape, shall be fabricated of rigid material, and shall be mounted with the bottom of the sign a minimum of 6 feet above the pavement on an appropriate support. The size of the STOP/SLOW sign shall be at least 24 x 24 inches with letters at least 8 inches high. The background of the STOP face shall be red with white letters and border. The background of the SLOW face shall be diamond-shaped and orange with black letters and border. Both faces of the STOP/SLOW sign shall be retroreflectorized.**

03 **The AFAD's STOP/SLOW sign shall have a means to positively lock, engage, or otherwise maintain the sign assembly in a stable condition when set in the STOP or SLOW position.**

04 **The AFAD's STOP/SLOW sign shall be supplemented with active conspicuity devices by incorporating either:**

**A. ~~White or~~ red flashing lights within the STOP face and white or yellow flashing lights within the SLOW face meeting the provisions contained in Section 6D.02; or**

**B. A Stop Beacon (see Section 4S.05) mounted a maximum of 24 inches above the STOP face and a Warning Beacon (see Section 4S.03) mounted a maximum of 24 inches above, below, or to the side of the SLOW face. The Stop Beacon shall not be flashed or illuminated when the SLOW face is displayed, and the Warning Beacon shall not be flashed or illuminated when the STOP face is displayed. Except for the mounting locations, the beacons shall comply with the provisions of Chapter 4S.**

Option:

05 Type B warning light(s) (see Section 6L.07) or strobe lights may be used in lieu of the Warning Beacon during the display of the SLOW face of the AFAD's STOP/SLOW sign.

**Standard:**

06 **If Type B warning lights or strobe lights are used in lieu of a Warning Beacon, they shall flash continuously when the SLOW face is displayed and shall not be flashed or illuminated when the STOP face is displayed.**

Option:

07 The faces of the AFAD's STOP/SLOW sign may include louvers to improve the stability of the device in windy or other adverse environmental conditions.

**Standard:**

08 **If louvers are used, the louvers shall be designed such that the full sign face is visible to approaching traffic at a distance of 50 feet or greater.**

*Guidance:*

09 *The STOP/SLOW AFAD should include a gate arm that descends to a down position across the approach lane of traffic when the STOP face is displayed and then ascends to an upright position when the SLOW face is displayed.*

Option:

10 In lieu of a stationary STOP/SLOW sign with a separate gate arm, the STOP/SLOW sign may be attached to a mast arm that physically blocks the approach lane of traffic when the STOP face is displayed and then moves to a position that does not block the approach lane when the SLOW face is displayed.

**Standard:**

11 **Gate arms, if used, shall be fully retroreflectorized on both sides, and shall have vertical alternating red and white stripes at 16-inch intervals measured horizontally as shown in Figure 8D-1. When the arm is in the down position blocking the approach lane:**

**A. The minimum vertical aspect of the arm and sheeting shall be 2 inches, and**

**B. The end of the arm shall reach at least to the center of the lane being controlled.**

12 **A WAIT ON STOP (R1-7) sign (see Figure 6L-1) shall be displayed to road users approaching the AFAD.**

Option:

13 A GO ON SLOW (R1-8) sign (see Figure 6L-1) may also be displayed to road users approaching the AFAD.

14 The WAIT ON STOP/ GO ON SLOW (R1-7a) sign (see Figure 6L-1) may also be used to display both messages to approaching road users.

**Standard:**

15 **The GO ON SLOW sign, if used, and the WAIT ON STOP sign shall be positioned on the same support structure as the AFAD or immediately adjacent to the AFAD such that they are in the same direct line of view of approaching traffic as the sign faces of the AFAD.**

16 **To inform road users to stop, the AFAD shall display the STOP face and the red ~~or white~~ lights, if used, within the STOP face shall flash or the Stop Beacon shall flash. To inform road users to proceed, the AFAD shall display the SLOW face and the yellow ~~or white~~ lights, if used, within the SLOW face shall flash or the Warning Beacon or the Type B warning lights shall flash.**

17 **If STOP/SLOW AFADs are used to control traffic in a one-lane, two-way TTC zone, safeguards shall be incorporated to prevent the flagger(s) from simultaneously displaying the SLOW face at each end of the TTC zone. Additionally, the flagger(s) shall not display the AFAD's SLOW face until all oncoming vehicles have cleared the one-lane portion of the TTC zone.**

## Section 6L.04 Red/Yellow Lens Automated Flagger Assistance Devices

**Standard:**

01 **A Red/Yellow Lens Automated Flagger Assistance Device (AFAD) shall alternately display a steadily illuminated CIRCULAR RED lens and a flashing CIRCULAR YELLOW lens to control traffic without the need for a flagger in the immediate vicinity of the AFAD or on the roadway (see Figure 6L- 2).**

02 **Red/Yellow Lens AFADs shall have at least one set of CIRCULAR RED and CIRCULAR YELLOW lenses that are 12 inches in diameter. Unless otherwise provided in this Section, the lenses and their arrangement, CIRCULAR RED on top and CIRCULAR YELLOW below, shall comply with the applicable provisions for traffic signal indications in Part 4. If the set of lenses is post-mounted, the bottom of the housing (including**

**brackets) shall be at least 7 feet above the pavement. If the set of lenses is located over any portion of the highway that can be used by motor vehicles, the bottom of the housing (including brackets) shall be at least 15 feet above the pavement.**

Option:

03 Additional sets of CIRCULAR RED and CIRCULAR YELLOW lenses, located over the roadway or on the left-hand side of the approach and operated in unison with the primary set, may be used to improve visibility and/or conspicuity of the AFAD.

**Standard:**

04 **A Red/Yellow Lens AFAD shall include a gate arm that descends to a down position across the approach lane of traffic when the steady CIRCULAR RED lens is illuminated and then ascends to an upright position when the flashing CIRCULAR YELLOW lens is illuminated. The gate arm shall be fully retroreflectorized on both sides, and shall have vertical alternating red and white stripes at 16- inch intervals measured horizontally as shown in Figure 8D-1. When the arm is in the down position blocking the approach lane:**

**A. The minimum vertical aspect of the arm and sheeting shall be 2 inches, and**

**B. The end of the arm shall reach at least to the center of the lane being controlled.**

05 **A Stop Here On Red (R10-6 or R10-6a) sign (see Section 2B.59) shall be installed on the right- hand side of the approach at the point at which drivers are expected to stop when the steady CIRCULAR RED lens is illuminated (see Figure 6L-2).**

06 **To inform road users to stop, the AFAD shall display a steadily illuminated CIRCULAR RED lens and the gate arm shall be in the down position. To inform road users to proceed, the AFAD shall display a flashing CIRCULAR YELLOW lens and the gate arm shall be in the upright position.**

07 **If Red/Yellow Lens AFADs are used to control traffic in a one-lane, two-way TTC zone, safeguards shall be incorporated to prevent the flagger(s) from actuating a simultaneous display of a flashing CIRCULAR YELLOW lens at each end of the TTC zone. Additionally, the flagger shall not actuate the AFAD's display of the flashing CIRCULAR YELLOW lens until all oncoming vehicles have cleared the one-lane portion of the TTC zone.**

08 **A change interval shall be provided as the transition between the display of the flashing CIRCULAR YELLOW indication and the display of the steady CIRCULAR RED indication. During the change interval, the CIRCULAR YELLOW lens shall be steadily illuminated. The gate arm shall remain in the upright position during the display of the steadily illuminated CIRCULAR YELLOW change interval.**

09 **A change interval shall not be provided between the display of the steady CIRCULAR RED indication and the display of the flashing CIRCULAR YELLOW indication.**

*Guidance:*

10 *The steadily illuminated CIRCULAR YELLOW change interval should have a duration of at least 5 seconds, unless a different duration, within the range of durations recommended by Section 4F.17, is justified by engineering judgment.*

## Section 6L.05 Portable Changeable Message Signs

Support:

01 Portable changeable message signs (PCMS) are TTC devices installed for temporary use with the flexibility to display a variety of messages. In most cases, portable changeable message signs follow the same provisions for design and application as those given for changeable message signs in Chapter 2L. The information in this Section describes situations where the provisions for portable changeable message signs differ from those given in Chapter 2L.

02 Portable changeable message signs are used most frequently on high-density urban freeways, but have applications on all types of highways where highway alignment, road user routing problems, or other pertinent conditions require advance warning and information.

03 Portable changeable message signs have a wide variety of applications in TTC zones including: roadway, lane, or ramp closures; incident management; width restriction information; speed control or reductions; advisories on work scheduling; road user management and diversion; warning of adverse conditions or special events; and other operational control.

04 The primary purpose of portable changeable message signs in TTC zones is to advise the road user of unexpected situations. Portable changeable message signs are particularly useful as they are capable of:

A. Conveying complex messages,

B. Displaying real time information about conditions ahead, and
C. Providing information to assist road users in making decisions prior to the point where actions must be taken.

05 Some typical applications include the following:

D. Where the speed of vehicular traffic is expected to drop substantially;
E. Where significant queuing and delays are expected;
F. Where adverse environmental conditions are present;
G. Where there are changes in alignment or surface conditions;
H. Where advance notice of ramp, lane, or roadway closures is needed;
I. Where crash or incident management is needed; and/or
J. Where changes in the road user pattern occur.

*Guidance:*

06 *The components of a portable changeable message sign should include: a message sign, control systems, a power source, and mounting and transporting equipment. The front face of the sign should be covered with a protective material.*

**Standard:**

07 **Portable changeable message signs shall comply with the applicable design and application principles established in Chapter 2A. Portable changeable message signs shall display only traffic operational, regulatory, warning, and guidance information, and shall not be used for advertising messages.**

Support:

08 Section 2L.02 contains information regarding overly simplistic or vague messages that is also applicable to portable changeable message signs.

**Standard:**

09 **The colors used for legends on portable changeable message signs shall comply with those shown in Table ~~2A-5~~ 2A-2.**

Support:

09a Refer to FHWA's List of Known Errors for error in Paragraph 9 text. Refer to Section 1A.04 for more details.

10 Section 2L.04 contains information regarding the luminance, luminance contrast, and contrast orientation that is also applicable to portable changeable message signs.

*Guidance:*

11 *Portable changeable message signs should be visible from ½ mile under both day and night conditions.*

Support:

12 Section 2B.21 contains information regarding the design of portable changeable message signs that are used to display speed limits that change based on operational conditions, or are used to display the speed at which approaching drivers are traveling.

*Guidance:*

13 *A portable changeable message sign should be limited to three lines of eight characters per line or should consist of a full matrix display.*

14 *Except as provided in Paragraph 15 of this Section, the letter height used for portable changeable message sign messages should be a minimum of 18 inches.*

Option:

15 For portable changeable message signs mounted on service patrol trucks or other incident response vehicles, a letter height as short as 10 inches may be used. Shorter letter sizes may also be used on a portable changeable message sign used on low speed facilities provided that the message is legible from at least 650 feet.

16 The portable changeable message sign may vary in size.

*Guidance:*

17 *Messages on a portable changeable message sign should consist of no more than two phases, and a phase should consist of no more than three lines of text. Each phase should be capable of being understood by itself, regardless of the order in which it is read. Messages should be centered within each line of legend. If more than one portable changeable message sign is simultaneously legible to road users, then only one of the signs should display a sequential message at any given time.*

Support:

18 Road users have difficulties in reading messages displayed in more than two phases on a typical three- line portable changeable message sign.

**Standard:**

19 **Except when being used to simulate an Arrow Board display (see Section 6L.06), techniques of message display such as animation, rapid flashing, dissolving, exploding, scrolling, traveling horizontally or vertically across the face of the sign, or other dynamic elements shall not be used.**

*Guidance:*

20 *When a message is divided into two phases, the display time for each phase should be at least 2 seconds, and the sum of the display times for both of the phases should be a maximum of 8 seconds.*

21 *All messages should be designed with consideration given to the principles provided in this Section and also taking into account the following:*

A. *The message should be as brief as possible and should contain three thoughts (with each thought preferably shown on its own line) that convey:*
    1. *The problem or situation that the road user will encounter ahead,*
    2. *The location of or distance to the problem or situation, and*
    3. *The recommended driver action.*

B. *If more than two phases are needed to display a message, additional portable changeable message signs should be used. When multiple portable changeable message signs are needed, they should be placed on the same side of the roadway and they should be separated from each other by a distance of at least 1,000 feet on freeways and expressways, and by a distance of at least 500 feet on other types of highways.*

**Standard:**

22 **When the word messages shown in Tables 1D-1 or 1D-2 need to be abbreviated on a portable changeable message sign, the provisions described in Section 1D.08 shall be followed.**

23 **In order to maintain legibility, portable changeable message signs shall automatically adjust their brightness under varying light conditions.**

24 **The control system shall include a display screen upon which messages can be reviewed before being displayed on the message sign. The control system shall be capable of maintaining memory when power is unavailable.**

25 **Portable changeable message signs shall be equipped with a power source and a battery back- up to provide continuous operation when failure of the primary power source occurs.**

26 **The mounting of portable changeable message signs on a trailer, a large truck, or a service patrol truck shall be such that the bottom of the message sign shall be a minimum of 7 feet above the roadway in urban areas and 5 feet above the roadway in rural areas when it is in the operating mode.**

*Guidance:*

27 *Portable changeable message signs should be used as a supplement to and not as a substitute for conventional signs and pavement markings.*

28 *When portable changeable message signs are used for route diversion, they should be placed far enough in advance of the diversion to allow road users ample opportunity to perform necessary lane changes, to adjust their speed, or to exit the affected highway.*

29 *Portable changeable message signs should be sited and aligned to provide maximum legibility and to allow time for road users to respond appropriately to the portable changeable message sign message.*

30 *Portable changeable message signs should be placed off the shoulder of the roadway and behind a traffic barrier, if practicable. Where a traffic barrier is not available to shield the portable changeable message sign, it should be placed off the shoulder and outside of the clear zone. If a portable changeable message sign has to be placed on the shoulder of the roadway or within the clear zone, it should be delineated with retroreflective TTC devices. When used, advanced warning delineation is not needed if the portable changeable message sign is behind a barrier, more than 2 feet behind the curb, or 15 feet or more from the edge of the traveled way (refer to Section 6B.04). If the portable changeable message sign is placed on shoulder or partially blocking the shoulder (including overhangs), the shoulder should be closed off by a taper of channelizing devices with a length of 1/3 L using the formulas in Tables 6B-3, 6B-3(CA) and 6B-4 (refer to Section 6B.08). Refer to Figure 6L-101(CA) for typical layout using channelizing devices to delineate a portable changeable message sign on shoulder.*

Option:

30a For incident management before additional resources are available or for short duration use (refer to Section 6N.01) or when portable changeable message sign is placed well beyond the shoulder but partially within 15 feet from the edge of the traveled way it may be delineated with a minimum of a 30 feet taper formed by three traffic cones.

*Guidance:*

31 *When portable changeable message signs are used in TTC zones, they should display only TTC messages.*

32 *When portable changeable message signs are not being used to display TTC messages, they should be relocated such that they are outside of the clear zone or shielded behind a traffic barrier and turned away from traffic. If relocation or shielding is impracticable, they should be delineated with retroreflective TTC devices. If the portable changeable message sign is stored within a shoulder or partially blocking a shoulder, the shoulder should be closed according to Section 6N.06. If the portable changeable message sign is stored well beyond the shoulder but within the clear zone, it should be delineated by a taper of channelizing devices with a length of 1/3 L using the formulas in Tables 6B-3, 6B-3(CA) and 6B-4 (see Section 6B.08). Clear zone is defined by AASHTO's "Roadside Design Guide" (refer to Section 1A.05). Refer to Figure 6L-101(CA) for typical layout using channelizing devices to delineate a portable changeable message sign on a shoulder.*

33 *Portable changeable message sign trailers should be delineated on a permanent basis by affixing retroreflective material, known as conspicuity material, in a continuous line on the face of the trailer as seen by oncoming road users.*

**Standard:**

34 **On State highways, the message displayed on Portable Changeable Message signs shall be visible from a distance of ½ mile and shall be legible from a distance of 750 feet, at noon on a cloudless day, by persons with vision of or corrected to 20/20.**

*Guidance:*

35 *On local roads, the message displayed on Portable Changeable Message signs should be visible from a distance of ½ mile and should be legible from a distance of 750 feet, at noon on a cloudless day, by persons with vision of or corrected to 20/20.*

Support:

36 Refer to Caltrans' Standard Specifications Section 12-3.32 for visibility criteria cited. Refer to Section 1A.05 for information regarding this publication.

37 Refer to Section 2B.21 for Vehicle Speed Feedback Signs.

38 Refer to Caltrans' Changeable Message Sign (CMS) Guidelines for additional information on (PCMS). Refer to Section 1A.05 for information regarding this publication.

## Section 6L.06 Arrow Boards

**Standard:**

01 **An arrow board shall be a sign with a matrix of elements capable of either flashing or sequential displays. This sign shall provide additional warning and directional information to assist in merging and controlling road users through or around a TTC zone.**

*Guidance:*

02 *An arrow board in the arrow or chevron mode should be used to advise approaching traffic of a lane closure along major multi-lane roadways in situations involving heavy traffic volumes, high speeds, and/or limited sight distances, or at other locations and under other conditions where road users are less likely to expect such lane closures.*

03 *If used, an arrow board should be used in combination with appropriate signs, channelizing devices, or other TTC devices.*

04 *An arrow board should be placed on the shoulder of the roadway or, if practicable, farther from the traveled lane. It should be delineated with retroreflective TTC devices. When an arrow board is not being used, it should be removed; if not removed, it should be shielded; or if the previous two options are not feasible, it should be delineated with retroreflective TTC devices.*

04a *If the arrow board is stored within a shoulder or partially blocking a shoulder, the shoulder should be closed according to Section 6G.07. If the arrow board is stored well beyond the shoulder but within the clear zone, it should be delineated by a taper of channelizing devices with a length of 1/3 L using the formulas in Tables 6B-3, 6B-3(CA) and 6B-4 (refer to Section 6B.08). Clear zone is defined by AASHTO's "Roadside Design Guide" (refer to Section 1A.05). Refer to Figure 6L-101(CA) for typical layout using channelizing devices to delineate an arrow board on a shoulder.*

**Standard:**

05 **Arrow boards shall meet the minimum size, legibility distance, number of elements, and other specifications shown in Figure 6L-3.**

Support:

06 Type A arrow boards are appropriate for use on low-speed urban streets. Type B or II arrow boards are appropriate for intermediate-speed facilities and for maintenance or mobile operations on high-speed roadways. Type C or I arrow boards are intended to be used on high-speed, high-volume motor vehicle traffic control projects. Type D arrow boards are intended for use on vehicles authorized by the State or local agency.

**Standard:**

07 **Type A, B or II, and C or I arrow boards shall have solid rectangular appearances. A Type D arrow board shall conform to the shape of the arrow.**

08 **All arrow boards shall be finished in non-reflective black. The arrow board shall be mounted on a vehicle, a trailer, or other suitable support.**

*Guidance:*

09 *The minimum mounting height, measured vertically from the bottom of the board to the roadway below it or to the elevation of the near edge of the roadway, of an arrow board should be 7 feet, except on vehicle-mounted arrow boards, which should be as high as practicable.*

10 *A vehicle-mounted arrow board should be provided with remote controls.*

**Standard:**

11 **Arrow board elements shall be capable of at least a 50 percent dimming from full brilliance. The dimmed mode shall be used for nighttime operation of arrow boards.**

*Guidance:*

12 *Full brilliance should be used for daytime operation of arrow boards.*

**Standard:**

13 **The arrow board shall have suitable elements capable of the various operating modes. The color presented by the elements shall be yellow.**

*Guidance:*

14 *If an arrow board consisting of a bulb matrix is used, the elements should be recess-mounted or equipped with an upper hood of not less than 180 degrees.*

**Standard:**

15 **The minimum element on-time shall be 50 percent for the flashing mode, with equal intervals of 25 percent for each sequential phase. The flashing rate shall be not less than 25 or more than 40 flashes per minute.**

16 **An arrow board shall have the following three mode selections:**

**A. A Flashing Arrow, Sequential Arrow, or Sequential Chevron mode;**
**B. A flashing Double Arrow mode; and**
**C. A flashing Caution or Alternating Diamond mode.**

17 **An arrow board in the arrow or chevron mode shall be used only for stationary or moving lane closures on multi-lane roadways.**

18 **For shoulder work, for blocking the shoulder, for roadside work near the shoulder, or for temporarily closing one lane on a two-lane, two-way roadway, an arrow board shall be used only in the caution mode.**

*Guidance:*

19 *For a stationary lane closure, the arrow board should be located on the shoulder at the beginning of the merging taper.*

20 *Where the shoulder is narrow, the arrow board should be located in the closed lane.*

**Standard:**

20a **The arrow board shall be located behind channelizing devices used to transition traffic from the closed lane.**

Support:

20b Caltrans' Standard Specifications for flashing arrow boards are in Section 12-3.30. Refer to Section 1A.05 for information regarding this publication.

**Standard:**

21 **When arrow boards are used to close multiple lanes, a separate arrow board shall be used for each closed lane.**

*Guidance:*

22 *When arrow boards are used to close multiple lanes, if the first arrow board is placed on the shoulder, the second arrow board should be placed in the first closed lane at the upstream end of the second merging taper (see Figure 6P-37). When the first arrow board is placed in the first closed lane, the second arrow board should be placed in the second closed lane at the downstream end of the second merging taper.*

23 *For mobile operations where a lane is closed, the arrow board should be located to provide adequate separation from the work operation to allow for appropriate reaction by approaching drivers.*

**Standard:**

24 **A vehicle displaying an arrow board shall be equipped with high-intensity rotating, flashing, oscillating, or strobe lights.**

25 **Arrow boards shall only be used to indicate a lane closure. Arrow boards shall not be used to indicate a lane shift.**

Option:

26 A portable changeable message sign may be used to simulate an arrow board display.

**Standard:**

27 **The minimum legibility distance is the distance at which flashing arrow boards shall be legible at noon on a cloudless day and at night by persons with vision of or corrected to 20/20.**

Support:

28 The minimum legibility distance for each arrow board type is shown in Figure 6L-3.

29 Refer to Caltrans' Standard Specifications Section 12-3.30 for visibility criteria cited. Refer to Section 1A.05 for information regarding this publication.

## Section 6L.07 Flashing Beacons and Warning Lights

*Guidance:*

01 *Lighting devices should be provided in TTC zones based on engineering judgment.*

Option:

02 Flashing beacons (see Chapter 4S) and/or warning lights may be used to supplement retroreflectorized signs, barriers, and channelizing devices.

Support:

03 Type A, Type B, Type C, and Type D 360-degree warning lights are portable, powered, yellow, lens- directed, enclosed lights.

**Standard:**

04 **Warning lights shall comply with the provisions in Chapter 13 of the publication entitled, "Equipment and Materials Standards of the Institute of Transportation Engineers," 1998, Institute of Transportation Engineers.**

05 **When warning lights are used, they shall be mounted on signs or channelizing devices in a manner that, if hit by an errant vehicle, they will not be likely to penetrate the windshield.**

*Guidance:*

06 *The maximum spacing for warning lights should be identical to the channelizing device spacing requirements.*

Support:

07 The light weight and portability of warning lights are advantages that make these devices useful as supplements to the retroreflectorization on signs and channelizing devices. The flashing lights are effective in attracting road users' attention.

Option:

08 Warning lights may be used in either a steady-burn or flashing mode.

**Standard:**

09 **Warning lights shall flash when placed on channelizing devices used alone or in a cluster to warn of a condition.**

10 **Except for the sequential flashing warning lights discussed in Paragraph 12 of this Section, warning lights placed on channelizing devices used in a series to channelize road users shall be steady- burn.**

11 **Except for the sequential flashing warning lights that are described in Paragraph 12 of this Section, flashing warning lights shall not be used for delineation, as a series of flashers fails to identify the desired vehicle path.**

12 **If a series of sequential flashing warning lights is used on channelizing devices that form a merging taper, the**

**successive flashing of the lights shall occur from the upstream end of the merging taper to the downstream end of the merging taper in order to identify the desired vehicle path. Each flashing warning light in the sequence shall be flashed at a rate of not less than 55 or more than 75 times per minute.**

13 **Type A Low-Intensity Flashing warning lights, Type C Steady-Burn warning lights, and Type D 360-degree Steady-Burn warning lights shall be maintained so as to be capable of being visible on a clear night from a distance of 3,000 feet. Type B High-Intensity Flashing warning lights shall be maintained so as to be capable of being visible on a sunny day when viewed without the sun directly on or behind the device from a distance of 1,000 feet.**

14 **Warning lights shall have a minimum mounting height of 30 inches to the bottom of the lens.**

Support:

15 Type A Low-Intensity Flashing warning lights are used to warn road users during nighttime hours that they are approaching or proceeding in a potentially hazardous area.

Option:

16 Type A warning lights may be mounted on channelizing devices. Support:

17 Type B High-Intensity Flashing warning lights are used to warn road users during both daylight and nighttime hours that they are approaching a potentially hazardous area.

Option:

18 Type B warning lights are designed to operate 24 hours per day and may be mounted on advance warning signs or on independent supports.

19 Type C Steady-Burn warning lights and Type D 360-degree Steady-Burn warning lights may be used during nighttime hours to delineate the edge of the traveled way.

*Guidance:*

20 *When used to delineate a curve, Type C and Type D 360-degree warning lights should only be used on devices on the outside of the curve, and not on the inside of the curve.*

Support:

21 Flashing warning beacon is a type of warning light and often used to supplement other TTC devices.

**Standard:**

22 **Flashing warning beacon shall comply with the provisions of Chapter 4L and Caltrans' standard signal lenses. A flashing warning beacon shall be a flashing yellow light with a minimum nominal diameter of 12 inch. Where flashing warning beacon is required, a Type B warning light shall not be used in its place. When placed within 15 feet of the edge of travel way the beacon and its support shall be certified as crashworthy (refer to Sections 6A.03 and 6A.04) or the beacon shall meet the lightweight criteria set for Type B warning light and is mounted on a certified crashworthy support. The mounting height shall be between 6 feet and 10 feet, measured from the bottom of the base to the center of the lens.**

## Section 6L.08 High-Level Warning Devices (Flag Trees)

Option:

01 A high-level warning device (flag tree) may supplement other TTC devices in TTC zones.

Support:

02 A high-level warning device is designed to be seen over the top of typical passenger cars. A typical high-level warning device is shown in Figure 6F-1.

**Standard:**

03 **A high-level warning device shall consist of a minimum of two flags with or without a Type B high-intensity flashing warning light. The distance from the roadway to the bottom of the lens of the light and to the lowest point of the flag material shall be not less than 8 feet. The flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color.**


Option:

04 An appropriate warning sign may be mounted below the flags.

Support:

05 High-level warning devices are most commonly used in high-density road user situations to warn road users of short-term operations.


# Figure 6L-1. Example of the Use of a STOP/SLOW Automated Flagger Assistance Device (AFAD)

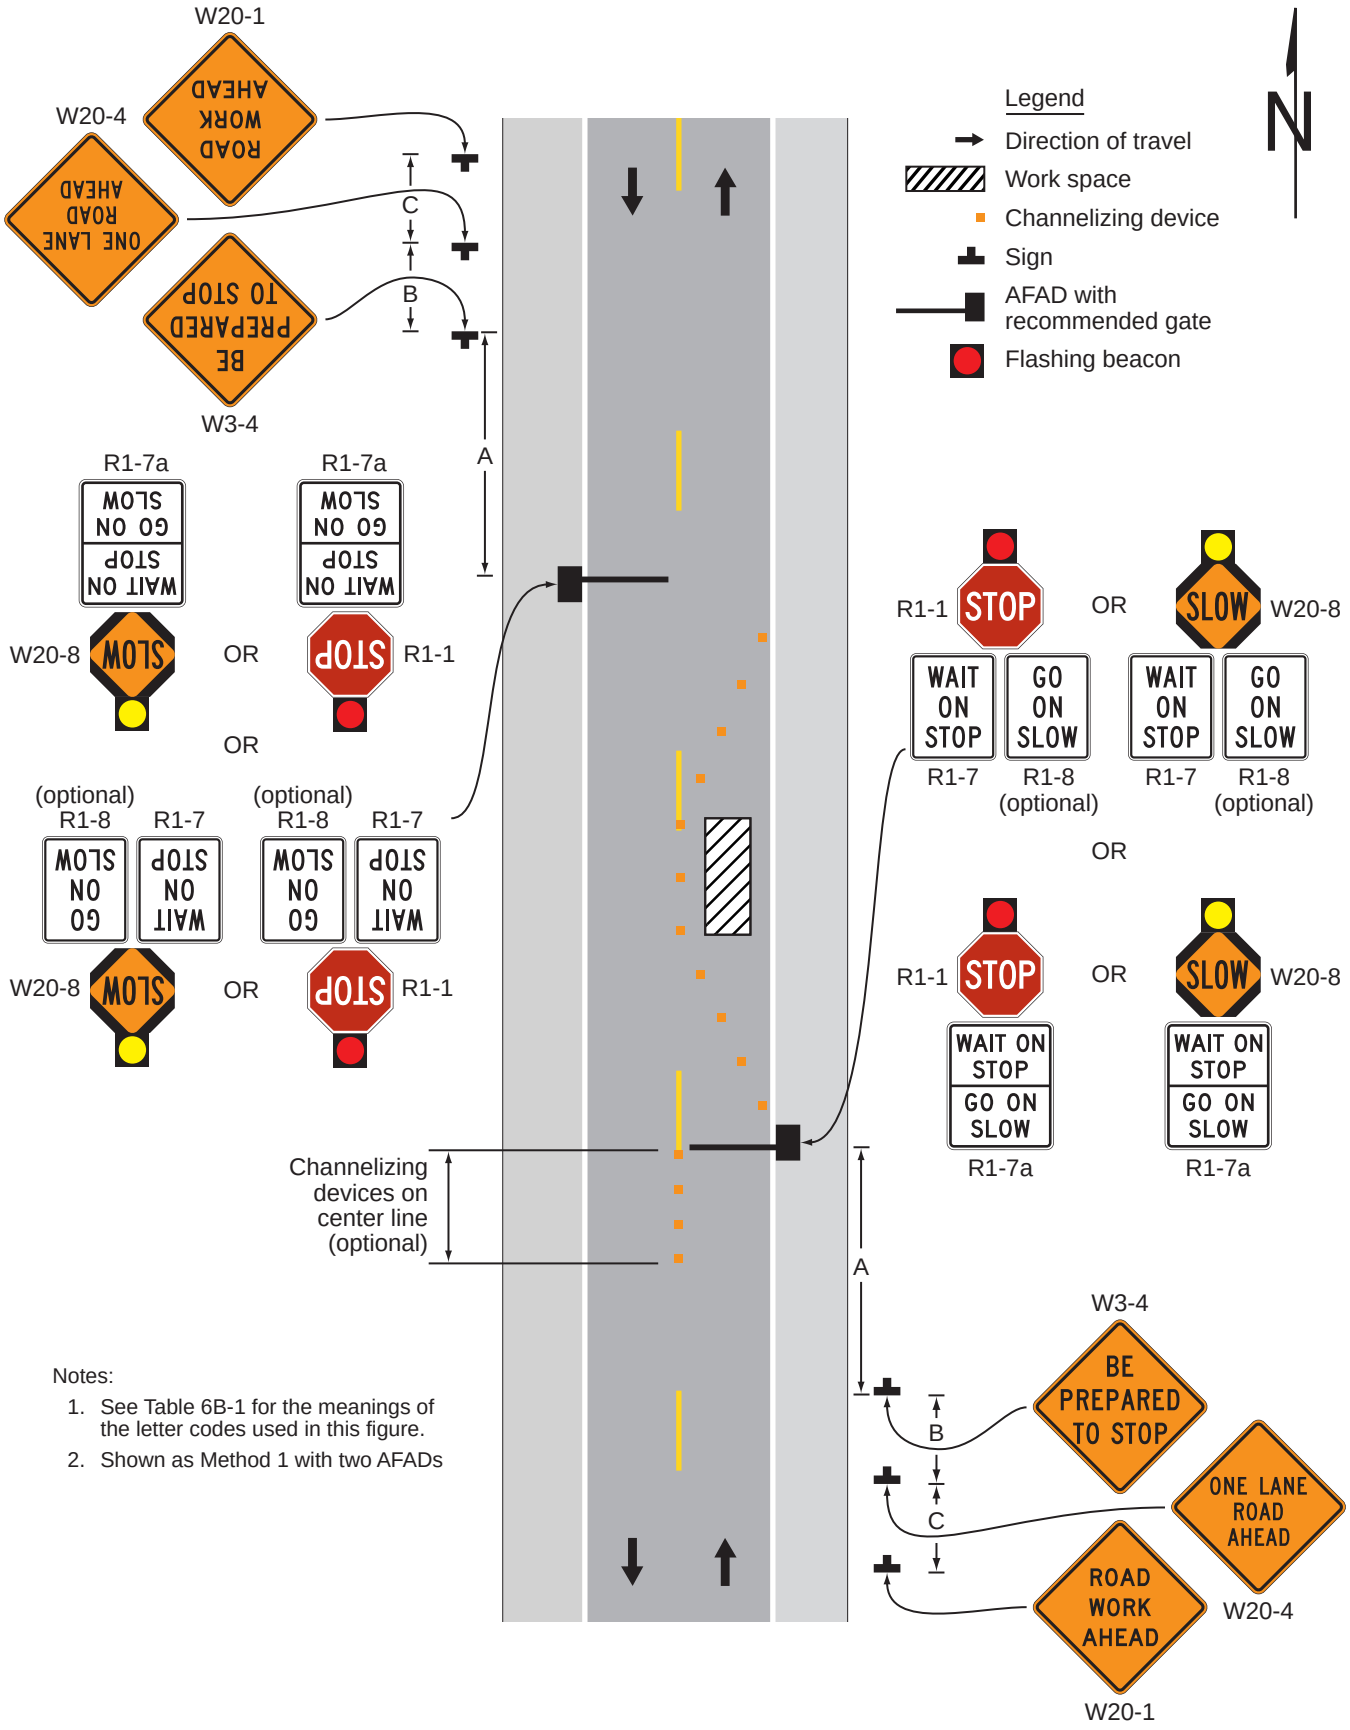


Notes:

1. See Table 6B-1 for the meanings of the letter codes used in this figure.
2. Shown as Method 1 with two AFADs

# Figure 6L-2. Example of the Use of a Red/Yellow Lens Automated Flagger Assistance Device (AFAD)

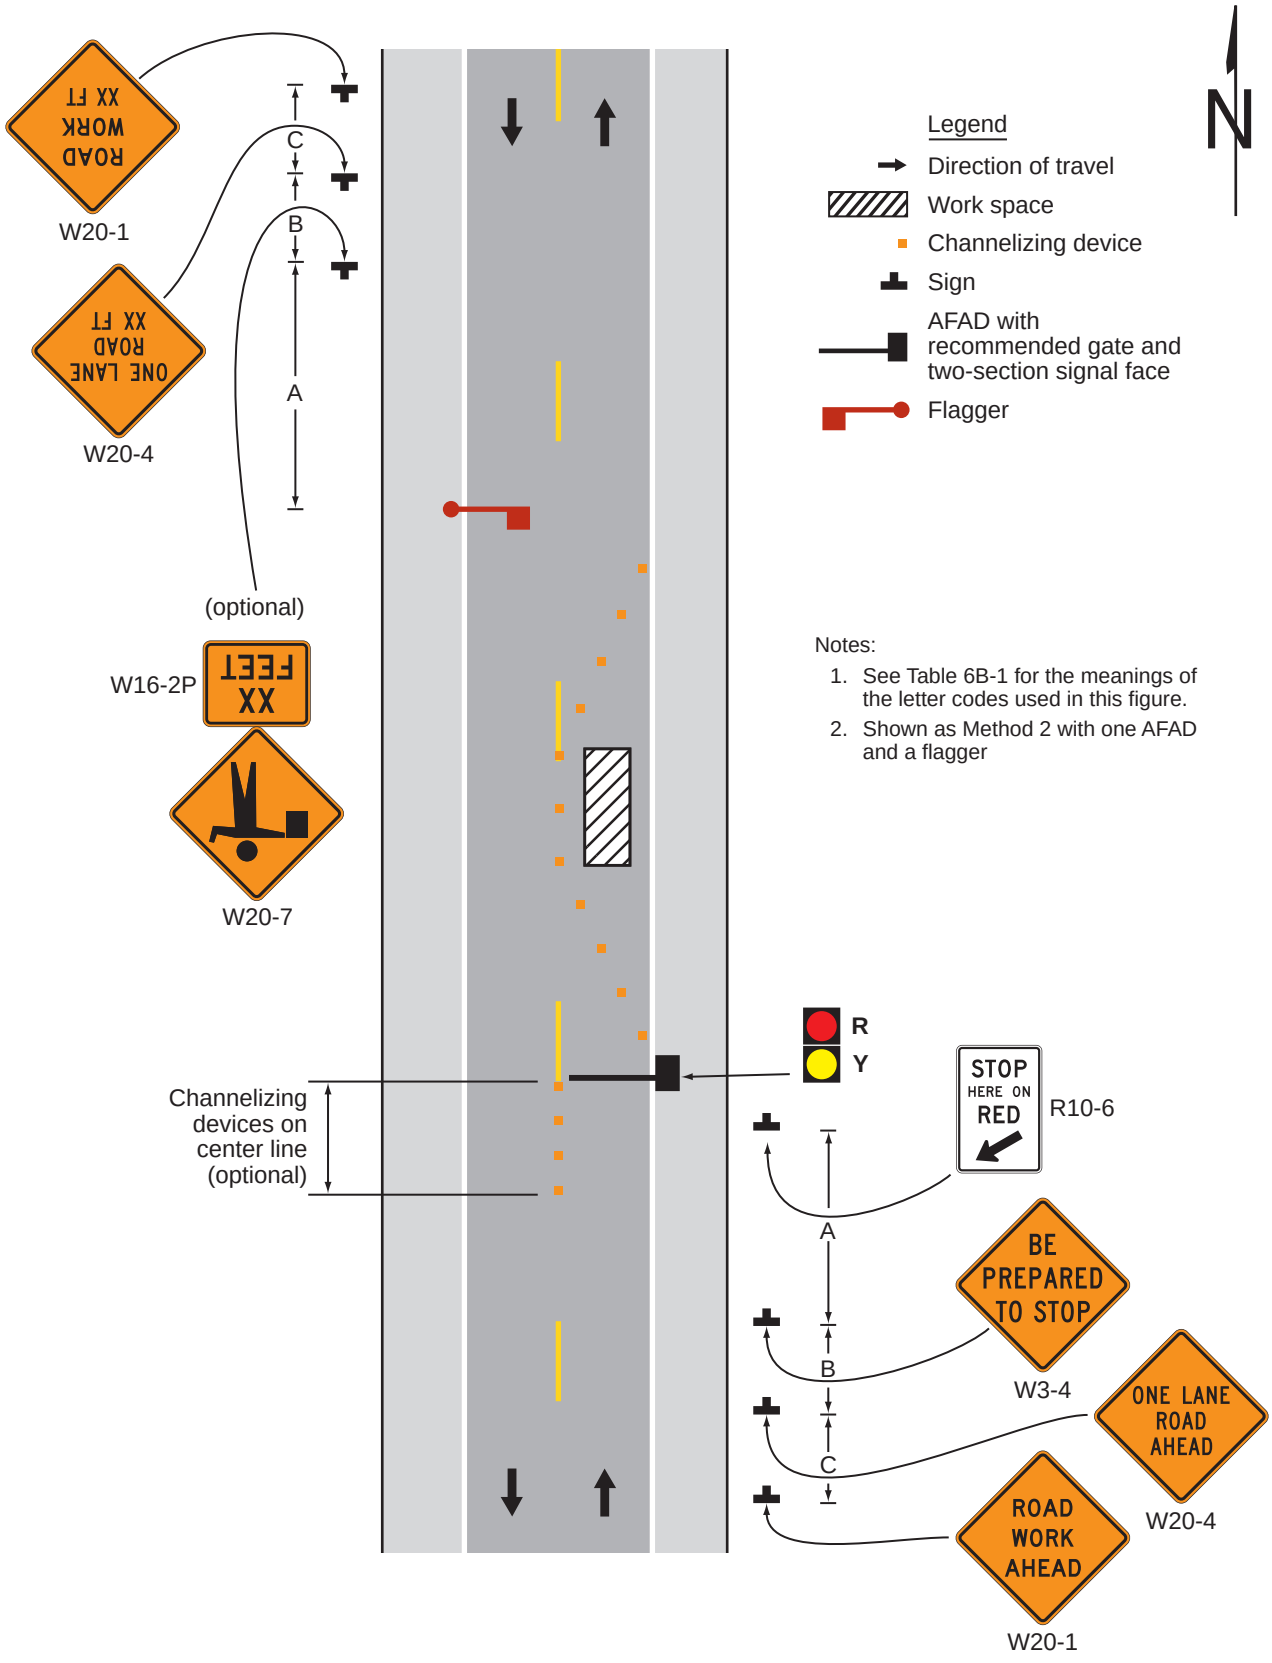

Scale = XX.XXX%
kal changed yellow to signal yellow on his own on 5/15/22


## Figure 6L-3. Advance Warning Arrow Board Display Specifications

| Operating Mode | Display (Type C arrow board illustrated) (right arrow shown; left is similar) |
|---|---|
| 1. At least one of the three following modes shall be provided: | |
| Flashing Arrow |  Merge Right |
| Sequential Arrow |  Merge Right |
| Sequential Chevron |  Merge Right |
| 2. The following mode shall be provided: Flashing Double Arrow |  Merge Right or Left |
| 3. At least one of the following modes shall be provided: Flashing Caution or Alternating Diamond Caution |  Flashing Caution or Flashing Caution or Alternating Diamond Caution |

| Arrow Board Type | Minimum Size | Minimum Legibility Distance | Minimum Number of Elements | Appropriate Use*** |
|---|---|---|---|---|
| A | 48x24 inches | 1/2 mile | 12 | Low-speed urban streets |
| B | 60 x 30 inches | 3/4 mile | 13 | Intermediate-speed facilities and maintenance or mobile operations on high-speed roadways |
| II** | 72 x 36 inches* | 3/4 mile | 13 | Use in place of Type B or C |
| C or I | 96 x 48 inches | 1 mile | 15 | High-speed, high volume roadways |
| D | None* | 1/2 mile | 12 | On authorized vehicles |

*Length of arrow equals 48 inches, width of arrowhead equals 24 inches.
**For State highways, the panel Type B shall be replaced by Type II.
***Refer to Section 6L.06 for more details.

## *Figure 6L-101(CA). Typical Layout Using Channelizing Devices to Delineate a Portable Changeable Message Sign on Shoulder*

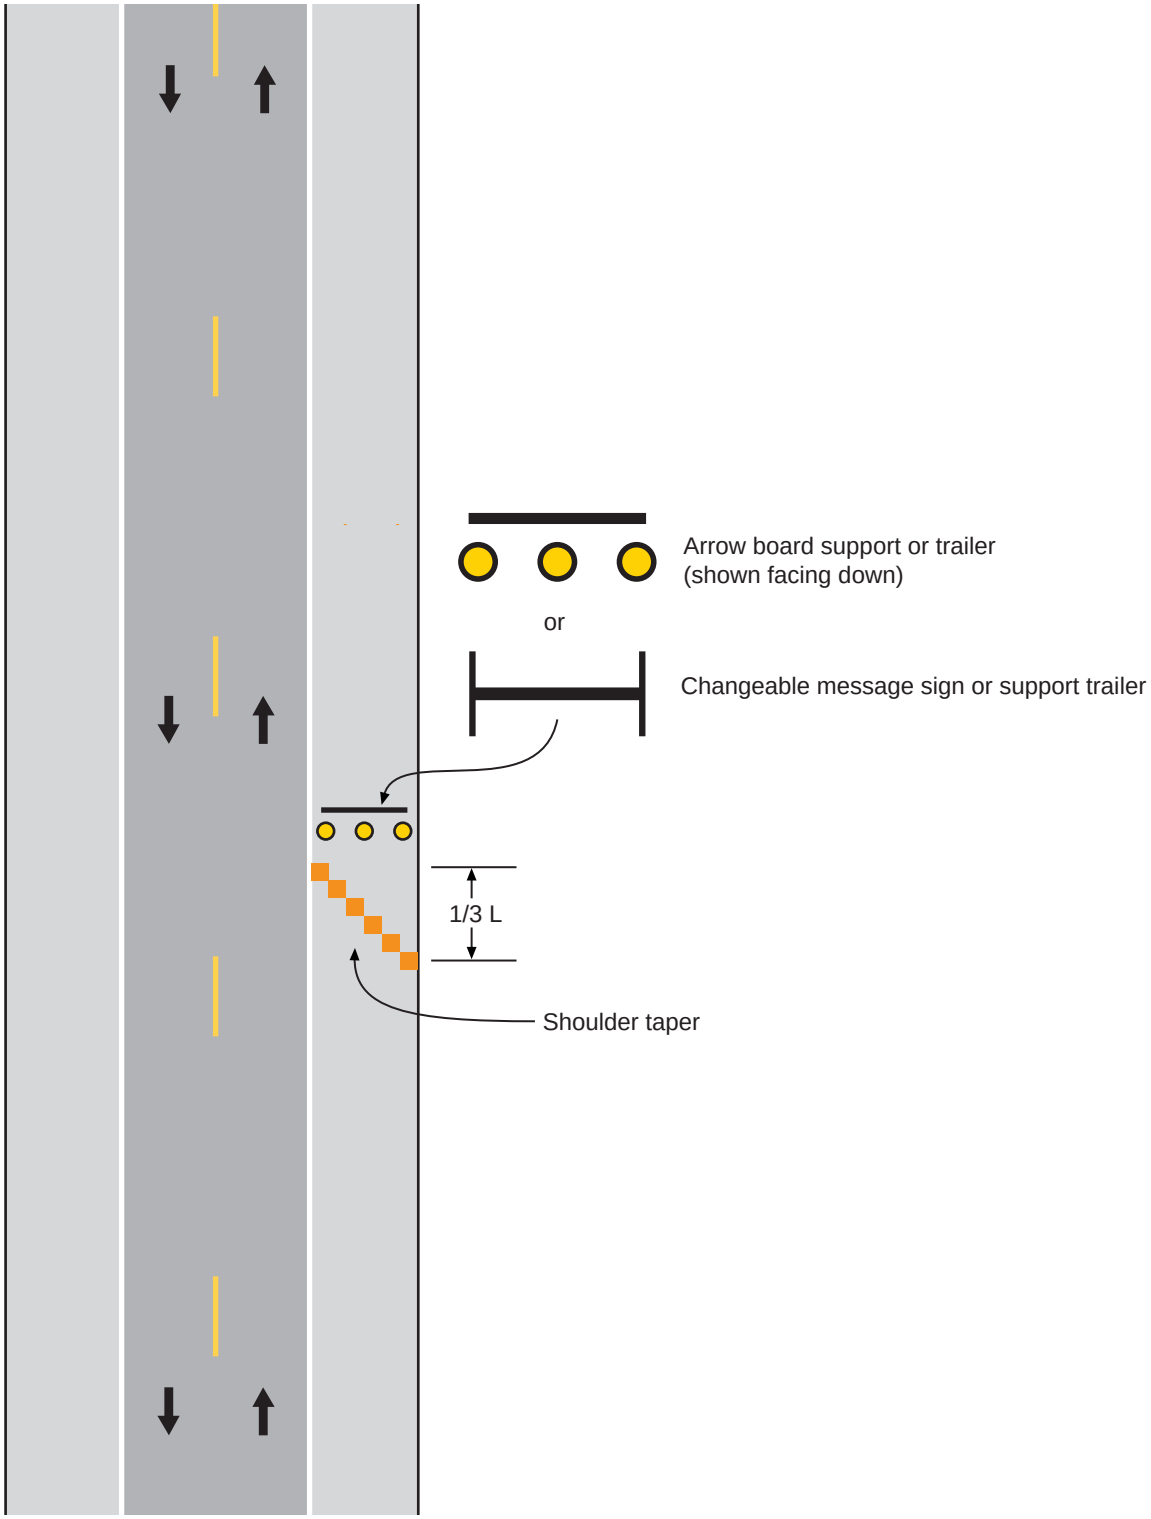

# CHAPTER 6M. OTHER TTC ZONE DESIGN FEATURES AND SAFETY DEVICES

## Section 6M.01 General

Support:

01 Although certain devices and design features, such as lighting, barriers, dividers, crash cushions, and screens, are sometimes used in TTC zones to supplement traffic control devices or enhance traffic operations or safety for road users, they are not considered to be traffic control devices. The following Sections describe the most commonly used devices and design features. Section 1D.04 contains additional information about these devices and design features.

## Section 6M.02 Positive Protection and Temporary Traffic Barriers

Support:

01 Temporary traffic barriers, including portable or movable barriers, are devices designed to help prevent penetration by vehicles while minimizing injuries to vehicle occupants, and to protect workers, bicyclists, and pedestrians.

*Guidance:*

02 *Except as otherwise required, at a minimum, longitudinal traffic barriers and/or other positive protection devices should be considered in work zone situations that place workers at increased risk from motorized traffic, and where positive protection devices offer the highest potential for improved safety for workers and road users.*

Support:

03 Considerations for positive protection include, but are not limited to, the following circumstances:

A. Work zones that provide workers no means of escape from motorized traffic such as tunnels or bridges;
B. Long-term stationary work zones of two weeks or more resulting in substantial worker exposure to motorized traffic;
C. Projects with anticipated operating speeds of 45 mph or greater, especially when combined with high traffic volumes;
D. Work operations that place workers, pedestrians, or bicyclists close to travel lanes open to traffic; and
E. Roadside hazards, such as drop-offs or unfinished bridge decks, that will remain in place overnight or longer.

04 Work zone setups vary depending on the nature of the positive protection used.

05 23 CFR Part 630.1108(a) contains additional requirements for certain projects.

Option:

06 Temporary traffic barriers may be used to separate two-way vehicular traffic.

**Standard:**

07 **Temporary traffic barriers shall be supplemented with standard delineation, pavement markings, or channelizing devices for improved daytime and nighttime visibility if they are used to channelize vehicular traffic. The delineation color shall match the applicable pavement marking color.**

08 **Temporary traffic barriers, including their end treatments, shall be crashworthy (see definition in Section 1C.02).**

09 **Short intermittent segments of temporary traffic barrier shall not be used because they nullify the containment and redirective capabilities of the temporary traffic barrier, increase the potential for serious injury both to vehicle occupants and pedestrians, and encourage the presence of blunt leading ends. Adjacent temporary traffic barrier segments shall be properly connected in order to provide the overall strength required for the temporary traffic barrier to perform properly.**

Option:

10 Steady-burn warning lights (see Section 6L.07) may be mounted on temporary traffic barrier installations.

10a Side reflectors or top mounted reflectors (facing the road user) may be used on temporary traffic barriers.

*Guidance:*

10b *If used, the spacing of these reflectors should not exceed a distance in feet equal to 1.0 times the speed limit in mph through the TTC zone.*

Support:

11 Temporary traffic barrier includes portable concrete, portable steel, or movable barrier which can all be moved laterally and/or longitudinally when needed and/or from site to site. More specific information on the use of temporary traffic barriers is contained in Chapters 8 and 9 of "Roadside Design Guide," 4th Edition, 2011, AASHTO.

12 More specific information on the use of portable barriers can be obtained from Caltrans' Standard Plans and Standard Specifications. Refer to Section 1A.05 for information regarding these publications.

## Section 6M.03 Temporary Raised Islands

**Standard:**

01 **Temporary raised islands shall be used only in combination with pavement striping and other suitable channelizing devices.**

Option:

02 A temporary raised island may be used to separate vehicular traffic flows in two-lane, two-way operations on roadways having a vehicular traffic volume range of 4,000 to 15,000 average daily traffic (ADT) and on freeways having a vehicular traffic volume range of 22,000 ADT to 60,000 ADT.

03 Temporary raised islands also may be used in other than two-lane, two-way operations where physical separation of vehicular traffic from the TTC zone is not required.

*Guidance:*

04 *Temporary raised islands should have the basic dimensions of 4 inches high by at least 12 inches wide and have rounded or chamfered corners.*

05 *The temporary raised islands should not be designed in such a manner that they would cause a motorist to lose control of the vehicle if the vehicle inadvertently strikes the temporary raised island. If struck, pieces of the island should not be dislodged to the extent that they could penetrate the occupant compartment or involve other vehicles.*

**Standard:**

06 **At pedestrian crossing locations, temporary raised islands shall have an opening or be shortened to provide at least a 60-inch wide passageway for the crossing pedestrian.**

## Section 6M.04 Detectable Edging for Pedestrians

Support:

01 Individual channelizing devices, tape or rope used to connect individual devices, other discontinuous barriers and devices, and pavement markings are not detectable by persons with vision disabilities and are incapable of providing detectable path guidance on temporary or realigned sidewalks or other pedestrian facilities.

*Guidance:*

02 *A continuously-detectable edging should be provided throughout the length of a temporary pedestrian facility such that it can be followed by pedestrians using long canes for guidance. This edging should extend at least 8 inches above the surface of the sidewalk or pathway, with the bottom of the edging a maximum of 2 inches above the surface. This edging should be continuous throughout the length of the facility except for gaps at locations where pedestrians or vehicles will be turning or crossing. This edging should consist of a prefabricated or formed-in-place curbing or other continuous device that is placed along the edge of the sidewalk or walkway. This edging should be firmly attached to the ground or to other devices. Adjacent sections of this edging should be interconnected such that the edging is not displaced by pedestrian or vehicular traffic or work operations, and such that it does not constitute a hazard to pedestrians, workers, or other road users.*

Support:

03 Examples of detectable edging for pedestrians include:

A. Prefabricated lightweight sections of plastic, metal, or other suitable materials that are interconnected and fixed in place to form a continuous edge.
B. Prefabricated lightweight sections of plastic, metal, or other suitable materials that are interconnected, fixed in place, and placed at ground level to provide a continuous connection between channelizing devices located at intervals along the edge of the sidewalk or walkway.
C. Sections of lumber interconnected and fixed in place to form a continuous edge.
D. Formed-in-place asphalt or concrete curb.
E. Prefabricated concrete curb sections that are interconnected and fixed in place to form a continuous edge.
F. Continuous temporary traffic barrier or longitudinal channelizing barricades placed along the edge of the sidewalk or walkway that provides a pedestrian edging at ground level.
G. Chain link or other fencing equipped with a continuous bottom rail.

*Guidance:*

04 Detectable pedestrian edging should be orange, white, or yellow and should match the color of the adjacent channelizing devices or traffic control devices, if any are present.

05 *If prefabricated edging is used to separate pedestrians and vehicular traffic, such edging should be certified as crashworthy (refer to Sections 6A.03-04). If section of lumber is used to form a railing system, any part of the railing that is more than 3 feet above pavement should be treated lumber and cause no harm to bare hand touching it.*

## Section 6M.05 Crash Cushions

Support:

01 Crash cushions are systems that mitigate the effects of errant vehicles that strike obstacles, either by smoothly decelerating the vehicle to a stop when hit head-on, or by redirecting the errant vehicle. The two types of crash cushions that are used in TTC zones are stationary crash cushions and truck-mounted attenuators. Crash cushions in TTC zones help protect the drivers from the exposed ends of barriers, fixed objects, shadow vehicles, and other obstacles. Specific information on the use of crash cushions can be found in "Roadside Design Guide," 4th Edition, 2011, AASHTO.

**Standard:**

02 **Crash cushions shall be crashworthy (see definition in Section 1C.02). They shall also be designed for each application to stop or redirect errant vehicles under prescribed conditions. Crash cushions shall be periodically inspected to verify that they have not been hit or damaged. Damaged crash cushions shall be promptly repaired or replaced to maintain their crashworthiness.**

Support:

03 Stationary crash cushions are used in the same manner as permanent highway installations to protect drivers from the exposed ends of barriers, fixed objects, and other obstacles.

**Standard:**

04 **Stationary crash cushions shall be designed for the specific application intended.**

05 **Truck-mounted attenuators shall be energy-absorbing devices attached to the rear of shadow trailers or trucks and shall be used in accordance with the manufacturer's specifications. If used, the shadow vehicle with the attenuator shall be located in advance of the work area, workers, or equipment to reduce the severity of rear-end crashes from errant vehicles.**

Support:

06 Trucks or trailers are often used as shadow vehicles to protect workers or work equipment from errant vehicles. These shadow vehicles are normally equipped with flashing arrows, changeable message signs, and/or high-intensity rotating, flashing, oscillating, or strobe lights and are located properly in advance of the workers and/or equipment that they are protecting. However, these shadow vehicles might themselves cause injuries to occupants of the errant vehicles if they are not equipped with truck-mounted attenuators.

*Guidance:*

07 *The shadow truck should be positioned a sufficient distance in advance of the workers or equipment being protected so that there will be sufficient distance, but not so much so that errant vehicles will travel around the shadow truck and strike the protected workers and/or equipment.*

Support:

08 Chapter 9 of "Roadside Design Guide," 4th Edition, 2011, AASHTO contains additional information regarding the use of shadow vehicles.

09 Information about designs and types of crash cushions currently approved for use on State highways is available from Caltrans' Division of Traffic Operations in Sacramento.

10 More specific information on the use of crash cushions can be obtained from Caltrans' Standard Plans, Standard Specifications and Traffic Safety Systems Manual. Refer to Section 1A.05 for information regarding these publications.

## Section 6M.06 Rumble Strips

Support:

01 Transverse rumble strips consist of intermittent, narrow, transverse areas of rough-textured or slightly-raised or depressed road surface that extend across the travel lanes to alert drivers to unusual vehicular traffic conditions. Through noise and vibration they attract the driver's attention to such features as unexpected changes in alignment and to conditions requiring a stop.

02 Longitudinal rumble strips consist of a series of rough-textured or slightly-raised or depressed road surfaces located along the shoulder to alert road users that they are leaving the travel lanes.

Option:

02a Portable transverse rumble strips may be used for flagging operations, as they are easy to set out, remove and/or relocate.

**Standard:**

03 **If it is desirable to use a color other than the color of the pavement for a longitudinal rumble strip, the color of the rumble strip shall be the same color as the longitudinal line the rumble strip supplements.**

04 **If the color of a transverse rumble strip used within a travel lane is not the color of the pavement, the color of the rumble strip shall be white, black, or orange.**

04a **The color of a portable transverse rumble strip used within a travel lane shall be black or orange.**

Support

04b The height of the portable transverse rumble strip shall be from 5/8 to 3/4 inch, including the height of adhesives, if used. The width of each portable transverse rumble strip shall not be less than 12 inches, nor more than 13 inches. Each portable transverse rumble strip shall be at least 10 feet long and shall have a minimum weight of 105 lbs.

Option:

05 Intervals between transverse rumble strips may be reduced as the distance to the approached conditions is diminished in order to convey an impression that a closure speed is too fast and/or that an action is imminent. A RUMBLE STRIPS (C45(CA)) sign warning drivers of the onset of rumble strips may be placed in advance of any transverse rumble strip installation.

*Guidance:*

06 *Transverse rumble strips should be placed transverse to vehicular traffic movement. They should not adversely affect overall pavement skid resistance under wet or dry conditions.*

07 *In urban areas, even though a closer spacing might be warranted, transverse rumble strips should be designed in a manner that does not promote unnecessary braking or erratic steering maneuvers by road users.*

08 *Transverse rumble strips should not be placed on sharp horizontal or vertical curves.*

09 *Rumble strips should not be placed through pedestrian crossings or on bicycle routes.*

10 *Transverse rumble strips should not be placed on roadways used by bicyclists unless a minimum clear path of 4 feet is provided at each edge of the roadway or on each paved shoulder.*

11 *Longitudinal rumble strips should not be placed on the shoulder of a roadway that is used by bicyclists unless a minimum clear path of 4 feet is also provided on the shoulder.*

12 *If used for flagging operation, 2 arrays (1 array is a single group or set) of portable transverse rumble strips should be placed transverse to the vehicular traffic movement in advance of and approach to each flagger station. Each array should consist of 3 rumble strips spaced no less than 6 feet and no more than 10 feet apart. The 1st array should be placed adjacent to the ONE LANE ROAD AHEAD (W20-4) sign and the 2nd array should be placed adjacent to the Flagger symbol W20-7 sign. Refer to Figure 6P-10.*

**Standard:**

13 **If portable transverse rumble strips are used for flagging operations, the RUMBLE STRIPS (C45(CA)) sign shall be placed half way between the ROAD WORK AHEAD (W20-1) sign and the ONE LANE ROAD AHEAD (W20-4) (refer to Figure 6P-10.**

14 **If the portable transverse rumble strips become out of alignment (skewed) by more than 6 inches, measured from one end to the other, they shall be readjusted to bring the placement back to the original location.**

## Section 6M.07 Screens

Support:

01 Screens are used to block the road users' view of activities that can be distracting. Screens might improve safety and motor vehicle traffic flow where volumes approach the roadway capacity because they discourage gawking and reduce headlight glare from oncoming motor vehicle traffic.

*Guidance:*

02 *Screens should not be mounted where they could adversely restrict road user visibility and sight distance and adversely affect the operation of vehicles.*

Option:

03 Screens may be mounted on the top of temporary traffic barriers that separate two-way motor vehicle traffic.

03a Temporary traffic screen may be mounted on top of temporary traffic barriers, when barriers are used in transition and crossover areas for glare-control on high-volume roadways.

*Guidance:*

03b *If used, temporary traffic screen panels should be a minimum of 24 inches in height.*

04 *Design of screens should be in accordance with Chapter 9 of "Roadside Design Guide," 4th Edition, 2011, AASHTO.*

## Section 6M.08 Lighting for Night Work

Support:

01 Utility, maintenance, or construction activities on highways are frequently conducted during nighttime periods when vehicular traffic volumes are lower. Large construction projects are sometimes operated on a double-shift basis requiring night work (see Section 6N.18).

**Standard:**

01a **Highway construction work lighting shall be as per Construction Safety Order 1523 (California Code of Regulations Title 8, Division 1, Chapter 4, Subchapter 4, Article 3, § 1523 - Illumination). See Section 1A.05 for information regarding this publication.**

*Guidance:*

02 *When nighttime work is being performed, floodlights should be used to illuminate the work area, equipment crossings, and other areas.*

03 *When used, floodlighting should be installed in a manner that minimizes glare to approaching road users, flaggers, or workers.*

04 *The adequacy of the floodlight placement and elimination of potential glare should be determined by driving through and observing the floodlighted area from each direction on all approaching roadways after the initial floodlight setup, at night, and periodically. Lighting should be sufficient so as to give road users the capability to identify a worker as a person. Care should be taken to minimize the potential for shadows to conceal workers within the work area.*

Support:

05 Desired illumination levels vary depending upon the nature of the task involved. An average horizontal luminance of ~~5 foot candles~~ 10-foot candles (108 lux) can be adequate for general activities. Tasks requiring high levels of precision and extreme care can require an average horizontal luminance of 20 foot candles.

**Standard:**

06 **Except in emergency situations, flagger stations shall be illuminated at night.**

# CHAPTER 6N. TYPES OF TEMPORARY TRAFFIC CONTROL ZONE ACTIVITIES

## Section 6N.01 Work Duration

Support:

01 Work duration is a major factor in determining the number and types of devices used in TTC zones. The duration of a TTC zone is defined relative to the length of time a work operation occupies a spot location.

**Standard***:*

02 **The five categories of work duration and their time at a location shall be defined as follows:**

- **A. Long-term stationary is work that occupies a location more than 3 days.**
- **B. Intermediate-term stationary is work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than 1 hour.**
- **C. Short-term stationary is daytime work that occupies a location for more than 1 hour within a single daylight period.**
- **D. Short duration is work that occupies a location up to 1 hour.**
- **E. Mobile is work that moves intermittently or continuously.**

Support:

03 At long-term stationary TTC zones, there is ample time to install and realize benefits from the full range of TTC procedures and devices that are available for use. Larger channelizing devices, temporary roadways, and temporary traffic barriers are frequently used.

**Standard:**

04 **Since long-term operations extend into nighttime, retroreflective and/or illuminated devices shall be used in long-term stationary TTC zones.**

Support:

05 In intermediate-term stationary TTC zones, it might not be feasible or practical to use procedures or devices that would be desirable for long-term stationary TTC zones, such as altered pavement markings, temporary traffic barriers, and temporary roadways. The increased time to place and remove these devices in some cases could significantly lengthen the project, thus increasing exposure time.

**Standard:**

06 **Since intermediate-term operations extend into nighttime, retroreflective and/or illuminated devices shall be used in intermediate-term stationary TTC zones.**

Support:

07 Most maintenance and utility operations are short-term stationary work.

08 As compared to stationary operations, mobile and short-duration operations are activities that might involve different treatments. Devices having greater mobility might be necessary such as signs mounted on trucks. Devices that are larger, more imposing, or more visible can be used effectively and economically. The mobility of the TTC zone is important.

*Guidance:*

09 *Safety in short-duration or mobile operations should not be compromised by using fewer devices simply because the operation will frequently change its location.*

Support:

10 During short-duration work, it often takes longer to set up and remove the TTC zone than to perform the work. Workers face hazards in setting up and taking down the TTC zone. Also, since the work time is short, delays affecting road users are significantly increased when additional devices are installed and removed.

Option:

11 Considering these factors, simplified control procedures may be warranted for short-duration work. A reduction in the number of devices may be offset by the use of other more dominant devices such as high- intensity rotating, flashing, oscillating, or strobe lights on work vehicles.

Support:

12 Mobile operations often involve frequent short stops for activities such as litter cleanup, pothole patching, or utility operations, and are similar to short-duration operations.

Option:

13 Flags and/or channelizing devices may additionally be used and moved periodically to keep them near the mobile work area.

14 Flaggers may be used for mobile operations that often involve frequent short stops. Support:

15 Mobile operations also include work activities where workers and equipment move along the road without stopping, usually at slow speeds. The advance warning area moves with the work area.

*Guidance:*

16 *When mobile operations are being performed, a shadow vehicle equipped with an arrow board or a sign should follow the work vehicle, especially when vehicular traffic speeds or volumes are high. Where feasible, warning signs should be placed along the roadway and moved periodically as work progresses.*

17 *To avoid high-volume conditions, consideration should be given to scheduling mobile operations work during off-peak hours.*

18 *If there are mobile operations on a high-speed travel lane of a multi-lane divided highway, arrow boards and/or Portable Changeable Message Signs should be used.*

**Standard:**

19 **Mobile operations shall have appropriate devices on the equipment (that is, high-intensity rotating, flashing, oscillating, or strobe lights, signs, or special lighting), or shall use a separate vehicle with appropriate warning devices. Although vehicle hazard warning lights are permitted to be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights, they shall not be used instead of these devices.**

Option:

20 For mobile operations that move at speeds of less than 3 mph, mobile signs or stationary signing that is periodically retrieved and repositioned in the advance warning area may be used.

Support:

21 A rolling roadblock is a method of TTC used to slow or stop traffic as a means of temporarily removing traffic from a roadway segment downstream of the road block. The rolling roadblock closes all lanes of traffic by using pacing vehicles to create a gap so that construction activities can be performed. Rolling roadblocks are used where long-term road closures using TTC devices are not needed. A rolling roadblock consists of one blocking/pacing vehicle per lane of traffic, a clearing vehicle, and an advance warning vehicle. The rolling roadblock is normally performed by law enforcement officers during off-peak hours.

## Section 6N.02 Location of Work

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 The choice of TTC needed for a TTC zone depends upon where the work is located. As a general rule, the closer the work is to road users (including bicyclists and pedestrians), the greater the number of TTC devices that are needed. Procedures are described later in this Chapter for establishing TTC zones in the following locations:

A. Outside the shoulder,
B. On the shoulder with no encroachment,
C. On the shoulder with minor encroachment,
D. Within the median, and
E. Within the traveled way.

**Standard:**

03 **When the work space is within the traveled way, except for short-duration and mobile operations, advance warning shall provide a general message that work is taking place and shall supply information about highway conditions. TTC devices shall clearly delineate the path roadway users are to follow through the TTC zone.**

## Section 6N.03 Modifications To Fulfill Special Needs

Support:

01 The typical applications in Chapter 6P illustrate commonly encountered situations in which TTC devices are employed.

Option:

02 Other devices may be added to supplement the devices provided in the typical applications, and device spacing may be adjusted to provide additional reaction time. When conditions are less complex than those depicted in the typical applications, fewer devices may be needed.

*Guidance:*

03 *When conditions are more complex, typical applications should be modified by giving particular attention to the provisions set forth in Chapter 6A and by incorporating appropriate devices and practices from the following list:*

- *A. Additional devices:*
  1. *Signs*
  2. *Arrow boards*
  3. *More channelizing devices at closer spacing (see Section 6M.04 for information regarding detectable edging for pedestrians)*
  4. *Temporary raised pavement markers*
  5. *High-level warning devices*
  6. *Portable changeable message signs*
  7. *Temporary traffic control signals (including accessible pedestrian signals where not otherwise required)*
  8. *Temporary traffic barriers*
  9. *Crash cushions*
  10. *Screens*
  11. *Rumble strips*
  12. *More delineation*
- *B. Upgrading of devices:*
  1. *A full complement of standard pavement markings*
  2. *Brighter and/or wider pavement markings*
  3. *Larger and/or brighter signs*
  4. *Channelizing devices with greater conspicuity*
  5. *Temporary traffic barriers in place of channelizing devices*
- *C. Improved geometrics at detours or crossovers*
- *D. Increased distances:*
  1. *Longer advance warning area*
  2. *Longer tapers*
- *E. Lighting:*
  1. *Temporary roadway lighting*
  2. *Steady-burn lights used with channelizing devices*
  3. *Flashing lights for isolated hazards*
  4. *Illuminated signs*
  5. *Floodlights*
- *F. Pedestrian routes and temporary facilities*
- *G. Bicycle diversions and temporary facilities*

## Section 6N.04 Work Affecting Pedestrian and Bicycle Facilities

Support:

01 It is not uncommon, particularly in urban areas, that road work and the associated TTC will affect existing pedestrian or bicycle facilities. It is essential that the needs of all road users, including pedestrians with disabilities, are considered in TTC zones.

02 In addition to specific provisions identified in Sections 6N.05 through 6N.13, there are a number of provisions that might be applicable for all of the types of activities identified in this Chapter.

*Guidance:*

03 *Where pedestrian or bicyclist usage is high, the typical applications should be modified by giving particular attention to the provisions set forth in Chapter 6C, this Chapter, Sections 6K.02 and 6M.04, and in other Sections of*

*Part 6 related to accessibility and detectability provisions in TTC zones.*

04 *Pedestrians should be separated from the worksite by appropriate devices that maintain the accessibility and detectability for pedestrians with disabilities.*

05 *Bicyclists and pedestrians should not be exposed to unprotected excavations, open utility access, overhanging equipment, or other such conditions.*

06 *Except for - and mobile operations, when a highway shoulder is occupied, a SHOULDER WORK (W21-5) sign, a SHOULDER CLOSED C30A(CA) sign, or other similar signs should be placed in advance of the activity area. When work is performed on a paved shoulder 8 feet or more in width, channelizing devices should be placed on a taper having a length that conforms to the requirements of a shoulder taper. Signs should be placed such that they do not narrow any existing pedestrian passages to less than 48 inches.*

Support:

06a Refer to FHWA's List of Known Errors for error in Paragraph 6 text. Refer to Section 1A.04 for more details.

*Guidance:*

06b *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01), information and devices contained in Figures 6P-19(CA), 6P-47 through 6P-51(CA), and 6P-101(CA) as appropriate per situation encountered, should be used in order to replicate existing conditions for the needs and control of bicyclists through a TTC zone.*

06c *Except for short durations and mobile operations (refer to Section 6N.01), when a highway shoulder is occupied and bicyclists would be sharing a lane with vehicular traffic, as a result of the TTC zone, a combination of Bicycle crossing (W11-1) and IN ROAD (W16-1P) plaque should be placed in advance of the activity area. When work is performed on a paved shoulder 8 feet or more in width, channelizing devices should be placed on a taper having a length that conforms to the requirements of a shoulder taper. Signs should be placed such that they do not block the bicyclist's path of travel and they do not narrow any existing pedestrian passages to less than 48 inches.*

07 *Pedestrian detours should be avoided since pedestrians rarely observe them and the cost of providing accessibility and detectability might outweigh the cost of maintaining a continuous route. Whenever possible, work should be done in a manner that does not create a need to detour pedestrians from existing routes or crossings.*

**Standard:**

08 **Where pedestrian routes are closed, alternate pedestrian routes shall be provided.**

09 **When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**

Option:

09b If establishing or maintaining an alternate pedestrian route is not feasible during the project, an alternate means of providing for pedestrians may be used, such as adding free bus service around the project or assigning a person the responsibility to assist pedestrians with disabilities through the project limits. Refer to Section 6C.02 for details.

*Guidance:*

10 *The continuity of a bikeway should be maintained through the TTC zone if practical.*

Support:

11 The continuity of a bikeway through the TTC zone is particularly important where bicyclists have been traveling on a shoulder, bicycle lane, or shared-use path adjacent to a general-purpose lane (having a speed limit greater than or equal to 35 miles per hour) and there would be a significant safety concern if bicyclists were to share that general-purpose lane through the TTC zone.

12 On roadways which are not bikeways but where bicyclists (when present) typically share lanes with motor vehicle traffic, the TTC plan and Typical Applications for general traffic will usually be adequate for bicyclists as well.

13 In order to maintain room for bicycle lanes through the TTC zone on a multi-lane roadway, one or more travel lanes could be closed.

*Guidance:*

14 *If a bikeway detour is unavoidable, it should be as short and direct as practical.*

15 *On-road bicyclists should not be directed onto a path or sidewalk intended for pedestrian use except where such a path or sidewalk is a shared-use path, or where no practical alternative is available (such as might be the case on a bridge in the course of a rehabilitation project).*

16 *If a portion of a bikeway is to be closed due to construction activities and the detoured bikeway follows a complex path not in the original bikeway corridor, then a full detour plan should be developed and implemented. The TTC for the*

*detour of the bikeway should include all necessary advance warning (W21 series) signs, detour (W4-9 series) signs, and any other TTC devices necessary to guide bicyclists along the detour route.*

Support:

17 Figures 6P-47 through 6P-51 provide examples and contain additional information for accommodating bicycles through or around typical TTC zones.

Option*:*

18 If an on-street bikeway had a wide travel lane or lanes in which bicyclists traveled side by side with motor vehicles prior to construction, and construction activities reduce the lane width(s) to less than 14 feet through the TTC zone, then the BICYCLISTS ALLOWED USE OF FULL LANE (R9-20) sign may be used.

**Standard:**

19 **The minimum TTC sign and plaque sizes for shared-use paths shall conform to those shown in Table 9A-1. The minimum TTC sign and plaque sizes for on-street bikeways shall conform to Chapters 6G, 6H, and 6I.**

## Section 6N.05 Work Outside of the Shoulder

Support:

01 When work is being performed beyond the shoulders, but within the right-of-way, little or no TTC might be needed. TTC generally is not needed where work is confined to an area 15 feet or more from the edge of the traveled way. However, TTC is appropriate where distracting situations exist, such as vehicles parked on the shoulder, vehicles accessing the worksite via the highway, and equipment traveling on or crossing the roadway to perform the work operations (for example, mowing). A typical application for work beyond the shoulder is shown in Figure 6P-1.

*Guidance:*

02 *Where the situations described in Paragraph 1 of this Section exist, a single warning sign, such as ROAD WORK AHEAD (W20-1) or Workers (W21-1) sign, should be used. If the equipment travels on the roadway, the equipment should be equipped with appropriate flags, high-intensity rotating, flashing, oscillating, or strobe lights, and/or a SLOW MOVING VEHICLE (W21-4) sign.*

03 *If work vehicles are on the shoulder, a SHOULDER WORK (W21-5) sign should be used.*

04 *A general warning sign like ROAD MACHINERY AHEAD (W21-3) should be used if workers and equipment must occasionally move onto the shoulder.*

Option:

05 For mowing operations, the sign MOWING AHEAD (W21-8) may be used.

06 Where the activity is spread out over a distance of more than 2 miles, the SHOULDER WORK (W21- 5) sign may be repeated every 1 mile.

07 A supplementary plaque with the message NEXT XX MILES (W7-3aP) may be used.

## Section 6N.06 Work on the Shoulder with No Encroachment

Support:

01 The provisions of this Section apply to short-term through long-term stationary operations.

**Standard:**

02 **When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct motor vehicle traffic to remain within the traveled way.**

*Guidance:*

03 *When paved shoulders having a width of 8 feet or more are closed on freeways and expressways, road users should be warned about potential disabled vehicles that cannot get off the traveled way. An initial general warning sign, such as ROAD WORK AHEAD (W20-1), should be used, followed by a RIGHT or LEFT SHOULDER CLOSED (W21-5a) sign. Where the downstream end of the shoulder closure extends beyond the distance that can be perceived by road users, a supplementary plaque bearing the message NEXT XX FEET (W16-4P) or MILES (W7-3aP) should be placed below the SHOULDER CLOSED (W21-5a) sign. On multi-lane, divided highways, signs advising of shoulder work or the condition of the shoulder should be placed only on the side of the affected shoulder.*

04 *When an improved shoulder is closed on a high-speed roadway, it should be treated as a closure of a portion of the road system because road users expect to be able to use it in emergencies. Road users should be given ample advance warning that shoulders are closed for use as refuge areas throughout a specified length of the approaching TTC zone.*

*The sign(s) should read SHOULDER CLOSED (W21-5a) with distances indicated. The work space on the shoulder should be closed off by a taper or channelizing devices with a length of ⅓ L using the formulas in Tables 6B-3, 6B-3(CA) and 6B-4.*

05 *When the shoulder is not occupied but work has adversely affected its condition, the LOW SHOULDER (W8-9) or SOFT SHOULDER (W8-4) sign should be used, as appropriate.*

06 *Where the condition extends over a distance in excess of 1 mile, the sign should be repeated at 1-mile intervals.*

Option:

07 In addition, a supplementary plaque bearing the message NEXT XX MILES (W7-3aP) may be used. Support:

08 Temporary traffic barriers might be needed to inhibit encroachment of errant vehicles into the work space and to protect workers.

**Standard:**

09 **When used for shoulder work, arrow boards shall operate only in the caution mode.**

Support:

10 A typical application for stationary work operations on shoulders is shown in Figure 6P-3. A typical application for short-duration or mobile work on shoulders is shown in Figure 6P-4. A typical application for work on freeway shoulders is shown in Figure 6P-5.

## Section 6N.07 Work on the Shoulder with Minor Encroachment

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

*Guidance:*

02 *When work takes up part of a lane, vehicular traffic volumes, vehicle mix (buses, trucks, cars, and bicycles), speed, and capacity should be analyzed to determine whether the affected lane should be closed. Unless the lane encroachment permits a remaining lane width of 10 feet, the lane should be closed.*

03 *Truck off-tracking should be considered when determining whether the minimum lane width of 10 feet is adequate.*

Option:

04 Except on State highways, a ~~A~~ lane width of 9 feet may be used for short-term stationary work on low-volume, low-speed roadways when vehicular traffic does not include longer and wider heavy commercial vehicles.

Support:

05 Figure 6P-6 illustrates a method for handling vehicular traffic where the stationary or short-duration work space encroaches slightly into the traveled way.

## Section 6N.08 Work Within the Median

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

*Guidance:*

02 *If work in the median of a divided highway is within 15 feet from the edge of the traveled way for either direction of travel, TTC should be used through the use of advance warning signs and channelizing devices.*

## Section 6N.09 Work Within the Traveled Way of a Two-Lane Highway

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 Detour signs are used to direct road users onto another roadway. At diversions, road users are directed onto a temporary roadway or alignment placed within or adjacent to the right-of-way. Typical applications for detouring or diverting road users on two-lane highways are shown in Figures 6P-7, 6P-8, and 6P-9. Figure 6P- 7 illustrates the controls around an area where a section of roadway has been closed and a diversion has been constructed. Channelizing devices and pavement markings are used to indicate the transition to the temporary roadway.

*Guidance:*

03 *When a detour is long, Detour (M4-8, M4-9) signs should be installed to remind and reassure road users*

*periodically that they are still successfully following the detour.*

04 *When an entire roadway is closed, as illustrated in Figure 6P-8, a detour should be provided and road users should be warned in advance of the closure, which in this example is a closure 10 miles from the intersection. If local road users are allowed to use the roadway up to the closure, the ROAD CLOSED AHEAD, LOCAL TRAFFIC ONLY (R11-3a) sign should be used. The portion of the road open to local road users should have adequate signing, marking, and delineation.*

05 *Detours should be signed so that road users will be able to traverse the entire detour route and back to the original roadway as shown in Figure 6P-9.*

Support:

06 Techniques for controlling vehicular traffic under one-lane, two-way conditions are described in Section 6E.01.

Option:

07 Flaggers may be used as shown in Figure 6P-10.

08 STOP/YIELD sign control may be used on roads with low traffic volumes as shown in Figure 6P-11. 09

09 A temporary traffic control signal may be used as shown in Figure 6P-12.

Support:

10 Refer to CVC § 21363 for detour signs.

## Section 6N.10 Work Within the Traveled Way of an Urban Street

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 In urban TTC zones, decisions are needed on how to control vehicular traffic, such as how many lanes are required, whether any turns need to be prohibited at intersections, and how to maintain access to business, industrial, and residential areas.

03 Pedestrian traffic needs separate attention. Chapter 6C contains information regarding pedestrian movements near TTC zones.

**Standard:**

04 **If the TTC zone affects the movement of bicyclists, adequate access to the roadway or shared- use paths shall be provided (see Part 9).**

05 **Where transit stops are affected or relocated because of work activity, both pedestrian and vehicular access to the affected or relocated transit stops shall be provided.**

*Guidance:*

06 *If a designated bicycle route is closed because of the work being done, a signed alternate route should be provided. Bicyclists should not be directed onto the path used by pedestrians.*

07 *Worksites within the intersection should be protected against inadvertent pedestrian incursion by providing detectable channelizing devices.*

Support:

08 Utility work takes place both within and outside the roadway to construct and maintain services such as power, gas, light, water, or telecommunications. Operations often involve intersections, since that is where many of the network junctions occur. The work force is usually small, only a few vehicles are involved, and the number and types of TTC devices placed in the TTC zone is usually minimal.

*Guidance:*

09 *As discussed under short-duration projects, however, the reduced number of devices in utility TTC zones should be offset by the use of high-visibility devices, such as high-intensity rotating, flashing, oscillating, or strobe lights on work vehicles or high-level warning devices.*

Support:

10 Figures 6P-6, 6P-10, 6P-15, 6P-18, 6P-21, 6P-22, 6P-23, 6P-26, and 6P-33 are examples of typical applications for utility operations. Other typical applications might apply as well.

## Section 6N.11 Work Within the Traveled Way of a Multi-Lane, Non-Access Controlled Highway

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when

pedestrian or bicycle facilities are affected by the worksite.

02 Work on multi-lane (two or more lanes of moving motor vehicle traffic in one direction) highways is divided into right-lane closures, left-lane closures, interior-lane closures, multiple-lane closures, and closures on five-lane roadways.

**Standard:**

03 **When a lane is closed on a multi-lane road for other than a mobile operation, a transition area containing a merging taper shall be used.**

*Guidance:*

04 *When justified by an engineering study, temporary traffic barriers (see Section 6K.09) should be used to prevent incursions of errant vehicles into hazardous areas or work space.*

Support:

05 Figure 6P-34 illustrates a lane closure in which temporary traffic barriers are used.

Option:

06 When the right-hand lane is closed, TTC similar to that shown in Figure 6P-33 may be used for undivided or divided four-lane roads.

*Guidance:*

07 *If morning and evening peak hour vehicular traffic volumes in the two directions are uneven and the greater volume is on the side where the work is being done in the right-hand lane, consideration should be given to closing the inside lane for opposing vehicular traffic and making the lane available to the side with heavier vehicular traffic, as shown in Figure 6P-31.*

08 *If the larger vehicular traffic volume changes to the opposite direction at a different time of the day, the TTC should be changed to allow two lanes for opposing vehicular traffic by moving the devices from the opposing lane to the center line. When it is necessary to create a temporary center line that is not consistent with the pavement markings, channelizing devices should be used and closely spaced.*

Option:

09 When closing a left-hand lane on a multi-lane undivided road, as vehicular traffic flow permits, the two interior lanes may be closed, as shown in Figure 6P-30, to provide drivers and workers additional lateral clearance and to provide access to the work space.

**Standard:**

10 **When only the left-hand lane is closed on undivided roads, channelizing devices shall be placed along the center line as well as along the adjacent lane.**

*Guidance:*

11 *When an interior lane is closed, an adjacent lane should also be considered for closure to provide additional space for vehicles and materials and to facilitate the movement of equipment within the work space.*

12 *When multiple lanes in one direction are closed, a capacity analysis should be made to determine the number of lanes needed to accommodate motor vehicle traffic needs. Vehicular traffic should be moved over one lane at a time. As shown in Figure 6P-37, the tapers should be separated by a distance of 2L, with L being determined by the formulas in Tables 6B-3, 6B-3(CA) and 6B-4.*

Option:

13 If operating speeds are 40 mph or less and the space approaching the work area does not permit moving traffic over one lane at a time, a single continuous taper may be used.

**Standard:**

14 **When a directional roadway is closed, inapplicable WRONG WAY signs and markings, and other existing traffic control devices at intersections within the temporary two-lane, two-way operations section shall be covered, removed, or obliterated.**

Option:

15 When half the road is closed on an undivided highway, both directions of vehicular traffic may be accommodated as shown in Figure 6P-32. When both interior lanes are closed, temporary traffic controls may be used as provided in Figure 6P-30. When a roadway must be closed on a divided highway, a median crossover may be used (see Section 6N.15).

Support:

16 TTC for lane closures on five-lane roads is similar to other multi-lane undivided roads. Figure 6P-32 can be adapted for use on five-lane roads. Figure 6P-35 can be used on a five-lane road for short duration and mobile operations.

## Section 6N.12 Work Within the Traveled Way at an Intersection

Support:

01 Chapter 6C and Sections 6M.04 and 6N.04 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 The typical applications for intersections are classified according to the location of the work space with respect to the intersection area (as defined by the extension of the curb or edge lines). The three classifications are near side, far side, and in-the-intersection. Work spaces often extend into more than one portion of the intersection. For example, work in one quadrant often creates a near-side work space on one street and a far-side work space on the cross street. In such instances, an appropriate TTC plan is obtained by combining features shown in two or more of the intersection and pedestrian typical applications.

03 TTC zones in the vicinity of intersections might block movements and interfere with normal road user flows. Such conflicts frequently occur at more complex signalized intersections having such features as traffic signal heads over particular lanes, lanes allocated to specific movements, multiple signal phases, signal detectors for actuated control, and accessible pedestrian signals and detectors.

*Guidance:*

04 *The effect of the work upon signal operation should be considered, and temporary corrective actions should be taken, if necessary, such as revising signal phasing and/or timing to provide adequate capacity, maintaining or adjusting signal detectors, and relocating signal heads to provide adequate visibility as described in Part 4.*

**Standard:**

05 **When work will occur near an intersection where operational, capacity, or pedestrian accessibility problems are anticipated, the highway agency having jurisdiction shall be contacted.**

*Guidance:*

06 *For work at an intersection, advance warning signs, devices, and markings should be used on all cross streets, as appropriate. The typical applications depict urban intersections on arterial streets. Where the posted speed limit, the off-peak 85th-percentile speed prior to the work starting, or the anticipated speed exceeds 40 mph, additional warning signs should be used in the advance warning area.*

07 *Pedestrian crossings near TTC sites should be separated from the worksite by appropriate barriers that maintain the accessibility and detectability for pedestrians with disabilities.*

Support:

08 Near-side work spaces, as depicted in Figure 6P-21, are simply handled as a midblock lane closure. A problem that might occur with near-side lane closure is a reduction in capacity, which during certain hours of operation could result in congestion and back-ups.

Option:

09 When near-side work spaces are used, a mandatory turn lane may be used for through vehicular traffic.

10 Where space is restricted in advance of near-side work spaces, as with short block spacings, two warning signs may be used in the advance warning area, and a third action-type warning or a regulatory sign (such as Keep Left) may be placed within the transition area.

Support:

11 Far-side work spaces, as depicted in Figures 6P-22 through 6P-25, involve additional treatment because road users typically enter the activity area by straight-through and left-turn or right-turn movements.

*Guidance:*

12 *When a lane through an intersection must be closed on the far side, it should also be closed on the near-side approach to preclude merging movements within the intersection.*

Option:

13 If there are a significant number of vehicles turning from a near-side lane that is closed on the far side, the near-side lane may be converted to a mandatory turn lane.

Support:

14 Figures 6P-26 and 6P-27 provide guidance on applicable procedures for work performed within the intersection.

Option:

15 If the work is within the intersection, any of the following strategies may be used:

A. A small work space so that road users can move around it, as shown in Figure 6P-26;

B. Flaggers or uniformed law enforcement officers to direct road users, as shown in Figure 6P-27; and Figure 6P-52;

C. Work in stages so the work space is kept to a minimum; and
D. Road closures or upstream diversions to reduce road user volumes.

*Guidance:*

16 *Depending on road user conditions, a flagger(s) and/or a uniformed law enforcement officer(s) should be used to control road users.*

Support:

17 Figures 6P-52 through 6P-54 provide guidance on applicable procedures for work performed within a circular intersection.

## Section 6N.13 Work Within the Traveled Way of a Freeway or Expressway

Support:

01 Special conditions encountered where vehicular traffic must be moved through or around TTC zones on high-speed, high-volume roadways can pose challenges to the TTC. Although the general principles outlined in other Sections of this Manual are applicable to all types of highways, high-speed, access-controlled highways need special planning and attention in order to accommodate vehicular traffic while also protecting road users and workers. The traffic volumes, vehicle mix (buses, trucks, cars, and bicycles, if permitted), and speed of vehicles on these facilities require that careful TTC procedures be implemented, for example, to induce critical merging maneuvers well in advance of work spaces and in a manner that creates minimum turbulence and delay in the vehicular traffic stream.

02 When the roadway capacity is reduced as a result of lane closures, the demand might exceed the available capacity and result in either a lengthy stopped or slow moving queue of vehicles that might extend past the normal signs used in the typical advance warning area.

*Guidance:*

03 *An assessment of the expected queue length should be a part of the TTC plan design process and adjustments to the sign spacing and number of signs as well as the possibility of using more conspicuous devices should be considered to increase the distance and conspicuity of the advance warning area.*

Support:

04 One strategy often employed to mitigate the extended queue issue is to work during off peak hours or at night. When the work is limited to night hours, increased use of warning lights, illumination of work spaces, and intelligent advance warning systems might be necessary.

05 TTC for a typical lane closure where a queue is not anticipated to accumulate on a divided highway is shown in Figures 6P-33 and 6P-34. Temporary traffic controls for short duration and mobile operations on freeways are shown in Figure 6P-35. A typical application for shifting vehicular traffic lanes around a work space is shown in Figures 6P-36 and 6P-36(CA). TTC for multiple and interior lane closures on a freeway is shown in Figures 6P-37 and ~~6P-38~~. Caltrans' Standard Plan T10, T10A. Refer to Section 1A.05 for information regarding this publication.

~~*Guidance:*~~

06 ~~*The method for closing an interior lane when the open lanes have the capacity to carry vehicular traffic should be as shown in Figure 6P-37. When the capacity of the other lanes is needed, the method shown in Figure 6P-38 should be used.*~~

07 The temporary traffic controls for short duration and mobile operations on State highways are shown in Caltrans' Standard Plans T15, T16 and T17.

08 A typical layout of closing lanes to direct traffic around a workspace is shown in Caltrans' Standard Plans T10 through T14.

09 Refer to Section 1A.05 for information regarding this publication.

## Section 6N.14 Two-Lane, Two-Way Traffic on One Roadway of a Normally Divided Highway

Support:

01 Two-lane, two-way operation on one roadway of a normally divided highway is a typical procedure that requires special consideration in the planning, design, and work phases, because unique operational problems (for example, increasing the risk of head-on crashes) can arise with the two-lane, two-way operation.

**Standard:**

02 **When two-lane, two-way traffic control must be maintained on one roadway of a normally divided highway, opposing vehicular traffic shall be separated with either temporary traffic barriers (concrete safety-shape or approved alternate), channelizing devices, Narrow Two-Way Traffic (W6-4) signs on flexible supports (see**

**Section 6H.17), or a temporary raised island throughout the length of the two-way operation. The use of markings and complementary signing, by themselves, shall not be used.**

Support:

03 Figure 6P-39 shows the procedure for two-lane, two-way operation. Treatments for entrance and exit ramps within the two-way roadway segment of this type of work are shown in Figures 6P-40 and 6P-41.

04 A temporary traffic control zone in the entrance and exit ramps may be handled as shown in Caltrans' Standard Plans T10 and T14. Refer to Section 1A.05 for information regarding this publication.

## Section 6N.15 Crossovers

*Guidance:*

01 *The following are considered good guiding principles for the design of crossovers:*

- *A. Tapers for lane drops should be separated from the crossovers, as shown in Figure 6P-39.*
- *B. Crossovers should be designed for speeds no lower than 10 mph below the posted speed, the off-peak 85th-percentile speed prior to the work starting, or the anticipated operating speed of the roadway, unless unusual site conditions require that a lower design speed be used.*
- *C. A good array of channelizing devices, delineators, and full-length, properly placed pavement markings should be used to provide drivers with a clearly defined travel path.*
- *D. The design of the crossover should accommodate all vehicular traffic, including trucks and buses.*

Support:

02 Temporary traffic barriers and the excessive use of TTC devices cannot compensate for poor geometric and roadway cross-section design of crossovers.

## Section 6N.16 Interchanges

*Guidance:*

01 *Access to interchange ramps on limited-access highways should be maintained even if the work space is in the lane adjacent to the ramps. Access to exit ramps should be clearly marked and delineated with channelizing devices. For long-term projects, conflicting pavement markings should be removed and new ones placed. Early coordination with officials having jurisdiction over the affected cross streets and providing emergency services should occur before ramp closings.*

Option:

02 If access is not possible, ramps may be closed by using signs and Type 3 Barricades. As the work space changes, the access area may be changed, as shown in Figure 6P-42. A TTC zone in the exit ramp may be handled as shown in Figure 6P-43.

03 When a work space interferes with an entrance ramp, a lane may need to be closed on the freeway (see Figure 6P-44). A TTC zone in the entrance ramp may require shifting ramp vehicular traffic (see Figure 6P-44).

04 A temporary traffic control zone in the entrance and exit ramps may be handled as shown in Caltrans' Standard Plans T10 and T14. Refer to Section 1A.05 for information regarding this publication.

## Section 6N.17 Work in the Vicinity of a Grade Crossing

**Standard:**

01 **When grade crossings exist either within or in the vicinity of a TTC zone, lane restrictions, flagging, or other operations shall not create conditions where vehicles can be queued across the tracks. If the queuing of vehicles across the tracks cannot be avoided, a uniformed law enforcement officer or flagger shall be provided at the crossing to prevent vehicles from stopping on the tracks, even if automatic warning devices are in place.**

Support:

02 Figure 6P-46 shows work in the vicinity of a grade crossing.

03 Section 8A.13 contains additional information regarding TTC zones in the vicinity of grade crossings.

*Guidance:*

04 *Early coordination with the railroad company or transit agency should occur before work starts.*

## Section 6N.18 Work During Nighttime Hours

Support:

01 Section 6A.05 contains additional information regarding considerations for conducting work operations during nighttime hours.

*Guidance:*

02 *Considering the safety issues inherent to night work, consideration should be given to enhancing traffic controls (see Section 6N.03) to provide added visibility and driver guidance, and increased protection for workers.*

03 *In addition to the enhancements listed in Section 6N.03, consideration should be given to providing additional lights and retroreflective markings to workers, work vehicles, and equipment.*

Option:

04 Where reduced traffic volumes at night make it feasible, the entire roadway may be closed by detouring traffic to alternate facilities, thus removing the traffic risk from the activity area.

*Guidance:*

05 *Consideration should be given to stationing uniformed law enforcement officers and lighted patrol cars at night work locations where there is a concern that high speeds or impaired drivers might result in undue risks for workers or other drivers.*

**Standard:**

06 **Except in emergencies, temporary lighting shall be provided at all flagger stations used during nighttime work.**

Support:

06a Refer to Construction Safety Order in the California Code of Regulations (Title 8, Division 1, Chapter 4, Subchapter 4, Article 11, § 1599 - Flaggers). See Section 1A.05 for information regarding this publication.

07 Desired illumination levels vary depending upon the nature of the task involved. ~~An average horizontal luminance of 5 foot candles can be adequate for general activities~~. An average horizontal luminance of 10 foot candles can be adequate for general activities and activities around equipment. Tasks requiring high levels of precision and extreme care can require an average horizontal luminance of 20 foot candles.

**Standard:**

08 **Highway construction work lighting shall be as per Construction Safety Order 1523 (California Code of Regulations Title 8, Division 1, Chapter 4, Subchapter 4, Article 3, § 1523 - Illumination). See Section 1A.05 for information regarding this publication.**

## Section 6N.19 Late Merge

Support:

01 The Late Merge is designed to use all available lanes until the merge point is reached at the lane closure taper rather than merging as soon as possible into the open lane. The Late Merge addresses many of the challenges that are associated with traffic operations in advance of lane closures at TTC zones such as queue length, capacity, and driver satisfaction.

Option:

02 Late Merge systems may consist of static or portable changeable message signs.

*Guidance:*

*03 Static Late Merge signing should consist of the STAY IN LANE TO MERGE POINT (R9-4a) sign to be within the work zone or advance warning area and the MERGE HERE TAKE TURNS (W9-2a) sign (see Figure 6N-1).*

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

Option:

04 The following messages may be used on changeable message signs at an upstream location during the Late Merge application:


A. "STAY IN YOUR LANE/MERGE AHEAD"
B. "STAY IN YOUR LANE/MERGE AHEAD XX MILES"
C. "USE BOTH LANES/TO MERGE POINT"
D. "USE BOTH LANES/STOPPED TRAFFIC AHEAD
E. "SLOW TRAFFIC AHEAD/USE BOTH LANES"

Support:

05 The following messages are typically used on changeable message signs at the merge point during the Late Merge application:

A. "TAKE YOUR TURN/MERGE HERE"
B. "MERGE HERE/TAKE TURNS"

# Figure 6N-1. Late Merge

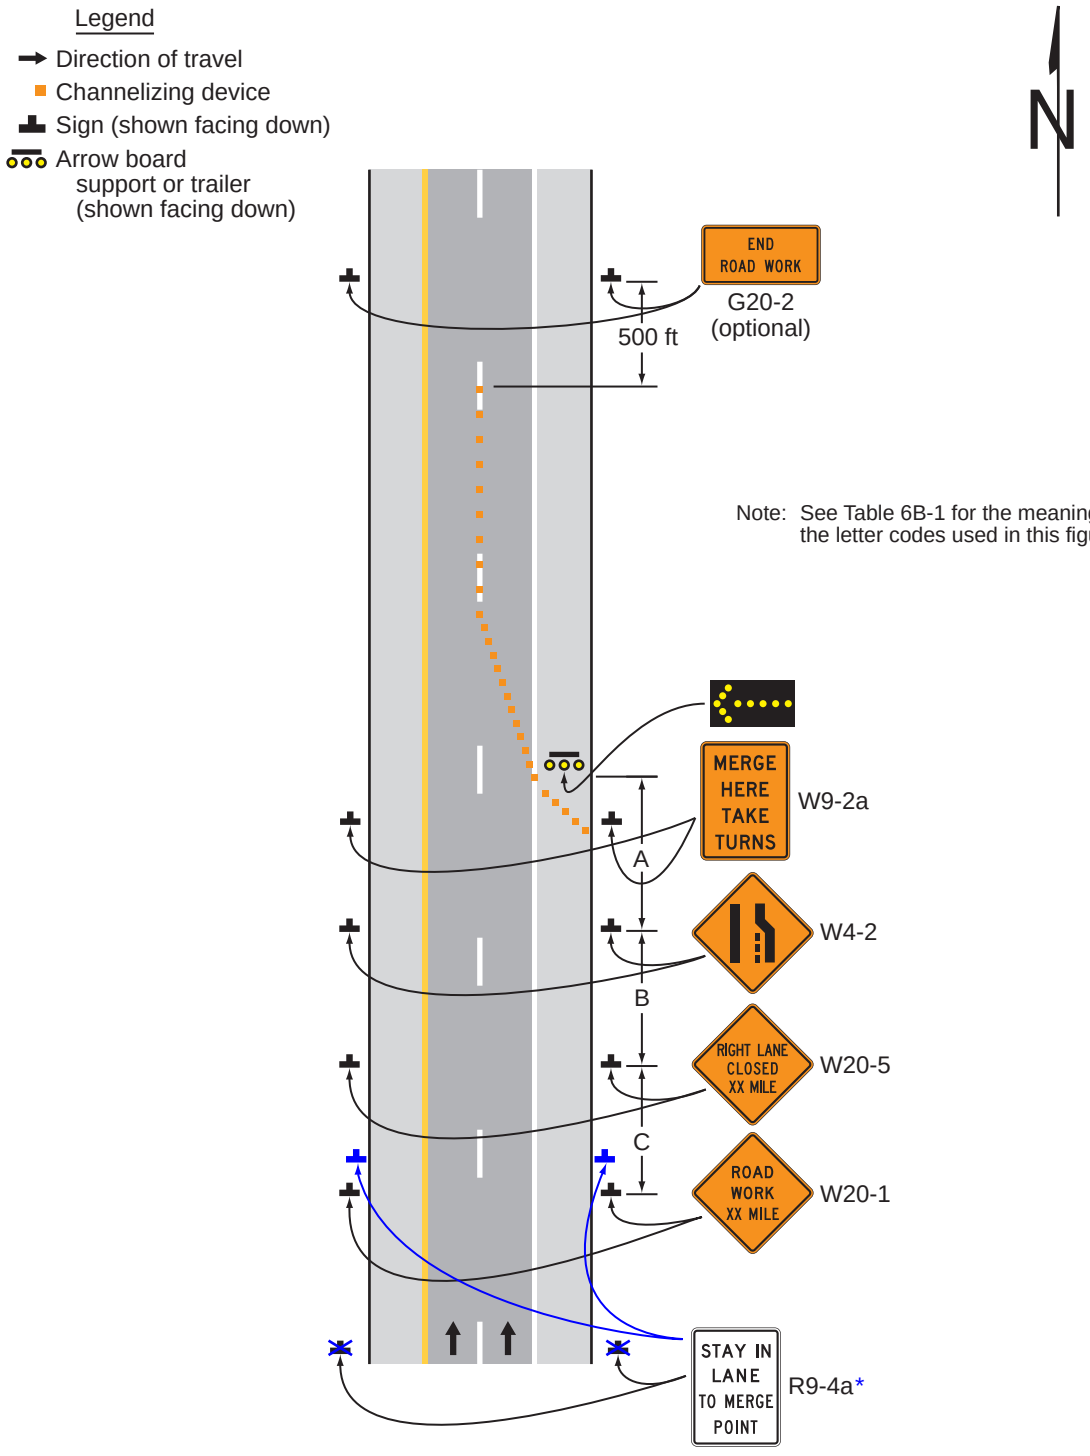


**Late Merge Signing**

* Refer to FHWA's List of Known Errors for error in sign designation. Refer to Section 1A.04 for more details.

# CHAPTER 6O. CONTROL OF TRAFFIC THROUGH TRAFFIC INCIDENT MANAGEMENT AREAS

## Section 6O.01 General

Support:

01 The National Incident Management System (NIMS) requires the use of the Incident Command System (ICS) at traffic incident management scenes.

02 A traffic incident is an emergency road user occurrence, a natural disaster, or other unplanned event that affects or impedes the normal flow of traffic.

03 A traffic incident management area is an area of a highway where temporary traffic controls are installed, as authorized by a public authority or the official having jurisdiction of the roadway, in response to a road user incident, natural disaster, hazardous material spill, or other unplanned incident. It is a type of TTC zone and extends from the first warning device (such as a sign, light, or cone) to the last TTC device or to a point where vehicles return to the original lane alignment and are clear of the incident.

04 Traffic incidents can be divided into three general classes of duration, each of which has unique traffic control characteristics and needs. These classes are:

A. Major—expected duration of more than 2 hours,
B. Intermediate—expected duration of 30 minutes to 2 hours, and
C. Minor—expected duration under 30 minutes.

05 The primary functions of TTC at a traffic incident management area are to inform road users of the incident and to provide guidance information on the path to follow through the incident area. Alerting road users and establishing a well-defined path to guide road users through the incident area will serve to protect the incident responders and those involved in working at the incident scene and will aid in moving road users expeditiously past or around the traffic incident, will reduce the likelihood of secondary traffic crashes, and will preclude unnecessary use of the surrounding local road system. Examples include a stalled vehicle blocking a lane, a traffic crash blocking the traveled way, a hazardous material spill along a highway, and natural disasters such as floods and severe storm damage.

*Guidance:*

06 *In order to reduce response time for traffic incidents, highway agencies, appropriate public safety agencies (law enforcement, fire and rescue, emergency communications, emergency medical, and other emergency management), and private sector responders (towing and recovery and hazardous materials contractors) should mutually plan for occurrences of traffic incidents along the major and heavily traveled highway and street system.*

07 *On-scene responder organizations should train their personnel in TTC practices for accomplishing their tasks in and near traffic and in the requirements for traffic incident management contained in this Manual. On-scene responders should take measures to move the incident off the traveled roadway or to provide for appropriate warning. All on-scene responders and news media personnel should constantly be aware of their visibility to oncoming traffic and wear high-visibility apparel. Refer to Section 6B.05 for details on high-visibility apparel requirements. Planning and training should include incorporation of estimated time durations to clear the event as part of their initial incident estimate. When events are deemed as probable Major Traffic Incidents that could generate prolonged lane or road closures, notification of all affected agencies should be initiated as part of the initial incident report that is provided to the emergency communications center who would then be responsible for making notifications to appropriate state, regional, and local agencies and resources for the purpose of ramping up and responding as quickly as possible thus facilitating a more rapid transition from emergency TTC to an MUTCD-compliant TTC zone when warranted.*

08 *Emergency vehicles arriving at an incident should be positioned in a manner that attempts to protect both the responders performing their duties and road users traveling through the incident scene, while minimizing, to the extent practical, disruption of the adjacent traffic flow. Emergency vehicle positions should optimize traffic flow through the incident scene. All emergency vehicles that subsequently arrive should be positioned in a manner that does not interfere with the established temporary traffic flow.*

09 *Responders arriving at a traffic incident should estimate the magnitude of the traffic incident, the expected time duration of the traffic incident, and the expected vehicle queue length, and then should set up the appropriate temporary traffic controls for these estimates.*

Option:

10 *Warning and guide signs used for TTC traffic incident management situations may have a black legend and border on a fluorescent pink background (see Figure 6O-1).*

Support:

10a Signs used for regular TTC (black legend and border on orange or fluorescent orange background) are also acceptable. Truck or trailer mounted Portable Changeable Message (PCMS) signs are effective tools for traffic incident management.

11 While some traffic incidents might be anticipated and planned for, emergencies and disasters might pose more severe and unpredictable problems. The ability to quickly install proper temporary traffic controls might greatly reduce the effects of an incident, such as secondary crashes or excessive traffic delays. An essential part of fire, rescue, spill clean-up, highway agency, and enforcement activities is the proper control of road users through the traffic incident management area in order to protect responders, victims, and other personnel at the site. These operations might need corroborating legislative authority for the implementation and enforcement of appropriate road user regulations, parking controls, and speed zoning. It is desirable for these statutes to provide sufficient flexibility in the authority for, and implementation of, TTC to respond to the needs of changing conditions found in traffic incident management areas.

Option:

12 For traffic incidents, particularly those of an emergency nature, TTC devices on hand may be used for the initial response as long as they do not themselves create unnecessary additional hazards.

Support:

13 The establishment, maintenance, and prompt removal of lane diversions can be effectively managed by interagency planning that includes representatives of highway and public safety agencies.

*Guidance:*

14 *All traffic control devices needed to set up the TTC at a traffic incident should be available so that they can be readily deployed for all major traffic incidents. The TTC should include the proper traffic diversions, tapered lane closures, and upstream warning devices to alert traffic approaching the queue and to encourage early diversion to an appropriate alternative route.*

15 *Attention should be paid to the upstream end of the traffic queue such that warning is given to road users approaching the back of the queue.*

16 *If manual traffic control is needed, it should be provided by qualified flaggers or uniformed law enforcement officers.*

Option:

17 If flaggers are used to provide traffic control for an incident management situation, the flaggers may use appropriate traffic control devices that are readily available or that can be brought to the traffic incident scene on short notice.

*Guidance:*

18 *When light sticks or flares are used to establish the initial traffic control at incident scenes, channelizing devices (see Section 6K.01) should be installed as soon thereafter as practical.*

Option:

19 The light sticks or flares may remain in place if they are being used to supplement the channelizing devices.

*Guidance:*

20 *The light sticks, flares, and channelizing devices should be removed after the incident is terminated.*

## Section 6O.02 Major Traffic Incidents

Support:

01 Major traffic incidents are typically traffic incidents involving hazardous materials, fatal traffic crashes involving numerous vehicles, and other natural or man-made disasters. These traffic incidents typically involve closing all or part of a roadway facility for a period exceeding 2 hours.

*Guidance:*

02 *If the traffic incident is anticipated to last more than 24 hours, applicable procedures and devices set forth in other Chapters of Part 6 should be used.*

Support:

03 A road closure can be caused by a traffic incident such as a road user crash that blocks the traveled way. Road users are usually diverted through lane shifts or detoured around the traffic incident and back to the original roadway. A combination of traffic engineering and enforcement preparations is needed to determine the detour route, and to install,

maintain, or operate, and then to remove the necessary traffic control devices when the detour is terminated. Large trucks are a significant concern in such a detour, especially when detouring them from a controlled-access roadway onto local or arterial streets.

04 During traffic incidents, large trucks might need to follow a route separate from that of automobiles because of bridge, weight, clearance, or geometric restrictions. Also, vehicles carrying hazardous material might need to follow a different route from other vehicles.

05 Some traffic incidents such as hazardous material spills might require closure of an entire highway. Through road users must have adequate guidance around the traffic incident. Maintaining good public relations is desirable. The cooperation of the news media in publicizing the existence of, and reasons for, traffic incident management areas and their TTC can be of great assistance in keeping road users and the general public well informed.

## Section 6O.03 Intermediate Traffic Incidents

Support:

01 Intermediate traffic incidents typically affect travel lanes for a time period of 30 minutes to 2 hours, and usually require traffic control on the scene to divert road users past the blockage. Full roadway closures might be needed for short periods during traffic incident clearance to allow traffic incident responders to accomplish their tasks.

## Section 6O.04 Minor Traffic Incidents

Support:

01 Minor traffic incidents are typically disabled vehicles and minor crashes that result in lane closures of less than 30 minutes. On-scene responders are typically law enforcement and towing companies, and occasionally highway agency service patrol vehicles.

02 Diversion of traffic into other lanes is often not needed or is needed only briefly. It is not generally possible or practical to set up a lane closure with traffic control devices for a minor traffic incident. Traffic control is the responsibility of on-scene responders.

*Guidance:*

03 *When a minor traffic incident blocks a travel lane, the vehicles involved in the incident should be moved from the blocked lane to the shoulder as quickly as possible.*

## Section 6O.05 Use of Emergency-Vehicle Lighting

Support:

01 The use of emergency-vehicle lighting (such as high-intensity rotating, flashing, oscillating, or strobe lights) is essential, especially in the initial stages of a traffic incident, for the safety of emergency responders and persons involved in the traffic incident, as well as road users approaching the traffic incident. Emergency- vehicle lighting, however, provides warning only and provides no effective traffic control. The use of too many lights at an incident scene can be distracting and can create confusion for approaching road users, especially at night. Road users approaching the traffic incident from the opposite direction on a divided facility are often distracted by emergency-vehicle lighting and slow their vehicles to look at the traffic incident posing a hazard to themselves and others traveling in their direction.

02 The use of emergency-vehicle lighting can be reduced if good traffic control has been established at a traffic incident scene. This is especially true for major traffic incidents that might involve a number of emergency vehicles. If good traffic control is established through placement of advance warning signs and traffic control devices to divert or detour traffic, then public safety agencies can perform their tasks on scene with minimal emergency-vehicle lighting.

*Guidance:*

03 *Public safety agencies should examine their policies on the use of emergency-vehicle lighting, especially after a traffic incident scene is secured, with the intent of reducing the use of this lighting as much as possible while not endangering those at the scene. Special consideration should be given to reducing or extinguishing forward facing emergency-vehicle lighting, especially on divided roadways, to reduce distractions to oncoming road users.*

04 *Because the glare from floodlights or vehicle headlights can impair the nighttime vision of approaching road users, any floodlights or vehicle headlights that are not needed for illumination, or to provide notice to other road users of an incident response vehicle being in an unexpected location, should be turned off at night.*

## Section 6O.101(CA) FLOODING AHEAD TURN AROUND DON'T DROWN W86(CA) Sign

Support:

01 The Federal Highway Administration has encouraged use of the phrase FLOODING AHEAD TURN AROUND DON'T DROWN as an official incident management sign.

Option:

02 The FLOODING AHEAD TURN AROUND DON'T DROWN (W86(CA)) sign (refer to Figure 6O-1(CA)) may be deployed to warn during times when low-water crossings, bridges, or culverts cannot pass high flood flows.

**Standard:**

03 **When used, W86(CA) sign shall be mounted on temporary sign holders, not on barricades.**

*Guidance:*

04 *The W86(CA) sign should be deployed at locations where stream waters flooding across a road have made passage unsafe.*

05 *The FLOODED (W55(CA)) sign (refer to Figure 6O-1(CA)) should be used in advance of locations where the highway is flooded.*

**Standard:**

06 **The W55(CA) signs shall be removed or covered when the condition no longer exists.**

## Section 6O.102(CA) EMERGENCY SCENE AHEAD W90(CA) Sign

Support:

01 The Federal Highway Administration has encouraged use of the phrase EMERGENCY SCENE AHEAD as an official incident management sign.

Option:

02 The EMERGENCY SCENE AHEAD (W90(CA)) sign (refer to Figure 6O-1(CA)) may be deployed to warn of an incident management scene ahead.


**Standard:**

03 **If used, W90(CA) sign shall be mounted on temporary sign holders, not on barricades.**

*Guidance:*

04 *The W90(CA) sign should be deployed at locations upstream of the traffic queue that has formed due to incident management.*

## Figure 6O-1. Examples of Traffic Incident Management Area Signs

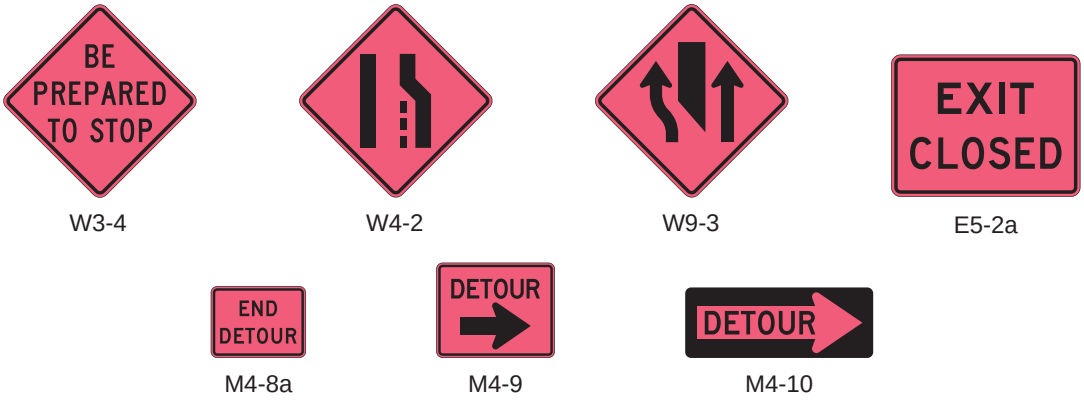


W3-4 W4-2 W9-3 E5-2a

M4-8a M4-9 M4-10

## *Figure 6O-1(CA). Examples of Traffic Incident Management Area Signs*




W86(CA)




W55(CA)




W90(CA)

# CHAPTER 6P. TYPICAL APPLICATIONS

## Section 6P.01 Typical Applications

Support:

01 Chapter 6N contains discussions of typical TTC activities. Section 6A.02 contains discussions on development of TTC plans for the various activities. This Chapter presents typical applications for a variety of situations commonly encountered. While not every situation is addressed, the information illustrated can generally be adapted to a broad range of conditions. In many instances, an appropriate TTC plan is achieved by combining features from various typical applications. For example, work at an intersection might present a near-side TTC zone for one street and a far-side TTC zone for the other street. These treatments are found in two different typical applications, while a third typical application shows how to handle pedestrian crosswalk closures.

02 In general, the procedures illustrated represent minimum solutions for the situations depicted. Except for the notes (which are clearly classified using headings as being Standard, Guidance, Option, or Support), the information presented in the typical applications can generally be regarded as Guidance.

Option:

03 TTC plans may deviate from the typical applications described in this Chapter to allow for conditions and requirements of a particular site or jurisdiction.

04 Other devices may be added to supplement the devices and device spacing may be adjusted to provide additional reaction time or delineation. Fewer devices may be used based on field conditions.

Support:

05 Figures and tables found throughout Part 6 provide information for the development of TTC plans.

06 Table 6P-1 is an index of the 54 typical applications. In the printed version, the typical applications are shown on the right-hand page with notes on the facing page to the left. In the electronic version, the notes are shown on the page preceding the figure. The legend for the symbols used in the typical applications is provided in Table 6P-2. In many of the typical applications, sign spacings and other dimensions are indicated by letters using the criteria provided in Table 6B-1. The formulas for determining taper lengths are provided in Table 6B-4.

07 Most of the typical applications show TTC devices for only one direction.

*Guidance:*

08 *The spacing of channelizing devices should not exceed the maximum distances shown in Table 6K-101(CA).*

Support:

09 Refer to Table 6P-1(CA) for California Typical Applications.

# Table 6P-1. Index to Typical Applications (Sheet 1 of 2)

| Typical Application Description | Typical Application Number |
|---|---|
| Work Outside of the Shoulder (see Section 6N.05) | |
| Work Beyond the Shoulder | TA-1 |
| Blasting Zone | TA-2 |
| Work on the Shoulder (see Sections 6N.06 and 6N.07) | |
| Work on the Shoulders | TA-3 |
| Short-Duration or Mobile Operation on a Shoulder | TA-4 |
| Shoulder Closure on a Freeway | TA-5 |
| Shoulder Work with Minor Encroachment | TA-6 |
| Work within the Traveled Way of a Two-Lane Highway (see Section 6N.09) | |
| Road Closed with a Diversion | TA-7 |
| Roads Closed with an Off-Site Detour | TA-8 |
| Overlapping Routes with a Detour | TA-9 |
| Lane Closure on a Two-Lane Road Using Flaggers | TA-10 |
| Lane Closure on a Two-Lane Road with Low Traffic Volumes | TA-11 |
| Lane Closure on a Two-Lane Road Using Traffic Control Signals | TA-12 |
| Temporary Road Closure | TA-13 |
| Haul Road Crossing | TA-14 |
| Work in the Center of a Road with Low Traffic Volumes | TA-15 |
| Surveying Along the Center Line of a Road with Low Traffic Volumes | TA-16 |
| Mobile Operations on a Two-Lane Road | TA-17 |
| Work within the Traveled Way of an Urban Street (see Section 6N.10) | |
| Lane Closure on a Minor Street | TA-18 |
| Detour for One Travel Direction | TA-19 |
| Detour for One Travel Direction | TA-19(CA) |
| Detour for a Closed Street | TA-20 |
| Work within the Traveled Way at an Intersection and on Sidewalks (see Section 6N.12) | |
| Lane Closure on the Near Side of an Intersection | TA-21 |
| Right-Hand Lane Closure on the Far Side of an Intersection | TA-22 |
| Left-Hand Lane Closure on the Far Side of an Intersection | TA-23 |
| Half Road Closure on the Far Side of an Intersection | TA-24 |
| Half Road Closure on the Far Side of an Intersection | TA-24(CA) |
| Multiple Lane Closures at an Intersection | TA-25 |
| Closure in the Center of an Intersection | TA-26 |
| Closure at the Side of an Intersection | TA-27 |
| Sidewalk Detour or Diversion | TA-28 |
| Crosswalk Closures and Pedestrian Detours | TA-29 |
| Work within the Traveled Way of a Multi-Lane, Non-Access Controlled Highway (see Section 6N.11) | |
| Interior Lane Closure on a Multi-Lane Street | TA-30 |
| Lane Closure on a Street with Uneven Directional Volumes | TA-31 |
| Half Road Closure on a Multi-Lane, High-Speed Highway | TA-32 |
| Stationary Lane Closure on a Divided Highway | TA-33 |
| Lane Closure with a Temporary Traffic Barrier | TA-34 |
| Mobile Operation on a Multi-Lane Road | TA-35 |




## Table 6P-1. Index to Typical Applications (Sheet 2 of 2)

| Typical Application Description | Typical Application Number |
|---|---|
| Work within the Traveled Way of a Freeway or Expressway (see Section 6N.13) | |
| Lane Shift on a Freeway | TA-36 |
| Double Lane Closure on a Freeway | TA-37 |
| ~~Interior Lane Closure on a Freeway~~ | ~~TA-38~~ |
| Median Crossover on a Freeway | TA-39 |
| Median Crossover for an Entrance Ramp | TA-40 |
| Median Crossover for an Exit Ramp | TA-41 |
| Work in the Vicinity of an Exit Ramp | TA-42 |
| Partial Exit Ramp Closure | TA-43 |
| Work in the Vicinity of an Entrance Ramp | TA-44 |
| Temporary Reversible Lane Using Movable Barriers | TA-45 |
| Work in the Vicinity of a Grade Crossing (see Section 6N.17) | |
| Work in the Vicinity of a Grade Crossing | TA-46 |
| Work in the Vicinity of Bicycle Lanes and Shared Use Paths (see Section 6N.04) | |
| Bicycle Lane Closure without a Detour | TA-47 |
| Bicycle Lane Closure with an On-Road Detour | TA-48 |
| Shared-Use Path Closure with a Diversion | TA-49 |
| On-Road Detour for a Shared-Use Path | TA-50 |
| Paved Shoulder Closure with a Bicycle Diversion onto a Temporary Path | TA-51 |
| Paved Shoulder Closure with a Bicycle Diversion onto a Temporary Path | TA-51(CA) |
| Work in the Traveled Way of Roundabouts | |
| Short-Term or Short-Duration Work in a Circular Intersection | TA-52 |
| Flagging Operation on a Single-Lane Circular Intersection | TA-53 |
| Inside Lane Closure on a Multi-Lane Circular Intersection | TA-54 |

## Table 6P-1(CA). Index to Typical Applications

| Typical Application Description | Typical Application Number |
|---|---|
| Work affecting Pedestrian and Bicycle Facilities (See Section 6N.04) | |
| Right Lane and Bike Lane Closure on Far Side of Intersection | TA-101(CA) |
| Work Within the Traveled Way of a Two-Lane Highway (See Section 6N.09) | |
| Lane Shift on Road with Low Traffic Volumes | TA-102(CA) |

## Table 6P-2. Meaning of Symbols on Typical Application Diagrams

| | |
|---|---|
|  | Arrow board |
|  | Arrow board support or trailer (shown facing down) |
|  | Changeable message sign or support trailer |
|  | Channelizing device |
|  | Crash cushion |
|  | Direction of temporary traffic detour |
|  | Direction of travel |
|  | Flagger |
|  | High-level warning device (Flag tree) |
|  | Longitudinal channelizing device |
|  | Luminaire |
|  | Pavement markings that should be removed for a long-term project |
|  | Shadow vehicle |
|  | Sign (shown facing left) |
|  | Surveyor |
|  | Temporary barrier |
|  | Temporary barrier with warning light |
|  | Traffic or pedestrian signal |
|  | Truck-mounted attenuator |
|  | Type 3 barricade |
|  | Warning light |
|  | Work space |
|  | Work vehicle |

## Notes for Figure 6P-1—Typical Application 1
## Work Beyond the Shoulder

*Guidance:*

1. *If the work space is in the median of a divided highway, an advance warning sign should also be placed on the left-hand side of the directional roadway.*


Option:

2. The ROAD WORK AHEAD sign or Workers (W21-1a) sign may be replaced with other appropriate signs such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.
3. The ROAD WORK AHEAD sign or Workers (W21-1a) sign may be omitted where the work space is behind a barrier, more than 24 inches behind the curb, or 15 feet or more from the edge of any roadway.
4. For short-term, short duration or mobile operation, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
5. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

6. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

## Figure 6P-1. Work Beyond the Shoulder (TA-1)

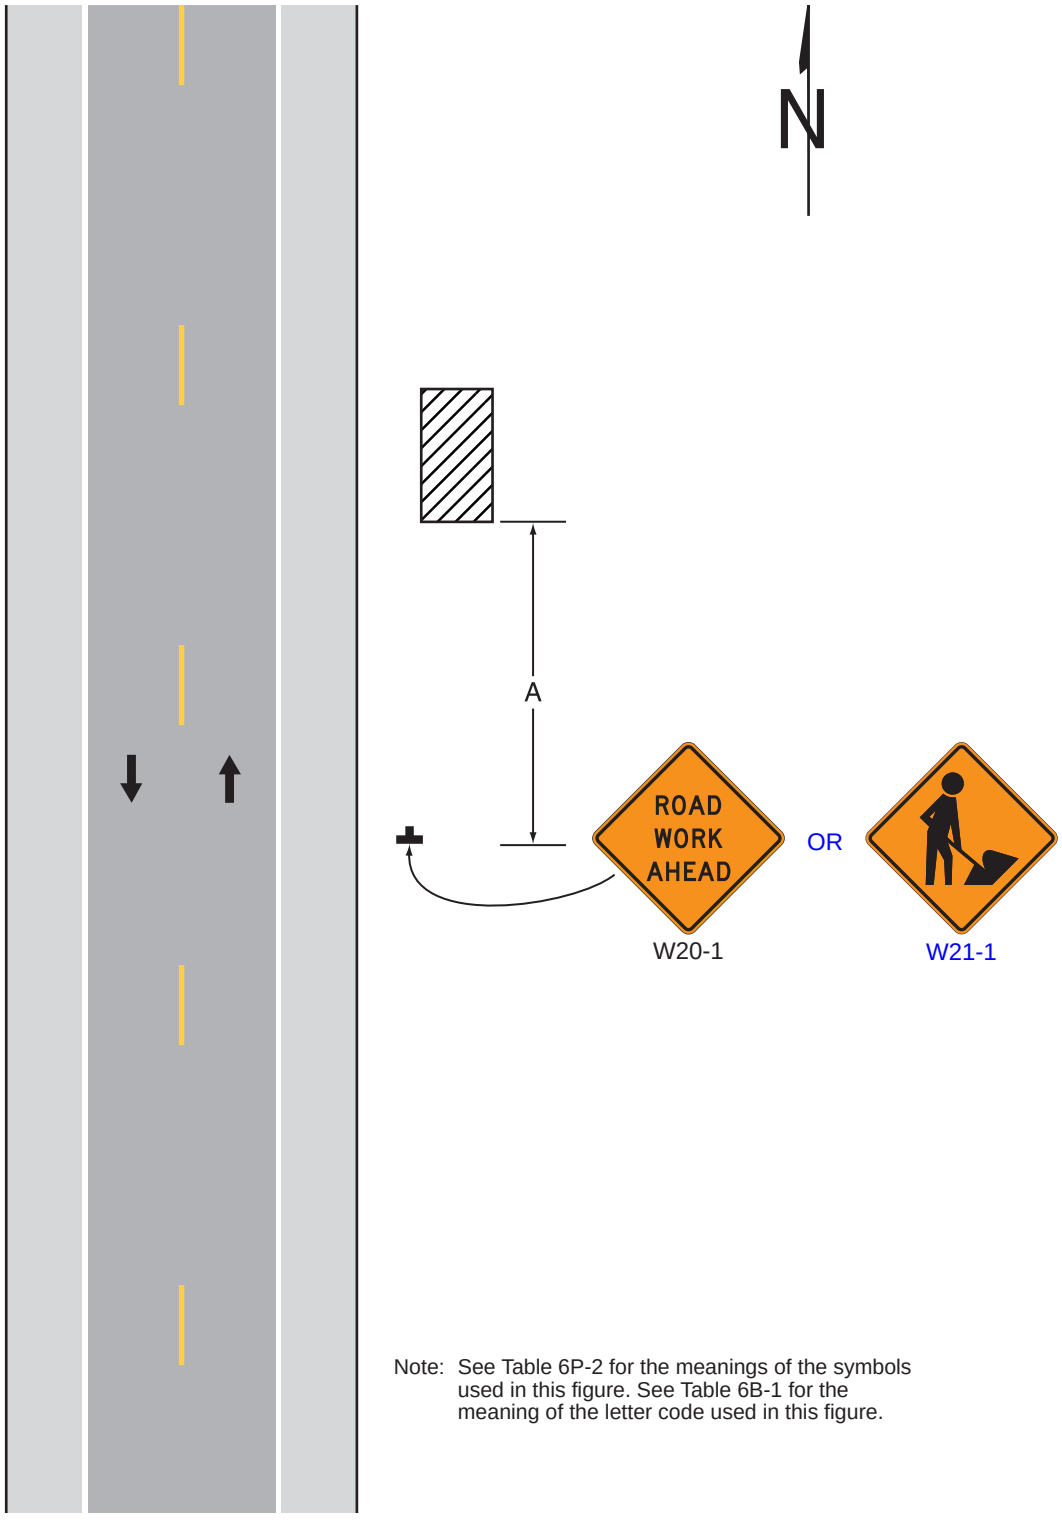


Note: See Table 6P-2 for the meanings of the symbols used in this figure. See Table 6B-1 for the meaning of the letter code used in this figure.

**Typical Application 1**

## Notes for Figure 6P-2—Typical Application 2
## Blasting Zone


**Standard:**

1. **Whenever blasting caps are used within 1,000 feet of a roadway, the signing shown shall be used.**
2. **The signs shall be covered or removed when there are no explosives in the area or the area is otherwise secure.**
3. **Whenever a side road intersects the roadway between the BLASTING ZONE AHEAD (W22-1) sign and the END BLASTING ZONE (W22-3) sign, or a side road is within 1,000 feet of any blasting cap, similar signing, as on the mainline, shall be installed on the side road.**
4. **Prior to blasting, the blaster in charge shall determine whether road users in the blasting zone will be endangered by the blasting operation. If there is danger, road users shall not be permitted to pass through the blasting zone during blasting operations.**

*Guidance:*

5. *On a divided highway, the signs should be mounted on both sides of the directional roadways.*

## Figure 6P-2. Blasting Zone (TA-2)

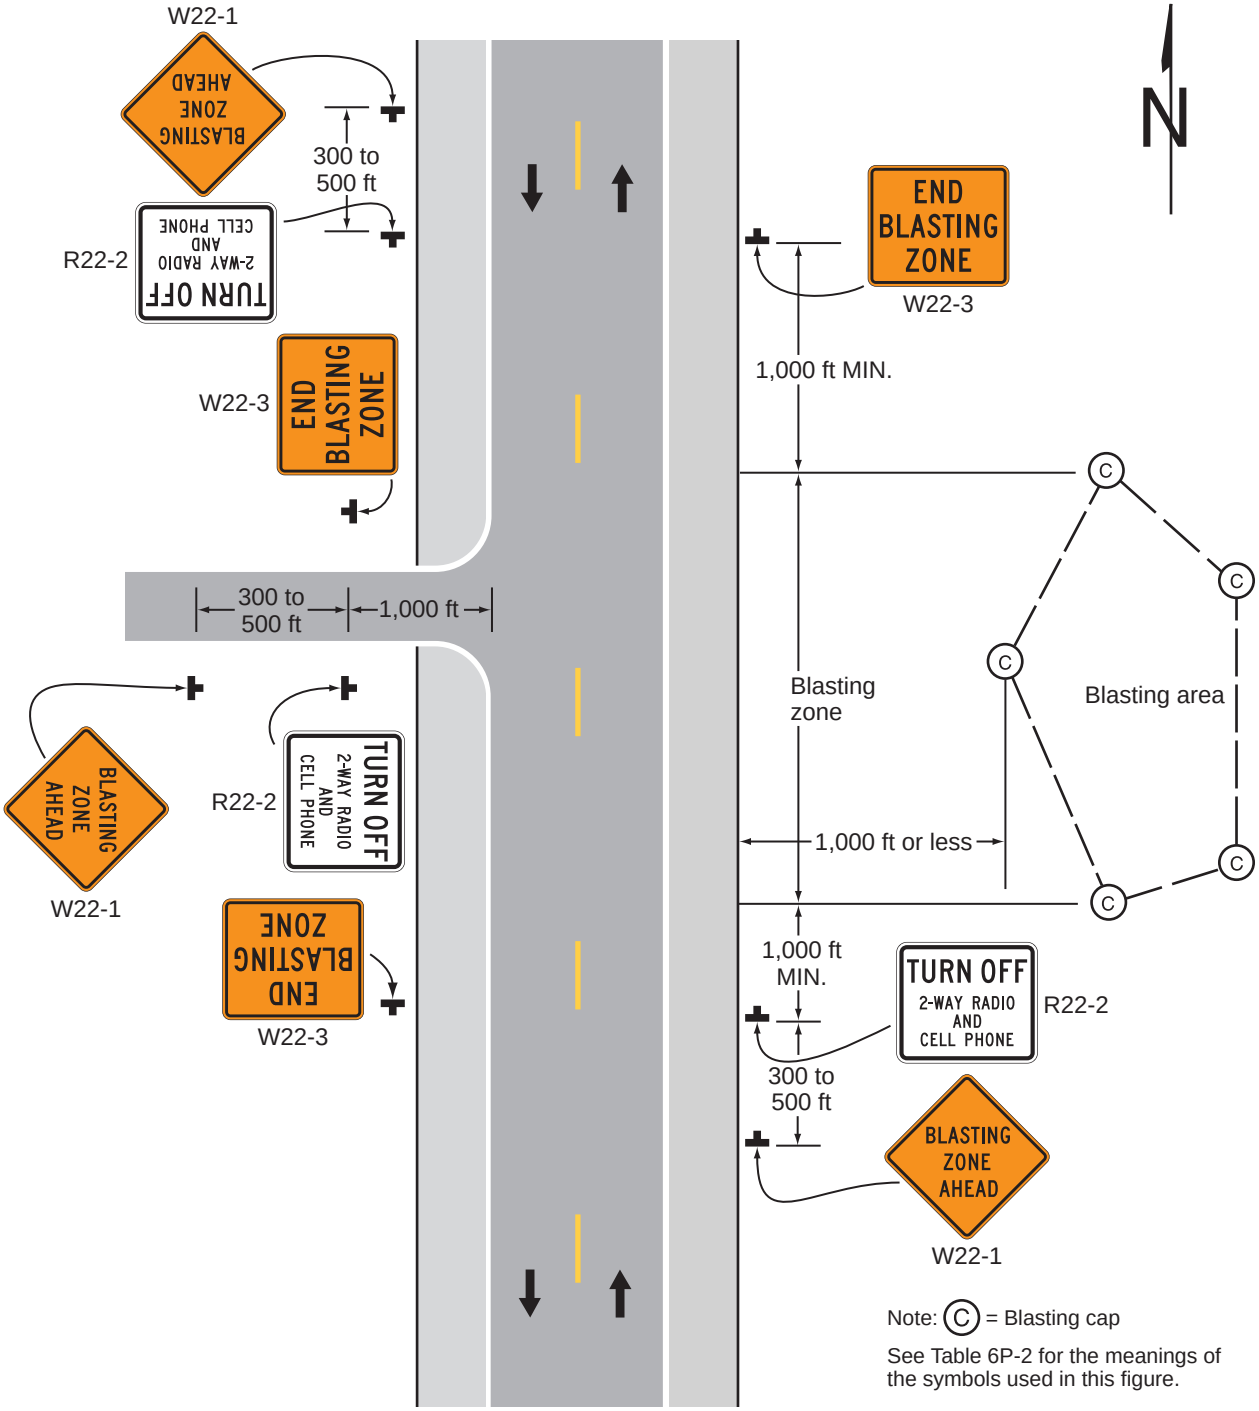


## Typical Application 2

## Notes for Figure 6P-3—Typical Application 3
## Work on the Shoulders

*Guidance:*

1. *A SHOULDER WORK (W21-5) sign should be placed on the left-hand side of the roadway for a divided or one-way street only if the left-hand shoulder is affected.*


Option:

2. Positive protection devices may be used per Section 6M.02.
3. The Workers symbol signs may be used instead of SHOULDER WORK (W21-5) signs.
4. The SHOULDER WORK (W21-5) sign on an intersecting roadway may be omitted where drivers emerging from that roadway will encounter another advance warning sign prior to this activity area.
5. For short duration operations of 60 minutes or less, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
6. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

7. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**
8. **When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and to direct vehicular traffic to remain within the traveled way.**

## Figure 6P-3. Work on the Shoulders (TA-3)

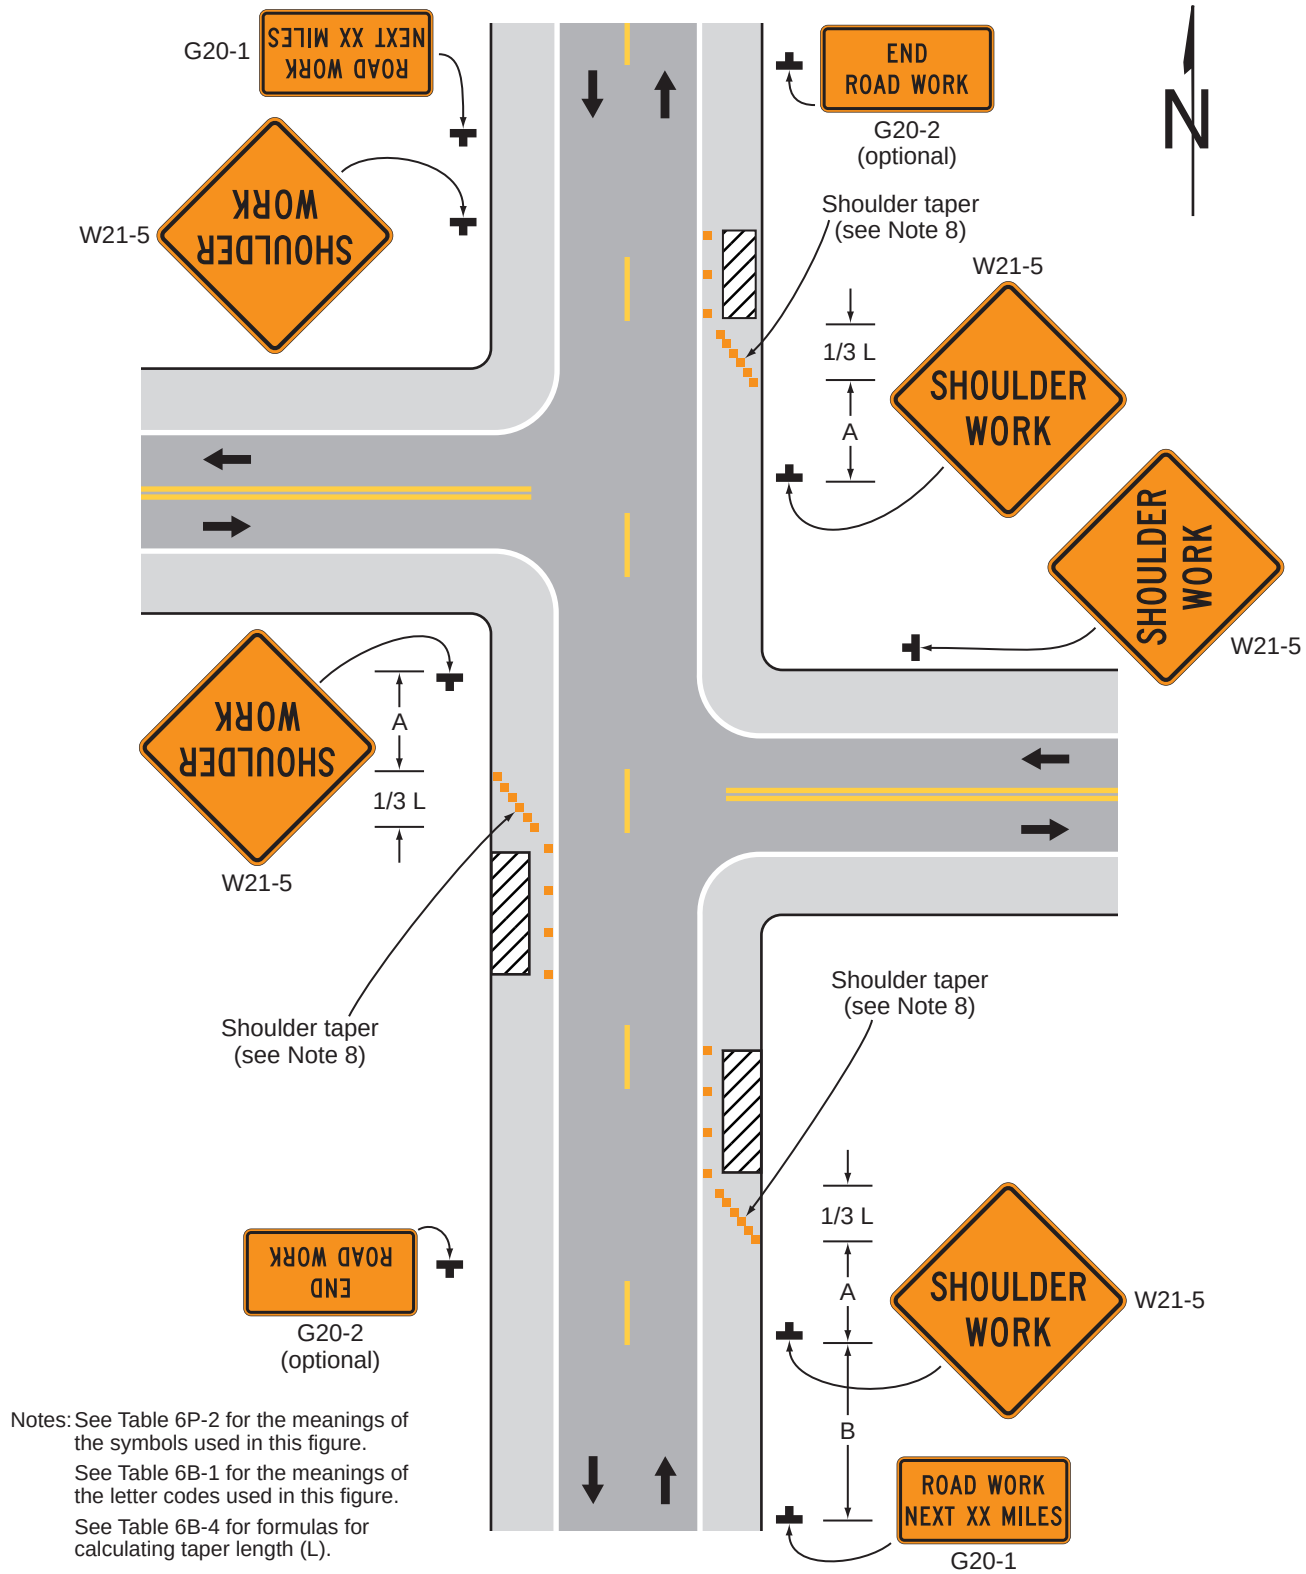


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 3**

## Notes for Figure 6P-4 —Typical Application 4
## Short-Duration or Mobile Operation on a Shoulder

*Guidance:*

1. *In those situations where multiple work locations within a limited distance make it practicable to place stationary signs, the distance between the advance warning sign and the work should not exceed 5 miles.*
2. *In those situations where the distance between the advance signs and the work is 2 miles to 5 miles, a Supplemental Distance plaque should be used with the ROAD WORK AHEAD (W20-1) sign or SHOULDER WORK AHEAD (C24(CA)) sign.*


Option:

3. Additional positive protection devices may be used per Section 6M.02.
4. The ROAD WORK NEXT XX MILES sign may be used instead of the ROAD WORK AHEAD sign or SHOULDER WORK AHEAD (C24(CA)) sign if the work locations occur over a distance of more than 2 miles.
5. Stationary warning signs may be omitted for short duration or mobile operations if the work vehicle displays high-intensity rotating, flashing, oscillating, or strobe lights.
6. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

7. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**
8. **If an arrow board is used for an operation on the shoulder, the caution mode shall be used.**
9. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**

## Figure 6P-4. Short-Duration or Mobile Operation on a Shoulder (TA-4)

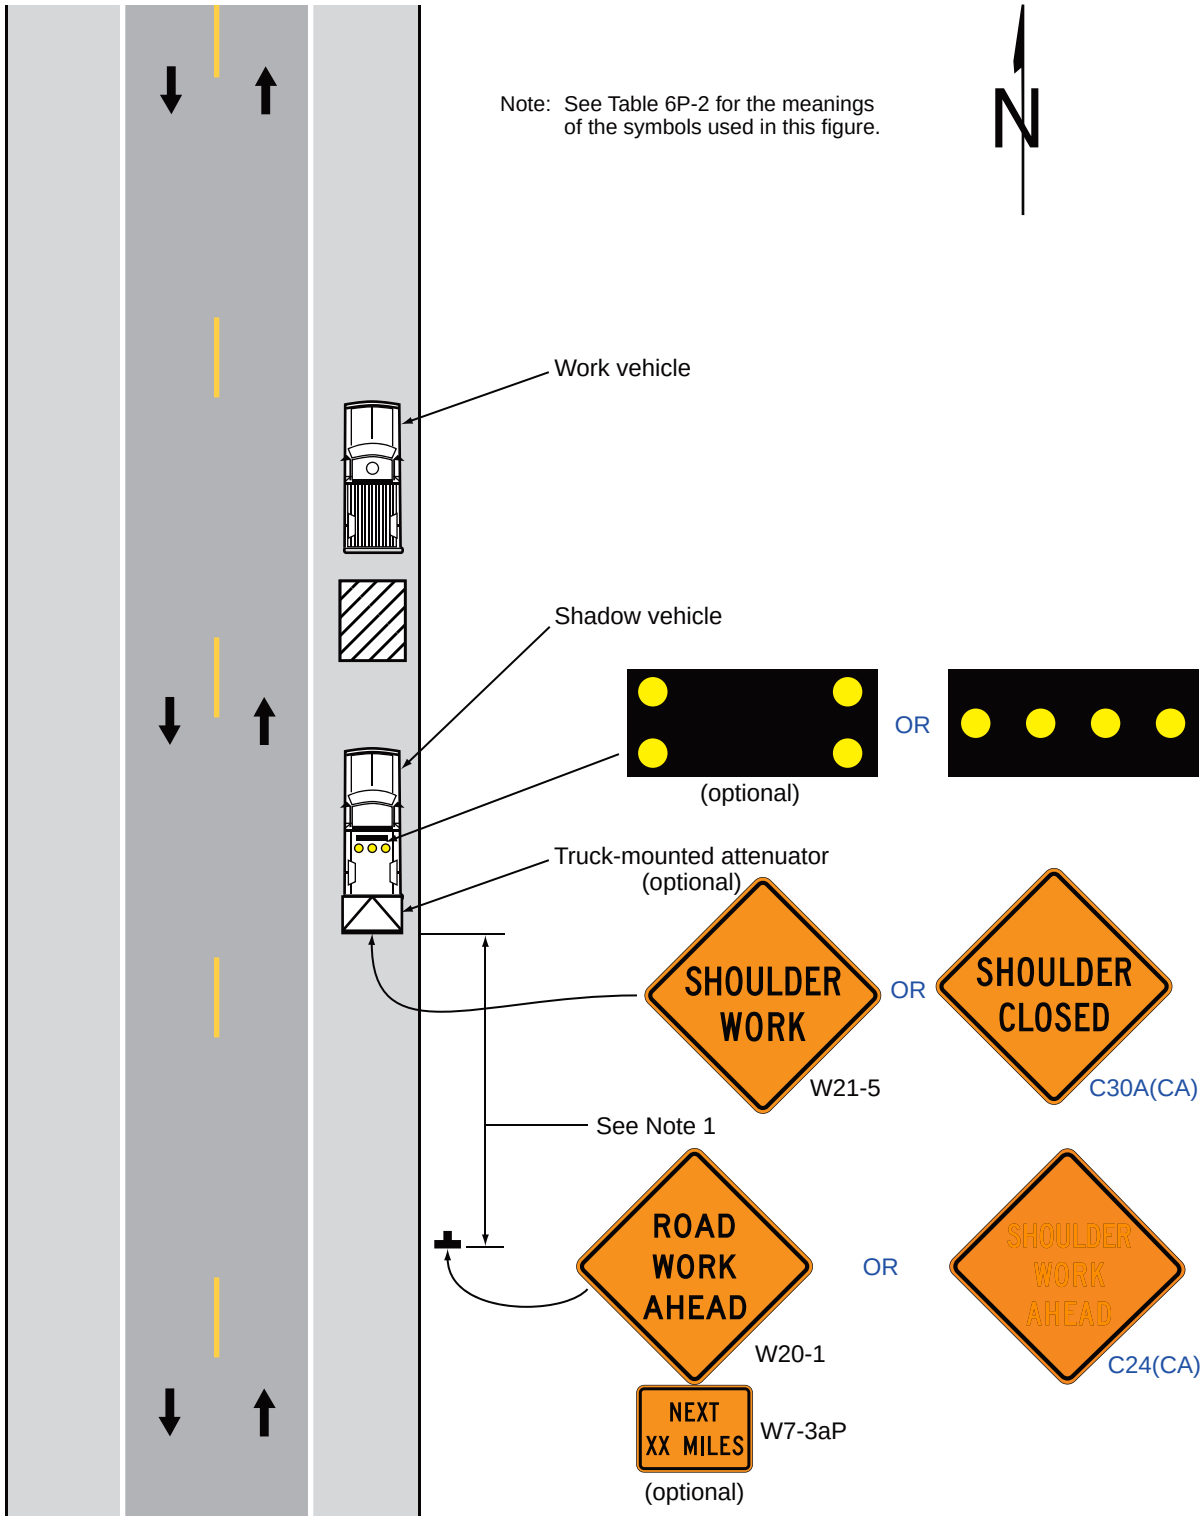


**Typical Application 4**

## Notes for Figure 6P-5 —Typical Application 5
## Shoulder Closure on a Freeway

*Guidance:*

1. *RIGHT (LEFT) SHOULDER CLOSED (W21-5a) signs should be used on limited-access highways where there is no opportunity for disabled vehicles to pull off the roadway.*
2. *If drivers cannot see a pull-off area beyond the closed shoulder, information regarding the length of the shoulder closure should be provided in feet or miles, as appropriate.*
3. *The use of a temporary traffic barrier should be based on engineering judgment.*


**Standard:**

4. **Temporary traffic barriers, if used, shall comply with the provisions of Section 6M.02.**

Option:

5. The barrier shown in this typical application is an example of one method that may be used to close a shoulder of a long-term project.
6. The warning lights shown on the barrier may be used.

## Figure 6P-5. Shoulder Closure on a Freeway (TA-5)

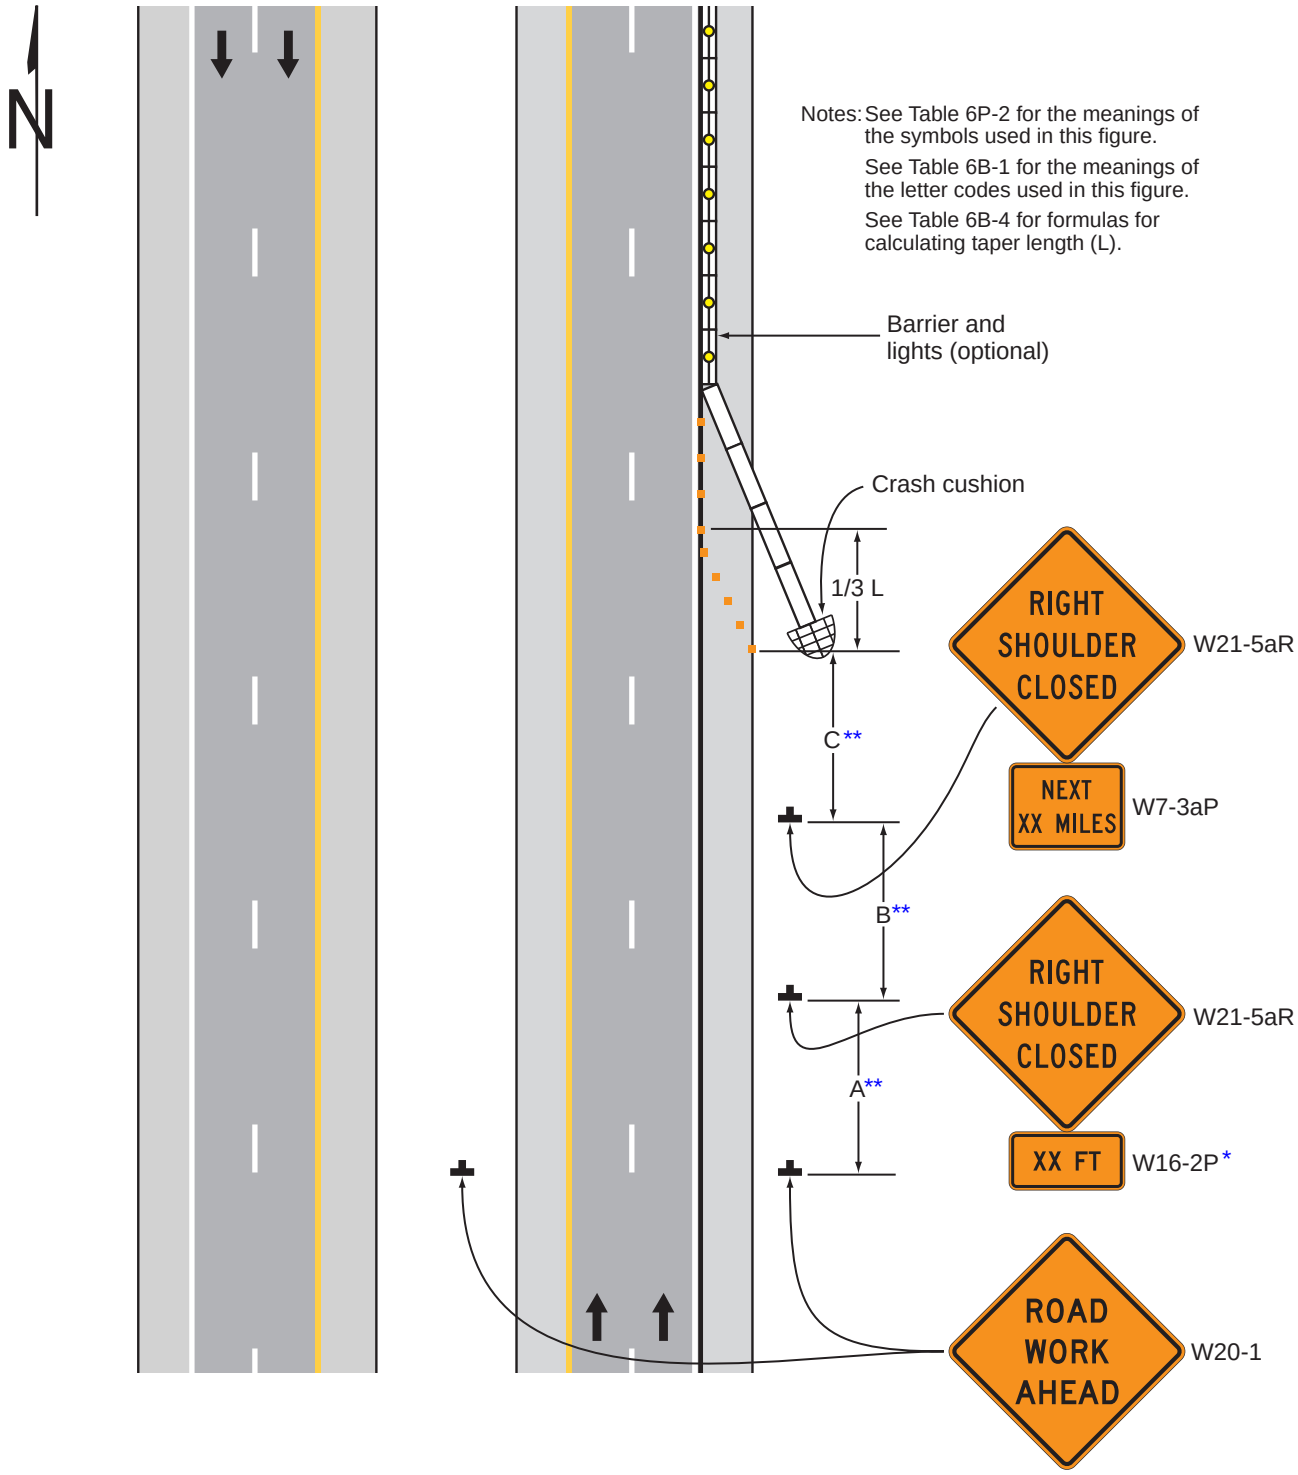


### Typical Application 5

* Refer to FHWA's List of Known Errors for error in sign designation. Refer to Section 1A.04 for more details.

** Refer to FHWA's List of Known Errors for error in sign spacing. Refer to Section 1A.04 for more details.

## Notes for Figure 6P-6 —Typical Application 6
## Shoulder Work with Minor Encroachment

*Guidance:*

1. *All lanes should be a minimum of 10 feet in width as measured to the near face of the channelizing devices.*
2. *The treatment shown should be used on a minor road having low speeds. For higher-speed traffic conditions, a lane closure should be used.*

Option:

3. Additional positive protection devices may be used per Section 6M.02.
4. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.
5. Where the opposite shoulder is suitable for carrying vehicular traffic and of adequate width, lanes may be shifted by use of closely-spaced channelizing devices, provided that the minimum lane width of 10 feet is maintained.
6. Additional advance warning may be appropriate, such as a ROAD NARROWS (W5-1) sign.
7. Temporary traffic barriers may be used along the work space.
8. The shadow vehicle may be omitted if a taper and channelizing devices are used.
9. A truck-mounted attenuator may be used on the shadow vehicle.
10. For short-duration work, the taper and channelizing devices may be omitted if a shadow vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
11. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.


**Standard:**

12. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
13. **Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.**
14. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

*Guidance:*

15. *All advance warning signs should be placed so that the path of travel for bicycles is not blocked, while maintaining visibility for road users.*
16. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, the Bicycle Warning (W11-1) sign and the IN ROAD (W16-1P) plaque should be used to advise motorists of the presence of bicyclists in the travel way lanes.*
17. *Except for short durations and mobile operations, when a highway shoulder is occupied and bicyclists would be sharing a lane with vehicular traffic, as a result of the TTC zone, speed reduction countermeasures should be used to reduce traffic speeds in the TTC zone. Refer to Sections 6B.01 and 6C.04.*
18. *Except for short durations and mobile operations, when a highway shoulder is occupied and bicyclists would be sharing a lane with vehicular traffic, as a result of the TTC zone, before narrowing the outside lane other measures such as widening the outside shoulder to allow bicyclists and motor vehicles to travel side by side through the TTC zone should be considered.*
19. *If traffic volumes make it feasible, the two left lanes should be merged into one lane to avoid using the shoulder as a traveled way lane and allowing continued use for emergency purposes and bicycle travel.*
20. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, a separate path should be considered for bicyclists.*

## Figure 6P-6. Shoulder Work with Minor Encroachment (TA-6)

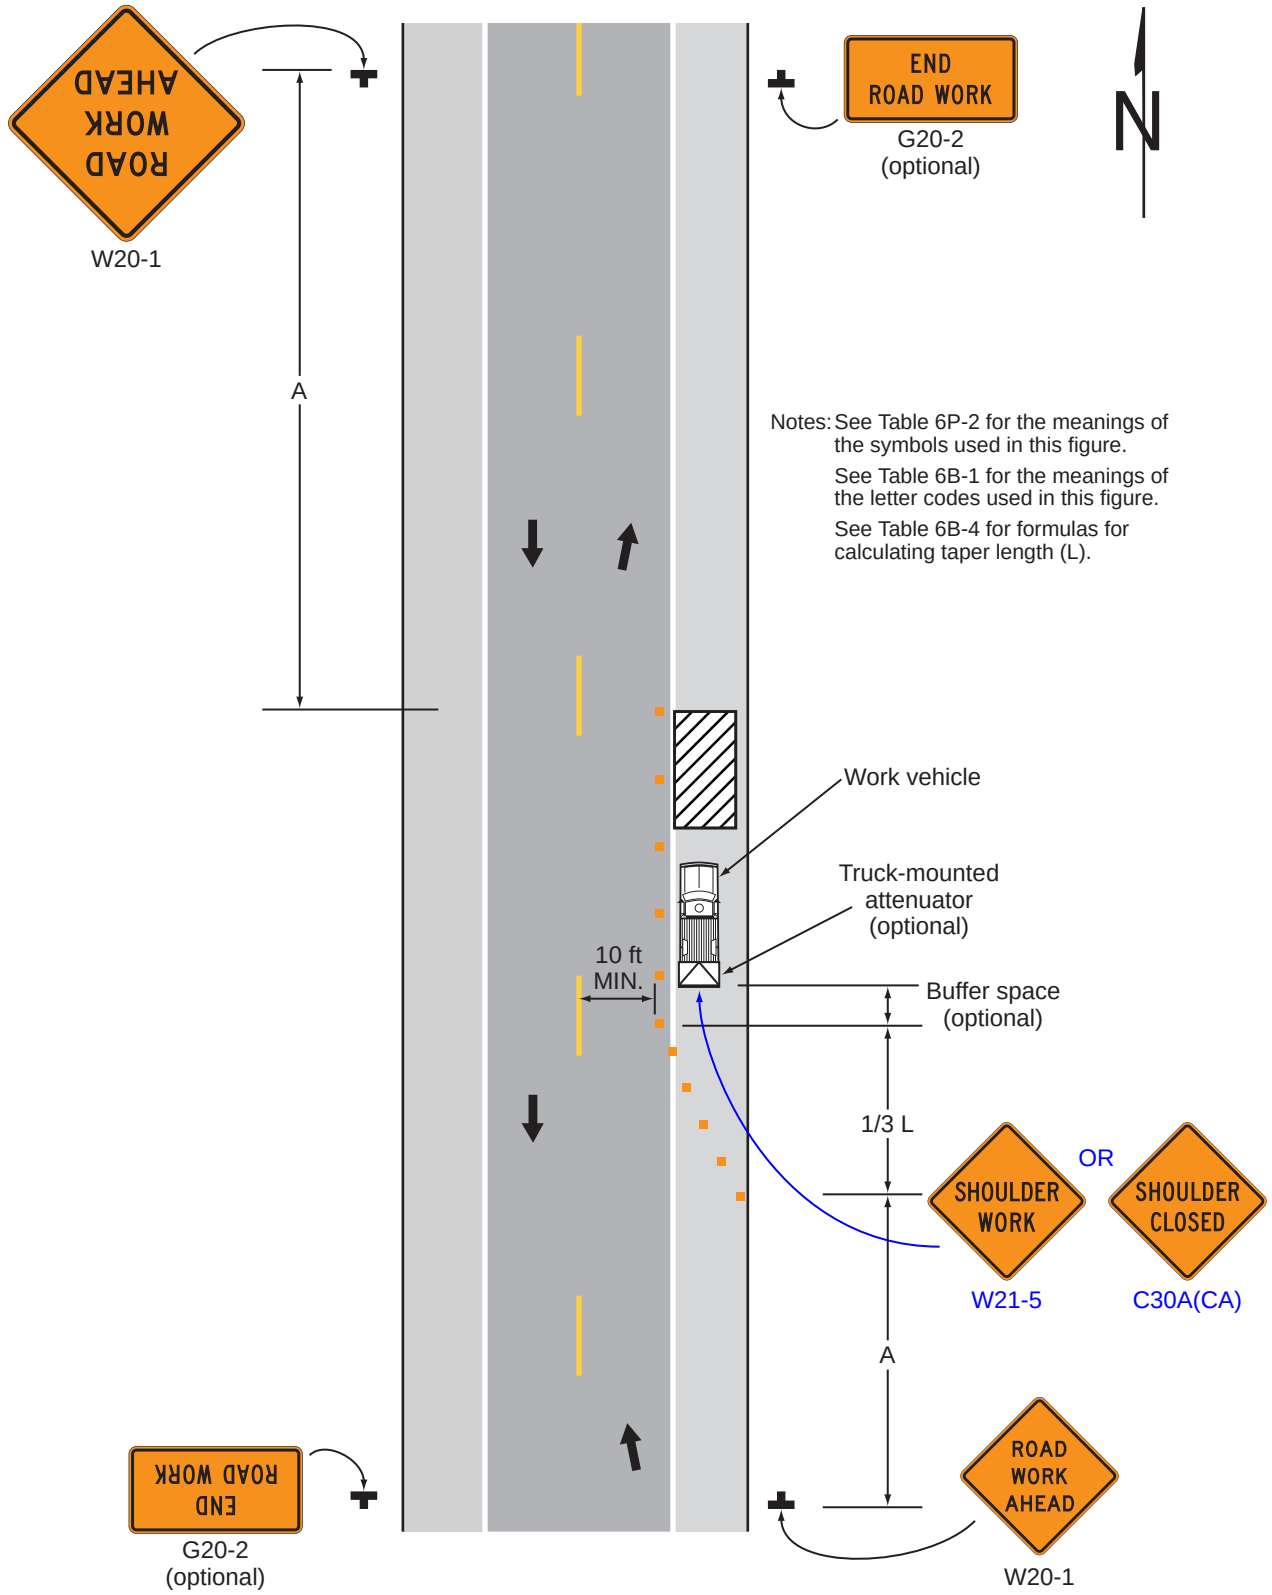


## Typical Application 6

## Notes for Figure 6P-7 —Typical Application 7
## Road Closure with a Diversion

Support:

1. Signs and object markers are shown for one direction of travel only.

**Standard:**

2. **Devices similar to those depicted shall be placed for the opposite direction of travel.**
3. **Pavement markings no longer applicable to the traffic pattern of the roadway shall be removed or obliterated before any new traffic patterns are open to traffic.**
4. **Temporary traffic barriers and end treatments shall be crashworthy.**


*Guidance:*

5. *If the tangent distance along the temporary diversion is more than 600 feet, a Reverse Curve sign, left first, should be used instead of the Double Reverse Curve sign, and a second Reverse Curve sign, right first, should be placed in advance of the second reverse curve back to the original alignment.*
6. *When the tangent section of the diversion is more than 600 feet, and the diversion has sharp curves with recommended speeds of 30 mph or less, Reverse Turn signs should be used.*
7. *Where the temporary pavement and old pavement are different colors, the temporary pavement should start on the tangent of the existing pavement and end on the tangent of the existing pavement.*
8. *Delineators or channelizing devices should be used along the diversion.*

Option:

9. Flashing warning lights and/or flags may be used to call attention to the warning signs.
10. On sharp curves, large arrow signs may be used in addition to other advance warning signs.
11. If the tangent distance along the temporary diversion is less than 600 feet, additional One-Direction Large Arrow (W1-6) and Chevron Alignment (W1-8) signs may be used.
12. When recommended speeds are the same for each curve, one Double Reverse Curve (W24-1) sign may be used, instead of two Reverse Curve (W1-4) signs, in advance of the first curve.

# Figure 6P-7. Road Closure with a Diversion (TA-7)

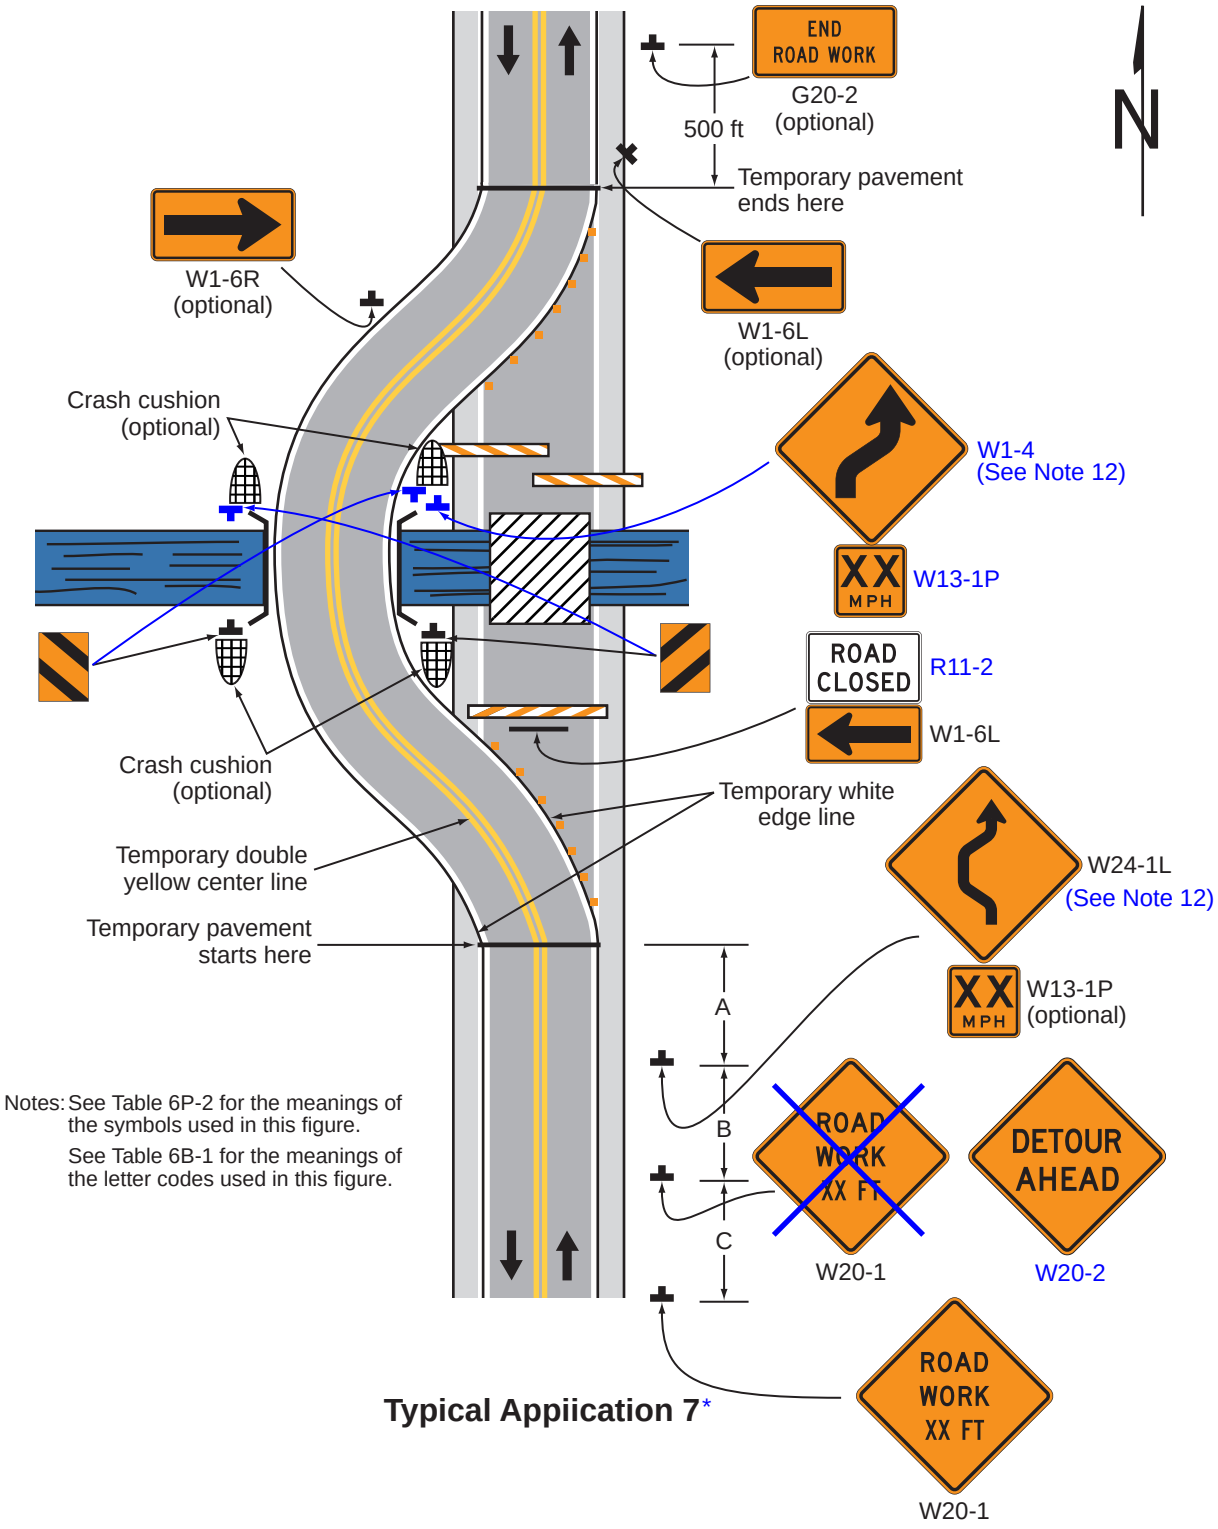


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Appiication 7***

* Refer to FHWA's List of Known Errors for error in Figure subheading. Refer to Section 1A.04 for more details.

## Notes for Figure 6P-8 —Typical Application 8
## Road Closure with an Off-Site Detour


*Guidance:*

1. *Regulatory traffic control devices should be modified as needed for the duration of the detour.*

Option:

2. If the road is opened for some distance beyond the intersection and/or there are significant origin/destination points beyond the intersection, the ROAD CLOSED (R11-2) and DETOUR (W20-2, M4-8, M4-10) signs on Type 3 Barricades may be located at the edge of the traveled way.
3. A Route Sign Directional assembly may be placed on the far left corner of the intersection to augment or replace the one shown on the near right corner.
4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
5. Cardinal direction plaques may be used with route signs.

## Figure 6P-8. Road Closure with an Off-Site Detour (TA-8)

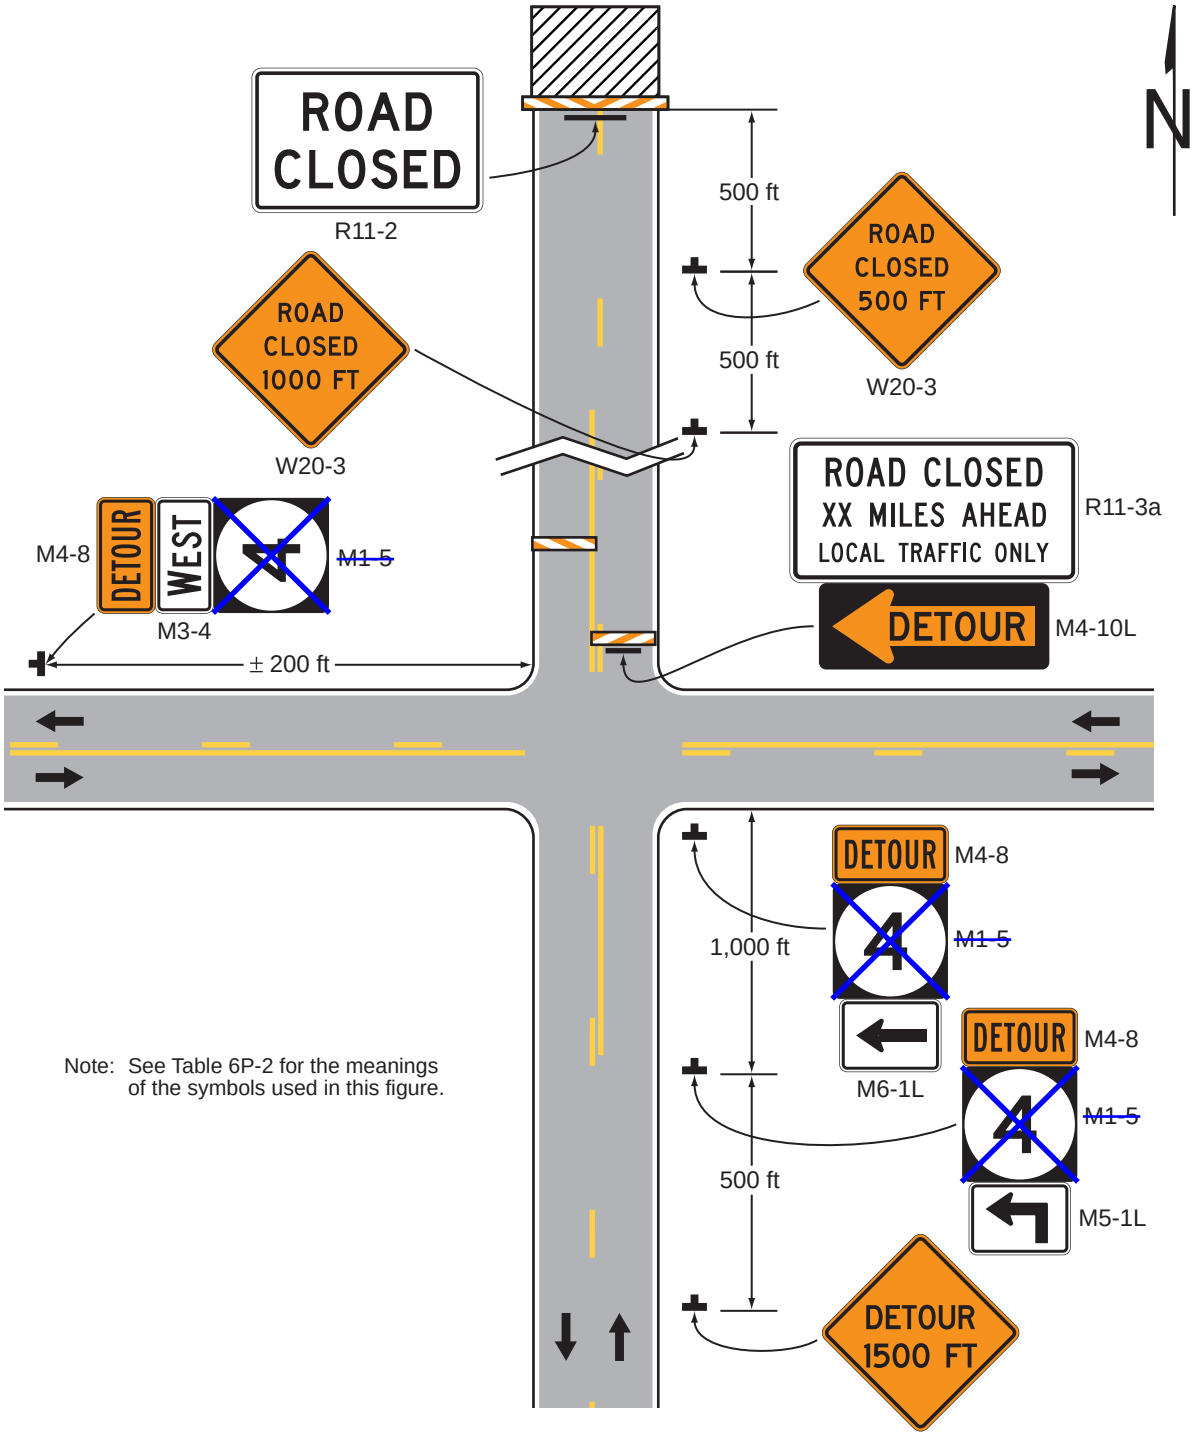


Note: See Table 6P-2 for the meanings of the symbols used in this figure.

**Typical Application 8**

Note: Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

## Notes for Figure 6P-9 —Typical Application 9 Overlapping Routes with a Detour

Support:

1. TTC devices are shown for one direction of travel only.

**Standard:**

**2. Devices similar to those depicted shall be placed for the opposite direction of travel.**


*Guidance:*

*3. STOP (R1-1) or YIELD (R1-2) signs displayed to side roads should be installed as needed along the temporary route.*

Option:

4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
5. Flashing warning lights may be used on the Type 3 Barricades.
6. Cardinal direction plaques may be used with route signs.

## Figure 6P-9. Overlapping Routes with a Detour (TA-9)

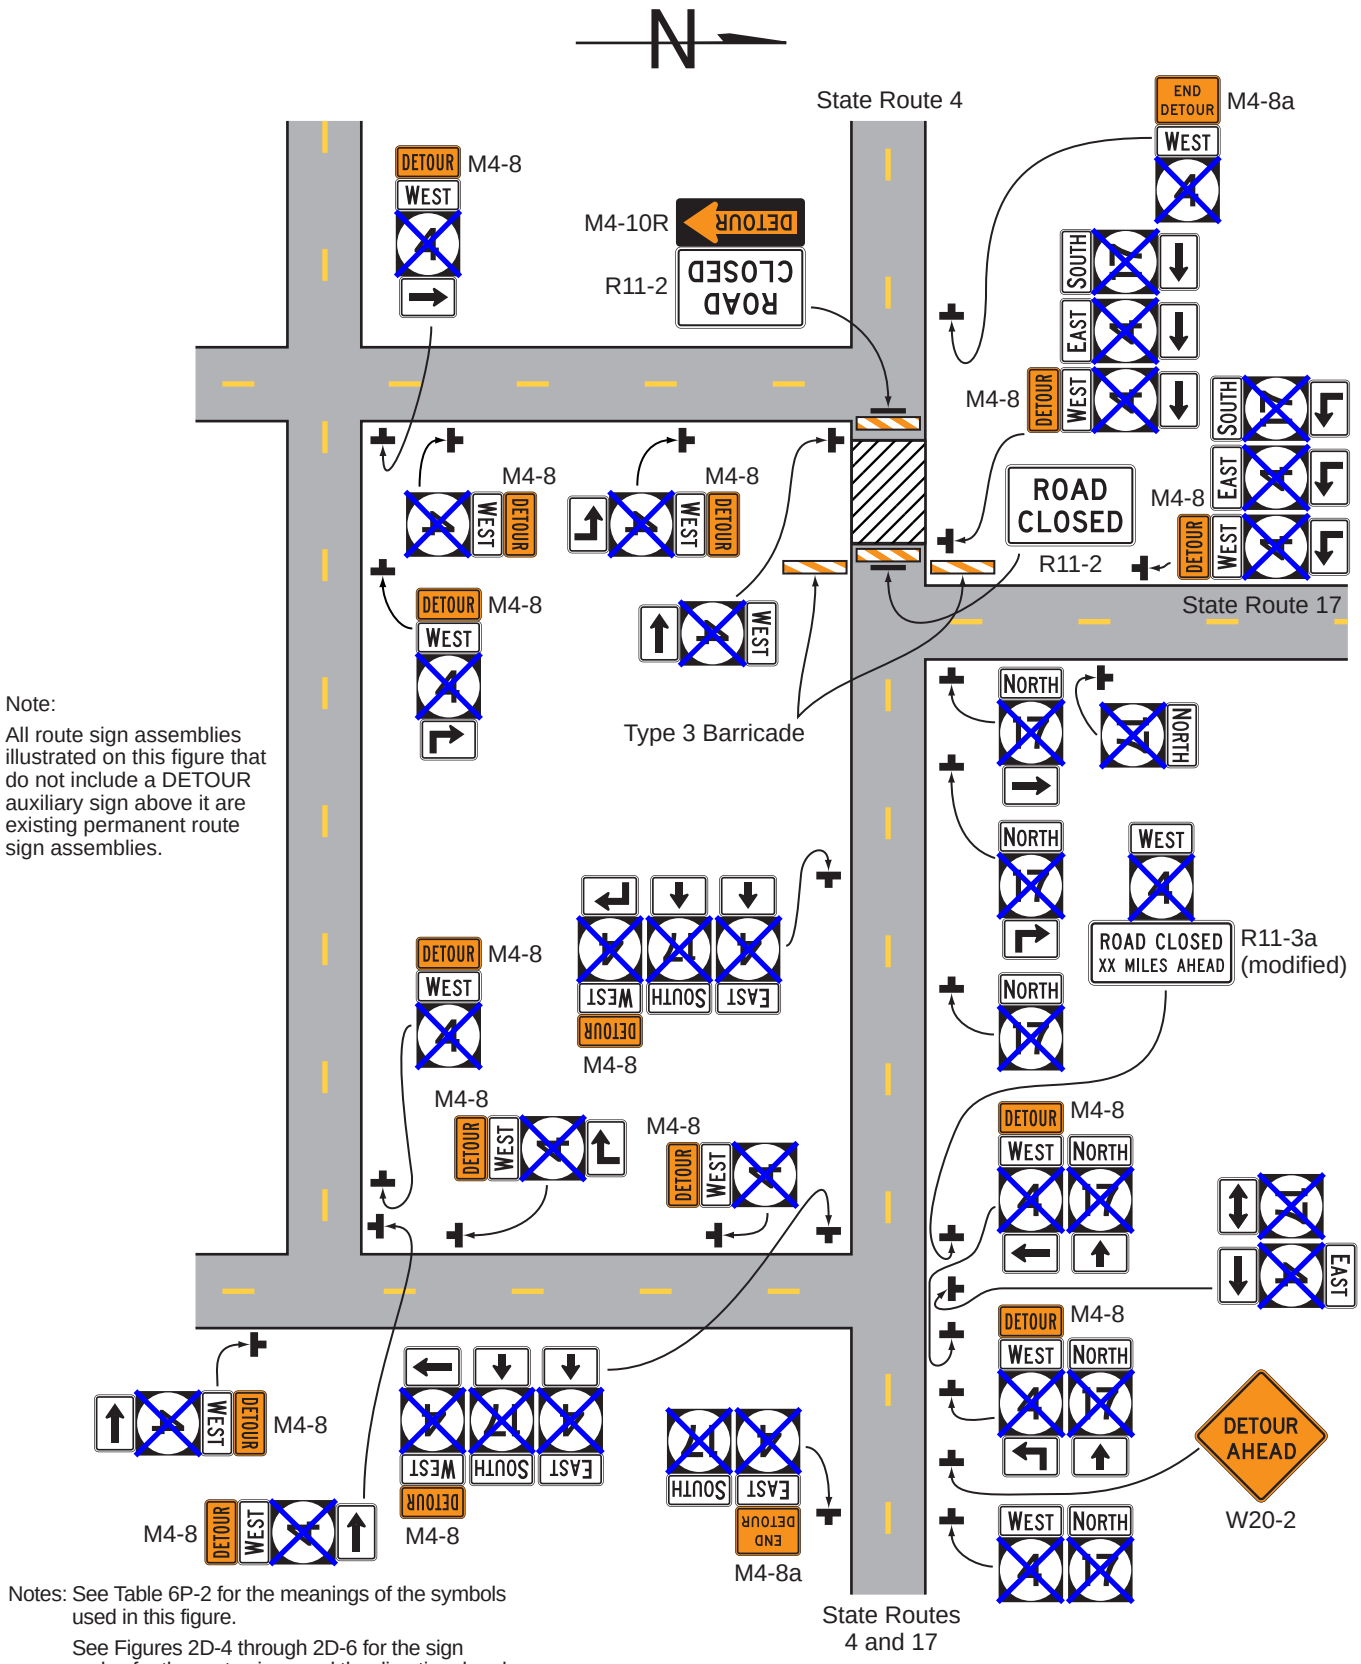


Note:

All route sign assemblies illustrated on this figure that do not include a DETOUR auxiliary sign above it are existing permanent route sign assemblies.

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Figures 2D-4 through 2D-6 for the sign codes for the route signs and the directional and arrow auxiliary signs associated with them.

Refer to Figure 2D-4 and Figure 2D-4(CA) for appropriate route shield and/or marker selection.

**Typical Application 9**

## Notes for Figure 6P-10 —Typical Application 10
## Lane Closure on a Two-Lane Road Using Flaggers

Option:

1. Positive protection devices may be used per Section 6M.02.
2. For low-volume situations with short TTC zones on straight roadways where the flagger is visible to road users approaching from both directions, a single flagger, positioned to be visible to road users approaching from both directions, may be used (see Chapter 6D).
3. The ROAD WORK AHEAD (W20-1) and the END ROAD WORK (G20-2) signs may be omitted for short-duration operations.
4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs. A BE PREPARED TO STOP (W3-4) sign may be added to the sign series.
5. Automated Flagger Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.

*Guidance:*

6. *The buffer space should be extended so that the two-way traffic taper is placed before a horizontal (or crest vertical) curve to provide adequate sight distance for the flagger and a queue of stopped vehicles.*

**Standard:**

7. **At night, flagger stations shall be illuminated, except in emergencies.**

*Guidance:*

8. *When used, the BE PREPARED TO STOP (W3-4) sign should be located ~~between~~ after the Flagger sign and the ONE LANE ROAD (W20-4) sign.*
9. *When a grade crossing exists within or upstream of the transition area and it is anticipated that queues resulting from the lane closure might extend through the grade crossing, the TTC zone should be extended so that the transition area precedes the grade crossing.*
10. *When a grade crossing equipped with active warning devices exists within the activity area, provisions should be made for keeping flaggers informed as to the activation status of these warning devices.*
11. *When a grade crossing exists within the activity area, drivers operating on the left-hand side of the normal center line should be provided with comparable warning devices as for drivers operating on the right-hand side of the normal center line.*
12. *Early coordination with the railroad company or transit agency should occur before work starts.*


Option:

13. A flagger or a uniformed law enforcement officer may be used at the grade crossing to minimize the probability that vehicles are stopped within 15 feet of the grade crossing, measured from both sides of the outside rails.

Support:

14. For State highways, refer to Caltrans' Standard Plan T13. Refer to Section 1A.05 for information regarding this publication.
15. If portable transverse rumble strips are used for flagging operations, refer to Section 6M.06.

## Figure 6P-10. Lane Closure on a Two-Lane Road Using Flaggers (TA-10)

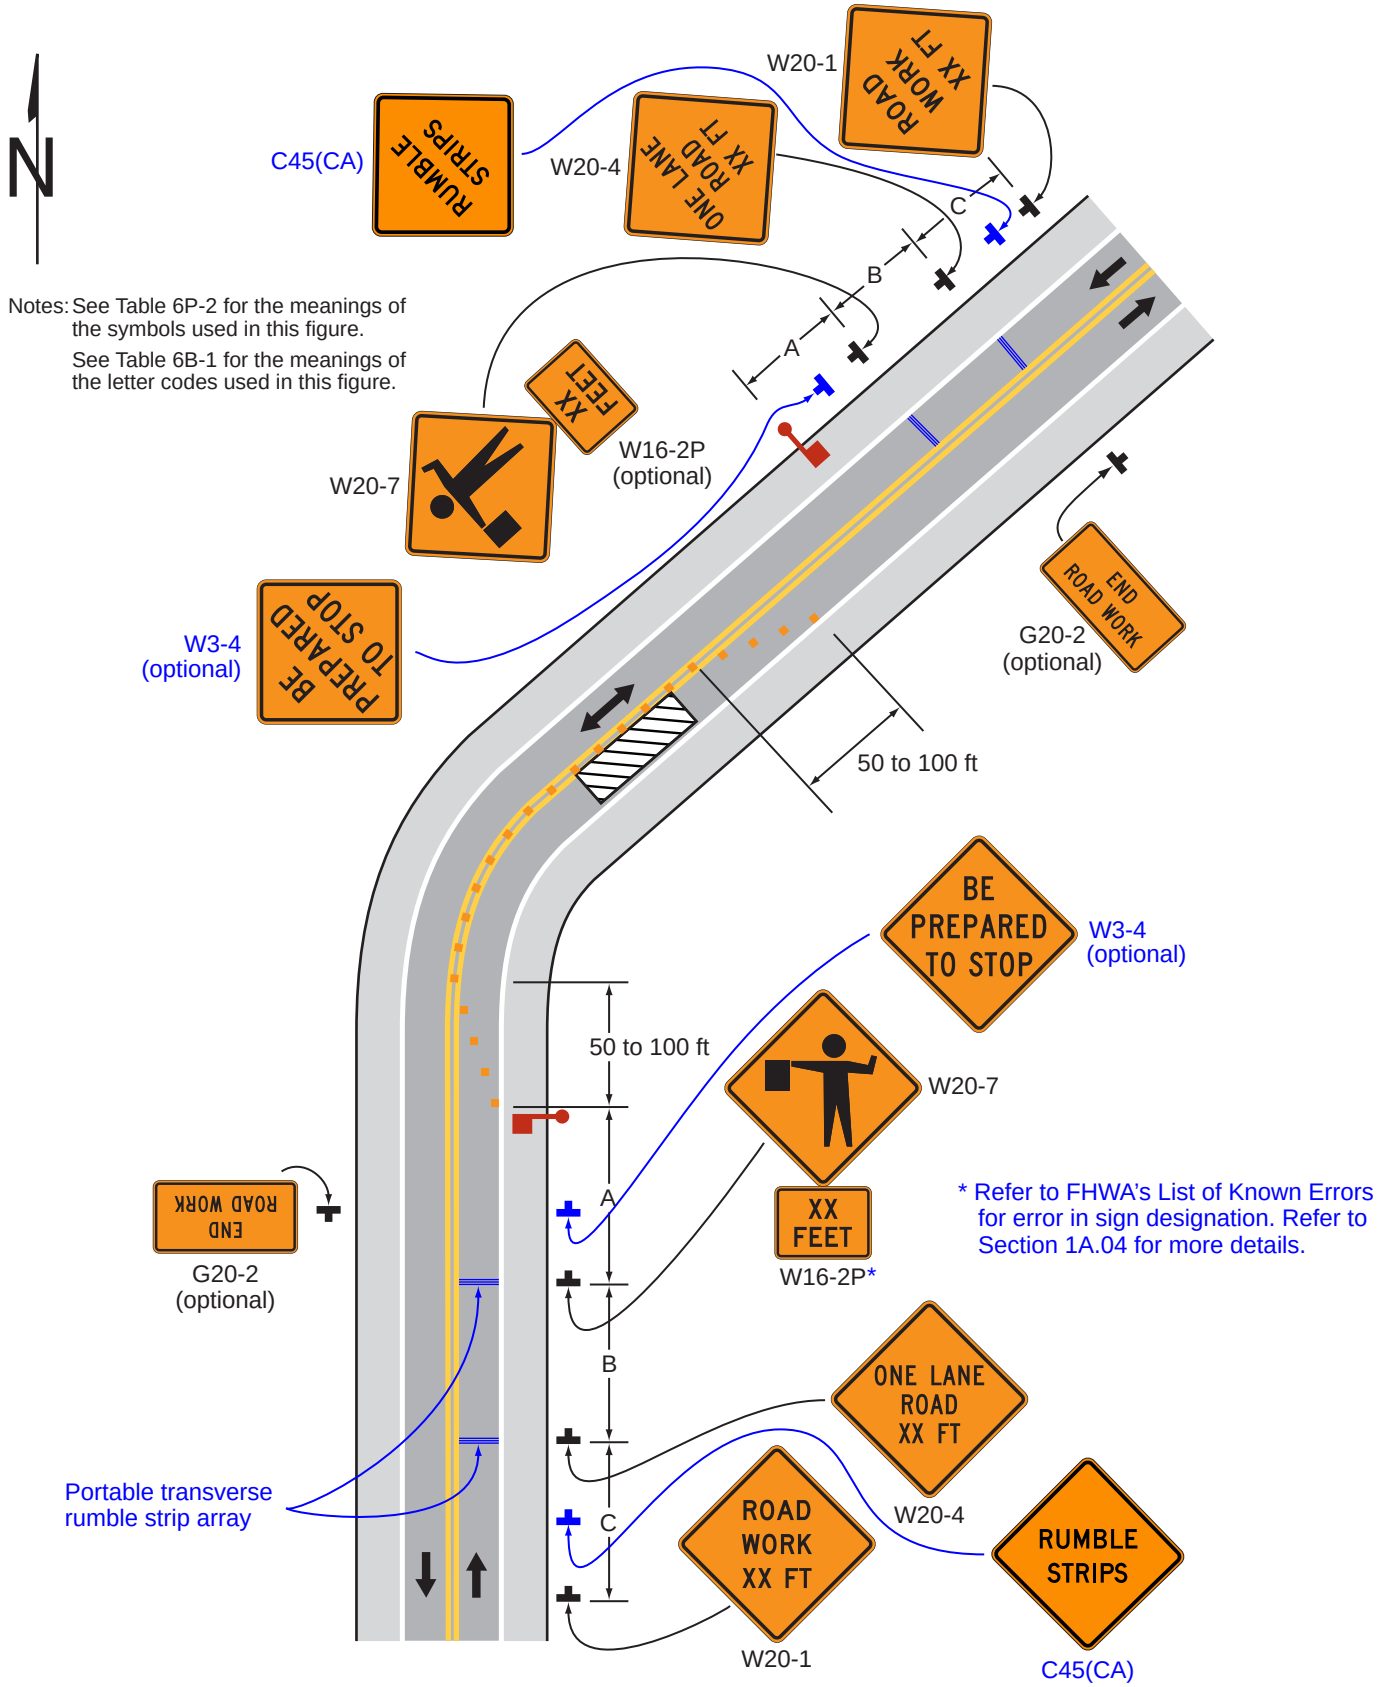


**Typical Application 10**

## Notes for Figure 6P-11 —Typical Application 11
## Lane Closure on a Two-Lane Road with Low Traffic Volumes

Option:

1. Positive protection devices may be used per Section 6M.02.
2. This TTC zone application may be used as an alternate to the TTC application shown in Figure 6P-10 (using flaggers) when the following conditions exist:
   a. Vehicular traffic volume is such that sufficient gaps exist for vehicular traffic that must yield.
   b. Road users from both directions are able to see approaching vehicular traffic through and beyond the worksite and have sufficient visibility of approaching vehicles.
3. The Type B flashing warning lights may be placed on the ROAD WORK AHEAD (W20-1) and the ONE LANE ROAD AHEAD (W20-4) signs whenever a night lane closure is necessary.


**Standard:**

**4. The approach to the side that is not closed shall be visible (for a distance equal to the safe passing sight distance for that approach) to the road user who must yield or stop.**

Support:

5. Refer to Section 3B.03 and 6E.06.

# Figure 6P-11. Lane Closure on a Two-Lane Road with Low Traffic Volumes (TA-11)

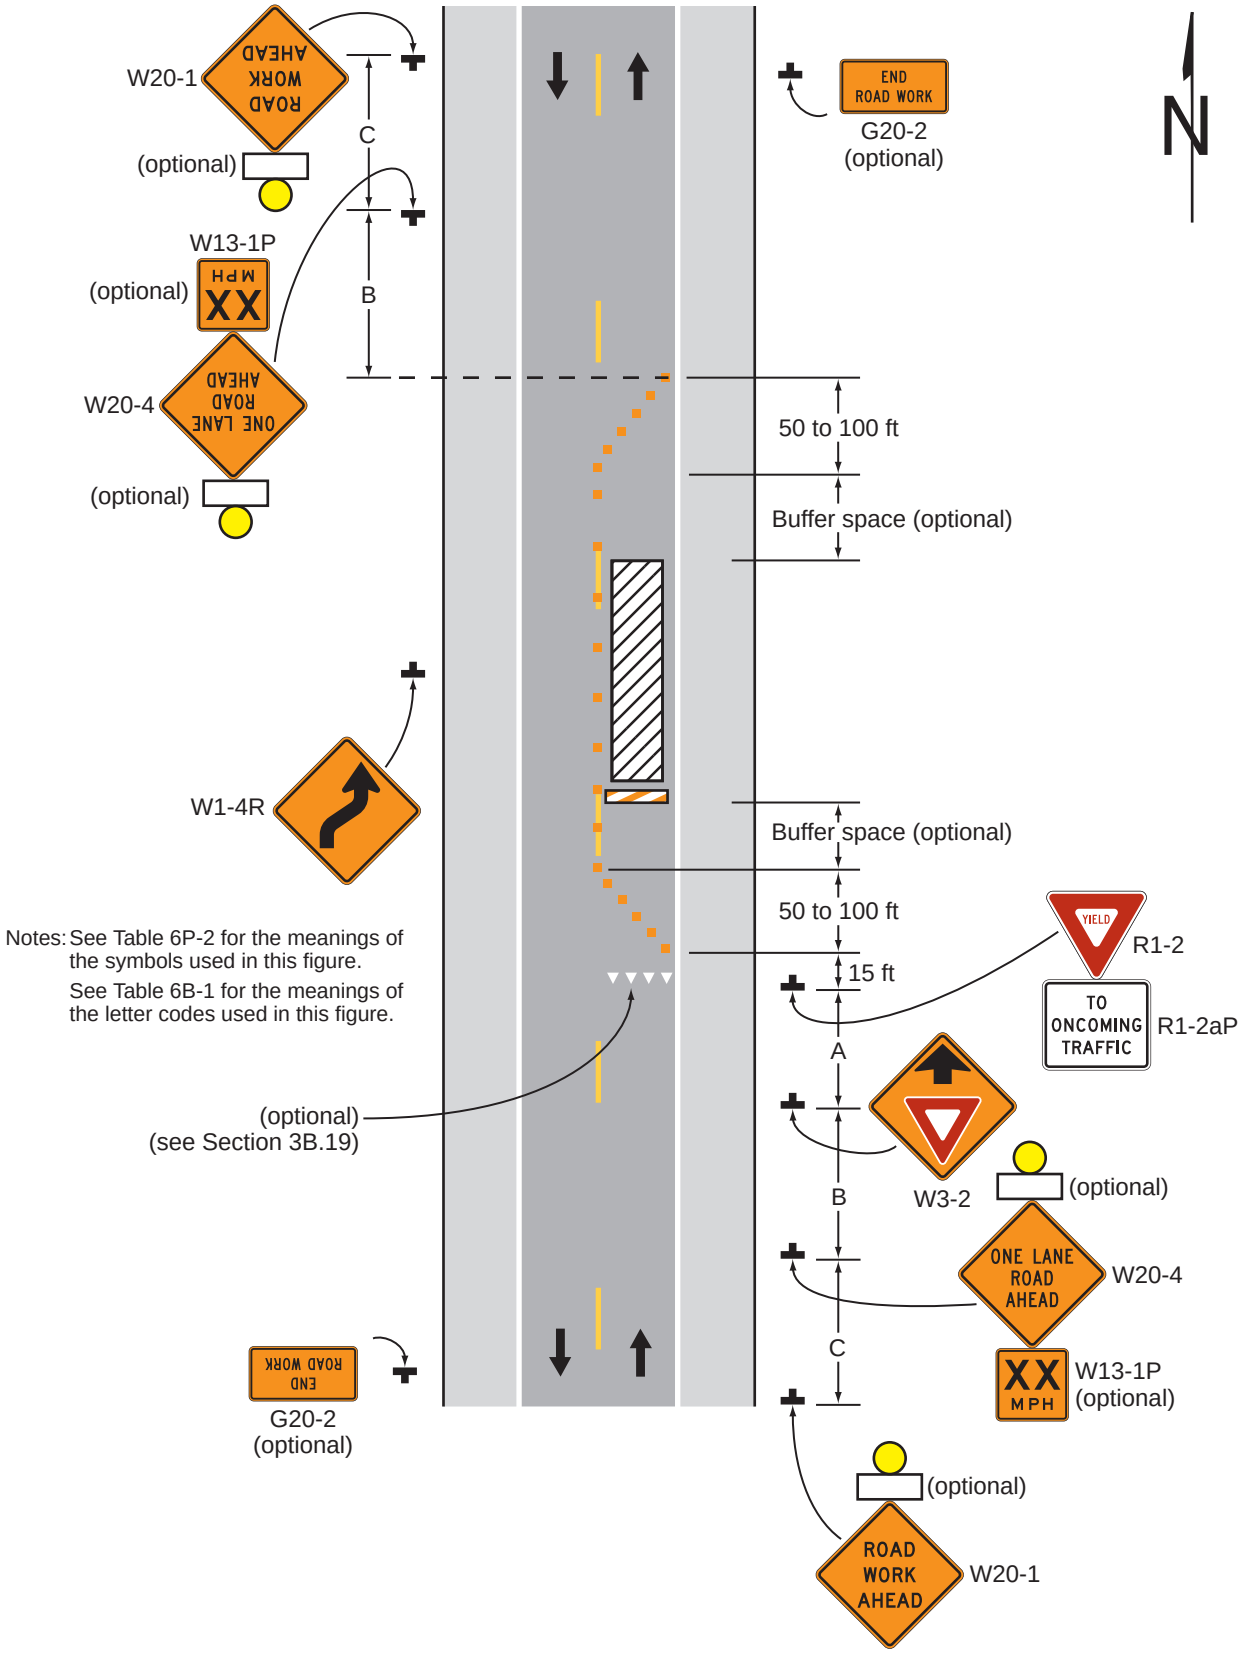


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

## Typical Application 11

## Notes for Figure 6P-12 —Typical Application 12
## Lane Closure on a Two-Lane Road Using Temporary Traffic Control Signals

**Standard:**

1. **Temporary traffic control signals shall be installed and operated in accordance with the provisions of Part 4. Temporary traffic control signals shall meet the physical display and operational requirements of conventional traffic control signals.**
2. **Temporary traffic control signal timing shall be established by authorized officials. Durations of red clearance intervals shall be adequate to clear the one-lane section of conflicting vehicles.**
3. **When the temporary traffic control signal is changed to the flashing mode, either manually or automatically, red signal indications shall be flashed to both approaches.**
4. **Stop lines shall be installed with temporary traffic control signals for long-term closures. Existing conflicting pavement markings and raised pavement marker reflectors between the activity area and each stop line shall be removed. After the temporary traffic control signal is removed, the stop lines and other temporary pavement markings shall be removed and the permanent pavement markings restored.**
5. **Safeguards shall be incorporated to avoid the possibility of conflicting signal indications at each end of the TTC zone.**


*Guidance:*

6. *Where no-passing lines are not already in place, they should be added.*
7. *Adjustments in the location of the advance warning signs should be made as needed to accommodate the horizontal or vertical alignment of the roadway, recognizing that the distances shown for sign spacings are minimums. Adjustments in the height of the signal heads should be made as needed to conform to the vertical alignment.*

Option:

8. Positive protection devices may be used per Section 6M.02.
9. Flashing warning lights shown on the ROAD WORK AHEAD (W20-1) and the ONE LANE ROAD AHEAD (W20-4) signs may be used.
10. Removable pavement markings may be used. Support:
11. Temporary traffic control signals are preferable to flaggers for long-term projects and other activities that would require flagging at night.
12. The maximum length of activity area for one-way operation under temporary traffic control signal control is determined by the capacity required to handle the peak demand.

# Figure 6P-12. Lane Closure on a Two-Lane Road Using Temporary Traffic Control Signals (TA-12)

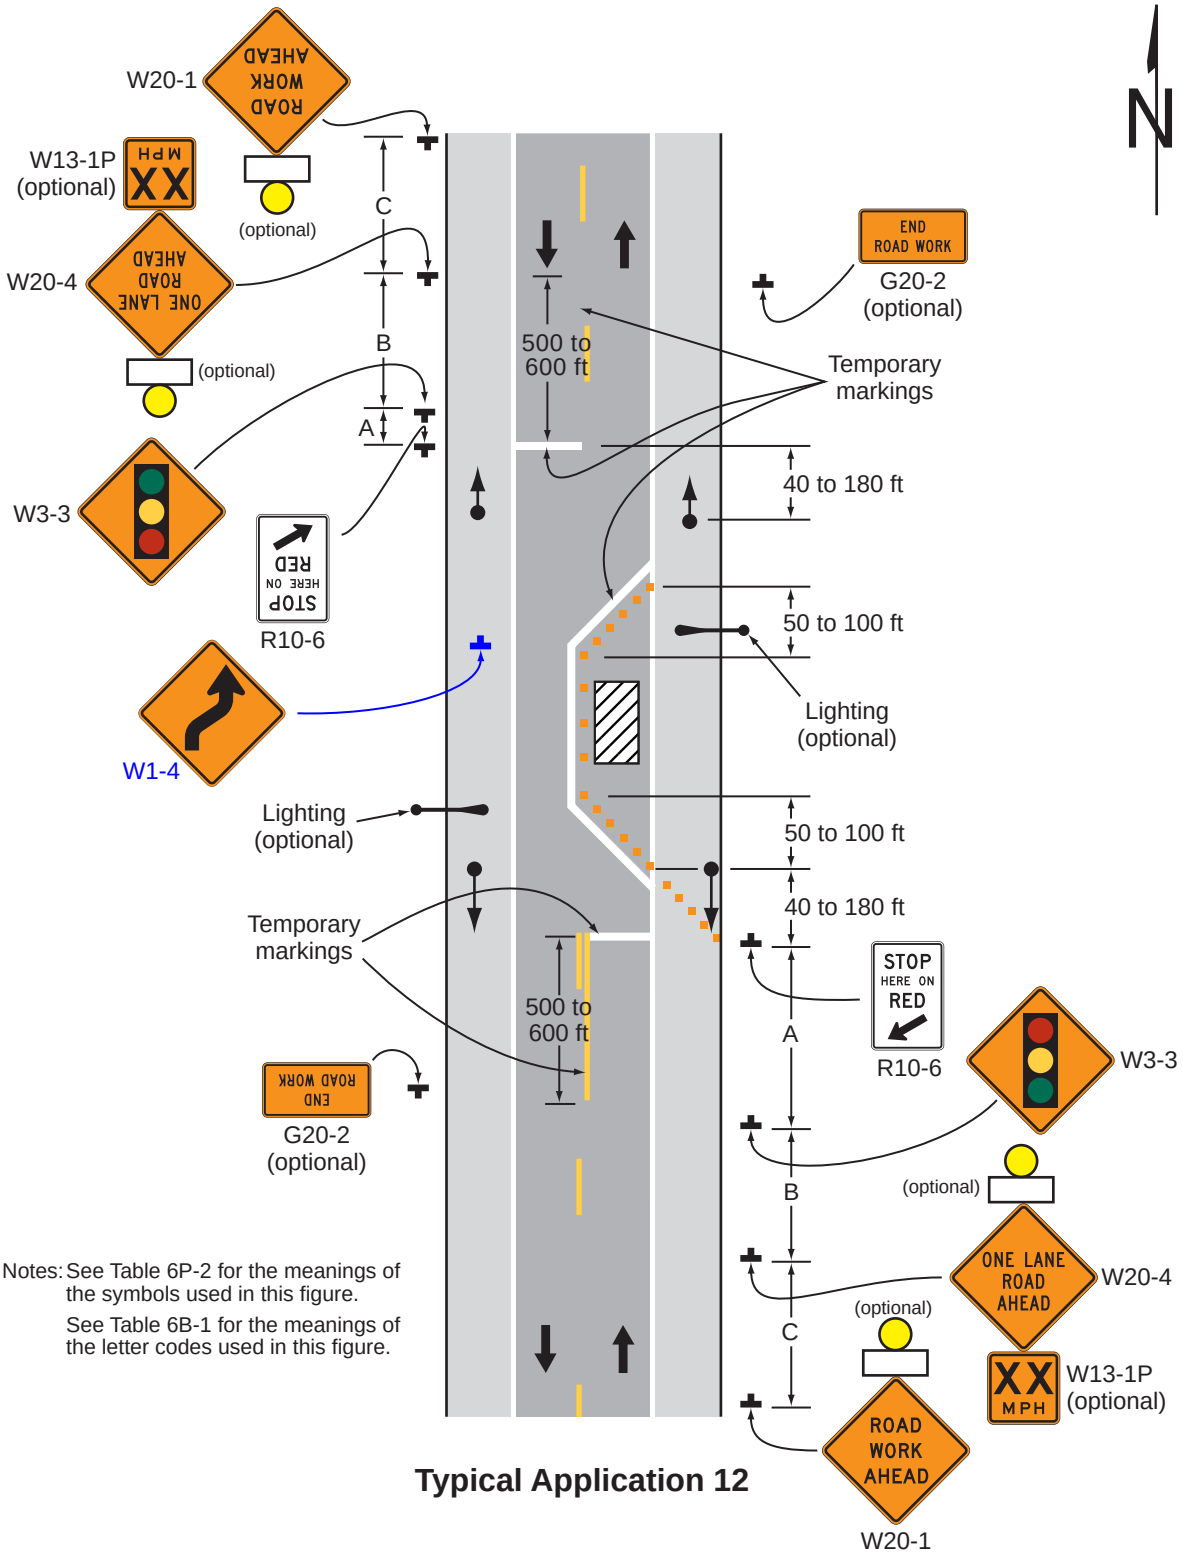


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 12**

## Notes for Figure 6P-13 —Typical Application 13
## Temporary Road Closure

Support:

1. Conditions represented are a planned closure not exceeding 20 minutes during the daytime.

**Standard:**

**2. A flagger or uniformed law enforcement officer shall be used for this application. The flagger, if used for this application, shall follow the procedures provided in Sections 6D.05 and 6D.06.**

*Guidance:*

*3. The uniformed law enforcement officer, if used for this application, should follow the procedures provided in Sections 6D.05 and 6D.06.*


Option:

4. A BE PREPARED TO STOP sign may be added to the sign series.
5. Positive protection devices may be used per Section 6M.02.
6. Automated Flagger Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.

*Guidance:*

*7. When used, the BE PREPARED TO STOP (W3-4) sign should be located ~~before~~ after the Flagger symbol sign.*

## Figure 6P-13. Temporary Road Closure (TA-13)

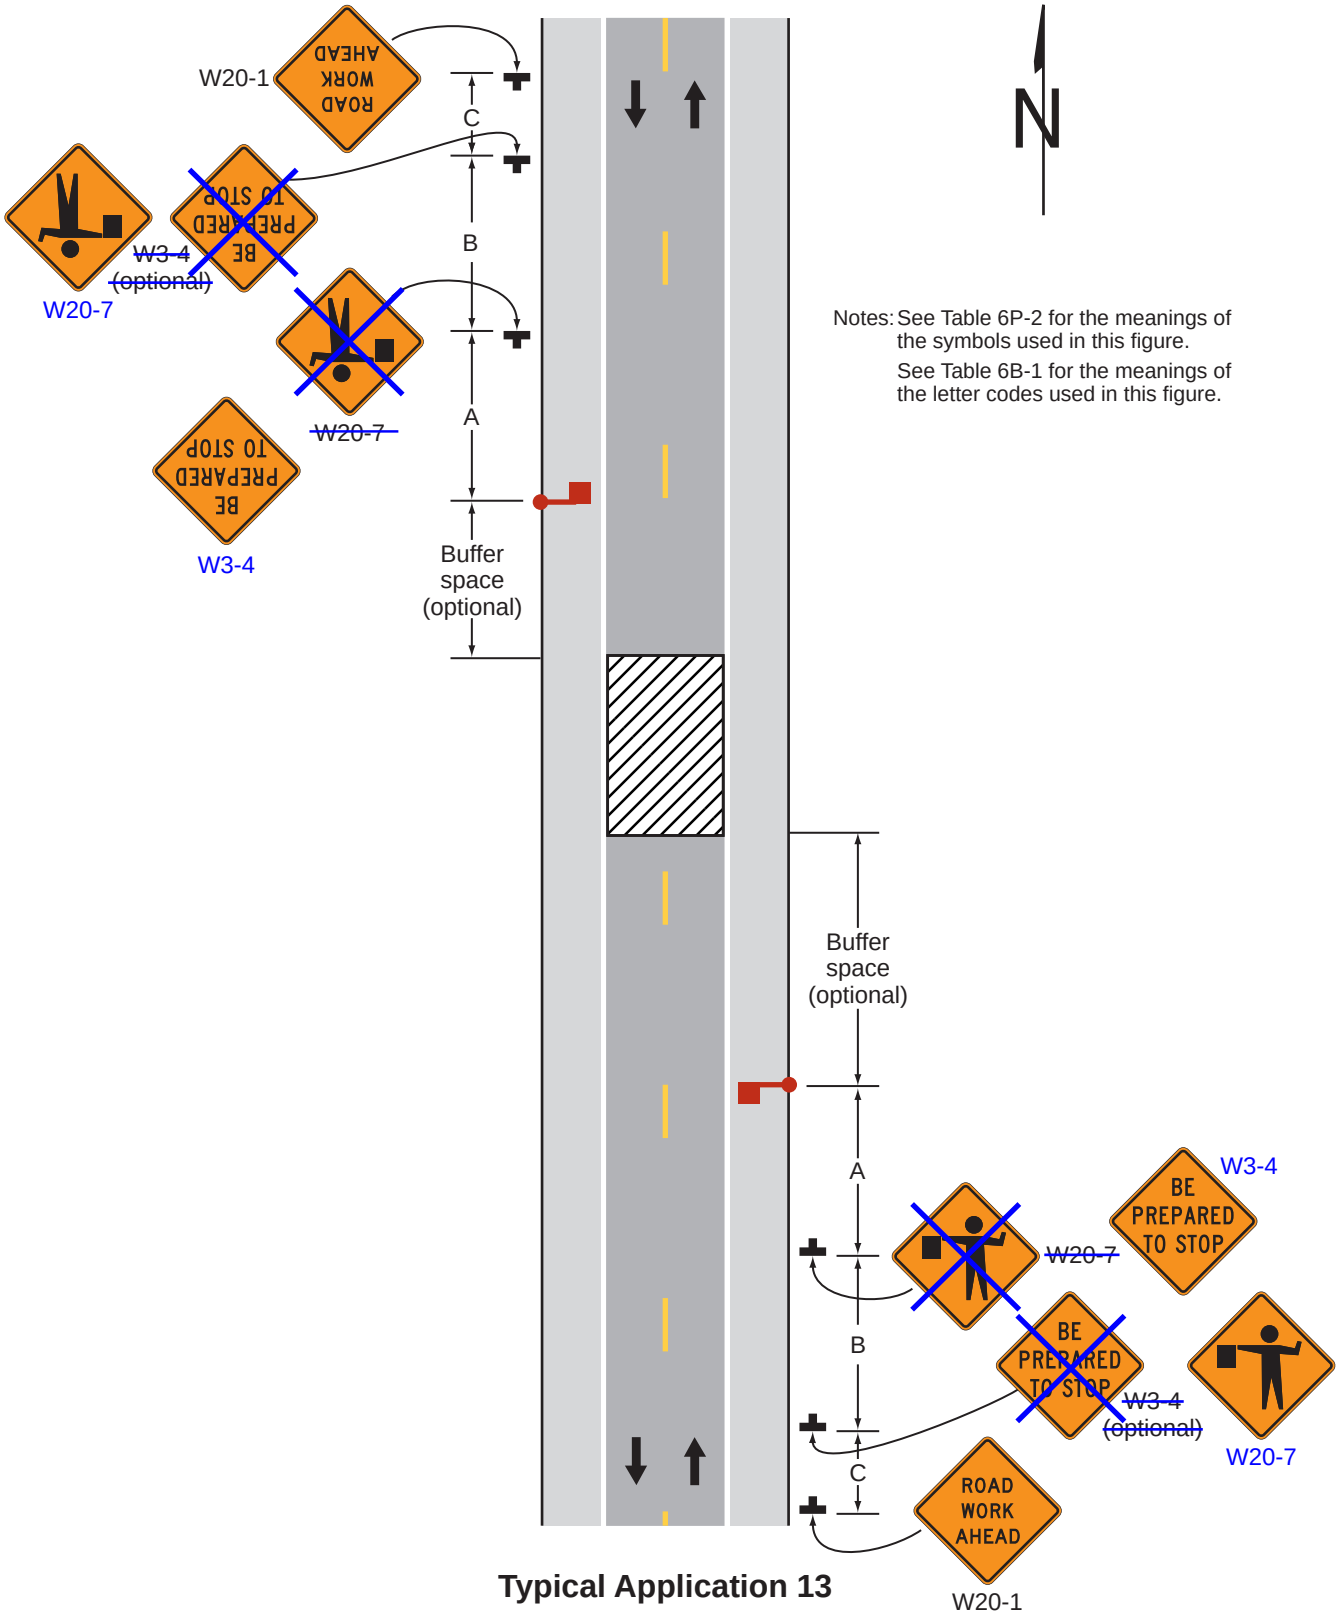


**Typical Application 13**

## Notes for Figure 6P-14 —Typical Application 14
## Haul Road Crossing

*Guidance:*

1. *Floodlights should be used to illuminate haul road crossings where existing light is inadequate.*
2. *Where no-passing lines are not already in place, they should be added.*

**Standard:**

**3. The traffic control method selected shall be used in both directions.**

**Flagging Method**

**4. When a road used exclusively as a haul road is not in use, the haul road shall be closed with Type 3 Barricades and the Flagger symbol signs covered.**
**5. The flagger shall follow the procedures provided in Sections 6D.05 and 6D.06.**
**6. At night, flagger stations shall be illuminated, except in emergencies.**

**Signalized Method**

**7. When a road used exclusively as a haul road is not in use, the haul road shall be closed with Type 3 Barricades. The signals shall either:**
   **a. Flash yellow on the main road and flash red on the haul road or be covered, and the Signal Ahead and STOP HERE ON RED (R10-6, R10-6a) signs shall be covered or hidden from view; or**
   **b. Display green on the main road and steady red on the haul road, but only if actuated signal operation is used such that green is always displayed to the main road except when a vehicle is detected on the haul road.**
**8. The temporary traffic control signals shall control both the highway and the haul road and shall meet the physical display and operational requirements of conventional traffic control signals as described in Part 4. Traffic control signal timing shall be established by authorized officials.**
**9. Stop lines shall be used on existing highways with temporary traffic control signals.**
**10. Existing conflicting pavements markings between the stop lines shall be removed. After the temporary traffic control signal is removed, the stop lines and other temporary pavement markings shall be removed and the permanent pavement markings restored.**

**10a. A temporary traffic control signal.**
   **a. Each temporary signals plan shall include the equipment details.**
   **b. Signal faces, detectors and control equipment shall be kept in good operating condition at all times.**
   **c. Timing of the signals shall be determined by the agency having jurisdiction.**
   **d. A Signal Ahead (W3-3) sign (and flashing beacon, if required) shall be placed on each approach of the highway in advance of the signal.**
   **e. Haul road signals shall be operated using manual control or vehicle detectors. The operation shall provide a green indication to the haul road only if the contractor's equipment is approaching the crossing.**
   **f. The all-red clearance interval shall permit a vehicle to travel the length of the one-way lane before a green indication is shown to opposing traffic.**
   **g. Failure to comply with any of the above or other specified conditions shall be justification for revoking the permit.**

Option:

10b. Temporary signals for traffic control at the intersection of a State highway and a haul road, or to provide one-way traffic control through a construction zone, may be either the fixed or portable type. Such signals are normally installed by a contractor and may require an Encroachment Permit.

Flagging Method


11. Automated Flagger Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.

*Guidance:*


*Signalized Method*

12. *If actuated signal operation is used (see Item b in Note 7 above) and pedestrian facilities, such as sidewalks, are present in the area of the haul road crossing, then consideration should be given to providing pedestrian actuation capability at the temporary traffic control signal to accommodate any pedestrians who might be depending upon a pedestrian phase to cross the main road.*

# Figure 6P-14. Haul Road Crossing (TA-14)

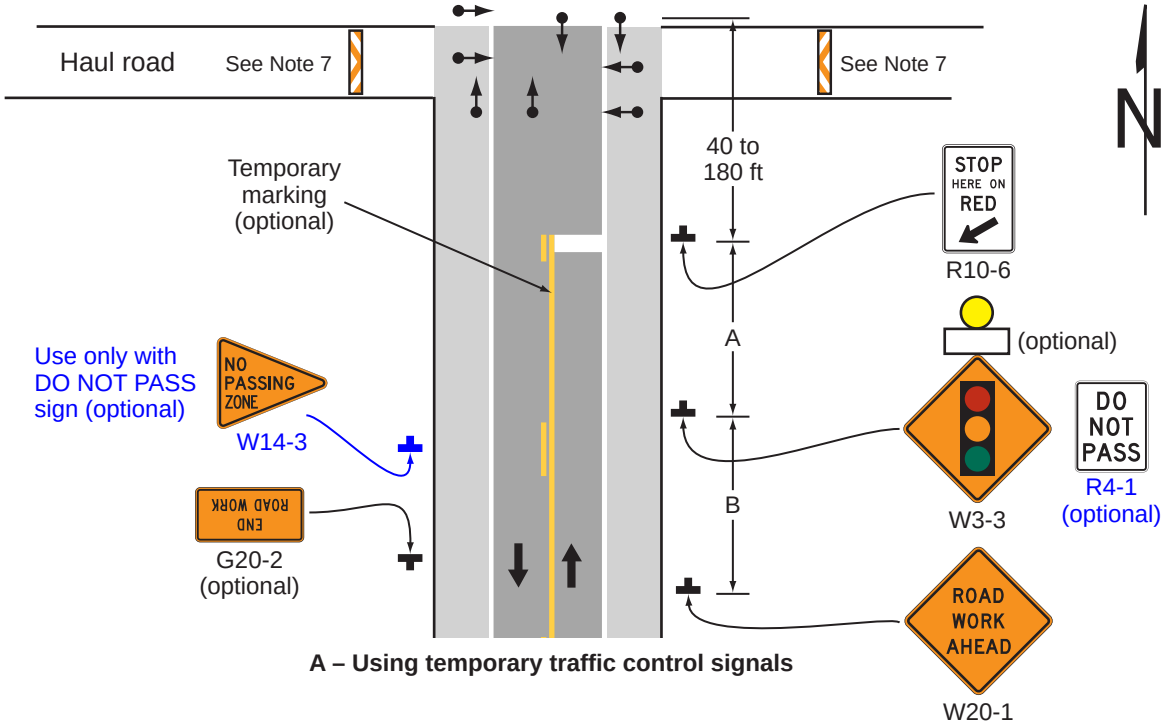


**A – Using temporary traffic control signals**

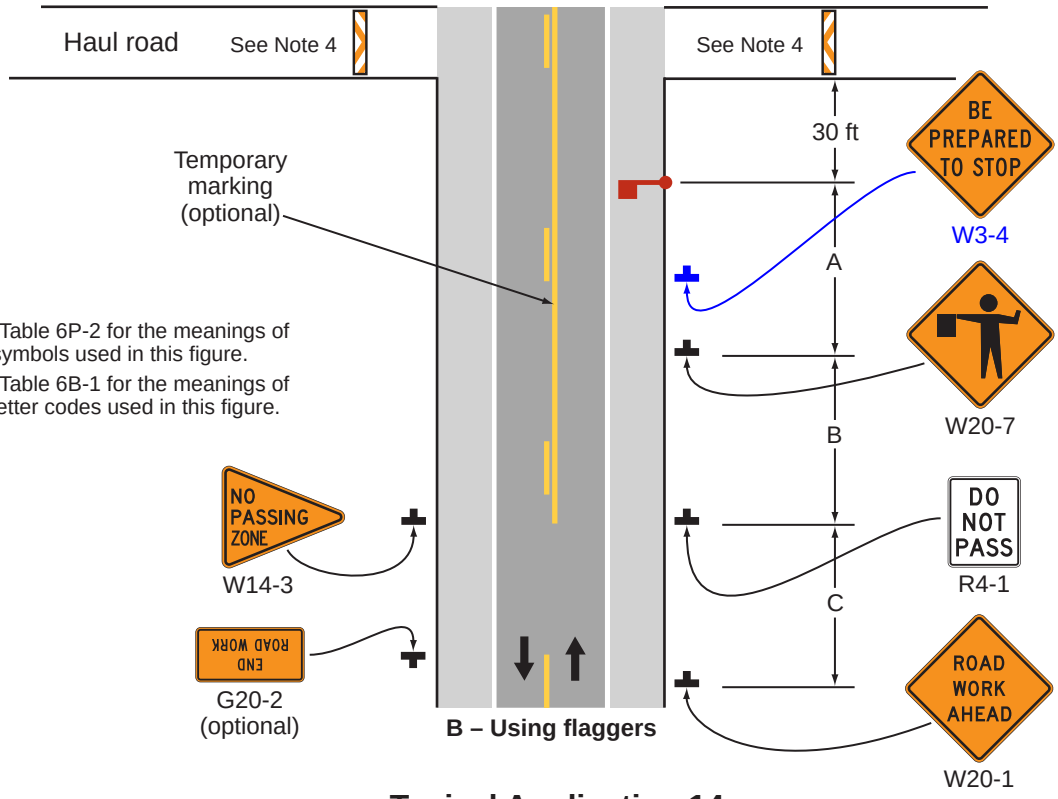


**B – Using flaggers**

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

## Typical Application 14

## Notes for Figure 6P-15 —Typical Application 15
## Work in the Center of a Road with Low Traffic Volumes

*Guidance:*

1. *The lanes on either side of the center work space should have a minimum width of 10 feet as measured from the near edge of the channelizing devices to the edge of the pavement or the outside edge of the paved shoulder.*

Option:

2. Positive protection devices may be used per Section 6M.02.
3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. If the closure continues overnight, warning lights may be used on the channelizing devices.
5. A lane width of 9 feet may be used for short-term stationary work on low-volume, low-speed roadways when motor vehicle traffic does not include longer and wider heavy commercial vehicles.
6. A work vehicle displaying high-intensity rotating, flashing, oscillating, or strobe lights may be used instead of the channelizing devices forming the tapers or the high-level warning devices.
7. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.


**Standard:**

8. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

*Guidance:*

9. *All advance warning signs should be placed so that the path of travel for bicycles is not blocked while maintaining visibility for road users.*
10. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, the Bicycle Crossing (W11-1) sign and the IN ROAD (W16-1P) plaque should be used to advise motorists of the presence of bicyclists in the travel way lanes.*
11. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01), the temporary white edge line should be used on the shoulder to indicate the use of a portion of the shoulder as a traveled way lane.*

## Figure 6P-15. Work in the Center of a Road with Low Traffic Volumes (TA-15)

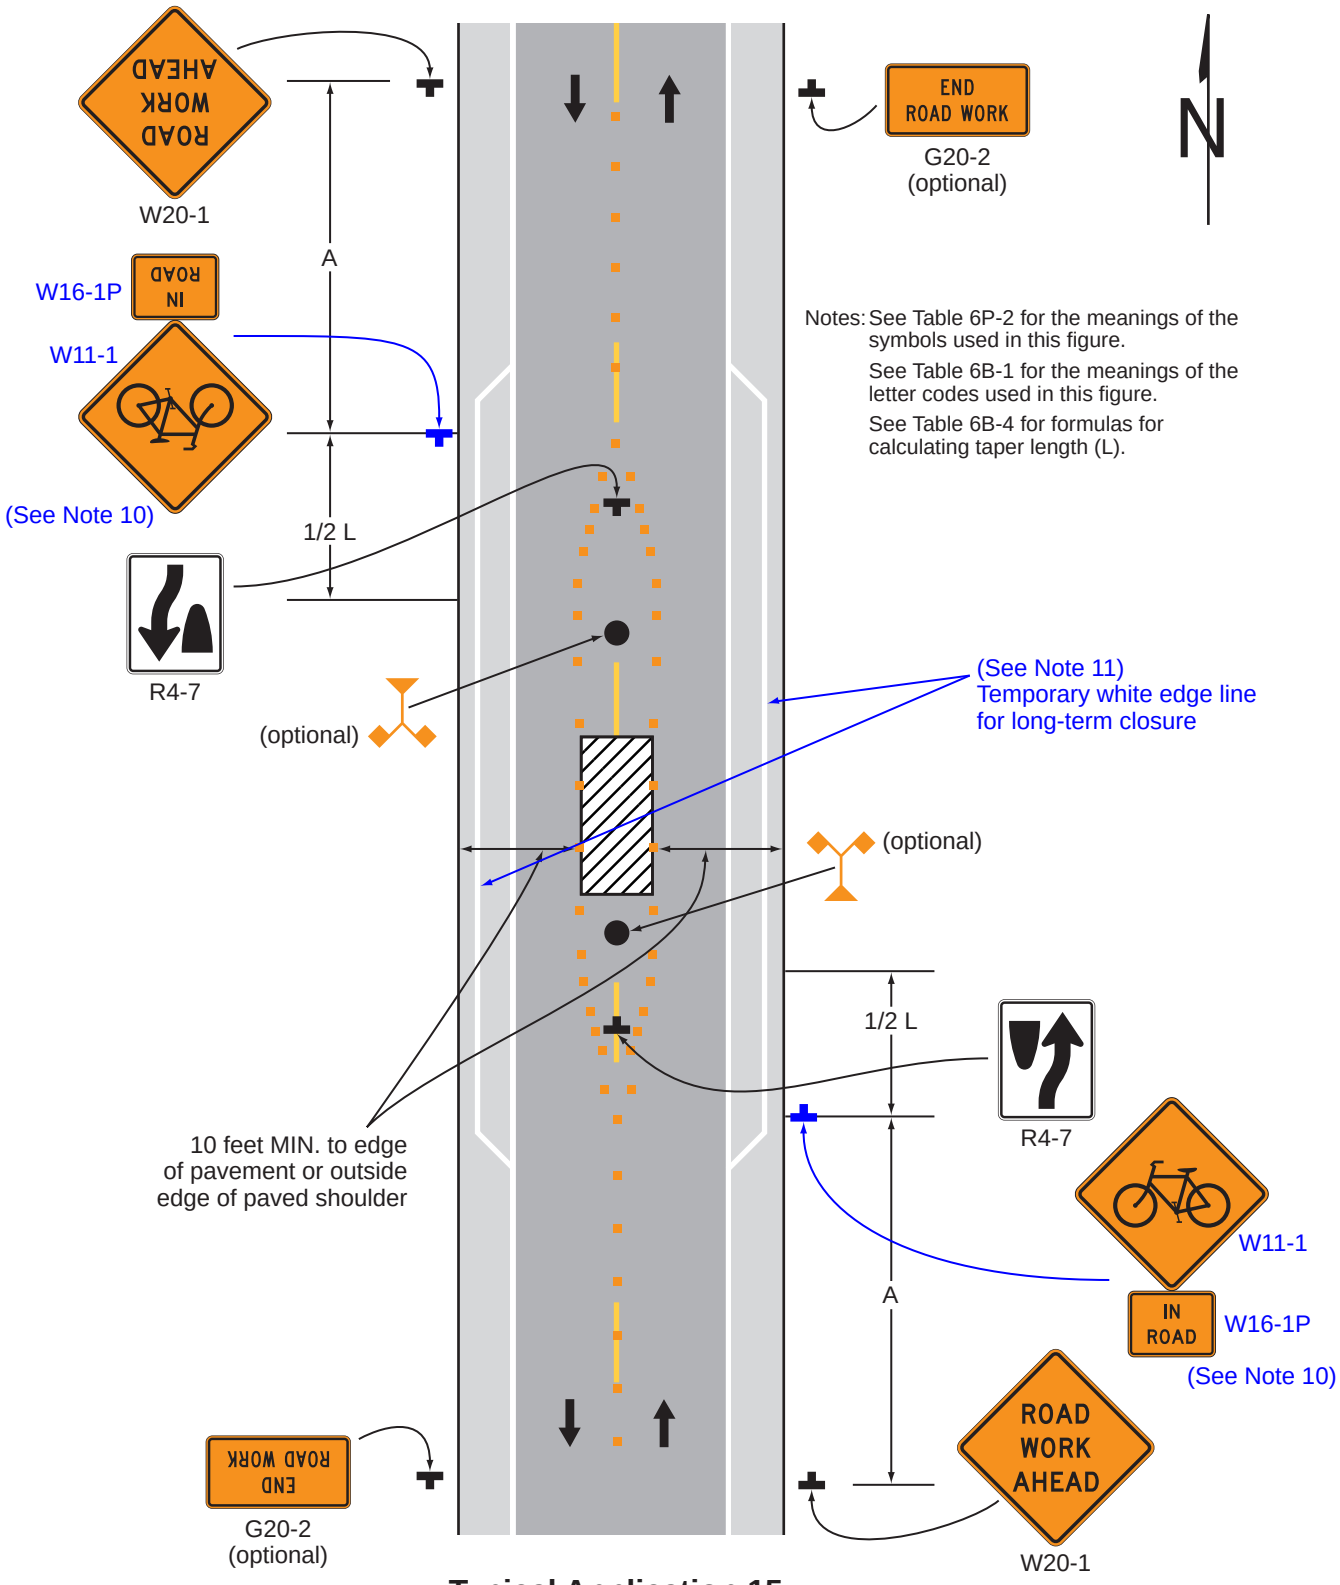


**Typical Application 15**

## Notes for Figure 6P-16 —Typical Application 16
## Surveying Along the Center Line of a Road with Low Traffic Volumes

*Guidance:*

1. *The lanes on either side of the center work space should have a minimum width of 10 feet as measured from the near edge of the channelizing devices to the edge of the pavement or the outside edge of the paved shoulder.*
2. *Cones should be placed 6 to 12 inches on either side of the center line.*
3. *A flagger should be used to warn workers who cannot watch road users.*

**Standard:**

4. **For surveying on the center line of a high-volume road, one lane shall be closed using the information illustrated in Figure 6P-10.**


Option:

5. A high-level warning device may be used to protect a surveying device, such as a target on a tripod.
6. Cones may be omitted for a cross-section survey.
7. ROAD WORK AHEAD (W20-1) signs may be used in place of the SURVEY CREW AHEAD (W21-6) signs.
8. Flags may be used to call attention to the advance warning signs.
9. If the work is along the shoulder, the flagger may be omitted.
10. For a survey along the edge of the road or along the shoulder, cones may be placed along the edge line.
11. A BE PREPARED TO STOP (W3-4) sign may be added to the sign series.
12. Automated Flagger Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.

*Guidance:*

13. *When used, the BE PREPARED TO STOP (W3-4) sign should be located ~~before~~ after the Flagger symbol (W20-7) sign.*

## Figure 6P-16. Surveying Along the Center Line of a Road with Low Traffic Volumes (TA-16)

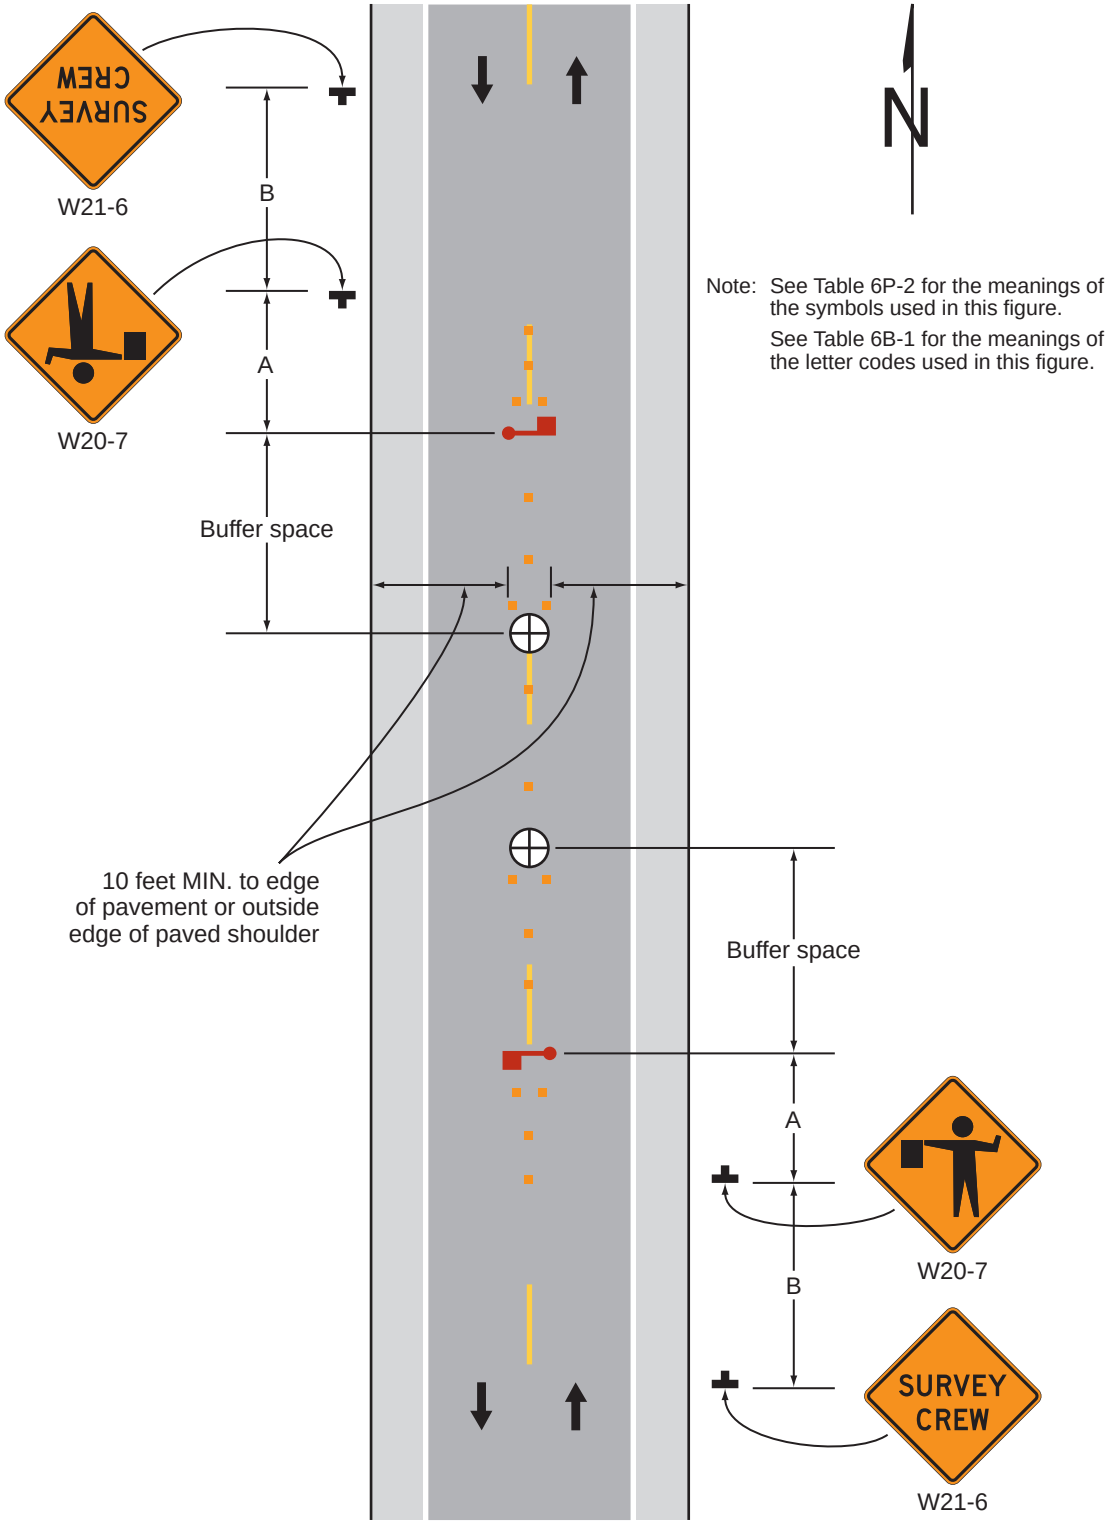


**Typical Application 16**

## Notes for Figure 6P-17 —Typical Application 17
## Mobile Operations on a Two-Lane Road

**Standard:**

1. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
2. **Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.**
3. **If an arrow board is used, it shall be used in the caution mode.**

*Guidance:*

4. *Where practical and when needed, the work and shadow vehicles should pull over periodically to allow vehicular traffic to pass.*
5. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicle should maintain the minimum distance from the work vehicle and proceed at the same speed. The shadow vehicle should slow down in advance of vertical or horizontal curves that restrict sight distance.*
6. *The shadow vehicles should also be equipped with two high-intensity flashing lights mounted on the rear, adjacent to the sign.*

Option:

7. Positive protection devices may be used per Section 6M.02.
8. The distance between the work and shadow vehicles may vary according to terrain, paint drying time, and other factors.
9. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
10. A truck-mounted attenuator may be used on the shadow vehicle or on the work vehicle.
11. If the work and shadow vehicles cannot pull over to allow vehicular traffic to pass frequently, a DO NOT PASS (R4-1) sign may be placed on the rear of the vehicle blocking the lane.


Support:

12. Shadow vehicles are used to warn motor vehicle traffic of the operation ahead.

**Standard:**

13. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**
14. **This typical application shall not be used on State highways, Caltrans' Standard Plan T17 for moving lane closure shall be used instead. Refer to Section 1A.05 for information regarding this publication.**

## Figure 6P-17. Mobile Operations on a Two-Lane Road (TA-17)

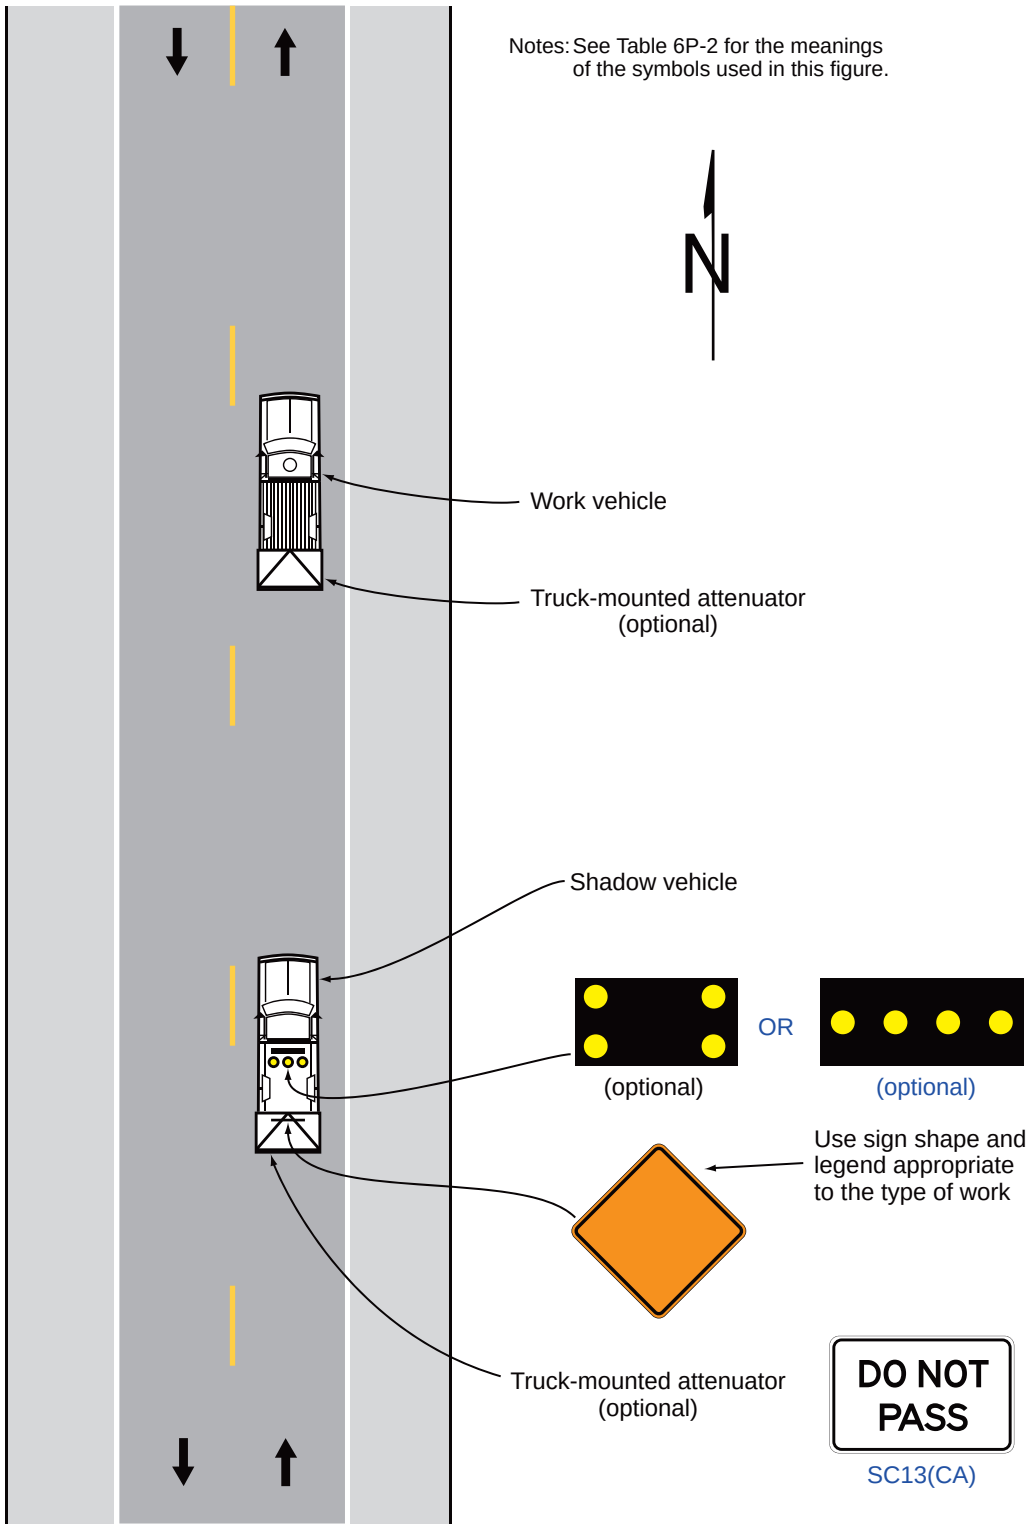


## Typical Application 17

## Notes for Figure 6P-18 —Typical Application 18
## Lane Closure on a Minor Street

**Standard:**

**1. This TTC shall be used only for low-speed facilities having low traffic volumes.**

Option:

2. Where the work space is short, where road users can see the roadway beyond, and where volume is low, vehicular traffic may be self-regulating.


**Standard:**

**3. Where vehicular traffic cannot effectively self-regulate, one or two flaggers shall be used as illustrated in Figure 6P-10.**

Option:

4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
5. A truck-mounted attenuator may be used on the work vehicle and the shadow vehicle.
6. Positive protection devices may be used per Section 6M.02.

## Figure 6P-18. Lane Closure on a Minor Street (TA-18)

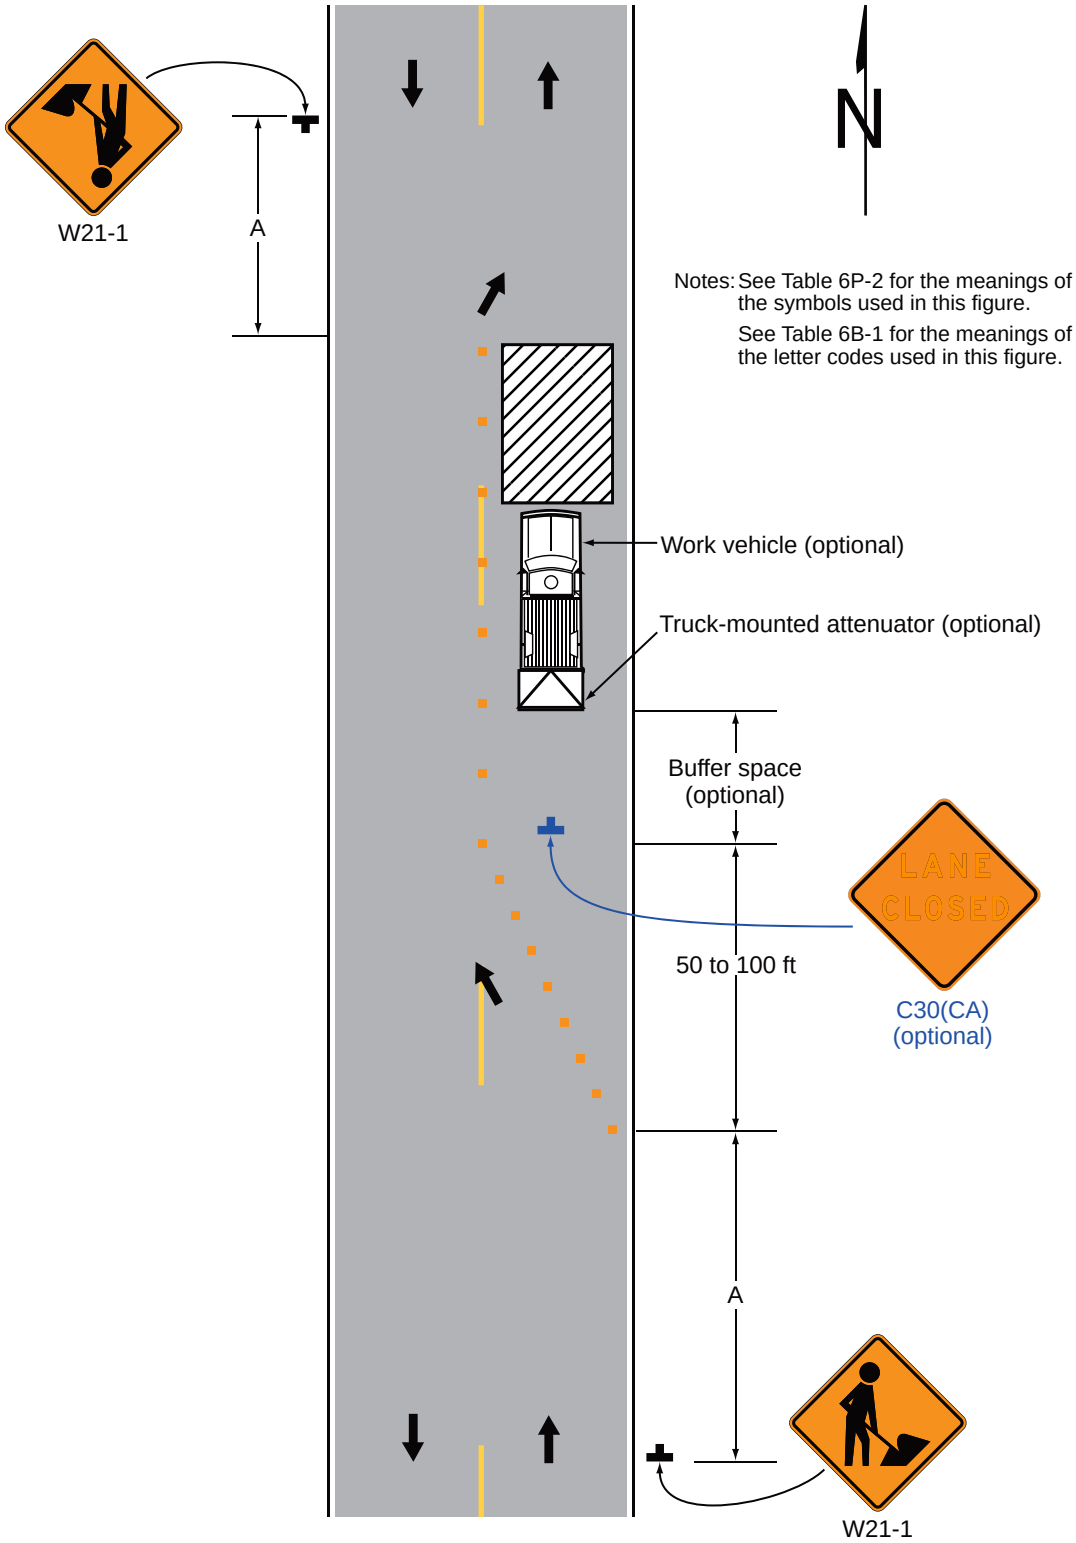


**Typical Application 18**

## Notes for Figure 6P-19 and Figure 6P-19(CA) —Typical Application 19 Detour for One Travel Direction

*Guidance:*

1. *This plan should be used for streets without posted route numbers.*
2. *On multi-lane streets, Detour signs with an Advance Turn Arrow should be used in advance of a turn.*

Option:

3. The STREET CLOSED legend may be used in place of ROAD CLOSED.
4. Additional DO NOT ENTER signs may be used at intersections with intervening streets.
5. Warning lights may be used on Type 3 Barricades.
6. Detour signs may be located on the far side of intersections.
7. A Street Name sign may be mounted with the Detour sign. The Street Name sign may be either white on green or black on orange.

**Standard:**

**8. When used, the Street Name sign shall be placed above the Detour sign.**

*Guidance:*


*9. The DETOUR (M4-8) sign should be placed on tangent sections at intervals not to exceed 1300 feet and at major intersections.*

*10. When the detour is applicable to bicyclists and not pedestrians, the Bicycle Detour (M4-9c) sign should be used instead of the Pedestrian/Bicycle Detour (M4-9a) sign.*

Option:

11. In urban areas, the M4-8 signs may be placed at every intersection.
12. For long-term duration projects (refer to Section 6N.01), the shared roadway bicycle marking may be used along detours with on-street parking and inadequate lane width.

## Figure 6P-19. Detour for One Travel Direction (TA-19)

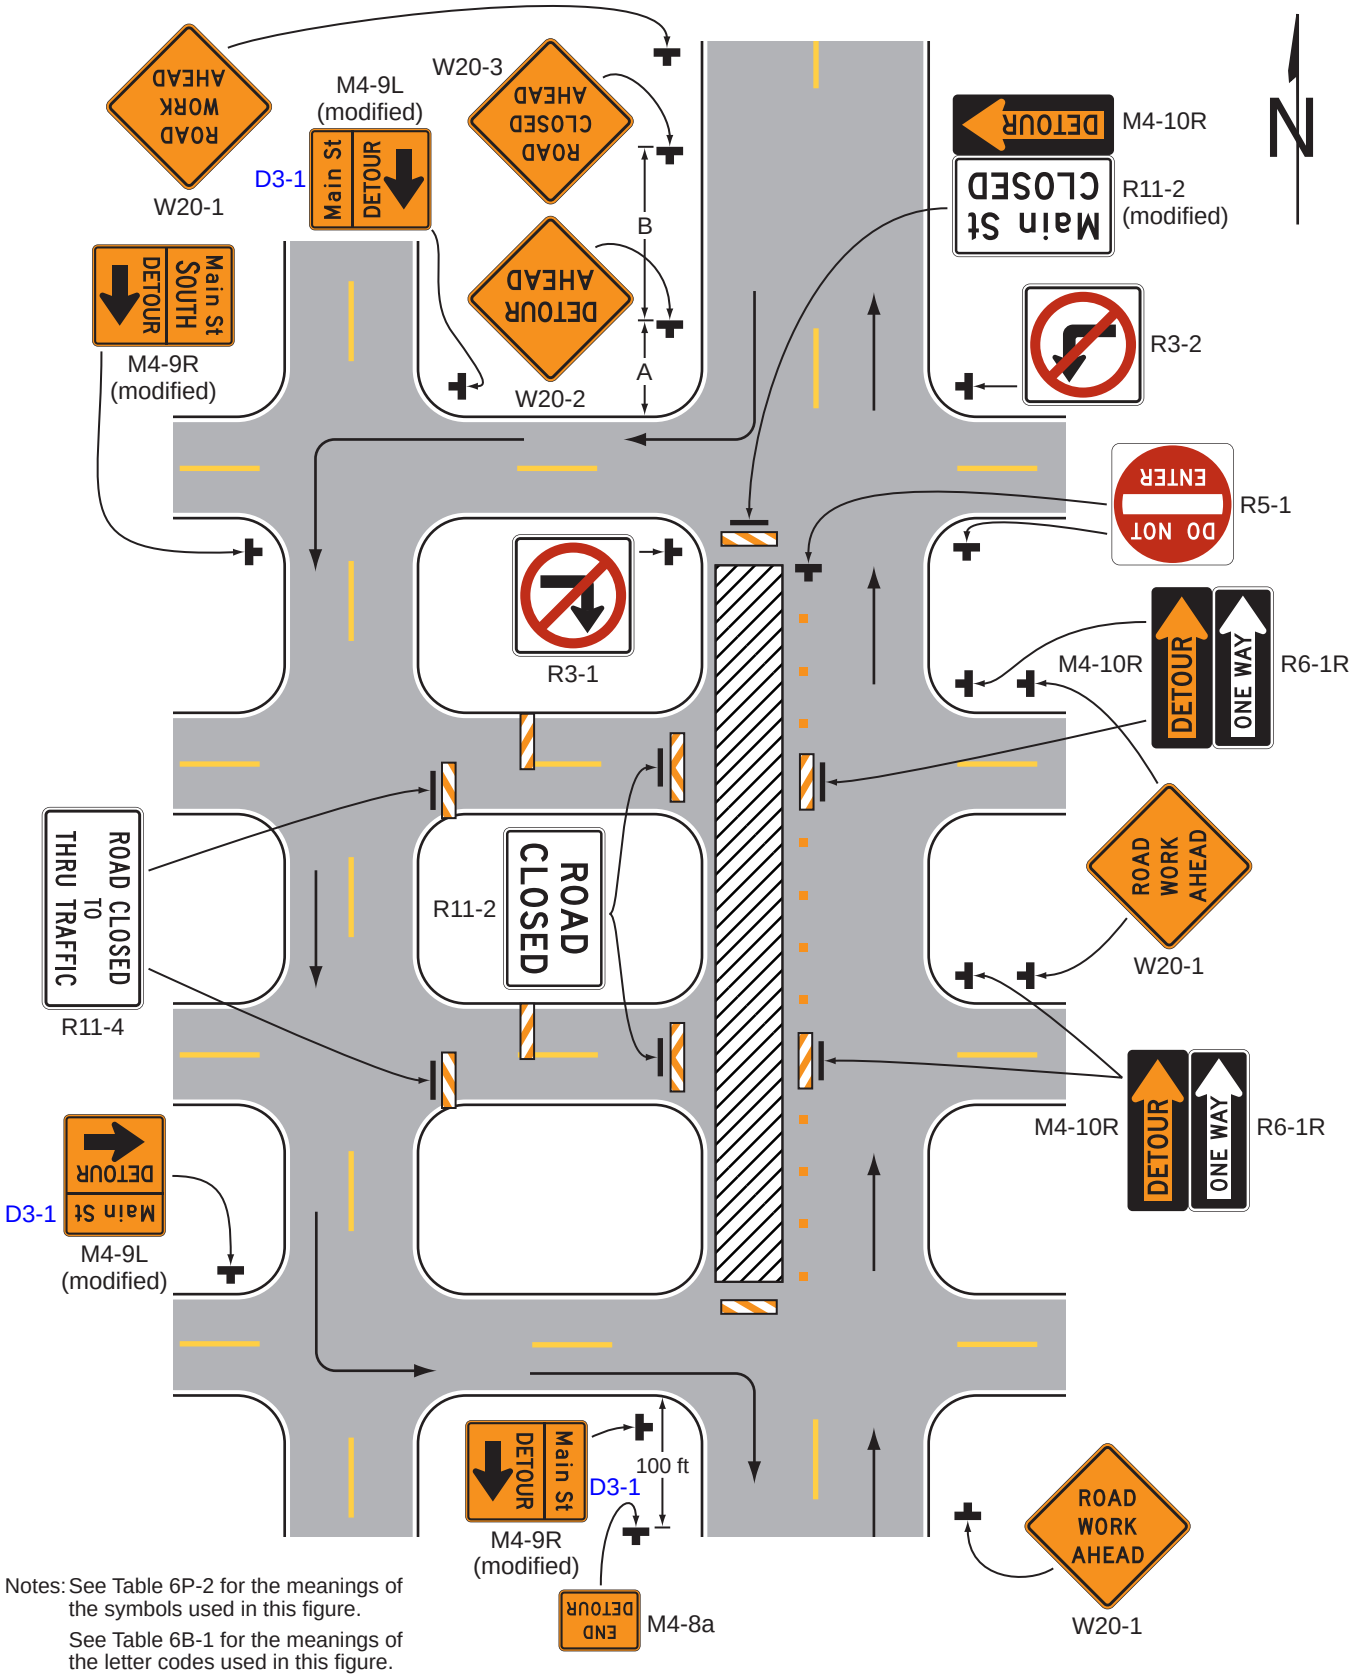



Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 19**

## *Figure 6P-19(CA). Detour for One Travel Direction (TA-19(CA))*

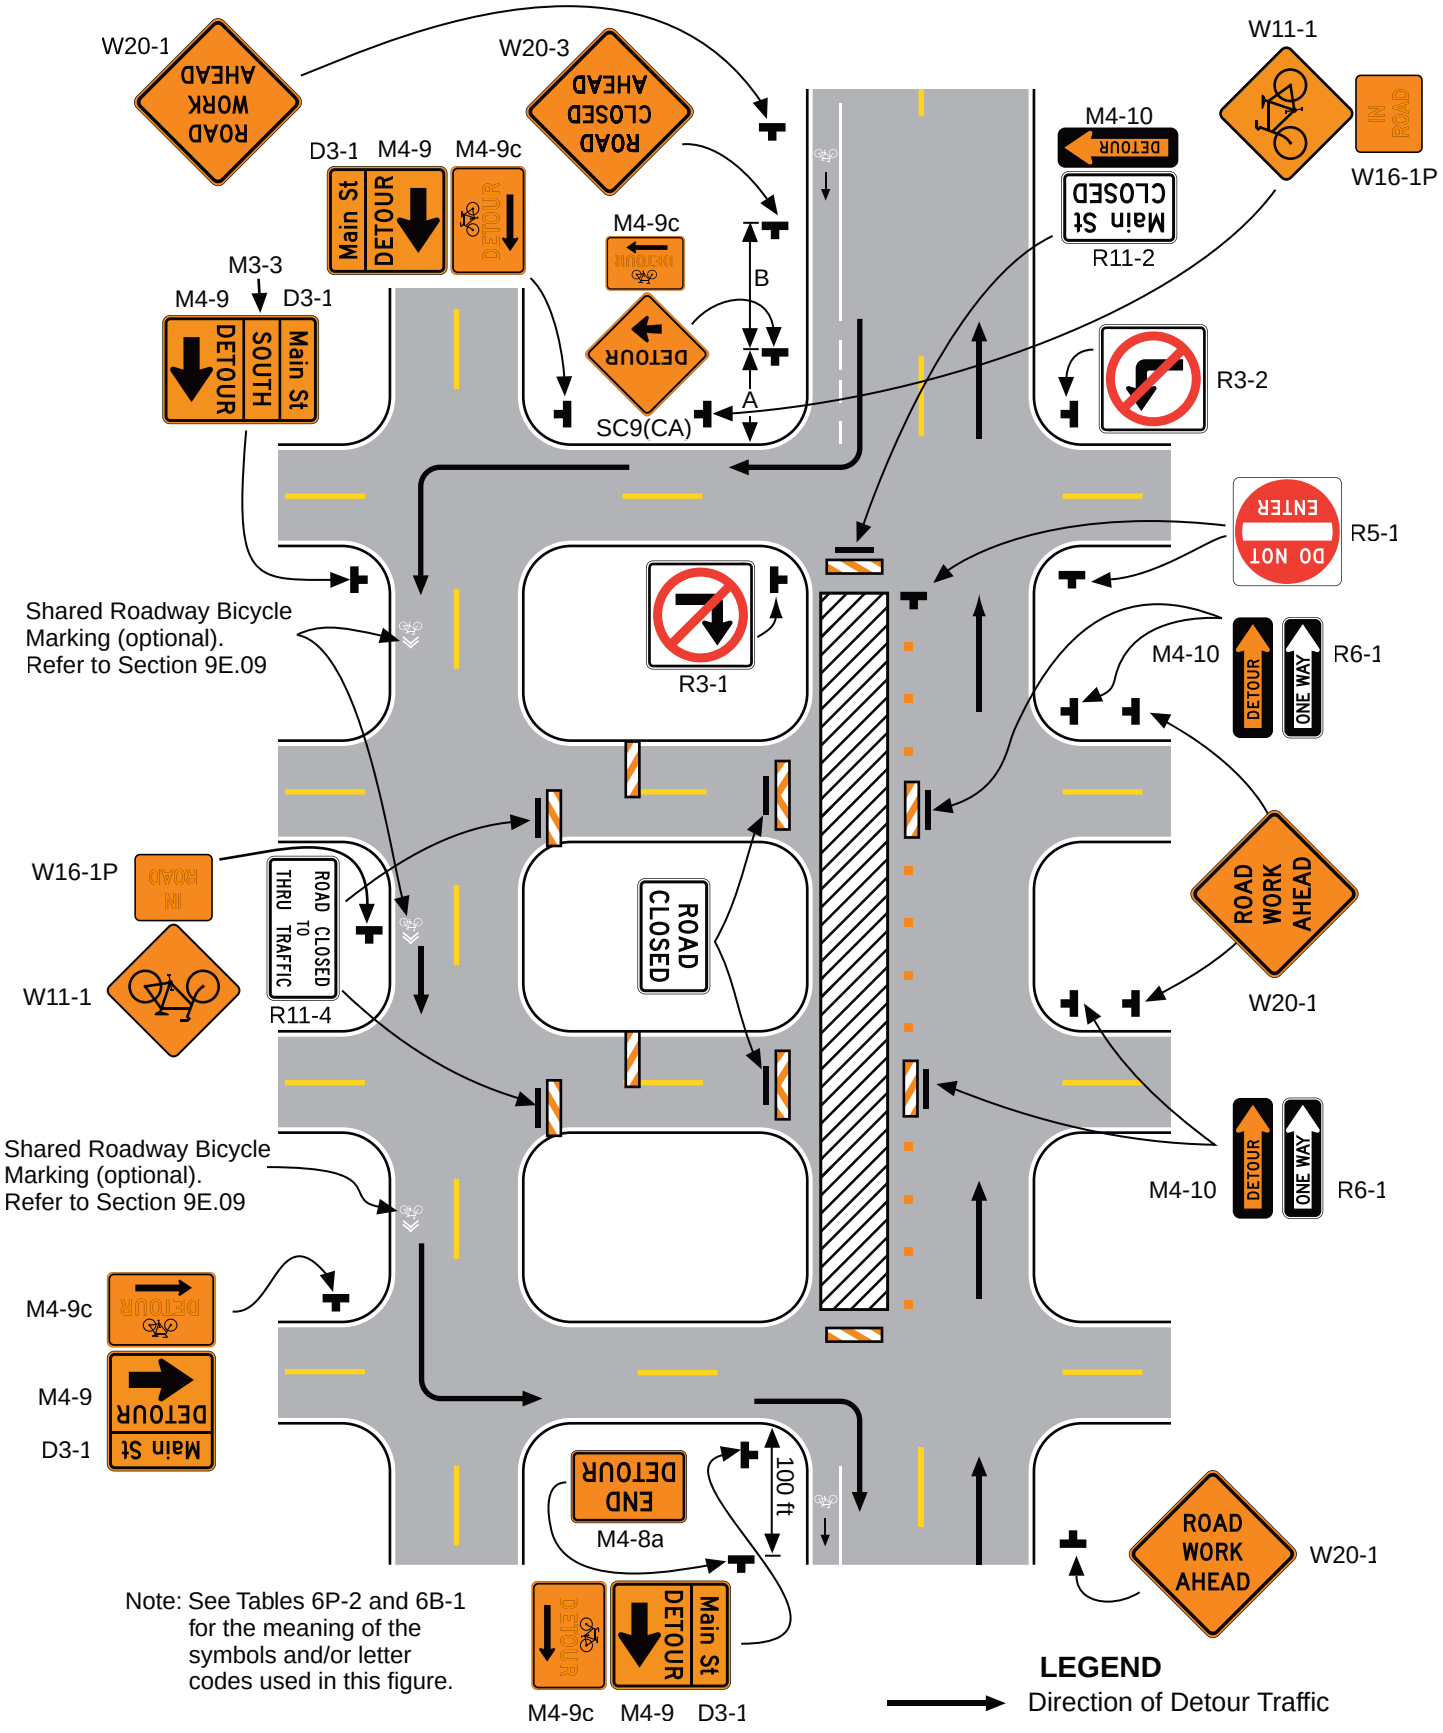


**Typical Application 19(CA)**

## Notes for Figure 6P-20 —Typical Application 20
## Detour for a Closed Street

*Guidance:*

1. *This plan should be used for streets without posted route numbers.*
2. *On multi-lane streets, Detour signs with an Advance Turn Arrow should be used in advance of a turn.*

Option:

3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. Flashing warning lights may be used on Type 3 Barricades.
5. Detour signs may be located on the far side of intersections. A Detour sign with an advance arrow may be used in advance of a turn.
6. A Street Name sign may be mounted with the Detour sign. The Street Name sign may be either white on green or black on orange.


**Standard:**

**7. When used, the Street Name sign shall be placed above the Detour sign.**

Support:

8. Figure 6P-9 contains the information for detouring a numbered highway.

# Figure 6P-20. Detour for a Closed Street (TA-20)

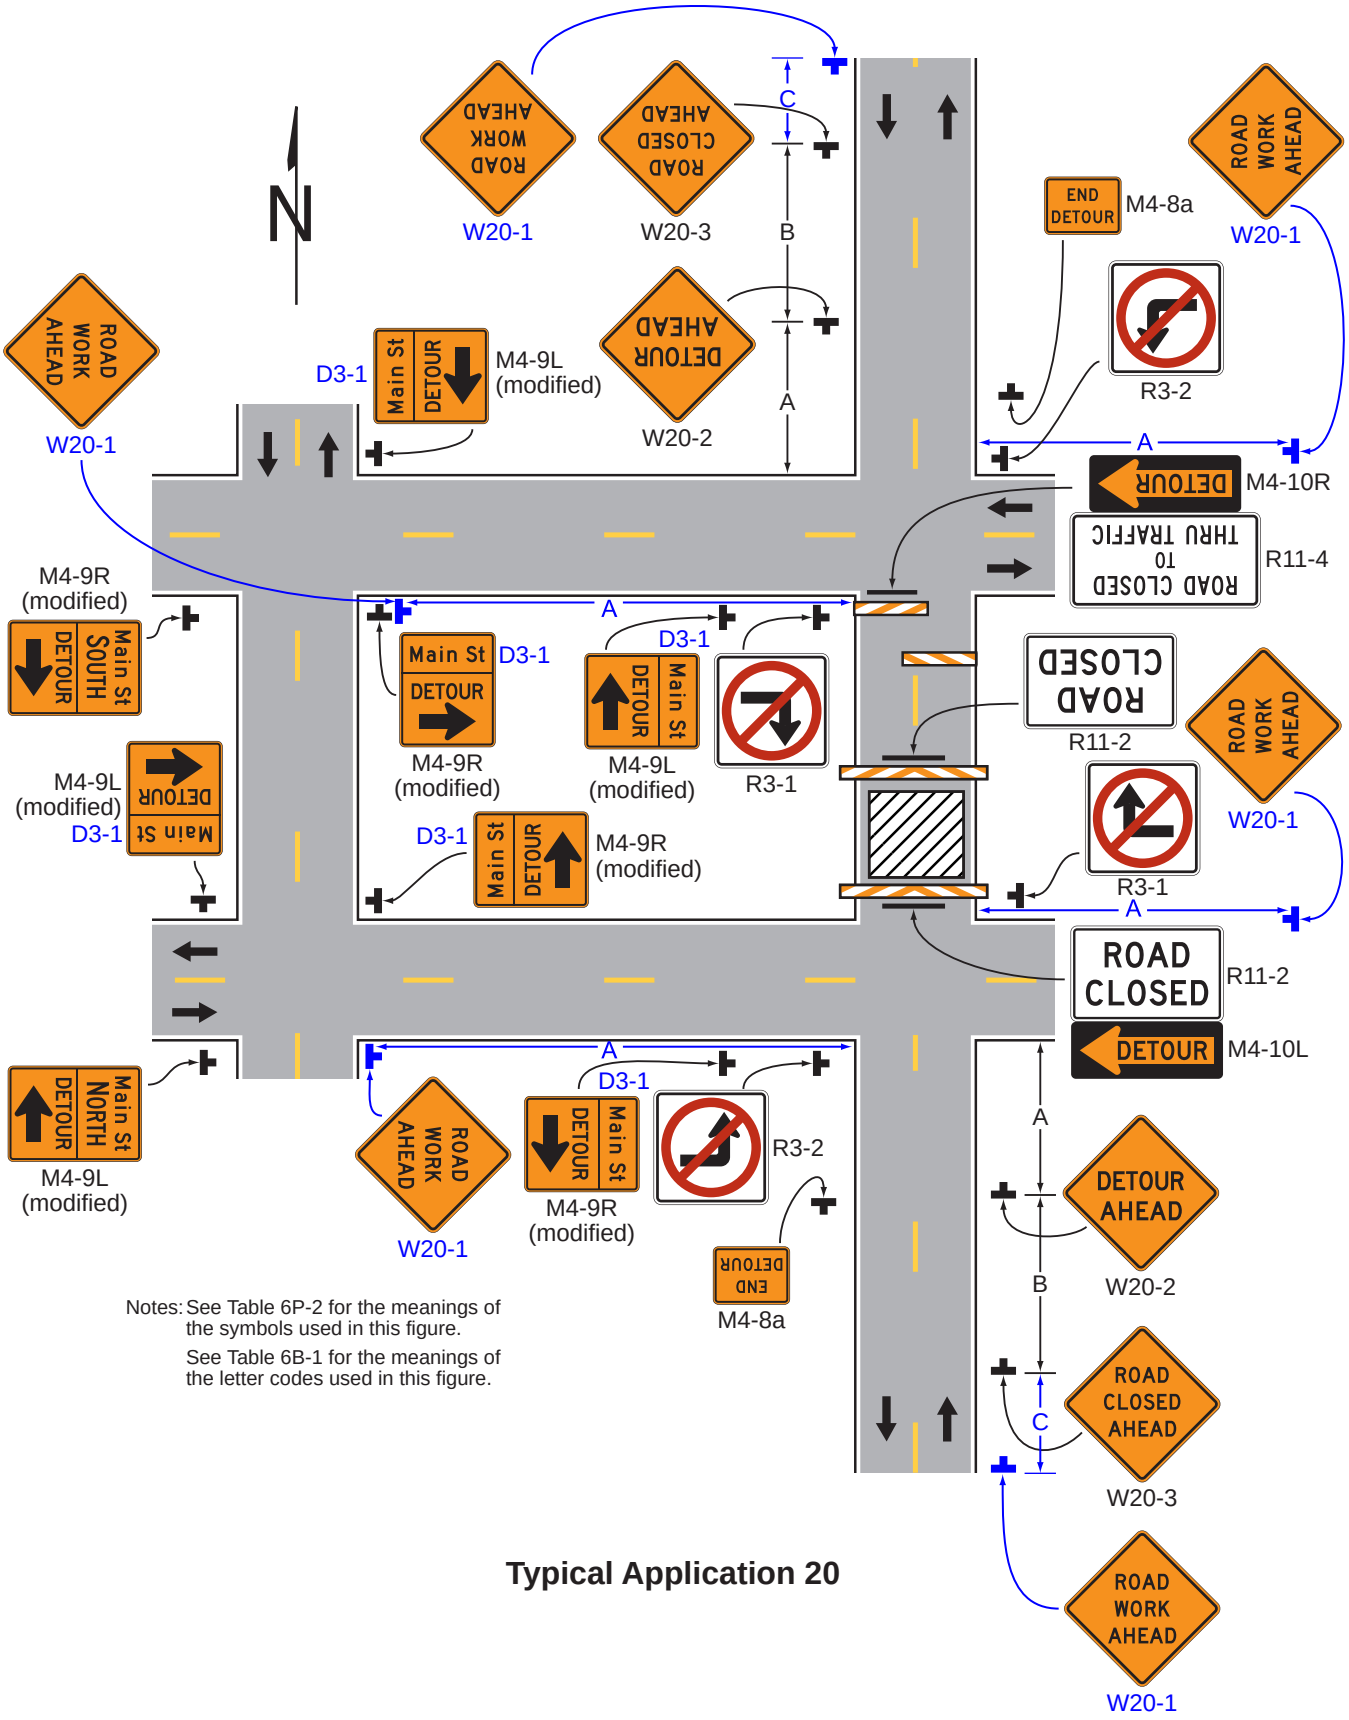


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

## Typical Application 20

## Notes for Figure 6P-21 —Typical Application 21
## Lane Closure on the Near Side of an Intersection

**Standard:**

1. **The merging taper shall direct vehicular traffic into either the right-hand or left-hand lane, but not both.**

*Guidance:*

2. *In this typical application, a left taper should be used so that right-turn movements will not impede through motor vehicle traffic. However, the reverse should be true for left-turn movements.*
3. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*


Option:

4. Positive protection devices may be used per Section 6M.02.
5. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
6. A shadow vehicle with a truck-mounted attenuator may be used.
7. A work vehicle with high-intensity rotating, flashing, oscillating, or strobe lights may be used with the ~~high-level warning device~~ arrow board.
8. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

9. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

## Figure 6P-21. Lane Closure on the Near Side of an Intersection (TA-21)

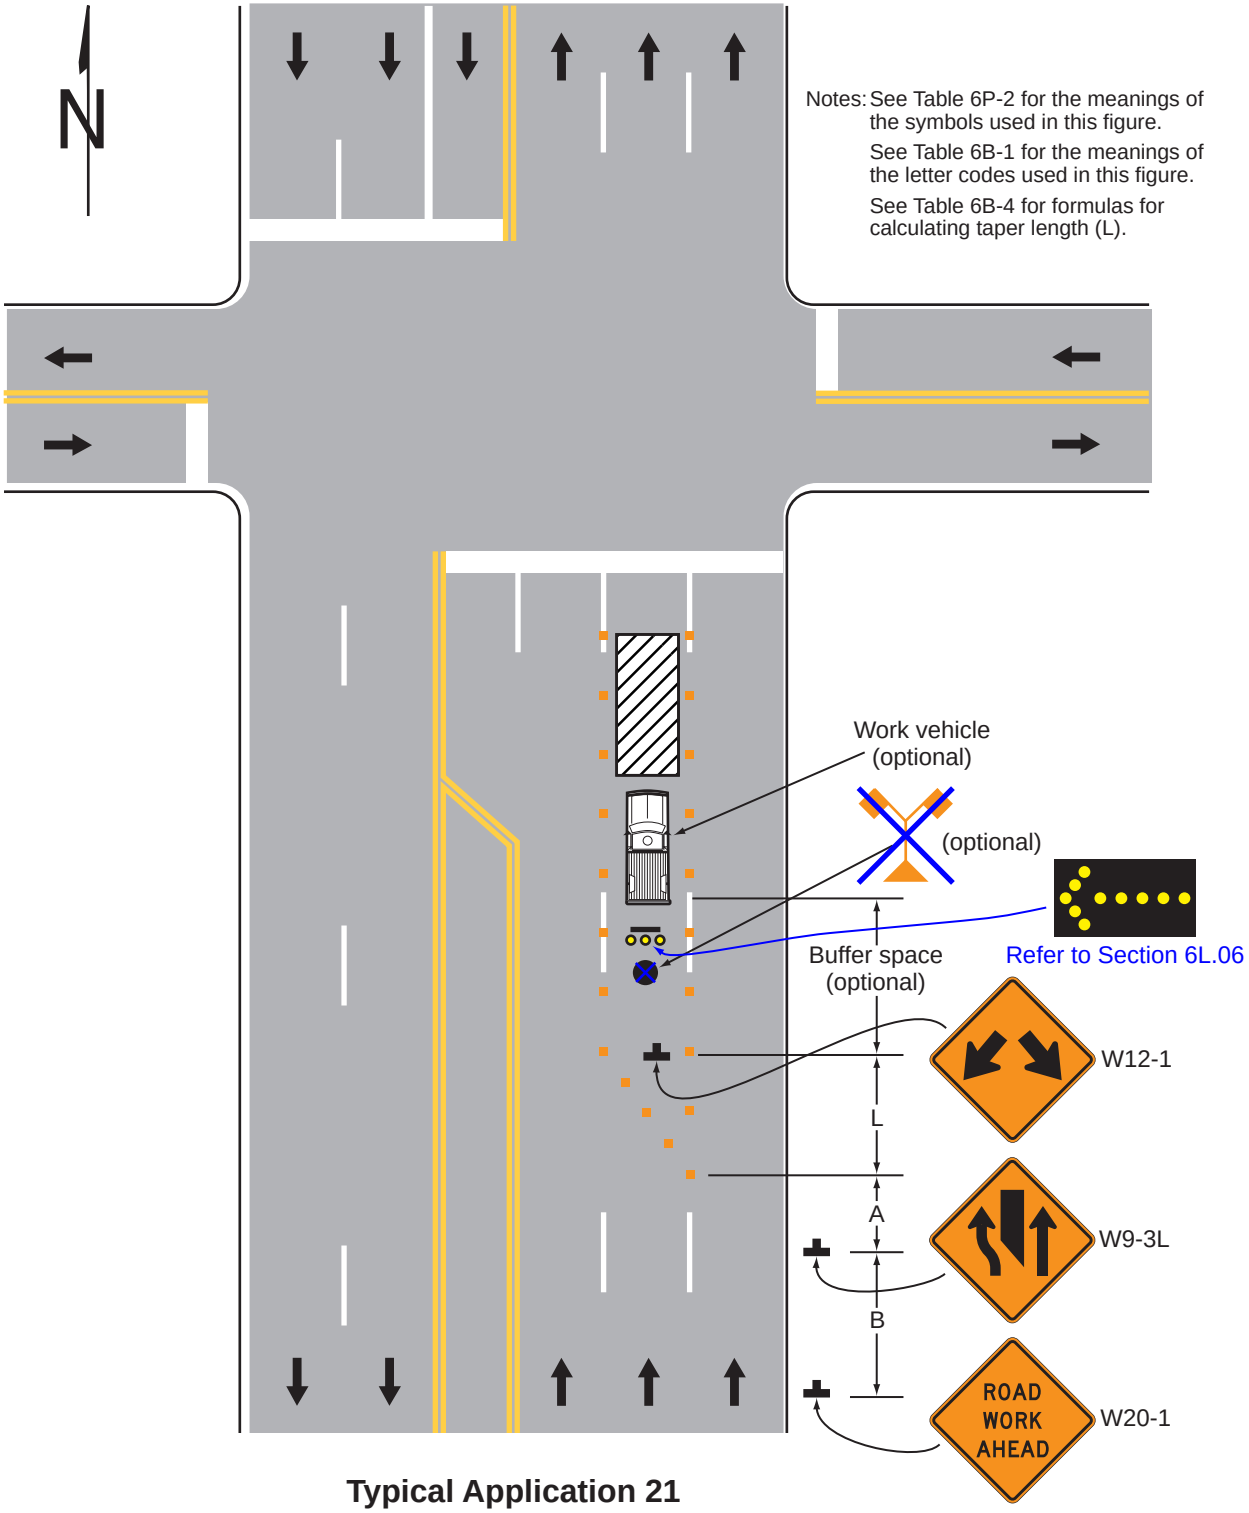


**Typical Application 21**

## Notes for Figure 6P-22—Typical Application 22
## Right-Hand Lane Closure on the Far Side of an Intersection

*Guidance:*

1. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*


Option:

2. Positive protection devices may be used per Section 6M.02.
3. When the normal procedure of closing on the near side of the intersection any lane that is not carried through the intersection results in the closure of a right-hand lane having significant right-turn movements, then the right-hand lane may be restricted to right turns only, requiring through traffic to use the left lane.
4. For intersection approaches reduced to a single lane, left-turn movements may be prohibited to maintain capacity for through vehicular traffic.
5. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
6. Where the turning radius is large, it may be possible to create a right-turn island using channelizing devices or pavement markings.
7. If dimension "A" is not available to create a temporary right-turn lane, continuous channelizers may be installed from the end of the taper to the intersection and, as a result, the RIGHT LANE MUST TURN RIGHT (R3-7R) signs would not be installed.

Support:

8. By first closing off the right-hand lane and then reopening it as a turn bay, the capacity of the through lane is preserved by separating the right-turning vehicles from the through vehicles.
9. Refer to Figure 3B-14(CA) (Sheet 3 of 3) for lane reduction markings. Refer to Section 2C.45 for merge signs.

## Figure 6P-22. Right-Hand Lane Closure on the Far Side of an Intersection (TA-22)

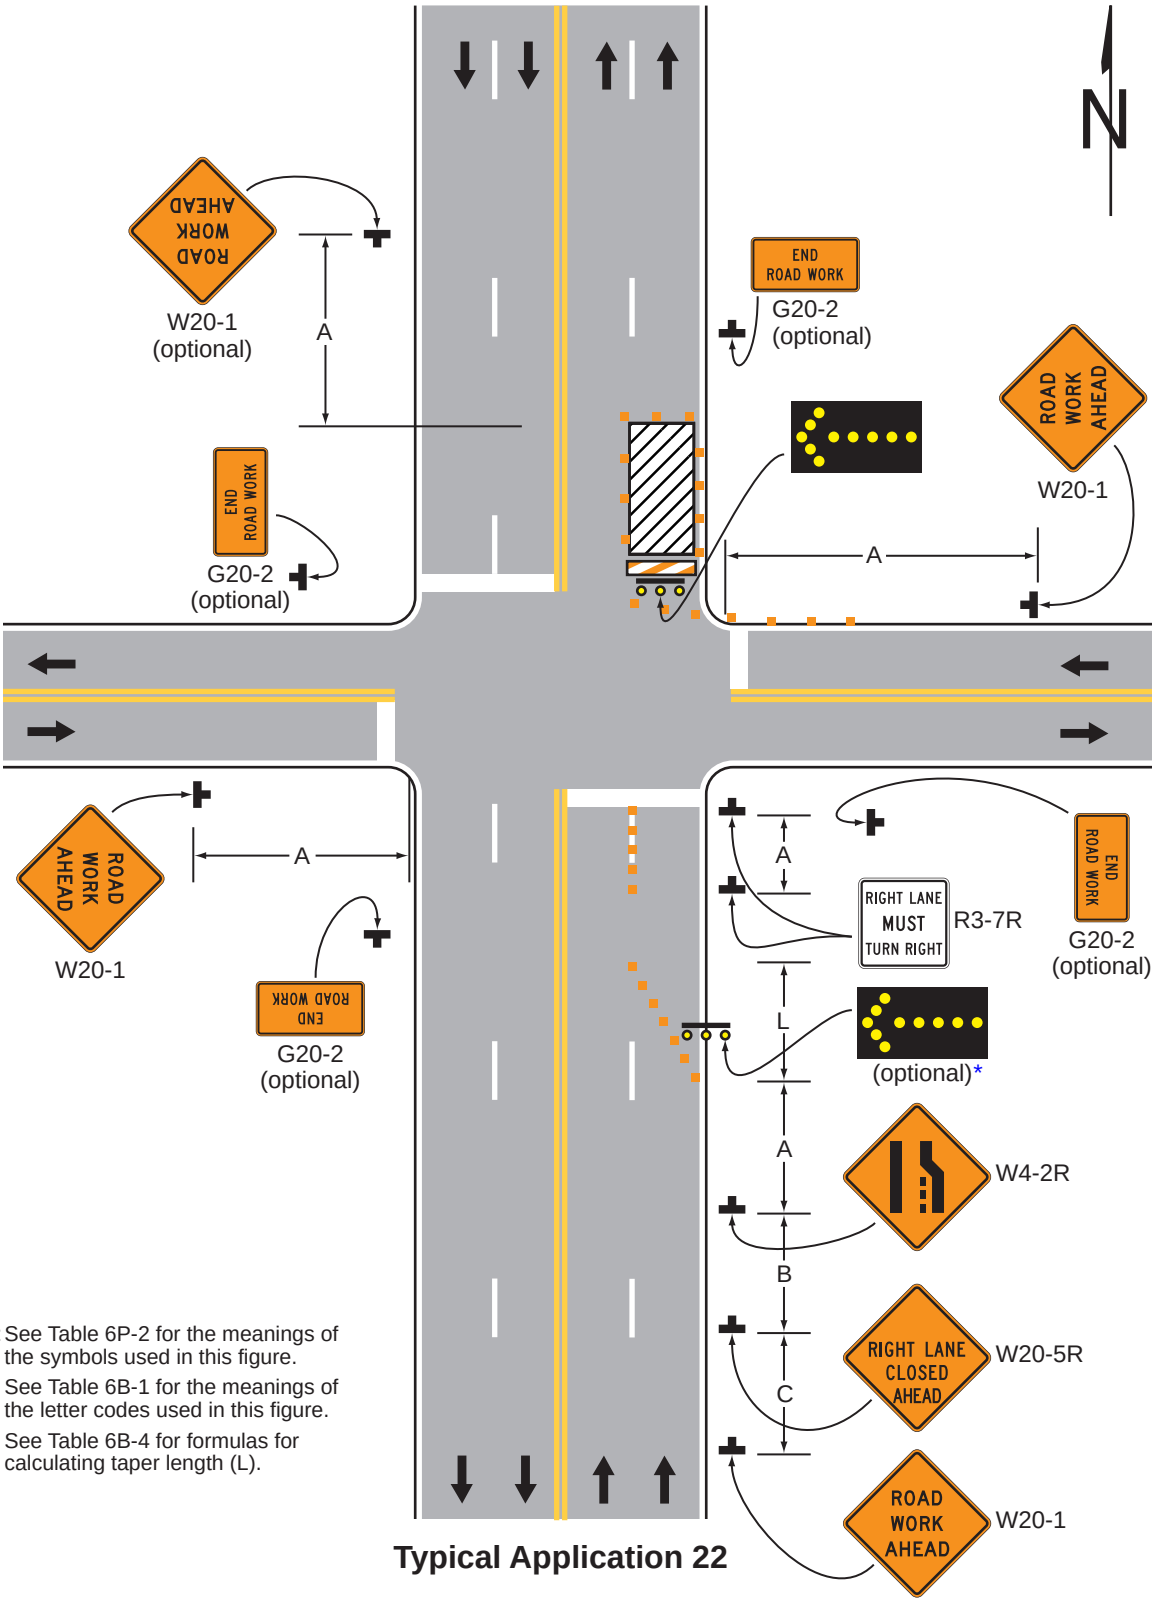


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 22**

* Refer to FHWA's List of Known Errors for error in figure text. Refer to Section 1A.04 for more details.

## Notes for Figure 6P-23 —Typical Application 23
## Left-Hand Lane Closure on the Far Side of an Intersection

*Guidance:*

1. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*


Option:

2. Positive protection devices may be used per Section 6M.02.
3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. When the normal procedure of closing on the near side of the intersection any lane that is not carried through the intersection results in the closure of a left-hand lane having significant left-turn movements, then the left-hand lane may be reopened as a turn bay for left turns only, as shown.

Support:

5. By first closing off the left-hand lane and then reopening it as a turn bay, the left-turn bay allows storage of turning vehicles so that the movement of through traffic is not impeded. A left-turn bay that is long enough to accommodate all turning vehicles during a traffic signal cycle will provide the maximum benefit for through traffic. Also, an island is created with channelizing devices that allows the LEFT LANE MUST TURN LEFT (R3-7L) sign to be repeated on the left adjacent to the lane that it controls.

## Figure 6P-23. Left-Hand Lane Closure on the Far Side of an Intersection (TA-23)

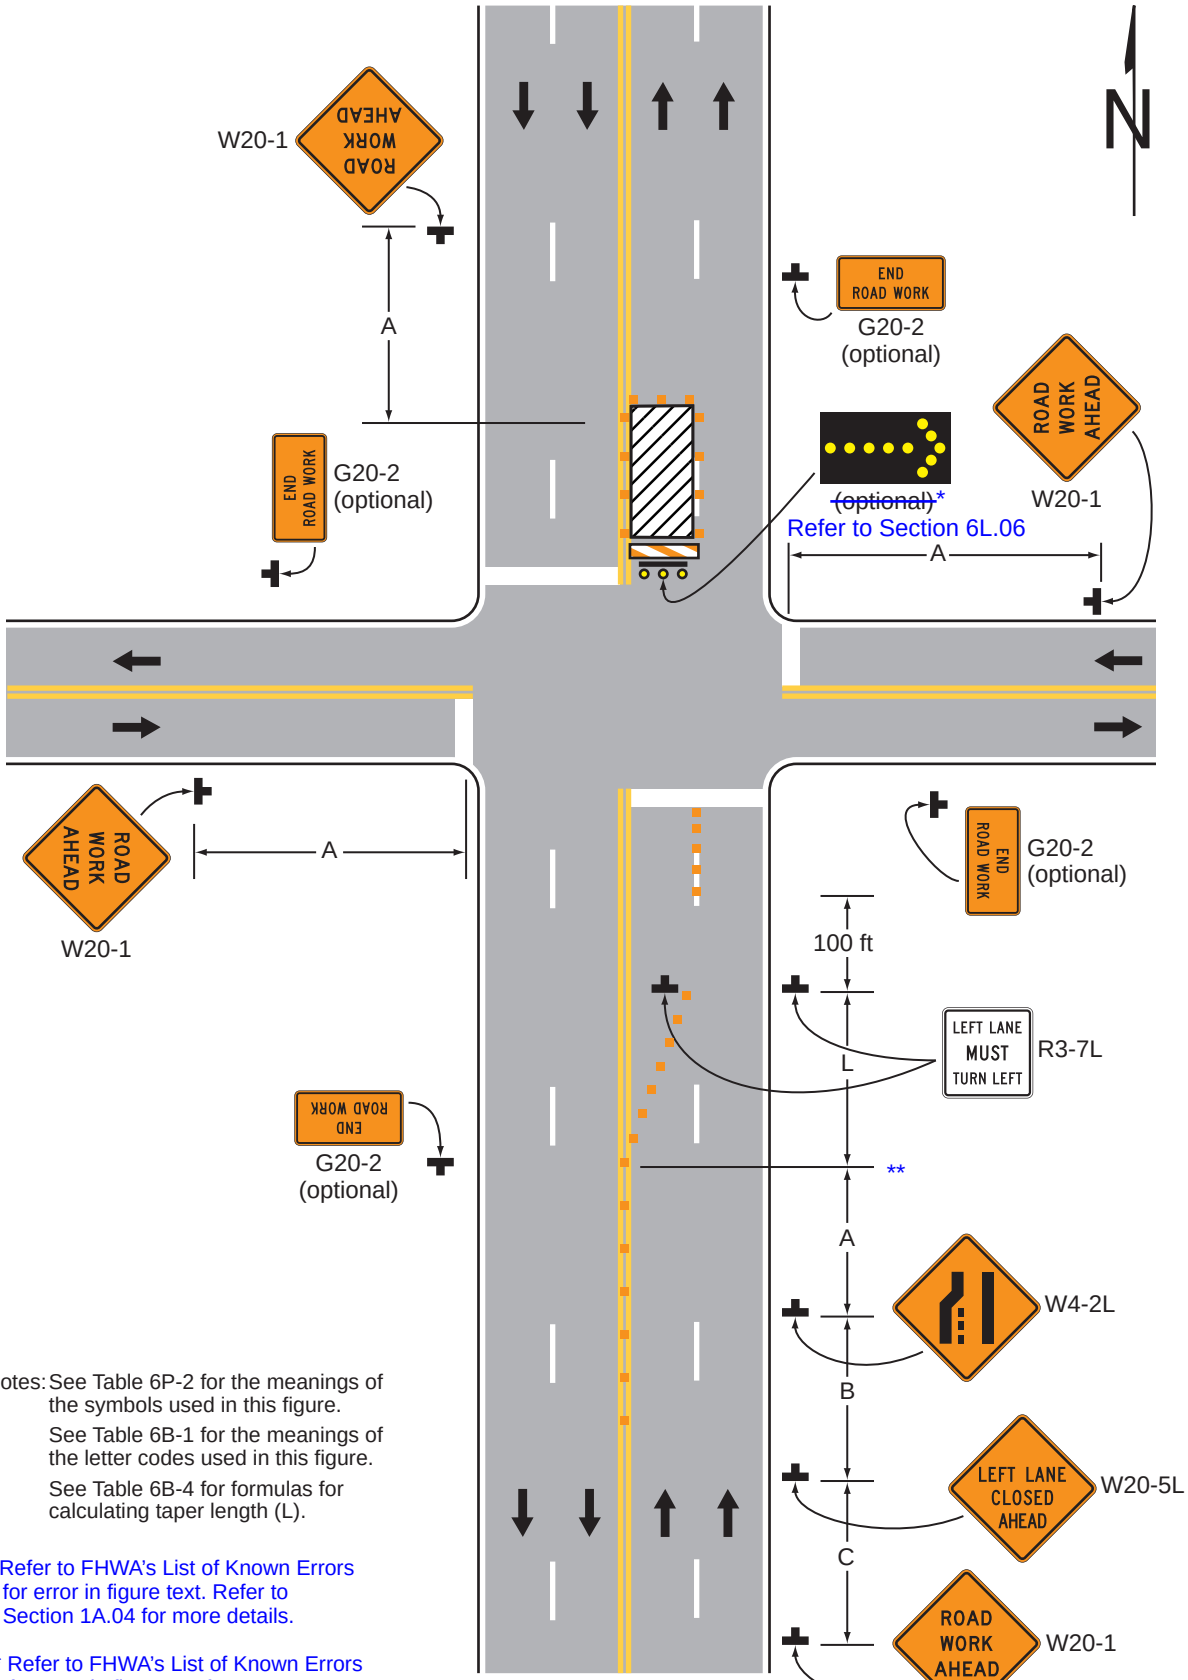


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

See Table 6B-4 for formulas for calculating taper length (L).

* Refer to FHWA's List of Known Errors for error in figure text. Refer to Section 1A.04 for more details.

** Refer to FHWA's List of Known Errors for error in figure. Refer to Section 1A.04 for more details.

**Typical Application 23**

## Notes for Figure 6P-24 and Figure 6P-24(CA) —Typical Application 24 Half Road Closure on the Far Side of an Intersection

*Guidance:*

1. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*
2. *When turn prohibitions are implemented, two turn prohibition signs should be used, one on the near side and, space permitting, one on the far side of the intersection.*


Option:

3. Positive protection devices may be used per Section 6M.02.
4. A buffer space may be used between opposing directions of vehicular traffic as shown in this application.
5. When the normal procedure of closing on the near side of the intersection any lane that is not carried through the intersection results in the closure of a right-hand lane having significant right-turn movements, then the right-hand lane may be restricted to right turns only, requiring through traffic to use the left lane.
6. Where the turning radius is large, a right-turn island using channelizing devices or pavement markings may be used.
7. If there is insufficient space to place the back-to-back Keep Right sign and No Left Turn symbol signs at the end of the row of channelizing devices separating opposing vehicular traffic flows, the No Left Turn symbol sign may be placed on the right and the Keep Right sign may be omitted.
8. For intersection approaches reduced to a single lane, left-turn movements may be prohibited to maintain capacity for through vehicular traffic.
9. Flashing warning lights and/or flags may be used to call attention to advance warning signs.
10. Temporary pavement markings may be used to delineate the travel path through the intersection.
11. If dimension "A" is not available to create a temporary right-turn lane, continuous channelizers may be installed from the end of the taper to the intersection and, as a result, the RIGHT LANE MUST TURN RIGHT (R3-7R) signs would not be installed.

Support:

12. Figure 6P-24 is appropriate for situations where the approach is stop-controlled (Stop sign and/or red flashing beacons) due to the abrupt transition through the intersection.
13. Figure 6P-24(CA) is appropriate for situations where the approach is uncontrolled or controlled by traffic signals.

## Figure 6P-24. Half Road Closure on the Far Side of an Intersection (TA-24)

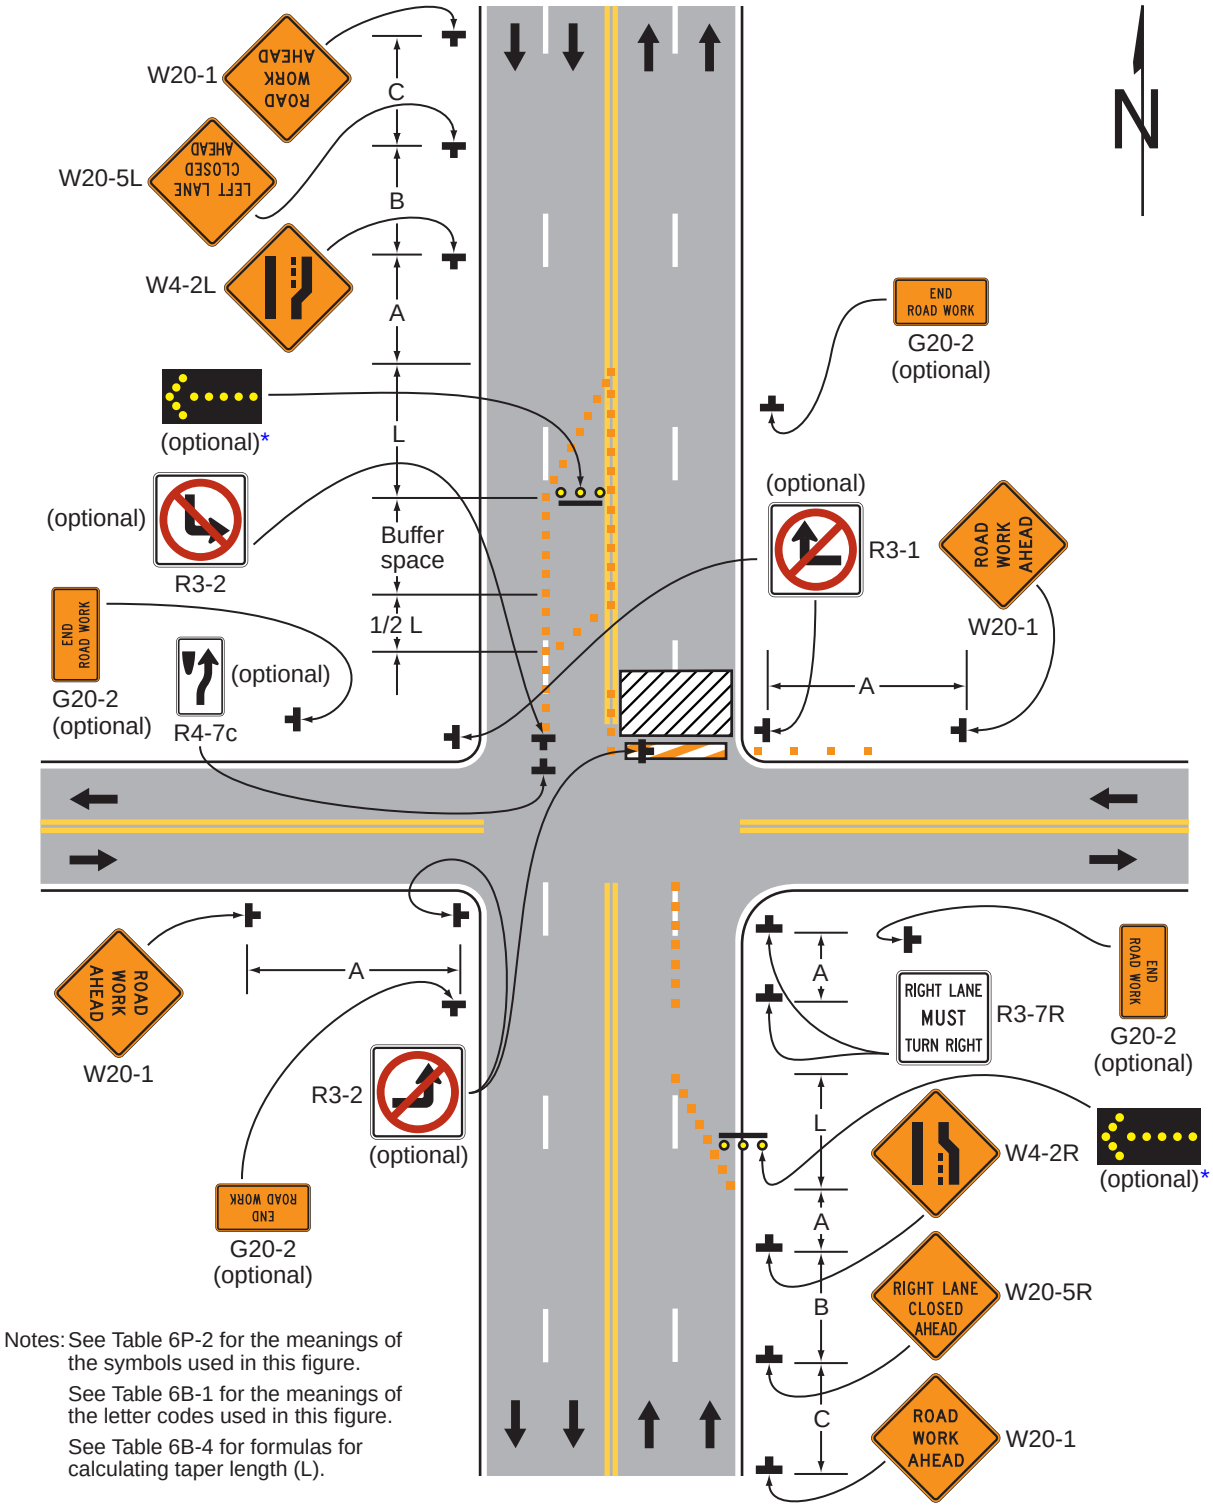



Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 24**

* Refer to FHWA's List of Known Errors for error in figure text. Refer to Section 1A.04 for more details.

## *Figure 6P-24(CA). Half Road Closure on the Far Side of an Intersection (TA-24(CA))*

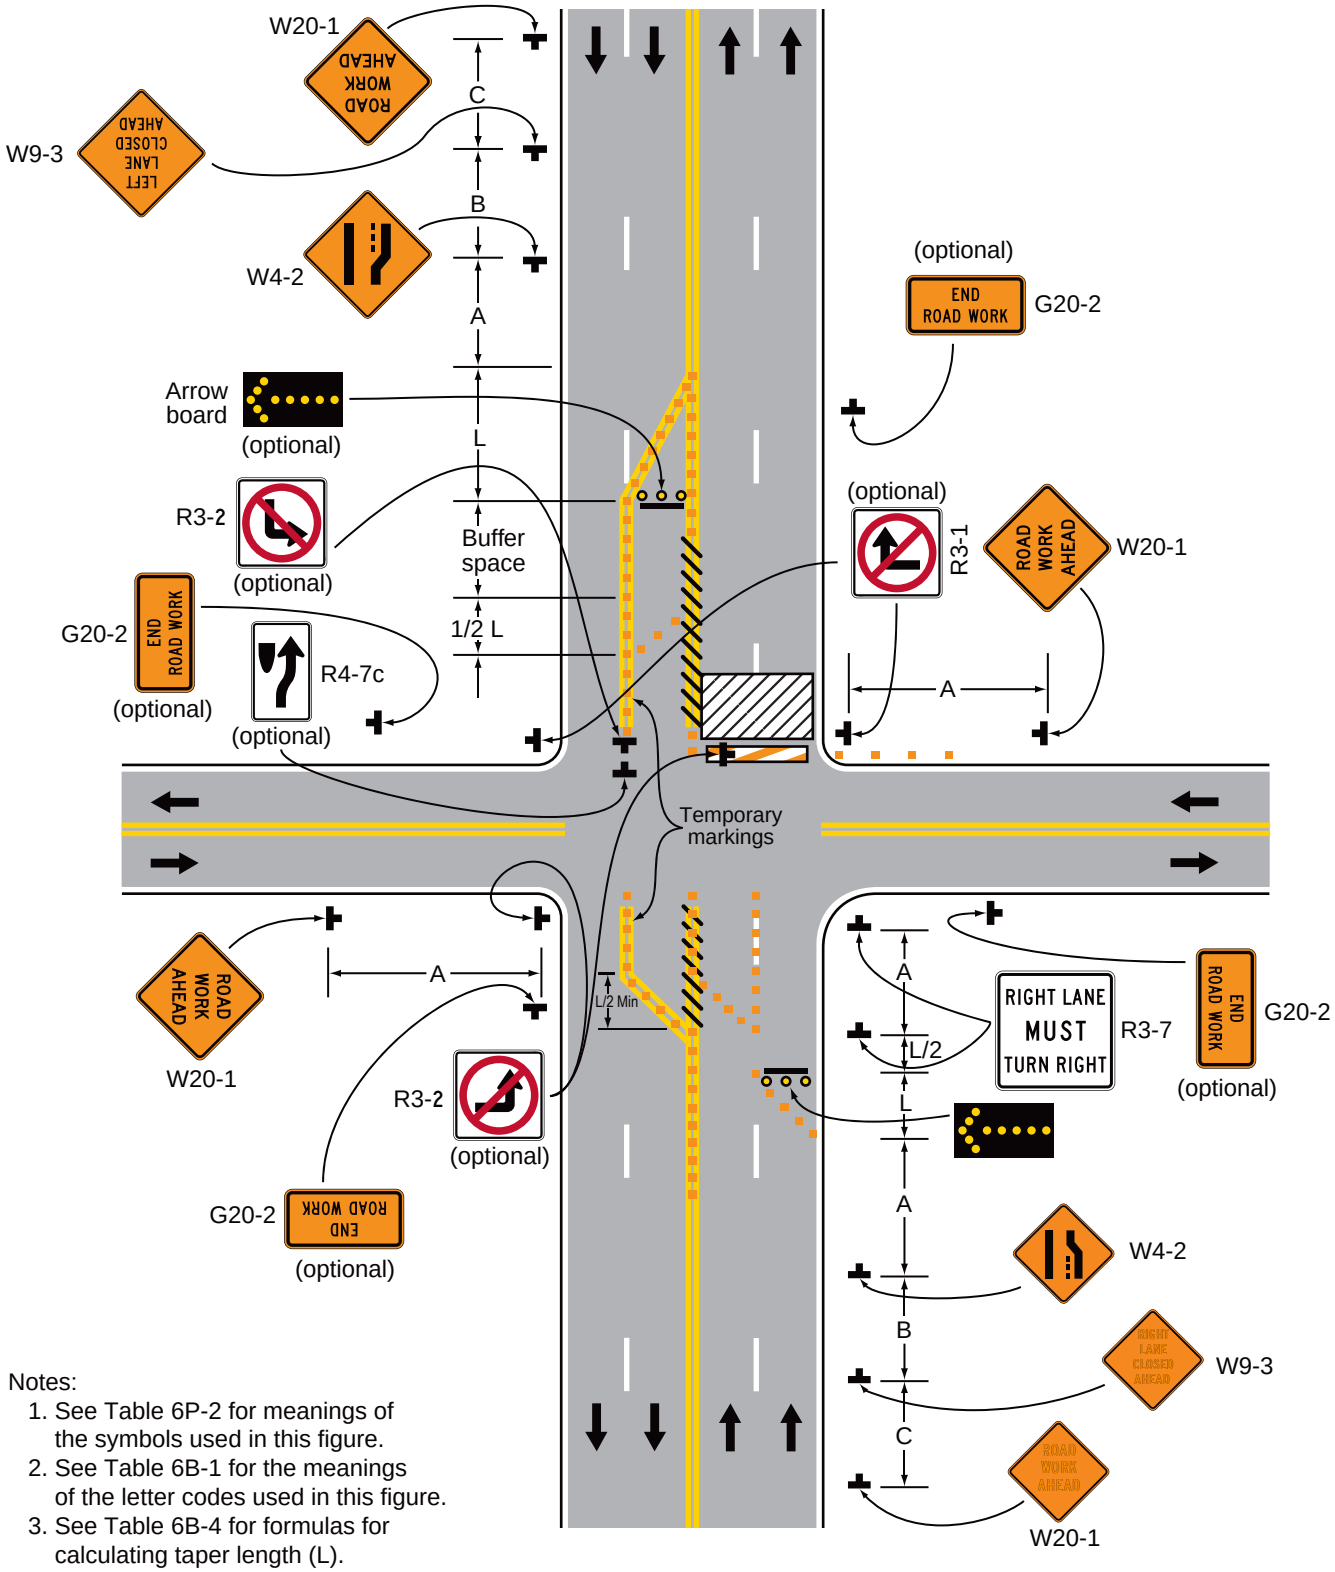


Notes:

1. See Table 6P-2 for meanings of the symbols used in this figure.
2. See Table 6B-1 for the meanings of the letter codes used in this figure.
3. See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 24(CA)**

## Notes for Figure 6P-25 —Typical Application 25
## Multiple Lane Closures at an Intersection

*Guidance:*

1. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*


Support:

2. The normal procedure is to close on the near side of the intersection any lane that is not carried through the intersection, as shown.

Option:

3. Positive protection devices may be used per Section 6M.02.
4. If the left-turn movement that normally uses the closed turn bay is small and/or the gaps in opposing vehicular traffic are frequent, left turns may be permitted on that approach.
5. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.

## Figure 6P-25. Multiple Lane Closures at an Intersection (TA-25)

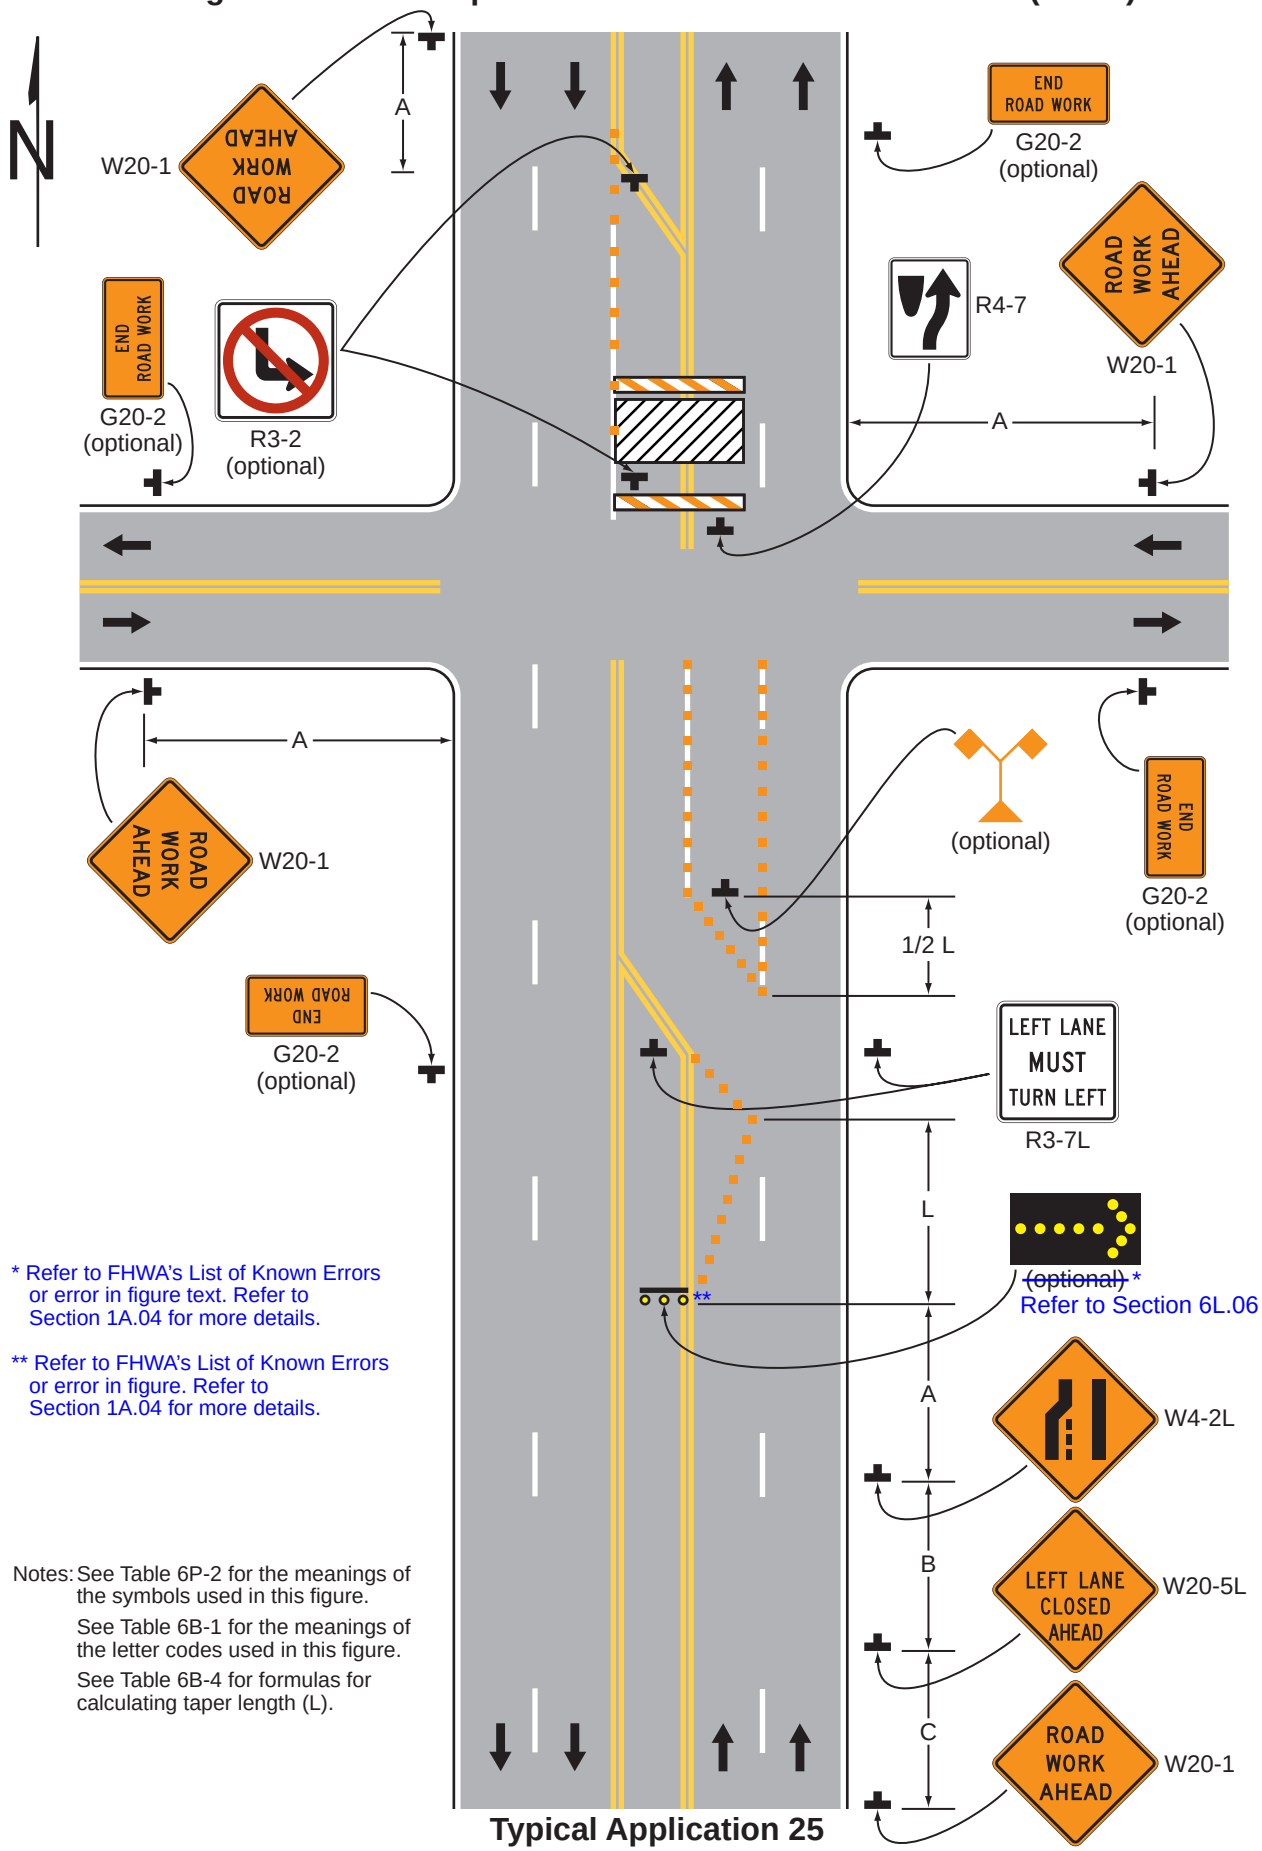


* Refer to FHWA's List of Known Errors or error in figure text. Refer to Section 1A.04 for more details.

** Refer to FHWA's List of Known Errors or error in figure. Refer to Section 1A.04 for more details.

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 25**

## Notes for Figure 6P-26 —Typical Application 26
## Closure in the Center of an Intersection

*Guidance:*

1. *All lanes should be a minimum of 10 feet in width as measured to the near face of the channelizing devices.*


Option:

2. A high-level warning device may be placed in the work space, if there is sufficient room.
3. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.
4. Flashing warning lights and/or flags may be used to call attention to advance warning signs.
5. Left turns may be prohibited as required by geometric conditions, such as where the streets are so narrow that it might be physically impossible to turn left, especially for large vehicles.
6. For short-duration work operations, the channelizing devices may be eliminated if a vehicle displaying high-intensity rotating, flashing, oscillating, or strobe lights is positioned in the work space.
7. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

8. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

## Figure 6P-26. Closure in the Center of an Intersection (TA-26)

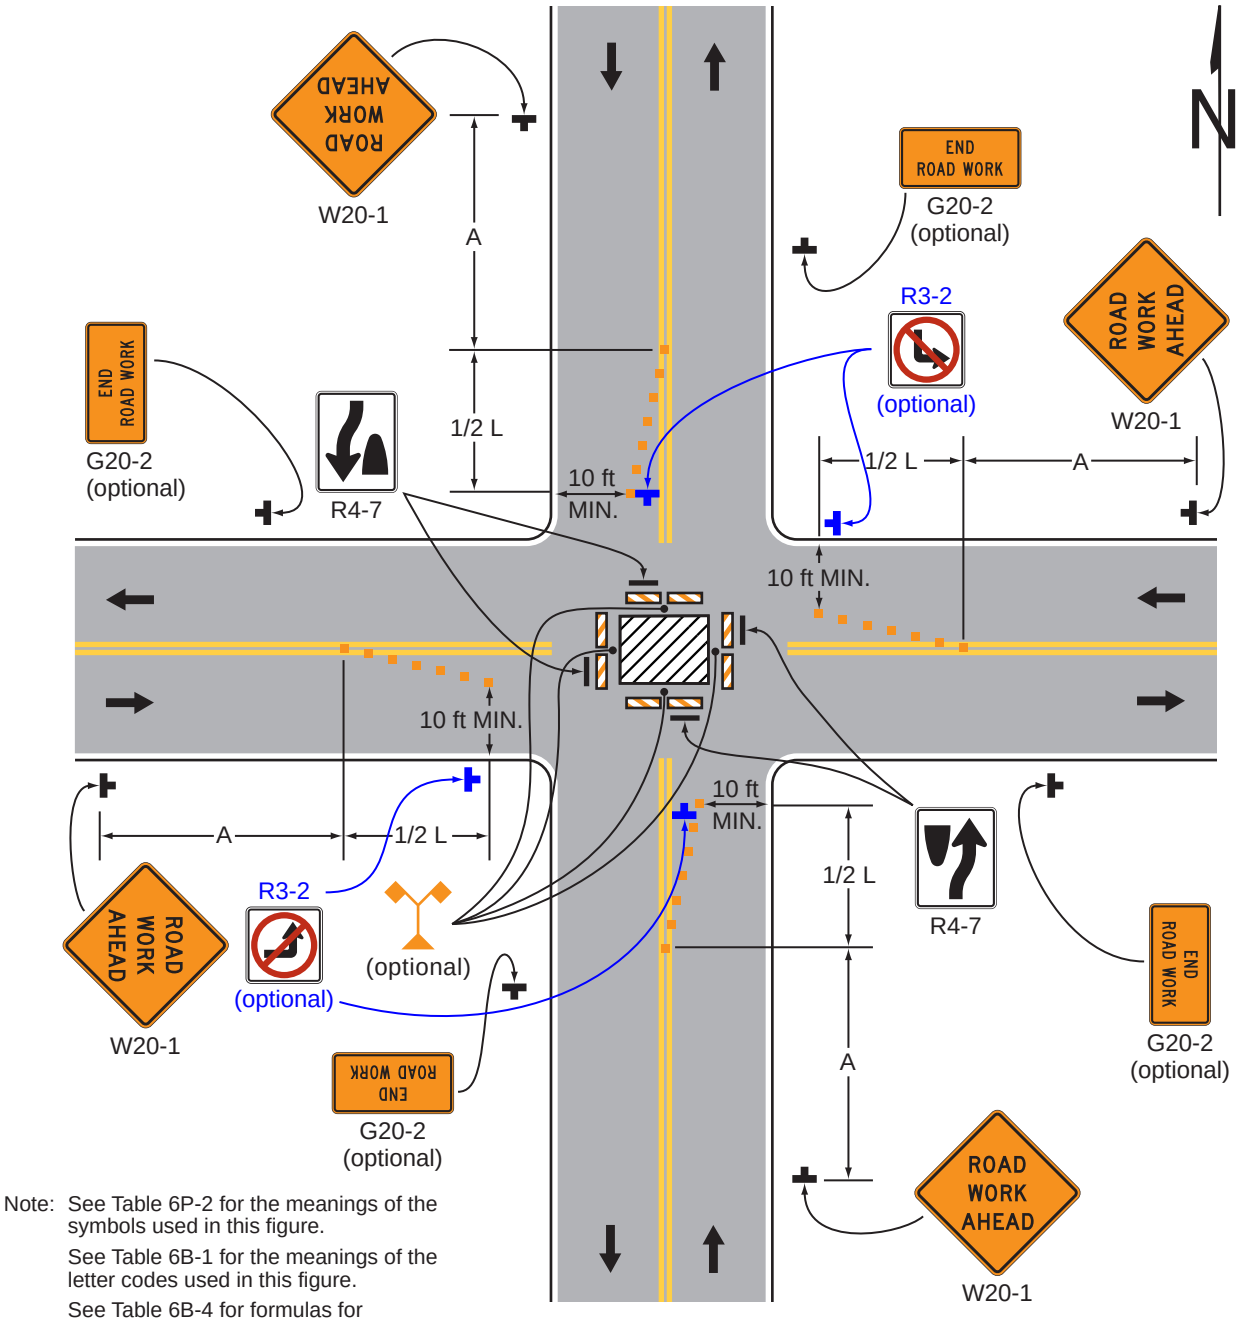


Note: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 26**

## Notes for Figure 6P-27 —Typical Application 27
## Closure at the Side of an Intersection

*Guidance:*

1. *The situation depicted can be simplified by closing one or more of the intersection approaches. If this cannot be done, and/or when capacity is a problem, through vehicular traffic should be directed to other roads or streets.*
2. *Depending on road user conditions, flagger(s) or uniformed law enforcement officer(s) should be used to direct road users within the intersection.*

**Standard:**

3. **At night, flagger stations shall be illuminated, except in emergencies.**

Option:

4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
5. For short-duration work operations, the channelizing devices may be eliminated if a vehicle displaying high-intensity rotating, flashing, oscillating, or strobe lights is positioned in the work space.
6. A BE PREPARED TO STOP sign may be added to the sign series.

*Guidance:*

7. *When used, the BE PREPARED TO STOP (W3-4) sign should be located ~~before~~ after the Flagger symbol sign.*
8. *ONE LANE ROAD AHEAD (W20-4) signs should also be used to provide adequate advance warning.*

~~Support:~~

Option:

9. Turns may be prohibited as required by vehicular traffic conditions, such as where the streets are so narrow that it might be physically impossible to make certain turns, especially for large vehicles.


Option:

10. Positive protection devices may be used per Section 6M.02.
11. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

12. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

## Figure 6P-27. Closure at the Side of an Intersection (TA-27)

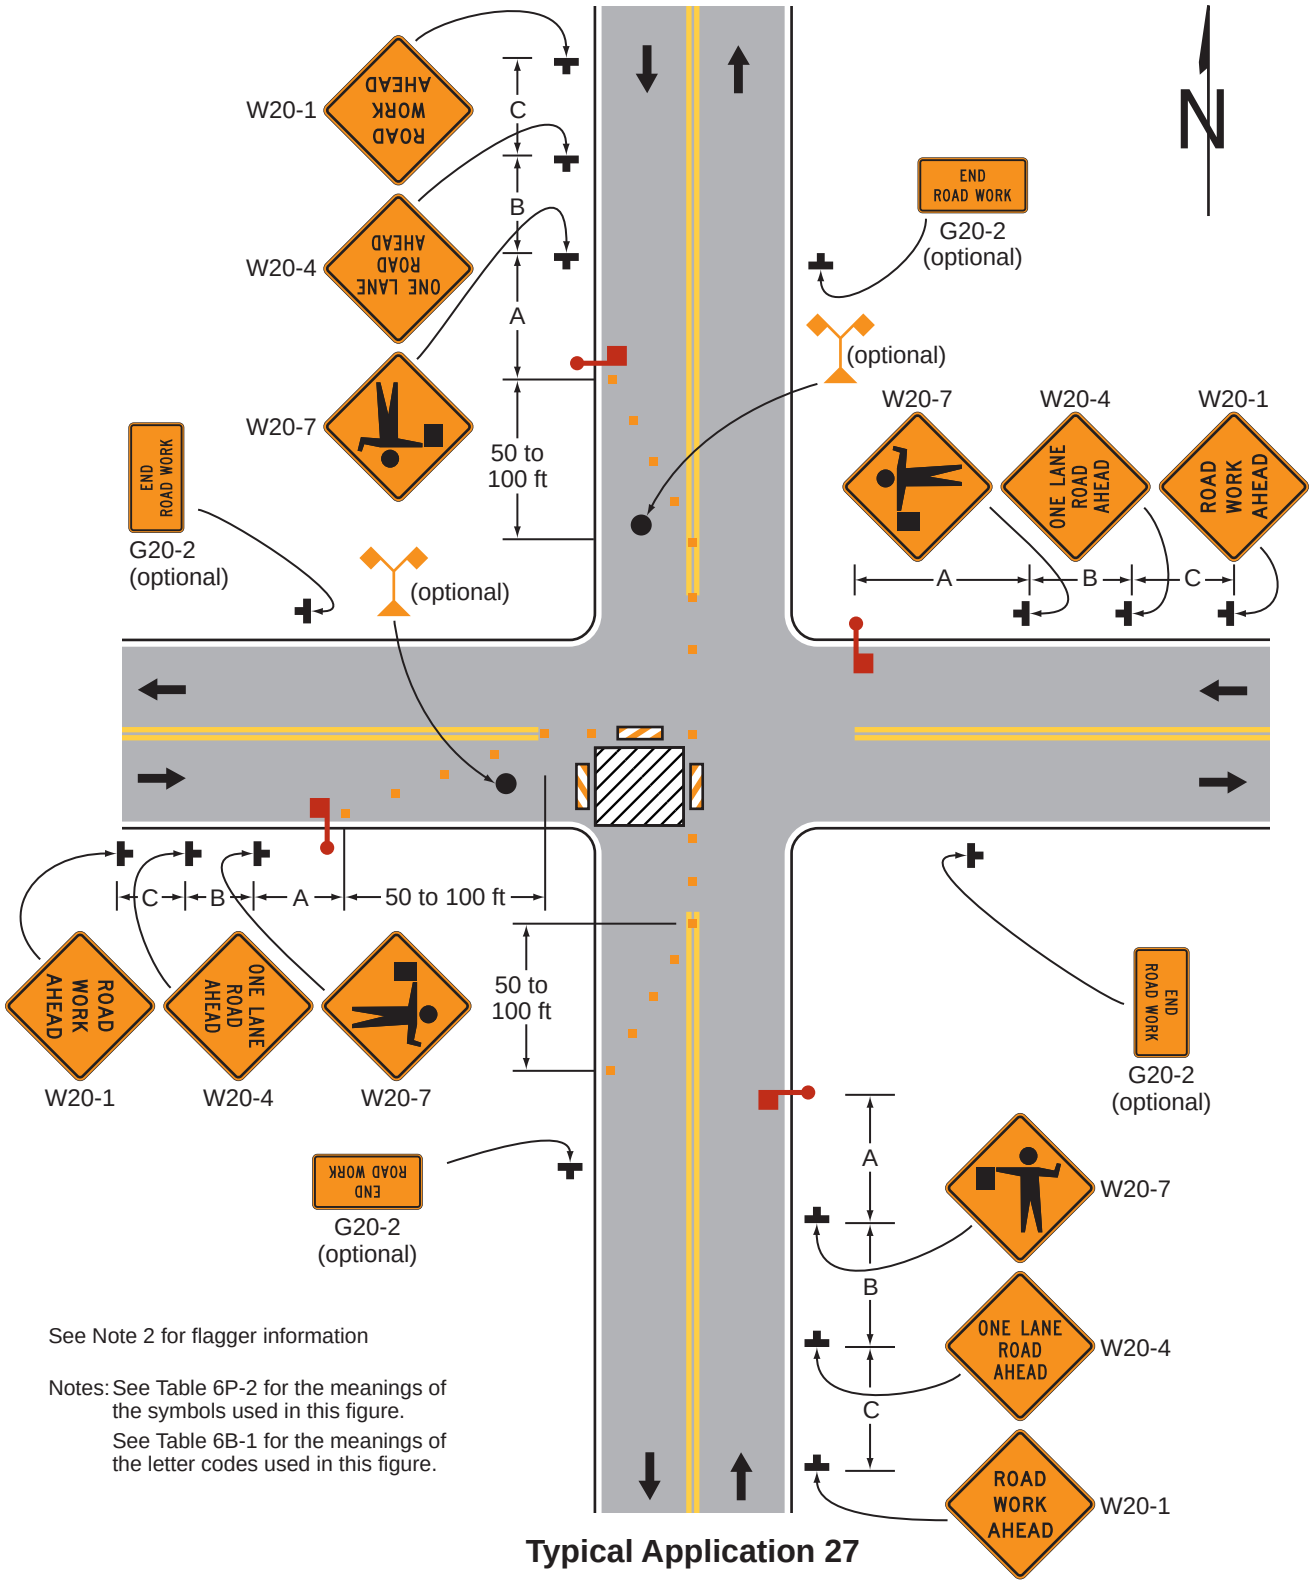


See Note 2 for flagger information

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 27**

## Notes for Figure 6P-28 —Typical Application 28
## Sidewalk Detour or Diversion

**Standard:**

1. **When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. A pedestrian channelizing device (see Figure 6K-2) that is detectable by a person with a vision disability traveling with the aid of a long cane shall be placed across the full width of the closed sidewalk.**
2. **When used, temporary ramps shall provide a 12:1 (8.33%) or flatter slope, with a slip-resistant surface. The ramp landing area shall provide a 48-inch x 48-inch minimum area with a 2% or flatter cross-slope.**
3. **When used, Longitudinal Channelizing Devices used for temporary pedestrian routes shall comply with Section 6K.02.**
4. **Temporary traffic barriers, if used, shall comply with the provisions of Section 6M.02.**
5. **SIDEWALK CLOSED CROSS HERE signs shall include audible information devices to provide adequate communication to pedestrians with vision disabilities.**
6. **Audible information devices shall be provided where midblock sidewalk closings and changed crosswalk areas cause inadequate communication to be provided to pedestrians with vision disabilities.**


*Guidance:*

7. *The surface of an alternate pathway should meet the requirements of the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.*
8. *The protective requirements of a TTC situation have priority in determining the need for temporary traffic barriers and their use in this situation should be based on engineering judgment.*

Option:

9. Street lighting may be considered.
10. Only the TTC devices related to pedestrians are shown. Other devices, such as lane closure signing or ROAD NARROWS (W5-1) signs, may be used to control vehicular traffic.
11. For nighttime closures, Type A Flashing warning lights may be used on barricades that support signs and close sidewalks.
12. Type C Steady-Burn or Type D 360-degree Steady-Burn warning lights may be used on channelizing devices separating the temporary sidewalks from vehicular traffic flow.
13. Signs, such as KEEP RIGHT (LEFT) (R4-7a, R4-8a), may be placed along a temporary sidewalk to guide or direct pedestrians.
14. The width of the alternate pedestrian route may be 48 inches with a passing area of 60 inches every 200 feet.

## Figure 6P-28. Sidewalk Detour or Diversion (TA-28)

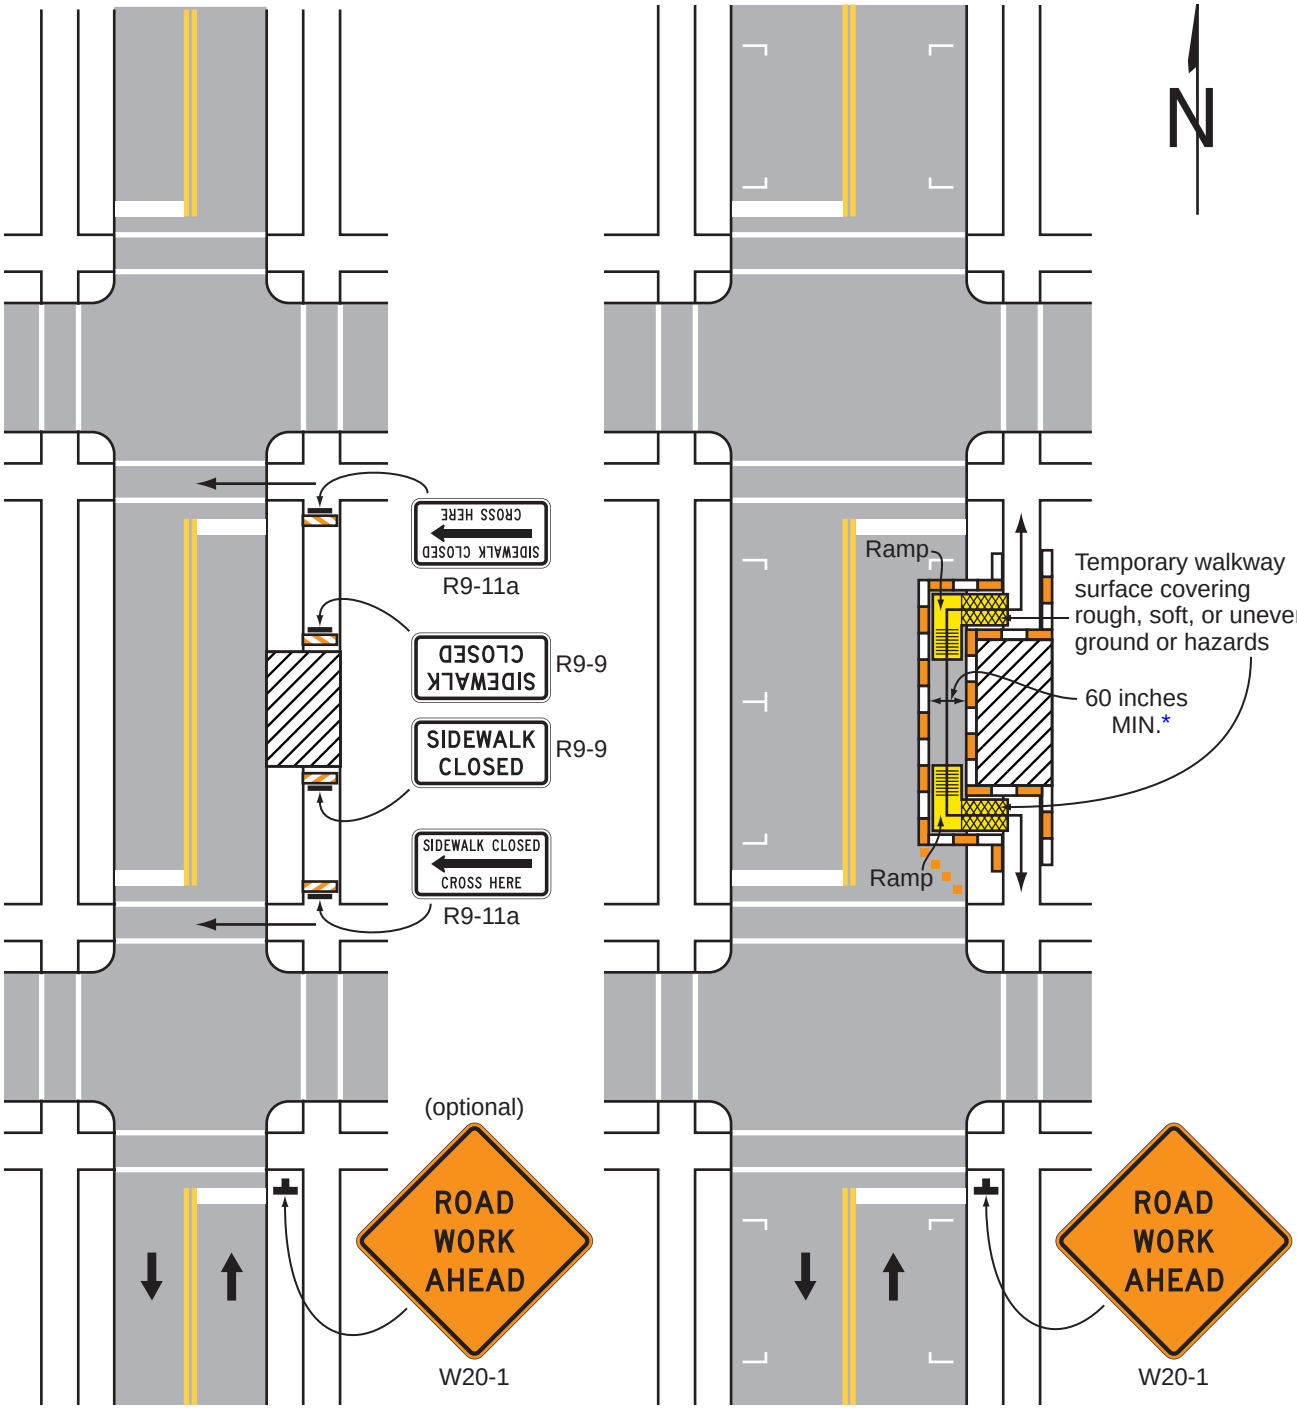


## Typical Application 28

Note: SeeTable 6P-2 for the meanings of the symbols used in this figure.

* Refer to FHWA's List of Known Errors for error in figure text. Refer to Section 1A.04 for more details.

## Notes for Figure 6P-29 —Typical Application 29
## Crosswalk Closures and Pedestrian Detours

**Standard:**

1. **When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**
2. **Curb parking shall be prohibited for at least 50 feet in advance of the midblock crosswalk.**
3. **SIDEWALK CLOSED CROSS HERE (R9-11a) signs shall include audible information devices to provide adequate communication to pedestrians with vision disabilities.**
4. **Audible information devices shall be provided where midblock sidewalk closings and changed crosswalk areas cause inadequate communication to be provided to pedestrians with vision disabilities.**

*Guidance:*

5. *Pedestrian traffic signal displays controlling closed crosswalks should be covered or deactivated.*


Option:

6. Street lighting may be considered.
7. Only the TTC devices related to pedestrians are shown. Other devices, such as lane closure signing or ROAD NARROWS (W5-1) signs, may be used to control vehicular traffic.
8. For nighttime closures, Type A Flashing warning lights may be used on barricades supporting signs and closing sidewalks.
9. Type C Steady-Burn or Type D 360-degree Steady-Burn warning lights may be used on channelizing devices separating the work space from vehicular traffic.
10. In order to maintain the systematic use of the fluorescent yellow-green background for pedestrian, bicycle, and school warning signs in a jurisdiction, the fluorescent yellow-green background for pedestrian, bicycle, and school warning signs may be used in TTC zones.
11. Positive protection devices may be used per Section 6M.02.

Support:

12. Refer to CVC § 22500 for mid-block crosswalks.

## Figure 6P-29. Crosswalk Closures and Pedestrian Detours (TA-29)

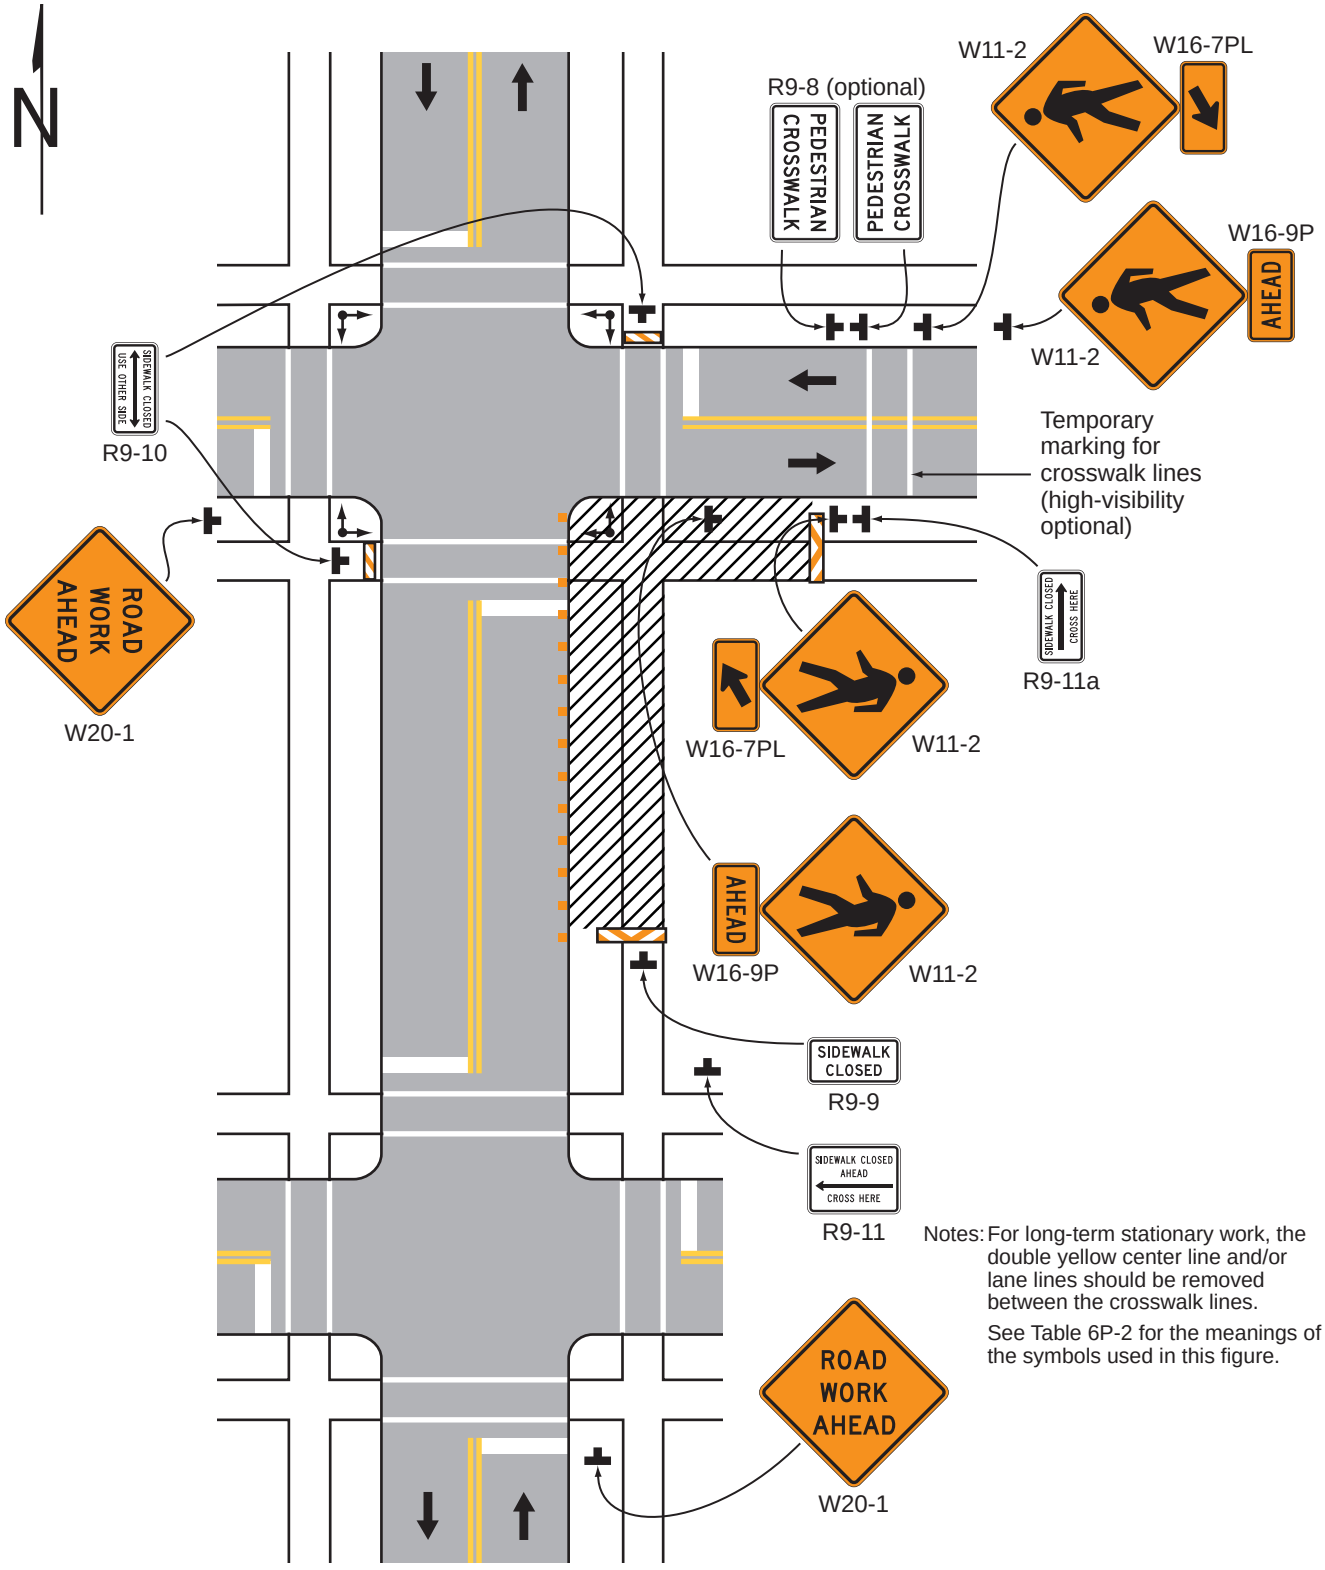


Notes: For long-term stationary work, the double yellow center line and/or lane lines should be removed between the crosswalk lines.

See Table 6P-2 for the meanings of the symbols used in this figure.

**Typical Application 29**

## Notes for Figure 6P-30 —Typical Application 30 Interior Lane Closure on a Multi-Lane Street

*Guidance:*

1. *This information applies to low-speed, low-volume urban streets. Where speed or volume is higher, additional signing such as LEFT LANE CLOSED XX FT (W20-5L) should be used between the signs shown.*


Option:

2. Positive protection devices may be used per Section 6M.02.
3. Shadow vehicles with a truck-mounted attenuator may be used. Support:
4. The closure of the adjacent interior lane in the opposing direction might not be necessary, depending upon the activity being performed and the work space needed for the operation.
5. The RIGHT (LEFT) LANE(S) CLOSED (W20-5 or C20(CA)) sign may be used instead of the Lane Reduction (W4-2) sign.

*Guidance:*

6. *All advance warning signs should be placed so that the path of travel for bicycles is not blocked, while maintaining visibility for road users.*
7. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, the Bicycle Crossing (W11-1) sign and the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque should be used to advise motorists of the presence of bicyclists in the travel way lanes.*
8. *If bicyclists are able to use the shoulder throughout the TTC zone, the Bicycle Crossing (W11-1) sign and the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque should be omitted.*

## Figure 6P-30. Interior Lane Closure on a Multi-Lane Street (TA-30)

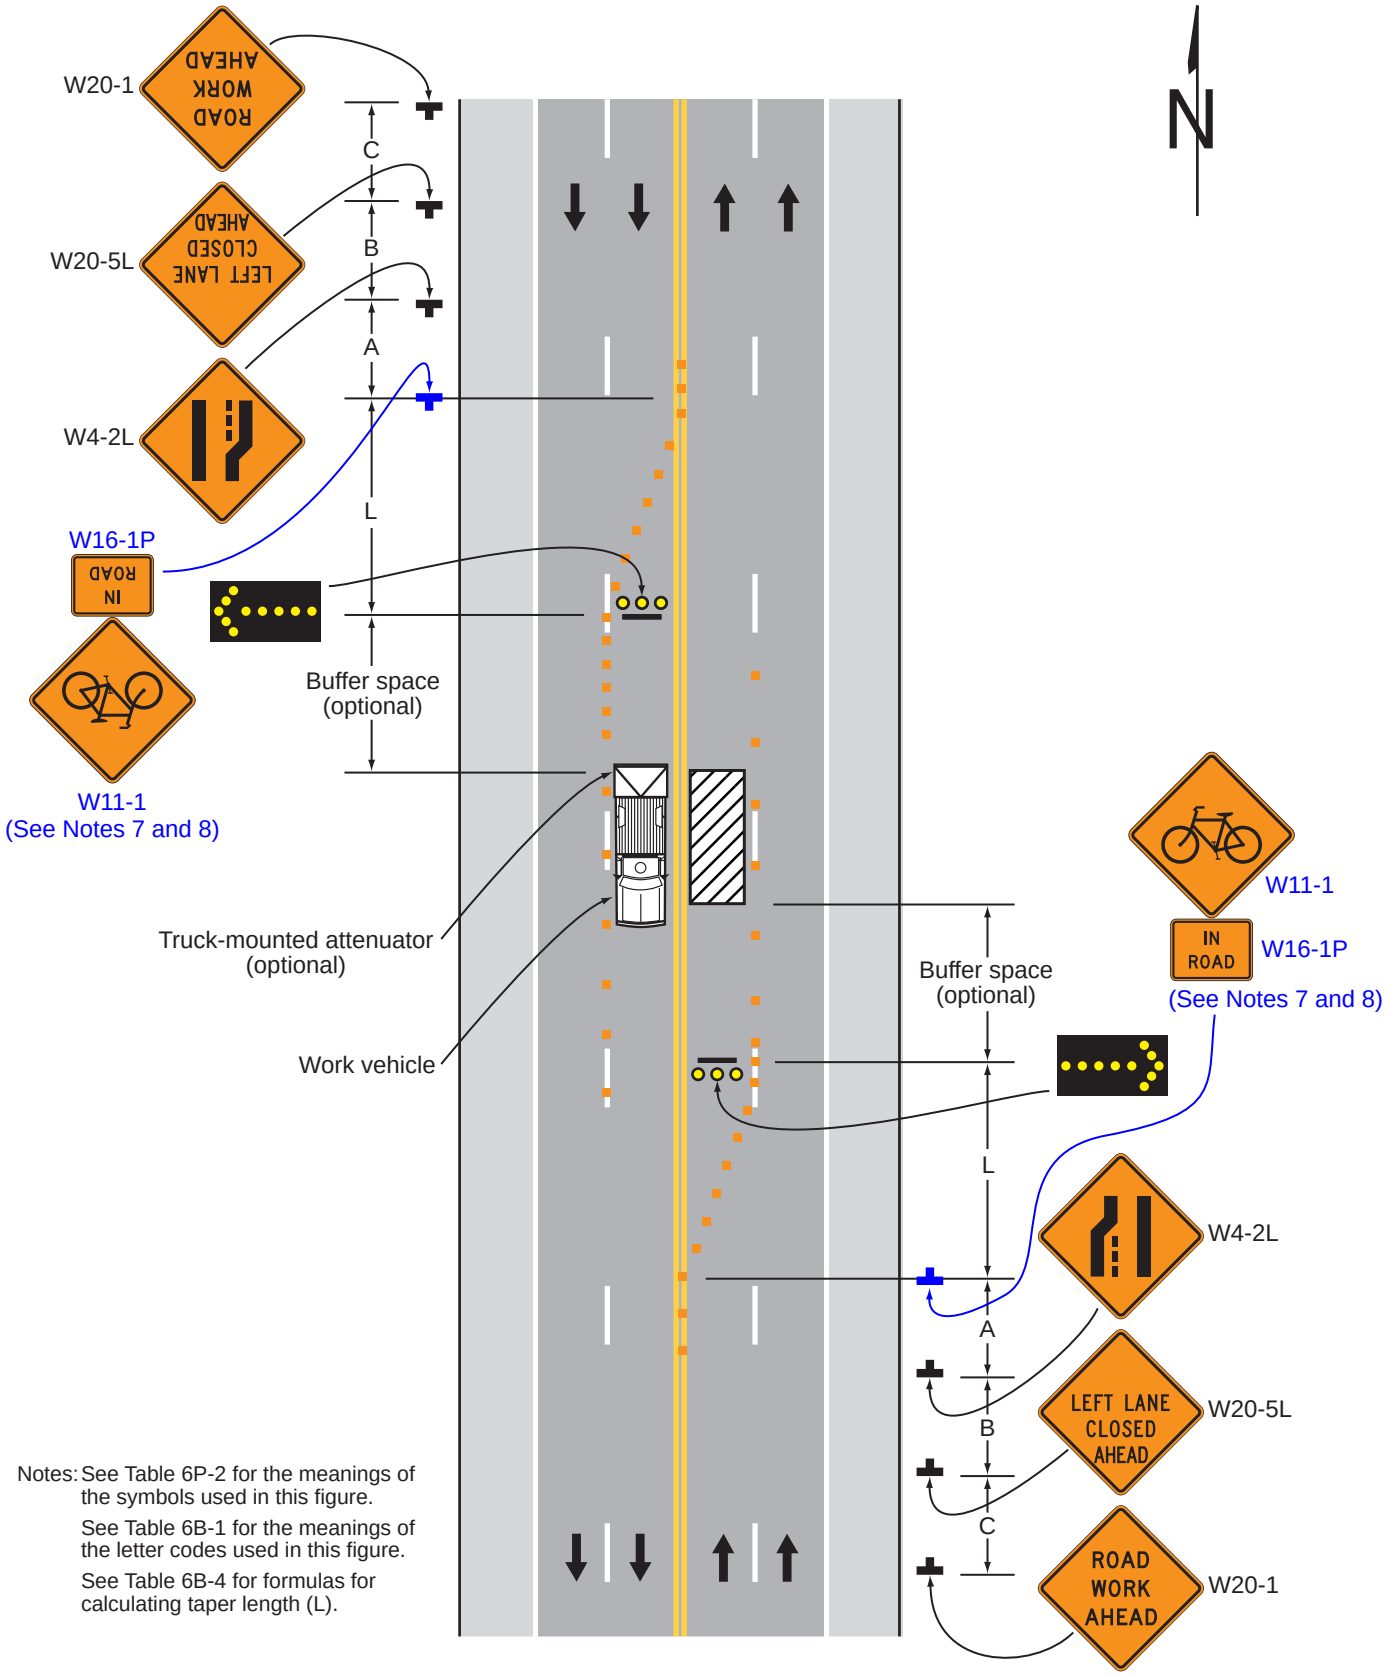


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 30**

## Notes for Figure 6P-31 —Typical Application 31
## Lane Closure on a Street with Uneven Directional Volumes

**Standard:**

1. **The illustrated information shall be used only when the vehicular traffic volume indicates that two lanes of vehicular traffic shall be maintained in the direction of travel for which one lane is closed.**

Option:

2. The procedure may be used during a peak period of vehicular traffic and then changed to provide two lanes in the other direction for the other peak.

*Guidance:*

3. *For high speeds, a LEFT LANE CLOSED XX FT (W20-5L) sign should be added for vehicular traffic approaching the lane closure, as shown in Figure 6P-32.*
4. *Conflicting pavement markings should be removed for long-term projects. For short-term and intermediate-term projects where this is impracticable, the channelizing devices in the area where the pavement markings conflict should be placed at a maximum spacing of ½ S feet where S is the speed in mph. Temporary markings should be installed where needed. The spacing of channelizing devices should not exceed the maximum distances shown in Table 6K-101(CA). Refer to Section 6K.01 for spacing of channelizing devices.*
5. *If the lane shift has curves with recommended speeds of 30 mph or less, Reverse Turn signs should be used.*
6. *Where the shifted section is long, a Reverse Curve sign should be used to show the initial shift and a second sign should be used to show the return to the normal alignment.*
7. *If the tangent distance along the temporary diversion is less than 600 feet, the Double Reverse Curve sign should be used at the location of the first Two Lane Reverse Curve sign. The second Two Lane Reverse Curve sign should be omitted. Use the Reverse Curve (W1-4) signs for both locations instead of the Double Reverse Curve or Two Lane Reverse Curve signs.*


**Standard:**

8. **Except as provided in Note 11 below, the number of lanes illustrated on the Reverse Curve or Double Reverse Curve signs shall be the same as the number of through lanes available to road users, and the direction of the reverse curves shall be appropriately illustrated.**

Option:

9. Positive protection devices may be used per Section 6M.02.
10. A longitudinal buffer space may be used in the activity area to separate opposing vehicular traffic.
11. Where two or more lanes are being shifted, a Reverse Curve (or Reverse Turn) sign with an ALL LANES plaque (see Figure 6H-1) may be used instead of a sign that illustrates the number of lanes.
12. Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.
13. A work vehicle or a shadow vehicle may be equipped with a truck-mounted attenuator.
14. When recommended speeds are the same for each curve, one Double Reverse Curve (W24-1) sign may be used, instead of two Reverse Curve (W1-4) signs, in advance of the first curve.

# Figure 6P-31. Lane Closure on a Street with Uneven Directional Volumes (TA-31)

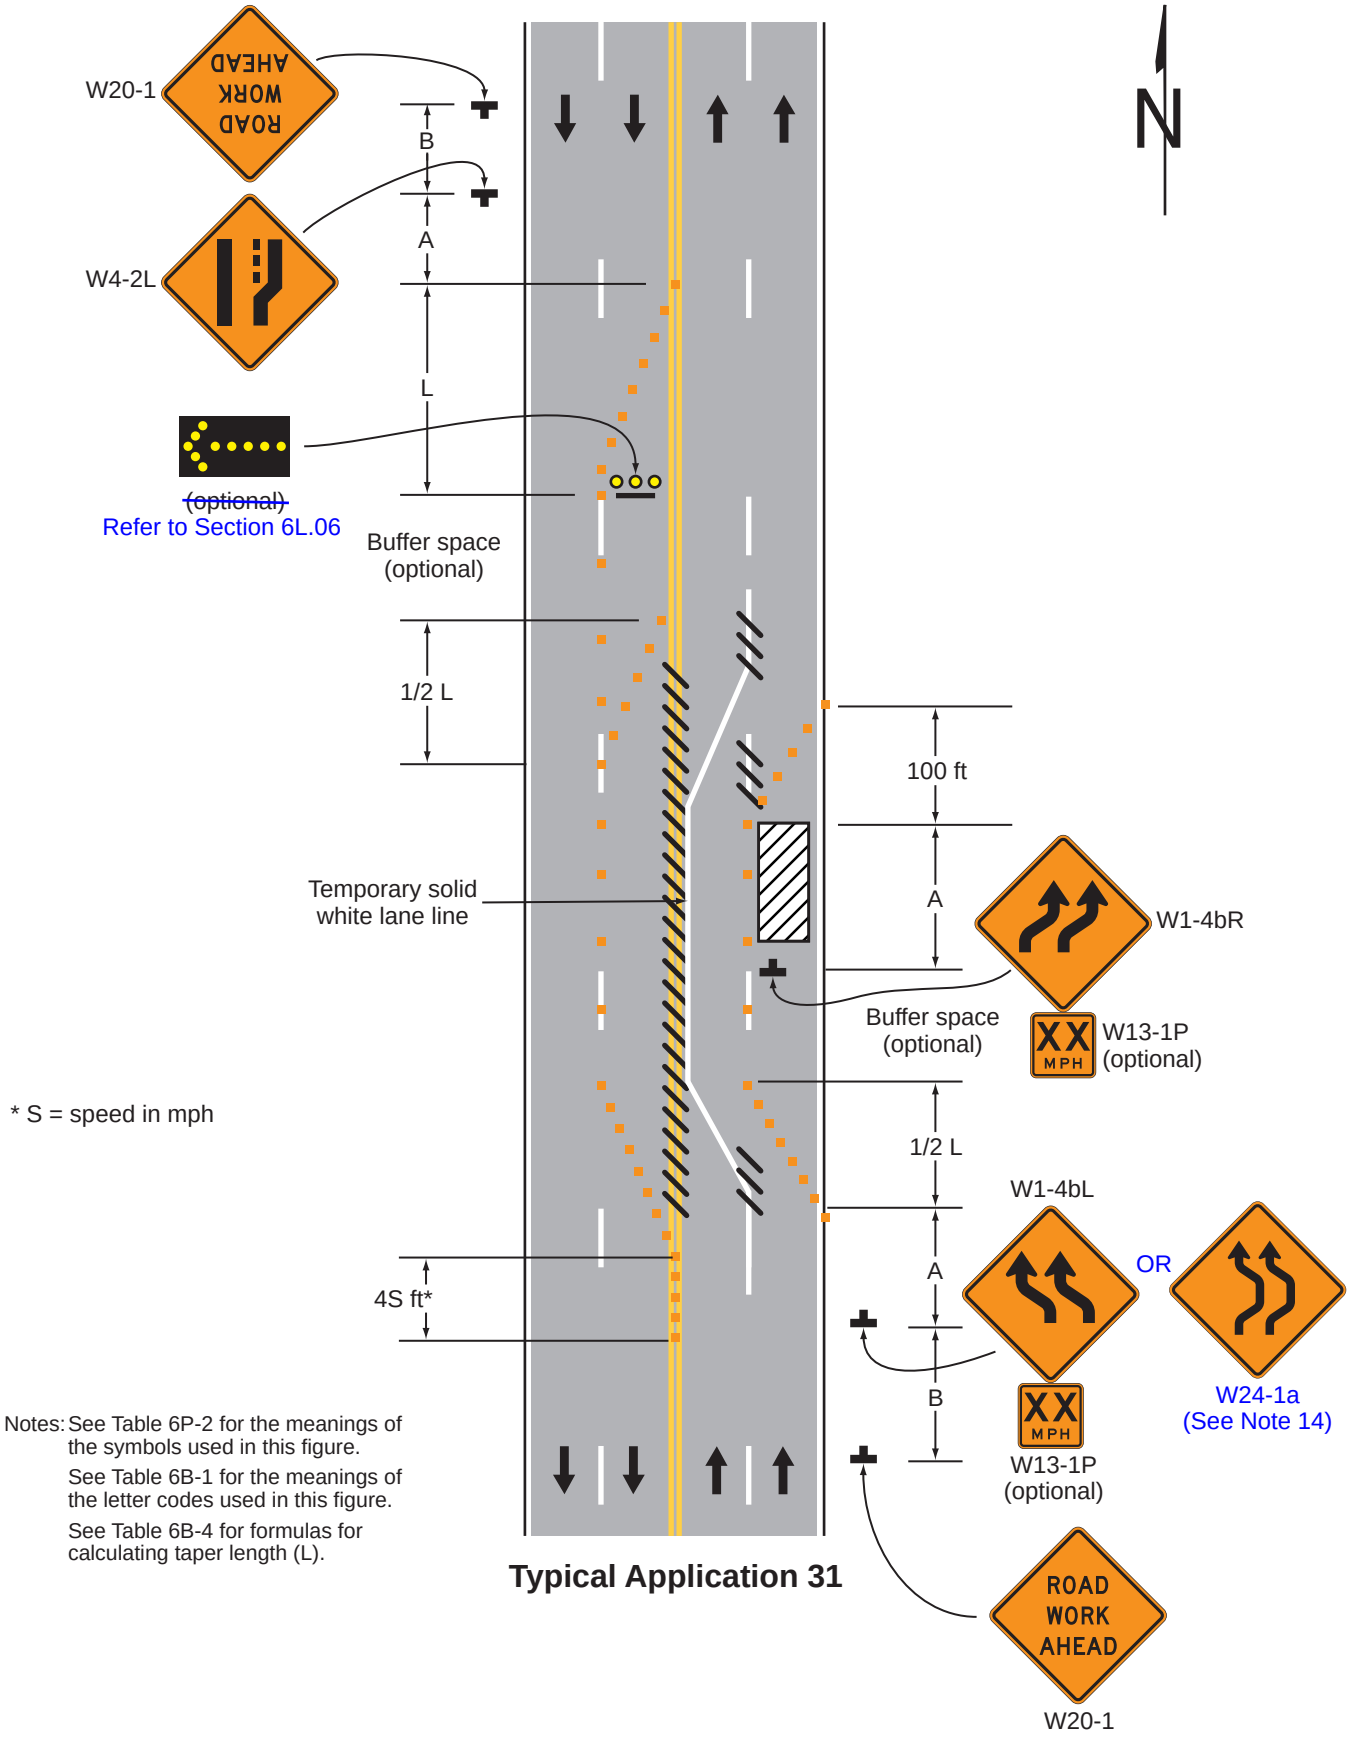


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 31**

## Notes for Figure 6P-32 —Typical Application 32
## Half Road Closure on a Multi-Lane, High-Speed Highway

**Standard:**

1. **Pavement markings no longer applicable shall be removed or obliterated as soon as practical. Except for intermediate-term and short-term situations, temporary markings shall be provided to clearly delineate the temporary travel path. For short-term and intermediate-term situations where it is not feasible to remove and restore pavement markings, channelization shall be made dominant by using a very close device spacing.**

*Guidance:*

2. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
3. *Where channelizing devices are used instead of pavement markings, the maximum spacing should be ½ S feet where S is the speed in mph. The spacing of channelizing devices should not exceed the maximum distances shown in Table 6K-101(CA). Refer to Section 6K.01 for spacing of channelizing devices.*
4. *If the tangent distance along the temporary diversion is less than 600 feet, a Double Reverse Curve sign should be used instead of the first Reverse Curve sign, and the second Reverse Curve sign should be omitted.*

Option:

5. Positive protection devices may be used per Section 6M.02.
6. Warning lights may be used to supplement channelizing devices at night.
7. A truck-mounted attenuator may be used on the work vehicle and/or the shadow vehicle.


Support:

8. Refer to Section 6F.102(CA) for use of the Slow For The Cone Zone (SC19(CA) and SC20(CA)) Signs.

*Guidance:*

9. *All advance warning signs should be placed so that the path of travel for bicycles is not blocked, while maintaining visibility for road users.*
10. *If bicyclists are able to use the shoulder throughout the TTC zone, the Bicycle Crossing (W11-1) sign should be used and the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque should be omitted.*
11. *The speeds used for the shoulder taper calculations should be of bicyclists in the project vicinity or if a special event such as a bike race, the expected speed of bicyclists approaching the TTC zone.*
12. *If bicyclists are sharing the traveled way lanes with motorists, speed reduction countermeasures should be used to reduce traffic speeds in the TTC zone. Refer to Sections 6B.01 and 6C.04.*
13. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, the Bicycle Crossing (W11-1) sign and the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque should be used to advise motorists of the presence of bicyclists in the travel way lanes.*

# Figure 6P-32. Half Road Closure on a Multi-Lane, High-Speed Highway (TA-32)

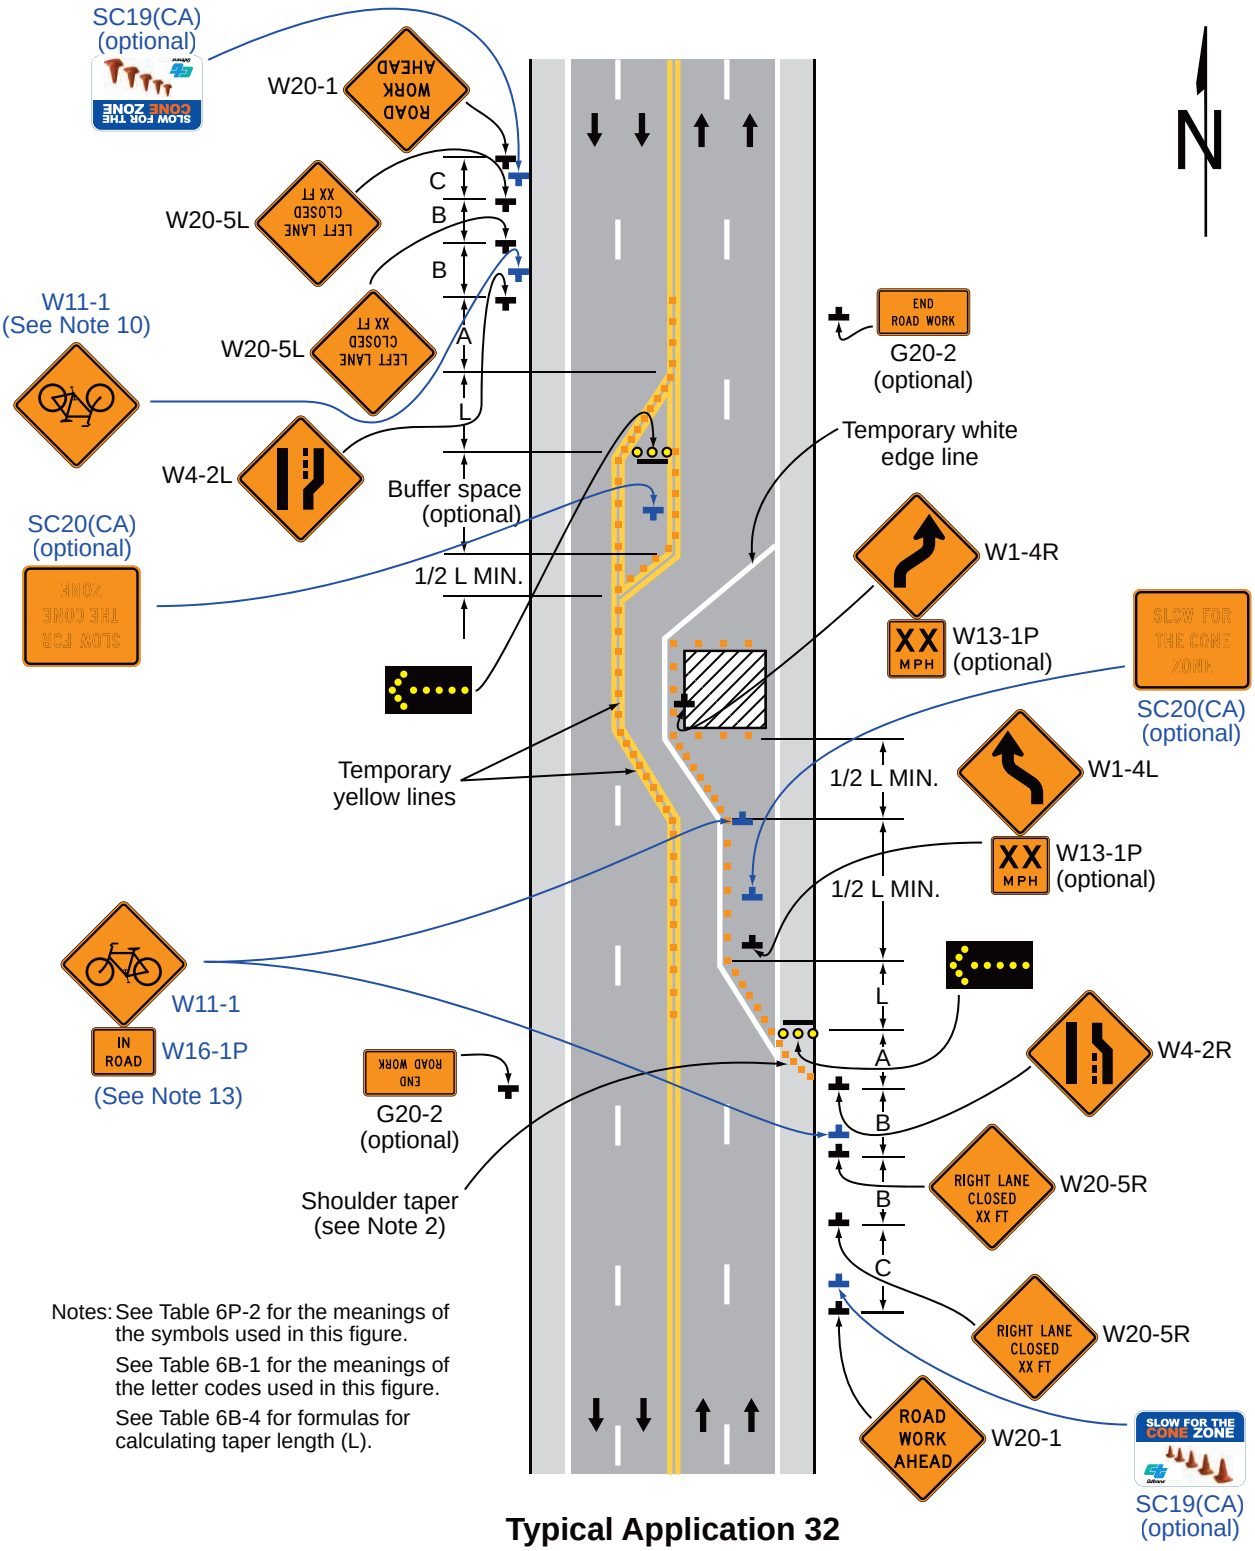


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 32**

## Notes for Figure 6P-33 —Typical Application 33 Stationary Lane Closure on a Divided Highway

**Standard:**

1. **This information also shall be used when work is being performed in the lane adjacent to the median on a divided highway. In this case, the LEFT LANE CLOSED signs and the corresponding Lane Ends signs shall be substituted.**
2. **When a side road intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

3. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*

Option:

4. A truck-mounted attenuator may be used on the work vehicle and/or shadow vehicle.
5. Positive protection devices may be used per Section 6M.02. Support:
6. Where conditions permit, restricting all vehicles, equipment, workers, and their activities to one side of the roadway might be advantageous.


**Standard:**

7. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**

Support:

8. Refer to Section 6F.102(CA) for use of the Slow For The Cone Zone (SC19(CA) and SC20(CA)) Signs.

# Figure 6P-33. Stationary Lane Closure on a Divided Highway (TA-33)

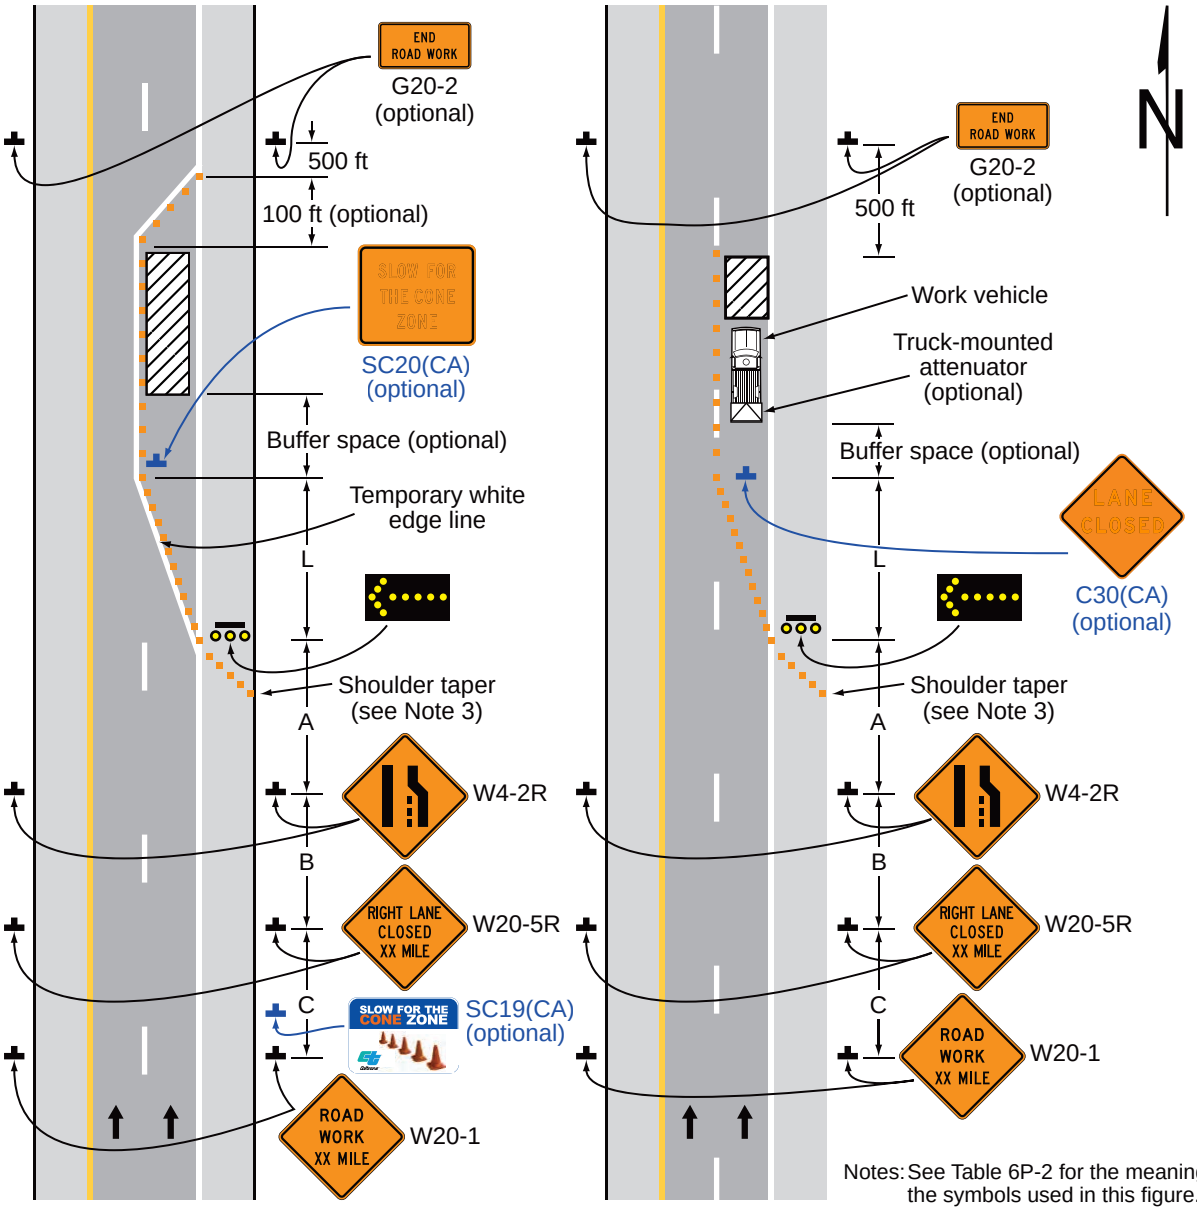


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

## Typical Application 33

## Notes for Figure 6P-34 —Typical Application 34
## Lane Closure with a Temporary Traffic Barrier

**Standard:**

1. **This information also shall be used when work is being performed in the lane adjacent to the median on a divided highway. In this case, the LEFT LANE CLOSED (W20-5L) signs and the corresponding Lane Ends signs shall be substituted.**

*Guidance:*

2. *For long-term lane closures on facilities with permanent edge lines, a temporary edge line should be installed from the upstream end of the merging taper to the downstream end of the downstream taper, and conflicting pavement markings should be removed.*
3. *The use of a barrier should be based on engineering judgment.*

**Standard:**

4. **Temporary traffic barriers, if used, shall comply with the provisions of Section 6M.02.**
5. **The barrier shall not be placed along the merging taper. The lane shall first be closed using channelizing devices and pavement markings.**

Option:

6. Type C Steady-Burn warning lights may be placed on channelizing devices and the barrier parallel to the edge of pavement for nighttime lane closures.
7. The barrier shown in this typical application is an example of one method that may be used to close a lane for a long-term project. If the work activity permits, a movable barrier may be used and relocated to the shoulder during non-work periods or peak-period vehicular traffic conditions, as appropriate.


**Standard:**

8. **If a movable barrier is used, the temporary white edge line shown in the typical application shall not be used. During the period when the right-hand lane is opened, the sign legends and the channelization shall be changed to indicate that only the shoulder is closed, as illustrated in Figure 6P-5. The arrow board, if used, shall be placed at the downstream end of the shoulder taper and shall display the caution mode.**

*Guidance:*

9. *If a movable barrier is used, the shift should be performed in the following manner. When closing the lane, the lane should be initially closed with channelizing devices placed along a merging taper using the same information employed for a stationary lane closure. The lane closure should then be extended with the movable-barrier transfer vehicle moving with vehicular traffic. When opening the lane, the movable-barrier transfer vehicle should travel against vehicular traffic from the termination area to the transition area. The merging taper should then be removed using the same information employed for a stationary lane closure.*

## Figure 6P-34. Lane Closure with a Temporary Traffic Barrier (TA-34)

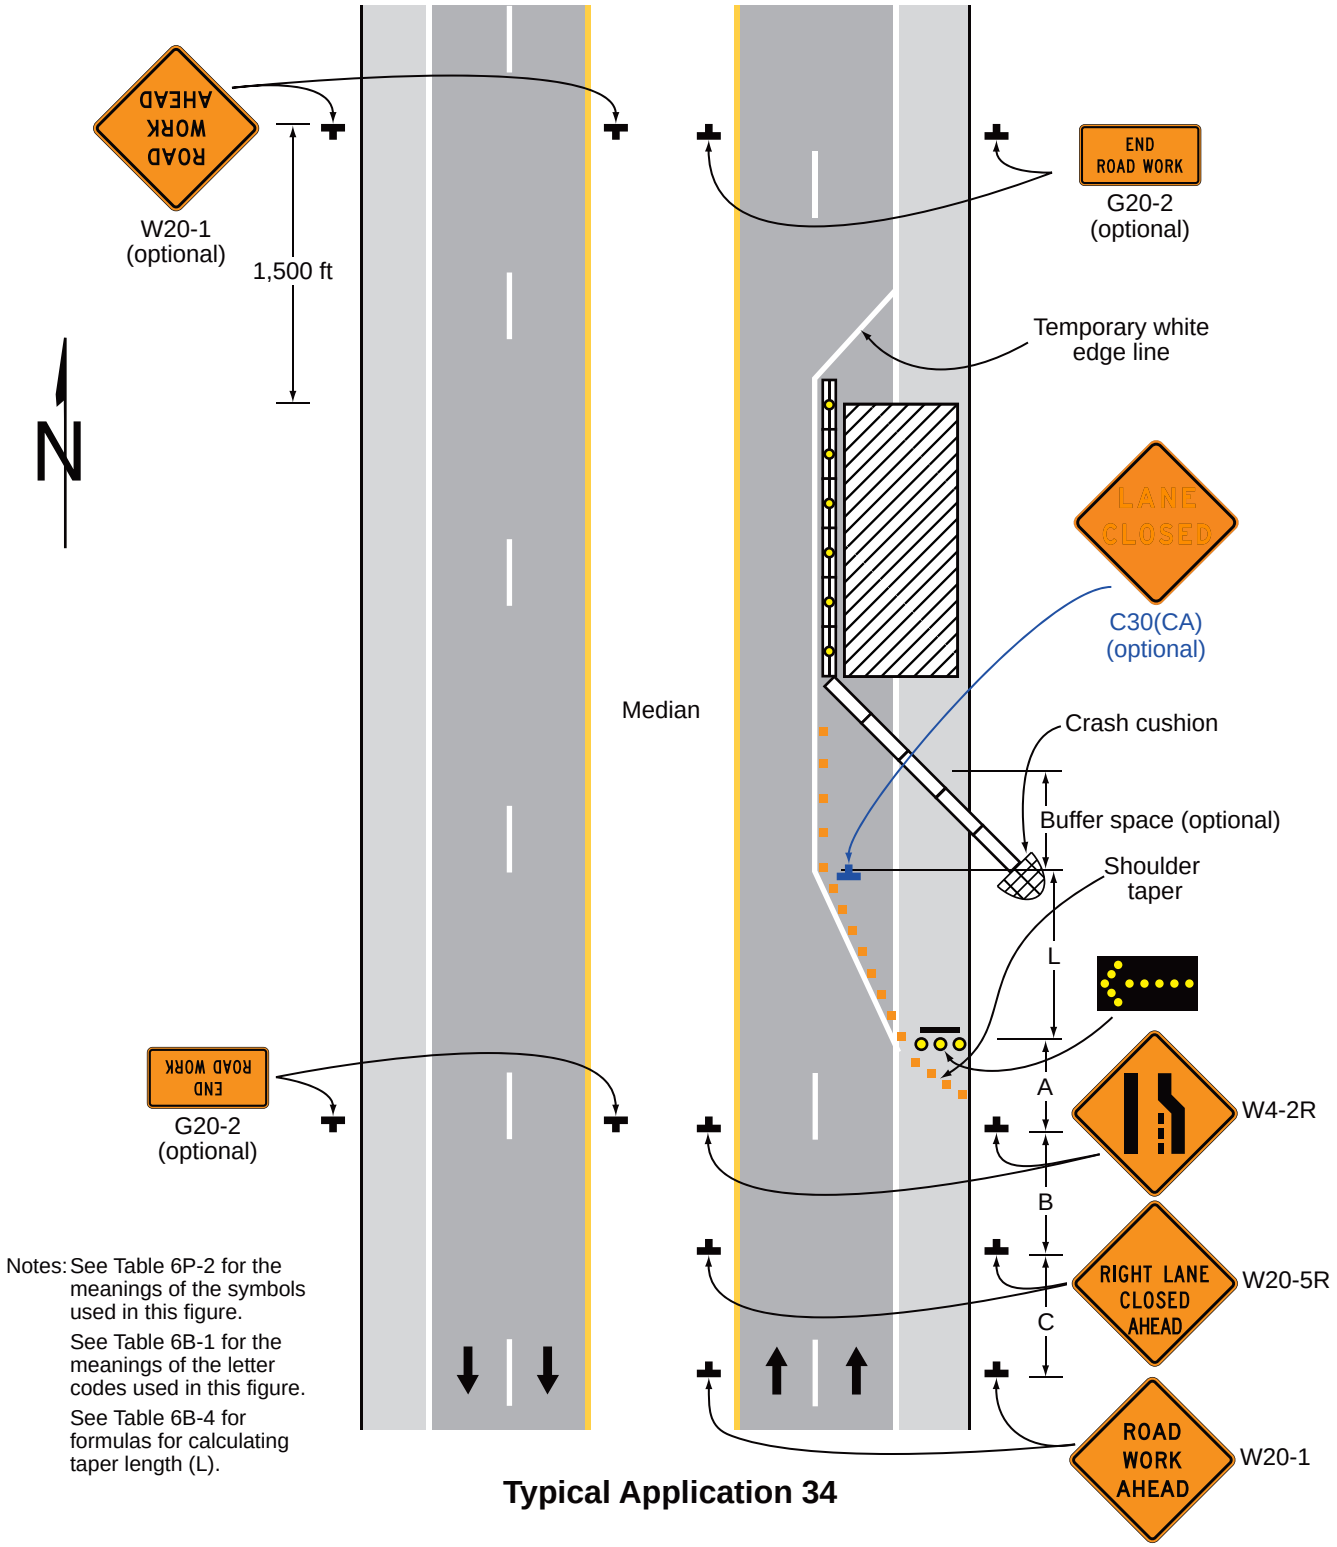


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 34**

## Notes for Figure 6P-35 —Typical Application 35
## Mobile Operation on a Multi-Lane Road

**Standard:**

1. **Arrow boards shall, as a minimum, be Type B, with a size of 60 x 30 inches.** **For State highways, the arrow boards shall, as a minimum, be type II, with a size of 72 x 36 inch. Refer to Caltrans' Standard Specifications Section 12-3.30 for minimum size and type of arrow panels cited above. Refer to Section 1A.05 for information regarding this publication.**
2. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
3. **Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.**
4. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

5. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as flags, signs, or arrow boards.*
6. *Shadow Vehicle 1 should be equipped with an arrow board and truck-mounted attenuator.*
7. *Shadow Vehicle 2 should be equipped with an arrow board. An appropriate lane closure sign should be placed on Shadow Vehicle 2 so as not to obscure the arrow board.*
8. *Shadow Vehicle 2 should travel at a varying distance from the work operation so as to provide adequate sight distance for vehicular traffic approaching from the rear.*
9. *The spacing between the work vehicles and the shadow vehicles, and between each shadow vehicle, should be minimized to deter road users from driving in between.*
10. *Work should normally be accomplished during off-peak hours.*
11. *When the work vehicle occupies an interior lane (a lane other than the far right or far left) of a directional roadway having a right-hand shoulder 10 feet or more in width, Shadow Vehicle 2 should drive on the right-hand shoulder with a sign indicating that work is taking place in the interior lane.*


Option:

12. A truck-mounted attenuator may be used on Shadow Vehicle 2.
13. Positive protection devices may be used per Section 6M.02.
14. On high-speed roadways, a third shadow vehicle (not shown) may be used with Shadow Vehicle 1 in the closed lane, Shadow Vehicle 2 straddling the edge line, and Shadow Vehicle 3 on the shoulder.
15. Where adequate shoulder width is not available, Shadow Vehicle 3 may also straddle the edge line.

Support:

16. For State highways, refer to Caltrans' Standard Plan T15 and T16. Refer to Section 1A.05 for information regarding this publication.

## Figure 6P-35. Mobile Operation on a Multi-Lane Road (TA-35)

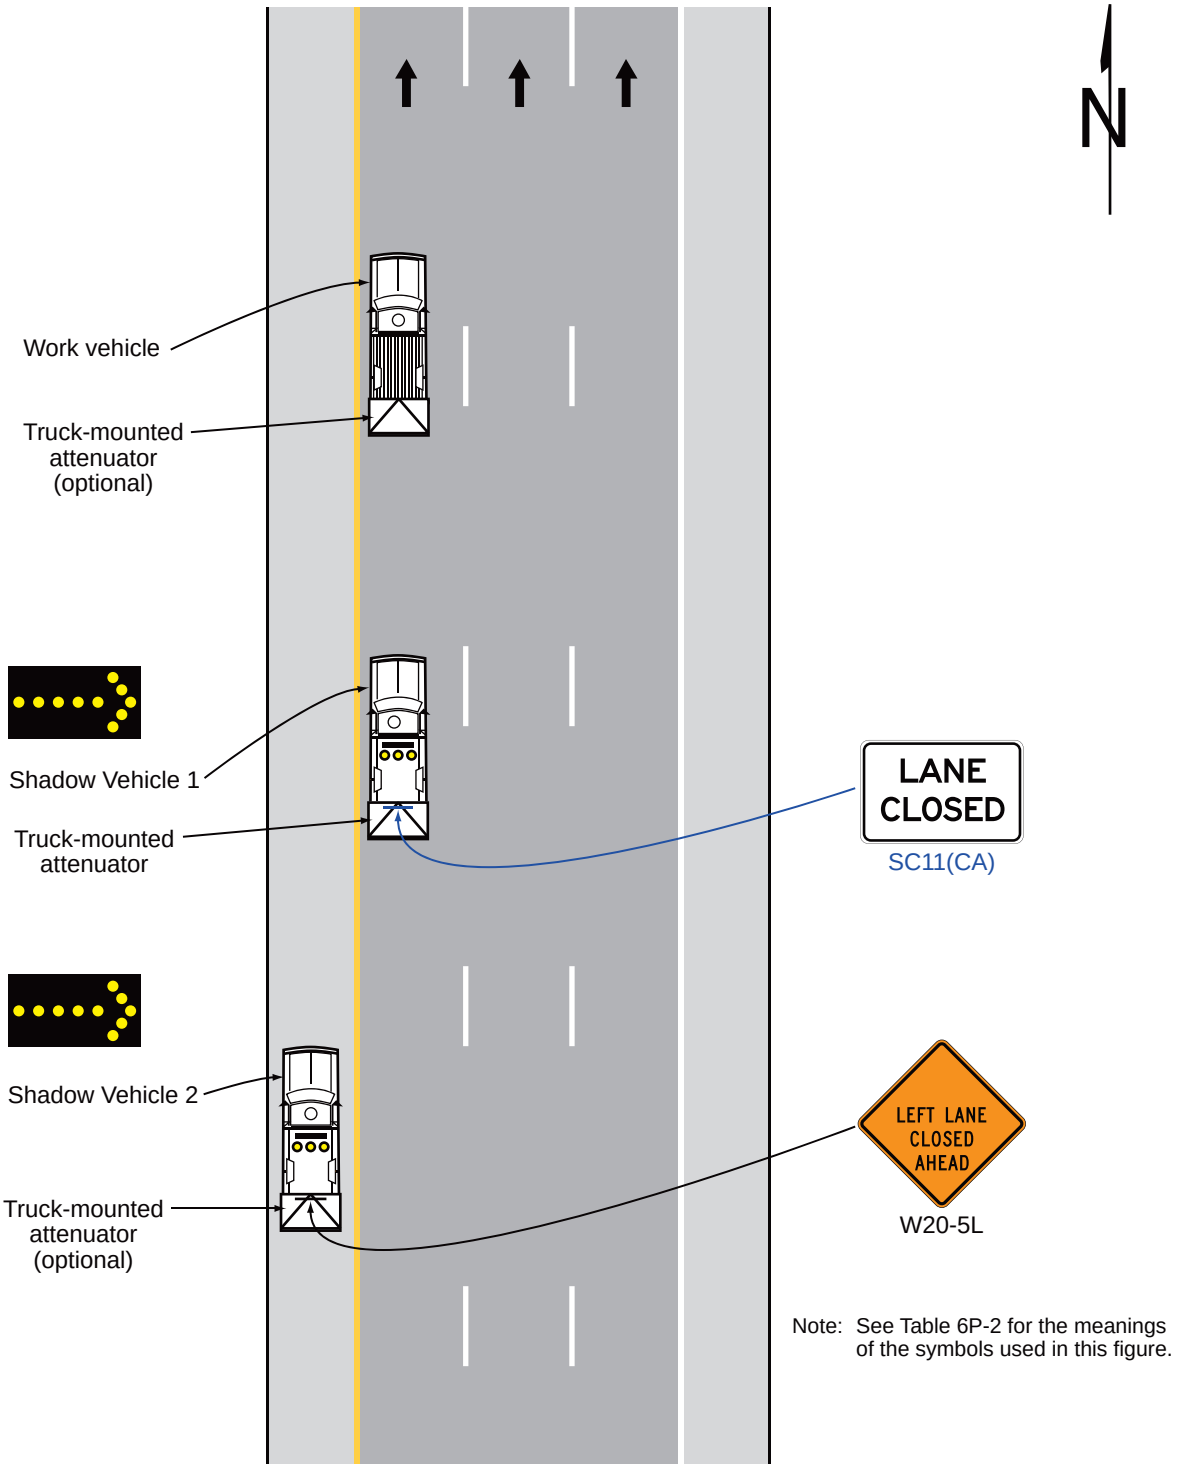


**Typical Application 35**

## Notes for Figure 6P-36 Typical Application 36
## Lane Shift on a Freeway

*Guidance:*

1. *The lane shift should be used when the work space extends into either the right-hand or left-hand lane of a divided highway and it is impracticable, for capacity reasons, to reduce the number of available lanes.*

Support:

2. When a lane shift is accomplished by using (1) geometry that meets the design speed at which the permanent highway was designed, (2) full normal cross-section (full lane width and full shoulders), and (3) complete pavement markings, then only the initial general work-zone warning sign is required.

*Guidance:*

3. *When the conditions in Note 2 above are not met, the information shown in the typical application should be employed and the provisions in Notes 4 through 17 below are applicable.*

**Standard:**

4. **Temporary traffic barriers, if used, shall comply with the provisions of Section 6M.02.**
5. **The barrier shall not be placed along the shifting taper. The lane shall first be shifted using channelizing devices and pavement markings.**

*Guidance:*

6. *A warning sign should be used to show the changed alignment.*

**Standard:**

7. **Except as provided in Note 8 below, the number of lanes illustrated on the Reverse Curve signs shall be the same as the number of through lanes available to road users, and the direction of the reverse curves shall be appropriately illustrated.**

Option:

8. Where two or more lanes are being shifted, a W1-4 (or W1-3) sign with an ALL LANES (W24-1cP) plaque (see Figure 6H-1) may be used instead of a sign that illustrates the number of lanes.
9. Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.

*Guidance:*

10. *Where the shifted section is longer than 600 feet, one set of Reverse Curve signs should be used to show the initial shift and a second set should be used to show the return to the normal alignment. If the tangent distance along the temporary diversion is less than 600 feet, a Double Reverse Curve sign should be used instead of the first Reverse Curve sign, and the second Reverse Curve sign should be omitted.*
11. *If a STAY IN LANE (R4-9) sign is used, then solid white lane lines should be used.*

**Standard:**

12. **The minimum width of the shoulder lane shall be 10 feet.**
13. **For long-term stationary work, existing conflicting pavement markings shall be removed and temporary markings shall be installed before traffic patterns are changed.**

Option:

14. For short-term stationary work, lanes may be delineated by channelizing devices or removable pavement markings instead of temporary markings.

*Guidance:*

15. *If the shoulder cannot adequately accommodate trucks, trucks should be directed to use the travel lanes.*
16. *The use of a barrier should be based on engineering judgment.*

Option:

17. Type C Steady-Burn warning lights may be placed on channelizing devices and the barrier parallel to the edge of the pavement for nighttime lane closures.
18. Detail 11 (refer to Figure 3A-102(CA)) may be used instead of the temporary solid white lane line, which is shown in Figure 6P-36.


Support:

19. Refer to Section 6F.102(CA) for use of the Slow For The Cone Zone (SC19(CA) and SC20(CA)) Signs.

*Guidance:*

20. *All advance warning signs should be placed so that the path of travel for bicycles is not blocked, while maintaining visibility for road users.*
21. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, the Bicycle Crossing (W11-1) sign and the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque should be used to advise motorists of the presence of bicyclists in the travel way lanes.*
22. *Except for short durations and mobile operations, when a highway shoulder is occupied and bicyclists would be sharing a lane with vehicular traffic, as a result of the TTC zone, speed reduction countermeasures should be used to reduce traffic speeds in the TTC zone. Refer to Sections 6B.01 and 6C.04.*
23. *Except for short durations and mobile operations, when a highway shoulder is occupied and bicyclists would be sharing a lane with vehicular traffic, as a result of the TTC zone, before narrowing the outside lane other measures such as widening the outside shoulder to allow bicyclists and motor vehicles to travel side by side through the TTC zone should be considered.*
24. *If traffic volumes make it feasible, the two left lanes should be merged into one lane to avoid using the shoulder as a traveled way lane and allowing continued use for emergency purposes and bicycle travel.*
25. *When existing accommodations for bicycle travel are disrupted or closed in a long-term duration project (refer to Section 6N.01) and the roadway width is inadequate for allowing bicyclists and motor vehicles to travel side by side, a separate path should be considered for bicyclists.*

## Figure 6P-36. Lane Shift on a Freeway (TA-36)

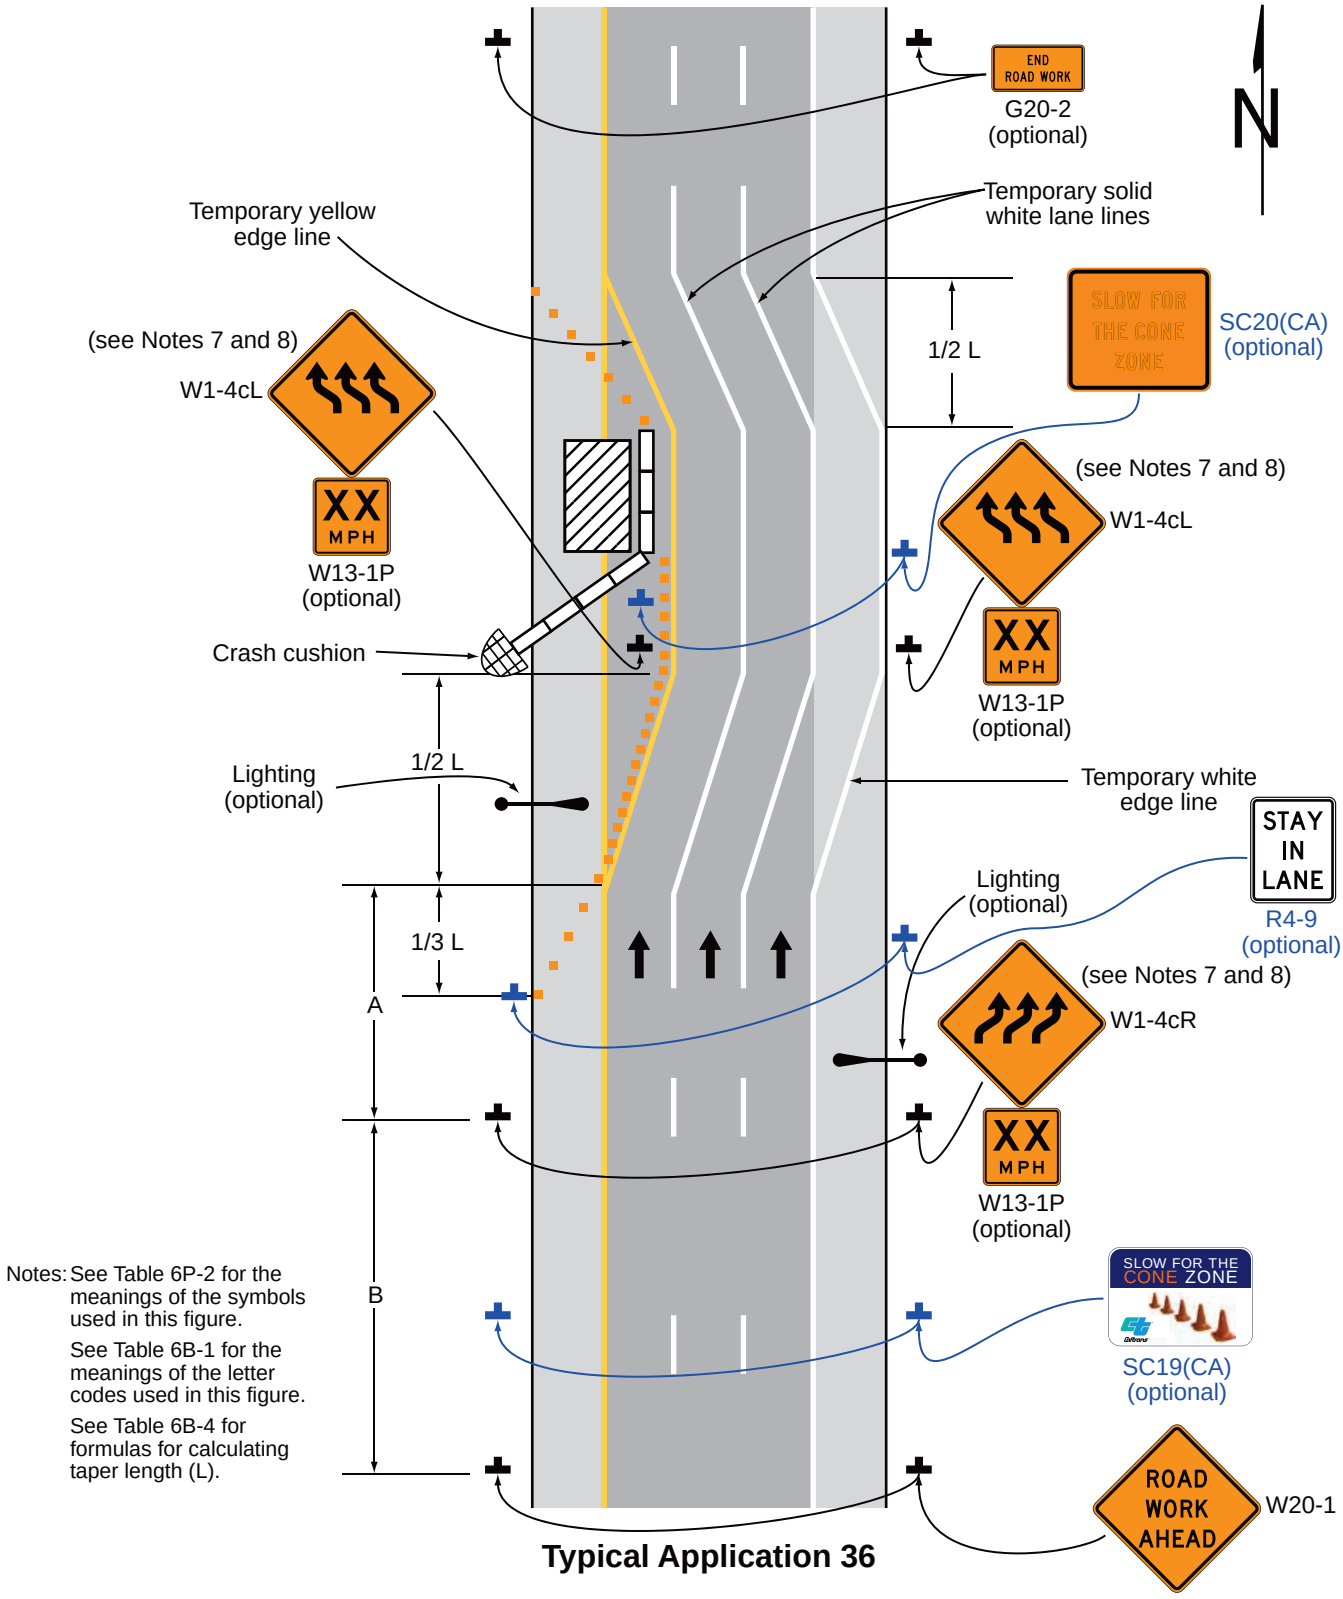


Notes:
- See Table 6P-2 for the meanings of the symbols used in this figure.
- See Table 6B-1 for the meanings of the letter codes used in this figure.
- See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 36**

## Notes for Figure 6P-37 —Typical Application 37
## Double Lane Closure on a Freeway

**Standard:**

1. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

2. *Ordinarily, the preferred position for the second arrow board is in the closed exterior lane at the upstream end of the second merging taper. However, the second arrow board should be placed in the closed interior lane at the downstream end of the second merging taper in the following situations:*
   a. *When a shadow vehicle is used in the interior closed lane, and the second arrow board is mounted on the shadow vehicle;*
   b. *If alignment or other conditions create any confusion as to which lane is closed by the second arrow board; and*
   c. *When the first arrow board is placed in the closed exterior lane at the downstream end of the first merging taper (the alternative position when the shoulder is narrow).*

**Standard:**

**2a. All advance warning signs mounted on portable supports shall be equipped with at least two flags or a flashing warning beacon. Each flag shall be at least 16 x 16 inches in size and shall be orange or red in color. Flashing warning beacons (Section 6L.07) shall be used to call attention to the initial warning signs during hours of darkness. Flashing warning beacons is optional during daytime operations.**

Option:

3. Flashing warning lights and/or flags may be used to call attention to the initial warning signs.
4. A truck-mounted attenuator may be used on the shadow vehicle.
5. Positive protection devices may be used per Section 6M.02.
6. If a paved shoulder having a minimum width of 10 feet and sufficient strength is available, the left- hand and adjacent interior lanes may be closed and vehicular traffic carried around the work space on the right-hand lane and a right-hand shoulder.

*Guidance:*

7. *When a shoulder lane is used that cannot adequately accommodate trucks, trucks should be directed to use the normal travel lanes.*

**Standard:**

**8. 3 cones or 2 Type II barricades shall be placed transversely across each closed lane at end of each merging taper and every 2000 feet throughout the lane closure.**


**9. On freeways, maximum spacing of channelizing devices shall be 50 feet in advance warning and transition areas, 100 feet in activity and termination areas (refer to Figure 6B-1).**

**10. LANE CLOSED C30(CA) sign shall be placed every 2000 feet throughout the lane closure adjacent to the open lane within the closed lane.**

Support:

11. For State highways, refer to the Caltrans' Standard Plan T10. Refer to Section 1A.05 for information regarding this publication.

## Figure 6P-37. Double Lane Closure on a Freeway (TA-37)

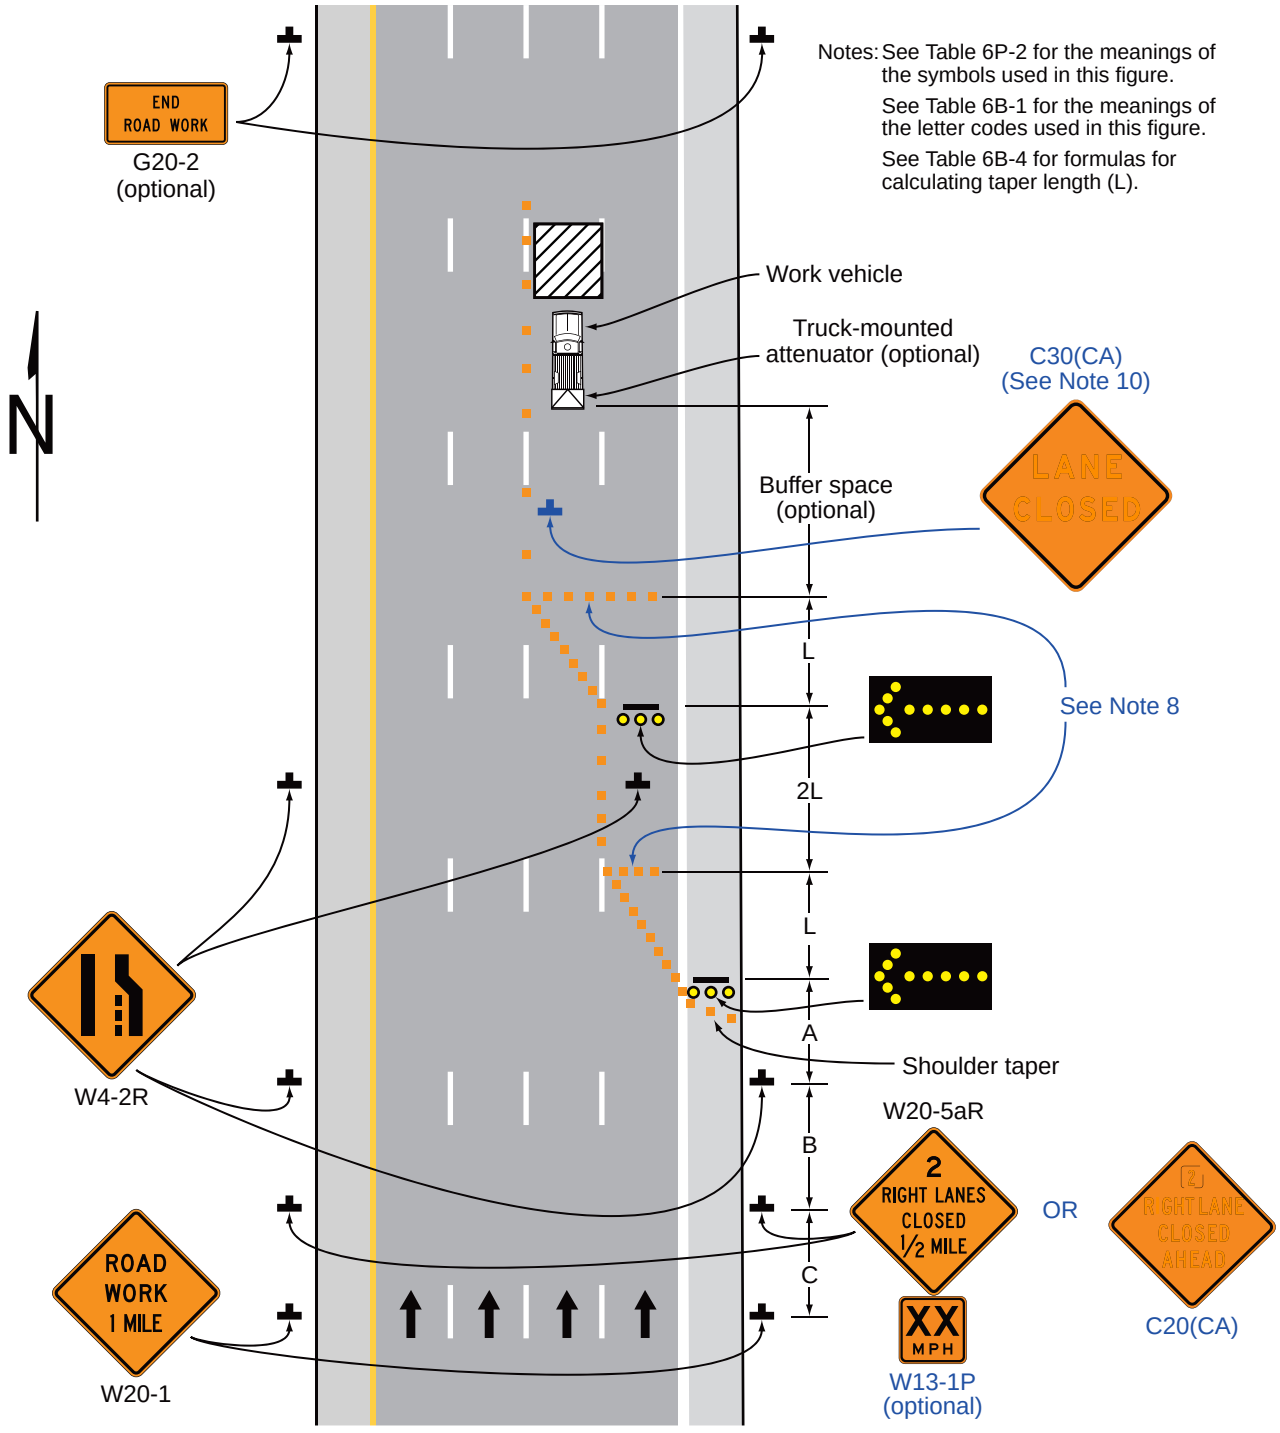


**Typical Application 37**

## ~~Notes for Figure 6P-38 – Typical Application 38~~
## ~~Interior Lane Closure on a Freeway~~

~~**Standard:**~~

1. ~~**An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**~~
2. ~~**If temporary traffic barriers are installed, they shall comply with the provisions and requirements in Section 6M.02.**~~
3. ~~**The barrier shall not be placed along the shifting taper. The lane shall first be shifted using channelizing devices and pavement markings.**~~
4. ~~**For long-term stationary work, existing conflicting pavement markings shall be removed and temporary markings shall be installed before traffic patterns are changed.**~~

~~*Guidance:*~~

5. ~~*For a long-term closure, a barrier should be used to provide additional safety to the operation in the closed interior lane. A buffer space should be used at the upstream end of the closed interior lane.*~~
6. ~~*An arrow board displaying an arrow pointing to the right should be placed on the left-hand shoulder at the beginning of the taper.*~~
7. ~~*For long-term use, the broken lane lines should be made solid white in the two-lane section.*~~

~~Option:~~

8. ~~As an alternative to initially closing the left-hand lane, as shown in the typical application, the right- hand lane may be closed in advance of the interior lane closure with appropriate channelization and signs. The Interior Lane Shift Ahead symbol sign may be mirrored to indicate a right lane shift.~~
9. ~~A short, single row of channelizing devices in advance of the vehicular traffic split to restrict vehicular traffic to their respective lanes may be added.~~
10. ~~DO NOT PASS signs may be used.~~
11. ~~If a paved shoulder having a minimum width of 10 feet and sufficient strength is available, the left- hand and center lanes may be closed and motor vehicle traffic carried around the work space on the right-hand lane and a right-hand shoulder.~~
12. ~~A work vehicle with a truck-mounted attenuator may be used within the closed interior lane between the buffer space and the work area.~~
13. ~~Positive protection devices may be used per Section 6M.02.~~

~~*Guidance:*~~

14. ~~*When a shoulder lane is used that cannot adequately accommodate trucks, trucks should be directed to use the normal travel lanes.*~~


**Standard:**

15. **This typical application is deleted for application and shall not be used on freeways in California. Whenever an interior lane needs to be closed on freeways, all adjacent lane(s) to one side of this lane shall be closed as illustrated in Figure 6P-37.**

Support:

16. For State highways, refer to Caltrans' Standard Plan T10, T10A, and T14. For interior lane closure on Freeways using mobile operation, refer to Caltrans' Standard Plan T16. Refer to Section 1A.05 for information regarding this publication.

## Figure 6P-38. Interior Lane Closure on a Freeway (TA-38)

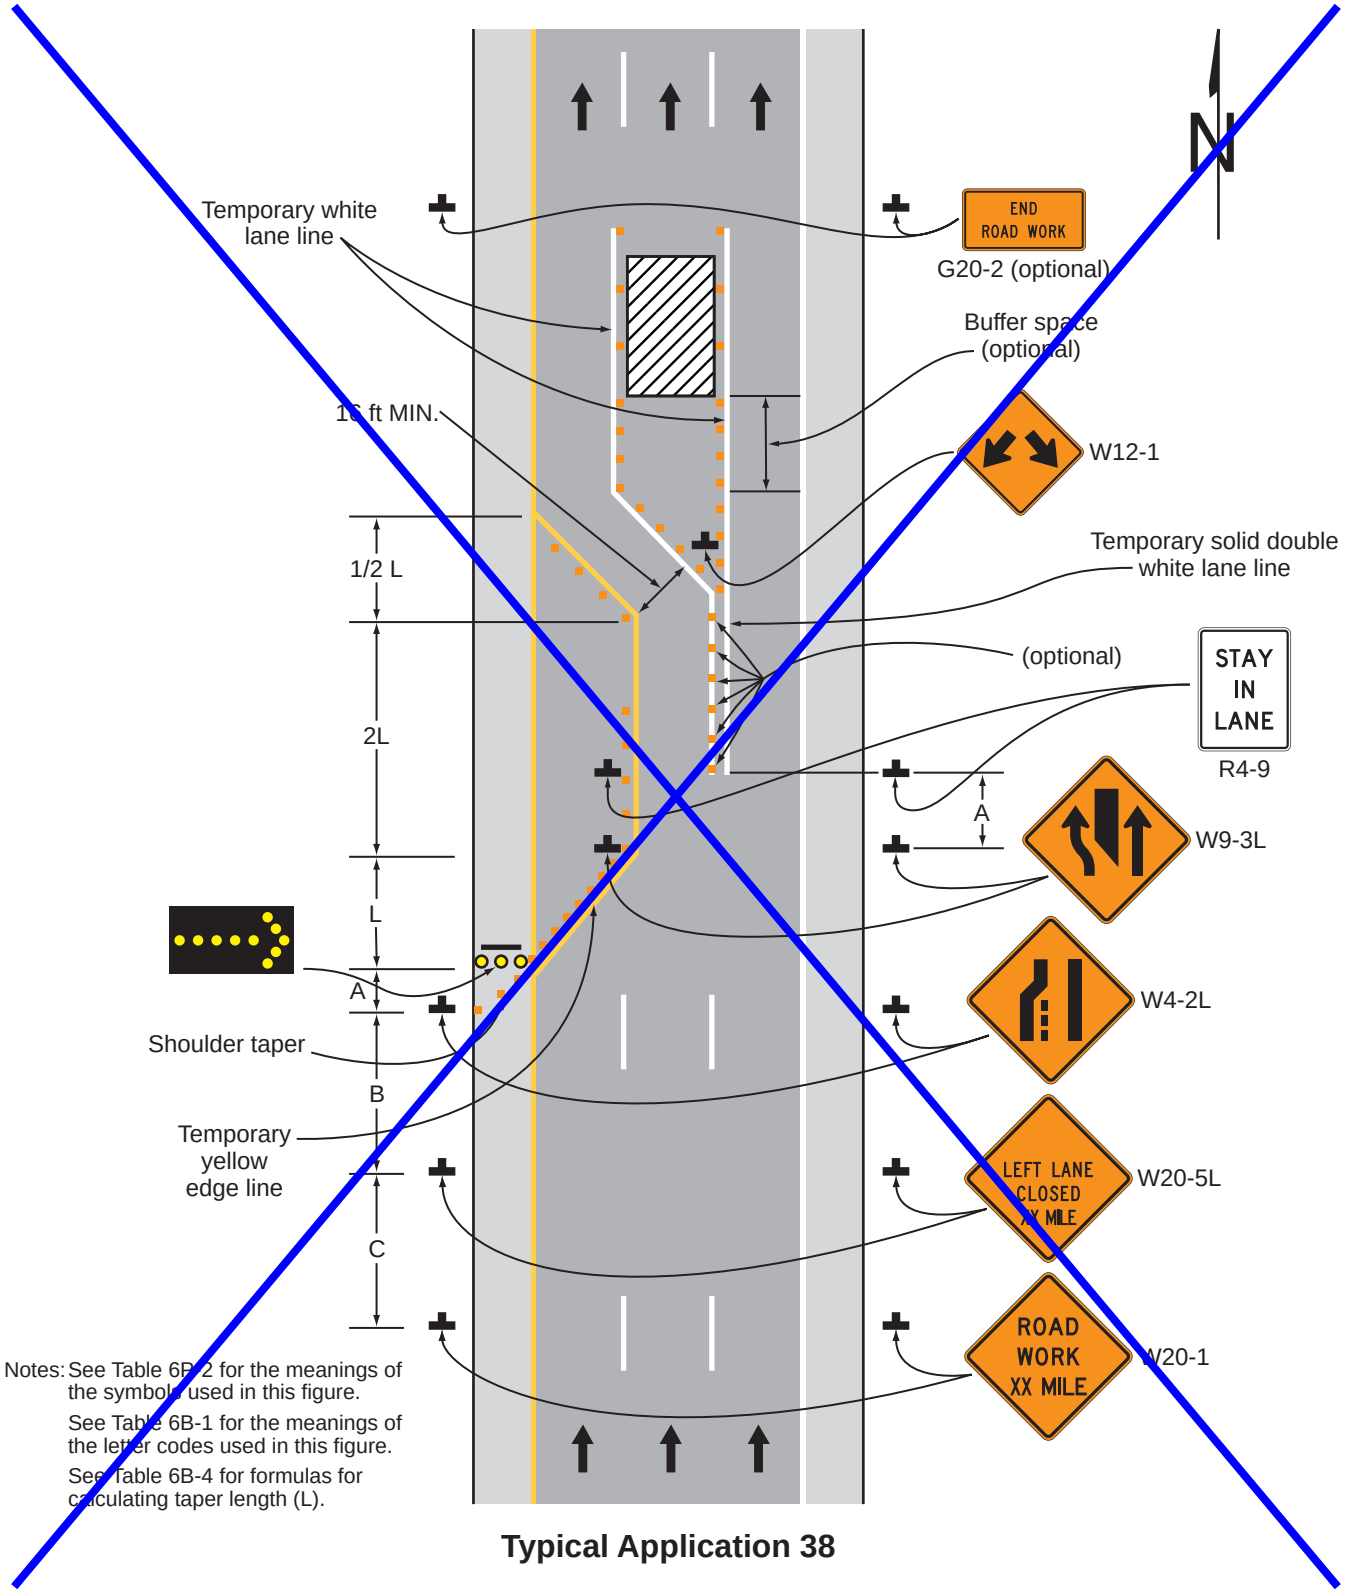


**Typical Application 38**

## Notes for Figure 6P-39 —Typical Application 39
## Median Crossover on a Freeway

**Standard:**

1. **Channelizing devices or temporary traffic barriers shall be used to separate opposing vehicular traffic.**
2. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

3. *For long-term work on high-speed, high-volume highways, consideration should be given to using a temporary traffic barrier to separate opposing vehicular traffic.*

Option:

4. When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic (W6-3), DO NOT PASS (R4-1), KEEP RIGHT (R4-7), and DO NOT ENTER (R5-1) signs may be eliminated.
5. The alignment of the crossover may be designed as a reverse curve.

*Guidance:*

6. *When the crossover follows a curved alignment, the design criteria contained in the "AASHTO Green Book – A Policy On Geometric Design of Highways and Streets," 7th Edition, 2018 AASHTO should be used.*
7. *When channelizing devices have the potential of leading vehicular traffic out of the intended traffic space, the channelizing devices should be extended a distance in feet of 2 times the speed limit in mph beyond the downstream end of the transition area as depicted.*
8. *Where channelizing devices are used, the Two-Way Traffic signs should be repeated every 1 mile.*

Option:

9. NEXT XX MILES (W7-3aP) Supplemental Distance plaques may be used with the Two-Way Traffic (W6-3) signs, where XX is the distance to the downstream end of the two-way section.


Support:

10. When the distance is sufficiently short that road users entering the section can see the downstream end of the section, they are less likely to forget that there is opposing vehicular traffic.
11. The sign legends for the four pairs of signs approaching the lane closure for the non-crossover direction of travel are not shown. They are similar to the series shown for the crossover direction, except that the left-hand lane is closed.

Option:

12. Positive protection devices may be used per Section 6M.02.

## Figure 6P-39. Median Crossover on a Freeway (TA-39)

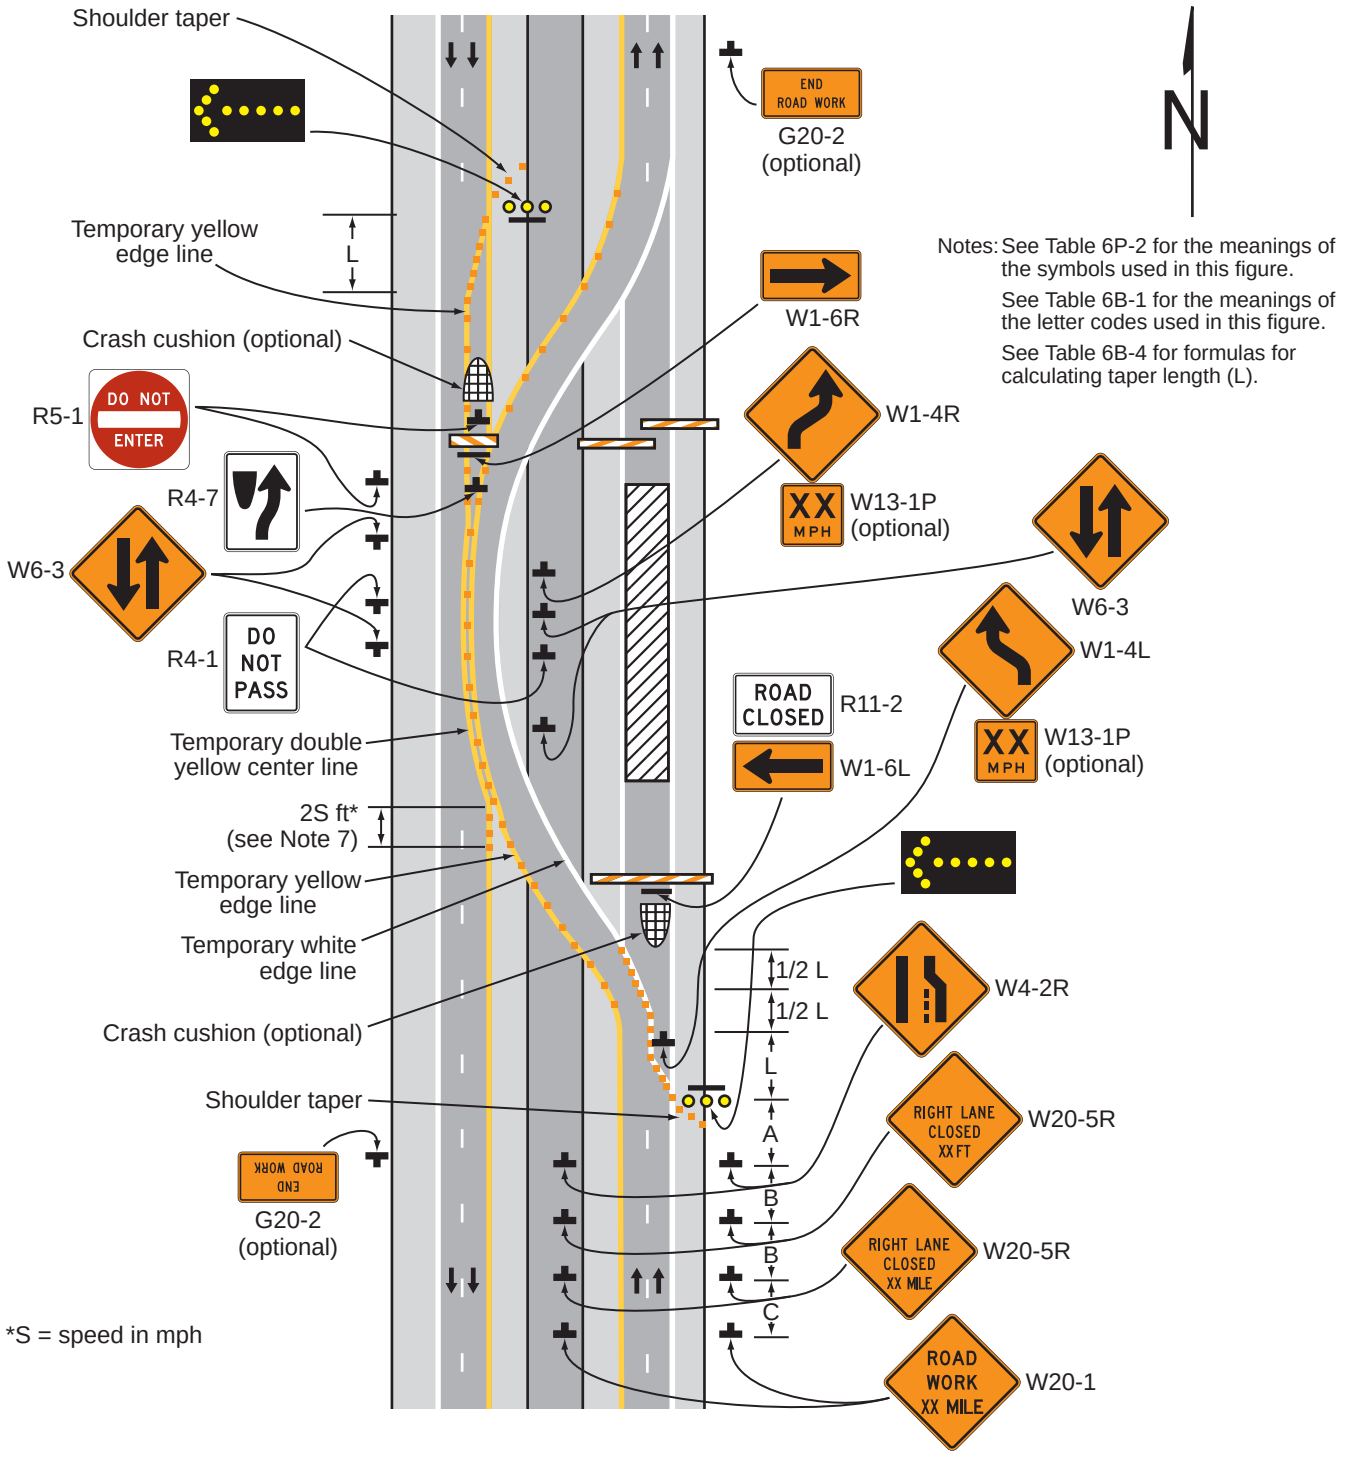


**Typical Application 39**

## Notes for Figure 6P-40 —Typical Application 40
## Median Crossover for an Entrance Ramp


*Guidance:*

1. *The typical application illustrated should be used for carrying an entrance ramp across a closed directional roadway of a divided highway.*
2. *A temporary acceleration lane should be used to facilitate merging.*
3. *When used, the YIELD (R1-2) or STOP (R1-1) sign should be located far enough forward to provide adequate sight distance of oncoming mainline vehicular traffic to select an acceptable gap, but should not be located so far forward that motorists will be encouraged to stop in the path of the mainline traffic. If needed, yield or stop lines should be installed across the ramp to indicate the point at which road users should yield or stop. Also, a longer acceleration lane should be provided beyond the sign to reduce the gap size needed.*

Option:

4. Positive protection devices may be used per Section 6M.02.
5. If vehicular traffic conditions allow, the ramp may be closed.
6. A broken edge line may be carried across the temporary entrance ramp to assist in defining the through vehicular traffic lane.
7. When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic (W6-3) signs and the DO NOT ENTER (R5-1) signs may be eliminated.

# Figure 6P-40. Median Crossover for an Entrance Ramp (TA-40)

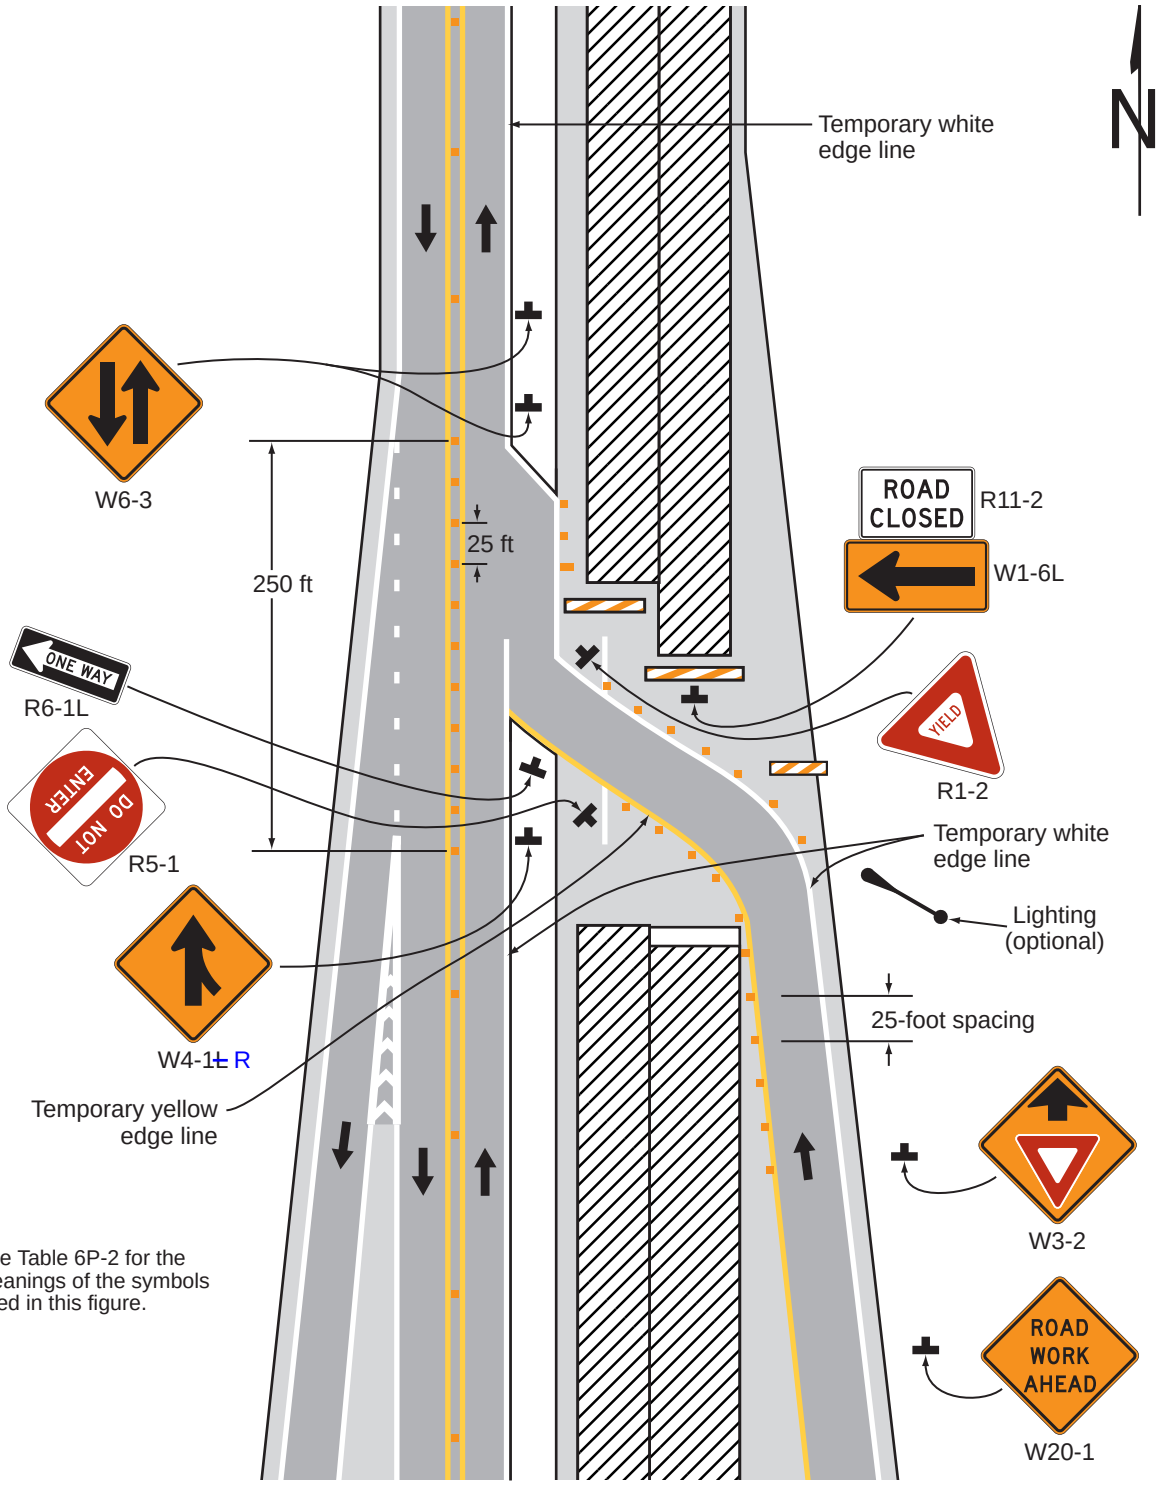


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

## Typical Application 40

## Notes for Figure 6P-41 —Typical Application 41
## Median Crossover for an Exit Ramp

*Guidance:*

1. *This typical application should be used for carrying an exit ramp across a closed directional roadway of a divided highway. The design criteria contained in the "AASHTO Green Book – A Policy On Geometric Design of Highways and Streets," 7th Edition, 2018, AASHTO should be used for determining the curved alignment.*
2. *The guide signs should indicate that the ramp is open, and where the temporary ramp is located. Conversely, if the ramp is closed, guide signs should indicate that the ramp is closed.*
3. *When the exit is closed, a black-on-orange EXIT CLOSED (E5-2a) sign panel should be placed diagonally across the interchange/intersection guide signs and channelizing devices should be placed to physically close the ramp.*
4. *In the situation (not shown) where channelizing devices are placed along the mainline roadway, the devices' spacing should be reduced in the vicinity of the off ramp to emphasize the opening at the ramp itself. Channelizing devices and/or temporary pavement markings should be placed on both sides of the temporary ramp where it crosses the median and the closed roadway.*
5. *Advance guide signs providing information related to the temporary exit should be relocated or duplicated adjacent to the temporary roadway.*


**Standard:**

6. **A temporary EXIT (E5-1) sign shall be located in the temporary gore. For better visibility, it shall be mounted a minimum of 7 feet from the pavement surface to the bottom of the sign.**

Option:

7. Positive protection devices may be used per Section 6M.02.
8. Guide signs referring to the exit may need to be relocated to the median.
9. The temporary EXIT (E5-1) sign placed in the temporary gore may be either black on orange or white on green.
10. In some instances, a temporary deceleration lane may be useful in facilitating the exiting maneuver.
11. When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic (W6-3) signs may be omitted.

## Figure 6P-41. Median Crossover for an Exit Ramp (TA-41)

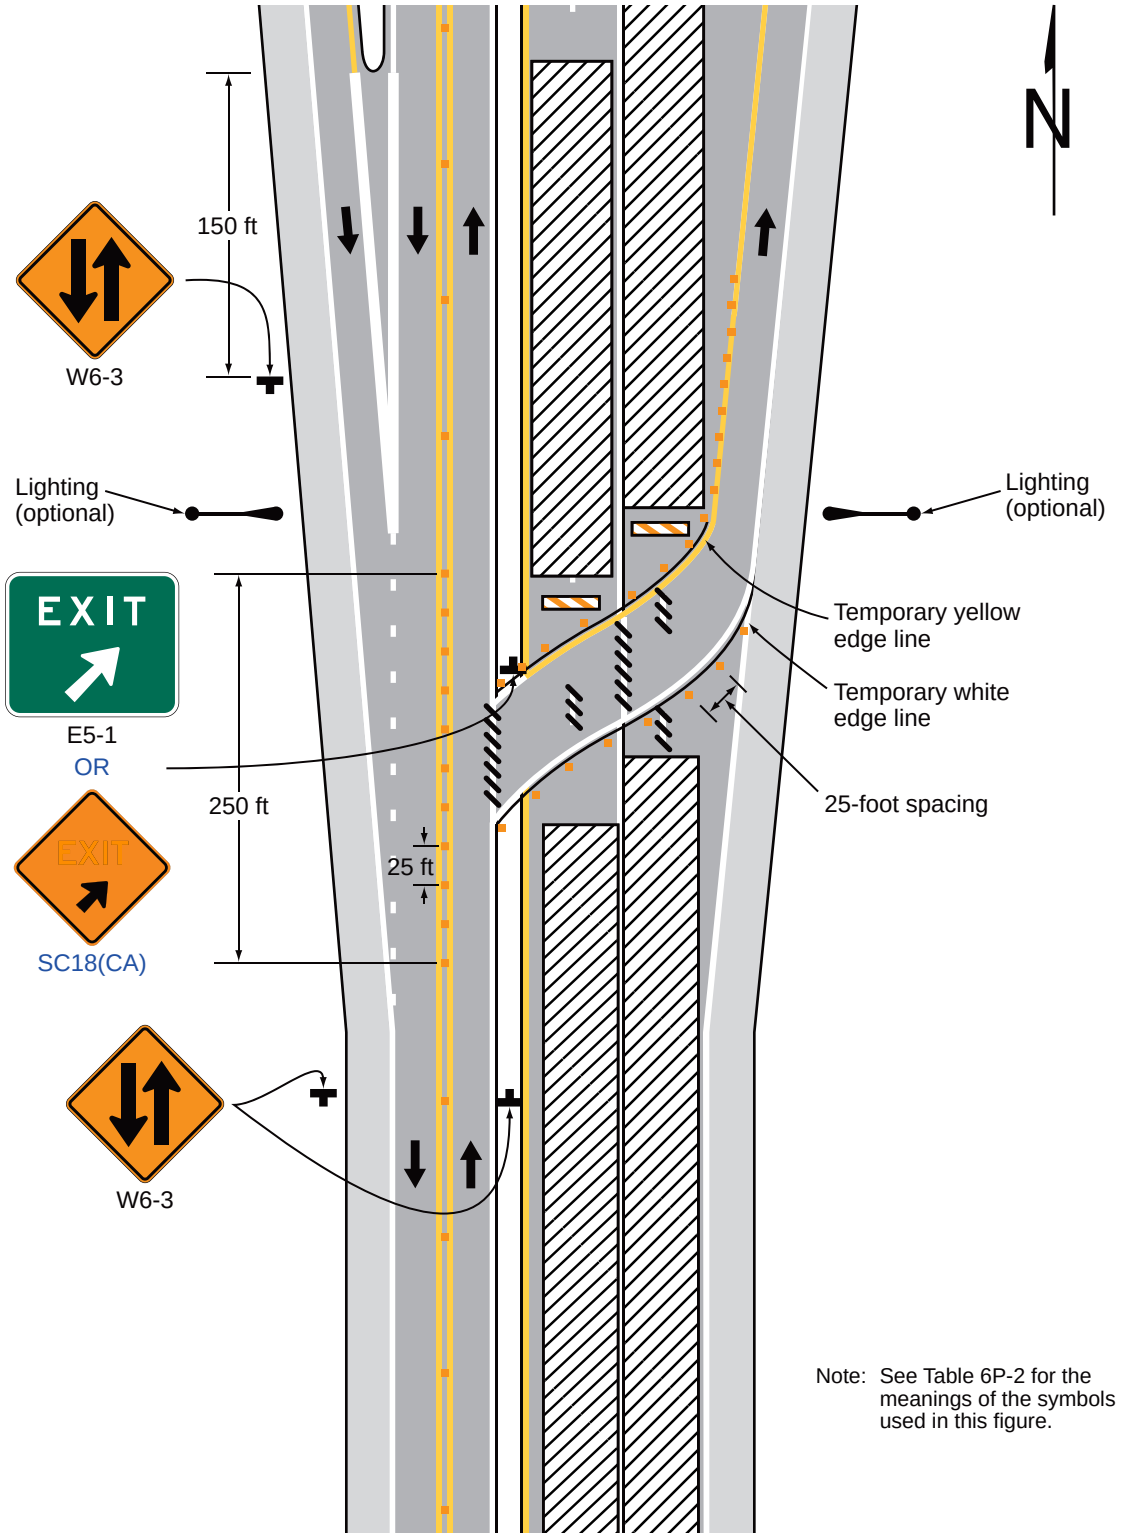


Note: See Table 6P-2 for the meanings of the symbols used in this figure.

**Typical Application 41**

## Notes for Figure 6P-42 —Typical Application 42
## Work in the Vicinity of an Exit Ramp

*Guidance:*

1. *The guide signs should indicate that the ramp is open, and where the temporary ramp is located. However, if the ramp is closed, guide signs should indicate that the ramp is closed.*
2. *When the exit ramp is closed, a black-on-orange EXIT CLOSED sign panel should be placed diagonally across the interchange/intersection guide signs.*
3. *The design criteria contained in the "AASHTO Green Book – A Policy On Geometric Design of Highways and Streets," 7th Edition, 2018, AASHTO should be used for determining the alignment.*

**Standard:**

4. **A temporary EXIT sign shall be located in the temporary gore. For better visibility, it shall be mounted a minimum of 7 feet from the pavement surface to the bottom of the sign.**

Option:

5. Positive protection devices may be used per Section 6M.02.
6. The temporary EXIT (E5-1) sign placed in the temporary gore may be either black on orange or white on green.
7. An alternative procedure that may be used is to channelize exiting vehicular traffic onto the right-hand shoulder and close the lane as necessary.

**Standard:**

8. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**


Option:

9. The Caltrans' Standard Plan T10, T10A, and T14 may be used instead of this typical application.

Support:

10. Refer to Section 1A.05 for information regarding this publication.

## Figure 6P-42. Work in the Vicinity of an Exit Ramp (TA-42)

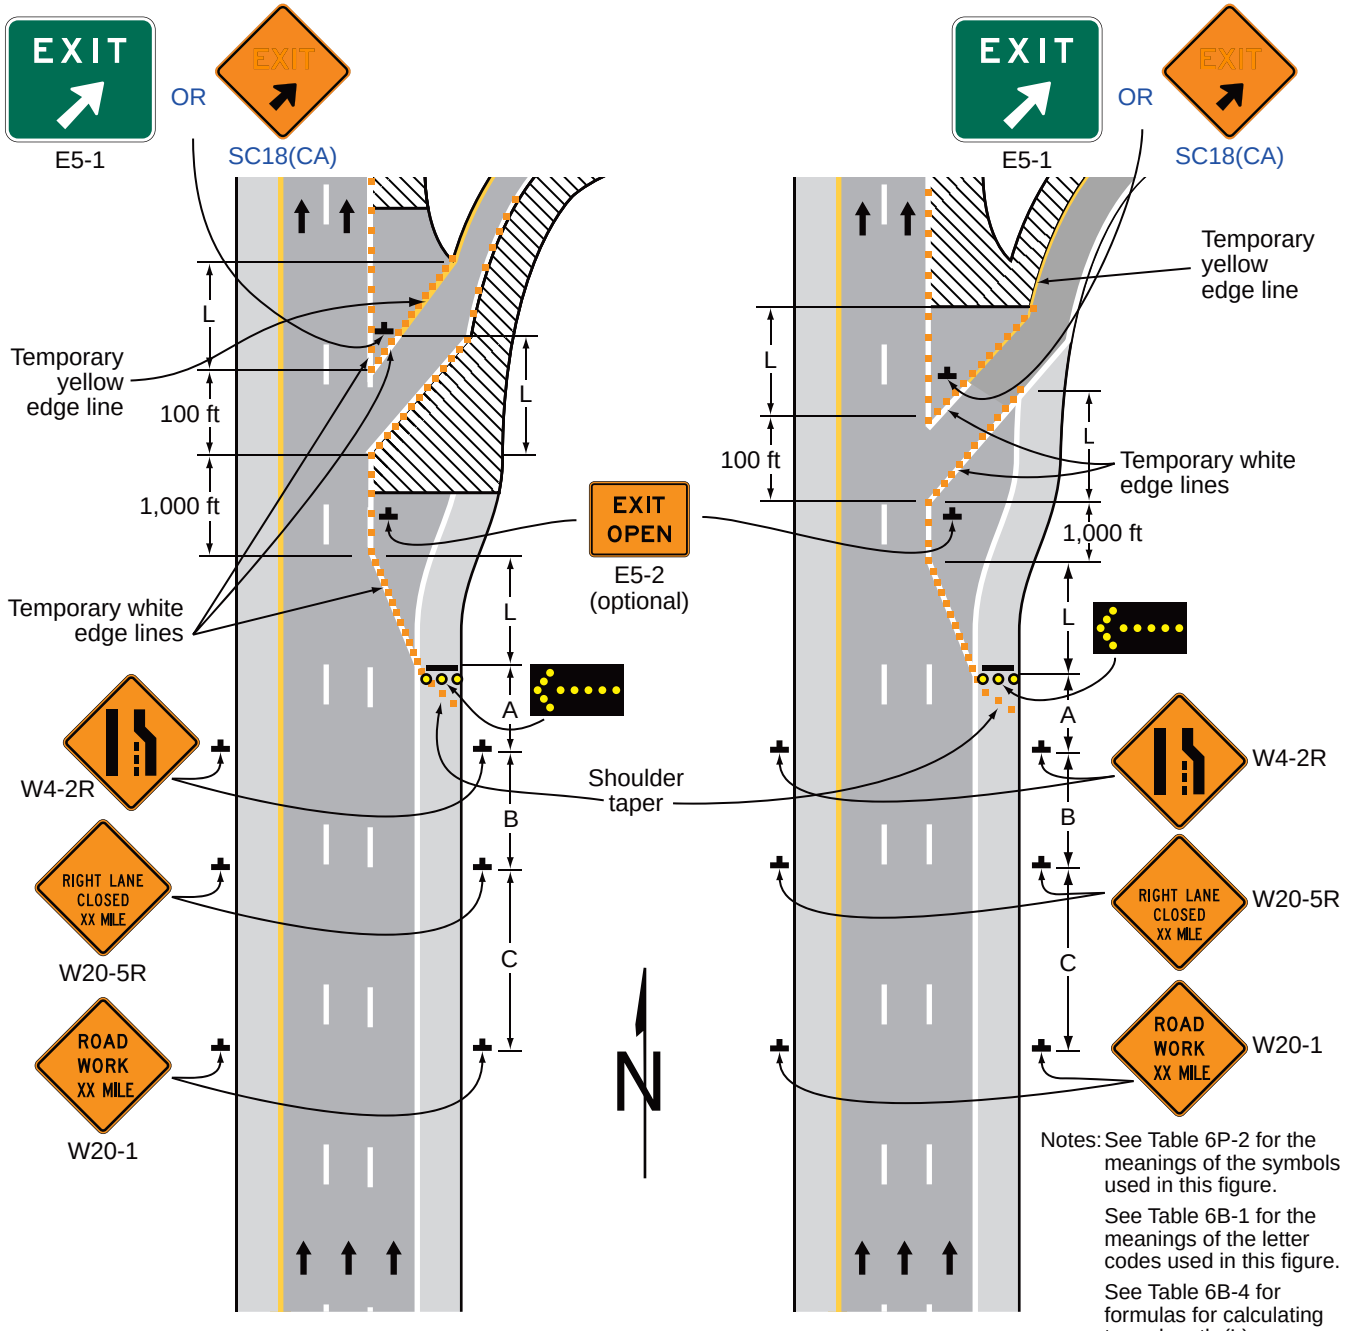


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 42**

## Notes for Figure 6P-43 —Typical Application 43
## Partial Exit Ramp Closure

*Guidance:*

1. *Truck off-tracking should be considered when determining whether the minimum lane width of 10 feet is adequate (see Section 6N.07).*


Option:

2. Positive protection devices may be used per Section 6M.02.
3. The ROAD NARROWS (W5-1) sign or NARROW LANE(S) (C12(CA)) sign may be used instead The RAMP NARROWS (W5-4) sign. Refer to Sections 2C.17 and 6H.102(CA).

*Guidance:*

4. *For planned partial ramp closure, consideration should be given to closing the entire exit ramp. Refer to the Caltrans' Standard Plan T14. Refer to Section 1A.05 for information regarding this publication.*

## Figure 6P-43. Partial Exit Ramp Closure (TA-43)

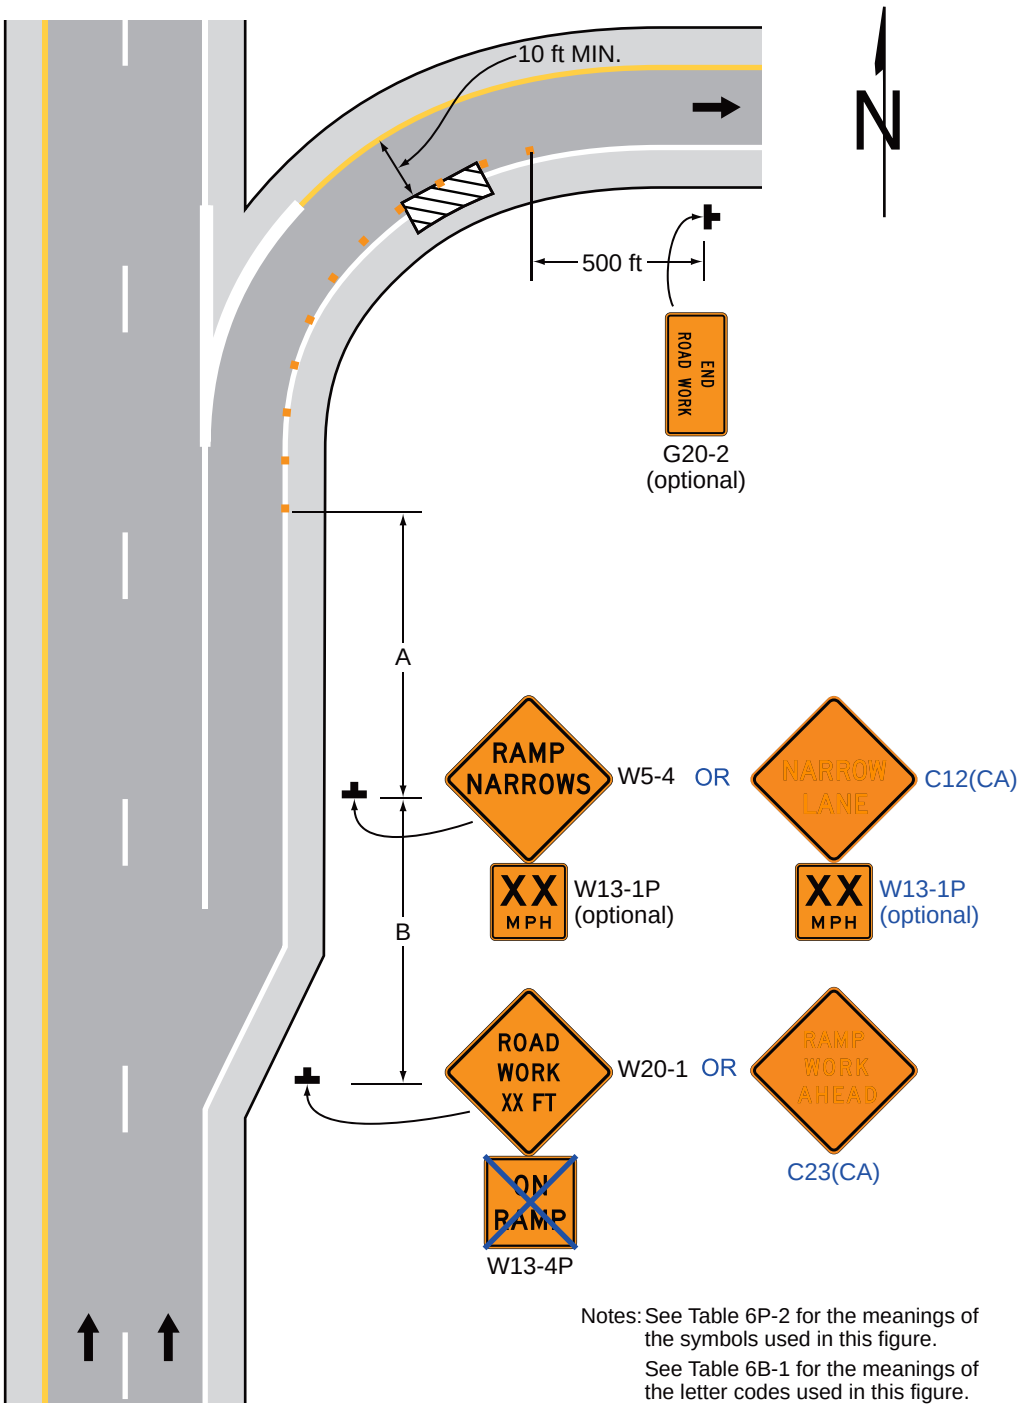


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 43**

## Notes for Figure 6P-44 —Typical Application 44
## Work in the Vicinity of an Entrance Ramp

*Guidance:*

1. *An acceleration lane of sufficient length should be provided whenever possible as shown on the diagram on the left.*

**Standard:**

2. **For the information shown on the diagram on the right-hand side of the typical application, where inadequate acceleration distance exists for the temporary entrance, the YIELD (R1-2) sign shall be replaced with STOP (R1-1) signs (one on each side of the approach).**

*Guidance:*

3. *When used, the YIELD (R1-2) or STOP (R1-1) sign should be located so that ramp vehicular traffic has adequate sight distance of oncoming mainline vehicular traffic to select an acceptable gap in the mainline vehicular traffic flow, but should not be located so far forward that motorists will be encouraged to stop in the path of the mainline traffic. Also, a longer acceleration lane should be provided beyond the sign to reduce the gap size needed. If sufficient gaps are not available, consideration should be given to closing the ramp.*
4. *Where a STOP (R1-1) sign is used, a temporary stop line should be placed across the ramp at the desired stop location.*
5. *The mainline merging taper with the arrow board at its starting point should be located sufficiently in advance so that the arrow board is not confusing to drivers on the entrance ramp, and so that the mainline merging vehicular traffic from the lane closure has the opportunity to stabilize before encountering the vehicular traffic merging from the ramp.*
6. *If the ramp curves sharply to the right, warning signs with advisory speeds located in advance of the entrance terminal should be placed in pairs (one on each side of the ramp).*

Option:

7. Positive protection devices may be used per Section 6M.02.
8. A Stop Beacon (see Section 4S.05) or a Type B high-intensity warning flasher with a red lens may be placed above the STOP (R1-1) sign.
9. Where the acceleration distance is significantly reduced, a supplemental plaque may be placed below the Yield Ahead sign reading NO MERGE AREA (W4-5aP).

**Standard:**

10. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**


Option:

11. The Caltrans' Standard Plan T10, T10A, and T14 may be used instead of this typical application.

Support:

12. Refer to Section 1A.05 for information regarding this publication.

## Figure 6P-44. Work in the Vicinity of an Entrance Ramp (TA-44)

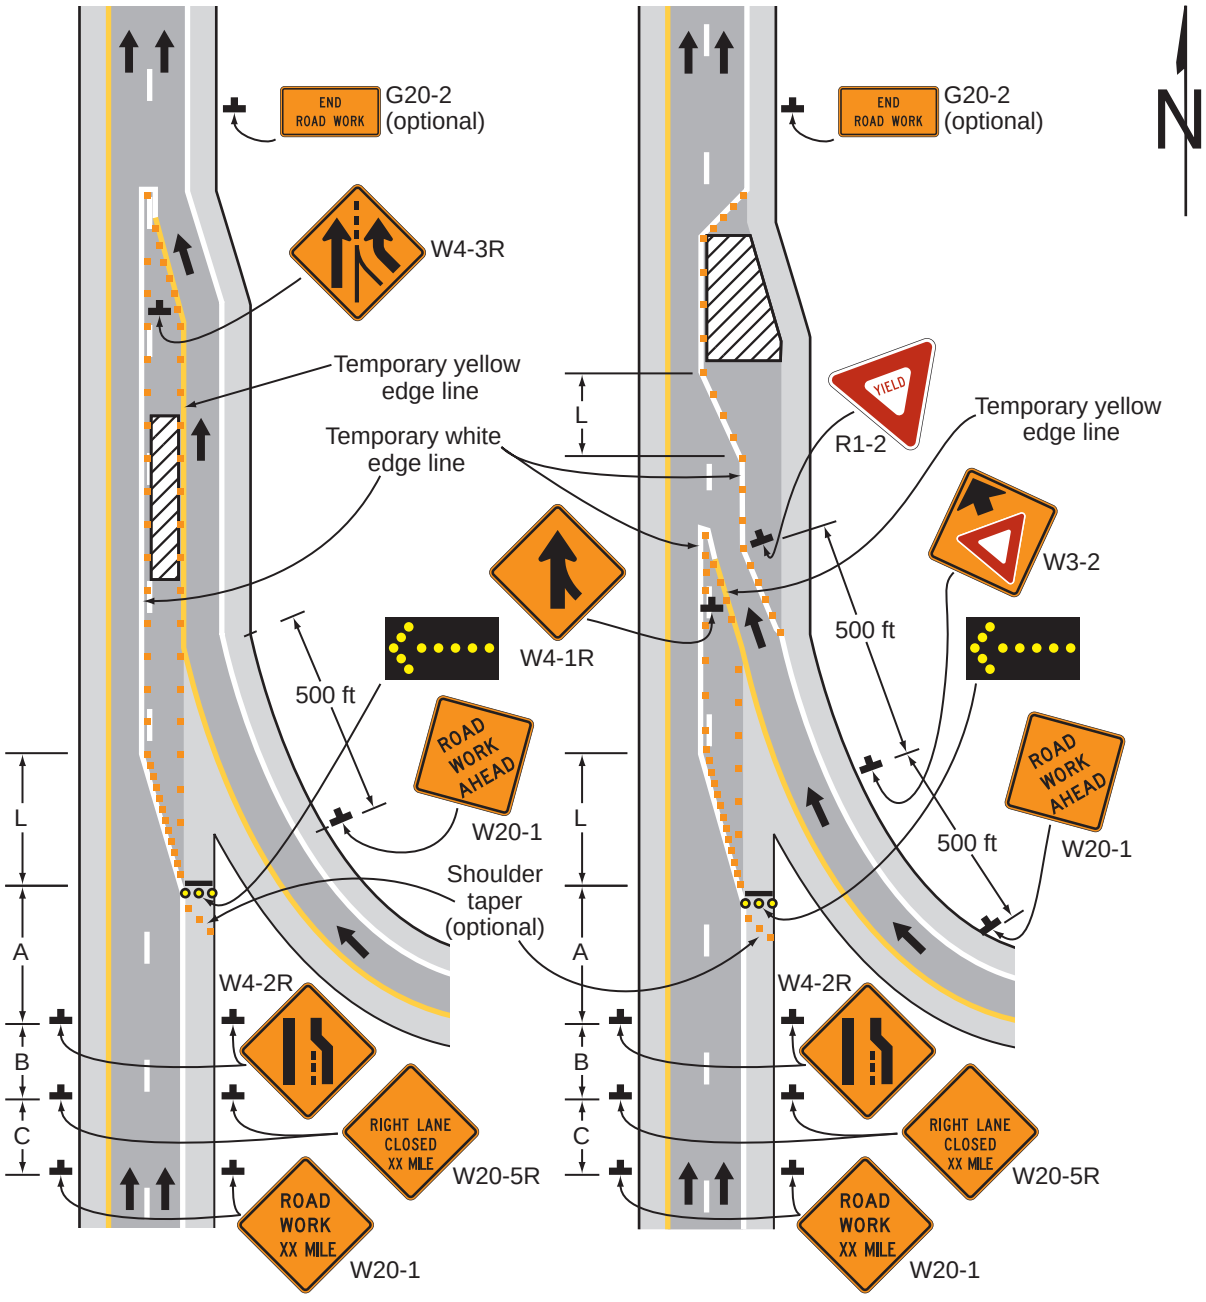


**A – Added lane** **B – Merge required**

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

## Typical Application 44

## Notes for Figure 6P-45 —Typical Application 45
## Temporary Reversible Lane Using Movable Barriers

Support:

1. This application addresses one of several uses for movable barriers (see Section 6M.02) in highway TTC zones. In this example, one side of a 6-lane divided highway is closed to perform the work operation, and vehicular traffic is carried in both directions on the remaining 3-lane roadway by means of a median crossover.
   To accommodate unbalanced peak-period vehicular traffic volumes, the direction of travel in the center lane is switched to the direction having the greater volume, with the transfer typically being made twice daily. Thus, there are four vehicular traffic phases described as follows:
   a. Phase A—two travel lanes northbound and one lane southbound;
   b. Transition A to B—one travel lane in each direction;
   c. Phase B—one travel lane northbound and two lanes southbound; and
   d. Transition B to A—one travel lane in each direction.
   The typical application on the left illustrates the placement of devices during Phase A. The typical application on the right shows conditions during the transition (Transition A to B) from Phase A to Phase B.

*Guidance:*

2. *For the reversible lane situation depicted, the ends of the movable barrier should terminate in a protected area or a crash cushion should be provided. During Phase A, the transfer vehicle should be parked behind the downstream end of the movable barrier for southbound traffic as shown in the typical application on the left. During Phase B, the transfer vehicle should be parked between the downstream ends of the movable barriers at the north end of the TTC zone as shown in the typical application on the right.*
   *The transition shift from Phase A to B should be as follows:*
   *a. Change the signs in the northbound advance warning area and transition area from a LEFT LANE CLOSED AHEAD (W20-5L) to a 2 LEFT LANES CLOSED AHEAD (W20-5aL). Change the mode of the second northbound arrow board from Caution to Right Arrow.*
   *b. Place channelizing devices to close the northbound center lane.*
   *c. Move the transfer vehicle from south to north to shift the movable barrier from the west side to the east side of the reversible lane.*
   *d. Remove the channelizing devices closing the southbound center lane.*
   *e. Change the signs in the southbound transition area and advance warning area from a 2 LEFT LANES CLOSED AHEAD (W20-5aL) to a LEFT LANE CLOSED AHEAD (W20-5L). Change the mode of the second southbound arrow board from Right Arrow to Caution.*
3. *Where the lane to be opened and closed is an exterior lane (adjacent to the edge of the traveled way or the work space), the lane closure should begin by closing the lane with channelizing devices placed along a merging taper using the same information employed for a stationary lane closure. The lane closure should then be extended with the movable-barrier transfer vehicle moving with vehicular traffic. When opening the lane, the transfer vehicle should travel against vehicular traffic. The merging taper should be removed in a method similar to a stationary lane closure.*


Option:

4. The procedure may be used during a peak period of vehicular traffic and then changed to provide two lanes in the other direction for the other peak.
5. A longitudinal buffer space may be used in the activity area to separate opposing vehicular traffic.
6. A work vehicle or a shadow vehicle may be equipped with a truck-mounted attenuator.

**Standard:**

7. **An arrow board shall be used when a freeway lane is closed. When more than one freeway lane is closed, a separate arrow board shall be used for each closed lane.**

# Figure 6P-45. Temporary Reversible Lane Using Movable Barriers (TA-45)

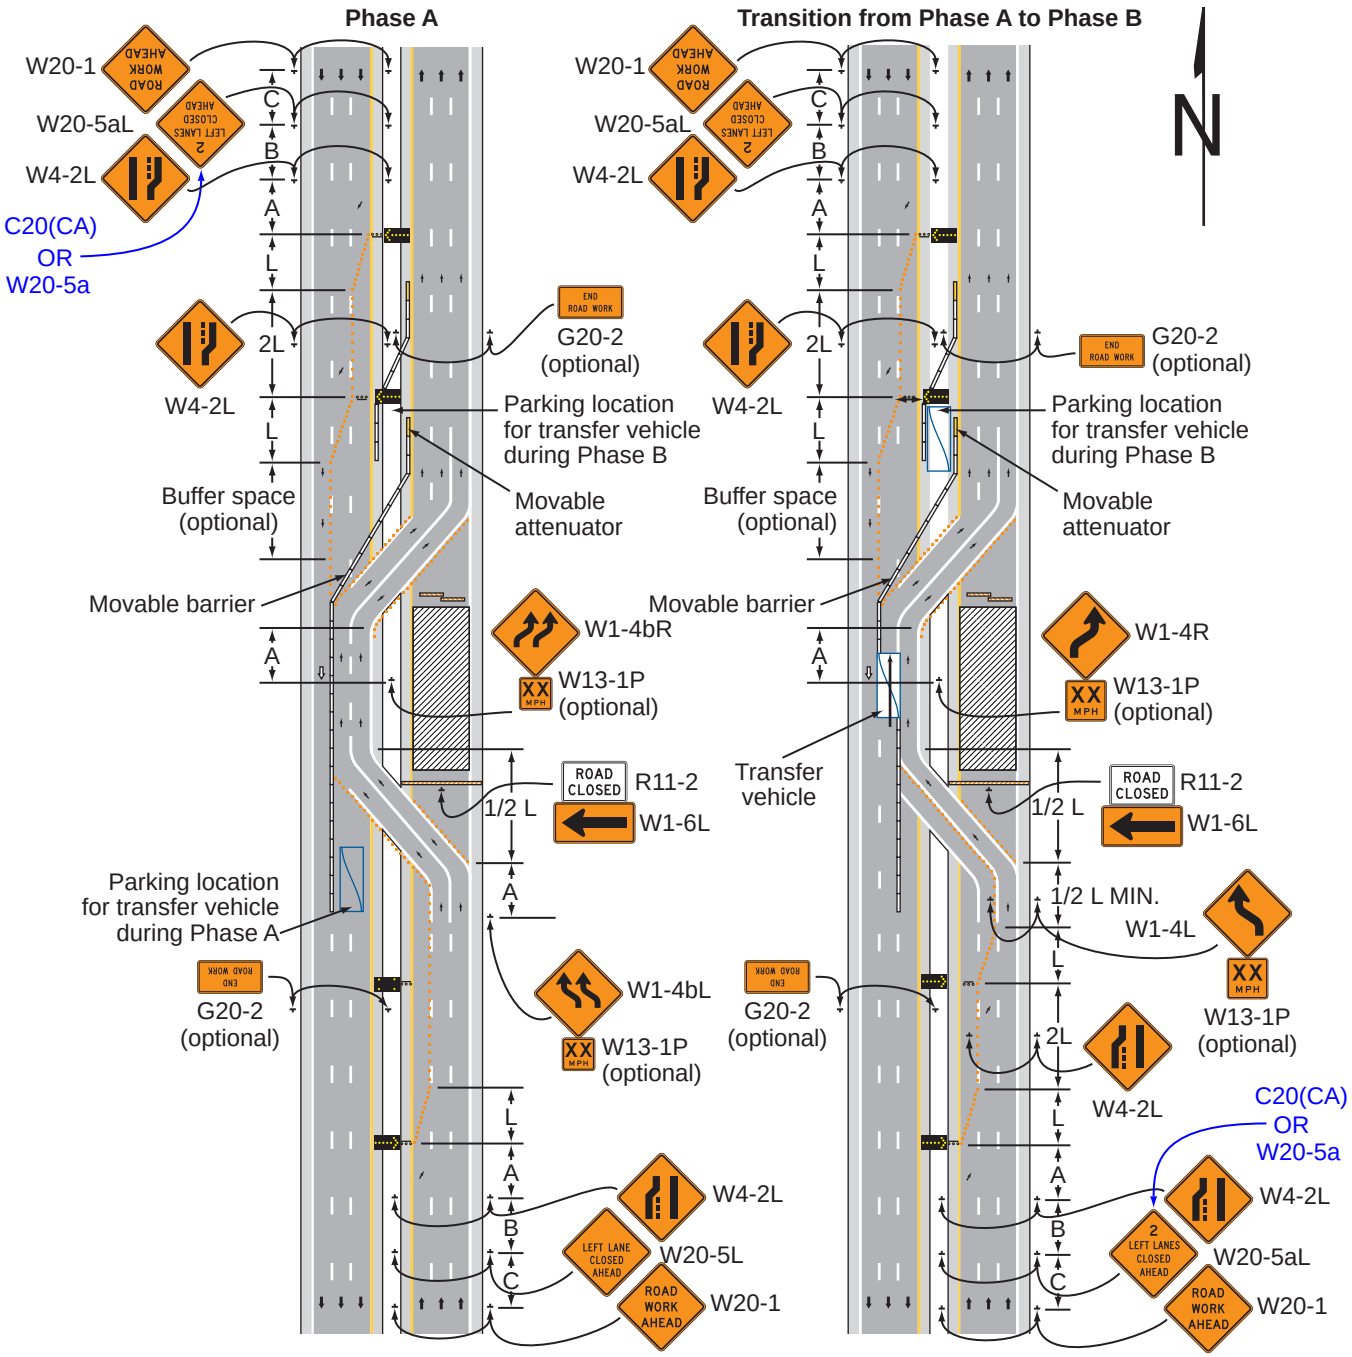


## Typical Application 45

Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

## Notes for Figure 6P-46 —Typical Application 46
## Work in the Vicinity of a Grade Crossing

*Guidance:*

1. *When grade crossings exist either within or in the vicinity of roadway work activities, extra care should be taken to minimize the probability of conditions being created, by lane restrictions, flagging, or other operations, where vehicles might be stopped within the grade crossing, considered as being 15 feet on either side of the closest and farthest rail. This should include roadway work activities on a street parallel to a highway-rail grade crossing where right-hand turns or left-hand turns could be impacted.*

**Standard:**

2. **If the queuing of vehicles across active rail tracks cannot be avoided, a uniformed law enforcement officer or flagger shall be provided at the grade crossing to prevent through or turning vehicles from stopping within the grade crossing (as described in Note 1 above), even if automatic warning devices are in place.**

*Guidance:*

3. *Early coordination with the railroad company or transit agency should occur before work starts.*
4. *In the example depicted, the buffer space of the activity area should be extended upstream of the grade crossing (as shown) so that a queue created by the flagging operation will not extend across the grade crossing.*
5. *The DO NOT STOP ON TRACKS (R8-8) sign should be used on all approaches to a grade crossing within the limits of a TTC zone.*

Option:

6. Positive protection devices may be used per Section 6M.02.
7. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
8. A BE PREPARED TO STOP (W3-4) sign may be added to the sign series.
9. Automated Flagger Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.


*Guidance:*

10. *When used, the BE PREPARED TO STOP (W3-4) sign should be located ~~before~~ after the Flagger symbol sign.*

**Standard:**

11. **At night, flagger stations shall be illuminated, except in emergencies.**

# Figure 6P-46. Work in the Vicinity of a Grade Crossing (TA-46)

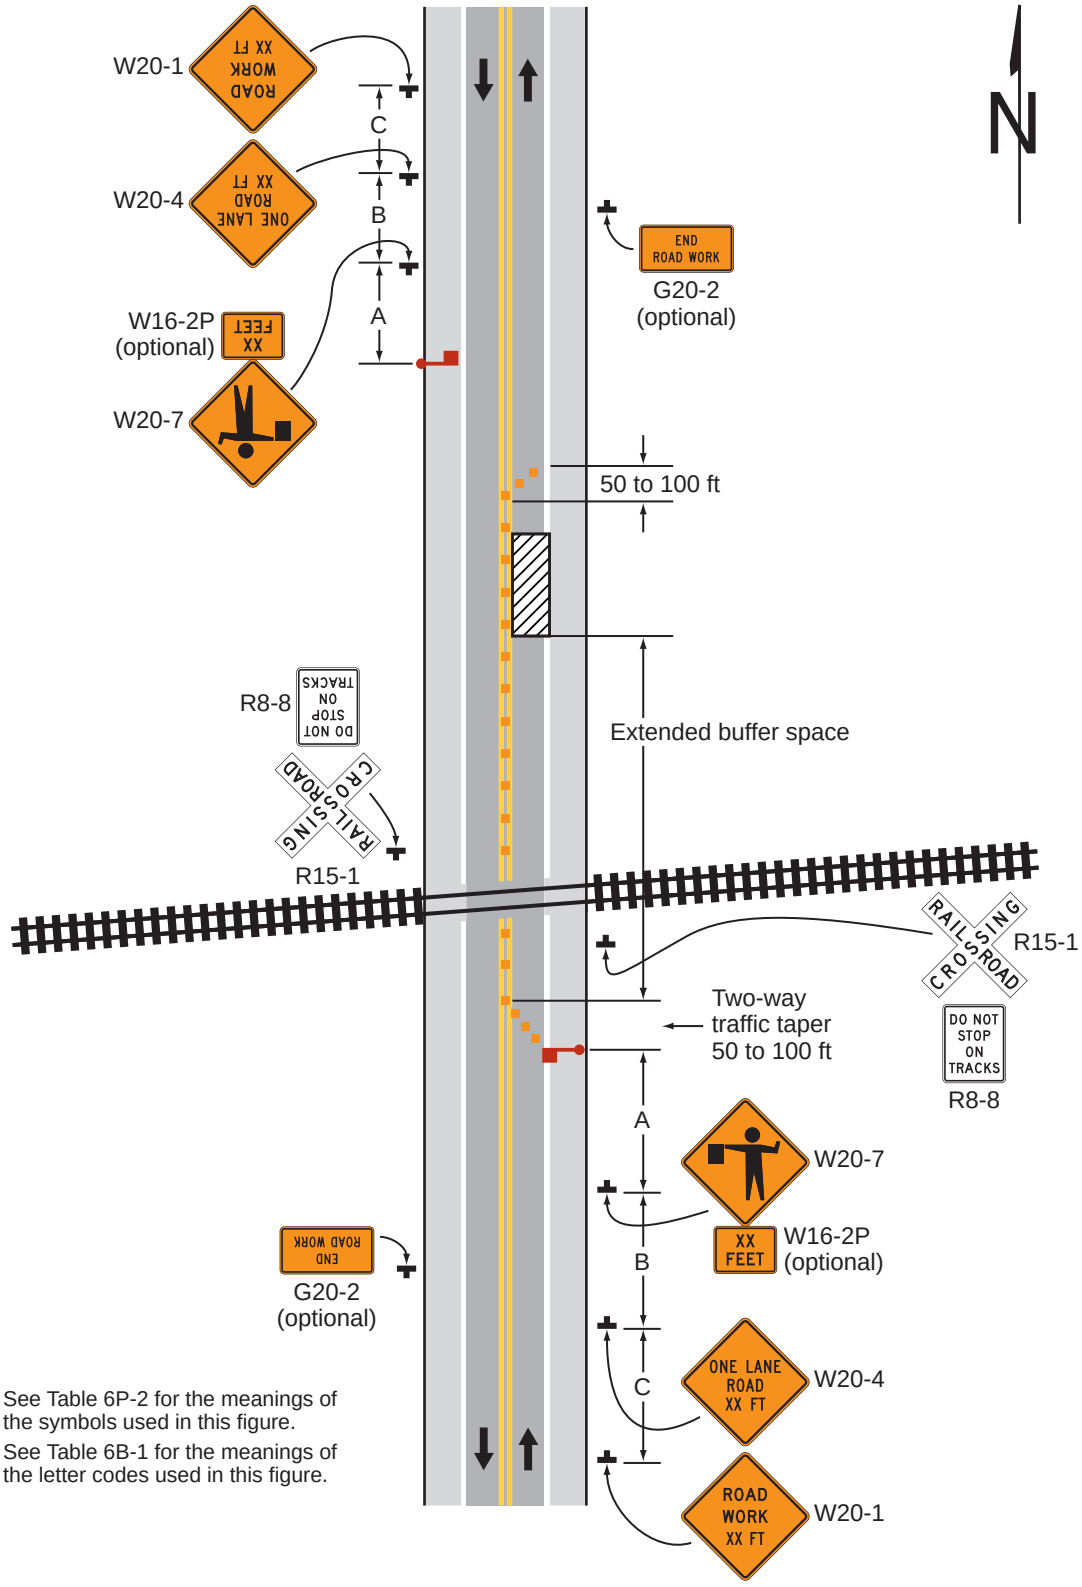


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

## Typical Application 46

## Notes for Figure 6P-47 – Typical Application 47
## Bicycle Lane Closure without a Detour

*Guidance:*

1. *If a bicycle lane on a roadway having a speed limit of 35 mph or higher is closed and conditions are not appropriate to direct bicyclists into a shared lane, a separate bicycle facility or detour route should be considered (see Figures 6P-48 and 6P-51).*

1a. *SHOULDER CLOSED (W21-5a) signs should be used on limited-access roadways where there is no opportunity for disabled vehicles to pull off the roadway*

1b. *If road users cannot see a pull-off area beyond the closed shoulder, information regarding the length of the shoulder closure should be provided in feet or miles, as appropriate.*


Option:

2. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is less than 14 feet wide, then BICYCLES ALLOWED USE OF FULL LANE (R9-20) signs may be used.
3. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is at least 14 feet wide throughout the TTC zone, then Bicycle Warning signs in association with IN STREET (W16-1aP) or IN ROADWAY (W16-1P) plaques may be used.
4. Positive protection devices may be used per Section 6M.02.
5. This typical application (TA-47) may be used for roadways without a bike lane or bicycle symbol markings.

*Guidance:*

6. *Where feasible, an* adequate *lane width should be provided to allow bicyclists and motor vehicles to travel side by side throughout the TTC zone. If lane width conditions are not met, use the IN ROAD (W16-1P) or Bicycles Allowed Use of Full Lane (R9-20) sign.*
7. *The speeds used for the shoulder taper calculations should be motor vehicle speeds.*

# Figure 6P-47. Bicycle Lane Closure without a Detour (TA-47)

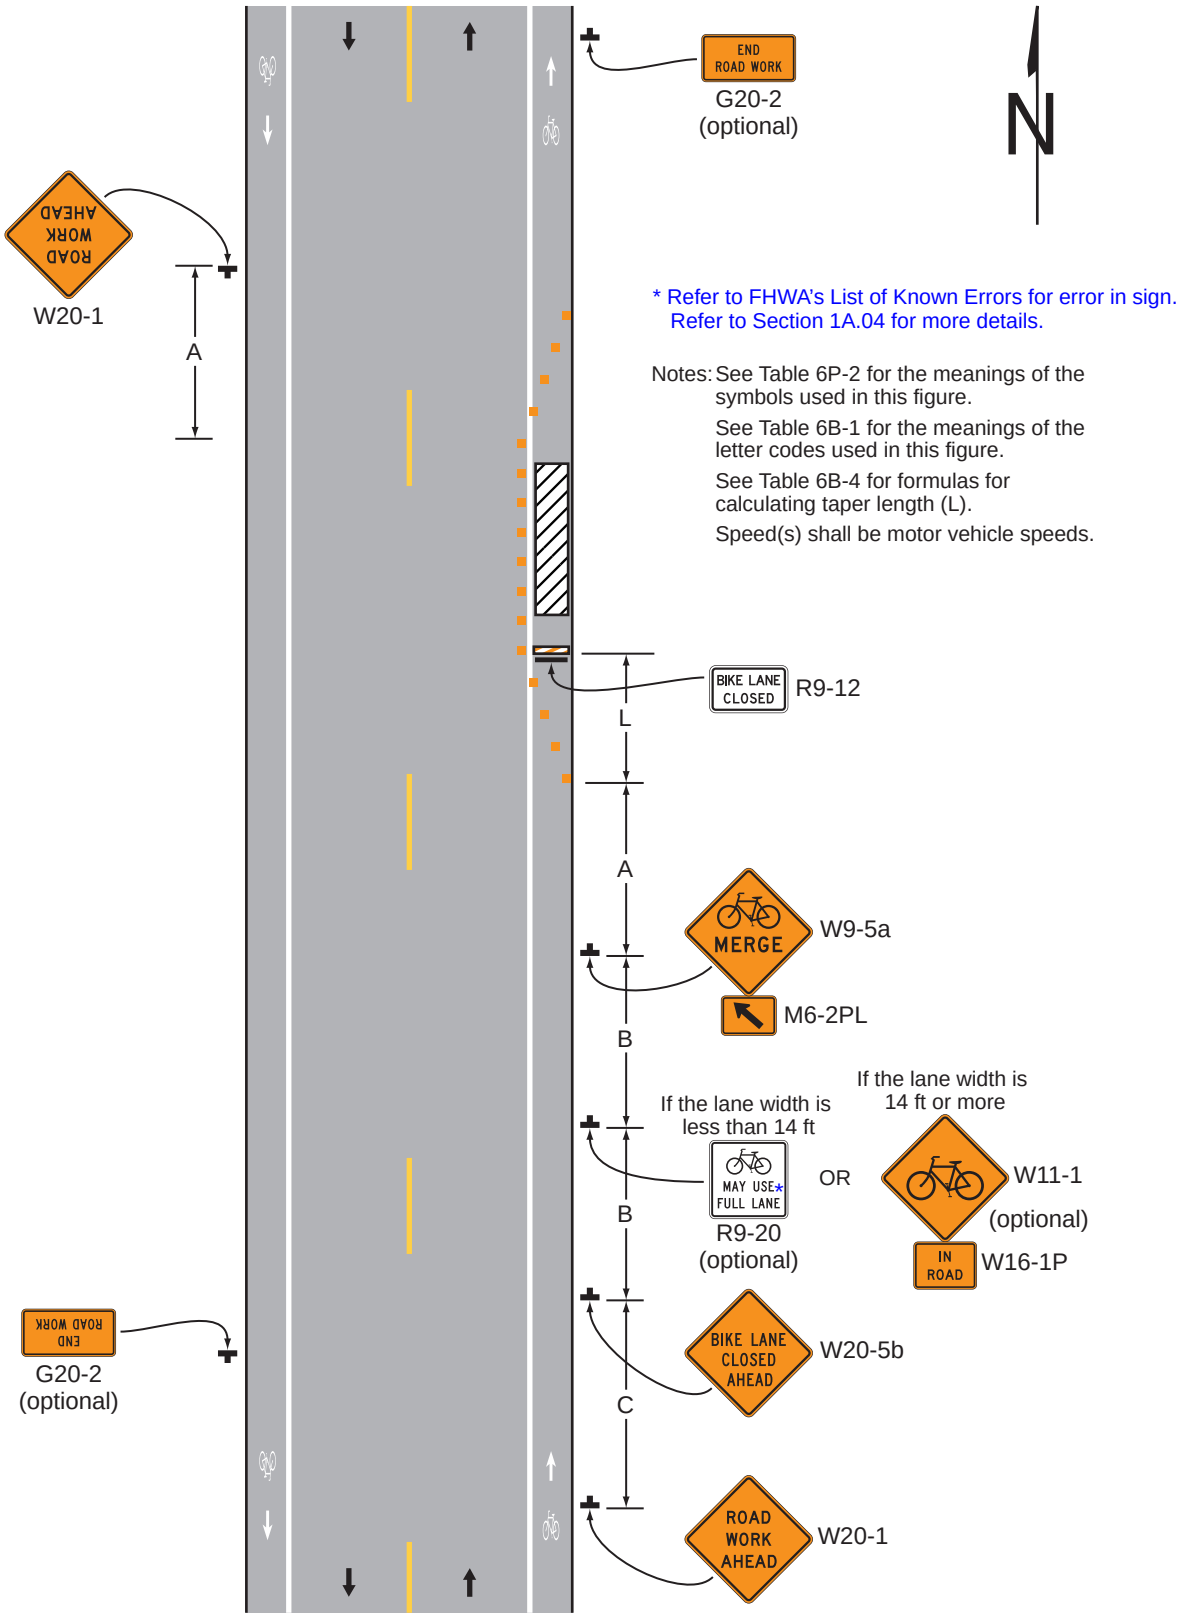


## Typical Application 47

## Notes for Figure 6P-48 – Typical Application 48
## Bicycle Lane Closure with an On-Road Detour

*Guidance:*

1. *A detour route for bicyclists where a section of bicycle lane is closed should use the most direct route practical on roadways or shoulders where conditions are appropriate for bicycling.*
2. *Bicycle related regulatory and/or warning signs should be considered along the bicycle detour based on engineering judgment and traffic conditions.*
3. *A Street Name sign or Bike Route Name sign should be mounted with the Bike Detour sign.*

Option:

4. The Street Name sign or Bike Route Name sign may be either white on green or black on orange.


**Standard:**

5. **Where used, the Street Name sign or Bike Route Name sign shall be placed above the Bike Detour sign.**

Option:

6. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is less than 14 feet wide, then BICYCLES ALLOWED USE OF FULL LANE (R9-20) signs may be used.
7. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is at least 14 feet wide throughout the TTC zone, then Bicycle Warning signs in association with IN STREET (W16-1aP) or IN ROADWAY (W16-1P) plaques may be used.

## Figure 6P-48. Bicycle Lane Closure with an On-Road Detour (TA-48)

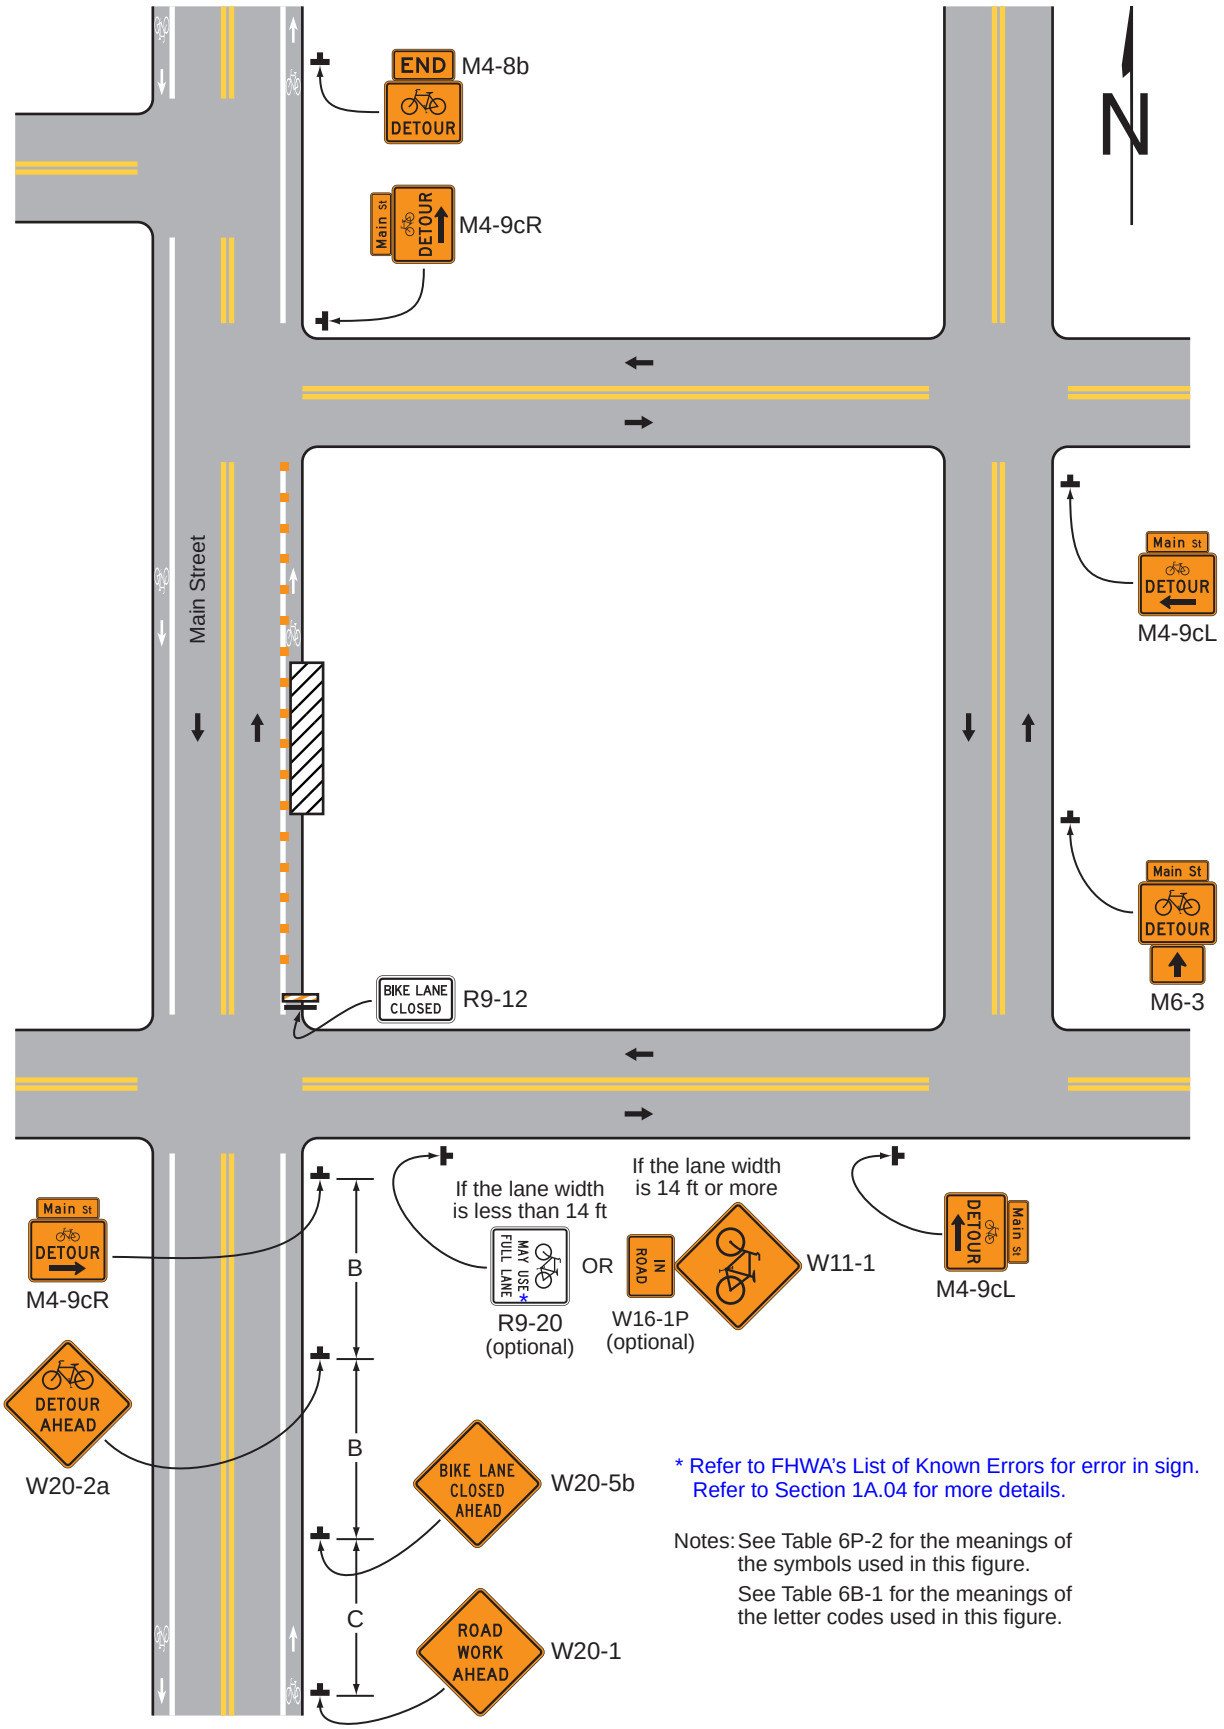



**Typical Application 48**

## Notes for Figure 6P-49 – Typical Application 49
## Shared-Use Path Closure with a Diversion

*Guidance:*

1. *The temporary paved shared-use path should be at least as wide as the shared-use path that was temporarily closed.*

## Figure 6P-49. Shared-Use Path Closure with a Diversion (TA-49)

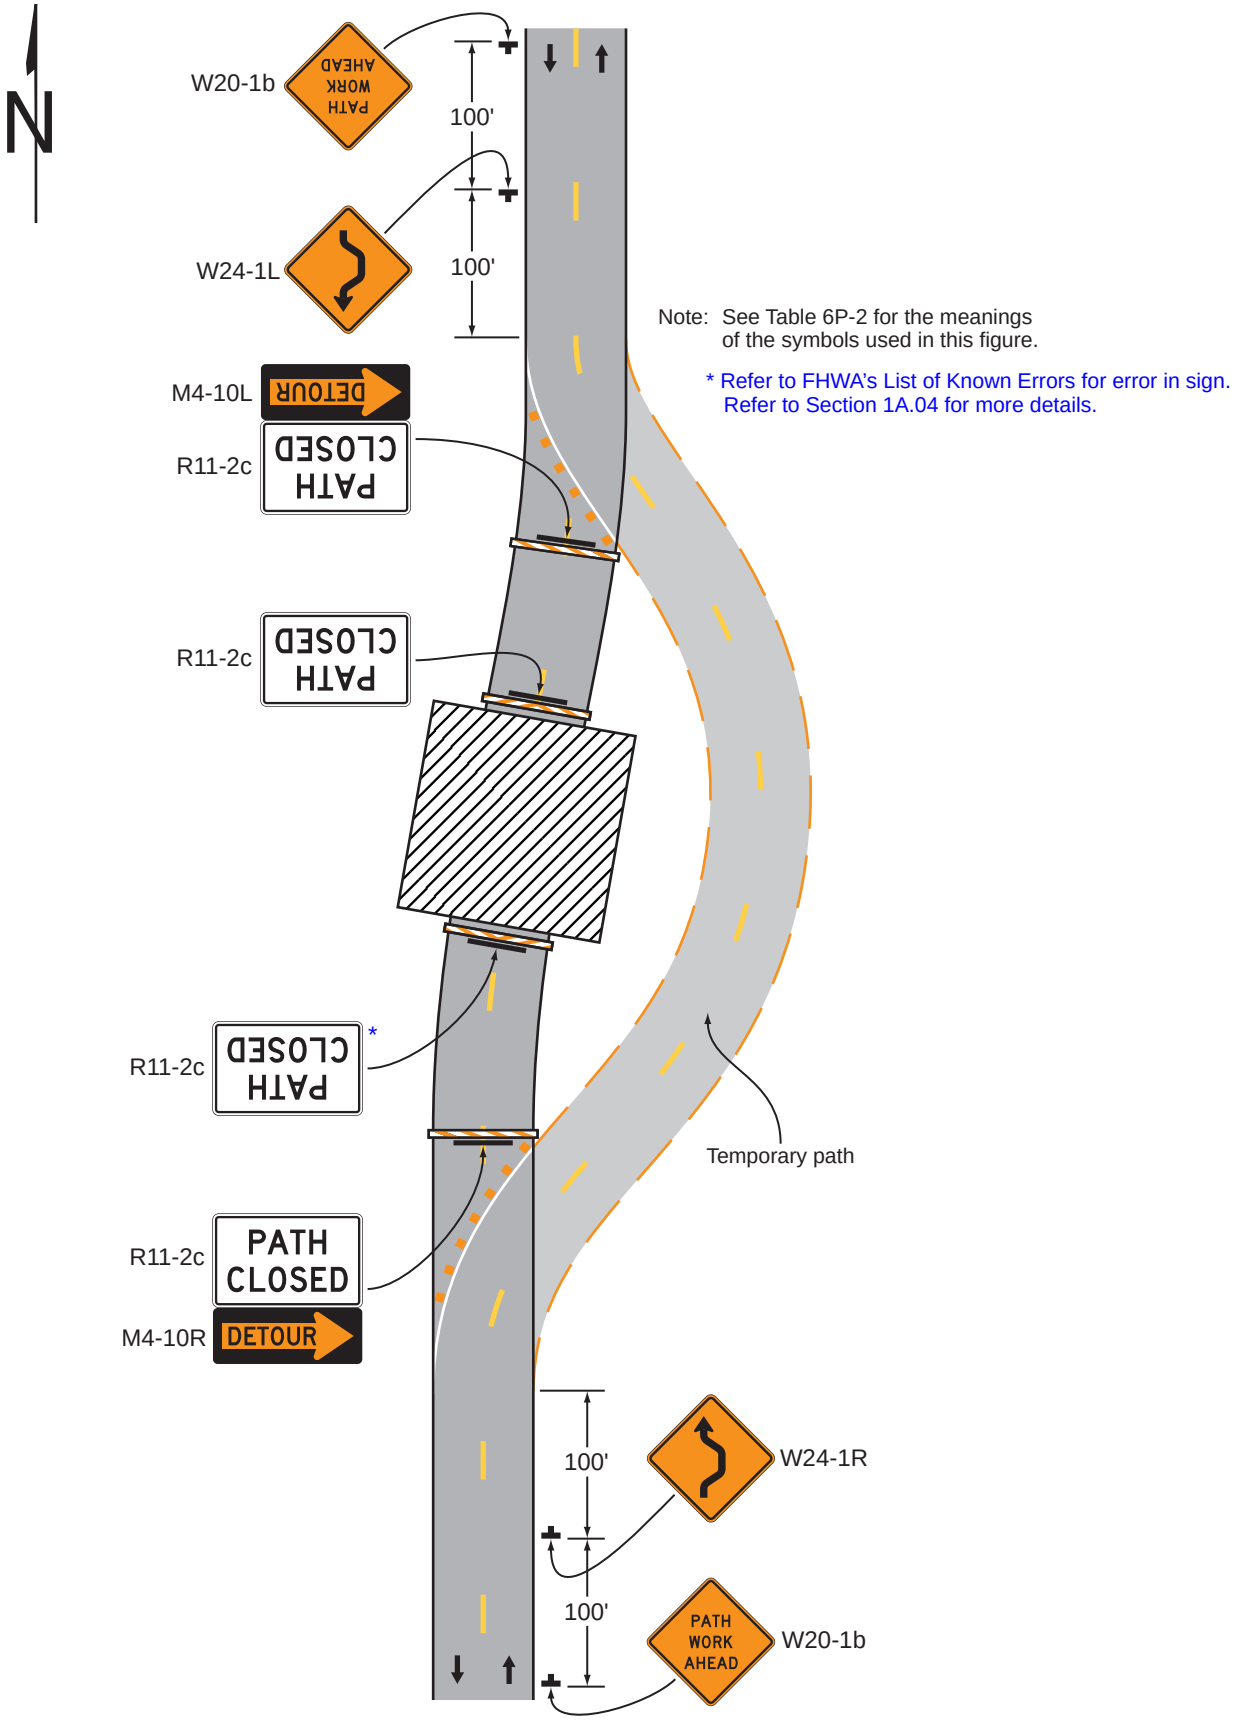


**Typical Application 49**

## Notes for Figure 6P-50 – Typical Application 50
## On-Road Detour for a Shared-Use Path

*Guidance:*

1. *The on-road detour route for bicyclists should use the most direct route practical on roadways or shoulders where conditions are appropriate for bicycling.*
2. *Bicycle related regulatory and/or warning signs should be considered along the bicycle detour based on engineering judgment and traffic conditions.*
3. *A Street Name sign or Bike Route Name sign should be mounted with the Bike Detour sign.*

Option:

4. The Street Name sign or Bike Route Name sign may be either white on green or black on orange.


**Standard:**

5. **Where used the Street Name sign or Bike Route Name sign shall be placed above the Bike Detour sign.**

Option:

6. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is less than 14 feet wide, then BICYCLES ALLOWED USE OF FULL LANE (R9-20) signs may be used.
7. If a bicycle lane on a roadway having a speed limit of 30 mph or less is closed, and the adjacent travel lane is at least 14 feet wide throughout the TTC zone, then Bicycle Warning signs in association with IN STREET (W16-1aP) or IN ROADWAY (W16-1P) plaques may be used.

# Figure 6P-50. On-Road Detour for a Shared-Use Path (TA-50)

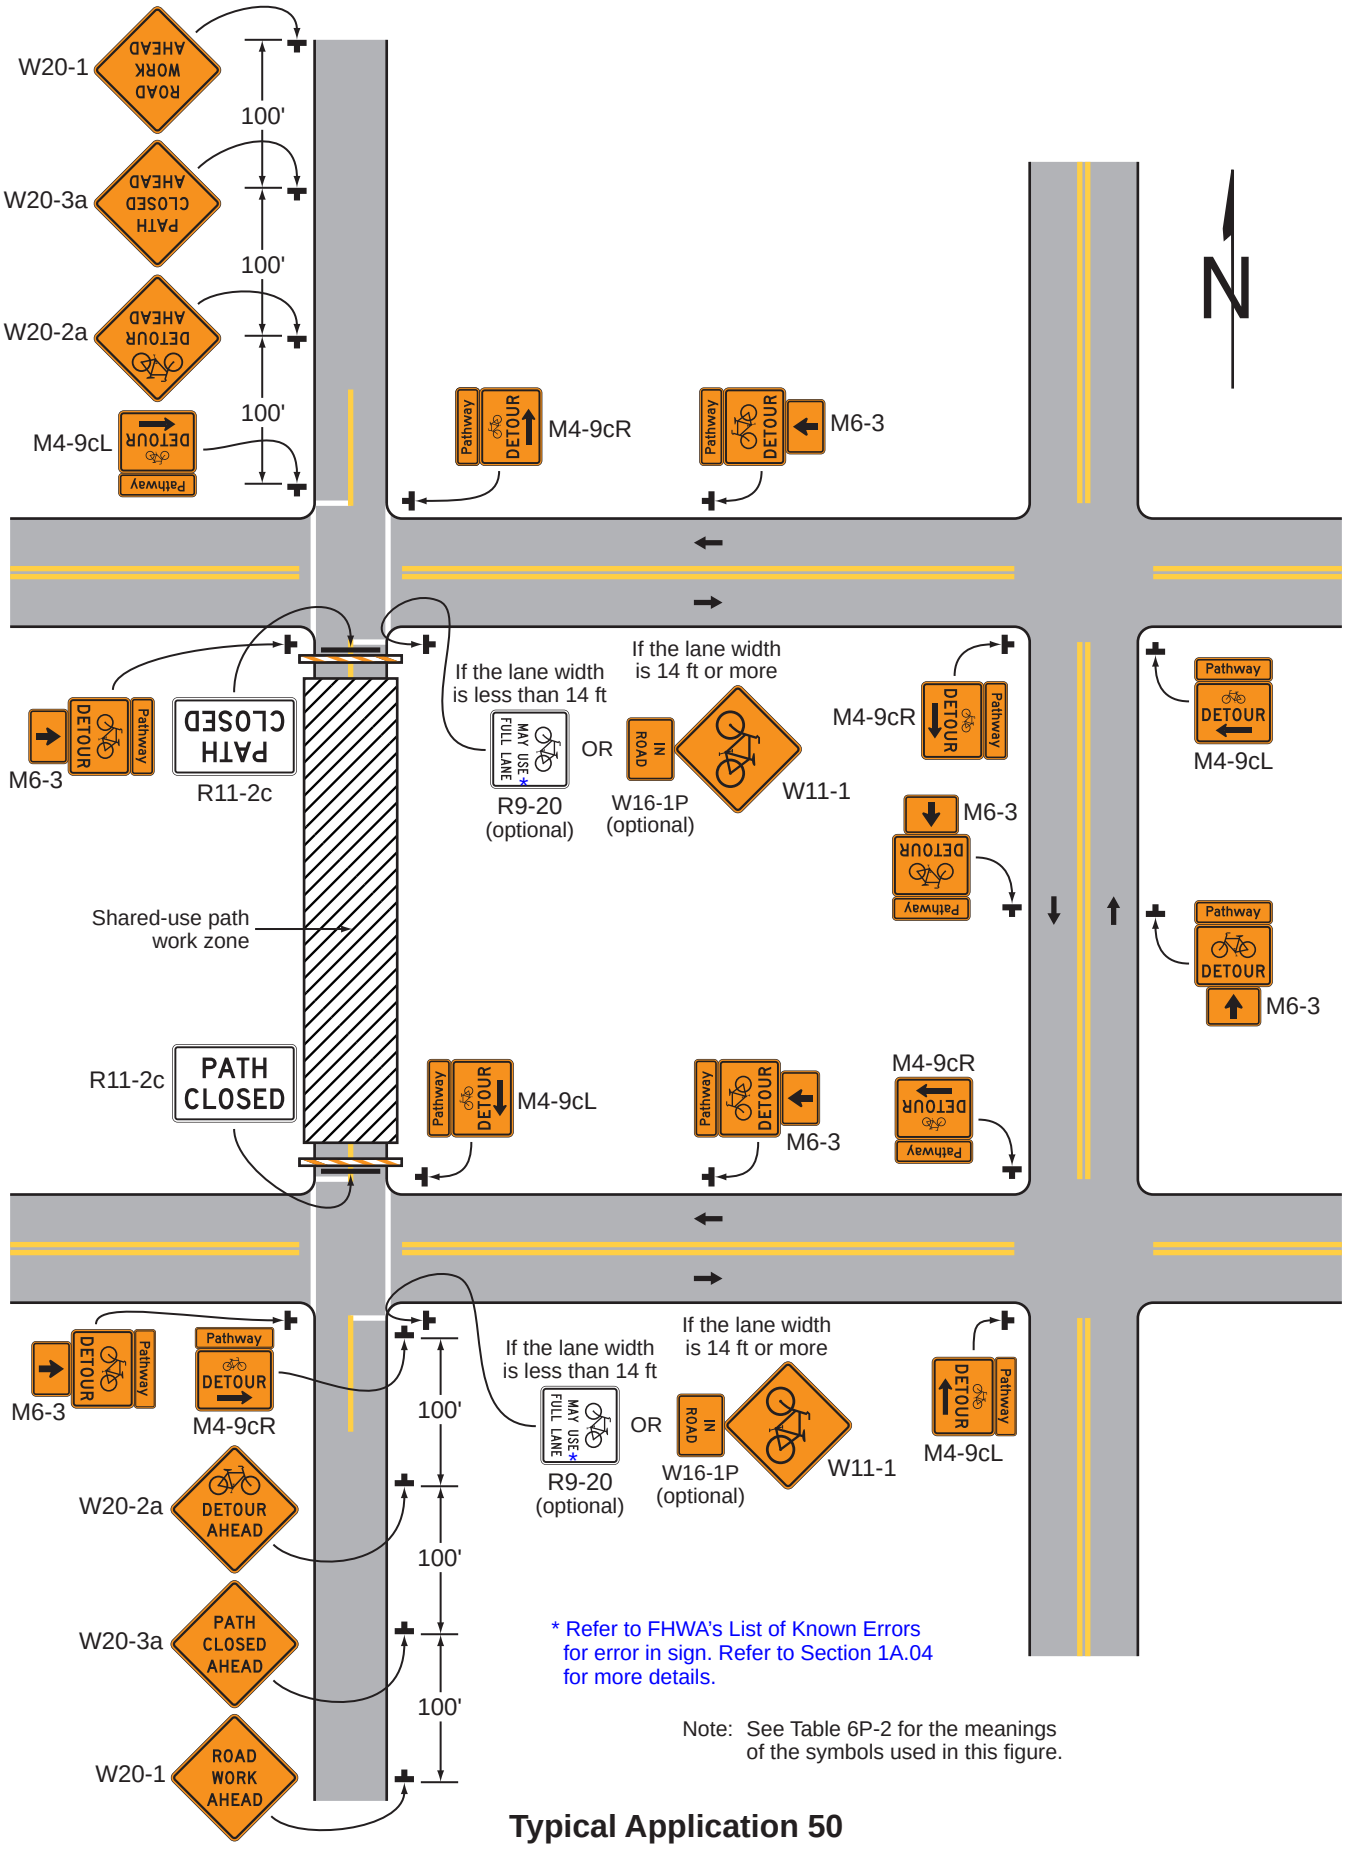


* Refer to FHWA's List of Known Errors for error in sign. Refer to Section 1A.04 for more details.

Note: See Table 6P-2 for the meanings of the symbols used in this figure.

## Typical Application 50

## Notes for Figure 6P-51 and Figure 6P-51(CA) – Typical Application 51
## Paved Shoulder Closure with a Bicycle Diversion onto a Temporary Path

Option:

1. This plan may be used where a paved shoulder is closed and a temporary paved path is provided for bicyclists.

*Guidance:*

2. *This plan should be used where a paved shoulder is closed on a roadway having a speed limit greater than or equal to 45 mph that is part of a bikeway system (local, county or state) and a temporary paved path is provided for bicyclists.*
3. *The A, B, and C dimensions should be based on anticipated bicycle speeds.*
4. *SHOULDER CLOSED (W21-5a) signs should be used on limited-access highways where there is no opportunity for disabled vehicles to pull off the roadway.*
5. *If road users cannot see a pull-off area beyond the closed shoulder, information regarding the length of the shoulder closure should be provided in feet or miles, as appropriate.*


Option:

6. Positive protection devices may be used per Section 6M.02.

*Guidance:*


7. *The width of the* existing *pedestrian facility should be provided for the temporary facility, if practical. When it is not possible to maintain a minimum width of 60 inches throughout the entire length of the pedestrian pathway, a 60 x 60 inch passing space should be provided at least every 200 feet to allow individuals in wheelchairs to pass.*

## Figure 6P-51. Paved Shoulder Closure with a Bicycle Diversion onto a Temporary Path (TA-51)

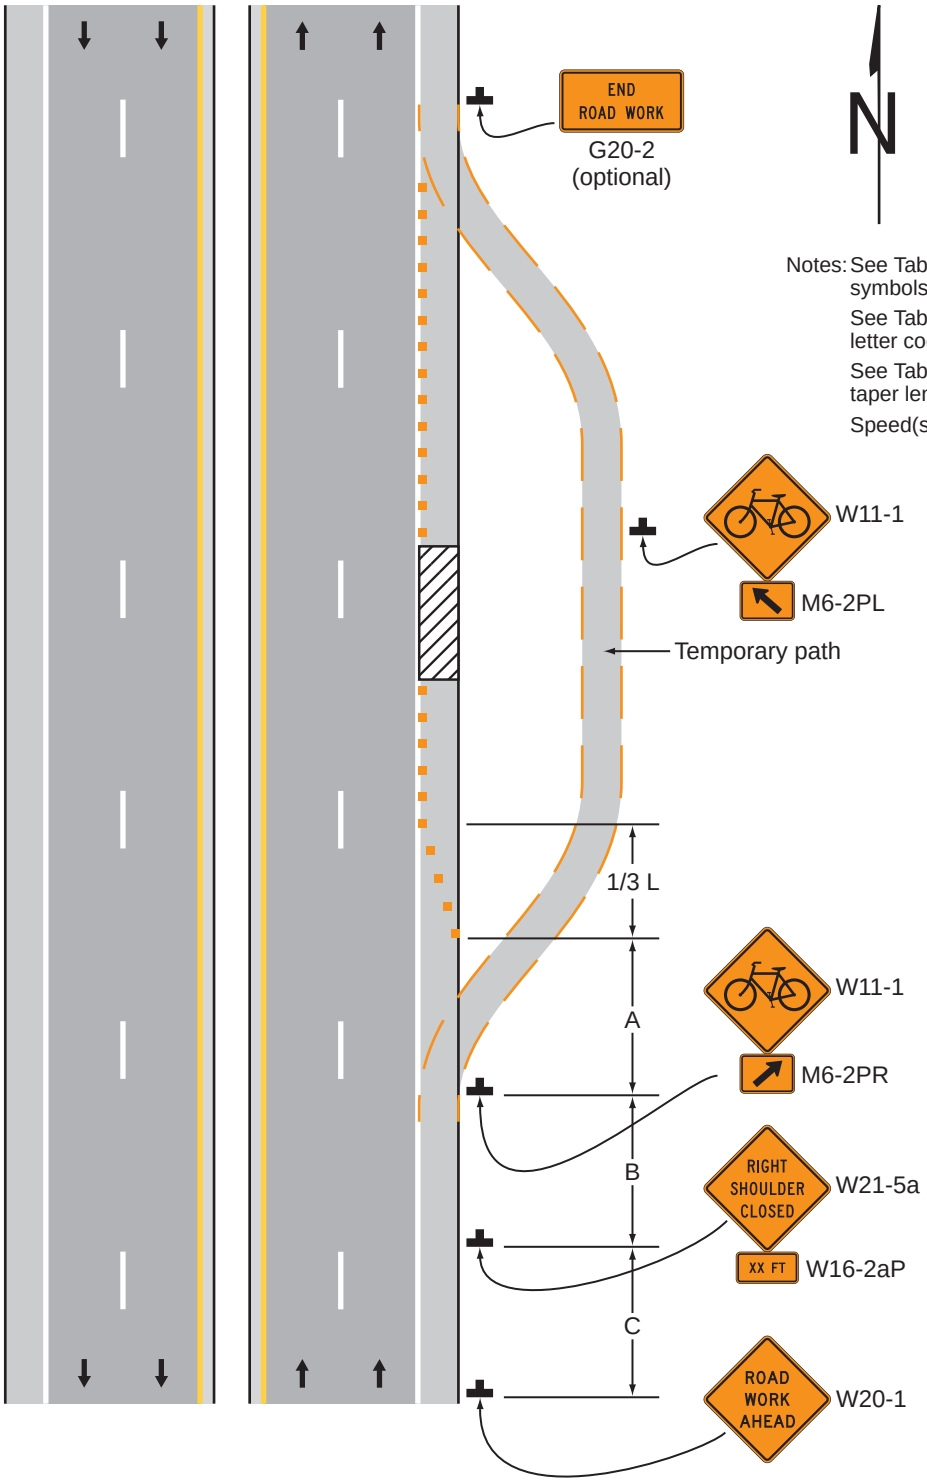


**Typical Application 51**

## *Figure 6P-51(CA). Paved Shoulder Closure with Bicycle Diversion onto a Temporary Path (TA-51(CA))*

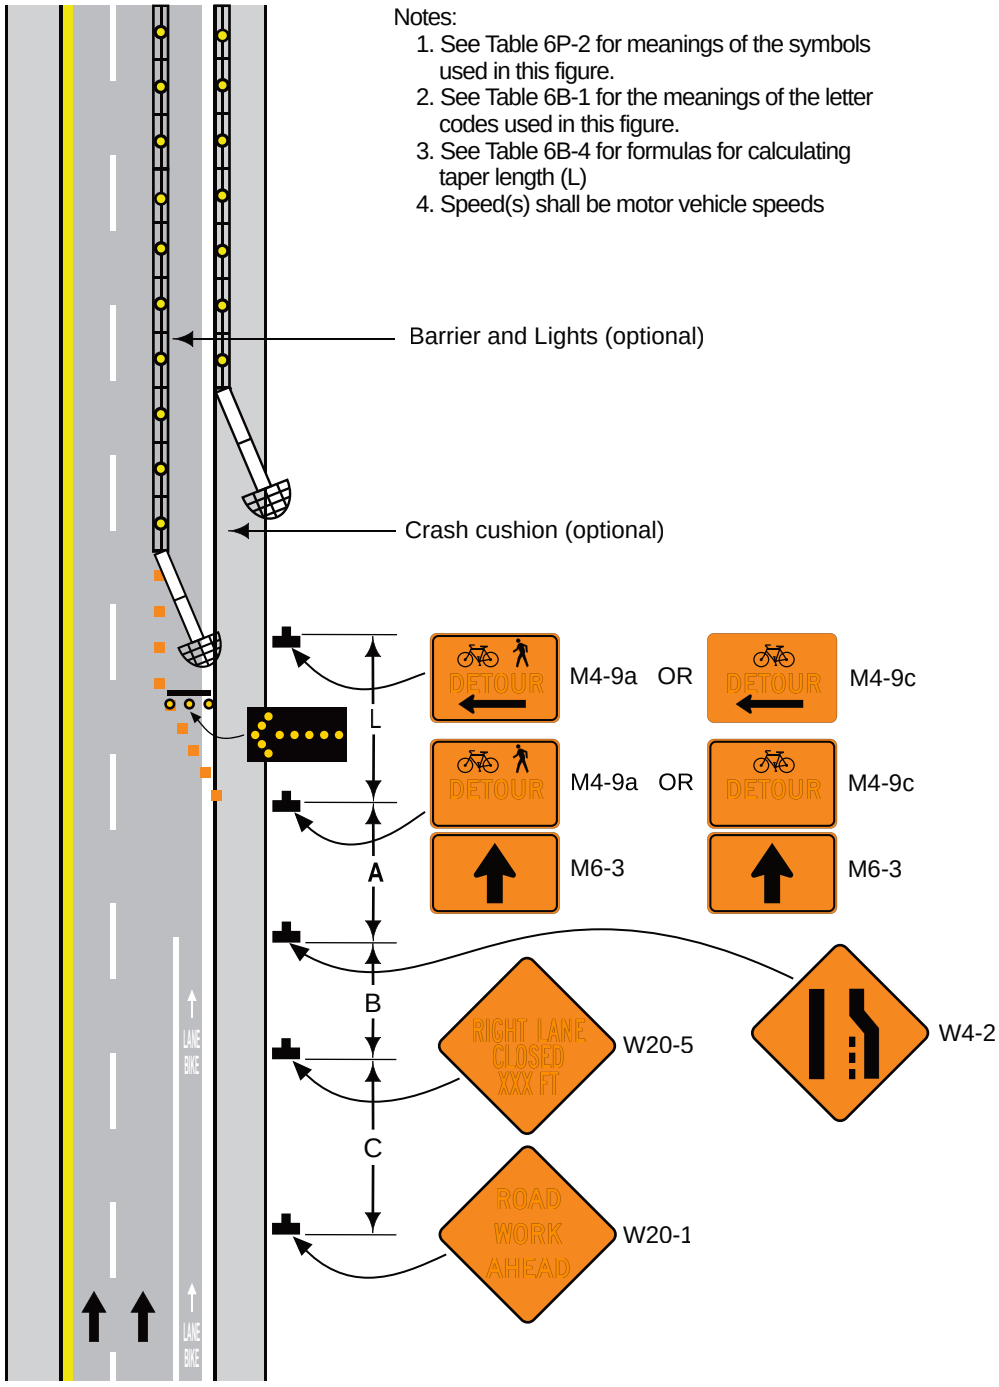


**Typical Application 51(CA)**

## Notes for Figure 6P-52 – Typical Application 52
## Short-Term or Short-Duration Work in a Circular Intersection

Option:

1. Flashing warning lights and/or flags may be used to call attention to the advance warning signs. A BE PREPARED TO STOP (W3-4) sign may be added to the sign series.
2. If closure continues overnight, warning lights may be used on the channelizing devices.

**Standard:**

3. **Where a quadrant of the circular intersection is closed, only one direction of approach traffic shall be released at a time.**
4. **At night, flagger stations shall be illuminated, except in emergencies.**
5. **WRONG WAY (R5-1a) signs shall be covered.**

*Guidance:*

6. *When used, the BE PREPARED TO STOP (W3-4) sign should be located between the Flagger sign and the ~~ONE LANE ROAD sign~~ Flagger symbol (W20-7).*
7. *YIELD (R1-2), ONE WAY (R6-1and R6-2), and Directional arrow (R6-4, R6-4a, and R6-4b) signs should be covered or removed.*
8. *Confusing or misleading guide or lane-use control signs should be covered.*


Option:

9. Crosswalks may be closed.
10. As an alternative to closing crosswalks, warning signs may be added informing pedestrians that there is traffic coming from the left.

*Guidance:*

11. *Since the geometrics of the circular intersection will be temporarily altered, consideration should be given to establishing a truck detour for the duration of the project.*
12. *For intermediate or long-term work, the circular intersection should be closed and traffic detoured, with appropriate detour signing (see Figure 6P-8) provided.*

## Figure 6P-52. Short-Term or Short-Duration Work in a Circular Intersection (TA-52)

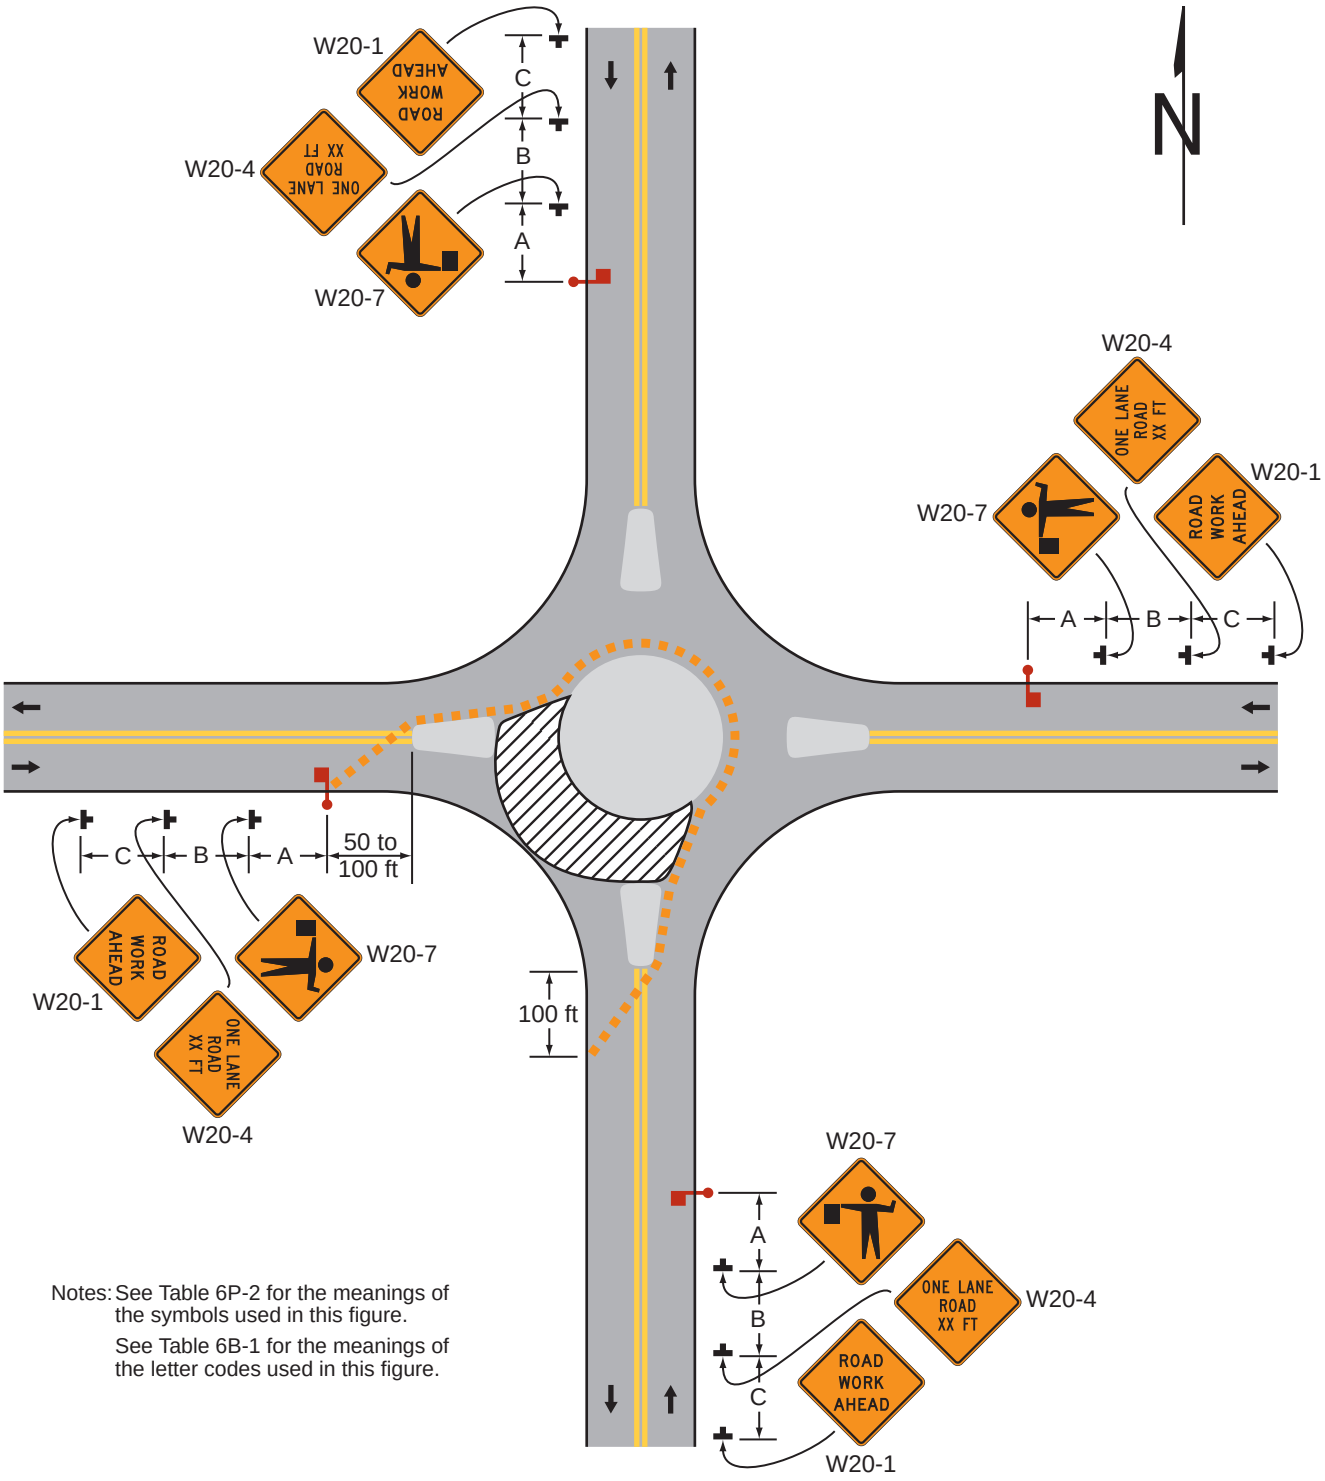


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.

See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 52**

# Notes for Figure 6P-53 – Typical Application 53
# Flagging Operation on a Single-Lane Circular Intersection

**Standard:**

1. **Flaggers shall follow the procedures provided in Sections 6D.05 and 6D.06.**
2. **When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities (see Figure 6P-29) shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**
3. **At night, flagger stations shall be illuminated, except in emergencies.**


*Guidance:*

4. *Flaggers on each approach to the intersection should coordinate with each other so that traffic proceeds through the circular intersection from only one entry point at any one time.*
5. *When designing the TTC and installing the channelizing devices for work activities at circular intersections, accommodations for the turning radius of wider heavy commercial vehicles should be considered.*
6. *Since the geometrics of the circular intersection will temporarily be altered, consideration should be given to establishing a truck detour for the duration of the project.*
7. *For intermediate or long-term work, the circular intersection should be closed if traffic cannot be accommodated, and traffic detoured with appropriate detour signing (see Figure 6P-8) provided.*
8. *Conflicting pavement markings should be removed for long-term projects. For short-term and intermediate-term projects where this is impracticable, the channelizing devices in the area where the pavement markings conflict should be placed at a maximum spacing of ½ S feet where S is the speed in mph. Temporary markings should be installed where needed.*
9. *When used, the BE PREPARED TO STOP (W3-4) sign should be located between the Flagger sign and the ONE LANE ROAD (W20-4) sign.*
10. *The buffer space should be extended so that the two-way traffic taper is placed before a horizontal (or crest vertical) curve to provide adequate sight distance for the flagger and a queue of stopped vehicles.*
11. *Care should be exercised when establishing the limits of the TTC zone to ensure adequate sight distance in advance of the transition.*

Option:

12. Periodic adjustments to the channelizing devices may be allowed in an active TTC zone to accommodate the turning movements of tractor trailer vehicles and other large vehicles.
13. On the approaches where traffic flow will be split, two pilot vehicles may be used to guide traffic through the circular intersection.

## Figure 6P-53. Flagging Operation on a Single-Lane Circular Intersection (TA-53)

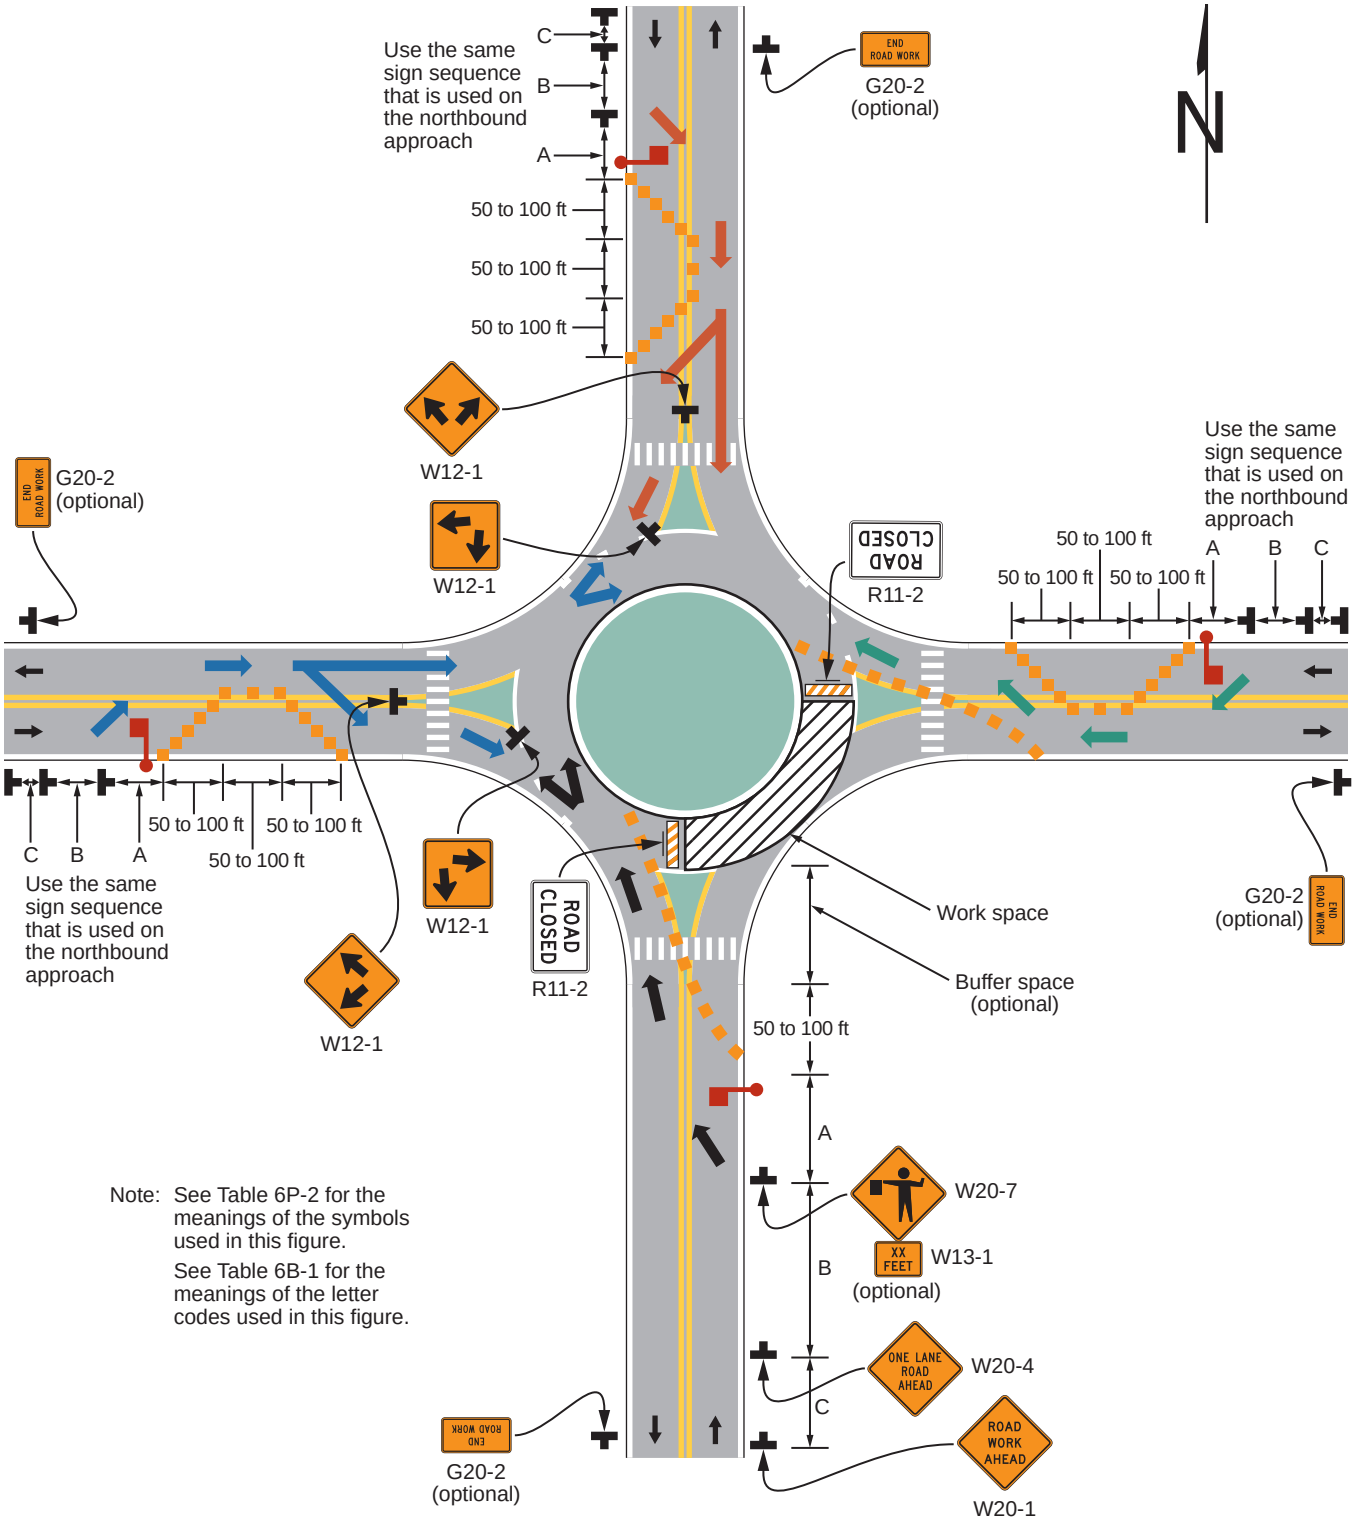


Note: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.

## Typical Application 53

## Notes for Figure 6P-54 – Typical Application 54
## Inside Lane Closure on a Multi-Lane Circular Intersection

**Standard:**

1. **When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities (see Figure 6P-29) shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**


*Guidance:*

2. *Care should be exercised when establishing the limits of the TTC zone to ensure adequate sight distance in advance of the transition.*
3. *When designing the TTC and installing the channelizing devices for work activities at circular intersections, accommodations for the turning radius of wider heavy commercial vehicles should be considered.*
4. *Since the geometrics of the circular intersection will temporarily be altered, consideration should be given to establishing a truck detour for the duration of the project.*
5. *For intermediate or long-term work, the circular intersection should be closed if traffic cannot be accommodated, and traffic detoured with appropriate detour signing provided (see Figure 6P-8).*
6. *Conflicting pavement markings should be removed for long-term projects. For short-term and intermediate-term projects where this is impracticable, the channelizing devices in the area where the pavement markings conflict should be placed at a maximum spacing of ½ S feet where S is the speed in mph. Temporary markings should be installed where needed.*

Option:

7. A portable changeable message sign may be used as part of the TTC plan to provide clear guidance to motorists on all approaches to the circular intersection.
8. On a multi-lane approach, a lane (or lanes) on either the left-hand side or the right-hand side may be closed.

## Figure 6P-54. Inside Lane Closure on a Multi-Lane Circular Intersection (TA-54)

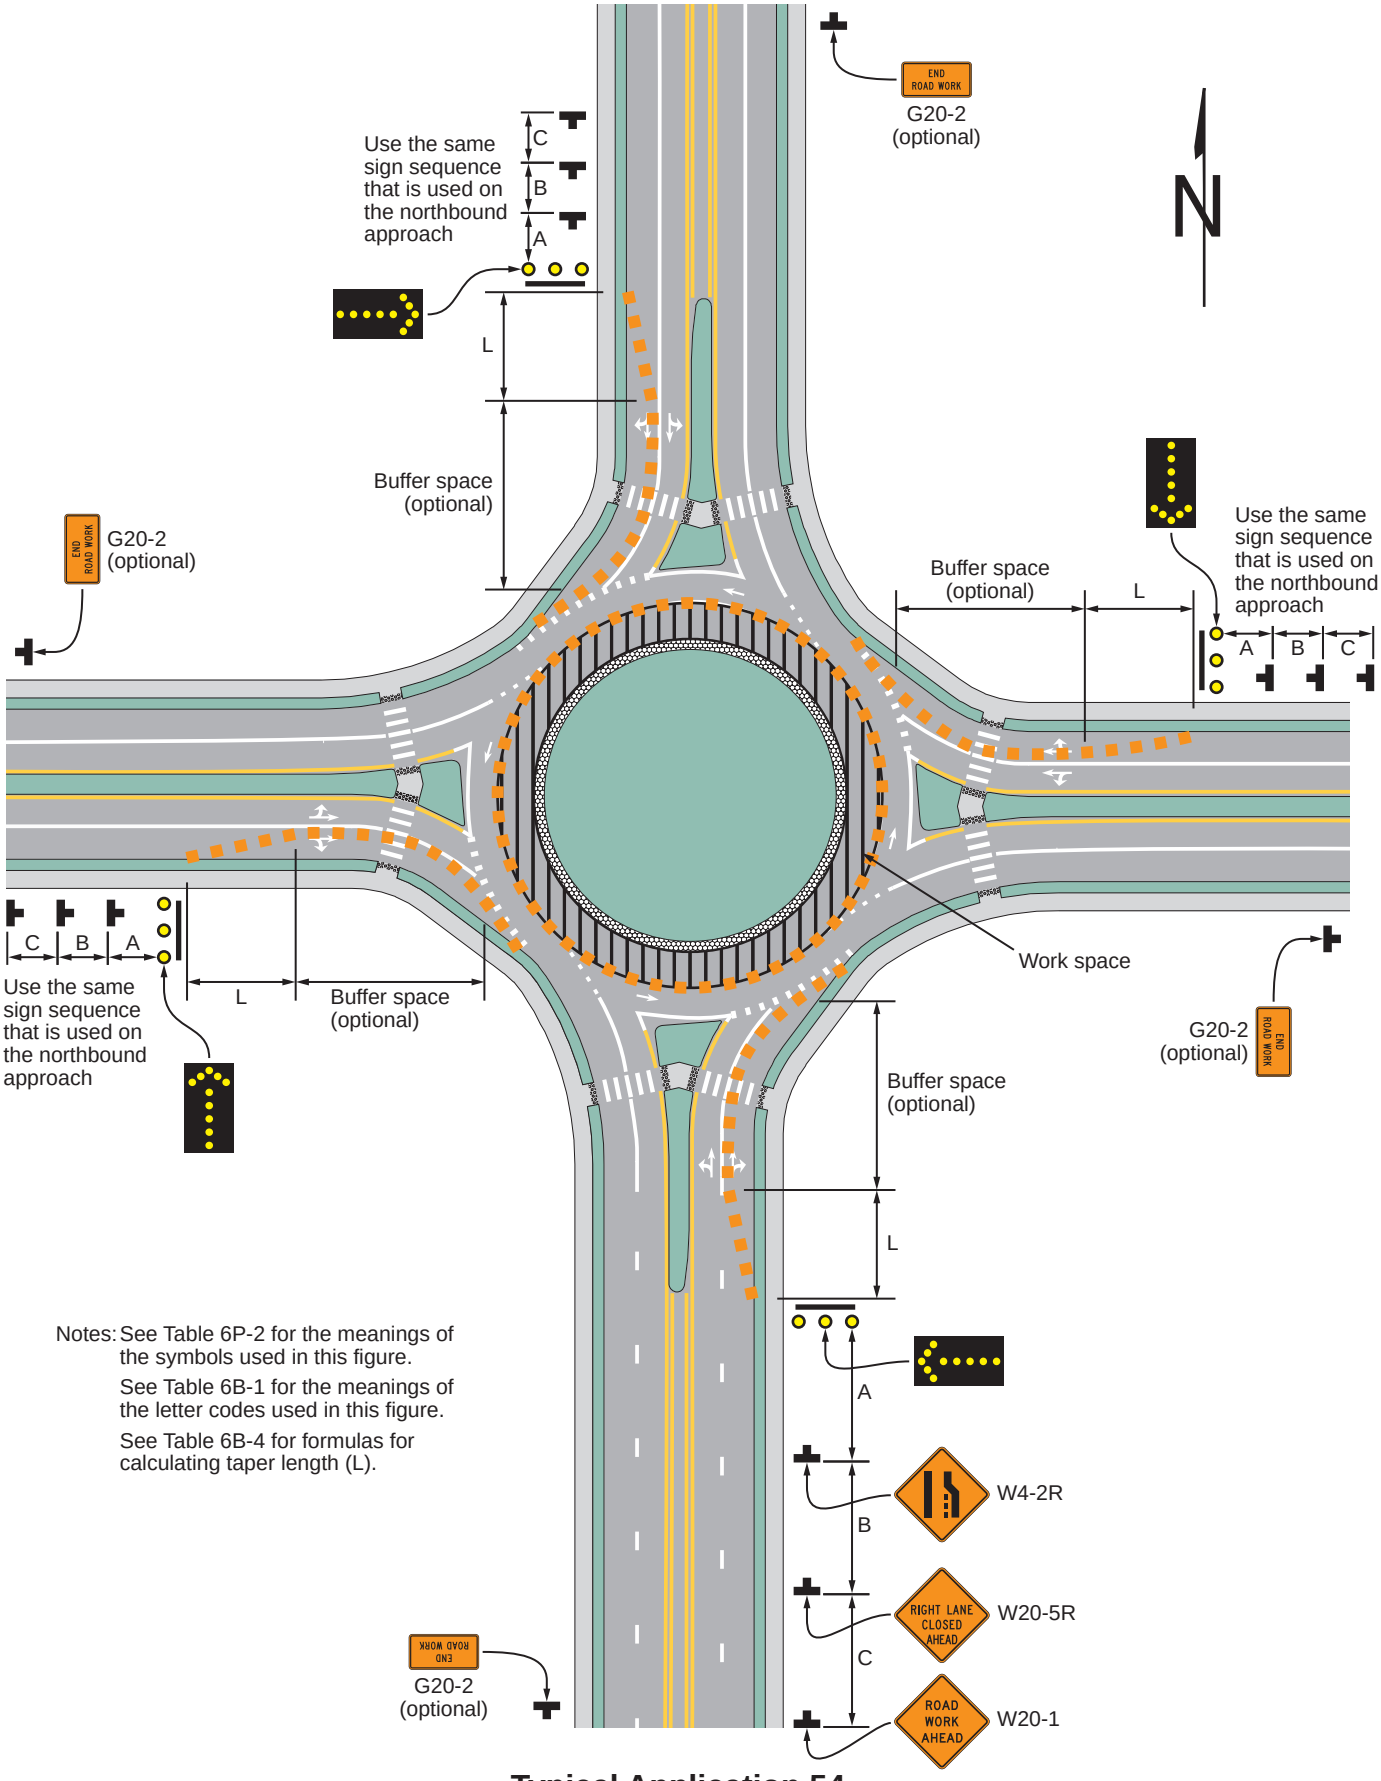


Notes: See Table 6P-2 for the meanings of the symbols used in this figure.
See Table 6B-1 for the meanings of the letter codes used in this figure.
See Table 6B-4 for formulas for calculating taper length (L).

**Typical Application 54**

## Notes for Figure 6P-101(CA) — Typical Application 101(CA)
## Right Lane and Bike Lane Closure on Far Side of Intersection

*Guidance:*

1. *When existing accommodations for bicycle travel are disrupted or closed, information and devices contained in Figures 6P-47 through 6P-51(CA), as appropriate per situation encountered, should be used to consider the needs and control of bicyclists through a TTC zone.*
2. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6P-29.*

Option:

3. The normal procedure is to close on the near side of the intersection any lane that is not carried through the intersection. However, when this results in the closure of a right lane having significant right turning movements, then the right lane may be restricted to right turns only, as shown. This procedure increases the through capacity by eliminating right turns from the open through lane.
4. For intersection approaches reduced to a single lane, left-turning movements may be prohibited to maintain capacity for through vehicular traffic.
5. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
6. Where the turning radius is large, it may be possible to create a right-turn island using channelizing devices or pavement markings.


*Guidance:*

8. *For long-term duration projects (refer to Section 6N.01), consideration should be given to installing signs in an overhead location.*

Option:

9. A high-level warning device (flag tree) may supplement the advance warning signs. Refer to Section 6L.08.

## *Figure 6P-101(CA). Right Lane and Bike Lane Closure on Far Side of Intersection (TA-101(CA))*

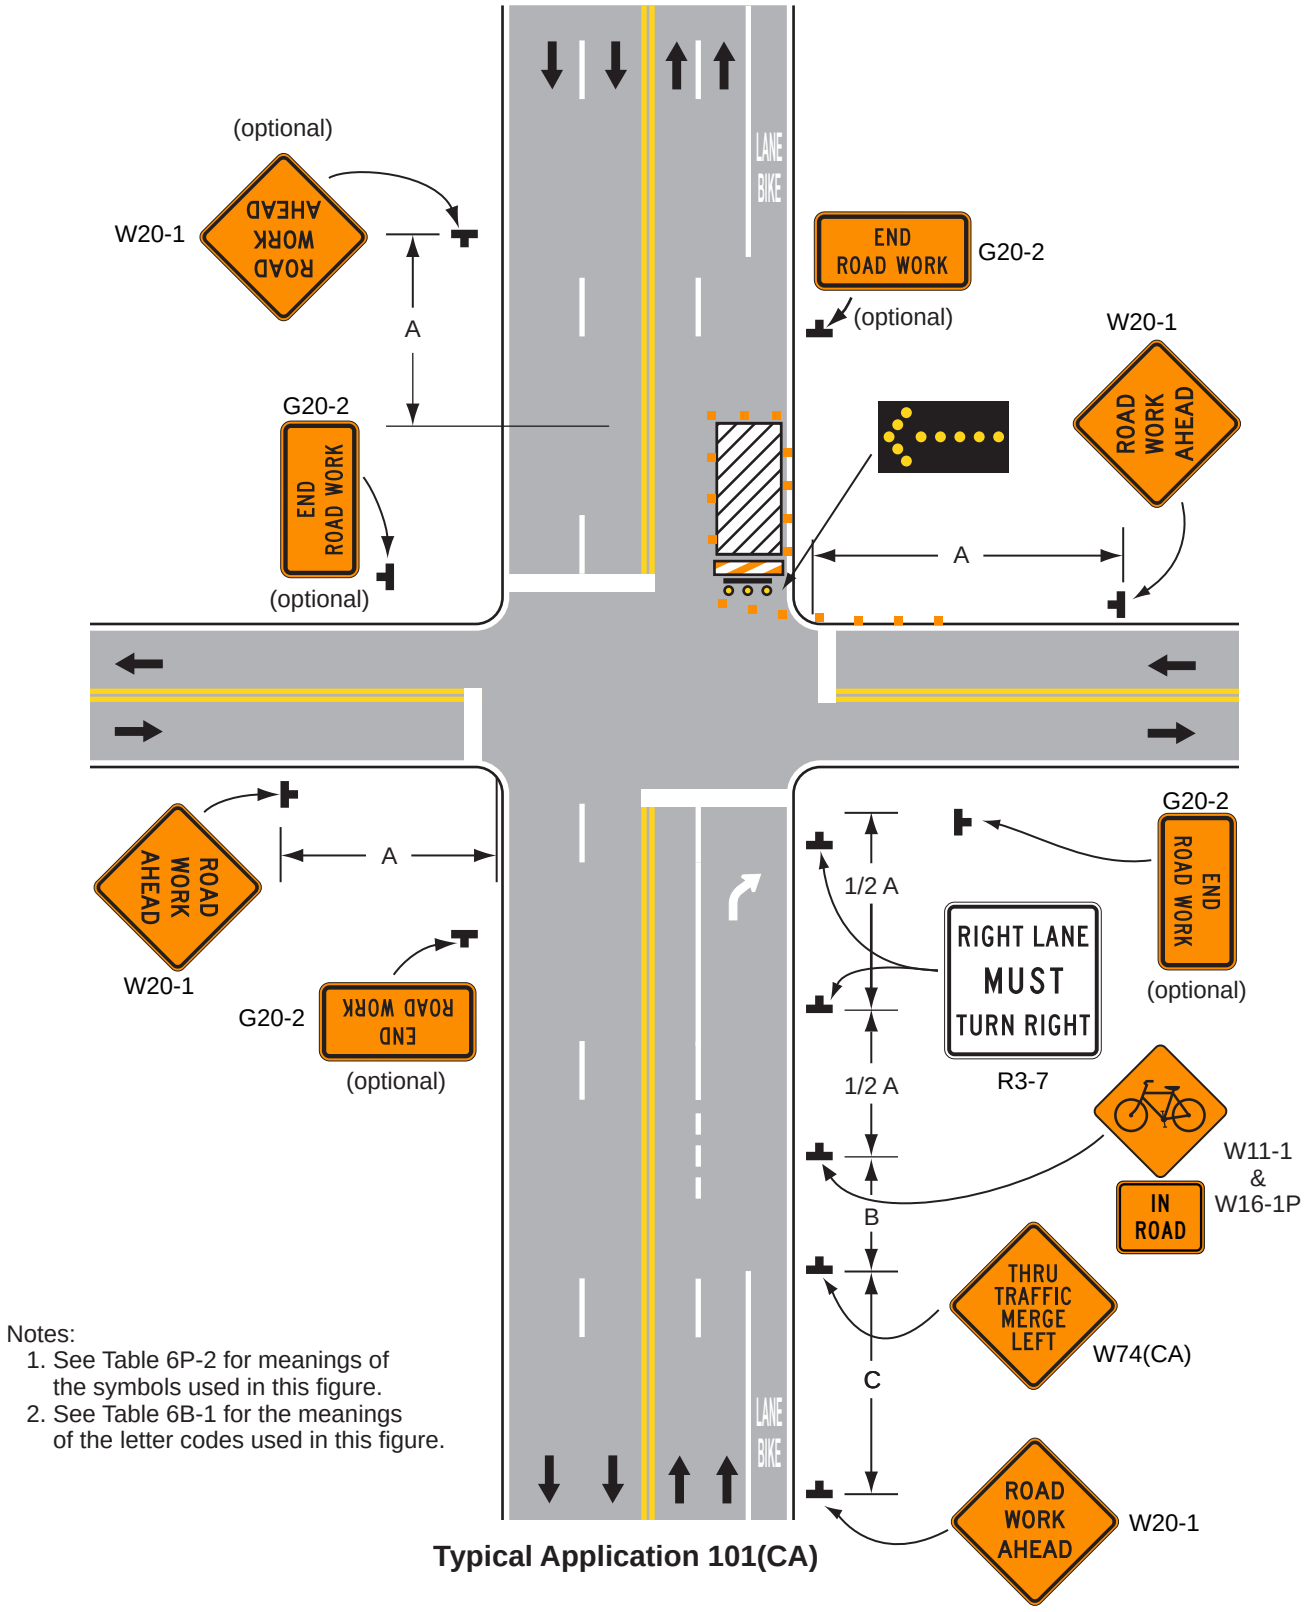


Notes:
1. See Table 6P-2 for meanings of the symbols used in this figure.
2. See Table 6B-1 for the meanings of the letter codes used in this figure.

**Typical Application 101(CA)**

## Notes for Figure 6P-102(CA) — Typical Application 102(CA)
## Lane Shift on Road with Low Traffic Volumes

*Guidance:*

1. *The lanes on either side of the center work space should have a minimum width of 10 feet as measured from the near edge of the channelizing devices to the edge of pavement or the outside edge of paved shoulder.*

**Standard:**

2. **Workers in the roadway shall wear high-visibility safety apparel as described in Section 6C.04.**


Option:

3. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
4. If the closure continues overnight, warning lights may be used on the channelizing devices.
5. A lane width of 9 feet may be used for short-term stationary work on low-volume, low-speed roadways when motor vehicle traffic does not include longer and wider heavy commercial vehicles.
6. A work vehicle displaying high-intensity rotating, flashing, oscillating, or strobe lights may be used instead of the channelizing devices forming the tapers or the high-level warning devices.
7. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

8. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**

## *Figure 6P-102(CA). Lane Shift on Road With Low Traffic Volumes (TA-102(CA))*

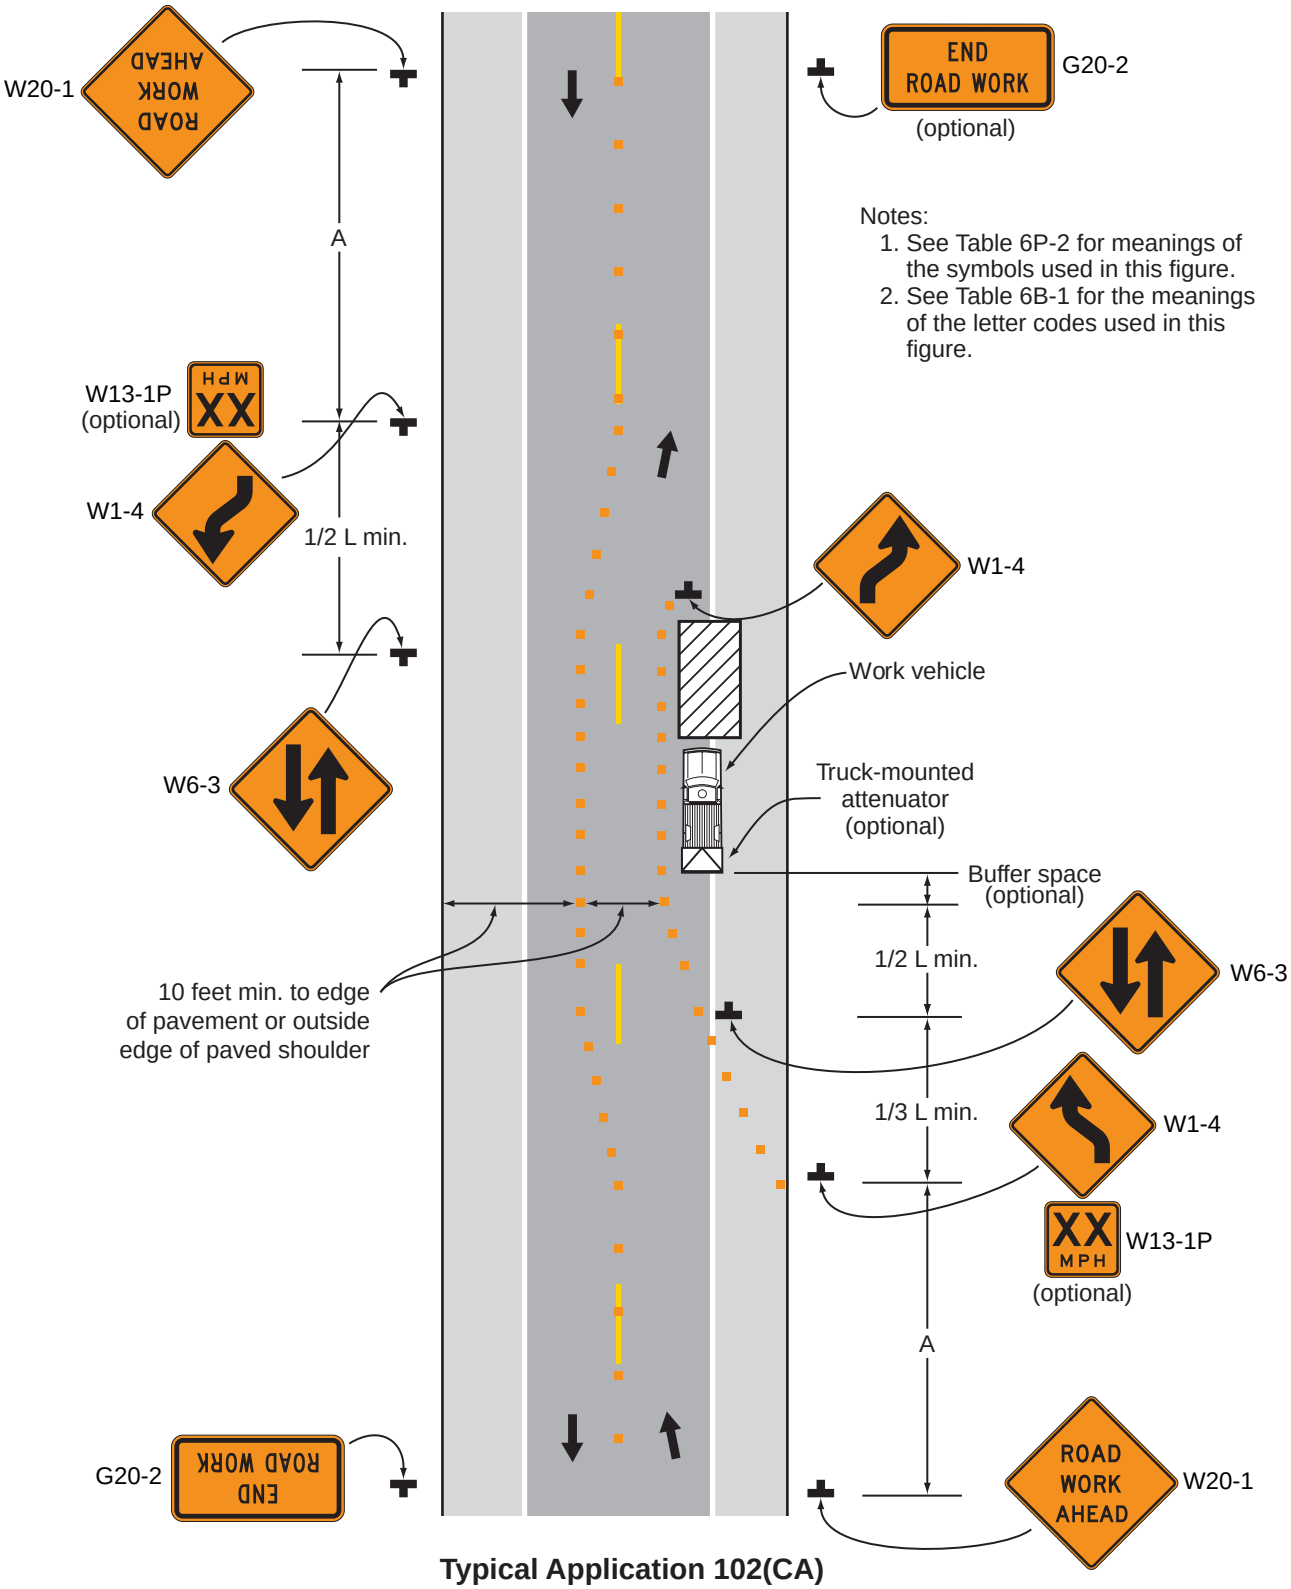


**Typical Application 102(CA)**

# PART 7
# TRAFFIC CONTROL FOR SCHOOL AREAS

## CHAPTER 7A. GENERAL

### Section 7A.01 Introduction

Support:

01 Part 7 sets forth basic principles and prescribes standards for the design, application, installation, and maintenance of all traffic control devices (including signs, signals, and markings) and other controls (including adult crossing guards) for the special pedestrian conditions in school areas.

### Section 7A.02 School Route Plans and School Crossings

*Guidance*:

01 *A school route plan for each school serving elementary to high school students should be prepared in order to develop uniformity in the use of school area traffic controls and to serve as the basis for a school traffic control plan for each school.*

02 *The school route plan, developed in a systematic manner by the school, law enforcement, and traffic officials responsible for school pedestrian safety, should consist of a map (see Figure 7A-1) showing streets, the school, existing traffic controls, established school walk routes, and established school crossings.*

03 *Bicycle use as a mode of transportation, as applicable, should also be considered. ~~if students biking to and from school are not allowed to use the sidewalks along the pedestrian route~~.*

04 *The type(s) of school area traffic control devices used, either warning or regulatory, should be related to the volume and speed of vehicular traffic, street width, and the number and age of the students using the crossing.*

05 *School area traffic control devices should be included in a school traffic control plan.*

Support:

05a The words "School Pedestrians", "Children", and "Students" are used interchangeably and could include student bicyclists for the purpose of determining appropriate crossing protection measures.

06 To establish a safer route to and from school for schoolchildren, the application of planning criterion for school walk routes might make it necessary for children to walk an indirect route to an established school crossing located where there is existing traffic control and to avoid the use of a direct crossing where there is no existing traffic control.

07 The frequency of gaps in the traffic stream that are sufficient for student crossing is different at each crossing location. When the delay between the occurrences of adequate gaps becomes excessive, students might become impatient and endanger themselves by attempting to cross the street during an inadequate gap. In these instances, the creation of sufficient gaps needs to be considered to accommodate the crossing demand.

*Guidance:*

08 *School walk routes should be planned to take advantage of existing traffic controls.*

09 *The following factors should be considered when determining the feasibility of requiring children to walk a longer distance to a crossing with existing traffic control:*

- *A. The availability of adequate sidewalks or other pedestrian walkways to and from the location with existing control,*
- *B. The number of students using the crossing,*
- *C. The age levels of the students using the crossing, and*
- *D. The total extra walking distance.*

Support:

10 A School Crossing signal warrant is provided in Section 4C.06.

11 Street closures are authorized by local ordinance or resolution on streets crossing or dividing school grounds when necessary for the protection of persons attending the school. Refer to CVC § 21102.

12 Engineering studies determine the appropriate measures developed at school crossings. The devices and treatments described herein are for use in school zones and do not preclude use of other devices and treatments described elsewhere in this document.

13 Types of school pedestrian measures that can be considered can include:

A. Warning signs and markings.
B. School speed limits.
C. Intersection stop signs.
D. Flashing yellow beacons.
E. Traffic signals.
F. Pedestrian Hybrid Beacons.
G. Remove visibility obstructions.
H. School Safety Patrol.
I. Adult Crossing Guard.
J. Pedestrian separation structures.
K. Pedestrian walkways along the roadway.
L. Pedestrian walkways separated from the roadway.
M. Parking controls and curb-use zones.

14 Refer to CVC § 21373 for school board request for traffic control devices.

15 Upon request of the local school district, responsible traffic authorities investigate all locations along the school route and recommend appropriate traffic control measures. Refer to CVC § 21373.

16 The following references from the California Vehicle Code relate to traffic controls for school areas:

A. Section 377 – Limit Line.
B. Section 627 – Engineering and Traffic Survey.
C. Section 21102 – Local Authority to Close Streets.
D. Section 21368 – Crosswalks Near Schools.
E. Section 21372 – Guidelines for Traffic Control Devices Near Schools.
F. Section 21373 – School Board Request for Traffic Control Devices.
G. Section 21458 – Curb Markings.
H. Section 21949 through 21971 – Pedestrians' Rights and Duties.
I. Section 22350 – Basic Speed Law.
J. Section 22352 – Prima Facie Speed Limits.
K. Section 22358.4 – Decrease of Local Limits Near Schools or Senior Centers.
L. Section 22504 – Unincorporated Area Parking; School Bus Stops.
M. Section 40802 – Speed Traps.
N. Section 42200 – Disposition by Cities and Other Local Entities.
O. Section 42201 – Disposition by County.

## Figure 7A-1. Example of School Route Plan Map



# CHAPTER 7B. SIGNS

## Section 7B.01 Design of School Signs

**Standard:**

01 **Except as provided in Section 2A.07, the sizes of signs and plaques to be used on conventional roadways in school areas shall be as shown in Table 7B-1.**

02 **The sizes in the Oversized column in Table 7B-1 shall be used on expressways in school areas**.

*Guidance:*

03 *The sizes in the Oversized column should be used on roadways that have four or more lanes with posted speed limits of 40 mph or higher.*

Option:

04 Signs and plaques larger than those shown in Table 7B-1 may be used (see Section 2A.07).

**Standard:**

05 **School warning signs, ~~including the "SCHOOL" portion of the School Speed Limit (S5-1) sign and~~ including any supplemental plaques used in association with these warning signs, shall have a fluorescent yellow-green background with a black legend and border unless otherwise provided in this Manual for a specific sign.**

06 **The signs used for school area traffic control shall be retroreflective or illuminated.**

Support:

07 Sections 2A.13 and 2A.14 contain provisions regarding the installation, placement, and location of signs.

08 Section 2A.15 contains provisions regarding the mounting heights of signs.

09 Section 2A.16 contains provisions regarding the lateral offsets of signs.

10 The "Standard Highway Signs" publication (see Section 1A.05) contains information regarding sign lettering.

Option:

11 In-roadway signs for school traffic control areas may be used consistent with the requirements of Sections 2B.20 and 7B.03.

Support:

12 Examples of location of school area signs and California School Assemblies for typical installations are shown in Figures 7B-2, 7B-2(CA), 7B-3 and 7B-101(CA) through 7B-104(CA).

13 Examples of school area signing, markings, flashing beacons and overhead school signs are shown in Figures 7B-2(CA) and Figures 7B-101(CA) through 7B-104(CA).

## Section 7B.02 School Area Signs and Plaques

Support:

01 Many state and local jurisdictions find it beneficial to advise road users that they are approaching a school that is adjacent to a highway, where additional care is needed, even though no school crossing is involved and the speed limit remains unchanged. Additionally, some jurisdictions designate school zones that have a unique legal standing in that fines for speeding or other traffic violations within designated school zones are increased or special enforcement techniques such as photo radar systems are used. It is important and sometimes legally necessary to mark the beginning and end points of these designated school zones so that the road user is given proper notice.

02 The School (S1-1) sign (see Figure 7B-1 or 7B-1(CA)) has the following four applications:

A. School Area – the S1-1 sign can be used to warn road users that they are approaching a school area that might include school buildings or grounds, a school crossing, or school related activity adjacent to the highway.
B. School Zone – the S1-1 sign can be used to identify the location of the beginning of a designated school zone.
C. School Advance Crossing – if combined with an AHEAD (W16-9P) plaque or an XX FEET (W16-2P or W16-2aP) plaque to comprise the School Advance Crossing assembly (see Figure 7B-1), the S1-1 sign can be used to warn road users that they are approaching a crossing where schoolchildren cross the roadway (see Section 7B.03).
D. School Crossing – if combined with a diagonal downward-pointing arrow (W16-7P) plaque to comprise the School Crossing assembly (see Figure 7B-1), the S1-1 sign can be used to warn approaching road users of the location of a crossing where schoolchildren cross the roadway (see Section 7B.03).

02a The School Assemblies A(CA) through E(CA) are shown in Figure 7B-1 and Table 7B-1(CA).

Option:

03 If a school area or school zone is located on a cross street in close proximity to the intersection, a School (S1-1) sign with a supplemental arrow (W16-5P or W16-6P) plaque (see Figure 7B-1) may be installed on each approach of the street or highway to warn road users making a turn onto the cross street that they will encounter a school area soon after making the turn.

**Standard:**

04 **If a school zone has been designated under** State or local **statute, a School (S1-1) sign (see Figure 7B-1 or 7B-1(CA)) shall be installed to identify the beginning point(s) of the designated school zone (see Figure 7B-2).**

Option:

05 A School Zone (S1-1) sign may be supplemented with a SCHOOL (S4-3P) plaque (see Figure 7B-1 or 7B-1(CA)).

06 ~~A School Zone (S1-1) sign may be supplemented with an ALL YEAR (S4-7P) plaque (see Figure 7B- 1) if the school operates on a 12-month schedule.~~

07 ~~The downstream end of a designated school zone may be identified with an END SCHOOL ZONE (S5-2) sign (see Figures 7B-1 and 7B-2).~~

Support:

08 The School Warning Assembly A(CA) does not need to be posted if there are no school pedestrians using the highway and the school grounds are separated from the highway by a fence, gate or other physical barrier. Refer to CVC § 22352.

**Standard:**

09 **The School Warning Assembly A(CA) shall be used on streets with prima facie 25 mph speed limits that are contiguous to a school building or school grounds.**

10 **The SCHOOL (S4-3P) plaque shall not be used alone.**

*Guidance:*

11 *If used, the School Warning Assembly A(CA) should be posted at the school boundary. Refer to CVC § 22352.*

Option:

12 If used, the School Warning Assembly A(CA) may be posted up to 500 feet in advance of the school boundary. Refer to CVC § 22352.

## Section 7B.03 School Crossing Signs

**Standard:**

01 **The School Advance Crossing assembly (see Figure 7B-1 or 7B-1(CA)) shall consist of a School Advance warning Assembly D(CA), or a School (S1-1) sign supplemented with an AHEAD (W16-9P) plaque or an XX FEET (W16-2P or W16-2aP) plaque.**

02 **Except as provided in Paragraph 3 of this Section, a School Advance Crossing assembly or Assembly D(CA) shall be used in advance (see Table 2C-3 for advance placement guidelines) of the first School Crossing assembly that is encountered in each direction as traffic approaches a school crosswalk (see Figure 7B- 3).**

Option:

03 The School Advance Crossing assembly or Assembly D(CA) may be omitted (see Figure 7B-2) where a School Zone (S1- 1) sign (see Section 7B.02) is installed to identify the beginning of a school zone in advance of the School Crossing assembly.

04 If a school crosswalk is located on a cross street in close proximity to an intersection, a School Advance Crossing assembly with a supplemental arrow (W16-5P or W16-6P) plaque may be installed on each approach of the street or highway to warn road users making a turn onto the cross street that they will encounter a school crosswalk soon after making the turn (see Figure 7B-3).

05 A 12-inch reduced size in-street School (S1-1) sign (see Figure 7B-1), installed in compliance with the mounting height and special mounting support requirements for an In-Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) sign (see Section 2B.20), may be used in advance of a school crossing to supplement the post-mounted school warning signs. A 12 x 6-inch reduced size AHEAD (W16-9P) plaque (see Figure 7B-1) may be mounted below the reduced size in-street School (S1-1) sign.

**Standard:**

05a **The School Advance Warning Assembly D(CA) shall be used in advance of any School Crosswalk Warning Assembly B(CA), School Crosswalk Warning Assembly E(CA) or the School Speed Limit Assembly C(CA).**

**Standard:**

06 **If used, the School Crossing ~~assembly~~ Assembly B(CA) (see Figure 7B-1 or 7B-1(CA)) shall be installed at the school crossing (see Figures 7B-2 and 7B-3), or as close to it as possible, and shall consist of a School (S1-1) sign supplemented with a diagonal downward-pointing arrow (W16-7P) plaque (see Section 2C.63) to show the location of the crossing.**

07 **The School Crossing ~~assembly~~ Assembly B(CA) or E(CA) shall not be used at crossings other than those adjacent to schools and those on established school pedestrian routes.**

08 **The School Crossing ~~assembly~~ Assembly B(CA) or E(CA) shall not be installed on an approach controlled by a STOP (R1-1) sign ~~or~~ a YIELD (R1-2) sign or a traffic signal, except as provided in Paragraphs 9 and 10 of this Section.**

**Standard:**

08a **The School Crosswalk Warning Assembly B(CA) or E(CA) shall be posted at all yellow school crosswalks that are not controlled by a STOP (R1-1) sign, a YIELD (R1-2) sign or a traffic signal.**

*Guidance:*

08b *The School Crosswalk Warning Assembly B(CA) or E(CA) should be posted at all white school crosswalks that are not controlled by a STOP (R1-1) sign, a YIELD (R1-2) sign or a traffic signal.*

Support:

08c The School Crosswalk Warning Assemblies B(CA) and E(CA) are shown in Figure 7B-1 and 7B-101(CA) through 7B-104(CA).

Option:

09 The School Crossing assembly may be installed on an approach to a circular intersection controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point at the entrance to a circulatory roadway.

10 At a signalized or stop-controlled intersection the School Crossing assembly may be installed on an approach to a channelized right turn lane controlled by a YIELD sign where the crosswalk is at least 20 feet in advance of the yield point.

11 A Yield Here To (Stop Here For) School Crossing (R1-5a ~~or R1-5c~~) sign (see Figure 7B-4) may be used, in accordance with the provisions of Section 2B.19, in advance of a marked crosswalk that crosses an uncontrolled multi-lane approach within school zones.

Support:

11a Refer to FHWA's List of Known Errors for error in Paragraph 11 text. Refer to Section 1A.04 for more details.

Option:

12 The In-Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) sign (see Section 2B.20 and Figure 7B-1) or the In- Street School Crossing (R1-6b ~~or R1-6c~~) sign (see Figure 7B-1) may be used at school crossings on approaches that are not controlled by a traffic control signal, a pedestrian hybrid beacon, or emergency- vehicle hybrid beacon. If used at a school crossing, a 12 x 4-inch SCHOOL (S4-3P) plaque (see Figure 7B-1) may be mounted above the sign. The STATE LAW legend on the R1-6 series signs may be omitted.

13 The In-Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) sign or In-Street School Crossing (R1-6b ~~or R1-6c~~) sign may be used at intersections or midblock crossings with flashing beacons.

14 The Overhead School Crossing (R1-9b ~~or R1-9c~~) sign (see Figure 7B-1) may be used at school crossings on approaches that are not controlled by a traffic control signal, pedestrian hybrid beacon, or an emergency-vehicle hybrid beacon. The STATE LAW legend on the R1-9 series signs may be omitted**.**

**Standard:**

14a **If used, the School Crosswalk Warning Assembly E(CA) (see Figures 7B-1 and 7B-101(CA) through 7B-104(CA)) shall be installed in an overhead location at the marked crosswalk, or as close to it as possible, and shall consist of a modified R1-9 sign to show the location of the crossing.**

Option:

14b For uncontrolled locations with more than one lane in each direction of travel, advance yield lines (see Section 3B.19) may be used with the 'Yield Here to Pedestrians' signs (R1-5 or R1-5a).

**Standard:**

15 **When used at an uncontrolled crossing, the In-Street or Overhead Pedestrian Crossing sign shall be used only as a supplement to a School Crossing assembly with a diagonal downward-pointing arrow (W16-7P) plaque at the crosswalk location.**

Option:

16 A 12-inch reduced size in-street School (S1-1) sign (see Figure 7B-1) may be used instead of the In- Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) or the In-Street School Crossing (R1-6b ~~or R1-6c~~) sign at a school crossing on approaches that are not controlled by a traffic control signal, pedestrian hybrid beacon, or an emergency-vehicle hybrid beacon. A 12 x 6-inch reduced size diagonal downward-pointing arrow (W16-7P) plaque (see Figure 7B-1) may be mounted below the reduced size in-street School (S1-1) sign.

Support:

16a The In-Street Pedestrian Crossing and the In-Street Schoolchildren Crossing (R1-6a and R1-6c) signs are deleted as a stop is not required in California per CVC § 21950.

**Standard:**

17 **If an In-Street Pedestrian Crossing sign, an In-Street School Crossing sign, or a reduced size in- street School (S1-1) sign is placed in the roadway, the sign support shall comply with the mounting height and special mounting support requirements for an In-Street Pedestrian Crossing (R1-6 ~~or R1-6a~~) sign (see Section 2B.20).**

18 **The In-Street Pedestrian Crossing sign, the In-Street School Crossing sign, the Overhead Pedestrian Crossing sign, and the reduced size in-street School (S1-1) sign shall not be used on approaches that are controlled by stop control, a traffic control signal, pedestrian hybrid beacon, or an emergency- vehicle hybrid beacon.**

## Section 7B.04 School Bus Stop Signs

*Guidance:*

01 *The School Bus Stop Ahead (S3-1) sign (see Figure 7B-1) should be installed in advance of locations where a school bus, when stopped to pick up or discharge passengers, is not visible to road users for an adequate distance and where there is no opportunity to relocate the school bus stop to provide adequate sight distance.*

**Standard:**

01a **The School Bus Stop Ahead (S3-1) sign shall be installed in advance of an approved school bus stop where there is not a clear view in advance of the stop from a distance of 200 feet. Refer to CVC § 22504(c).**

Option:

02 The SCHOOL BUS TURN AHEAD (S3-2) sign (see Figure 7B-1) may be installed in advance of locations where a school bus turns around on a roadway at a location not visible to approaching road users for a distance as determined by the "0" column under Condition B of Table 2C-3, and where there is no opportunity to relocate the school bus turn around to provide the distance provided in Table 2C-3.

## Section 7B.05 School Speed Limit Signs and Plaques

**Standard:**

01 **A School Speed Limit ~~assembly~~ Assembly C(CA) (see Figure 7B-1) ~~or a School Speed Limit When Flashing (S5-1) sign (see Figure 7B-1)~~ shall be used to indicate the speed limit where a reduced school speed limit zone has been established based upon an engineering study or where a reduced school speed limit is specified for such areas by statute. The School Speed Limit ~~assembly~~ Assembly C(CA) or School Speed Limit ~~When Flashing~~ sign shall be placed at or as near as practicable to the point where the reduced school speed limit zone begins (see Figures 7B-2 ~~and 7B-4~~).**

02 **If a reduced school speed limit zone has been established, a School (S1-1) sign shall be installed in advance (see Table 2C-3 for advance placement guidelines) of the first School Speed Limit sign assembly ~~or S5-1 sign~~ that is encountered in each direction as traffic approaches the reduced school speed limit zone (see Figures 7B-2 ~~and 7B-4~~).**

03 **~~Except as provided in Paragraph 4 of this Section, the~~ The downstream end of an authorized and posted reduced school speed limit zone shall be identified with an END SCHOOL SPEED LIMIT (S5-3) and/or Speed Limit (R2-1) sign (see Figures 7B-1, 7B-1(CA), 7B-2, and 7B-2(CA) ~~7B-4~~).**

Option:

04 ~~If a reduced school speed limit zone ends at the same point as a designated school zone (see Section 7B.02), an END SCHOOL ZONE (S5-2) sign may be used instead of an END SCHOOL SPEED LIMIT (S5-3) sign.~~ A ~~standard~~ Speed Limit sign ~~showing the speed limit for the section of highway that is downstream from the authorized and posted reduced school speed limit zone~~ may be mounted on the same post above the END SCHOOL SPEED LIMIT (S5-3)

sign ~~or the END SCHOOL ZONE (S5-2) sign~~. or the Speed Limit (R2-1) sign may be posted by itself (see Figures 7B-2(CA) and 7B-102(CA)).

*Guidance:*

05 ~~*The beginning point of a reduced school speed limit zone should be at least 200 feet in advance of the school grounds or a school crossing; however, this 200-foot distance should be increased if the reduced school speed limit is 30 mph or higher. The maximum beginning point of a reduced school speed limit zone should not be greater than 500 feet in advance of the school grounds or a school crossing*~~. *Refer Figures 7B-1(CA), 7B-2, 7B-2(CA), and 7B-101(CA) through 7B-103(CA).*

**Standard:**

06 **The School Speed Limit ~~assembly~~ Assembly C(CA) shall be either a static sign assembly, a blank-out sign, or a changeable message sign (see Chapter 2L).**

07 **The static School Speed Limit ~~assembly~~ Assembly C(CA) shall consist of a top plaque (S4-3P) with the legend SCHOOL, a Speed Limit (R2-1) sign, and a bottom plaque WHEN CHILDREN ARE PRESENT ~~(S4-1P, S4-2P, S4-4P, or S4-6P) indicating the specific periods of the day and/or days of the week that the special school speed limit is in effect~~ (see Figure 7B-1).**

08 ~~**When a School Speed Limit When Flashing (S5-1) sign or a Speed Limit (R2-1) sign with a supplemental WHEN FLASHING (S4-4P) plaque is used, a Speed Limit Sign Beacon (see Section 4S.04) shall be used to identify the periods that the school speed limit is in effect.**~~

09 **Fluorescent yellow-green pixels shall be used when the "SCHOOL" message is displayed on a changeable message sign for a school speed limit.**

Option:

10 Changeable message signs may use blank-out messages or other methods in order to display the school speed limit only during the periods it applies.

11 A Vehicle Speed Feedback (W13-20aP) plaque that displays the speed of approaching drivers (see Sections 2B.21 and 2C.13), that is part of a School Speed Limit assembly ~~or a School Speed Limit When Flashing (S5-1) sign~~, may be used in a school speed limit zone.

*Guidance:*

12 *If used, the Vehicle Speed Feedback (W13-20aP) plaque should only be used during the time period when the school speed limit is in effect.*

13 *A Reduced School Speed Limit Ahead (S4-5or S4-5a) sign (see Figure 7B-1)) should be used to inform road users of a reduced speed zone where the speed limit is being reduced by more than 10 mph, or where engineering judgment indicates that advance notice would be appropriate for the School Advance Warning Assembly D(CA).*

**Standard:**

14 **If used, the Reduced School Speed Limit Ahead sign shall be followed by a School Speed Limit sign or a School Speed Limit ~~assembly~~ Assembly C(CA).**

15 **The speed limit displayed on the Reduced School Speed Limit Ahead sign shall be identical to the speed limit displayed on the subsequent School Speed Limit sign or School Speed Limit ~~assembly~~ Assembly C(CA).**

## EXTENDED 25 MPH AND/OR REDUCED SPEEDS IN SCHOOL ZONES (CVC § 22352)

*Guidance:*

16 *For school area traffic control with a reduced school zone speed limit of 15 mph and/or an extended school zone speed limit of 25 mph in a residential district, the Reduced Speed School Zone Ahead (S4-5, S4-5a) sign should be used to give advance notice of a reduced 15 mph school zone speed limit and/or an extended school zone speed limit of 25 mph.*

Option:

17 For school area traffic control with a reduced school zone speed limit of 20 mph and/or an extended school zone speed limit of 25 mph in a residential district, the Reduced Speed School Zone Ahead (S4-5, S4-5a) sign may be used to give advance notice of a reduced 15 mph school zone speed limit and/or an extended school zone speed limit of 25 mph.

**Standard:**

18 **The School Speed Limit Assembly C(CA) shall be used on streets with speed limits greater than 25 mph that are contiguous to a school building or school grounds.**

Support:

19 The School Speed Limit Assembly C(CA) is shown in Figure 7B-1.

Option:

20 If used, the School Speed Limit Assembly C(CA) may be posted up to 500 feet in advance of the school boundary.

**Standard:**

21 **The "WHEN FLASHING" and specific time period messages shall not be used in school areas in California as they are not supported by CVC § 22352. Hence, the Specific Time Period Plaque (S4-1P), WHEN FLASHING (S4-4P) and SCHOOL SPEED LIMIT 20 WHEN FLASHING (S5-1) signs shall not be used in California.**

Support:

22 The "WHEN FLASHING" message is misleading because it suggests that the speed limit is in force only when the flashing beacons are in operation. The prima facie speed limit of 25 mph is in effect based on the presence of children per CVC § 22352, not on the operation of the flashing beacons.

23 Not using the "WHEN FLASHING" message also addresses the situation when children are present but the flashing beacons are inoperative for any reason.

24 Not using the "WHEN FLASHING" message does not alter the warrants or the use of a flashing yellow beacon or its effectiveness as an attention-getting device.

25 The specific time period message is misleading because it suggests that the speed limit is in force only during the time period specified. The prima facie speed limit of 25 mph is in effect based on the presence of children per CVC § 22352, not on the time period specified.

## EXTENDED 25 MPH AND/OR REDUCED SPEEDS IN SCHOOL ZONES (CVC § 22358.4)

Option:

26 A local authority may declare a 20 or 15 mph prima facie speed limit within 500 feet of a school building or school grounds and an extended 25 mph prima facie speed limit within 500 to 1000 feet from a school or school grounds.

Support:

27 The extended 25 mph school speed zone can provide a progressive speed reduction.

**Standard:**

28 **If the local authority declares by ordinance or resolution the above prima facie speed limits, all of the following criteria shall be met:**

- **A. Street or highway is in a residential district.**
- **B. Street or highway outside of a school zone has a posted speed limit no greater than 30 mph.**
- **C. Street or highway has no more than a total of two through traffic lanes (one in each direction or two in one direction).**
- **D. The reduced school zone speed limit of 20 or 15 mph is within 500 feet of school grounds.**
- **E. The extended school zone speed limit of 25 mph is within 500 to 1000 feet of school grounds.**

29 **When used, a local ordinance or resolution adopted to establish a 20 or 15 mph reduced school zone speed limit and/or an extended 25 mph school zone speed limit shall not be effective until School Speed Limit Assembly C (CA) giving notice of the speed limit(s) is erected upon the highway.**

30 **On a State highway, the ordinance or resolution shall not be effective until the ordinance or resolution has been approved by Caltrans and appropriate school zone speed signs are erected upon the State highway.**

31 **For purposes of a 20 or 15 mph reduced prima facie speed limit, School Speed Limit Assembly C (CA) indicating a speed limit of 20 or 15 mph shall be placed at a distance up to 500 feet away from school grounds. For purposes of an extended 25 mph prima facie speed limit, School Speed Limit Assembly C (CA) indicating a speed limit of 25 mph shall be placed at any distance between 500 to 1,000 feet away from school grounds. Refer to Figure 7B-103(CA).**

32 **The established school speed limits shall be effective when children are going to or leaving the school, either during school hours or during the noon recess hour. The school speed limits shall also apply when the school grounds are not separated from the highway by a fence, gate, or other physical barrier while the grounds are in use by children (this condition can apply at any time of day or any day of the week).**

32 **The determination to reduce a prima facie speed limit to 20 or 15 mph and/or extend a 25 mph school zone speed limit, as described above, shall be documented in writing, in an engineering study. The engineering study shall identify the provisions of Section 627 of the California Vehicle Code (CVC) that support the reduced and/or extended school zone speed limit(s).**

*Guidance:*

33 *When preparing an engineering study pursuant to the Standard above, the local authority should cite all elements of an Engineering and Traffic Survey, as discussed in CVC § 627, that support the need for a reduced speed limit of 20 or 15 mph and/or*

*an extended 25 mph school zone speed limit.*

Support:

34 The documentation of prevailing speeds found in CVC § 627 can be used to establish an existing speed profile for the school zone, but the 85th percentile speed is not used to set the reduced or extended school speed limit.

**Standard:**

35 **The local authority shall reimburse Caltrans for all costs incurred by Caltrans under this section.**

## Section 7B.06 Higher Fines Zone Signs and Plaques in School Areas

Support:

00 The section is deleted as there is no law on higher fines in school areas in California.

01 ~~The signs and plaques used to inform road users of higher fines zones and their locations depend on whether the fines apply to all traffic violations or only to speeding violations. Their locations also depend on whether the higher fines zone begins and/or ends at the same point as the school zone or school speed limit zone. Figures 7B-4 and 7B-5 show examples of higher fines zones signing.~~

~~**Standard:**~~

02 ~~**Where increased fines are imposed for traffic violations within a designated school zone:**~~

~~**A. A BEGIN HIGHER FINES ZONE (R2-10) sign (see Figure 7B-1) or a FINES HIGHER (R2-6P), FINES DOUBLE (R2-6aP), or $XX FINE (R2-6bP) plaque (see Figure 7B-1) shall be installed as a supplement to the School Zone (S1-1) sign to identify the beginning point of the higher fines zone (see Figures 7B-4 and 7B-5); and**~~

~~**B. An END HIGHER FINES ZONE (R2-11) sign (see Figure 7B-1) or an END SCHOOL ZONE (S5-2) sign (see Figure 7B-1) shall be installed at the downstream end of the zone to notify road users of the termination of the increased fines zone (see Figure 7B-5).**~~

03 ~~**If exceeding the speed limit is the only traffic violation that is subject to higher fines, a FINES HIGHER (R2-6P), FINES DOUBLE (R2-6aP), or $XX FINE (R2-6bP) plaque shall be posted with the School Speed Limit (S5-1) sign and shall not be posted beneath the School Zone (S1-1) sign (see Section 7B.05).**~~

04 ~~**If the portion of the roadway that is subject to higher fines does not begin at the location of the School Zone (S1-1) sign, a BEGIN HIGHER FINES ZONE (R2-10) sign shall be placed at the point where the higher fines begin (see Sheet 2 of Figure 7B-5).**~~

~~Option:~~

05 ~~If a BEGIN HIGHER FINES ZONE (R2-10) sign is used downstream of the School Zone (S1-1) sign, a FINES HIGHER (R2-6P), FINES DOUBLE (R2-6aP), or $XX FINE (R2-6bP) plaque may also be placed beneath the School Zone (S1-1) sign.~~

06 ~~Where appropriate, one of the following plaques may be mounted below the sign that identifies the beginning point of the higher fines zone:~~

~~A. A S4-1P plaque (see Figure 7B-1) specifying the times that the higher fines are in effect,~~

~~B. A WHEN CHILDREN ARE PRESENT (S4-2P) plaque (see Figure 7B-1), or~~

~~C. A WHEN FLASHING (S4-4P) plaque (see Figure 7B-1) if used in conjunction with a yellow flashing beacon.~~

~~*Guidance:*~~

07 ~~*If other traffic violations in addition to exceeding the speed limit are subject to higher fines, then the duplicate FINES HIGHER (R2-6P), FINES DOUBLE (R2-6aP), or $XX FINE (R2-6bP) plaque should be omitted from the School Speed Limit When Flashing (S5-1) sign (see Section 7B.05).*~~

~~Option:~~

08 ~~If a higher fines zone ends at the same point as a reduced school speed limit zone, an END SCHOOL ZONE (S5-2) sign may be used instead of a combination of an END HIGHER FINES ZONE (R2-11) sign and an END SCHOOL SPEED LIMIT (S5-3) sign (see Figure 7B-5).~~

09 ~~Where the higher fines zone is established by statute, the BEGIN HIGHER FINES ZONE (R2-10) sign, FINES HIGHER (R2-6P), FINES DOUBLE (R2-6aP), and $XX FINE (R2-6bP) plaques may be omitted.~~

## Section 7B.07 Parking and Stopping (R7 and R8 Series) Signs

Option:

01 Parking and stopping regulatory signs may be used to prevent parked or waiting vehicles from blocking pedestrians'

views, and drivers' views of pedestrians, and to control vehicles as a part of the school traffic plan.

Support:

02 Parking signs and other signs governing the stopping and standing of vehicles in school areas cover a wide variety of regulations. Typical examples of regulations are as follows:

A. NO PARKING X:XX AM to X:XX PM SCHOOL DAYS ONLY
B. NO STOPPING X:XX AM to X:XX PM SCHOOL DAYS ONLY,
C. XX MIN LOADING X:XX AM to X:XX PM SCHOOL DAYS ONLY, and
D. NO STANDING X:XX AM to X:XX PM SCHOOL DAYS ONLY.

03 Sections 2B.53 through 2B.55 contain information regarding the signing of parking regulations in school zone areas.


# Figure 7B-1. Signs in School Areas and at School Crossings (Sheet 1 of 2)

**A – School area signs**


School Advance Crossing Assembly D(CA)





School Crossing Assembly B(CA)

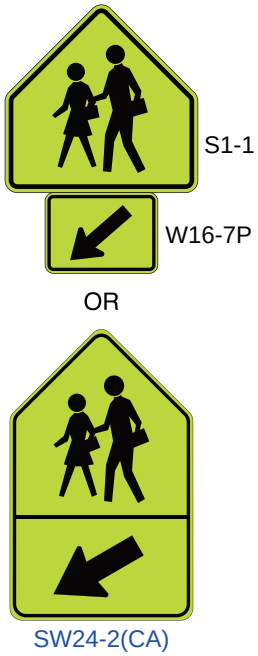



School Zone Sign Assembly A(CA)

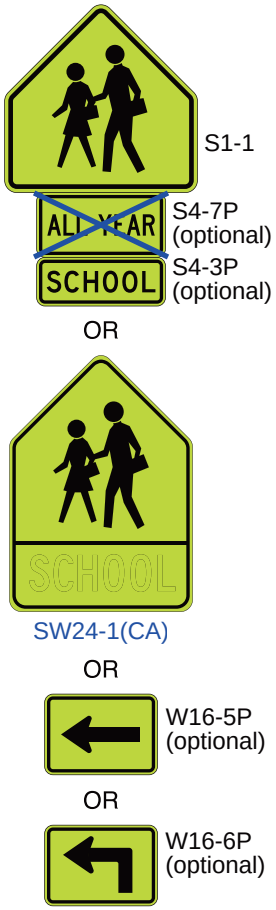


School Speed Limit Assembly C(CA)

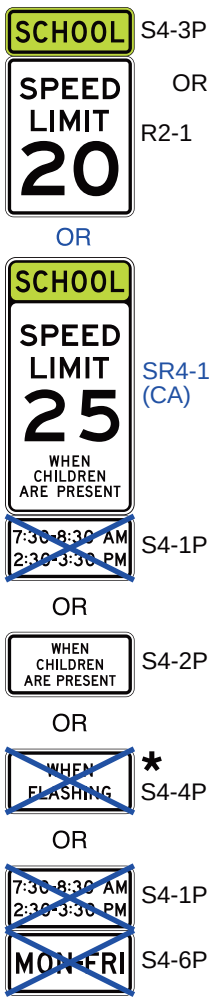


~~School Speed Limit When Flashing Sign~~

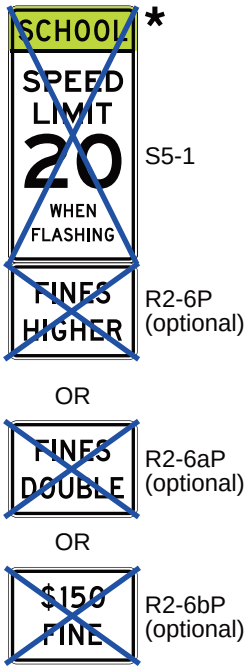


~~* If used, the assembly or sign with WHEN FLASHING legend shall be accompanied by a flashing yellow Speed Limit Sign Beacon (see Section 4S.04).~~


S3-1




S3-2



S4-5



S4-5a



S5-2



S5-3



R2-10



R2-11

# Figure 7B-1. Signs in School Areas and at School Crossings (Sheet 2 of 2)

## B – Signs in advance of the school crossing




R1-5a




R1-5c

**In-Street Use**

S1-1*




W16-9P*

## C – In-street signs at the school crossing




S4-3P*

R1-6

OR




S4-3P*


R1-6a

OR




R1-6b

OR




R1-6c

OR

S1-1*




W16-7P*

## D – Overhead signs at the school crossing Assembly E(CA)




R1-9b (shown reduced 50% proportional to other signs on page)




R1-9c (shown reduced 50% proportional to other signs on page)


Notes:

1. The use of the STATE LAW legend is optional on the R1-6 series and R1-9 series signs (see Section 7B.03).
2. The use of the SCHOOL plaque above the R1-6 and R1-6a signs is optional.
3. Signs are shown in proportion to their designated sizes unless otherwise noted.

*Reduced size signs for in-street use (see Section 7B.03):

| | |
|---|---|
| S1-1 | 12 x 12 inches |
| S4-3P | 12 x 4 inches |
| W16-7P | 12 x 6 inches |
| W16-9P | 12 x 6 inches |

## *Figure 7B-1(CA). Signs in School Areas and at School Crossings*

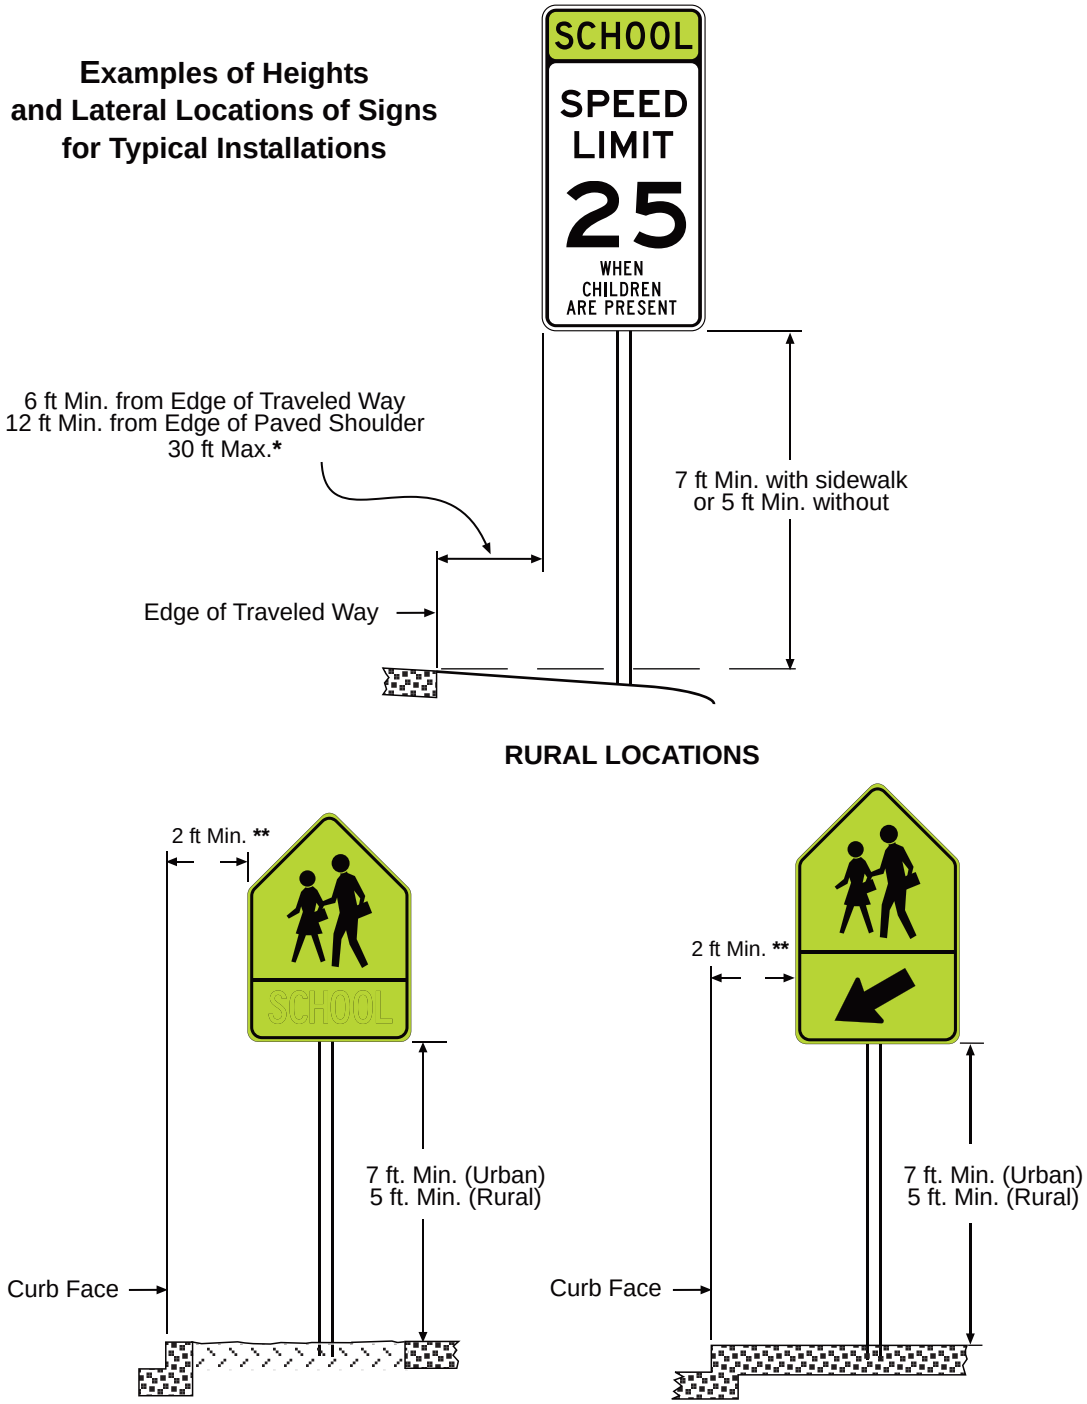



Notes:

(*) When clear roadside recovery areas are provided, signs shall be placed as far from the edge of traveled way as possible, up to a maximum of 30 ft. When possible they shall be placed in locations less likely to be hit by a vehicle leaving the traveled way. Signs should not be closer than 6 ft from the edge of a paved shoulder, or if none, 12 ft from the edge of the traveled way.

(**) In urban areas, where sidewalk width is limited or existing poles are close to the curb, a clearance of 1 ft from the curb face is permissible.


A 4-foot minimum unobstructed pedestrian access route should be maintained.

# Figure 7B-2. Example of Signing for a School Zone with a School Speed Limit and a School Crossing

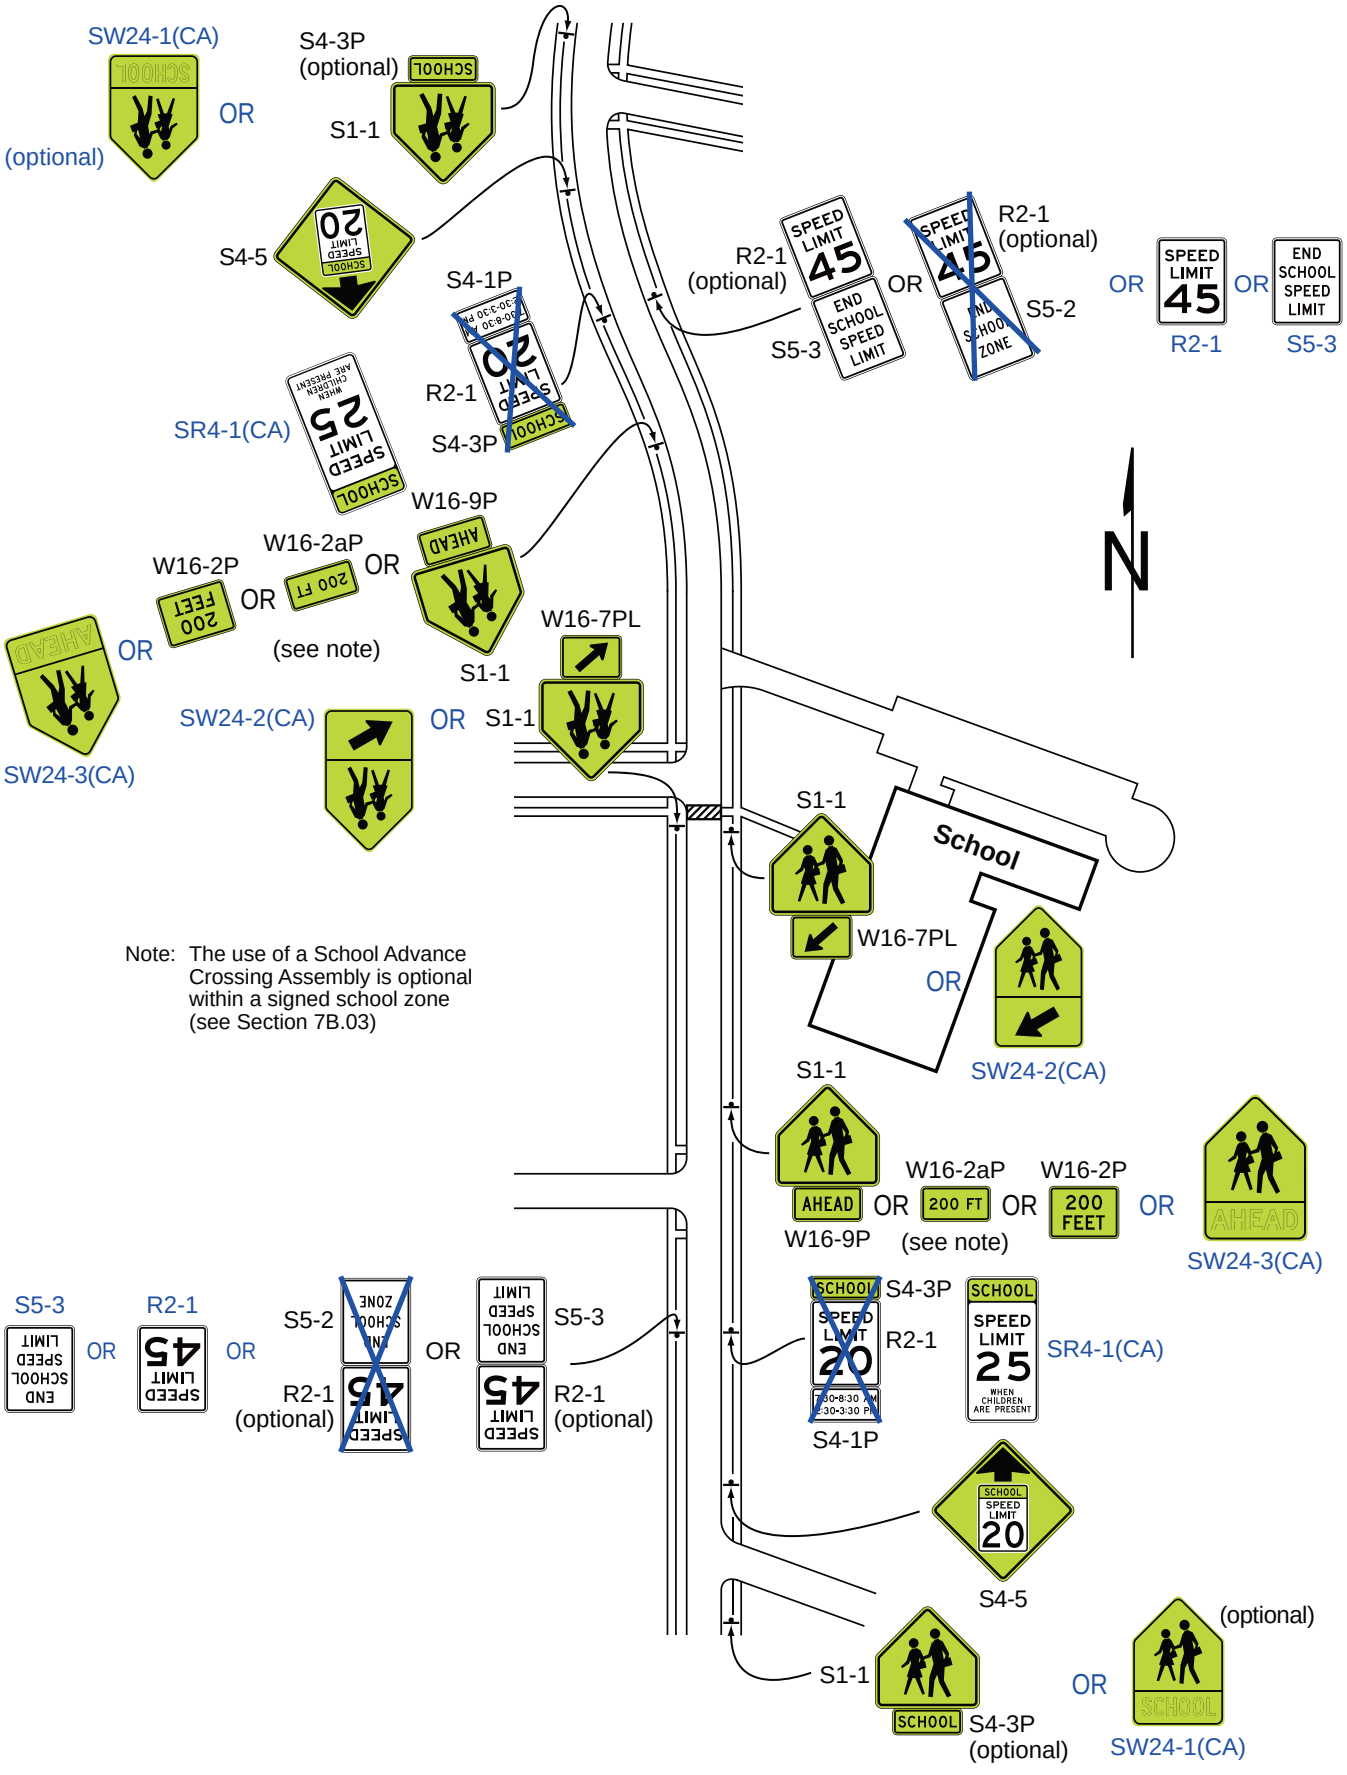


Note: The use of a School Advance Crossing Assembly is optional within a signed school zone (see Section 7B.03)


## *Figure 7B-2(CA). Example of Signing for a School Zone with a School Speed Limit and a School Crossing*

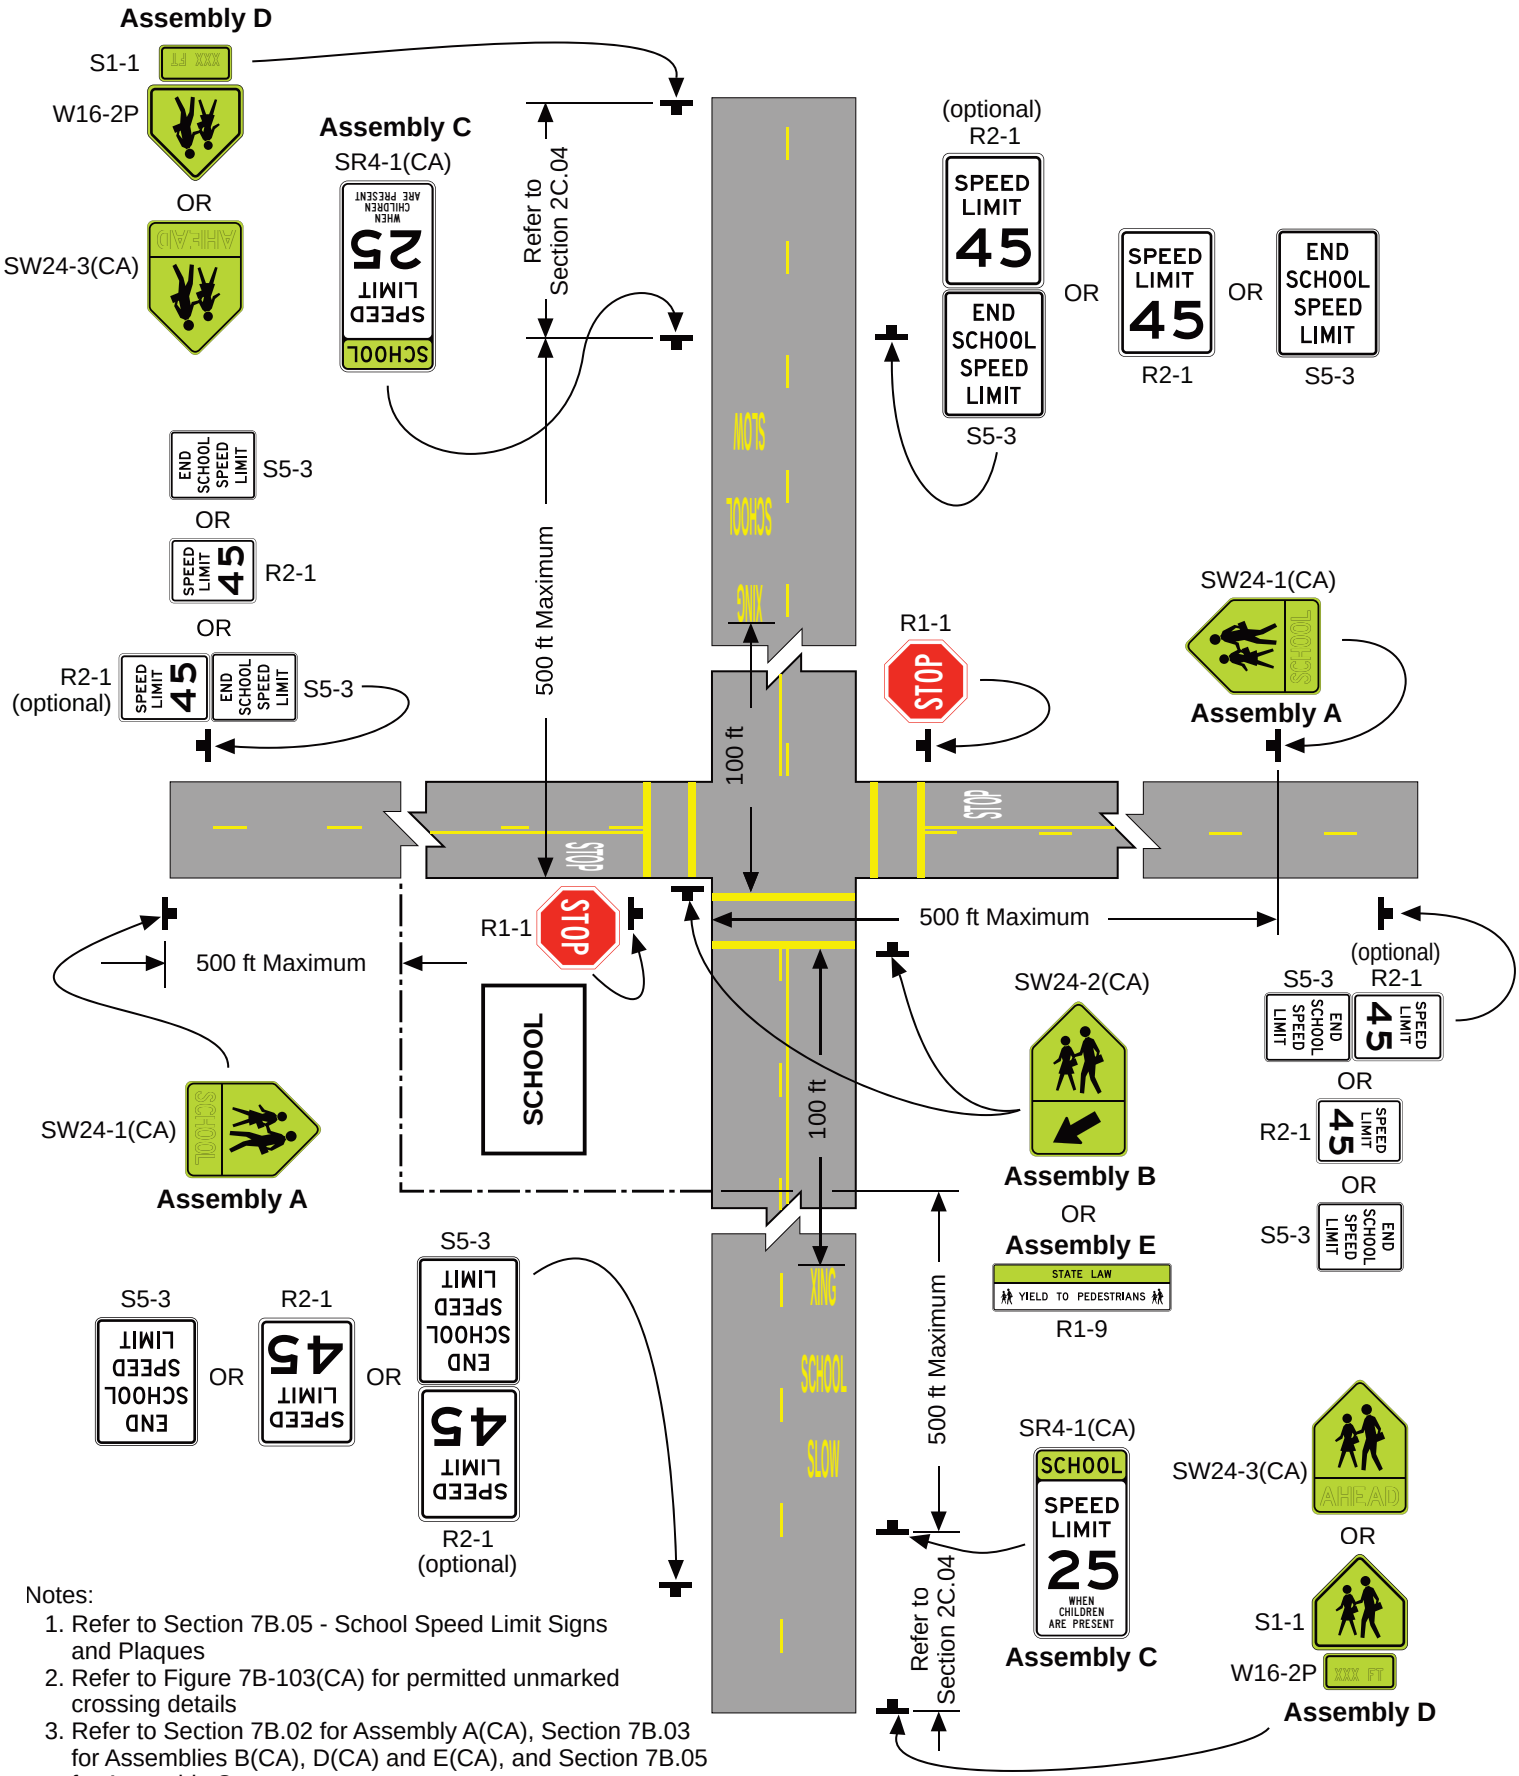



Notes:

1. Refer to Section 7B.05 - School Speed Limit Signs and Plaques
2. Refer to Figure 7B-103(CA) for permitted unmarked crossing details
3. Refer to Section 7B.02 for Assembly A(CA), Section 7B.03 for Assemblies B(CA), D(CA) and E(CA), and Section 7B.05 for Assembly C.

## Figure 7B-3. Example of Signing for a School Crossing Outside of a School Zone

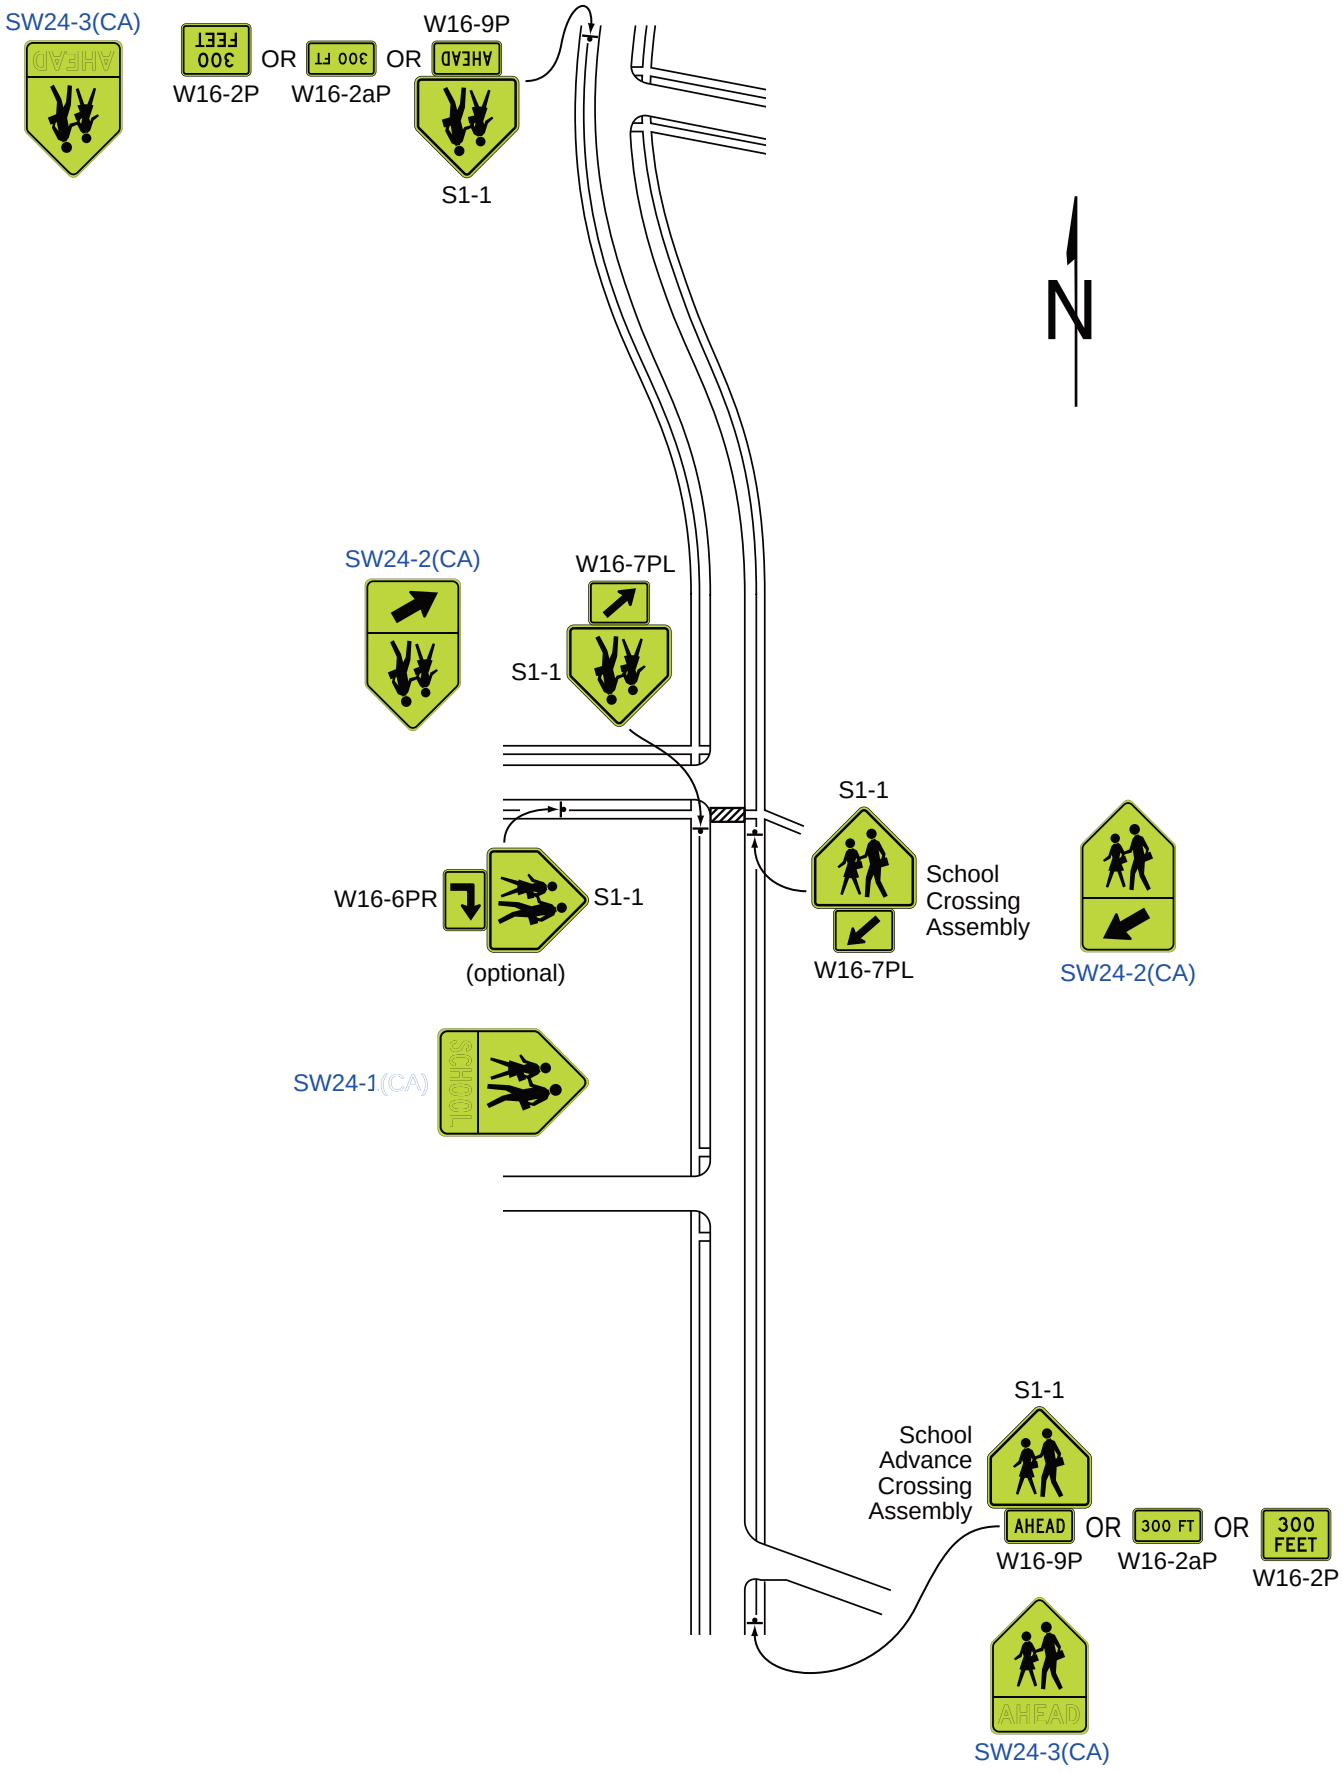


## Figure 7B-4. Example of Signing for a School Zone with a School Speed Limit and Higher Fines Only for Speeding

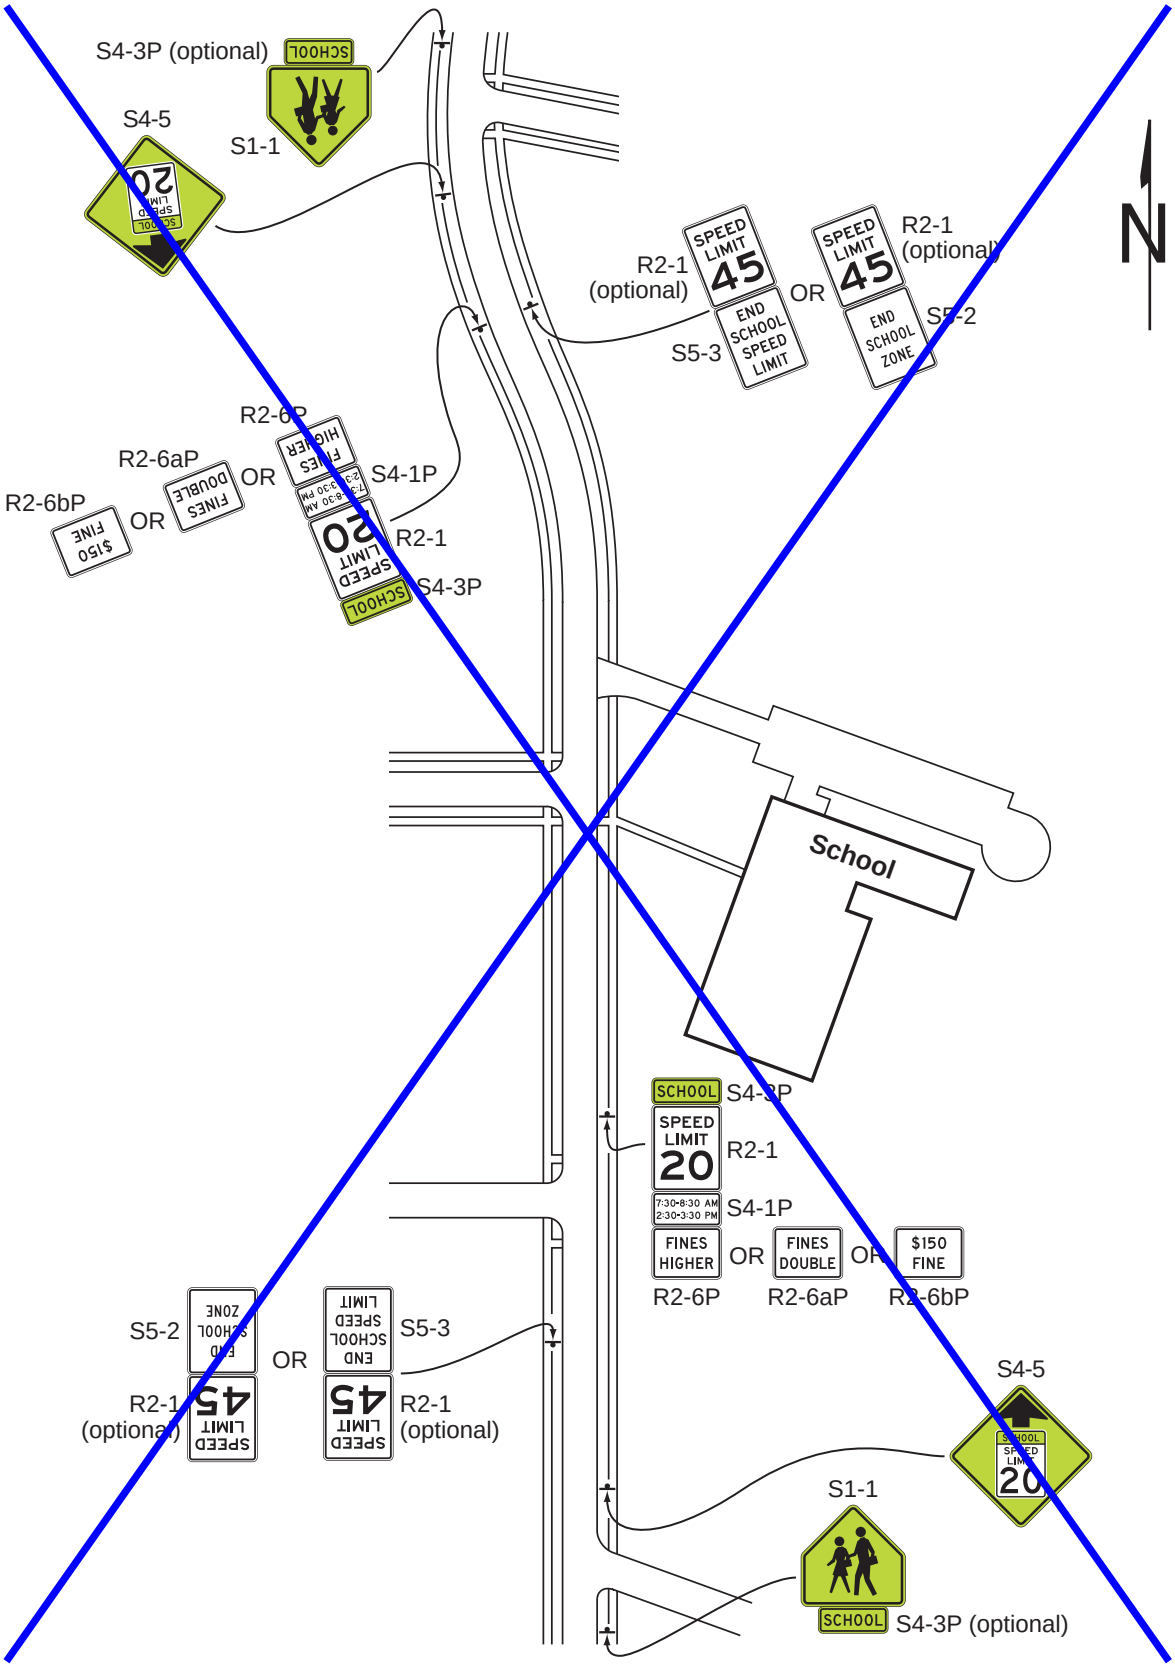


## Figure 7B-5. Example of Signing for a School Zone with Higher Fines for All Traffic Violations (Sheet 1 of 2)

**A – Higher fines zone begins at the beginning of the school zone**

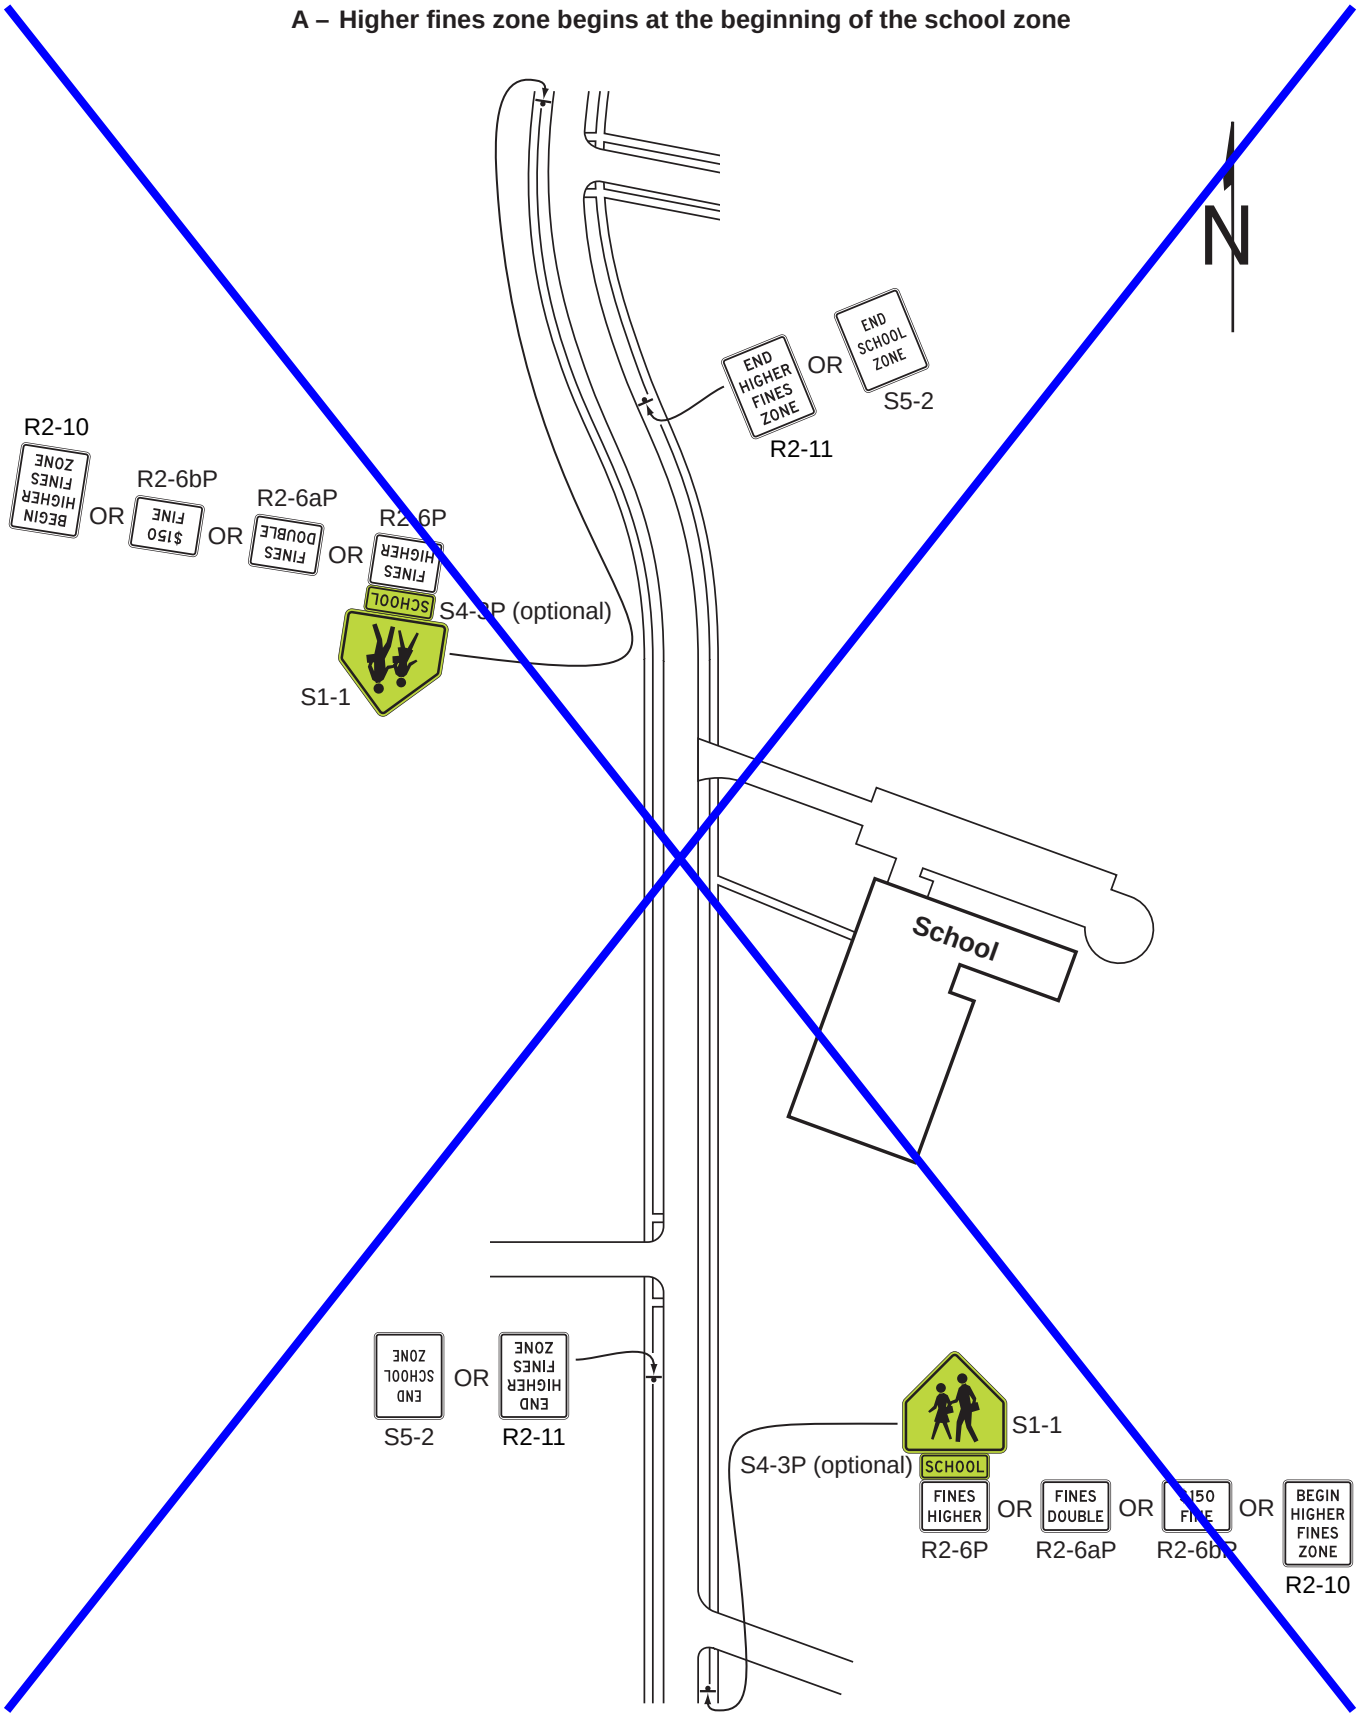


## Figure 7B-5. Example of Signing for a School Zone with Higher Fines for All Traffic Violations (Sheet 2 of 2)

**B – Higher fines zone begins after the beginning of the school zone**

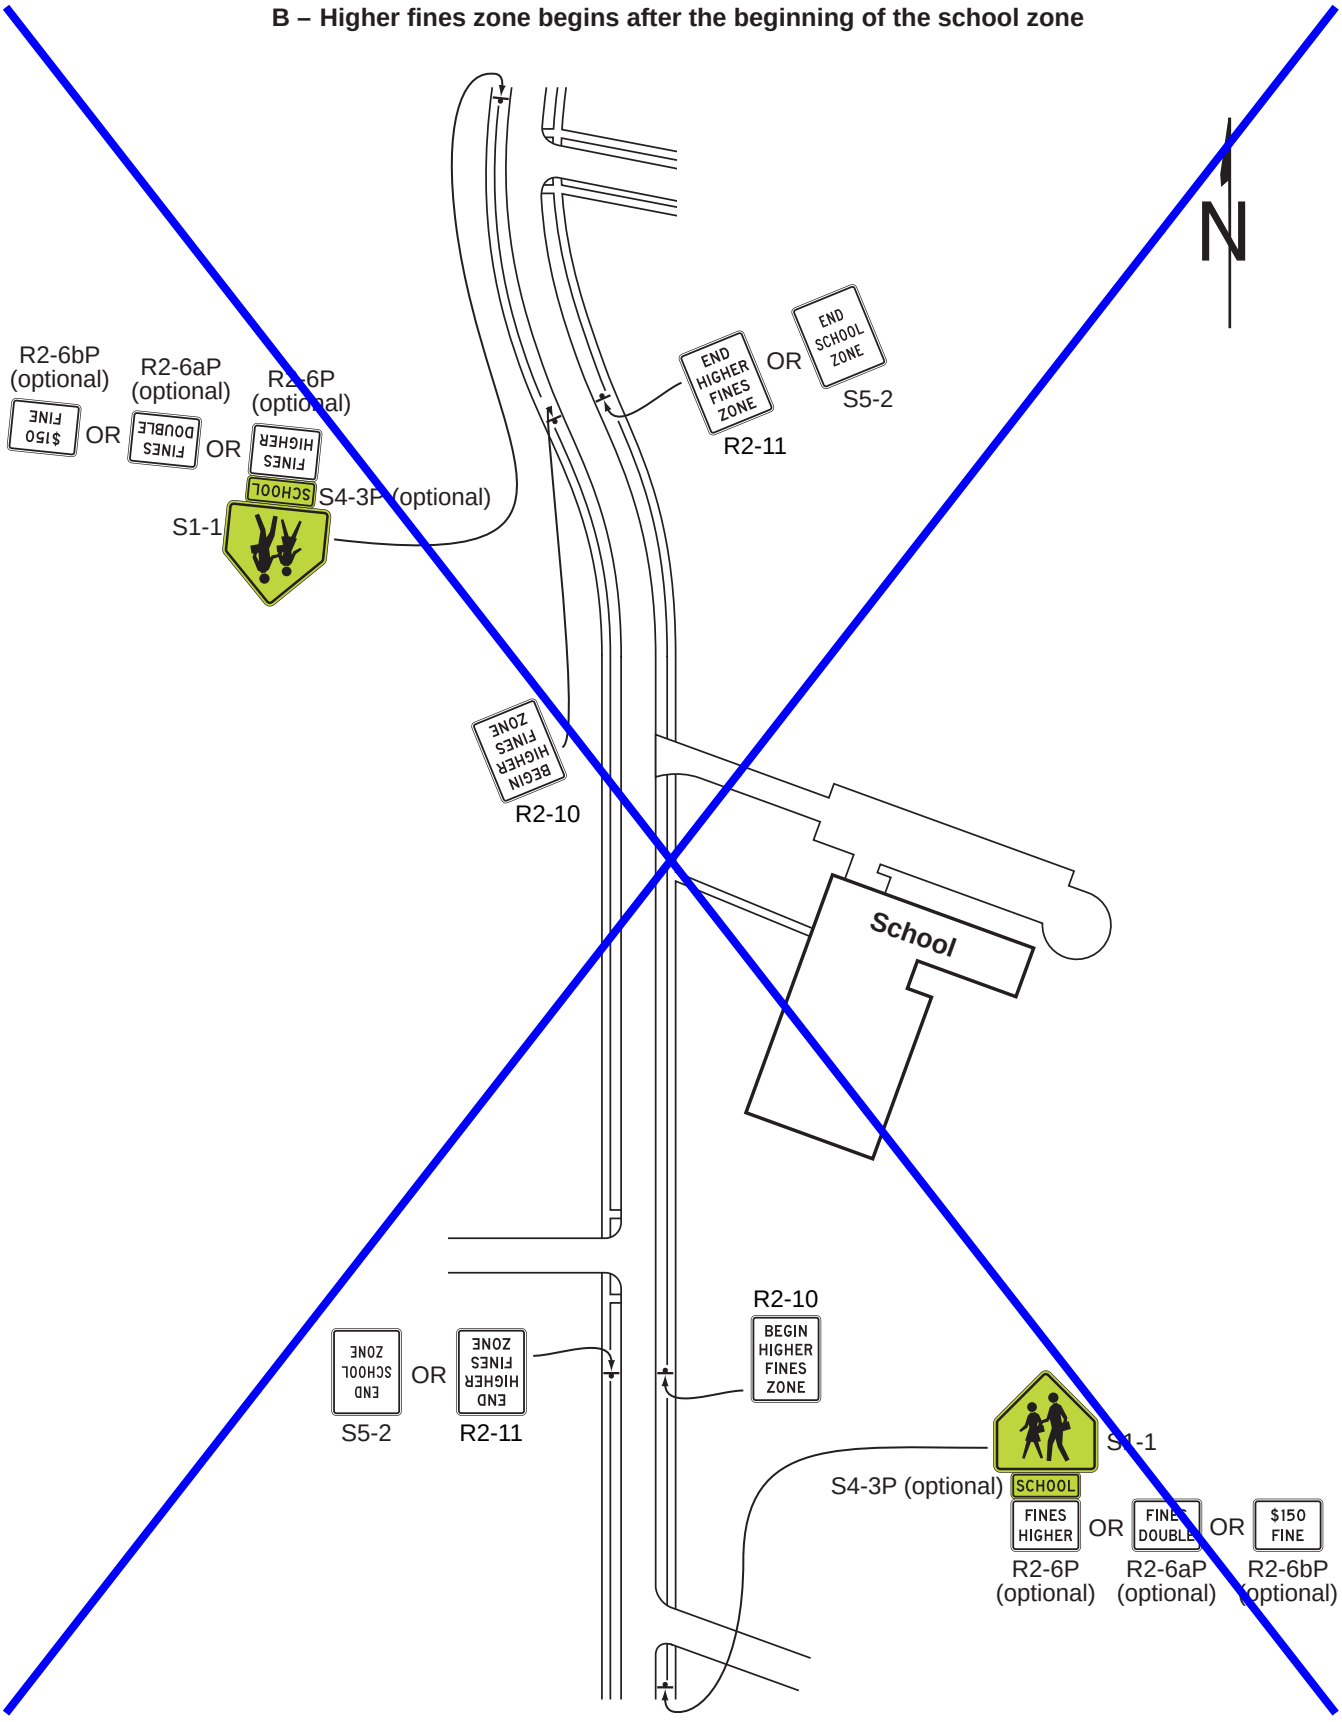


## *Figure 7B-101(CA). Example of School Area Signs with Flashing Yellow Beacons*

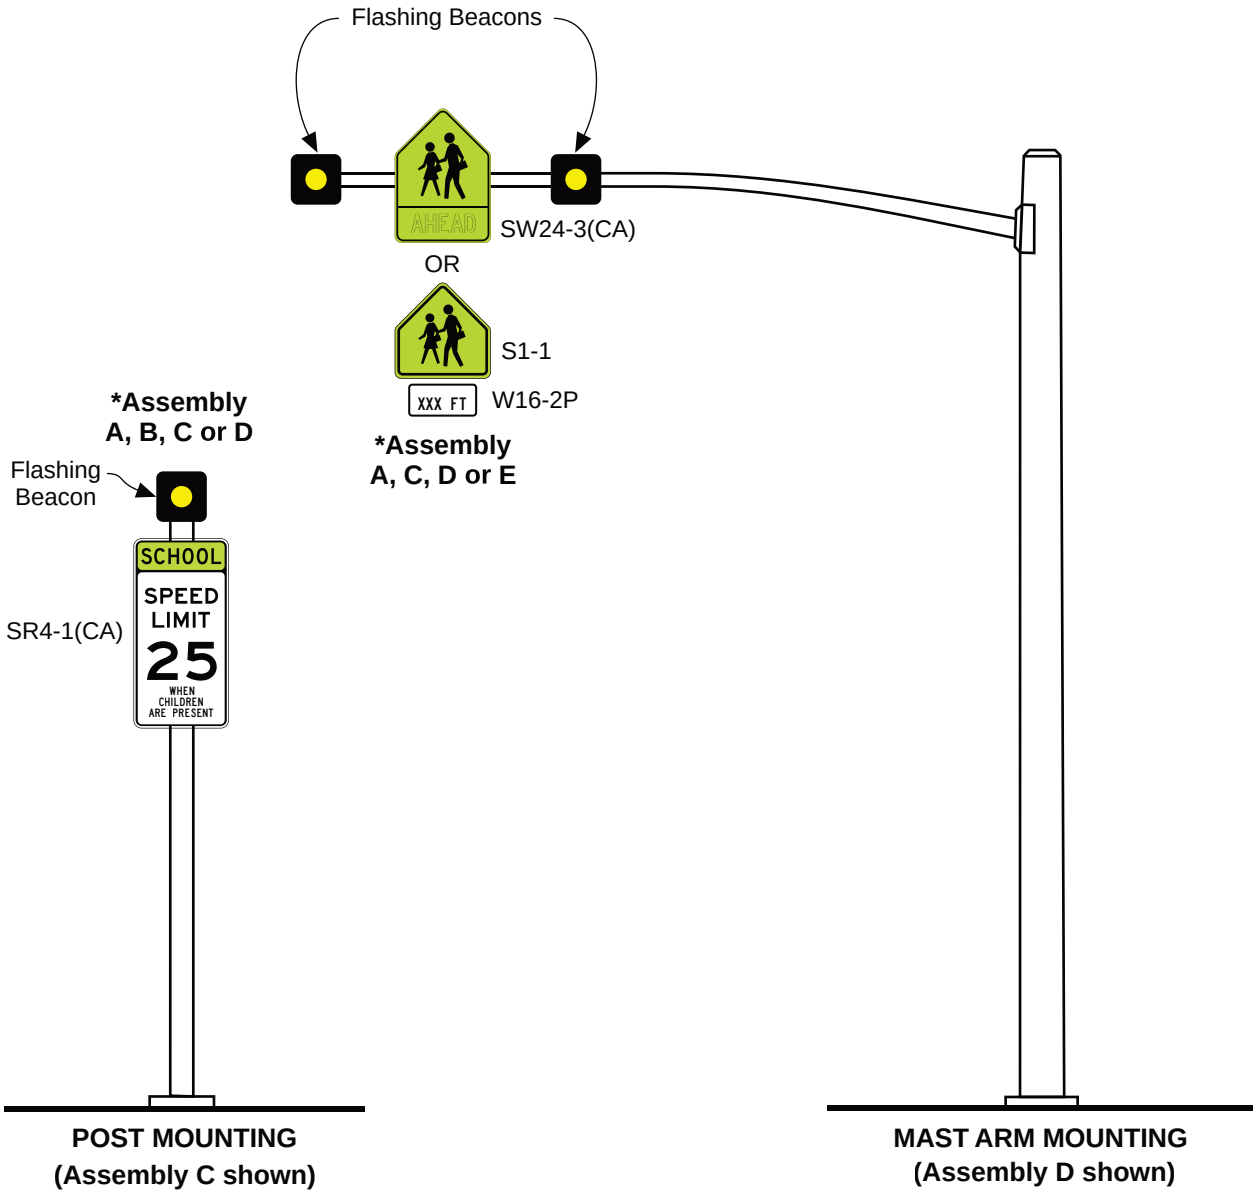



* Refer to Figure 7B-1 (Sheet 1 of 2) for Assembly options.

## *Figure 7B-102(CA). Example of Signing for Traffic Control in School Areas with Flashing Yellow Beacons*

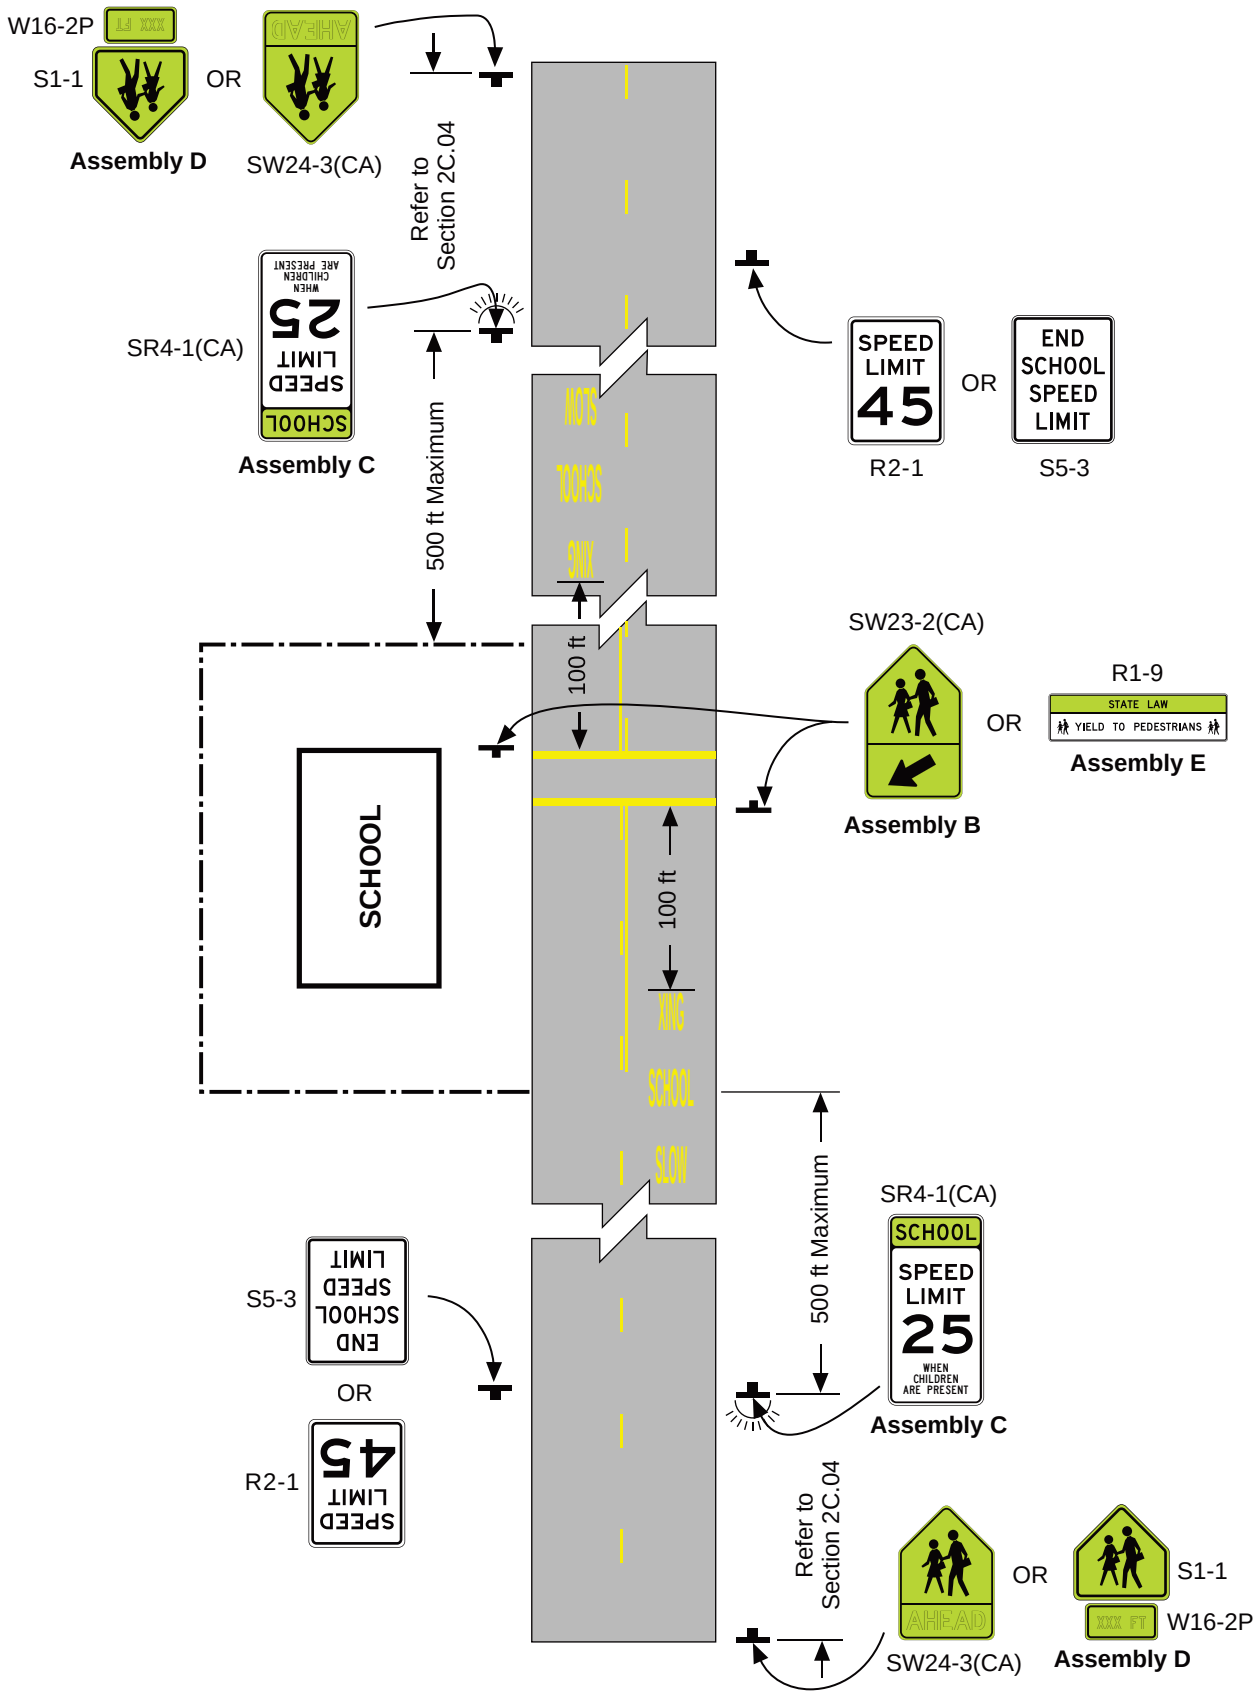


## *Figure 7B-103(CA). Example of Signing for School Area Traffic Control with Extended and/or Reduced School Zone Speed Limits*

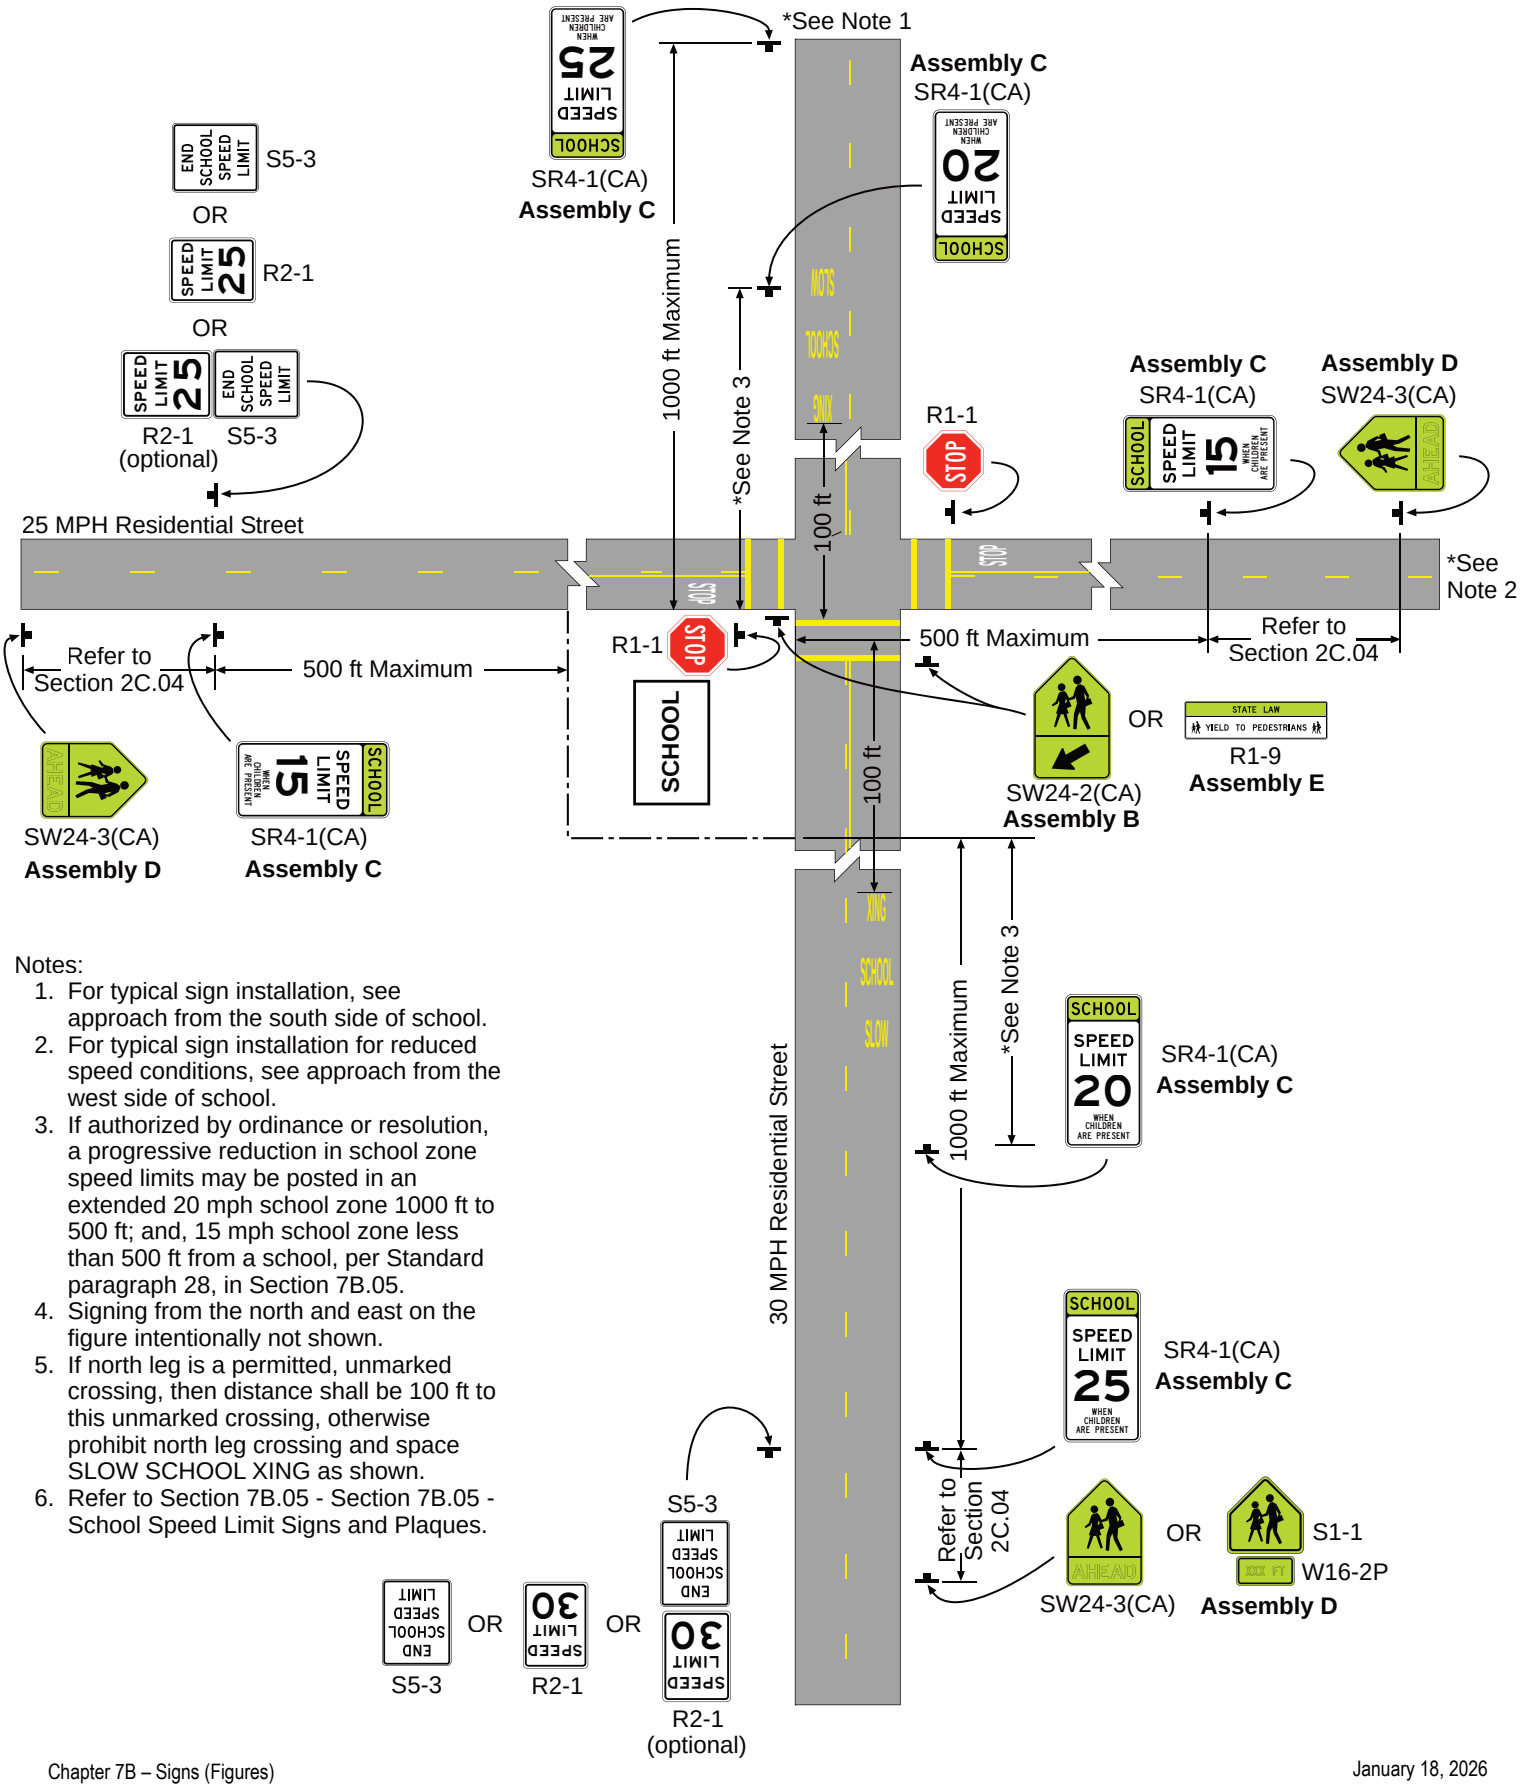


Notes:

1. For typical sign installation, see approach from the south side of school.
2. For typical sign installation for reduced speed conditions, see approach from the west side of school.
3. If authorized by ordinance or resolution, a progressive reduction in school zone speed limits may be posted in an extended 20 mph school zone 1000 ft to 500 ft; and, 15 mph school zone less than 500 ft from a school, per Standard paragraph 28, in Section 7B.05.
4. Signing from the north and east on the figure intentionally not shown.
5. If north leg is a permitted, unmarked crossing, then distance shall be 100 ft to this unmarked crossing, otherwise prohibit north leg crossing and space SLOW SCHOOL XING as shown.
6. Refer to Section 7B.05 - Section 7B.05 - School Speed Limit Signs and Plaques.

## *Figure 7B-104(CA). Example of Signing for School Crosswalk Warning Assembly*

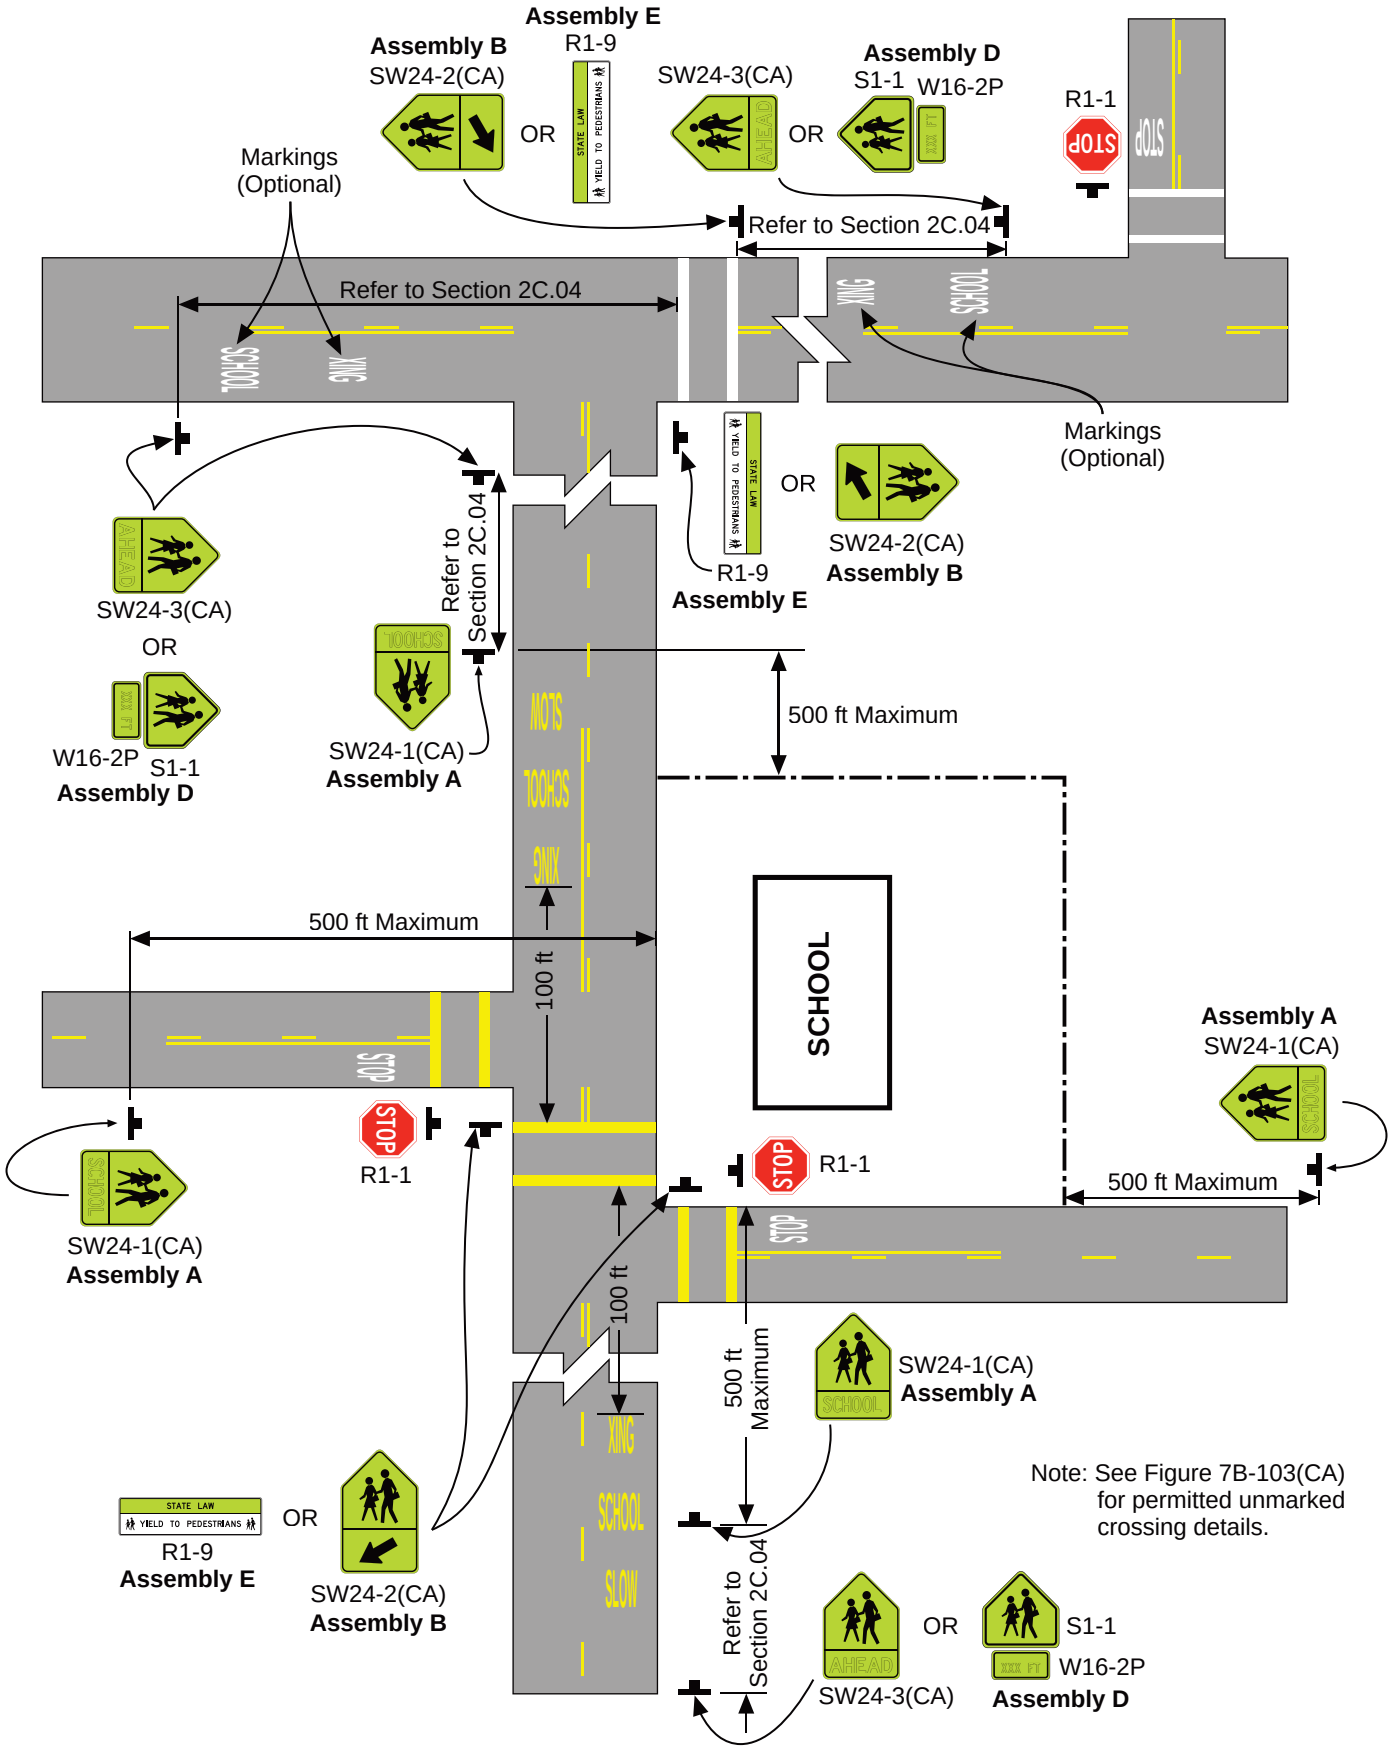

# Table 7B-1. School Area Sign and Plaque Sizes

| Sign | Sign Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| School | S1-1 | 7B.02 | 36 x 36 | 30 x 30 | 48 x 48 |
| School Bus Stop Ahead | S3-1 | 7B.04 | 36 x 36 | 30 x 30 | 48 x 48 |
| School Bus Turn Ahead | S3-2 | 7B.04 | 36 x 36 | 30 x 30 | 48 x 48 |
| Reduced School Speed Limit Ahead | S4-5, S4-5a | 7B.05 | 36 x 36 | 30 x 30 | 48 x 48 |
| ~~School Speed Limit XX When Flashing~~ | ~~S5-1~~ | ~~7B.05~~ | ~~24 x 48~~ | ~~—~~ | ~~36 x 72~~ |
| ~~End School Zone~~ | ~~S5-2~~ | ~~7B.02~~ | ~~24 x 30~~ | ~~—~~ | ~~36 x 48~~ |
| End School Speed Limit | S5-3 | 7B.05 | 24 x 30 | — 24 x 30 | 36 x 48 |
| Yield ~~(Stop)~~ Here for School Crossing | R1-5a, ~~R1-5c~~ | 7B.03 | 36 x 36 | — | — |
| In-Street Ped or School Crossing | R1-6, ~~R1-6a,~~ R1-6b, ~~R1-6c~~ | 7B.03 | 12 x 36 | — N/A | — N/A |
| Overhead School Crossing | R1-9b, ~~R1-9c~~ | 7B.03 | 90 x 24 | — | — |
| Speed Limit (School Use) | R2-1 | 7B.05 | 24 x 30 | — 24 x 30 | 36 x 48 |
| ~~Begin Higher Fines Zone~~ | ~~R2-10~~ | ~~7B.06~~ | ~~24 x 30~~ | ~~—~~ | ~~36 x 48~~ |
| ~~End Higher Fines Zone~~ | ~~R2-11~~ | ~~7B.06~~ | ~~24 x 30~~ | ~~—~~ | ~~36 x 48~~ |

| Plaque | Sign Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| ~~Time of Day X:XX to X:XX AM X:XX to X:XX PM~~ | ~~S4-1P~~ | ~~7B.06~~ | ~~24 x 12~~ | | ~~36 x 18~~ |
| When Children Are Present | S4-2P | 7B.06 | 24 x 12 | — 24 x 10 | 36 x 18 |
| School | S4-3P | 7B.02, 7B.05 | 24 x 9 | — 24 x 8 | 36 x 12 |
| ~~When Flashing~~ | ~~S4-4P~~ | ~~7B.05, 7B.06~~ | ~~24 x 12~~ | ~~—~~ | ~~36 x 18~~ |
| ~~Days of Week Mon-Fri~~ | ~~S4-6P~~ | ~~7B.05~~ | ~~24 x 12~~ | ~~—~~ | ~~36 x 18~~ |
| ~~All Year~~ | ~~S4-7P~~ | ~~7B.02~~ | ~~24 x 12~~ | ~~—~~ | ~~30 x 18~~ |
| ~~Fines Higher~~ | ~~R2-6P~~ | ~~7B.06~~ | ~~24 x 18~~ | ~~—~~ | ~~36 x 24~~ |
| ~~Fines Double~~ | ~~R2-6aP~~ | ~~7B.06~~ | ~~24 x 18~~ | ~~—~~ | ~~36 x 24~~ |
| ~~$XX Fine~~ | ~~R2-6bP~~ | ~~7B.06~~ | ~~24 x 18~~ | ~~—~~ | ~~36 x 24~~ |
| XX Feet (2-line) | W16-2P | 7B.02, 7B.03 | 24 x 18 | — 24 x 18 | 30 x 24 |
| XX Ft (1-line) | W16-2aP | 7B.02, 7B.03 | 24 x 12 | — 24 x 12 | 30 x 18 |
| Directional Arrow | W16-5P | 7B.02, 7B.03 | ~~21 x 15~~ 24 x 18 | — 24 x 18 | 30 x 21 |
| Advance Turn Arrow | W16-6P | 7B.02, 7B.03 | ~~21 x 15~~ 24 x 18 | — 24 x 18 | 30 x 21 |
| Downward Diagonal Arrow | W16-7P | 7B.02, 7B.03 | 21 x 15 | — 24 x 12 | 30 x 21 |
| Ahead | W16-9P | 7B.02, 7B.03 | 24 x 12 | — 24 x 12 | 30 x 18 |

Notes: 1. Larger sizes may be used when appropriate
2. Dimensions are shown in inches and are shown as width x height
3. Minimum sign sizes for multi-lane conventional roads shall be as shown in the Conventional Road column
4. Larger plaque sizes can optionally be specified to match sign widths in school sign assemblies.

## Table 7B-1(CA). California School Area Sign Assembly Sizes

| Assembly | Sign Designation | Section | Conventional Road | Minimum | Oversized |
|---|---|---|---|---|---|
| School Warning Assembly A(CA) | SW24-1(CA) | 7B.02 | 36 x 48 | 30 x 42 | 48 x 60 |
| School Crosswalk Warning Assembly B(CA) | SW24-2(CA) | 7B.03 | 36 x 54 | 30 x 48 | 48 x 66 |
| School Speed Limit Assembly C(CA) | SR4-1(CA) | 7B.05 | 36 x 72 | 24 x 48 | 48 x 96 |
| School Advance Warning Assembly D(CA) | SW24-3(CA) | 7B.03 | 36 x 36 | 30 x 30 | 48 x 48 |
| School Crosswalk Warning Assembly E(CA) | R1-9 | 2B.20, 7B.03 | 90 x 24 | 90 x 24 | 90 x 24 |

# CHAPTER 7C. MARKINGS

## Section 7C.01 Crosswalk Markings

**Standard:**

00a **When transverse crosswalk lines are used, they shall be solid white or yellow, marking both edges of the crosswalk, except as noted in the Option. Refer to CVC § 21368. They shall be not less than 12 inches nor greater than 24 inches in width.**

*Guidance:*

00b *If transverse crosswalk lines are used to mark a crosswalk, the gap between the lines should not be less than 6 feet. If diagonal or longitudinal lines are used without transverse lines to mark a crosswalk, the crosswalk width should not be less than 6 feet.*

00c *Crosswalk lines on both sides of the crosswalk should extend across the full width of pavement or to the edge of the intersecting crosswalk to discourage diagonal walking between crosswalks.*

01 *Crosswalks should be marked at all intersections on established routes to a school where there is substantial conflict between motorists, bicyclists, and student movements; where students are encouraged to cross between intersections; where students would not otherwise recognize the proper place to cross; or where motorists or bicyclists might not expect students to cross (see Figure 7A-1).*

02 *An engineering study considering the factors described in Section 3C.02 should be performed before a marked crosswalk is installed at a location away from a traffic control signal or an approach controlled by a STOP or YIELD sign.*

03 *Because non-intersection school crossings are generally unexpected by the road user, warning signs (see Section 7B.03) should be installed for all marked school crosswalks at non-intersection locations. Adequate visibility of students by approaching motorists and of approaching motorists by students should be provided by parking prohibitions or other appropriate measures.*

Support:

04 Section 3C.03 contains provisions regarding the placement and design of crosswalks, and Section 3B.19 contains provisions regarding the placement and design of the stop lines and yield lines that are associated with them. Provisions regarding the curb markings that can be used to establish parking regulations on the approaches to crosswalks are contained in Section 3B.18.

Support:

05 Examples of school area signing, markings, flashing beacons and overhead school signs are shown in Figures 7B-2(CA) and Figures 7B-101(CA) through 7B-104(CA).

06 Refer to CVC § 21368 for crosswalks near schools.

**Standard:**

07 **Whenever a marked pedestrian crosswalk has been established in a roadway contiguous to a school building or school grounds, it shall be yellow. If any one of the crosswalks is required to be yellow at an intersection, then all other marked pedestrian crosswalks at that intersection shall also be yellow. Refer to CVC 21368.**

Option:

08 A marked pedestrian crosswalk may be yellow if the nearest point of the crosswalk is not more than 600 feet from a school building or school grounds. Refer to CVC § 21368.

09 A marked pedestrian crosswalk may be yellow if the nearest point of the crosswalk is not more than 2800 feet from a school building or school grounds and there are no intervening crosswalks other than those contiguous to the school grounds, and it appears that the facts and circumstances require special marking for the protection and safety of persons attending the school. Refer to CVC § 21368.

*Guidance:*

10 *Diagonal or longitudinal markings should be used when a crosswalk is marked at an uncontrolled crossing location. The diagonal or longitudinal lines should be 12 to 24 inches wide and spaced 12 to 60 inches apart. The spacing design should avoid the wheel paths.*

Option:

11 For added visibility, the area of a crosswalk may be marked with white or yellow diagonal lines at a 45-degree angle to the line of the crosswalk or with white or yellow longitudinal lines parallel to traffic flow. Refer to CVC § 21368. When diagonal or longitudinal lines are used to mark a crosswalk, the transverse crosswalk lines may be omitted.

## Section 7C.02 Pavement Word, Symbol, and Arrow Markings

~~Option:~~

01 ~~If used, the SCHOOL word marking may extend to the width of two approach lanes (see Figure 7C-1).~~

~~*Guidance:*~~

02 ~~*If the two-lane SCHOOL word marking is used, the letters should be 10 feet or more in height.*~~

Support:

03 Section 3B.20 contains provisions regarding other word, symbol, and arrow pavement markings that can be used to guide, warn, or regulate traffic.

**Standard:**

04 **If used, the SCHOOL pavement marking shown in Figure 7C-101(CA) shall be used and it shall be restricted to a single lane.**

*Guidance:*

05 *On State highways, all letters, numerals, and symbols should be in accordance with Caltrans' Standard Plans publication. See Section 1A.05 for more information regarding this publication.*

**Standard:**

06 **The SLOW SCHOOL XING marking shall be used in accordance with the provisions of CVC § 21368 in advance of all yellow school crosswalks (see Figure 7C-101(CA)). They shall not be used where the crossing is controlled by stop signs, traffic signals, or yield signs. They shall be yellow, with the word XING at least 100 feet in advance of the school crosswalk.**

Option:

07 The SCHOOL XING marking and crosswalks may be used at remote locations outside of the school zone.

Support:

08 Remote crosswalk locations are locations near schools, which are not included in CVC § 21368 criteria. Also refer to Section 7C.02.

**Standard:**

09 **If the SCHOOL XING marking and crosswalks are used at remote locations outside of the school zone, they shall not be yellow (Refer to CVC § 21368), but white.**

*Guidance:*

10 *The SCHOOL XING marking should be used in advance of all white school crosswalks.*

Option:

11 The SCHOOL marking may be used with the School Assemblies A(CA) or C(CA), except at locations where SLOW SCHOOL XING markings are required.

**Standard:**

12 **If the SCHOOL marking is used with the School Assemblies A(CA) or C(CA) (See Section 7B.02 and 7B.05), it shall be yellow.**


*Guidance:*

13 *If used, the SCHOOL marking should be located adjacent to the School Assemblies A(CA) or C(CA) (See Section 7B.02 and 7B.05).*


Support:

14 Refer to Section 3C.03 for more details on SCHOOL marking.

## Figure 7C-1. Two-Lane Pavement Marking of "SCHOOL"

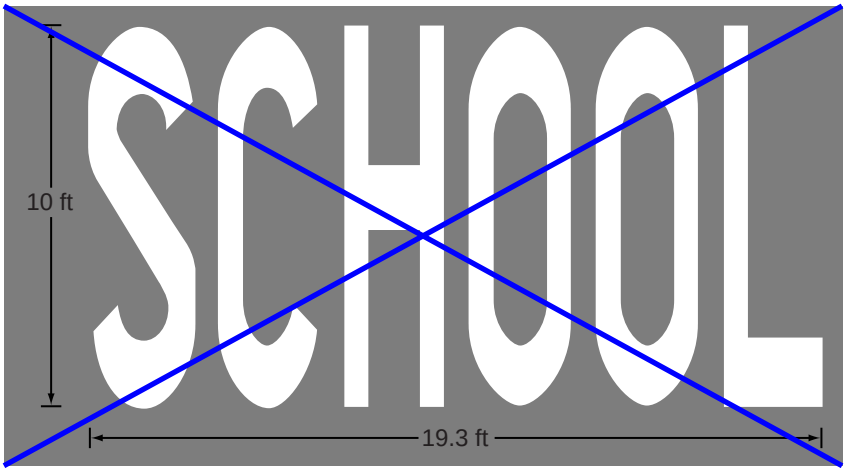

## *Figure 7C-101(CA). Pavement Word Markings for School Areas*

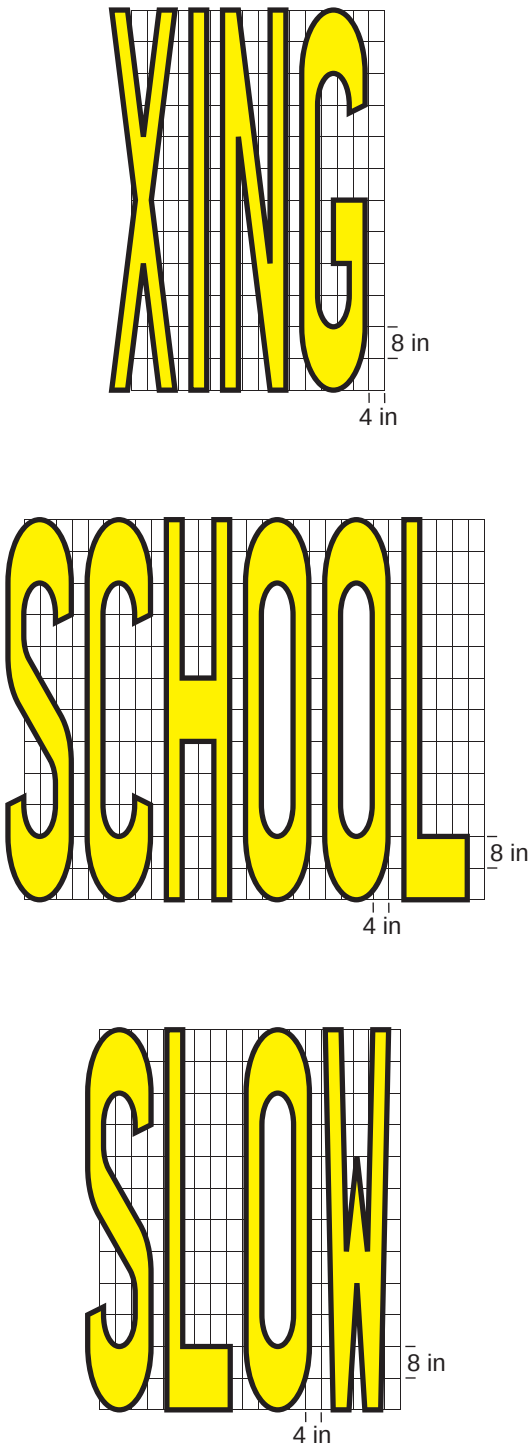


**NOT TO SCALE**

Note: See Section 7C.02 for SLOW SCHOOL XING marking.

# CHAPTER 7D. CROSSING SUPERVISION

## Section 7D.01 Adult Crossing Guards

Option:

01 Adult crossing guards may be used to provide gaps in traffic at school crossings where an engineering study has shown that adequate gaps need to be created, and where authorized by law.

Support:

02 Adult crossing guards can also add conspicuity at the crossing where children, who are typically smaller in stature, might not be as visible.

03 High standards for selection of adult crossing guards are essential because they are responsible for the safety of and the efficient crossing of the street by schoolchildren within and in the immediate vicinity of school crosswalks.

*Guidance:*

04 *Jurisdictions should have policies and procedures for the qualifications, selection, and training of adult crossing guards.*

Option:

05 Adult Crossing Guards may be temporarily or permanently assigned at designated school crossings to assist school pedestrians at specified hours when going to or from school. The following suggested policy for their assignment applies only to crossings.

*Guidance:*

06 *An Adult Crossing Guard should be considered when:*

*A. Special situations make it necessary to assist school pedestrians in crossing the street.*

*B. A change in the school crossing location is being made, but prevailing conditions require school crossing supervision until the change is constructed and it is not reasonable to install another form of traffic control or technique for this period.*

### Criteria for Adult Crossing Guards

Support:

07 Adult Crossing Guards normally are assigned where official supervision of school pedestrians is desirable, while they cross a public highway, and at least 40 school pedestrians for each of any two hours (not necessarily consecutive) daily use the crossing, while going to, or from, school.

08 Adult crossing guards can be considered under the following conditions:

1. At uncontrolled crossings where there is no alternate controlled crossing within 600 feet; and
   a. In urban areas where the vehicular traffic volume exceeds 350 during each of any two hours (not necessarily consecutive) in which 40 or more school pedestrians cross daily while going to or from school; or
   b. In rural areas where the vehicular traffic volume exceeds 300 during each of any two hours (not necessarily consecutive) in which 30 or more school pedestrians cross daily while going to or from school.

   Whenever the critical (85th percentile) approach speed exceeds 40 mph, the guidelines for rural areas should be applied.
2. At stop sign-controlled crossing:
   Where the vehicular traffic volumes on undivided highways of four or more lanes exceeds 500 per hour during any period when the school pedestrians are going to or from school.
3. At traffic signal-controlled crossings:
   a. Where the number of vehicular turning movements through the school crosswalk exceeds 300 per hour while school pedestrians are going to or from school; or
   b. Where justified through analysis of the operations of the intersection.
4. At pedestrian hybrid beacon controlled crossings.

09 Consider discontinuing the use of Adult Crossing Guards at crossings when they no longer meet the conditions under which they were initially used.

### Legal Authority and Program Funding for Adult Crossing Guards

Option:

10 Cities and counties may designate local law enforcement agencies, the governing board of any school district or a county superintendent of schools to recruit and assign adult crossing guards to intersections that meet approved guidelines for adult supervision.

Support:

11 There are various methods for funding a school adult crossing guard program. One of these methods is through the use of fines and forfeitures received under the Penal Code. Disposition of these fines and forfeitures is defined in CVC §§ 42200 and 42201.

12 An example of these dispositions by cities and counties is as follows:

A. Disposition by cities (CVC § 42200). Fines and forfeitures received by cities and deposited into a "Traffic Safety Fund" may be used to pay the compensation of school crossing guards who are not regular full-time members of the police department of the city.

B. Disposition by county (CVC § 42201). Fines and forfeitures received by a county and deposited in the road fund of the county may be used to pay the compensation of school crossing guards, and necessary equipment and administrative costs. The board of supervisors may adopt standards for crossing guards and has final authority over the total cost of the crossing guard program.

**Training Programs for Adult Crossing Guards**

Support:

13 Caltrans and Active Transportation Resource Center (ATRC) provides local jurisdictions "California School Crossing Guard Training Program - Administration and Training Guidelines", to promote standardized training to newly employed Crossing Guards, as well as seasoned Crossing Guards, to help them understand their roles and responsibilities, learn about relevant laws and traffic regulations, practice proper crossing techniques, and foster safe school environments. More details on the training program and guideline are available at https://caatpresources.org/train_cot_crossguard.html.

*Guidance:*

14 *Adequate training should be provided in adult crossing guard responsibilities and authority. This function can usually be performed effectively by a law enforcement agency responsible for traffic control.*

15 *Training programs should be designed to acquaint newly employed or reassigned crossing guards with their specific duties, local traffic regulations, and crossing techniques. Training workshops may be used as a method of advising experienced employees of recent changes in existing traffic laws and program procedures. For example, crossing guards should be familiar with the California law which provides that any person who disregards any traffic signal or direction given by a non-student school crossing guard authorized by a law enforcement agency, any board of supervisors of a county or school district shall be guilty of an infraction and subject to the penalties of Section 42001 of the CVC (§ 2815).*

## Section 7D.02 Operating Procedures for Adult Crossing Guards

**Standard:**

01 **Law enforcement officers performing school crossing supervision and adult crossing guards and school safety patrol shall wear high-visibility retroreflective safety apparel labeled as ANSI 107-2020 standard performance for Class 2, Type R, as described in Section 6C.05.**

02 **Adult crossing guards shall not direct traffic in the usual law enforcement regulatory sense. In the control of traffic, they shall pick opportune times to create a sufficient gap in the traffic flow. At these times, they shall stand in the roadway to indicate that pedestrians are about to use or are using the crosswalk, and that all vehicular traffic must stop.**

03 **Adult crossing guards shall use a STOP paddle. The STOP paddle shall be the primary hand- signaling device.**

04 **The STOP paddle shall comply with the provisions for a STOP/SLOW paddle (see Section 6D.02) except both sides shall be a STOP face.**

05 **The paddle shall be retroreflective or illuminated when used during hours of darkness.**

Option:

06 The 24 x 24 inch size of the STOP (C28A(CA) paddle may be used where greater emphasis is needed and speeds are 30 mph or more.

Support:

07 See Section 6D.02 for details on STOP paddles and rigid staff.

## Section 7D.101(CA) School Safety Patrols

Support:

01 The California Education Code, Sections 49300 to 49307, and the California Code of Regulations, Sections 570 to 576 and 632, authorize the development of School Safety Patrols and outline rules for implementing these programs within the state.

# PART 8
## TRAFFIC CONTROL FOR RAILROAD AND LIGHT RAIL TRANSIT GRADE CROSSINGS

### CHAPTER 8A. GENERAL

### Section 8A.01 Introduction

Support:

01 Where the acronym "LRT" is used in Part 8, it refers to "light rail transit."

02 Chapters 8A, 8B, 8C, and 8D describe the traffic control devices that are used at highway-rail and highway-LRT grade crossings. Unless otherwise provided in the text or on a figure or table, the provisions of Part 8 are applicable to both highway-rail and highway-LRT grade crossings. Where the phrase "grade crossing" is used by itself without the prefix "highway-rail" or "highway-LRT," it refers to both highway-rail and highway-LRT grade crossings.

03 Chapter 8E describes the traffic control devices that are used at pathway and sidewalk grade crossings.

04 Traffic control for grade crossings includes all signs, signals, markings, other warning devices, and their supports along highways approaching and at grade crossings. The function of this traffic control is to promote safety and provide effective operation of rail and/or LRT and highway traffic at grade crossings.

05 For purposes of design, installation, operation, and maintenance of traffic control devices at grade crossings, it is recognized that the crossing of the highway and rail tracks is situated on a right-of-way available for the joint use of both highway traffic and railroad or LRT traffic.

06 Grade crossings and the traffic control devices that are associated with them are unique in that in many cases, the highway agency or authority with jurisdiction, ~~the regulatory agency with statutory authority (if applicable)~~ California Public Utilities Commission (CPUC), and the railroad company or transit agency are jointly involved in the development of engineering judgment or the performance of an engineering study. This joint process is accomplished through the efforts of a Diagnostic Team made up of the highway agency with jurisdiction, the regulatory agency with statutory authority (if applicable), and the railroad company and/or transit agency (if applicable). CPUC is the state regulatory agency with statutory authority over grade crossings.

06a The role of the Diagnostic Team is to evaluate and recommend traffic control devices at the grade crossing.

07 In Part 8, the combination of traffic control devices selected or installed at a specific grade crossing is referred to as a "traffic control system."

08 The combination of railroad or LRT active traffic control devices used to inform road users at a grade crossing of the approach or presence of rail traffic and the necessary control equipment for the devices are referred to as a "grade crossing warning system." The "2023 AREMA Communications and Signals Manual" published by the American Railway Engineering and Maintenance-of-Way Association (AREMA) contains further information about grade crossing warning systems.

**Standard:**

09 **Except at grade crossings of privately-owned roadways, pathways, and sidewalks, the traffic control devices, systems, and practices described in this Manual shall be used at all grade crossings open to public travel (see Section 1B.01 and 1C.02 for applicability of CA MUTCD), consistent with Federal, State, and local laws and regulations.**

Option:

09a At grade crossings of privately-owned roadways, pathways, and sidewalks, the traffic control devices, systems, and practices described in CA MUTCD may be used, consistent with Federal, State, and local laws and regulations.

Support:

10 23 CFR 655.603 contains information on the applicability of this Manual at private grade crossings.

11 Public Utilities Code Section 7537 and 7538, and CPUC General Order 75, as amended, contain information on State laws and regulations for private grade crossings in California.

## Section 8A.02 Highway-LRT Grade Crossings

Support:

01 Part 8 also describes the traffic control devices that are used in locations where light rail transit (LRT) vehicles are operating along streets and highways in mixed traffic with road users.

02 LRT is a mode of public transportation that employs LRT vehicles (commonly known as light rail vehicles, streetcars, or trolleys) that operate on rails in streets in mixed traffic, and LRT traffic that operates in semi-exclusive rights-of-way, or in exclusive rights-of-way. Where the phrase "LRT" is used in Part 8, it refers to light rail vehicles, streetcars, and trolleys. Grade crossings with LRT can occur at intersections or at midblock locations, including public and private driveways.

03 An initial educational campaign along with an ongoing program to continue to educate new drivers is beneficial when introducing LRT operations to an area and, hence, new traffic control devices.

04 LRT alignments can be grouped into one of the following three types (see definitions in Section 1C.02):

A. Exclusive: An LRT right-of-way that is grade-separated or protected by a fence or traffic barrier. Motor vehicles, pedestrians, and bicycles are prohibited within the right-of-way. This type of alignment does not have grade crossings and is not further addressed in Part 8.
B. Semi-exclusive: An LRT alignment that is in a separate right-of-way or along a street or railroad right-of-way where motor vehicles, pedestrians, and bicyclists have limited access and cross at designated locations only, such as at grade crossings where road users must yield the right-of-way to the light rail transit traffic.
C. Mixed-use: An alignment where LRT operates in mixed traffic with all types of road users. In a mixed-use alignment, the light rail transit traffic does not have the right-of-way over other road users at grade crossings and intersections. If the LRT traffic is controlled by traffic control signals or LRT signal faces at an intersection with a roadway, the alignment is considered to be mixed-use even if some of the approaches to the intersection are used exclusively by LRT traffic.

*Guidance:*

05 *If a highway-LRT grade crossing is equipped with flashing-light signals and is located 200 feet or less from an intersection or midblock location controlled by a traffic control signal, a pedestrian hybrid beacon, or an emergency-vehicle hybrid beacon, the intersection should be provided with rail preemption in accordance with Sections 4F.19 and 8D.09 ~~unless otherwise determined by the Diagnostic Team~~.*

Option:

06 Where LRT vehicles are operating in a mixed-use alignment, traffic signal priority or preemption may be used as determined by CPUC and recommended by a Diagnostic Team.

**Standard:**

07 **Where LRT and railroads use the same tracks or adjacent tracks, the traffic control devices, systems, and practices for highway-rail grade crossings shall be used.**

## Section 8A.03 Traffic Control Systems and Practices at Grade Crossings

Support:

01 Because of the large number of significant variables to be considered, no single standard system of traffic control devices is universally applicable for all grade crossings.

**Standard:**

02 **~~Before any new grade crossing traffic control system is installed or before modifications are made to an existing system, approval shall be obtained from the highway agency with jurisdiction, the regulatory agency with statutory authority (if applicable), and the railroad company and/or transit agency~~.**

02a **The removal, reduction, addition, or change in the type of warning devices at each public grade crossing, or publicly-used private grade crossing (as determined by CPUC or a court of competent jurisdiction), shall not be permitted unless authorized by CPUC.**

Support:

02b This includes any changes that can affect interconnections with adjacent traffic signals, or any other modification that can impact the safety of the grade crossing.

02c Refer to Public Utilities Code Sections 1201 through 1205, 7537, 7538 and 99152 and CPUC General Orders 75 and 143, as amended.

**Standard:**

02d **The highway agency with jurisdictional and/or statutory authority, and the railroad company and/or transit agency shall be consulted during the planning, design and installation of traffic control devices at grade crossings.**

03 **The Diagnostic Team members shall make a recommendation, documented in an engineering study (see Section 8A.05), on new grade crossing traffic control systems and on proposed changes to an existing grade crossing traffic control system. The Diagnostic Team recommendation shall be made based on the Diagnostic Team's site visits, meetings, conference calls, or a combination of some or all of these methods.**

04 **Except as provided in Paragraph 7 of this Section, operational changes made to a grade crossing traffic control system shall be evaluated by a Diagnostic Team.**

05 **Among the types of changes at a grade crossing for which a Diagnostic Team shall conduct an engineering study are: additions, removals, or modifications of the lanes approaching or traversing the grade crossing; addition or removal of tracks; significant changes in the number or speed of trains; significant changes in the number or speed of vehicles; addition of vehicle access near the grade crossing; additions or modifications to sidewalks; additions or modifications to bicycle lanes, especially if a counter-flow bicycle lane is added on a one-way street; changes to roadway use, including conversion to or from one-way operation or reversible lanes; and the installation of or significant operational changes to traffic control signals that might affect the grade crossing.**

Option:

06 A Diagnostic Team may conduct an engineering study and make recommendations as part of the Quiet Zone establishment process (see Section 8A.11).

07 Where determined by the responsible public agency, the railroad company, and/or the transit agency, general maintenance activities or minor operational changes to the grade crossing traffic control system that do not have a negative impact on the overall operation of the traffic control system may be made without a review and determination by a Diagnostic Team.

Support:

08 Many other details of grade crossing traffic control systems that are not set forth in Part 8 are contained in publications such as the "2023 AREMA Communications and Signals Manual" published by the American Railway Engineering and Maintenance-of-Way Association (AREMA), the Third Edition of "Highway-Rail Crossing Handbook" published by the FHWA and the FRA, and the 2nd Edition of "Preemption of Traffic Signals Near Railroad Crossings" published by the Institute of Transportation Engineers (ITE).

## Section 8A.04 Traffic Control Systems at Highway-LRT Grade Crossings

Support:

01 The combination of devices selected or installed at a specific highway-LRT grade crossing is referred to as a "Light Rail Transit Traffic Control System."

02 The normal rules of the road and traffic control priority identified in the "Uniform Vehicle Code" (see Section 1A.06) govern the order assigned to the movement of vehicles at an intersection unless the local agency determines that it is appropriate to assign a higher priority to LRT vehicles. Examples of different types of LRT priority control include separate traffic control signal phases for LRT movements, restriction of movement of roadway vehicles in favor of LRT operations, and preemption of highway traffic signal control to accommodate LRT movements.

**Standard:**

03 **Highway-LRT grade crossings in semi-exclusive alignments outside of a roadway shall be equipped with flashing-light signals, with or without automatic gates, unless a Diagnostic Team recommends and CPUC determines that the use of Crossbuck Assemblies, STOP signs, or YIELD signs alone would be adequate.**

## Section 8A.05 Engineering Studies at Grade Crossings

**Standard:**

01 **The appropriate traffic control system to be used at a grade crossing shall be ~~determined~~ evaluated and recommended based on an engineering study conducted by a Diagnostic Team involving the highway agency with jurisdiction, ~~the regulatory agency with statutory authority (if applicable)~~ CPUC, and the railroad company and/or transit agency (as applicable).**

Option:

02 ~~The regulatory agency with statutory authority (if applicable)~~ CPUC may ~~approve~~ determine and prescribe the grade

crossing traffic control system.

*Guidance:*

03 *Among the factors that should be considered in the ~~determination~~ evaluation and recommendation by a Diagnostic Team of which traffic control devices would be appropriate to install at a grade crossing are road geometrics, stopping sight distance, clearing sight distance, the proximity of nearby roadway intersections (including the traffic control devices at the intersections), adjacent driveways, traffic volume across the grade crossing, extent of queuing upstream or downstream from the grade crossing, train volume, pedestrian and bicycle volumes, operation of passenger trains, presence of nearby passenger station stops, maximum allowable train speeds, variable train speeds, accelerating and decelerating trains, multiple tracks, high-speed train operation, number of school buses or hazardous material haul vehicles, and the crash history at or near the location.*

Option:

04 The engineering study may include the Highway-Rail Intersection (HRI) components of the National Intelligent Transportation Systems (ITS) architecture, which is a USDOT accepted method for linking the highway, vehicles, and traffic management systems with rail operations and wayside equipment.

Support:

05 More detail on Highway-Rail Intersection components is available from the USDOT's Federal Railroad Administration, 1200 New Jersey Avenue, SE, Washington, DC 20590, or www.fra.dot.gov.

## Section 8A.06 Uniform Provisions

**Standard:**

01 **All signs used in grade crossing traffic control systems shall be retroreflective or illuminated as described in Section 2A.21 to show the same shape and similar color to an approaching road user during both day and night.**

02 **No sign or signal shall be located in the center of an undivided highway, unless it is crashworthy (breakaway, yielding, or shielded with a longitudinal barrier or crash cushion) or unless it is placed on a raised island.**

*Guidance:*

03 *Any signs or signals placed on a raised island in the center of an undivided highway should be installed with a clearance of at least 2 feet from the outer edge of the raised island to the nearest edge of the sign or signal, except as permitted in Section 2A.16.*

04 *Where a raised median island is installed supplemental to an automatic gate to discourage road users from driving around a lowered gate, the Diagnostic Team should consider the length of the vehicle queues that typically form on the approach to the grade crossing when ~~determining~~ evaluating and recommending how far in advance of the grade crossing to extend the island.*

05 *If the roadway at a grade crossing includes a two-way left-turn lane (see Section 3B.05), the two-way left-turn lane should be discontinued in the immediate vicinity of the grade crossing by installing median islands, by designating the lane for left turns in one direction only, or by installing yellow diagonal markings in the lane (see Figure 3B-5). If yellow diagonal markings are used, the use of channelizing devices (see Section 3I.01), such as supplemental tubular markers, should also be considered.*

Option:

06 If yellow diagonal markings are used, extending the automatic gate across the lane may be considered.

## Section 8A.07 Minimum Track Clearance Distance and Clear Storage Distance

Support:

01 The upstream point of the minimum track clearance distance is determined in the following manner:

A. If an automatic gate is present on the approach, the upstream point is the portion of the automatic gate arm that is farthest from the nearest rail.
B. If an automatic gate is not present on the approach, the upstream point is the portion of the stop line that is farthest from the nearest rail.
C. If the roadway is not paved, the upstream point is the point that is farthest from the nearest rail that is 10 feet measured perpendicular from the nearest rail.

02 The downstream point of the minimum track clearance distance is 6 feet beyond the track(s) or the edge of the downstream highway-highway intersection, whichever is closer, and is measured perpendicular to the farthest rail, along the center line or edge line of the highway, as appropriate, to obtain the longer distance. Where an Exit Gate system (see

Section 8D.05) is present, the downstream point is the point where the rear of the vehicle would be clear of the exit gate arm. In cases where the exit gate arm is not perpendicular to the highway, the distance is measured either along the center line or edge line of the highway, as appropriate, to obtain the longer distance.

03 Where two adjacent grade crossings (see Section 8A.08) are located within 200 feet of each other as measured along the highway, the minimum track clearance distance is measured from a point that is upstream of the first grade crossing to a point that is downstream from the second grade crossing.

04 Where a highway-highway intersection is located beyond a grade crossing, the clear storage distance defines on a lane-by-lane basis the area of the roadway between the downstream point of the minimum track clearance distance and the intersection stop line, yield line, or normal stopping point on the highway.

05 The Highway-Rail Crossing Handbook contains an illustration of the minimum track clearance distance and the clear storage distance.

06 The minimum track clearance distance and the clear storage distance are used by the Diagnostic Team to determine the appropriate traffic control devices and/or roadway treatments to be used at the grade crossing, and to determine the queue start-up and queue clearance time necessary where a traffic signal or hybrid beacon is interconnected with a grade crossing active warning system.

## Section 8A.08 Adjacent Grade Crossings

Support:

01 Adjacent grade crossings sometimes exist within 200 feet of each other as measured along the highway between the inside rails. These closely-spaced grade crossings sometimes result from separate railroads or from a railroad and an LRT alignment operating in parallel corridors.

*Guidance:*

02 *Where adjacent grade crossings are located within 200 feet of each other along the highway as measured along the highway between the inside rails, the Diagnostic Team should consider the possibility that rail traffic might arrive at a grade crossing when rail traffic is already occupying the adjacent grade crossing.*

03 *Where the shortest distance between the tracks at adjacent grade crossings, measured along the highway between the inside rails, is 100 feet or less, the grade crossings should be treated as one individual grade crossing.*

04 *Where the shortest distance between the tracks at adjacent grade crossings, measured along the highway between the inside rails, is more than 100 feet and less than 200 feet, additional signs or other appropriate traffic control devices should be used to inform approaching road users of the long distance to cross the tracks.*

05 *Where active traffic control devices are installed between adjacent grade crossings that are more than 100 feet apart and less than 200 feet apart as measured along the highway between the inside rails, the operation of the devices should provide additional time for vehicles to clear the extended minimum track clearance distance (see Section 8A.07) that results from the closely-spaced grade crossings.*

06 *Where the shortest distance between the tracks at adjacent grade crossings, measured along the highway between the inside rails, is more than 200 feet, the grade crossings should be treated as individual grade crossings and traffic control devices should be installed between the grade crossings.*

Support:

07 The "2023 AREMA Communications and Signals Manual" published by the American Railway Engineering and Maintenance-of-Way Association (AREMA) contains further information and recommendations about the location and operation of active traffic control devices at adjacent grade crossings that are located within 200 feet of each other.

## Section 8A.09 Grade Crossing Elimination

Option:

01 If a particular grade crossing appears to be redundant or unnecessary for motor vehicle, pedestrian, and bicycle traffic, an engineering study may be conducted to determine the costs and benefits of eliminating the crossing.

*Guidance:*

02 *If an engineering study is conducted, any necessary improvements to adjacent grade crossings and the surrounding roadway network to accommodate diverted traffic should also be included in the analysis.*

03 *If the conclusion of the engineering study is that the grade crossing should be eliminated, a Diagnostic Team should use the engineering study to ~~determine~~ evaluate and recommend the appropriate steps that need to be taken to accomplish the grade crossing elimination.*

**Standard:**

04 **Where a grade crossing is eliminated, the traffic control devices for the crossing shall be removed, and shall be covered or turned from view in the interim period prior to removal**.

Support:

04a Refer to FHWA's "Highway-Rail Crossing Handbook" regarding how a crossing is eliminated, such as replacing the crossing with a grade separated facility, removing the roadway, or removal of the tracks.

~~*Guidance:*~~

**Standard:**

05 **If the existing traffic control devices at a multiple-track grade crossing become improperly placed or are no longer applicable because of the removal of some of the tracks, the existing devices ~~should~~ shall be relocated and/or modified.**

*Guidance:*

06 *Where a roadway is removed from a grade crossing, the roadway approaches in the railroad or LRT right-of-way should also be removed and appropriate signs and object markers should be placed at the roadway end in accordance with Section 2C.73.*

07 *Where a railroad or LRT is eliminated at a grade crossing, the tracks should be removed or paved over.*

Option:

08 Based on engineering judgment, the TRACKS OUT OF SERVICE (R8-9) sign (see Figure 8B-1) may be temporarily installed until the tracks are removed or covered. The length of time before the tracks will be removed or covered may be considered in making the decision as to whether to install the sign.

## Section 8A.10 Illumination at Grade Crossings

Support:

01 Illumination is sometimes installed at or adjacent to a grade crossing in order to provide better nighttime visibility of trains or LRT equipment and the grade crossing (for example, where a substantial amount of railroad or LRT operations are conducted at night, where grade crossings are blocked for extended periods of time, or where crash history indicates that road users experience difficulty in seeing trains or LRT equipment or traffic control devices during hours of darkness).

02 Recommended types and locations of luminaires for illuminating grade crossings are contained in the American National Standards Institute's "ANSI/IES RP-8-22, Recommended Practice: Lighting Roadway and Parking Facilities," which is available from the Illuminating Engineering Society.

03 Delineators can be placed on the right side of all approaches to non-illuminated rural grade crossings. If needed, place the delineators from the location of the Grade Crossing Advance Warning (W10-1) sign to the Crossbuck (R15-1) sign and extend an equal distance downstream, spacing no more than 50 feet apart.

04 Other devices can be added to supplement the existing devices and device spacing can be adjusted to provide additional reaction time or delineation.

## Section 8A.11 Quiet Zone Treatments at Highway-Rail Grade Crossings

Support:

01 49 CFR Part 222 (Use of Locomotive Horns at Highway-Rail Grade Crossings; Final Rule) prescribes Quiet Zone requirements and treatments.

**Standard:**

02 **Any traffic control device and its application where used as part of a Quiet Zone shall comply with all applicable provisions of the ~~MUTCD~~ CA MUTCD.**

Support:

03 Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

## Section 8A.12 Grade Crossings Within or In Close Proximity to Circular Intersections

Support:

01 At circular intersections, such as roundabouts and traffic circles, that include or are within close proximity to a grade crossing, a queue of vehicular traffic could cause motor vehicles to stop on the grade crossing.

**Standard:**

02 **Where circular intersections include or are within 200 feet of a grade crossing, an engineering study shall be made to determine if queuing could impact the grade crossing.**

*Guidance:*

03 *The Diagnostic Team should review the findings of the engineering study and ~~determine~~ recommend the appropriate measures to clear highway traffic from the grade crossing prior to the arrival of rail traffic.*

03a *If traffic queues impact the grade crossing, provisions should be made to keep the grade crossing clear of highway traffic or to clear highway traffic from the grade crossing prior to the arrival of rail traffic. Factors to be considered should include traffic volumes, highway vehicle mix, highway vehicle and train approach speeds, frequency of trains, and number of travel lanes at the circular intersection.*

Support:

04 Among the actions that can be taken to keep the grade crossing clear of traffic or to clear traffic from the grade crossing prior to the arrival of rail traffic are the following:

A. Grade crossing regulatory and warning devices;
B. Highway traffic signals;
C. Traffic metering devices;
D. Activated signs;
E. Geometric design revisions, including reconstruction or elimination of the circular intersection; or
F. A combination of these or other actions.

## Section 8A.13 Temporary Traffic Control Zones

Support:

01 Temporary traffic control planning provides for continuity of operations (such as movement of motor vehicle traffic, pedestrians, and bicyclists, transit operations, and access to property/utilities) when the normal function of a roadway at a grade crossing is suspended because of temporary traffic control operations. Temporary traffic control planning is also needed when traffic is detoured over an existing grade crossing.

**Standard:**

02 **Traffic controls for temporary traffic control zones that include grade crossings shall be as provided in Part 6.**

*Guidance:*

03 *Where a temporary traffic control zone extends over an active grade crossing (see Section 6N.17), and where the direction of traffic in any lane is reversed over the grade crossing, the railroad company or transit agency should be part of the temporary traffic control planning process. Where a grade crossing warning system is not modified to support the temporary traffic control operation, at least one uniformed law enforcement officer or flagger should be in place at all times that rail traffic might approach or occupy the grade crossing.*

04 *Where traffic is detoured over an existing passive grade crossing, a temporary traffic control plan (see Section 6B.01) should be prepared.*

05 *Public and private agencies, emergency services, businesses, and railroad companies or transit agencies should meet to plan appropriate traffic detours and the necessary signing, marking, signalization, and flagging requirements for operations during temporary traffic control zone activities or during the period when traffic is being detoured over an existing passive grade crossing. Consideration should be given to the length of time that the grade crossing is to be closed, the length of time that a detour is to be in place, the type of rail or LRT and highway traffic affected, the time of day, and the materials and techniques of repair.*

06 *The agencies responsible for the operation of the LRT and highway should be contacted when the initial planning begins for any temporary traffic control zone that might directly or indirectly influence the flow of traffic on facilities where LRT vehicles operate on a mixed-use alignment.*

07 *Temporary traffic control operations should minimize the inconvenience, delay, and crash potential to affected traffic. Prior notice should be given to affected public or private agencies, emergency services, businesses, railroad companies or transit agencies, and road users before the free movement of road users or rail traffic is infringed upon or blocked.*

Support:

08 Section 6N.17 contains additional information regarding temporary traffic control zones in the vicinity of grade

crossings, and Figure 6P-46 shows an example of a typical situation that might be encountered.

## Section 8A.101(CA) Relation to Other Documents

Support:

01 The following rules and regulations govern traffic control devices at highway-rail grade crossings in the State:

A. General Order No. 75, as amended, REGULATIONS GOVERNING STANDARDS FOR WARNING DEVICES FOR AT-GRADE HIGHWAY-RAIL CROSSINGS IN THE STATE OF CALIFORNIA, Public Utilities Commission of the State of California.

B. General Order No. 143, as amended, SAFETY RULES AND REGULATIONS GOVERNING LIGHT-RAIL TRANSIT, Public Utilities Commission of the State of California.

# CHAPTER 8B. SIGNS

## Section 8B.01 Purpose and Application

Support:

01 Passive traffic control systems, consisting of signs and pavement markings only, identify and direct attention to the location of a grade crossing and advise road users to reduce their speed or stop at the grade crossing as necessary in order to yield to any rail traffic occupying, or approaching and in proximity to, the grade crossing.

02 Signs and markings regulate, warn, and guide the road users so that they, as well as LRT vehicle operators on mixed-use alignments, can take appropriate action when approaching a grade crossing.

03 Unless otherwise provided in this Chapter, the provisions of Part 2 are applicable to the design and location of signs at grade crossings.

*Guidance:*

04 *Signs placed in advance of a grade crossing should be positioned to not obstruct the motorists' line of sight of the flashing-light signals or other traffic control devices at the grade crossing.*

## Section 8B.02 Sizes of Grade Crossing Signs

**Standard:**

01 **The minimum sizes of grade crossing signs shall be as shown in Table 8B-1.**

Option:

02 Signs larger than those shown in Table 8B-1 may be used (see Section 2A.07).

## Section 8B.03 Grade Crossing (Crossbuck) Sign (R15-1) and Number of Tracks Plaque (R15-2P) at Active and Passive Grade Crossings

**Standard:**

01 **The Grade Crossing (R15-1) sign (see Figure 8B-1), commonly identified as the Crossbuck sign, shall be retroreflective white with the words RAILROAD CROSSING in black lettering, mounted as shown in Figure 8B-2.**

Support:

02 In most States, the Crossbuck sign requires road users to yield the right-of-way to rail traffic at a grade crossing.

**Standard:**

03 **As a minimum, one Crossbuck sign shall be used on each highway approach to every highway- rail grade crossing, alone or in combination with other traffic control devices.**

04 **As a minimum, one Crossbuck sign shall be used on each highway approach to every highway- LRT grade crossing where flashing-light signals or automatic gates are used, alone or in combination with other traffic control devices.**

Option:

05 A Crossbuck sign may be used on a highway approach to a highway-LRT grade crossing where flashing-light signals or automatic gates are not used, alone or in combination with other traffic control devices.

**Standard:**

06 **If there are two or more tracks at a grade crossing, the number of tracks shall be indicated on a supplemental Number of Tracks (R15-2P) plaque (see Figure 8B-1) of inverted T shape mounted below the Crossbuck sign in the manner shown in Figure 8B-2.**

07 **On each approach to a highway-rail grade crossing and, if used, on each approach to a highway-LRT grade crossing, the Crossbuck sign shall be installed on the right-hand side of the highway on each approach to the grade crossing. Where restricted sight distance or unfavorable highway geometry exists on an approach to a grade crossing, or where there is a one-way multi-lane approach, an additional Crossbuck sign shall be installed on the left-hand side of the highway, possibly placed back-to-back with the Crossbuck sign for the opposite approach, or otherwise located so that two Crossbuck signs are displayed for that approach.**

08 **A strip of retroreflective white material not less than 2 inches in width shall be used on the back of each blade of each Crossbuck sign for the length of each blade at all passive grade crossings, except those where Crossbuck signs have been installed back-to-back or where double-faced Crossbuck signs have been installed.**

Option:

09 A strip of retroreflective white material not less than 2 inches in width may be used on the back of each blade of each Crossbuck sign for the length of each blade at active grade crossings.

*Guidance:*

10 *Minimum clearance dimensions for crossbuck signs relative to the proximity to the nearest rail should conform to the requirements of the railroad company and/or transit agency, and ~~the regulatory agency with statutory authority (if applicable)~~ CPUC.*

11 *Except as provided in Paragraph 12 of this Section, the mounting height of Crossbuck signs, measured vertically from the center of the sign to the elevation of the near edge of the pavement, should be approximately 9 feet (see Figure 8B-2).*

Option:

12 The 9-foot mounting height for the Crossbuck sign may be varied as required by local conditions and may be increased to accommodate signs mounted below the Crossbuck sign.

## Section 8B.04 Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings

**Standard:**

01 **A Crossbuck Assembly shall consist of a Crossbuck (R15-1) sign, and a Number of Tracks (R15- 2P) plaque if two or more tracks are present, that complies with the provisions of Section 8B.03, and either a YIELD (R1-2) or STOP (R1-1) sign installed on the same support, except as provided in Paragraph 10 of this Section. YIELD or STOP signs used at passive grade crossings shall be installed in compliance with the provisions of Section 2B.18, and Figures 8B-2 and 8B-3.**

02 **At all public highway-rail grade crossings that are not equipped with the active traffic control systems that are described in Chapter 8D, except crossings where road users are directed by an authorized person on the ground to not enter the crossing at all times that an approaching train is about to occupy the crossing, a Crossbuck Assembly shall be installed on the right-hand side of the highway on each approach to the highway-rail grade crossing.**

03 **If a Crossbuck sign is used on a highway approach to a public highway-LRT grade crossing that is not equipped with the active traffic control systems that are described in Chapter 8D, a Crossbuck Assembly shall be installed on the right-hand side of the highway on each approach to the highway-LRT grade crossing.**

04 **Where restricted sight distance or unfavorable highway geometry exists on an approach to a grade crossing that has a Crossbuck Assembly, or where there is a one-way multi-lane approach, an additional Crossbuck Assembly shall be installed on the left-hand side of the highway.**

05 **A YIELD sign shall be the default traffic control device for Crossbuck Assemblies on all highway approaches to passive grade crossings unless an engineering study performed by the regulatory agency or highway authority having jurisdiction over the roadway approach ~~determines~~ recommends that a STOP sign is appropriate and is consistent with determination by CPUC.**

05a **STOP signs shall not be installed at any highway-rail grade crossing which is controlled by automatic traffic control devices except as provided in CVC § 21355 and in the Options in this section of this Manual.**

*Guidance:*

06 *The use of STOP signs at passive grade crossings should be limited to unusual conditions where requiring all motor vehicles to make a full stop is ~~determined to be necessary~~ recommended by a Diagnostic Team and consistent with determination by CPUC. Among the factors that should be considered by the Diagnostic Team are the line of sight to approaching rail traffic (giving due consideration to seasonal crops or vegetation beyond both the highway and railroad or LRT rights-of-ways), the number of tracks, the speeds of trains or LRT equipment and motor vehicles, and the crash history at the cross grading.*

07 *Where a passive grade crossing is located on a stop-controlled approach and the clear storage distance is less than the length of the design vehicle, and where adequate sight distance to oncoming traffic on the parallel roadway is available to road users stopped on the approach to the grade crossing, consideration should be given to installing a STOP sign at the Crossbuck Assembly instead of at the highway-highway intersection. If the STOP sign is installed at the Crossbuck Assembly instead of at the highway-highway intersection, the Diagnostic Team should consider installing some other intersection traffic control device at the highway-highway intersection.*

**Standard:**

08 **If a Crossbuck Assembly is installed on the approach to a passive grade crossing located at a highway-highway intersection controlled by a traffic control signal that is not interconnected with the grade crossing and not preempted by the approach of rail traffic, a Diagnostic Team shall be convened to ~~determine~~ evaluate and recommend the appropriate traffic control devices. A STOP sign shall not be installed on a Crossbuck Assembly in this situation.**

Support:

09 Sections 8A.01 through 8A.05 contain information regarding the responsibilities of the Diagnostic Team, highway agency, ~~regulatory agency with statutory authority (if applicable)~~ CPUC, and the railroad company or transit agency regarding the selection, design, and operation of traffic control devices placed at grade crossings.

Option:

10 If a YIELD or STOP sign is installed for a Crossbuck Assembly at a grade crossing, it may be installed on the same support as the Crossbuck sign or it may be installed on a separate support at a point where the motor vehicle is to stop, or as near to that point as practicable, but in either case, the YIELD or STOP sign is considered to be a part of the Crossbuck Assembly.

**Standard:**

11 **If a YIELD or STOP sign is installed on an existing Crossbuck sign support, the mounting height, measured vertically from the bottom of the YIELD or STOP sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the YIELD or STOP sign to the elevation of the near edge of the traveled way, shall be at least 4 feet (see Figure 8B-2).**

12 **If a Crossbuck Assembly is installed on a new sign support (see Figure 8B-2) or if the YIELD or STOP sign is installed on a separate support (see Figure 8B-3), the mounting height, measured vertically from the bottom of the YIELD or STOP sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the YIELD or STOP sign to the elevation of the near edge of the traveled way, shall be at least 5 feet in rural areas and shall be at least 7 feet in areas where parking or pedestrian movements are likely to occur.**

*Guidance:*

13 *If a YIELD or STOP sign is installed for a Crossbuck Assembly at a grade crossing on a separate support than the Crossbuck sign (see Figure 8B-3), the YIELD or STOP sign face of the sign should be placed in the same plane as the Crossbuck sign and closer to the traveled way than the Crossbuck sign. The minimum separation between the nearest point of the YIELD or STOP sign and the nearest point of the Crossbuck sign should be 2 inches as shown in Figure 8B-3.*

Support:

14 The meaning of a Crossbuck Assembly that includes a YIELD sign is that a road user approaching the grade crossing needs to be prepared to decelerate, and when necessary, yield the right-of-way to any rail traffic that might be occupying the crossing or might be approaching and in such close proximity to the crossing that it would be unsafe for the road user to cross.

15 Certain commercial motor vehicles and school buses are required to stop at all grade crossings in accordance with 49 CFR 392.10 even if a YIELD sign (or just a Crossbuck sign) is posted.

16 The meaning of a Crossbuck Assembly that includes a STOP sign is that a road user approaching the grade crossing must come to a full stop not less than 15 feet short of the nearest rail, and remain stopped while the road user determines if there is rail traffic either occupying the crossing or approaching and in such close proximity to the crossing that the road user must yield the right-of-way to rail traffic. The road user is permitted to proceed when it is safe to cross.

**Standard:**

17 **A vertical strip of retroreflective white material, not less than 2 inches in width, shall be used on each Crossbuck support at passive grade crossings for the full length of the back of the support from the Crossbuck sign or Number of Tracks plaque to within 2 feet above the near edge of the roadway, except as provided in Paragraph 18 of this Section. A white retroreflective strip wrapped around a round support for the full length of the support from the Crossbuck Sign or Number of Tracks plaque to within 2 feet above the near edge of the roadway shall satisfy this requirement as long as the round support has an outside diameter of at least 2 inches.**

Option:

18 The vertical strip of retroreflective material may be omitted from the back sides of Crossbuck sign supports installed on one-way streets and at pathway or sidewalk grade crossings (see Section 8E.05).

19 If a YIELD or STOP sign is installed on the same support as the Crossbuck sign, a vertical strip of red (see Section 2A.11) or white retroreflective material that is at least 2 inches wide may be used on the front of the support from the YIELD or STOP sign to within 2 feet above the near edge of the roadway.

**Standard:**

20 **If a Crossbuck sign support at a passive grade crossing does not include a YIELD or STOP sign (either because the YIELD or STOP sign is placed on a separate support or because a YIELD or STOP sign is not present on the approach), a vertical strip of retroreflective white material, not less than 2 inches in width, shall be used for the full length of the front of the support from the Crossbuck sign or Number of Tracks plaque to within 2 feet above the near edge of the roadway. A white retroreflective strip wrapped around a round support for the full length of the support from the Crossbuck Sign or Number of Tracks plaque to within 2 feet above the near edge of the roadway shall satisfy this requirement as long as the round support has an outside diameter of at least 2 inches.**

21 **At all grade crossings where YIELD or STOP signs are installed, Yield Ahead (W3-2) or Stop Ahead (W3-1) signs shall also be installed if the criteria for their installation in Section 2C.35 is met.**

Support:

22 Section 8C.03 contains provisions regarding the use of stop lines or yield lines at grade crossings.

## Section 8B.05 Use of STOP (R1-1) or YIELD (R1-2) Signs without Crossbuck Signs at Highway-LRT Grade Crossings

*Guidance:*

01 *The use of only STOP or YIELD signs for road users at highway-LRT grade crossings should be limited to those crossings where the need and feasibility is ~~determined~~ evaluated by the Diagnostic Team and consistent with determination by CPUC. Such crossings should have all of the following characteristics:*

- *A. The crossing roadways are secondary in character (such as a minor street with one lane in each direction, an alley, or a driveway) with low traffic volumes and low speed limits. The specific thresholds of traffic volumes and speed limits should be determined by the local agencies.*
- *B. The line of sight for an approaching LRT operator is adequate from a sufficient distance such that the operator can sound an audible signal and bring the LRT equipment to a stop before arriving at the crossing.*
- *C. The road user has sufficient sight distance at the stop line to permit the vehicle to cross the tracks before the arrival of the LRT equipment.*
- *D. If at an intersection of two roadways, the intersection does not meet the warrants for a traffic control signal as provided in Chapter 4C.*
- *E. The LRT tracks are located such that motor vehicles are not likely to stop on the tracks while waiting to enter a crossroad or highway.*

**Standard:**

02 **For all highway-LRT grade crossings where only STOP (R1-1) or YIELD (R1-2) signs are installed, the placement shall comply with the requirements of Section 2B.18. Stop Ahead (W3-1) or Yield Ahead (W3-2) Advance Warning signs shall also be installed if the criteria for their installation given in Section 2C.35 is met.**

## Section 8B.06 Grade Crossing Advance Warning Signs (W10-1 through W10-4)

**Standard:**

01 **A Grade Crossing Advance Warning (W10-1) sign (see Figure 8B-4) shall be used on each highway in advance of every grade crossing, except in the following circumstances:**

- **A. On an approach to a grade crossing from an intersection with a parallel highway if the distance from the ~~nearest rail of the tracks~~ stop line or yield line to the edge of the parallel roadway is less than 100 feet and W10-2, W10-3, or W10-4 signs are used on the approaches of the parallel highway (see Paragraph 5 of this Section);**
- **~~B. On low-volume, low-speed highways crossing minor spurs or other tracks that are infrequently used and road users are directed by an authorized person on the ground to not enter the crossing at all times that approaching rail traffic is about to occupy the crossing;~~**
- **~~C. In business or commercial areas where active grade crossing traffic control systems are in use;~~**
- **~~D. Where physical conditions do not permit even a partially effective display of the sign; or~~**

**E. At highway-LRT grade crossings where Crossbuck signs are not used (see Section 8B.03).**

Support:

01a Refer to CVC § 21362.

01b Figure 8C-1(CA) provides examples of placement of Grade Crossing Advance Warning signs.

**Standard:**

02 **The placement of the Grade Crossing Advance Warning sign shall be in accordance with Section 2C.04 and Table 2C-3.**

*Guidance:*

02a *The Diagnostic Team should evaluate the location of Grade Crossing Advance Warning signs.*

Option:

02b The Diagnostic Team may recommend a placement at a different distance than Table 2C-3 based on engineering judgment.

Support:

02c Adjustment of the advance placement distance can provide motorists with increased conspicuity of the advance warning sign. Legibility distance is a typical consideration. Other advance placement distance considerations include distractions or visibility issues along the approach such as parking, trees, closely spaced signs, driveways, or intersections. Refer to Section 2C.04 for additional discussion regarding the application of the distances in Table 2C-3.

**Standard:**

03 **If a YIELD or STOP sign is present at a passive grade crossing, a Yield Ahead (W3-2) or Stop Ahead (W3-1) Advance Warning sign shall also be installed if the criteria for their installation given in Section 2C.35 is met. If a Yield Ahead or Stop Ahead sign is installed on the approach to the crossing, the W10-1 sign shall be installed upstream from the Yield Ahead or Stop Ahead sign. The Yield Ahead or Stop Ahead sign shall be located in accordance with Table 2C-3. The minimum distance between the signs shall be in accordance with Section 2C.04 and Table 2C-3.**

Option:

04 On divided highways and one-way streets, an additional W10-1 sign may be installed on the left-hand side of the roadway.

**Standard:**

05 **If the distance between the tracks and a parallel highway, from the ~~nearest rail of the tracks~~ stop line or yield line to the edge of the parallel roadway, is less than 100 feet, a W10-2, W10-3, or W10-4 sign (see Figure 8B-4) shall be installed on each approach of the parallel highway to warn road users making a turn that they will encounter a grade crossing soon after making a turn, and a W10-1 sign for the approach to the tracks shall not be required to be between the tracks and the parallel highway.**

06 **If the W10-2, W10-3, or W10-4 sign is used, sign placement in accordance with the guidelines for Intersection Warning signs in Table 2C-3 using the speed of through traffic along the parallel highway, shall be measured from the highway intersection.**

Option:

06a The W10-2, W10-3, or W10-4 sign may be omitted at highway-LRT grade crossings where Crossbuck signs are not used (see Section 8B.03).

*Guidance:*

07 *If the distance between the tracks and the parallel highway, from the ~~nearest rail of the tracks~~ stop line or yield line to the edge of the parallel roadway, is 100 feet or more, a W10-1 sign should be installed ~~in advance of the grade crossing~~ between the tracks and the parallel highway, and the W10-2, W10-3, or W10-4 sign should not be used on the parallel highway.*

08 *If the distance between the grade crossing stop line or yield line and the parallel highway is 100 feet or more and that distance is less than the W10-1 sign placement in accordance with Table 2C-3, then a W10-1 sign should be placed between the grade crossing and the parallel highway within 50 feet of the intersection. Refer to Figure 8C-1(CA) Sheet 2.*

**Standard:**

09 **The Number of Tracks (W48P(CA)) plaque shall be placed below the Grade Crossing Advance Warning (W10-1) sign at grade crossings with two or more tracks.**

Option:

10 The Number of Tracks (W48P(CA)) plaque may be placed below the Grade Crossing Advance Warning (W10-2, W10-3, or

W10-4) sign at grade crossings with two or more tracks.

Support:

11 The Number of Tracks (W48P(CA)) plaque is shown in Figure 8B-4(CA).

## Section 8B.07 DO NOT STOP ON TRACKS Sign (R8-8)

*Guidance:*

01 *If motor vehicle queues are likely to extend onto the tracks, a DO NOT STOP ON TRACKS (R8-8) sign (see Figure 8B-1) should be used.*

Support:

02 Locations where motor vehicles could queue onto the grade crossing include intersections where a STOP or YIELD sign is installed downstream of the grade crossing, where there is a downstream circular intersection, or where there is a pre-signal installed at the grade crossing.

*Guidance:*

03 *The R8-8 sign, if used, should be located on the right-hand side of the highway on either the near or far side of the grade crossing, depending upon which position provides better visibility to approaching drivers or motorists at the grade crossing stop or yield line.*

Option:

04 DO NOT STOP ON TRACKS signs may be placed on both sides of the track.

05 On divided highways and one-way streets, a second DO NOT STOP ON TRACKS sign may be placed on the near or far left-hand side of the highway at the grade crossing to further improve the visibility of the sign.

## Section 8B.08 TRACKS OUT OF SERVICE Sign (R8-9)

Option:

01 The TRACKS OUT OF SERVICE (R8-9) sign (see Figure 8B-1) may be used at a grade crossing instead of a Crossbuck (R15-1) sign and a Number of Tracks (R15-2P) plaque or instead of a Crossbuck Assembly where railroad or LRT tracks have been temporarily or permanently abandoned or disconnected, but only until such time that the tracks are removed or covered.

**Standard:**

02 **Where tracks are out of service, except as provided in Paragraphs 3 and 4 of this Section, traffic control devices and gate arms shall be removed and the signal heads shall be removed or hooded or turned from view to clearly indicate that they are not in operation.**

03 **Where tracks are out of service, even if a TRACKS OUT OF SERVICE (R8-9) sign has been installed, an Emergency Notification System (I13-1) sign (see Section 8B.27) shall be retained at the grade crossing and shall be visible to road users.**

*Guidance*:

04 *Warning signs, such as the Low Ground Clearance Grade Crossing (W10-5) sign and the Skewed Crossing (W10-12) sign, that warn road users about physical roadway conditions at the grade crossing should be left in place after the tracks are taken out of service, until the physical condition is no longer present.*

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

**Standard:**

05 **The R8-9 sign shall be removed when the tracks have been removed or paved over or when the grade crossing is returned to service. The Emergency Notification System (I13-1) sign shall be removed when the tracks have been removed or paved over.**

## Section 8B.09 STOP HERE WHEN FLASHING Signs (R8-10 and R8-10a)

Option:

01 The STOP HERE WHEN FLASHING (R8-10 and R8-10a) signs (see Figure 8B-1) may be used at a grade crossing to inform drivers of the location of the stop line or the point at which to stop when the flashing- light signals (see Section 8D.02) are activated.

## Section 8B.10 STOP HERE ON RED Signs (R10-6 and R10-6a)

Support:

01 The STOP HERE ON RED (R10-6 or R10-6a) sign (see Figure 8B-1) defines and facilitates observance of stop lines at traffic control signals.

Option:

02 STOP HERE ON RED signs may be used at locations where motor vehicles frequently violate the stop line or where it is not obvious to road users where to stop.

*Guidance:*

03 *If possible, stop lines should be placed at a point where the motor vehicle driver has adequate sight distance along the track.*

## Section 8B.11 EXEMPT Grade Crossing Plaques (~~R15-3P~~ and W10-1aP)

~~Option:~~

01 ~~Where authorized by law or regulation, an EXEMPT (R15-3P) plaque (see Figure 8B-1) with a white background may be used below the Crossbuck sign or Number of Tracks plaque, if present, at the grade crossing, and an EXEMPT (W10-1aP) plaque (see Figure 8B-4) with a yellow background may be used below the Grade Crossing Advance Warning (W10-1 through W10-4) sign.~~

02 ~~Where neither the Crossbuck sign nor the advance warning signs exist for a particular highway-LRT grade crossing, an EXEMPT (R15-3P) plaque with a white background may be placed on its own post on the near right-hand side of the approach to the crossing.~~

Support:

03 ~~These plaques inform drivers of motor vehicles carrying passengers for hire, school buses carrying students, or motor vehicles carrying hazardous materials that a stop is not required at certain designated grade crossings, except when rail traffic is approaching or occupying the grade crossing, or the driver's view is blocked.~~

**Standard:**

04 **Highway-rail grade crossings shall be established as "exempt" from the stop requirements specified in CVC § 22452 only with authorization of the California Public Utilities Commission (CPUC), pursuant to CVC § 22452.5 and CPUC General Order 145, as amended.**

05 **The EXEMPT (W10-1aP) sign (see Figure 8B-4), having a yellow background with black legend, shall be placed and maintained by the roadway authority below Grade Crossing Advance Warning (W10-1) signs on each approach to an exempt crossing that was established after January 1, 1978. This sign shall not be replaced with a W46AP(CA) black background with yellow legend plaque or EXEMPT (R15-3P) white background with black legend plaque.**

06 **The EXEMPT (W46AP(CA)) plaque (see Figure 8B-4(CA)), having a black background with yellow legend, shall be placed and maintained by the roadway authority below the Grade Crossing Advance Warning (W10-1) signs on each approach to an exempt crossing that was established prior to January 1, 1978. The W46AP(CA) plaque displays the word EXEMPT above the crossing number assigned by the CPUC to the crossing which the sign governs. This sign shall have dimensions of 15 inch in width and 9 inch in height. This W46AP(CA) plaque shall not be replaced with a W10-1aP sign unless authorized by the CPUC.**

07 **The EXEMPT (R15-3P) plaque (see Figure 8B-1), having a white background with black legend, shall not be used. See CVC § 22452.**

Support:

08 These EXEMPT (W10-1aP and W46AP(CA)) plaques inform drivers of certain vehicles that a stop may not be required at certain designated highway-rail grade crossings, per the CVC § 22452.

09 At crossings where the W10-1aP sign is installed, the CVC provides that any vehicle listed in CVC § 22452(a), other than any school bus or any school pupil activity bus, is exempted from the highway-rail grade crossing stop requirements.

10 At crossings where the W46AP(CA) plaque is installed and was approved prior to January 1, 1978, the CVC provides that any vehicle listed in CVC § 22452(a) is exempted from the highway-rail grade crossing stop requirements.

## Section 8B.12 Light Rail Transit Only Lane Signs (R15-4 Series)

Support:

01 The Light Rail Transit Only Lane (R15-4 series) signs (see Figure 8B-1) are used for multi-lane operations, where

road users might need additional guidance on lane use and/or restrictions.

Option:

02 Light Rail Transit Only Lane signs may be used on a roadway lane limited to only LRT use to indicate the restricted use of a lane in semi-exclusive and mixed alignments.

*Guidance:*

03 *If used, the R15-4a, R15-4b, and R15-4c signs should be installed on posts adjacent to the roadway containing the LRT tracks or overhead above the LRT only lane.*

Option:

04 If the trackway is paved, preferential lane markings (see Chapter 3E) may be installed, but only in combination with Light Rail Transit Only Lane signs.

Support:

05 The trackway is the continuous way designated for LRT, including the entire dynamic envelope. Section 8C.06 contains more information regarding the dynamic envelope.

## Section 8B.13 Do Not Pass Light Rail Transit Signs (R15-5 and R15-5a)

Support:

01 A Do Not Pass Light Rail Transit (R15-5) sign (see Figure 8B-1) is used to indicate that motor vehicles are not allowed to pass LRT vehicles that are loading or unloading passengers where there is no raised platform or physical separation from the lanes upon which other motor vehicles are operating.

Option:

02 The R15-5 sign may be used in mixed-use alignments and may be mounted overhead where there are multiple lanes.

03 Instead of the R15-5 symbol sign, a regulatory sign with the word message DO NOT PASS STOPPED TRAIN (R15-5a) may be used (see Figure 8B-1).

*Guidance:*

04 *If used, the R15-5 or R15-5a sign should be located immediately before the LRT boarding area.*

## Section 8B.14 No Motor Vehicles On Tracks Signs (R15-6 and R15-6a)

Support:

01 The No Motor Vehicles On Tracks (R15-6) sign (see Figure 8B-1) is used where there are adjacent traffic lanes separated from the LRT lane by a curb or pavement markings.

*Guidance:*

02 *The DO NOT ENTER (R5-1) sign should be used where a road user could wrongly enter an LRT only street.*

Option:

03 A No Motor Vehicles On Tracks sign may be used to deter motor vehicles from driving on the trackway. It may be installed on a 3-foot flexible post between double tracks, on a post alongside the tracks, or overhead.

04 Instead of the R15-6 symbol sign, a regulatory sign with the word message DO NOT DRIVE ON TRACKS (R15-6a) may be used (see Figure 8B-1).

05 A reduced size of 12 x 12 inches may be used if the R15-6 sign is installed between double tracks.

**Standard:**

06 **The smallest size for the R15-6 sign shall be 12 x 12 inches.**

## Section 8B.15 Divided Highway with Light Rail Transit Crossing Signs (R15-7 Series)

Option:

01 The Divided Highway with Light Rail Transit Crossing (R15-7 or R15-7a) sign (see Figure 8B-1) may be used as a supplemental sign on the approach legs of a roadway that intersects with a divided highway where LRT equipment operates in the median. The sign may be placed beneath a STOP sign or mounted separately.

*Guidance:*

02 *The number of tracks displayed on the R15-7 or R15-7a sign should be the same as the actual number of tracks.*

**Standard:**

03 **When the Divided Highway with Light Rail Transit Crossing sign is used at a four-leg intersection, the R15-7 sign shall be used. When used at a T-intersection, the R15-7a sign shall be used.**

## Section 8B.16 Low Ground Clearance Grade Crossing Sign (W10-5)

*Guidance:*

01 *If the highway profile conditions are sufficiently abrupt to create a hang-up situation for long wheelbase vehicles or for trailers with low ground clearance, the Low Ground Clearance Grade Crossing (W10-5) sign (see Figure 8B-4) should be installed in advance of the grade crossing.*

**Standard:**

02 **Because this symbol might not be readily recognizable by the public, the Low Ground Clearance Grade Crossing (W10-5) warning sign shall be accompanied by a LOW GROUND CLEARANCE (W10-5P) educational plaque. The LOW GROUND CLEARANCE educational plaque shall remain in place for at least 3 years after the initial installation of the W10-5 sign (see Section 2A.09).**

*Guidance*:

03 *Because other vehicle types and combinations also face the potential risk of hanging up at a grade crossing, word message warning signs and selective exclusion regulatory signs (see Section 2B.45) for specific vehicle types and combinations should be used in addition to, or in place of, the Low Ground Clearance Grade Crossing (W10-5) sign.*

Support:

04 While not all inclusive, some potential low ground clearance vehicles and combinations include single-unit trucks, buses, motor coaches, low-boy trailers, car carriers, and recreational vehicles.

*Guidance:*

05 *Auxiliary plaques such as AHEAD, NEXT CROSSING, or USE NEXT CROSSING (with appropriate arrows), or a supplemental distance plaque should be placed below the W10-5 sign at the nearest intersecting highway where a vehicle can detour or at a point on the highway wide enough to permit a U-turn.*

06 *If engineering judgment of roadway geometric and operating conditions confirms that motor vehicle speeds across the tracks should be below the posted speed limit, a W13-1P advisory speed plaque should be posted.*

07 *A signed detour should be installed to guide potential hang-up vehicles to alternate nearby crossings to avoid the potential hang-up condition.*

Support:

08 Information on ground clearance ~~requirements~~ design considerations at grade crossings is available in the 2019 edition of the "American Railway Engineering and Maintenance-of-Way Association's Engineering Manual," or in "A Policy on Geometric Design of Highways and Streets," 2018 Edition, AASHTO.

09 An inventory of crossings with low ground clearance concerns, including a list of potential vehicle types that could hang up on the crossing, can be useful in tracking locations of low ground clearance crossings. Specific geometric conditions, known incidents, or anecdotal evidence of vehicle hang- ups can also be used to identify crossings with low ground clearance concerns.

## Section 8B.17 Light Rail Transit Approaching-Activated Blank-Out Warning Sign (W10-7)

Support:

01 The Light Rail Transit Approaching-Activated Blank-Out (W10-7) warning sign (see Figure 8B-4) supplements the traffic control devices to warn road users crossing the tracks of approaching LRT equipment.

Option:

02 A Light Rail Transit Approaching-Activated Blank-Out warning sign may be used at signalized intersections near highway-LRT grade crossings or at crossings controlled by STOP signs or automatic gates.

Support:

03 The provisions contained in Chapter 2L for blank-out signs are applicable to the W10-7 sign.

## Section 8B.18 Another Train Coming Sign (W10-16)

Support:

01 Conflicts between vehicles or vulnerable road users and multiple trains can occur at multi-track crossings on sidewalks, pathways, and at crossings in station areas where grade crossing users might not consider the arrival of another train on a different track.

*Guidance:*

02 *The decision to provide notification of another train should be ~~made~~ evaluated and recommended by a Diagnostic Team and consistent with determination by CPUC. In making this ~~determination~~ recommendation, the Diagnostic Team*

*should consider the pedestrian usage, pedestrian collision history, train speeds and volumes, operating plans and/or schedules, and the presence of a nearby station or transit center.*

Option:

03 An ANOTHER TRAIN COMING (W10-16) train-activated blank-out sign (see Figure 8B-4) may be used to provide notification of another train coming. For added sign conspicuity, a Warning Beacon may be used in accordance with the requirements of Section 4S.03.

## Section 8B.19 TRAINS MAY EXCEED 80 MPH Sign (W10-8)

*Guidance:*

01 *Where trains are permitted to travel at speeds exceeding 80 mph, a TRAINS MAY EXCEED 80 MPH (W10-8) sign (see Figure 8B-4) should be installed facing road users approaching the highway-rail grade crossing.*

02 *If used, the TRAINS MAY EXCEED 80 MPH signs should be installed between the Grade Crossing Advance Warning (W10-1 through W10-4) sign (see Figure 8B-4) and the highway-rail grade crossing on all approaches to the highway-rail grade crossing. The locations should be determined based on specific site conditions and consistent with determination by CPUC.*

## Section 8B.20 NO TRAIN HORN Sign or Plaque (W10-9 and W10-9P)

**Standard:**

01 **Either a NO TRAIN HORN (W10-9) sign (see Figure 8B-4) or a NO TRAIN HORN (W10-9P) plaque (see Figure 8B-4) shall be installed in each direction at each highway-rail grade crossing where a Quiet Zone has been established in compliance with 49 CFR Part 222. If a W10-9P plaque is used, it shall supplement and be mounted directly below the Grade Crossing Advance Warning (W10-1 through W10-4) sign (see Figure 8B-4).**

Option:

02 At grade crossings where Grade Crossing Advance Warning (W10 series) sign (see Figure 8B-4) is used along with a Number of Tracks (W48P(CA)) plaque (see Figure 8B-4(CA)), the No Train Horn (W10-9P) plaque (see Figure 8B-4)) may be placed below the W48P(CA) plaque.

## Section 8B.21 Storage Space Signs (W10-11, W10-11a, and W10-11b)

*Guidance:*

01 *A Storage Space (W10-11) sign supplemented by a word message Storage Space Ahead (W10-11a) sign (see Figure 8B-4) should be used where there is a highway intersection in close proximity to the grade crossing and the Diagnostic Team determines that adequate space is not available to store a design vehicle(s) between the highway intersection and the train or LRT equipment dynamic envelope.*

02 *The Storage Space (W10-11 and W10-11a) signs should be mounted in advance of the grade crossing at an appropriate location to advise drivers of the space available for motor vehicle storage between the highway intersection and the grade crossing.*

Option:

03 A word message Storage Space Behind (W10-11b) sign (see Figure 8B-4) may be mounted beyond the grade crossing at the highway intersection under the STOP or YIELD sign or just prior to the signalized intersection to remind drivers of the storage space between the tracks and the highway intersection.

**Standard:**

04 **A Storage Space (W10-11) sign shall not be used as a replacement for the required Advance Warning (W10-1) sign. If used, the Storage Space sign shall be used in addition to the W10-1 sign and shall be mounted on a separate post.**

## Section 8B.22 Skewed Crossing Sign (W10-12)

~~Option:~~

*Guidance:*

01 *The Skewed Crossing (W10-12) sign (see Figure 8B-4) ~~may~~ should be used at a skewed grade crossing that has an angle of 30 degrees or less between the track and the roadway alignment to warn road users that the tracks are not perpendicular to the highway.*

~~*Guidance:*~~

02 *If the Skewed Crossing sign is used, the symbol should show the direction of the crossing (near left to far right as shown on the sign image in Figure 8B-4, or the mirror image if the track goes from far left to near right).*

02a *If used, the W10-12 sign should be erected approximately midway between the crossing and the Grade Crossing Advance Warning (W10-1) sign.*

**Standard:**

03 **The Skewed Crossing sign shall not be used as a replacement for the required Advance Warning (W10-1) sign. If used, the Skewed Crossing sign shall be used in addition to the W10-1 sign and shall be mounted on a separate post.**

## Section 8B.23 NO GATES OR LIGHTS Plaque (W10-13P)

Option:

01 The NO GATES OR LIGHTS (W10-13P) plaque (see Figure 8B-4) may be mounted below the Grade Crossing Advance Warning (W10-1 through W10-4) sign at grade crossings that are not equipped with automatic gates or automated signals.

## Section 8B.24 Next Crossing Plaques (W10-14P and W10-14aP)

Option:

01 The NEXT CROSSING (W10-14P) plaque (see Figure 8B-4) may be mounted below the Low Ground Clearance (W10-5) sign (see Section 8B.16) or Skewed Crossing (W10-12) sign to indicate to a road user that the warning is associated with the next grade crossing. This plaque may be used where multiple grade crossings exist in close proximity to one another.

02 Where recommended by a Diagnostic Team, the USE NEXT CROSSING (W10-14aP) plaque (see Figure 8B-4) may be mounted below the Low Ground Clearance (W10-5) sign (see Section 8B.16) to advise a road user with a low clearance load to use the crossing after the upcoming crossing to avoid encountering a low ground clearance situation.

## Section 8B.25 ROUGH CROSSING Plaque (W10-15P)

Option:

01 The ROUGH CROSSING (W10-15P) plaque (see Figure 8B-4) may be mounted below the Grade Crossing Advance Warning (W10-1 through W10-4) sign on the approach to a grade crossing to provide supplemental information that the surface or condition of the grade crossing might require a reduced speed or some other appropriate action by the road user.

02 If the grade crossing is rough, word message signs such as BUMP, DIP, or ROUGH CROSSING may be installed. A W13-1P advisory speed plaque may be installed below the word message sign in advance of rough crossings.

## Section 8B.26 Light Rail Transit Station Sign (I3-8)

Option:

01 The Light Rail Transit Station (I3-8) sign (see Section 2H.01) may be used to direct road users to an LRT station or boarding location. It may be supplemented by a Transit System Name (G96AP(CA)) plaque with the name of the transit system such as TROLLEY or BART, as appropriate, and by arrows as provided in Section 2D.08 and Figure 8B-101(CA).

## Section 8B.27 Emergency Notification System Sign (I13-1)

Support:

00 CPUC General Order 75, as amended, includes requirements on posting grade crossing identification.

**Standard:**

01 **The Emergency Notification System (I13-1) sign (see Figure 8B-5) shall be installed on each approach at all highway-rail grade crossings, and at all highway-LRT grade crossings with automatic gates or ~~flashing light signals~~ flashing-light signals, to provide information to road users so that they can notify the railroad company or transit agency about emergencies or malfunctioning traffic control devices.**

02 **At a highway-rail grade crossing, the Emergency Notification System sign shall, at a minimum, include the USDOT grade crossing inventory number and the emergency contact telephone number.**

03 **Where Emergency Notification System signs are used at a highway-LRT grade crossing, they shall, at a minimum, include ~~a unique crossing identifier~~ either the CPUC or USDOT grade crossing inventory number and the**

**emergency contact telephone number.**

04 **The minimum width of the Emergency Notification System sign shall be 12 inches and the minimum height shall be 9 inches. The lettering on Emergency Notification System signs for the telephone number, the grade crossing inventory number, and the explanation of the purpose of the sign shall be composed of numerals and upper-case letters that are at least 1 inch in height.**

05 **Emergency Notification System signs shall be retroreflective.**

06 **Except as provided in Paragraph 7 of this Section, Emergency Notification System signs shall have a white legend and border on a blue background.**

Option:

07 The seven-character grade crossing inventory number may be shown on the sign as a black legend on a white rectangular background.

*Guidance:*

08 *Except as provided in Paragraph 12 of this Section, Emergency Notification System signs should be attached to the Crossbuck Assemblies or grade crossing signal masts on the right-hand side of each roadway approach to the grade crossing rather than on the railroad or LRT signal control equipment housings.*

*Emergency Notification System signs should be oriented so the face of the sign is approximately parallel or approximately perpendicular to the edge of the roadway or pathway and is visible to road users or pathway users. The visibility of the Emergency Notification System sign should not be obstructed by automatic gates in either the vertical or horizontal position.*

09 *The Emergency Notification System signs should be positioned so as to not obstruct any traffic control devices or limit the view of rail traffic approaching the grade crossing.*

10 *Emergency Notification System signs mounted on Crossbuck Assemblies or signal masts should only be large enough to provide the necessary contact information. Use of larger signs on Crossbuck Assemblies or signal masts that might obstruct the view of rail traffic or other motor vehicles should be avoided.*

11 *At station crossings, Emergency Notification System signs or information should be posted in a conspicuous location.*

Option:

12 Emergency Notification System signs may be located on a separate post. Where located on a separate post, the size of the Emergency Notification System sign may be increased for improved visibility.

13 Where the improvement of the conspicuity of an Emergency Notification System sign is desired, a solid yellow rectangular header panel with a legend of "NOTICE" in black letters may be used (see Section 2A.11).

14 Additional Emergency Notification System signs may be installed at a grade crossing.

## Section 8B.101(CA) Train Station Signs (I3-7 and G97AP(CA))

**Standard:**

01 **The AMTRAK (G97AP(CA)) plaque shall be used for all new installations to identify Amtrak facilities.**

Option:

02 Alternatively, CALTRAIN, BART or other names of the transit system may be used, as appropriate.

Support:

03 The G97AP(CA) plaque is shown in Figure 8B-101(CA).

## Section 8B.102(CA) Pedestrian Grade Crossing Sign (R15-1D(CA))

**Standard:**

01 **The Pedestrian Grade Crossing (R15-1D(CA)) sign (see Figure 8B-1(CA)) shall be posted at grade crossings exclusively used by pedestrians and/or bicyclists. Refer to CPUC General Order 75, as amended.**

Support:

02 Refer to Table 8B-1(CA) for minimum size of the Pedestrian Grade Crossing (R15-1D(CA)) sign.

## Section 8B.103(CA) Private Grade Crossing Sign (R15-1X(CA))

**Standard:**


01 **The Private Grade Crossing (R15-1X(CA)) sign (see Figure 8B-1(CA)) shall be installed at all private grade crossings. If**

**a STOP (R1-1) sign is used at the private grade crossing, the R15-1X(CA) sign shall be mounted on the post below it. If flashing-light signals are used, the R15-1X(CA) sign shall be attached to the mast below the flashing-light signals. Refer to CPUC General Order 75, as amended.**

Support:

02 Refer to Table 8B-1(CA) for minimum size of the Private Grade Crossing (R15-1X(CA)) sign.

## Figure 8B-1. Regulatory Signs and Plaques for Grade Crossings

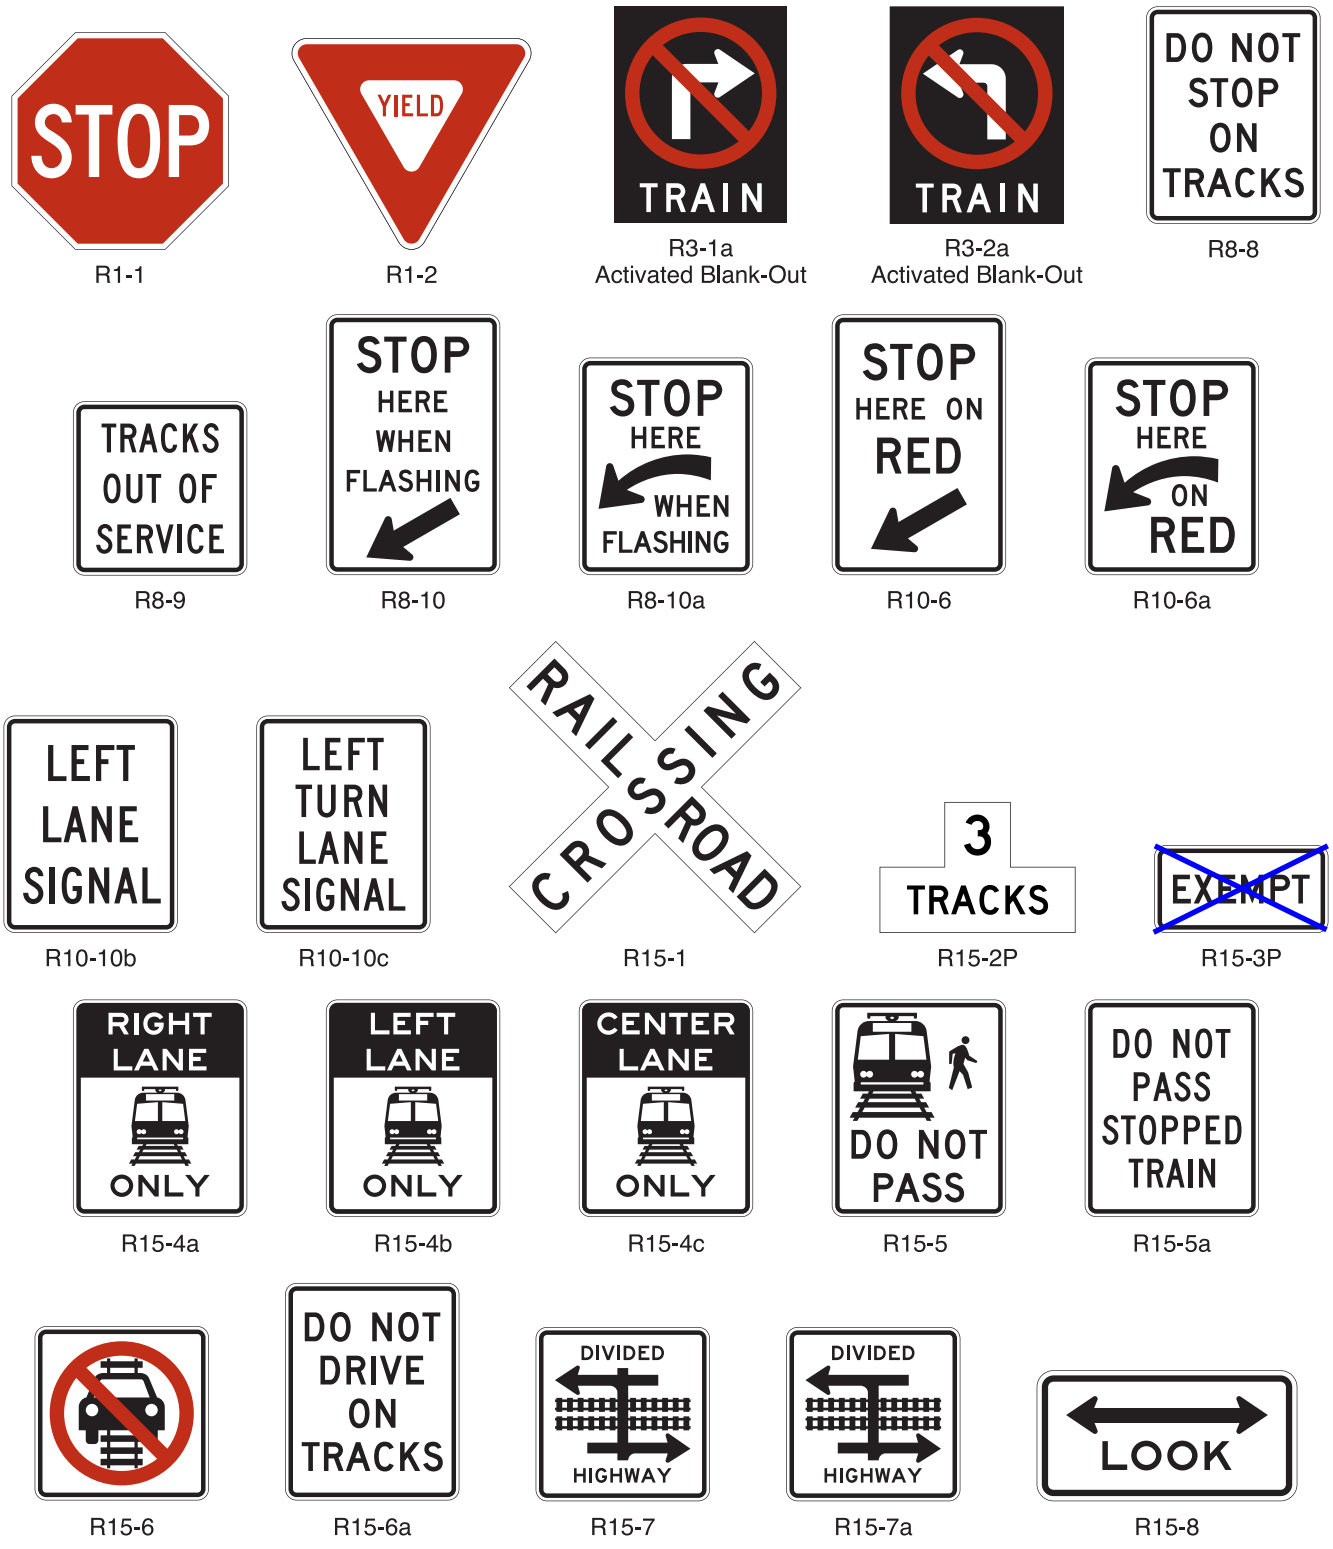

## *Figure 8B-1(CA). Regulatory Signs and Plaques for Grade Crossings*





R15-1D(CA)




R15-1E(CA)

# Figure 8B-2. Crossbuck Assembly with a YIELD or STOP Sign on the Crossbuck Sign Support

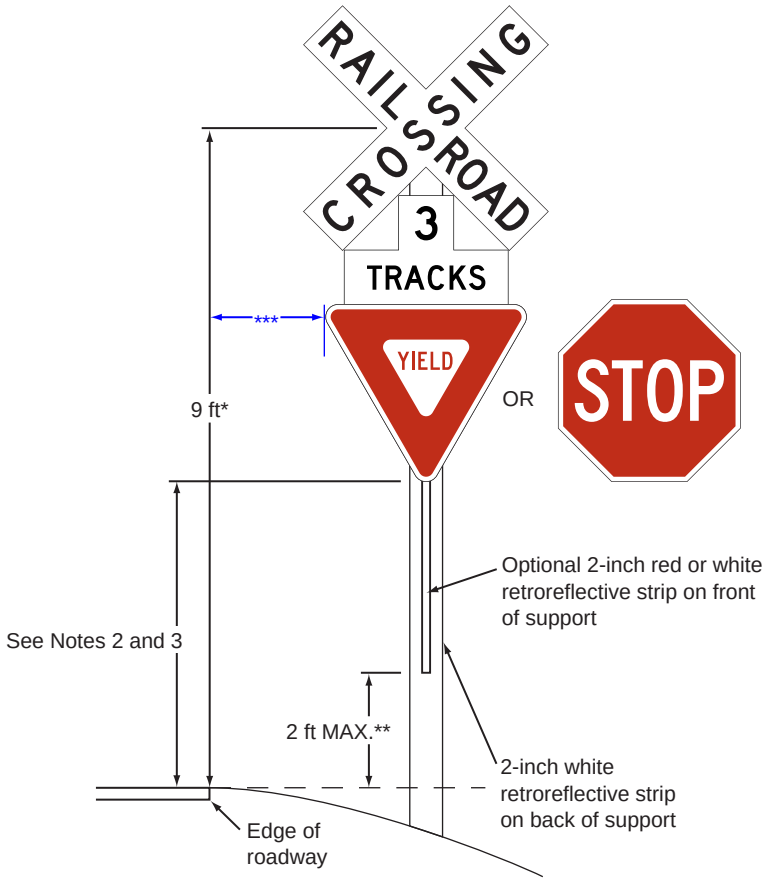


* Height may be varied as required by local conditions and may be increased to accommodate signs mounted below the Crossbuck sign


** Measured to the elevation of the near edge of the roadway

*** Refer to Section 2A.16 regarding lateral offset offset of signs


Notes:

1. YIELD or STOP signs are used only at passive crossings. A STOP sign is used only if an engineering study determines that it is appropriate for that particular approach.
2. Mounting height shall be at least 4 feet for installations of YIELD or STOP signs on existing Crossbuck sign supports.
3. Mounting height shall be at least 5 feet for new installations in rural areas and at least 7 feet for new installations in areas where parking or pedestrian movements are likely to occur.
4. Refer to Section 8B.27 regarding the Emergency Notification System (I13-1) sign.

## Figure 8B-3. Crossbuck Assembly with a YIELD or STOP Sign on a Separate Sign Support (Sheet 1 of 2)

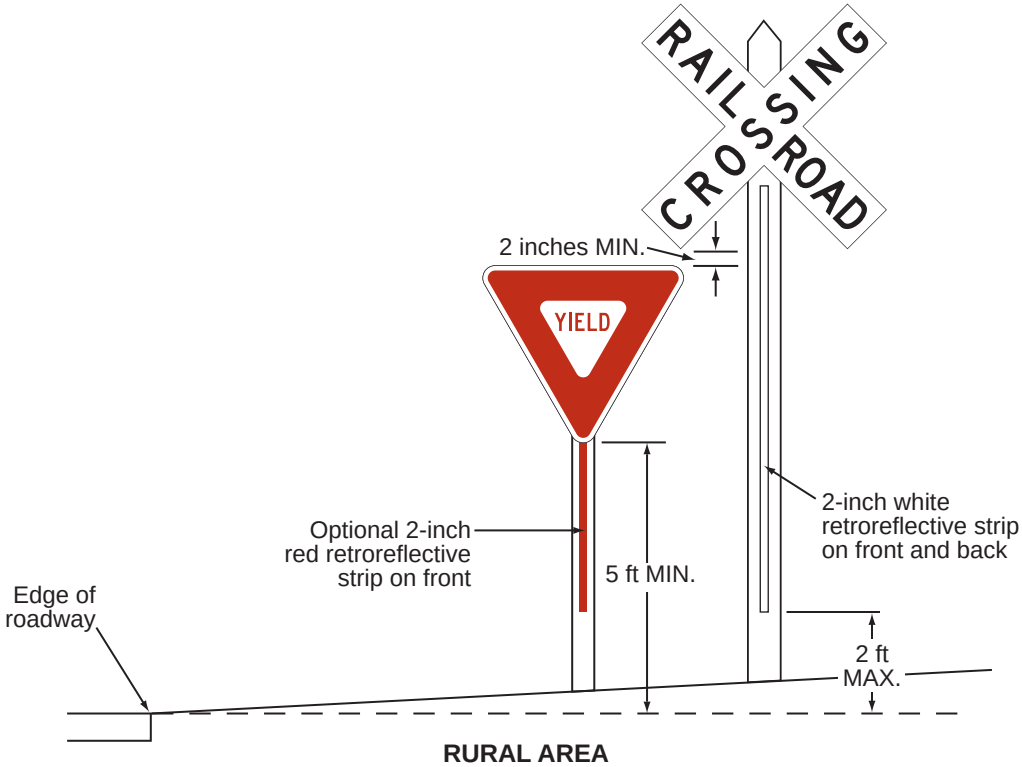


**RURAL AREA**

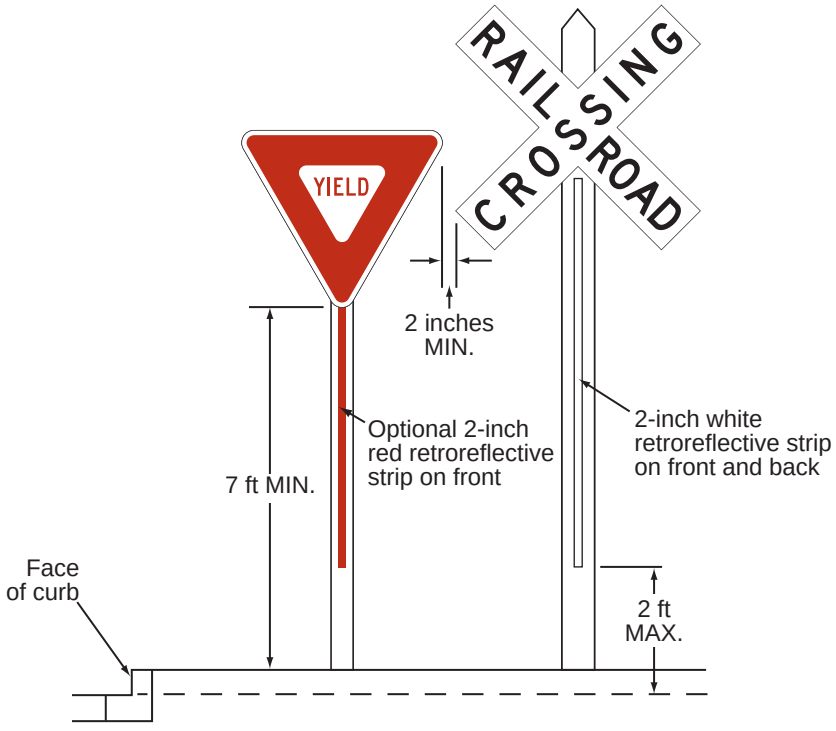




**AREA WITH PEDESTRIAN MOVEMENTS OR PARKING**

Notes:

1. YIELD signs are used only at passive crossings.
2. Place the face of the signs in the same plane and place the YIELD sign closer to the traveled way. Provide a 2-inch minimum separation between the edge of the Crossbuck sign and the edge of the YIELD sign.

## Figure 8B-3. Crossbuck Assembly with a YIELD or STOP Sign on a Separate Sign Support (Sheet 2 of 2)

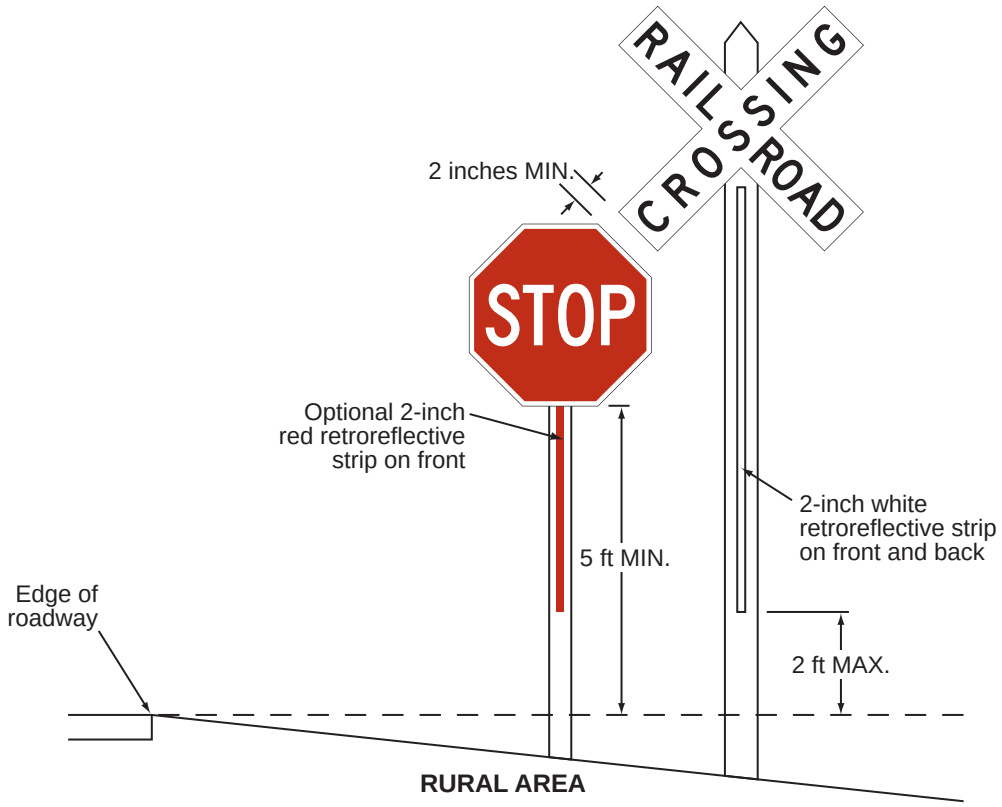

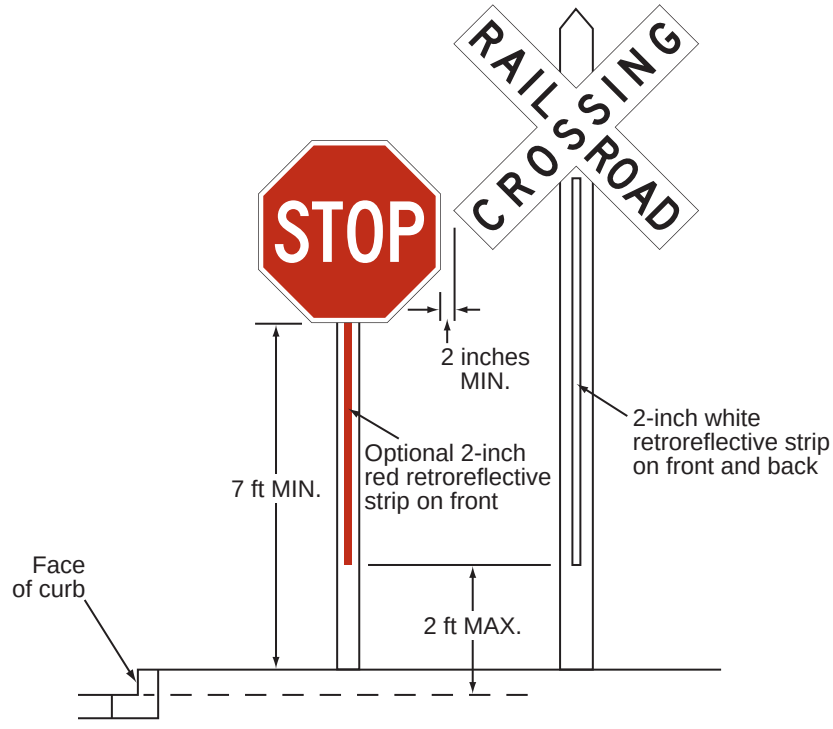




**AREA WITH PEDESTRIAN MOVEMENTS OR PARKING**

Notes:

1. STOP signs are used only at passive crossings and only if an engineering study determines that it is appropriate for that particular approach.
2. Place the face of the signs in the same plane and place the STOP sign closer to the traveled way. Provide a 2-inch minimum separation between the edge of the Crossbuck sign and the edge of the STOP sign.
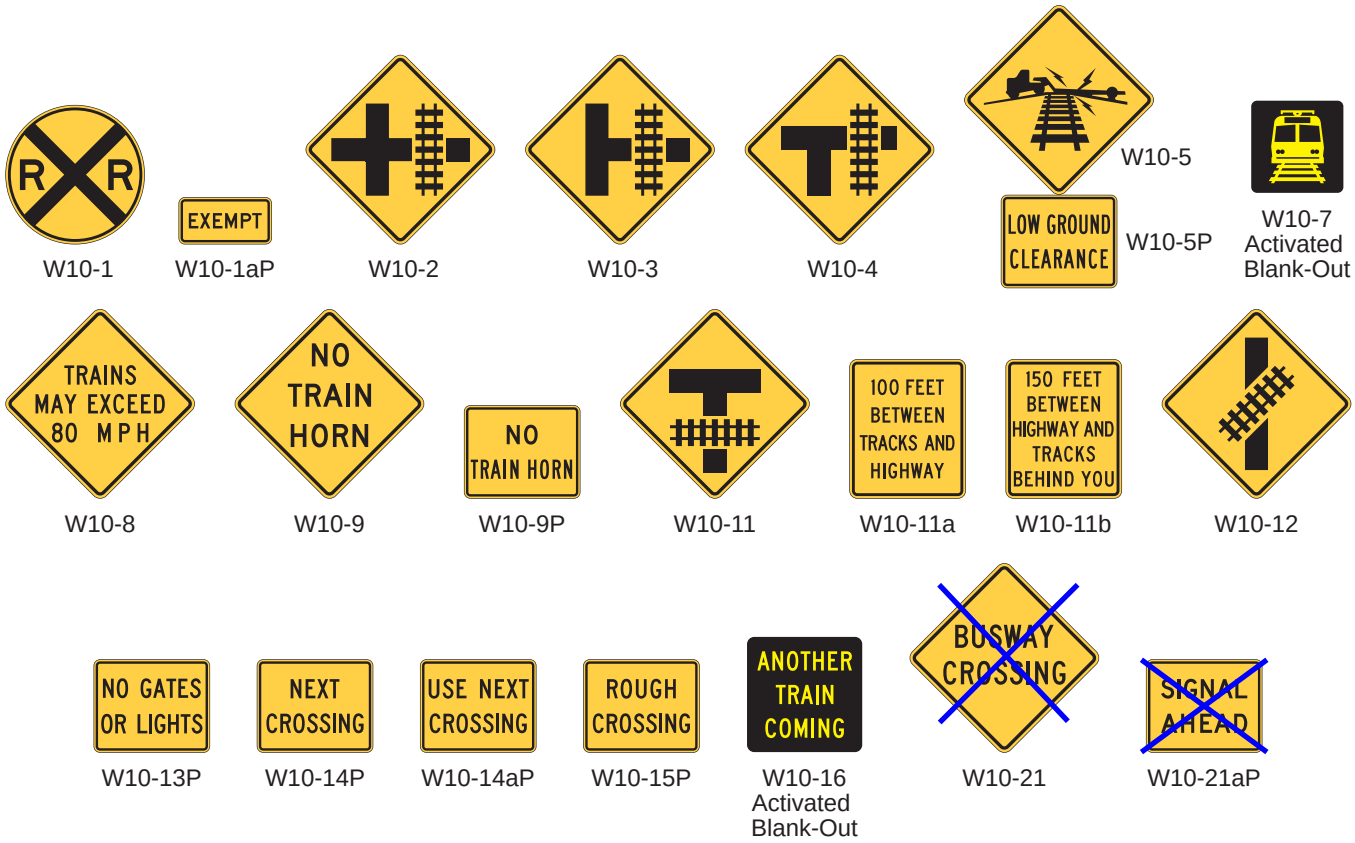
## Figure 8B-4. Warning Signs and Plaques for Grade Crossings




W10-1 W10-1aP W10-2 W10-3 W10-4 W10-5 W10-5P W10-7 Activated Blank-Out

W10-8 W10-9 W10-9P W10-11 W10-11a W10-11b W10-12

W10-13P W10-14P W10-14aP W10-15P W10-16 Activated Blank-Out W10-21 W10-21aP

Note: The W10-11 sign is a W10-3 sign modified for geometrics. Other signs can be oriented or revised as needed to better portray the geometrics of the roadways and the tracks.

## *Figure 8B-4(CA). Warning Signs and Plaques for Grade Crossings*




W46A(CA)*****




W48P(CA)

* The number below the word "EXEMPT" is the identification number uniquely associated with the associated highway-rail crossing.

## Figure 8B-5. Example of an Emergency Notification System Sign




I13-1

## *Figure 8B-101(CA). Train Station Signs*




G96AP(CA)




G97AP(CA)

## Table 8B-1. Grade Crossing Sign and Plaque Minimum Sizes (Sheet 1 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | |
| Stop | R1-1 | 8B.04, 8B.05 | 30 x 30 | 36 x 36 | 36 x 36 | — | 48 x 48 |
| Yield | R1-2 | 8B.04, 8B.05 | 30 x 30 x 30 | 36 x 36 x 36 | 36 x 36 x 36 | — | 48 x 48 x 48 |
| No Right Turn - Train (symbol) | R3-1a | 8D.10 | 24 x 30 | 30 x 36 | — | — | — |
| No Left Turn - Train (symbol) | R3-2a | 8D.10 | 24 x 30 | 30 x 36 | — | — | — |
| Do Not Stop on Tracks | R8-8 | 8B.07 | 24 x 30 | 24 x 30 | 36 x 48 | — | 36 x 48 |
| Tracks Out of Service | R8-9 | 8B.08 | 24 x 24 | 24 x 24 | 36 x 36 | — | 36 x 36 |
| Stop Here When Flashing | R8-10 | 8B.09 | 24 x 36 | 24 x 36 | — | — | 36 x 48 |
| Stop Here When Flashing | R8-10a | 8B.09 | 24 x 30 | 24 x 30 | — | — | 36 x 42 |
| Stop Here on Red | R10-6 | 8B.10 | 24 x 36 | 24 x 36 | — | — | 36 x 48 |
| Stop Here on Red | R10-6a | 8B.10 | 24 x 30 | 24 x 30 | — | — | 36 x 42 |
| Left (Right) Lane Signal | R10-10b | 8D.11 | 30 x 36 | 30 x 36 | — | 24 x 30 | — |
| Left (Right) Turn Lane Signal | R10-10c | 8D.11 | 30 x 42 | 30 x 42 | — | 24 x 36 | — |
| Grade Crossing (Crossbuck) | R15-1 | 8B.03 | 48 x 9 | 48 x 9 | — | — | — |
| Number of Tracks (plaque) | R15-2P | 8B.03 | 27 x 18 | 27 x 18 | — | — | — |
| ~~Exempt (plaque)~~ | ~~R15-3P~~ | ~~8B.11~~ | ~~24 x 12~~ | ~~24 x 12~~ | | | |
| Light Rail Only Right Lane | R15-4a | 8B.12 | 24 x 30 | 24 x 30 | — | — | — |
| Light Rail Only Left Lane | R15-4b | 8B.12 | 24 x 30 | 24 x 30 | — | — | — |
| Light Rail Only Center Lane | R15-4c | 8B.12 | 24 x 30 | 24 x 30 | — | — | — |
| Light Rail Do Not Pass (symbol) | R15-5 | 8B.13 | 24 x 30 | 24 x 30 | — | — | — |
| Do Not Pass Stopped Train | R15-5a | 8B.13 | 24 x 30 | 24 x 30 | — | — | — |
| No Motor Vehicles On Tracks (symbol) | R15-6 | 8B.14 | 24 x 24 | 24 x 24 | — | — | — |
| Do Not Drive On Tracks | R15-6a | 8B.14 | 24 x 30 | 24 x 30 | — | — | — |
| Light Rail Divided Highway (symbol) | R15-7 | 8B.15 | 24 x 24 | 24 x 24 | — | — | — |
| Light Rail Divided Highway (T-Intersection) (symbol) | R15-7a | 8B.15 | 24 x 24 | 24 x 24 | — | — | — |
| Look | R15-8 | 8E.03 | — | — | — | 18 x 9 | — |
| Grade Crossing Advance Warning | W10-1 | 8B.06 | 36 Dia. | 36 Dia. | 48 Dia. | — | 48 Dia. |
| Exempt (plaque) | W10-1aP | 8B.11 | 24 x 12 | 24 x 12 | — | — | — |
| Grade Crossing and Intersection Advance Warning (symbol) | W10-2,3,4 | 8B.06 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| Low Ground Clearance (symbol) | W10-5 | 8B.16 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| Low Ground Clearance (plaque) | W10-5P | 8B.16 | 30 x 24 | 30 x 24 | — | — | — |
| Light Rail Activated Blank-Out (symbol) | W10-7 | 8B.17 | 24 x 24 | 24 x 24 | — | — | — |
| Trains May Exceed 80 MPH | W10-8 | 8B.19 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| No Train Horn | W10-9 | 8B.20 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| No Train Horn (plaque) | W10-9P | 8B.20 | 30 x 24 | 30 x 24 | — | — | — |
| Storage Space (symbol) | W10-11 | 8B.21 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| Storage Space XX Feet between Tracks & Highway | W10-11a | 8B.21 | 30 x 36 | 30 x 36 | — | — | — |
| Storage Space XX Feet between Highway & Tracks Behind You | W10-11b | 8B.21 | 30 x 36 | 30 x 36 | — | — | — |
| Skewed Crossing (symbol) | W10-12 | 8B.22 | 36 x 36 | 36 x 36 | 48 x 48 | — | 48 x 48 |
| No Gates or Lights (plaque) | W10-13P | 8B.23 | 30 x 24 | 30 x 24 | — | — | — |
| Next Crossing (plaque) | W10-14P | 8B.24 | 30 x 24 | 30 x 24 | — | — | — |
| Use Next Crossing (plaque) | W10-14aP | 8B.24 | 30 x 24 | 30 x 24 | — | — | — |

## Table 8B-1. Grade Crossing Sign and Plaque Minimum Sizes (Sheet 2 of 2)

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi-Lane | | | |
| Rough Crossing (plaque) | W10-15P | 8B.25 | 30 x 24 | 30 x 24 | — | — | 36 x 30 |
| Another Train Coming Activated Blank-Out | W10-16 | 8B.18 | 30 x 30 | 30 x 30 | — | — | — |
| ~~Busway Crossing~~ | ~~W10-21~~ | ~~8B.06~~ | ~~36x36~~ | ~~36x36~~ | ~~48x48~~ | — | ~~48x48~~ |
| ~~Signal Ahead (plaque)~~ | ~~W10-21aP~~ | ~~8B.06~~ | ~~30x24~~ | ~~30x24~~ | — | — | — |
| Emergency Notification | I13-1 | 8B.27 | — | — | — | 12 x 9 | — |
| Push to Exit | I13-2 | 8E.06 | — | — | — | 18 x 9 | — |

Notes: 1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height
3. Table 9A-1 shows the minimum sizes that may be used for grade crossing signs and plaques that face shared-use paths and pedestrian facilities

## Table 8B-1(CA). California Grade Crossing Sign and Plaque Minimum Sizes

| Sign or Plaque | Sign Designation | Section | Conventional Road | | Expressway | Minimum | Oversized |
|---|---|---|---|---|---|---|---|
| | | | Single Lane | Multi- Lane | | | |
| Transit System Name (plaque) | G96AP(CA) | 8B.26 | 24 x 6 | 24 x 6 | 30 x 8 | 18 x 5 | — |
| AMTRAK (plaque) | G97AP(CA) | 8B.101(CA) | 24 x 6 | 24 x 6 | 30 x 8 | 18 x 5 | — |
| EXEMPT (plaque) | W46AP(CA) | 8B.11 | 15 x 9 | 15 x 9 | — | — | — |
| Number of Tracks (plaque) | W48P(CA) | 8B.06 | 30 x 24 | 30 x 24 | — | — | — |
| Pedestrian Grade Crossing | R15-1D(CA) | 8B.102(CA) | — | — | — | 18 x 30 | — |
| Private Grade Crossing | R15-1E(CA) | 8B.103(CA) | — | — | — | 18 x 30 | — |

Notes: 1. Larger signs may be used when appropriate.
2. Dimensions in inches are shown as width x height.

# CHAPTER 8C. MARKINGS

## Section 8C.01 Purpose and Application

Support:

01 Passive traffic control systems, consisting of signs and pavement markings only, identify and direct attention to the location of a grade crossing and advise road users to reduce their speed or stop at the grade crossing as necessary in order to yield to any rail traffic occupying, or approaching and in proximity to, the grade crossing.

02 Signs and pavement markings regulate, warn, and guide the road users so that they, as well as LRT vehicle operators on mixed-use alignments, can take appropriate action when approaching a grade crossing.

03 Unless otherwise provided in this Chapter, the provisions of Part 3 are applicable to the design and location of pavement markings at grade crossings.

## Section 8C.02 Grade Crossing Pavement Markings

**Standard:**

01 **On paved roadways, grade crossing pavement markings shall consist of an X, the letters RR, a no-passing zone marking (on two-lane, two-way highways with center line markings in compliance with Section 3B.01), and certain transverse lines as shown with detailed dimensions in Figures 8C-1, 8C-1(CA), and 8C-2 Example A.**

Support:

01a The grade crossing advance warning pavement markings consisting of an X, the letter R on each side of the X, and a transverse line before and after the X, is referred to as an "RXR marking".

**Standard:**

02 **Except as provided in Paragraphs 3 and 4 of this Section, grade crossing pavement markings shall be placed in each approach lane on all paved approaches to highway-rail grade crossings ~~where signals or automatic gates are located, and at all other grade crossings where the posted or statutory highway speed is 40 mph or higher.~~**

03 **~~Grade crossing pavement markings shall not be required at highway-rail grade crossings where the posted or statutory highway speed is less than 40 mph if the Diagnostic Team determines that other installed devices provide suitable warning and control.~~**

04 **~~Grade crossing pavement markings shall not be required at highway-rail grade crossings in urban areas if the Diagnostic Team determines that other installed devices provide suitable warning and control.~~**

05 **Grade crossing pavement markings shall be placed in each approach lane on all paved approaches to highway-LRT grade crossings where ~~a~~ Crossbuck (R15-1) signs, flashing-light signals, or automatic gates are ~~is~~ placed at the grade crossing.**

06 **If grade crossing pavement markings are used on a multi-lane approach to a grade crossing, identical markings shall be placed in each approach lane that crosses the tracks.**

07 **~~All grade crossing pavement~~ RXR markings, stop lines and yield lines shall be retroreflective white. All other markings shall be in accordance with Part 3.**

*Guidance:*

08 *Where grade crossing pavement markings are used, a portion of the X symbol should be directly opposite the Grade Crossing Advance Warning (W10-1) sign.*

08a *RXR markings should be omitted between the tracks and parallel highway if the distance from the stop line or yield line to the edge of the parallel highway is less than 100 feet and W10-2, W10-3, or W10-4 signs are used on the approaches of the parallel highway.*

08b *If the W10-2, W10-3, or W10-4 sign is installed along the parallel highway, RXR markings should be placed along the parallel highway within mandatory turn lanes for movements toward the crossing and RXR markings should be omitted from any other lanes on the parallel highway that do not turn toward the tracks.*

Support:

08c Figure 8C-1(CA) provides examples of grade crossing pavement markings and signage in the vicinity of intersections.

Option:

09 Where ~~determined~~ recommended by the Diagnostic Team, supplemental pavement marking symbol(s) may be placed between the Grade Crossing Advance Warning sign and the grade crossing.

*Guidance:*

10 *If ~~supplemental pavement marking symbol(s)~~ RXR markings are placed between the Grade Crossing Advance Warning sign and the grade crossing, the downstream transverse line should be at least 50 feet upstream from the stop or yield line at the grade crossing.*

11 *If used, the no-passing zone marking should extend at least 100 feet upstream of the stop or yield line.*

Support:

12 *Refer to Section 3B.03 for additional details regarding no-passing zone markings.*

## Section 8C.03 Stop and Yield Lines

*Guidance:*

01 *On paved roadway approaches to passive grade crossings where a STOP sign is installed in conjunction with the Crossbuck sign, a stop line should be installed to indicate the point behind which motor vehicles are required to stop or as near to that point as practicable.*

~~Option:~~

02 *On paved roadway approaches to passive grade crossings where a YIELD sign is installed in conjunction with the Crossbuck sign, a yield line (see Section 3B.19) ~~or a stop line may~~ should be installed to indicate the point behind which motor vehicles are required to yield or stop or as near to that point as practicable.*

~~*Guidance:*~~

03 *If a yield line (see Figure 3B-16) or stop line is used at a passive grade crossing, it should be a transverse line at a right angle to the traveled way and should be placed no closer than 15 feet in advance of the nearest rail.*

**Standard:**

04 **On paved roadways at grade crossings that are equipped with active control devices such as flashing-light signals, automatic gates, or traffic control signals, a stop line (see Section 3B.19) shall be installed to indicate the point behind which motor vehicles are or might be required to stop.**

04a **Stop lines shall be 24 inches wide.**

*Guidance:*

05 *If a stop line is used at an active grade crossing where road users are controlled by flashing-light signals, it should be a transverse line at a right angle to the traveled way and should be placed approximately 8 feet in advance of the flashing-light signals or automatic gate (if present), whichever is farther from the track(s), but no closer than 15 feet in advance of the nearest rail (see Figure 8C-1 and 8C-1(CA)).*

06 *If a stop line is used at an active grade crossing where road users are controlled by a traffic control signal, it should be a transverse line at a right angle to the traveled way and should be placed no closer than 15 feet in advance of the nearest rail.*

**Standard:**

07 **If a stop line is used at an active grade crossing where road users are controlled by a traffic control signal, it shall be placed such that the lateral and longitudinal positions of the signal faces for the approach comply with the provisions of Sections 4D.07 and 4D.08.**

## Section 8C.04 Lane-Use Arrow Markings

**Standard:**

01 **Lane-use arrow markings (see Section 3B.23) that indicate that a turning movement must be made or is permitted to be made from a lane that crosses a grade crossing shall not be placed between the stop line for the grade crossing and the track(s).**

*Guidance:*

02 *Lane-use arrow markings that indicate that a turning movement must be made or is permitted to be made from a lane that crosses a grade crossing should not be placed less than 100 feet upstream from the stop line for the grade crossing or less than 20 feet beyond the farthest rail.*

## Section 8C.05 Edge Lines, Lane Lines, Center Lines, Raised Pavement Markers, and Tubular Markers

*Guidance:*

01 *Except as provided in Paragraphs ~~3 through~~ 4 and 5 of this Section, if edge lines (see Section 3B.09), lane lines (see Section 3B.06), or center lines (see Section 3B.01) are used on an approach to a grade crossing, the edge lines, lane*

*lines, and center lines should extend up to and across the grade crossing to reduce the likelihood that road users might inadvertently turn into the track area.*

02 *If crossing surface maintenance or highway approach maintenance is performed that alters the markings, the removal or replacement of the markings, raised pavement markers, and/or tubular markers should be coordinated with the road authority and the railroad company or transit agency.*

Option:

03 ~~Edge lines, lane lines, and center lines may be omitted on or between the rails to conform to the requirements of the railroad company and/or transit agency.~~

04 Edge lines, lane lines, and center lines may be omitted on or between the rails where the highway profile is sufficiently abrupt to create a hang-up situation for pavement marking equipment with low ground clearance.

05 The edge lines, lane lines, and center lines may be omitted from the highway surface at a grade crossing if the surface cannot retain the application of the edge line, lane line, or center line marking.

06 If recommended by a Diagnostic Team, raised pavement markers (see Section 3B.16) may be used to supplement the edge lines, lane lines, or center lines that extend up to and across the grade crossing.

07 If recommended by a Diagnostic Team, tubular markers (see Section 3I.02) may be used to supplement the edge lines that extend up to and across the grade crossing.

*Guidance:*

08 *Tubular markers should be installed in accordance with the clearance requirements of the railroad company and/or transit agency and CPUC.*

**Standard:**

09 **The color under both daytime and nighttime conditions of raised pavement markers or tubular markers that are used at a grade crossing shall be the same color as the edge line, lane line, or center line that they supplement.**

## Section 8C.06 Dynamic Envelope and Do Not Block Pavement Markings

Option:

01 Dynamic envelope markings may be installed at a grade crossing to mark the edges of the train dynamic envelope.

**Standard:**

02 **If used, pavement markings for indicating the dynamic envelope shall comply with the provisions of Part 3 and shall be a solid white line not less than 4 inches nor greater than 24 inches in width.**

Option:

03 Contrasting pavement color (see Section 3A.03 and Chapter 3H) and/or contrasting pavement texture may be used alone or in combination with pavement markings to indicate the dynamic envelope.

*Guidance:*

04 *If a solid white line is used to convey the dynamic envelope, the line should be placed completely outside of the dynamic envelope. If used, dynamic envelope pavement markings should be placed parallel to the nearest rail in accordance with the railroad company or transit agency and CPUC requirements. If used, dynamic envelope pavement markings should extend across the roadway as shown in Figure 8C-3. Dynamic envelope pavement markings should not be placed perpendicular to the roadway at skewed grade crossings.*

Option:


05 If solid white lines are used to indicate the dynamic envelope, white cross-hatching lines (see Figure 8C-3) may also be placed on the highway pavement within the dynamic envelope as a supplement to, but not as a substitute for, the solid white lines. White cross-hatching lines (see Section 3B.26) may also be placed on the pavement to mark areas adjacent to the dynamic envelope where vehicles are not intended to stop or stand as shown in Figure 8C-4.

06 In semi-exclusive LRT alignments, the dynamic envelope markings may be along the LRT trackway between intersections where the trackway is immediately adjacent to travel lanes and no physical barrier is present.

07 In mixed-use LRT alignments, the dynamic envelope markings may be continuous between intersections (see Figure 8C-5).

08 In mixed-use LRT alignments, pavement markings for adjacent travel or parking lanes may be used instead of dynamic envelope markings if the lines are outside the dynamic envelope.

# Figure 8C-1. Example of Placement of Warning Signs and Pavement Markings at Grade Crossings

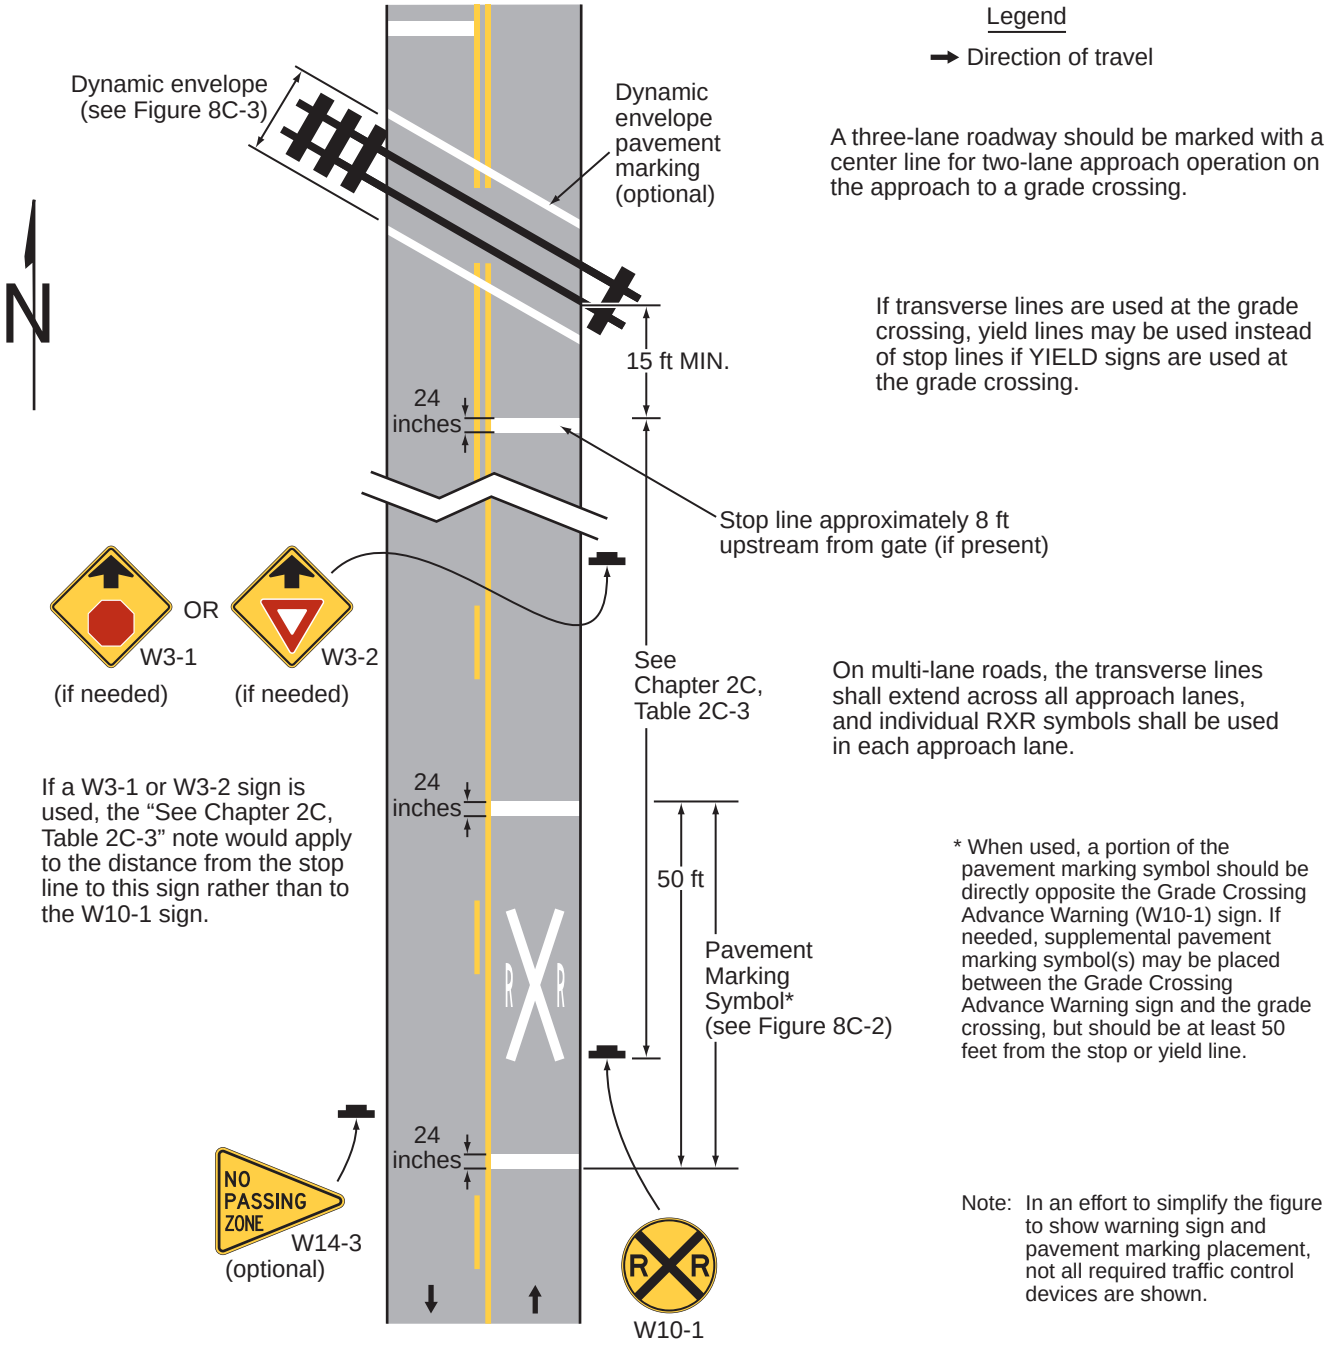


A three-lane roadway should be marked with a center line for two-lane approach operation on the approach to a grade crossing.

If transverse lines are used at the grade crossing, yield lines may be used instead of stop lines if YIELD signs are used at the grade crossing.


On multi-lane roads, the transverse lines shall extend across all approach lanes, and individual RXR symbols shall be used in each approach lane.

If a W3-1 or W3-2 sign is used, the "See Chapter 2C, Table 2C-3" note would apply to the distance from the stop line to this sign rather than to the W10-1 sign.


* When used, a portion of the pavement marking symbol should be directly opposite the Grade Crossing Advance Warning (W10-1) sign. If needed, supplemental pavement marking symbol(s) may be placed between the Grade Crossing Advance Warning sign and the grade crossing, but should be at least 50 feet from the stop or yield line.

Note: In an effort to simplify the figure to show warning sign and pavement marking placement, not all required traffic control devices are shown.

## *Figure 8C-1(CA). Example of Placement of Warning Signs and Pavement Markings at Grade Crossings (Sheet 1 of 3)*

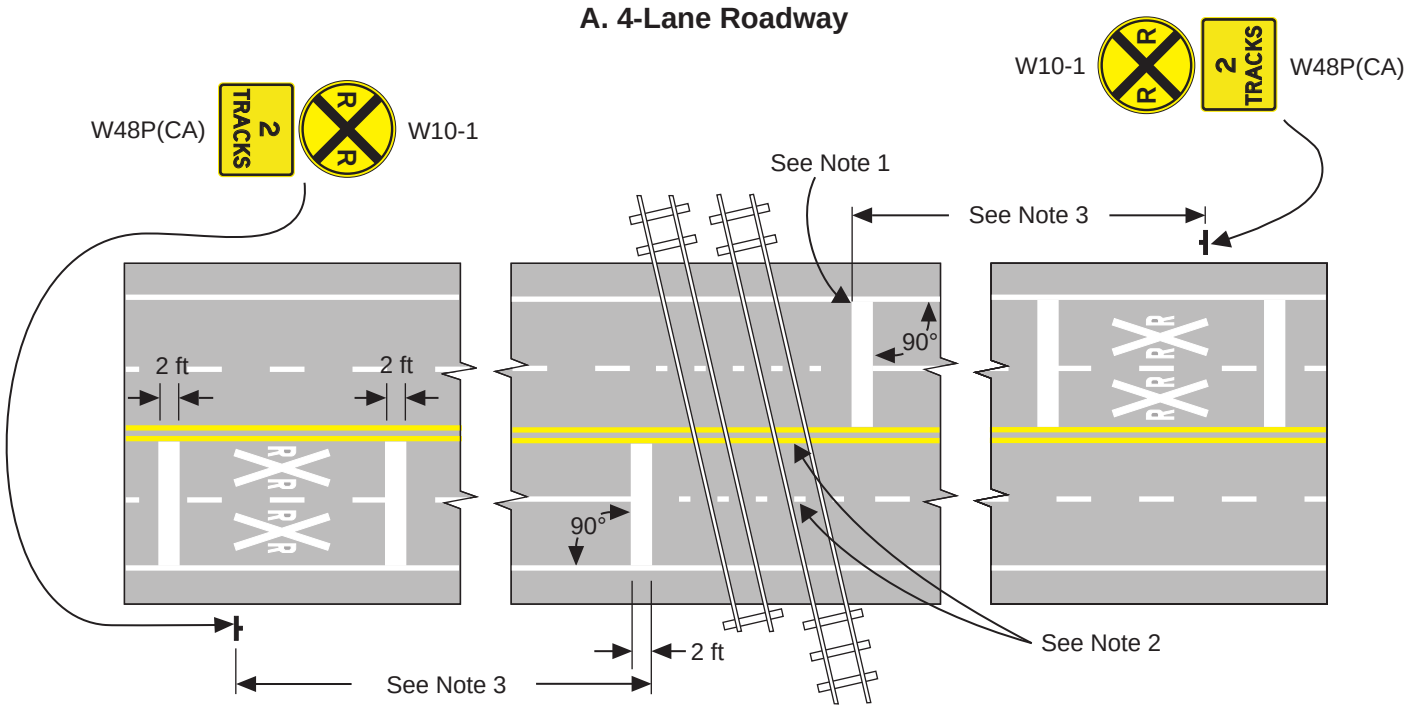


General Note:
In an effort to simplify the figure to show warning sign and pavement marking placement, not all required traffic control devices are shown.

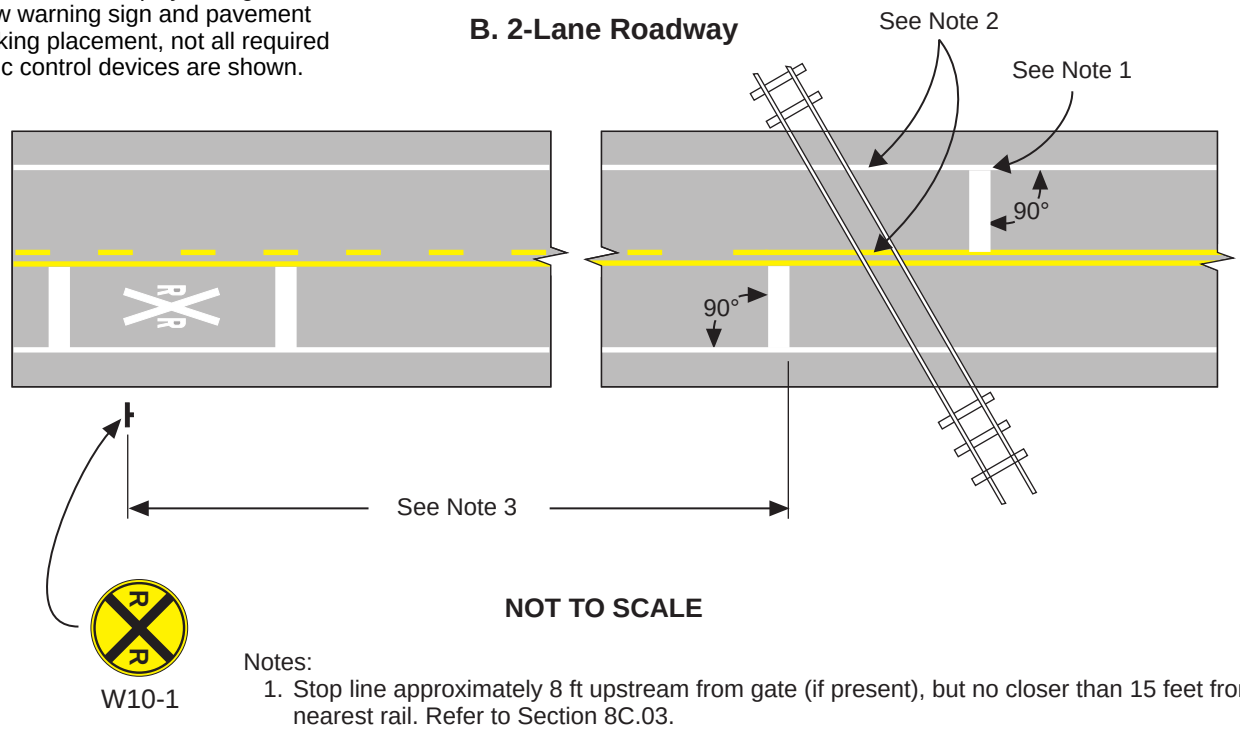



**NOT TO SCALE**


Notes:
1. Stop line approximately 8 ft upstream from gate (if present), but no closer than 15 feet from nearest rail. Refer to Section 8C.03.
2. Edge lines, lane lines, and center lines should extend up to and across the grade crossing. Refer to Section 8C.05.
3. Refer to Section 2C.04. The distances contained in Table 2C-3 should be applied with engineering judgment.

## *Figure 8C-1(CA). Example of Placement of Warning Signs and Pavement Markings at Grade Crossings (Sheet 2 of 3)*

### C. Parallel Roadway less than 100 feet

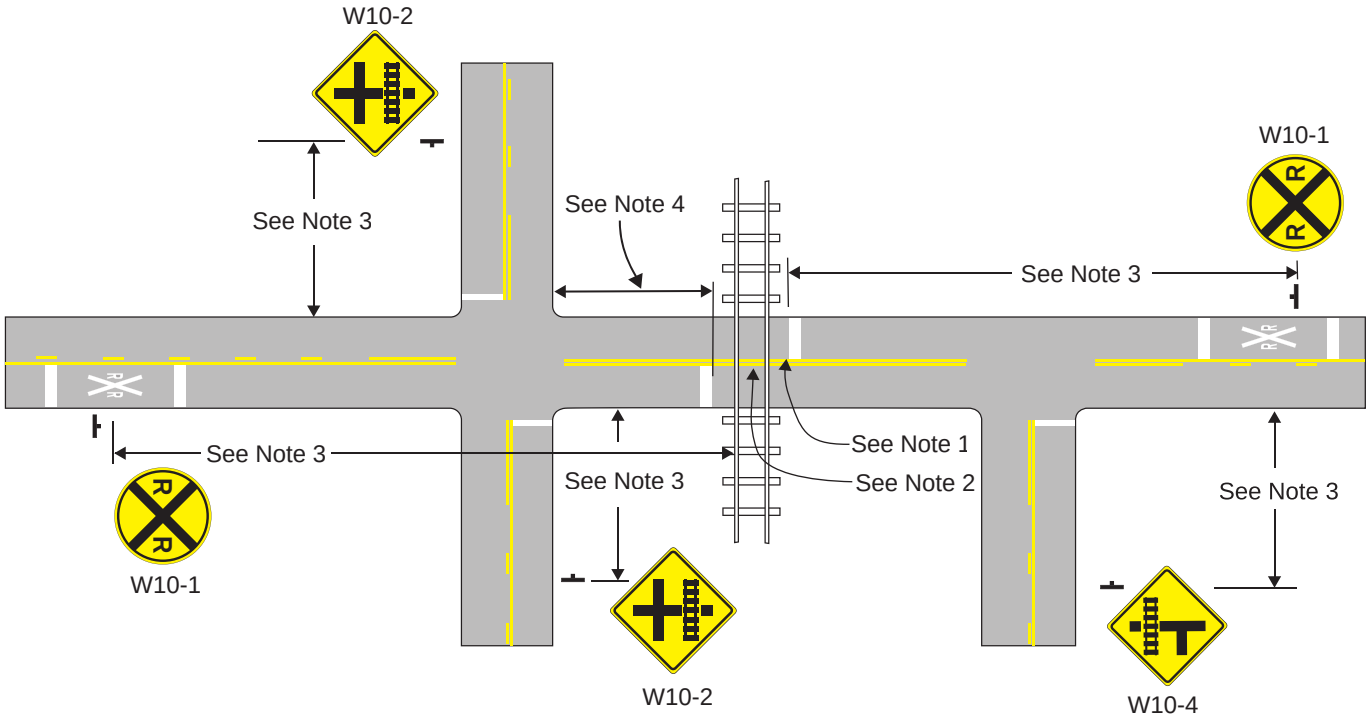


### D. Parallel Roadway greater than 100 feet

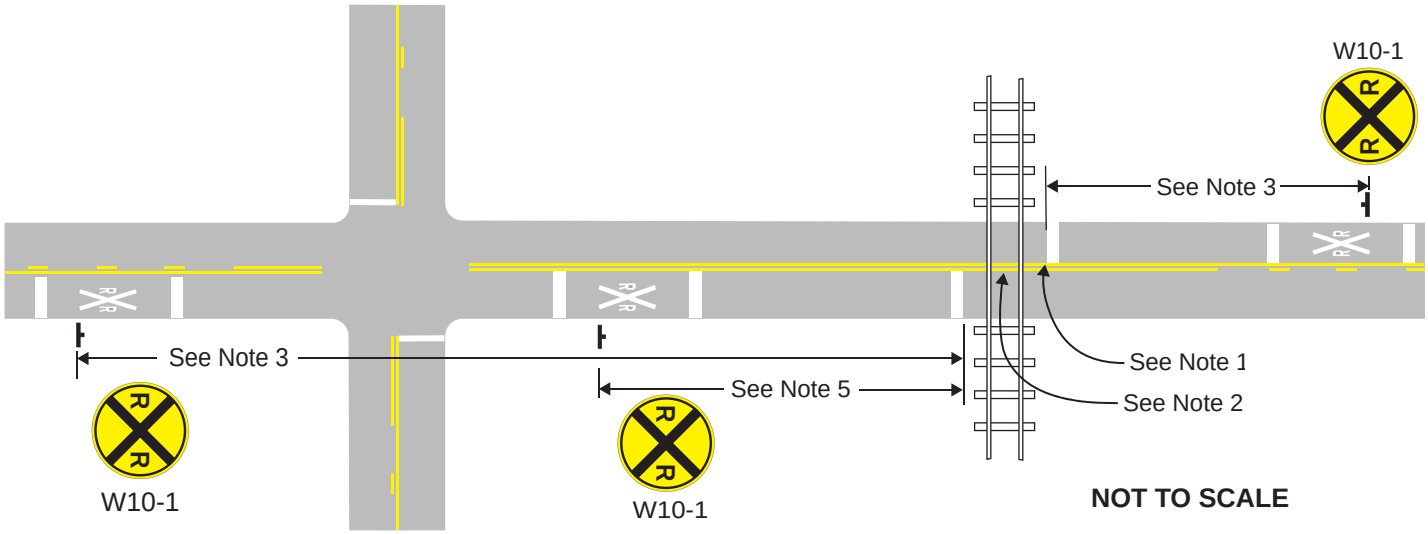



Notes:

1. Stop line approximately 8 ft upstream from gate (if present), but no closer than 15 feet from nearest rail. Refer to Section 8C.03.
2. Edge lines, lane lines, and center lines should extend up to and across the grade crossing. Refer to Section 8C.05.
3. Refer to Section 2C.04. The distances contained in Table 2C-3 should be applied with engineering judgment.
4. RXR marking should be omitted between the intersection and the crossing where the distance is less than 100 feet and W10-2, W10-3, or W10-4 signs are used on the approaches of the parallel highway. Refer to Section 8C.02.
5. W10-1 sign between the tracks and the parallel highway should be placed within 50 feet of the intersection. Refer to Section 8B.06.

## *Figure 8C-1(CA). Example of Placement of Warning Signs and Pavement Markings at Grade Crossings (Sheet 3 of 3)*

### E. Parallel Roadway less than 100 feet - Mandatory Turn Lanes

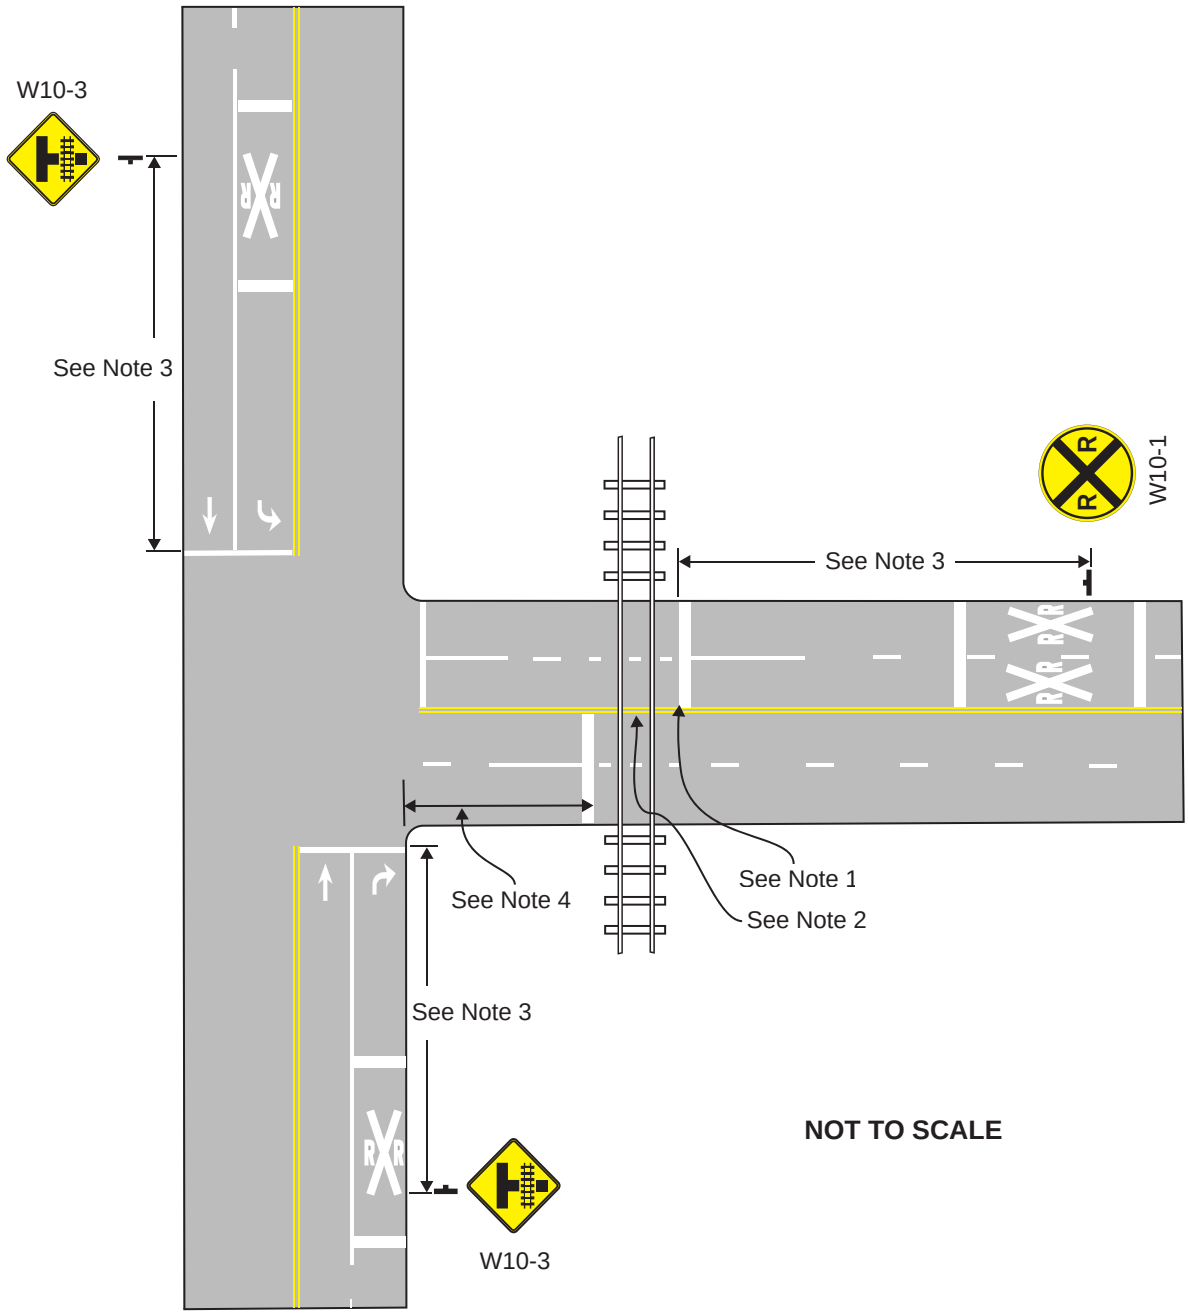



Notes:

1. Stop line approximately 8 ft upstream from gate (if present), but no closer than 15 feet from nearest rail. Refer to Section 8C.03.
2. Edge lines, lane lines, and center lines should extend up to and across the grade crossing. Refer to Section 8C.05.
3. Refer to Section 2C.04. The distances contained in Table 2C-3 should be applied with engineering judgment.
4. RXR marking should be omitted between the intersection and the crossing where the distance is less than 100 feet and W10-2, W10-3, or W10-4 signs are used on the approaches of the parallel highway. Refer to Section 8C.02.


# Figure 8C-2. Grade Crossing Pavement Markings

**A – Grade crossing pavement marking symbol**

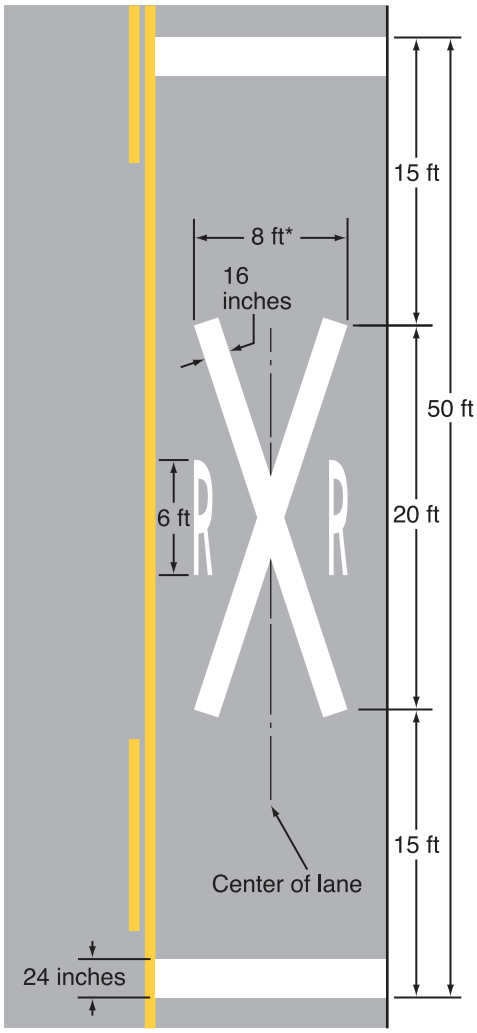



* Width may vary according to lane width

**B – Grade crossing alternative (narrow) pavement marking symbol**

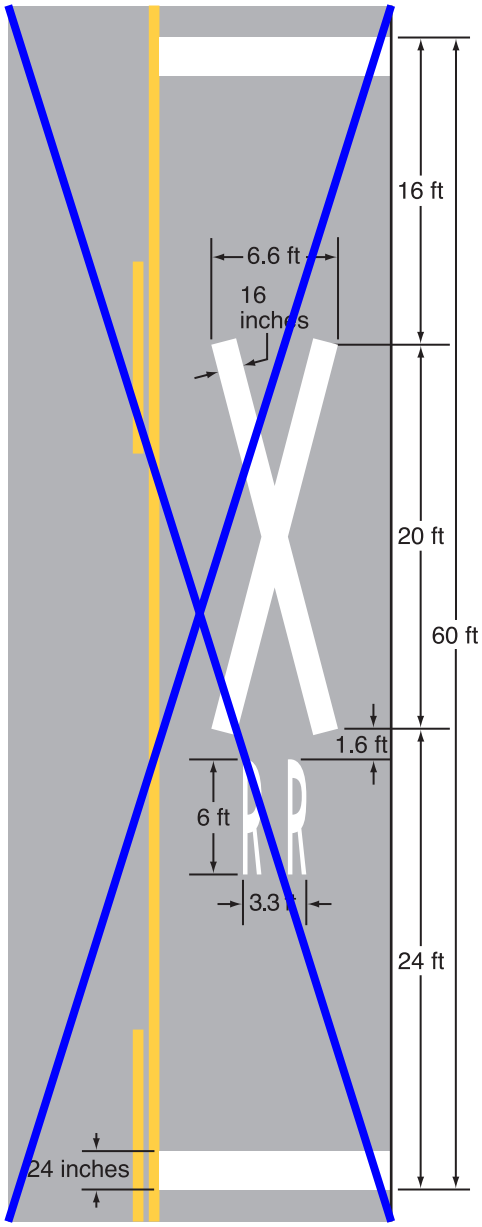



Note: Refer to Figure 8C-1 for placement


## Figure 8C-3. Example of Dynamic Envelope Pavement Markings at Grade Crossings

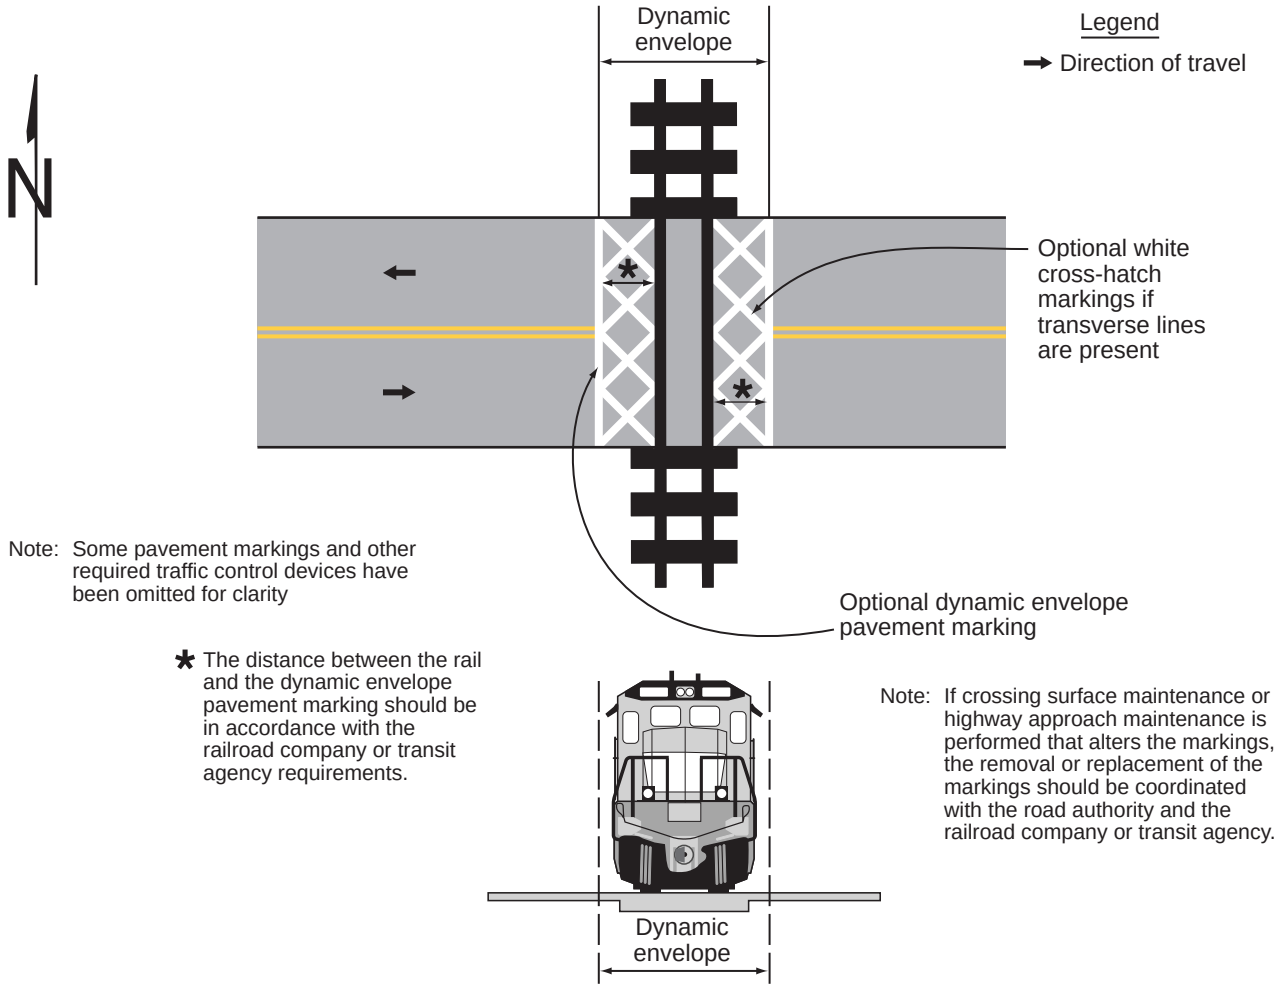

## Figure 8C-4. Example of Dynamic Envelope and Do Not Block Pavement Markings at Grade Crossings

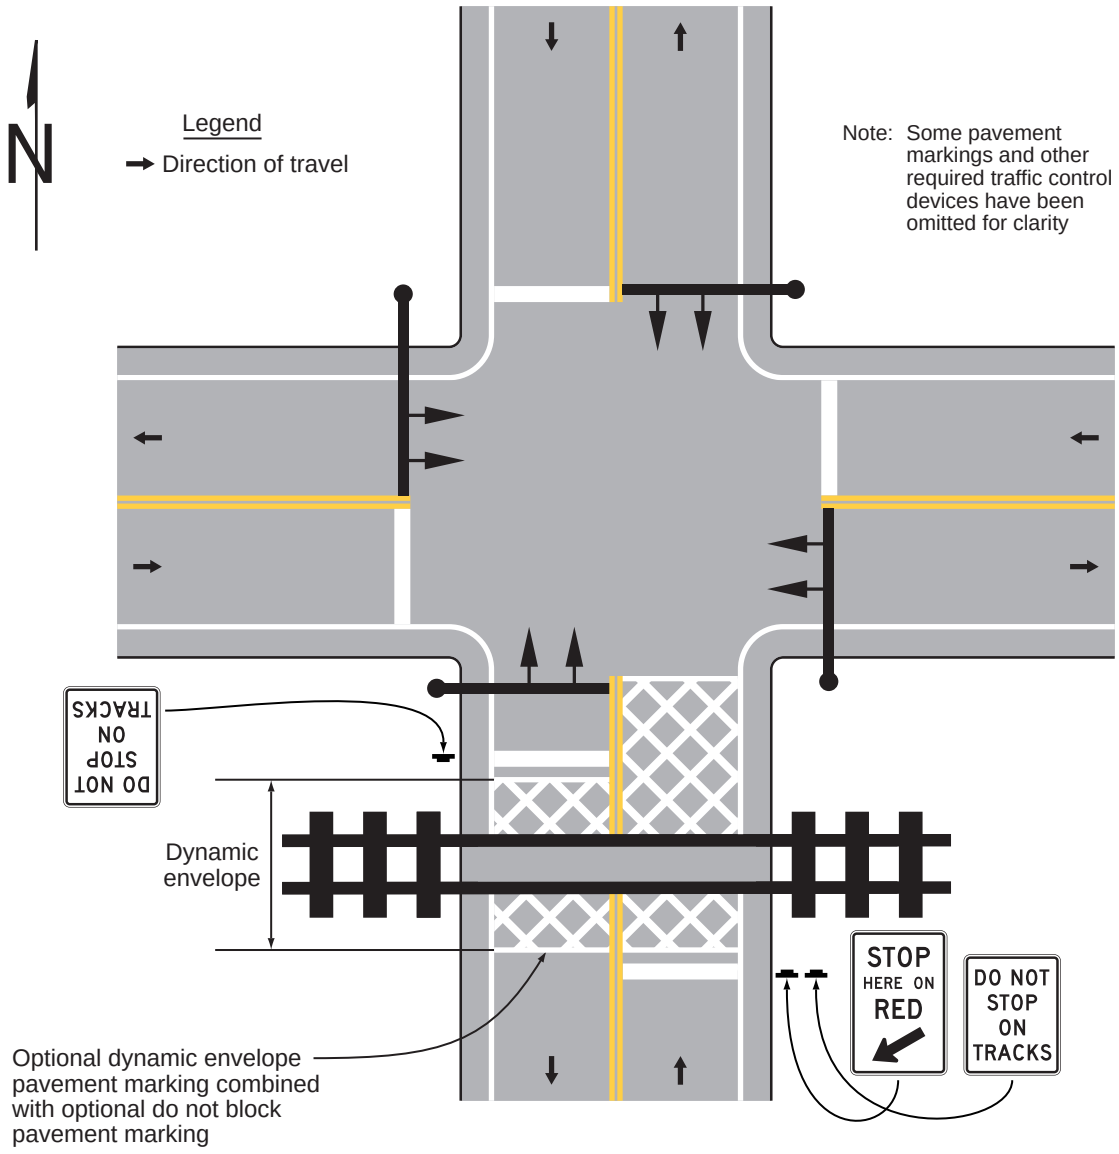

## Figure 8C-5. Examples of Light Rail Transit Vehicle Dynamic Envelope Markings for Mixed-Use Alignments

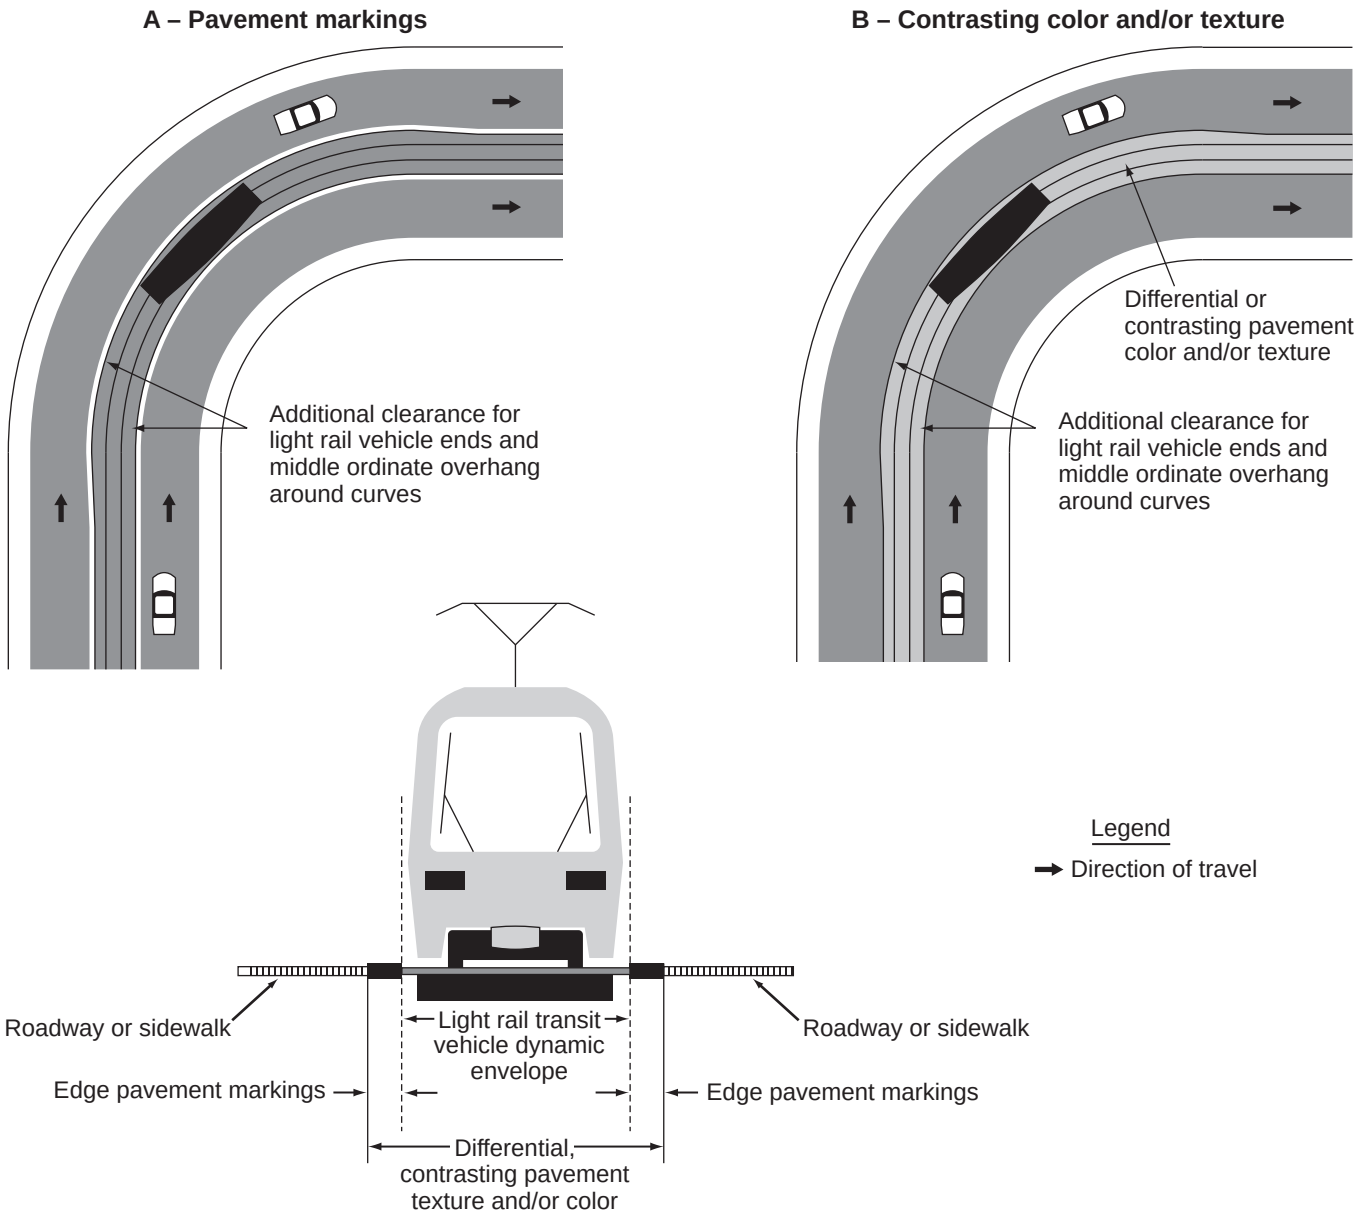

# CHAPTER 8D. FLASHING-LIGHT SIGNALS, AUTOMATIC GATES, AND TRAFFIC CONTROL SIGNALS

## Section 8D.01 Introduction

Support:

01 Active traffic control systems inform road users of the approach or presence of rail traffic at grade crossings. These systems include Exit Gate systems, automatic gates, flashing-light signals, traffic control signals, actuated blank-out and variable message signs, and other active traffic control devices that are used in conjunction with the signs and pavement markings that are described in Chapters 8B and 8C, respectively.

02 Figure 8D-1 shows a post-mounted flashing-light signal (two light units mounted in a horizontal line), a flashing-light signal mounted on an overhead structure, and an automatic gate assembly.

03 Where LRT speed is cited in this Part, it refers to the maximum speed at which LRT equipment is permitted to traverse a particular grade crossing.

03a California Public Utilities Commission General Order 143, "Safety Rules and Regulations Governing Light-Rail Transit", as amended, governs the operation and allowable speeds of light rail transit systems.

Option:

04 Post-mounted and overhead flashing-light signals may be used separately or in combination with each other as ~~determined~~ recommended by the Diagnostic Team and determined by CPUC. Also, flashing-light signals may be used without automatic gate assemblies, as ~~determined~~ recommended by the Diagnostic Team and determined by CPUC.

**Standard:**

05 **The meaning of flashing-light signals and automatic gates shall be as stated in ~~Sections 11-701 and 11-703 of the Uniform Vehicle Code~~ CVC § 22451 (see Section 1A.06).**

06 **Location for flashing-light signals and automatic gates shall be as shown in Figure 8D-1.**

07 **Where there is a curb, a horizontal offset of at least 2 feet shall be provided from the face of the vertical curb to the nearest part of the signal or automatic gate arm in its upright position. Where a cantilevered-arm flashing-light signal is used, the vertical clearance shall be at least 17 feet above the crown of the highway to the lowest point of the signal unit.**

08 **Where there is a shoulder, but no curb, a horizontal offset of at least 2 feet from the edge of a paved shoulder shall be provided, with an offset of at least 6 feet from the edge of the traveled way.**

09 **Where there is no curb or shoulder, the minimum horizontal offset shall be 6 feet from the edge of the traveled way.**

10 **Minimum clearance dimensions for flashing-light signals and automatic gates relative to the closest track shall conform to standards provided by the railroad company and/or transit agency, and ~~the regulatory agency with statutory authority (if applicable)~~ CPUC.**

*Guidance:*

11 *Equipment housings (controller cabinets) should have a lateral offset of at least 30 feet from the edge of the highway, and where railroad or LRT property and conditions allow, at least 25 feet from the nearest rail.*

12 *If a pedestrian route is provided, sufficient clearance from supports, posts, and automatic gate mechanisms should be maintained for pedestrian travel.*

13 *Where ~~determined~~ recommended by the Diagnostic Team, a lateral escape route to the right-hand side of the highway in advance of the grade crossing traffic control devices should be kept free of guardrail or other ground obstructions. Where guardrail is not deemed necessary or appropriate, barriers should not be used for protecting signal supports.*

14 *The same lateral offset and roadside safety features should apply to flashing-light signal and automatic gate locations on both the right-hand and left-hand sides of the roadway.*

14a *The visibility of flashing-light signals to approaching vehicular and/or pedestrian traffic should be the highest priority for flashing-light signal placement and aiming.*

Option:

15 In industrial or other areas involving only low-speed highway traffic or where signals are vulnerable to damage by turning truck traffic, guardrail may be installed to provide protection for the signal assembly.

*Guidance:*

16 *Where both traffic control signals and flashing-light signals (with or without automatic gates) are in operation at the same highway-LRT grade crossing, the operation of the devices should be coordinated to avoid any display of conflicting signal indications.*

Option:

17 If highway traffic signals must be located within close proximity to the flashing-light signals, the highway traffic signals may be mounted on the same overhead structure as the flashing-light signals.

## Section 8D.02 Flashing-Light Signals

Support:

01 Section 8D.04 contains additional information regarding flashing-light signals at highway-LRT grade crossings in semi-exclusive and mixed-use alignments.

**Standard:**

02 **If used, the flashing-light signal assembly (shown in Figure 8D-1) on the side of the highway shall include a standard Crossbuck (R15-1) sign, and where there is more than one track, a supplemental Number of Tracks (R15-2P) plaque, all of which indicate to motorists, bicyclists, and pedestrians the location of a grade crossing.**

*Guidance:*

*03 The bottom of the Number of Tracks (R15-2P) plaque (when used) should be located as low as practicable above the flashing-light backgrounds. The Crossbuck (R15-1) sign should be located just above the Number of Tracks (R15-2P) plaque or, if no plaque is present, the bottom of the Crossbuck sign should be located as low as practicable above the flashing-light backgrounds.*

Support:

04 Additional information regarding sizes and clearances of components used on flashing-light signals can be found in Part 3 of the "2023 AREMA Communications and Signals Manual" published by the American Railway Engineering and Maintenance-of-Way Association (AREMA).

~~Option:~~

**Standard:**

05 **Except for median-mounted flashing-light signals, ~~At~~ at highway-rail grade crossings, bells or other audible warning devices ~~may~~ shall be included in the assembly and ~~may~~ shall be operated in conjunction with the flashing-light signals to provide additional warning for pedestrians, bicyclists, and/or other non-motorized road users.**

Option:

05a An audible device such as a bell that is operated in conjunction with flashing-light signals may be mounted on either the top or side of the mast of the flashing-light signal assembly.

**Standard:**

05b **The minimum mounting height for any part of the audible device including the mounting arm, such as a bell that is operated in conjunction with flashing-light signals, shall be no lower than the bottom of the flashing-light signals.**

06 **When indicating the approach or presence of rail traffic, the flashing-light signal shall display toward approaching highway traffic two red lights mounted in a horizontal line flashing alternately.**

07 **If used, flashing-light signals shall be placed to the right-hand side of approaching highway traffic on all highway approaches to a grade crossing. They shall be located laterally with respect to the highway in compliance with Figure 8D-1 except where such location would adversely affect signal visibility.**

08 **If used at a grade crossing with highway traffic in both directions, back-to-back flashing-light signals shall be placed on each side of the tracks. On multi-lane one-way streets and divided highways, flashing-light signals shall be placed on the approach side of the grade crossing on both sides of the roadway or shall be placed above the highway.**

09 **Each red signal unit in the flashing-light signal shall flash alternately. The number of flashes per minute for each lamp shall be 35 minimum and 65 maximum. Each lamp shall be illuminated for approximately the same length of time. The total time of illumination of each pair of lamps shall be the entire operating time.**

10 **Flashing-light units shall use ~~either 8-inch or~~ 12-inch nominal diameter lenses. Refer to CPUC General Order 75, as amended.**

*Guidance:*

11 ~~*In choosing between the 8-inch or 12-inch nominal diameter lenses for use in grade crossing flashing- light signals, consideration should be given to the principles stated in Section 4E.02.*~~

12 *If flashing-light signals are used, at least one pair of flashing lights should be ~~provided for~~ visible from each approach lane of the roadway.*

13 *The center-to-center distance between the two red lights in a flashing-light unit should be approximately 30 inches.*

14 *The mounting height of the flashing-light units, measured from the center of the flashing-light unit housing to the elevation of the crown of the roadway, should be between 8 feet and 9 feet.*

15 *The top of the support pole foundation should be no more than 4 inches above the surface of the ground ~~and should be at the same elevation as the crown of the roadway~~.*

Option:

15a Where site conditions do not allow the top of the support pole foundation to meet the guidance above, the shoulder slope may need to be re-graded, or the height of the railroad signal mast may need to be adjusted to meet requirements for vertical clearance above the roadway.

**Standard:**

16 **Grade crossing flashing-light signals shall operate at a low voltage using storage batteries either as a primary or stand-by source of electrical energy. Provision shall be made to provide a source of energy for charging batteries.**

Option:

17 Additional flashing-light signals may be mounted on the same supporting post and directed toward vehicular traffic approaching the grade crossing from other than the principal highway route, such as where there are approaching routes on highways closely adjacent to and parallel to the track(s).

*Guidance:*

18 *Where the storage distance for vehicles approaching a grade crossing is less than a design vehicle length, the Diagnostic Team should consider providing additional flashing-light signals aligned toward the movement turning toward the grade crossing.*

19 *The Diagnostic Team should consider the use of additional flashing-light signals to provide supplemental warning to pedestrians, especially on one-way streets and divided highways.*

**Standard:**

20 **References to lenses in this Section shall not be used to limit flashing-light signal optical units to incandescent lamps within optical assemblies that include lenses.**

Support:

21 Research has resulted in flashing-light signal optical units that are not lenses, such as, but not limited to, light-emitting diode (LED) flashing-light signal modules.

Option:

22 If a Diagnostic Team recommends and CPUC determines that it is appropriate, the flashing-light signals may be installed on overhead structures or cantilevered supports as shown in Figure 8D-1 where needed for additional emphasis, or for better visibility to approaching traffic, particularly on multi-lane approaches or highways with profile restrictions.

23 If it is ~~determined~~ recommended by a Diagnostic Team and determined by CPUC that one flashing-light signal on the cantilever arm is not sufficiently visible to road users, one or more additional flashing-light signals may be mounted on the supporting post and/or on the cantilever arm.

*Guidance:*

23a *For an approach to a pre-signal or queue cutter signal at a grade crossing, the Diagnostic Team should consider whether omission of overhead flashing-light signals would enhance the conspicuity of the pre-signal or queue cutter signal.*

**Standard:**

24 **Breakaway or frangible bases shall not be used on the supporting posts for overhead structures or cantilevered arms that support overhead flashing-light signals.**

## Section 8D.03 Automatic Gates

Support:

01 An automatic gate is a traffic control device used in conjunction with flashing-light signals.

**Standard:**

02 **The automatic gate (see Figure 8D-1) shall consist of a drive mechanism and a fully retroreflective red-and-white-striped gate arm with lights. When in the down position, the gate arm shall extend across the approaching lanes of highway traffic.**

03 **In the normal sequence of operation, unless constant warning time detection or other advanced system requires otherwise, the flashing-light signals and the lights on the gate arm (in its normal upright position) shall be activated immediately upon detection of approaching rail traffic. The gate arm shall start its downward motion not less than 3 seconds after the flashing-light signals start to operate, shall reach its horizontal position at least 5 seconds before the arrival of the rail traffic, and shall remain in the down position until the rail traffic completely clears the grade crossing.**

04 **When the rail traffic clears the grade crossing, and if no other rail traffic is detected, the gate arm shall ascend to its upright position, following which the flashing-light signals and the lights on the gate arm shall cease operation.**

05 **Gate arms shall be fully retroreflective on both sides and shall have vertical stripes alternately red and white at 16-inch intervals measured horizontally. The width (which becomes the height of the retroreflective sheeting when the automatic gate is in the down position) of the retroreflective sheeting on the front of the gate arm shall be at least 4 inches for the first 32 feet of gate arm length measured from the center of the gate mast. The front of the gate arm beyond 32 feet to the tip of the gate shall have retroreflective sheeting at least 2 inches in width.**

Support:

05a Refer to FHWA's List of Known Errors for error in Paragraph 5 text. Refer to Section 1A.04 for more details.

06 ~~It is acceptable to replace a damaged gate arm with a gate arm having vertical stripes even if the other existing gate arms at the same grade crossing have diagonal stripes; however, it~~ It is ~~also~~ acceptable to replace a damaged gate arm with a gate arm having diagonal stripes if the other existing gate arms at the same grade crossing have diagonal stripes in order to maintain consistency per the provisions of Paragraph 13 of Section 1B.03.

**Standard:**

07 **Gate arms shall have at least three red lights as shown in Figure 8D-1.**

08 **When activated, the gate arm light nearest the tip shall be illuminated continuously and the other lights shall flash alternately in unison with the flashing-light signals such that the left-most flashing gate arm light(s) flashes simultaneously with the left-hand light of the flashing-light signals and the right-most flashing gate arm light(s) flashes simultaneously with the right-hand light of the flashing- light signals.**

Support:

09 Typical gate arm lights are approximately 4 inches in diameter if they are circular. Rectangular gate arm lights with approximately the same illuminated surface area are sometimes used on gate arms instead of circular lights.

**Standard:**

10 **The entrance gate arm mechanism shall be designed to fail safe in the down position.**

*Guidance:*

11 *The gate arm should ascend to its upright position in 12 seconds or less.*

12 *In its normal upright position, when no rail traffic is approaching or occupying the grade crossing, the gate arm should be approximately vertical (see Figure 8D-1).*

13 *In the design of individual installations, consideration should be given to timing the operation of the gate arm to accommodate large and/or slow-moving motor vehicles.*

14 *The gate arms should cover the approaching highway to block all motor vehicles from being driven around the gate arms without crossing the center line.*

15 *The height of the gate arm when it is in the down position should be between 3.5 feet and 4.5 feet above the ~~crown~~ surface of the roadway. When the gate arm is in the down position, no portion of the counterweight should extend into the traveled way, sidewalk, or pathway.*

Option:

16 Channelizing devices and/or raised median islands may be used to discourage driving around lowered automatic gates.

*Guidance:*

17 *Where sufficient space is available, median islands should be at least 60 feet in length.*

Option:

18 Where automatic gates are located in the median, additional median width may be required to provide the minimum clearance for the counterweight supports.

19 Automatic gates may be supplemented by cantilevered flashing-light signals (see Figure 8D-1) where there is a need for additional emphasis or better visibility.

## Section 8D.04 Use of Active Traffic Control Systems at LRT Grade Crossings

**Standard:**

01 **At highway-LRT grade crossings where LRT speeds exceed 25 mph, active traffic control systems (see Section 8D.01) shall be used.**

02 **At highway-LRT grade crossings where LRT speeds exceed ~~40~~ 35 mph, the active traffic control system shall include automatic gates. Refer to CPUC General Order 143, as amended.**

Option:

03 The Diagnostic Team may recommend an active traffic control system with automatic gates at highway-LRT grade crossings where LRT speeds do not exceed ~~40~~ 35 mph.

*Guidance:*

04 *At highway-LRT grade crossings where LRT speeds are 25 mph or less, active traffic control systems should be used unless the Diagnostic Team recommends and CPUC determines that the use of Crossbuck Assemblies, STOP signs alone, or YIELD signs alone would be adequate.*

05 *Where the highway-LRT grade crossing is at a location other than an intersection and LRT speeds exceed 20 mph, traffic control signals should not be used in lieu of flashing-light signals.*

Support:

06 Sections 8D.02 and 8D.03 contain additional provisions regarding the design and operation of flashing-light signals and automatic gates, respectively.

**Standard:**

07 **If flashing-light signals are in operation at a highway-LRT crossing that is used by pedestrians, bicyclists, and/or other non-motorized road users, an audible device such as a bell shall also be provided and shall be operated in conjunction with the flashing-light signals.**

## Section 8D.05 Exit Gate and Four-Quadrant Gate Systems

Option:

01 Exit Gate systems may be installed to improve safety at grade crossings where a Diagnostic Team recommends and CPUC determines that less restrictive measures, such as automatic gates and median islands, are not effective.

Support:

02 A grade crossing that includes exit gates on some, but not all, of the exiting lanes is an Exit Gate system, but is not considered to be a Four-Quadrant Gate system.

03 The term Four-Quadrant Gate system is used in a generic sense in that it refers to the fact that all entrances and exits from a grade crossing are controlled by automatic gates in order to provide a full closure to all entering and exiting lanes. The term Four-Quadrant Gate system does not refer to the number of gates installed, but rather the fact that a full closure is provided.

**Standard:**

04 **The Exit Gate system shall use a series of automatic gates with fully retroreflective red-and- white-striped gate arms with lights, and when in the down position the gate arms extend individually across the entrance and exit lanes of the roadway as shown in Figure 8D-2. The provisions contained in Section 8D.02 for flashing-light signals shall be followed for signal specifications, location, and clearance distances.**

05 **Gate arm design, colors, and lighting requirements shall be in accordance with the provisions contained in Section 8D.03.**

Support:

06 The provisions contained in Section 8D.03 for automatic gates are applicable to exit gates.

**Standard:**

07 **In the normal sequence of operation, unless constant warning time detection or other advanced system requires otherwise, the flashing-light signals and the lights on the gate arms (in their normal upright positions)**

**shall be activated immediately upon the detection of approaching rail traffic. The entrance gate arms shall start their downward motion not less than 3 seconds after the flashing-light signals start to operate and shall reach their horizontal position at least 5 seconds before the arrival of the rail traffic. Exit gate arm activation and downward motion shall be based on detection or timing requirements ~~established~~ recommended by a Diagnostic Team and as established or determined by CPUC. If an Exit Gate system is present, the queue exit gate clearance time (see AREMA Manual) shall be long enough to permit the exit gate arm to lower after a design vehicle of maximum length is clear of the minimum track clearance distance (see Section 8A.07). The gate arms shall remain in the down position as long as the rail traffic occupies the grade crossing.**

Support:

07a Refer to FHWA's List of Known Errors for error in Paragraph 7 text. Refer to Section 1A.04 for more details.

07b The term queue exit gate clearance time as used in Paragraph 7 is typically interpreted as equivalent to the term exit gate clearance time.

**Standard:**

08 **When the rail traffic clears the grade crossing, and if no other rail traffic is detected, the gate arms shall ascend to their upright positions, following which the flashing-light signals and the lights on the gate arms shall cease operation.**

09 **~~Except as provided in Paragraph 21 of this Section~~, the exit gate arm mechanism shall be designed to fail-safe in the up position.**

09b **Timed Exit Gate Operating Mode shall not be used. Only Dynamic Exit Gate Operating Mode shall be used. Refer to CPUC General Order 75, as amended.**

10 **At locations where gate arms are offset a sufficient distance for motor vehicles to drive between the entrance and exit gate arms, median islands (see Figure 8D-2) shall be installed in accordance with the needs ~~determined~~ recommended by the Diagnostic Team and determined by CPUC.**

*Guidance:*

11 *The gate arm should ascend to its upright position in 12 seconds or less.*

12 *At highway-rail grade crossings, Constant warning time detection ~~circuits~~ should be used with Exit Gate systems where practical.*

13 ~~*The operating mode of the exit gates should be determined by a Diagnostic Team.*~~

14 ~~*If the Timed Exit Gate Operating Mode is used, the Diagnostic Team should also determine the Exit Gate Clearance Time (see definition in Section 1C.02).*~~

**Standard:**

15 **Exit gate systems shall use ~~If~~ the Dynamic Exit Gate Operating Mode. ~~is used, highway~~ Highway vehicle intrusion detection devices that are part of a system that incorporates processing logic to detect the presence of motor vehicles within the minimum track clearance distance (see Section 8A.07) ~~should~~ shall be installed to control exit gate operation. Exit gates ~~should~~ shall be independently controlled for each direction of roadway traffic.**

*Guidance:*

16 ~~*Regardless of which exit gate operating mode is used,*~~ *the Exit Gate Clearance Time should be considered when determining additional time requirements for the Minimum Warning Time.*

Support:

17 The minimum warning time is the least amount of time that active warning devices operate prior to the arrival of rail traffic at a grade crossing.

*Guidance:*

18 ~~*If an Exit Gate system is used at a location that is adjacent to an intersection that could cause motor vehicles to queue within the minimum track clearance distance (see Section 8A.07), the Dynamic Exit Gate Operating Mode should be used unless the Diagnostic Team determines otherwise.*~~

19 *If an Exit Gate system is interconnected with a highway traffic signal (see Section 8D.09), back-up or standby power should be considered for the highway traffic signal. Also, circuitry should be installed to prevent the highway traffic signal from leaving the track clearance green interval until all of the gates are lowered.*

Option:

19a Circuitry may be installed to prevent the highway traffic signal from leaving the track clearance green interval until vehicles are no longer detected in the track area by the vehicle presence detection system.

*Guidance:*

20 *Exit Gate systems should include remote health (status) monitoring capable of automatically notifying railroad or LRT signal maintenance personnel when anomalies have occurred within the system.*

Option:

21 ~~Exit gate arms may fail in the down position if the grade crossing is equipped with remote health (status) monitoring~~.

22 Exit Gate system installations may include median islands between opposing lanes on an approach to a grade crossing.

*Guidance:*

23 *Where sufficient space is available, median islands should be at least 60 feet in length.*

## Section 8D.06 Wayside Horn Systems

Option:

01 A wayside horn system (see definition in Section 1C.02) may be installed in compliance with 49 CFR Part 222 to provide audible warning directed toward the road users at a highway-rail grade crossing or at a pathway grade crossing.

**Standard:**

02 **Wayside horn systems used at grade crossings where the locomotive horn is not sounded shall be equipped and shall operate in compliance with the requirements of Appendix E to 49 CFR Part 222.**

*Guidance:*

03 *The same lateral clearance and roadside safety features should apply to wayside horn systems as described in the provisions contained in Section 8D.01. Wayside horn systems, when mounted on a separate pole assembly, should be installed no closer than 15 feet from the center of the nearest track and should be positioned to not obstruct the motorists' line of sight of the flashing-light signals.*

## Section 8D.07 Rail Traffic Detection

**Standard:**

01 **The devices employed in active traffic control systems shall be actuated by some form of rail traffic detection.**

02 **Rail traffic detection ~~circuits~~, insofar as practical, shall be designed on the fail-safe principle.**

03 **Flashing-light signals shall operate for at least 20 seconds before the arrival of any rail traffic, except as provided in Paragraph 4 of this Section.**

Option:

04 On tracks where all rail traffic operates at less than 20 mph and where road users are directed by an authorized person on the ground to not enter the crossing at all times that approaching rail traffic is about to occupy the crossing, a shorter signal operating time for the flashing-light signals may be used.

05 Additional warning time may be provided when determined by an engineering study.

*Guidance:*

06 *Where the speeds of different rail traffic on a given track vary considerably under normal operation, special devices or circuits should be installed to provide reasonably uniform notice in advance of all rail traffic movements over the grade crossing. Special control features should be used to eliminate the effects of station stops and switching operations within approach control circuits to prevent excessive activation of the traffic control devices while rail traffic is stopped on or switching upon the approach track control circuits.*

## Section 8D.08 Use of Traffic Control Signals at Grade Crossings

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, traffic control signals shall not be used instead of flashing-light signals to control road users at a highway-rail grade crossing.**

Option:

02 Traffic control signals may be used instead of flashing-light signals to control road users at industrial highway-rail grade crossings and other places where the maximum speed of trains is 10 mph or less.

Support:

03 Sections 8D.04 and 8D.14 contain information regarding the use of traffic control signals at highway- LRT grade crossings.

**Standard:**

04 **The appropriate provisions of Part 4 relating to traffic control signal design, installation, and operation shall be applicable where traffic control signals are used instead of flashing-light signals to control road users at grade crossings.**

## Section 8D.09 Preemption of Highway Traffic Signals at or Near Grade Crossings

Support:

01 Traffic signal preemption for grade crossings is a complex topic that requires a specific understanding of grade crossing warning systems and highway traffic signal operations. While most traffic signal operations are governed only by the traffic signal controller unit and the associated traffic signal equipment, preemption for grade crossings is also governed by the grade crossing warning system. Active grade crossing warning systems include flashing-light signals and possibly automatic gates, as well as various types of train detection equipment. Where the traffic signal controller unit is interconnected with the grade crossing warning system for the purpose of preemption, a combined system is created. It is the combined system that requires a thorough understanding of the design and operating parameters in order to provide proper operation of the preemption system.

02 The Federal Railroad Administration (FRA) has issued two documents that provide additional information relating to preemption of highway traffic signals at or near grade crossings. The first document is "Technical Bulletin S-12-01, Guidance Regarding the Appropriate Process for the Inspection of Highway-Rail Grade Crossing Warning System Preemption Interconnections with Highway Traffic Signals" and the second document is "Safety Advisory 2010-02, Signal Recording Devices for Highway-Rail Grade Crossing Active Warning Systems that are Interconnected with Highway Traffic Signal Systems."

02a Preemption of highway traffic signals at or near grade crossings ("railroad preemption") involves the notification of approaching rail traffic that is forwarded from the railroad or light rail transit equipment to the highway traffic signal controller unit or assembly. This results in the traffic signal entering a special control mode of operation. Railroad preemption has different considerations than light rail transit priority because a railroad preemption design assumes that the train is unable to stop for signal indications provided by the highway traffic signal system. The priority control of traffic control signals (see Section 4F.20), such as light rail transit priority, is not considered railroad preemption.

02b Railroad preemption is evaluated based on many location-specific factors such as the relation of the tracks to the intersection, the number of phases in the traffic signal, other roadway conditions, and information provided by the railroad or light rail transit agency.

02c The "pedestrian change interval" (see Section 4I.06) is an interval during which the flashing UPRAISED HAND (symbolizing DONT WALK) signal indication is displayed. The "pedestrian change interval" is a component of the "pedestrian clearance time".

02d The "track clearance interval" (see paragraph 11) provides an opportunity for motor vehicles at the grade crossing to clear the track prior to the arrival of rail traffic, typically by displaying a green signal indication to motorists that are moving away from the track. The "right-of-way transfer time" (see paragraph 20) is the amount of time needed prior to display of the track clearance interval.

02e Shortening or omitting the pedestrian clearance time presents potential safety conflicts for road users. This is an important consideration in the vicinity of schools, senior centers, stations, event centers and other significant pedestrian trip generators. Where the railroad preemption system is designed to include the pedestrian clearance time, the pedestrian clearance time is a component of the right-of-way transfer time.

**Standard:**

02f **Where traffic control signals interconnected with a grade crossing include pedestrian signal heads, the Diagnostic Team shall evaluate and recommend, subject to CPUC determination, whether the right-of-way transfer time includes pedestrian clearance time.**

*Guidance:*

02g *The railroad preemption system should be designed to be capable of providing pedestrian clearance time during the approach of a train.*

03 *If a grade crossing is equipped with flashing-light signals and is located 200 feet or less from an intersection or midblock location controlled by a traffic control signal, a pedestrian hybrid beacon, or an emergency-vehicle hybrid beacon, the intersection should be provided with rail preemption in accordance with Section 4F.19 unless otherwise ~~determined~~ recommended by the Diagnostic Team and determined by CPUC.*

04 *Coordination with the flashing-light signals, such as using queue detection and queue cutter signals, blank-out signs, or other alternatives, should be considered where a traffic control signal, a pedestrian hybrid beacon, or an*

*emergency-vehicle hybrid beacon is located more than 200 feet from the grade crossing. Factors to be considered should include traffic volumes, highway vehicle mix, highway vehicle and train approach speeds, frequency of trains, presence of midblock driveways or unsignalized intersections, and the potential for vehicular queues resulting from an adjacent downstream grade crossing or highway traffic signal to extend into the minimum track clearance distance (see Section 8A.07).*

05 *The highway agency or authority with jurisdiction and ~~the regulatory agency with statutory authority, if applicable~~ CPUC, should jointly ~~determine~~ evaluate and recommend, subject to CPUC determination the preemption operation and the timing of highway traffic signals interconnected with grade crossings adjacent to signalized locations.*

06 *If a highway traffic signal is installed 200 feet or less from a passive grade crossing, unless otherwise ~~determined~~ recommended by the Diagnostic Team and determined by CPUC, an active grade crossing warning system should be installed at the grade crossing to provide a means to preempt the highway traffic signal in order to clear vehicles from the minimum track clearance distance (see Section 8A.07) upon approach of rail traffic.*

07 *If a highway traffic signal is interconnected with flashing-light signals, the flashing-light signals should be provided with automatic gates to prevent additional vehicles from being drawn into the minimum track clearance distance (see Section 8A.07) during the track clearance interval prior to the arrival of rail traffic unless a Diagnostic Team recommends and CPUC determines otherwise.*

Support:

08 Regular joint inspections by the highway agency or authority with jurisdiction, ~~the regulatory agency with statutory authority, if applicable~~ CPUC, and the railroad company or transit agency are a best practice and typically include verification of the preemption operation, the amount of warning time and/or preemption time being provided by the grade crossing warning system, and the timing of highway traffic signals interconnected and/or coordinated with the flashing-light signals.

09 Section 4F.19 includes a recommendation that traffic control signals that are adjacent to highway-rail grade crossings and that are coordinated with the flashing-light signals at the grade crossing or that include railroad preemption features be provided with a back-up power supply.

**Standard:**

10 **Information regarding the type of preemption and any related timing parameters shall be provided to the railroad company or transit agency so that the railroad company or transit agency can design the appropriate train detection circuitry.**

11 **If preemption is provided, unless otherwise ~~determined~~ recommended by a Diagnostic Team and determined by CPUC, the normal sequence of highway traffic signal indications shall be preempted upon the approach of a train to provide a track clearance interval to provide an opportunity for motor vehicles at the grade crossing to clear the minimum track clearance distance (see Section 8A.07) prior to the arrival of rail traffic.**

Option:

12 Where train switching or train restarts occur close to a grade crossing, the Diagnostic Team may ~~determine~~ recommend, subject to CPUC determination, that the preemption time can be reduced in accordance with the operating requirements of the railroad company and/or transit agency.

**Standard:**

13 **Where flashing-light signals are in place at a grade crossing, any highway traffic signal faces installed within 50 feet of any rail shall be preempted upon the approach of rail traffic. The Diagnostic Team shall evaluate and recommend, subject to CPUC determination ~~determine~~ the signal indications displayed by the highway traffic signal faces that control movements across the grade crossing in accordance with Section 4F.19 in order to avoid the display of signal indications that conflict with the flashing-light signals.**

*Guidance:*

14 *Where the flashing-light signals are in place at a grade crossing, the operation of any flashing yellow beacon installed within 50 feet of any rail should be considered by a Diagnostic Team to ~~determine~~ recommend whether the operation of the beacon should be terminated during the approach and passage of rail traffic.*

**Standard:**

15 **The preemption special control mode shall be activated by a supervised preemption interconnection using fail-safe design principles between the control circuits of the grade crossing warning system and the traffic signal controller unit. The approach of rail traffic to a grade crossing shall de-energize the interconnection or send a message via a fail-safe data communication protocol (such as the "IEEE Standard for the Interface Between the**

**Rail Subsystem and the Highway Subsystem at a Highway Rail Intersection," 1570-2002 (R2008), Institute of Electrical and Electronics Engineers), which in turn shall activate the traffic signal controller preemption sequence. This shall establish and maintain the preemption condition during the time the grade crossing warning system is activated, except that when automatic gates exist, the preemption condition shall not be terminated until the automatic gates are energized to start their upward movement.**

Support:

16 Advance preemption is the notification of approaching rail traffic that is forwarded to the highway traffic signal controller unit or assembly by the railroad or light rail transit equipment in advance of the activation of the grade crossing warning system.

17 The maximum preemption time is the maximum amount of time needed following initiation of the preemption sequence for the highway traffic signals to complete the timing of the right-of-way transfer time, queue clearance time, and separation time.

18 The separation time is the component of maximum preemption time during which the minimum track clearance distance is clear of vehicular traffic prior to the arrival of rail traffic.

19 Simultaneous preemption is the notification of approaching rail traffic that is forwarded to the highway traffic signal controller unit or assembly and grade crossing warning system at the same time.

20 The right-of-way transfer time is the amount of time needed prior to display of the track clearance interval. This includes any time needed by the railroad, light rail transit, or highway traffic signal control equipment to react to a preemption call, and any traffic control signal green, pedestrian walk and clearance if used (see Section 4F.19), yellow change, and red clearance intervals for conflicting traffic.

21 A supervised preemption interconnection is one that incorporates both a normally-open and a normally-closed circuit from the grade crossing warning system to verify the proper operation of the interconnection.

Option:

22 Instead of supervision, a double-break preemption interconnection circuit that uses two normally- closed circuits that open both the source and return energy circuits may be used.

23 A preemption interconnection may incorporate both supervision and double-break circuits.

*Guidance:*

24 *Where train detection circuits are present at a passive grade crossing, the operation of the preemption interconnection should be treated as if active traffic control devices exist at the crossing and the preemption operation should be ~~determined~~ evaluated by a Diagnostic Team and consistent with determination by CPUC.*

25 *Where left turns are permitted at a downstream highway-highway traffic control signal from the roadway approach that crosses the track and a delayed or impeded left-turn movement could prevent vehicles from clearing the track, a protected left-turn movement should be provided during the track clearance interval if green signal indications are displayed to the approach for track clearance.*

26 *The decision to implement simultaneous or advance preemption should include consideration of the right-of-way transfer time, the queue clearance time, and the separation time in order to determine the maximum preemption time. These time periods should be compared to and verified with the operation of the grade crossing traffic control devices in order to evaluate the operation of the highway traffic signal and the preemption operation. These factors should be considered regardless of whether simultaneous or advance preemption operation is implemented as they are based on traffic signal minimum timing, vehicle acceleration characteristics, and physical distances along the roadway.*

Support:

26a NCHRP Report 812: Signal Timing Manual, Second Edition, published by the National Cooperative Highway Research Program (NCHRP), provides additional information about preemption considerations for grade crossings, including the entry into preemption.

27 Preemption time variability occurs when the traffic signal controller enters the preemption clearance interval with less than the maximum design right-of-way transfer time or when the speed of a train approaching the grade crossing varies.

28 The time interval between the initiation of advance preemption and the operation of the grade crossing warning system for rail traffic will decrease in situations when rail traffic is accelerating or increase in situations when rail traffic is decelerating.

*Guidance:*

29 *Where preemption is used and automatic gates are present, the possibility that an automatic gate might descend upon a vehicle should be analyzed.*

30 *If simultaneous preemption is used, an analysis of extended grade crossing warning time requirements should be conducted.*

31 *If advance preemption is used, an analysis of preemption operation, traffic signal sequencing, and traffic signal phasing should be conducted to identify preemption time variability. The analysis should include both the condition requiring the longest amount of time to enter the track clearance interval and the condition requiring the shortest amount of time to enter the track clearance interval.*

**Standard:**

32 **Where automatic gates are present and green signal indications are displayed at the downstream traffic control signal during the track clearance interval, the preemption sequence shall be designed such that the green signal indications are not terminated until the automatic gate(s) that controls access over the grade crossing toward the downstream intersection is fully lowered.**

Support:

33 The following are two examples of mutually-exclusive methods to resolve preemption time variability:

A. Gate-down circuitry provides a means to hold the traffic signal controller sequence in the track clearance interval until the automatic gate(s) that controls access over the grade crossing toward the downstream intersection is fully lowered.
B. Timing correction resolves preemption time variability by adding the right-of-way transfer time to the track clearance interval in the traffic signal controller unit and setting a fixed maximum period of time between the start of advance preemption and the operation of the flashing-light signals. The fixed maximum period of time can be implemented in the grade crossing warning system using a time delay relay or other methods generally referred to in this section as a timing circuit.

34 The Third Edition of the FHWA's "~~Railroad-Highway Grade~~ Highway-Rail Crossing Handbook", the Second Edition of the Signal Timing Manual (NCHRP Report 812, 2015), and the "2023 AREMA Communications and Signals Manual" published by the American Railway Engineering and Maintenance-of- Way Association (AREMA) provide additional information about preemption time variability.

**Standard:**

35 **Where gate-down circuitry is used to resolve preemption time variability and an automatic gate is broken or is not fully lowered, the crossing control circuits shall not terminate the track clearance interval before the rail traffic has entered the grade crossing.**

36 **Where timing correction is used to resolve preemption time variability, a timing circuit shall be used to maintain a maximum time interval between the initiation of advance preemption and the operation of the grade crossing warning system when the approaching rail traffic is decelerating.**

*Guidance:*

37 *Where a highway-highway intersection controlled by traffic control signals is interconnected with a grade crossing equipped with exit gates, advance preemption should be used because of the additional operating time that is required for the exit gates.*

38 *Where rail traffic routinely stops and re-starts within or just outside of the approaches to a grade crossing that is interconnected with highway traffic signals, the effects of rail traffic operations on the preemption operation should be analyzed by a Diagnostic Team.*

39 *Highway traffic signal control equipment should be capable of providing immediate re-service of successive requests for preemption from the railroad warning devices, even if the initial preemption sequence has not been completed. As appropriate, the highway traffic signal control equipment should be able to promptly return to the start of the track clearance interval at any time that the demand for preemption is cancelled and then reactivated. The highway traffic signal control equipment should have the ability to provide this immediate re-service at any point in the preemption sequence.*

**Standard:**

40 **Where traffic control signals are programmed to operate in a flashing mode during the preemption dwell interval (the period following the track clearance interval that lasts for the duration of the preemption interconnection activation), the beginning of the preemption dwell flashing mode shall not occur until the grade crossing equipment indicates that the rail traffic has entered the grade crossing.**

41 **At locations where conflicting preemption calls might be received to serve boats and trains, the Diagnostic Team shall ~~determine~~ evaluate and recommend the relative priority when conflicting preemption calls occur (see**

**Section 4F.19). Where the boat and the train do not conflict with each other, the Diagnostic Team shall ~~determine~~ evaluate and recommend the preemption sequence when both preemption calls are occurring simultaneously. The United States Coast Guard or other appropriate authority that regulates the operation of the waterway shall be invited to participate on the Diagnostic Team and/or to provide input to the Diagnostic Team.**

Support:

42 Section 4C.10 describes the Intersection Near a Grade Crossing signal warrant that is intended for use at a location where the proximity to the intersection of a grade crossing on an intersection approach controlled by a STOP or YIELD sign is the principal reason to consider installing a traffic control signal.

43 Section 4F.19 describes additional considerations regarding preemption of traffic control signals at or near grade crossings.

*Guidance:*

44 *Except as provided in paragraph 45 of this section, permissive only mode and/or protected/permissive mode for left-turn movements should not be used where the opposing movement is a track clearance phase.*

Option:

45 A flashing YELLOW ARROW signal indication may be used where the opposing movement is a track clearance phase if evaluated and recommended by a Diagnostic Team and consistent with determination by CPUC.

Support:

46 Railroad preemption typically operates with a sequence similar to the following.

47 If there is sufficient advance preemption time available, the pedestrian walk and clearance intervals are provided. If there is not sufficient advance preemption time available, the pedestrian walk and/or pedestrian change intervals are shortened or omitted.

48 A yellow change interval and red clearance interval are provided for any signal phase that is green or yellow when preemption is initiated and which will be red during the track clearance interval. The pedestrian signal faces display a steady UPRAISED HAND.

49 Phases, which are in the green interval when preemption is initiated, and which will be green during the track clearance interval, remain green. If permissive left turn movements would conflict with the track clearance green phase, a yellow change interval and red clearance interval are provided prior to displaying the track clearance green phase.

50 The track clearance interval is provided, typically a green signal indication, for the signal phase or phases controlling the approach to the intersection that crosses the railroad tracks, followed by the yellow change and red clearance intervals.

51 If gates are provided at the crossing, limited service is then typically provided following the track clearance interval. Signal indications that control movements toward the tracks display steady red. The traffic signal provides a sequence of the phases that do not control movements toward the tracks. Pedestrian signal phases operate in conjunction with phases that are permitted during the limited service.

52 The traffic signal returns to normal operation following release of railroad preemption.

## Section 8D.10 Movements Prohibited During Preemption

*Guidance:*

01 *At a signalized intersection that is located within 100 feet of a grade crossing and the intersection traffic control signals are preempted by the approach of rail traffic, all existing permissive-only turning movements toward the grade crossing should be prohibited, steady red arrow signal indications should be shown to all existing protected/permissive and protected-only turning movements toward the grade crossing, and red signal indications should be shown to the straight-through movement toward the grade crossing during the signal preemption sequences. The prohibition of a permissive-only turning movement toward the grade crossing during preemption should be accomplished through the installation of ~~a~~ two blank-out turn prohibition (R3-1a or R3-2a) ~~sign~~ signs (see Figure 8B-1).*

Option:

02 All movements toward the track may be prohibited at a signalized intersection that is preempted by the approach of rail traffic, even if the clear storage distance is more than 100 feet.

Support:

03 Including the word "TRAIN" as part of the blank-out turn prohibition sign informs road users that the turn prohibition being displayed by the sign is in effect because rail traffic is approaching or occupying a nearby rail grade crossing, and that the turn prohibition will be terminated after the rail traffic has cleared the grade crossing.

04 Rail operations can include the use of activated blank-out turn prohibition (R3-1a or R3-2a) signs at unsignalized highway-highway intersections in the vicinity of grade crossings, such as where a semi-exclusive or mixed-use alignment is within or parallel to the roadway where road users are normally permitted to turn across the tracks.

*Guidance:*

05 *An LRT-activated blank-out turn prohibition (R3-1a or R3-2a) sign should be used during preemption where all three of the following conditions are present:*

*A. There is no active warning system for the LRT grade crossing,*

*B. Vehicles traveling along a parallel roadway would normally be permitted to turn left or right to travel across tracks that are located within 100 feet of the highway-highway intersection or within the median of the intersection, and*

*C. The drivers turning at the highway-highway intersection are not controlled by a traffic control signal.*

**Standard:**

06 **Blank-out turn prohibition signs that are associated with preemption shall display their message only when a preemption signal is being received from the railroad or LRT equipment or while the automatic gate is activated.**

Support:

07 The provisions contained in Chapter 2L for blank-out signs are applicable to R3-1a and R3-2a signs.

08 Blank-out turn prohibition signs that are exclusively associated with preemption typically start to display their message when the track clearance interval begins or when the grade crossing warning system begins activation, whichever occurs first.

## Section 8D.11 Pre-Signals at or Near Grade Crossings

*Guidance:*

01 *If a grade crossing is located in close proximity to an intersection controlled by a traffic control signal and the clear storage distance is less than the design vehicle length, the use of pre-signals to control traffic approaching the grade crossing in the direction toward the intersection should be considered.*

02 *If a grade crossing equipped with flashing-light signals, but without automatic gates, is located within 200 feet of an intersection controlled by a traffic control signal, a pre-signal should be provided.*

Support:

03 A pre-signal is generally used where the grade crossing is located less than 200 feet from a downstream signalized intersection. Section 8D.12 contains information for grade crossings located 200 feet or more from a downstream signalized intersection.

04 Other measures that could be considered instead of or in addition to a pre-signal to minimize the possibility of vehicles queuing across the grade crossing include providing additional lanes, reducing the cycle length, using split phasing, using protected turn phasing, and/or providing an extended green interval for the approach.

**Standard:**

05 **Pre-signal faces shall display a steady red signal indication during the track clearance interval of the signal preemption sequence to prohibit additional motor vehicles from entering the minimum track clearance distance (see Section 8A.07).**

06 **Pre-signal faces shall not display green signal indications when the grade crossing flashing-light signals are displaying flashing red indications.**

*Guidance:*

07 *Consideration should be given to using visibility-limited signal faces (see definition in Section 1C.02) at the intersection for the downstream signal faces that control the approach that is equipped with pre- signals.*

Option:

08 The duration of the extended green interval may be adjusted by vehicle detection located between the pre-signal and the downstream signalized intersection.

09 The pre-signal phase sequencing may be timed with an offset from the downstream signalized intersection during normal operation of the traffic signal such that the pre-signal's green signal indication terminates prior to the downstream intersection's green signal indication to minimize the possibility of stopping motor vehicles within the minimum track clearance distance (see Section 8A.07) and the clear storage distance.

*Guidance:*

10 *If pre-signals are used, the queue clearance time (see Section 8D.09) should be long enough to allow a design vehicle of maximum length stopped just inside the minimum track clearance distance (see Section 8A.07) to start up and move through the downstream intersection, or to clear the minimum track clearance distance if there is sufficient clear storage distance.*

Support:

11 The storage area for mandatory left-turn and right-turn lanes at signalized intersections that are downstream from grade crossings sometimes extends from the signalized intersection back to and across the grade crossing. In such cases, drivers that are in the turn lane are required to make a straight-through movement when they cross the track(s) and then are required to make a turning movement when they reach the downstream signalized intersection.

*Guidance:*

12 *A separate pre-signal face for the mandatory left-turn lane and/or right-turn lane should be provided in addition to the pre-signal signal faces provided for the through movement where both of the following conditions are met:*

*A. The storage area for the turn lane extends from the downstream signalized intersection back to and across the grade crossing, and*

*B. The green interval for the turning movement at the downstream intersection does not always begin and end simultaneously with the green interval for the adjacent through movement at the downstream intersection.*

**Standard:**

13 **Where adjacent lanes at a pre-signal are controlled separately, all of the signal faces shall be capable of displaying the following signal indications: CIRCULAR RED, CIRCULAR YELLOW, and straight-through GREEN ARROW. Left-turn GREEN ARROW and right-turn GREEN ARROW signal indications shall not be used in pre-signal faces. CIRCULAR GREEN signal indications shall not be used in pre-signal faces where adjacent lanes are controlled separately.**

Option:

14 Where all adjacent lanes at a pre-signal are controlled together, CIRCULAR GREEN signal indications may be used in pre-signal faces.

**Standard:**

15 **If a separate signal face is provided at a pre-signal for separate control of a mandatory left-turn and/or right-turn lane that extends from the downstream signalized intersection back to and across the grade crossing, the separate signal face shall be devoted exclusively to controlling traffic in the turn lane separately from adjacent lanes, and:**

**A. Shall be visibility-limited from the adjacent through movement, or**

**B. A LEFT (RIGHT) LANE SIGNAL (R10-10b) sign (see Figure 8B-1) shall be mounted adjacent to the separate signal face controlling traffic in a single turn lane or in the turn lane that is farthest from the adjacent through lane(s) if multiple turn lanes are present for a particular turning movement, and a LEFT (RIGHT) TURN LANE SIGNAL (R10-10c) sign (see Figure 8B-1) shall be mounted adjacent to the separate signal face controlling traffic in the other turn lanes if multiple turn lanes are present for a particular turning movement.**

Support:

16 Because the signal faces at a pre-signal do not always display the same signal indications as the downstream signalized intersection, the approach to the pre-signal is considered to be a separate approach from the approach to the downstream signalized intersection. This means that the provisions in Sections 4D.05 through 4D.08 regarding the number of signal faces, the visibility and aiming of the signal faces, and the lateral and longitudinal positioning of the signal faces apply separately to the approach to the pre-signal.

17 The provisions in Section 4D.07 regarding the lateral positioning of separate turn signal faces are applicable to the separate signal faces that are provided at pre-signals for a mandatory turn lane that extends from the downstream signalized intersection back to and across the grade crossing.

*Guidance:*

18 *A STOP HERE ON RED (R10-6 or R10-6a) sign should be installed at the pre-signal's stop line.*

**Standard:**

19 **If a pre-signal is installed upstream from a signalized intersection, a No Turn on Red (R10-11, R10-11a, or R10-11b) sign (see Section 2B.60) shall be installed at the pre-signal for the approach that crosses the track if turns on red would otherwise be permitted at the downstream intersection.**

Option:

20 DO NOT STOP ON TRACKS (R8-8) signs may be installed in conjunction with a pre-signal.

21 Pre-signal faces may be located either upstream or downstream from the grade crossing in order to provide the most effective display to road users approaching the grade crossing.

22 If pre-signal faces must be located within close proximity to the flashing-light signals, the pre-signal faces may be mounted on the same overhead structure as the flashing-light signals.

## Section 8D.12 Queue Cutter Signals at or Near Grade Crossings

Support:

01 A queue cutter signal is a traffic control signal that controls one direction of traffic at a grade crossing to minimize the possibility of vehicles stopping within the minimum track clearance distance (see Section 8A.07). Although a queue cutter signal has a similar purpose as a pre-signal (see Section 8D.11), the difference is that a queue cutter signal is independent from the downstream signalized intersection, whereas a pre-signal is part of the downstream signal.

Option:

02 At grade crossing locations where the queue from a bottleneck (usually a signalized intersection) that is downstream from the grade crossing frequently extends back to and across the grade crossing, a queue cutter signal may be installed.

03 A queue cutter signal may be operated in one of the following modes:

A. Actuated mode – the queue cutter signal operation is dependent on downstream detection of a growing queue.
B. Non-actuated mode – the queue cutter signal operates on a time-of-day plan based on anticipated downstream queues. This mode could be similar to the functional operation of a pre-signal.
C. Variable mode – the queue cutter signal operation varies between the actuated mode and the non- actuated mode based on the time of day, on queue detection, or both.

Support:

04 A non-actuated queue cutter signal is generally used where the grade crossing is located between 200 feet and 400 feet from a downstream bottleneck. An actuated queue cutter signal is generally used where the grade crossing is located more than 400 feet from a downstream bottleneck. Section 8D.11 contains information for grade crossings located less than 200 feet from a downstream signalized intersection.

**Standard:**

05 **Where adjacent lanes at a queue cutter signal are controlled separately, all of the signal faces shall be capable of displaying the following signal indications: CIRCULAR RED, CIRCULAR YELLOW, and straight-through GREEN ARROW. Left-turn GREEN ARROW and right-turn GREEN ARROW signal indications shall not be used in queue cutter signal faces. CIRCULAR GREEN signal indications shall not be used in queue cutter signal faces where adjacent lanes are controlled separately.**

Option:

06 Where all adjacent lanes at a ~~pre-signal~~ queue cutter are controlled together, CIRCULAR GREEN signal indications may be used in queue cutter signal faces.

07 Queue cutter signal faces may be located either upstream or downstream from the grade crossing in order to provide the most effective display to road users approaching the grade crossing.

08 If queue cutter signal faces must be located within close proximity to the flashing-light signals, the queue cutter signal faces may be mounted on the same overhead structure as the flashing-light signals.

*Guidance:*

09 *A STOP HERE ON RED (R10-6 or R10-6a) sign should be installed at the queue cutter signal's stop line.*

Option:

10 DO NOT STOP ON TRACKS (R8-8) signs may be installed in conjunction with a queue cutter signal.

*Guidance:*

11 *Where a queue cutter signal operates in an actuated mode based on vehicle presence detection, the queue detector should be located to provide adequate distance to detect a growing queue, permit the queue cutter signal to complete any programmed minimum green or yellow change interval time, and then allow a design vehicle that lawfully crosses the queue cutter signal's stop line during the yellow change interval to clear the minimum track clearance distance (see Section 8A.07) before the growing queue extends to the grade crossing.*

12 *A queue cutter signal that is operating in an actuated mode and that is displaying CIRCULAR RED signal indications should continue to display CIRCULAR RED signal indications as long as the downstream detection system continues to detect the presence of a vehicular queue at the detection point on the departure side of the grade crossing.*

13 *Where a queue cutter signal operates in actuated mode based on vehicle presence detection, consideration should be given to the potential for turning movements between the grade crossing and the downstream bottleneck that could create an intermediate queue of vehicles. Supplemental queue detectors should be considered to detect the formation of*

*these intermediate queues to activate the queue cutter signal.*

14 *Where a queue cutter signal is operated in a non-actuated mode, the queue cutter signal should be coordinated with adjacent signals to provide for the progressive movement of traffic.*

Option:

15 Where a queue cutter signal is always operated in a non-actuated mode based on anticipated queues, the queue cutter signal may be operated in a flashing mode at times when the downstream queues are not expected to extend back to and across the grade crossing.

16 When a variable-mode queue cutter signal is operating in the non-actuated mode, the queue detector may be used to extend the display of the CIRCULAR RED signal indication as long as the downstream detection system continues to detect the presence of a vehicular queue at the detection point on the departure side of the grade crossing.

**Standard:**

17 **A queue cutter signal shall be interconnected with the flashing-light signals at the grade crossing.**

18 **Queue cutter signal faces shall not display green signal indications when the grade crossing flashing-light signals are displaying flashing red indications.**

19 **When a queue cutter signal that is displaying straight-through GREEN ARROW signal indications (when operating in a steady, stop-and-go mode) or flashing CIRCULAR YELLOW signal indications (when operating in a programmed flashing mode) is preempted by the approach of rail traffic, it shall immediately display steady CIRCULAR YELLOW signal indications during the yellow change interval (see Section 4F.17) followed by steady CIRCULAR RED signal indications. The queue cutter signal shall continue to display the steady CIRCULAR RED signal indications until the rail traffic clears the grade crossing and no other rail traffic is detected.**

20 **A queue cutter signal operating in an actuated mode shall display straight-through GREEN ARROW signal indications except when it receives an actuation from the downstream vehicle presence detection system or is preempted by the approach of rail traffic. When it receives an actuation from the vehicle presence detection system, the queue cutter signal shall finish timing any active minimum green interval, if used, and then display steady CIRCULAR YELLOW signal indications during the yellow change interval (see Section 4F.17) followed by steady CIRCULAR RED signal indications. When no preemption call is present and the queue length is such that no vehicles are detected in the detection zone of the downstream vehicle presence detection system, the queue cutter signal shall finish timing any active minimum red interval, if used, and then return to the display of straight-through GREEN ARROW signal indications.**

21 **The failure modes of the queue cutter signal control system and vehicle presence detection circuitry shall be evaluated and accounted for in the design of any such system. Fail-safe design techniques shall be used in the system design. If a queue detector fails, the queue cutter signal shall display flashing CIRCULAR RED signal indications until the normal functioning of the detection system is restored.**

Support:

22 The storage area for mandatory left-turn and right-turn lanes at signalized intersections that are downstream from grade crossings sometimes extends from the signalized intersection back to and across the grade crossing. In such cases, drivers that are in the turn lane are required to make a straight-through movement when they cross the track(s) and then are required to make a turning movement when they reach the downstream signalized intersection.

*Guidance:*

23 *A separate queue cutter signal face for the mandatory left-turn lane and/or right-turn lane should be provided in addition to the queue cutter signal faces provided for the through movement where both of the following conditions are met:*

- *A. The storage area for the turn lane extends from the downstream signalized intersection back to and across the grade crossing, and*
- *B. The green interval for the turning movement at the downstream intersection does not always begin and end simultaneously with the green interval for the adjacent through movement at the downstream intersection.*

**Standard***:*

24 **If a separate signal face is provided at a queue cutter signal for separate control of a mandatory left-turn and/or right-turn lane that extends from the downstream signalized intersection back to and across the grade crossing, the separate signal face shall be devoted exclusively to controlling traffic in the turn lane separately from adjacent lanes, and:**

**A. Shall be visibility-limited from the adjacent through movement, or**

**B. A LEFT (RIGHT) LANE SIGNAL (R10-10b) sign (see Figure 8B-1) shall be mounted adjacent to the separate signal face controlling traffic in a single turn lane or in the turn lane that is farthest from the adjacent through lane(s) if multiple turn lanes are present for a particular turning movement, and a LEFT (RIGHT) TURN LANE SIGNAL (R10-10c) sign (see Figure 8B-1) shall be mounted adjacent to the separate signal face controlling traffic in the other turn lanes if multiple turn lanes are present for a particular turning movement.**

Support:

25 Because the signal faces at a queue cutter signal do not always display the same signal indications as the downstream signalized intersection, the approach to the queue cutter signal is considered to be a separate approach from the approach to the downstream signalized intersection. This means that the provisions in Sections 4D.05 through 4D.08 regarding the number of signal faces, the visibility and aiming of the signal faces, and the lateral and longitudinal positioning of the signal faces apply separately to the approach to the queue cutter signal.

26 The provisions in Section 4D.07 regarding the lateral positioning of separate turn signal faces are applicable to the separate signal faces that are provided at queue cutter signals for a turn lane that extends from the downstream signalized intersection back to and across the grade crossing.

27 While queue cutter signals and queue jumping signals have similar names, their purpose, design, and operation are quite different. Care must be taken to avoid confusion between queue cutter signals used in conjunction with a grade crossing and queue jumping signals used with transit operations.

## Section 8D.13 Warning Beacons or LED-Enhanced Warning Signs at Grade Crossings

Option:

01 Warning Beacons (see Section 4S.03) or LEDs within the legend, symbol, or border of the sign (see Section 2A.12) may be used to supplement warning signs installed at or on an approach to a grade crossing if additional emphasis is desired for the warning sign. The Warning Beacon or LED-enhanced sign may operate continuously or be activated upon the approach or presence of rail traffic.

Support:

02 Most of the warning signs that are used at or on an approach to a grade crossing warn of physical conditions that exist at the grade crossing regardless of whether rail traffic is approaching or occupying the grade crossing. In these cases, a Warning Beacon or LED-enhanced sign would typically be operated continuously to enhance the conspicuity of the sign.

03 Some warning signs, such as a BE PREPARED TO STOP (W3-4) sign (see Section 2C.35), if used in advance of a grade crossing and supplemented with a WHEN FLASHING (W16-13P) plaque, provide information that is typically not applicable except when rail traffic is approaching or occupying the grade crossing. Likewise, a special word message sign (see Section 2A.04) with a legend such as TRAIN WHEN FLASHING provides notice of a condition that only exists when rail traffic is approaching or occupying the grade crossing. These signs would not typically be operated continuously, but instead only when the condition is present.

**Standard:**

04 **If a Warning Beacon or LEDs within the legend, symbol, or border of the sign is activated by the approach or presence of rail traffic in conjunction with a warning sign that includes the legend WHEN FLASHING either on the sign itself or on a supplemental plaque, the activation of the Warning Beacon or LEDs shall be accomplished by a supervised preemption interconnection using fail-safe design principles (see Section 8D.09) between the control circuits of the grade crossing warning system and the Warning Beacon or LED-enhanced sign.**

Support:

05 In the event of a system failure, the normal fault state using a fail-safe interconnection for a Warning Beacon or LED-enhanced sign that is activated by the approach or presence of rail traffic at the grade crossing would be for the Warning Beacon or LEDs to operate when no rail traffic is present.

Option:

06 A Warning Beacon or LED-enhanced sign that is activated by the approach or presence of rail traffic at the grade crossing may continue to operate for a period of time following the passage of the rail traffic to permit the standing queue to dissipate.

*Guidance:*

07 *If a Warning Beacon or LED-enhanced sign is activated by the approach or presence of rail traffic at the grade crossing, the Warning Beacon or LED-enhanced sign should begin operating prior to the activation of the flashing-light signals at the grade crossing based upon the typical travel time from the location of the Warning Beacon or LED-enhanced sign to the stop line for the grade crossing.*

08 *If a Warning Beacon or LED-enhanced sign that is activated by the approach or presence of rail traffic at the grade crossing is operated by commercial AC power, a back-up power system should be provided.*

## Section 8D.14 Traffic Control Signals at or Near Highway-LRT Grade Crossings

Support:

01 There are two types of traffic control signals for controlling vehicular and LRT movements at interfaces of the two modes. The first is the standard traffic control signal described in Part 4, which is the focus of this Section. The other type of signal is referred to as an LRT signal and is discussed in Section 8D.15.

**Standard:**

02 **The provisions of Part 4 and Sections 8D.08 through 8D.12 relating to traffic control signal design, installation, and operation, including interconnection with nearby automatic gates or flashing-light signals, shall be applicable as appropriate where traffic control signals are used at highway-LRT grade crossings.**

03 **If traffic control signals are in operation at an LRT grade crossing that is used by pedestrians, bicyclists, and/or other non-motorized road users, an ~~audible device such as a bell~~ Accessible Pedestrian Signal shall also be provided and shall be operated in conjunction with the traffic control signals.**

*Guidance:*

04 *If the highway traffic signal has emergency-vehicle preemption capability, it should be coordinated with LRT operation.*

05 *Where LRT operates in a wide median, motor vehicles crossing the tracks and being controlled by both near and far side traffic signal faces should receive a protected left-turn phase from the far side signal face to clear motor vehicles from the crossing when LRT traffic is approaching the crossing.*

Option:

06 Signal indications that permit the movement of motor vehicles, pedestrians, and bicyclists and do not conflict with LRT movements may be provided during LRT phases.

07 A traffic control signal may be installed in addition to Exit Gate systems and automatic gates at a highway-LRT grade crossing if the crossing occurs within a highway-highway intersection and if the installation of the traffic control signal can be justified based on the warrants described in Chapter 4C.

08 Where a highway-LRT grade crossing is at a location other than an intersection and LRT operating speeds are less than 25 mph, traffic control signals may be used in lieu of flashing-light signals.

Support:

09 Typical circumstances for using traffic control signals might include:

A. Geometric conditions preclude the installation of highway-LRT grade crossing warning devices,
B. LRT vehicles share the same roadway with road users, or
C. Traffic control signals already exist.

10 Section 4F.18 contains information regarding traffic control signals at or near highway-LRT grade crossings that are not equipped with highway-LRT grade crossing warning devices.

11 Section 4C.10 describes the Intersection Near a Grade Crossing signal warrant that is intended for use at a location where the proximity to the intersection of a grade crossing on an intersection approach controlled by a STOP or YIELD sign is the principal reason to consider installing a traffic control signal.

*Guidance:*

12 *When a highway-LRT grade crossing exists within a signalized intersection, consideration should be given to providing separate turn signal faces (see definition in Section 1C.02) for the movements crossing the tracks.*

**Standard:**

13 **Separate turn signal faces that are provided for turn movements toward the crossing shall display a steady red indication during the approach and/or passage of LRT traffic.**

Support:

14 Section 8D.10 contains information regarding the prohibition of turning movements toward the crossing during preemption.

## Section 8D.15 Use of LRT Signals for Control of LRT Vehicles at Highway-LRT Grade Crossings

Option:

01 LRT signal indications may be used at grade crossings and at intersections in mixed-use alignments in conjunction with standard traffic control signals where special LRT signal phases are used to accommodate turning LRT vehicles or where additional LRT clearance time is desirable.

02 LRT signal indications may be used at intersections where special signal phases are used for bus movements.

**Standard:**

03 **If the LRT crossing control is separate from the intersection control, the two shall be interconnected. The LRT signal phase shall not be terminated until after the LRT vehicle has cleared the crossing or intersection.**

04 **If a separate set of standard traffic control signal indications (red, yellow, and green circular and arrow indications) is used to control LRT movements, the indications shall be positioned so they are not visible to motorists, pedestrians, and bicyclists (see Section 4D.06).**

*Guidance:*

05 *If a signal face used to control LRT movements cannot be positioned where the indications are not visible to road users, the LRT signal indications shown in Figure 8D-3 or 8D-3(CA) should be used.*

05a *Diverging route signal aspects should be evaluated and recommended by a Diagnostic Team.*

**Standard:**

06 **If special LRT signal indications such as those shown in Figure 8D-3 or 8D-3(CA) are used, the color of the signal indications shall be white.**

Option:

07 If used, individual LRT signal sections may be displayed to form clustered signal faces or multiple LRT signal indications may be displayed in an individual housing.

07a The diagonal LRT signal indication may be rotated 45 degrees either clockwise or counter-clockwise.


*Guidance:*

08 *LRT signal faces should be located at least 3 feet from the nearest highway traffic signal face for the same approach measured either horizontally perpendicular to the approach between the centers of the signal faces or vertically from the center of the lowest signal indication of the top signal face to the center of the highest signal indication of the bottom signal face.*

Support:

09 Section 4F.18 contains information about the use of the LRT signal indications shown in Figure 8D-3 for the control of exclusive bus movements at "queue jumper lanes" and for the control of exclusive bus rapid transit movements on mixed-use alignments.

## Figure 8D-1. Composite Drawing of Active Traffic Control Devices for Grade Crossings Showing Clearances

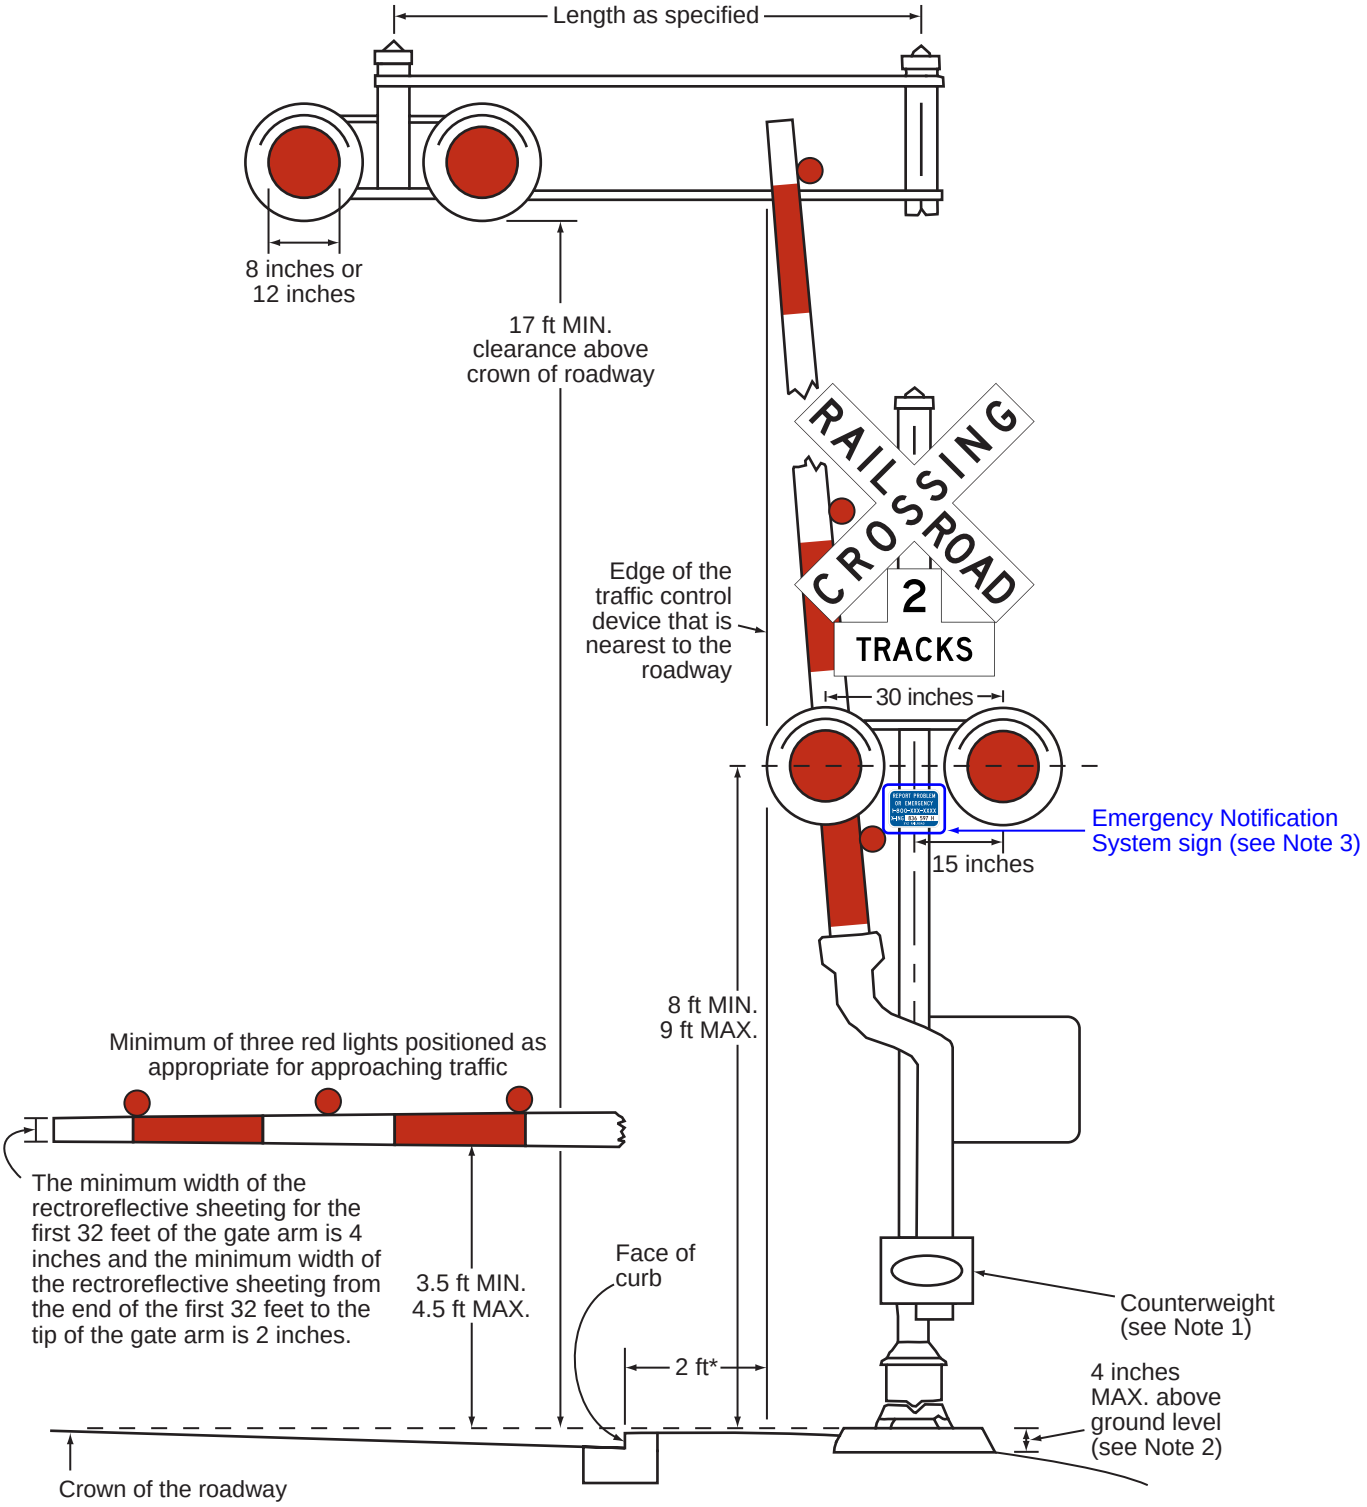



*For locating this reference line on an approach that does not have a curb, see Section 8D.01.

Notes:


1. Where gates are located in the median, additional median width may be required to provide the minimum clearance for the counterweight supports.
2. The top of the signal foundation should be no more than 4 inches above the surface of the ground and should be at the same elevation as the crown of the roadway. Where site conditions would not allow this to be achieved, the shoulder side slope should be re-graded or the height of the signal post should be adjusted to meet the 17-foot vertical clearance requirement.
3. Refer to Section 8B.27 regarding the Emergency Notification System (I13-1) sign.

# Figure 8D-2. Examples of Location Plan for Flashing-Light Signals and Four-Quadrant Gates


The locations of the gates and the placement of medians or islands between the gates are to be ~~determined~~ by the Diagnostic Team.
evaluated and recommended

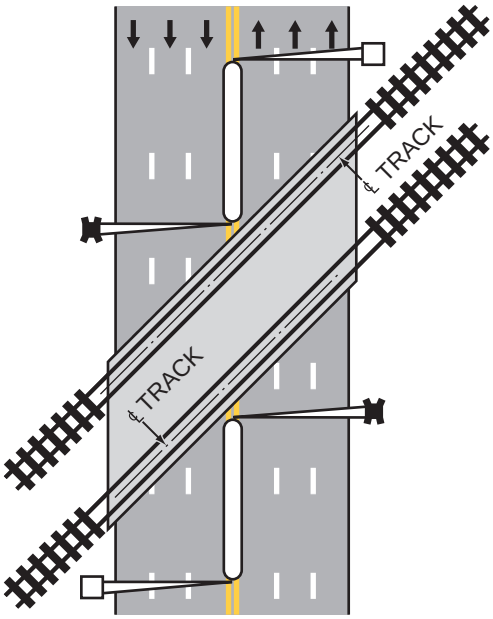


**A – Obtuse angle**

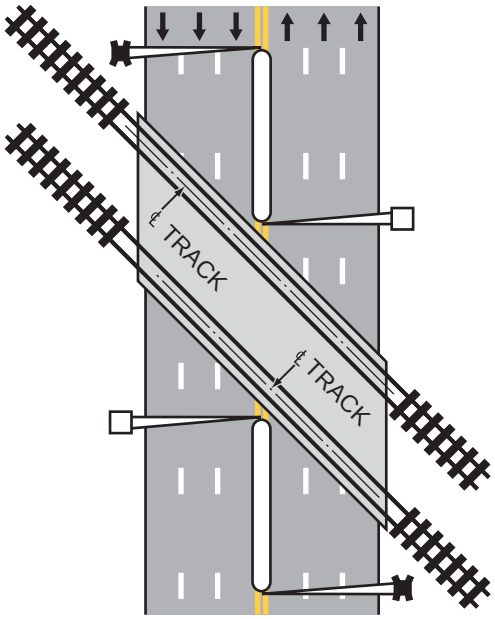


**B – Acute angle**

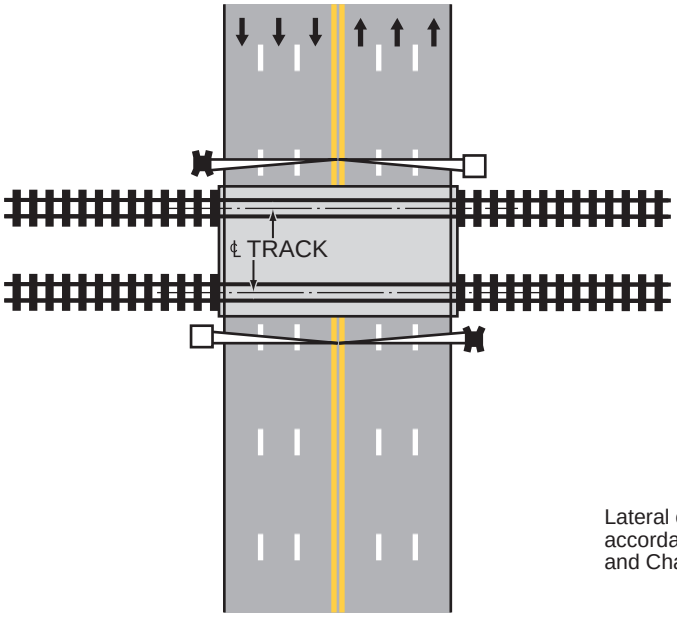


**C – Right angle**

Legend
- Direction of travel
- Entrance gate
- Exit gate

Lateral clearances shall be in accordance with Figure 8D-1 and Chapter 8D.

Note: In an effort to simplify the figure to show typical location plans for flashing-light signals and four-quadrant gates, not all traffic control devices are shown on this figure.

## Figure 8D-3. Light Rail Transit Signal Indications




Stop | Go (straight) | Go (left) | Go (right)

Notes:

1. All rectangular bar signal indications shall be white.
2. Go signal indications may be flashed to inform LRT operators to prepare to stop.

## *Figure 8D-3(CA). Light Rail Transit Signals*

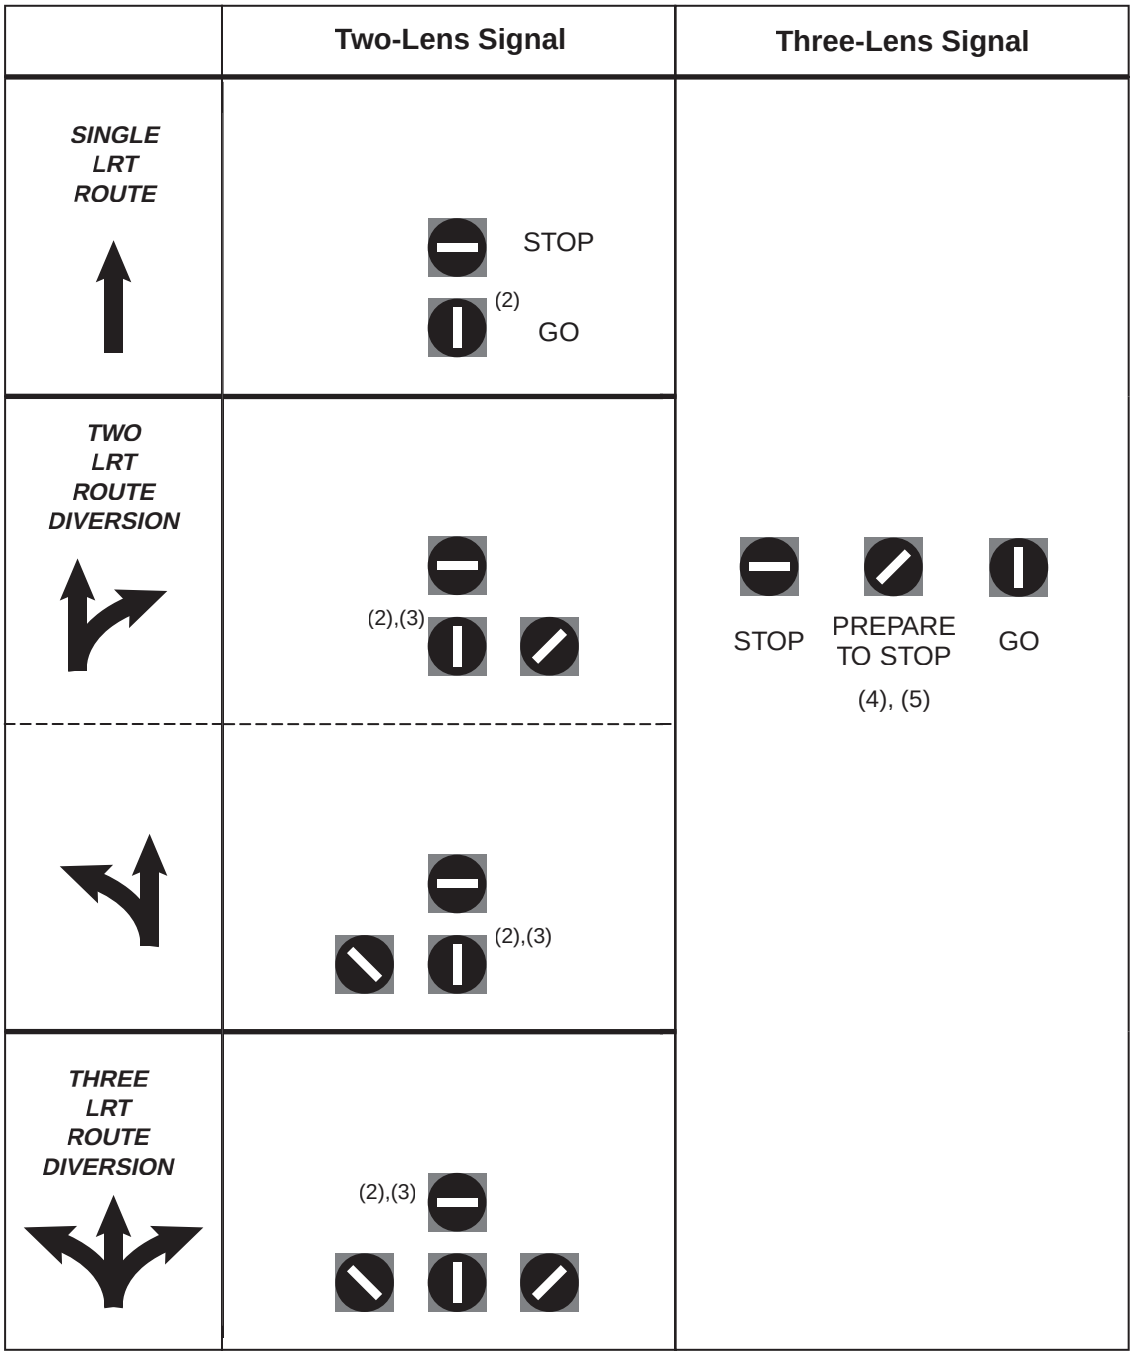


Notes:

1. All rectangular bar signal indications shall be white.
2. Go signal indications may be flashed to inform LRT operators to prepare to stop.
3. Could be in single housing.
4. Diverging route signal aspects should be evaluated and recommended by a Diagnostic Team. Refer to Section 8D.15
5. The diagonal LRT signal indication may be rotated 45 degrees either clockwise or counter-clockwise. Refer to Section 8D.15

# CHAPTER 8E. PATHWAY AND SIDEWALK GRADE CROSSINGS

## Section 8E.01 Purpose

Support:

01 Traffic control for pathway and sidewalk grade crossings includes all signs, signals, markings, other warning devices, and their supports at pathway and sidewalk grade crossings and along pathway and sidewalk approaches to grade crossings. The function of this traffic control is to promote safety and provide effective operation of both rail and pathway or sidewalk traffic at pathway or sidewalk grade crossings.

02 Other physical treatments that are described in this Chapter that are also applicable to pathways and sidewalks at grade crossings, such as detectable warnings, swing gates, and fencing, provide increased safety for pathway and sidewalk users.

03 Crosswalk markings at intersections where pedestrians cross LRT tracks in mixed-use alignments are covered by the provisions of Chapter 3C rather than by the provisions of this Chapter.

04 Figure 8E-1 illustrates the difference between a pathway grade crossing and a sidewalk grade crossing. A pathway is frequently placed in its own right-of-way on an alignment that is independent of any roadway. If a pathway is built parallel to a roadway, it is physically separated from the roadway by an open space or barrier such that the traffic control devices for the roadway grade crossing do not exert an influence over or provide adequate warning to pathway users. A sidewalk runs parallel to a roadway within the highway right-of-way and is close enough to the edge of the roadway's traveled way that the traffic control devices for the roadway grade crossing can frequently exert an influence over or provide adequate warning to sidewalk users. Pathways are typically used by both pedestrians and bicyclists, whereas sidewalks are typically used only by pedestrians.

## Section 8E.02 Use of Standard Devices, Systems, and Practices

*Guidance:*

01 *The pathway or sidewalk user's ability to detect the presence of approaching rail traffic should be considered in determining the type and placement of traffic control devices at pathway or sidewalk grade crossings.*

02 *The traffic control devices, including the appropriate traffic control system to be used, and other physical treatments at a pathway or sidewalk grade crossing should be ~~determined~~ evaluated by a Diagnostic Team that includes the agency with jurisdiction over the pathway or sidewalk.*

03 *At skewed grade crossings, the adjustment, re-alignment, or relocation of existing sidewalk grade crossings should be considered when determining the placement of traffic control devices for roadway users.*

Support:

04 The safety of pathway and sidewalk users is enhanced when pathways and sidewalks are designed such that they do not cross the tracks at a narrow angle. The casters of wheelchairs and the wheels of bicycles could fall into and might be constrained in the flangeway gap at a skewed crossing. The flangeway gap is typically 2.5 inches wide at LRT grade crossings and 3 inches wide at railroad grade crossings.

05 It is desirable that pathways and sidewalks be designed such that they maintain a relatively consistent horizontal alignment and profile from the nearest rail to the detectable warning (if present) or from the nearest rail to the stop line (if present) on each approach to the crossing. Providing a pedestrian refuge area in advance of the stop line or the detectable warning surface so that pedestrians have a place to wait while rail traffic approaches and occupies the crossing can be beneficial to pedestrian safety.

06 When designing new sidewalk grade crossings, placing the sidewalk outside of the area occupied by grade crossing traffic control devices for vehicular traffic is desirable (see Figure 8E-2). This includes making sure that the counterweights and support arms for the automatic gates for vehicular traffic do not obstruct the sidewalk when the gate is fully lowered.

07 Additional information regarding the design of pathways and sidewalks is contained in the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.

## Section 8E.03 Pathway and Sidewalk Grade Crossing Signs and Markings

**Standard:**

01 **Pathway and sidewalk grade crossing signs shall be standard in shape, legend, and color.**

02 **The minimum sizes of sidewalk grade crossing signs that are intended to be viewed only by sidewalk users and of pathway grade crossing signs shall be as shown in the shared-use path column in Table 9A-1.**

*Guidance:*

03 *No portion of a traffic control device or its support should protrude into the pathway or sidewalk grade crossing. Sidewalk and pathway grade crossing traffic control devices should be located such that all physical features of the device, including the support hardware, conform to clearance requirements provided by the railroad company and/or transit agency, and ~~the regulatory agency with statutory authority (if applicable)~~ CPUC.*

04 *The minimum mounting height for post-mounted signs adjacent to pathways and sidewalks should be 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the pathway or sidewalk surface (see Figure 9A-1).*

05 *If overhead traffic control devices are placed above pathways, the clearance from the bottom of the device to the pathway surface directly under the sign or device should be at least 8 feet.*

06 *If overhead traffic control devices are placed above pathways that are used by equestrians, the clearance from the bottom of the device to the pathway surface directly under the sign or device should be at least 10 feet.*

**Standard:**

07 **If overhead traffic control devices are placed above sidewalks, the clearance from the bottom of the device to the sidewalk surface directly under the sign or device shall be at least 7 feet.**

*Guidance:*

08 *Traffic control devices mounted adjacent to pathways at a height of less than 8 feet measured vertically from the bottom of the device to the elevation of the near edge of the pathway surface should have a minimum lateral offset of 2 feet from the near edge of the device to the near edge of the pathway (see Figure 9A-1).*

09 *If pathway users include those who travel faster than pedestrians, such as bicyclists or skaters, warning signs should be installed in advance of the pathway grade crossing (see Figure 8E-3).*

Option:

10 The Skewed Crossing (W10-12) sign (see Section 8B.22) may be used at a skewed pathway or sidewalk grade crossing to warn pathway or sidewalk users that the tracks are not perpendicular to the pathway or sidewalk.

11 The LOOK (R15-8) sign (see Figure 8B-1) may be used at a pathway or sidewalk grade crossing to inform pathway or sidewalk users to look in both directions prior to crossing the track(s).

*Guidance:*

12 *If a LOOK (R15-8) sign is used at a pathway or sidewalk grade crossing, it should be mounted on a separate post that is farther from the pathway or sidewalk than the Crossbuck sign or Crossbuck Assembly.*

Support:

13 The LOOK (R15-8) sign is used to provide additional warning for pedestrians and bicyclists.

## Section 8E.04 Stop Lines, Edge Lines, and Detectable Warnings

*Guidance:*

01 *A stop line should be provided at a pathway grade crossing if the surface where the marking is to be applied is capable of retaining the application of the marking.*

Option:

02 A stop line may be provided at a sidewalk grade crossing if the surface where the marking is to be applied is capable of retaining the application of the marking.

Support:

02a At a sidewalk grade crossing, detectable warning is typically used without a stop line.

*Guidance:*

03 *If used at pathway or sidewalk grade crossings, the stop line should be a transverse line that extends across the full width of the pathway or sidewalk at the point where a pathway or sidewalk user is to stop. If no detectable warning is provided, the stop line should be placed at least 2 feet in advance of the automatic gate, counterweight, flashing-light signals, or Crossbuck Assembly (if any of these are present), and at least 12 feet from the nearest rail.*

Option:

04 Edge lines (see Section 3B.09) to delineate the designated user route may be used on the approach to and across the tracks at a pathway grade crossing, a sidewalk grade crossing, or a station crossing if the surface where the marking is to be applied is capable of retaining the application of the marking.

Support:

05 Edge line delineation can be beneficial where the distance across the tracks is long, commonly because of a skewed grade crossing or because of multiple tracks, or where the pathway or sidewalk surface is immediately adjacent to a traveled way.

06 Information regarding the design of detectable warning surfaces is contained in the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990.

**Standard:**

07 **Detectable warnings (see Chapter 3C) shall be used at pathway grade crossings where pedestrian travel is permitted and at sidewalk grade crossings and shall extend across the full width of the pathway or sidewalk.**

*Guidance:*

08 *The dimension of the detectable warning in the direction of pedestrian travel should be at least 2 feet.*

09 *Detectable warnings should be placed immediately beyond the pathway or sidewalk stop line (if a stop line is present) or should be incorporated into and made a part of the stop line. The downstream edge of the detectable warning should be located at least 2 feet upstream from the automatic gate, counterweight, flashing-light signals, or Crossbuck Assembly (if any of these are present), which would be on the side of the device further from the tracks, and at least 12 feet from the nearest rail (see Figures 8E-2 and 8E-3).*

10 *If the distance between the nearest rail of two adjacent tracks at a sidewalk or pathway grade crossing is 30 feet or more, additional detectable warnings should be used to designate the limits of the pedestrian refuge area (see Figure 8E-4).*

Option:

11 At pathway-LRT and sidewalk-LRT grade crossings, the downstream edge of the detectable warning may be located less than 12 feet from the nearest rail.

*Guidance:*

12 *The downstream edge of the detectable warning at pathway-LRT and sidewalk-LRT grade crossings should be located at least 2 feet upstream from the automatic gate, counterweight, flashing-light signals, or Crossbuck assembly (if any of these are present), at least 6 feet from the nearest rail as measured perpendicular to the rail and in accordance with the requirements of the railroad company and/or transit agency, and ~~regulatory agency with statutory authority (if applicable)~~ CPUC.*

## Section 8E.05 Passive Traffic Control Devices– Crossbuck Assemblies

**Standard:**

01 **Where the nearest edge of a passive pathway or sidewalk grade crossing is located more than 25 feet from the center of the nearest traffic control warning device at the grade crossing, a Crossbuck Assembly (see Figure 8E-5) shall be installed on each approach to the pathway or sidewalk grade crossing. The distance shall be measured perpendicular to the traveled way from the center of the support post of a Crossbuck Assembly at a passive grade crossing or from the center of the mast of an active traffic control warning device at an active grade crossing to the nearest edge of the pathway or sidewalk surface where it crosses the track(s) (see Figure 8E-2).**

Option:

02 A Crossbuck Assembly may be installed on the approaches to a pathway or sidewalk grade crossing where the nearest edge of the pathway or sidewalk is located 25 feet or less from the center of the nearest traffic control warning device at a grade crossing.

03 The Crossbuck Assembly may be omitted at station crossings.

04 The retroreflective strip on the back of the support may be omitted on the Crossbuck support at a pathway or sidewalk grade crossing.

**Standard:**

05 **The minimum height, measured vertically from the bottom of the YIELD or STOP sign to the elevation of the near edge of the pathway or sidewalk, of Crossbuck Assemblies installed on pathways or sidewalks shall be 4**

**feet where the lateral offset to the nearest edge of the sign is 2 feet or more and shall be 7 feet where the lateral offset to the nearest edge of the sign is less than 2 feet (see Figure 8E-5).**

06 **The minimum lateral offset, measured horizontally from the nearest edge of the pathway or sidewalk to the nearest edge of the Crossbuck Assembly signs, shall be 0 feet for sidewalks and 2 feet for pathways.**

## Section 8E.06 Channelizing Devices used with Sidewalk and Pathway Traffic Control Devices

Support:

01 The pathway or sidewalk user's ability to detect the presence of approaching rail traffic needs to be considered in determining the type and placement of channelizing devices such as swing gates, fencing, and pedestrian barriers.

02 Where automatic gates and swing gates are used, it is desirable to design the pathway or sidewalk in a manner that channelizes or directs users to the entrance to and exit from the pathway or sidewalk grade crossing.

02a Where automatic pedestrian gates are installed, swing gates are typically installed along an emergency escape route in conjunction with each automatic pedestrian gate.

03 Swing gates (see Figures 8E-6, 8E-9, and 8E-10) are designed to open away from the track(s) so that pathway or sidewalk users can quickly push the swing gate open when moving away from the track(s), and to automatically return to the closed position after each use.

04 It is important to use retroreflective material, appropriate object markers (see Section 9C.09), and/or signs on swing gates, maze fencing, or pedestrian barriers that are placed at pathway or sidewalk grade crossings. Illumination of such areas can also be beneficial.

05 When used in conjunction with automatic gates at a pathway or sidewalk grade crossing, swing gates are typically ~~equipped with a latching device that permits the swing gate~~ designed to be opened only from the track side of the swing gate. Push bars, kick plates, or similar devices are also appropriate for use on a swing gate.

06 Latching devices that are used on swing gates need to be designed in a manner such that they are operable by all users of the pathway or sidewalk.

*Guidance:*

07 *A swing gate should be equipped with a PUSH TO EXIT (I13-2) sign on the track side of the swing gate, and a DO NOT ENTER (R5-1) sign on the side of the swing gate facing away from the tracks (see Figure 8E-10).*

Support:

07a Where swing gates are placed along an emergency escape route near a roadway, signs mounted on the swing gate are typically oriented and sized to be visible to pedestrians rather than motorists.

08 The U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010, 28 CFR 35 and 36, Americans with Disabilities Act of 1990 contains information regarding the design of swing gates and related hardware.

09 Where fencing (see Figures 8E-6 and 8E-9) is installed to direct pathway or sidewalk users to the grade crossing, it is desirable that this fencing be connected to any continuous existing or new fencing or channelization that has been installed parallel to the track(s) to discourage pedestrians from circumventing the grade crossing.

10 Pedestrian barriers or fencing, sometimes referred to as a "maze fencing," direct pathway or sidewalk users to face approaching rail traffic before entering the trackway.

11 Where used, maze fencing or pedestrian barriers need to be designed to permit the passage of wheelchairs and power-assisted mobility devices, and if bicycles are permitted, to permit the passage of dismounted bicyclists with tandem bicycles, cargo bicycles, or bicycles with trailers.

## Section 8E.07 Active Traffic Control Systems

**Standard:**

01 **Except as provided in Paragraph 5 of this Section, at pathway-LRT and sidewalk-LRT grade crossings where LRT operating speeds on a semi-exclusive alignment exceed 25 mph, active traffic control systems shall be used.**

02 **Except as provided in Paragraph 5 of this Section, at pathway-LRT and sidewalk-LRT grade crossings where LRT operating speeds on a semi-exclusive alignment exceed ~~40~~ 35 mph, active traffic control systems, including automatic gates, shall be used. Refer to CPUC General Order 143.**

03 **If used at a pathway or sidewalk grade crossing, an active traffic control system (see Section 8D.01) shall include flashing-light signals (see Figure 8E-7) on each approach to the crossing.**

~~*Guidance:*~~
**Standard:**

04 **If used at a pathway or sidewalk grade crossing, an active traffic control system (see Section 8D.01) ~~should~~ shall include an audible device such as a bell that is operated in conjunction with the flashing-light signals.**

Option:

05 Flashing-light signals, bells, and other audible warning devices may be omitted at pathway or sidewalk grade crossings that are located within 25 feet of an active warning device at a grade crossing that is equipped with those devices.

06 Additional pairs of flashing-light signals, bells, or other audible warning devices may be installed on the active traffic control devices at a grade crossing for pathway or sidewalk users approaching the grade crossing from the back side of those devices.

*Guidance:*

07 *Where railroad or LRT tracks in a semi-exclusive alignment are parallel and immediately adjacent to a roadway and if adequate space exists, a pedestrian refuge area or island should be provided between the tracks and the roadway to permit pedestrians to stand clear of the tracks while waiting to cross the roadway and to stand clear of the roadway while waiting to cross the tracks. If a pedestrian refuge area or island is provided at a signalized crossing of the roadway, additional pedestrian features (see Chapter 4I), such as signal heads, signing, and detectors, should be installed in the refuge area or on the island.*

## Section 8E.08 Active Traffic Control Devices – Signals

Support:

01 Pedestrian signal heads are typically used at highway-highway intersections where pedestrians have an expectation that other roadway users will sometimes be legally required to yield the right-of-way to them. At grade crossings where rail traffic does not stop, pedestrians will not have the right-of-way yielded to them. Therefore, pedestrian signal heads are not an appropriate traffic control device to use at a pathway or sidewalk grade crossing where rail traffic does not stop. Instead, the universal application of horizontally-aligned, alternately-flashing red lights is the uniform active traffic control device for all grade crossings where rail traffic does not stop including pathway and sidewalk grade crossings.

**Standard:**

02 **Except as provided in Paragraph 3 of this Section, pedestrian signal heads as described in Chapter 4I comprised of Upraised Hand and Walking Person symbols shall not be used at a pathway or sidewalk grade crossing.**

Option:

03 Pedestrian signal heads may be used at a pathway or sidewalk grade crossing where the movement of LRT vehicles is controlled by a traffic control signal or by special LRT signals (see Section 8D.15).

**Standard:**

04 **If used at a pathway or sidewalk grade crossing, flashing-light signals shall be aligned horizontally and the light units shall have a diameter of at least ~~4~~ 12 inches. For ~~4 inch~~ 12-inch diameter light units, the light centers shall be spaced approximately ~~16~~ 30 inches apart and, if used, the flashing light unit backgrounds shall be at least ~~8~~ 24 inches in diameter.**

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4 text. Refer to Section 1A.04 for more details.

05 **Each red signal unit in the flashing-light signal shall flash alternately. The number of flashes per minute for each lamp shall be 35 minimum and 65 maximum. Each lamp shall be illuminated for approximately the same length of time. The total time of illumination of each pair of lamps shall be the entire operating time.**

06 **The minimum mounting height of the flashing-light signals shall be 4 feet, measured vertically from the bottom edge of the lights to the elevation of the near edge of the pathway or sidewalk surface.**

Option:

07 At station, pathway, or sidewalk grade crossings with multiple tracks, traffic control devices may be installed between the tracks in compliance with any railroad clearance requirements.

**Standard:**

08 **The mounting height for flashing-light signals that are installed between the tracks at multiple-track crossings shall be a minimum of 1 foot, measured vertically from the bottom edge of the lights to the elevation of the near**

**edge of the pathway surface.**

*Guidance:*

09 *If a Diagnostic Team finds that a flashing-light signal with a Crossbuck sign and an audible device is still not resulting in appropriate pedestrian behavior, consideration should be given to also installing an automatic pedestrian gate (see Section 8E.09).*

10 *Flashing-light signals (see Figure 8E-7) with a Crossbuck (R15-1) sign and an audible device should be installed along semi-exclusive LRT alignments at station, pathway, or sidewalk grade crossings where the Diagnostic Team has determined that the sight distance is not sufficient for pathway or sidewalk users to complete their crossing prior to the arrival of LRT traffic at the crossing.*

11 *If the Diagnostic Team determines that flashing-light signals with a Crossbuck sign and an audible device would not provide sufficient notice of approaching LRT traffic, consideration should be given to also installing an automatic pedestrian gate (see Section 8E.09) with appropriate channelization or fencing.*

## Section 8E.09 Active Traffic Control Devices – Automatic Pedestrian Gates

Option:

01 Automatic pedestrian gates *(see Figures 8E-6, 8E-8, 8E-9, 8E-11, and 8E-12)* may be used at pathway or sidewalk grade crossings.

Support:

01a If used at a pathway or sidewalk grade crossing, an automatic pedestrian gate typically includes an audible device such as a bell, a Crossbuck (R15-1) sign, flashing-light signals, and, if applicable, the Pedestrian Grade Crossing Sign (R15-1D(CA)). Refer to CPUC General Order 75, as amended.

**Standard:**

02 **A pathway or sidewalk grade crossing across tracks where trains are permitted to travel at speeds of 80 mph or higher shall be equipped with a system of automatic pedestrian gates and an escape area with swing gates and fencing installed in the vicinity of the crossing to direct users to the pathway or sidewalk grade crossing (see Figure 8E-6) unless the Diagnostic Team recommends and CPUC determines that other safety treatments for the crossing would be more appropriate.**

*Guidance:*

03 *Where automatic pedestrian gates are installed across a pathway or sidewalk at a grade crossing, or where a sidewalk is located between the edge of a roadway and the support for an automatic gate arm that extends across the sidewalk and into the roadway, an emergency escape route (see Figures 8E-9 and 8E-10) should be provided to allow pedestrians to egress away from the track area when the automatic pedestrian gates are activated.*

**Standard:**

04 **~~Except as provided in Paragraph 6 of this Section,~~ automatic pedestrian gate arms shall be provided with at least one red light as shown in Figures 8E-6, 8E-8, 8E-9, 8E-11, and 8E-12. This light shall be continuously illuminated whenever the warning system is active.**

05 **If any red lights in addition to the continuously-illuminated red light that is required in Paragraph 4 of this Section are provided on the automatic pedestrian gate arm, they shall be installed in pairs and shall be flashed alternately in unison with the other flashing-light units at the crossing.**

~~Option:~~

06 ~~The red light on an automatic pedestrian gate arm may be omitted if the pathway or sidewalk grade crossing is located within 25 feet of the traveled way at a highway-rail or highway-LRT grade crossing that is equipped with active warning devices (see Figure 8E-11).~~

*Guidance:*

07 *If used at a pathway or sidewalk grade crossing, the height of the automatic pedestrian gate arm when in the down position should be a minimum of 3 feet and a maximum of 4 feet above the pathway or sidewalk.*

08 *If used at a pathway or sidewalk grade crossing, the gate configuration, which might include a combination of automatic pedestrian gates and swing gates, should provide for full-width coverage of the pathway or sidewalk on each approach to the crossing.*

**Standard:**

09 **Where a sidewalk is located between the edge of a roadway and the support for an automatic gate arm that extends across the sidewalk and into the roadway, the location, placement, and height prescribed for vehicular**

**gates shall be used (see Section 8D.03).**

*Guidance:*

10 *Except as provided in Paragraph 11 of this Section, if a separate automatic pedestrian gate is used for a sidewalk at a highway-rail or highway-LRT grade crossing, instead of a supplemental or auxiliary gate arm installed as a part of the same mechanism as the vehicular gate, a separate mechanism (see Figure 8E- 11) should be provided for the separate automatic pedestrian gate so that if a pedestrian manually raises the pedestrian gate arm, it will have no effect on the vehicular gate.*

Option:

11 A supplemental or auxiliary pedestrian gate arm installed as a part of the same mechanism as the vehicular gate may be used if the operating mechanism is designed to prevent the vehicular gate from being raised as a result of a pedestrian manually raising the pedestrian gate arm.

12 A horizontal hanging bar (see Figure 8E-12) may be attached to an automatic pedestrian gate at a pathway or sidewalk grade crossing to inform pedestrians with vision disabilities that the automatic pedestrian gate is in the down position and to reduce the likelihood that pedestrians will violate a lowered crossing gate.

Support:

12a Striping of the horizontal hanging bar typically matches the pattern of the gate arm.

*Guidance:*


13 *If a horizontal hanging bar is attached to an automatic pedestrian gate, the height of the horizontal hanging bar when in the down position should be a maximum of 26 inches above the pathway or sidewalk.*

## Section 8E.10 Active Traffic Control Devices – Multiple-Track Pathway or Sidewalk Grade Crossings


*Guidance:*

01 *Where railroad or LRT tracks are immediately adjacent to other tracks, the traffic control devices that control pedestrian movements should be designed to avoid having pedestrians wait between sets of tracks.*

## Figure 8E-1. Illustration of the Difference between a Pathway Grade Crossing and a Sidewalk Grade Crossing

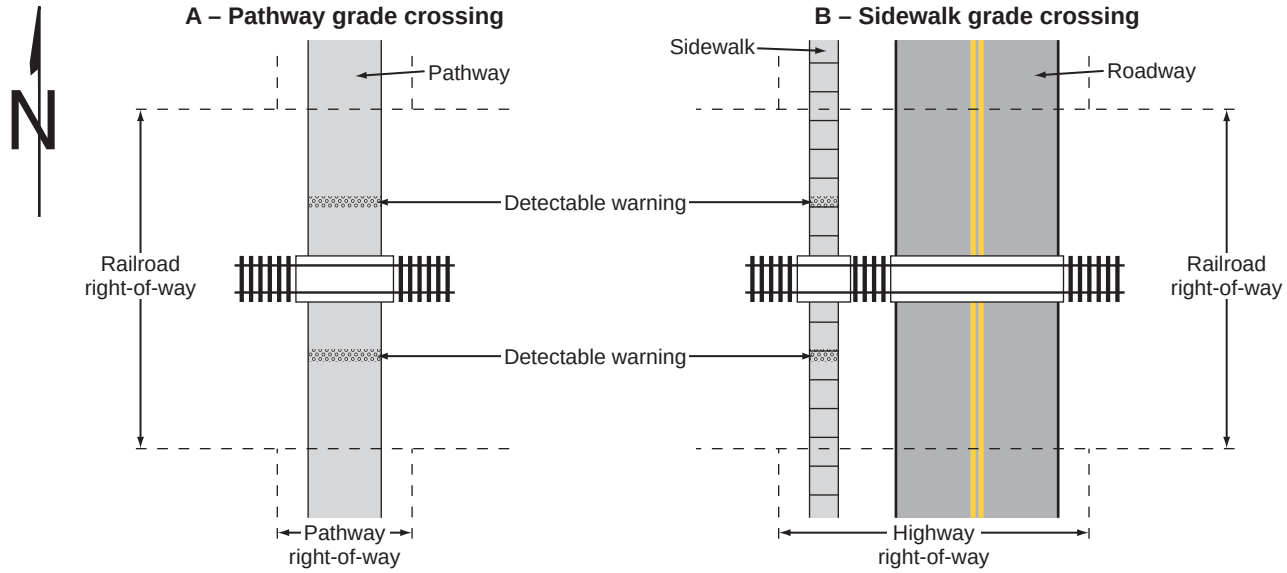

# Figure 8E-2. Example of an Active Traffic Control System for a Sidewalk or Pathway Grade Crossing

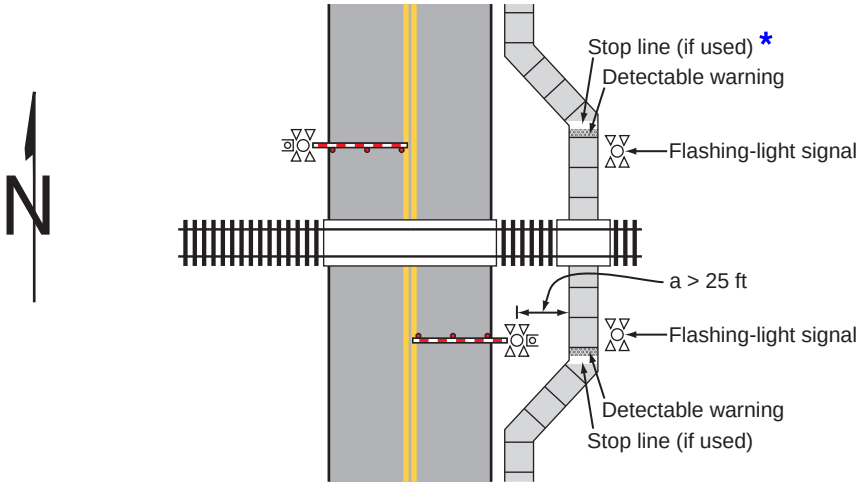



Notes: The dimension "a" is the distance from the edge of the sidewalk grade crossing to the center of the traffic control warning devices at the grade crossing.

If a ≤ 25 feet, flashing-light signals may be omitted at a pathway or sidewalk grade crossing (see Section 8E.07).


* At a sidewalk grade crossing, detectable warning is typically used without a stop line (Refer to Section 8E.04).

## Figure 8E-3. Example of Signing and Markings at a Pathway Grade Crossing

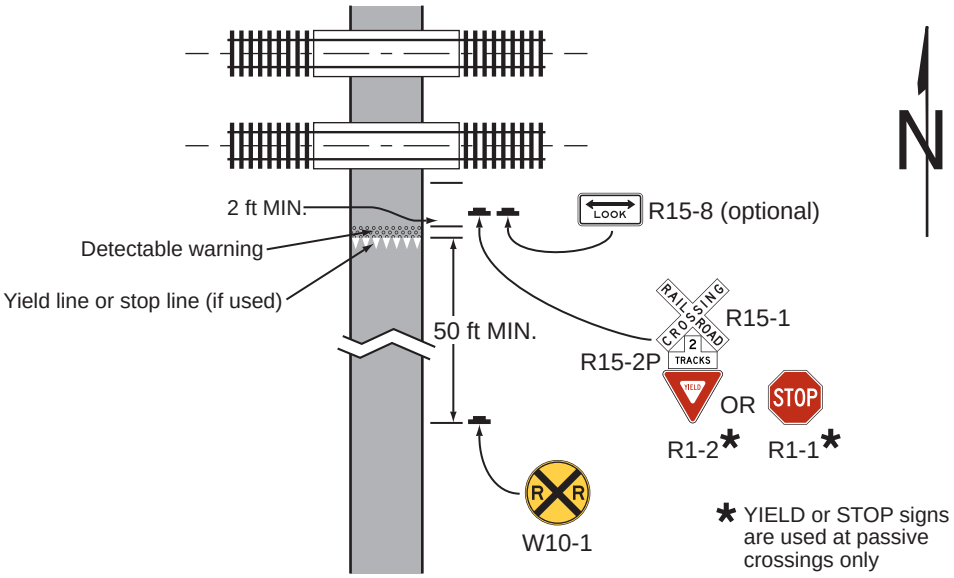


Note: The Pedestrian Grade Crossing (R15-1D(CA)) sign shall be posted at grade crossings exclusively used by pedestrians and/or bicyclists (Refer to Section 8B.103(CA)).


## Figure 8E-4. Example of Detectable Warning and Stop Lines for a Refuge Area at a Sidewalk Grade Crossing

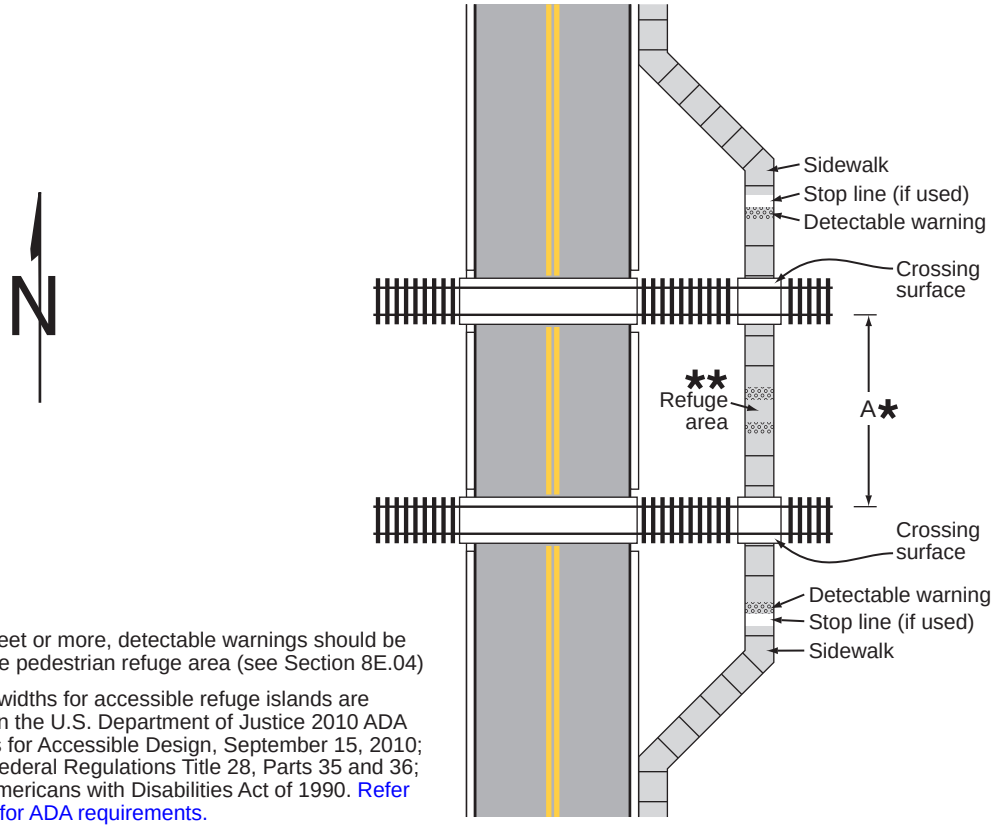


* If A is 30 feet or more, detectable warnings should be used at the pedestrian refuge area (see Section 8E.04)

** Minimum widths for accessible refuge islands are provided in the U.S. Department of Justice 2010 ADA Standards for Accessible Design, September 15, 2010; Code of Federal Regulations Title 28, Parts 35 and 36; and the Americans with Disabilities Act of 1990. Refer to DIB 82 for ADA requirements.

# Figure 8E-5. Example of a Crossbuck Assembly at a Pathway or Sidewalk Grade Crossing

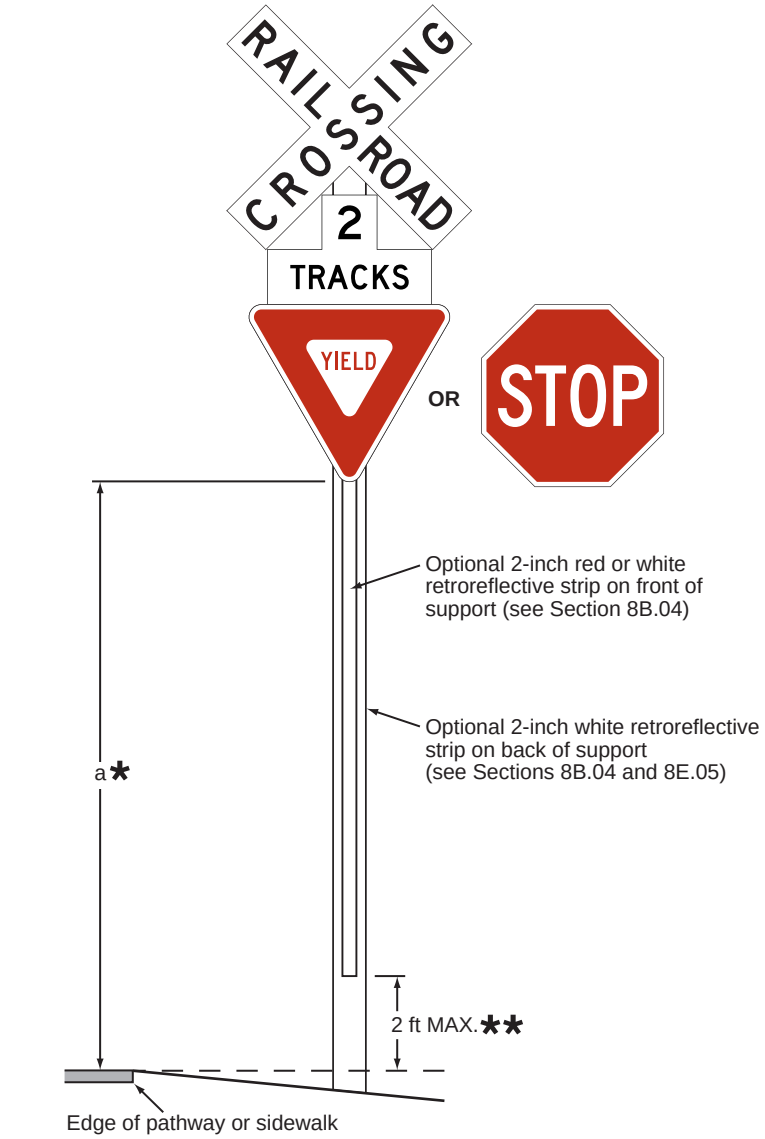


* Mounting height shall be at least 7 feet for sidewalks where the lateral offset is less than 2 feet, at least 4 feet for sidewalks where the lateral offset is 2 feet or more, and at least 4 feet for pathways.


** Measured to the elevation at the near edge of the pathway or sidewalk.

Notes: YIELD or STOP signs are used only at passive crossings.
A STOP sign is used only if an engineering study determines that it is appropriate for that particular approach.


The R15-1D(CA) Pedestrian Grade Crossing sign is required for pathway grade crossings, but not for sidewalk grade crossings.

Refer to Section 8B.103(CA)

# Figure 8E-6. Example of an Automatic Pedestrian Gate and an Emergency Escape Route at a Pathway Grade Crossing

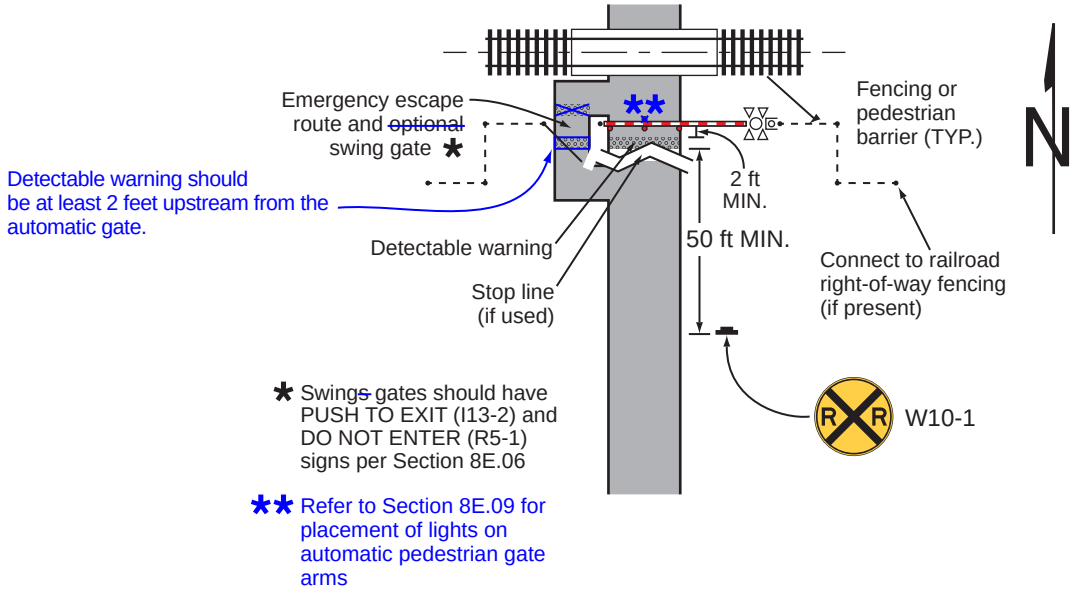

# Figure 8E-7. Example of a Flashing-Light Signal Assembly at a Pathway or Sidewalk Grade Crossing

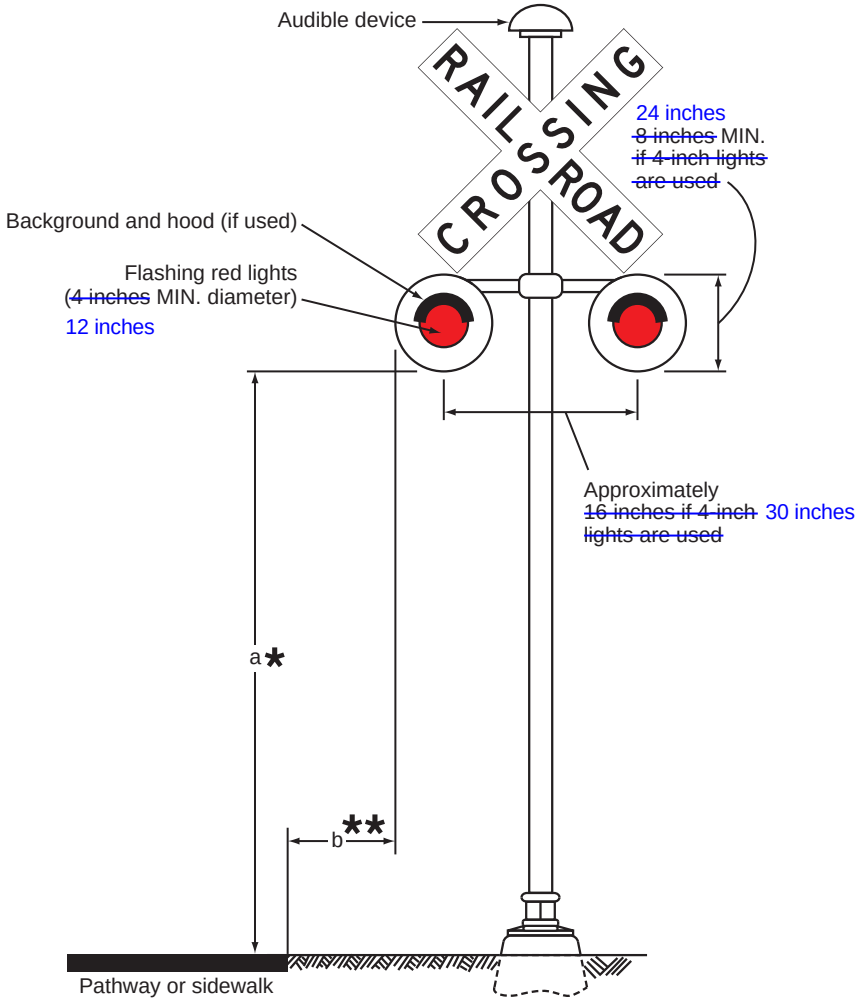



* Minimum mounting height adjacent to sidewalks and pathways should be 4 feet. Minimum mounting height above a sidewalk shall be 7 feet. Minimum mounting height above a pathway should be 8 feet.

** Minimum lateral offset for pathways should be 2 feet. Sidewalks do not have a minimum lateral offset.


Note: The R15-1D(CA) Pedestrian Grade Crossing sign is required for pathway grade crossings, but not for sidewalk grade crossings (Refer to Section 8B.103(CA)).

## Figure 8E-8. Example of an Automatic Pedestrian Gate at a Pathway or Sidewalk Grade Crossing

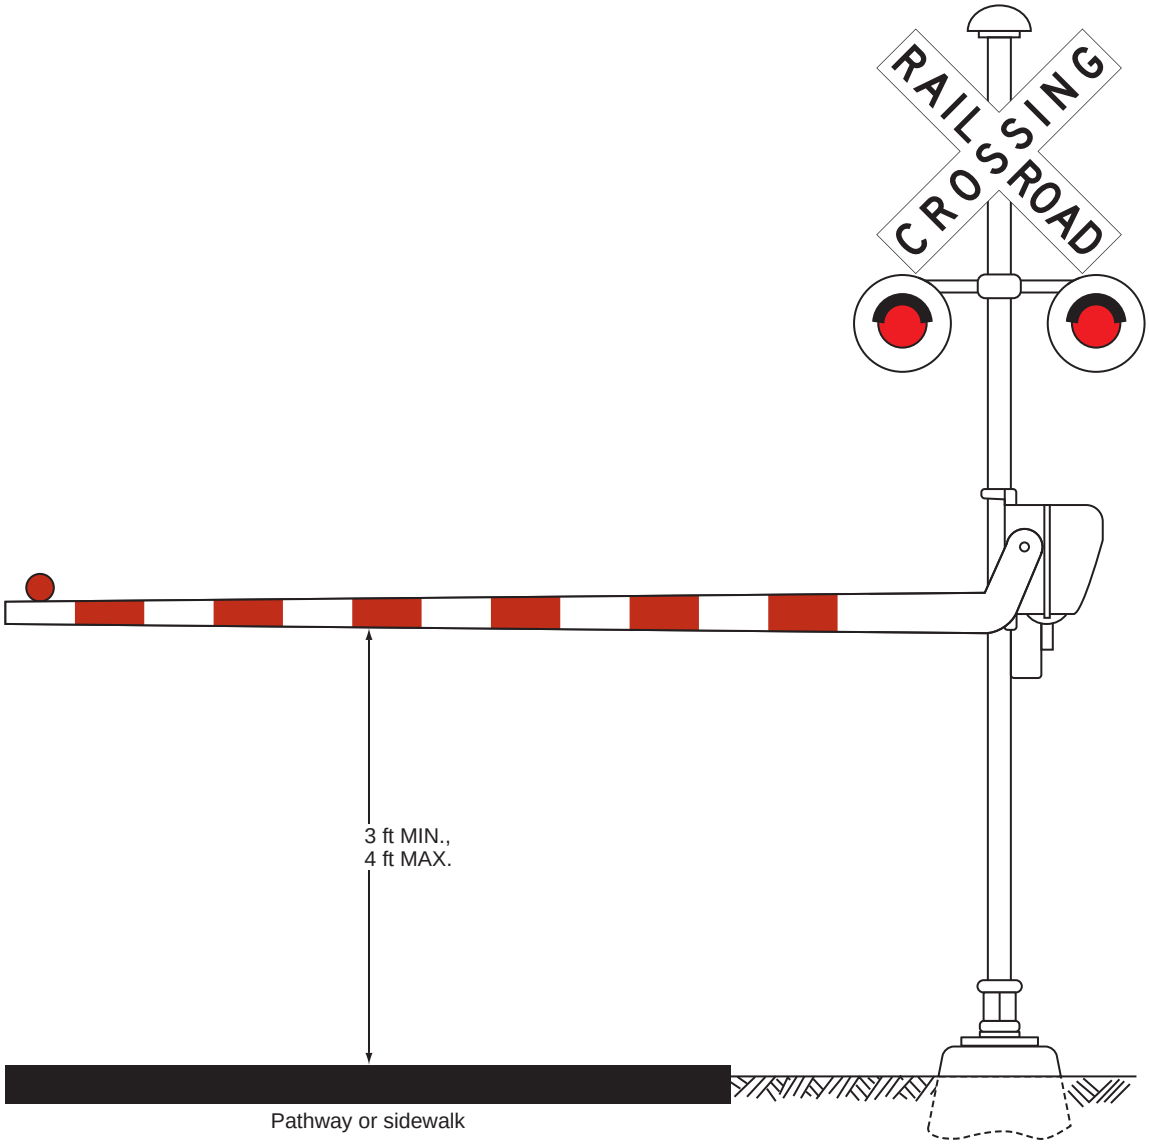



Note: The R15-1D(CA) Pedestrian Grade Crossing sign is required for pathway grade crossings, but not for sidewalk grade crossings (Refer to Section 8B.103(CA)).

# Figure 8E-9. Example of Active Traffic Control Systems with Automatic Pedestrian Gates and Swing Gates at a Sidewalk Grade Crossing

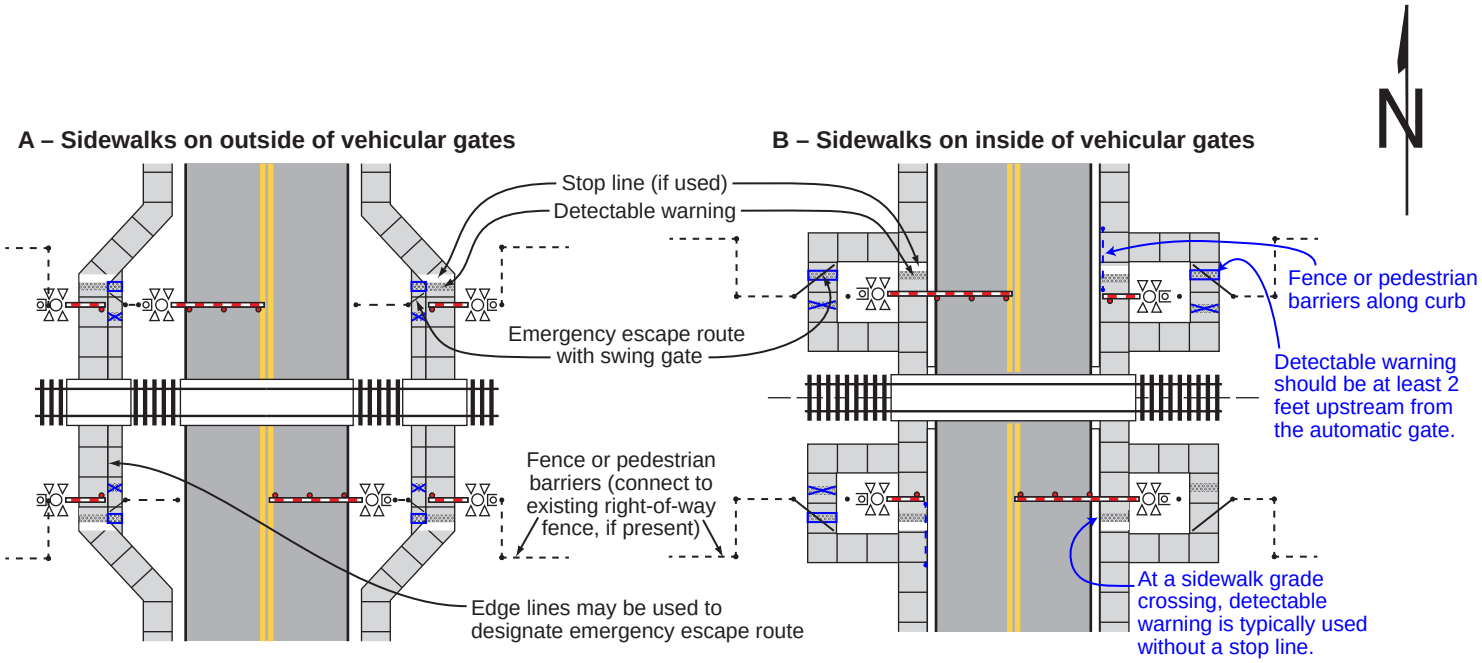


## Figure 8E-10. Example of Traffic Control Devices for an Optional Swing Gate

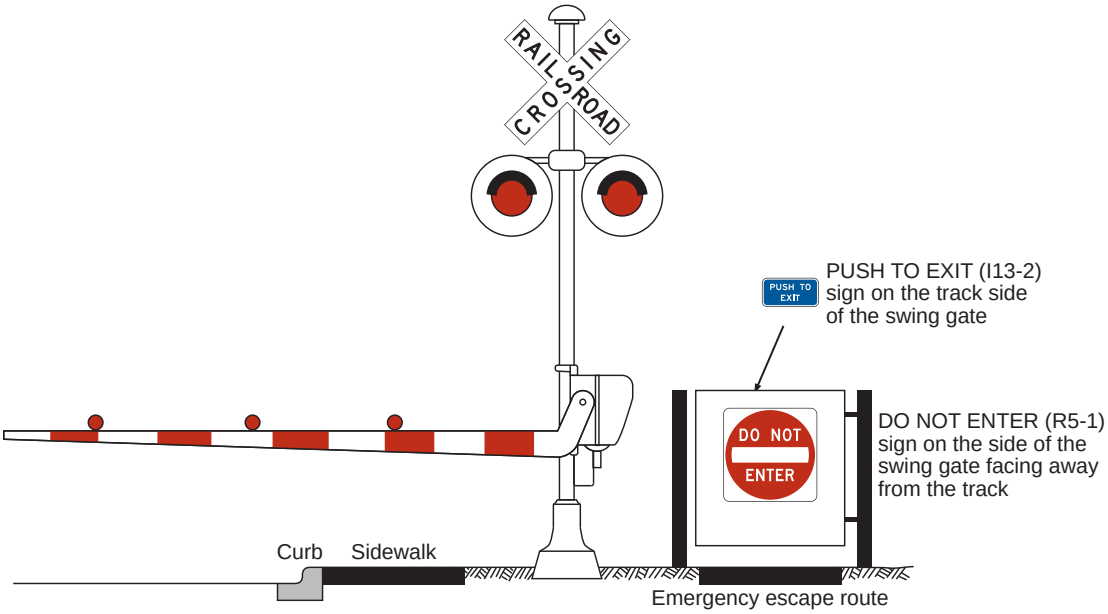


Note: Where swing gates are placed along an emergency escape route near a roadway, signs are typically oriented and sized to be visible to pedestrians rather than motorists (Refer to Section 8E.06).


## Figure 8E-11. Example of a Separate Automatic Pedestrian Gate

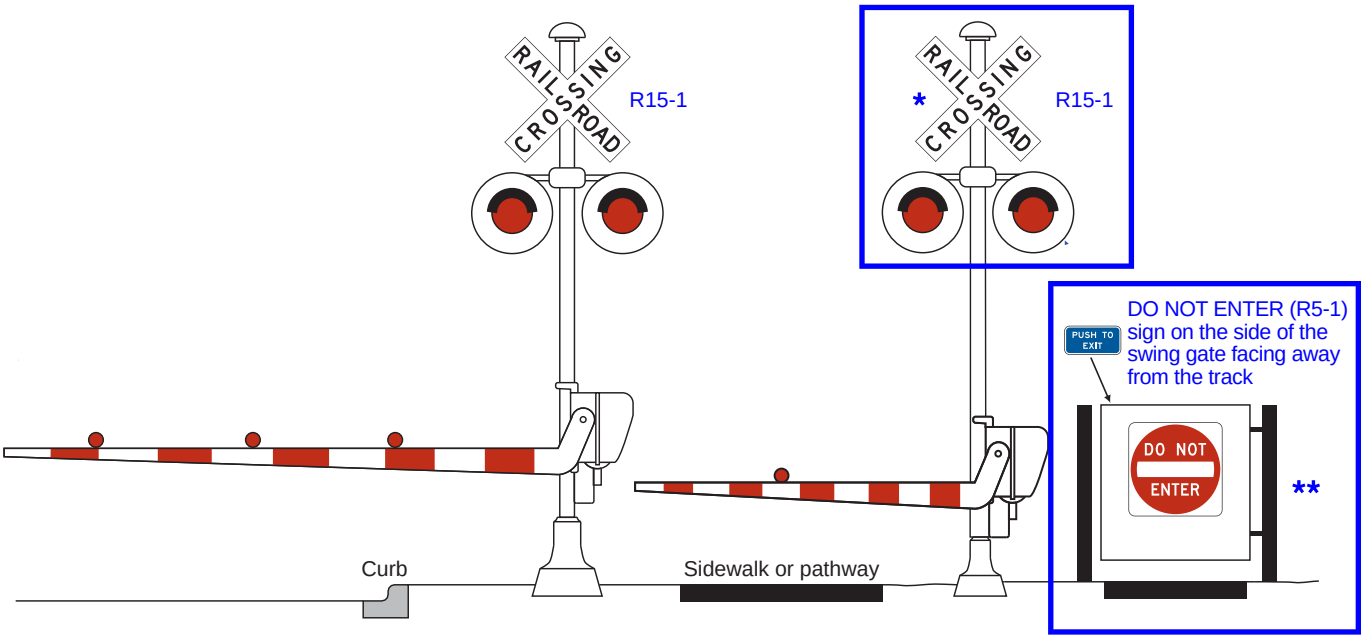


* If used at a pathway or sidewalk grade crossing, an automatic pedestrian gate typically includes an audible device such as a bell, a Crossbuck (R15-1) sign, flashing-light signals, and, if applicable, the Pedestrian Grade Crossing Sign (R15-1D(CA)).

** Refer to Section 8E.06.

## Figure 8E-12. Example of an Automatic Pedestrian Gate with a Horizontal Hanging Bar at a Pathway or Sidewalk Grade Crossing

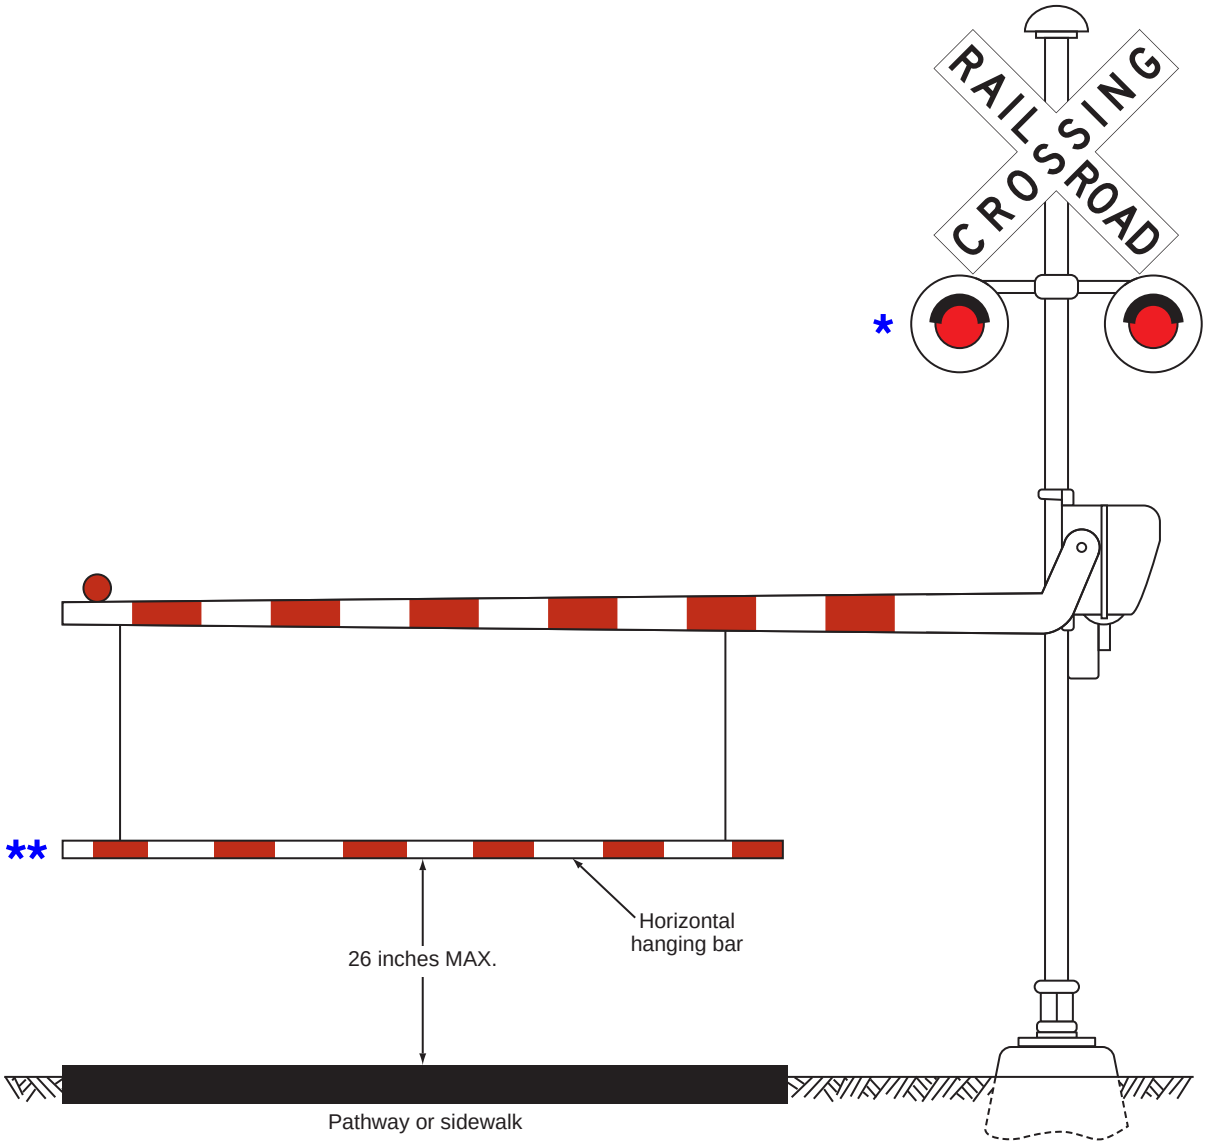


* Refer to Section 8E.08 regarding the diameter of flashing-light signals and backgrounds.

** Striping of the horizontal hanging bar typically matches the pattern of the gate arm.

*THIS PAGE INTENTIONALLY LEFT BLANK*

# PART 9
# TRAFFIC CONTROL FOR BICYCLE FACILITIES

## CHAPTER 9A. GENERAL

### Section 9A.01 General

Support:

01 Part 9 covers signs and pavement markings specifically related to bicycle operation on roadways, separated bikeways, and shared-use paths. In jurisdictions where small, low-speed, human or electric-powered transportation devices (often referred to as a micromobility devices) are allowed to use bicycle facilities, they can be regulated by signs, pavement markings, and other traffic control devices related to bicycle operations. Part 4 contains information on highway traffic signals and bicycle signal faces. Part 6 contains information on work zones for bicycle facilities and the mitigation of impacts to bicycle travel through work zones.

02 Definitions and acronyms pertaining to Part 9 are provided in Sections 1C.02 and 1C.03.

03 When operating on a roadway, bicycles are typically defined as vehicles and the operator of a bicycle is given the same rights and duties as an operator of a motor vehicle. Bicyclists are also vulnerable road users who have little to no protection from crash forces.

04 Designing bicycle facilities and the traffic control devices on those facilities in a manner that encourages predictable behavior and compliance with traffic laws from all roadway users can improve safety and increase public acceptance of bicyclists from other road users. The misuse of traffic control devices for improperly designed bicycle facilities or non-uniform applications can produce ineffective or counterproductive results. Section 1D.01 provides more information on the importance of uniformity of traffic control devices.

05 The "Bikeway Selection Guide" (FHWA-SA-18-077), FHWA, provides information on the designs and configuration of bicycle facilities.

Support:

05a Refer to FHWA's List of Known Errors for error in heading between Paragraphs 5 and 6. Refer to Section 1A.04 for more details.

06 The operation of bicycles is generally allowed on rights-of-way open to motor vehicles, even if the bicycle-specific traffic control devices outlined in Part 9 are not present.

*Guidance:*

07 *All signs, signals, and markings, including those on bicycle facilities, should be properly maintained to command respect from all road users. When installing signs and markings on bicycle facilities, an agency should be designated to maintain these devices.*

### Section 9A.02 Standardization of Application for Signing

Support:

01 The installation of nonstandard signing on bikeways or modifying standard signing in a manner inconsistent with Chapter 2A of this Manual to draw special attention, educate users or the community, or brand a bicycle facility can contribute to problems with public acceptance and enforcement.

**Standard:**

02 **Bicycle signs shall comply with the provisions of this Manual for standard shape, legend, and color.**

03 **All signs installed on bikeways shall be retroreflective, including those on shared-use paths, and bicycle lane facilities.**

04 **Where signs serve both bicyclists and other road users, vertical mounting height and lateral placement shall be as provided in Sections 2A.15 and 2A.16 of this Manual.**

*Guidance:*

05 *Where used on a shared-use path, no portion of a sign or its support should be placed less than 2 feet laterally from the near edge of the path, or less than 8 feet vertically over the entire width of the shared-use path (see Figure 9A-1).*

06 *Mounting height for post-mounted signs on shared-use paths should be a minimum of 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the path surface (see Figure 9A-1).*

07 *Signs for the exclusive use of bicyclists should be located so that other road users are not confused by them.*

08 *The clearance for overhead signs on shared-use paths should be adjusted when appropriate to accommodate path users requiring more clearance, such as equestrians, or typical maintenance or emergency vehicles.*

Support:

08a California regulatory and guide signs for bicycle facilities are shown in Figure 9B-1(CA) and Figure 9D-1(CA), respectively.

**Standard:**

09 **If the sign or plaque applies to motorists and bicyclists, then the size shall be as shown for conventional roads in Tables 2B-1, 2C-1, 2D-1, and 8B-1, as applicable.**

10 **The minimum sign and plaque sizes for signs specific to bicycle-only facilities and shared-use paths shall be those shown in Table 9A-1. These sizes shall be used only for signs and plaques installed specifically for bicyclist applications.**

Option:

11 Larger sizes of signs and plaques may be used on bicycle facilities when appropriate (see Section 2A.07).

12 Any diamond-shaped warning sign that is placed such that it is applicable only to bicyclists or pedestrians on shared-use paths or separated bicycle lanes may be 18" x 18".

*Guidance:*

13 *Except for size, the design of signs and plaques for bicycle facilities should be identical to that provided in this Manual for signs and plaques for streets and highways.*

Support:

14 Uniformity in design of bicycle signs and plaques includes shape, color, symbols, arrows, wording, lettering, and illumination or retroreflectivity.

## Section 9A.03 Standardization of Application for Markings

Support:

01 Markings indicate the separation of the lanes for road users, assist the bicyclist by indicating assigned travel paths, indicate correct position for traffic control signal actuation, and provide advance information for turning and crossing maneuvers.

~~*Guidance:*~~

Option:

02 Pavement marking word messages, symbols, ~~and/or~~ arrows, and/or colored pavement may ~~should~~ be used in bikeways where appropriate.

*Guidance:*

03 *Consideration should be given to selecting pavement marking materials that will minimize loss of traction for bicycles under wet conditions.*

**Standard:**

04 **Pavement markings on bicycle facilities that must be visible at night or in low-light conditions shall be retroreflective unless the markings are adequately visible under provided lighting.**

05 **The colors, width of lines, patterns of lines, symbols, and arrows used for marking bicycle facilities shall be as defined in Part 3.**

05a **On State highways, marking materials shall conform to Sections 84-2.02 and 84-3.02 of the Standard Specifications published by Caltrans.**

Support:

06 Section 3H.06 contains information on green-colored pavement for use with certain traffic control devices for bicycles and bicycle facilities.

07 Section 9E.17 contains information on the use of channelizing devices to emphasize the pavement markings for bicycle facilities.

*Guidance:*

08 *Raised pavement markers should not be used on bicycle lanes or shared-use paths.*

09 *If used around bicycle facilities, raised pavement markers should not be placed immediately adjacent to the travel path of bicyclists in a bicycle lane or on a shared-use path.*

Support:

10 Using raised pavement markers creates a collision potential for bicyclists by placing fixed objects immediately


adjacent to the travel path of the bicyclist. Raised pavement markers can cause a bicyclist to lose balance and fall, and might not be visible to a bicyclist who is following another bicyclist.

## Section 9A.101(CA) Traffic Controls for Bicycle Facilities at Rail Crossings

**Standard:**

01 **Any bicycle facility traversing an at-grade railroad crossing shall conform to Part 8.**

## Figure 9A-1. Sign Placement on Shared-Use Paths

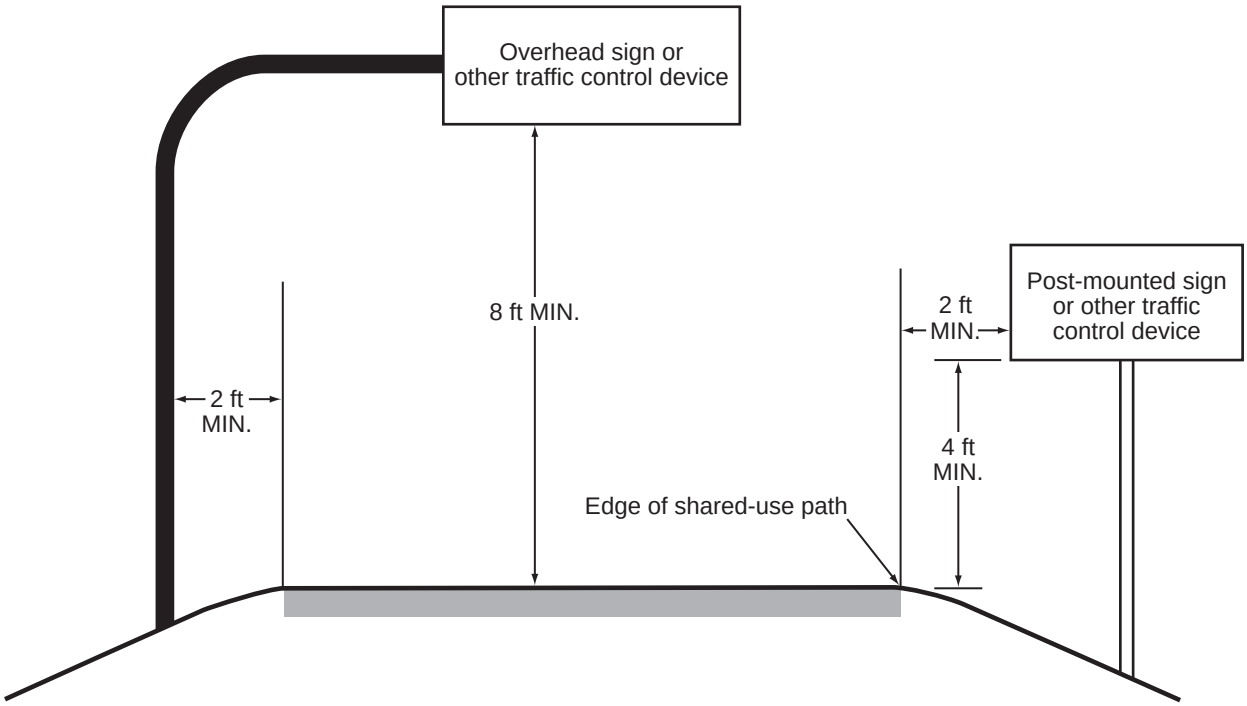


Note: Refer to Federal accessibility standards and State accessibility guidelines for sign requirements.

## Table 9A-1. Bicycle Facility Sign and Plaque Minimum Sizes (Sheet 1 of 3)

| Sign or Plaque | Sign Designation | Section | Off Roadway[1,5] | Roadway[2,5] |
|---|---|---|---|---|
| Stop | R1-1 | 9B.01 | 18 x 18 | — |
| Yield | R1-2 | 9B.01 | 18 x 18 x 18 | — |
| Bike Lane (plaque) | R3-5hP | 9B.04 | — | 30 x 12 |
| Except Bicycles (plaque) | R3-7bP | 9B.02 | — | 24 x 12 |
| Advance Intersection Lane Control with Bike Lane | R3-8x Series | 9B.03 | — | Varies x 36 |
| Bike Lane | R3-17 | 9B.04 | — | 24 x 18 |
| Ahead, Ends (plaques) | R3-17aP, R3-17bP | 9B.04 | — | 24 x 9 |
| Movement Restriction | R4-1,2,3,7,16 | 9B.24 | 12 x 18 | — |
| Begin Right Turn Lane Yield to Bikes | R4-4 | 9B.05 | — | 36 x 30 |
| Bicycle Passing Clearance | R4-19 | 9B.15 | — | 30 x 30 |
| Bicycle Wrong Way | R5-1b | 9B.06 | 12 x 18 | 12 x 18 |
| No Motor Vehicles | R5-3 | 9B.07 | 24 x 24 | 24 x 24 |
| No Bicycles | R5-6 | 9B.08 | 18 x 18 | — |
| On Freeway (plaque) | R5-10dP | 9B.17 | — | 24 x 6 |
| No Parking Bike Lane | R7-9,9a | 9B.09 | — | 12 x 18 |
| Back-In Parking | R7-10 | 9B.10 | — | 12 x 18 |
| No Pedestrian Crossing | R9-3 | 9B.08 | 18 x 18 | — |
| Ride With Traffic (plaque) | R9-3cP | 9B.06 | 12 x 12 | 12 x 12 |
| Bicycles Use Pedestrian Signal | R9-5 | 9B.11 | 12 x 18 | 12 x 18 |
| Bicycles Yield to Pedestrians | R9-6 | 9B.12 | 12 x 18 | 12 x 18 |
| Shared-Use Path Restriction | R9-7 | 9B.13 | 12 x 18* | — |
| No Skaters | R9-13 | 9B.08 | 18 x 18 | 18 x 18 |
| No Equestrians | R9-14 | 9B.08 | 18 x 18 | 18 x 18 |
| No Snowmobiles | R9-15 | 9B.08 | 18 x 18 | 18 x 18 |
| No All-Terrain Vehicles | R9-16 | 9B.08 | 18 x 18 | 18 x 18 |
| Bicycles Allowed Use of Full Lane | R9-20 | 9B.14 | — | 30 x 30 |
| Bicycles Use Shoulder Only | R9-21 | 9B.16 | — | 24 x 30 |
| Bicycles Must Exit | R9-22 | 9B.17 | — | 24 x 30 |
| Bicycle All Turns from Bike Lane | R9-23 | 9B.18 | — | 12 x 18 |
| Bicycle Left Turn from Bike Lane | R9-23a | 9B.18 | — | 12 x 18 |
| Bicycle Left Turn Must Use Turn Box | R9-23b, R9-23c | 9B.18 | — | 12 x 18 |
| Bicycle All Turns | R9-24,24a | 9B.19 | — | 24 x 6 |
| Bicycle U and Left Turns | R9-25,25a,25b | 9B.19 | — | 24 x 9 |
| Bicycle U Turn | R9-26,26a,26b | 9B.19 | — | 24 x 6 |
| Bicycle Left Turn | R9-27,27a,27b | 9B.19 | — | 24 x 6 |
| ~~Push Button for Green~~ | ~~R10-4~~ | ~~9B.20~~ | ~~9 x 12~~ | ~~9 x 12~~ |
| Left Turn Yield to Bicycle | R10-12b | 9B.21 | — | 30 x 36 |
| Bicycle Detector | R10-22 | 9B.20 | 12 x 18 | 12 x 18 |
| Bike Push Button for Green Light | R10-24 | 9B.20 | 9 x 15 | 9 x 15 |
| Push Button for Warning Lights - Wait for Gap | R10-25 | 9B.20 | 9 x 12 | 9 x 12 |
| Bike Push Button for Green Light (arrow) | R10-26 | 9B.20 | 9 x 15 | 9 x 15 |
| Bicycle Signal | R10-40, R10-40a, R10-41, R10-41a, R10-41b, R10-41c | 9B.22 | 12 x 21 | 12 x 21 |
| ** Grade Crossing (Crossbuck) | R15-1 | 9B.23 | 24 x 4.5 | 48 x 9 |
| Number of Tracks (plaque) | R15-2P | 9B.23 | 13.5 x 9 | 27 x 18 |
| Look | R15-8 | 9B.23 | 18 x 9 | 36 x 18 |
| Horizontal Alignment | W1-1,2,3,4,5 | 9C.01 | 18 x 18 | — |
| Large Arrow | W1-6,7 | 9C.01 | 24 x 12 | — |
| Intersection Warning | W2-1,2,3,4,5 | 9C.02 | 18 x 18 | — |

## Table 9A-1. Bicycle Facility Sign and Plaque Minimum Sizes (Sheet 2 of 3)

| Sign or Plaque | Sign Designation | Section | Off Roadway[1,5] | Roadway[2,5] |
|---|---|---|---|---|
| Stop Ahead, Yield Ahead, Signal Ahead | W3-1,2,3 | 9C.08 | 18 x 18 | — |
| Narrow Bridge | W5-2 | 9C.08 | 18 x 18 | — |
| Path Narrows | W5-4a | 9C.08 | 18 x 18 | — |
| Hill | W7-5 | 9C.08 | 18 x 18 | 30 x 30 |
| Bump, Dip | W8-1,2 | 9C.03 | 18 x 18 | — |
| Pavement Ends | W8-3 | 9C.03 | 18 x 18 | — |
| Bicycle Surface Condition | W8-10 | 9C.03 | 18 x 18 | 30 x 30 |
| Slippery When Wet (plaque) | W8-10P | 9C.03 | 12 x 9 | 12 x 9 |
| Bicycle Lane Ends | W9-5 | 9C.07 | — | 30 x 30 |
| Bicycles Merging | W9-5a | 9C.07 | 18 x 18 | 30 x 30 |
| Grade Crossing Advance Warning | W10-1 | 9C.08 | 24 Dia. | 36 Dia. |
| No Train Horn (plaque) | W10-9P | 9C.08 | 18 x 12 | 30 x 24 |
| Skewed Crossing | W10-12 | 9C.08 | 18 x 18 | 36 x 36 |
| Bicycle | W11-1 | 9C.04, 9C.08 | 18 x 18 | — |
| Pedestrian | W11-2 | 9C.08 | 18 x 18 | — |
| Trail Crossing | W11-15 | 9C.04 | 18 x 18 | — |
| Trail Crossing (plaque) | W11-15P | 9C.04 | 18 x 12 | — |
| Low Clearance | W12-2 | 9C.08 | 18 x 18 | — |
| Playground | W15-1 | 9C.08 | 18 x 18 | — |
| In Road (plaque) | W16-1P | 9C.08 | — | 18 x 12 |
| In Street (plaque) | W16-1aP | 9C.08 | — | 18 x 12 |
| XX Feet (2-line plaque) | W16-2P | 9C.04 | 18 x 12 | — |
| XX Ft (1-line plaque) | W16-2aP | 9C.04 | 12 x 9 | — |
| Downward Diagonal Arrow (plaque) | W16-7P | 9C.04 | 12 x 9 | — |
| Ahead (plaque) | W16-9P | 9C.04 | — | 24 x 12 |
| Except Bicycles (plaque) | W16-20P | 9C.05 | — | 24 x 12 |
| 2-Way Bicycle Cross Traffic (plaque) | W16-21P | 9C.06 | — | 24 x 12 |
| Object Marker Type 3 | OM3-L,C,R | 9C.09 | 6 x 18 | 12 x 36 |
| Destination (1 line) | D1-1, D1-1a | 9D.01 | Varies x 6 | — |
| Bicycle Destination (1 line) | D1-1b, D1-1c | 9D.01 | Varies x 6 | Varies x 6 |
| Destination (2 lines) | D1-2, D1-2a | 9D.01 | Varies x 12 | — |
| Bicycle Destination (2 lines) | D1-2b, D1-2c | 9D.01 | Varies x 12 | Varies x 12 |
| Destination (3 lines) | D1-3, D1-3a | 9D.01 | Varies x 18 | — |
| Bicycle Destination (3 lines) | D1-3b, D1-3c | 9D.01 | Varies x 18 | Varies x 18 |
| Distance (1 line) | D2-1 | 9D.01 | Varies x 6 | — |
| Bike Route Destination and Distance (1 Line) | D2-1a | 9D.01 | Varies x 12 | Varies x 12 |
| Distance (2 line) | D2-2 | 9D.01 | Varies x 9 | — |
| Bike Route Destination and Distance (2 Lines) | D2-2a | 9D.01 | Varies x 15 | Varies x 15 |
| Distance (3 line) | D2-3 | 9D.01 | Varies x 12 | — |
| Bike Route Destination and Distance (3 Lines) | D2-3a | 9D.01 | Varies x 18 | Varies x 18 |
| Street Name (1 line) | D3-1 | 9D.01 | Varies x 6 | Varies x 6 |
| Street Name (2 lines) | D3-1 | 9D.01 | Varies x 12 | Varies x 12 |
| Bicycle Parking Area Directional | D4-3 | 9D.09 | 18 x 12 | 18 x 12 |
| Bicycle-Sharing Station Directional | D4-4 | 9D.09 | 12 x 18 | 12 x 18 |
| Bicycle Lockers Directional | D4-4a | 9D.09 | 12 x 18 | 12 x 18 |
| Reference Location (1-digit) | D10-1 | 9D.10 | 6 x 9 | — |
| Intermediate Reference Location (2-digits) | D10-1a | 9D.10 | 6 x 15 | — |
| Reference Location (2-digits) | D10-2 | 9D.10 | 6 x 15 | — |
| Intermediate Reference Location (3-digits) | D10-2a | 9D.10 | 6 x 21 | — |

# Table 9A-1. Bicycle Facility Sign and Plaque Minimum Sizes (Sheet 3 of 3)

| Sign or Plaque | Sign Designation | Section | Off Roadway[1,5] | Roadway[2,5] |
|---|---|---|---|---|
| Reference Location (3-digits) | D10-3 | 9D.10 | 6 x 21 | — |
| Intermediate Reference Location (4-digits) | D10-3a | 9D.10 | 6 x 24 | — |
| Bike Route | D11-1 | 9D.02 | 24 x 18 | 24 x 18 |
| Bike Route (plaque) | D11-1bP | 9D.03 | 18 x 6 | 18 x 6 |
| Bike Route with Destination | D11-1c | 9D.02 | 24 x 18 | 24 x 18 |
| Shared-Use Path Destination (1 line) | D11-10a | 9D.12 | Varies x 6* | — |
| Shared-Use Path Destination (2 lines) | D11-10b | 9D.12 | Varies x 12* | — |
| Shared-Use Path Destination (3 lines) | D11-10c | 9D.12 | Varies x 18* | — |
| Shared-Use Path Destination and Distance (1 line) | D11-10d | 9D.12 | Varies x 6* | — |
| Shared-Use Path Destination and Distance (2 lines) | D11-10e | 9D.12 | Varies x 12* | — |
| Shared-Use Path Destination and Distance (3 lines) | D11-10f | 9D.12 | Varies x 18* | — |
| Bicycles Directional | D11-11 | 9D.11 | 18 x 18 | — |
| Pedestrians Directional | D11-12 | 9D.11 | 18 x 18 | — |
| Skaters Directional | D11-13 | 9D.11 | 18 x 18 | — |
| Equestrians Directional | D11-14 | 9D.11 | 18 x 18 | — |
| Bicycle Turn Box Guide Signs | D11-20, D11-20a | 9D.13 | — | 12 x 18 |
| State or Local Bicycle Route | M1-8, M1-8a | 9D.05 | 12 x 18 | 18 x 24 |
| Non-Numbered Bicycle Route | M1-8b, M1-8c | 9D.06 | 12 x 12 | 18 x 18 |
| U.S. Bicycle Route | M1-9 | 9D.07 | 12 x 18 | 18 x 24 |
| Bicycle Route Auxiliary Signs (plaque) | M2-1P, M3-1P,2P,3P,4P, M4-1P,1aP,2P,3P,5P,6P,7P, 7aP,8P,14P | 9D.08 | 12 x 6 | 12 x 6 |
| Bicycle Route Arrow Signs (plaque) | M5-1P, 2P, M6-1P, 2P, 3P, 4P, 5P, 6P, 7P | 9D.08 | 12 x 9 | 12 x 9 |

* For use on shared-use paths only.

** Refer to FHWA's List of Known Errors for error in table. Refer to Section 1A.04 for more details.

Notes: 1. Includes shared-use paths and bicycle-only facilities outside of the roadway.

2. If the sign or plaque applies to motorists and bicyclists, then the size shall be as shown for conventional roads in Tables 2B-1, 2C-1, 2D-1, or 8B-1.

3. Larger signs may be used when appropriate.

4. Dimensions are shown in inches and are shown as width x height.

5. Separated bicycle lanes (see definition in Section 1C.02) can be located within the roadway or outside the roadway, and the minimum sign sizes for these facilities are shown in the off roadway and roadway columns respectively.

## Table 9A-1(CA). California Bicycle Facility Sign and Plaque Minimum Sizes

| Sign or Plaque | Sign Designation | Section | Off Roadway[1,5] | Roadway[2,5] |
|---|---|---|---|---|
| MEMORIAL BIKEWAY | G12-3(CA) | 9D.01 | Varies x 12 | — |
| PUSH OR WAVE AT BUTTON TO TURN ON WARNING LIGHTS | R10-3k(CA) | 2B.58, 9B.20 | 9 x 12 | 9 x 12 |
| BIKE PATH EXCLUSION | R44-1(CA) | 9B.07 | 12 x 24 | — |
| BICYCLES MOTOR-DRIVEN CYCLES MUST EXIT (with Arrow) | R44B(CA) | 9B.17 | — | 30 x 36 |
| BIKE TURN-OUT XX FEET | SR64A(CA) | 9B.101(CA) | — | 30 x 30 |
| BIKE TURN-OUT (with arrow) | SR64B(CA) | 9B.101(CA) | — | 30 x 30 |

Notes: 1. Includes shared-use paths and bicycle-only facilities outside of the roadway.

2. If the sign or plaque applies to motorists and bicyclists, then the size shall be as shown for conventional roads in Tables 2B-1, 2C-1, 2D-1, or 8B-1.

3. Larger signs may be used when appropriate.

4. Dimensions are shown in inches and are shown as width x height.

5. Separated bicycle lanes (see definition in Section 1C.02) can be located within the roadway or outside the roadway, and the minimum sign sizes for these facilities are shown in the off roadway and roadway columns respectively.

6. Other sign sizes are available, see California Sign Specifications.

# CHAPTER 9B. REGULATORY SIGNS

## Section 9B.01 STOP and YIELD Signs (R1-1 and R1-2)

**Standard:**

01 **STOP (R1-1) signs (see Figure 9B-1) shall be installed on bicycle facilities at points where bicyclists are required to stop.**

02 **YIELD (R1-2) signs (see Figure 9B-1) shall be installed on bicycle facilities at points where bicyclists have an adequate view of conflicting traffic as they approach the sign, and where bicyclists are required to yield the right-of-way to that conflicting traffic.**

03 **A STOP sign or a YIELD sign shall not be installed in conjunction with a bicycle signal face (see Chapter 4H).**

Option:

04 Larger signs may be used on shared-use paths and separated bikeways for added emphasis.

*Guidance:*

05 *Where conditions require shared-use path users or bicyclists on separated bikeways, but not roadway users, to stop or yield, the STOP or YIELD sign should be placed or shielded so that it is not readily visible to roadway users.*

06 *When the placement of STOP or YIELD signs is being considered, the priority at a shared-use path/bikeway with roadway intersection should be assigned with consideration of the following:*

*A. Relative speeds of shared-use path, bikeway and roadway users,*
*B. Relative volumes of shared-use path, bikeway and roadway traffic, and*
*C. Relative importance of shared-use path, bikeway and roadway.*

07 *Speed should not be the sole factor used to determine priority, as it is sometimes appropriate to give priority to a high-volume shared-use path that crosses a low-volume street, or to a regional shared-use path that crosses a minor collector street or where a shared-use path begins, ends, or it merges with other types of roadway.*

08 *When priority is assigned (see Sections 2B.06 and 2B.08), the least-restrictive control that is appropriate should be placed on the lower-priority approaches. STOP signs should not be used where YIELD signs would provided adequate control.*

## Section 9B.02 EXCEPT BICYCLES Regulatory Plaque (R3-7bP)

Support:

01 There are circumstances where it might be appropriate to exempt bicyclists from regulatory restrictions applied to other traffic.

*Guidance:*

02 *Where an engineering study or engineering judgment demonstrates that it is appropriate to exempt bicyclists from the provisions of a regulatory sign, the EXCEPT BICYCLES (R3-7bP) regulatory plaque (see Figure 9B-1) should be used.*

Support:

02a Where signs are provided to prohibit or regulate turns from streets or driveways that intersect with a roadway and those signs are not intended for bicycle traffic, the supplemental EXCEPT BICYCLES (R3-7bP) regulatory plaque can be used.

Support:

03 Figure 9B-2 shows examples of how the EXCEPT BICYCLES (W16-20P) regulatory plaque can be applied.

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

04 Section 9C.05 contains information regarding the EXCEPT BICYCLES warning plaque when applicable to a warning sign.

**Standard:**

05 **The EXCEPT BICYCLES regulatory plaque shall not be used to exempt bicyclists from the legal requirement of a STOP or YIELD sign, Yield Here to Pedestrians Signs, ~~Stop Here for Pedestrians Signs,~~ or a traffic signal indication.**

06 **Where a regulatory sign, such as the No Left Turn (R3-2) sign (see Section 2B.26), is installed on the same post or mounting as a STOP sign or YIELD sign, the EXCEPT BICYCLES regulatory plaque shall not be**

**installed in conjunction with the regulatory sign on that post or mounting that includes the STOP sign or YIELD sign.**

07 **The EXCEPT BICYCLES regulatory plaque shall be placed below the regulatory sign that it supplements.**

## Section 9B.03 Advance Intersection Lane Control Signs (R3-8 Series) for Bicycle Lanes

Option:

01 Advance Intersection Lane Control (R3-8 series) signs (see Section 2B.30) may display the arrangement of a conventional or buffer-separated bicycle lane in relation to other lanes in the same direction that are present on a roadway approach to an intersection.

Support:

02 The number and combination of permissible movements by both the motor vehicle and the bicycle on the same approach to an intersection might be practically limited by the amount of information that can be legibly displayed on signs or in signing sequences and still be readily comprehended by road users. The excessive display of all movements by more than one mode can result in unwieldy signs that are difficult to locate and install.

*Guidance:*

03 *On an approach to an intersection with complex geometry that can include multiple through lanes and multiple turn lanes and also includes a bicycle lane, consideration should be given to displaying all allowable movements on separate signs, such as using Mandatory Movement Lane Control (R3-5) signs (see Section 2B.28) for the through lanes and Mandatory Movement Lane Control (R3-7) signs (see Section 2B.28) for the turn lanes, and guide signs for bicycle routes (see Section 9D.02 through 9D.07) and Bicycle Route Sign auxiliary plaques (see Section 9D.08) for the bicycle movement.*

**Standard:**

04 **The portion of the sign face for the bicycle lane shall be limited to the relationship of the bicycle lane to the other lanes on the roadway approach to the intersection. The portion of the sign face for the bicycle lane shall not be modified to display specific, supplementary information about the bicycle lane such as bicycle lane extensions, contiguous buffer spaces, or other ancillary bicycle operations such as two-stage turn boxes or bicycle boxes.**

05 **Counter-flow bicycle lanes shall not be displayed on Advance Intersection Lane Control signs.**

06 **The shared-lane marking symbol shall not be displayed on Advance Intersection Lane Control signs.**

07 **Shared-use paths shall not be displayed on Advance Intersection Lane Control signs.**

08 **Advance Intersection Lane Control signs that display the bicycle lane shall use a contrasting white legend on a black background for the bicycle lane (see Figure 2B-4). The portion of the display for the bicycle lane shall not use the color green on the sign face in an attempt to be consistent with the green-colored pavement that might be present on the intersection approach.**

## Section 9B.04 Bicycle Lane Signs and Plaques (R3-17, R3-5hP, R3-17aP, and R3-17bP)

**Standard:**

01 **The BIKE LANE (R3-17) sign and the BIKE LANE (R3-5hP), AHEAD (R3-17aP), and ENDS (R3-17bP) plaques (see Figure 9B-1) shall be used only in conjunction with marked bicycle lanes as described in Sections 9E.01, 9E.06, and 9E.07.**

~~*Guidance:*~~

02 **If used, Bicycle Lane signs and plaques ~~should~~ shall be located at the beginning of the bicycle lane, ~~and~~ in advance of the downstream end of the bicycle lane, and at all major changes in direction. The BIKE LANE (R3-17) sign shall be used to regulate bicycle and motor vehicle traffic, in accordance with CVC §§ 21207, 21207.5, 21208, 21209 and 21717.**

*Guidance:*

02a *The BIKE LANE (R3-17) sign should be placed at every arterial street and at 1/2 mile intervals of each designated Bike lane.*

Option:

03 Additional Bicycle Lane signs and plaques may be used at periodic intervals along the bicycle lane as determined by engineering judgment based on the operating speed of bicycle and other traffic, block length, distances from adjacent intersections, and other considerations.

Support:

04 Section 2B.33 contains information for the application of BEGIN and END plaques.

05 Section 9B.03 contains information on displaying the bicycle lane on Advance Intersection Lane Control signs.

Option:

06 Where two or more movements from a bicycle lane are allowed, or where the emphasis of allowed bicycle movements is needed, an Optional Movement Lane Control sign (see Section 2B.29) may be supplemented with a BIKE LANE (R3-5hP) plaque above the Optional Movement Lane Control sign.

07 Where bicycle lanes are located between travel lanes on intersection approaches or where only a single bicycle movement is allowed from a certain bicycle lane, a Mandatory Movement Lane Control sign (see Section 2B.28) may be supplemented with a BIKE LANE plaque to require a bicyclist in a particular bicycle lane at an intersection to stay in the same lane and proceed straight through the intersection, or to indicate a required turn from a particular bicycle lane.

## Section 9B.05 BEGIN RIGHT TURN LANE YIELD TO BIKES Sign (R4-4)

Option:

01 Where motor vehicles entering a mandatory right-turn lane must weave across bicyclists in bicycle lanes, the BEGIN RIGHT TURN LANE YIELD TO BIKES (R4-4) sign (see Figure 9B-1) may be used to inform both the motorist and the bicyclist of this weaving maneuver (see Figures 9E-3 and 9E-4).

*Guidance:*

02 *The R4-4 sign should not be used when bicyclists need to move left because of a right-turn lane drop situation.*

## Section 9B.06 Bicycle WRONG WAY Sign and RIDE WITH TRAFFIC Plaque (R5-1b and R9-3cP)

Option:

01 The Bicycle WRONG WAY (R5-1b) sign and RIDE WITH TRAFFIC (R9-3cP) plaque (see Figure 9B-1) may be placed facing wrong-way bicyclists, such as on the left-hand side of a roadway.

02 This sign and plaque may be mounted back-to-back with other signs to minimize visibility to other traffic.

*Guidance:*

03 *The RIDE WITH TRAFFIC plaque should be used only in conjunction with the Bicycle WRONG WAY sign, and should be mounted directly below the Bicycle WRONG WAY sign.*

## Section 9B.07 NO MOTOR VEHICLES Sign (R5-3)

Option:

01 The NO MOTOR VEHICLES (R5-3) sign (see Figure 9B-1) may be installed at the entrance to a shared-use path.

02 The Bike Path Exclusion (R44A-1(CA)) sign may be used to identify a bike path or shared-use path and prohibit motor vehicles and motorized bicycles from entering the bike path. If motorized bicycles are permitted, the "Motorized Bicycles" portion may be replaced with "Motorized Bicycles Permitted".

Support:

03 The R44A-1(CA) sign is shown in Figure 9B-1(CA).

## Section 9B.08 Selective Exclusion Signs

Option:

01 Selective Exclusion signs (see Figure 9B-1) may be installed at the entrance to a roadway or facility to notify road or facility users that designated types of traffic are excluded from using the roadway or facility.

Support:

02 Typical exclusion messages include:

A. No Bicycles (R5-6);
B. No Pedestrians (R9-3);
C. No Skaters (R9-13);
D. No Equestrians (R9-14);
E. No Snowmobiles (R9-15); and
F. No All-Terrain Vehicles (R9-16).

Option:

03 Where bicyclists, pedestrians, and motor-driven cycles are all prohibited, the R5-10a word message sign (see Section 2B.45) may be used.

## Section 9B.09 No Parking Bike Lane Signs (R7-9 and R7-9a)

**Standard:**

01 **If the installation of signs is necessary to restrict parking, standing, or stopping in a bicycle lane, appropriate signs as described in Sections 2B.53 through 2B.55, or the No Parking Bike Lane (R7-9 or R7-9a) signs (see Figure 9B-1) shall be installed.**

Support:

02 Refer to CVC § 21211 for restrictions related to bicycle facilities.

## Section 9B.10 Back-In Parking Sign (R7-10)

Option:

01 The Back-In Parking (R7-10) sign (see Section 2B.52 and Figure 9B-1) may be used where back-in parking is required by motor vehicles in the presence of a bicycle lane or movement.

Support:

02 Angled back-in curb parking is commonly applied on streets where a bicycle lane is present so that the scanning behavior of a motorist associated with the back-in angle parking task, both entering and exiting the parking space, would place a bicyclist in a bicycle lane in a more direct view of the motor vehicle operator.

03 Figure 9B-3 shows an example of the use of back-in parking signs in conjunction with bicycle lanes.

## Section 9B.11 Bicycles Use Ped Signal Sign (R9-5)

Option:

01 The Bicycles Use Ped Signal (R9-5) sign (see Figure 9B-1) may be used where the crossing of a street by bicyclists is controlled by pedestrian signal indications.

02 In order to remind drivers who are making turns to yield to or stop for pedestrians or bicyclists, a Turning Vehicles Yield to Pedestrians (R10-15) sign, Turning Vehicles Stop for Pedestrians (R10-15a) sign (see Section 2B.59), or Left Turn Yield to Bicycles (R10-12b) sign (see Section 9B.21) may be used.

*Guidance:*

03 *If used, the R9-5 sign should be installed in the vicinity of where bicyclists will be crossing the street.*

## Section 9B.12 Bicycles Yield to Peds Sign (R9-6)

Option:

01 The Bicycles Yield to Peds (R9-6) sign (see Figure 9B-1) may be used at locations where a bicyclist is required to cross or share a facility used by pedestrians and is required to yield to the pedestrians.

**Standard:**

02 **Where the Bicycles Yield to Peds sign is supported by a yield line pavement marking (see Section 3B.19) to establish the yielding point, the sign and the pavement marking shall be installed adjacent to each other.**

03 **The Bicycles Yield to Peds sign shall not be used in bicycle corridors to establish a programmatic regulation where no yielding point exists.**

04 **The Bicycles Yield to Peds sign shall not be used in conjunction with a STOP or YIELD sign~~,~~ or a Yield Here to Pedestrians Sign~~, or a Stop Here for Pedestrians Sign~~.**

## Section 9B.13 Shared-Use Path Restriction Sign (R9-7)

Option:

01 The Shared-Use Path Restriction (R9-7) sign (see Figure 9B-1) may be installed to supplement a solid white pavement marking line (see Section 9E.13) on facilities that are to be shared by pedestrians and bicyclists in order to provide a separate designated pavement area for each mode of travel. The symbols may be transposed as appropriate.

Support:

01a The Shared-Use Path Restriction (R9-7) sign can be used for locations with sidewalk level shared-use paths to further

communicate the appropriate use of each space. The symbols may be switched as appropriate.

*Guidance:*

02 *If two-way operation is allowed on the facility for pedestrians and/or bicyclists, the designated pavement area that is provided for each two-way mode of travel should be wide enough to accommodate both directions of travel for that mode. The two-way facility should be marked according to Section 9E.13.*

## Section 9B.14 Bicycles Allowed Use of Full Lane Sign (R9-20)

Support:

01 The Uniform Vehicle Code (UVC) (Also refer to CVC § 21202(a)(3)) defines a "substandard width lane" as a "lane that is too narrow for a bicycle and a vehicle to travel safely side by side within the same lane."

Option:

02 The Bicycles Allowed Use of Full Lane (R9-20) sign (see Figure 9B-1) may be used on roadways where no bicycle lanes or adjacent shoulders usable by bicycles are present and where travel lanes are too narrow for bicycles and motor vehicles to operate side-by-side.

03 The Bicycles Allowed Use of Full Lane sign may be used in locations where it is important to inform road users that bicyclists might occupy the travel lane.

04 Section 9E.09 describes a shared-lane marking that may be used in addition to or instead of the Bicycles Allowed Use of Full Lane sign to inform road users that bicyclists might occupy the travel lane.

## Section 9B.15 Bicycle Passing Clearance Sign (R4-19)

Option:

01 The Bicycle Passing Clearance (R4-19) sign (see Figure 9B-1) may be used in jurisdictions that have defined in law or ordinance a specific clearance to be provided by motor vehicles when they pass bicycles.

01a In situations where there is a need to remind motorists to pass bicyclists with sufficient lateral clearance in compliance with CVC § 21760 (Three Feet for Safety Act) the Bicycle Passing Clearance (R4-19) sign may be used.

Support:

01b Refer to CVC § 21760 for the Three Feet for Safety Act.

01c CVC § 21202(a)(3) defines a "substandard width lane" as a lane that is too narrow for a bicycle and vehicle to travel safely side by side within the same lane.

01d Refer to Section 9B.14 for Bicycles Allowed Use of Full Lane Sign (R9-20).

Option:

02 The specific clearance displayed on the Bicycle Passing Clearance (R4-19) sign may be adjusted to reflect the applicable law or ordinance.

**Standard:**

03 **The Bicycle Passing Clearance (R4-19) sign shall not be used in jurisdictions that do not have a specific passing clearance to be provided by motor vehicles passing bicycles, as defined in law or ordinance.**

*Guidance:*

04 *The Bicycle Passing Clearance (R4-19) sign should not be used on roadways with bicycle lanes or with shoulders usable for bicycle travel.*

## Section 9B.16 Bicycles Use Shoulder Only Sign (R9-21)

Option:

01 The Bicycles Use Shoulder Only (R9-21) sign (see Figure 9B-1) may be used to designate locations on a freeway or expressway where bicycles are allowed, but must remain on an available and usable shoulder.

*Guidance:*

02 *The Bicycles Use Shoulder Only sign should be limited to use on freeways and expressways.*

03 *The Bicycles Use Shoulder Only sign should be placed adjacent to the entrance ramp or entrance to the freeway at or near the location where the full-width shoulder resumes beyond the entrance ramp taper.*

## Section 9B.17 Signing for Bicycles on Freeways and Expressways

**Standard:**

01 **The Bicycles Must Exit (R9-22) sign (see Figure 9B-1) shall be used in advance of a location where a freeway or expressway becomes prohibited to bicycle travel, and shall be placed in advance of the intersection or exit ramp prior to the prohibited segment of roadway (see Figure 9B-4).**

Option:

02 The Bicycles Must Exit sign may be used below a post-mounted Exit Direction sign.

**Standard:**

03 **If the Bicycles Must Exit sign is used, a No Bicycles (R5-6) sign (see Figure 9B-1) shall be placed downstream from the intersection or exit ramp departure point where the prohibited segment of freeway or expressway begins. The No Bicycles sign shall not be placed below the Exit Gore sign.**

Option:

04 The ON FREEWAY (R5-10dP) plaque (see Figure 9B-1) may be used with an appropriate Selective Exclusion sign to indicate a prohibition along ramps leading to an adjacent or parallel freeway.

Support:

05 Section 2B.45 contains information on regulatory signing for prohibiting bicycles from using particular roadways or facilities.

Support:

06 Refer Section 2B.45 and CVC § 21960 for restrictions on use of freeways.

07 Refer Section 2B.45 for NO PEDESTRIANS BICYCLES MOTOR-DRIVEN CYCLES (R5-10), NO PEDESTRIANS OR BICYCLES (R5-10b) and NO PEDESTRIANS (R5-10c) signs.

**Standard:**

08 **The BICYCLES MOTOR-DRIVEN CYCLES MUST EXIT (R44B(CA)) sign shall be used on freeways in advance of an exit ramp where bicycles and motor-driven cycles must exit.**

*Guidance:*

09 *The R5-10, R5-10b or R5-10c sign, as appropriate, should be placed beyond the exit ramp gore as a follow-up message to the R44B(CA) sign.*

## Section 9B.18 Two-Stage Bicycle Turn Box Regulatory Signing (R9-23 Series)

Support:

01 Where two-stage bicycle turn boxes are provided in an intersection, the design of an approach to that intersection will determine whether the use of a two-stage bicycle turn box is required by bicycles to facilitate a turn.

02 Situations in which a two-stage bicycle turn box might be necessary to facilitate turns include, but are not limited to, those in which:

A. A separated bicycle facility is provided where upstream access to a lane used to facilitate turns by motor vehicle traffic is physically inaccessible to bicycles;
B. Left turns are prohibited from the left-most lane, or right turns are prohibited from the right-most lane, at an intersection; or
C. Locations where physical or operational conditions make it impracticable or unsafe for a bicyclist to merge and make the appropriate turn as would any other vehicle.

**Standard:**

03 **Where bicycles are required to use a two-stage bicycle turn box (see Figure 9B-5), the Two- Stage Bicycle Turn Box regulatory sign series (see Figure 9B-5) shall be used.**

04 **Where bicycles are required to use a two-stage bicycle turn box, the Bicycles All Turns from Bike Lane (R9-23) or Bicycle Left Turn from Bike Lane (R9-23a) advance regulatory sign shall be mounted in advance of the intersection, and at least one Bicycle Turn Must Use Turn Box (R9-23b or R9-23c) sign shall be used at the intersection.**

05 **Where used, the Bicycle Turn Must Use Turn Box (R9-23b) sign shall be mounted at the near side of the intersection.**

06 **Where used, the Bicycle Turn Must Use Turn Box location (R9-23c) sign shall be mounted at the far side of the intersection.**

Option:

07 Where use of a two-stage bicycle turn box is optional, the Two-Stage Bicycle Turn Box guide sign series (see Section 9D.13) may be used to provide directional information.

08 If used, an appropriately sized Street Name (D3-1) sign (see Section 2D.45) may be installed below the All Turns from Bike Lane sign or Left Turn from Bike Lane sign to identify the crossroad where the turn box will be available.

Support:

09 Section 9E.11 contains information regarding pavement markings and turning restrictions for two- stage turn boxes.

## Section 9B.19 Bicycle Jughandle Signs (R9-24, R9-25, R9-26, and R9-27 Series)

Support:

01 Bicycle jughandle turns allow bicycles to use the traffic control provided for the crossroad for facilitating a left turn, right turn, or U-turn.

Option:

02 The R9-23 sign (see Figure 9B-1) may be used in advance of where bicyclists are required to use the bicycle jughandle turn in order to facilitate all turns.

03 The R9-24 series sign (see Figure 9B-1) may be used where bicyclists are required to use the bicycle jughandle turn in order to facilitate all turns.

04 The R9-25 series sign (see Figure 9B-1) may be used where bicyclists are required to use a bicycle jughandle turn to facilitate U-turns and left turns and where right-turning bicyclists are exempted or the right turn is not available or possible (see Figure 9B-6).

05 The R9-26 series sign (see Figure 9B-1) may be used where bicyclists are required to use a jughandle to facilitate U-turns and where left-turning and right-turning bicyclists are exempted or the left turn or right turn is not available or possible.

06 The R9-27 series sign (see Figure 9B-1) may be used where bicyclists are required to use a jughandle to facilitate left turns and where U-turning and right-turning bicyclists are exempted or the U-turn or right turn is not available or possible.

07 A Bicycle Jughandle sign may be used to indicate a jughandle turn initially made by a left turn for a bicycle lane on the left-hand side of a one-way street or for a counter-flow bicycle lane. The legend RIGHT may be substituted for the legend LEFT on Bicycle Jughandle signs to represent bicycle facilities on the left- hand side of the roadway where facilitating a right turn would be applicable.

*Guidance:*

*08 Applications of Bicycle Jughandle signs should be limited to brief independent alignments either through physical separation or islands formed by pavement markings. Bicycle Jughandle signs should not be used for a turning movement facilitated by a two-stage turn box (see Section 9B.18).*

Support:

09 Bicycle Jughandle signs are designed to be mounted below guide signs.

10 Section 9D.01 contains information regarding the use of Bicycle Destination signs that can be used for jughandles.

## Section 9B.20 Bicycle Actuation Signs (R10-4, R10-22, R10-24, R10-25, and R10-26)

Option:

01 Where bicycles are not controlled by pedestrian signal indications, the R10-4, R10-24, or R10-26 sign (see Section 2B.58) may be used.

*Guidance:*

02 *If used, the R10-4, R10-24, or R10-26 signs (see Figure 9B-1) should be installed in the vicinity of where bicycles will be crossing the street.*

Option:

03 If bicycles are crossing a roadway where In-Roadway Warning Lights (see Section 4U.02) or other warning lights or beacons have been provided, the R10-25 or R10-3k(CA) sign (refer to Figure 9B-1 (CA)) sign may be used.

04 The Bicycle Detector (R10-22) sign (see Figure 9B-1) may be installed at signalized intersections where pavement markings are used to indicate the location where a bicycle is to be positioned to actuate the signal (see Section 9E.15).

*Guidance:*

05 *If the Bicycle Detector sign is installed, it should be placed at the roadside adjacent to the marking to emphasize the*

*location of the marking.*

## Section 9B.21 Left Turn Yield to Bicycles Sign (R10-12b)

Option:

01 The Left Turn Yield to Bicycles (R10-12b) sign (see Figure 9B-1) may be used to emphasize the requirement for motorists to yield to bicyclists in situations where the motorist is turning across a bicycle movement that may be unexpected in direction, location, or some other quality that would be inconsistent with the typical bicycle lane.

Support:

02 Section 2B.59 contains provisions on the placement and use of regulatory Traffic Signal signs.

## Section 9B.22 Bicycle Signal Signs (R10-40, R10-40a, R10-41, R10-41a, R10-41b, and R10-41c)

Support:

01 The purposes of the Bicycle Signal signs (see Figure 9B-1) are to inform road users that the signal indications in the bicycle signal face are intended only for bicyclists, and to inform bicyclists which specific bicycle movements are controlled by the bicycle signal face.

02 Section 4H.03 contains information on signs that are used in conjunction with bicycle signal faces.

**Standard:**

03 **The Bicycle Signal – Mandatory Movement (R10-40 or R10-40a) sign or the Bicycle Signal – Optional Movement (R10-41. R10-41a, R10-41b, or R10-41c) sign shall require bicycles to turn, shall permit turns where such turns would otherwise not be allowed, shall require a bicycle to stay in the same lane and proceed straight through an intersection, or shall indicate allowed movements when a GREEN BICYCLE signal indication is displayed on a bicycle signal face.**

## Section 9B.23 LOOK Sign (R15-8)

Option:

01 At railroad or LRT grade crossings with shared-use paths or separated bikeways, the LOOK (R15-8) sign (see Figure 9B-1) may be mounted on the Crossbuck support below the Crossbuck (R15-1) sign or any other signs, or on a separate post in the immediate vicinity of the grade crossing on the railroad or LRT right- of-way.

*Guidance:*

02 *A LOOK sign should not be mounted on a Crossbuck Assembly that has a YIELD or STOP sign mounted on the same support as the Crossbuck.*

## Section 9B.24 Other Regulatory Signs

Option:

01 Other regulatory signs described in Chapters 2B and 8B may be installed on bicycle facilities as appropriate.

## Section 9B.101(CA) Bike Turn-out Signs SR64A(CA) and SR64B(CA)

Support:


01 On two-lane highways in areas where bicyclists share the road with motorists and roadway width, traffic volumes and/or vertical or horizontal curvature make passing bicyclists difficult for motorists, turn-out areas for bicyclists are sometimes provided for the purpose of allowing vehicles an opportunity to pass bicyclists.

*Guidance:*


02 *Where an area has been provided for bicyclists to use as a turn-out to allow vehicles an opportunity to pass bicyclists, a BIKE TURN-OUT XX FEET (SR64A(CA)) sign (refer to Figure 9B-1(CA)) should be installed in advance of the turn-out area.*

03 *A BIKE TURN-OUT (with arrow) (SR64B(CA)) sign (refer to Figure 9B-1(CA)) should be installed at the entrance of the turn-out area provided for bicyclists.*

## Figure 9B-1. Regulatory Signs and Plaques for Bicycle Facilities (Sheet 1 of 2)

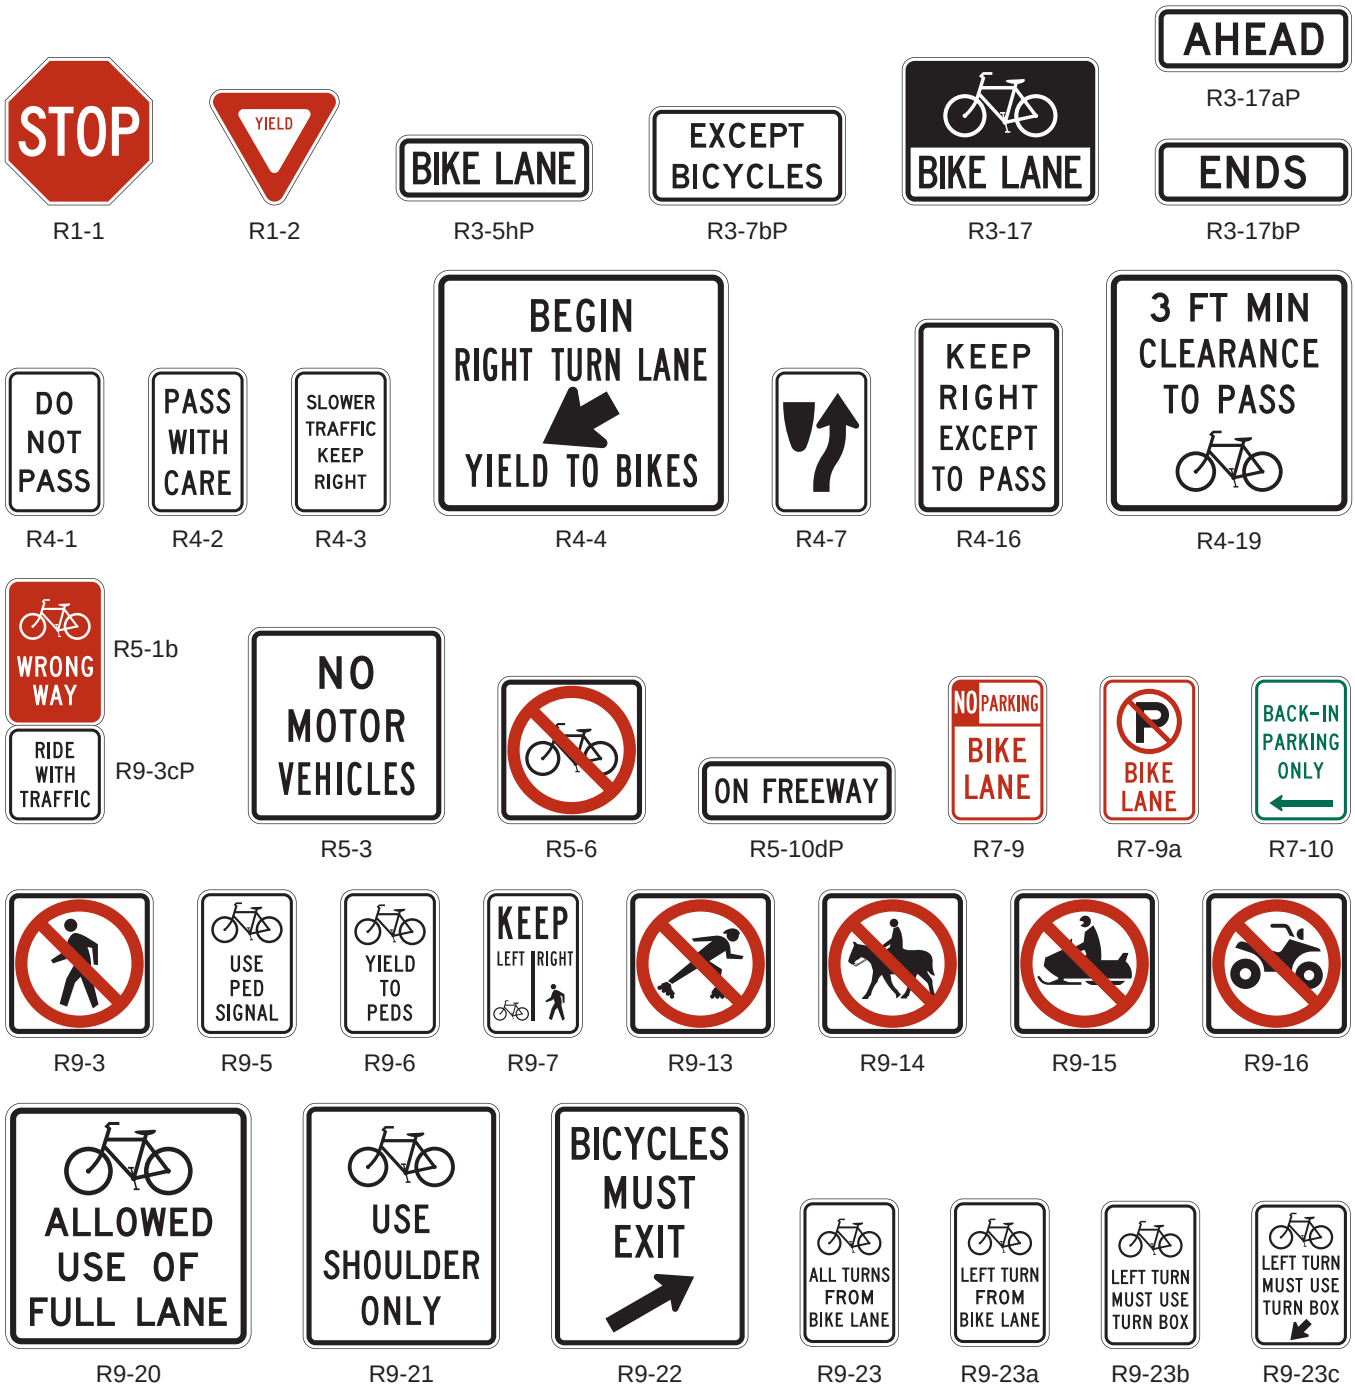

## Figure 9B-1. Regulatory Signs and Plaques for Bicycle Facilities (Sheet 2 of 2)

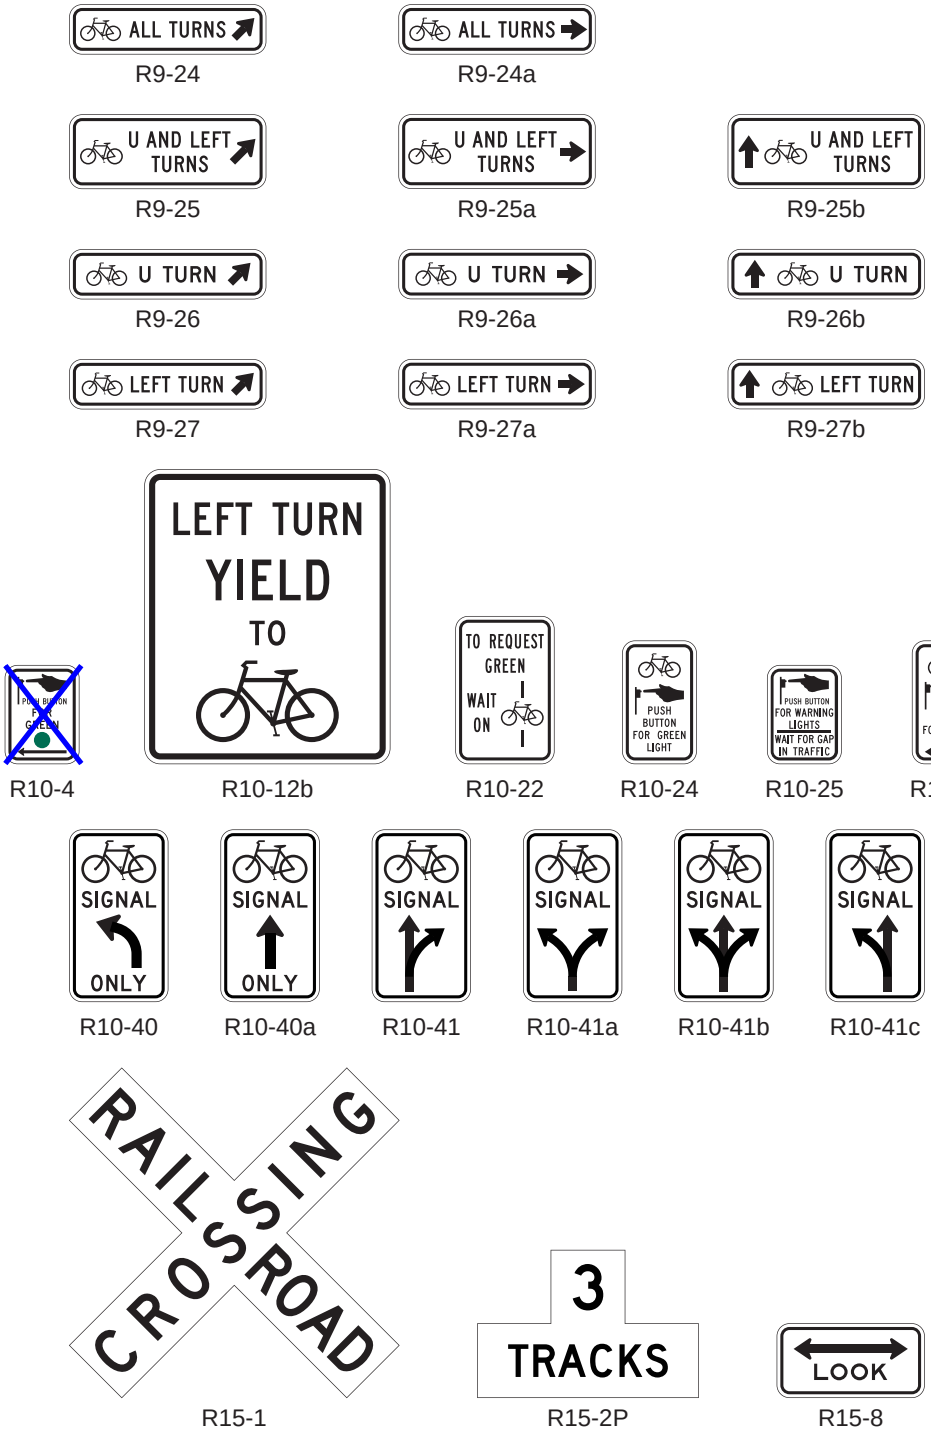

## *Figure 9B-1(CA). California Regulatory Signs and Plaques for Bicycle Facilities*




R10-3K(CA)




R44A-1(CA)




R44B(CA)





SR64A(CA)





SR64B(CA)


## Figure 9B-2. Examples of Applications of EXCEPT BICYCLES Regulatory Plaques

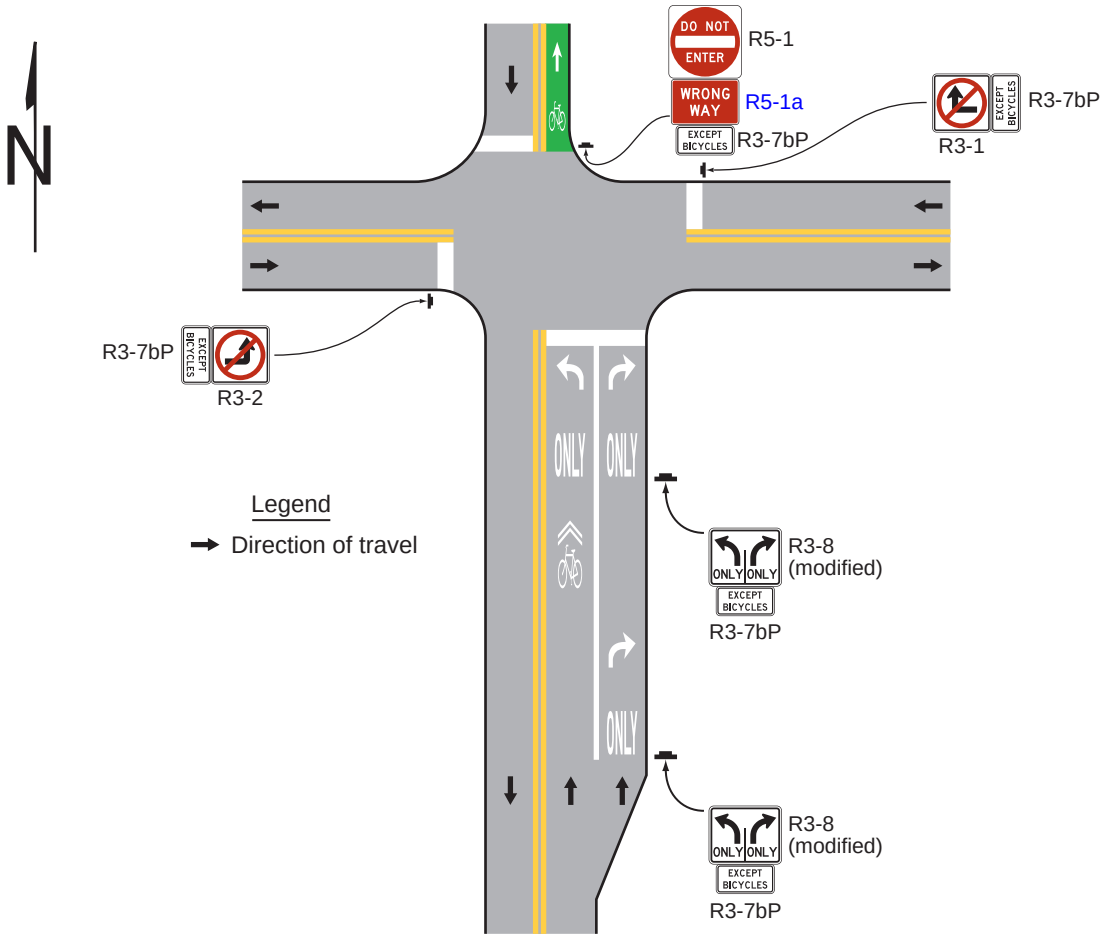


## Figure 9B-3. Examples of Bicycle Facilities Adjacent to Back-In Parking

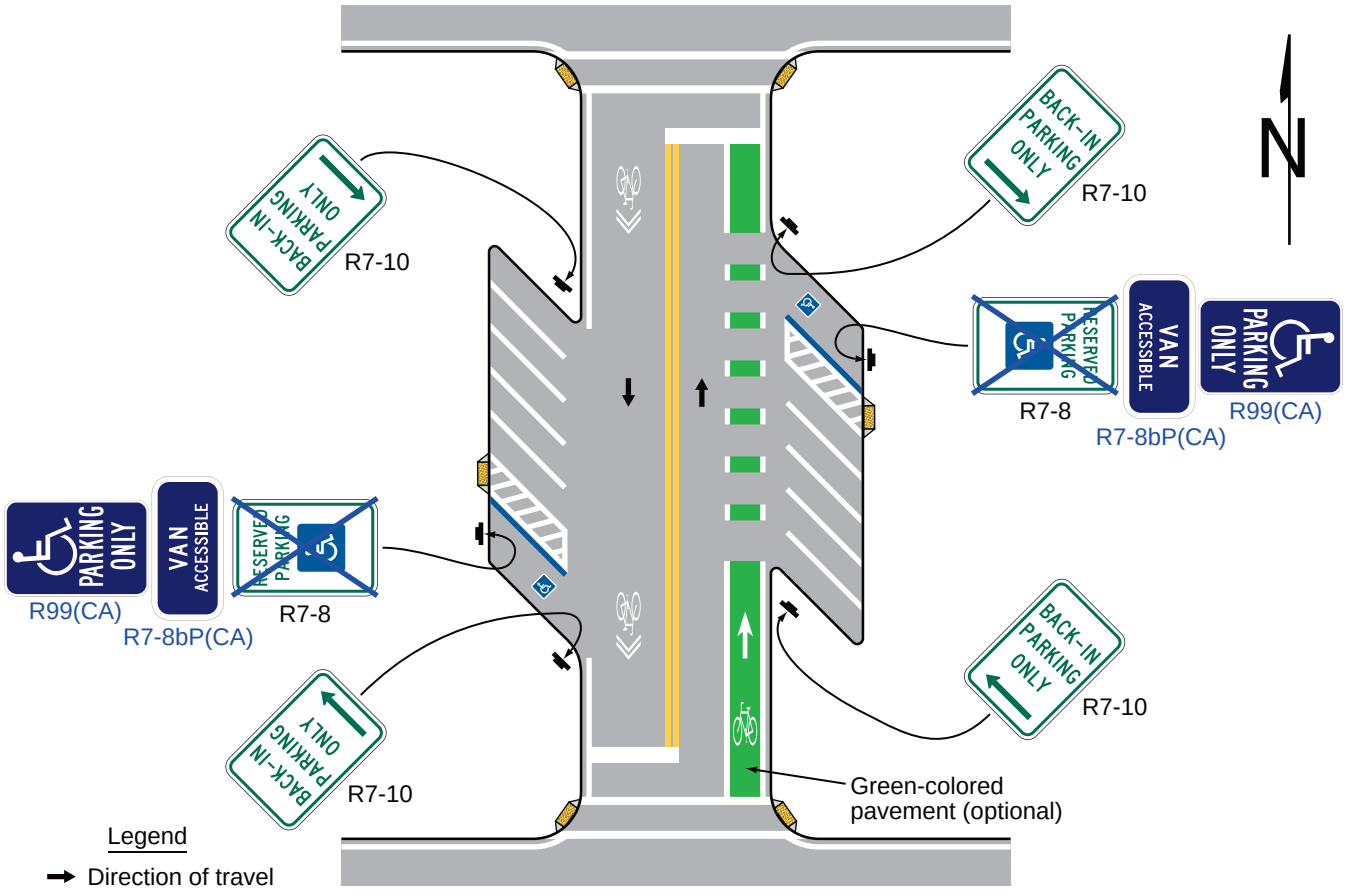

## Figure 9B-4. Signing for Termination of Bicycle Access on Freeways and Expressways

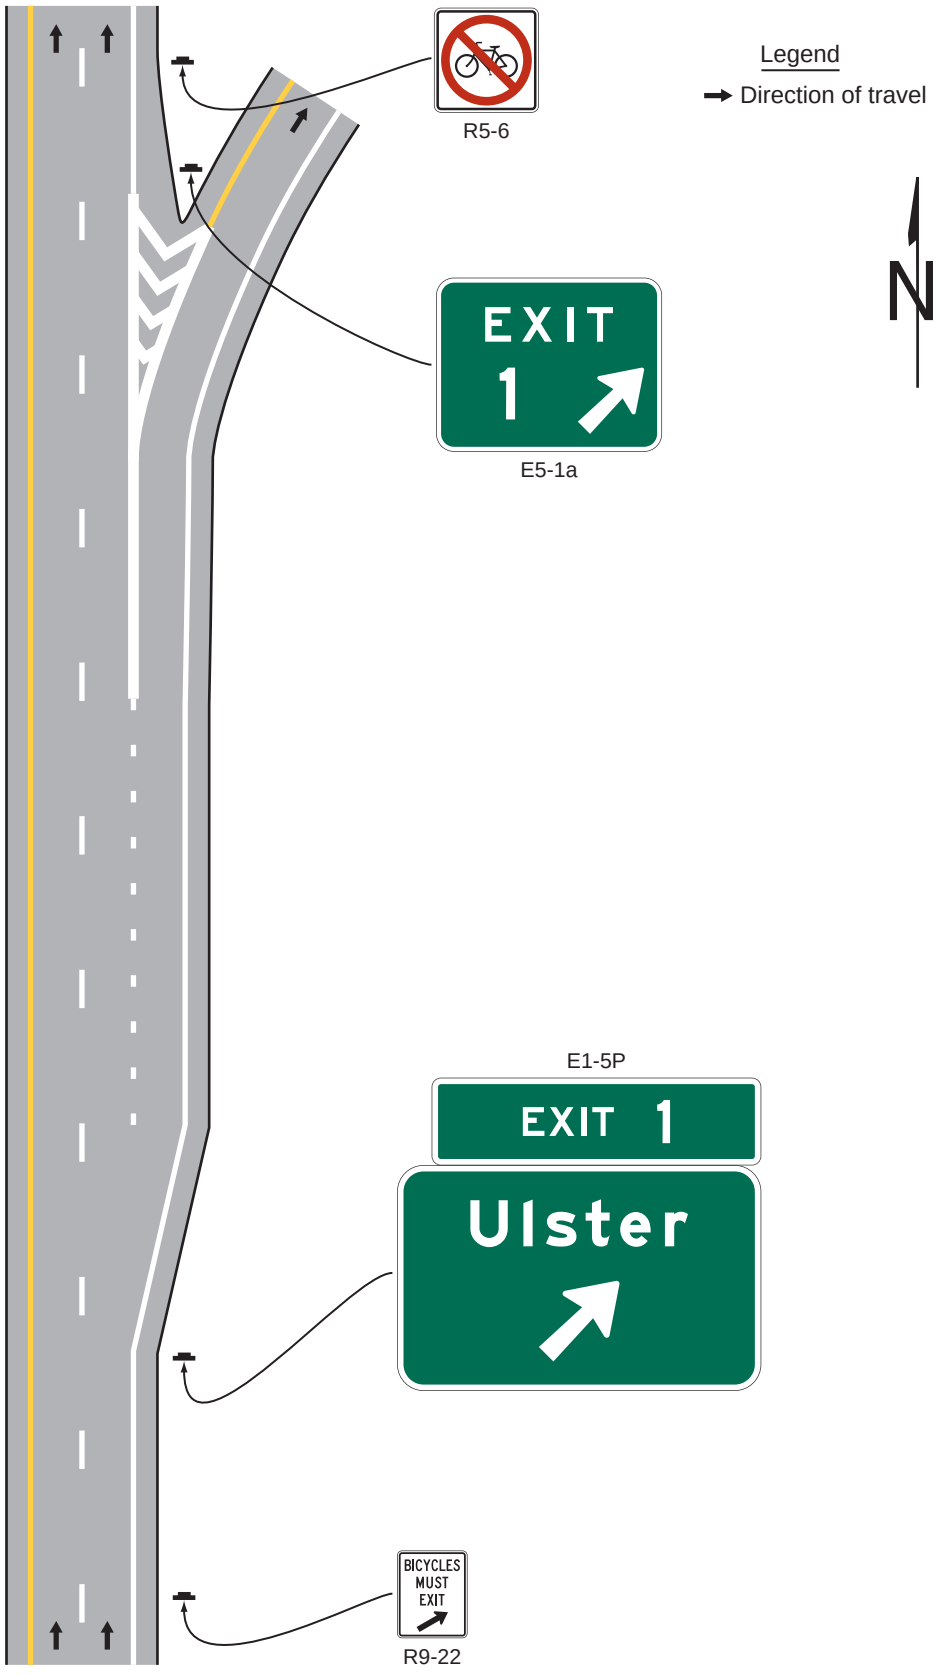


## Figure 9B-5. Example of Two-Stage Bicycle Turn Box when Use is Mandatory*

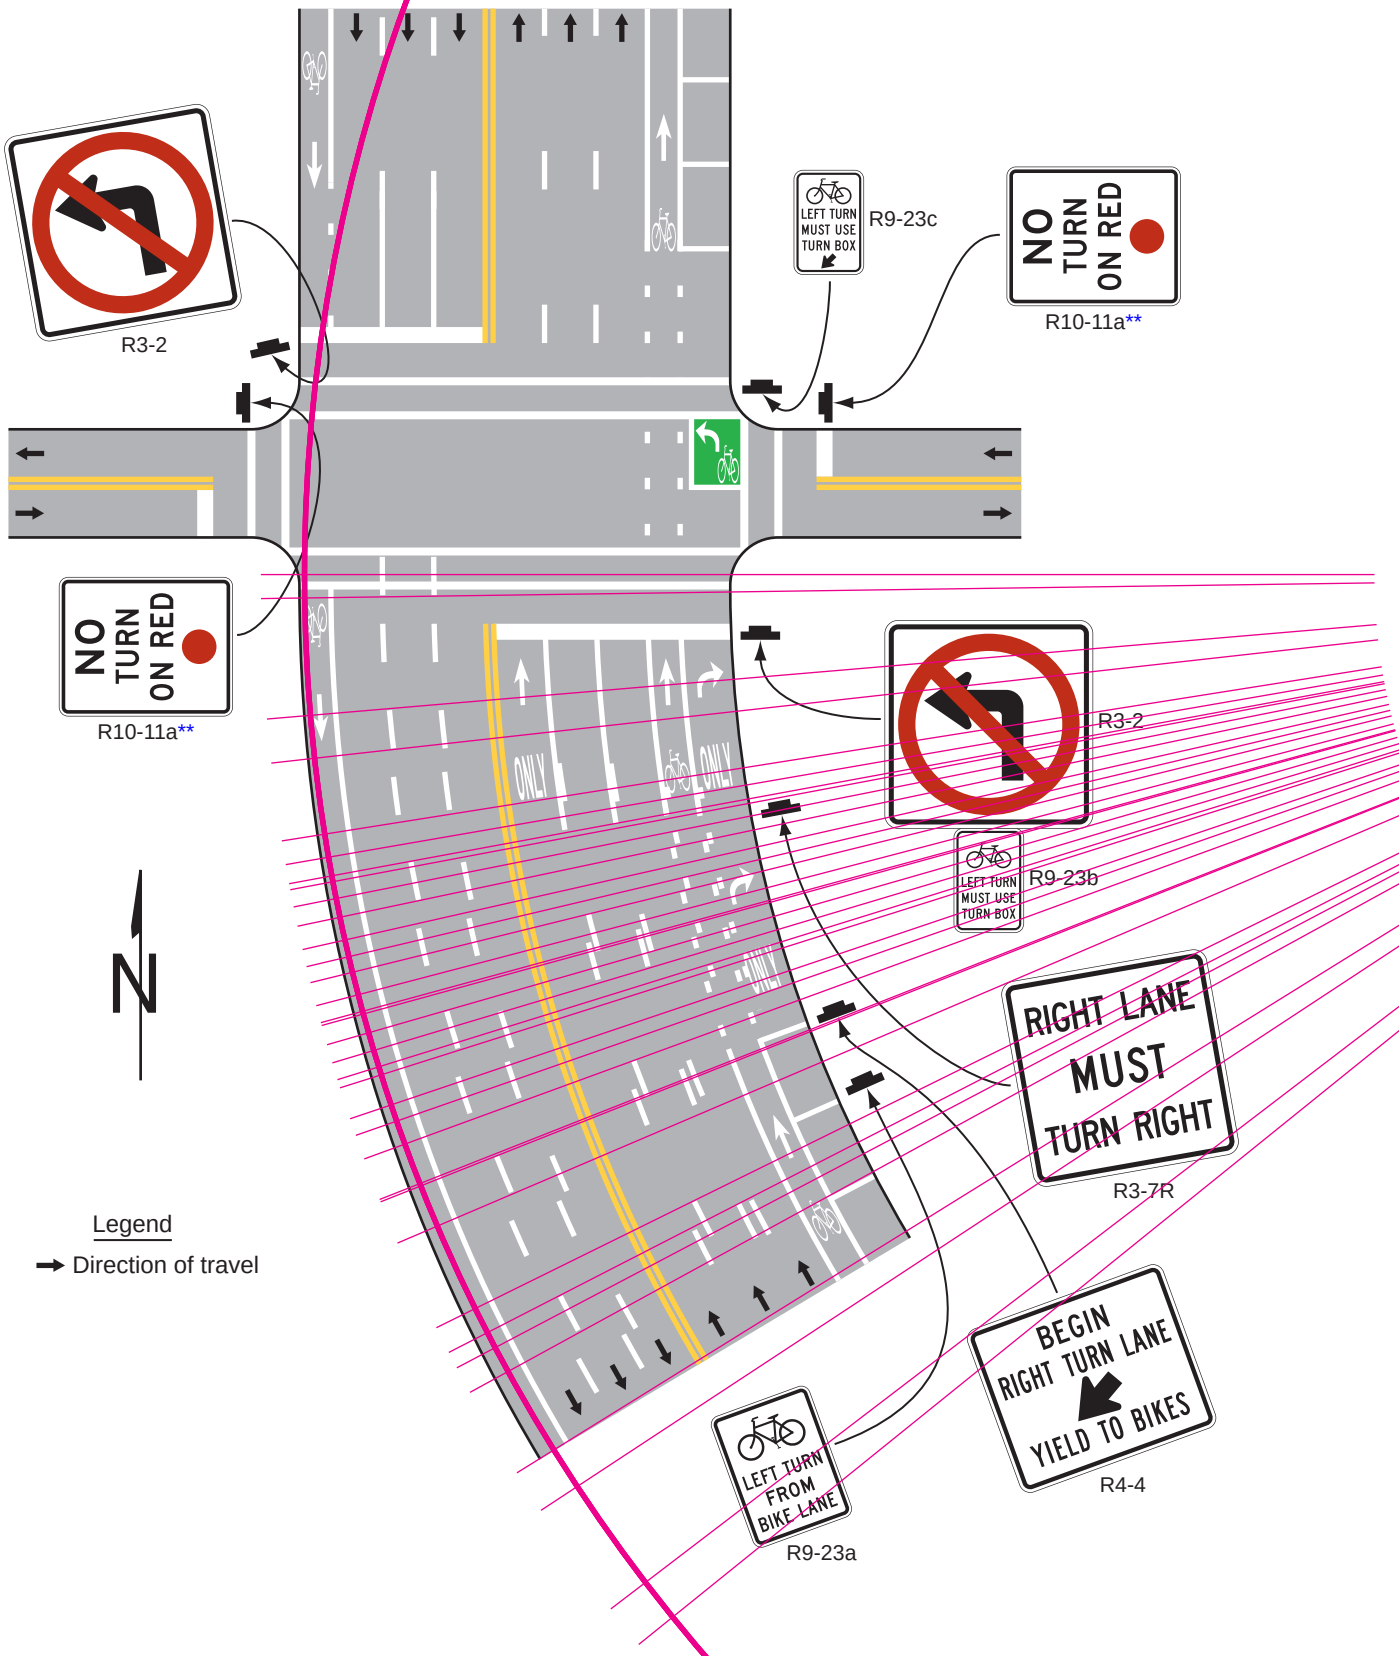


* Refer to FHWA's List of Known Errors for error in the title. Refer to Section 1A.04 for more details.
** Refer to FHWA's List of Known Errors for error in the sign and the sign code. Refer to Section 1A.04 for more details.

Scale = 3.5%
borders checked - kal

## Figure 9B-6. Example of Application of Bicycle Jughandle Sign

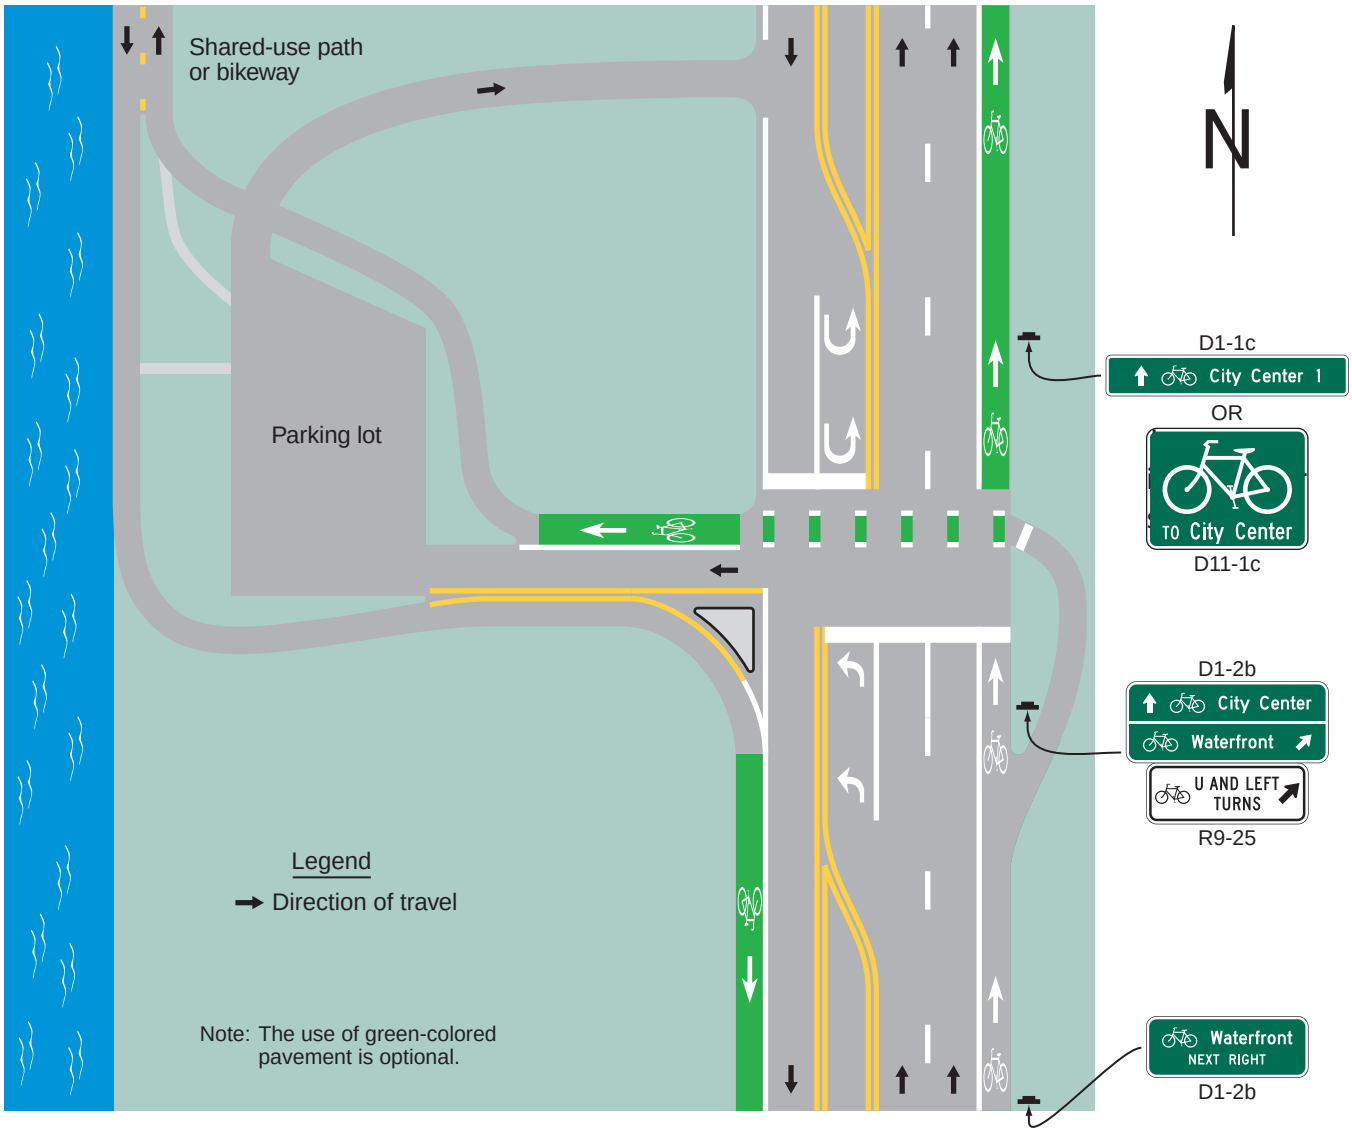

# CHAPTER 9C. WARNING SIGNS AND OBJECT MARKERS

## Section 9C.01 Turn or Curve Warning Signs (W1 Series)

*Guidance:*

01 *To warn bicyclists of unexpected changes in shared-use path direction, appropriate Turn, Curve, or Large Arrow (W1-1 through W1-7) signs (see Figure 9C-1) should be used.*

02 *The W1-1 through W1-5 signs should be installed at least 50 feet in advance of the beginning of the change of alignment.*

## Section 9C.02 Intersection Warning Signs (W2 Series)

Option:

01 Intersection Warning (W2-1 through W2-5) signs (see Figure 9C-1) may be used on a roadway, street, or shared-use path in advance of an intersection to indicate the presence of an intersection and the possibility of turning or entering traffic.

*Guidance:*

02 *When engineering judgment determines that the visibility of the intersection is limited on the shared- use path approach, Intersection Warning signs should be used.*

03 *Intersection Warning signs should not be used where the shared-use path approach to the intersection is controlled by a STOP sign, a YIELD sign, or a traffic control signal.*

## Section 9C.03 Bicycle Surface Condition Warning Sign (W8-10)

Option:

01 The Bicycle Surface Condition Warning (W8-10) sign (see Figure 9C-1) may be installed where roadway bikeway, or shared-use path conditions could cause a bicyclist to lose control of the bicycle.

02 Signs warning of other conditions that might be of concern to bicyclists, including BUMP (W8-1), DIP (W8-2), PAVEMENT ENDS (W8-3), and any other word message that describes conditions that are of concern to bicyclists, may also be used (see Figure 9C-1).

03 A supplemental plaque may be used to clarify the specific type of surface condition.

## Section 9C.04 Bicycle Warning and Trail Crossing Signs (W11-1 and W11-15)

Support:

01 The Bicycle Warning (W11-1) sign (see Figure 9C-1) alerts the road user to unexpected entries into the roadway by bicyclists, and other crossing activities that might cause conflicts. These conflicts might be relatively confined, or might occur randomly over a segment of roadway.

02 Section 9C.06 contains information for Bicycle Cross Traffic Warning plaques that can be used below STOP signs on crossroads or driveways that intersect with bicycle facilities.

Option:

03 The Trail Crossing (W11-15) sign (see Figure 9C-1) may be used where both bicyclists and pedestrians might be crossing the roadway, such as at an intersection with a shared-use path. A TRAIL X-ING (W11-15P) supplemental plaque may be mounted below the W11-15 sign.

Support:

03a Refer to FHWA's List of Known Errors for error in labeling Paragraph 4. Refer to Section 1A.04 for more details.

04 If used in advance of a trail crossing, a W11-15 or W11-15a sign should be supplemented with an AHEAD (W16-9P) or XX FEET (W16-2P or W16-2aP) plaque to inform road users that they are approaching a point where crossing activity might occur.

Support:

05a Refer to FHWA's List of Known Errors for errors in Paragraph 4 and in between Paragraphs 4 and 5. Refer to Section 1A.04 for more details.

*Guidance:*

05 *If used in advance of a specific crossing point, the Bicycle Warning or Trail Crossing sign should be placed at a distance in advance of the crossing location that complies with Table 2C-3.*

**Standard:**

06 **Bicycle Warning and Trail Crossing signs, when used at the location of the crossing, shall be supplemented with a diagonal downward-pointing arrow (W16-7P) plaque to show the location of the crossing.**

Option:

07 A fluorescent yellow-green background color with a black legend and border may be used for Bicycle Warning and Trail Crossing signs and supplemental plaques.

*Guidance:*

08 *When the fluorescent yellow-green background color is used, a systematic approach featuring one background color within a zone or area should be used. The mixing of standard yellow and fluorescent yellow-green backgrounds within a zone or area should be avoided.*

## Section 9C.05 EXCEPT BICYCLES Warning Plaque (W16-20P)

Option:

01 Where it might be advantageous to notify bicyclists that the conditions or hazards depicted by a warning sign are not applicable to bicycles, the EXCEPT BICYCLES (W16-20P) warning plaque (see Figure 9C-1) may be used.

Support:

02 Examples of warning signs where an EXCEPT BICYCLES warning plaque can be mounted include DEAD END (W14-1) and NO OUTLET (W14-2) signs (see Section 2C.24).

03 Sections 2C.57 and 2C.58 contain information on the design of supplemental warning plaques.

## Section 9C.06 Two-Way Bicycle Cross Traffic Warning Plaque (W16-21P)

**Standard:**

01 **When used, the Two-Way Bicycle Cross Traffic (W16-21P) warning plaque (see Figure 9C-1) shall be installed below a STOP or YIELD sign.**

Option:

02 The Two-Way Bicycle Cross Traffic warning plaque may be used below STOP or YIELD signs on crossroads and driveways to alert road users of an unexpected bicycle movement.

Support:

03 The Two-Way Bicycle Cross Traffic warning plaque can help minimize overuse or misapplication of other warning signs such as the Bicycle Warning (W11-1) sign.

*Guidance:*

04 *The Two-Way Bicycle Cross Traffic warning plaque should be used in combination with a STOP or YIELD sign when a counter-flow or two-way bicycle facility has an approach that is counter to the customary scanning behavior of a motorist at that location.*

## Section 9C.07 Bicycle Lane Ends Warning Sign (W9-5) and Bicycles Merging Sign (W9-5a)

Support:

01 Where a warning sign is appropriate, the Bicycle Lane Ends (W9-5) warning sign (see Figure 9C-1) is intended to alert road users that a bicycle lane is ending and that bicycles will share or occupy the travel lane after merging.

Option:

02 The Bicycle Lane Ends warning sign may be used in advance of the end of a bicycle lane to warn that a bicycle lane will be ending.

03 The Bicycles Merging (W9-5a) sign (see Figure 9C-1) may be used where a bicycle merging maneuver might occur. The Bicycles Merging sign may be used in addition to the Bicycle Lane Ends (W9-5) warning sign.

*Guidance:*

04 *To avoid excessive use of signs, the Bicycle Lane Ends warning sign should not be used where a bicycle lane is dropped on the approach to an intersection and resumes immediately after the intersection.*

Option:

05 A Bicycles Allowed Use of Full Lane (R9-20) sign (see Section 9B.14) and/or shared-lane markings (see Section 9E.09) may be installed downstream of the merge area.

06 A W16-2aP supplemental warning plaque may be used to inform road users of the distance to the end of the bicycle

lane and/or to the bicycle merge.

## Section 9C.08 Other Bicycle Warning Signs

Option:

01 Other bicycle warning signs (see Figure 9C-1) such as PATH NARROWS (W5-4a) and Hill (W7-5) may be installed on shared-use paths, to warn bicyclists of conditions not readily apparent.

02 In situations where there is a need to warn road users to watch for bicycles traveling along the highway, the Bicycle Warning (W11-1) sign may be used with the IN ROAD (W16-1P) plaque or the IN STREET (W16-1aP) plaque (see Figure 9C-1).

02a In situations where there is a need to warn motorists to watch for bicyclists traveling along the freeway, the NEXT XX MILES (W7-3aP) plaque (refer to Figure 2C-5) may be used in conjunction with the W11-1 sign.

*Guidance:*

03 *If used, other advance bicycle warning signs should be installed at least 50 feet in advance of the beginning of the condition.*

04 *Where temporary traffic control zones are present on bikeways, appropriate signs from Part 6 should be used.*

Option:

05 Other warning signs described in Chapters 2C and 8C may be installed on bicycle facilities as appropriate.

Support:

06 Refer to Section 8B.22 for Skewed Crossing (W10-12) Sign.

## Section 9C.09 Object Markers


**Standard:**

01 **Obstructions in a shared-use path shall be marked with retroreflective material or appropriate object markers as described in Section 2C.70.**

Option:


02 Fixed objects adjacent to shared-use paths may be marked with Type 1, Type 2, or Type 3 object markers. If the object marker is not also intended to be seen by motorists, a smaller version of the Type 3 object marker may be used (see Table 9A-1).

## Figure 9C-1. Warning Signs and Plaques and Object Markers for Bicycle Facilities (Sheet 1 of 2)

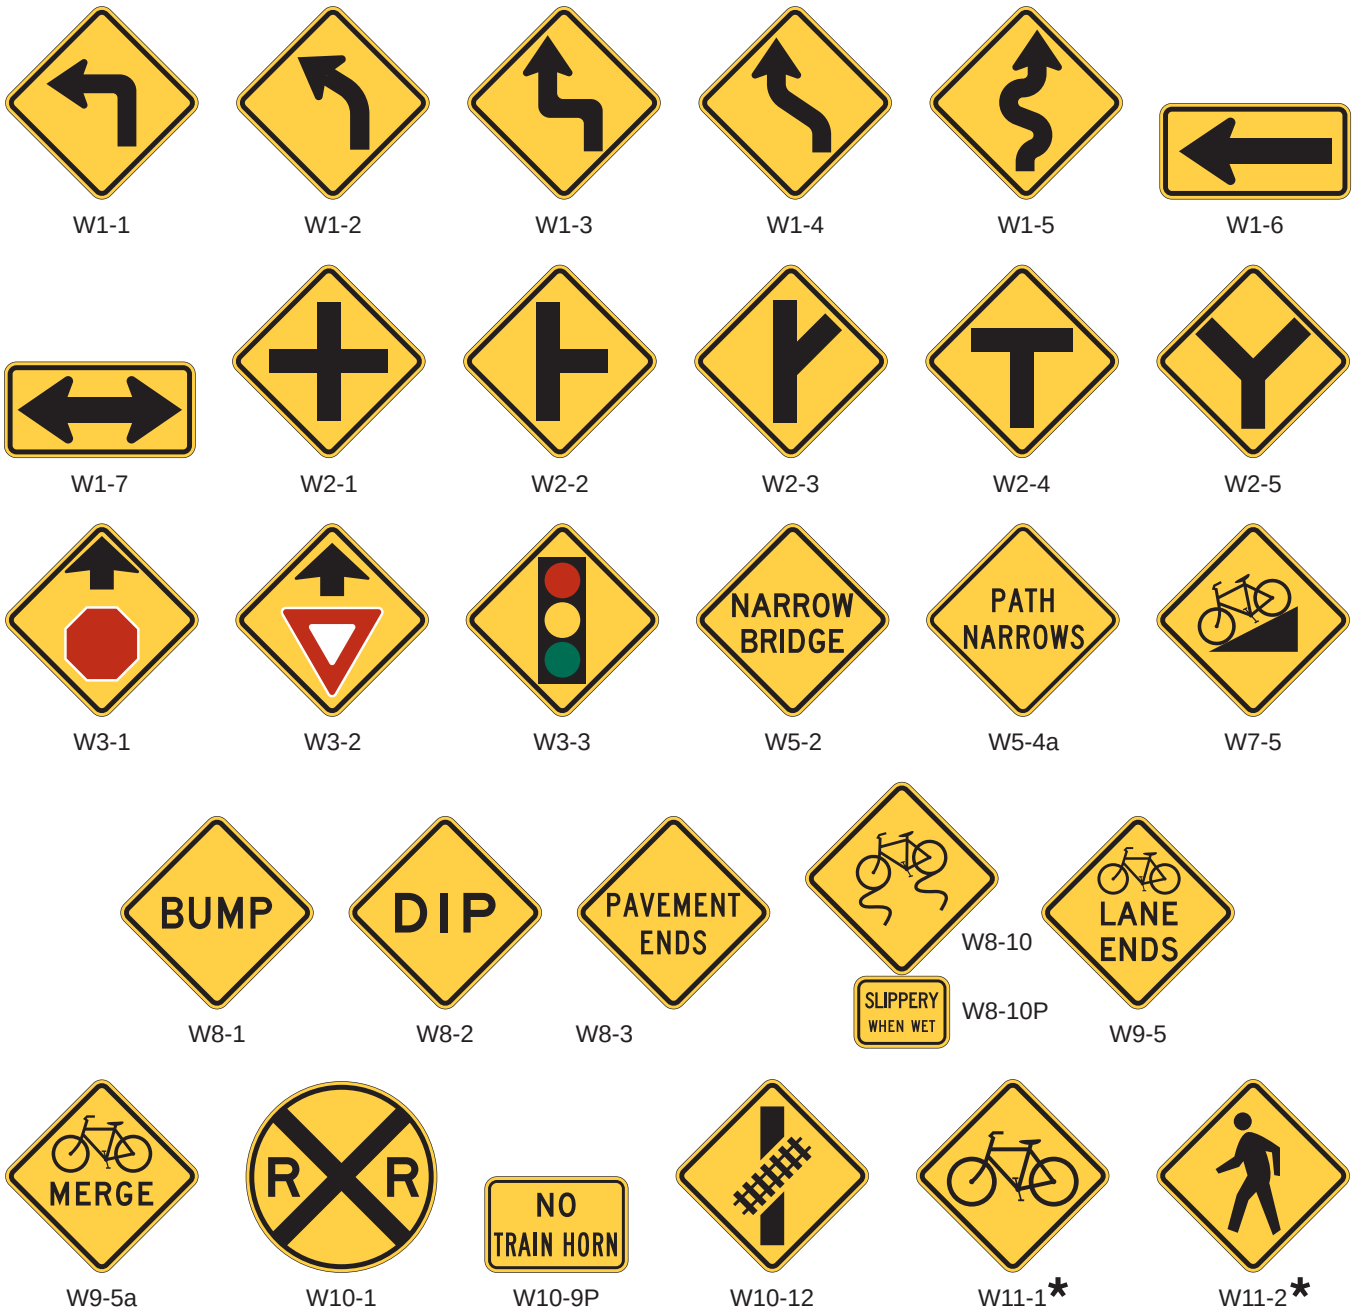


* A fluorescent yellow-green background color may be used for this sign or plaque. The background color of the plaque should match the color of the warning sign that it supplements.

## Figure 9C-1. Warning Signs and Plaques and Object Markers for Bicycle Facilities (Sheet 2 of 2)

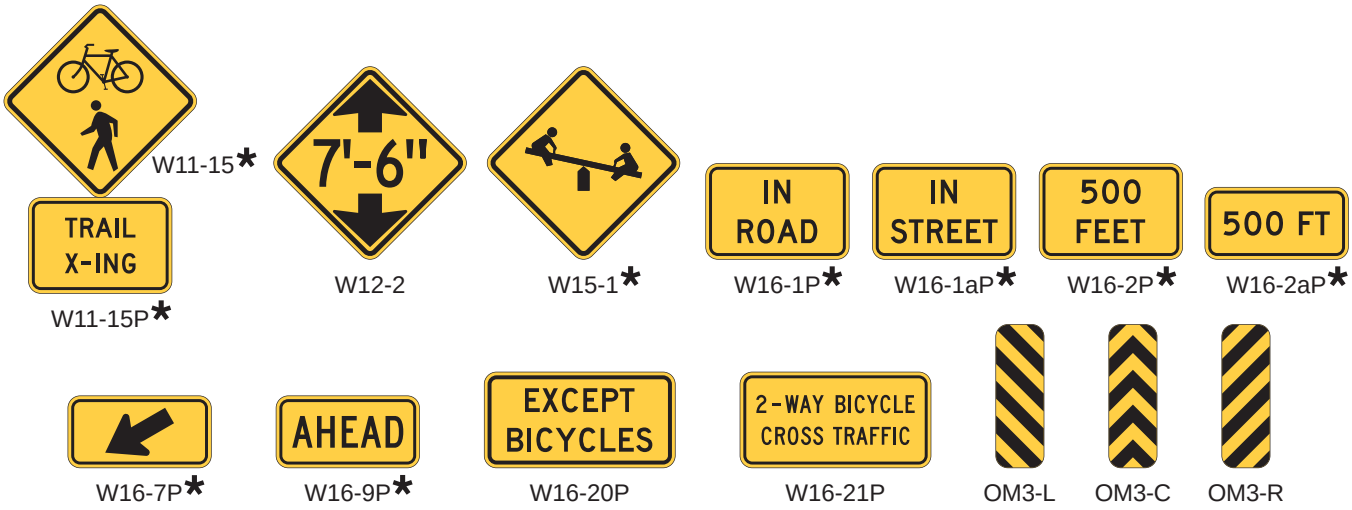


* A fluorescent yellow-green background color may be used for this sign or plaque. The background color of the plaque should match the color of the warning sign that it supplements.

# CHAPTER 9D. GUIDE AND SERVICE SIGNS

## Section 9D.01 Bicycle Destination Signs (D1-1b, D1-1c, D1-2b, D1-2c, D1-3b, D1-3c, D2-1a, D2-2a, and D2-3a, D3-1 and D3-1a)

Support:

00 Refer to FHWA's List of Known Errors for error in Section title. Refer to Section 1A.04 for more details.

01 The purpose of Bicycle Destination (D1-1b, D1-1c, D1-2b, D1-2c, D1-3b, and D1-3c) signs (see Figure 9D-1) and Bicycle Distance (D2-1a, D2-2a, and D2-3a) signs (see Figure 9D-1) is to provide guidance to bicyclists traveling along a bikeway network directing them to typical bicycle destinations or points of interest. The smaller size of Bicycle Destination and Distance signs can deemphasize the messages to motorists, especially when the direction(s) or destination(s) displayed provides access to routes or pathways where the use of motor vehicles is prohibited or discouraged. Examples include, but are not limited to:

A. Bicycles can go in a direction counter to conventional traffic,
B. Access to a separated bikeway or shared-use path from a street,
C. Access to a bicycle route,
D. Bicycles are directed to another roadway or bikeway that facilitates a parallel or alternative route to the same destination, or
E. Access to a sidewalk that provides connectivity between bicycle facilities.

02 Section 2D.36 contains information on Destination signs used for when the destinations listed would apply to both motorists and bicyclists.

03 Section 2D.43 contains information on Distance signs used for when the destinations listed would apply to both motorists and bicyclists.

**Standard:**

04 **Because of their smaller size, Bicycle Destination and Distance signs shall not be used as a substitute for vehicular destination signs when the message is also intended to be applicable to motorists.**

Option:

05 Bicycle Destination and Distance (D1-1b, D1-1c, D1-2b, D1-2c, D1-3b, D1-3c, D2-1a, D2-2a, and D2-3a) signs may be installed to provide direction, destination, and distance information as needed for bicycle travel. If several destinations are to be shown at a single location, they may be placed on a single sign with an arrow (and the distance, if desired) for each name. If more than one destination lies in the same direction, a single arrow may be used for the destinations.

06 Destination (D1-1 and D1-1a) signs (see Section 2D.36) and ~~Street Name (D3-1) signs (see Section 2D.45)~~ may be installed instead of or in addition to Bicycle Destination signs as needed if the Destination or Street Name sign applies to motorists and bicyclists.

07 Distance (D2-1 through D2-3) signs (see Section 2D.43) may be installed instead of, or in addition to, Bicycle Distance (D2-1a through D2-3a) signs, as needed, if the destination and distance information applies to motorists and bicyclists.

*Guidance:*

07a *Street Name (D3-1 or D3-1a signs should be installed at intersections of Class I bikeways with other bikeways and with streets.*

Option:

07b Street Name (D3-1 or D3-1a signs may be installed at all street and shared-use path intersections.

*Guidance:*

08 *Adequate separation should be made between any destination or group of destinations in one direction and those in other directions by suitable design of the arrow, spacing of lines of legend, heavy lines entirely across the sign, or separate signs.*

09 *Where a Bicycle Destination sign with distance information is located less than ½ mile from the destination, the distance displayed should be to the nearest ¼ mile. Where the distance to be displayed on a Bicycle Destination sign is less than ¼ mile, the distance should be displayed in feet, rather than miles, to the nearest 50 feet.*

**Standard:**

09a **For Memorial Bikeway signs, one sign shall be placed at each terminal. Signs shall be white on green. When used, Memorial Bikeway (G12-3(CA)) sign (refer to Figure 9D-1(CA)) shall be placed at the beginning of the bikeway segment**

**memorialized by the Legislature.**

Option:

10 Distances may be displayed in fractions of a mile to the nearest ⅒ mile to communicate distance information on Bicycle Destination signs where the distance to a destination is desired to be more precise than ¼-mile increments.

Support:

11 Section 2A.08 contains provisions on the display of fractions on guide signs.

**Standard:**

12 **An arrow pointing to the right, if used, shall be at the extreme right-hand side of the sign. An arrow pointing left or up, if used, shall be at the extreme left-hand side of the sign. The distance numerals, if used, shall be placed to the right of the destination names.**

13 **Except as provided in Paragraph 14 of this Section, a bicycle symbol shall be placed next to each destination or group of destinations.**

Option:

14 An oversized bicycle symbol may be displayed as the top line of a Bicycle Destination sign instead of individual bicycle symbols for each of the destination/distance lines.

**Standard:**

15 **If an arrow is at the extreme left, the bicycle symbol shall be placed to the right of the respective arrow.**

*Guidance:*

16 *Where the arrow is at the extreme right, the bicycle symbol should be to the left of the destination legend.*

17 *Unless a sloping arrow will convey a clearer indication of the direction to be followed, the directional arrows should be either horizontal or vertical.*

18 *If several individual name signs are assembled into a group, all of the signs in the assembly should have the same horizontal width.*

19 *Travel times should not be used on Bicycle Destination signs.*

Support:

20 Travel times can vary greatly for bicyclists based on a variety of factors including individual speed, bicycle type, and type of facility.

## Section 9D.02 Bike Route Guide Signs (D11-1 and D11-1c)

Support:

01 The Bike Route Guide (D11-1 or D11-1c) sign (see Figure 9D-1) is used where no unique designation of routes is desired. Sections 9D.04 through 9D.07 contain information for Bicycle Route signs where the bicycle route is designated by number, name, or both.

Option:

02 Bike Route Guide signs may be provided along designated unnumbered, unnamed bicycle routes to inform bicyclists of bicycle route direction changes and to confirm route direction and destination.

03 If used, Bike Route Guide signs may be repeated at regular intervals so that bicycles entering from side streets will have an opportunity to know that they are on a bicycle route. Similar guide signing may be used for shared roadways with intermediate signs placed for bicycle guidance.

04 The Alternative Bike Route Guide (D11-1c) sign may be used to display a word legend that provides information on route direction, destination, and/or route name in place of the "BIKE ROUTE" word legend on the D11-1 sign (see Figure 9D-1).

05 Other plaques such as BEGIN (M4-14P) and END (M4-6P) may be used with Bike Route Guide signs.

*Guidance:*

06 *Travel times should not be used on Bike Route Guide signs.*

Support:

07 Travel times can vary greatly for bicyclists based on a variety of factors including individual speed, bicycle type, and type of facility.

08 Figure 9D-2 shows examples of guide sign applications for bicycle travel.

## Section 9D.03 BIKE ROUTE Plaque (D11-1bP)

Option:

01 The BIKE ROUTE (D11-1bP) plaque (see Figure 9D-1) may be installed to supplement:

A. The Alternative Bike Route Guide (D11-1c) sign (see Section 9D.02);
B. The Bicycle Directional (D11-11) sign (see Section 9D.11) for use on a shared-use path; or
C. A Street Name (D3-1) sign (see Section 2D.45).

02 When installed above or below a Street Name sign, the D11-1bP supplemental plaque may include a bicycle symbol to the left of the BIKE ROUTE legend.

**Standard:**

03 **The bicycle symbol shall not be used on a Street Name sign.**

04 **Where a BIKE ROUTE plaque is used in conjunction with a Street Name sign to identify a street that is part of an overall bicycle network, one of the following signs shall also be used systematically to establish the designated bicycle route on the street identified by the BIKE ROUTE plaque:**

**A. Bike Route Guide signs (see Section 9D.02),**
**B. Alternative Bike Route Guide (D11-1c) sign (see Section 9D.02),**
**C. State or Local Bicycle Route (M1-8 and M1-8a) signs (see Section 9D.05),**
**D. Non-Numbered Bicycle Route (M1-8b and M1-8c) signs (see Section 9D.06), or**
**E. United States Bicycle Route (M1-9) sign (see Section 9D.07).**

05 **BIKE ROUTE plaques shall not incorporate replicas of the United States Bicycle Route, State or Local Bicycle Route, or Non-Numbered Bicycle Route sign to replace or supplement the bicycle symbol.**

Option:

06 The BIKE ROUTE plaque and the Street Name sign may be different widths.

Support:

07 Figure 9D-3 shows an example of bicycle guide signing using the BIKE ROUTE plaque.

## Section 9D.04 Numbered Bikeway Systems

Support:

01 The purpose of numbering and signing bikeways and bicycle routes is to identify routes and facilitate travel.

02 The United States Bicycle Routes are numbered by the American Association of State Highway Transportation Officials (AASHTO) upon recommendations of State highway organizations. County and local bikeways and bicycle routes are numbered by the appropriate authorities.

02a Refer to FHWA's List of Known Errors for error in Paragraph 2 text. Refer to Section 1A.04 for more details.

03 Bicycle route sign systems can be used to distinguish junctions, turns, the beginning of routes, and route termination points. Extensive use of reassurance markers is typically not needed.

04 An agency or jurisdiction can use several methods for bicycle route guidance including maps, information guides, or signing.

*Guidance:*

05 *Establishing bicycle route systems described in Paragraph 2 of this Section and any other bicycle route system should be followed with effective communication between affected jurisdictions. County and local jurisdictions that are establishing numbered routes should coordinate with the respective State transportation agency. Care should be taken to avoid the use of numbers or other designations that have been assigned to U.S. Bicycle Routes or other routes in the same geographical region or State. Overlapping numbered routes should be kept to a minimum.*

06 *Bicycle routes, which might be a combination of various types of bikeways, should establish a continuous routing.*

**Standard:**

07 **Multiple numbered bicycle route systems shall be given preference in this order: United States, State, and county or local. The preference shall be given by installing the highest-priority legend on the top or the left of the sign assembly with other numbered overlapping bicycle routes.**

08 **Where applicable, multiple bicycle route systems with concurrency shall be signed in accordance with Figure 9D-4.**

*Guidance:*

09 *Numbered bicycle routes should be identified by route signs (see Sections 9D.05 through 9D.07) and auxiliary plaques (see Section 9D.08).*

10 *If used, Bicycle Route signs should be placed at locations to keep bicyclists informed of changes in route direction.*

Option:

11 Bicycle Route signs may be installed on shared roadways, shared-use paths, or separated bikeways, or bike lane facilities to provide navigational guidance for bicyclists.

## Section 9D.05 Numbered Bicycle Route Signs (M1-8 and M1-8a)

Option:

01 To establish a unique identification (route designation) for a State or local bicycle route, the Bicycle Route (M1-8 or M1-8a) sign (see Figure 9D-1) may be used.

Support:

01a Refer to FHWA's List of Known Errors for error in Paragraph 1 text. Refer to Section 1A.04 for more details.

01b The Numbered Bicycle Route (M1-8a) sign may be used on public highways/bikeways where a numerical designation for bike routes is desired. The local agency that requests the M1-8a sign on State highways is responsible for furnishing, installing and maintaining the signs.

*Guidance:*

01c *For numbered bike routes initiated by the State, the Bike Route (D11-1) sign should be used on State highways. The District Traffic Engineer is responsible for approving the use of M1-8a signs on State highways.*

**Standard:**

02 **The Numbered Bicycle Route (M1-8) sign shall display a route designation and shall have a green background with a white legend and border.**

03 **The Numbered Bicycle Route (M1-8a) sign shall display the same information as the M1-8 sign and in addition shall display a pictograph or words on the upper portion of the sign panel that are associated with the route or with the agency that has jurisdiction over the route.**

04 **If a Numbered Bicycle Route (M1-8 or M1-8a) sign is used on a roadway, it shall include a bicycle symbol.**

*Guidance:*

05 *If a pictograph is used on the M1-8a sign the maximum dimension (height or width) of the pictograph should not exceed 2 times the height of the route numeral, and should be contained within a green border. The minimum width of the graphic on the M1-8a sign should be ⅔ of the sign width, and the maximum width should be $^{9}/_{10}$ of the sign width.*

06 *If a bicycle symbol is used on the M1-8a sign, it should have a minimum height of ¼ of the M1-8a sign panel height.*

## Section 9D.06 Non-Numbered Bicycle Route Signs (M1-8b and M1-8c)

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, Non-Numbered Bicycle Route (M1-8b and M1-8c) signs (see Figure 9D-1) used on roadways shall have a green background with a white border and shall include words identifying the bicycle route or a legend consisting of words identifying the bicycle route and a pictograph or bicycle symbol.**

Option:

02 Words identifying the bicycle route may be omitted on Non-Numbered Bicycle Route (M1-8b and M1-8c) signs where a pictograph includes the likeness of a bicycle that clearly identifies the route as a bicycle route.

Support:

03 Bicycle routes are sometimes designated specifically by name or established using a distinctive route identity, but are not numbered or are intentionally excluded from an overall numbered bicycle route system.

04 Section 9D.02 contains information for Bicycle Route signs where no unique designation route is beneficial or desired.

Option:

05 Where a bicycle route is named instead of numbered, the Non-Numbered Bicycle Route sign may be used.

05a The Non-numbered Bicycle Route (M1-8b and M1-8c) signs may be installed above the Bike Route (D11-1) sign for those bicycle routes where a community or the responsible agency has given a designated name to selected routes.

06 A green background or white border may be omitted on Non-Numbered Bicycle Route (M1-8b or M1-8c) signs used on shared-use paths.

Support:

07 Certain uninterrupted, long-distance interstate bicycle routes can largely be on shared-use paths, or other off-roadway facilities. In order to achieve continuity, these bicycle systems might have to share alignments with urban streets, rural highways, or water crossings.

08 Long-distance interstate bicycle routes can be administered by independent organizations serving other non-transportation objectives.

*Guidance:*

09 *In order to provide signing on a facility managed by a transportation agency, a statewide policy for encouraging independent organizations to adopt the Non-Numbered Bicycle Route sign should be established.*

## Section 9D.07 U.S. Bicycle Route Sign (M1-9)

*Guidance:*

01 *Where a designated bicycle route extends through two or more States, a coordinated submittal by the affected States for an assignment of a U.S. Bicycle Route number designation should be sent to the American Association of State Highway and Transportation Officials.*

**Standard:**

02 **The U.S. Bicycle Route (M1-9) sign (see Figure 9D-1) shall have a green legend and border with a white background and shall display the route designation as assigned by AASHTO.**

## Section 9D.08 Bicycle Route Sign and Auxiliary Plaques

Support:

01 Section 2D.12 contains additional provisions for the design of route sign auxiliary plaques. Sections 2D.29 through 2D.34 contain additional provisions for the general application of route signs.

*Guidance*

02 *If a designated or numbered bicycle route is concurrent with a numbered highway, the route sign and auxiliary plaques for the bikeway should be installed as independent assemblies and should not be installed with other Route signs or confirmation assemblies for the numbered or named highway on the same assembly.*

**Standard:**

03 **Route signs for bikeways shall not be installed on guide signs or overhead.**

Option:

04 Route assemblies for a designated or numbered bicycle route may be installed at locations or distances other than those prescribed in Sections 2D.29 through 2D.34 if engineering judgment indicates that the operation or speed of the bicycle justifies alternate locations or distances.

05 Auxiliary plaques (see Figure 9D-1) may be used in conjunction with Bicycle Route signs as needed.

*Guidance:*

06 *If used, Junction (M2-1P), Cardinal Direction (M3 series), and Alternative Route (M4 series) auxiliary plaques should be mounted above the appropriate Bicycle Route signs.*

07 *If used, Advance Turn Arrow (M5 series) and Directional Arrow (M6 series) auxiliary plaques should be mounted below the appropriate Bicycle Route signs.*

08 *Except for the M4-8P plaque, all route sign auxiliary plaques should match the color combination of the route sign that they supplement.*

09 *Route sign auxiliary plaques carrying word legends that are used on bicycle routes should have a minimum size of 12 x 6 inches. Route sign auxiliary plaques carrying arrow symbols that are used on bicycle routes should have a minimum size of 12 x 9 inches.*

**Standard:**

10 **If both the Junction (M2-1P), Cardinal Direction (M3 series), or Alternative Route (M4 series) auxiliary plaque and the Advance Turn Arrow (M5 series) or Directional Arrow (M6 series) auxiliary plaques are used on the same sign assembly as a Bicycle Route sign, the Junction, Cardinal Direction, or Alternative Route auxiliary plaque shall be installed above the Bicycle Route sign, and the Advance Turn Arrow or Directional Arrow auxiliary plaque shall be installed below the Bicycle Route sign.**

Option:

11 With route signs of larger sizes, auxiliary plaques may be suitably enlarged, but not such that they exceed the width

of the route sign.

12 A route sign and any auxiliary plaques used with it may be combined on a single sign as a guide sign.

Support:

12a Refer to FHWA's List of Known Errors for error between Paragraphs 12 and 13. Refer to Section 1A.04 for more details.

13 Figure 9D-3 shows typical placements of signs for bicycle routes.

**Standard:**

14 **If used, a Bicycle Route sign assembly shall consist of a route sign and auxiliary plaques that identify the route and indicate the direction.**

*Guidance:*

15 *If the bicycle route is signed, Bicycle Route sign assemblies should be installed on all approaches where that route intersects with other numbered bicycle routes.*

**Standard:**

16 **Within groups of assemblies, information for bicycle routes intersecting from the left shall be mounted at the left in horizontal arrangements and at the top or center of vertical arrangements. Similarly, information for bicycle routes intersecting from the right shall be at the right or bottom, and for straight-through bicycle routes at the center in horizontal arrangements or top in vertical arrangements.**

17 A Junction assembly shall consist of a Junction auxiliary plaque and a Bicycle Route sign. The Bicycle Route sign shall carry the number of the intersected or joined bicycle route.

Option:

18 The Junction assembly may be installed in advance of intersections where a numbered bicycle route is intersected or joined by another numbered bicycle route.

**Standard:**

19 **An Advance Bicycle Route Turn assembly shall consist of a Bicycle Route sign, an Advance Turn Arrow or word message auxiliary plaque, and a Cardinal Direction auxiliary plaque, if needed. If used, it shall be installed in advance of an intersection where a turn must be made to remain on the indicated route.**

Option:

20 The Advance Bicycle Route Turn assembly may be used in advance of intersecting routes. On the approach to an intersection with a numbered bicycle route, the Advance Bicycle Route Turn assembly may be used to pre-position turning bicyclists in the correct lane position from which to make their turn.

**Standard:**

21 **A Directional assembly shall consist of a Cardinal Direction auxiliary plaque, if needed, a route sign, and a Directional Arrow auxiliary plaque.**

*Guidance:*

22 *The various uses of Directional assemblies should be as follows:*

- *A. Turning movements should be marked by a Directional assembly with a route sign displaying the number of the turning route and a single-headed arrow pointing in the direction of the turn.*
- *B. The beginning of a route should be marked by a Directional assembly with a route sign displaying the number of that route and a single-headed arrow pointing in the direction of the route.*
- *C. An intersected route on a crossroad where the route is designated on both legs should be designated by:*
  - *1. Two Directional assemblies, each with a route sign displaying the number of the intersected route, a Cardinal Direction auxiliary plaque, and a single-headed arrow pointing in the direction of movement on that route; or*
  - *2. A Directional assembly with a route sign displaying the number of the intersected route and a double-headed arrow, pointing at appropriate angles to the left, right, or ahead.*
- *D. An intersected route on a side road or on a crossroad where the route is designated only on one of the legs should be designated by a Directional assembly with a route sign displaying the number of the intersected route, a Cardinal Direction auxiliary plaque, and a single-headed arrow pointing in the direction of movement on that route.*

Option:

23 Straight-through movements may be indicated by a Directional assembly with a route sign displaying the number of the continuing route and a M6-3P Directional Arrow – Through auxiliary plaque.

*Guidance:*

24 *A Directional assembly should not be used for a straight-through movement in the absence of other assemblies indicating right or left turns, as the Confirming assembly sign beyond the intersection normally provides adequate guidance.*

25 *Directional assemblies should be located on the near-right corner of the intersection. Where unusual conditions exist, the location of a Directional assembly should be determined by engineering judgment.*

Support:

26 It is more important that guide signs be readable, and that the information and direction displayed thereon be readily understood, at the appropriate time and place than to be located with absolute uniformity.

*Guidance:*

27 *If used, Confirming or Reassurance assemblies should consist of a Cardinal Direction auxiliary plaque and a route sign. Where the Confirming or Reassurance assembly is for an alternative route, the appropriate auxiliary plaque for an alternative route should also be included in the assembly.*

28 *If used, a Confirming assembly should be installed just beyond intersections of numbered routes.*

29 *If used, Reassurance assemblies should be installed between intersections in urban areas as needed, and beyond the built-up area of any incorporated city or town.*

30 *If used, Bicycle Route signs for either confirming or reassurance purposes should be spaced at such intervals as necessary to keep bicyclists informed of their routes.*

## Section 9D.09 Bicycle Parking Area, Sharing Station, and Lockers Guide Signs (D4-3, D4-4, and D4-4a)

Support:

01 Bicycle parking areas include bicycle racks or stands, parking stations or structures, sharing systems, or lockers. These facilities can be either regulated or unregulated.

Option:

02 The Bicycle Parking Area (D4-3) guide sign (see Figure 9D-1) may be installed where it is desirable to show the direction to a designated bicycle parking area. The arrow may be reversed as appropriate.

02a The Advance Turn Arrow or Directional Arrow auxiliary signs (refer to Section 2D.26 and Section 2D.28) may be used in combination with and below the D4-3 sign to show direction to a designated bicycle parking area.

03 The Bicycle-Sharing Station (D4-4) guide sign (see Figure 9D-1) may be installed to provide directional information to a designated bicycle-sharing system. The arrow may be reversed as appropriate.

04 The Bicycle-Sharing Station guide sign may be modified with two lines to accommodate installation in constrained areas.

05 The Bicycle Lockers (D4-4a) guide sign (see Figure 9D-1) may be installed where it is desirable to show the direction to designated bicycle lockers. The arrow may be reversed as appropriate.

*Guidance:*

06 *If used, the Bicycle-Sharing Station guide sign should be used in conjunction with a regulated bicycle- sharing system such as one that requires the user to pre-register or provide a deposit in order to use a bicycle.*

07 *Where it is determined that unregulated bicycle-sharing parking facilities necessitate a bicycle parking sign, the Bicycle Parking Area guide sign should be used.*

**Standard:**

08 **In accordance with Section 1D.07, Bicycle Parking Area, Sharing Station, and Lockers guide signs shall not include promotional advertising, business logos, or other identification that would convey the involvement of a public-private partnership for operating the bicycle parking facility or sharing system.**

## Section 9D.10 Reference Location Signs (D10-1 through D10-3) and Intermediate Reference Location Signs (D10-1a through D10-3a)

Support:

01 There are two types of reference location signs:

A. Reference Location (D10-1, D10-2, and D10-3) signs (see Figure 9D-1) show an integer distance point along a shared-use path; and

B. Intermediate Reference Location (D10-1a, D10-2a, and D10-3a) signs (see Figure 9D-1) show the same information as Reference Locations signs, but they also show a tenth-of-a-mile decimal so that they can be installed between integer distance points along a shared-use path.

Option:

02 Reference Location (D10-1 through D10-3) signs may be installed along any section of a shared-use path to assist users in estimating their progress, to provide a means for identifying the location of emergency incidents and crashes, and to aid in maintenance and servicing.

03 To augment the reference location sign system, Intermediate Reference Location (D10-1a to D10-3a) signs, which show the tenth of a mile with a decimal point, may be installed at one-tenth-of-a-mile intervals, or at some other regular spacing.

*Guidance:*

04 *If Intermediate Reference Location (D10-1a through D10-3a) signs are used to augment the reference location sign system, the Reference Location sign at the integer mile point should display a decimal point and a zero numeral.*

05 *Reference location signs for shared-use paths path; should have a minimum mounting height of 2 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the shared-use path, and should not be governed by the mounting height requirements prescribed in Section 9A.02.*

Option:

06 Reference location signs may be installed on one side of the shared-use path only and may be installed back-to-back.

07 If a reference location sign cannot be installed in the correct location, it may be moved in either direction as much as 50 feet.

*Guidance:*

08 *If a reference location sign cannot be placed within 50 feet of the correct location, it should be omitted.*

09 *Zero distance should begin at the south and west terminus points of shared-use paths path.*

Support:

10 Section 2H.11 contains additional information regarding reference location signs.

## Section 9D.11 Mode-Specific Directional Guide Signs for Shared-Use Paths (D11-11, D11-12, D11-13, and D11-14)

Option:

01 Where separate pathways are provided for different types of users, mode-specific Directional Guide (D11-11, D11-12, D11-13, and D11-14) signs (see Figure 9D-1) may be used to guide different types of users to the pathway that is intended for their respective modes.

02 Mode-specific Directional Guide signs may be installed at the entrance to shared-use paths where the signed mode(s) are permitted or encouraged, and periodically along these facilities as needed.

03 The Bicycle Directional (D11-11) sign, when combined with the BIKE ROUTE (D11-1bP) supplemental plaque, may be substituted for the D11-1 Bike Route Guide sign on shared-use paths.

04 When some, but not all, non-motorized user types are encouraged or permitted on a shared-use path, mode-specific Directional Guide signs may be placed in combination with each other, and in combination with signs (see Section 9B.08) that prohibit travel by particular modes.

Support:

05 Figure 9D-5 shows an example of signing where separate pathways are provided for different non- motorized user types.

## Section 9D.12 Destination Guide Signs for Shared-Use Paths (D11-10a, D11-10b, D11-10c, D11-10d, D11-10e, and D11-10f)

Support:

01 This Section contains information on the application of Destination Guide signs for shared-use paths.

**Standard:**

02 **Where bicycle traffic is allowed on the shared-use path, Destination Guide signs for shared-use paths and any identification markers shall be retroreflective.**

*Guidance:*

03 *Destination Guide signs for shared-use paths should be installed on independent assemblies and should not be*

*combined with regulatory and warning signs.*

Option:

04 Destination Guide signs for shared-use paths may use symbols detailed in the "Standard Highway Signs" publication (see Section 1A.05) in addition to the bicycle symbol to display other modes permitted to use the shared-use path.

**Standard:**

05 **If used, symbols on Destination Guide signs for shared-use paths shall be limited to those where the symbol displayed is an allowable mode on the path or pathway alignment, and where the symbol is supported by other regulatory signs to convey the operation. Symbols unrelated to the allowable modes that would otherwise display directional navigation to a facility, activity, or point of interest shall not be used.**

Support:

06 Chapter 2M contains information for symbol signs used for facilities, activities, and points of interest.

*Guidance:*

07 *Destination Guide signs for shared-use paths, exclusive of any identification marker used, should be rectangular in shape. Simplicity and uniformity in design, position, and application as described in Section 2A.04 are important and should be incorporated into the sign design.*

08 *Destination Guide signs for shared-use paths should be limited to three destinations per sign (see Section 2D.06).*

09 *Abbreviations (see Section 1D.08) should be kept to a minimum, and should include only those that are commonly recognized and understood.*

Support:

10 Figure 9D-6 shows an example of a signing system of Destination Guide signs used on shared-use paths.

**Standard:**

11 **The arrow location and priority order of destinations shall follow the provisions described in Sections 2D.08 and 2D.36. Arrows shall be of the designs provided in Section 2D.08.**

12 **The lettering for destinations on Destination Guide signs for shared-use paths shall be a combination of lower-case letters with initial upper-case letters (see Section 2D.04). All other word messages on Destination Guide signs for shared-use paths shall be in all upper-case letters.**

13 **Except as provided in Paragraph 15 of this Section, the lettering style used for destination and directional legends on Destination Guide signs for shared-use paths shall comply with the provisions of Section 2D.04.**

Option:

14 The distance to the place named may be displayed on the Destination Guide sign. If several destinations are to be displayed at a single point, the several names may be placed on a single sign with an arrow (and the distance, if desired) for each name. If more than one destination lies in the same direction, a single arrow may be used for such a group of destinations.

15 A lettering style other than the Standard Alphabets provided in the "Standard Highway Signs" publication (see Section 1A.05) may be used on Destination Guide signs for shared-use paths if an engineering study determines that the legibility and recognition values for the chosen lettering style at minimum letter heights meet or exceed the values for the Standard Alphabets for the same legend height and stroke width.

**Standard:**

16 **Where a shared-use path is within the highway right-of-way or crosses a street or highway, an alternative lettering style shall not be used.**

Option:

17 Pictographs (see definition in Section 1C.02) may be used on Destination Guide signs for shared-use paths.

**Standard:**

18 **If a pictograph is used, its height shall not exceed 2 times the height of the upper-case letters of the principal legend on the sign.**

19 **Business logos, commercial graphics, or other forms of advertising (see Section 1D.07) shall not be used on Destination Guide signs for shared-use paths or sign assemblies.**

Option:

20 An identification marker may be used in an assembly for Destination Guide signs applied to shared- use paths, or may be incorporated into the overall design of Destination Guide sign, as a means of visually identifying the sign as part of an overall system of signs.

**Standard:**

21 **The size of an identification marker shall be smaller than the Destination Guide sign. Identification markers shall not be designed to have an appearance that could be mistaken by road users as being a traffic control device.**

*Guidance:*

22 *The area of the identification marker should not exceed ⅕ of the area of the Destination Guide sign with which it is mounted in the same sign assembly.*

**Standard:**

23 **Except as provided in Paragraph 26 of this Section, Destination Guide signs for shared-use paths shall have a white legend and border on a green or brown background and shall be consistent with the basic design principles for guide signs.**

24 **Color coding or pictographs shall not be used to distinguish between different types of destinations. If used, color coding shall be accomplished by the use of different colored square or rectangular panels on the face of the sign, each positioned to the left of the named geographic area to which the color-coding panel applies. The height of the colored square or rectangular panels shall not exceed 2 times the height of the upper-case letters of the principal legend on the sign.**

Option:

25 The different colored square or rectangular panels may include either a black or a white (whichever provides the better contrast with the color of the panel) letter, numeral, or other appropriate designation to identify the destination.

26 Except where a shared-use path is within the highway right-of-way or crosses a street or highway, Destination Guide signs for shared-use paths may use background colors other than green or brown in order to provide a color identification for systematic destinations within the overall guide signing system.

**Standard:**

27 **The standard colors of red, orange, yellow, purple, or the fluorescent versions thereof, fluorescent yellow-green, and fluorescent pink shall not be used as background colors for Destination Guide signs for shared-use paths, in order to minimize possible confusion with critical, higher-priority regulatory and warning sign color meanings readily understood by path users.**

Option:

28 Destination Guide signs for shared-use paths may display telephone numbers, Internet addresses, and e-mail addresses, including domain names and uniform resource locators (URLs).

**Standard:**

29 If used, the use of telephone numbers, Internet addresses, and e-mail addresses shall be limited to direct contact information of the jurisdiction with authority of the shared-use path, or contact information for emergency service response, or both. Contact information for advertising purposes shall not be used.

## Section 9D.13 Two-Stage Bicycle Turn Box Guide Signs (D11-20 Series)

Support:

01 Two-stage bicycle turn boxes provide a way for a bicyclist to make a turn in a manner such that a merge across the general-purpose lanes is not required.

02 Section 9B.18 provides information about situations when the use of a two-stage bicycle turn box is required and also contains information about the Two-Stage Bicycle Turn Box (R9-23 series) regulatory signs.

03 Section 9E.11 contains information regarding pavement markings for two-stage bicycle turn boxes.

Option:

04 Where a two-stage bicycle turn box is provided, the Two-Stage Bicycle Turn Box guide sign series (see Figure 9D-1) may be used.

**Standard:**

05 **Where used, the Two-Stage Bicycle Turn Box Advance (D11-20) guide sign shall be mounted in advance of the intersection where the turn box is located.**

06 **Where used, the Two-Stage Bicycle Turn Box (D11-20a) guide sign shall be mounted on the far side of the intersection.**

Option:

07 Where the Two-Stage Bicycle Turn Box Advance (D11-20) guide sign is used, an additional Two- Stage Bicycle Turn Box Advance guide sign may be mounted on the near side of the intersection where the turn box is located.

08 If used, an appropriately-sized Street Name (D3-1) sign (see Section 2D.45) may be installed below the Two-Stage Bicycle Turn Box Advance guide sign to identify the crossroad where the turn box will be available.

Support:

08a Refer to FHWA's List of Known Errors for error between Paragraphs 8 and 9. Refer to Section 1A.04 for more details.

09 Figure 9D-7 shows an example of Two-Stage Bicycle Turn Box guide signs at a location where the use of the turn box is optional.

## Section 9D.14 General Service Signing for Bikeways

Option:

01 General Service signs (see Chapter 2I) may be used on bikeways.

**Standard:**

02 **The sizes of General Service signs intended for viewing by both bicyclists and other road users shall comply with the sizes in Table 2I-1.**

Option:

03 General Service signs intended for the exclusive use of bicyclists may be of reduced size.

## Section 9D.101(CA) Signs on Overcrossing Structures

Support:

01 Signage identifying overcrossing structures over a Class I or IV bikeway can be useful in orienting bikeway users.

02 Consider the skew of the structure (greater than 45 degrees), height of the overcrossing structure, and other pertinent factors while determining the feasibility of installing the sign.


Option:

03 Street Name (I2-3 and I2-3A) signs identifying the overcrossing structure over a Class I or IV bikeway may be installed on the overcrossing structure. If sign installation on the overcrossing is not practical, roadside sign installation may be considered.


*Guidance:*

04 *Structural analysis should be considered prior to installation of signs on the overcrossing structure.*

**Figure 9D-1. Guide Signs and Plaques for Bicycle Facilities** (Sheet 1 of 3)

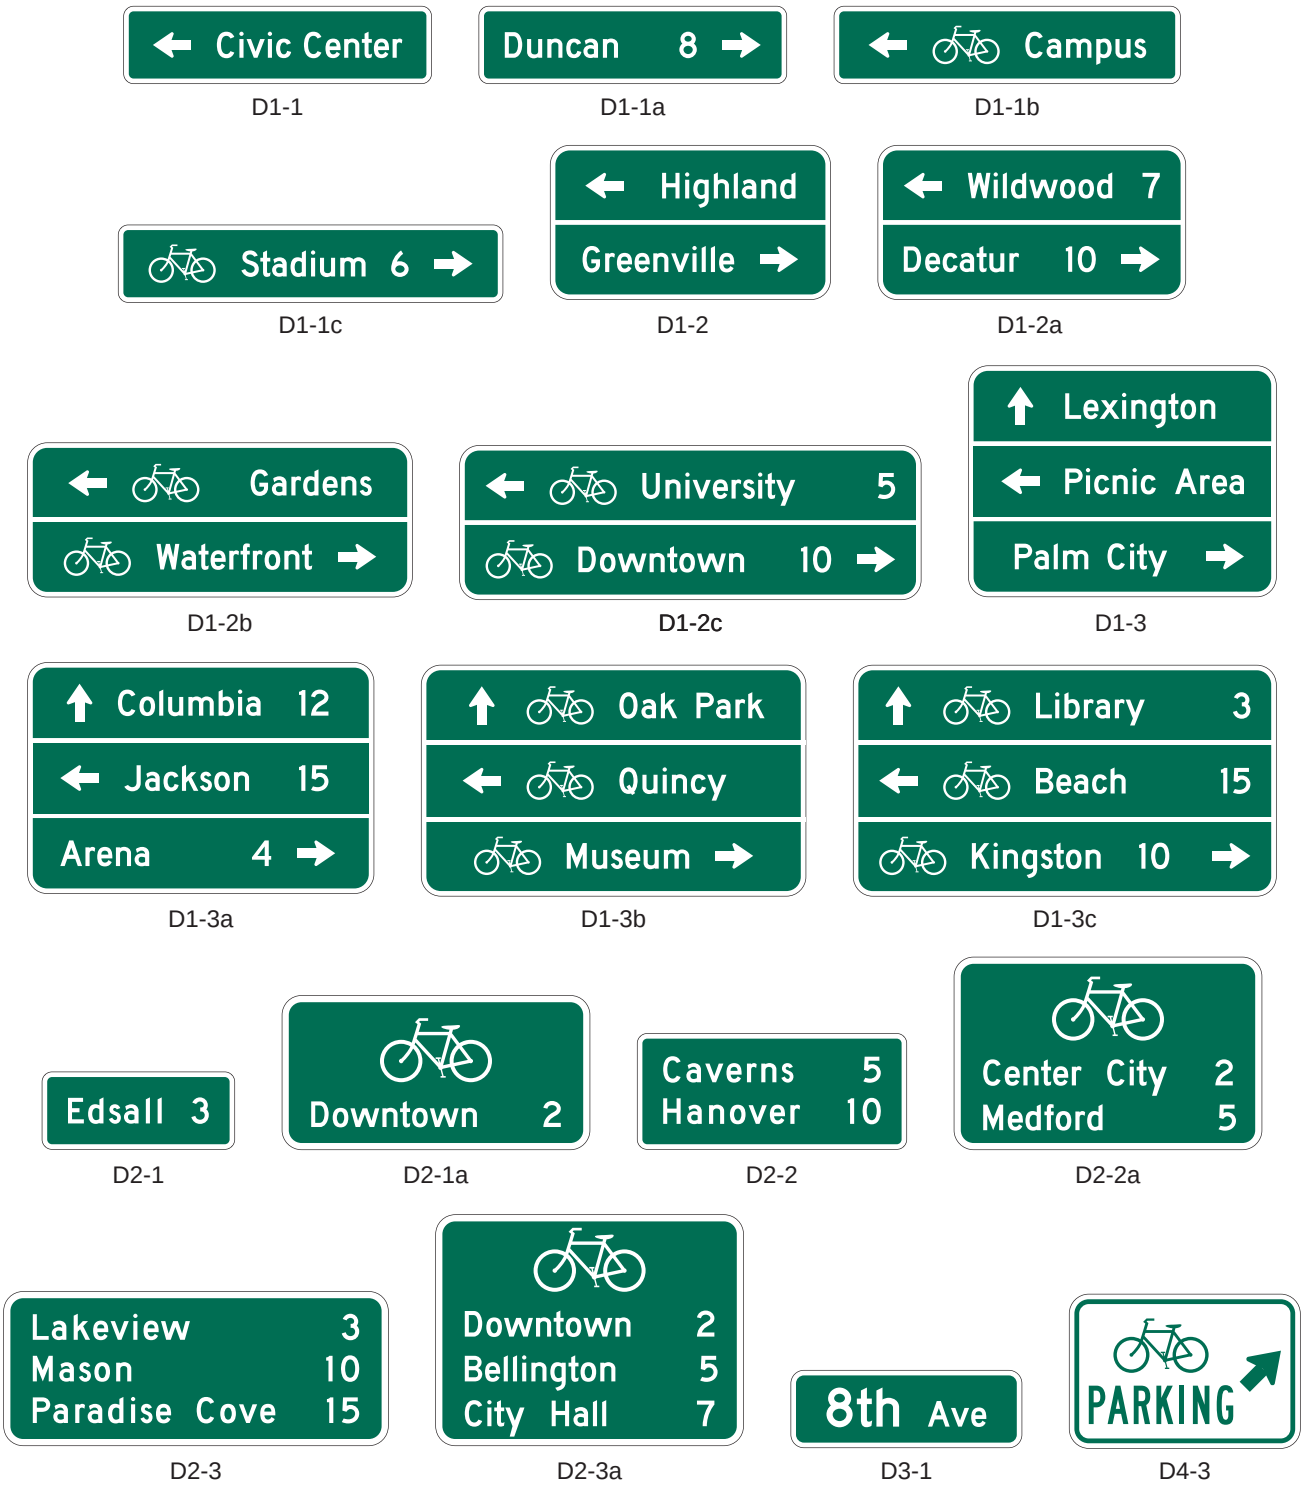

## Figure 9D-1. Guide Signs and Plaques for Bicycle Facilities (Sheet 2 of 3)

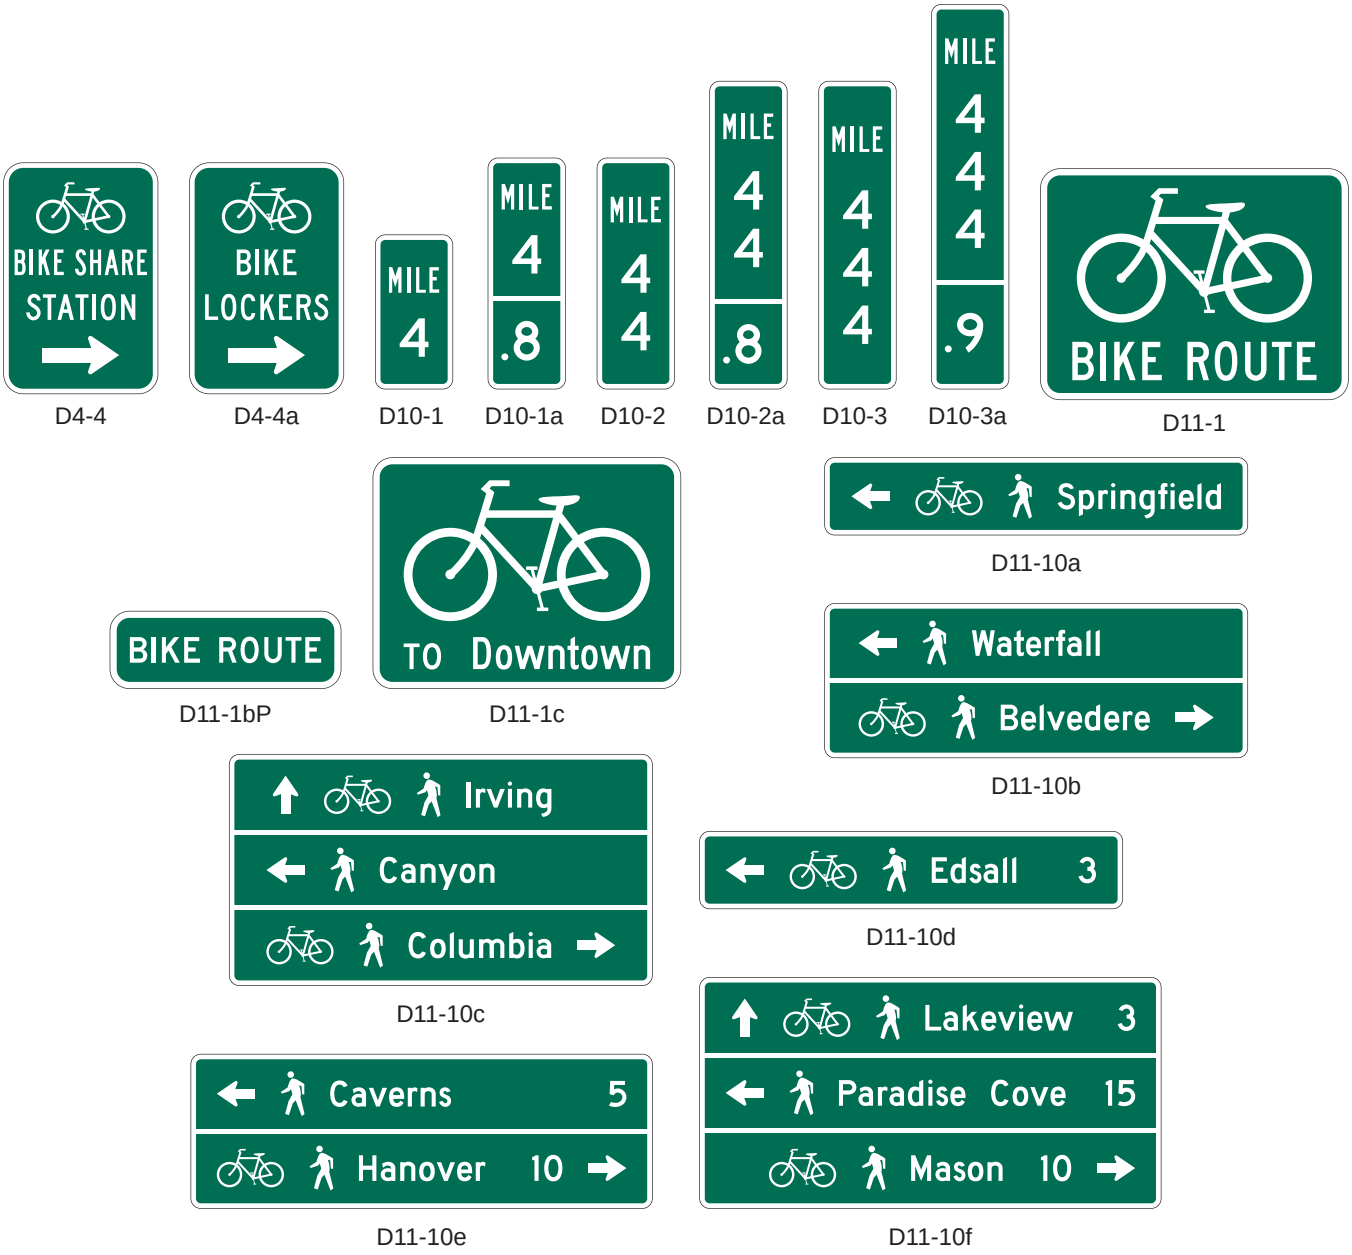


D4-4 D4-4a D10-1 D10-1a D10-2 D10-2a D10-3 D10-3a D11-1

D11-1bP D11-1c D11-10a D11-10b D11-10c D11-10d D11-10e D11-10f

## Figure 9D-1. Guide Signs and Plaques for Bicycle Facilities (Sheet 3 of 3)




## *Figure 9D-1(CA). California Guide Signs and Plaques for Bicycle Facilities*





G12-3(CA)


## Figure 9D-2. Examples of Bicycle Guide Signing (Sheet 1 of 2)

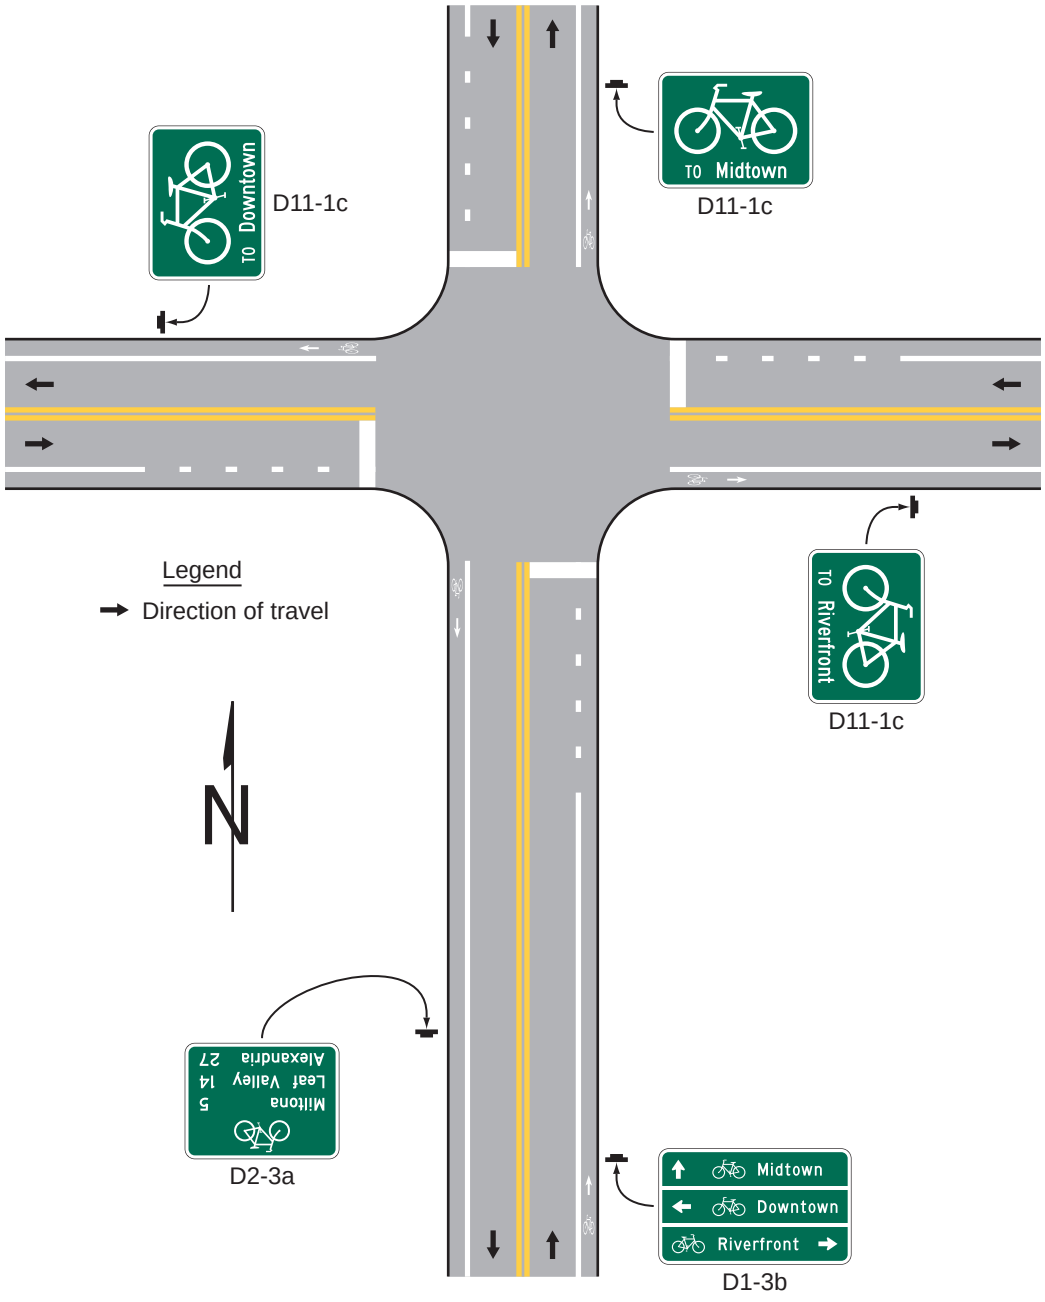

## Figure 9D-2. Examples of Bicycle Guide Signing (Sheet 2 of 2)

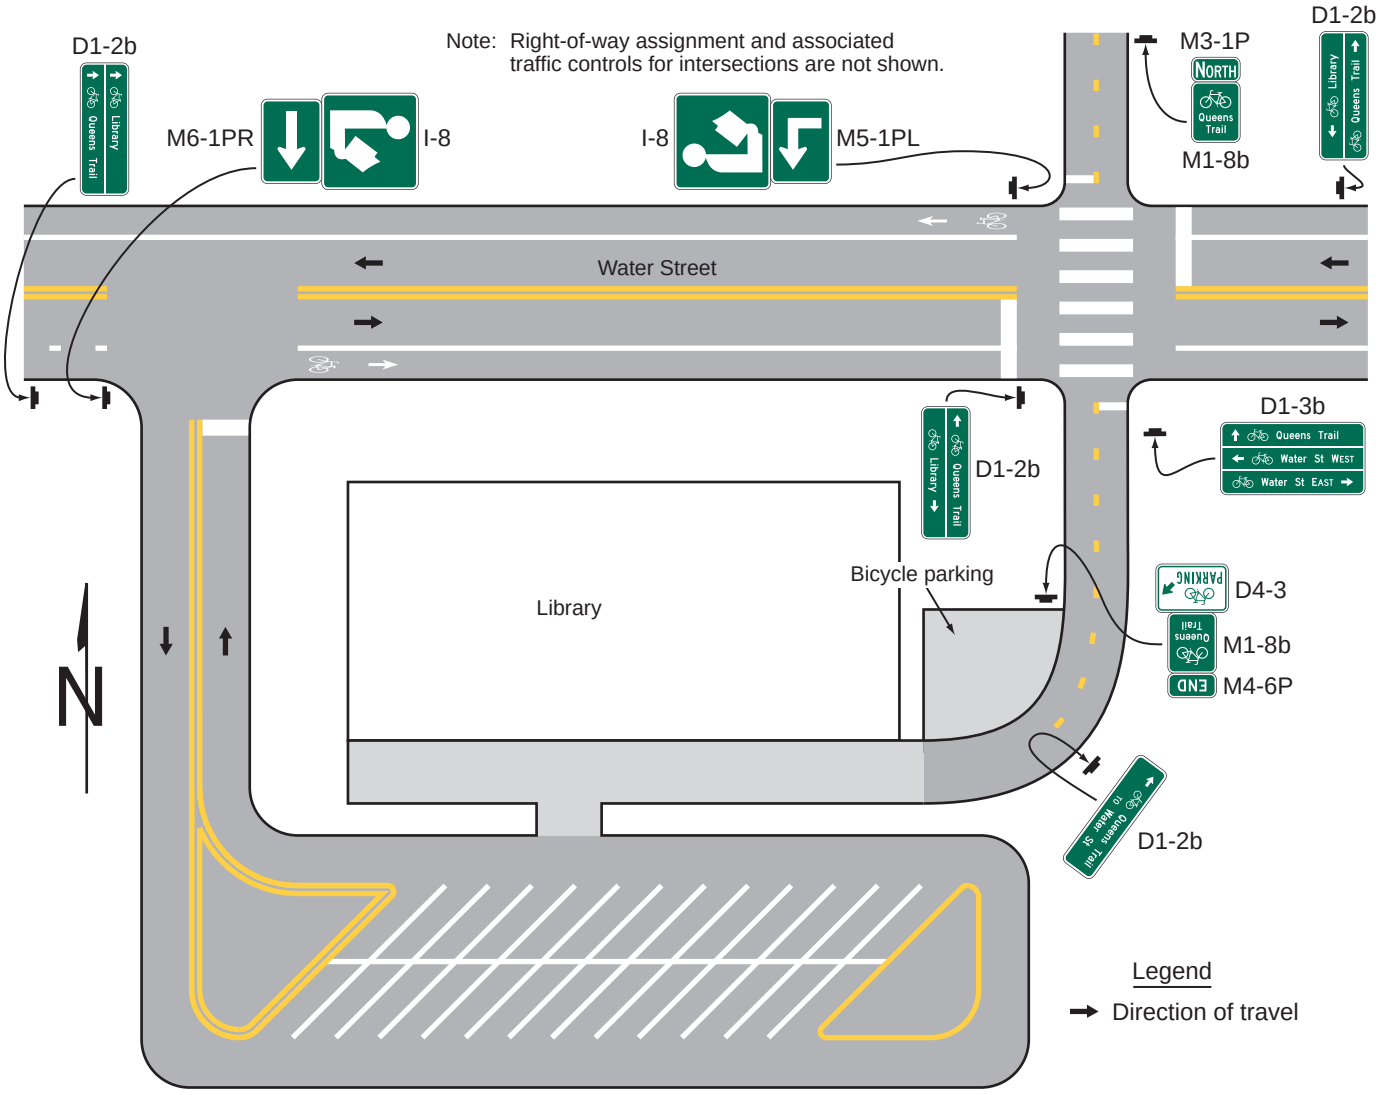


## Figure 9D-3. Example of Bicycle Route Guide Signing

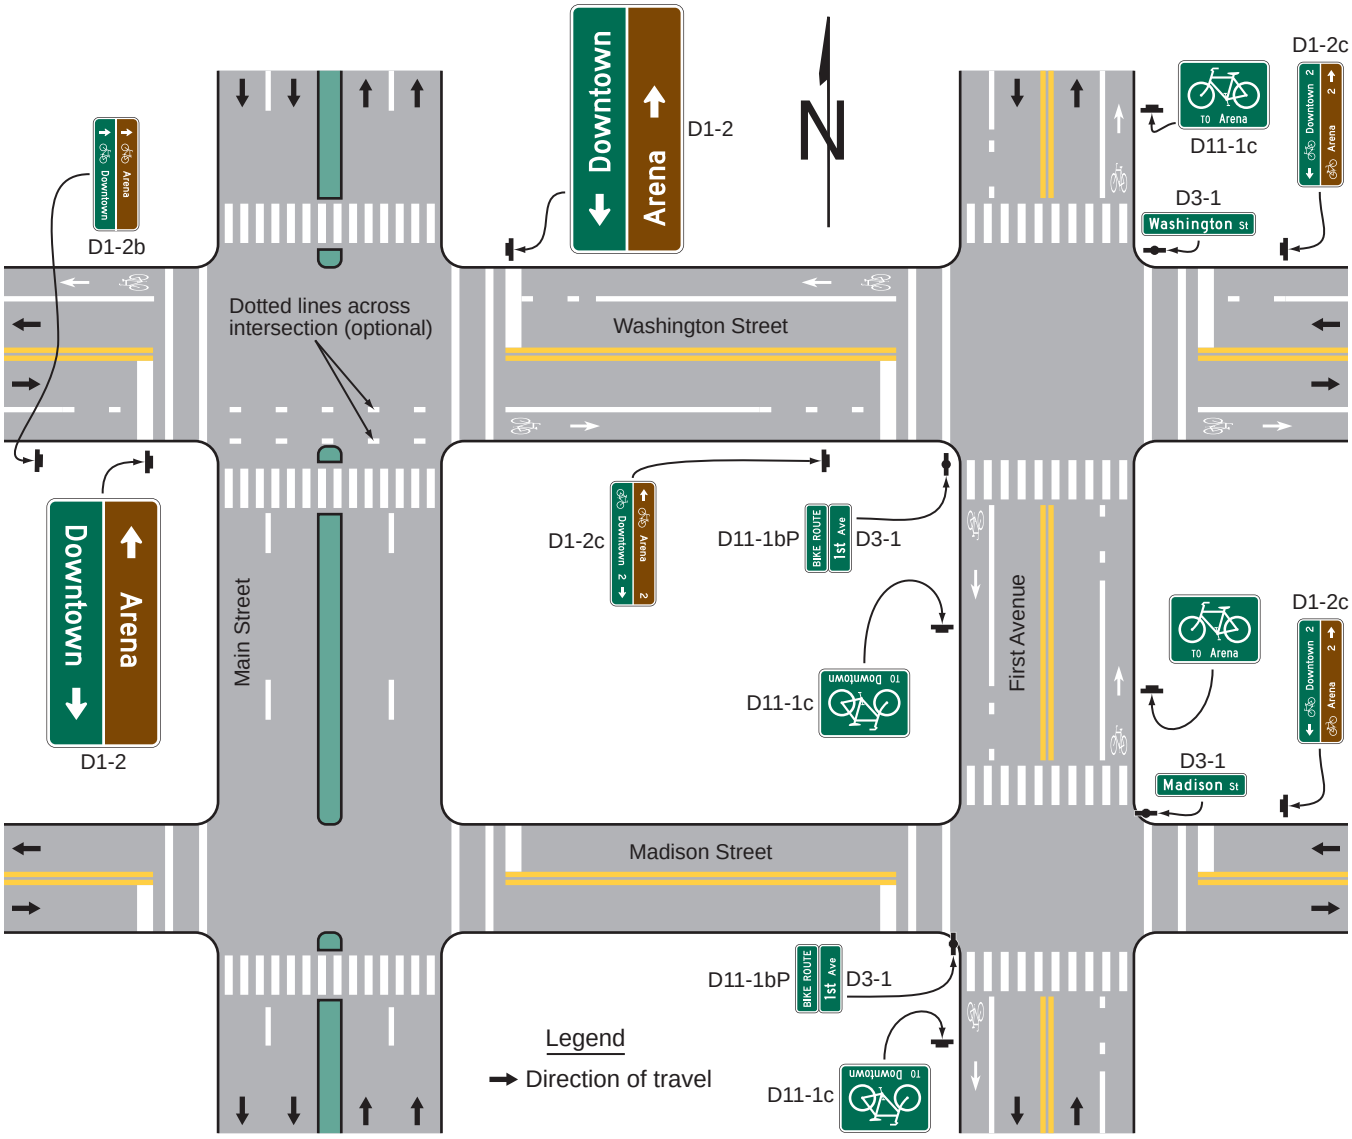



Note: The D1-2 signs are larger than the other guide signs on this figure because the legends on the D1-2 signs need to be legible to motorists.


# Figure 9D-4. Examples of Route Signing for Numbered or Named Bicycle Routes

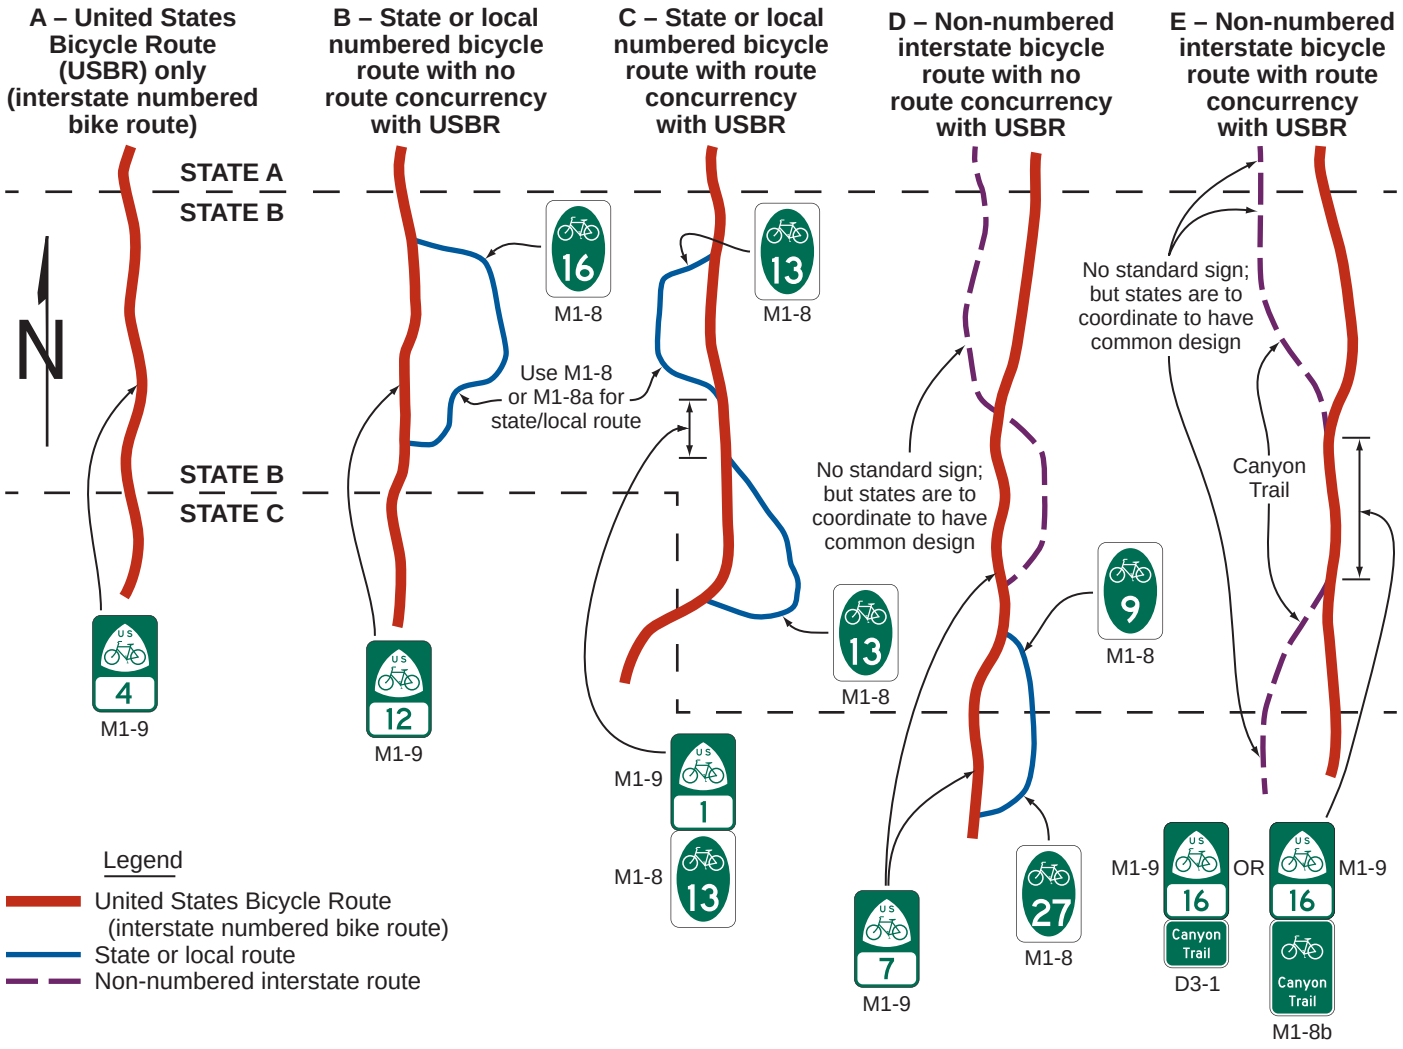


## Figure 9D-5. Examples of Mode-Specific Guide Signing on a Shared-Use Path

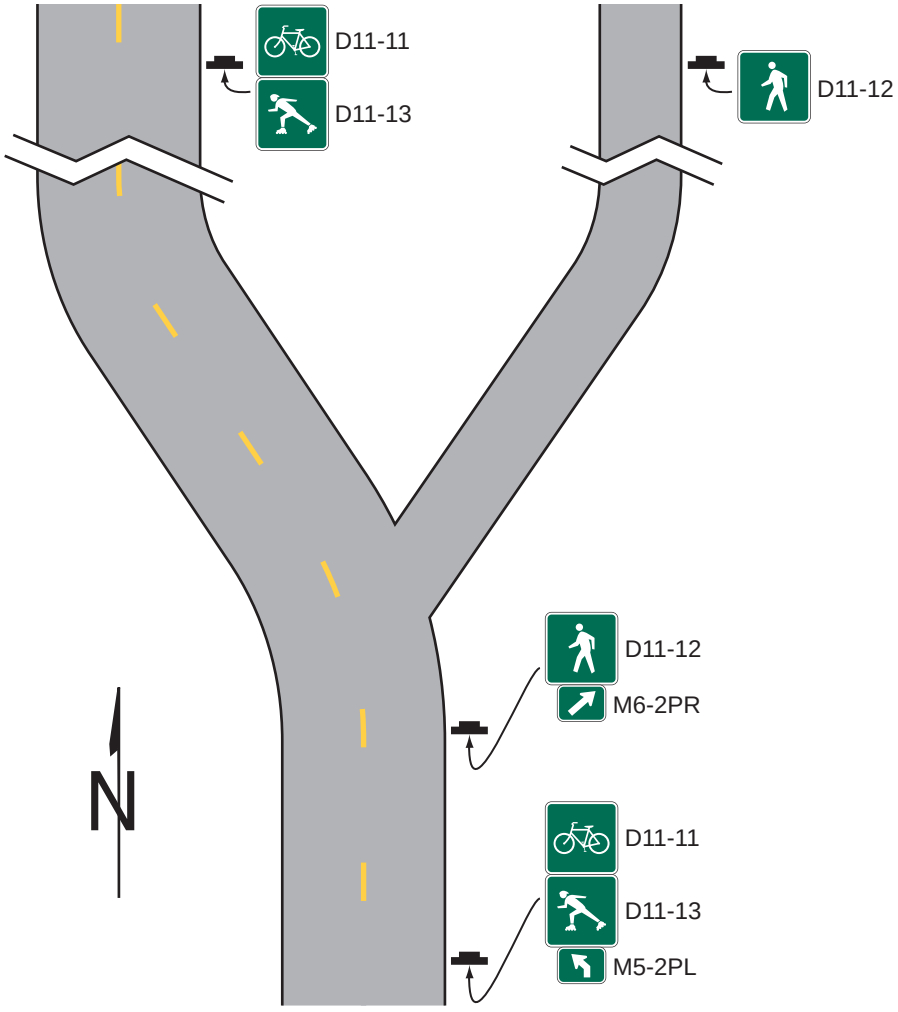

## Figure 9D-6. Examples of Destination Guide Signs for Shared-Use Paths

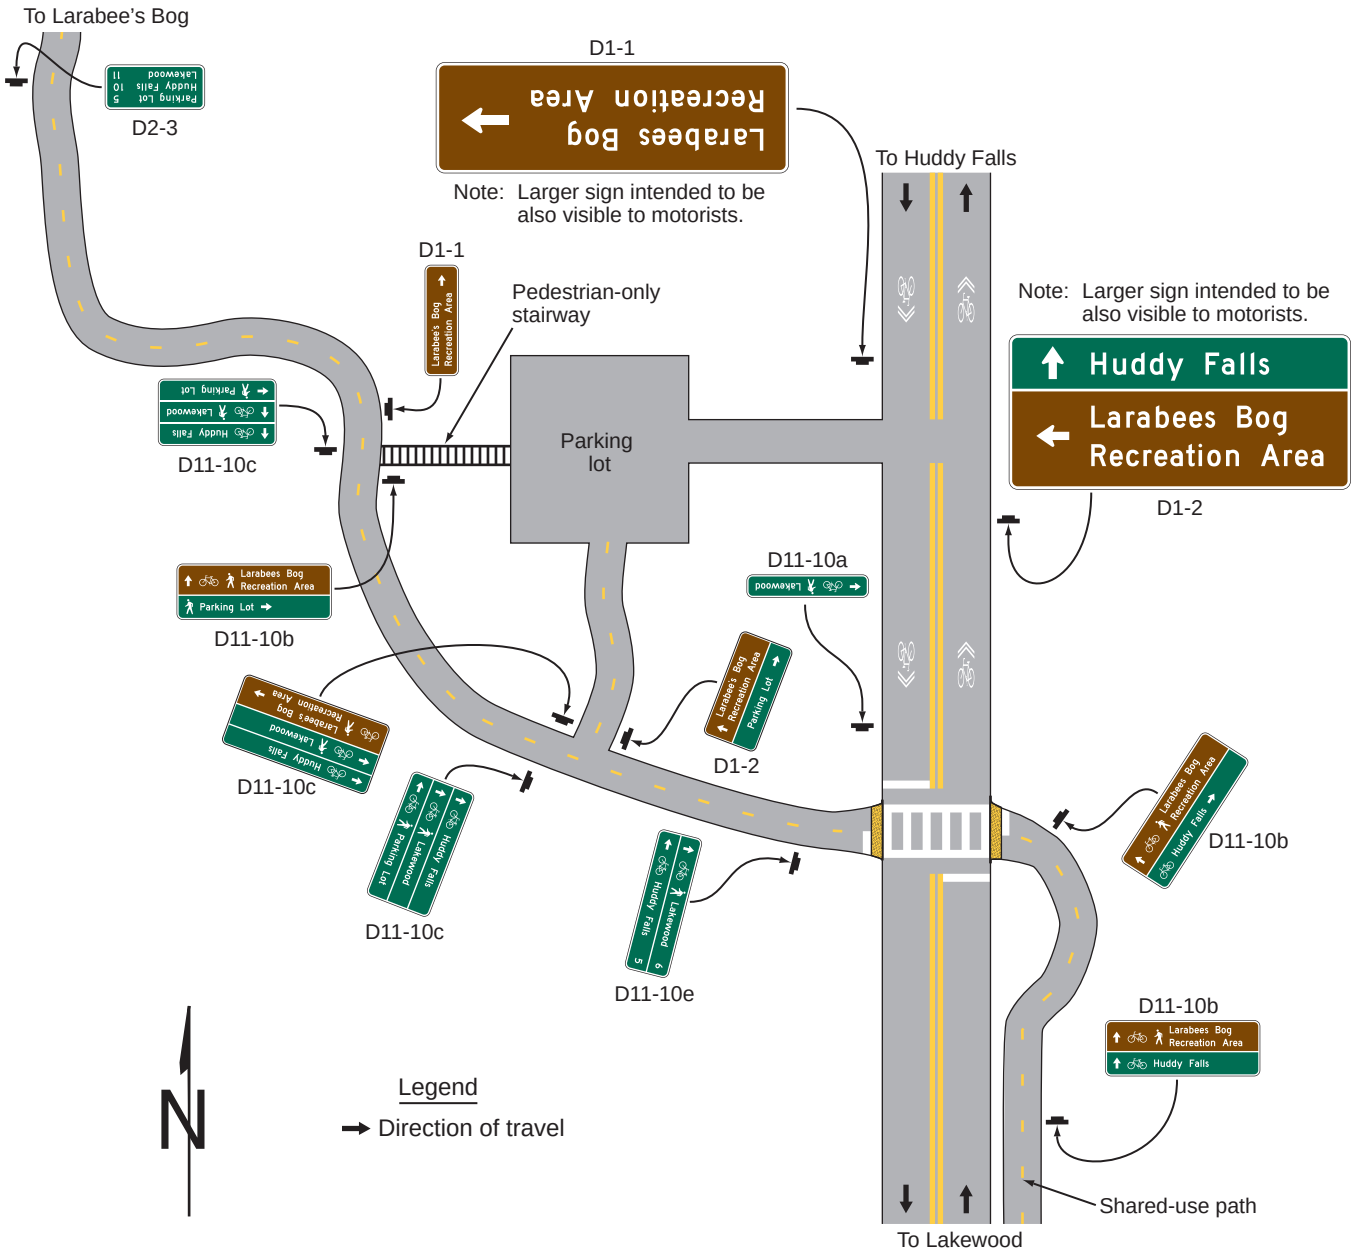

## Figure 9D-7. Example of Two-Stage Bicycle Turn Box when Use is Optional**

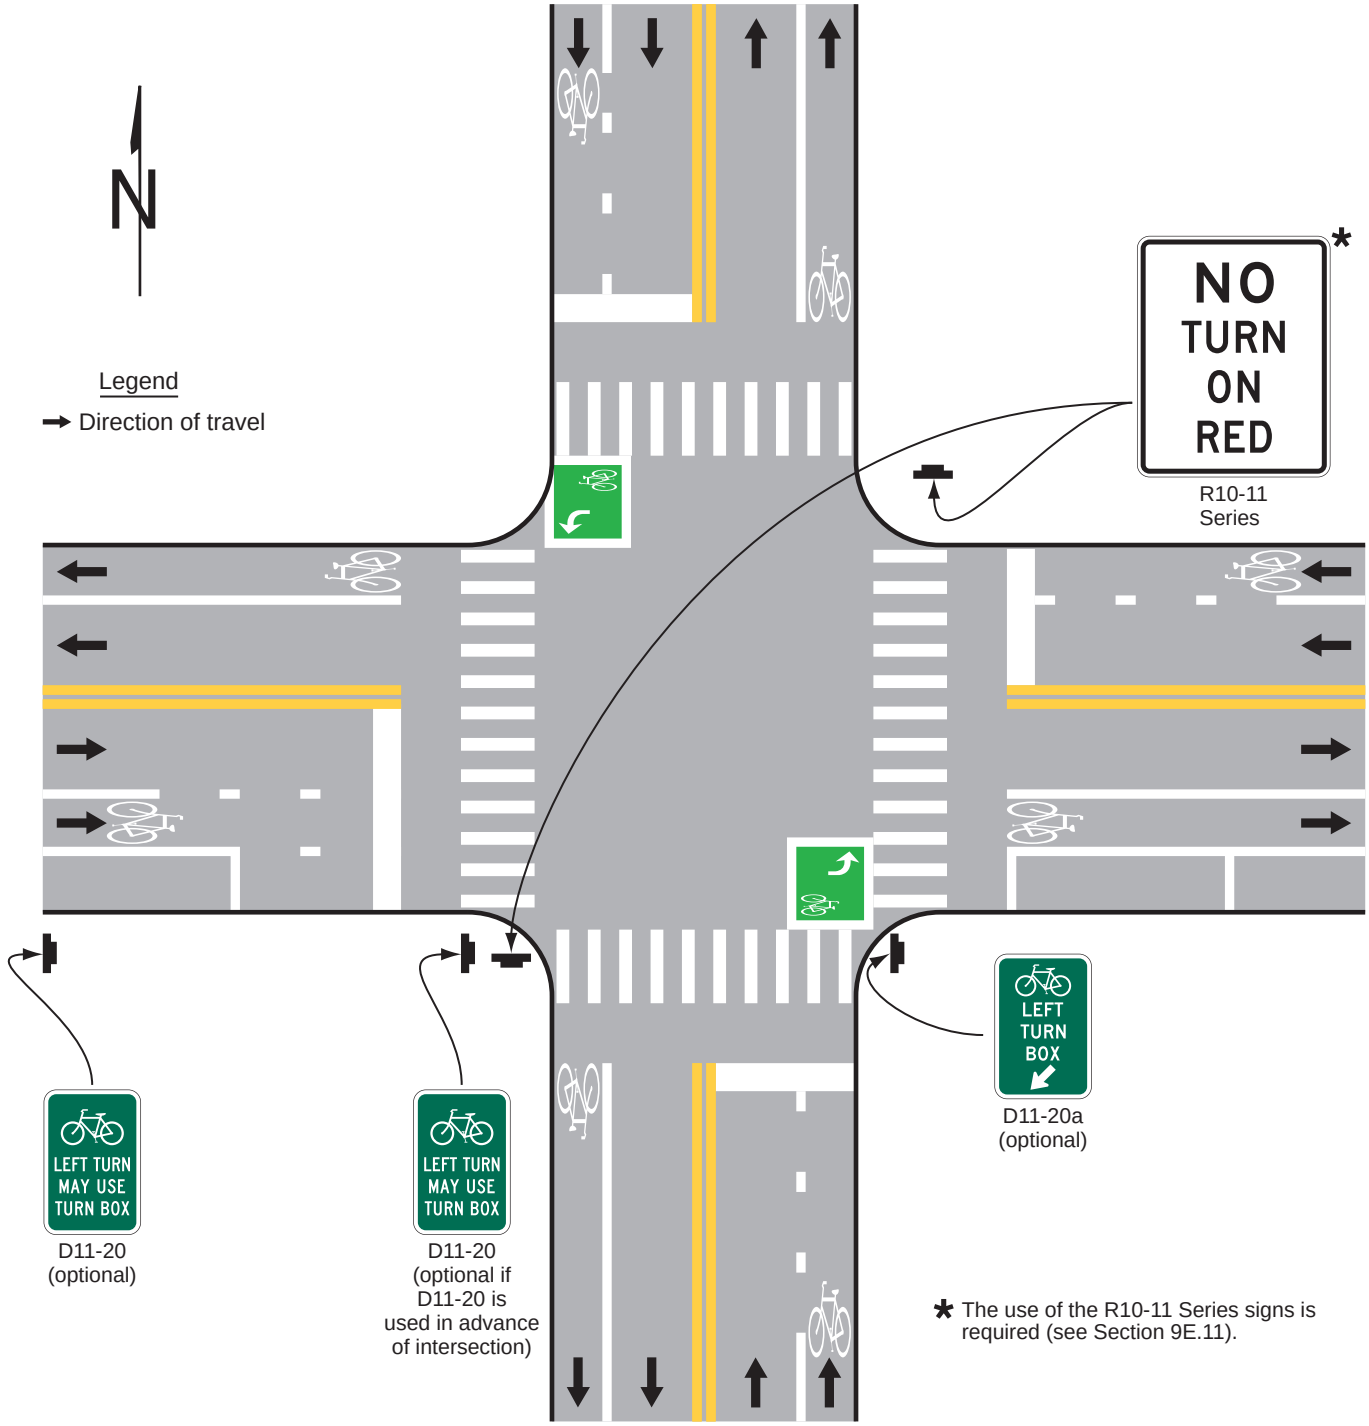


** Refer to FHWA's List of Known Errors for error in the title. Refer to Section 1A.04 for more details.

# CHAPTER 9E. MARKINGS

## Section 9E.01 Bicycle Lanes (Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane))

Support:

01 Pavement markings designate that portion of the roadway for preferential use by bicyclists. Markings inform all road users of the restricted nature of the bicycle lane.

**Standard:**

02 **Longitudinal pavement markings and bicycle lane symbol or word markings (see Figure 9E-1) shall be used to define bicycle lanes.**

02a **The BIKE LANE pavement markings shall be placed on the far side of each intersection.**

Option:

02b The BIKE LANE pavement markings may also be placed at other locations as desired.

Support:

02c Examples of BIKE LANE pavement markings are shown in various figures in this chapter.

Option:

02d Optional word, arrow and symbol markings with details as shown in Figure 9E-1 may be used.

*Guidance:*

03 *The first symbol, ~~or~~ word, and/or green-colored pavement marking in a bicycle lane should be placed at the beginning of the bicycle lane and downstream symbol or word markings should be placed after major intersections. Additional symbol or word markings should be placed at periodic intervals along the bicycle lane based on engineering judgment. Refer to Figure 9E-109(CA).*

03a *Bicycle lane markings on Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane) should be placed a constant distance from the marked lane line or centerline, as appropriate. Bike lanes with parking permitted should not be directed toward the curb at intersections or localized areas where parking is prohibited. Such a practice prevents bicyclists from following a straight course. Where transitions from one type of bike lane to another are necessary, smooth tapers should be provided.*

Support:

03b Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane) require standard signing and pavement markings as shown in Figure 3A-112(CA). Bike lane lines are not typically extended through intersections.

*Guidance:*

03c *Where right turns are not permitted, the solid bike lane stripe should extend to the edge of the intersection, and begin again on the far side. Where there is no right turn only lane, but right turns are permitted, the solid stripe should terminate 50 feet to 200 feet prior to the intersection.*

Option:

03d A dashed line, as shown in Figure 3A-112(CA), may be carried to, or near, the intersection. Where city blocks are short (less than 400 feet), the length of dashed stripe may be 50 feet.

*Guidance:*

03e *Where blocks are longer or vehicle speeds are high (greater than 35 mph), the length of dashed stripe should be increased to 200 feet.*

03f *Markings for a bike lane where vehicle parking is prohibited or permitted are shown in Figures 9E-2, 9E-2(CA), 9E-6(CA), 9E-101(CA), 9E-103(CA), and 9E-106(CA).*

**Standard:**

03g **Where motorist right turns are permitted, the solid bike lane shall either be dropped entirely, or dashed beginning at a point between 50 feet and 200 feet in advance of the intersection.**

Option:

03h In areas where parking stalls are not necessary (because parking is light), a 4 to 6 inch wide solid white stripe on local agency roadways and a 6 inch wide stripe on the state highways may be painted to fully delineate the bike lane. This may be advisable where there is concern that motorists may misconstrue the bike lane to be a traffic lane.

04 An arrow marking (see Figure 9E-1) may be used in conjunction with the bicycle lane symbol or word marking, placed downstream from the symbol or word marking.

05 Where the bicycle lane symbols or word markings are used, Bicycle Lane signs (see Section 9B.04) may also be used, but not necessarily adjacent to every set of pavement markings in order to avoid overuse of the signs.

Support:

06 Section 3H.06 contains information on green-colored pavement for use in bicycle lanes. Refer to Figure 9E-109(CA).

**Standard:**

06a **Raised barriers (e.g., raised traffic bars and asphalt concrete dikes) or raised pavement markers shall not be used to delineate bike lanes on Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane).**

Support:

06b Raised barriers prevent motorists from merging into bike lanes before making right turns, as required by the CVC, and restrict the movement of bicyclists desiring to enter or exit bike lanes.

06c They also impede routine maintenance. Raised pavement markers increase the difficulty for bicyclists when entering or exiting bike lanes, and discourage motorists from merging into bike lanes before making right turns.

Option:

06d Physical barriers or other vertical elements may be used to convert a Class II Bikeway (Bike Lane or Buffer-Separated Bicycle Lane) to Class I Bikeway (Bike Path) or Class IV Bikeway (Cycle Track, Separated Bikeway or Separated Bicycle Lane).

**Standard:**

07 **The bicycle symbol or BIKE LANE pavement word marking and the pavement marking arrow shall not be used in a shoulder.**

08 **A portion of the roadway shall not be established as both a shoulder and a bicycle lane.**

Option:

08a The BIKE LANE may count towards the shoulder width per Caltrans Highway Design Manual Index 301.2.

Support:

09 Where a shoulder is provided or is of sufficient width to meet the expectation of a highway user in that it can function as a space for emergency, enforcement, or maintenance activities, or avoidance or recovery maneuvers, Section 9B.16 contains information regarding the Bicycles Use Shoulder Only sign that can be used to denote locations on a freeway or expressway where bicycles are permitted on an available and usable shoulder.

10 Examples of pavement markings for bicycle lanes on a two-way street are shown in Figure 9E-2 and 9E-2(CA).

## Section 9E.02 Bicycle Lanes at Intersection Approaches (Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane))

**Standard:**

01 **Except as provided in Paragraph 2 of this Section, a through bicycle lane shall not be positioned to the right of a right turn only lane or to the left of a left turn only lane.**

Option:

02 A through bicycle lane may be positioned to the right of a right turn only lane or to the left of a left turn only lane provided that the bicycle lane is controlled by a traffic signal that displays bicycle signal indications (see Chapter 4H).

02a A bicycle lane for travel in the same direction as the general purpose lanes may be placed on the left hand side of the general purpose lanes.

Support:

03 Unless controlled by a bicycle signal indication, a bicyclist continuing straight through an intersection from the right of a right turn only lane or from the left of a left turn only lane would be inconsistent with normal traffic behavior and would violate the expectations of right-turning or left-turning motorists.

Option:

03a When a bike lane approaches an intersection with right- or left-turn only lanes, Figure 9E-3 and Figure 9E-3(CA) may be used.

*Guidance:*

03b *Where through motor vehicle lanes approaching an intersection become mandatory turn lanes, adjacent bike lanes should be delineated using Figures 9E-3(CA).*

04 *When the right (left) through lane is dropped to become a mandatory right-turn (left-turn) lane, the bicycle lane markings should stop at least 100 feet before the beginning of the right-turn (left-turn) lane. Through bicycle lane markings should resume to the left (right) of the mandatory right-turn (left-turn) lane.*

05 *Except as provided in Paragraph 2 of this Section, an optional through-right (through-left) turn lane next to a mandatory right-turn (left-turn) lane should not be used where there is a through bicycle lane.*

05a *A dashed line across the right-turn-only lane should not be used on extremely long lanes, or where there are double right-turn-only lanes. For these types of intersections, all striping should be dropped to permit judgment by the bicyclists to prevail.*

**Standard:**

06 **A bicycle lane located on an intersection approach between general-purpose lanes for motor vehicle movements shall be marked with at least one bicycle symbol and at least one arrow pavement marking as provided in Paragraph 4 of Section 9E.01.**

Support:

06a Refer to FHWA's List of Known Errors for error in Paragraph 6 text. Refer to Section 1A.04 for more details.

**Standard:**

07 **A bicycle lane shall not be marked within a general-purpose lane, either with dotted or any other line markings.**

Option:

08 Where there is insufficient width in the roadway to include both a bicycle lane and a general-purpose turn lane, bicycle travel may be accommodated within the turn lane or general-purpose lane using shared-lane markings.

**Standard:**

09 **Where a general-purpose turn lane is controlled by a traffic control signal, through bicycle movements shall not be accommodated in the turn lane unless the turning movement is always permitted to proceed simultaneously with the adjacent through movement.**

Option:

09a A Bicycle Crossing (W11-1) sign may be used to warn road users of the potential for bicyclists crossing their path. Refer to Section 9B.18.

09b When a bike lane approaches ramp intersection that intersects the local facility at or close to 90° (typical of a compact or spread diamond configuration), then Figure 9E-3 and Figure 9E-3(CA) may be used.

*Guidance:*

09c *However, when a bike lane approaches one or more ramp intersections that intersect the local facility at various angles other than 90° (typically high-speed, skewed ramps), Figure 9E-102(CA) should be used.*

Support:

10 Examples of bicycle lane markings on approaches to intersections are shown in Figures 9E-3, 9E-3(CA), 9E-4, and 9E-9.

*Guidance:*

11 *The longitudinal line defining a bicycle lane should be dotted on approaches to intersections where turning vehicles are permitted to cross the path of through-moving bicycles (see Figure 9D-7).*

**Standard:**

11a **If used, the space for bicycle use shall be delineated by Detail 39 on the right of the through lane and Detail 38A on the left of the right-turn-only lane. Refer to Figure 3A-112(CA).**

Support:

12 Buffer-separated and separated bicycle lanes require additional considerations at intersections, including sight distances for bicycles and other road users, user expectations, and intersection geometry.

Option:

13 A buffer-separated or separated bicycle lane may be shifted closer to, or farther away from the adjacent general-purpose lane depending upon site-specific conditions (see Drawings D and E in Figure 9E-7).

Support:

14 A buffer-separated or separated bicycle lane shifted away from the adjacent general-purpose lane at an intersection can create space for a motor vehicle to queue between the general-purpose lane and the extension of the bicycle lane. This design can also improve the safety and comfort of bicyclists by reducing the speed of turning motor vehicles, improving sightlines, and creating additional buffer space prior to the conflict point with turning motor vehicles.

15 The purpose of shifting a buffer-separated or separated bicycle lane away from the adjacent general- purpose lane is to allow the driver of a turning vehicle to undertake the tasks of turning and scanning for bicycle cross traffic in isolation versus simultaneously. Sufficient sight distance for both drivers and bicyclists is important in this design (see Drawing E in Figure 9E-7).

16 The purpose of shifting a buffer-separated or separated bicycle lane toward the adjacent general- purpose lane is to improve the visibility of bicyclists to the adjacent traffic and avoid conflicts between turning motor vehicles and bicyclists (see Drawing D in Figure 9E-7).

Option:

16a At locations with right-turn-only lanes where bicycles are not prohibited but Class II bicycle facilities do not exist on the approach, a minimum 4-foot wide space for bicycle use may be provided between the right-turn and through lane, and where the posted speed is greater than 40 mph the minimum width should be 6 feet.

16b When the width between the right-turn and through lane is greater than 4-feet, a buffer area may be striped adjacent to the 4' minimum width for bicycle travel, regardless of the posted speed.

16c The buffer may be placed on the left or on the right of the 4' space for bicycle travel.

Support:

16d Refer to Caltrans' Highway Design Manual, Index 403.6 Turning Traffic.

16e Refer to Figure 9E-3 and Figure 9E-3(CA) for details on striping and Figure 9E-6 and Figure 9E-6(CA) for details on buffer area striping.

17 Staggering stop lines (see Section 3B.19) so that general-purpose lanes stop further in advance from the intersection than the bicycle lane can improve the visibility of bicyclists for drivers of turning vehicles (see Drawing D in Figure 9E-7).

Option:

18 Where a general-purpose mandatory turn lane is provided at an intersection and the approach also includes a separated or buffer-separated bicycle lane, a mixing zone may be established to allow general- purpose turning traffic to share the roadway space with bicyclists (see Figure 9E-5).

**Standard:**

19 **Mixing zones shall be used only where the bicycle lane is one-way in the same direction of travel as the adjacent general-purpose lane.**

20 **Mixing zones with a yielding area shall have yield markings indicating where general-purpose traffic entering the shared space shall yield to bicyclists.**

21 **Where a mixing zone continues to the intersection itself sharing space between bicyclists and general-purpose turning traffic, shared-lane markings and turn arrows shall be provided in the lane.**

Support:

22 Mixing zones require bicycles and general traffic to share space, interrupting a buffer-separated or separated bicycle lane where bicycle traffic is otherwise separated from general traffic. The preference is to provide a dedicated bicycle facility for the intersection approach, If that is not possible, the mixing zone needs to indicate that bicyclists and motorists are entering a shared condition.

*Guidance:*

23 *Where a mixing zone provides for the re-establishment of a bicycle lane after bicycles and general- purpose lanes cross paths, a buffered or physically-separated space should be provided between the bicycle lane and the adjacent general-purpose lane (see Drawing C in Figure 9E-5).*

## Section 9E.03 Extensions of Bicycle Lanes through Intersections (Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane))

Support:

01 Extensions of bicycle lanes through intersections can help identify the paths of bicyclists and guide them on movements that could be difficult to discern. Extensions of bicycle lanes through intersections also assist other road users of the intersection to identify where bicyclists are expected to operate and to recognize potentially unexpected conflict points.

02 The design, placement, and maintenance of bicycle lane extensions through intersections are important considerations, especially when contiguous to a crosswalk, to avoid potential confusion to pedestrians with vision disabilities.

03 The width and color of lane extension markings are discussed in Section 3B.11.

Option:

04 The bicycle symbol, the arrow marking, pavement word markings, or a combination thereof may be used in bicycle lane extensions through intersections.

05 Green-colored pavement may be used in a bicycle lane extension in accordance with the provisions of Section 3H.06.

**Standard:**

06 **Shared-lane markings or chevron markings shall not be used in bicycle lanes or bicycle lane extensions (see Section 9E.09).**

07 **Extensions of bicycle lanes through intersections shall use dotted line patterns.**

Support:

08 Separated and buffer-separated bicycle lanes may have alignments that are not as obvious within an intersection as a standard bicycle lane, therefore additional conspicuity is important where these types of bicycle lanes cross intersections.

*Guidance:*

09 *Lane extension markings should be used to extend a buffer-separated or separated bicycle lane through intersections and driveways.*

10 *The extension of a bicycle lane through an intersection should use two lines defining both lateral limits of the bicycle lane.*

Option:

10a The Bike Lane Intersection (Detail 39A) line as shown in Figure 3A-112(CA) may be used to extend the bike lane to or through an intersection.

10b The extension of bicycle lanes through intersections advises motorists that bicyclists are likely to use the intended path.

10c Bicycle lane markings may be extended through intersections consistent with the provisions of Section 3B.11.

10d Bicycle lane markings as shown in Figure 9E-103(CA) may be used within the boundaries of bicycle lane extensions.

10e Green-colored pavements may be used in a bicycle lane extension through an intersection or a driveway consistent with Section 3H.06. Refer to Figures 9E-2, 9E-2(CA), 9E-3, 9E-3(CA), 9E-8, 9E-102(CA), 9E-103(CA) and 9E-106(CA).

**Standard:**

11 **Where the path of the bicycle lane through the intersection is contiguous to a crosswalk, two longitudinal dotted lines shall be provided to establish the lateral limits of the bicycle lane extension. The transverse line establishing one side of the crosswalk, or the limit of a high-visibility crosswalk pattern (see Section 3C.05) that does not employ a transverse line, shall not be used to demarcate one side of the bicycle lane extension.**

Support:

12 Markings for a bike lane through a typical interchange are shown in Figure 9E-102(CA).

Option:

13 Figure 9E-102(CA) may also be used where the preferred designation is a Class III Bikeway (Bike Route), with the Bike Lane (R3-17) signs being replaced with Bike Route (D11-1) signs and the bike lane delineation eliminated. A 4- to 6-inch-wide stripe on local agency roadways, and a 6-inch-wide stripe on state highways, may be used to delineate the shoulder throughout the bike route designation.

**Standard:**

14 **Signing and striping as shown in Figure 9E-102(CA) shall be repeated at additional onramps within the interchange.**

*Guidance:*

15 *Where the onramps intersect at the local road at or near 90º, the striping should be per Figure 9E-3 and Figure 9E-3(CA).*

## Section 9E.04 Bicycle Lanes at Driveways (Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane))

Support:

01 The definition of an "Intersection" in Section 1C.02 contains information to determine if a driveway can be considered an intersection.

Option:

02 Bicycle lanes may be continued through a driveway using solid or dotted longitudinal lines.

03 The bicycle symbol, the arrow marking, pavement word markings, or a combination thereof may be used in bicycle lane extensions through driveways.

04 Green-colored pavement (see Section 3H.06) may be used as a background to enhance the conspicuity of the bicycle symbol at driveways.

## Section 9E.05 Bicycle Lanes at Circular Intersections (Class II Bikeways (Bike Lane or Buffer-Separated Bicycle Lane))

**Standard:**

01 **Bicycle lanes shall not be provided in the circulatory roadway of an unsignalized circular intersection that includes conflicts at entry or exit points (see Chapter 3D) except as provided in Paragraph 4 of this Section.**

*Guidance:*

02 *Bicycle lane markings should stop at least 100 feet before the crosswalk, or if no crosswalk is provided, at least 100 feet before the yield line, or if no yield line is provided, then at least 100 feet before the edge of the circulatory roadway.*

03 *If used, bicycle crossings should be a minimum of 20 feet from the edge of the circular roadway.*

Support:

03a Refer to FHWA's List of Known Errors for error in Paragraph 3 text. Refer to Section 1A.04 for more details.

Option:

04 Separated bicycle lanes may be used in circular intersections.

Support:

05 Separated bicycle lanes allow bicycles to navigate a circular intersection and its crossing points without merging into traffic and without dismounting and using a crosswalk at the intersection crossing point. This is beneficial at multi-lane and higher-speed circular intersections.

06 Section 9E.10 contains information on using shared-lane markings to facilitate the bicycle movement through a circular intersection.

07 The "Guide for the Development of Bicycle Facilities," 2012 Fourth Edition, American Association of State Highway and Transportation Officials, contains information on designing for bicycles on the sidewalk in lieu of, or in addition to, using shared-lane markings in the circulatory roadway of the intersection.

08 The FHWA's informational guide "Improving Intersections for Pedestrians and Bicyclists" contains information on incorporating separated bicycle lanes and other bicycle facilities into circular intersections.

09 Refer to FHWA's List of Known Errors for error in Paragraph 8 text. Refer to Section 1A.04 for more details.

## Section 9E.06 Buffer-Separated Bicycle Lanes (Class II Bikeway (Bike Lane or Buffer-Separated Bicycle Lane))

Support:

00a Refer to Sections 1C.02 and SHC § 890.4.

**Standard:**

00b **All topics in this section referencing buffer, buffer area, buffer space, buffer-separated bicycle lane, shall mean to apply to Class II Bikeway, bike lane, bicycle lane or buffer-separated bicycle lane.**

Support:

01 Buffer-separated bicycle lanes provide additional lateral separation between a bicycle lane and a general-purpose lane by a pattern of pavement markings without the presence of vertical elements. Providing a buffer space between a bicycle lane and a general-purpose lane creates more separation between motor vehicles and bicycles, can reduce vehicle encroachment into the bicycle lane, and can increase the comfort of bicyclists.

02 Providing a buffer space between a bicycle lane and a parking lane can reduce crashes involving bicycles and the opening of vehicle doors from the parking lane.

Option:

02a A bicycle lane buffer area may be used to separate a bicycle lane from an adjacent general-purpose lane and/or parking lane.

*Guidance:*

02b *BIKE LANE (R3-17) signs (refer to Figure 9B-1) should be used to distinguish a buffer-separated bicycle lane from a general-purpose lane.*

**Standard:**

03 **If used, and except as provided in Paragraph 5 of this Section, a buffer space shall be marked with a solid white line along both edges of the buffer space where crossing is discouraged.**

03a **Directional arrows shall be used in conjunction with the bicycle lane symbol or word marking in buffer-separated bicycle lanes, placed downstream from the symbol or word marking.**

*Guidance:*

04 *Engineering judgment should be used to establish intermittent breaks or interruptions in the buffer space, such as for driveways, transit stops, or on-street parallel parking lanes, in order to convey access points or an otherwise*

*general legal movement to cross the buffer space (see Figure 9E-6 and Figure 9E-6(CA)).*

Option:

05 Buffer spaces may be established without specific longitudinal lines if contiguous facilities have longitudinal lines or other pavement markings themselves that, when installed, automatically demarcate the buffer space (see Drawing D in Figure 9E-6).

**Standard:**

06 **Except as provided in Paragraph 7 of this Section, a through buffer-separated bicycle lane shall not be positioned to the right of a mandatory right-turn lane or to the left of a mandatory left-turn lane.**

Option:

07 A buffer-separated bicycle lane may be placed to the right of a mandatory right-turn lane (or to the left of a mandatory left-turn lane) only if a bicycle signal face (see Section 4H.01) is used and the signal phasing and signing eliminates any potential conflicts between the bicycle movement and the turning movement.

*Guidance:*

07a *Where vehicles are expected to cross the buffer area at driveways, both lines should be broken. Otherwise, both lines should be solid.*

07b *Buffer areas should end on the approach to the intersection of side streets or major commercial driveways as shown in Figure 9E-6 and Figure 9E-6(CA).*

08 *The width of the buffer space should be at least 3 times the width of the normal or wide longitudinal line used to mark the buffer space.*

09 *Where a buffer space is 2 to 3 feet wide, chevron or diagonal markings (see Section 3B.25) should be applied within the buffer space.*

Support:

09a The buffer area width includes the width of the parallel white lines. Refer to DIB 89-02 for buffer area width requirements.

09b Markings for buffered bicycle lanes are shown in Figure 9E-6 and Figure 9E-6(CA).

Option:

10 Where a buffer space is less than 2 feet wide, diagonal markings or no markings at all in the buffer space may be applied within the buffer space.

**Standard:**

11 **If used, diagonal markings shall slant away from traffic in the adjacent travel lane for motor- vehicle traffic.**

*Guidance:*

12 *Where used, the spacing of chevrons or diagonal markings should be 10 feet or greater.*

Support:

13 Chevron and diagonal markings convey that the buffer space is not an additional bicycle lane or other travel lane open to traffic.

**Standard:**

14 **Where a buffer space is more than 3 feet wide, chevron or diagonal markings shall be applied within the buffer space.**

*Guidance:*

14a *The use of chevron or diagonal markings should be considered in a bicycle lane buffer area and should be based on Section 3B.25 and engineering judgment.*

14b *If used, interior chevron or diagonal markings should consist of 4 to 6 inch lines on local agency roadways and 6 inch line on state highways, angled at 45 degrees and striped at intervals of 10 to 40 feet.*

Support:

14c Increased interior chevron or diagonal marking frequency can increase motorist compliance.

*Guidance:*

15 *Lane extension markings should be used to extend a buffer-separated bicycle lane across intersections and driveways.*

## Section 9E.07 Separated Bicycle Lanes (Class IV Bikeway (Cycle Track or Separated Bikeways))

Support:

00a Refer to Sections 1C.02, 9E.06 and SHC § 890.4.

**Standard:**

00b **All topics in this section referencing buffer, buffer area, and buffer space for a buffer-separated bicycle lane shall mean to apply to a Class II Bikeway. All topics in this section referencing buffer, buffer area, and buffer space for a separated bicycle lane shall mean to apply to a Class IV Bikeway (Cycle Track or Separated Bikeway).**

Support:

01 Separated bicycle lanes provide a physical separation between a general-purpose lane and a bicycle lane through the use of vertical objects or vertical separation between the general-purpose lane and bicycle lane. Providing a physical separation between a bicycle lane and a general-purpose lane can reduce vehicle encroachment into the bicycle lane beyond a marked buffer alone and can in some cases prevent that encroachment altogether.

02 Physical separation between general-purpose lanes and bicycle lanes introduces additional design considerations over buffer-separated bicycle lanes, including the awareness of a potentially unexpected conflict point for turning motor vehicles and the provision of adequate sight distance for all users at intersections and driveway crossings.

Option:

03 Vertical elements used to provide physical separation between general-purpose lanes and bicycle lanes may include, but are not limited to, tubular markers, raised islands, ~~or~~ parked vehicles~~.~~, grade separation, flexible delineator posts, bikeway separator posts, inflexible physical barriers, or on-street parking.

Support:

03a Refer to Figure 9E-106(CA). Refer to Caltrans' Design Information Bulletin Number 89 Class IV Bikeway Guidance (Separated Bikeways/Cycle Tracks) for more information.

03b Refer to FHWA "Separated Bike Lane Planning and Design Guide" for detailed information on planning and design of separated bike lanes.

**Standard:**

03c **Vertical elements, vertical objects or vertical separation between the general-purpose lane and bicycle lane shall be used to define Class IV bikeway (cycle track, separated bikeway or separated bicycle lane).**

Support:

03d Vertical elements are not traffic control devices in themselves; however, when placed in a position identical to a line of channelizing devices and marked and/or equipped with appropriate channelization features to provide guidance and warning both day and night, they function as traffic control devices.

04 Where on-street parking is provided adjacent to the buffer area of a separated bicycle lane, pedestrians will need to access those vehicles.

*Guidance:*

05 *BIKE LANE (R3-17) signs (see Figure 9B-1) should be used to distinguish a separated bicycle lane from a general-purpose lane. Refer to Paragraph 00a and 00b in this section.*

06 *Where an on-street parking lane serves as the separation between a general-purpose lane and a separated bicycle lane, a buffer space should be provided between the parking lane and the bicycle lane to allow for opening doors of parked vehicles. Refer to Paragraph 00a and 00b in this section.*

Support:

07 Separated bicycle lanes may be designed for one-way or two-way bicycle travel. Providing one-way separated bicycle lanes in the same direction as and on the right-hand side of the general-purpose lane, whether on a one-way or two-way roadway, accommodates the expectations of road users and might result in fewer conflict points at intersections or driveway crossings.

Option:

08 Separated bicycle lanes may be provided on one or both sides of a roadway or in a center median.

08a A through separated bicycle lane may be positioned to the right of a right turn only lane or to the left of a left turn only lane, if bicycle signals are used. Refer to Section 4H.101(CA) for optional use of Bicycle Signal Faces.

Support:

09 The presence of two-way separated bicycle lanes on one side of a roadway or in a center median can introduce additional challenges and conflict points, which can warrant additional design considerations when selecting the design for a separated bicycle lane. These considerations include design requirements for pedestrians who would interact with the separated bicycle lane.

**Standard:**

10 **The edge line and lane line colors used for separated bicycle lanes shall conform to the requirements in**

**Chapter 3A (see Figure 9E-7).**

10a **Where separated bikeways (cycle track or separated bicycle lane) are designed for two-way travel, a solid yellow line shall be used to separate the two directions of travel where passing is not permitted. A broken yellow line shall be used where passing is permitted (Refer to Figure 9E-106(CA); refer to Section 9E.13 for marking patterns).**

11 **Directional arrows shall be used in conjunction with the bicycle lane symbol or word marking in separated bicycle lanes, placed downstream from the symbol or word marking. Refer to Paragraph 00a and 00b in this section.**

11a **The Bike Symbol pavement markings (Figure 9E-1) shall be placed on the far side of each intersection.**

Option:

11b The dashed bike lane marking, with or without green-colored pavement between left and right dash may be placed through an intersection.

11c The DO NOT ENTER (R5-1) sign with the supplemental EXCEPT BICYCLES (R3-7bP) regulatory plaque may be used on separated bikeways (cycle tracks or separated bicycle lanes) to reduce the likelihood of accidental entrance by motor vehicles.

**Standard:**

12 **Turns on red shall be prohibited across separated bicycle lanes while bicyclists are allowed to proceed through the intersection.**

Support:

13 Additional information on signals for bicycle facilities is found in Chapter 4H.

**Standard:**

14 **The buffer space for a separated bicycle lane shall be marked with solid longitudinal lines. Refer to Paragraph 00a and 00b in this section.**

Support:

14a Refer to FHWA's List of Known Errors for error in Paragraph 14 text. Refer to Section 1A.04 for more details.

**Standard:**

15 **A marked buffer space that is 2 feet or wider for a separated bicycle lane, including those buffer spaces where tubular markers are provided, shall use chevron or diagonal markings within the buffer, unless physical separation is provided that occupies the majority of the buffer space, such as raised islands or other physical dividers, or such as where an on-street parking lane occupies the majority of the buffer space. Refer to Paragraph 00a and 00b in this section.**

15a **If accessible parking or loading zones are provided on a roadway alongside a separated bikeway (cycle track or separated bicycle lane), then unobstructed access by bicycles shall be maintained.**

*Guidance:*

16 *Where used in the buffer area of a separated bicycle lane, the spacing of chevrons or diagonal markings should be 10 feet or greater. Refer to Paragraph 00a and 00b in this section.*

17 *Crosswalks that cross a separated bicycle lane should be marked consistent with the style of crosswalk marking provided across the adjacent general-purpose lane.*

Support:

18 Where on-street parking is provided as the physical separation adjacent to the buffer area of a separated bicycle lane, the chevron or diagonal marking provisions in Section 9E.06 apply to the area outside of the marked parking area within the buffer (see Figure 9E-7).

19 Intersection treatments for separated bicycle lanes can vary depending on the geometric and operational conditions at the intersection (see Section 9E.02).

*Guidance:*

20 *If used in buffer-separated bicycle lanes, channelizing devices should be placed in the buffer space and at least 1 foot from the longitudinal bicycle lane pavement marking.*

21 *The flexible bikeway separator posts should be placed in the center of a marked buffer that is 3 feet wide preferred, with 2 feet being the minimum width.*

Option:

22 For the separated bikeway (cycle track or separated bicycle lane) at sidewalk level, the separation may include the flexible bikeway separator posts 1.5 feet minimum from face of curb.

*Guidance:*

23 *An inflexible physical barrier should be used in lower speed environments (where the posted speed is 35 mph or less). An inflexible physical barrier should be placed in a marked buffer of 3 feet wide preferred, with 2 feet minimum width. In higher speed*

*environments a concrete barrier should be used.*

Option:

24 For a separated bikeway at sidewalk level, the separation may include the inflexible physical barrier 1.5 feet minimum from face of curb.

## Section 9E.08 Counter-Flow Bicycle Lanes (Class II Bikeway (Bike Lane or Buffer-Separated Bicycle Lane) or Class IV Bikeway (Cycle Track, Separated Bikeway or Separated Bicycle Lane))

Support:

01 Counter-flow bicycle lanes are one-directional and provide a lawful path of travel for bicycles in the opposite direction from general traffic on a roadway that allows general traffic to travel in only one direction.

02 Counter-flow bicycle lanes establish two-way traffic on a roadway. Section 9B.21 contains information on the Left Turn Yield to Bicycles (R10-12b) sign used with traffic signals and counter-flow bicycle lanes.

02a Counter-flow bicycle lanes can be provided as a Class II (bike lane, bicycle lane or buffer-separated bicycle lane) or as a Class IV Bikeway (cycle track, separated bikeway or separated bicycle lane), depending upon the physical separation provided between a general-purpose lane and a bicycle lane. If the physical separation is provided by a pattern of pavement markings without the presence of vertical elements, then it is a Class II Bikeway and if the physical separation is provided by vertical objects or vertical separation, then it is a Class IV Bikeway. Refer to Sections 1C.02, 9E.06, 9E.07 and SHC § 890.4.

*Guidance:*

03 *Where used, a counter-flow bicycle lane should be marked such that bicycles in the counter-flow lane travel on their right-hand side of the road in accordance with normal rules of the road, with opposing traffic on the left.*

**Standard:**

04 **Counter-flow bicycle lanes located at the edge of the roadway shall use double yellow center line pavement markings (see Section 3B.01), a painted median island, a raised median island (see Chapter 3J), or some form of physical separation where the speed limit is 30 mph or less.**

05 **For speed limits 35 mph or greater, a buffer per Section 3B.25, a painted or raised median island, or some form of physical separation shall be used to separate a counter-flow bicycle lane from the adjacent travel lane.**

*Guidance:*

06 *Lane extension markings should be used where counter-flow bicycle movements cross intersections.*

07 *Counter-flow bicycle lanes should not be used between a general-purpose lane and an on-street parallel parking lane for motor vehicles.*

Support:

08 Counter-flow bicycle lanes located between a general-purpose lane and an on-street parallel parking lane for motor vehicles can limit visibility of bicycles for vehicles exiting the parking lane, potentially impacting the safety of bicyclists. Locating counter-flow bicycle lanes at the edge of the roadway can reduce conflicts for bicycles.

**Standard:**

09 **Where signs are provided to regulate turns from streets or driveways that intersect with a roadway that has a counter-flow bicycle lane, ONE WAY signs (see Section 2B.49) shall not be used. Movement Prohibition signs (see Section 2B.26) with supplemental EXCEPT BICYCLES (R3-7bP) regulatory plaque(s) shall be used (see Figure 9E-8).**

10 **If a DO NOT ENTER ~~(R5-1) sign(s)~~package is used at egress points for motor vehicle traffic, the EXCEPT BICYCLES (R3-7bP) regulatory plaque(s) shall be placed under the DO NOT ENTER sign (see Figure 9E-8) where a counter-flow bicycle lane is used.**

11 **Where intersection traffic controls are provided (such as STOP or YIELD signs or traffic signals), appropriate devices shall be provided and oriented toward bicyclists in the counter-flow lane.**

12 **At signalized locations, appropriate bicycle signalization (see Chapter 9F) shall be provided and oriented toward bicyclists in the counter-flow lane, including a method for counter-flow bicycles to actuate the green phase for the counter-flow movement.**

Support:

13 Higher levels of traffic control or additional signalization, signing, and/or pavement marking treatments can be helpful for intersecting traffic where the counter-flow bicycle movement is unexpected.

*Guidance:*

14 *A Bicycle Cross Traffic warning plaque (see Section 9C.06) should be used below a STOP sign on the crossroad at*

*intersections where a counter-flow bicycle lane is provided on the primary street.*

## Section 9E.09 Shared-Lane Marking

Support:

01 The "Standard Highway Signs" publication (see Section 1A.05) contains details on the shared-lane marking symbol.

Option:

02 The shared-lane marking shown in Figure 9E-9 may be used to:

A. Assist bicyclists with lateral positioning in a shared lane with on-street parallel parking in order to reduce the chance of a bicyclist impacting the open door of a parked vehicle,
B. Assist bicyclists with lateral positioning in lanes that are too narrow for a motor vehicle and a bicycle to travel side-by-side within the same traffic lane,
C. Alert road users of the lateral location bicycles are likely to occupy within the traveled way,
D. Encourage safe passing of bicycles by motor vehicles,
E. Reduce the incidence of wrong-way bicycling in the roadway, and
F. Assist bicyclists with lateral positioning in mixing zones.
G. Assist bicyclists with lateral positioning within a traffic circle or roundabout (Refer to Figure 9E-104(CA)),
H. Supplement a signed bicycle route that is identified as a Class III bicycle facility,
I. Encourage the lateral positioning of bicyclists away from on-street angled parking, and
J. Indicate that a bicycle can travel straight through a right-turn or left-turn only lane.

*Guidance:*

03 ~~*The shared-lane marking should not be placed on roadways that have a speed limit of 40 mph or greater.*~~

**Standard:**

03a **The shared lane marking shall not be placed on roadways that have a posted speed limit greater than 30 mph, except at or near an intersection for the purpose of connecting a Class I, Class II, or Class IV bikeway through the intersection. Refer to SHC § 891.9.**

Support:

03b On roadways that have a speed limit greater than 30 mph, a Class II bikeway or Class IV bikeway is more appropriate to facilitate bicycle travel.

**Standard:**

04 **Shared-lane markings shall not be used in:**

**A. Shoulders;**
**B. Bicycle lanes or in designated extensions of bicycle lanes through intersections or driveways,**
**C. A travel lane in which light-rail transit vehicles also travel;**
**D. The transition area where a motor vehicle entering a mandatory turn lane must weave across bicyclists in bicycle lanes;**
**E. Two-stage turn boxes;**
**F. Bicycle boxes;**
**G. Shared-use paths or shared-use path crossings; or**
**H. Physically-separated bikeways, either in the roadway or on an independent right-of-way.**

05 **Green-colored pavement shall not be applied as a background to shared-lane markings (see Section 3H.06).**

Option:

06 Black background markings (see Section 3A.03) may be used in combination with shared-lane markings to enhance contrast.

Support:

06a The effective lane width, as used in this section, indicates the width of the pavement available after subtracting the width of the parked vehicle and door zone from the distance of the lane line/centerline to the face of the curb/edge of the pavement.

*Guidance:*

07 *If used in a shared lane with on-street parallel parking, if the effective lane width is 14 feet or greater, shared-lane markings should be placed so that the centers of the markings are a minimum of ~~12~~ 13 feet from the face of the curb, or from the edge of the pavement where there is no curb. If the effective lane width is less than 14 feet, the marking should be centered within the effective lane width. Refer to Figure 9E-105(CA).*

08 *If used on a street without on-street parking that has an outside travel lane that is less than 14 feet wide, shared-*

*lane markings should be centered in the travel lane. If used on a street without on-street parking that has an outside travel lane with lane width equal to 14 feet or greater, the shared lane markings should be centered placed so that the centers of the markings are a minimum of 4 feet from the face of the curb, or from the edge of the pavement where there is no curb.*

08a *If used on a shared right-turn or left-turn only lane that is less than 14 feet wide, to indicate that a bicycle may travel straight through an intersection, the centers of the Shared Lane Markings should be centered in the travel lane. If used on a shared right-turn or left-turn only lane that is 14 feet or greater, the Shared Lane Markings should be centered at least 4 feet from the edge of channelizing line. Refer to Figure 9E-107(CA) and Figure 9E-108(CA).*

08b *Placing Shared Lane Markings on the wheel paths should be avoided where possible.*

Support:

08c When a shared lane is sufficiently wide that motor vehicles can pass bicyclists within the lane, the purpose of the Shared Lane Marking is to indicate a bicyclist line of travel that facilitates passing while avoiding fixed obstructions (e.g. drainage inlet, gutter joint). When a shared lane is not wide enough to enable passing with adequate clearance, the purpose of the marking is to indicate a bicyclist line of travel that deters passing within the lane.

**Spacing**

*Guidance:*

09 *At non-intersection locations, the shared-lane marking should be spaced at intervals of not less than 50 feet or greater than 250 feet.*

10 *The first shared-lane marking downstream from an intersection should be placed no more than 50 feet from the intersection.*

Option:

10a Closer spacing between Shared Lane Markings may be considered approaching, traversing, and departing intersections, where there is higher potential for conflicts between motorists and bicyclists. Refer to Figure 9E-3(CA) and Figure 9E-4.

10b Closer spacing between Shared Lane Markings may be considered where there are sight distance constraints, for example, approaching the crest of a vertical curve.

10c Closer spacing between Shared Lane Markings may be considered to guide bicyclists when deviating from a straight line of travel (e.g. merging, angled railroad crossing).

11 Section 9B.14 describes a Bicycles Allowed Use of Full Lane sign that may be used in addition to or instead of the shared-lane marking to inform road users that bicyclists might occupy the travel lane.

*Guidance:*

12 *If the Bicycles Allowed Use of Full Lane (R9-20) sign is used as an addition to shared-lane marking, the shared-lane marking should be placed so that the center of the marking is in the approximate center of the travel lane.*

Option:

13 The shared-lane marking may be used (see Figure 9E-9) where the width of the roadway is insufficient to continue a bicycle lane or separated bikeway on the approach to the intersection, or it is advantageous to terminate the bicycle lane or separated bikeway in order to provide for a shared lane.

14 The shared-lane marking may be used on an approach to an intersection (see Figure 9E-5) in a mandatory turn lane to indicate a shared space for bicyclists and motorists where there is insufficient width in the roadway for both the bicycle lane and turn lane.

## Section 9E.10 Shared-Lane Markings for Circular Intersections

Option:

01 Shared-lane markings may be used in the circulatory roadway of circular intersections.

*Guidance:*

02 *If used, shared-lane markings should be placed in the center of the lane when used inside of circulatory roadways.*

Support:

03 The "Guide for Development of Bicycle Facilities," 2012 Fourth Edition, American Association of State Highway and Transportation Officials, contains information on designing for bicycles on shared-used paths in lieu of, or in addition to, using shared-lane markings in the circulatory roadway of the intersection.

## Section 9E.11 Two-Stage Bicycle Turn Boxes

Support:

01 Two-stage bicycle turn boxes allow bicyclists the opportunity to make turns at an intersection or crossing point

instead of requiring them to merge into traffic upstream or to dismount and use a crosswalk at the intersection or crossing point.

02 Section 9B.18 contains information on regulatory signing that shall be used in conjunction with a two-stage bicycle turn box pavement marking where bicyclists are required to use the turn box.

03 Section 9D.13 contains information on guide signing that can be used in conjunction with a two-stage bicycle turn box pavement marking where bicyclists are not required to use the turn box.

**Standard:**

04 **If used, two-stage bicycle turn boxes shall be located:**

**A. In an area between the closest through bicycle or motor vehicle movement and the parallel crosswalk (see Drawing A in Figure 9E-10),**

**B. In an area between the through bicycle movement and the parallel pedestrian crossing movement if no crosswalk is established (see Drawing B in Figure 9E-10),**

**C. On the innermost side of the bicycle facility provided that the two-stage turn box is located in a portion of the intersection where parallel or motor vehicle traffic does not travel, such as projections of islands or parking lanes (see Drawing C in Figure 9E-10), or**

**D. In an area between the through bicycle movement and a pedestrian facility for T-intersections (see Drawing D in Figure 9E-10).**

Support:

04a Refer to FHWA's List of Known Errors for error in Paragraph 4, Item C text. Refer to Section 1A.04 for more details.

**Standard:**

05 **A two-stage bicycle turn box shall consist of at least one bicycle symbol pavement marking and at least one pavement marking arrow.**

06 **A turn arrow in the appropriate direction shall be used if a two-stage turn box is used with a one-way bicycle lane, and a through arrow in the appropriate direction shall be used if a two-stage turn box is used with a two-way bikeway (see Figure 9E-11).**

07 **A two-stage bicycle turn box shall be bounded on all sides by a solid white line.**

08 **For two-stage bicycle turn boxes that facilitate turns from a one-way bikeway, the bicycle symbol shall precede the pavement marking turn arrow in the direction of bicycle travel (see Figure 9E- 10).**

09 **Passive detection of bicycles in the two-stage bicycle turn box shall be provided if the signal phase that permits bicycles to enter the intersection during the second stage of their turn is actuated.**

*Guidance:*

10 *Engineering judgment should be used to develop the size of the two-stage bicycle turn box. Factors considered should include intersection geometry and keeping queued bicycles away from moving traffic, as well as peak hour bicycle volumes to avoid overflow of the two-stage turn box that subjects any bicyclist to conflicting movements.*

Option:

11 The two-stage turn box may use green-colored pavement.

**Standard:**

12 **If used, green-colored pavement shall encompass all of the two-stage turn box.**

13 **Where the path of vehicles lawfully turning on red would pass through a two-stage bicycle turn box, a full-time no-turn-on-red prohibition (see Section 2B.60) shall be provided for the crossroad approach.**

## Section 9E.12 Bicycle Box

Option:

01 A bicycle box (see Figure 9E-12) may be used to increase the visibility of stopped bicycles on the approach to a signalized intersection during the portion of the signal cycle when a red signal indication is being displayed to motor vehicles in the approach lane(s) that is behind the box.

*Guidance:*

02 *Providing a bicycle box on a signalized intersection approach where a discernible number of conflicts between vehicles turning across through bicycles in a bicycle lane has been demonstrated during the green interval of a signal should be evaluated based on engineering judgment or study.*

03 *Other treatments should be considered for conflicts between turning vehicles and through bicycles such as using leading or exclusive signal phases, or separating turning traffic from through traffic through mandatory turn lanes.*

04 *A bicycle lane should be used on the approach to a bicycle box.*

05 *A bicycle box should not be contiguous with a crosswalk. A stop line on the downstream end of the bicycle box should be used to mark the location where bicycles are required to stop.*

**Standard:**

06 **If used, the distance from the upstream edge of the bicycle box that is nearest to the stop line for motor vehicles to the downstream edge of the bicycle box that is nearest the crosswalk or intersection shall be at least 10 feet. At least one bicycle symbol marking (see Figure 9E-12) shall be used in the bicycle box.**

07 **Where an existing stop line for motor vehicles is relocated upstream to install a new bicycle box, the yellow change and red clearance intervals (see Section 4F.17) shall be recalculated and if necessary, reprogrammed to accommodate the length of the bicycle box.**

08 **Countdown pedestrian signals (see Section 4I.04) for the crosswalk or pedestrian crossing movement that crosses the approach shall accompany bicycle boxes that extend across more than one approach lane for motor vehicles. Countdown pedestrian signals used with bicycle boxes shall display the pedestrian change interval countdown without the need for actuation.**

09 **Turns on red shall be prohibited from the lane where a bicycle box is placed.**

Support:

10 Countdown pedestrian signals can inform bicyclists whether there is adequate time remaining to an adjacent lane before the onset of the green signal phase for that approach.

*Guidance:*

11 *Countdown pedestrian signals for the crosswalk or pedestrian crossing movement that crosses the approach should accompany single-lane bicycle boxes where it is demonstrated that bicycles arrive at the intersection at or near the end of the red signal indication being displayed to traffic in the approach lane(s) that is behind the box.*

Option:

12 Green-colored pavement may be used in a bicycle box.

**Standard:**

13 **If used, green-colored pavement shall be used in the full limits of the bicycle box.**

Support:

14 Section 9B.02 contains information on the EXCEPT BICYCLES (R3-7bP) regulatory plaque that can be used below the STOP HERE ON RED (R10-6 or R10-6a) sign (see Section 2B.59) to exempt bicyclists from the requirement of the advance stop line.

## Section 9E.13 Shared-Use Paths (Class I Bikeway (Bike Path))

Option:

01 Where shared-use paths are of sufficient width to designate two minimum width lanes, a solid yellow center line may be used to separate the two directions of travel where passing or traveling to the left of the line is not permitted. A broken yellow center line may be used where passing is permitted (see Figure 9E-13).

*Guidance:*

02 *Broken lines used on shared-use paths should have a nominal 3-foot segment with a 9-foot gap.*

Support:

02a A centerline marking is particularly beneficial in the following circumstances:

A. Where there is heavy use;
B. On curves with restricted sight distance; and,
C. Where the path is unlighted and nighttime riding is expected.

Option:

03 A solid white line may be used on shared-use paths to separate different types of users in the same direction. The R9-7 sign (see Section 9B.13) may be used to supplement the solid white line.

03a A solid white line may be used to delineate the traveled way of the bike path from the shoulder if the shoulder is paved with the same material as the bike path.

Support:

03b Refer to Caltrans' Highway Design Manual Index 1003.1 Class I Bikeways (Bike Paths).

04 Smaller size pavement word markings and symbols may be used on shared-use paths. Where arrows are needed on shared-use paths, half-size layouts of the arrows may be used (see Section 3B.20).

**Standard:**

05 **Where a shared-use path crosses a roadway, crosswalk markings shall be used (see Chapter 3C).**

Option:

06 **Where pedestrian and bicycle movements on a shared-use path are separated on the approach to a roadway crossing, parallel bicycle and pedestrian crossing markings may be used as shown in Figure 9E-14.**

*Guidance:*

07 *If parallel bicycle and pedestrian crossing markings are used where a shared-use path crosses a roadway, crossing areas for bicycles should use green-colored pavement if the shared-use path crossing has a high volume of either mode.*

### Barrier Posts on Class I Bikeways (Bike Path)

Support:

08 Before a decision is made to install barrier posts, consideration needs to be given to the implementation of other remedial measures, such as Bike Path Exclusion (R44A(CA)) signs (refer to Section 9B.07) and/or redesigning the path entry so that motorists do not confuse it with vehicle access.

09 It could be necessary to install barrier posts across the width of the bike path, at entrances to bike paths to prevent motor vehicles from entering or to slow down the bicyclists when approaching an intersection with vehicular traffic. This can occur, where the bike paths intersect with vehicular roadways, especially if the width of the bike path at its intersection, could lead to confusion for drivers on the vehicular roadway that the bike path is a vehicular roadway. The number of barriers posts installed need to be an odd number, as they will result in even number of passages, to provide equal number of passage ways for each direction. When locating such installations, care needs to be taken to assure that barriers are well marked and visible to bicyclists, day and night (i.e., install reflectors or reflectorized tape).

*Guidance:*

10 *An envelope around the barriers should be striped as shown in Figure 9E-17. If sight distance is limited, special advance warning signs or painted pavement warnings should be provided. Where more than one post is necessary, 5 foot spacing should be used to permit passage of bicycle-towed trailers, adult tricycles, and to assure adequate room for safe bicycle passage without dismounting. Barrier post installations should be designed so they are removable to permit entrance by emergency and service vehicles.*

Support:

11 Generally, barrier configurations that preclude entry by motorcycles present safety and convenience problems for bicyclists. Such devices are used only where extreme problems are encountered.

## Section 9E.14 Bicycle Route Pavement Markings (Class III Bikeway (Bike Route))

Option:

01 Bicycle route pavement markings simulating guide signs for bicycle routes (see Section 9D.02 through 9D.07) and route auxiliary plaques (see Section 9D.08) may be used to supplement guide signing to help bicyclists in navigation (see Figure 9E-15).

**Standard:**

02 **Bicycle route pavement markings shall be limited to shared-use paths (Class I Bikeway), separated bicycle lanes (Class II or Class IV Bikeway), or buffer-separated bicycle lanes (Class II Bikeway). Bicycle route pavement markings shall not be used in standard bicycle lanes (Class II Bikeway) or in shared lanes (Class III Bikeway).**

Support:

02a Class III Bikeways (Bike Route) are shared routes and do not require pavement markings. In some instances, a 4 to 6 inch wide white edge stripe on local agency roadways and a 6 inch wide stripe on the state highways, separating the traffic lanes from the shoulder can be helpful in providing for safer shared use. This practice is particularly applicable on rural highways and on major arterials in urban areas where there is no vehicle parking.

*Guidance:*

03 *A systematic methodology of locating guide signs for bicycle routes adjacent to the bicycle route pavement marking should be used that includes locations where either the sign or the pavement marking can exist alone to avoid overuse of the guide sign or the pavement marking.*

04 *The route marker pavement marking should be elongated.*

05 *The location, size, and materials of the route marker pavement marking should be designed in a manner that will minimize the loss of traction for bicyclists under wet conditions.*

## Section 9E.15 Bicycle Detector Symbol

Option:

01 The bicycle detector symbol (see Figure 9E-16) may be placed on the pavement indicating the optimum position for a bicycle to actuate the signal.

02 Appropriately-sized WAIT HERE FOR GREEN word markings may be placed on the pavement immediately below the bicycle detector symbol.

03 A R10-22 sign (see Section 9B.20) may be installed to supplement the bicycle detector symbol pavement marking.

Support:

04 The "Standard Highway Signs" publication (see Section 1A.05) contains details on the bicycle detector symbol.

05 Section 3H.06 contains information on incorporating green-colored pavement as a background enhancement to the bicycle detector symbol.

06 Section 4H.102(CA) and Figure 4H-101(CA) contain information on bicycle detectors and their locations.

## Section 9E.16 Pavement Markings for Obstructions

*Guidance:*

01 *Markings as shown in Figure 9E-17 should be used at the location of obstructions in the center of a shared-use path or a physically-separated bikeway, including vertical elements intended to physically prevent unauthorized motor vehicles from entering the path.*

02 *For roadway situations where it is impracticable to eliminate a drain grate or other roadway obstruction that is inappropriate for bicycle travel, white markings applied as shown in Figure 9E-17 should be used to guide bicyclists around the condition.*

## Section 9E.17 Raised Devices (Class IV Bikeway (Cycle Track, Separated Bikeway or Separated Bicycle Lane))

Support:

01 Chapter 3I contains information on using channelizing devices to emphasize pavement marking patterns associated with certain bicycle facilities. A common application is the use of flexible raised devices to create separated bicycle lanes (see Section 9E.07).

02 Using inflexible raised devices immediately adjacent to the travel path of a bicyclist without a buffer creates a collision potential for bicyclists.

Option:

03 In accordance with Chapter 3I, channelizing devices may be used to emphasize a pavement marking pattern that establishes a bicycle lane or other bicycle facility provided that the installation of channelizing devices does not prevent motor vehicles from turning when the turn requires the motor vehicle to merge with the bicycle lane or facility as required by law or ordinance.

*Guidance:*

04 *If used, channelizing devices for bicycle facilities should be tubular markers (see Section 3I.02).*

05 *The selection of a raised device for use with bicycle facilities should consider the collision potential of both the post and the base since the base might still be present in the event the post is struck and missing.*

Support:

06 Measures to reduce the likelihood of a road user striking a channelizing device include marking a buffer space, improving lighting, improving retroreflectivity, or the periodic addition of taller vertical elements within runs of shorter elements.

**Standard:**

07 **Channelizing devices that are used to emphasize the pavement marking patterns of bicycle facilities shall not incorporate the color green into either the device or its retroreflective element to supplement the presence of green-colored pavement.**

Support:

07a Refer to Sections 3A.03 and 3I.01 for the color of channelizing devices, when they are used in bicycle facilities.


*Guidance:*

08 *If used in buffer-separated bicycle lanes, channelizing devices should be placed in the buffer space and at least 1 foot from the longitudinal bicycle lane pavement marking.*

Support:

09 Refer to FHWA's List of Known Errors for error in Paragraph 08 text. Refer to Section 1A.04 for more details.


## Figure 9E-1. Word, Symbol, and Arrow Pavement Markings for Bicycle Lanes

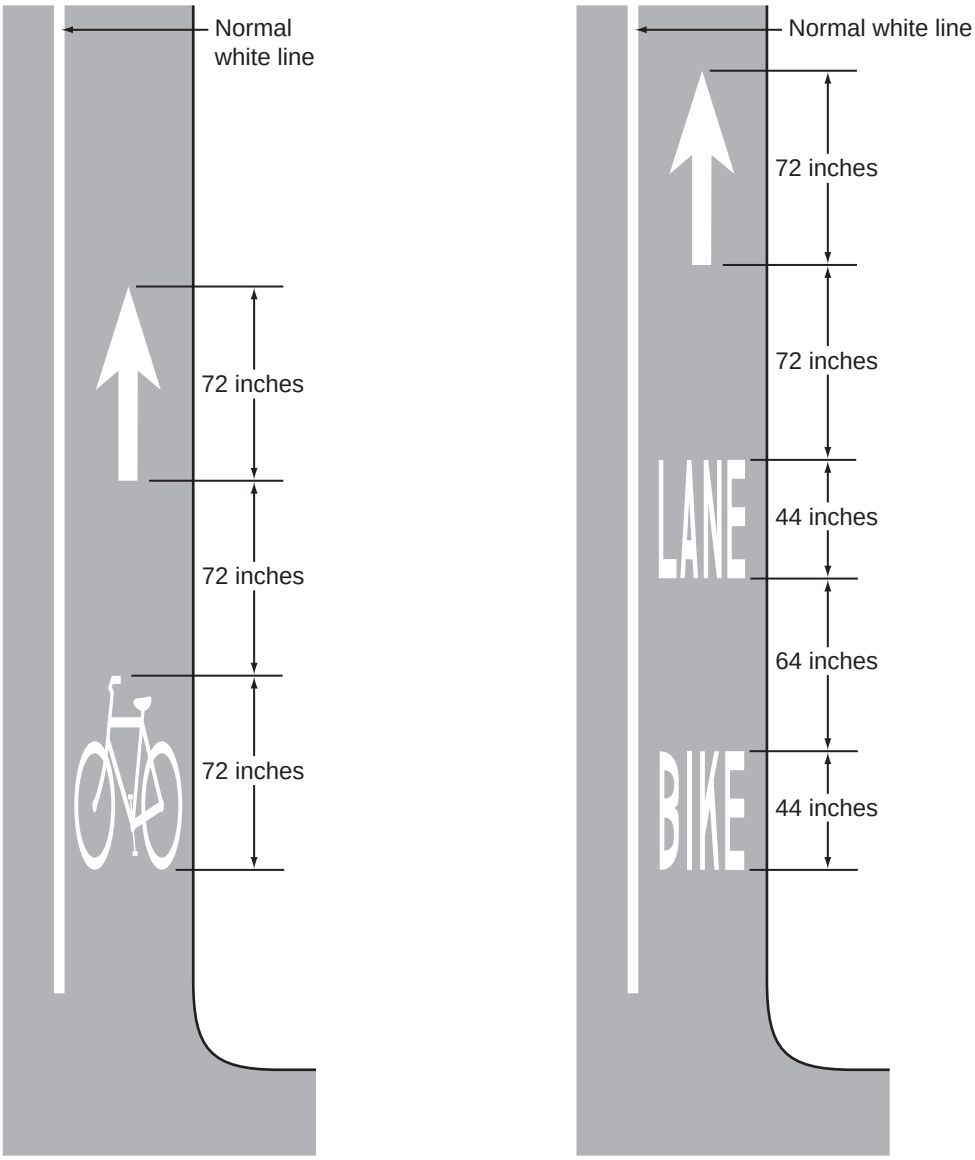



**A – Bike symbol**

**B – Word legends**

# Figure 9E-2. Example of Pavement Markings for Bicycle Lanes on a Two-Way Street

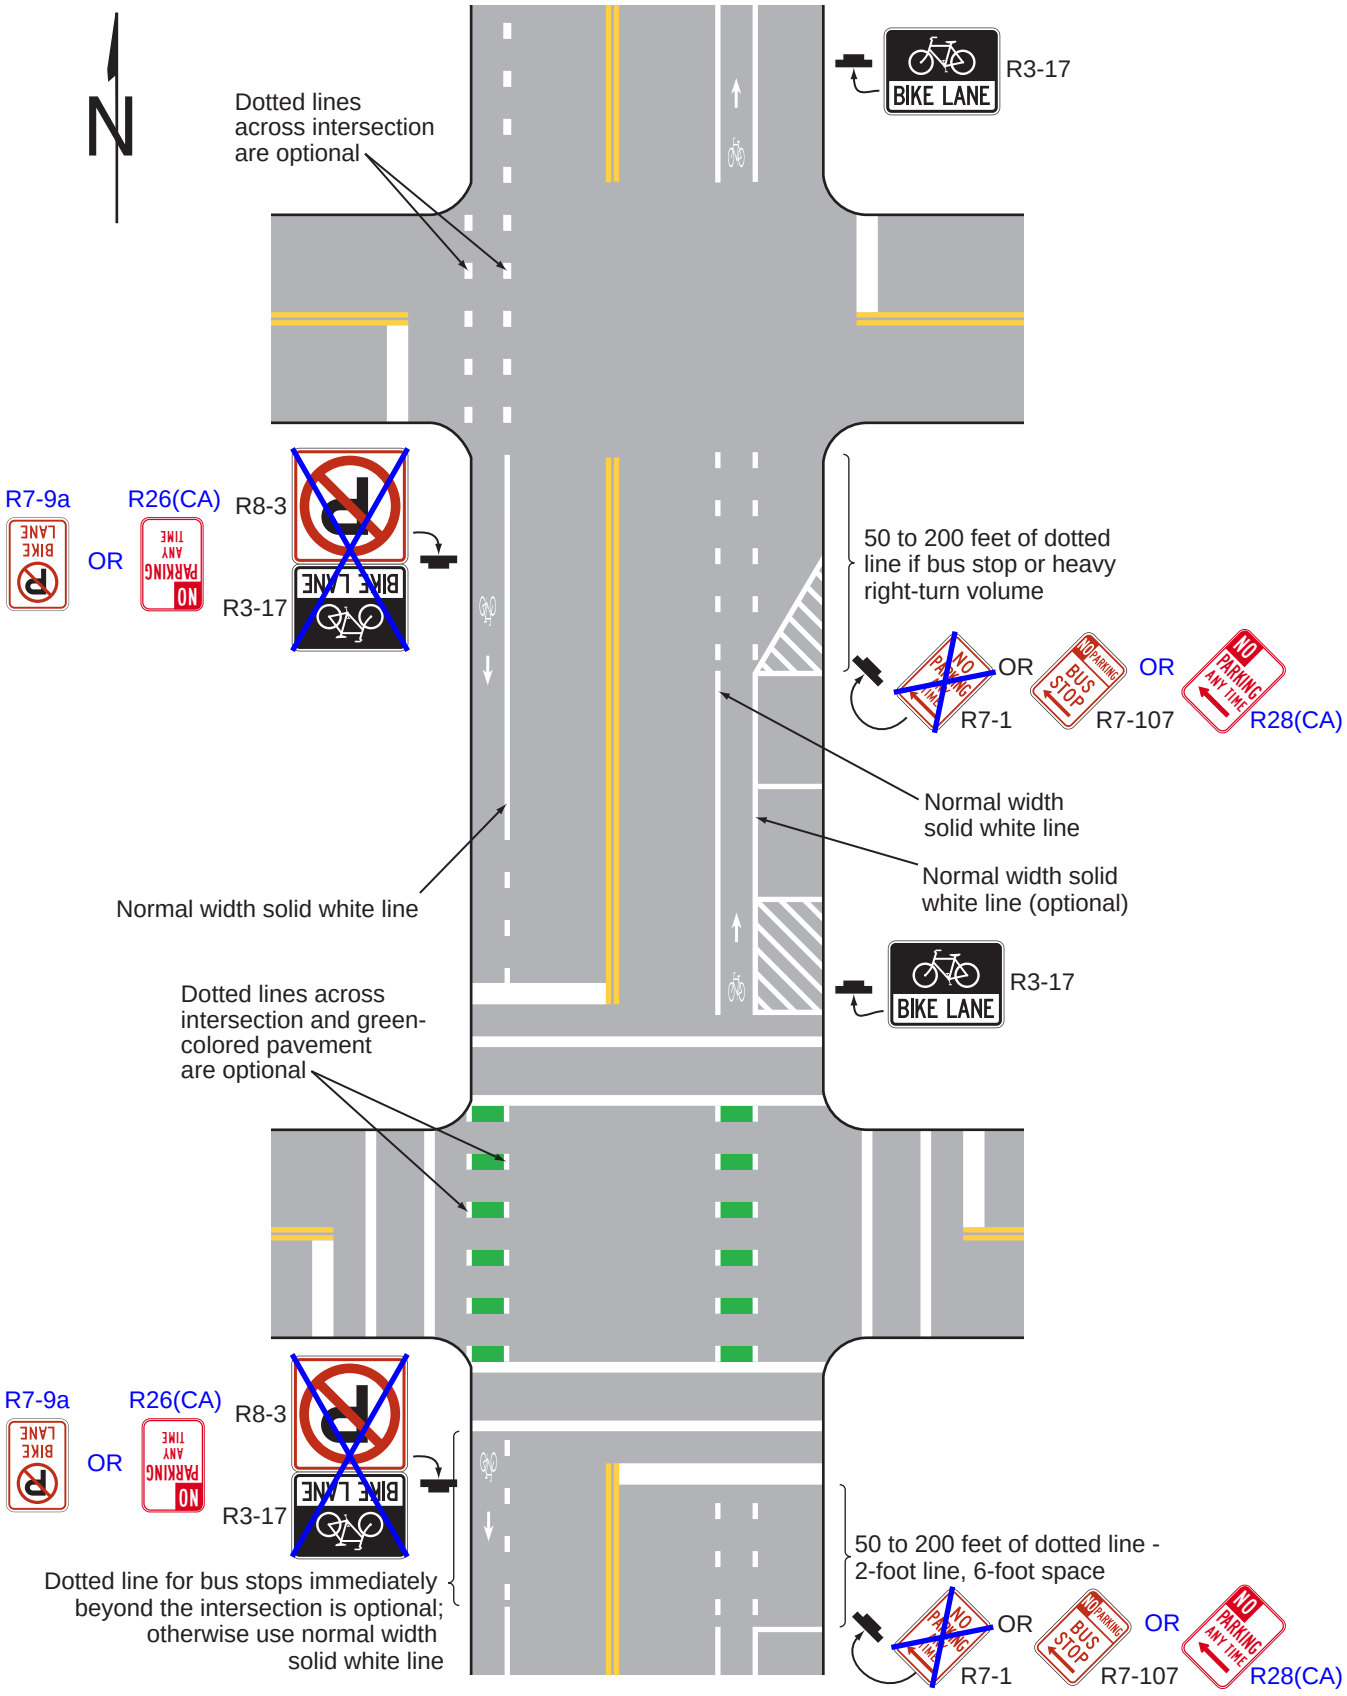

## *Figure 9E-2(CA). Example of Pavement Markings for Bicycle Lanes on a Two-Way Street (Sheet 1 of 2)*

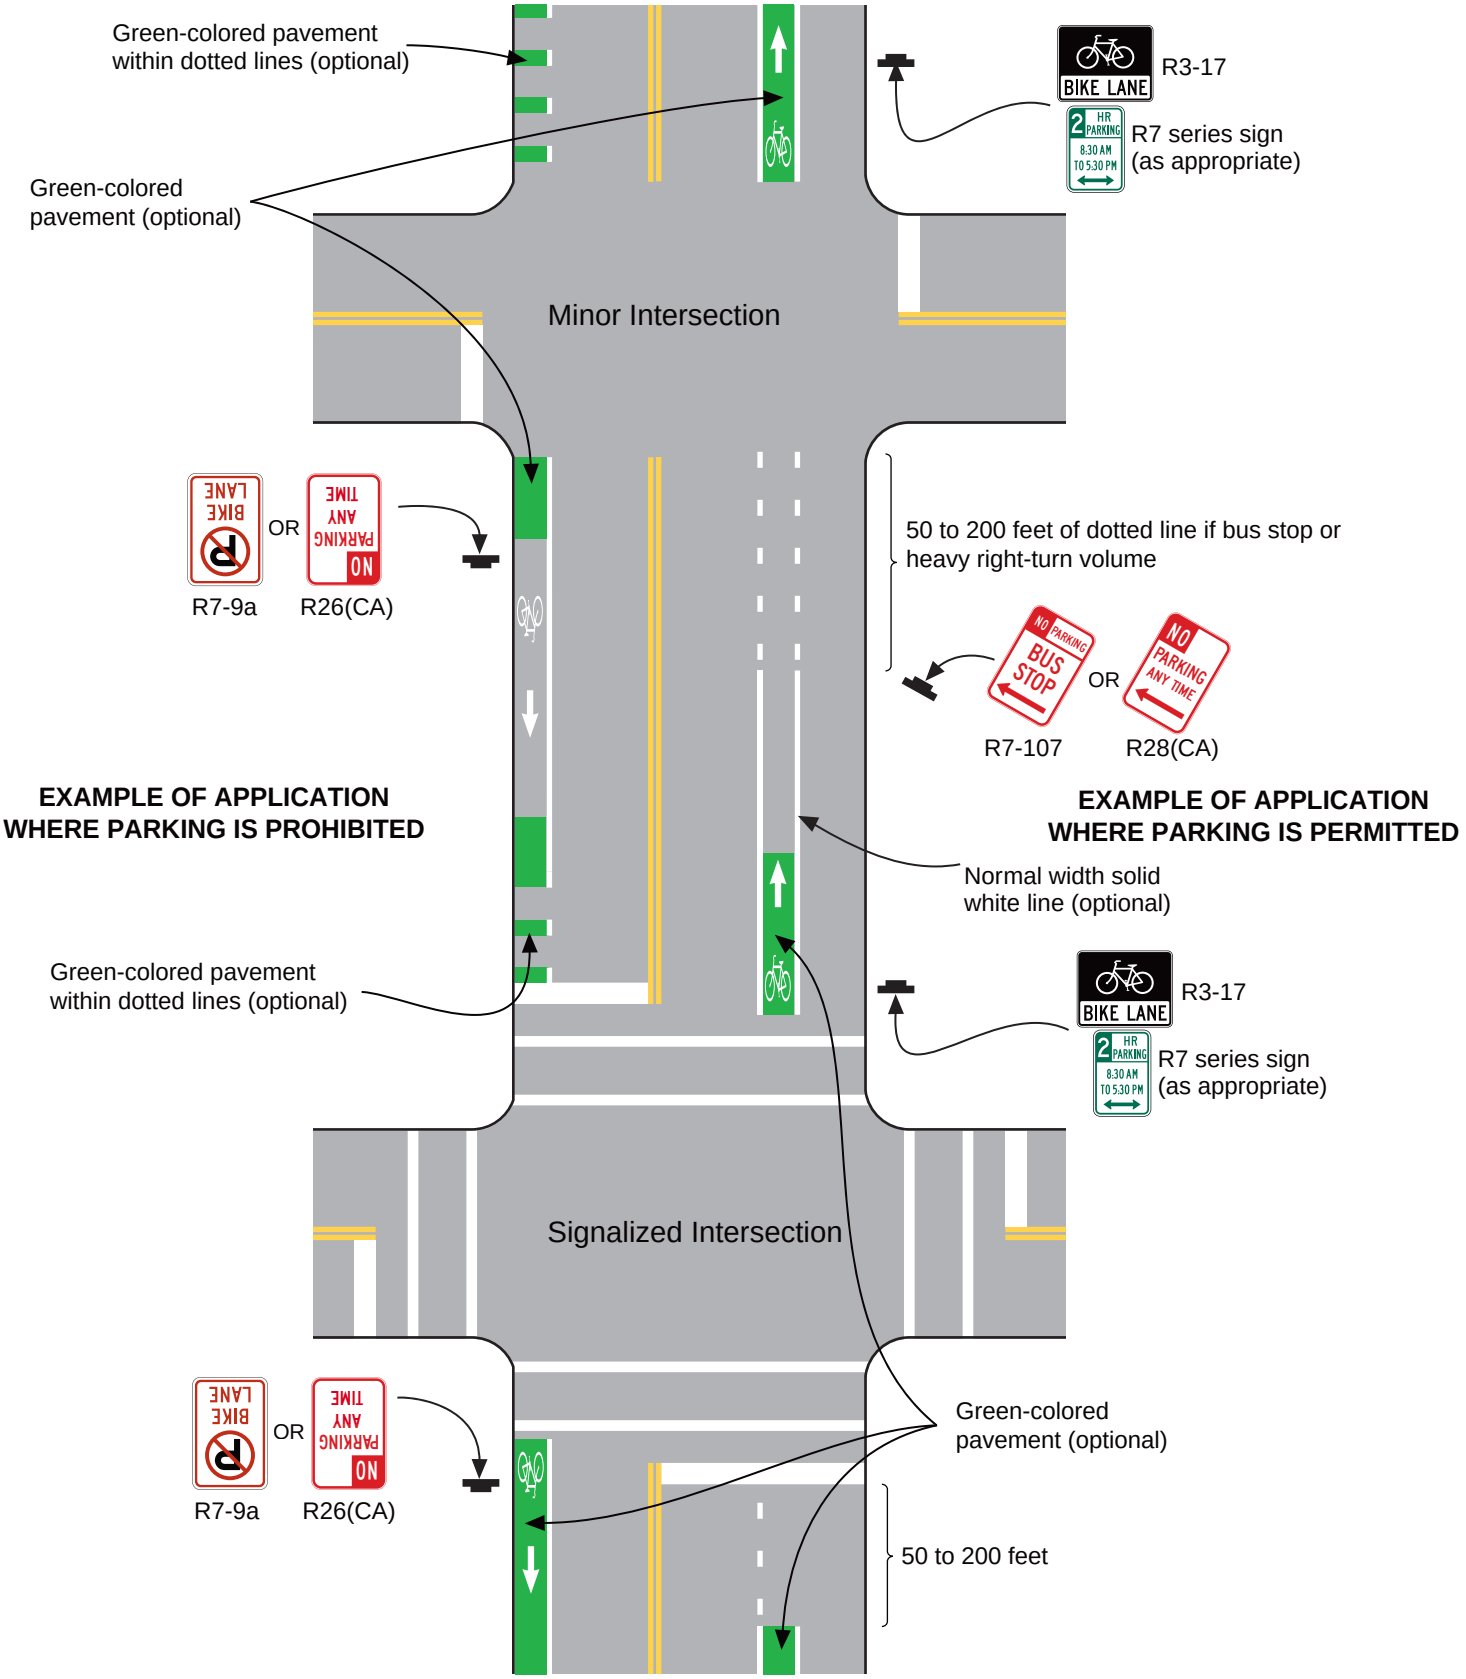

## *Figure 9E-2(CA). Example of Pavement Markings for Bicycle Lanes on a Two-Way Street (Sheet 2 of 2)*

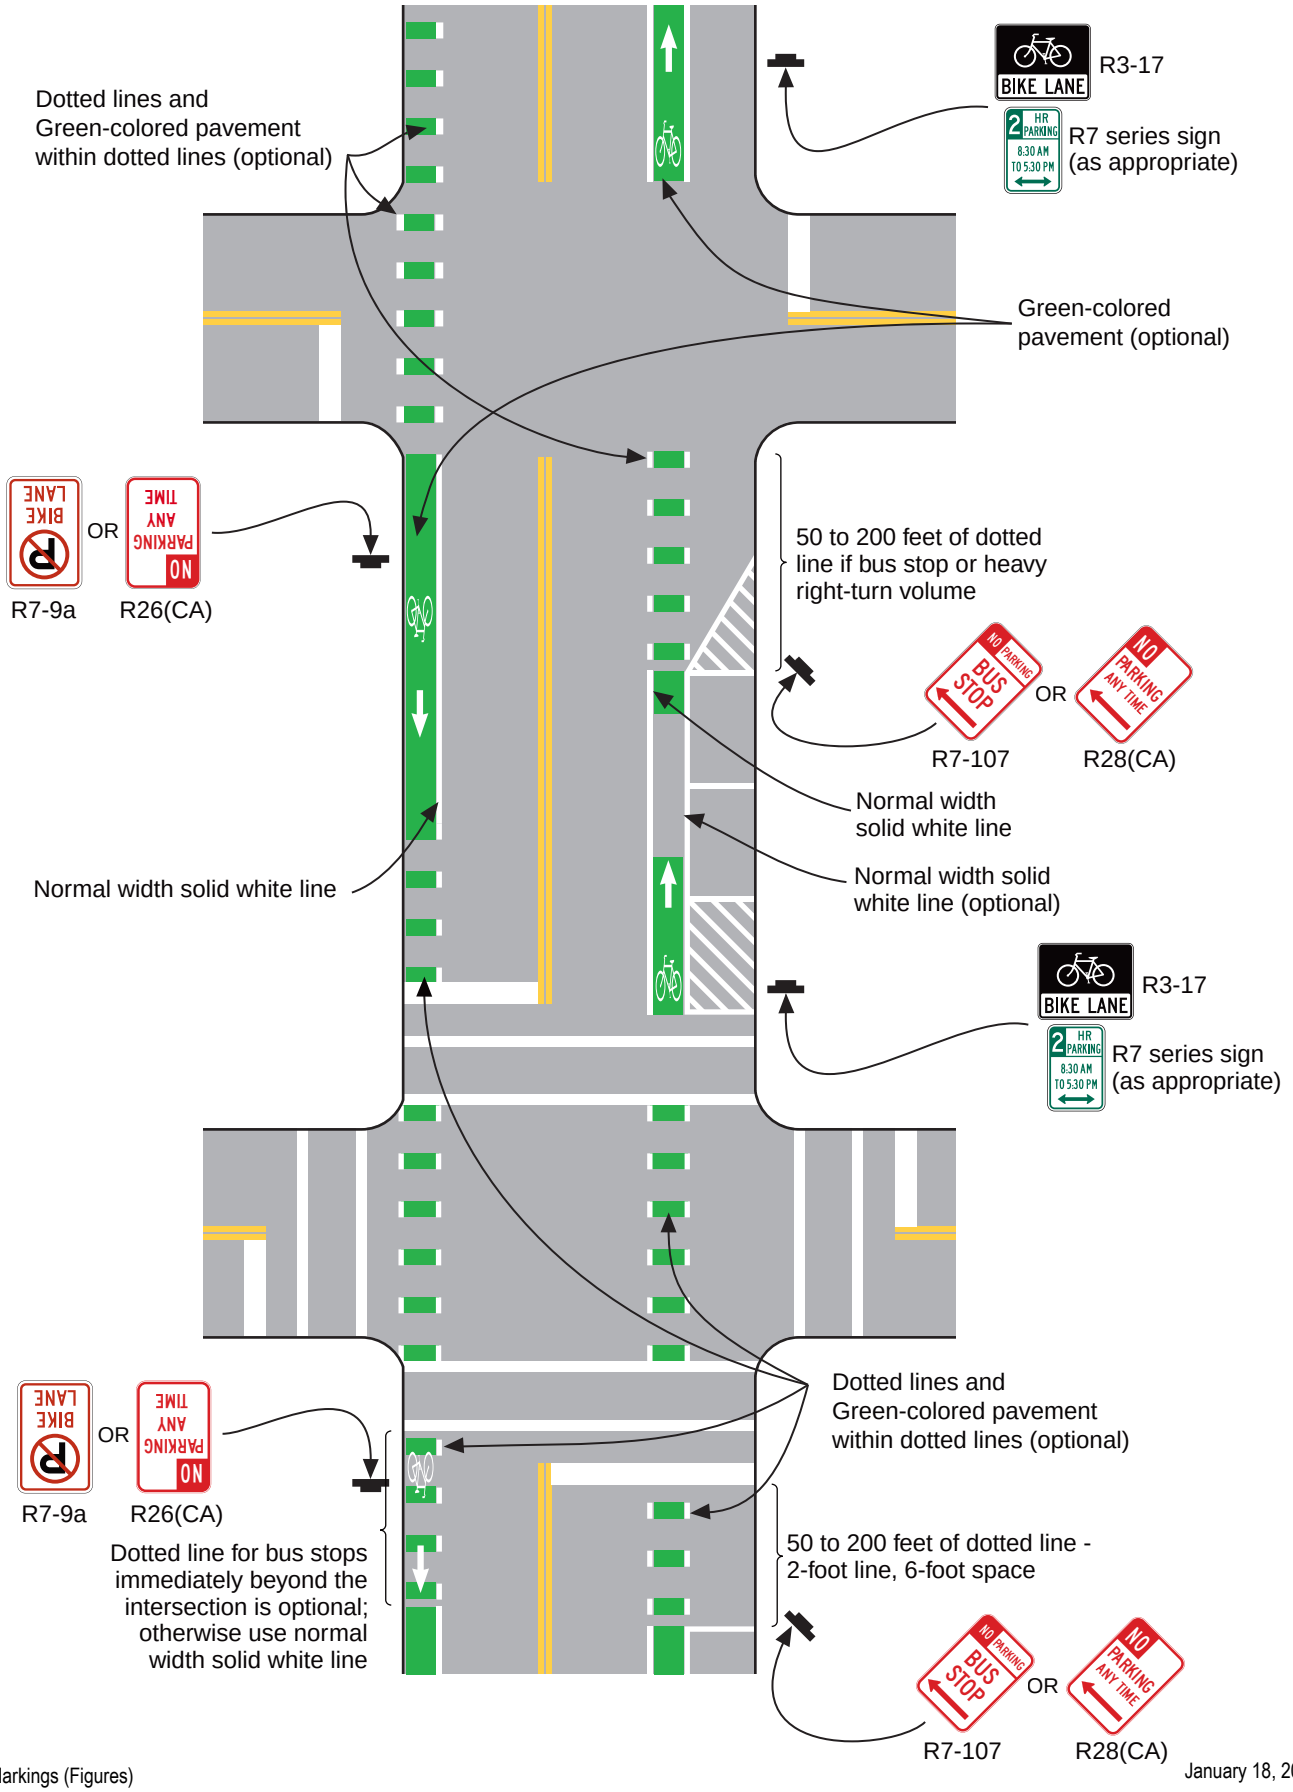


**Figure 9E-3. Examples of Bicycle Lane Markings on an Approach to an Intersection**
(Sheet 1 of 3)

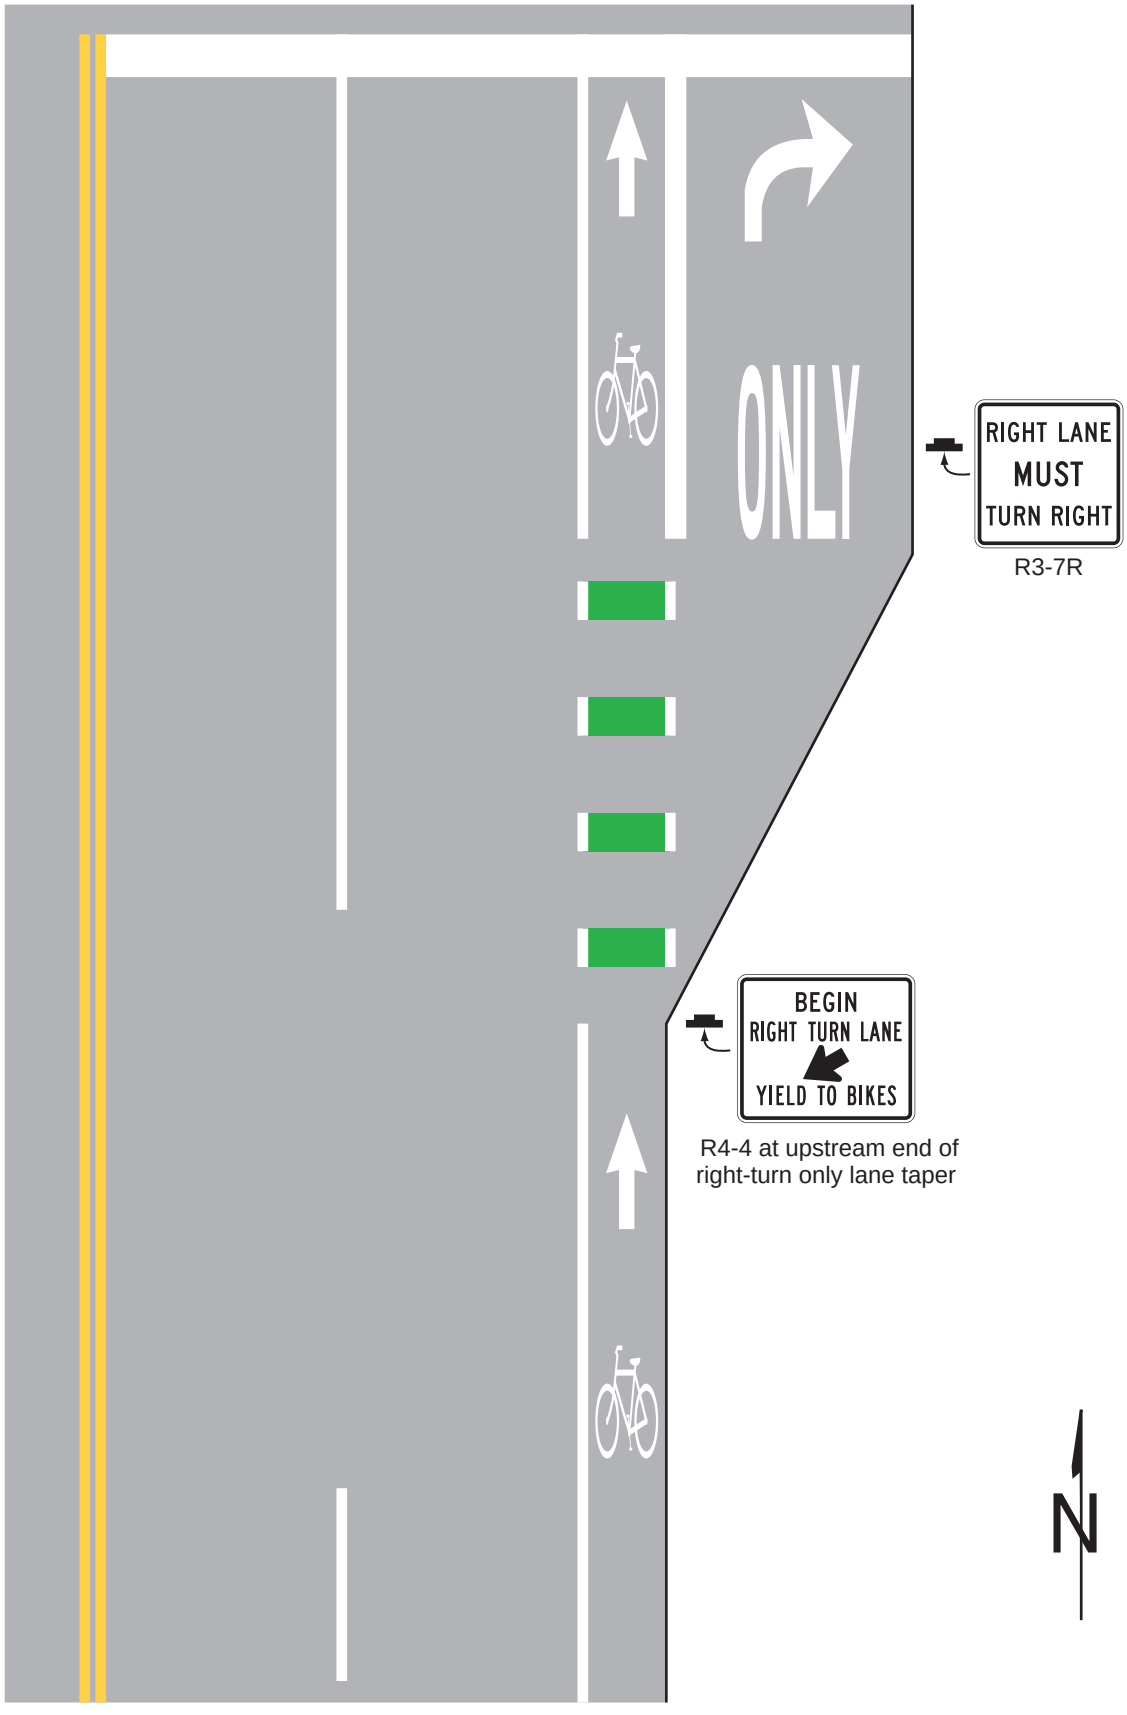


**Figure 9E-3. Examples of Bicycle Lane Markings on an Approach to an Intersection**
(Sheet 2 of 3)



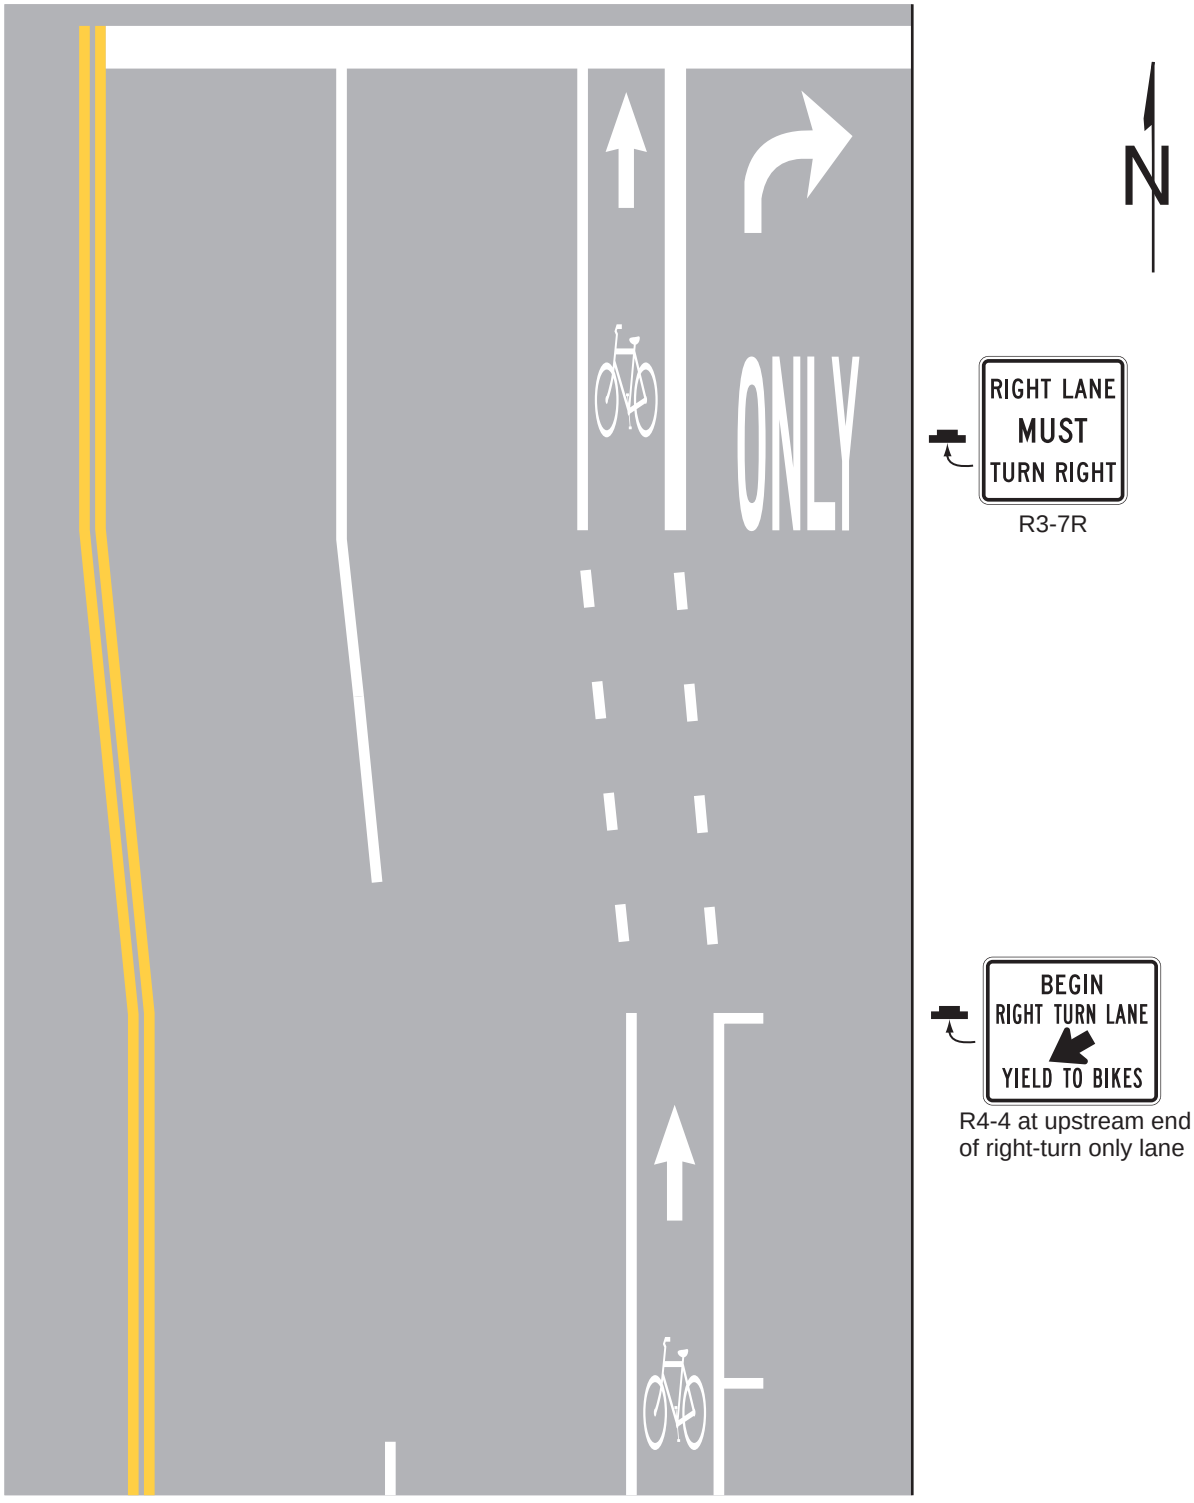


**Figure 9E-3. Examples of Bicycle Lane Markings on an Approach to an Intersection**
(Sheet 3 of 3)

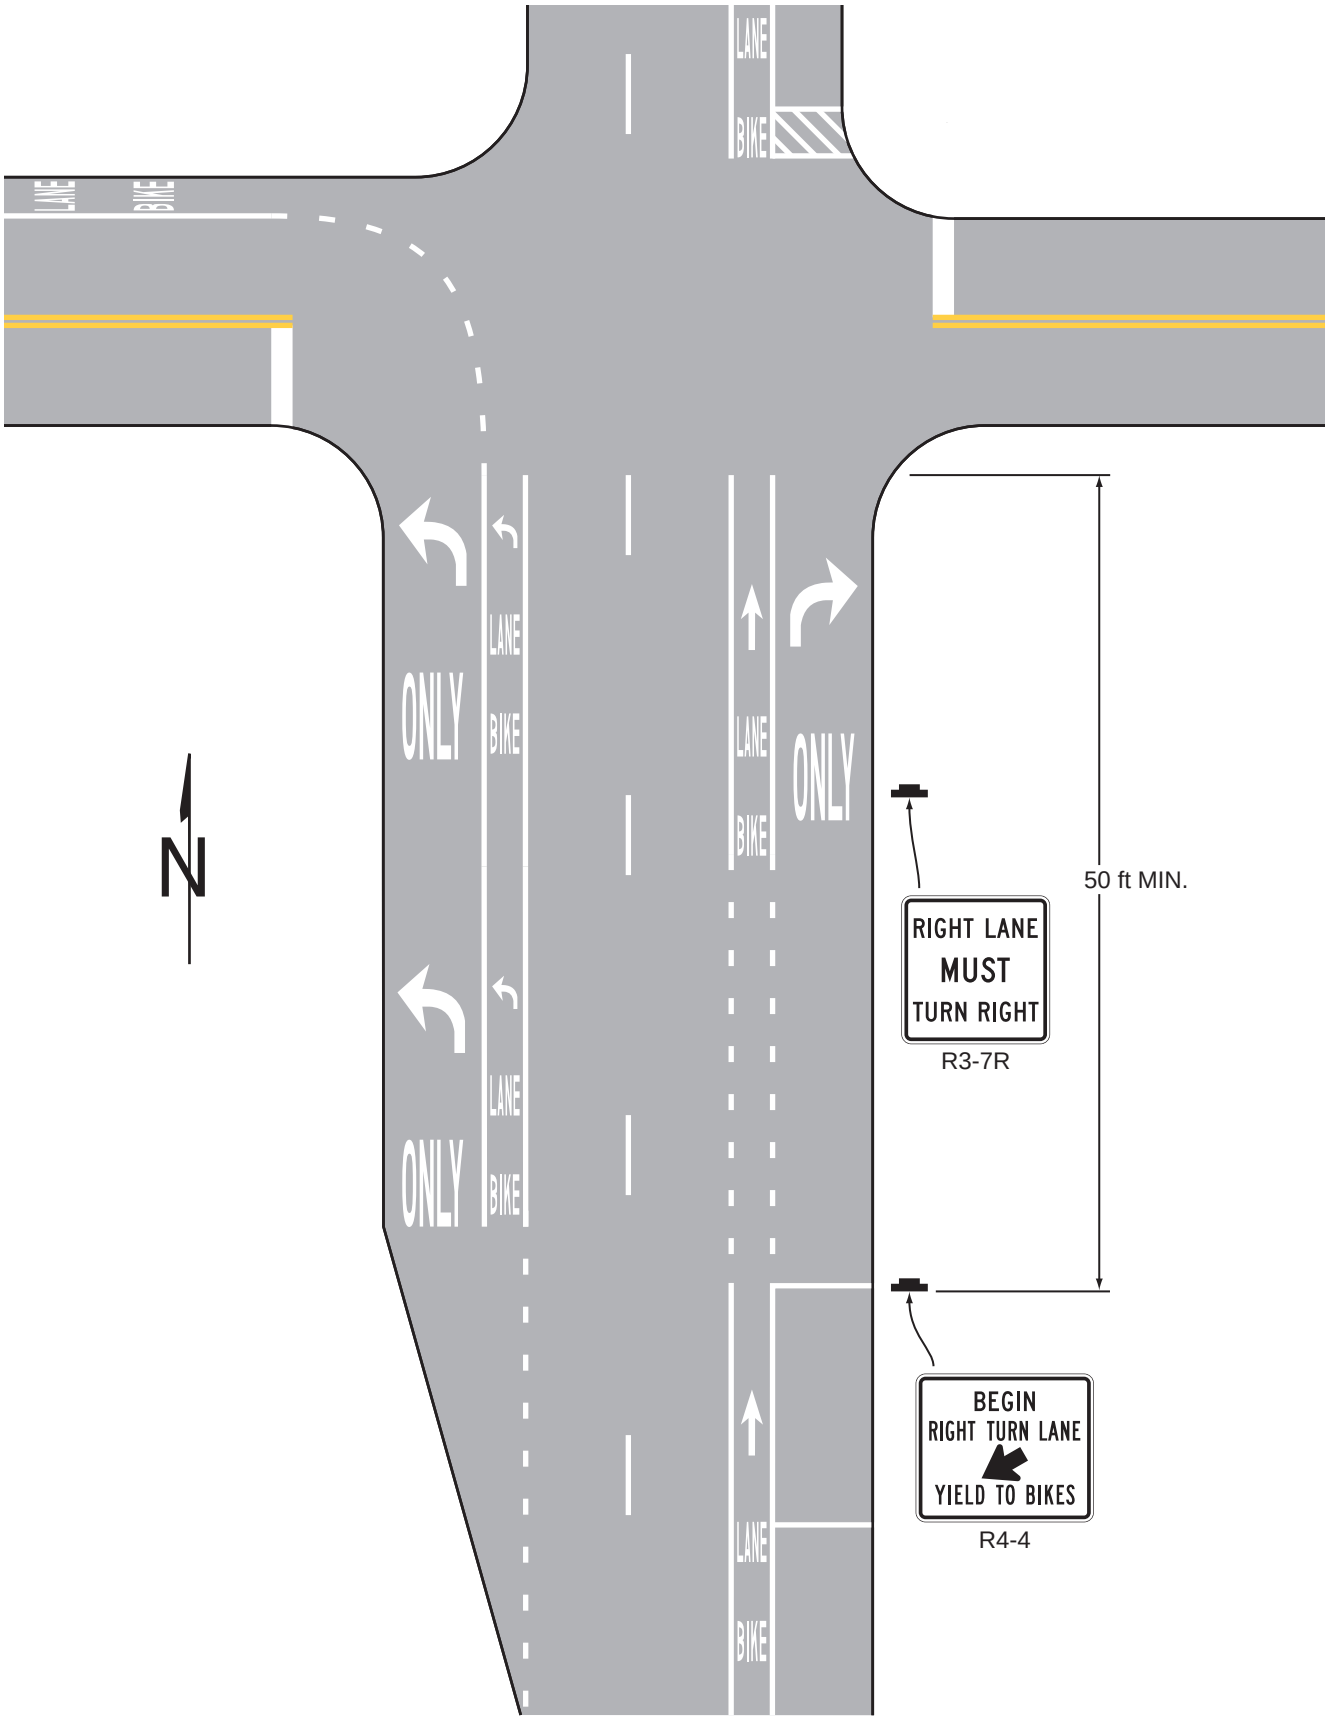


## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 1 of 7)*

### A. Example of Bicycle Lane Treatment at a Right Turn Only Lane

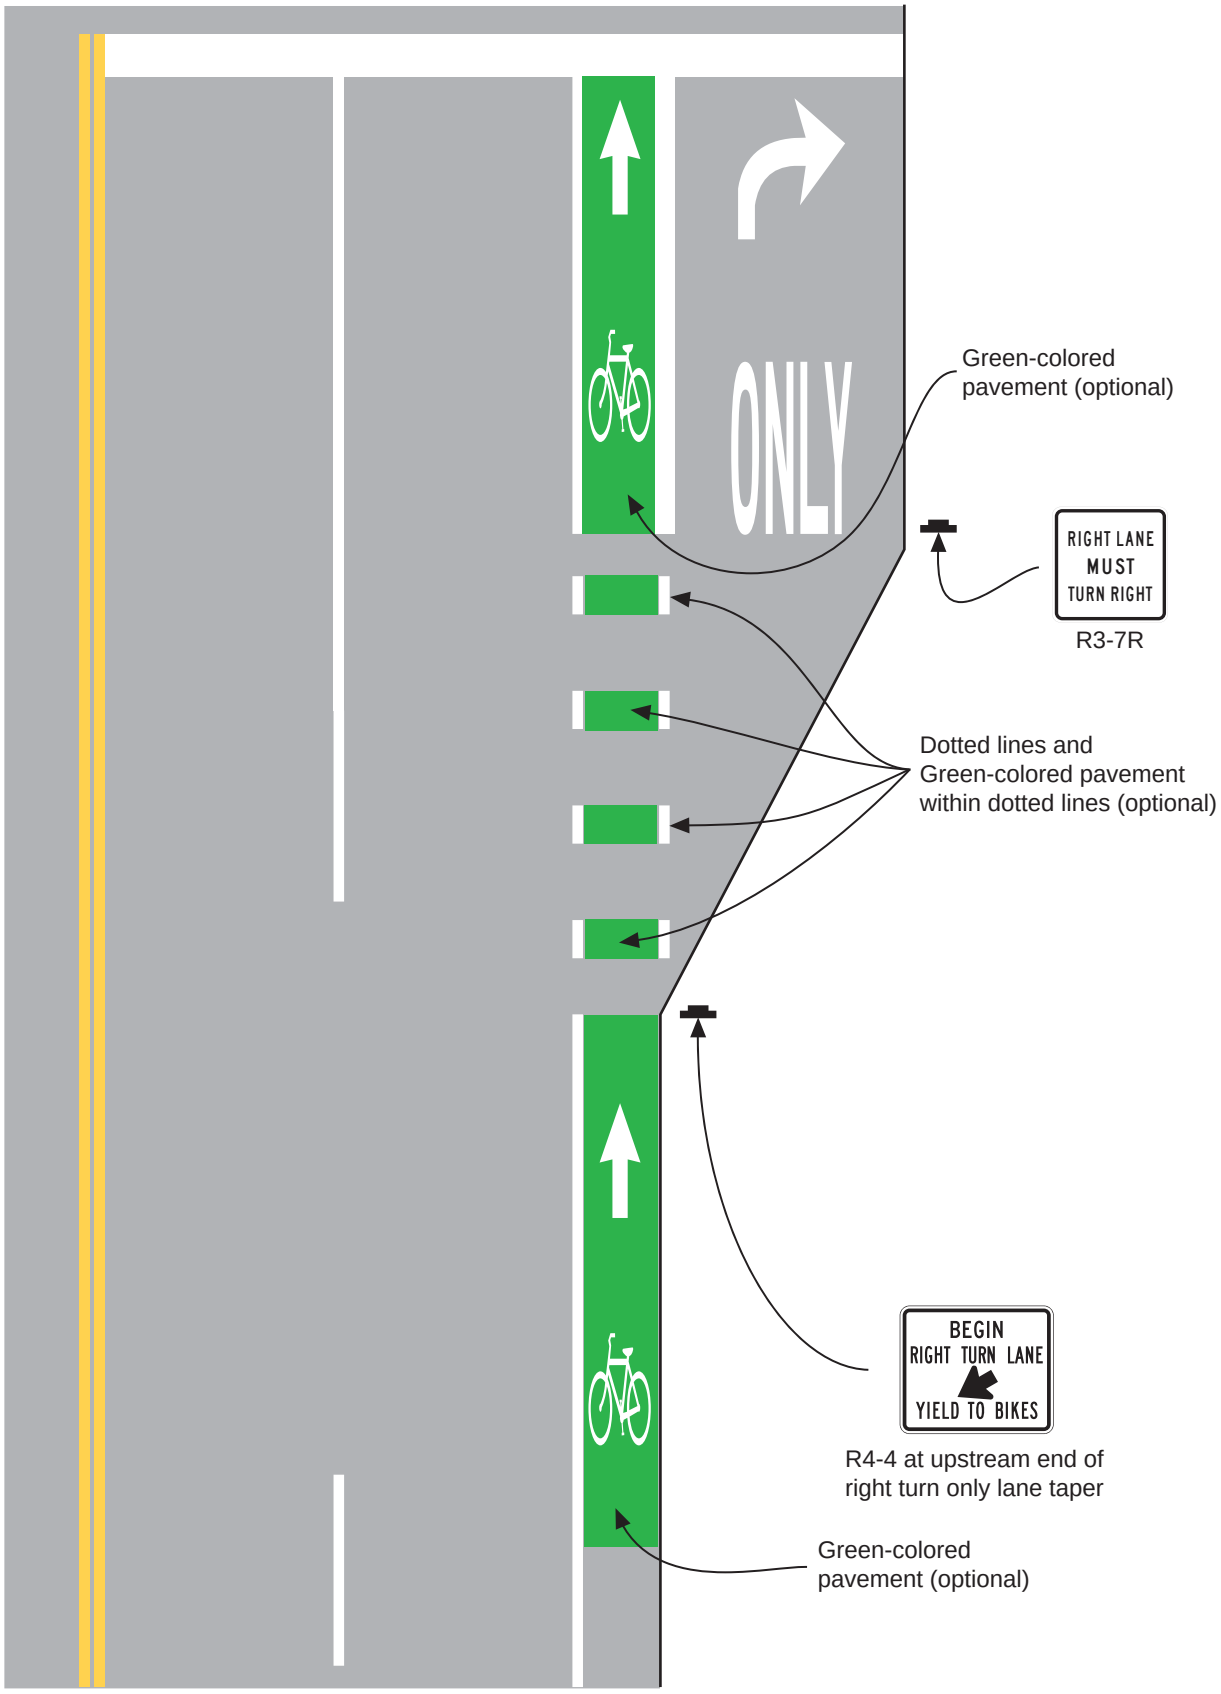

## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 2 of 7)*


### B. Example of Bicycle Lane Treatment at a Right Turn Only Lane

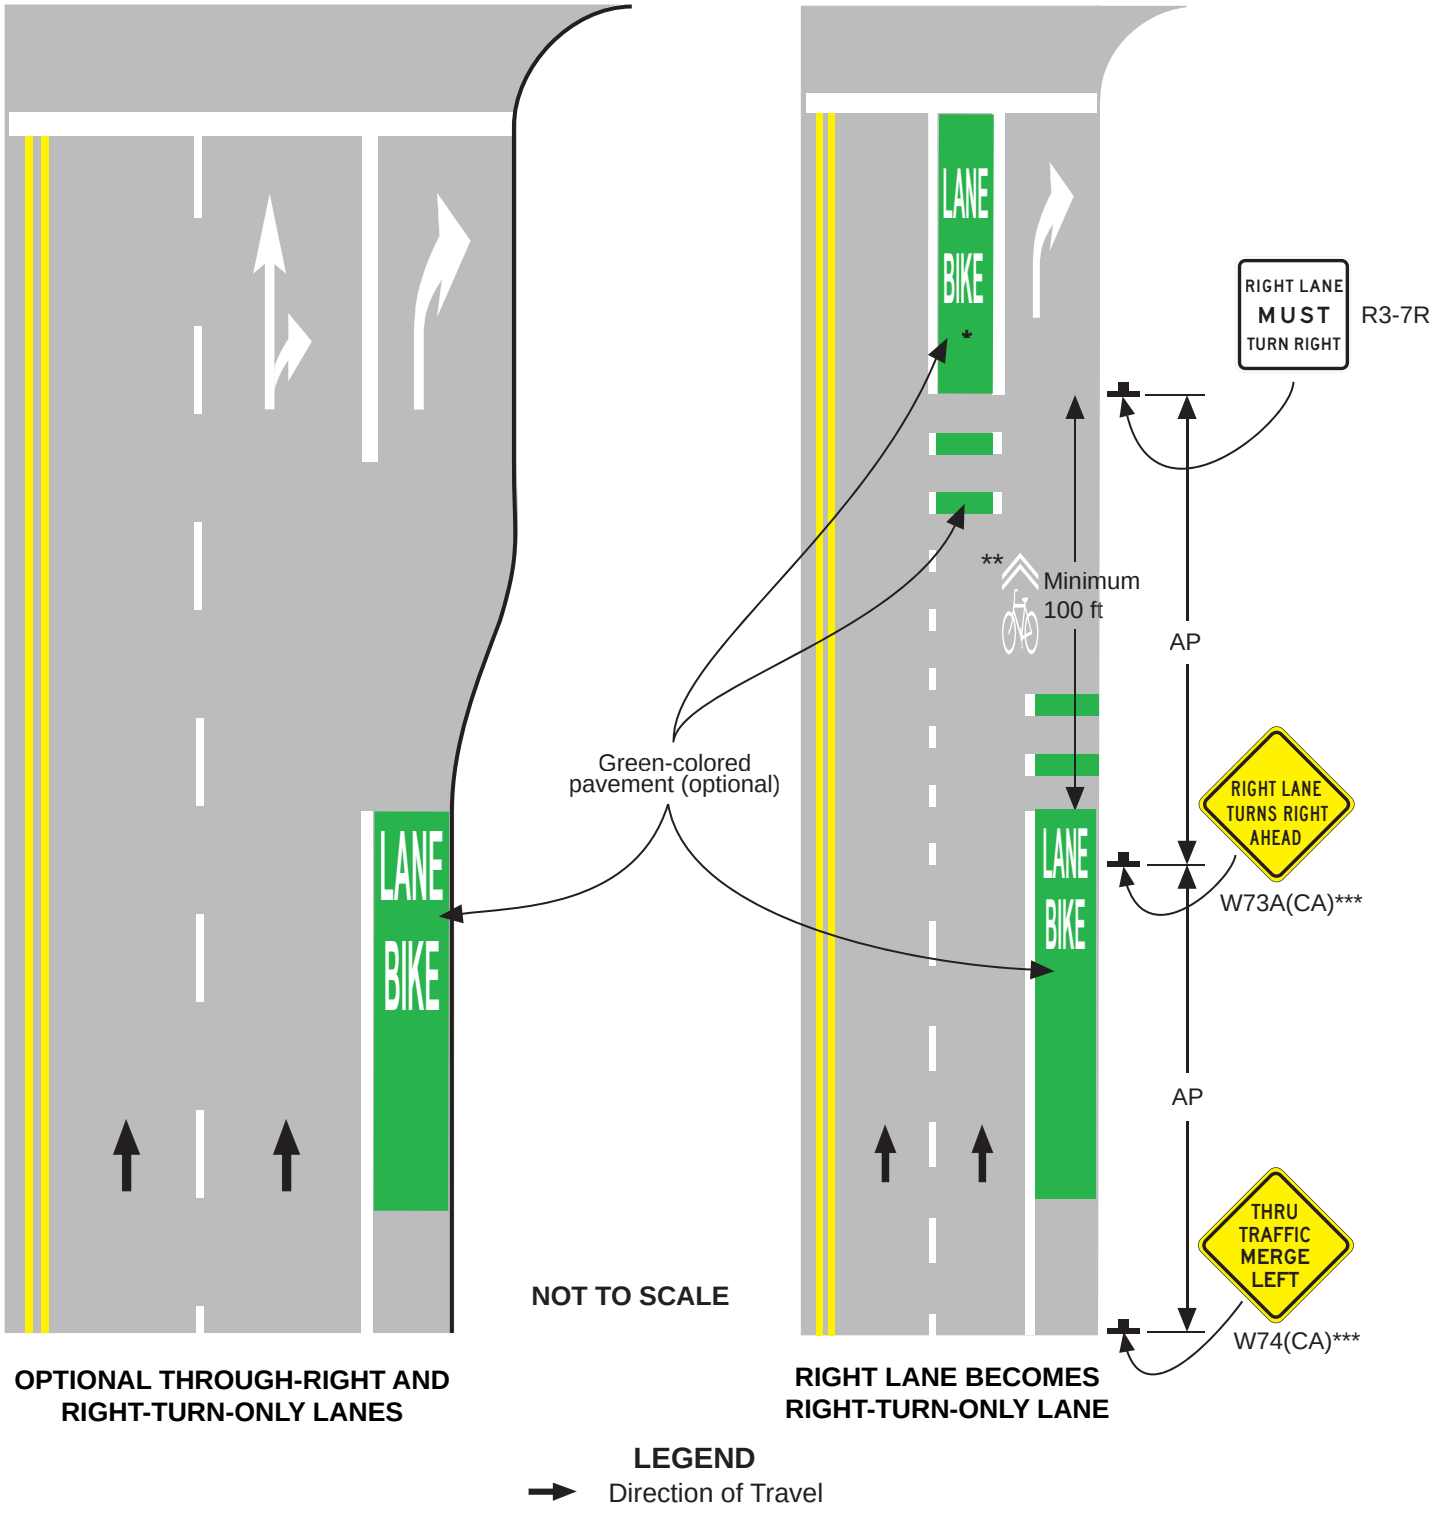


* 4 ft minimum width, 6 ft minimum width for posted speed greater than 40 mph
** The shared lane markings are appropriate to assist bicyclists with positioning, with or without a bicycle lane at the intersection. More than one shared lane marking may be placed.
*** Refer to Section 2C.50
AP = Advance Placement Distance (Refer to Section 2C.04)

## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 3 of 7)*


### C. Example of Share Lane Marking While Approaching an Intersection

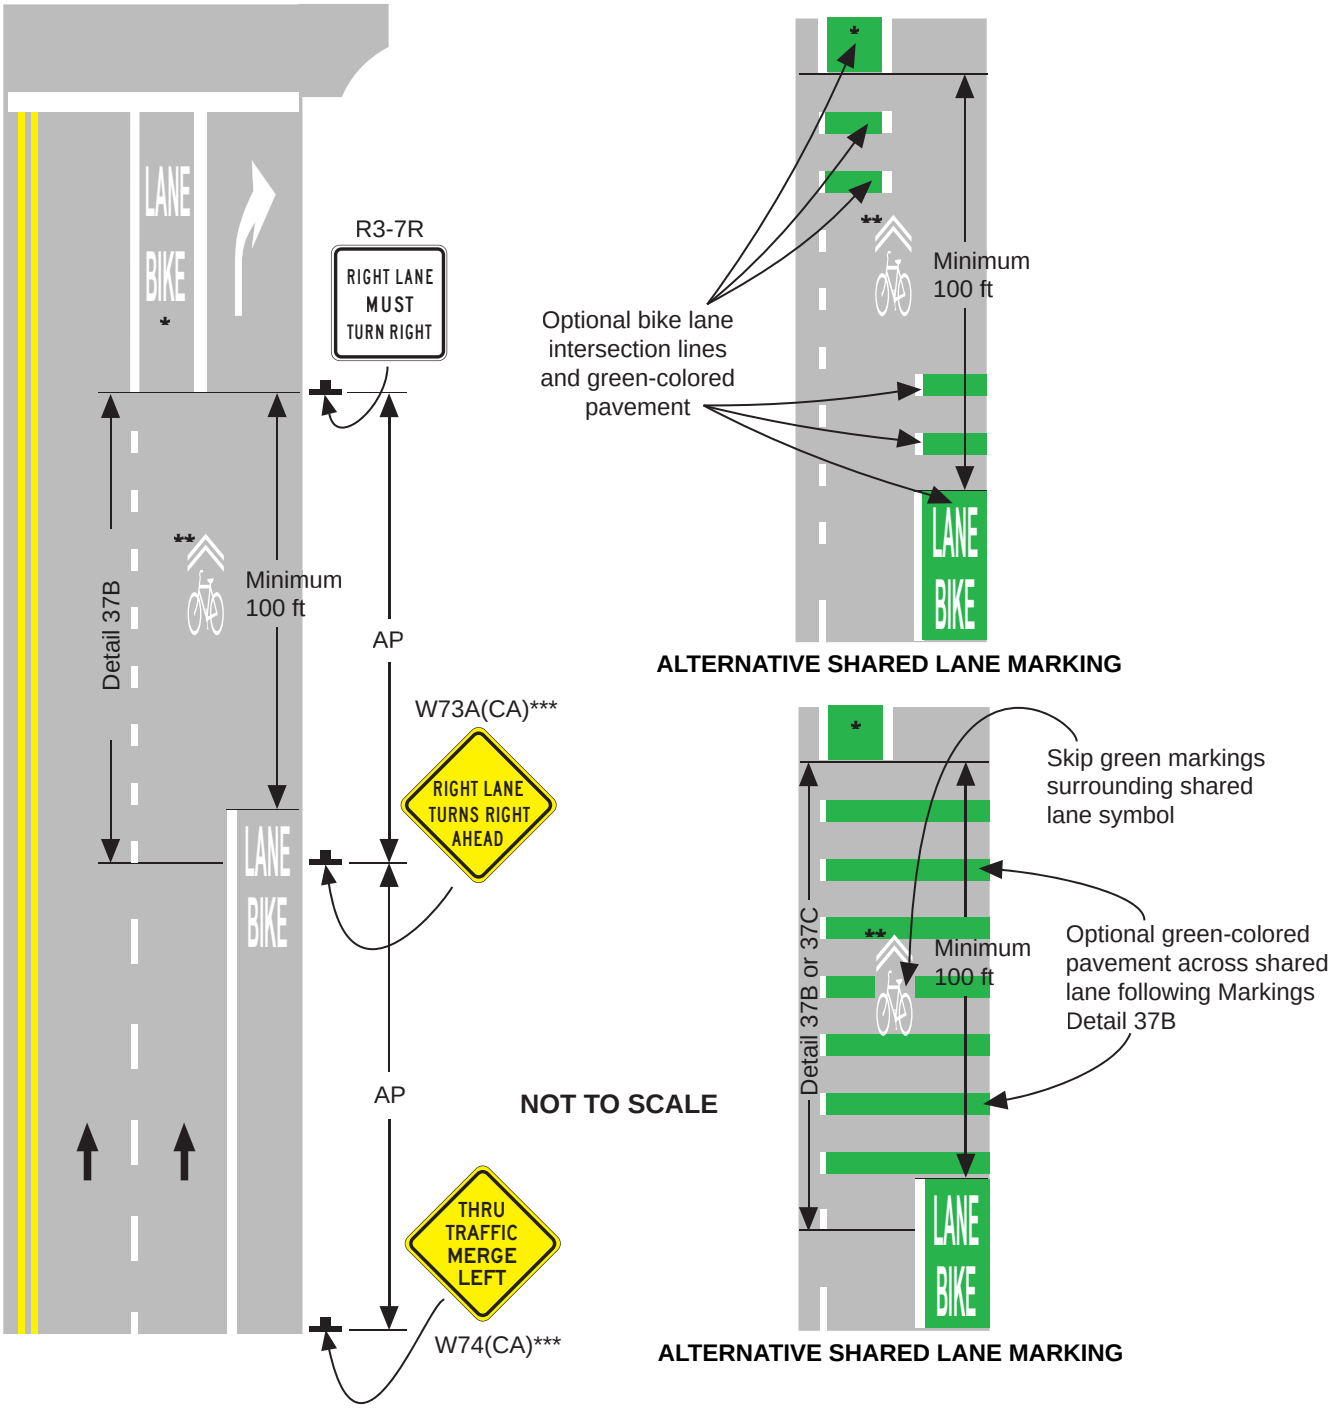


* 4 ft minimum width, 6 ft minimum width for posted speed greater than 40 mph
** The shared lane markings are appropriate to assist bicyclists with positioning, with or without a bicycle lane at the intersection. More than one shared lane marking may be placed.
*** Refer to Section 2C.50
AP = Advance Placement Distance (Refer to Section 2C.04)

## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 4 of 7)*

### D. Example of Bicycle Lane Treattment at a Right Turn Only Lane, Posted Speed > 40 mph

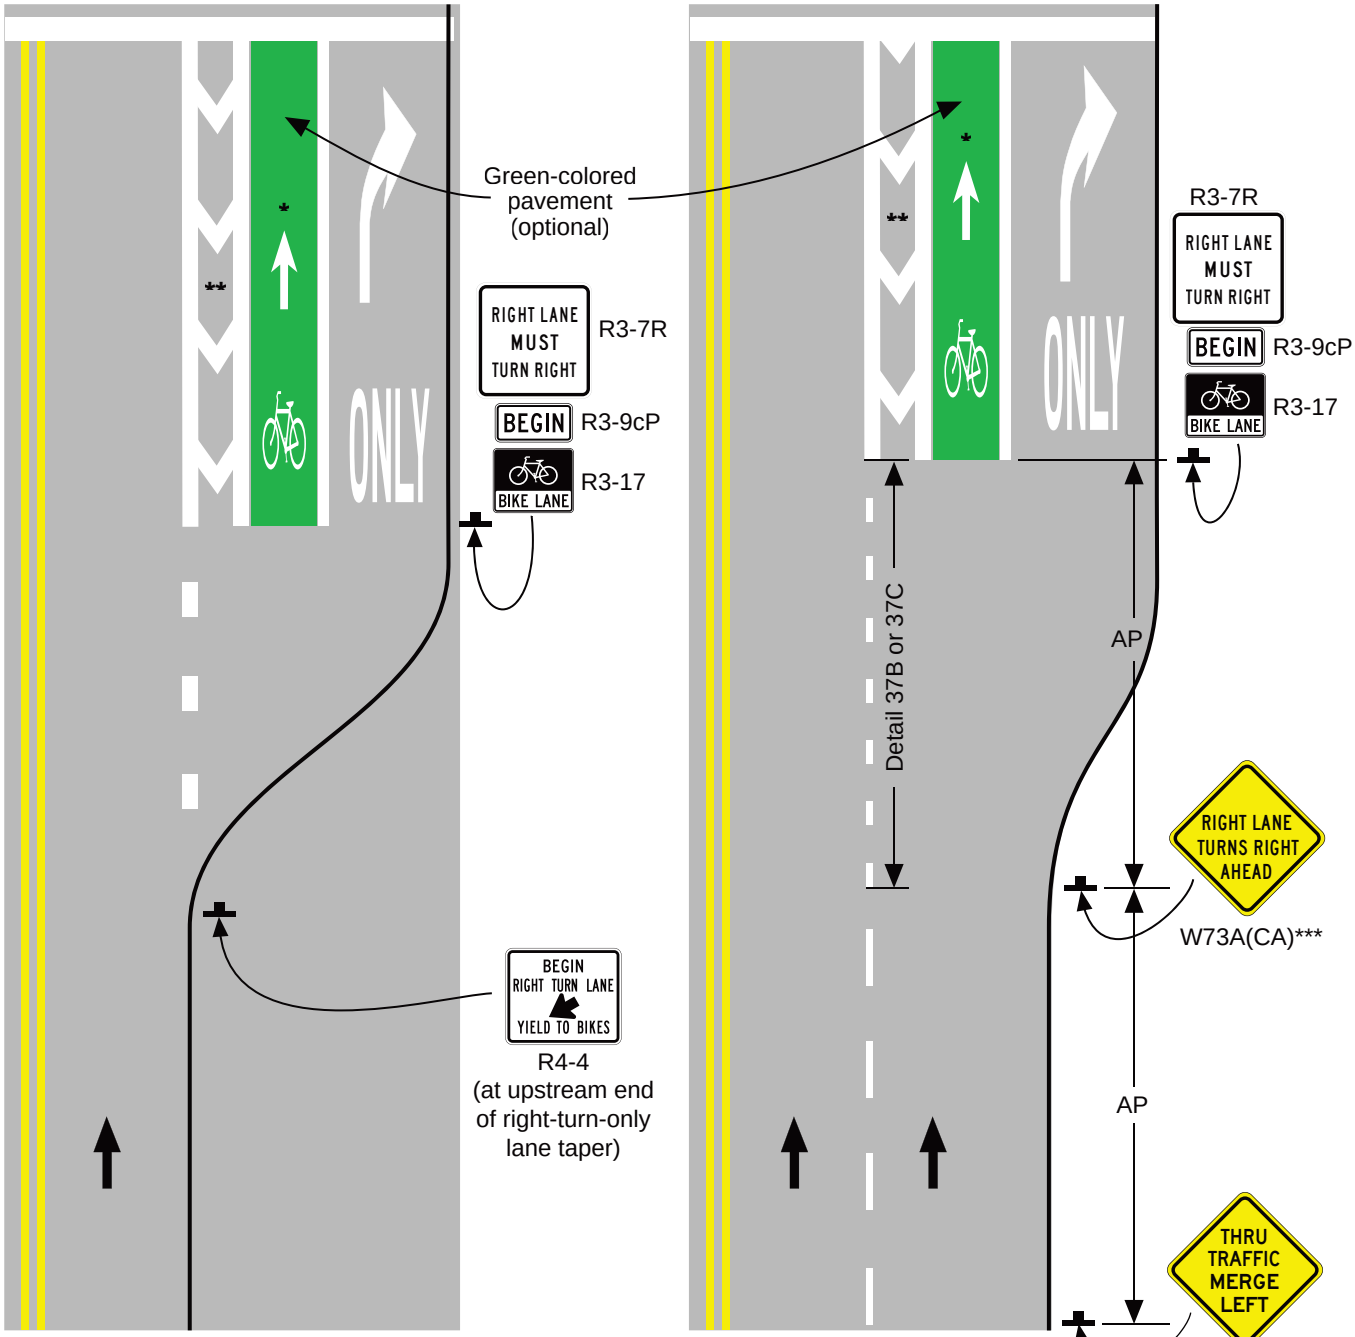


**RIGHT-TURN ONLY LANE**

**RIGHT LANE BECOMES RIGHT-TURN-ONLY LANE**

**NOT TO SCALE**


**LEGEND**

→ Direction of Travel

* 4 ft minimum width
** 2 ft (minimum 18 in.) buffered area may be striped on the left or on the right within the space for bicycle use
*** Refer to Section 2C.50
AP = Advance Placement Distance (Refer to Section 2C.04)

## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 5 of 7)*

### E. Example of Bicycle Lane Treatment at a Right Turn Only Lane, Posted Speed ≤ 40 mph

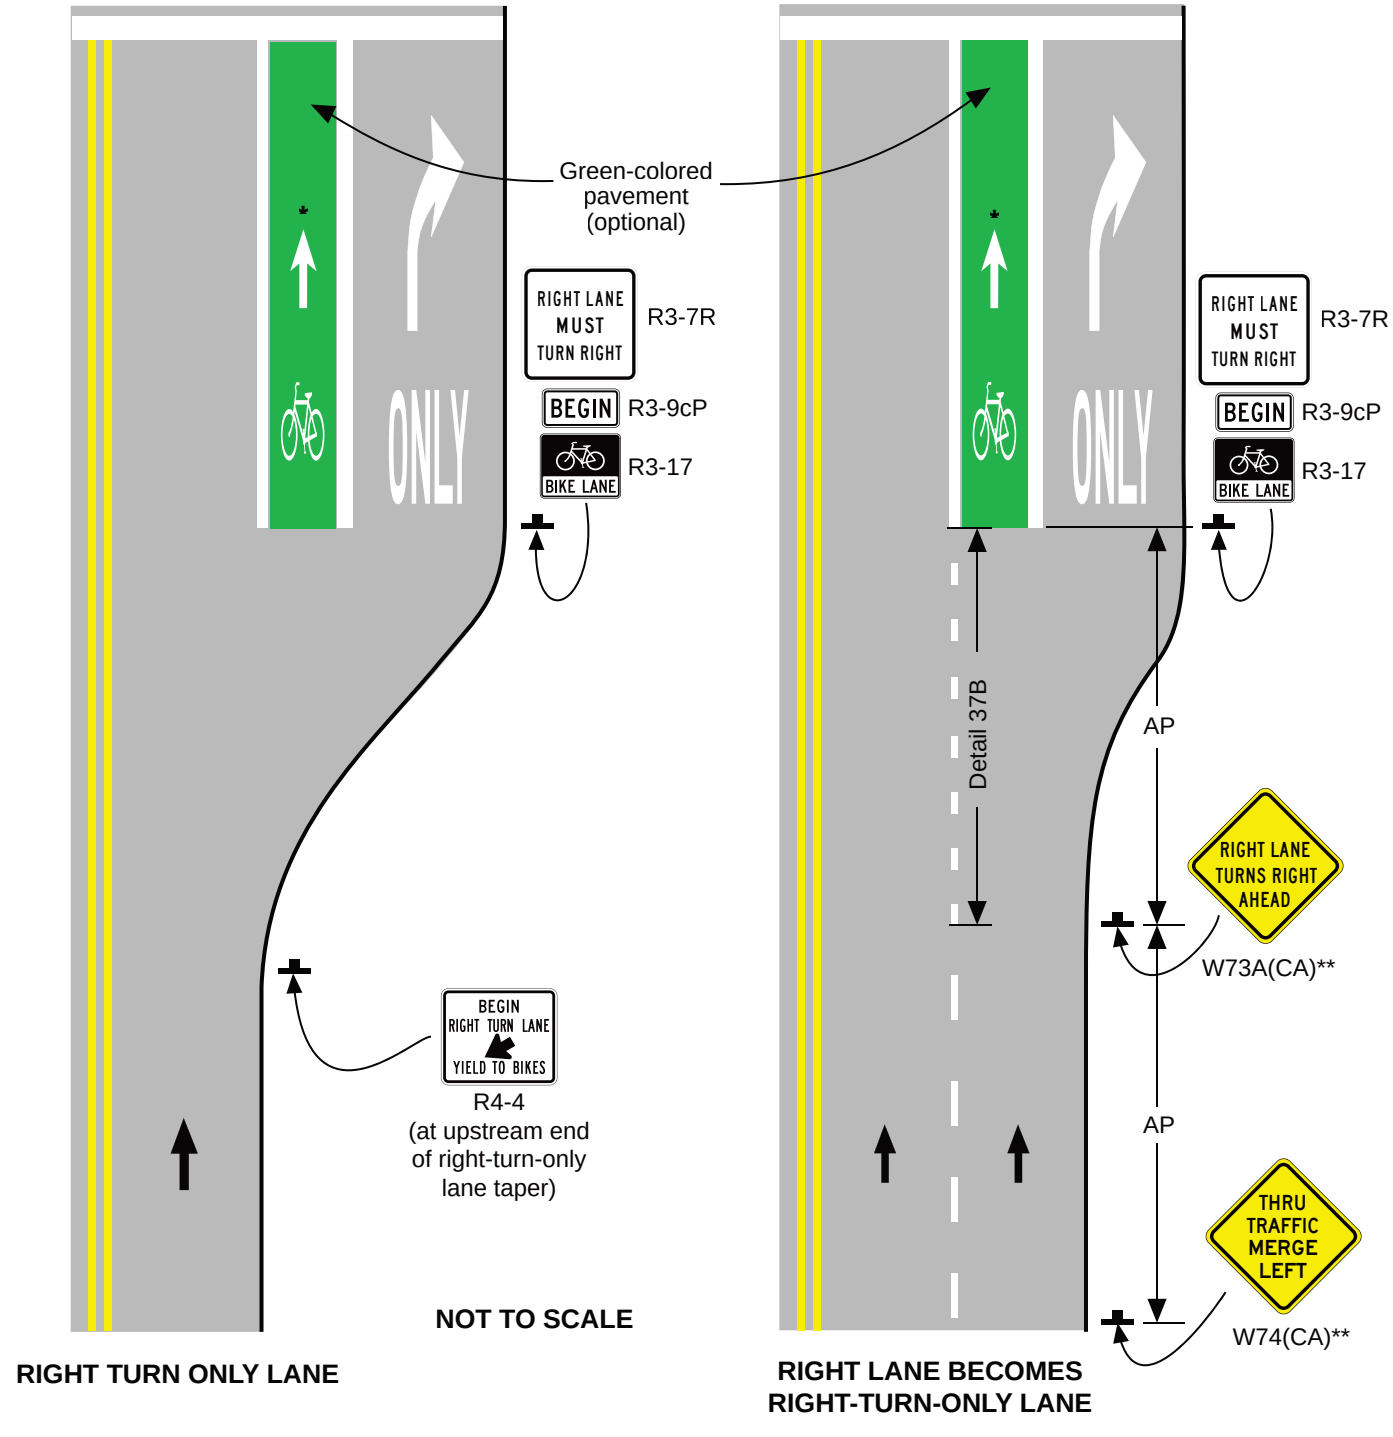



**LEGEND**

→ Direction of Travel

* 4 ft minimum width
** Refer to Section 2C.50
AP = Advance Placement Distance (Refer to Section 2C.04)


## *Figure 9E-3(CA). Example of Bicycle Lane Markings on an Approach to an Intersection (Sheet 6 of 7)*

### F. Example of Bicycle Lane Treatment at Parking Lane into a Right Turn Only Lane

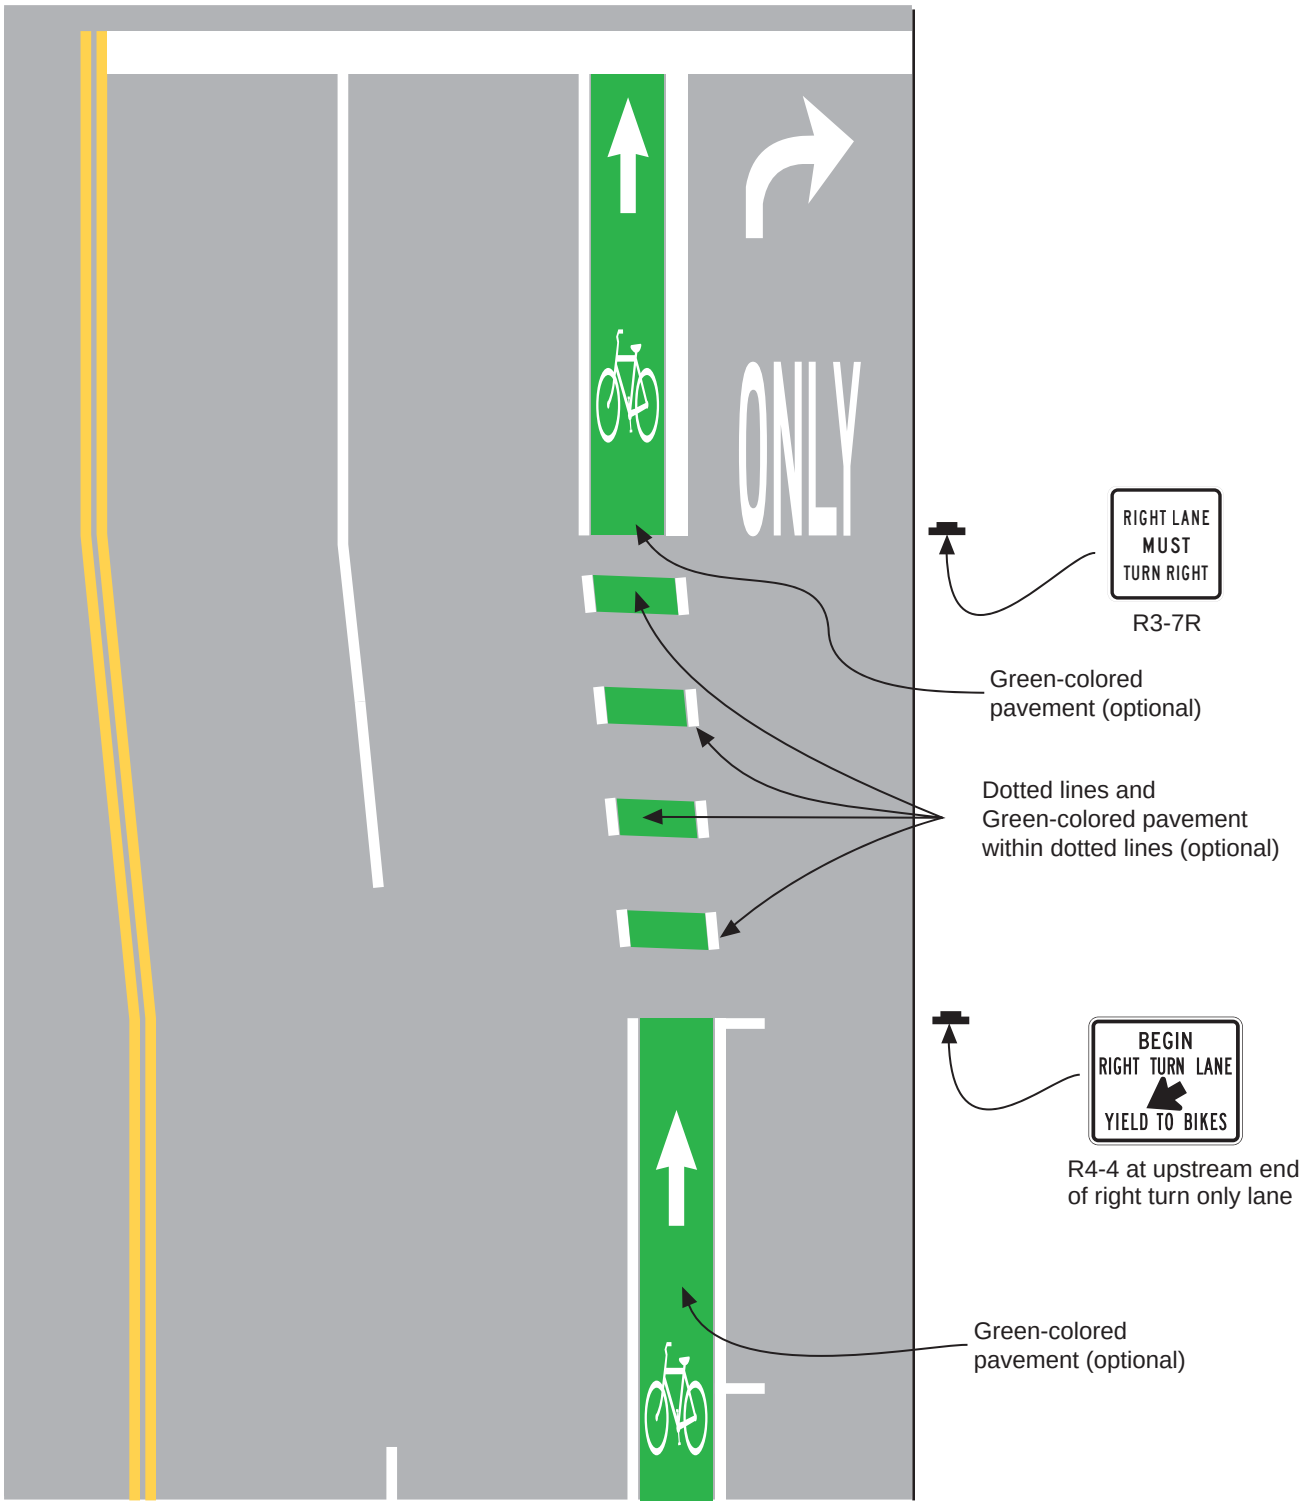


## *Figure 9E-3(CA). Example of Bicycle Lane Markings On an Approach to an Intersection (Sheet 7 of 7)*


### G. Example of Bicycle Lane Treatment at a Left Turn Only Lane

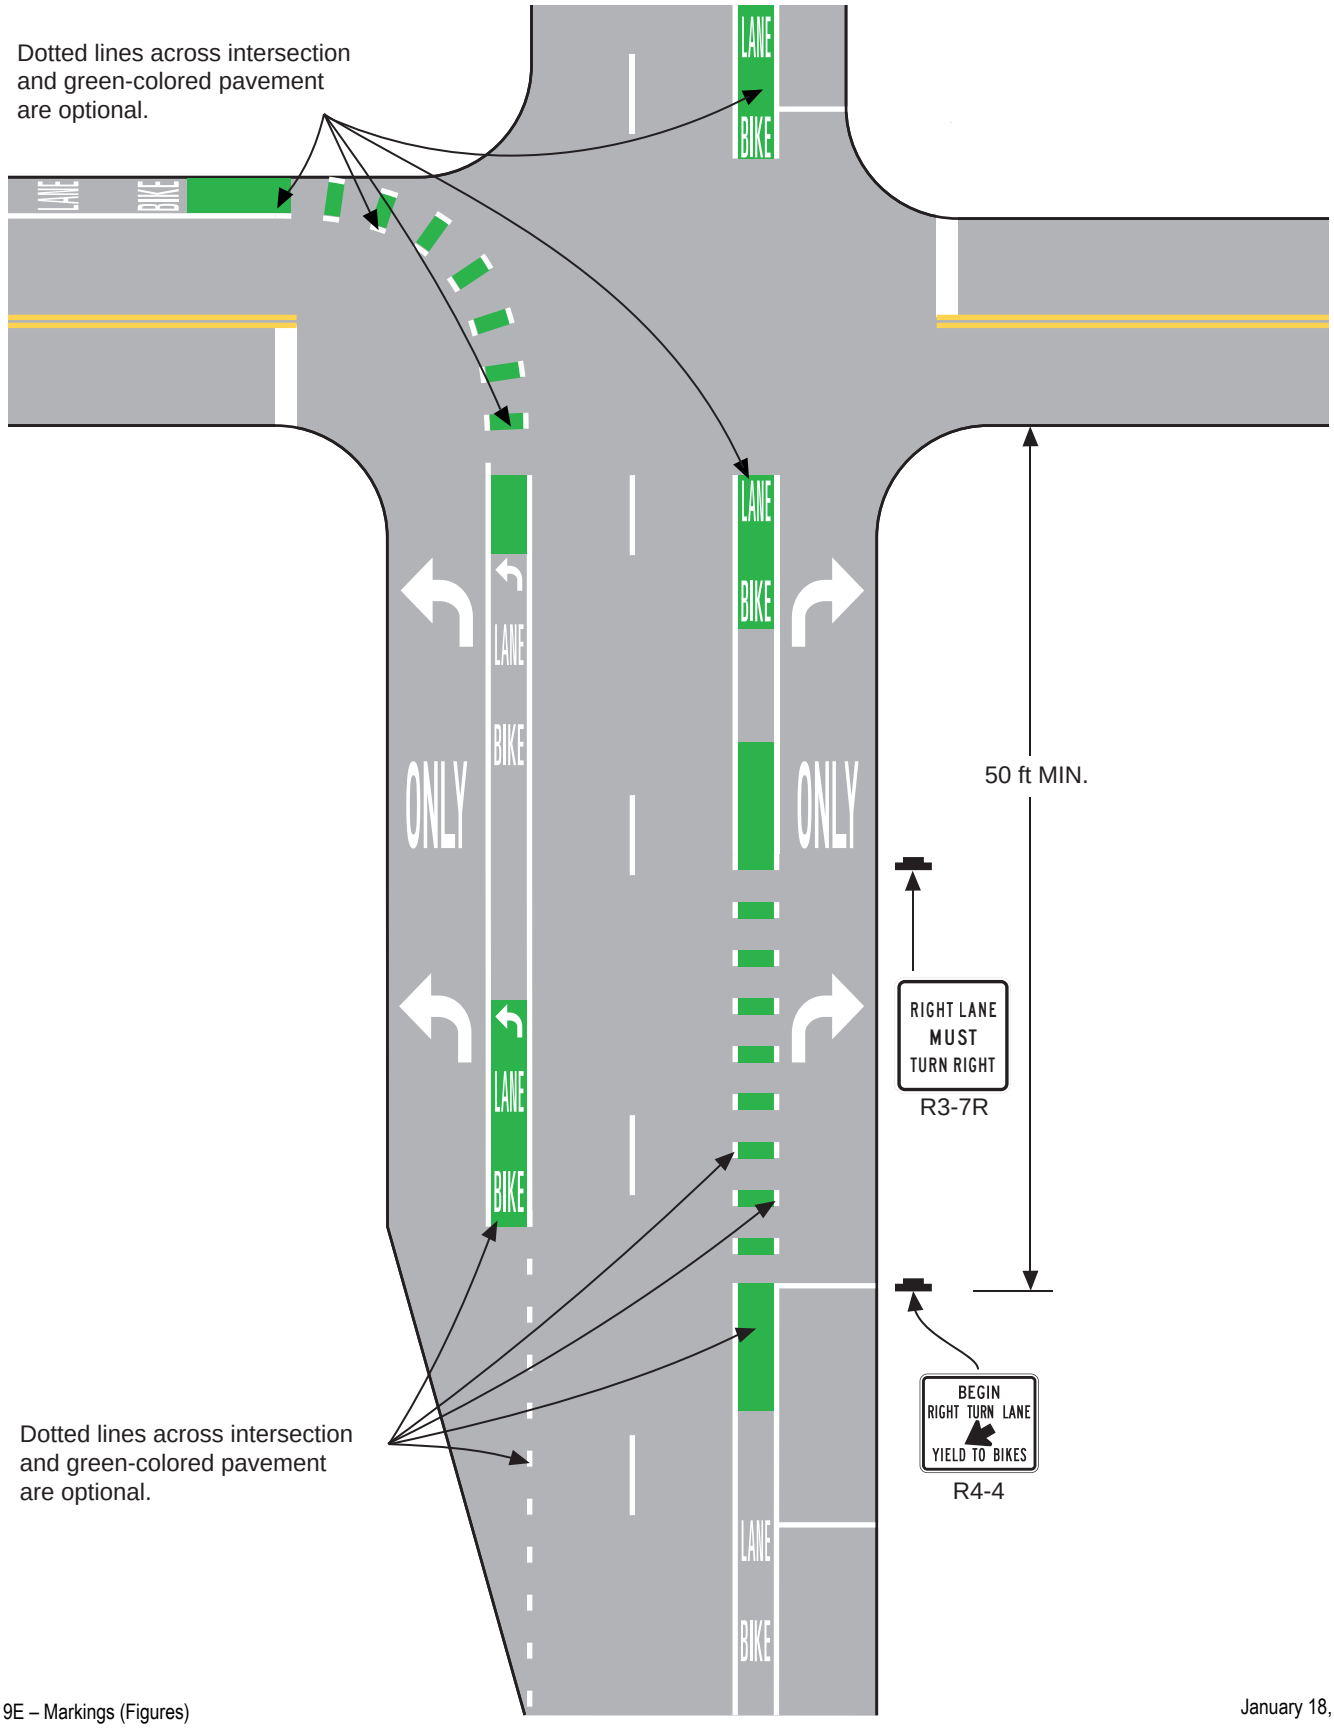


## Figure 9E-4. Example of Bicycle Lane Markings on an Approach to an Intersection that Transitions from a Shared Lane

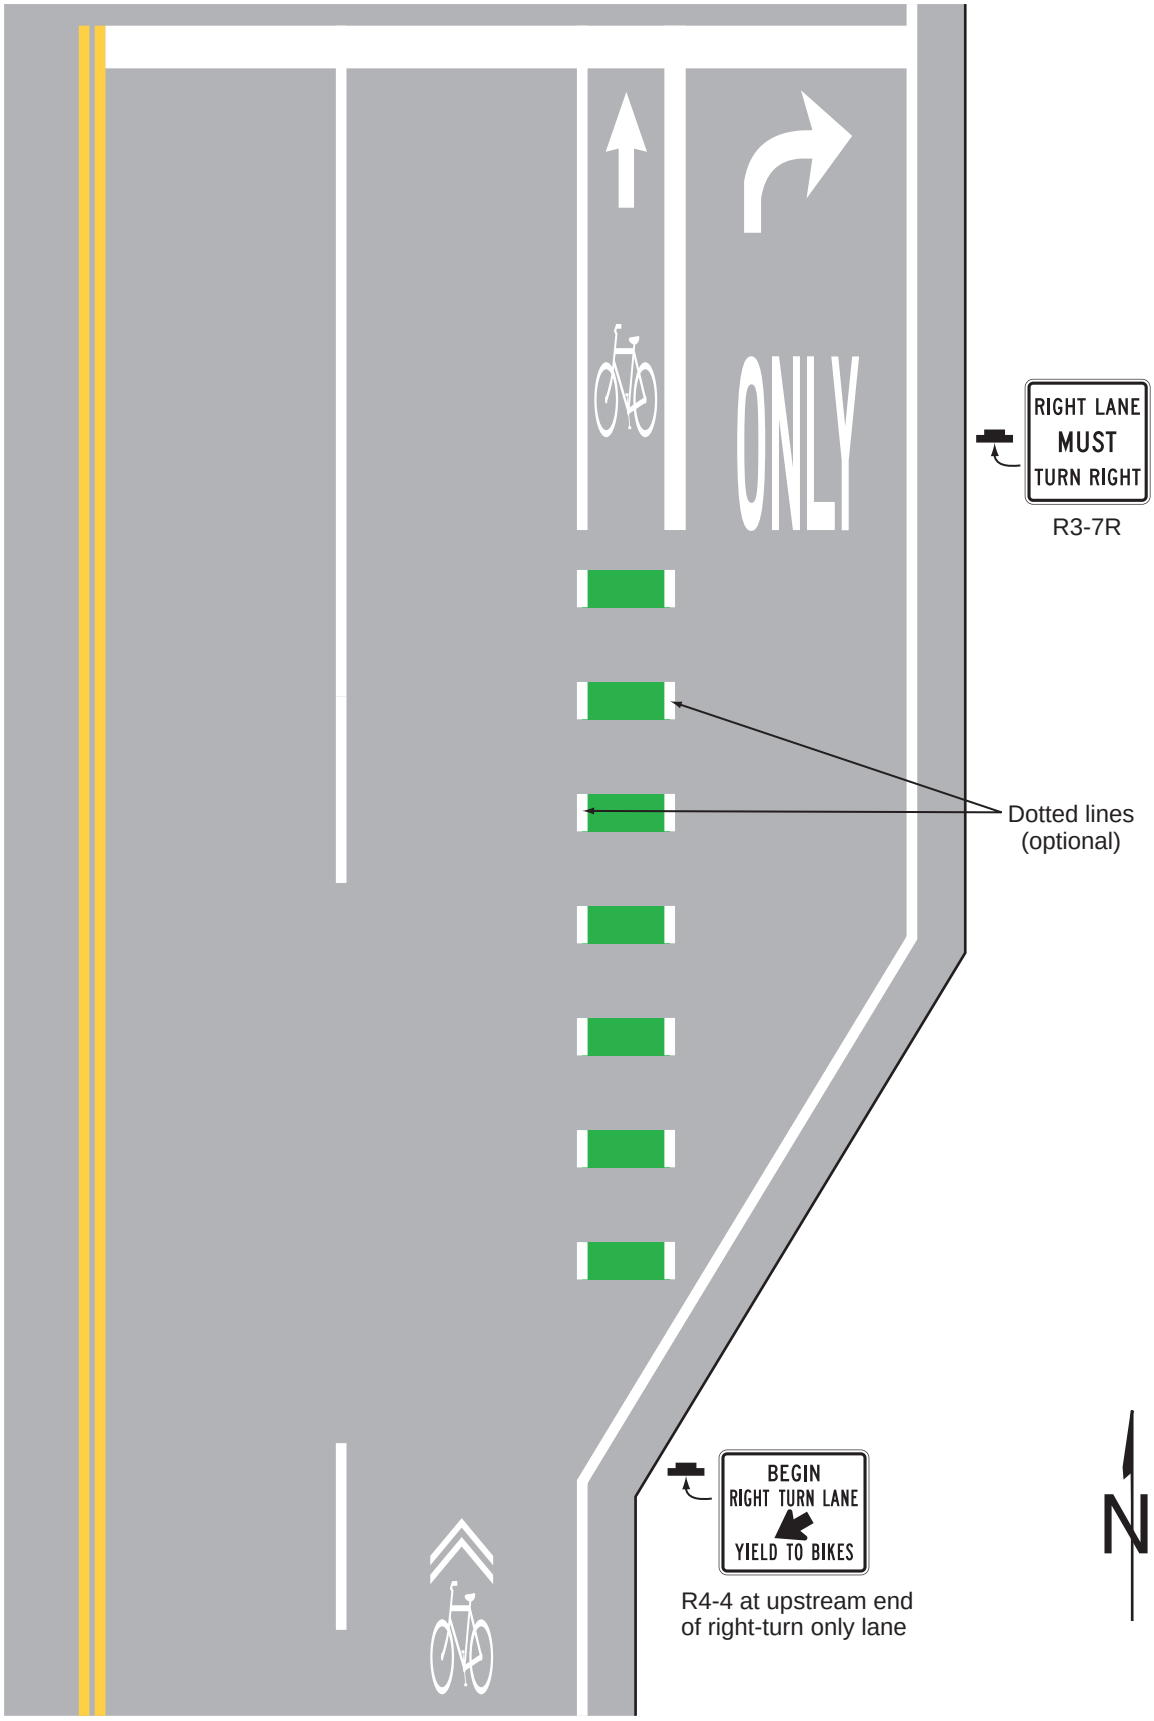

## Figure 9E-5. Examples of Pavement Markings for Mixing Zones

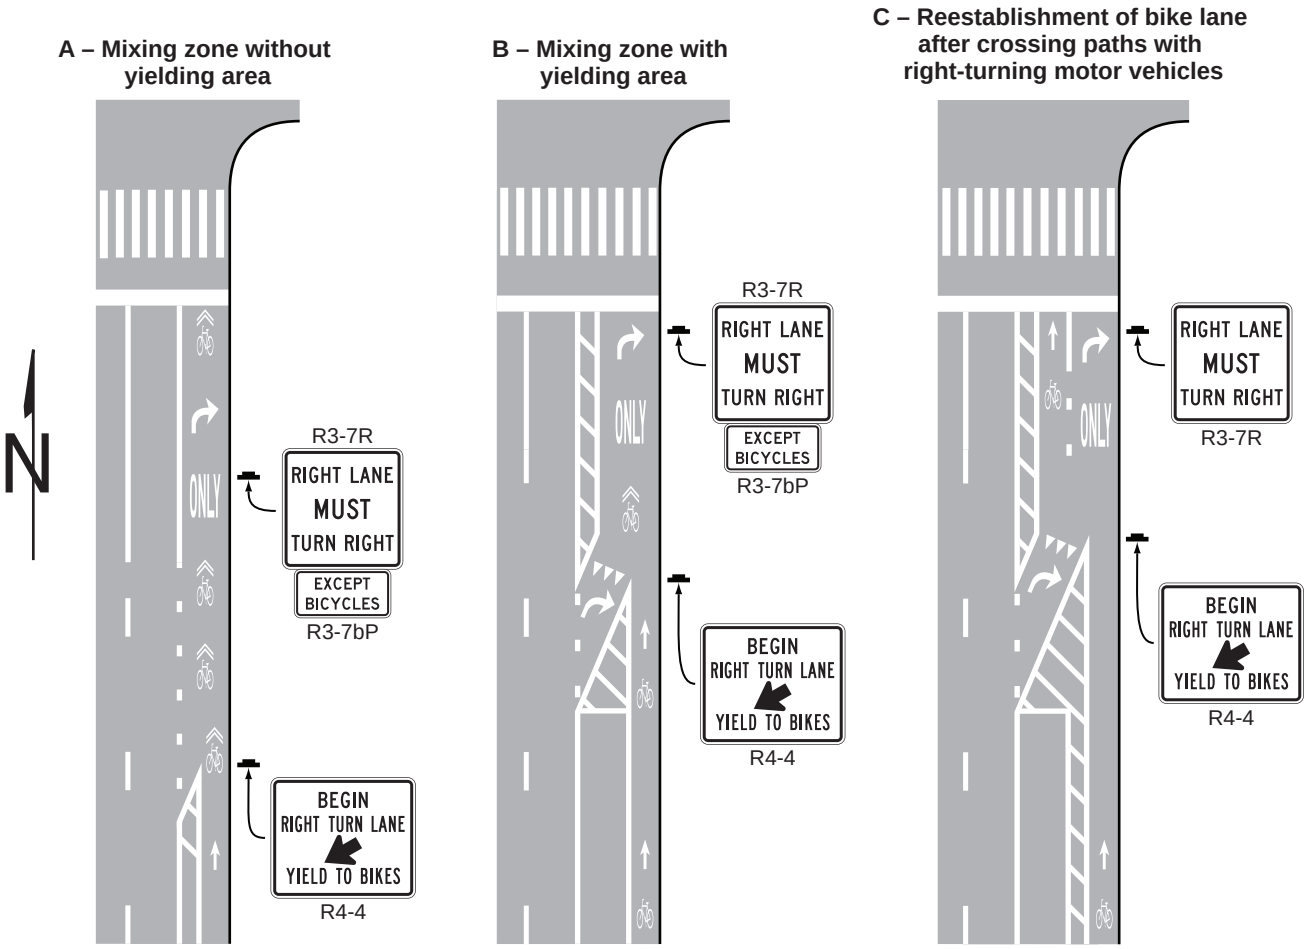


# Figure 9E-6. Examples of Markings for Buffer-Separated Bicycle Lanes

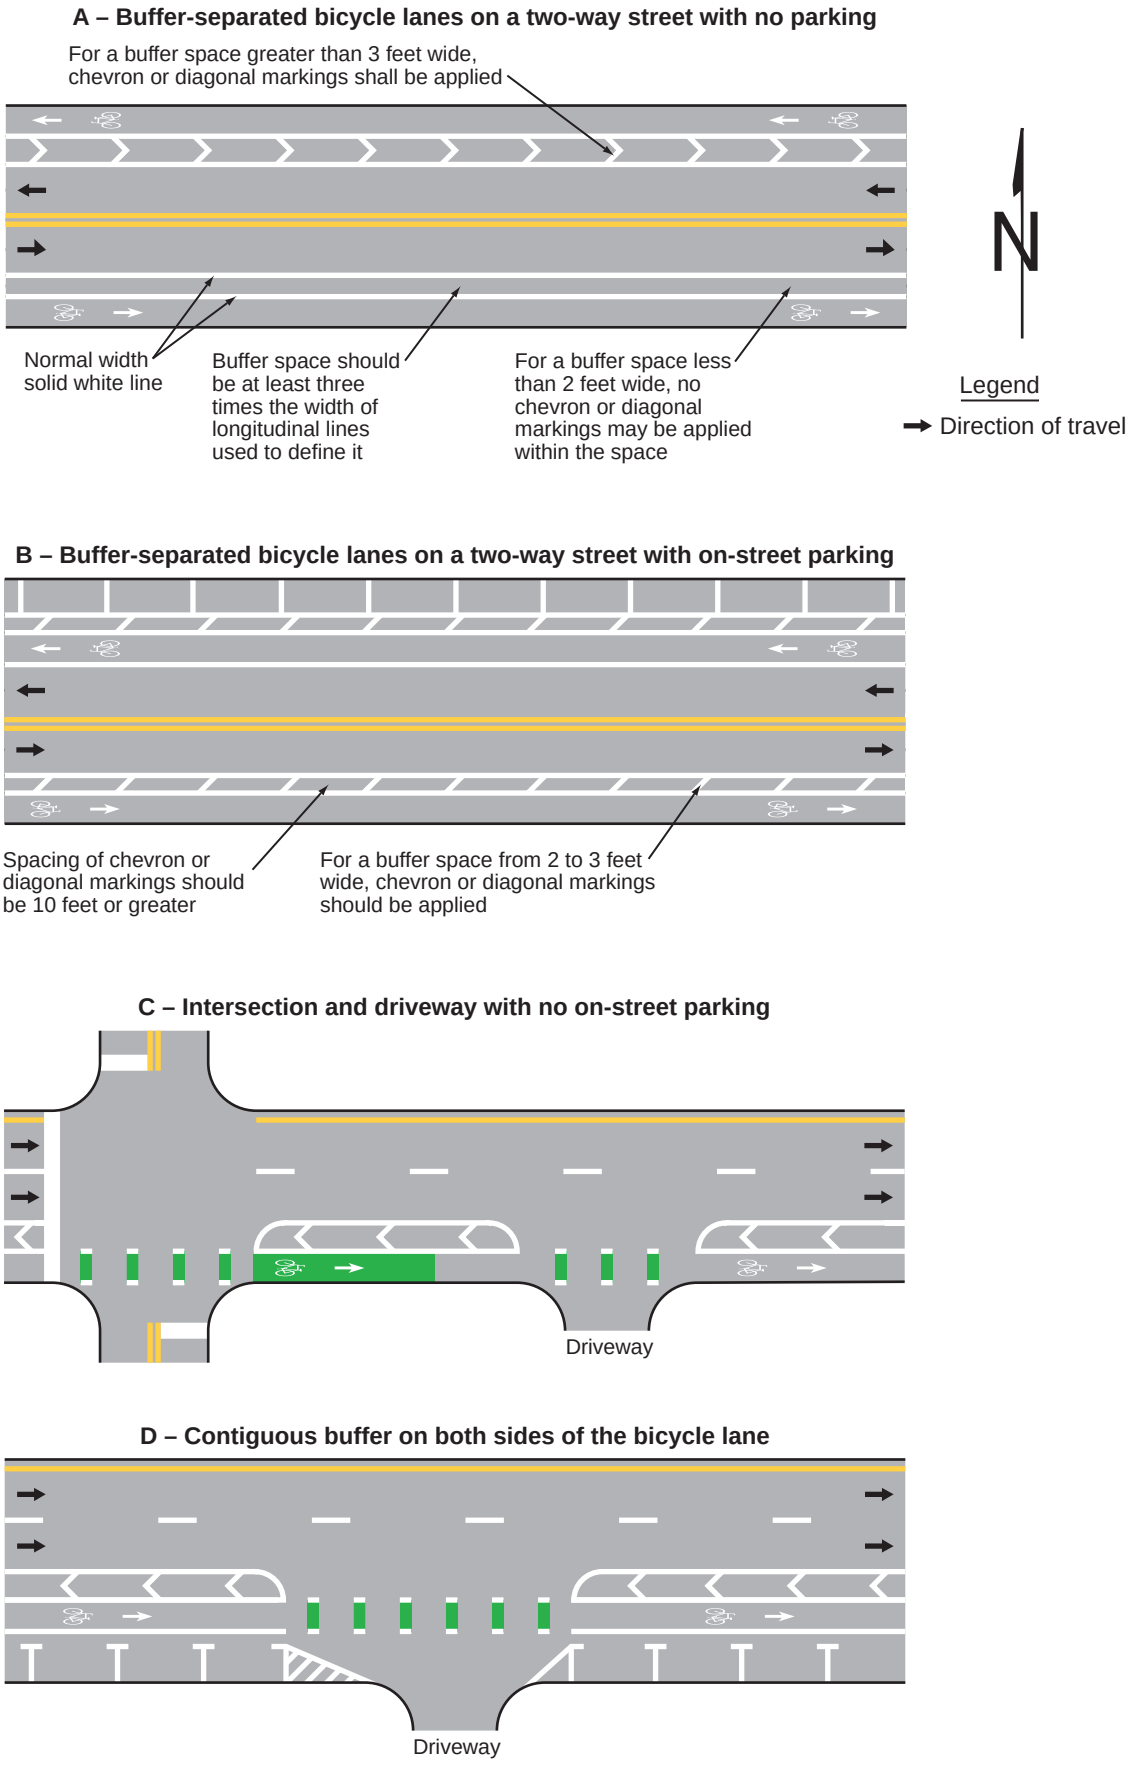


## *Figure 9E-6(CA). Examples of Markings for Buffer-Separated Bicycle Lanes (Sheet 1 of 2)*

### A. Buffer Between Bicycle Lane and General Purpose Lane Where Vehicle Parking is Prohibited

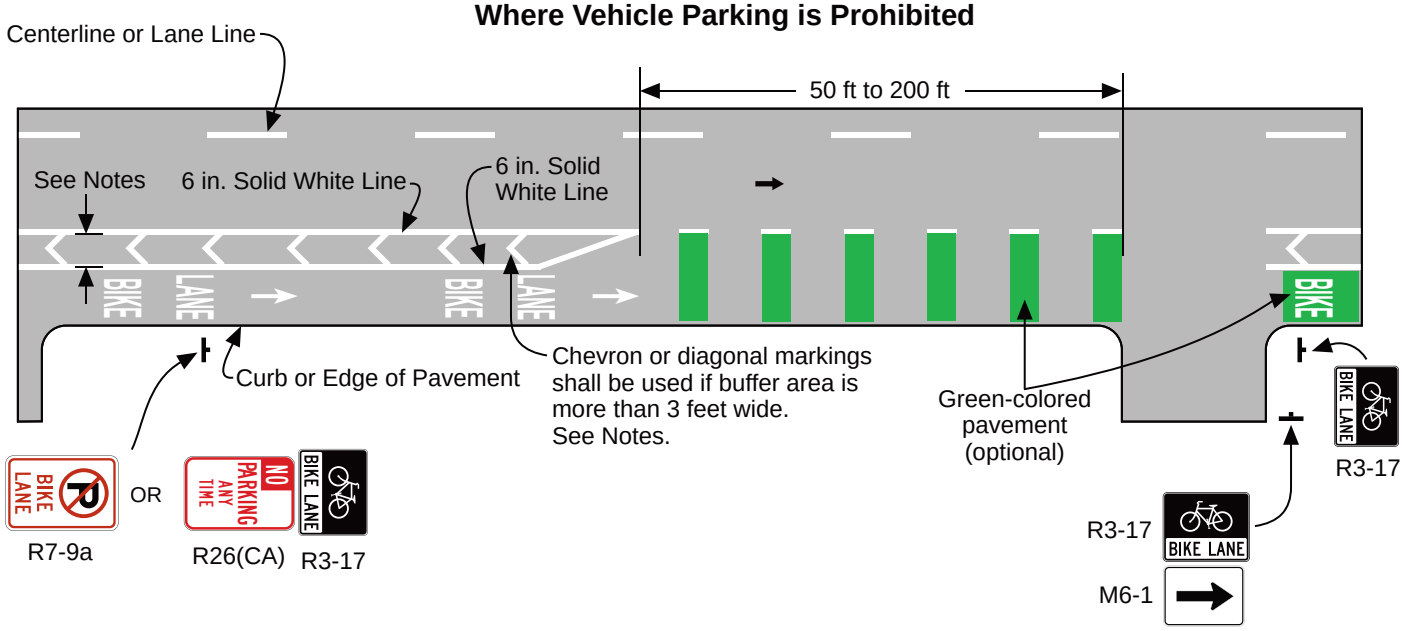


### B. Buffer Between Bicycle Lane and General Purpose Lane Where Vehicle Parking is Permitted

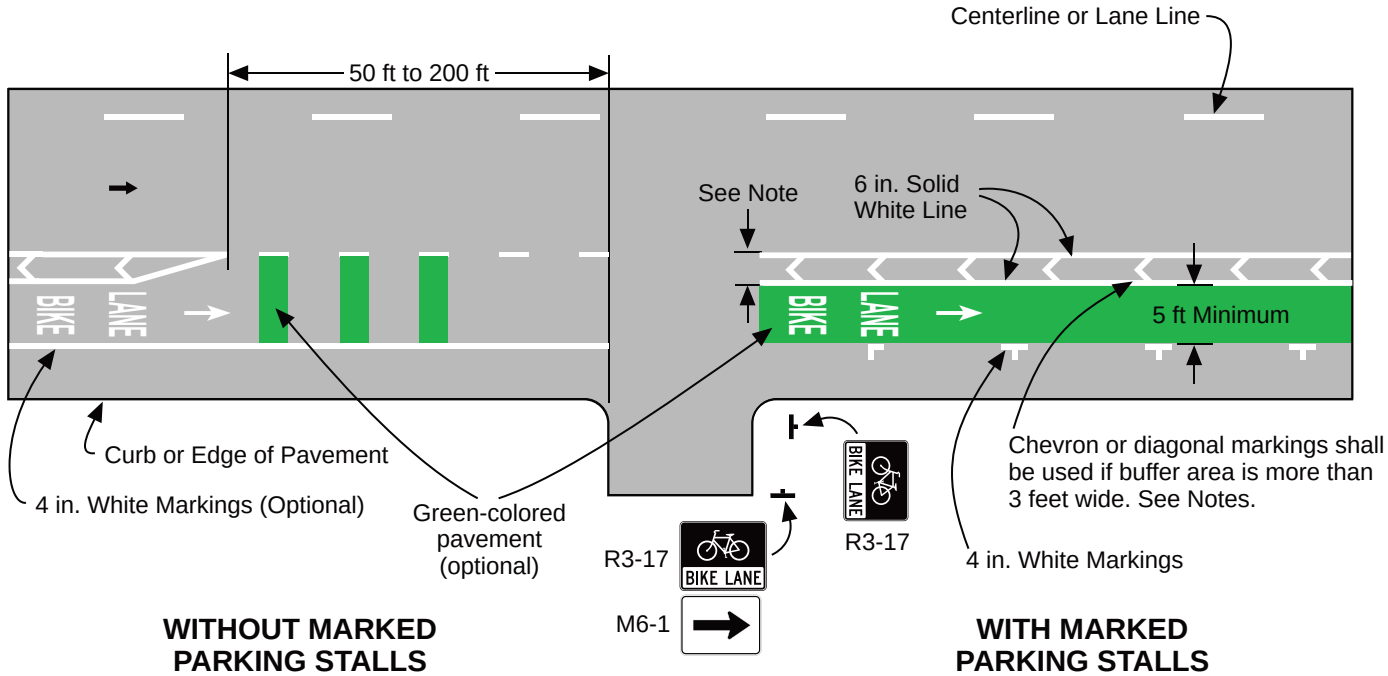


**NOT TO SCALE**

**LEGEND**


→ Direction of Travel

Notes:

1. 18 in. Minimum for Buffered Area Width. The Buffer Area Width includes the width of the parallel White Lines
2. Refer to Section 9E.06 for width of chevron or diagonal markings

## *Figure 9E-6(CA). Examples of Markings for Buffer-Separated Bicycle Lanes (Sheet 2 of 2)*

### C. Buffer Between Bicycle Lane and Parking Lane

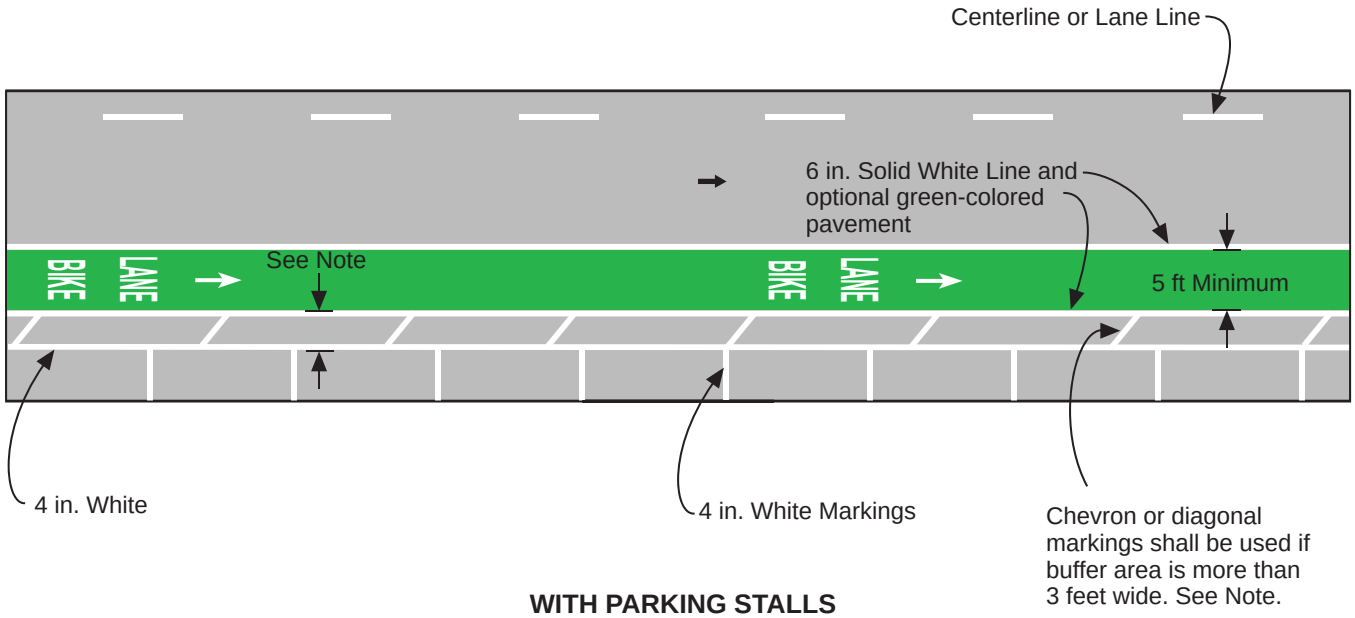


**WITH PARKING STALLS**

**NOT TO SCALE**

**LEGEND**

→ Direction of Travel


Notes:

1. 18 in**.** Minimum for Buffered Area Width. The Buffer Area Width includes the width of the parallel White Lines.
2. Refer to Section 9E.06 for width of chevron or diagonal markings.

# Figure 9E-7. Examples of Lane Markings for Separated Bicycle Lanes (Sheet 1 of 2)


**A – One-way bicycle lanes on a two-way street**

Note: Diagonal or chevron markings shall be used if buffer width is 2 feet or greater for separated bicycle lanes.




**B – One-way bicycle lane on a one-way street behind on-street parking**

Note: Parking provides the vertical element of this separated bicycle lane.




**C – Two-way bicycle lane on a one-way street**

Note: Diagonal or chevron markings shall be used if buffer width is 2 feet or greater for separated bicycle lanes.




**D – Separated bicycle lane shifted toward the adjacent general-purpose lane***

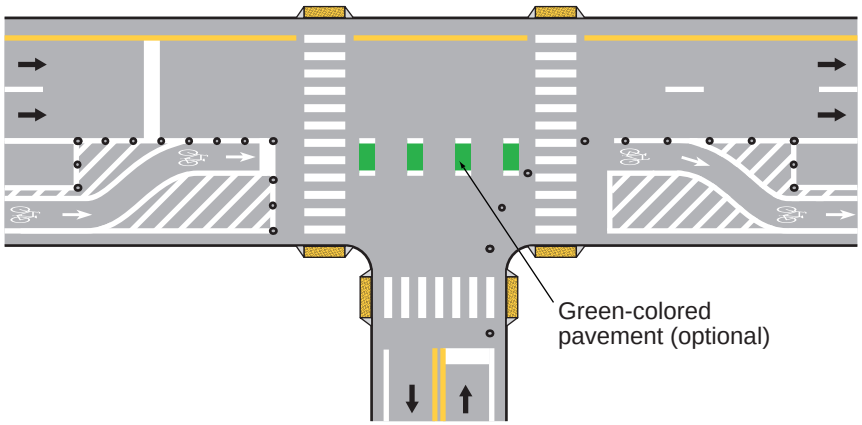


Legend


→ Direction of travel
∘ Tubular marker

**E – Separated bicycle lane shifted away from traffic**

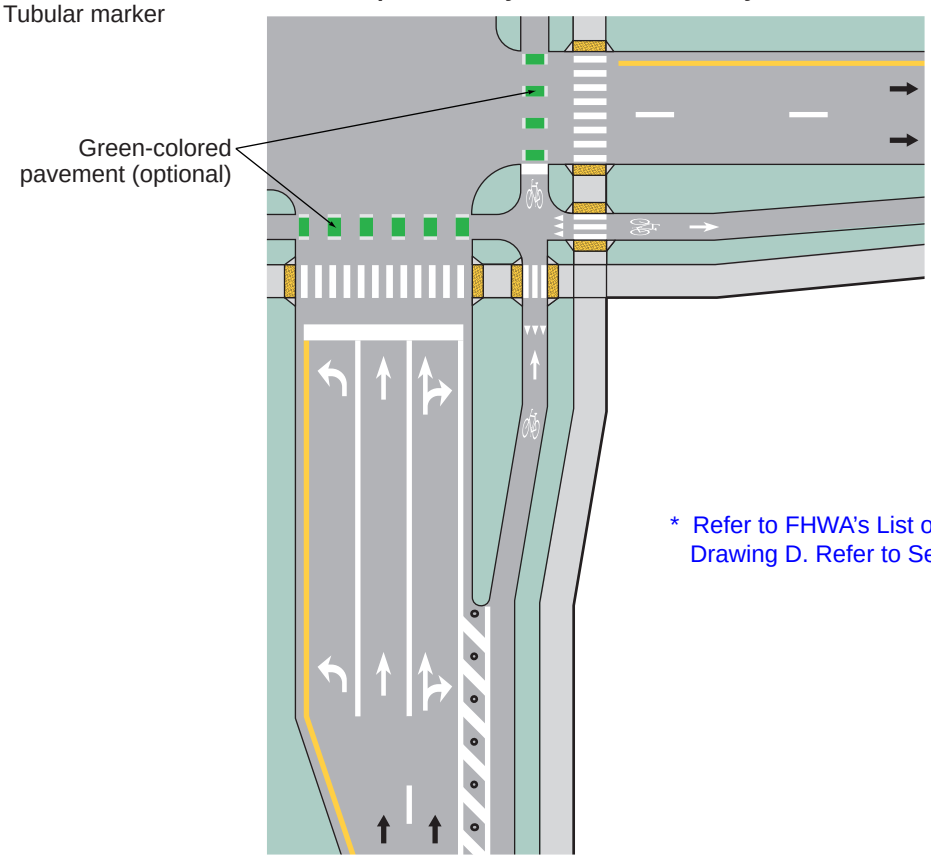



* Refer to FHWA's List of Known Errors for error in Drawing D. Refer to Section 1A.04 for more details.

# Figure 9E-7. Examples of Lane Markings for Separated Bicycle Lanes (Sheet 2 of 2)

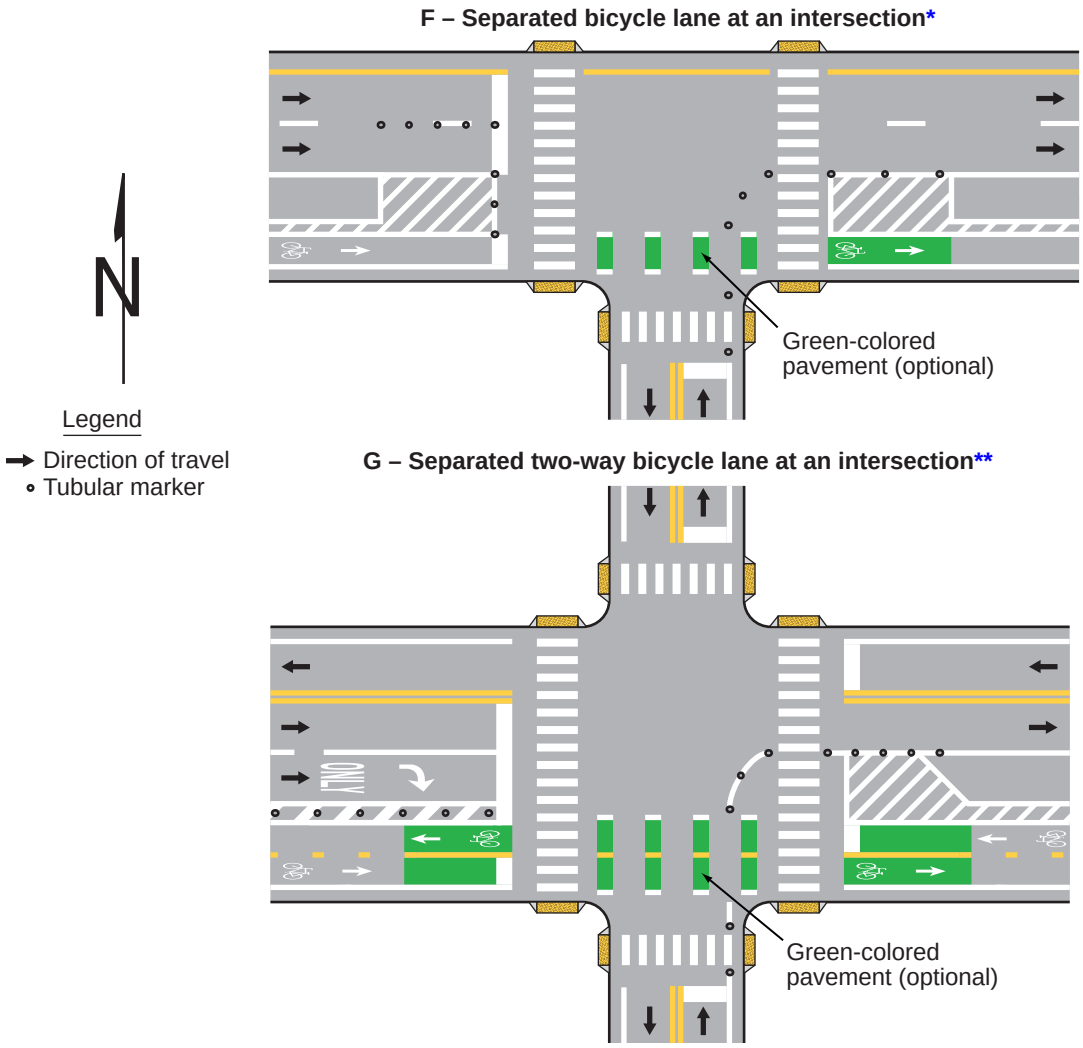



* Refer to FHWA's List of Known Errors for error in Drawing F. Refer to Section 1A.04 for more details.
** Refer to FHWA's List of Known Errors for error in Drawing G. Refer to Section 1A.04 for more details.

# Figure 9E-8. Example of Counter-Flow Bicycle Lanes at an Intersection

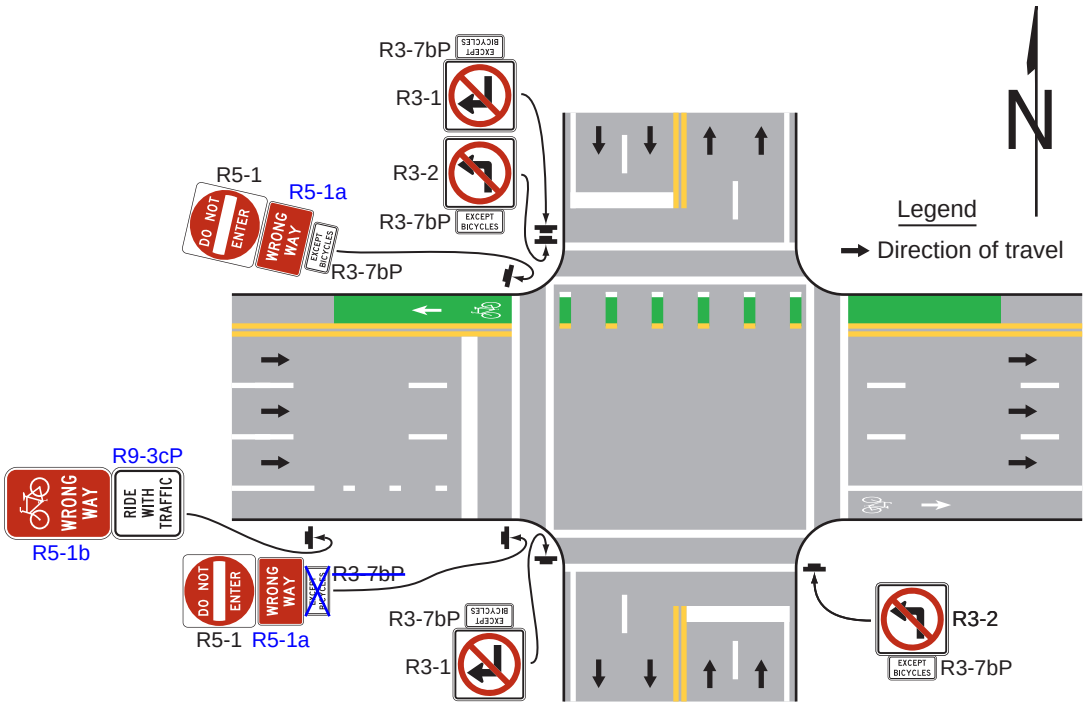


# Figure 9E-9. Examples of Shared-Lane Marking Applications

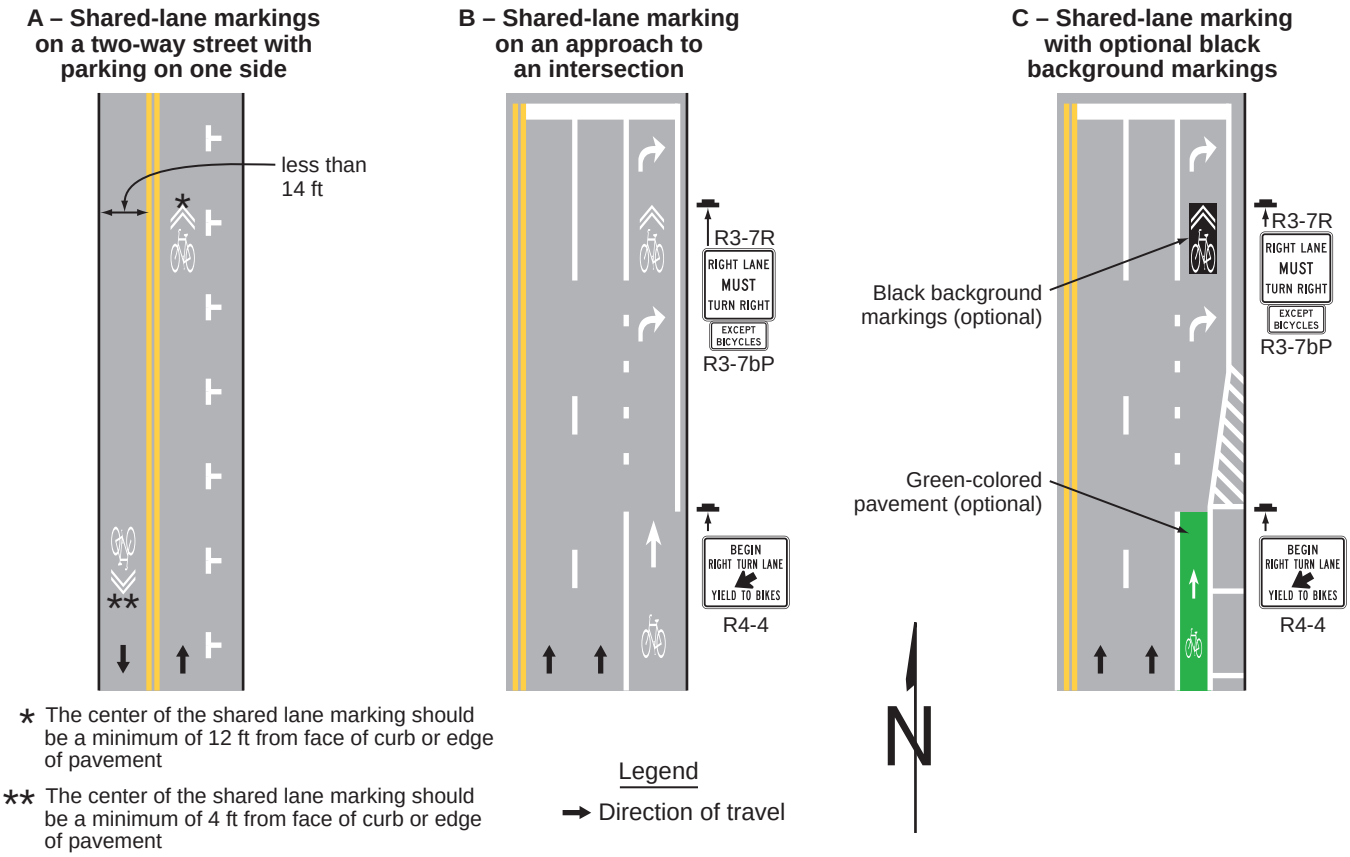



Note: For shared-lane marking design details, see the Pavement Markings chapter of the Standard Highway Signs publication

## Figure 9E-10. Examples of Two-Stage Turn Box Locations at Intersections

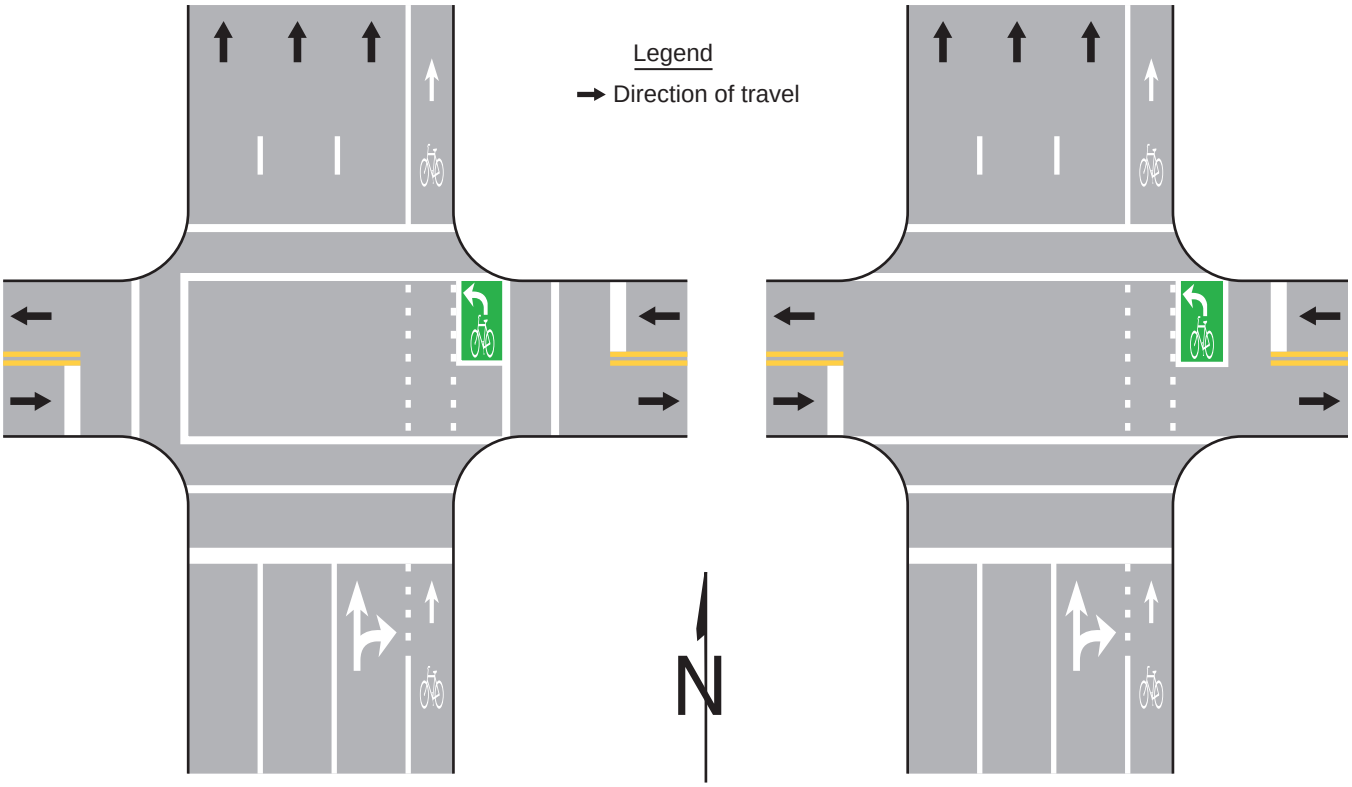


**A – Between the through bicycle lane and the parallel crosswalk**


**B – Between the through bicycle lane and the parallel pedestrian movement**

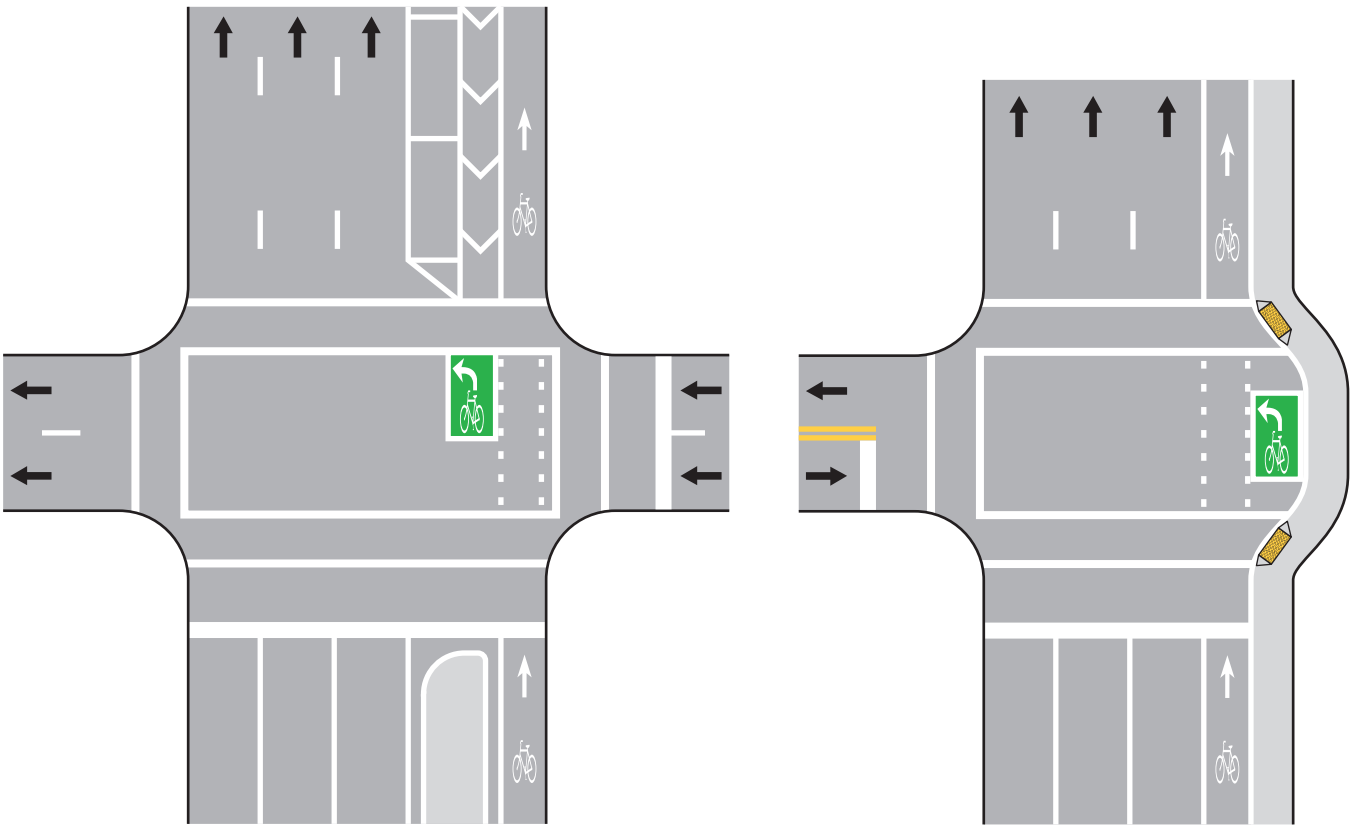


**C – On the inside of the through bicycle lane**

**D – Between the through bicycle lane and the sidewalk at a T-intersection**

## Figure 9E-11. Example of a Two-Stage Turn Box Location at an Intersection with a Two-Way Bikeway

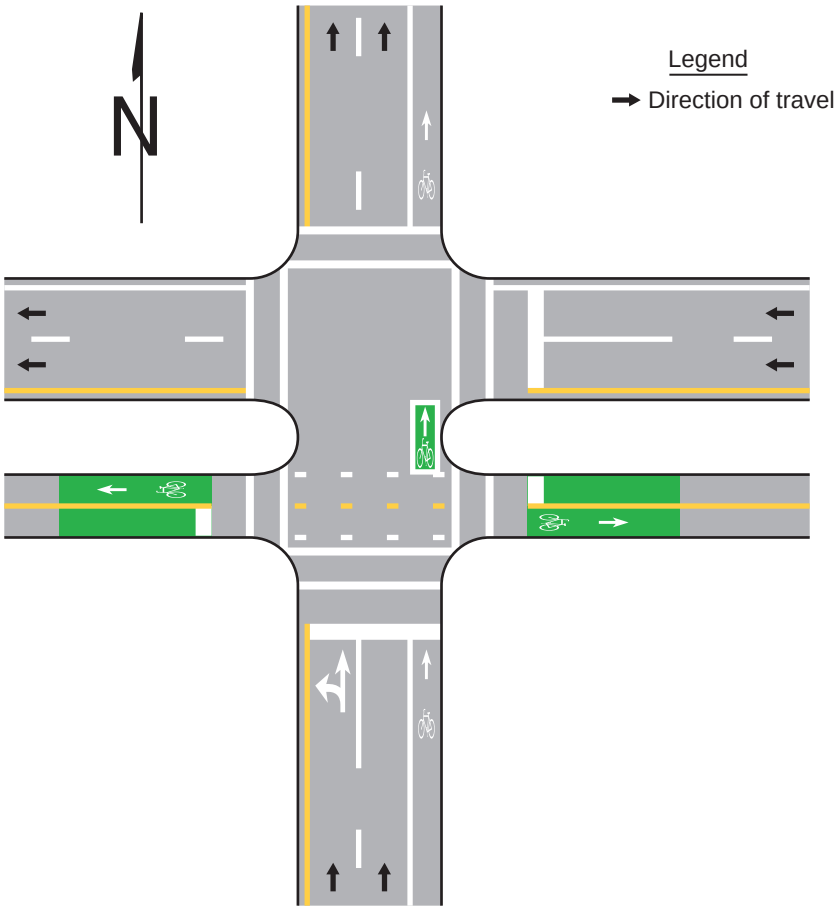


## Figure 9E-12. Examples of Intersection Bicycle Boxes (Sheet 1 of 2)

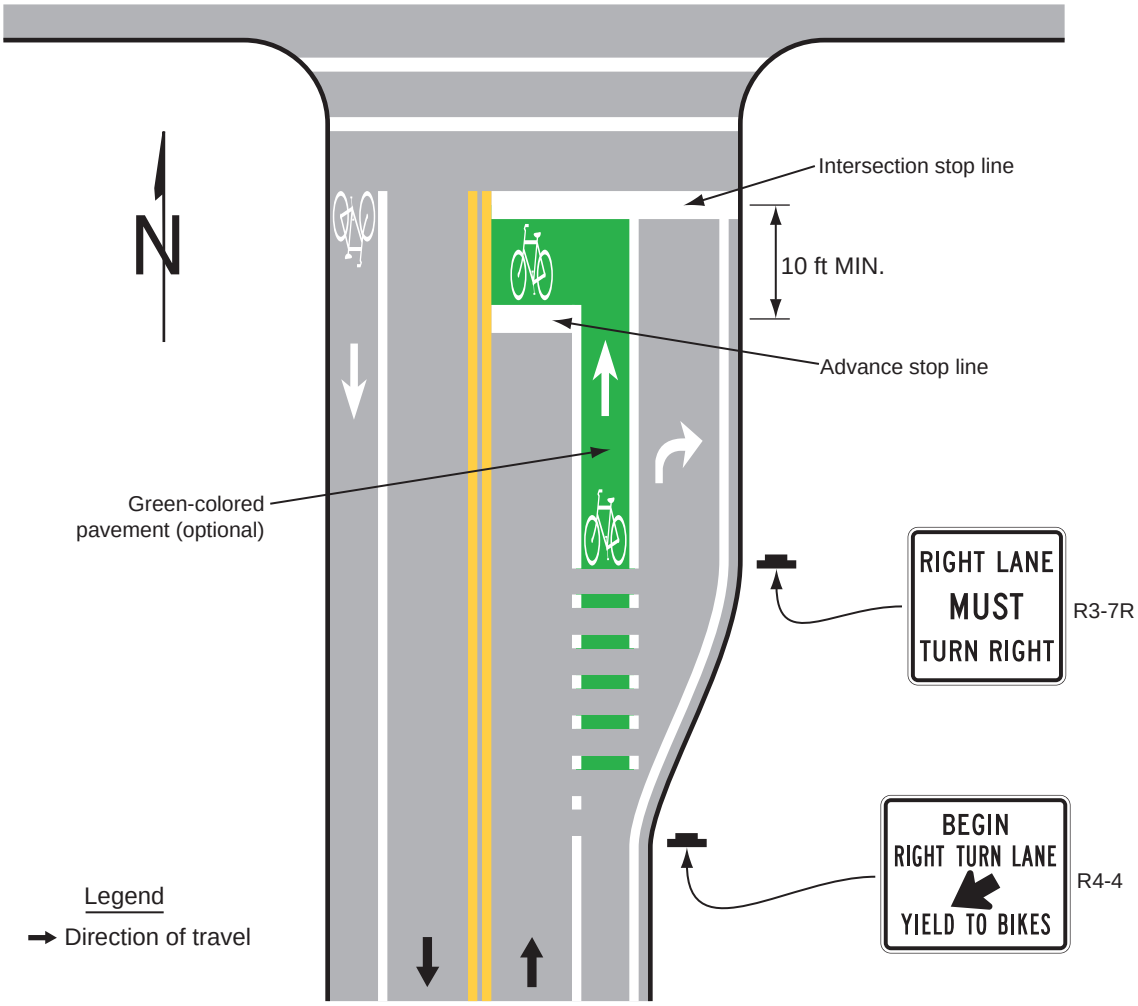



**A – Bicycle box across one lane**

## Figure 9E-12. Examples of Intersection Bicycle Boxes (Sheet 2 of 2)

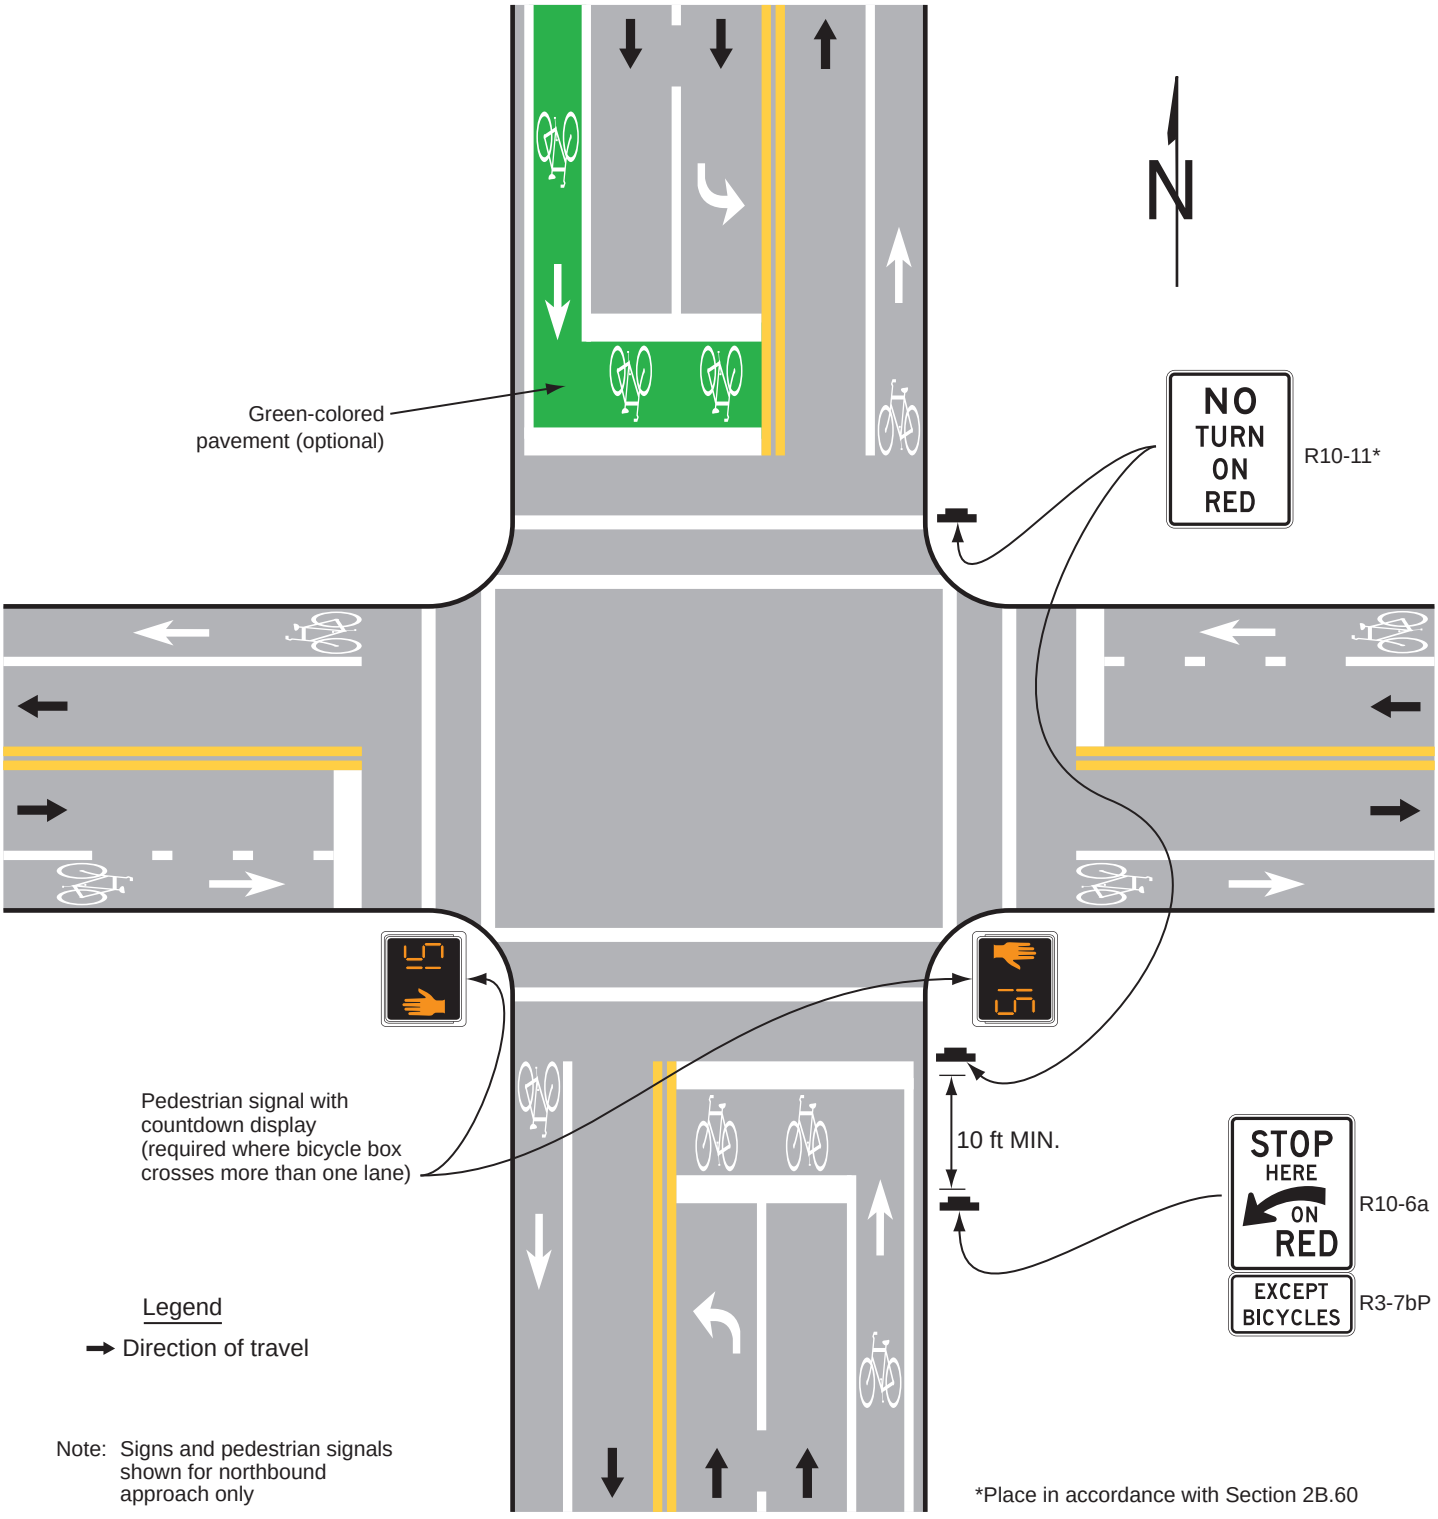


**B – Bicycle box across multiple lanes**


## Figure 9E-13. Examples of Center Line Markings for Shared-Use Paths

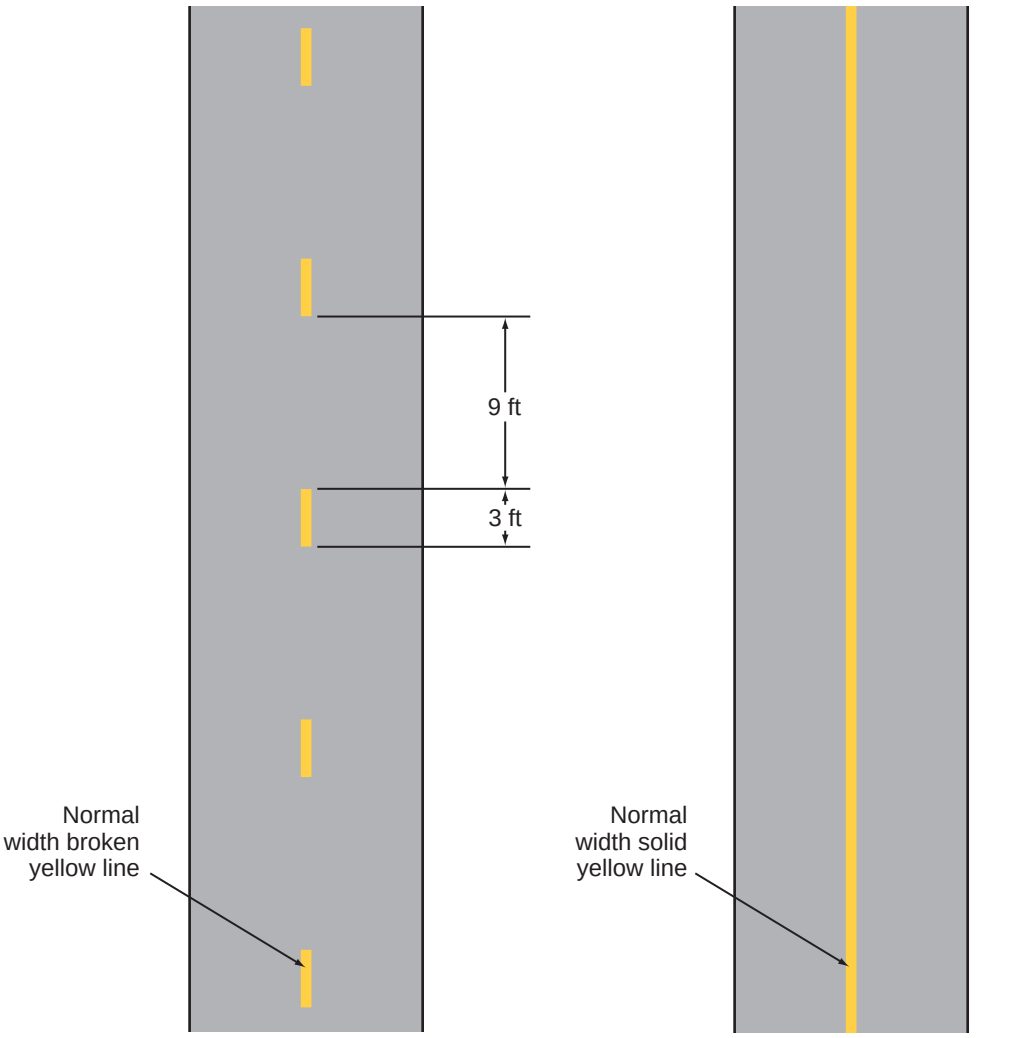



**A – Passing permitted**

**B – Passing NOT permitted**


## Figure 9E-14. Example of Pavement Markings for a Shared-Use Path with Mode Separation

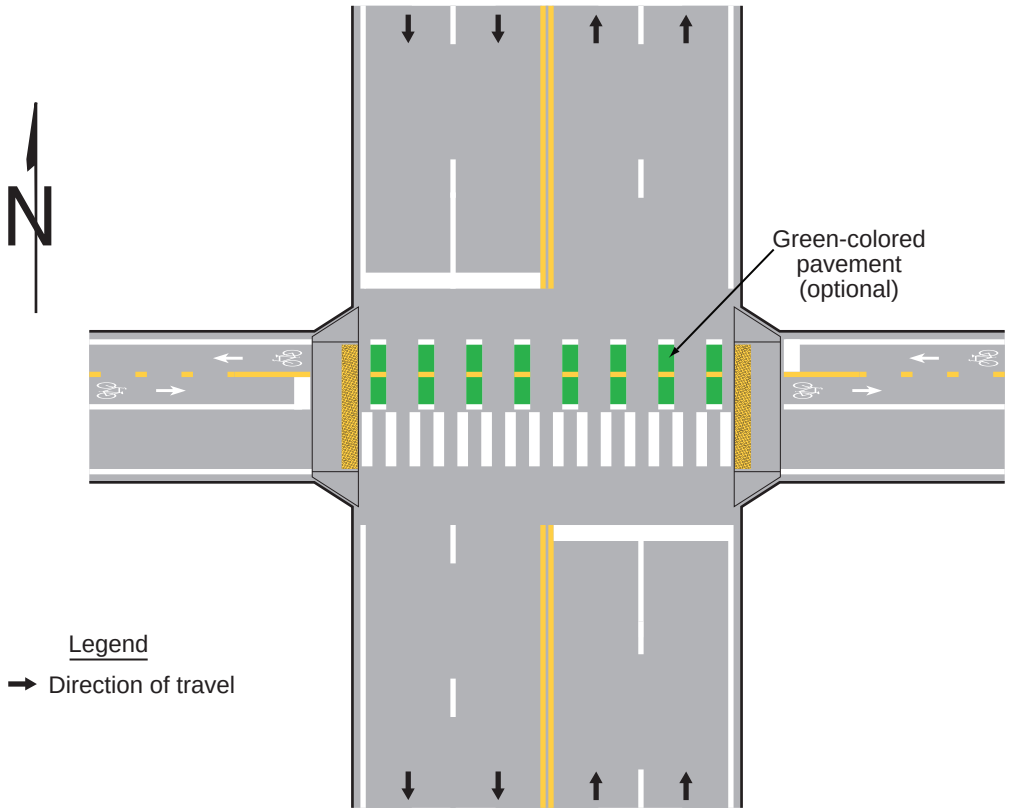

# Figure 9E-15. Example of Placement of Route Markers for Shared-Use Paths

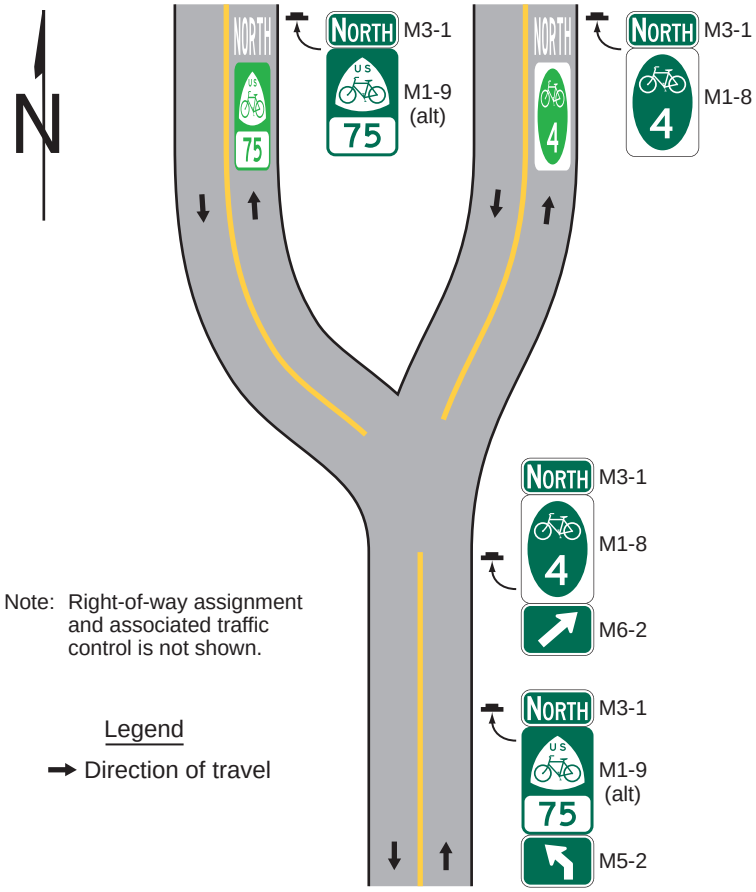


## Figure 9E-16. Bicycle Detector Pavement Marking

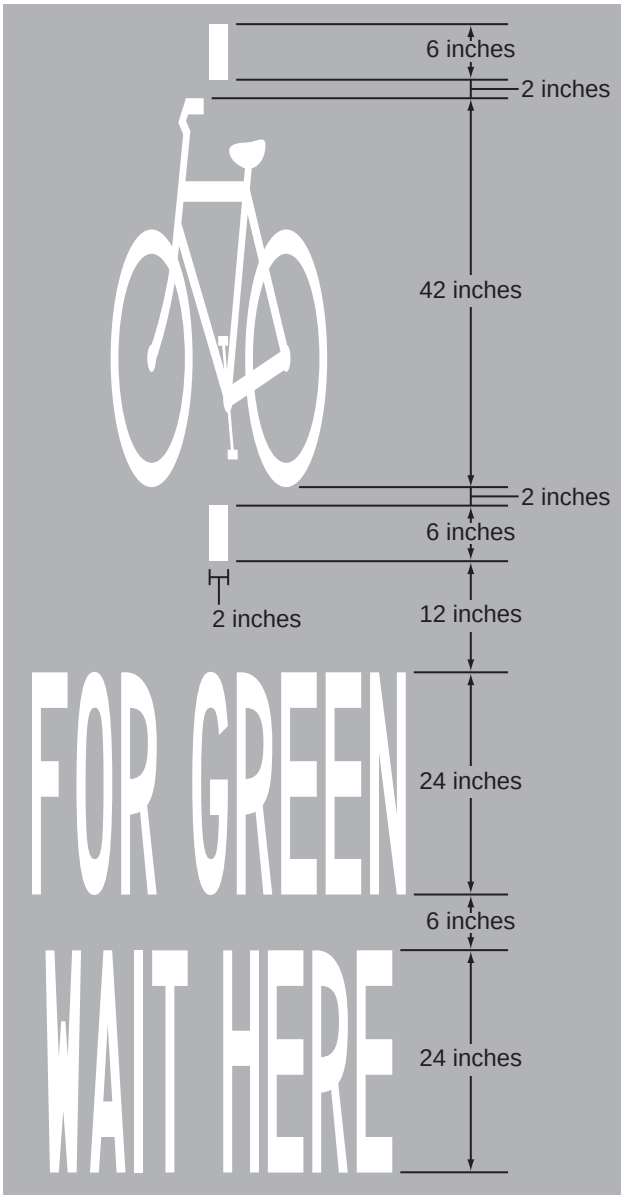



Note: The word pavement markings are optional.

## Figure 9E-17. Examples of Obstruction Pavement Markings

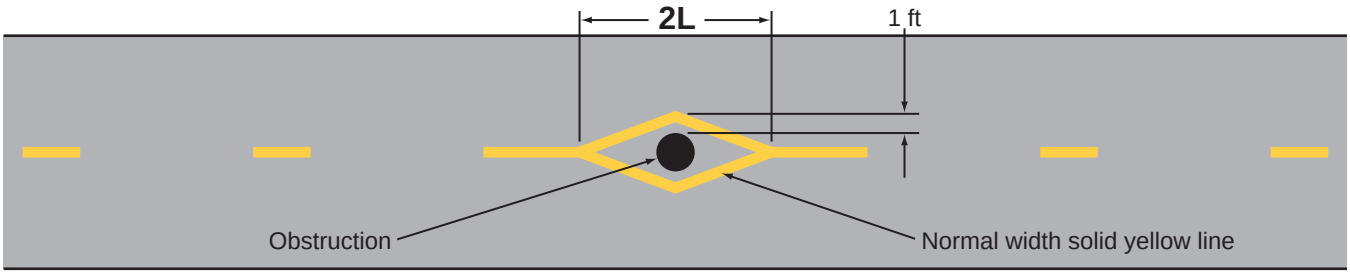


**A – Obstruction within the path**

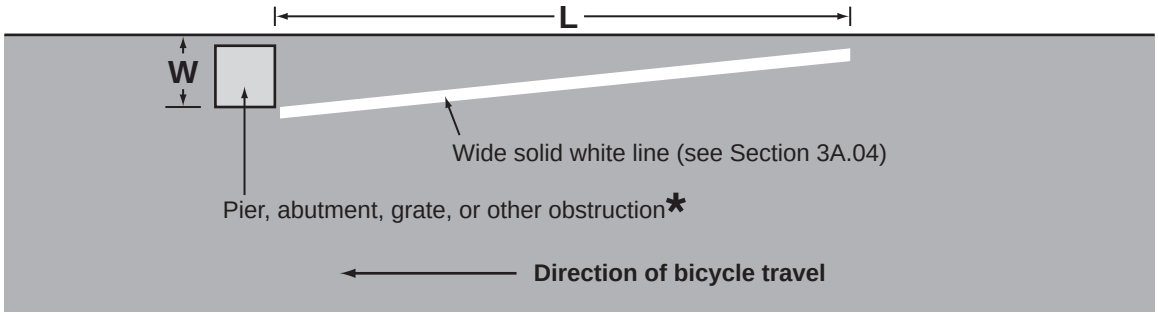



**B – Obstruction at the edge of the path or roadway**

L = WS, where W is the offset in feet and S is bicycle approach speed in mph


* Provide an additional foot of offset for a raised obstruction and use the formula L = (W+1) S for the taper length

## *Figure 9E-101(CA). Examples of Bicycle Lane Treatment Where Vehicle Parking is Prohibited/Permitted*

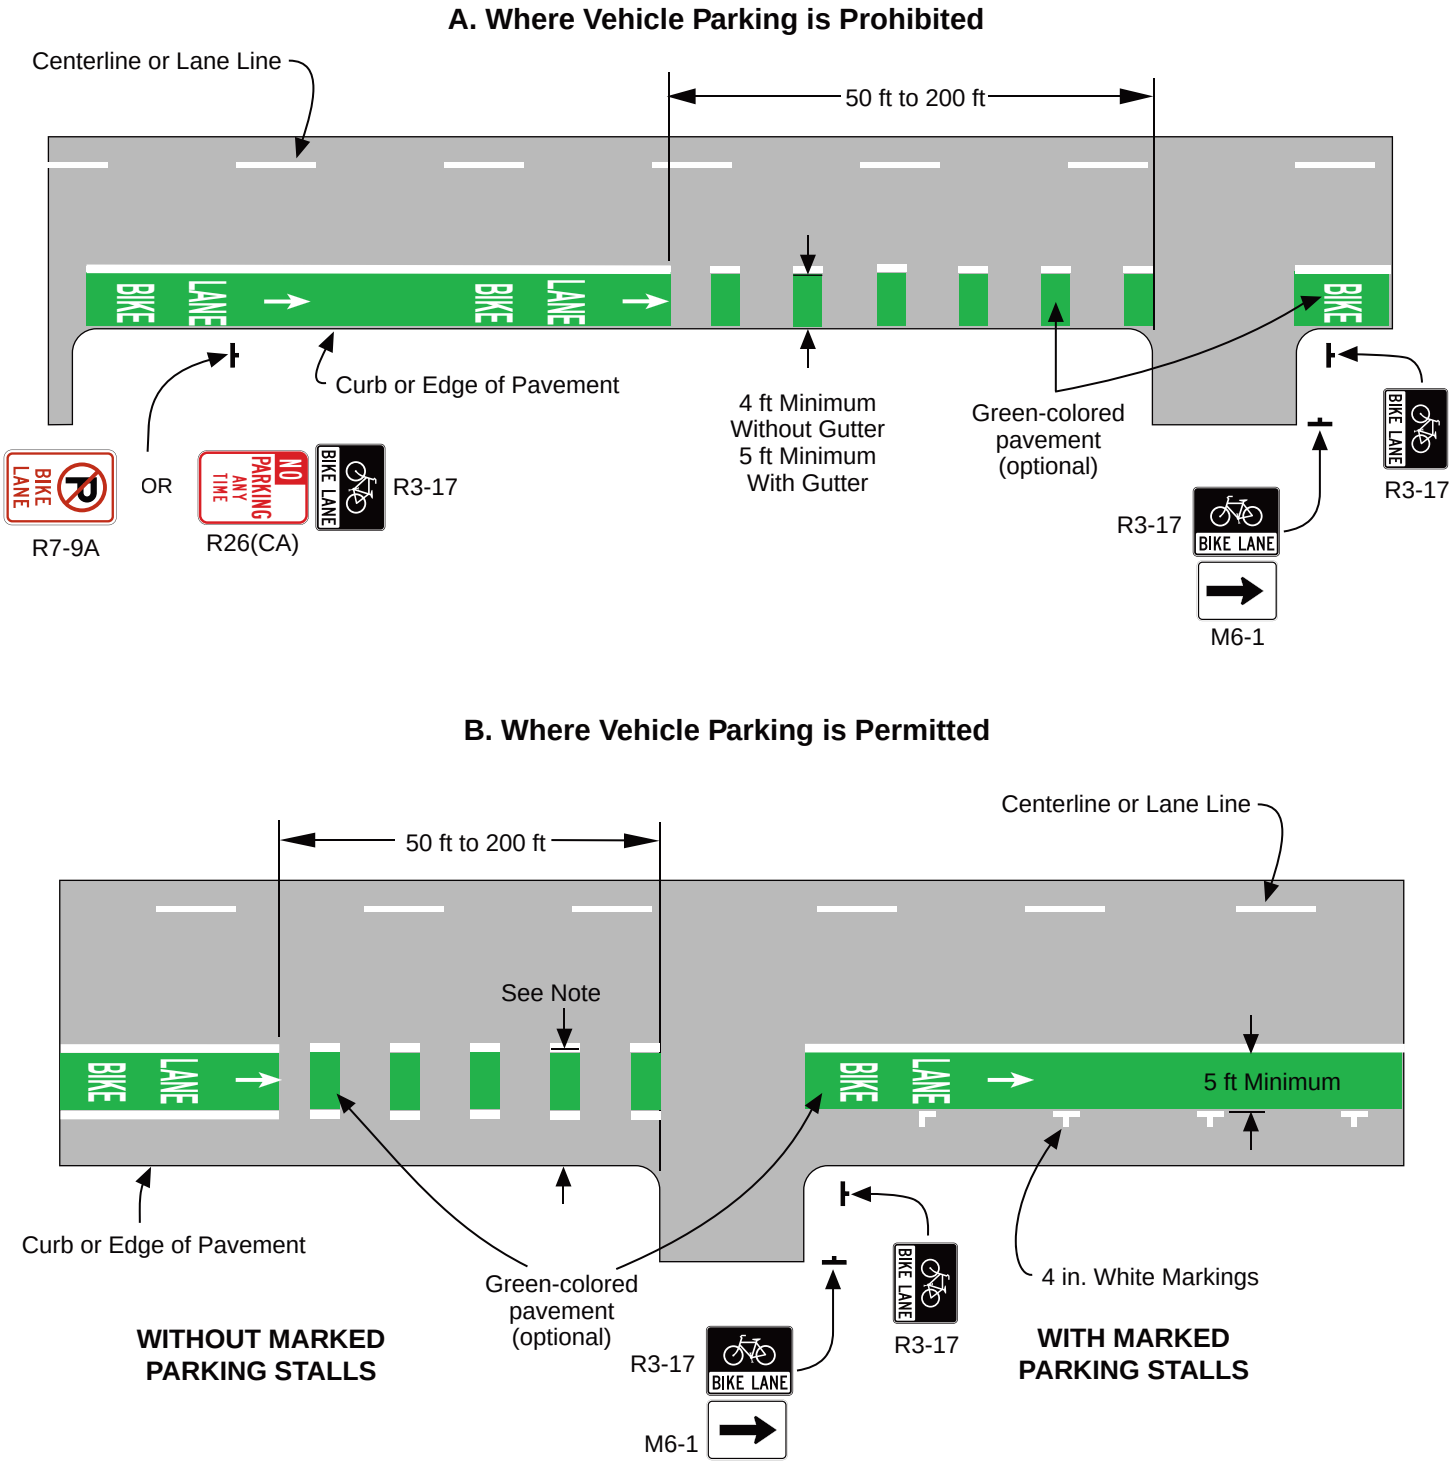



Notes:
1. 11 ft Minimum for Rolled Curb
2. 12 ft Minimum for Vertical

## *Figure 9E-102(CA). Example of Bicycle Lane Treatment Through an Interchange*

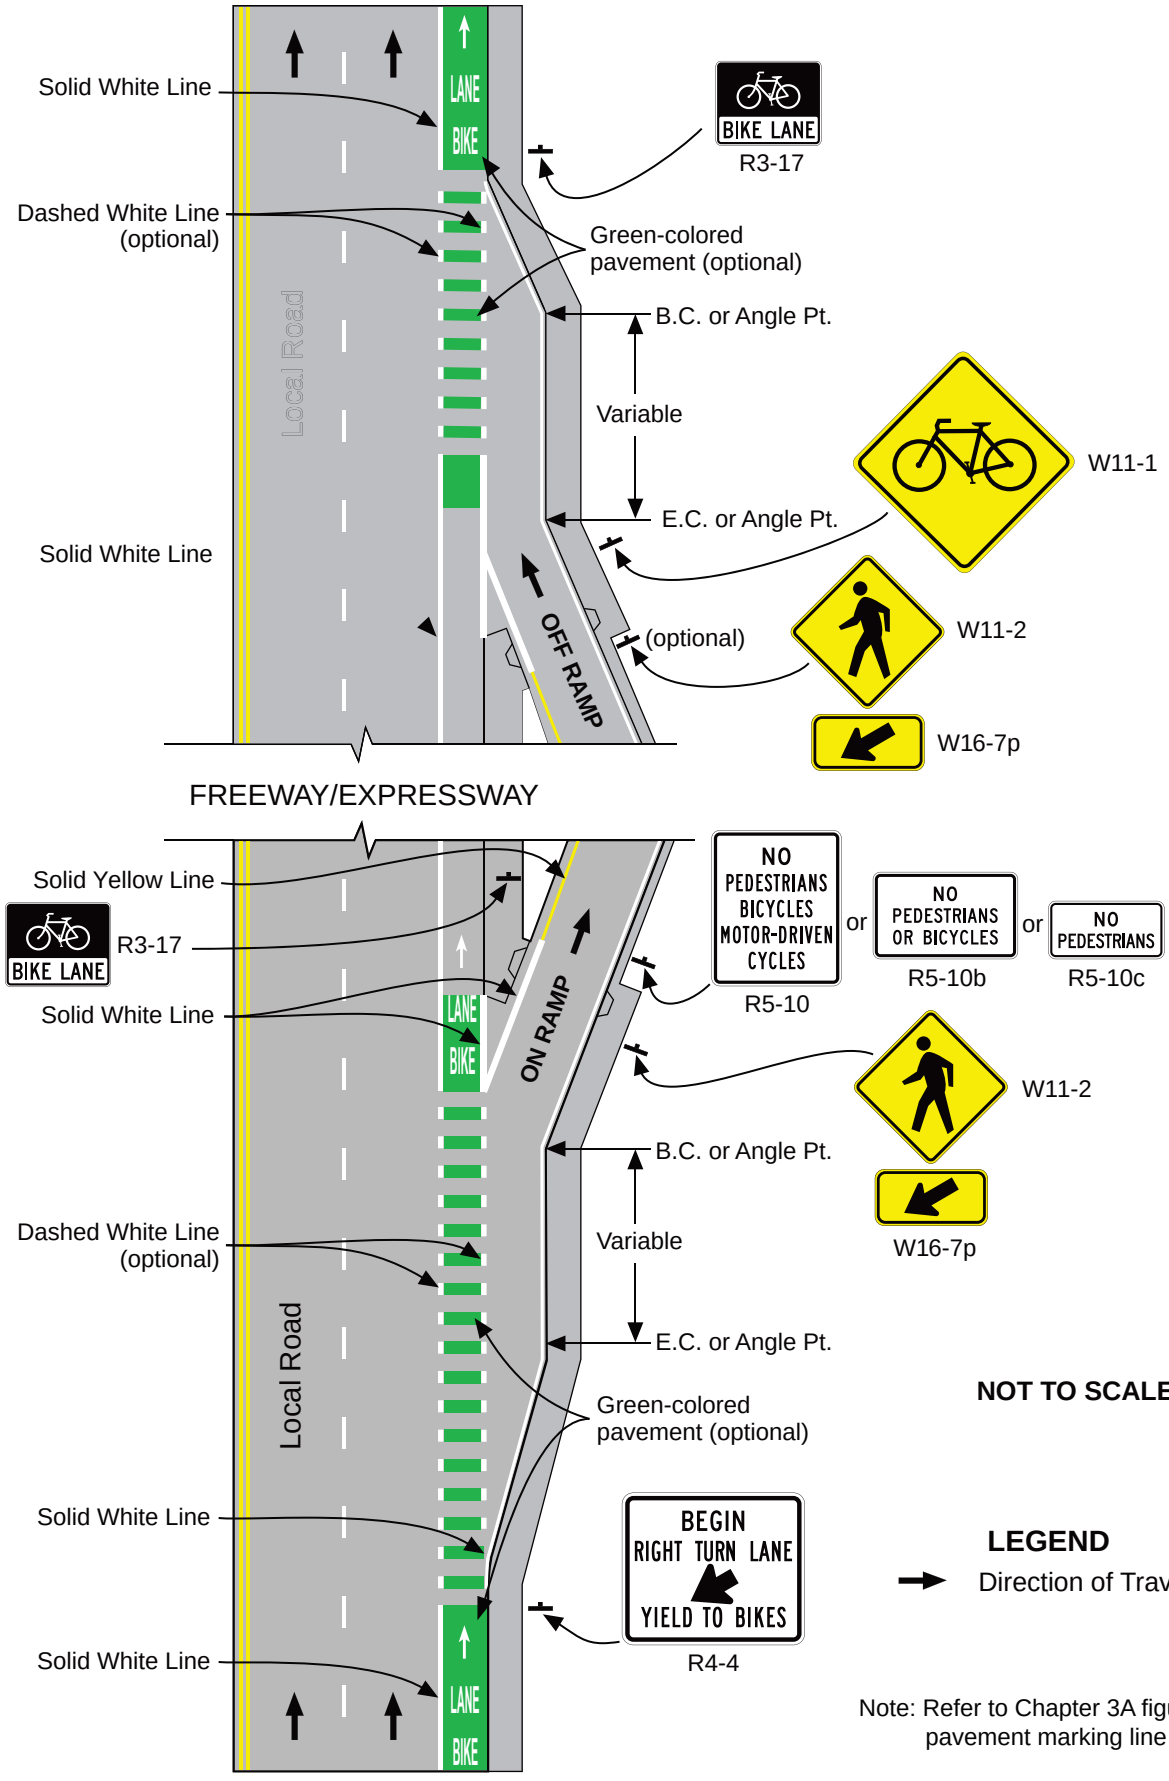



Note: Refer to Chapter 3A figures for pavement marking line widths

## *Figure 9E-103(CA). Examples of Bicycle Lane Extensions Through Intersection*

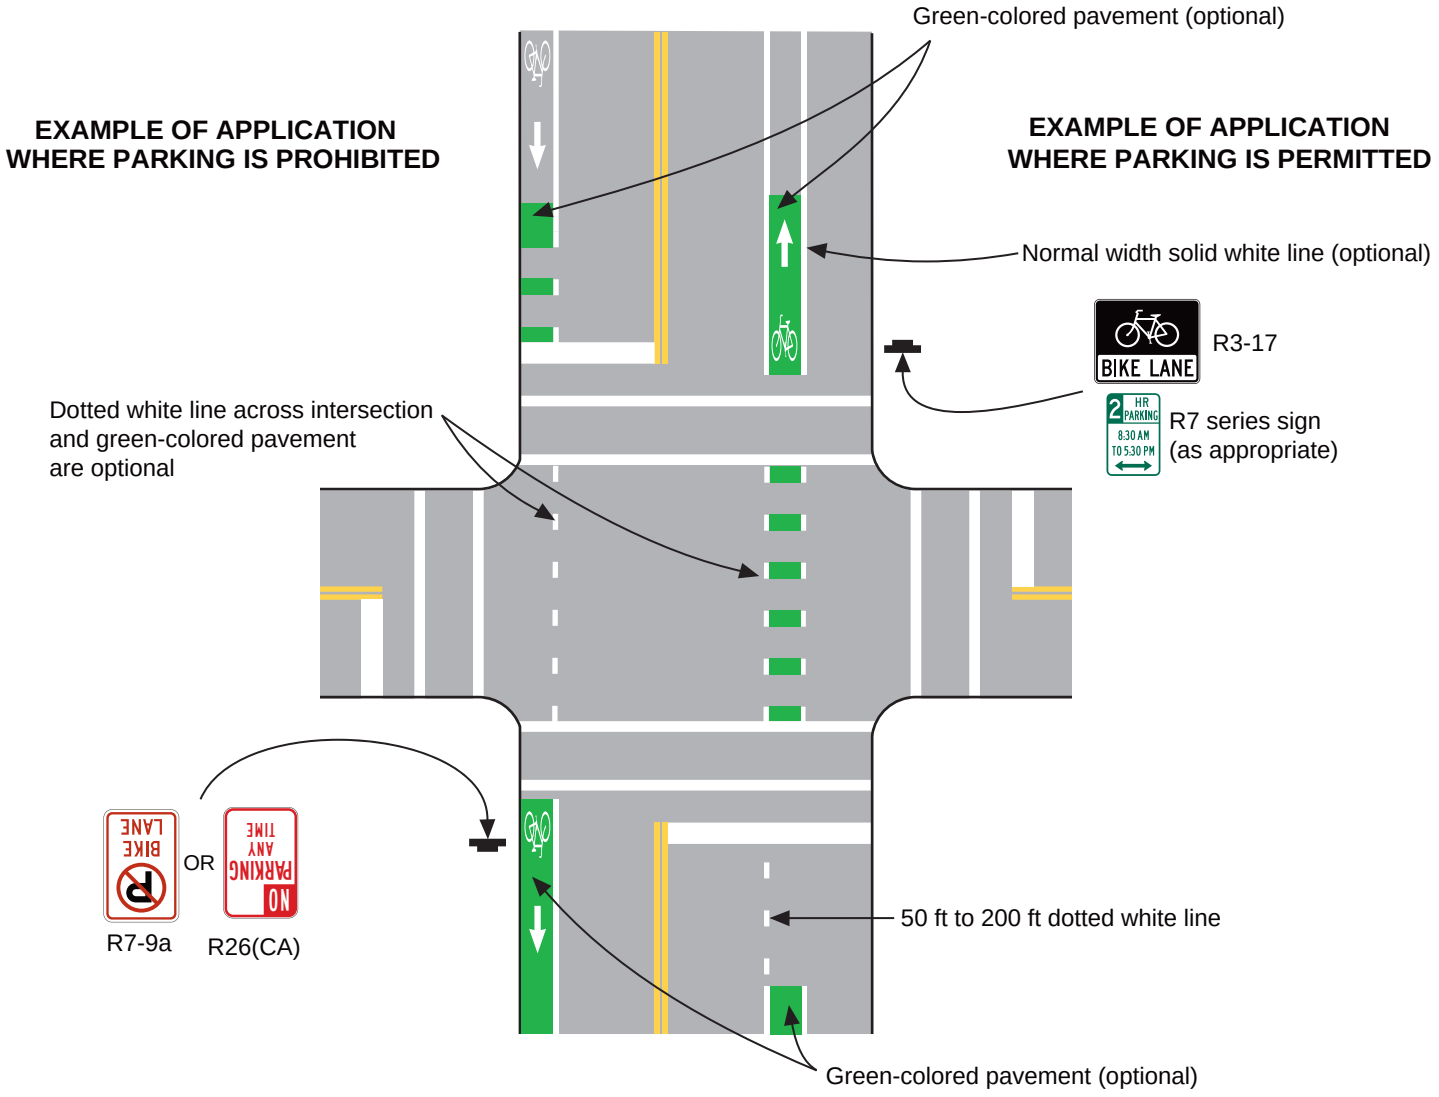


**NOT TO SCALE**


## *Figure 9E-104(CA). Example of Marking for a One-Lane Roundabout with Shared Lane Markings and Bicycle Lanes*

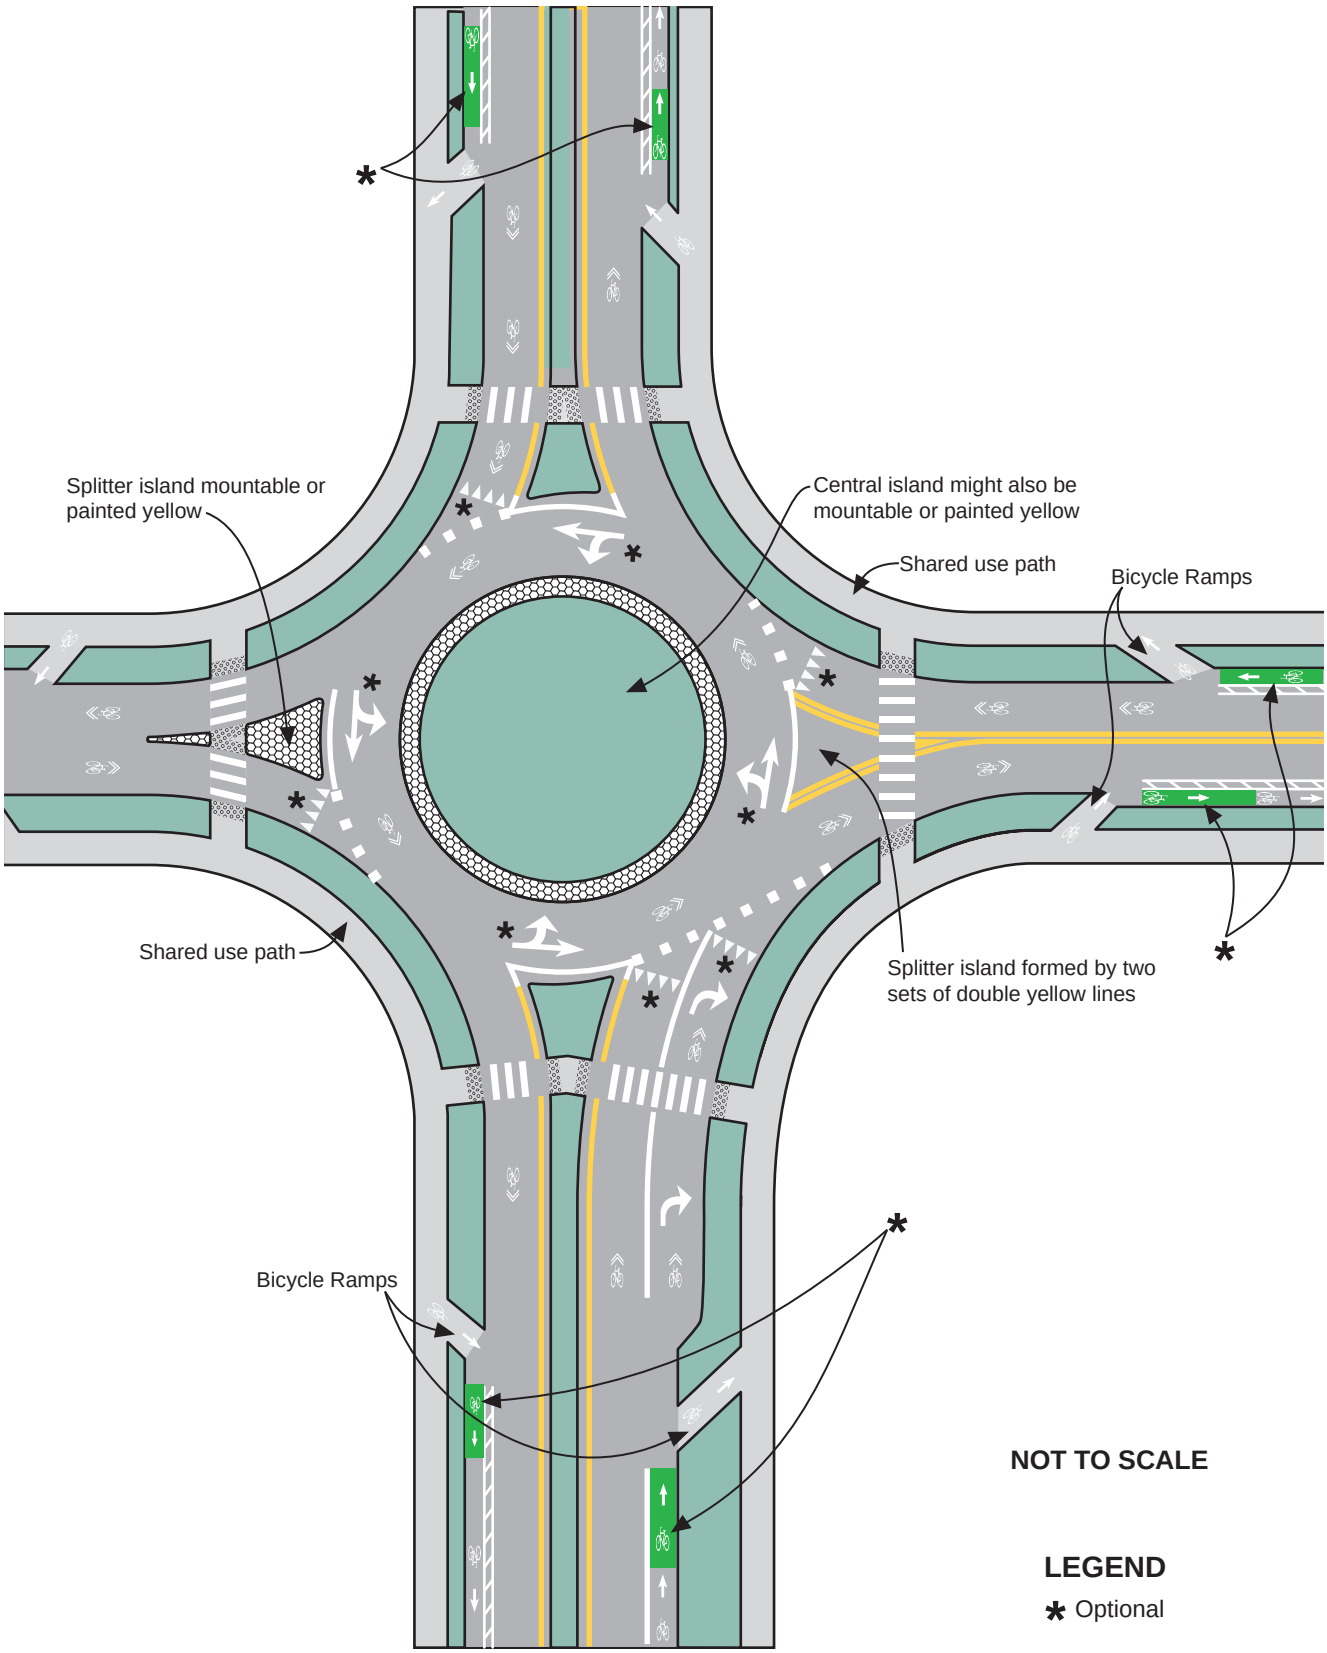


Notes:


1. Refer to Sections 9E.01 through 9E.08 for information regarding markings for bicycle lanes and guidance on buffered bicycle lanes.
2. Bicycle facility markings are not to scale.

## *Figure 9E-105(CA). Example of Placement of Shared Lane Markings*

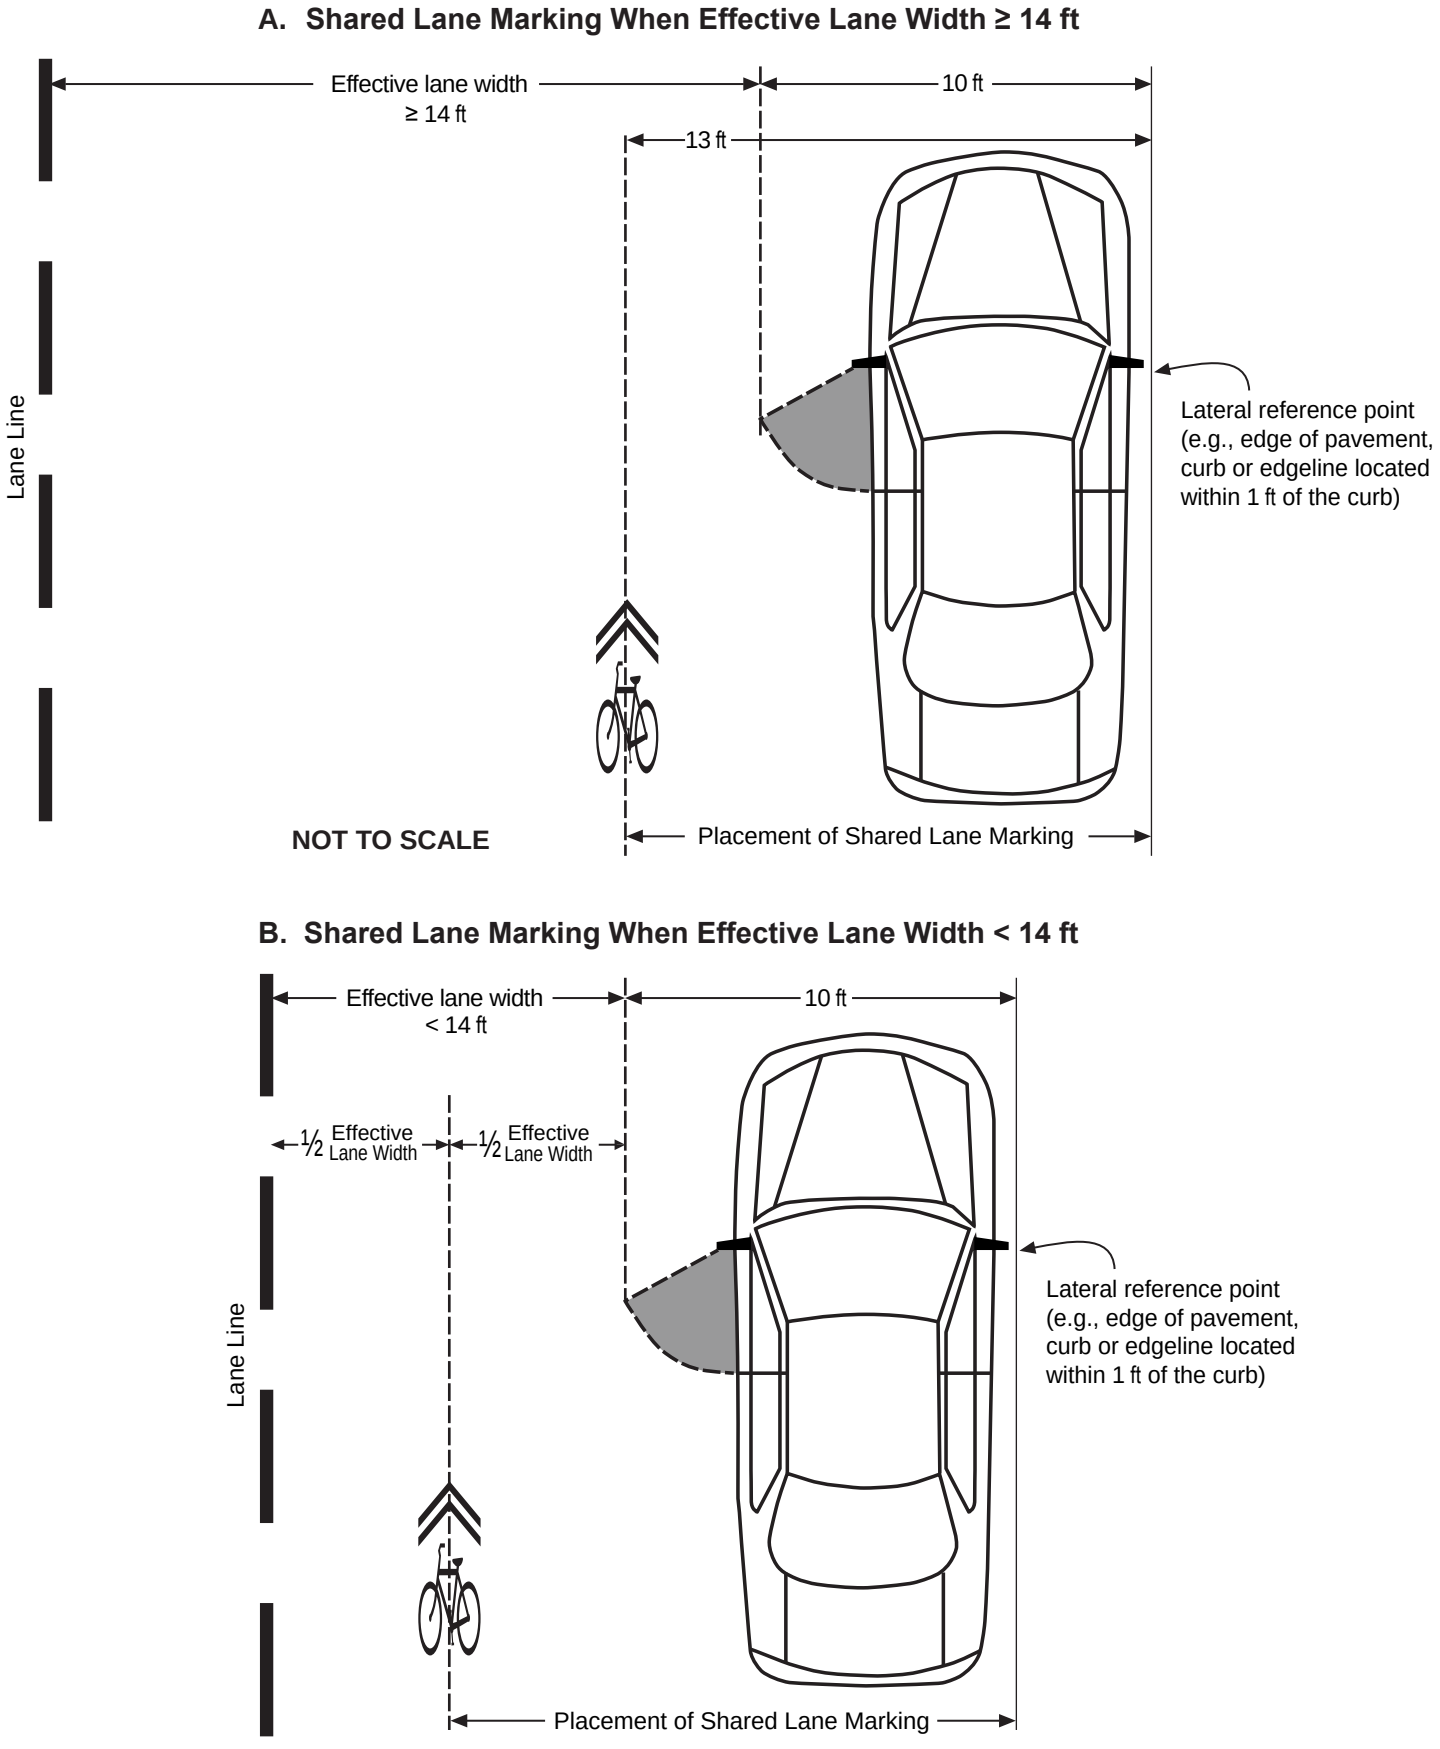


## *Figure 9E-106(CA). Examples of Markings for Separated Bikeways (Sheet 1 of 4)*

### A. One-Way Separated Bikeway with On-Street Parking

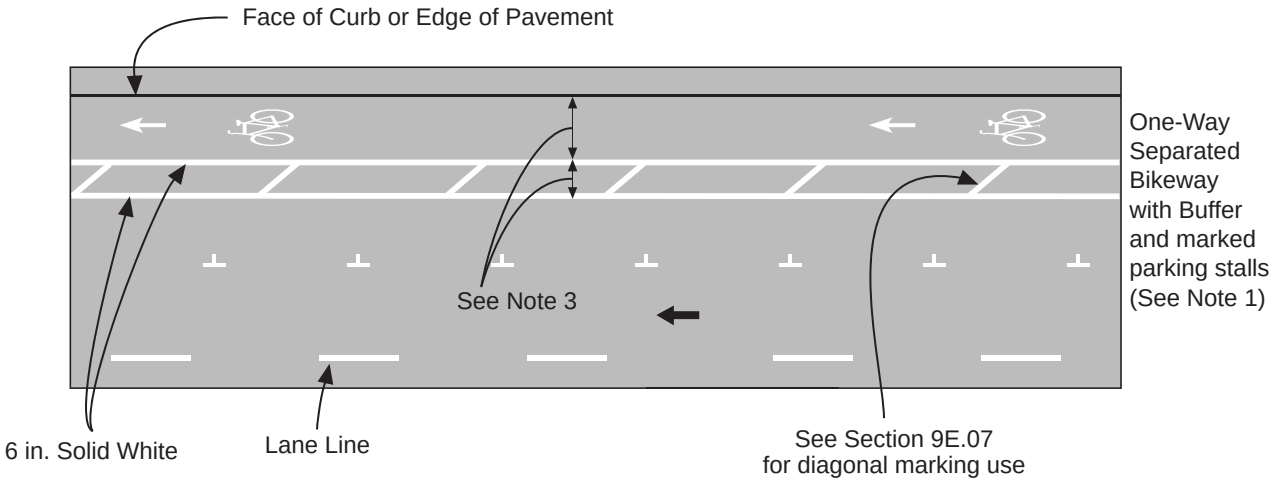


### B. One-Way Separated Bikeway On Street with No Parking

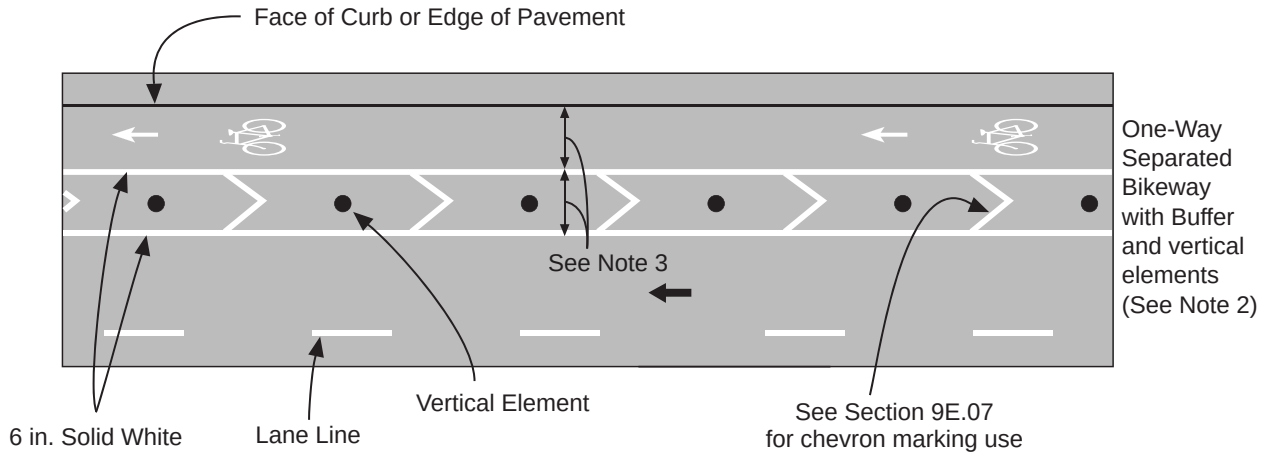


**NOT TO SCALE**

**LEGEND**

→ Direction of Travel

Notes:


1. Refer to Figure 3B-23 for examples of parking space markings.

2. Vertical elements in the buffer are an important separation feature of the Separated Bikeway. These may include grade separation, flexible posts, inflexible physical barriers, or on-street parking. Refer to DIB 89 for more information.


**3**. Refer to DIB 89 for separated bikeway width and buffer width.

## *Figure 9E-106(CA). Examples of Markings for Separated Bikeways (Sheet 2 of 4)*

### C. Two-Way Separated Bikeway with On-Street Parking

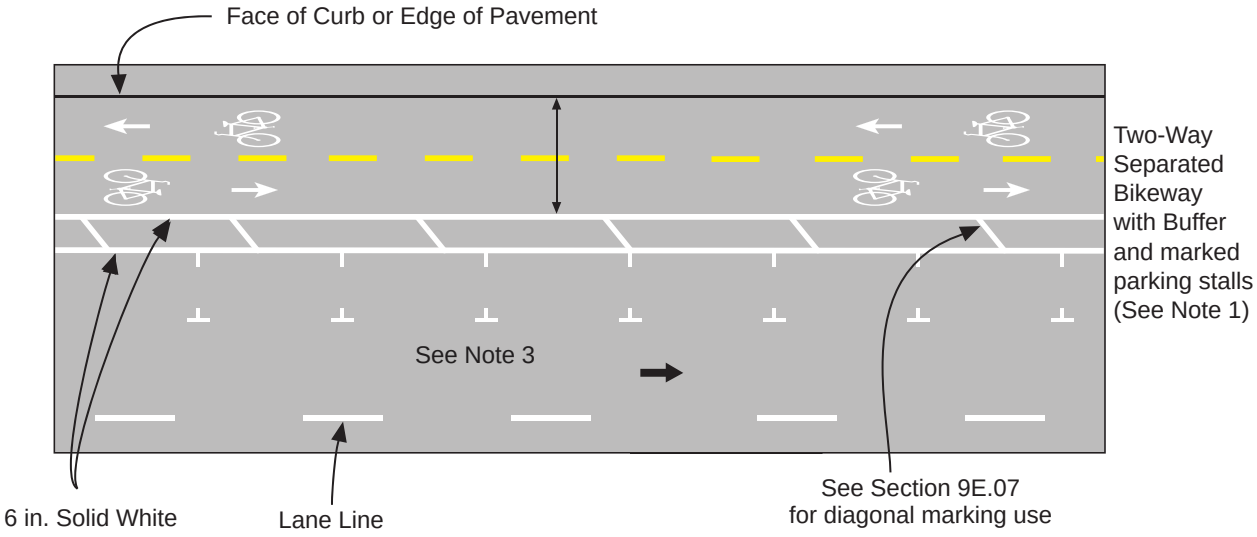


### D. Two-Way Separated Bikeway with No Parking

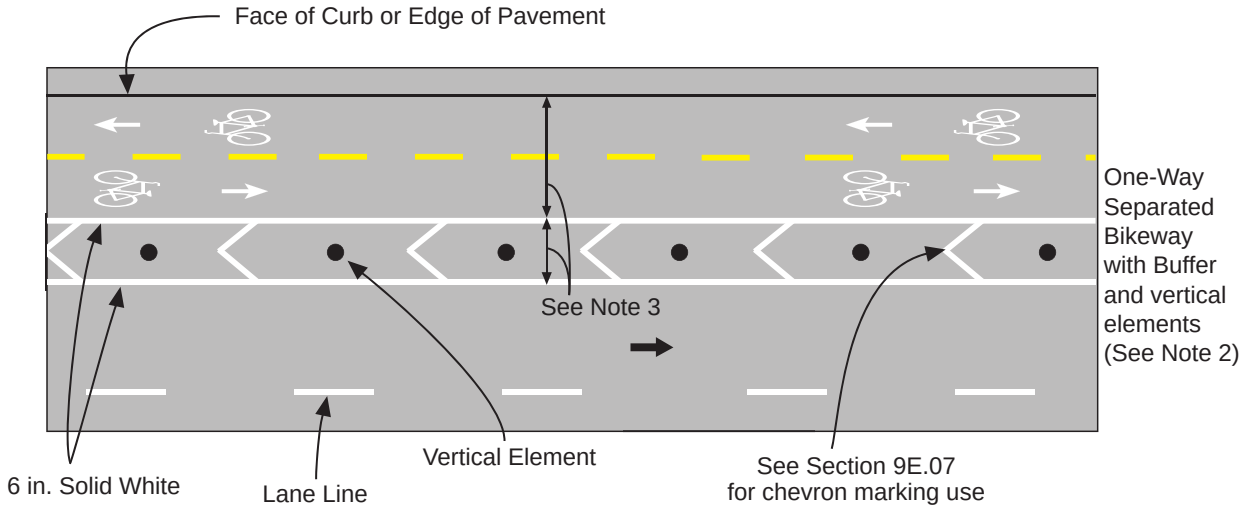


**NOT TO SCALE**

**LEGEND**


→ Direction of Travel

Notes:


1. Refer to Figure 3B-23 for examples of parking space markings.
2. Vertical elements in the buffer are an important separation feature of the Separated Bikeway. These may include grade separation, flexible posts, inflexible physical barriers, or on-street parking. Refer to DIB 89 for more information.
3. Refer to DIB 89 for separated bikeway width and buffer width.

## *Figure 9E-106(CA). Examples of Markings for Separated Bikeways (Sheet 3 of 4)*

### E. Transition of a Buffer Space Between a Bicycle Lane and On-Street Parking to a Buffer Space Where Crossing is Prohibited

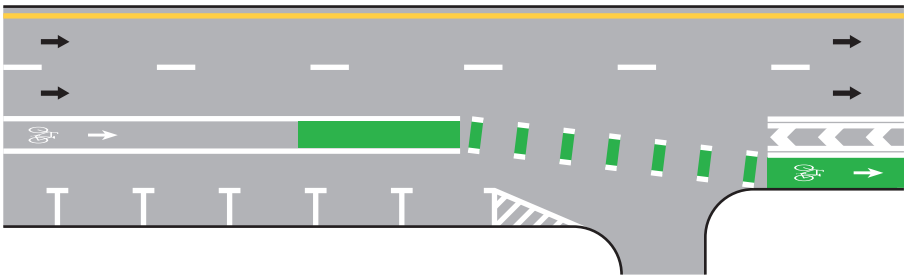


### F. Adjacent to Reserved Parking for Persons with Disabilities

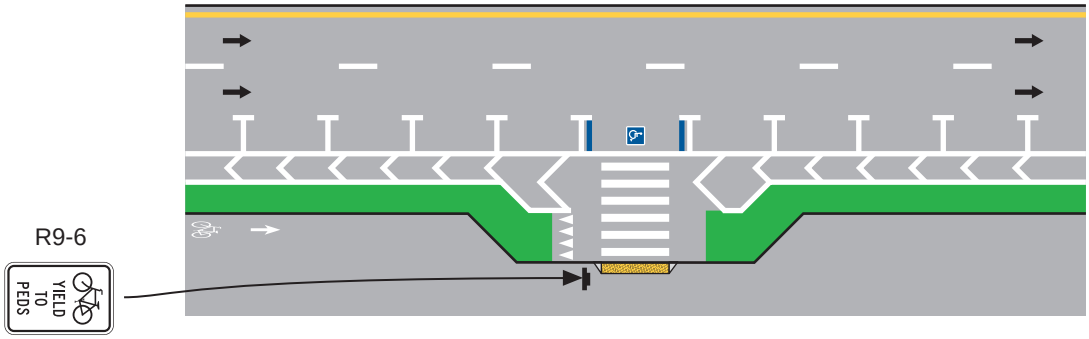


**LEGEND**

→ Direction of Travel

Notes:


1. Vertical elements in the buffer are an important separation feature of the Separated Bikeway. These may include grade separation, flexible posts, inflexible physical barriers, or on-street parking. See DIB 89 for more information.

2. See DIB 89 for separated bikeway width and buffer width.


3. Optional green-colored pavement shown.

## *Figure 9E-106(CA). Examples of Markings for Separated Bikeways (Sheet 4 of 4)*


### G. Separated Bicycle Lane Shift Away from Curb

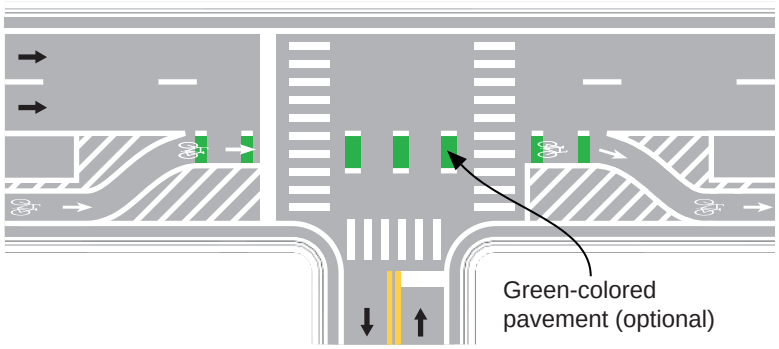


### H. Separated Bicycle Lane at Intersection

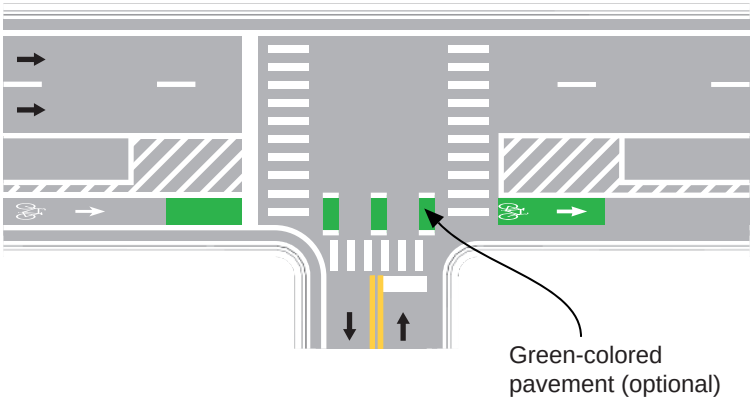


### I. Separated Two-Way Bicycle Lane at Intersection

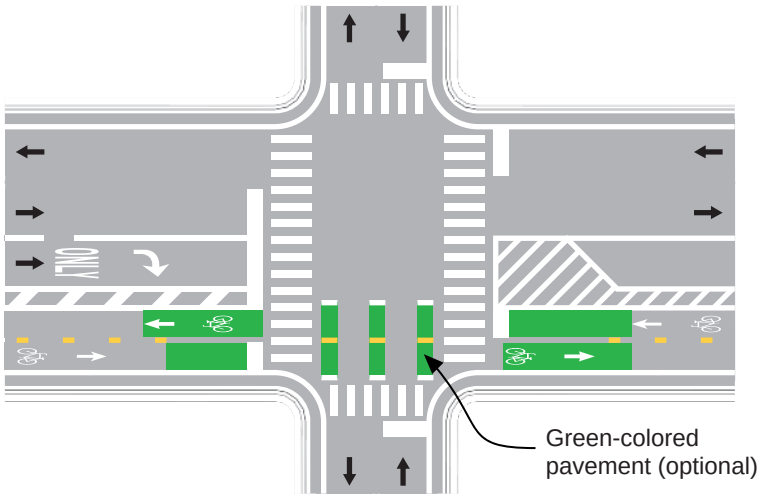


**NOT TO SCALE**

**LEGEND**


→ Direction of Travel

Notes:


1. Vertical elements in the buffer are an important separation feature of the Separated Bikeway. These may include grade separation, flexible posts, inflexible physical barriers, or on-street parking. Refer to DIB 89 for more information.

2. Refer to DIB 89 for separated bikeway width and buffer width.

## *Figure 9E-107(CA). Example of Intersection Pavement Markings and Signs— Bicycle Traveling Straight From Left Turn and Right Turn Only Lanes - One Way*

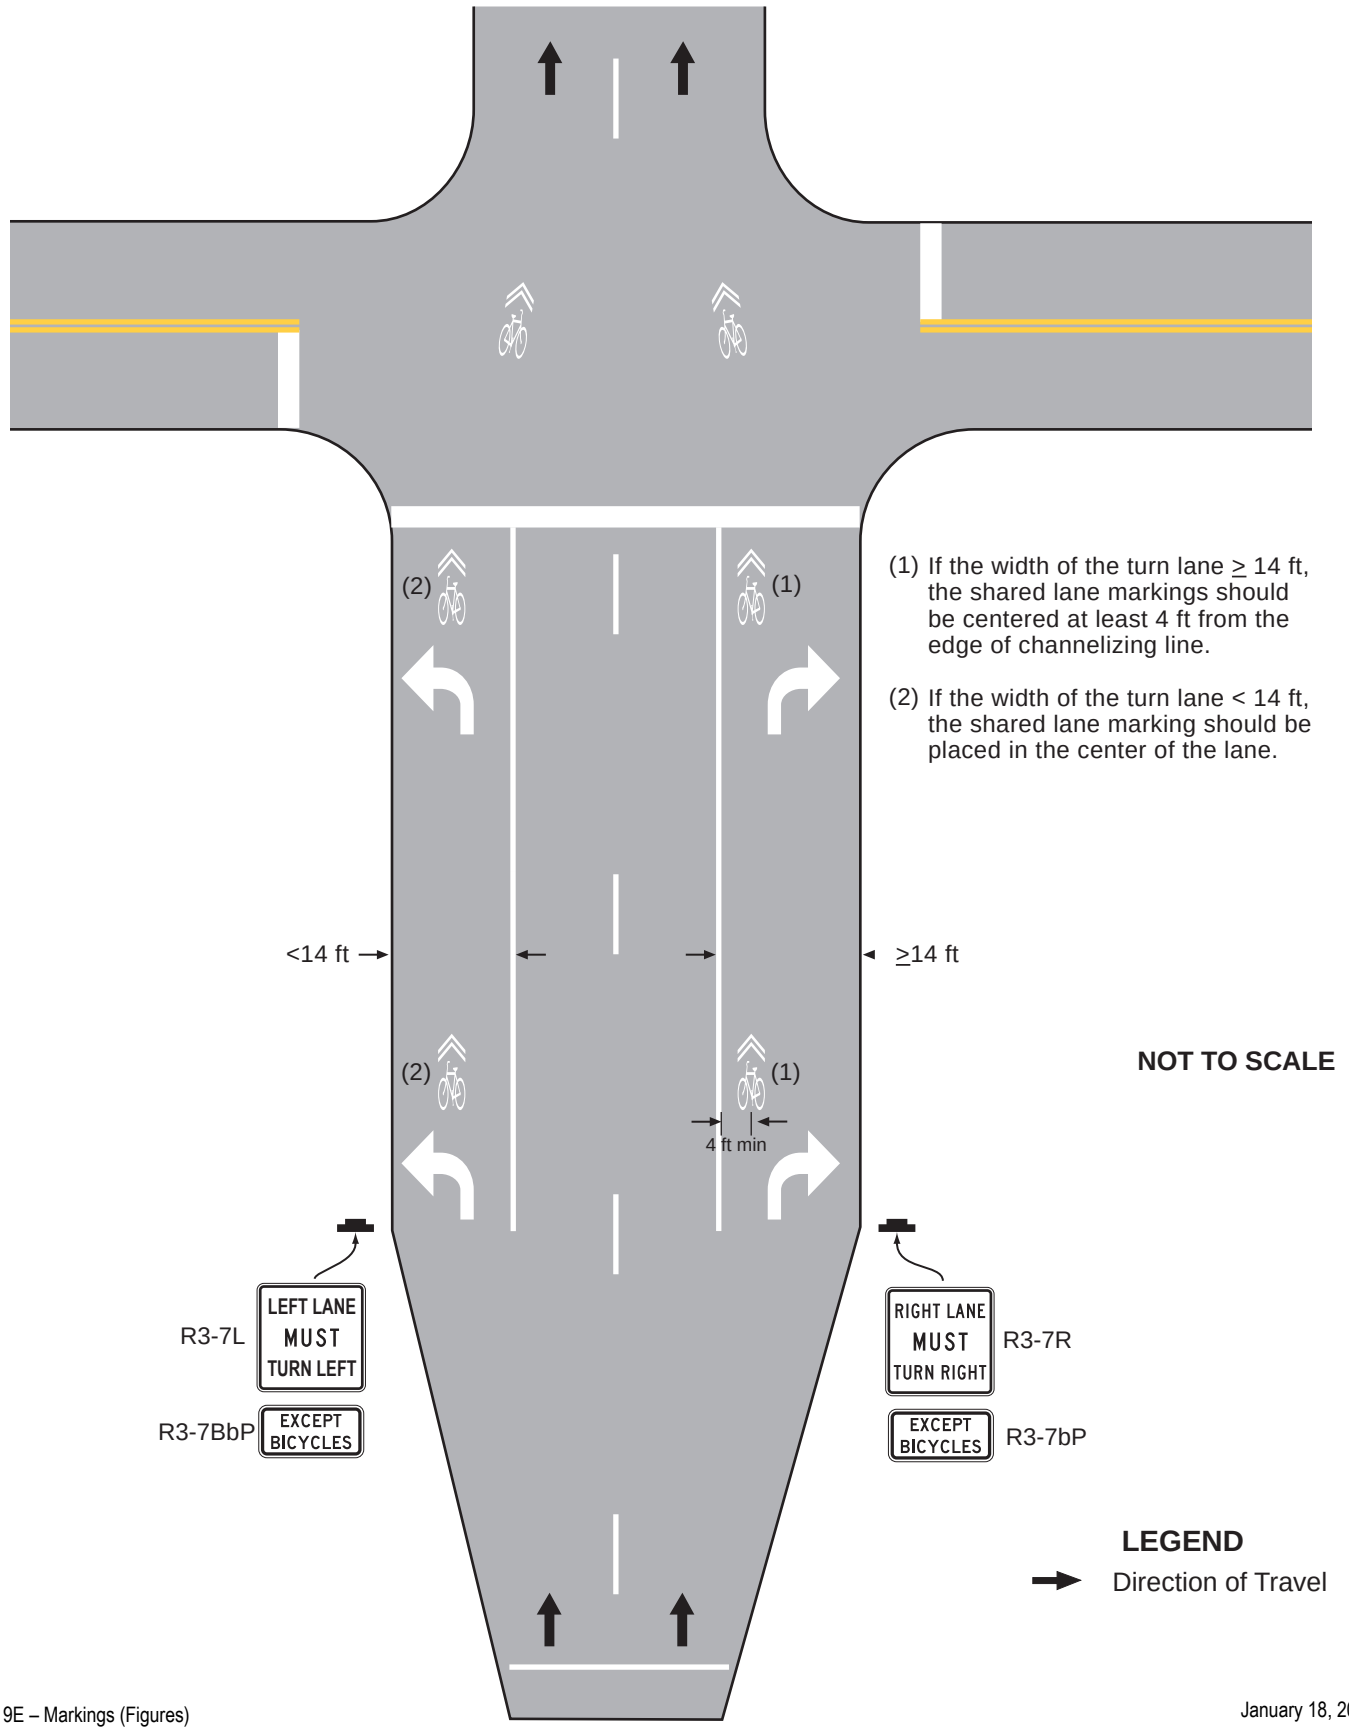

## *Figure 9E-108(CA). Example of Intersection Pavement Markings and Signs—Bicycle Traveling Straight From Right Turn Only Lanes*

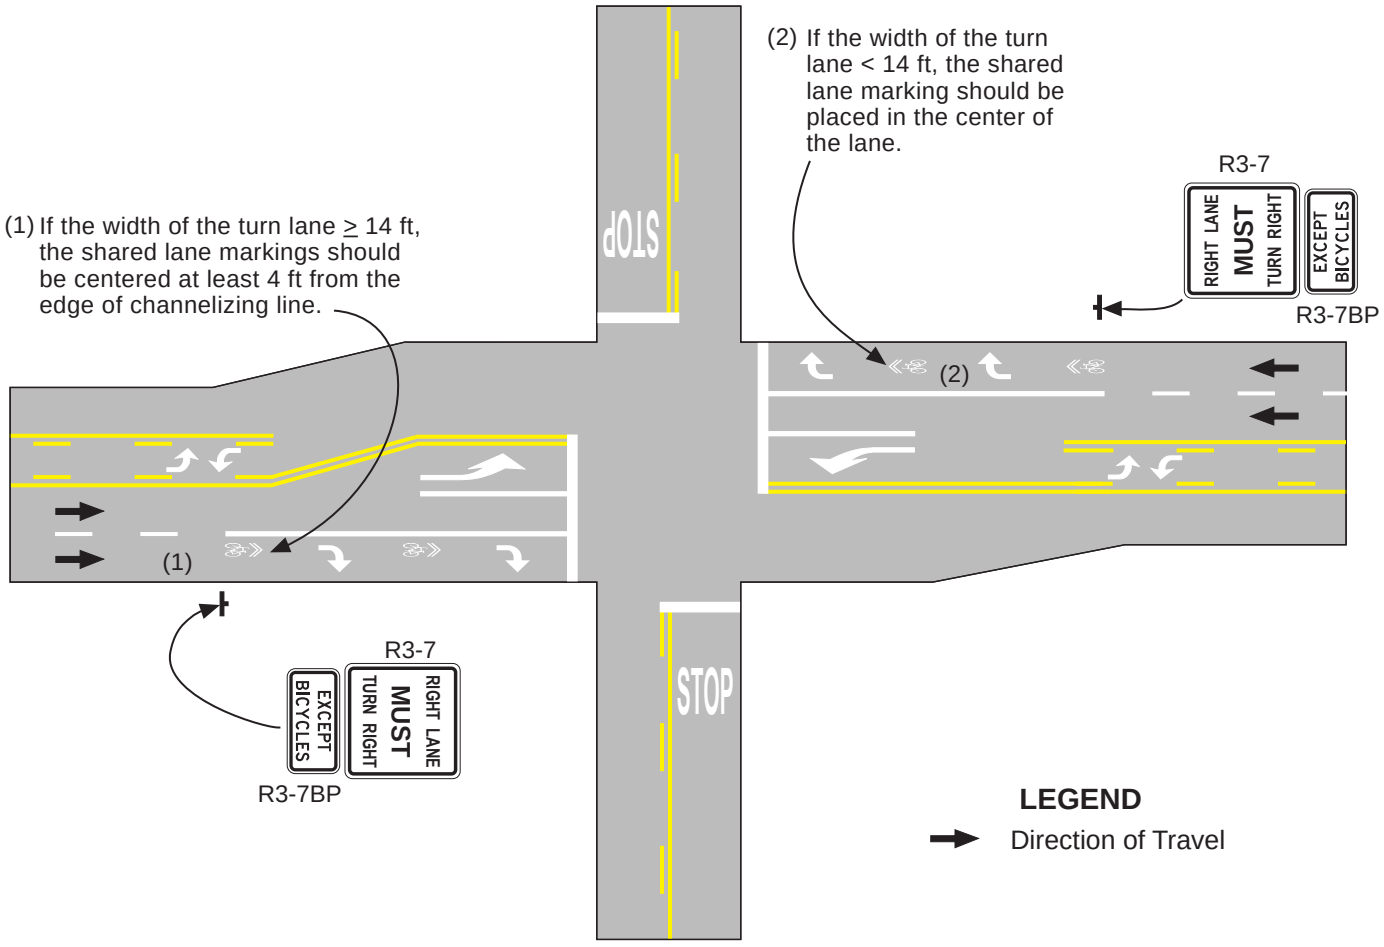


**NOT TO SCALE**

## *Figure 9E-109(CA). Examples of Optional Green-Colored Pavement Applications*


### A. Applied to the Entire Corridor



### B. Limited to the Bicycle Symbol and Arrow



### C. Applied Approaching and Departing an Intersection

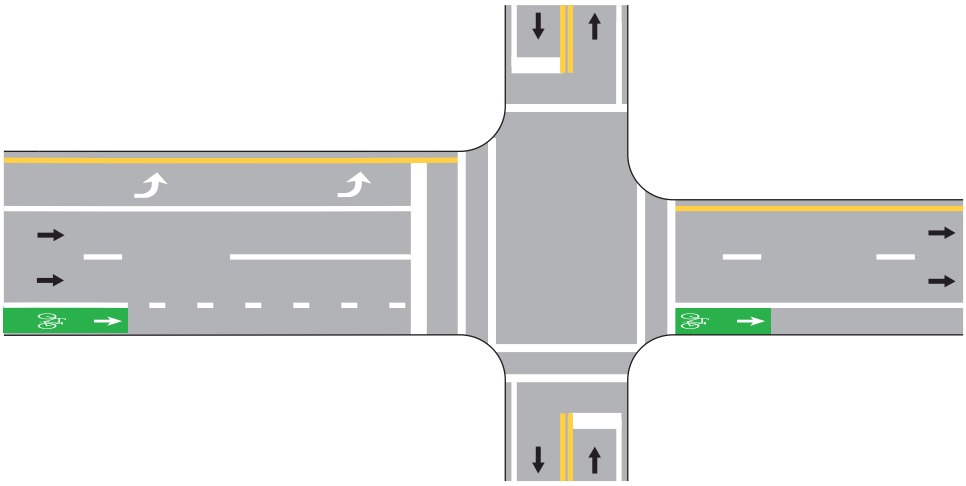

**NOT TO SCALE**

**LEGEND**

→ Direction of Travel

# CHAPTER 9F. SIGNALS

## Section 9F.01 Application

Support:

01 Part 4 contains information regarding signal warrants and other requirements relating to signal installations.

Option:

02 For purposes of signal warrant evaluation, bicycles may be counted as either vehicles or pedestrians.

Support:

03 Also refer to Part 4 of this Manual for highway traffic signals, Chapter 4H bicycle signals, in particular:

A. Section 4H.101(CA) – Optional Use of Bicycle Signal Faces.
B. Section 4H.102(CA) – Limit Line Bicycle Detection Zone.

## Section 9F.02 Bicycle Signal Faces

Support:

01 Chapter 4H contains information on the design and application of bicycle signal faces.

02 Section 9B.22 contains information for the Bicycle Signal sign that is required to be installed with a bicycle signal face.

## Section 9F.03 Signal Operations for Bicycles

**Standard:**

01 **At installations where visibility-limited signal faces are used, signal faces shall be adjusted so bicyclists for whom the indications are intended can see the signal indications. If the visibility-limited signal faces cannot be aimed to serve the bicyclist, then separate signal faces shall be provided for the bicyclist.**

02 **On bikeways, signal timing and actuation shall be reviewed and adjusted to consider the needs of bicyclists.**

# APPENDICES

# APPENDIX A1

# CONGRESSIONAL ACTIONS

## PUBLIC LAW 102-240-DEC. 18, 1991 (INTERMODAL SURFACE TRANSPORTATION EFFICIENCY ACT OF 1991)

**Section 1077. REVISION OF MANUAL —** Not later than 90 days after the date of the enactment of this Act, the Secretary shall revise the Manual of Uniform Traffic Control Devices and such other regulations and agreements of the Federal Highway Administration as may be necessary to authorize States and local governments, at their discretion, to install stop or yield signs at any rail-highway grade crossing without automatic traffic control devices with 2 or more trains operating across the rail-highway grade crossing per day.

## PUBLIC LAW 102-388-OCT. 6, 1992 (DEPARTMENT OF TRANSPORTATION AND RELATED AGENCIES APPROPRIATIONS ACT, 1993)

**Section 406 —** The Secretary of Transportation shall revise the Manual of Uniform Traffic Control Devices to include —

(a) a standard for a minimum level of retroreflectivity that must be maintained for pavement markings and signs, which shall apply to all roads open to public travel; and

(b) a standard to define the roads that must have a centerline or edge lines or both, provided that in setting such standard the Secretary shall consider the functional classification of roads, traffic volumes, and the number and width of lanes.

## PUBLIC LAW 104-59-NOV. 28, 1995 (NATIONAL HIGHWAY SYSTEM DESIGNATION ACT OF 1995)

**Section 205. RELIEF FROM MANDATES —**

(c) METRIC REQUIREMENTS —

(1) PLACEMENT AND MODIFICATION OF SIGNS — The Secretary shall not require the States to expend any Federal or State funds to construct, erect, or otherwise place or to modify any sign relating to a speed limit, distance, or other measurement on a highway for the purpose of having such sign establish such speed limit, distance, or other measurement using the metric system.

(2) OTHER ACTIONS — Before September 30, 2000, the Secretary shall not require that any State use or plan to use the metric system with respect to designing or advertising, or preparing plans, specifications, estimates, or other documents, for a Federal-aid highway project eligible for assistance under title 23, United States Code.

(3) DEFINITIONS — In this subsection, the following definitions apply:

(A) HIGHWAY — The term 'highway' has the meaning such term has under section 101 of title 23, United States Code.

(B) METRIC SYSTEM — the term 'metric system' has the meaning the term 'metric system of measurement' has under section 4 of the Metric Conversion Act of 1975 (15 U.S.C. 205c).

**Section 306. MOTORIST CALL BOXES —** Section 111 of title 23, United States Code, is amended by adding at the end the following:

(c) MOTORIST CALL BOXES —

(1) IN GENERAL — Notwithstanding subsection (a), a State may permit the placement of motorist call boxes on rights-of-way of the National Highway System. Such motorist call boxes may include the identification and sponsorship logos of such call boxes.

(2) SPONSORSHIP LOGOS —

(A) APPROVAL BY STATE AND LOCAL AGENCIES — All call box installations displaying sponsorship logos under this subsection shall be approved by the highway agencies having jurisdiction of the highway on which they are located.

(B) SIZE ON BOX — A sponsorship logo may be placed on the call box in a dimension not to exceed the size of the call box or a total dimension in excess of 12 inches by 18 inches.

(C) SIZE ON IDENTIFICATION SIGN — Sponsorship logos in a dimension not to exceed 12 inches by 30 inches may be displayed on a call box identification sign affixed to the call box post.

(D) SPACING OF SIGNS — Sponsorship logos affixed to an identification sign on a call box post may be located on the rights-of-way at intervals not more frequently than 1 per every 5 miles.

(E) DISTRIBUTION THROUGHOUT STATE — Within a State, at least 20 percent of the call boxes displaying sponsorship logos shall be located on highways outside of urbanized areas with a population greater than 50,000.

(3) NONSAFETY HAZARDS — The call boxes and their location, posts, foundations, and mountings shall be consistent with requirements of the Manual on Uniform Traffic Control Devices or any requirements deemed necessary by the Secretary to assure that the call boxes shall not be a safety hazard to motorists.

**Section 353(a) SIGNS —** Traffic control signs referred to in the experimental project conducted in the State of Oregon in December 1991 shall be deemed to comply with the requirements of Section 2B-4 of the Manual on Uniform Traffic Control Devices of the Department of Transportation.

**Section 353(b) STRIPES —** Notwithstanding any other provision of law, a red, white, and blue center line in the Main Street of Bristol, Rhode Island, shall be deemed to comply with the requirements of Section 3B-1 of the Manual on Uniform Traffic Control Devices of the Department of Transportation.

**PUBLIC LAW 115-141-MAR. 23, 2018 (CONSOLIDATED APPROPRIATIONS ACT, 2018) DIVISION L, TITLE I**

**Section 125 —** For this fiscal year, the Federal Highway Administration shall reinstate Interim Approval IA-5, relating to the provisional use of an alternative lettering style on certain highway guide signs, as it existed before its termination, as announced in the Federal Register on January 25, 2016 (81 Fed. Reg. 4083).

Option:

Series E(modified)-Alternate may be used in place of Series E(modified) for the names of places, streets, and highways on freeway and expressway guide signs in accordance with the provisions of the following paragraph.

**Standard:**

**The use of Series E(modified)-Alternate shall be limited to the display of names of places, streets, and highways on freeway and expressway guide signs. Words shall be composed of lower-case letters with initial upper-case letters. The design and spacing of the letters shall be as provided in the "Standard Highway Signs" publication (see Section 1A.05 of this Manual). The nominal loop height of the lower-case letters shall be 84 percent of the height of the initial upper-case letter. Interline spacing, measured from the baseline of the upper line of legend to the upper limit of the initial upper-case letter of the lower line of legend, shall be at least 96 percent of the initial upper-case letters (equivalent to 84 percent of the initial upper-case letter when measured from the baseline of the upper line of legend to the upper limit of the rising stems of the lower-case letters of the lower line of legend). Edge spacing shall be as provided in Section 2E.13 of this Manual. The size of the sign shall be suitably enlarged to accommodate the larger lower-case letters and interline spacing. When the name of a place, street, or highway contains numerals, the numerals shall be composed of the FHWA Standard Alphabet Series E(modified). Other lettering on the sign, such as for cardinal directions and distance or action messages, and all numerals or special characters, shall be composed of Series B, C, D, E, E(modified), or F of the FHWA Standard Alphabets as provided in this Manual.**

**Series E(modified)-Alternate shall not be used for any application other than as provided in the two preceding paragraphs.**

# APPENDIX A2
# METRIC CONVERSIONS

Throughout this Manual all dimensions and distances are provided in English units. Tables A2-1 through A2-4 show the equivalent Metric (International System of Units) value for each of the English unit numerical values that are used in this Manual.

## Table A2-1. Conversion of Inches to Millimeters

| Inches | Millimeters |
|---|---|
| 0.25 | 6 |
| 0.4 | 10 |
| 0.5 | 13 |
| 0.75 | 19 |
| 1 | 25 |
| 1.25 | 31 |
| 2 | 50 |
| 2.25 | 56 |
| 2.5 | 62 |
| 3 | 75 |

| Inches | Millimeters |
|---|---|
| 3.5 | 87 |
| 4 | 100 |
| 4.5 | 113 |
| 5 | 125 |
| 6 | 150 |
| 8 | 200 |
| 9 | 225 |
| 10 | 250 |
| 10.4 | 260 |
| 10.6 | 265 |

| Inches | Millimeters |
|---|---|
| 12 | 300 |
| 15 | 375 |
| 16 | 400 |
| 18 | 450 |
| 21 | 525 |
| 24 | 600 |
| 27 | 675 |
| 28 | 700 |
| 30 | 750 |
| 32 | 800 |

| Inches | Millimeters |
|---|---|
| 36 | 900 |
| 42 | 1050 |
| 48 | 1200 |
| 54 | 1350 |
| 60 | 1500 |
| 72 | 1800 |
| 84 | 2100 |
| 120 | 3000 |

Note: 1 inch = 25.4 millimeters; 1 millimeter = 0.039 inches

## Table A2-2. Conversion of Feet to Meters

| Feet | Meters |
|---|---|
| 1 | 0.3 |
| 2 | 0.6 |
| 2.5 | 0.75 |
| 3 | 0.9 |
| 3.25 | 1 |
| 3.5 | 1.1 |
| 4 | 1.2 |
| 4.5 | 1.4 |
| 4.75 | 1.45 |
| 5 | 1.5 |
| 5.67 | 1.7 |
| 6 | 1.8 |
| 7 | 2.1 |
| 8 | 2.4 |
| 9 | 2.7 |
| 9.25 | 2.8 |
| 9.5 | 2.9 |
| 10 | 3 |

| Feet | Meters |
|---|---|
| 11 | 3.4 |
| 12 | 3.7 |
| 12.75 | 3.9 |
| 14 | 4.3 |
| 15 | 4.6 |
| 16 | 4.9 |
| 17 | 5.2 |
| 18 | 5.5 |
| 19 | 5.8 |
| 20 | 6.1 |
| 22 | 6.7 |
| 23.5 | 7.2 |
| 25 | 7.6 |
| 25.6 | 7.8 |
| 30 | 9 |
| 32 | 9.8 |
| 33 | 10 |
| 36 | 11 |

| Feet | Meters |
|---|---|
| 40 | 12 |
| 50 | 15 |
| 53 | 16 |
| 60 | 18 |
| 70 | 21 |
| 72 | 22 |
| 75 | 23 |
| 80 | 24 |
| 90 | 27 |
| 95 | 29 |
| 100 | 30 |
| 110 | 34 |
| 120 | 37 |
| 125 | 38 |
| 130 | 675 |
| 140 | 700 |
| 150 | 750 |
| 180 | 800 |

| Feet | Meters |
|---|---|
| 200 | 60 |
| 250 | 75 |
| 300 | 90 |
| 330 | 100 |
| 400 | 120 |
| 500 | 150 |
| 530 | 160 |
| 600 | 180 |
| 650 | 200 |
| 700 | 210 |
| 750 | 230 |
| 800 | 245 |
| 1,000 | 300 |
| 1,500 | 450 |
| 2,000 | 600 |
| 2,300 | 700 |
| 3,000 | 900 |

Note: 1 foot = 0.3048 meters; 1 meter = 3.28 feet

## Table A2-3. Conversion of Miles to Kilometers

| Miles | Kilometers |
|---|---|
| 0.25 | 0.4 |
| 0.5 | 0.8 |
| 0.6 | 1 |

| Miles | Kilometers |
|---|---|
| 1 | 1.6 |
| 2 | 3.2 |
| 3 | 4.8 |

| Miles | Kilometers |
|---|---|
| 5 | 8 |
| 10 | 16 |
| 15 | 25 |

| Miles | Kilometers |
|---|---|
| 70 | 110 |

Note: 1 mile = 1.609 kilometers; 1 kilometer = 0.621 miles

## Table A2-4. Conversion of Miles per Hour to Kilometers/Hour

| mph | km/h |
|---|---|
| 3 | 5 |
| 10 | 16 |
| 15 | 20 |
| 20 | 30 |

| mph | km/h |
|---|---|
| 25 | 40 |
| 30 | 50 |
| 35 | 60 |
| 40 | 60 |

| mph | km/h |
|---|---|
| 45 | 70 |
| 50 | 80 |
| 55 | 90 |
| 60 | 100 |

| mph | km/h |
|---|---|
| 65 | 105 |
| 65* | 110 |
| 80 | 130 |

Note: 1 mile per hour = 1.609 kilometers/hour; 1 kilometer/hour = 0.621 miles per hour
* Refer to FHWA's List of Known Errors for error in table. Refer to Section 1A.04 for more details.